

RJTH / HACHIJOJIMA

AD CHART



INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART-INSTRUMENT

RJTH / HACHIOJIMA

SID


HACHIOJO REVERSAL SIX DEPARTURE

RWY08 : Climb RWY HDG to HCE 3.0DME, turn left HDG 027° to intercept and proceed via HCE R057 to 9.0DME, turn right, direct to HCE VOR/DME.

Cross HCE R057/9.0DME at or above 3000FT,
cross HCE VOR/DME at or above 5000FT.

RWY26 : Climb RWY HDG to HCE 3.0DME, turn left HDG 211° to intercept and proceed via HCE R241 to 9.0DME, turn left, direct to HCE VOR/DME.

Cross HCE R241/9.0DME at or above 3000FT,
cross HCE VOR/DME at or above 5000FT.

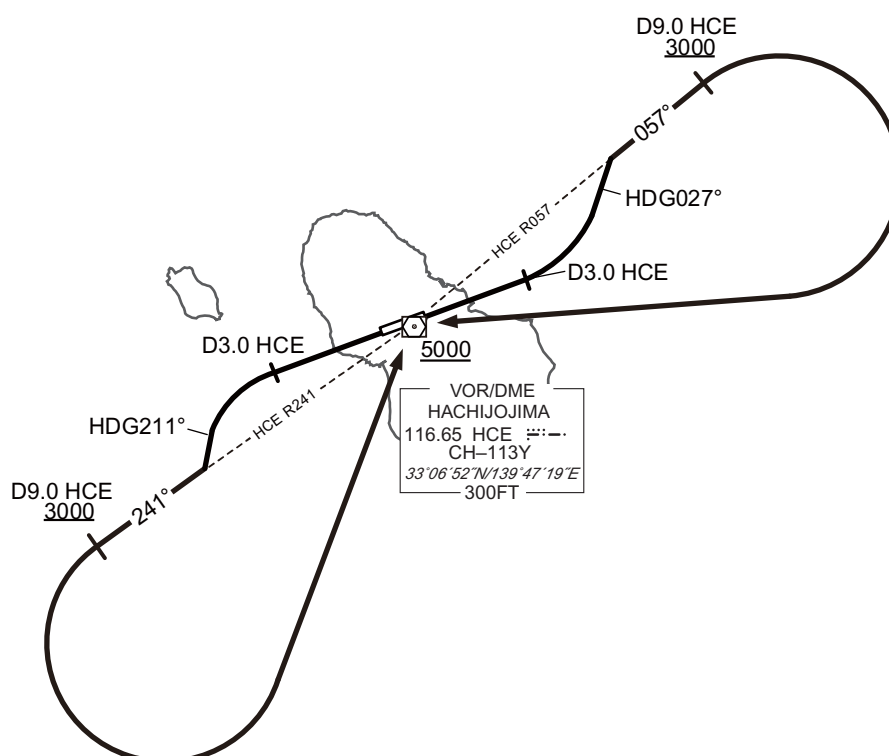


CHANGE : PROC renamed. PROC course.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTH / HACHIJOJIMA

RNAV SID

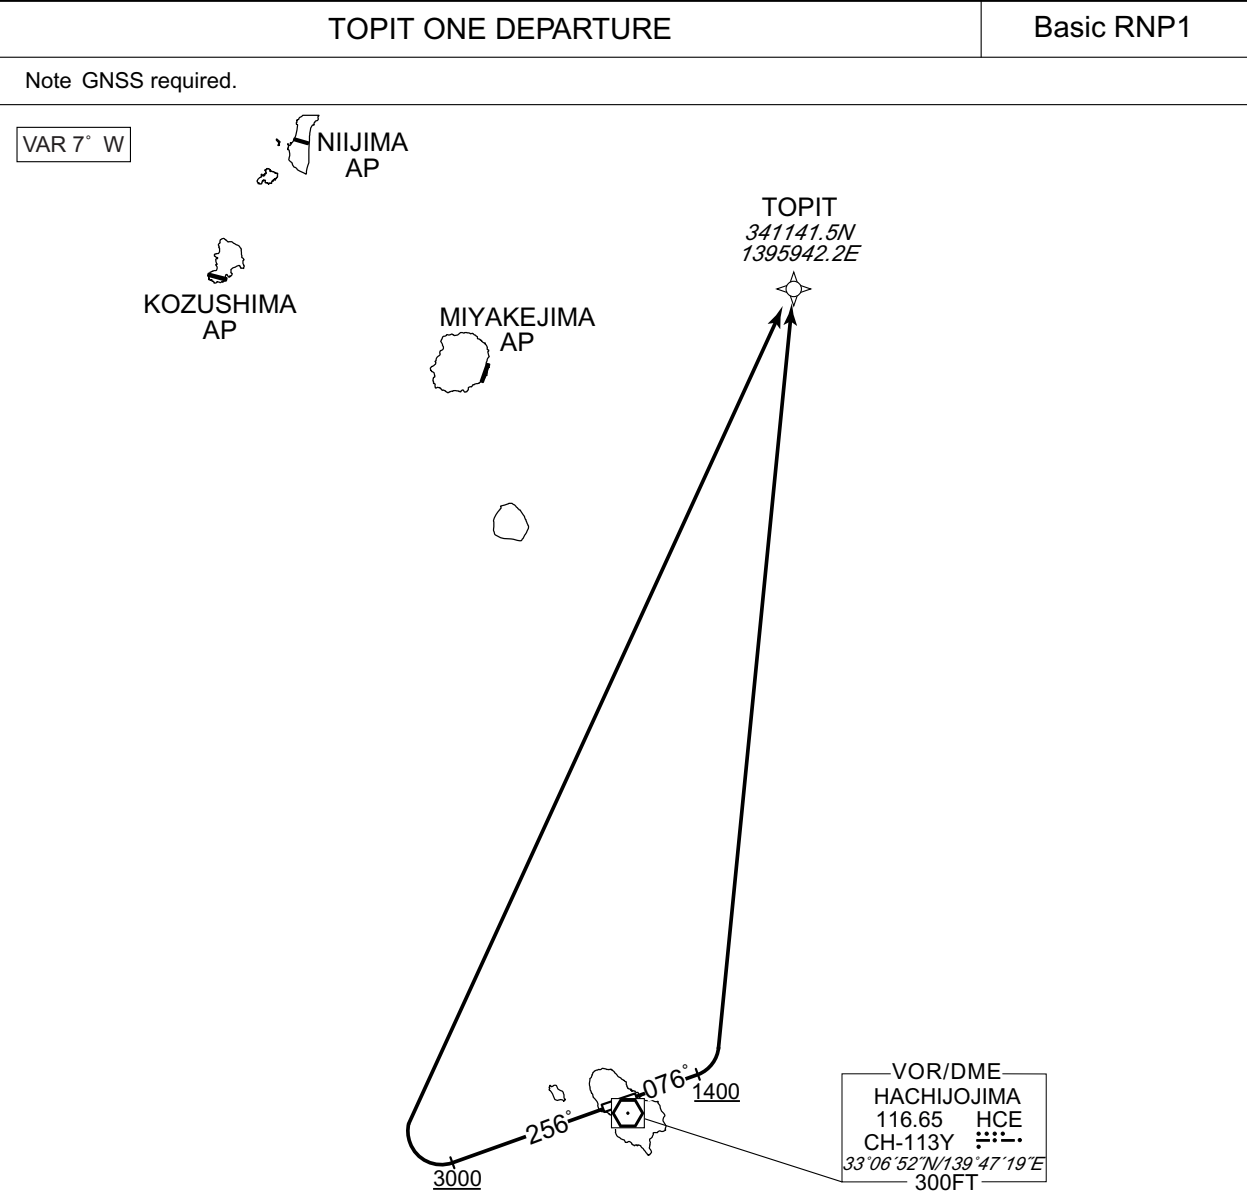

RWY08 : Climb on HDG 076° at or above 1400FT, turn left direct to TOPIT.
RWY26 : Climb on HDG 256° at or above 3000FT, turn right direct to TOPIT.

RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	076 (069.5)	-6.7	—	—	+1400	—	—	Basic RNP1
002	DF	TOPIT	—	—	-6.7	—	L	—	—	—	Basic RNP1

RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	256 (249.5)	-6.7	—	—	+3000	—	—	Basic RNP1
002	DF	TOPIT	—	—	-6.7	—	R	—	—	—	Basic RNP1

CHANGE : Description of VAR and PROC name.

STANDARD ARRIVAL CHART-INSTRUMENT


RJTH/HACHIOJIMA

RNAV STAR RWY26

SANGO ARRIVAL

Basic RNP1

Note GNSS required.

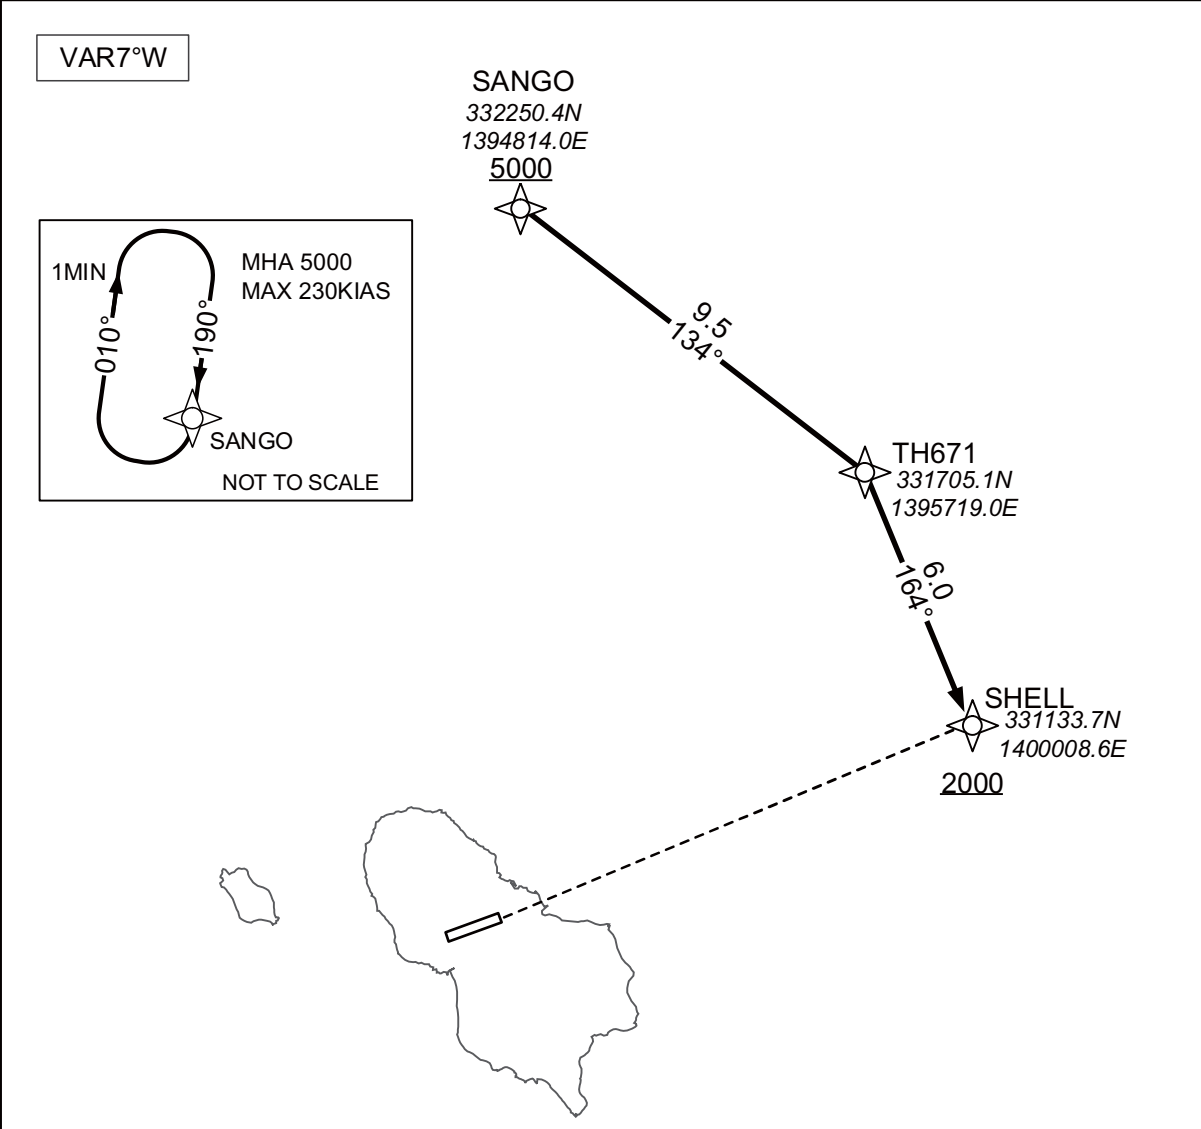

From SANGO at or above 5000FT, to TH671, to SHELL at or above 2000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SANGO	-	-	-6.9	-	-	+5000	-	-	Basic RNP1
002	TF	TH671	-	134 (127.1)	-6.9	9.5	-	-	-	-	Basic RNP1
003	TF	SHELL	-	164 (156.8)	-6.9	6.0	-	+2000	-	-	Basic RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	SANGO	190 (182.8)	-6.9	1.0(-14000)	R	5000	FL 140	-230(-14000)	Basic RNP1

INTENTIONALLY LEFT BLANK

RJTH / HACHIJOJIMA

LOC Z RWY26



Climb via HCE R254 to HCE 8.0DME,
turn left, direct to HCE VOR/DME and
hold at 5000FT.
Contact HACHIJO RADIO.




MINIMA		THR elev. 284	AD elev. 301	
CAT			CIRCLING	
	MDA(H)	CMV	MDA(H)	VIS
A	550 (266)	1000	-	-
B		1100		
C		1200		
D		1400		

Circling NOT authorized.


RJTH / HACHIJOJIMA

LOC Y RWY26

TOKYO CONTROL 125.9 – 134.15 318.2 – 227.3	LOC 110.1 IHC LOC-DME CH-38X	HACHIJO RADIO 118.7 AFIS provided by New Chitose Airport Office	NO RADAR
--	------------------------------------	--	----------

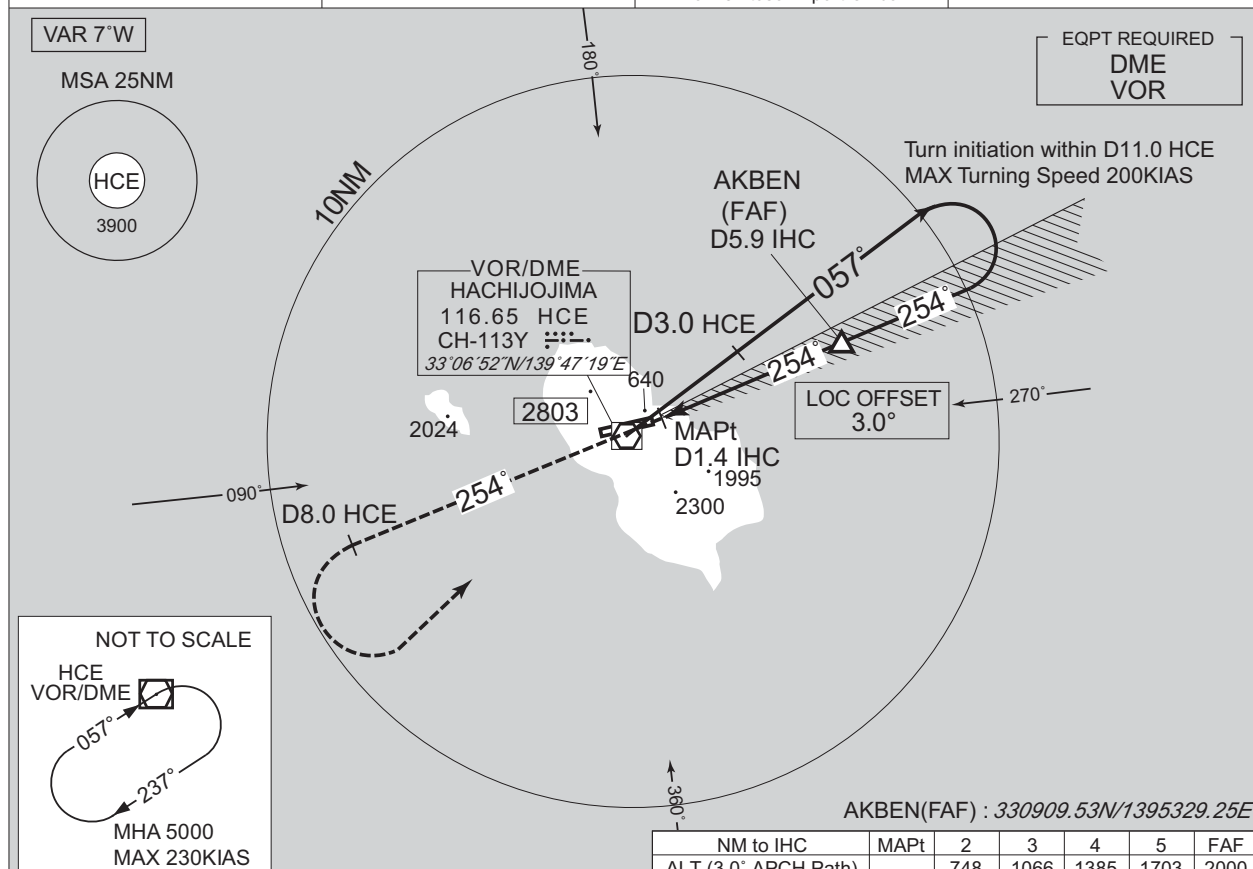

Climb via HCE R254 to HCE 8.0DME,
turn left, direct to HCE VOR/DME and
hold at 5000FT.
Contact HACHIJO RADIO.

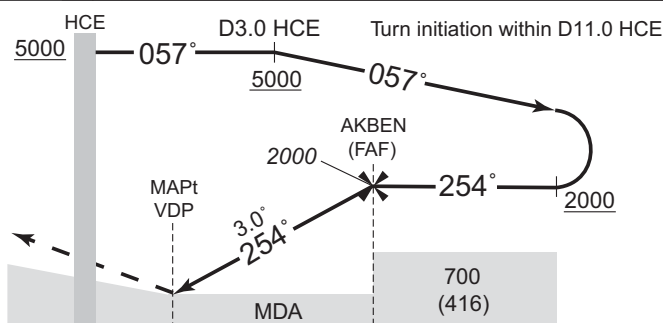

Timing not authorized for defining the MAPt.


DME to IHC	0.7	1.4	5.9
NM to THR	0	0.7	5.2

MINIMA		THR elev. 284	AD elev. 301	
CAT			CIRCLING	
	MDA(H)	CMV	MDA(H)	VIS
A	550 (266)	1000	-	-
B		1100		
C		1200		
D		1400		

Circling NOT authorized.

CHANGE : PROC course. ALT(3.0°APCH path).


INSTRUMENT APPROACH CHART

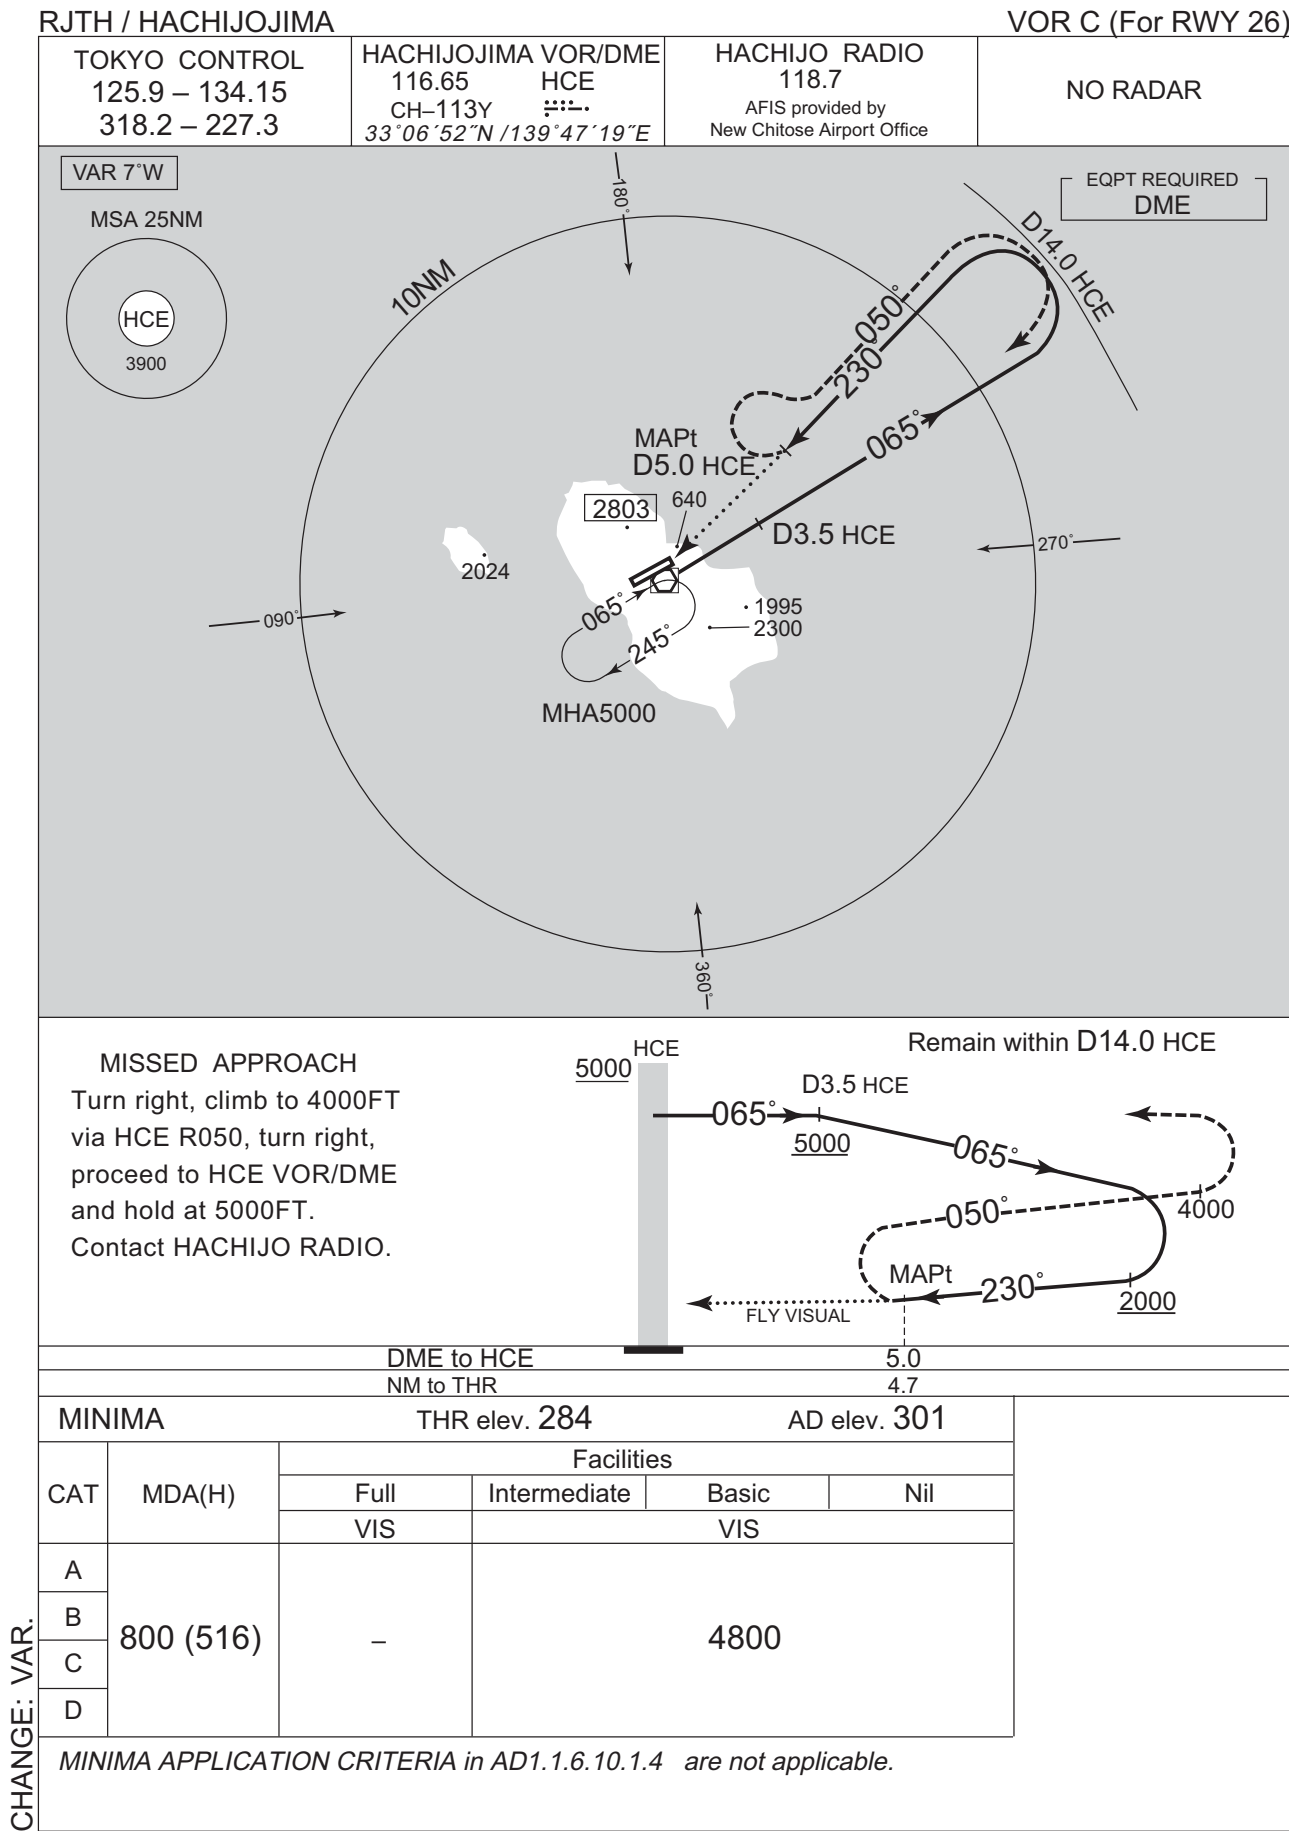

RJTH / HACHIOJIMA

VOR D (For RWY 08)

NO RADAR

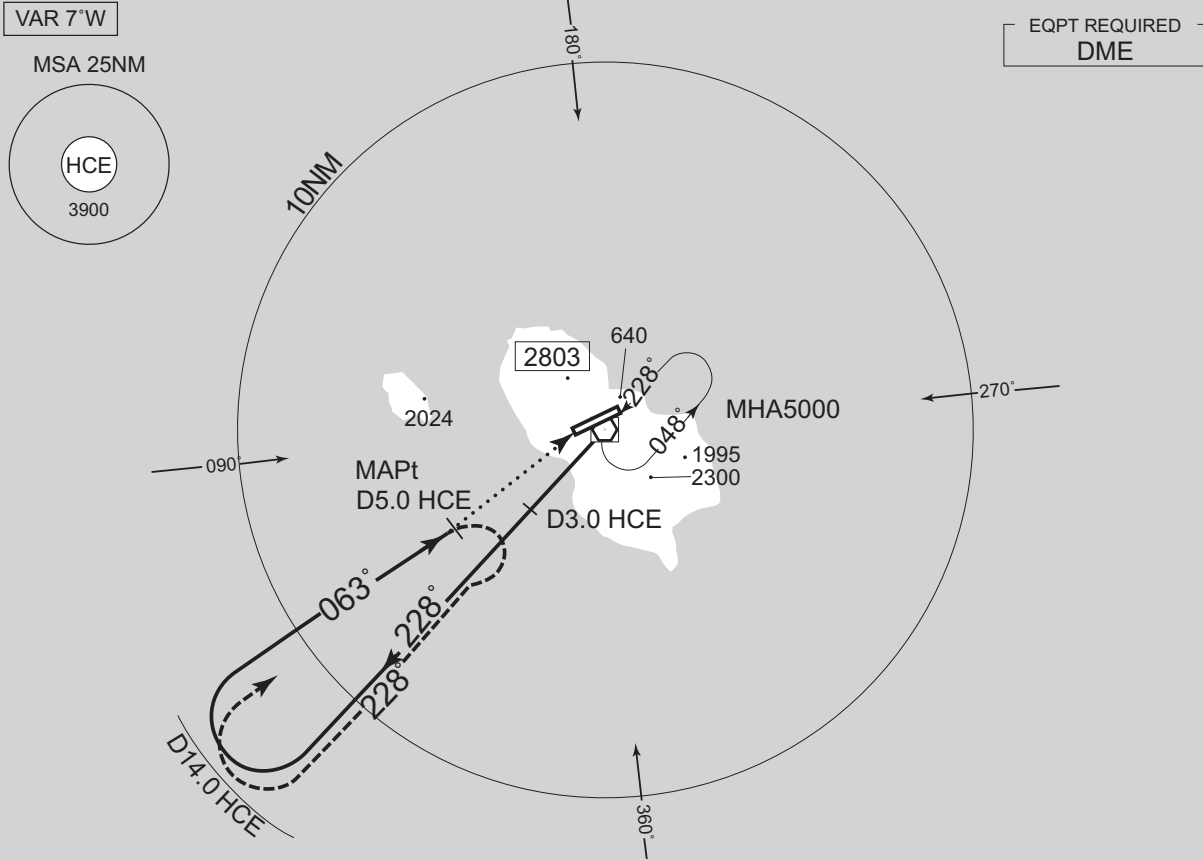

main within D14.0 HCE

4000

5000

228°

228°

228°

063°

MAPt

FLY VISUAL

5.0

4.3

HCE

5000

DME

NM to


MISSED APPROACH
Turn right, climb to 4000FT via
HCE R228, turn right,
proceed to HCE VOR/DME
and hold at 5000FT.
Contact HACHIJO RADIO.

MINIMA		THR elev. 282			AD elev. 301	
CAT	MDA(H)	Facilities				
		Full	Intermediate	Basic	Nil	
		VIS			VIS	
A	800 (518)	–			4800	
B						
C						
D						

MINIMA APPLICATION CRITERIA in AD1.1.6.10.1.4 are not applicable.

CHANGE: VAR.

INSTRUMENT APPROACH CHART

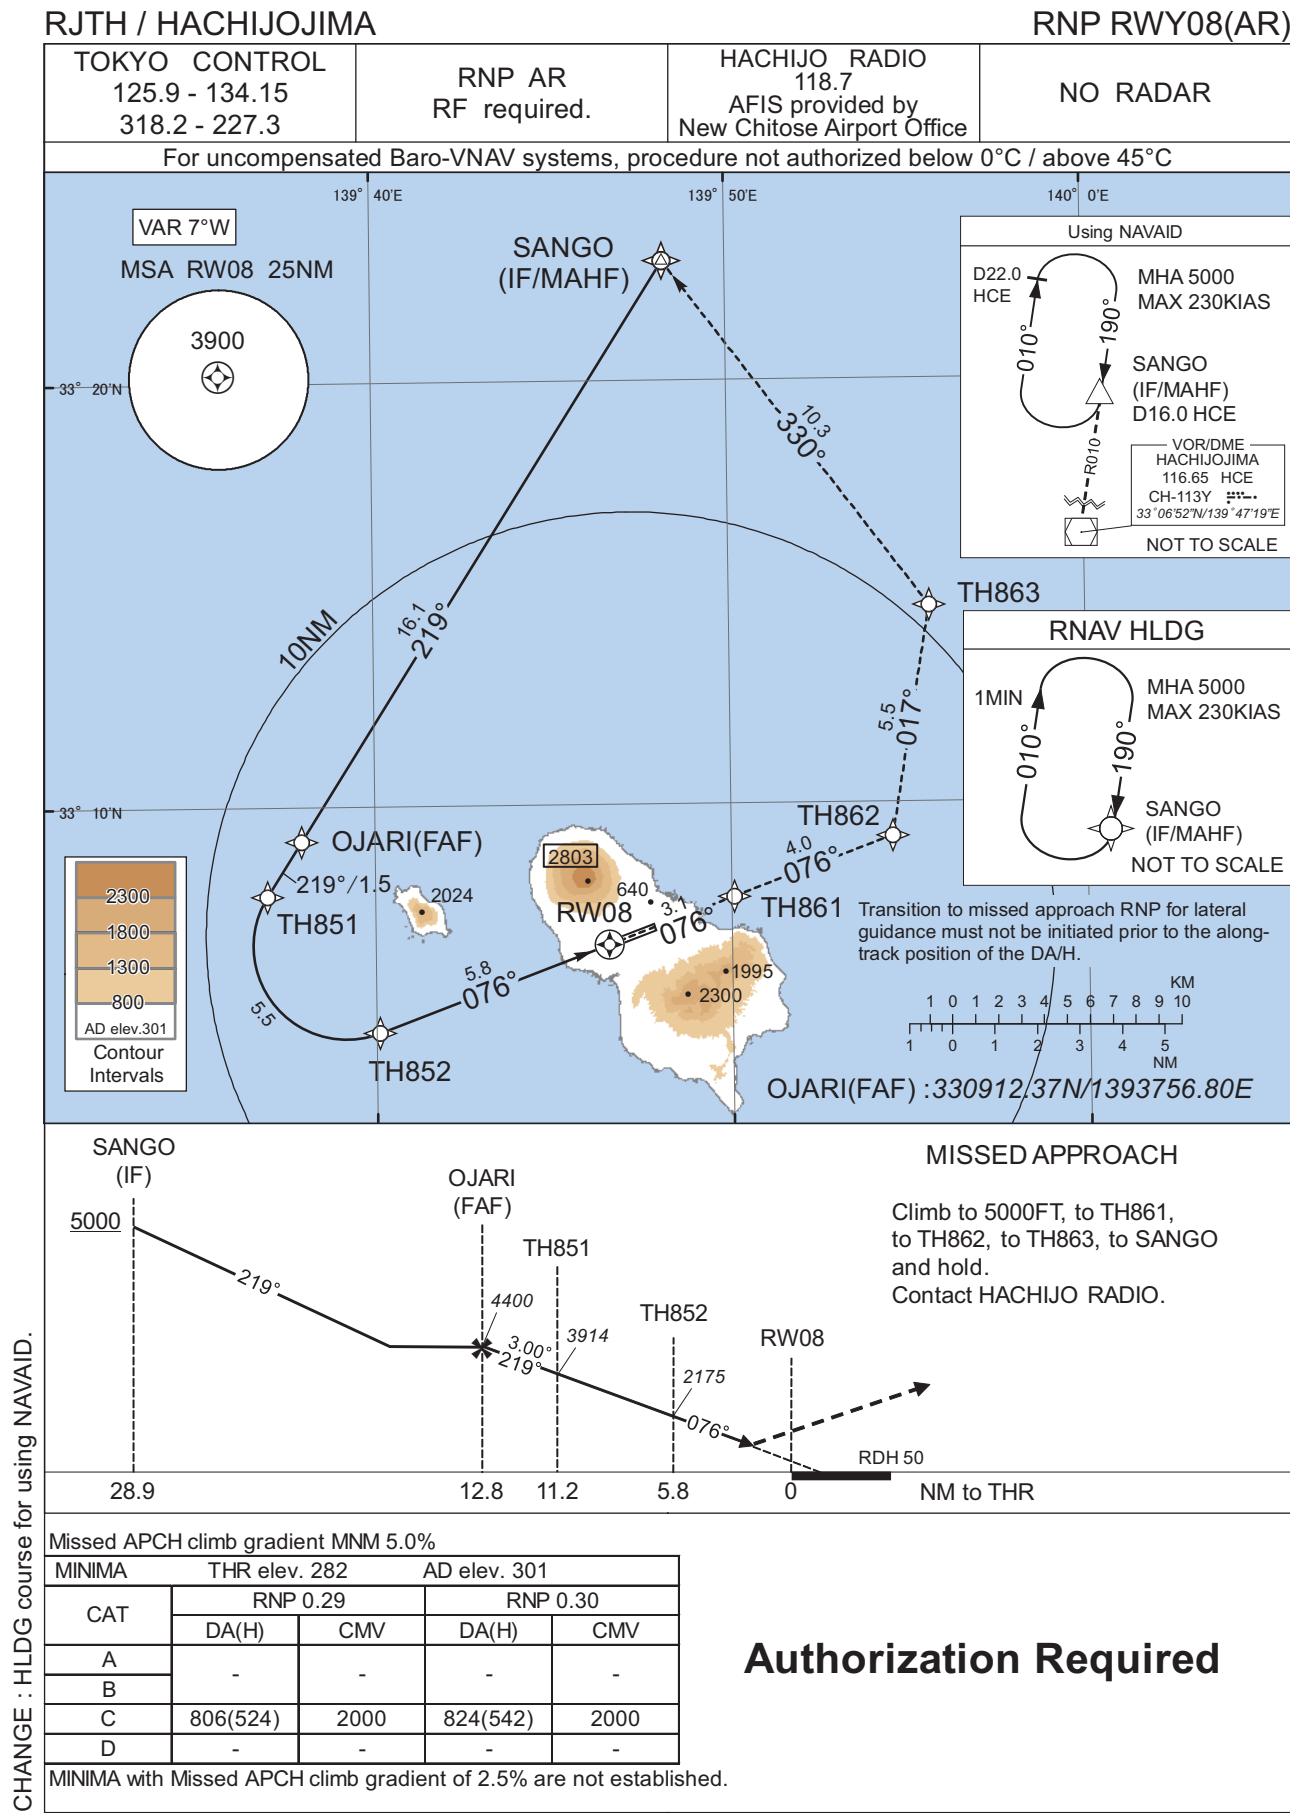

INSTRUMENT APPROACH CHART

RJTH / HACHIJOJIMA

RNP RWY08(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	SANGO	-	-	-6.9	-	-	+5000	-	-	-
002	TF	OJARI	-	219 (212.3)	-6.9	16.1	-	4400	-	-	1.0
003	TF	TH851	-	219 (212.2)	-6.9	1.5	-	3914	-	-3.00	0.29 0.30
004	RF Center: THRF1 r=2.19NM	TH852	-	-	-6.9	5.5	L	2175	-	-3.00	0.29 0.30
005	TF	RW08	Y	076 (069.4)	-6.9	5.8	-	332	-	-3.00/50	0.29 0.30
006	TF	TH861	-	076 (069.5)	-6.9	3.1	-	-	-	-	0.29 0.30
007	TF	TH862	-	076 (069.5)	-6.9	4.0	-	-	-	-	1.0
008	TF	TH863	-	017 (009.6)	-6.9	5.5	-	-	-	-	1.0
009	TF	SANGO	-	330 (323.0)	-6.9	10.3	-	5000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	SANGO	190 (182.8)	-6.9	1.0 (-14000)	R	5000	FL140	-230 (-14000)	1.0


Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
SANGO	332250.44N / 1394814.02E	THRF1	330644.49N / 1393910.78E
OJARI	330912.37N / 1393756.80E		
TH851	330754.90N / 1393658.54E		
TH852	330441.17N / 1394005.63E		
RW08	330643.03N / 1394633.07E		
TH861	330749.27N / 1395004.24E		
TH862	330913.15N / 1395432.21E		
TH863	331439.22N / 1395537.92E		

CHANGE : VAR. Course FM TH862 to TH863. RNAV HLDG established.

INSTRUMENT APPROACH CHART

RJTH / HACHIOJIMA RNP RWY26(AR)

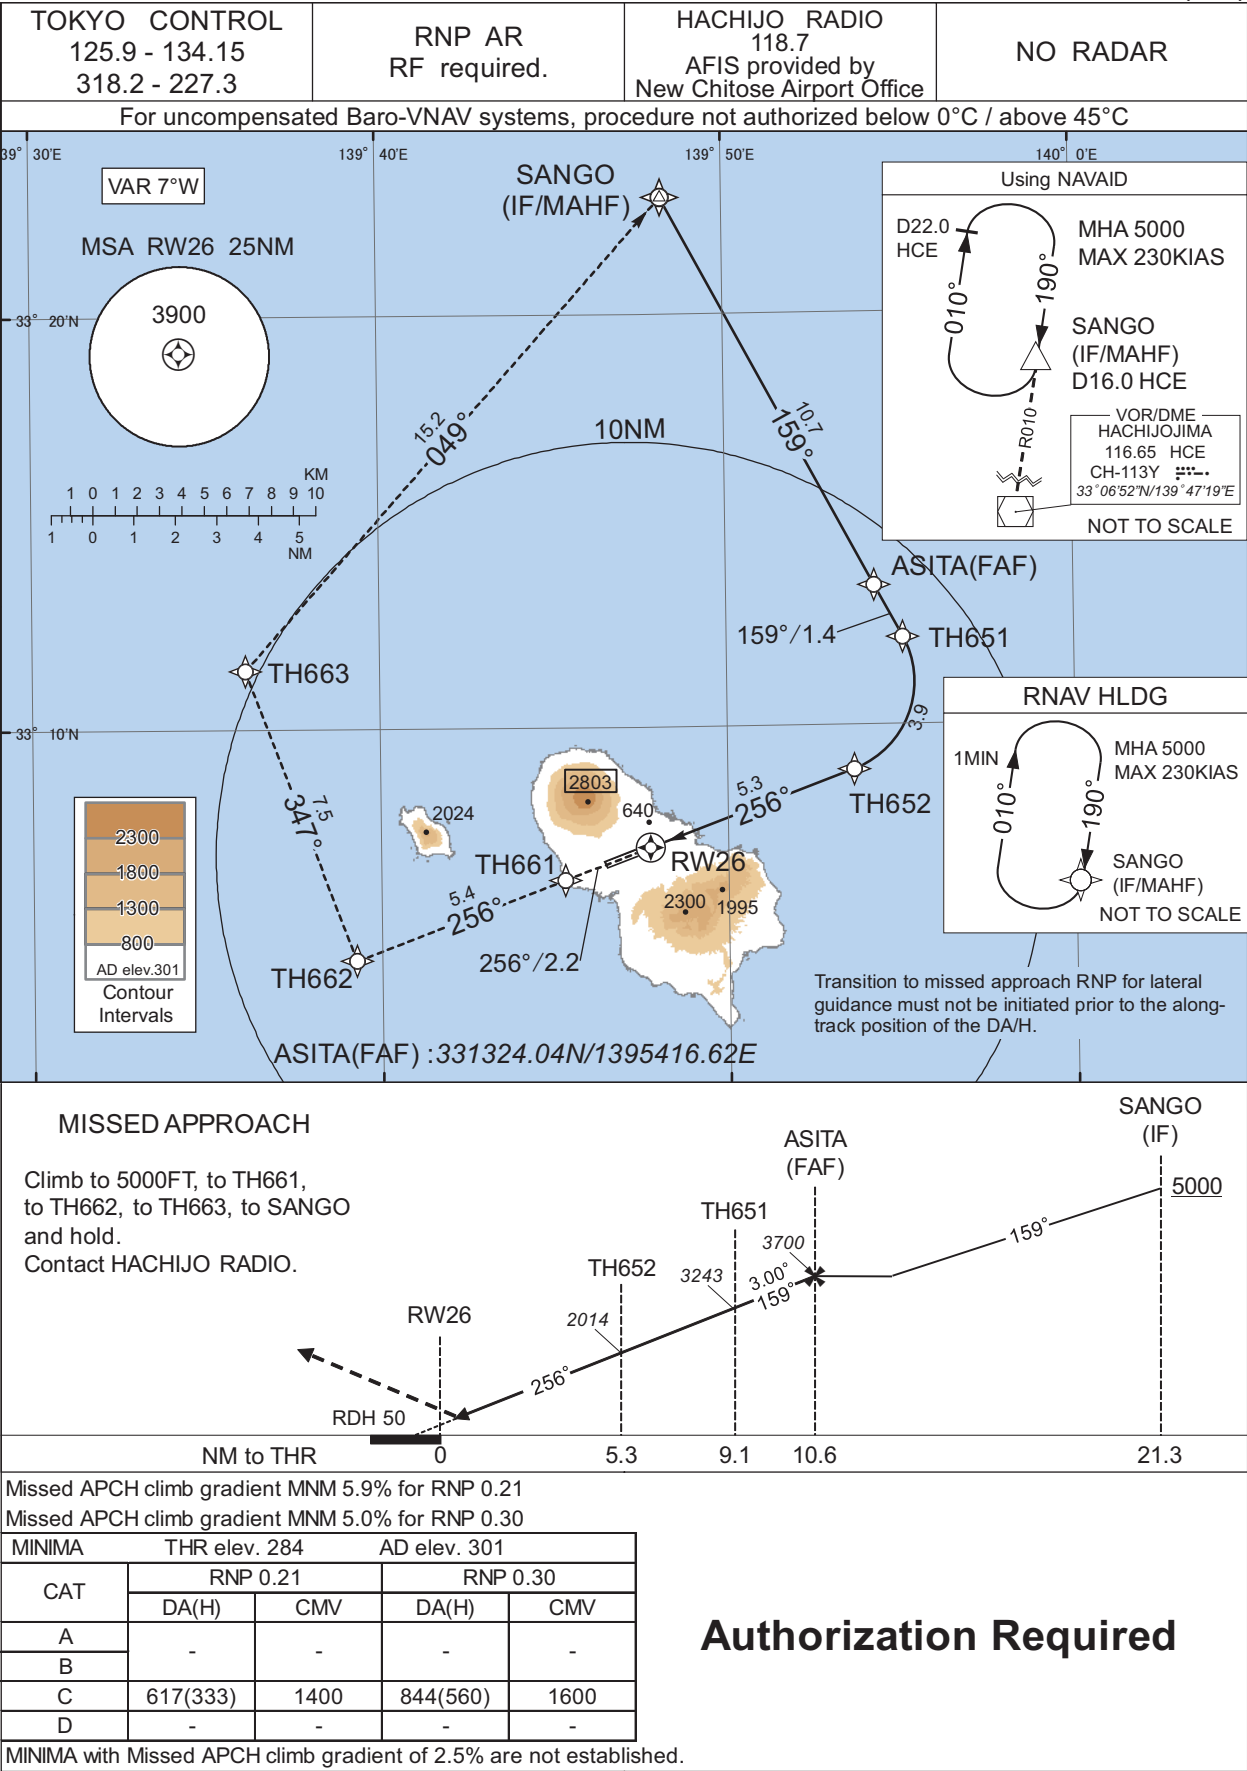

INSTRUMENT APPROACH CHART

RJTH / HACHIJOJIMA

RNP RWY26(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	SANGO	-	-	-6.9	-	-	+5000	-	-	-
002	TF	ASITA	-	159 (151.8)	-6.9	10.7	-	3700	-	-	1.0
003	TF	TH651	-	159 (151.9)	-6.9	1.4	-	3243	-	-3.00	0.21 0.30
004	RF Center: THRF2 r=2.26NM	TH652	-	-	-6.9	3.9	R	2014	-	-3.00	0.21 0.30
005	TF	RW26	Y	256 (249.5)	-6.9	5.3	-	334	-	-3.00/50	0.21 0.30
006	TF	TH661	-	256 (249.5)	-6.9	2.2	-	-	-	-	0.21 0.30
007	TF	TH662	-	256 (249.4)	-6.9	5.4	-	-	-	-	1.0
008	TF	TH663	-	347 (339.6)	-6.9	7.5	-	-	-	-	1.0
009	TF	SANGO	-	049 (041.6)	-6.9	15.2	-	5000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	SANGO	190 (182.8)	-6.9	1.0 (-14000)	R	5000	FL140	-230 (-14000)	1.0


Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
SANGO	332250.44N / 1394814.02E	THRF2	331103.88N / 1395242.68E
ASITA	331324.04N / 1395416.62E		
TH651	331208.17N / 1395505.07E		
TH652	330856.50N / 1395339.00E		
RW26	330705.72N / 1394745.36E		
TH661	330619.39N / 1394517.79E		
TH662	330425.68N / 1393916.49E		
TH663	331127.97N / 1393608.44E		

CHANGE : VAR. PROC course. Missed APCH PROC. RNAV HLDG established.

RJTH / HACHIOJIMA

Visual REP

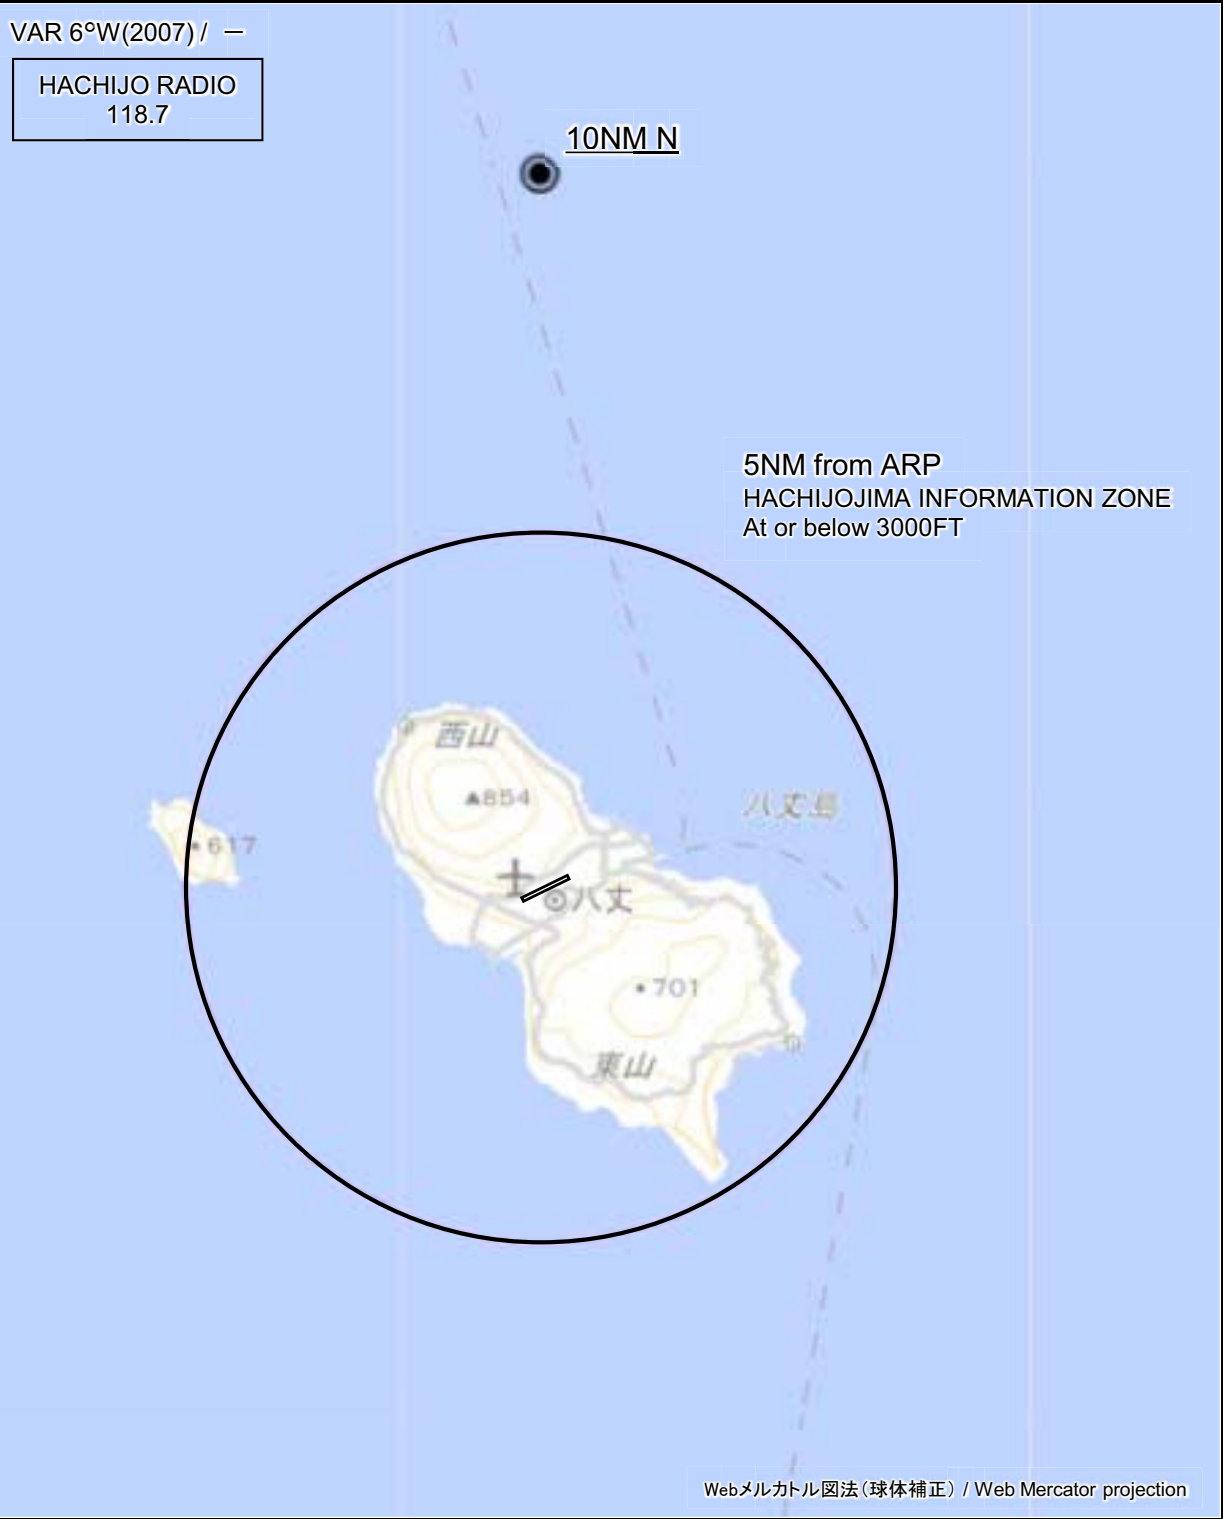


CHANGE : Map updated.

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
10NM N	360°T / 10.0NM	海上 Over the sea


RJTH / HACHIOJIMA

LDG CHART

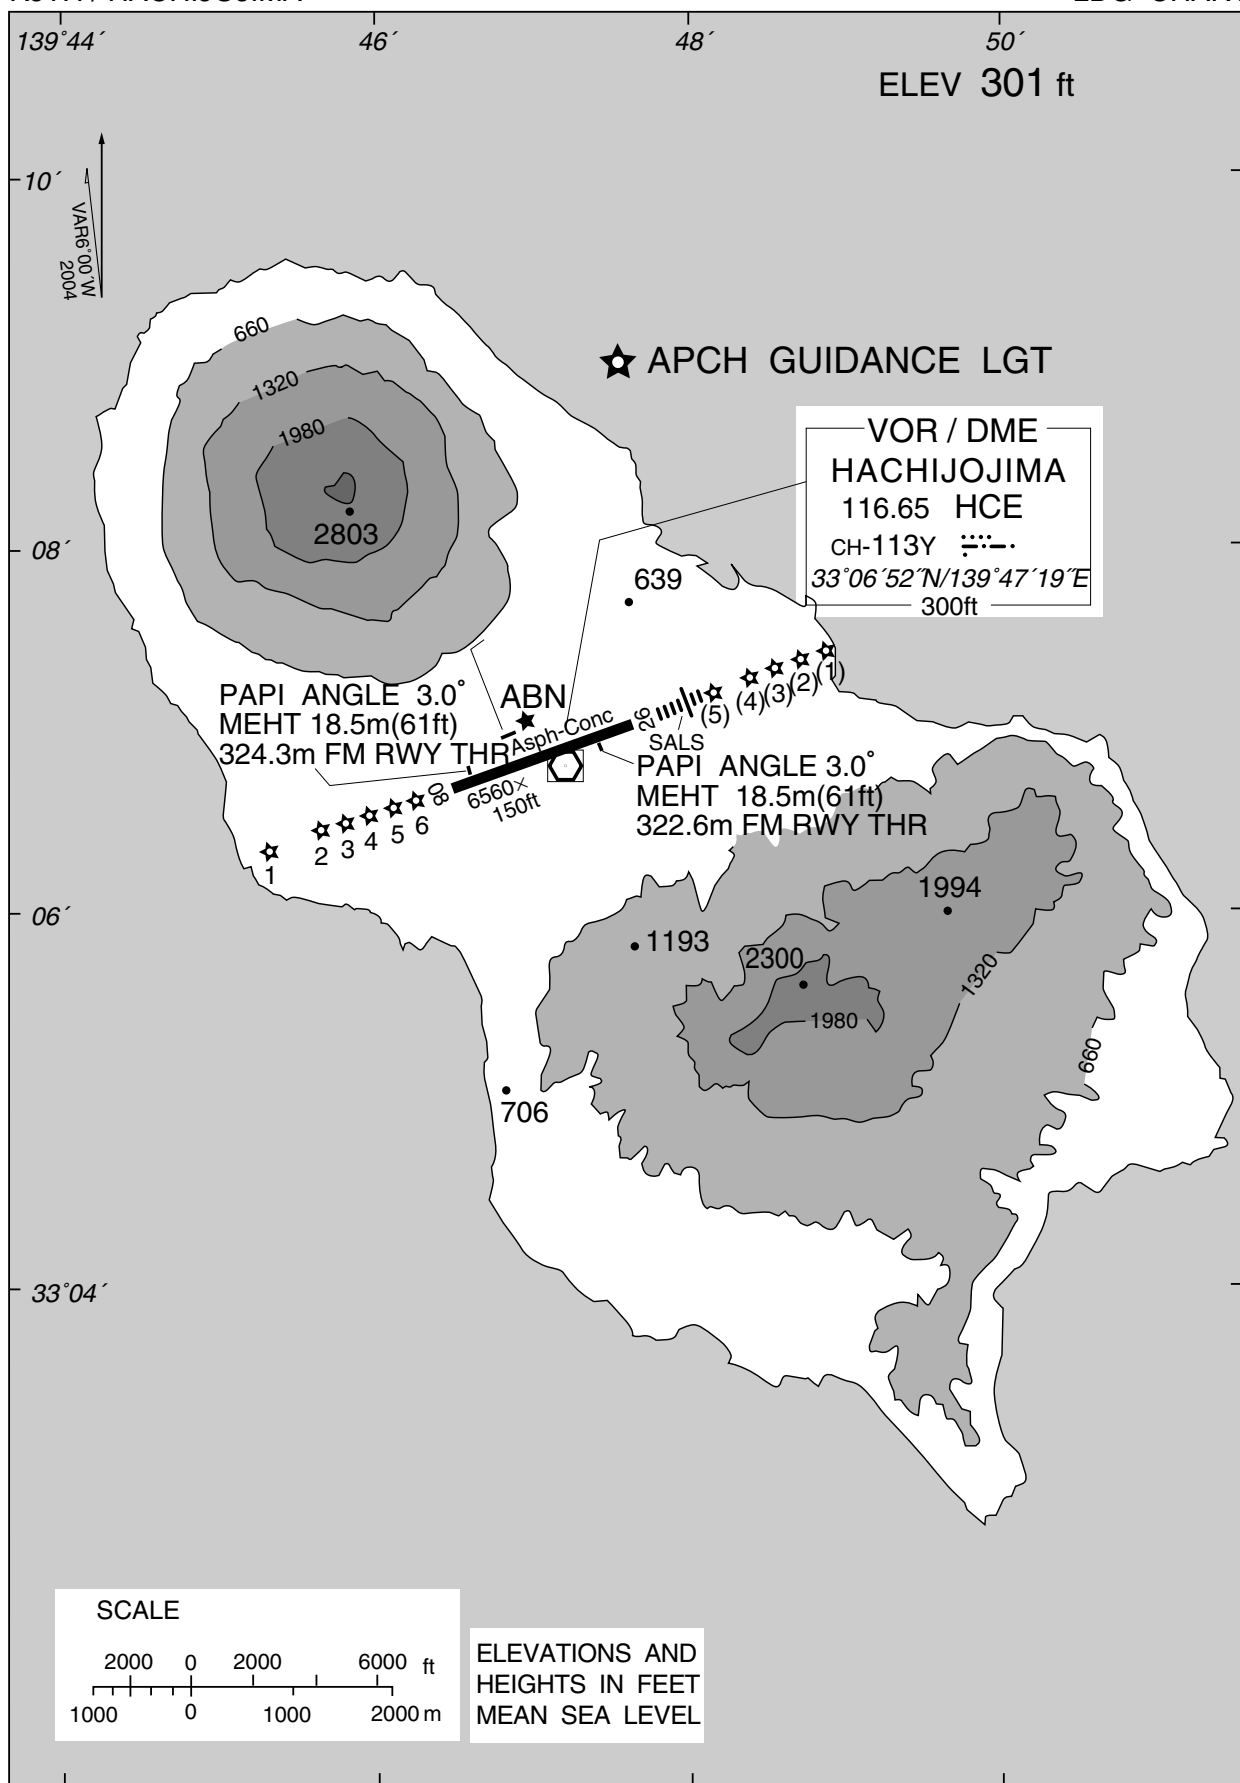

RJTH / HACHIOJIMA

Minimum Vectoring Altitude CHART

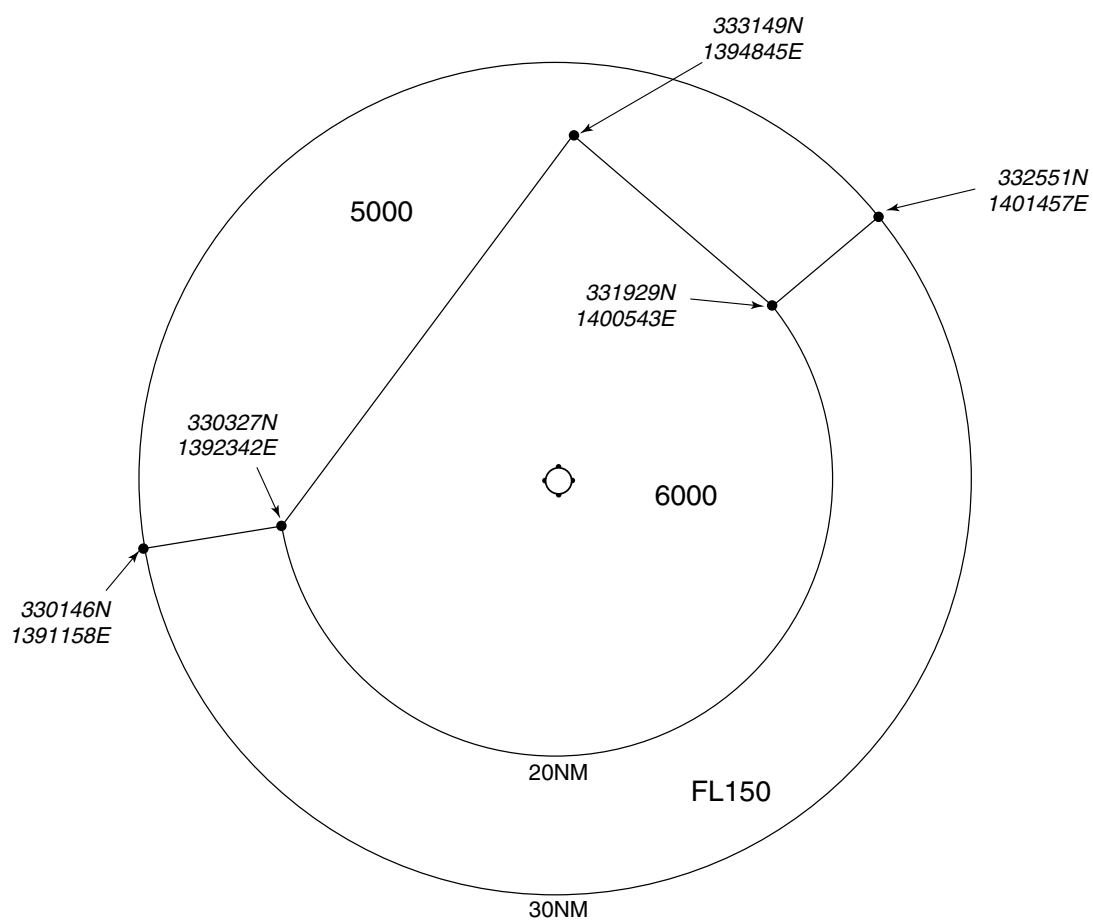

CENTER : 330654N/1394709E (ARP)

INTENTIONALLY LEFT BLANK