

AD CHART

HIROSHIMA AP

ABN ★

VAR 8°W 2022
Annual change 4.8°W

STOP BAR LGT (T-1~T-6)

SUB APRON

PAPI Angle 3.0'

CEILOMETER MEHT 20.0m(66ft)

APRON FLOOD LGT

TWR

RVR WDI : P-1

RVR WDI : P-2

RVR WDI : P-3

RVR WDI : P-4

RVR WDI : P-5

RVR WDI : P-6

RVR WDI : P-7

RVR WDI : P-8

RVR WDI : P-9

RVR WDI : P-10

RVR WDI : P-11

RVR WDI : P-12

RVR WDI : P-13

RVR WDI : P-14

RVR WDI : P-15

RVR WDI : P-16

RVR WDI : P-17

RVR WDI : P-18

RVR WDI : P-19

RVR WDI : P-20

RVR WDI : P-21

RVR WDI : P-22

RVR WDI : P-23

RVR WDI : P-24

RVR WDI : P-25

RVR WDI : P-26

RVR WDI : P-27

RVR WDI : P-28

RVR WDI : P-29

RVR WDI : P-30

RVR WDI : P-31

RVR WDI : P-32

RVR WDI : P-33

RVR WDI : P-34

RVR WDI : P-35

RVR WDI : P-36

RVR WDI : P-37

RVR WDI : P-38

RVR WDI : P-39

RVR WDI : P-40

RVR WDI : P-41

RVR WDI : P-42

RVR WDI : P-43

RVR WDI : P-44

RVR WDI : P-45

RVR WDI : P-46

RVR WDI : P-47

RVR WDI : P-48

RVR WDI : P-49

RVR WDI : P-50

RVR WDI : P-51

RVR WDI : P-52

RVR WDI : P-53

RVR WDI : P-54

RVR WDI : P-55

RVR WDI : P-56

RVR WDI : P-57

RVR WDI : P-58

RVR WDI : P-59

RVR WDI : P-60

RVR WDI : P-61

RVR WDI : P-62

RVR WDI : P-63

RVR WDI : P-64

RVR WDI : P-65

RVR WDI : P-66

RVR WDI : P-67

RVR WDI : P-68

RVR WDI : P-69

RVR WDI : P-70

RVR WDI : P-71

RVR WDI : P-72

RVR WDI : P-73

RVR WDI : P-74

RVR WDI : P-75

RVR WDI : P-76

RVR WDI : P-77

RVR WDI : P-78

RVR WDI : P-79

RVR WDI : P-80

RVR WDI : P-81

RVR WDI : P-82

RVR WDI : P-83

RVR WDI : P-84

RVR WDI : P-85

RVR WDI : P-86

RVR WDI : P-87

RVR WDI : P-88

RVR WDI : P-89

RVR WDI : P-90

RVR WDI : P-91

RVR WDI : P-92

RVR WDI : P-93

RVR WDI : P-94

RVR WDI : P-95

RVR WDI : P-96

RVR WDI : P-97

RVR WDI : P-98

RVR WDI : P-99

RVR WDI : P-100

RVR WDI : P-101

RVR WDI : P-102

RVR WDI : P-103

RVR WDI : P-104

RVR WDI : P-105

RVR WDI : P-106

RVR WDI : P-107

RVR WDI : P-108

RVR WDI : P-109

RVR WDI : P-110

RVR WDI : P-111

RVR WDI : P-112

RVR WDI : P-113

RVR WDI : P-114

RVR WDI : P-115

RVR WDI : P-116

RVR WDI : P-117

RVR WDI : P-118

RVR WDI : P-119

RVR WDI : P-120

RVR WDI : P-121

RVR WDI : P-122

RVR WDI : P-123

RVR WDI : P-124

RVR WDI : P-125

RVR WDI : P-126

RVR WDI : P-127

RVR WDI : P-128

RVR WDI : P-129

RVR WDI : P-130

RVR WDI : P-131

RVR WDI : P-132

RVR WDI : P-133

RVR WDI : P-134

RVR WDI : P-135

RVR WDI : P-136

RVR WDI : P-137

RVR WDI : P-138

RVR WDI : P-139

RVR WDI : P-140

RVR WDI : P-141

RVR WDI : P-142

RVR WDI : P-143

RVR WDI : P-144

RVR WDI : P-145

RVR WDI : P-146

RVR WDI : P-147

RVR WDI : P-148

RVR WDI : P-149

RVR WDI : P-150

RVR WDI : P-151

RVR WDI : P-152

RVR WDI : P-153

RVR WDI : P-154

RVR WDI : P-155

RVR WDI : P-156

RVR WDI : P-157

RVR WDI : P-158

RVR WDI : P-159

RVR WDI : P-160

RVR WDI : P-161

RVR WDI : P-162

RVR WDI : P-163

RVR WDI : P-164

RVR WDI : P-165

RVR WDI : P-166

RVR WDI : P-167

RVR WDI : P-168

RVR WDI : P-169

RVR WDI : P-170

RVR WDI : P-171

RVR WDI : P-172

RVR WDI : P-173

RVR WDI : P-174

RVR WDI : P-175

RVR WDI : P-176

RVR WDI : P-177

RVR WDI : P-178

RVR WDI : P-179

RVR WDI : P-180

RVR WDI : P-181

RVR WDI : P-182

RVR WDI : P-183

RVR WDI : P-184

RVR WDI : P-185

RVR WDI : P-186

RVR WDI : P-187

RVR WDI : P-188

RVR WDI : P-189

RVR WDI : P-190

RVR WDI : P-191

RVR WDI : P-192

RVR WDI : P-193

RVR WDI : P-194

RVR WDI : P-195

RVR WDI : P-196

RVR WDI : P-197

RVR WDI : P-198

RVR WDI : P-199

RVR WDI : P-200

RVR WDI : P-201

RVR WDI : P-202

RVR WDI : P-203

RVR WDI : P-204

RVR WDI : P-205

RVR WDI : P-206

RVR WDI : P-207

RVR WDI : P-208

RVR WDI : P-209

RVR WDI : P-210

RVR WDI : P-211

RVR WDI : P-212

RVR WDI : P-213

RVR WDI : P-214

RVR WDI : P-215

RVR WDI : P-216

RVR WDI : P-217

RVR WDI : P-218

RVR WDI : P-219

RVR WDI : P-220

RVR WDI : P-221

RVR WDI : P-222

RVR WDI : P-223

RVR WDI : P-224

RVR WDI : P-225

RVR WDI : P-226

RVR WDI : P-227

RVR WDI : P-228

RVR WDI : P-229

RVR WDI : P-230

RVR WDI : P-231

RVR WDI : P-232

RVR WDI : P-233

RVR WDI : P-234

RVR WDI : P-235

RVR WDI : P-236

RVR WDI : P-237

RVR WDI : P-238

RVR WDI : P-239

RVR WDI : P-240

RVR WDI : P-241

RVR WDI : P-242

RVR WDI : P-243

RVR WDI : P-244

RVR WDI : P-245

RVR WDI : P-246

RVR WDI : P-247

RVR WDI : P-248

RVR WDI : P-249

RVR WDI : P-250

RVR WDI : P-251

RVR WDI : P-252

RVR WDI : P-253

RVR WDI : P-254

RVR WDI : P-255

RVR WDI : P-256

RVR WDI : P-257

RVR WDI : P-258

RVR WDI : P-259

RVR WDI : P-260

RVR WDI : P-261


RVR WDI :

INTENTIONALLY LEFT BLANK

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

MAGNETIC VARIATION 8° W-JUN 2022

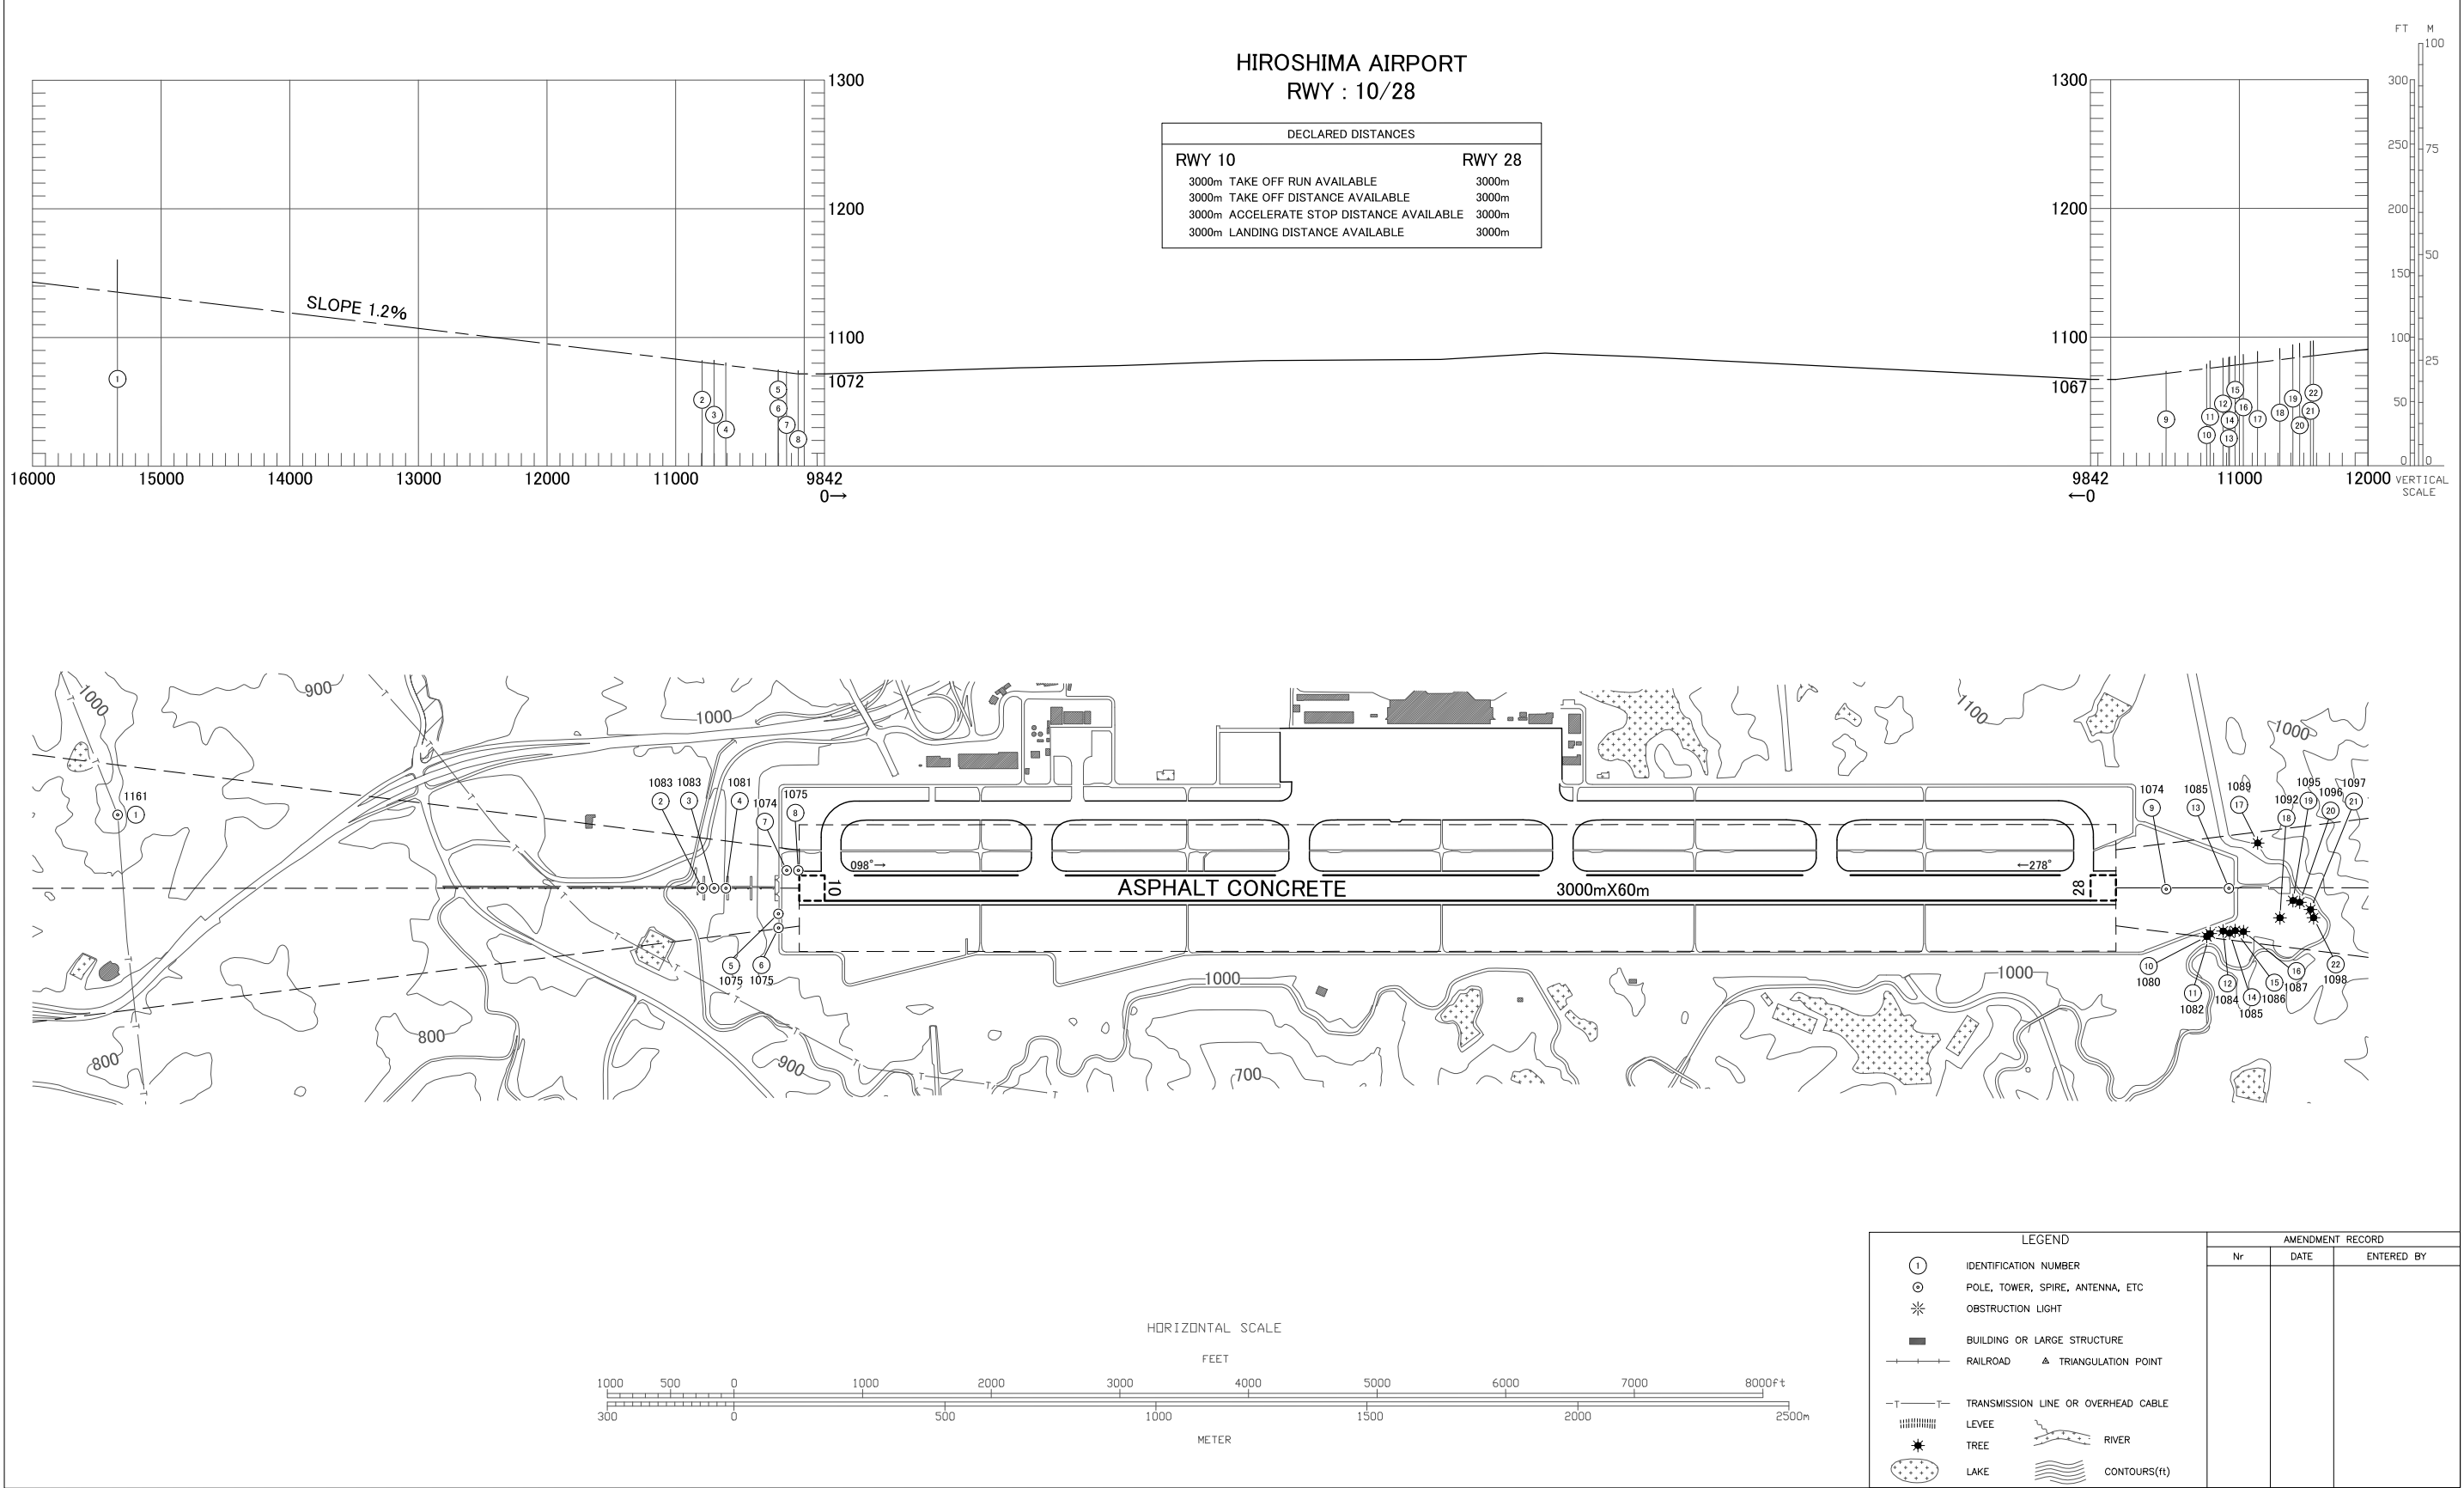


CHANGE : VAR.

AERODROME OBSTACLE CHART-ICAO
TYPE B (OPERATING LIMITATIONS)

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

AERODROME ELEVATION 1086ft ARP



LEGEND	AMENDMENT RECORD		
	NO	DATE	ENTERED BY
✦ AERODROME REFERENCE POINT 54°26'10"N 132°55'10"E			
⊙ POLE, TOWER, SPIRE, ANTENNA, ETC			
★ AERONAUTICAL GROUND LIGHT			
✧ OBSTRUCTION LIGHT			
■ BUILDING OR LARGE STRUCTURE			
—+—+— TERRAIN PENETRATING OBSTACLE PLANE			
—T—T— TRANSMISSION LINE OR OVERHEAD CABLE			
— LEVEE			
✧ TREE			
⊙ LAKE			
— RIVER			
— CONTOURS(11)			

CHANGE : VAR.

PRECISION APPROACH TERRAIN CHART-ICAO

PRCISION APPROACH TERRAIN CHART



STANDARD DEPARTURE CHART - INSTRUMENT


RJOA / HIROSHIMA

SID

HONGO REVERSAL FOUR DEPARTURE

RWY 10 : Climb RWY HDG to HGE 4.6DME(4.0NM FM DER), turn left....,
RWY 28 : Climb on HDG 271° to HGE 5.0DME(4.0NM FM DER), turn right....,
....direct to HGE VOR/DME. Cross HGE VOR/DME at or above 5000FT.

Note : RWY10 : 3.8% climb gradient required up to 2300FT.
OBST ALT 2002FT located at 088°/5.7NM FM DER.
RWY28 : 3.8% climb gradient required up to 1600FT.
OBST ALT 2559FT located at 338°/7.7NM FM DER.

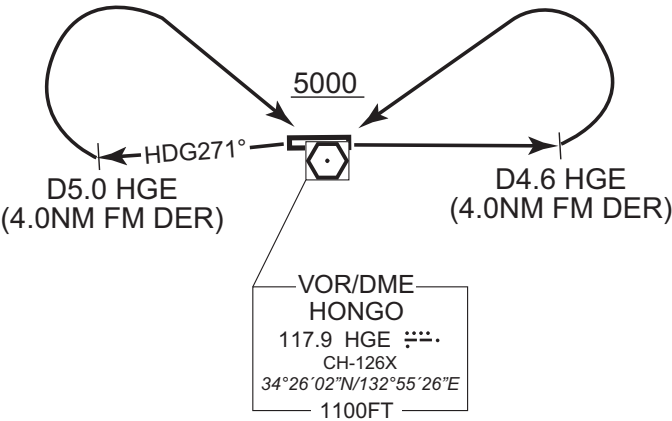

CHANGE : PROC renamed. PROC course. Note RWY10(OBST). Note RWY28(Climb gradient, OBST).

STANDARD DEPARTURE CHART - INSTRUMENT


RJOA / HIROSHIMA

RNAV SID

MARCO TWO DEPARTURE

RNP1

Note GNSS required.

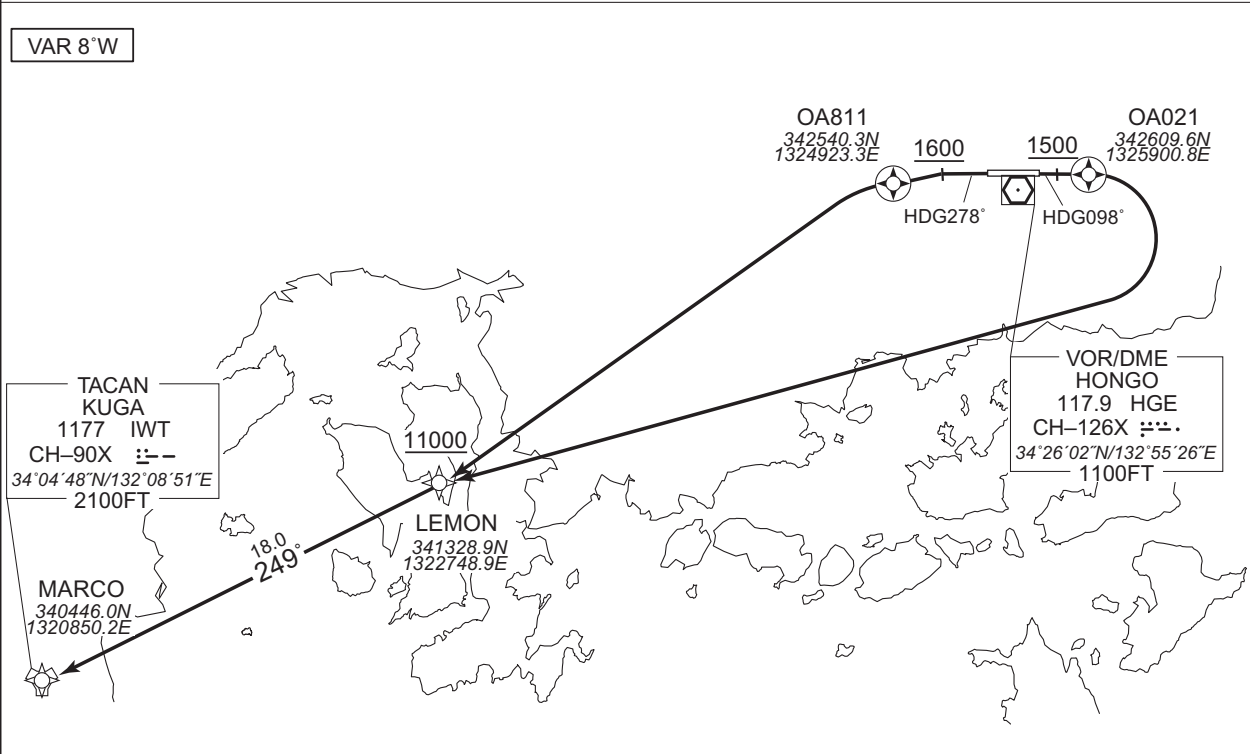

RWY10 : Climb on HDG098° at or above 1500FT, direct to OA021, turn right direct to LEMON at or above 11000FT, to MARCO.

RWY28 : Climb on HDG278° at or above 1600FT, direct to OA811, turn left direct to LEMON at or above 11000FT, to MARCO.

NOTE RWY10 : 5.0% climb gradient required up to 1500FT.
RWY28 : 3.6% climb gradient required up to 1600FT.

RWY10											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	098 (090.0)	-8.1	—	—	+1500	—	—	RNP1
002	DF	OA021	Y	—	-8.1	—	—	—	—	—	RNP1
003	DF	LEMON	—	—	-8.1	—	R	+11000	—	—	RNP1
004	TF	MARCO	—	249 (241.1)	-8.1	18.0	—	—	—	—	RNP1


RWY28											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	278 (270.0)	-8.1	—	—	+1600	—	—	RNP1
002	DF	OA811	Y	—	-8.1	—	—	—	—	—	RNP1
003	DF	LEMON	—	—	-8.1	—	L	+11000	—	—	RNP1
004	TF	MARCO	—	249 (241.1)	-8.1	18.0	—	—	—	—	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART - INSTRUMENT

RJOA / HIROSHIMA

RNAV SID and TRANSITION

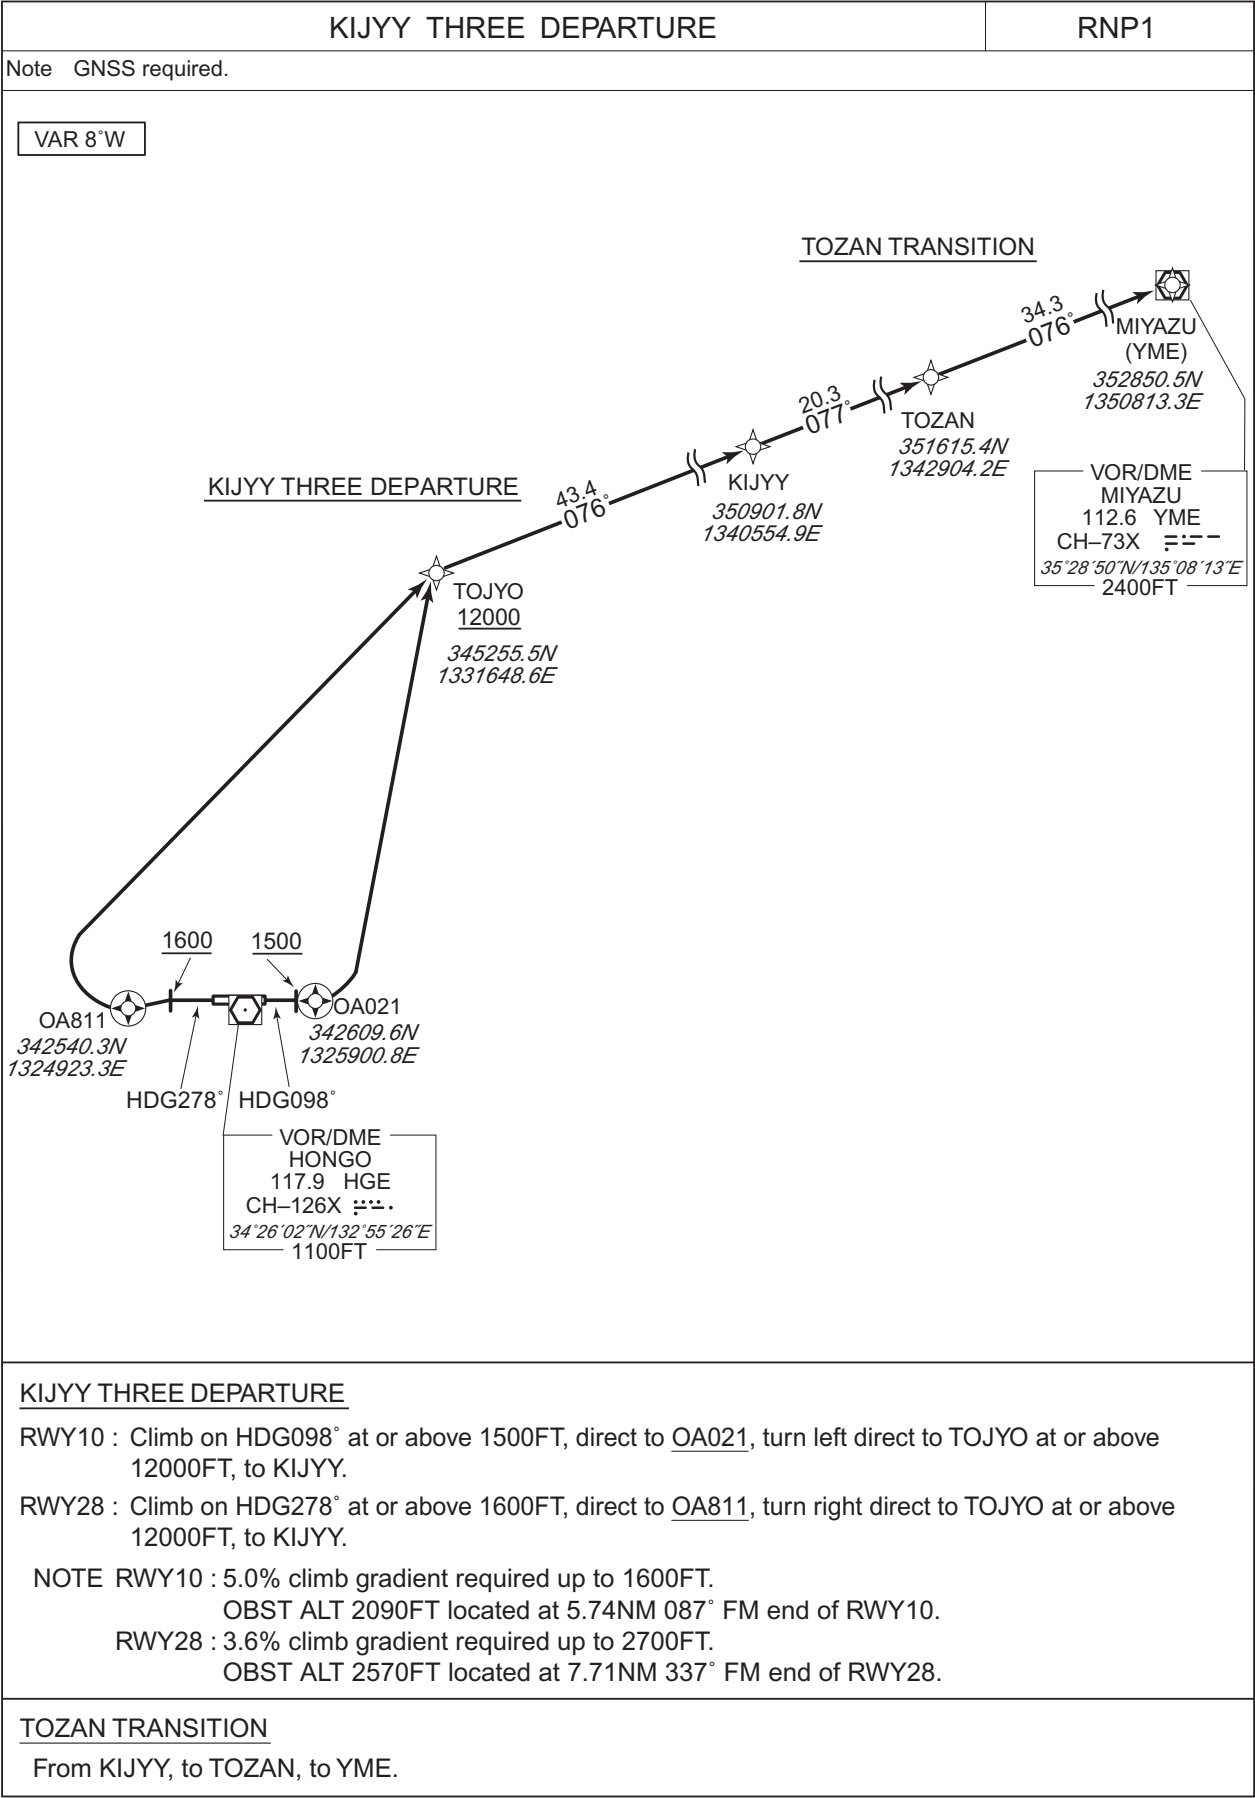

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART - INSTRUMENT

RJOA / HIROSHIMA

RNAV SID and TRANSITION

KIJYY THREE DEPARTURE

RWY10

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	098 (090.0)	-8.1	-	-	+1500	-	-	RNP1
002	DF	OA021	Y	-	-8.1	-	-	-	-	-	RNP1
003	DF	TOJYO	-	-	-8.1	-	L	+12000	-	-	RNP1
004	TF	KIJYY	-	076 (067.9)	-8.1	43.4	-	-	-	-	RNP1

RWY28

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	278 (270.0)	-8.1	-	-	+1600	-	-	RNP1
002	DF	OA811	Y	-	-8.1	-	-	-	-	-	RNP1
003	DF	TOJYO	-	-	-8.1	-	R	+12000	-	-	RNP1
004	TF	KIJYY	-	076 (067.9)	-8.1	43.4	-	-	-	-	RNP1

TOZAN TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIJYY	-	-	-8.1	-	-	-	-	-	RNP1
002	TF	TOZAN	-	077 (069.0)	-8.1	20.3	-	-	-	-	RNP1
003	TF	YME	-	076 (068.3)	-8.1	34.3	-	-	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

RJOA / HIROSHIMA
RNAV SID and TRANSITION

BOLIG TWO DEPARTURE MIDER TRANSITION	RNP1
Note GNSS required.	
<div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 10px;">VAR 8°W</div> <div style="text-align: center; margin-bottom: 10px;"> <u>MIDER TRANSITION</u> </div> <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p style="text-align: center;"><u>BOLIG TWO DEPARTURE</u></p> <p>TOJYO 12000 345255.5N 1331648.6E</p> <p>BOLIG 350358.3N 1341031.8E</p> <p>IKUNO 351204.8N 1345124.8E</p> <p>MIDER 350101.4N 1354933.6E</p> <p>OA811 342540.3N 1324923.3E</p> <p>OA021 342609.6N 1325900.8E</p> <p>VOR/DME HONGO 117.9 HGE CH-126X 34°26'02"N/132°55'26"E 1100FT</p> </div> <div style="width: 50%;"> <p>45.4° 084°</p> <p>34.4° 084°</p> <p>48.9° 111°</p> </div> </div>	
<p><u>BOLIG TWO DEPARTURE</u></p> <p>RWY10 : Climb on HDG098° at or above 1500FT, direct to <u>OA021</u>, turn left direct to TOJYO at or above 12000FT, to BOLIG.</p> <p>RWY28 : Climb on HDG278° at or above 1600FT, direct to <u>OA811</u>, turn right direct to TOJYO at or above 12000FT, to BOLIG.</p> <p>NOTE RWY10 : 5.0% climb gradient required up to 1600FT. OBST ALT 2090FT located at 5.74NM 087° FM end of RWY10.</p> <p>RWY28 : 3.6% climb gradient required up to 2700FT. OBST ALT 2570FT located at 7.71NM 337° FM end of RWY28.</p>	
<p><u>MIDER TRANSITION</u></p> <p>From BOLIG, to IKUNO, to MIDER.</p>	

CHANGE : PROC renamed. Note. Navigation Specification.

STANDARD DEPARTURE CHART - INSTRUMENT

RJOA / HIROSHIMA

RNAV SID and TRANSITION

BOLIG TWO DEPARTURE

RWY10

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	098 (090.0)	-8.2	—	—	+1500	—	—	RNP1
002	DF	OA021	Y	—	-8.2	—	—	—	—	—	RNP1
003	DF	TOJYO	—	—	-8.2	—	L	+12000	—	—	RNP1
004	TF	BOLIG	—	084 (075.7)	-8.2	45.4	—	—	—	—	RNP1

RWY28


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	278 (270.0)	-8.2	—	—	+1600	—	—	RNP1
002	DF	OA811	Y	—	-8.2	—	—	—	—	—	RNP1
003	DF	TOJYO	—	—	-8.2	—	R	+12000	—	—	RNP1
004	TF	BOLIG	—	084 (075.7)	-8.2	45.4	—	—	—	—	RNP1

MIDER TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	BOLIG	—	—	-8.2	—	—	—	—	—	RNP1
002	TF	IKUNO	—	084 (076.2)	-8.2	34.4	—	—	—	—	RNP1
003	TF	MIDER	—	111 (102.8)	-8.2	48.9	—	—	—	—	RNP1

CHANGE : PROC renamed. Navigation Specification.

STANDARD DEPARTURE CHART -INSTRUMENT

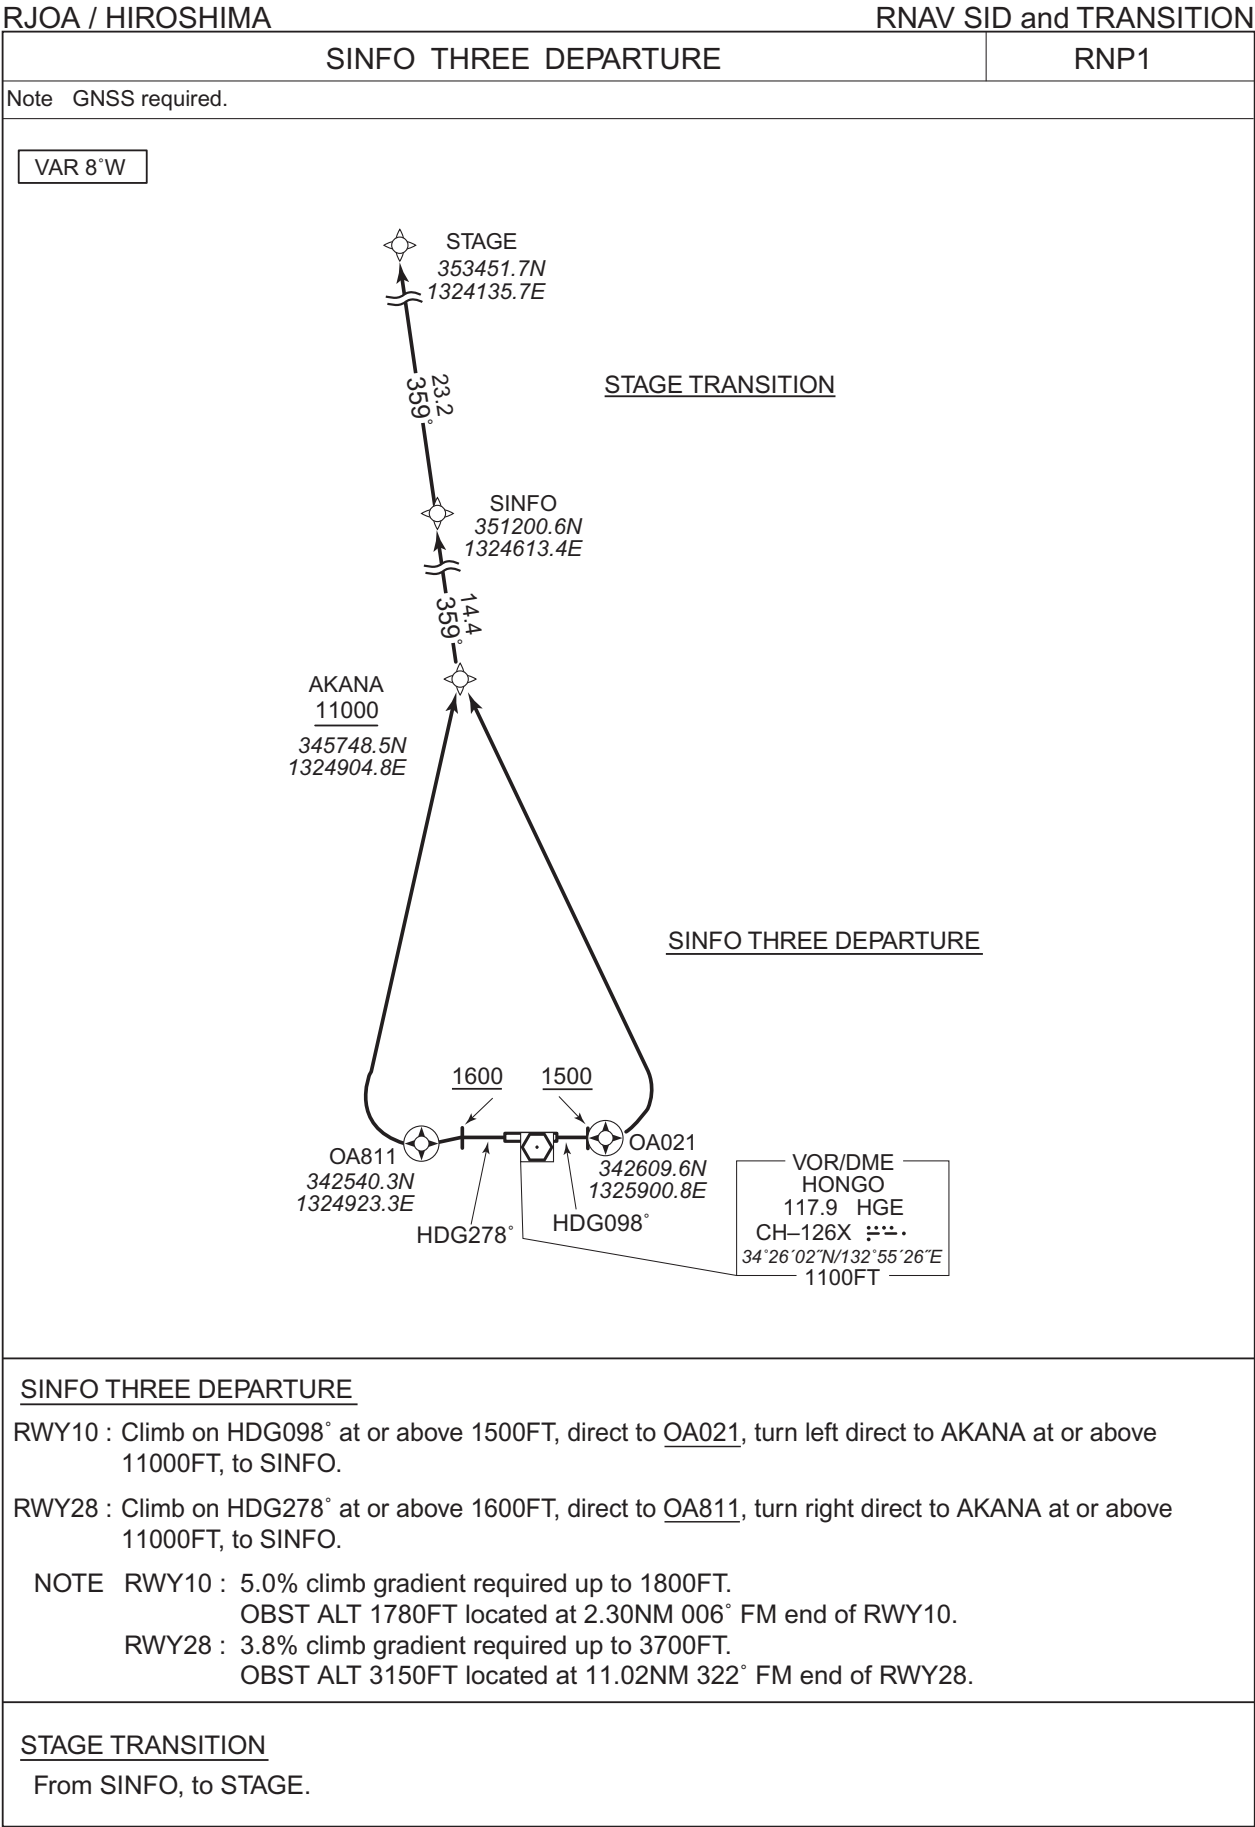

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART -INSTRUMENT

RJOA / HIROSHIMA

RNAV SID and TRANSITION

SINFO THREE DEPARTURE											
RWY10											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	098 (090.0)	-8.1	-	-	+1500	-	-	RNP1
002	DF	OA021	Y	-	-8.1	-	-	-	-	-	RNP1
003	DF	AKANA	-	-	-8.1	-	L	+11000	-	-	RNP1
004	TF	SINFO	-	359 (350.7)	-8.1	14.4	-	-	-	-	RNP1
RWY28											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	278 (270.0)	-8.1	-	-	+1600	-	-	RNP1
002	DF	OA811	Y	-	-8.1	-	-	-	-	-	RNP1
003	DF	AKANA	-	-	-8.1	-	R	+11000	-	-	RNP1
004	TF	SINFO	-	359 (350.7)	-8.1	14.4	-	-	-	-	RNP1
STAGE TRANSITION											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SINFO	-	-	-8.1	-	-	-	-	-	RNP1
002	TF	STAGE	-	359 (350.6)	-8.1	23.2	-	-	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

RJOA / HIROSHIMA

STAR

From over HGE VOR/DME, via HGE R249 to intercept and proceed via HGE 14.0DME clockwise ARC to MISEN.
Cross MISEN at or above 4100FT.




CHANGE : Course FM HGE to MISEN.

STANDARD ARRIVAL CHART -INSTRUMENT

RJOA / HIROSHIMA

RNAV STAR RWY10

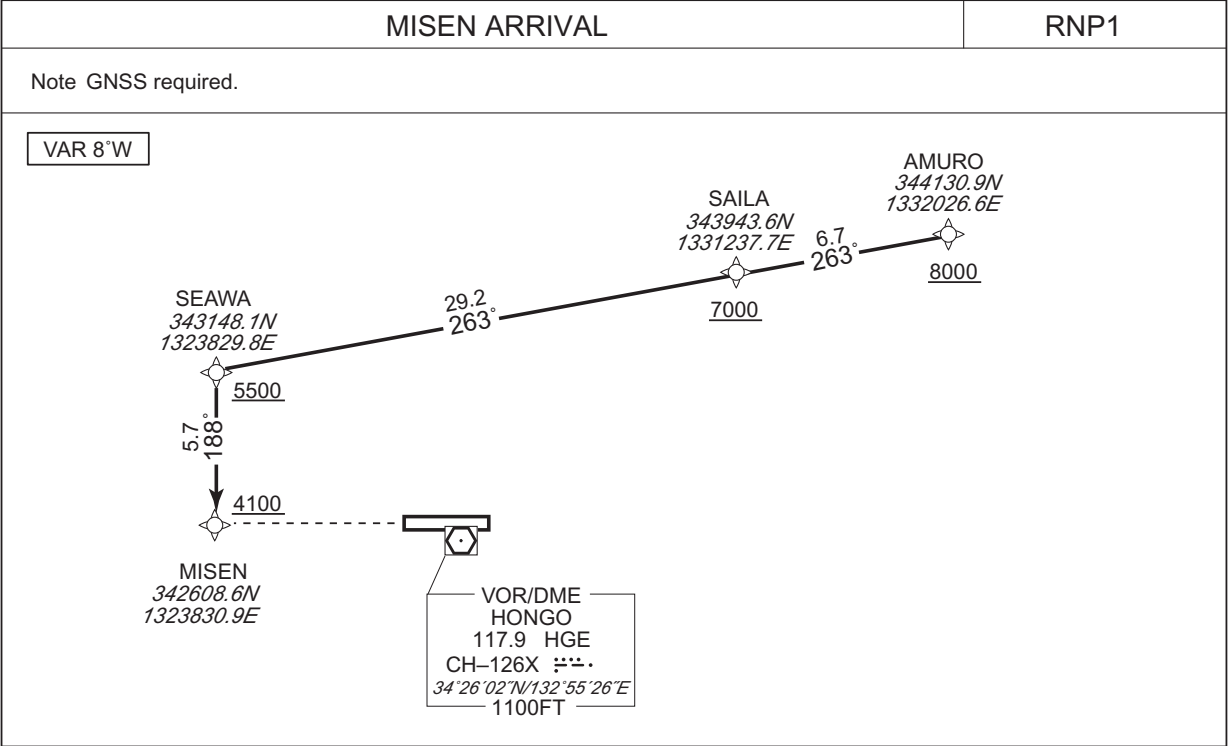

From AMURO at or above 8000FT, to SAILA at or above 7000FT, to SEAWA at or above 5500FT, to MISEN at or above 4100FT.


CHANGE : PROC course. Note. Navigation Specification. VAR.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AMURO	—	—	-8.1	—	—	+8000	—	—	RNP1
002	TF	SAILA	—	263 (254.5)	-8.1	6.7	—	+7000	—	—	RNP1
003	TF	SEAWA	—	263 (254.4)	-8.1	29.2	—	+5500	—	—	RNP1
004	TF	MISEN	—	188 (179.8)	-8.1	5.7	—	+4100	—	—	RNP1

STANDARD ARRIVAL CHART-INSTRUMENT

RJOA / HIROSHIMA

RNAV STAR RWY10

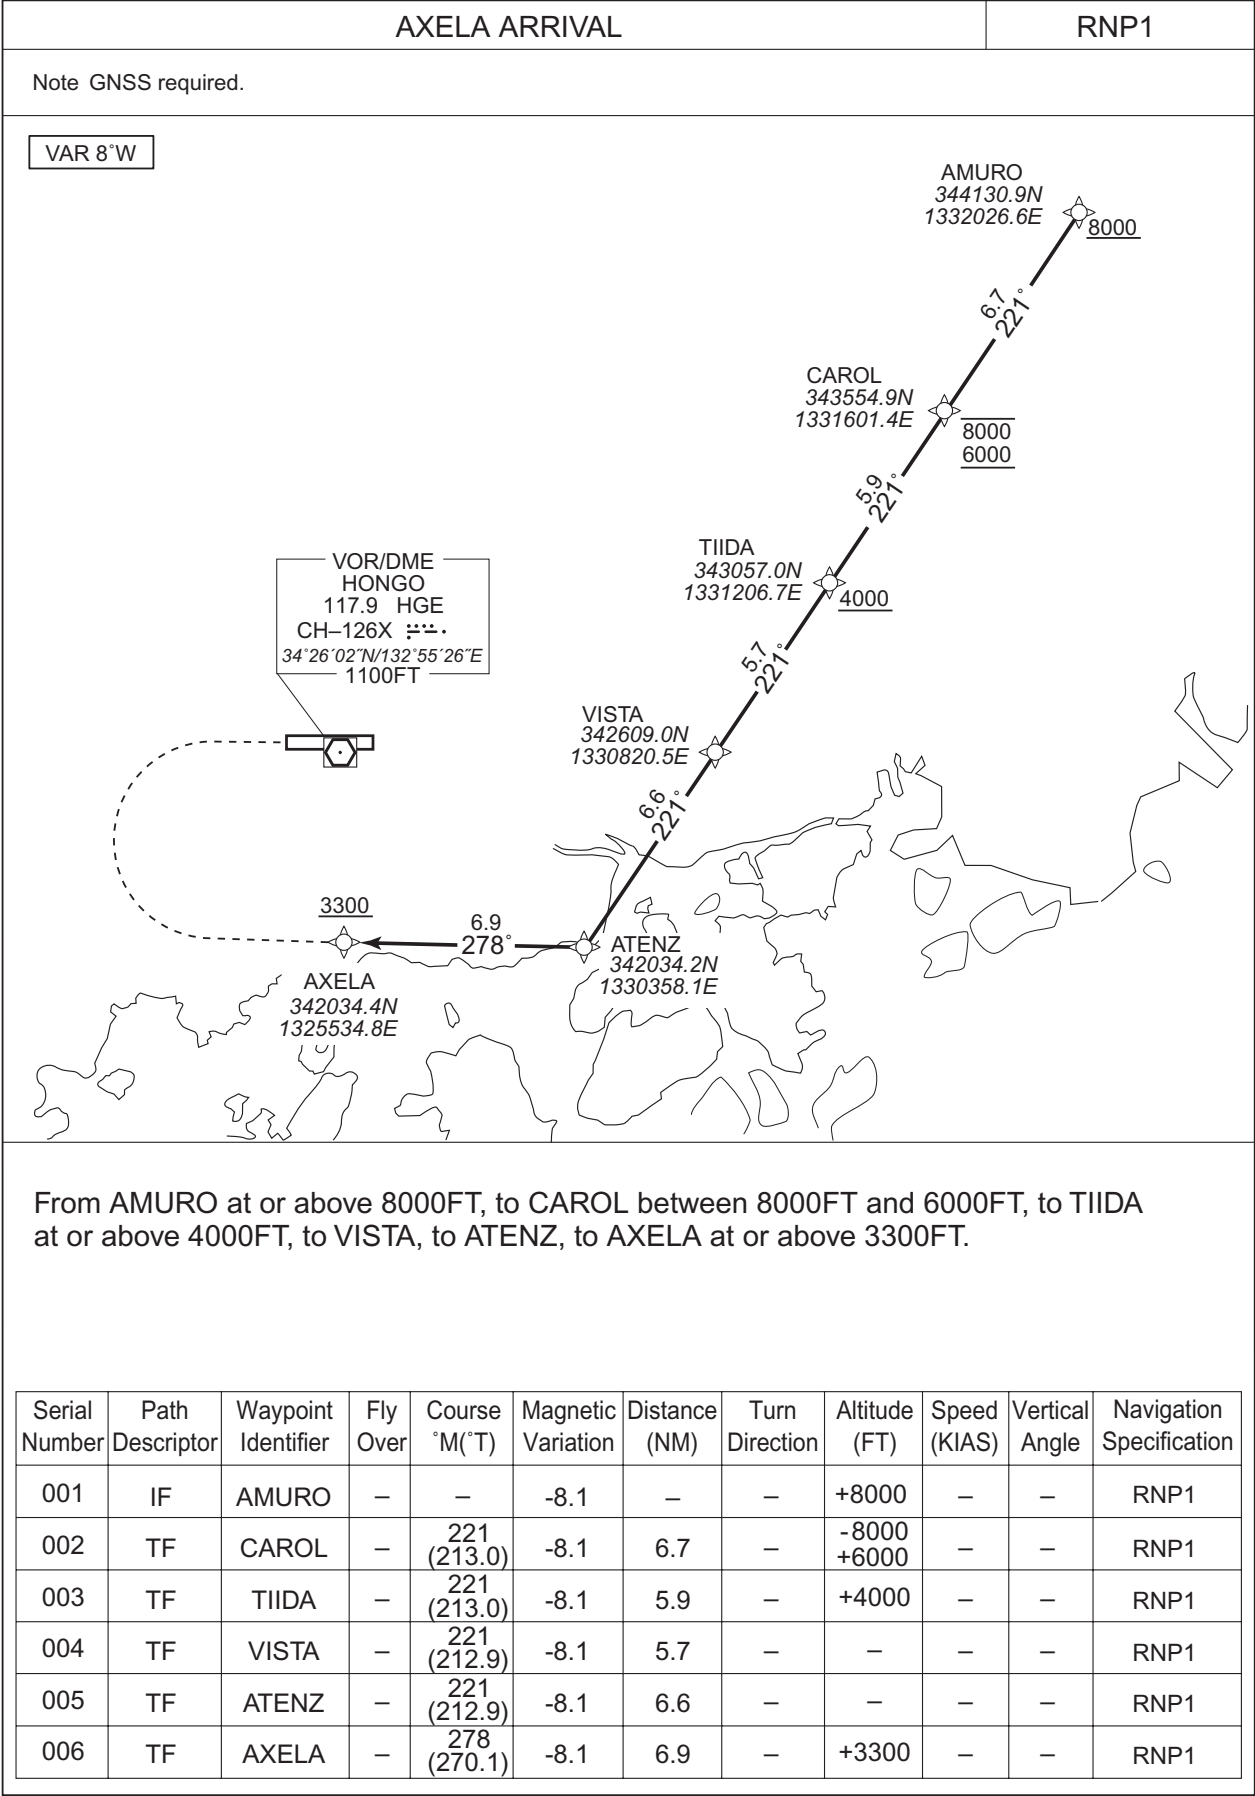

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD ARRIVAL CHART-INSTRUMENT

RJOA / HIROSHIMA

RNAV STAR RWY10

DEMIO ARRIVAL

RNP1

Note GNSS required.

VAR 8°W


The chart illustrates the DEMIO ARRIVAL RNAV STAR RWY10. It shows a sequence of waypoints: AMURO (344130.9N, 1332026.6E) at 8000 FT, MIATA (343904.6N, 1331320.6E) at 7000 FT, and DEMIO (343248.5N, 1325512.5E) at 5500 FT. The flight path starts at AMURO, proceeds to MIATA with a distance of 6.3 NM and a course of 255°, then continues to DEMIO with a distance of 16.2 NM and a course of 255°. A VOR/DME station HONGO (117.9 HGE, CH-126X) is located at 34°26'02"N/132°55'26"E, 1100 FT. A dashed line indicates a turn from the HONGO station towards the DEMIO waypoint. A note specifies 'VAR 8°W'.

From AMURO at or above 8000FT, to MIATA at or above 7000FT, to DEMIO at or above 5500FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AMURO	—	—	-8.1	—	—	+8000	—	—	RNP1
002	TF	MIATA	—	255 (247.4)	-8.1	6.3	—	+7000	—	—	RNP1
003	TF	DEMIO	—	255 (247.3)	-8.1	16.2	—	+5500	—	—	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD ARRIVAL CHART -INSTRUMENT

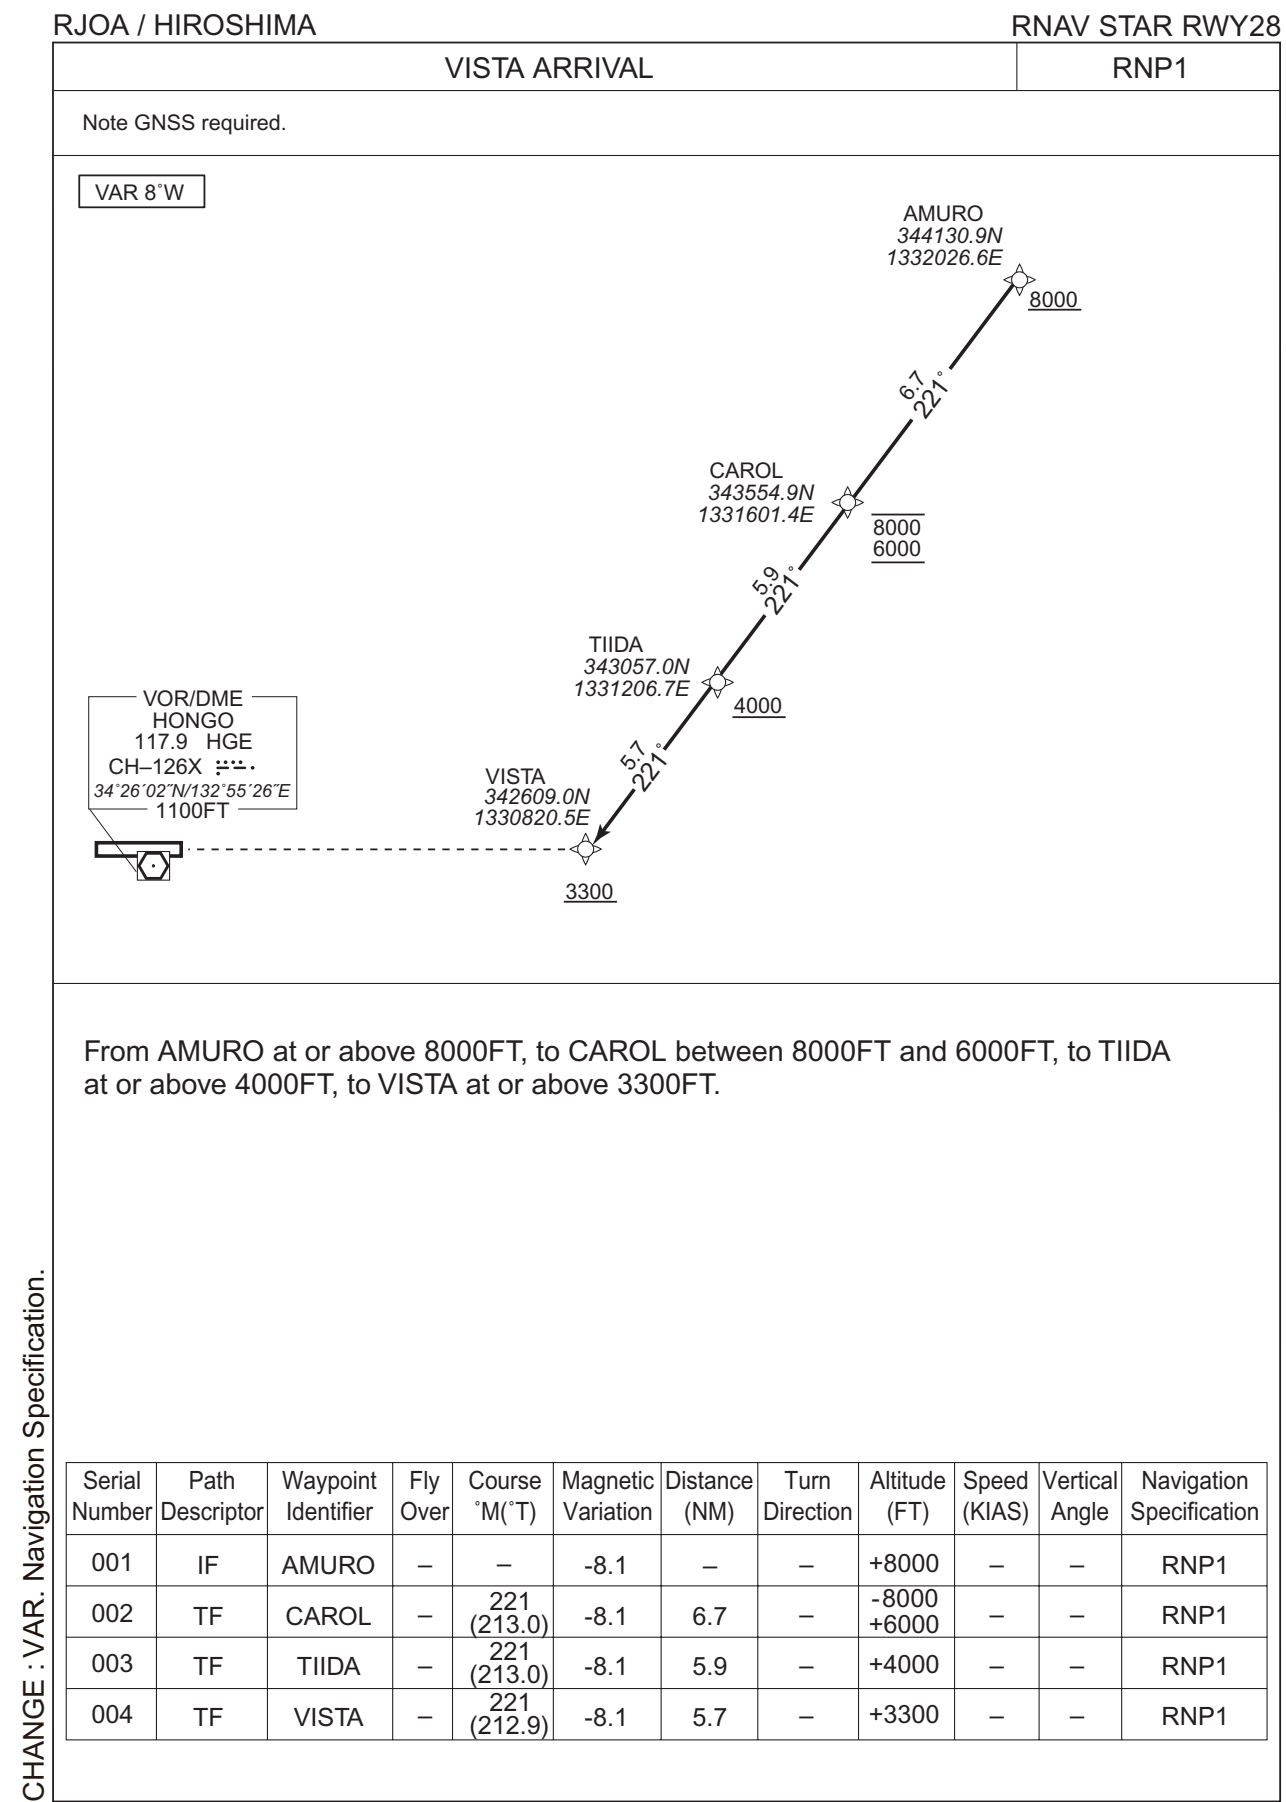

STANDARD ARRIVAL CHART -INSTRUMENT


RJOA / HIROSHIMA

RNAV STAR RWY10

PUNUP ARRIVAL	RNP1
---------------	------

Note GNSS required.

VAR 8°W

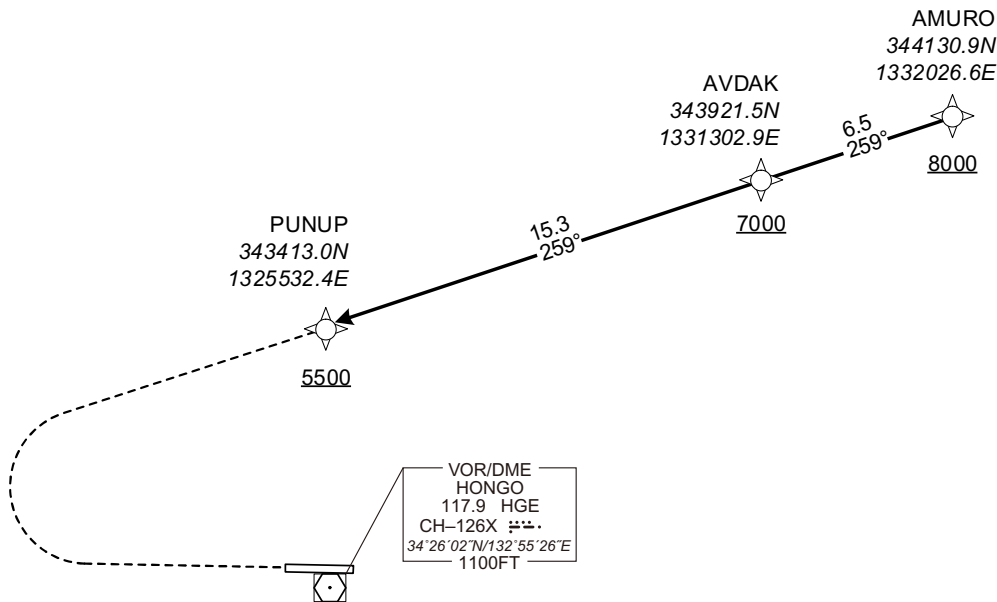

From AMURO at or above 8000FT, to AVDAK at or above 7000FT, to PUNUP at or above 5500FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AMURO	—	—	-8.1	—	—	+8000	—	—	RNP1
002	TF	AVDAK	—	259 (250.5)	-8.1	6.5	—	+7000	—	—	RNP1
003	TF	PUNUP	—	259 (250.4)	-8.1	15.3	—	+5500	—	—	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

ILS Z or LOC RWY10 (CAT III)




CHANGE : PROC renamed. Description of VAR.


INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

ILS Y RWY10(CATⅢ)

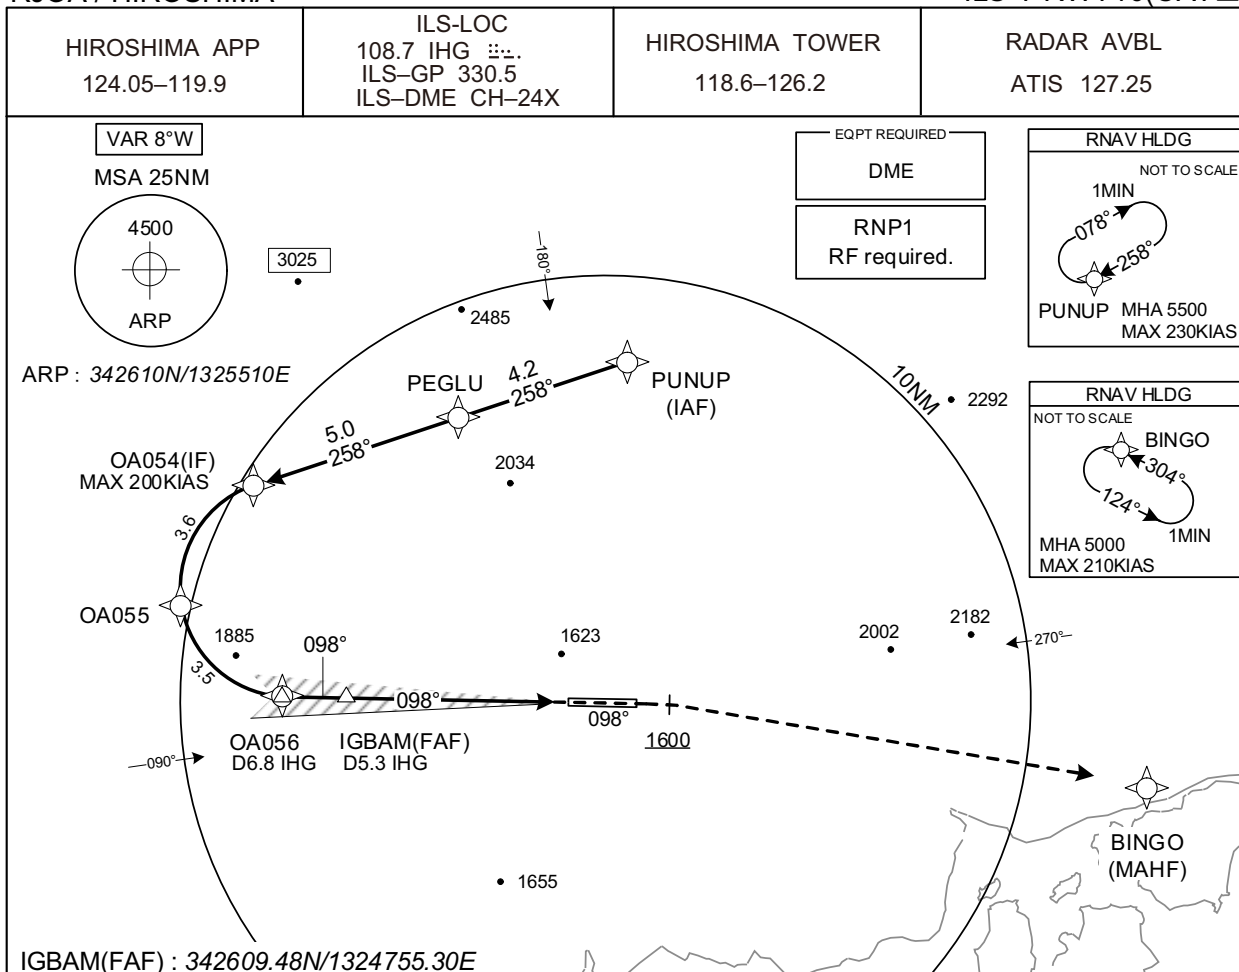

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

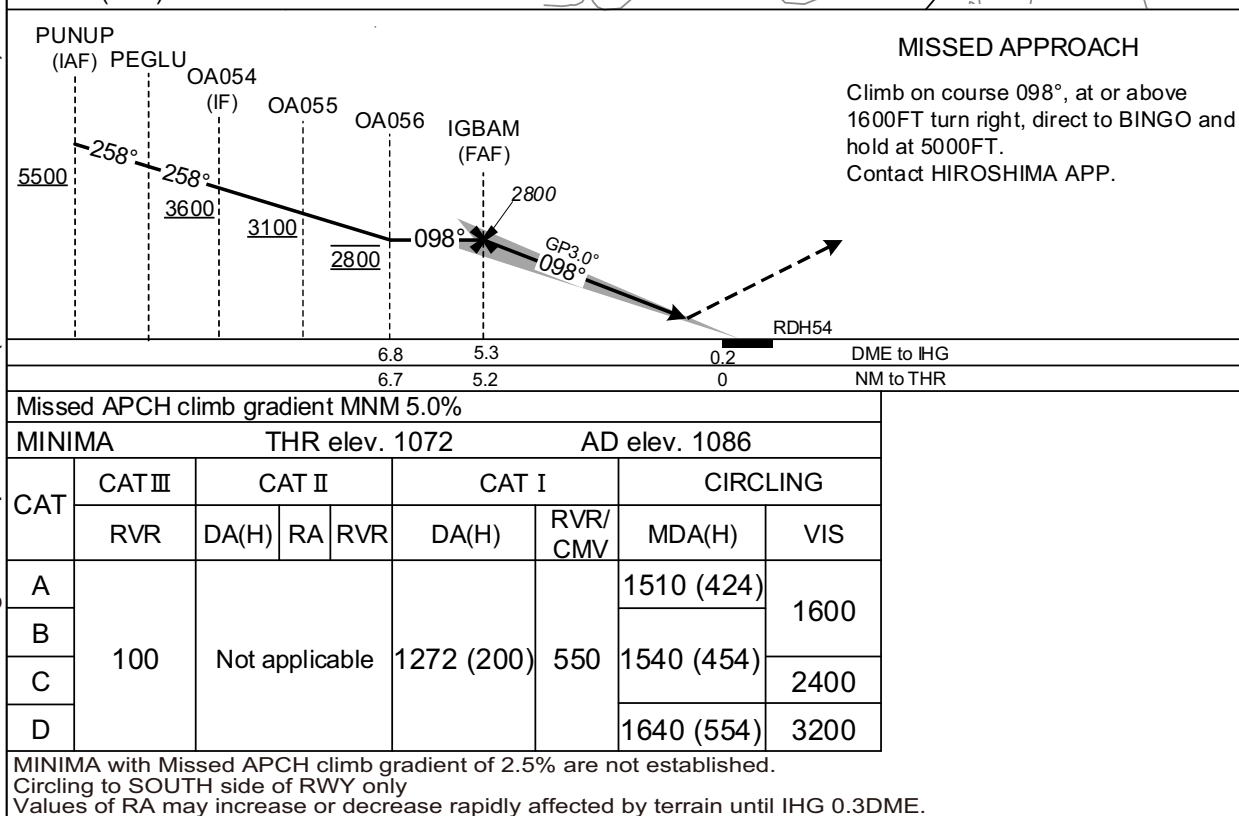

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

ILS Y RWY10(CATⅢ)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	PUNUP	-	-	-8.1	-	-	+5500	-	-	RNP1
002	TF	PEGLU	-	258 (250.3)	-8.1	4.2	-	-	-	-	RNP1
003	TF	OA054	-	258 (250.2)	-8.1	5.0	-	+3600	-200	-	RNP1
004	RF Center: OARF3 r=2.55NM	OA055	-	-	-8.1	3.6	L	+3100	-	-	RNP1
005	RF Center: OARF3 r=2.55NM	OA056	-	-	-8.1	3.5	L	2800	-	-	RNP1
001	CA	-	-	098 (090.0)	-8.1	-	-	+1600	-	-	RNP1
002	DF	BINGO	-	-	-8.1	-	R	5000	-	-	RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	PUNUP	258 (250.3)	-8.1	1.0 (-14000)	R	5500	FL140	-230 (-14000)	RNP1
Hold	BINGO	304 (296.1)	-8.1	1.0 (-14000)	L	5000	FL140	-210 (-14000)	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
PUNUP	343412.97N / 1325532.36E	OARF3	342842.60N / 1324606.23E
PEGLU	343248.19N / 1325045.55E		
OA054	343106.85N / 1324503.74E		
OA055	342814.80N / 1324304.26E		
OA056	342609.36N / 1324606.51E		
BINGO	342425.72N / 1331040.68E		

CHANGE : Correction of misdescription(HLDG speed, Minimum ALT at BINGO).


Civil Aviation Bureau,Japan (EFF:18 APR 2024)

18/4/24

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA


VOR RWY10

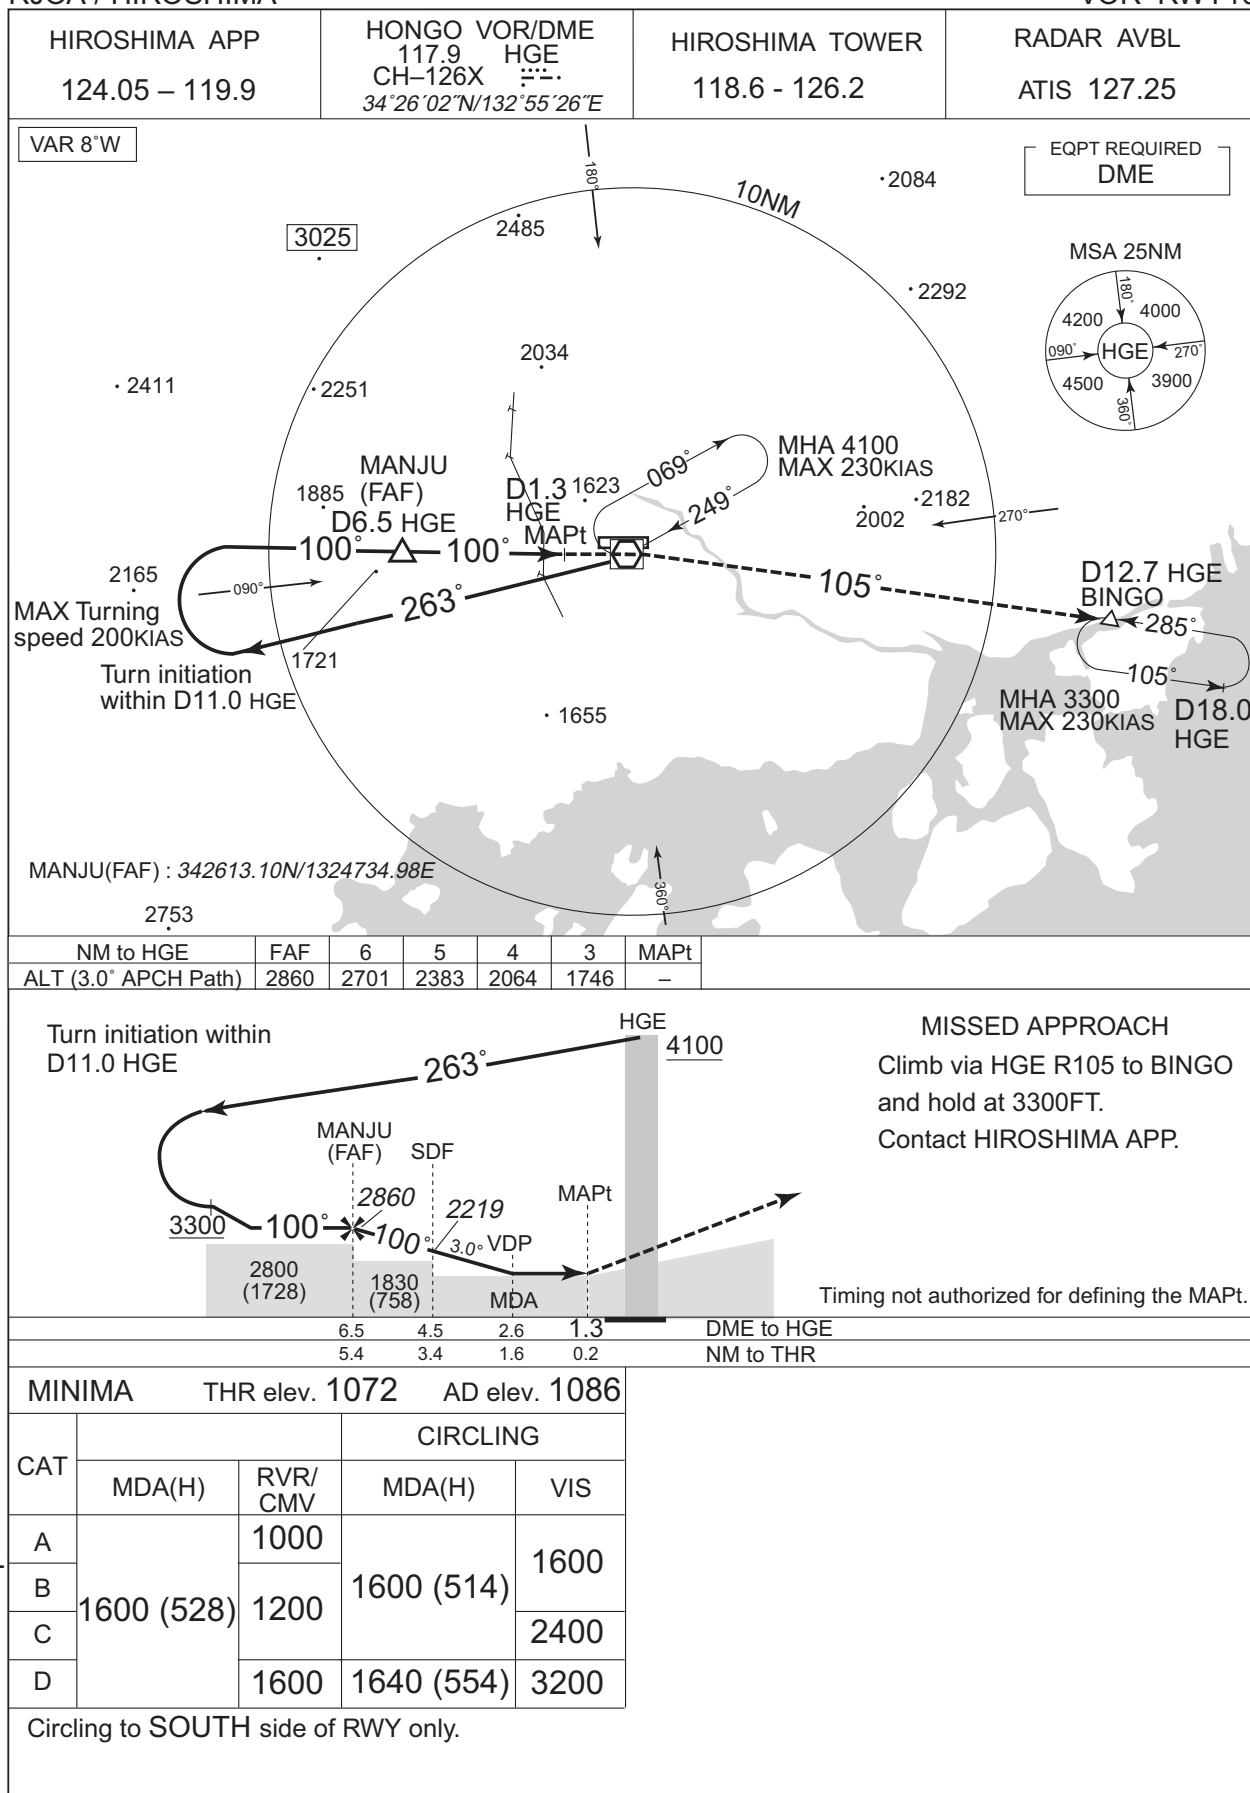

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

VOR RWY28

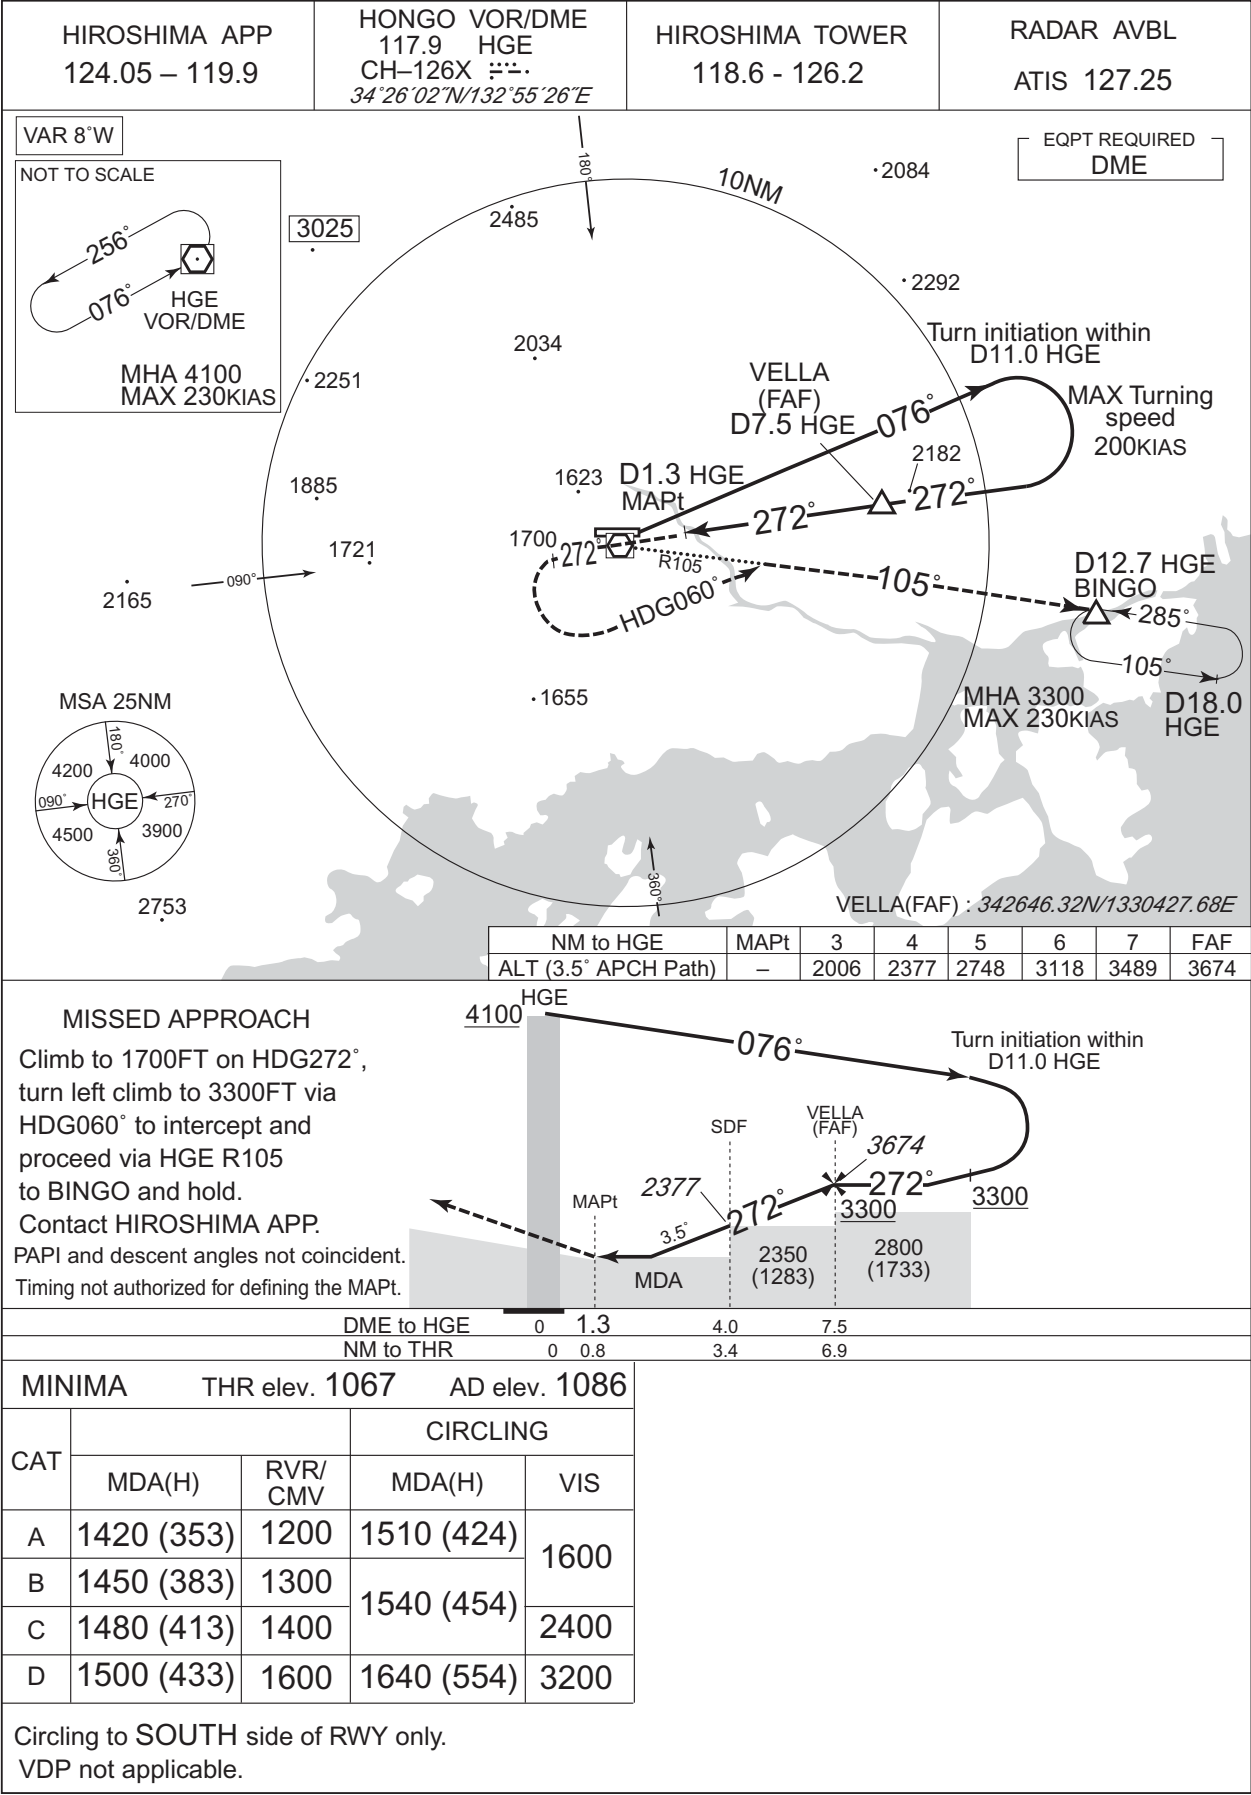

CHANGE : Description of VAR.

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

RNP RWY28



INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

RNP Z RWY10(AR)



INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

RNP Z RWY10(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	DEMIO	-	-	-8.1	-	-	+5500	-	-	-
002	TF	OA050	-	255 (247.1)	-8.1	4.5	-	+3200	-185	-	1.0
003	RF Center: OARF1 r=2.54NM	OA051	-	-	-8.1	2.8	L	3200	-	-	1.0
004	RF Center: OARF1 r=2.54NM	OA052	-	-	-8.1	4.2	L	1874	-	-3.00	0.10 0.30
005	TF	RW10	Y	098 (090.0)	-8.1	2.3	-	1126	-	-3.00/54	0.10 0.30
006	TF	OA053	-	098 (090.0)	-8.1	6.2	-	-	-	-	1.0
007	TF	BINGO	-	111 (103.2)	-8.1	7.6	-	5000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	DEMIO	255 (247.1)	-8.1	1.0 (-14000)	R	5500	FL140	-230(-14000)	1.0
Hold	BINGO	304 (296.1)	-8.1	1.0 (-14000)	L	5000	FL140	-210(-14000)	1.0


Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
DEMIO	343248.47N / 1325512.50E	OARF1	342842.28N / 1325120.72E
OA050	343102.99N / 1325009.23E		
OA051	342852.58N / 1324816.81E		
OA052	342609.63N / 1325120.84E		
RW10	342609.69N / 1325411.25E		
OA053	342609.67N / 1330143.51E		
BINGO	342425.72N / 1331040.68E		

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

RNP Y RWY10(AR)

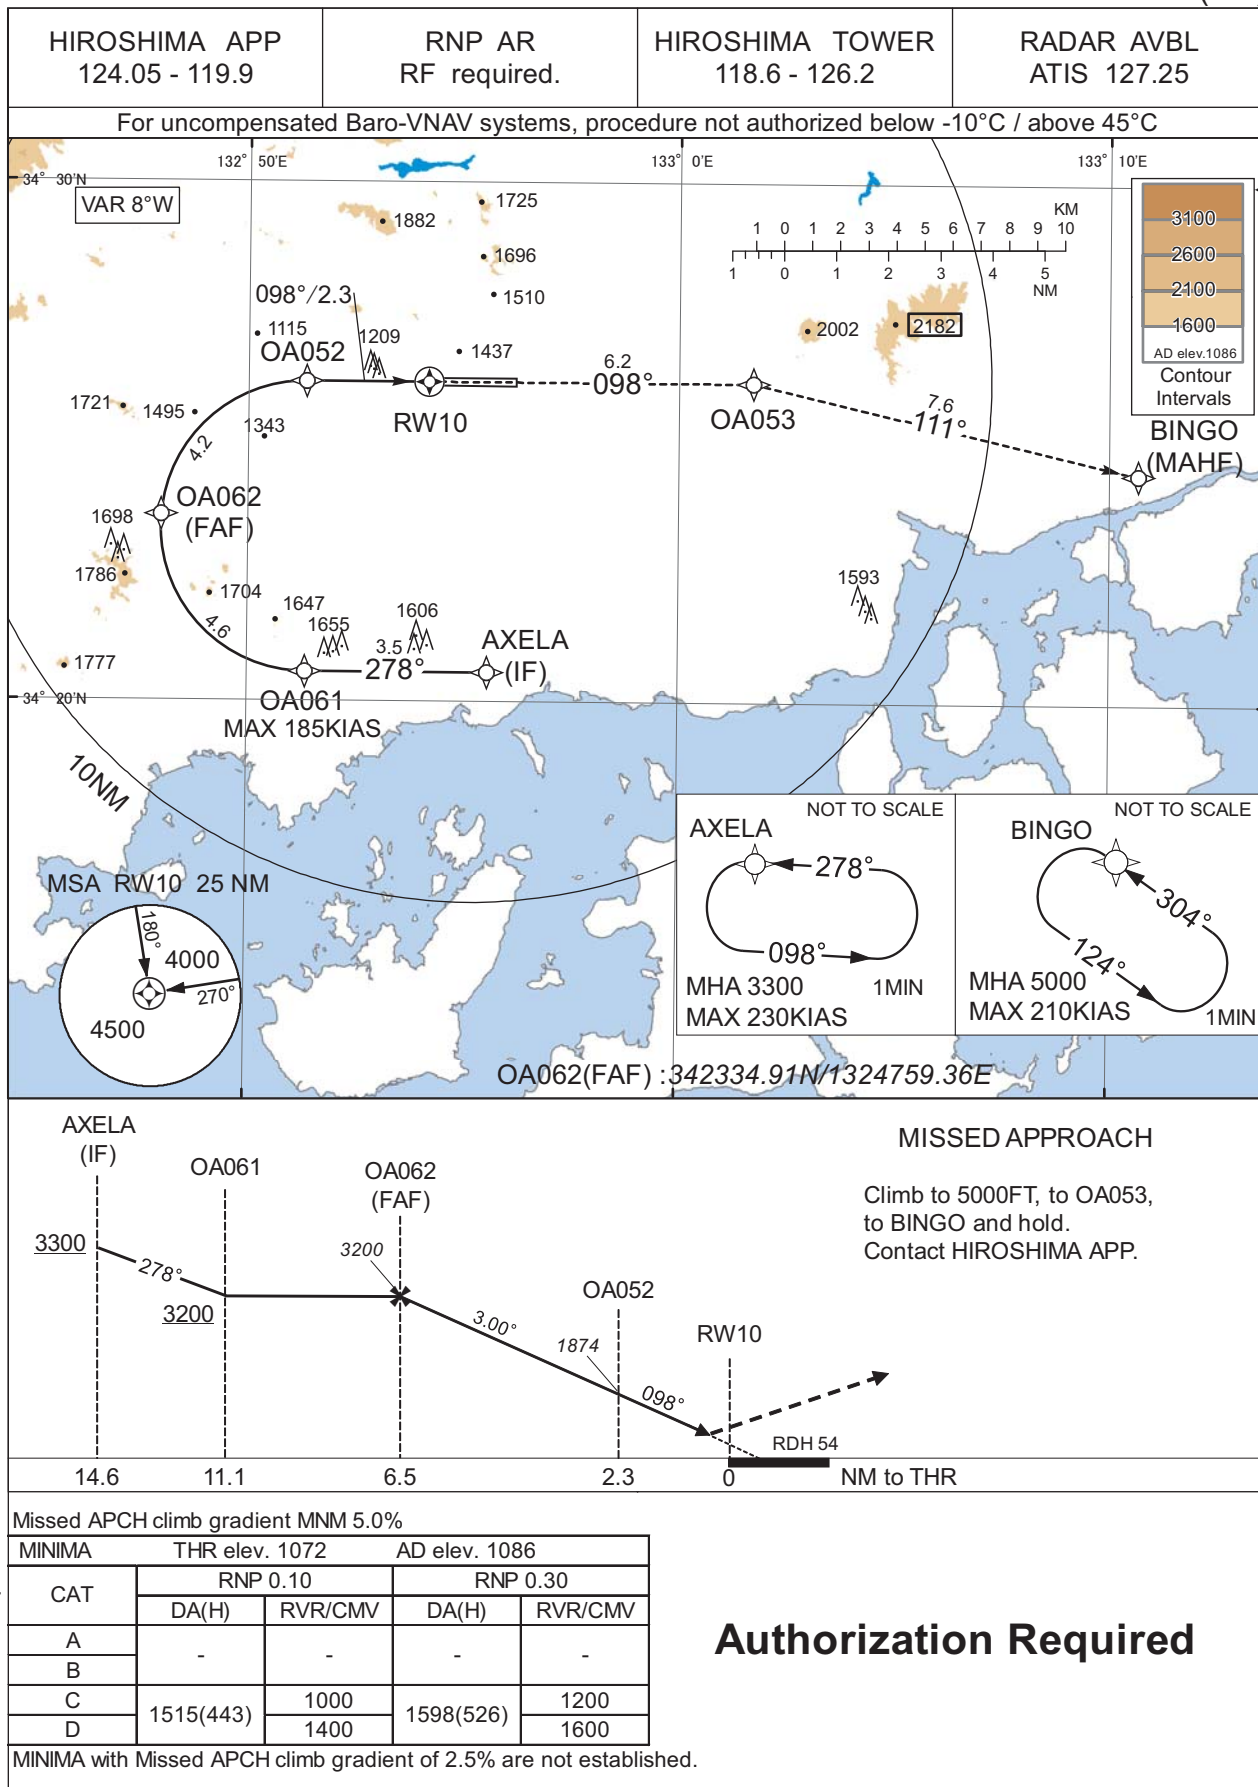

CHANGE : Description of VAR.

Authorization Required

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

RNP Y RWY10(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	AXELA	-	-	-8.1	-	-	+3300	-	-	1.0
002	TF	OA061	-	278 (270.0)	-8.1	3.5	-	+3200	-185	-	1.0
003	RF Center: OARF2 r=2.79NM	OA062	-	-	-8.1	4.6	R	3200	-	-	1.0
004	RF Center: OARF2 r=2.79NM	OA052	-	-	-8.1	4.2	R	1874	-	-3.00	0.10 0.30
005	TF	RW10	Y	098 (090.0)	-8.1	2.3	-	1126	-	-3.00/54	0.10 0.30
006	TF	OA053	-	098 (090.0)	-8.1	6.2	-	-	-	-	1.0
007	TF	BINGO	-	111 (103.2)	-8.1	7.6	-	5000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	AXELA	278 (270.0)	-8.1	1.0 (-14000)	L	3300	FL140	-230(-14000)	1.0
Hold	BINGO	304 (296.1)	-8.1	1.0 (-14000)	L	5000	FL140	-210(-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
AXELA	342034.40N / 1325534.80E	OARF2	342321.96N / 1325120.96E
OA061	342034.29N / 1325121.21E		
OA062	342334.91N / 1324759.36E		
OA052	342609.63N / 1325120.84E		
RW10	342609.69N / 1325411.25E		
OA053	342609.67N / 1330143.51E		
BINGO	342425.72N / 1331040.68E		

RJOA / HIROSHIMA

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
白竜 Hakuryu	345°T / 4.3NM	湖 Lake
小佐木 Kosagi	115°T / 10.1NM	小佐木島 Kosagi - Island
竹原 Takehara	184°T / 5.8NM	竹原駅 Railway Station
三永サウス Minaga South	251°T / 8.4NM	東広島駅 Railway Station
新庄 Shinjo	209°T / 2.9NM	新庄交差点 Shinjo Intersection



RJOA / HIROSHIMA

Minimum Vectoring Altitude CHART

VAR 8°W (2022)



CENTER : 342602N/1325458E (RADAR SITE)

CHANGE : VAR.