



AD CHART



27/11/25

RJOI / IWAKUNI


Aircraft Parking / Docking Chart

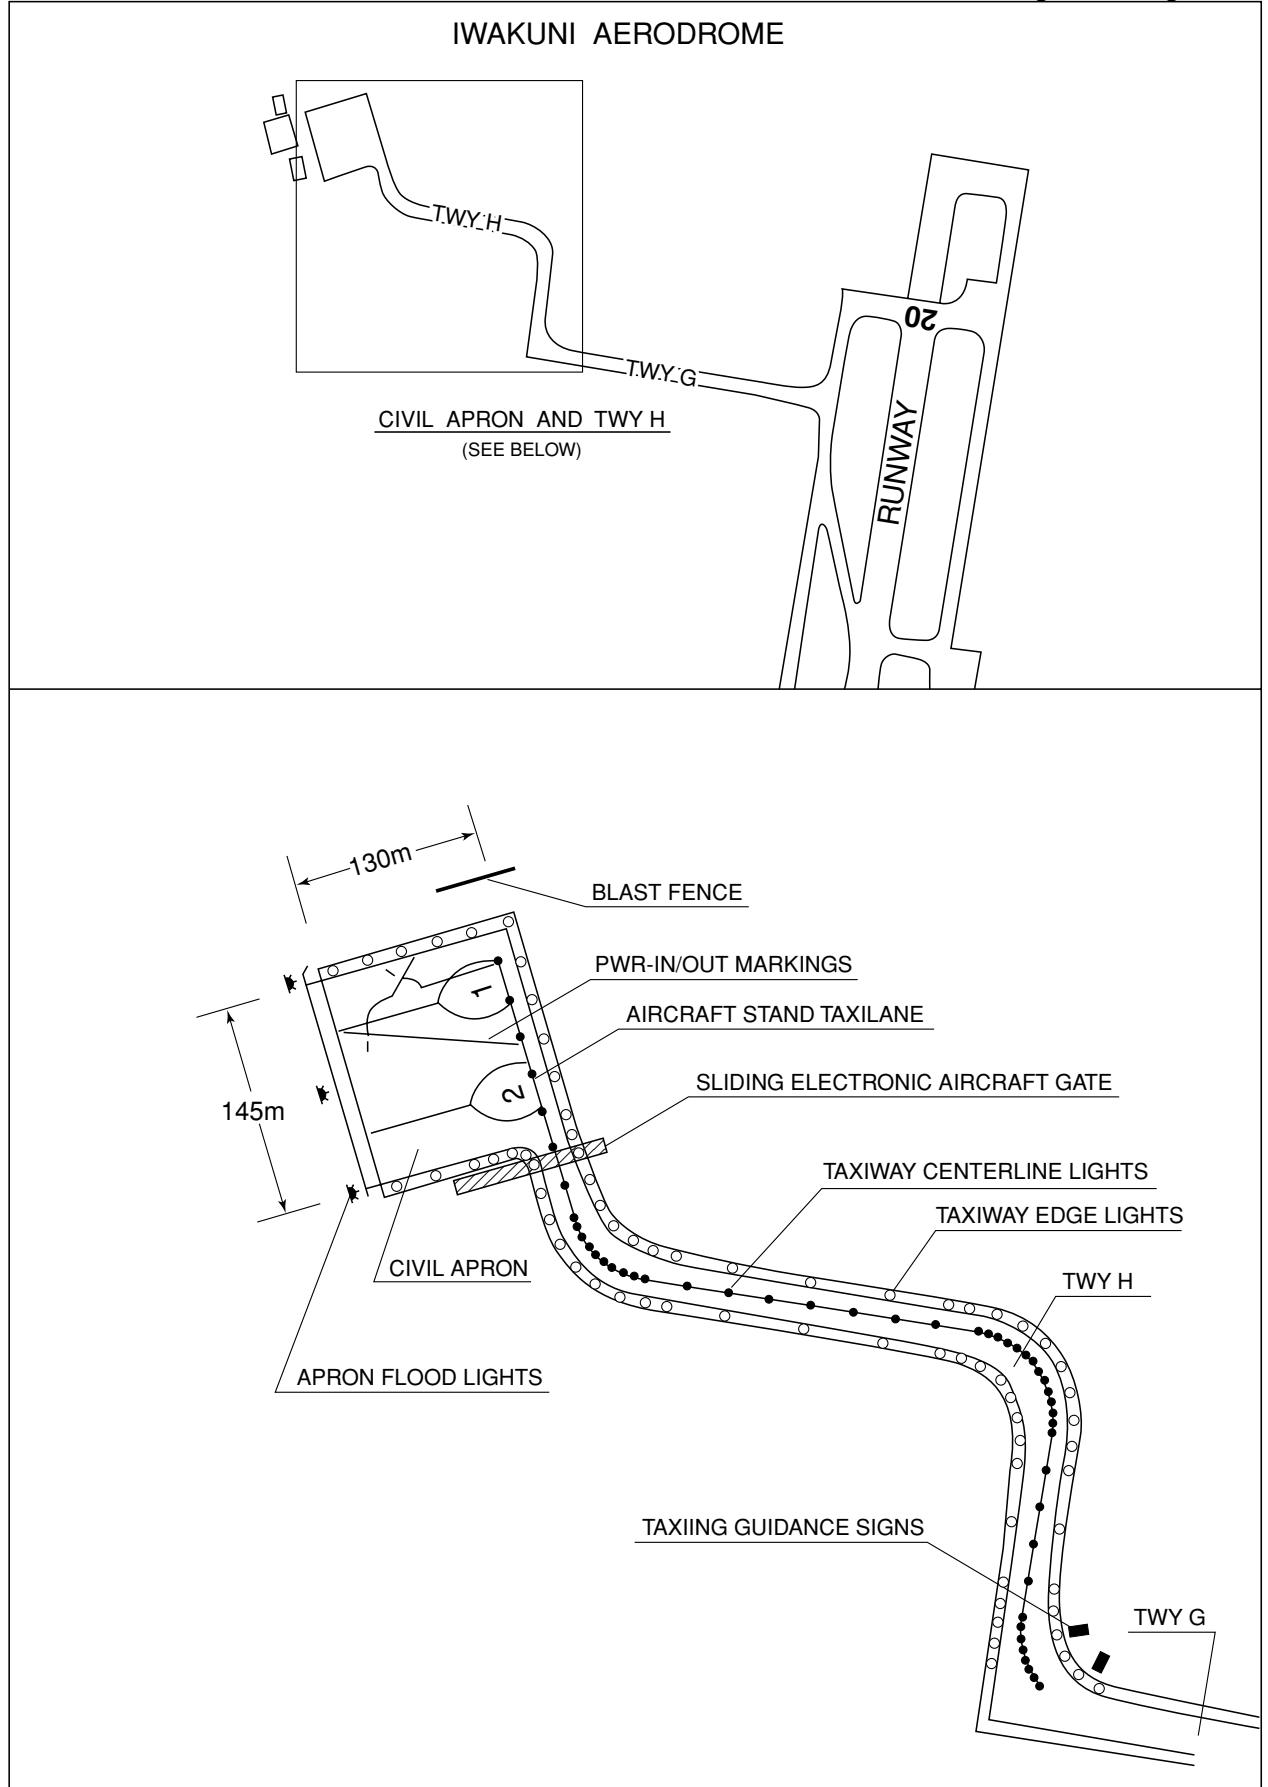

RJOI / IWAKUNI MATSUYAMA SE FOUR DEPARTURE(OBSTACLE)(RNAV)

Rwy	Knots	60	120	180	240	300	360
* 02 Ⓐ	V/V(fpm)	230	460	690	920	1150	1650
† 02/20 Ⓑ	V/V(fpm)	280	560	840	1120	1400	1680
† 20 Ⓒ	V/V(fpm)	204	408	612	816	1020	1224

2795

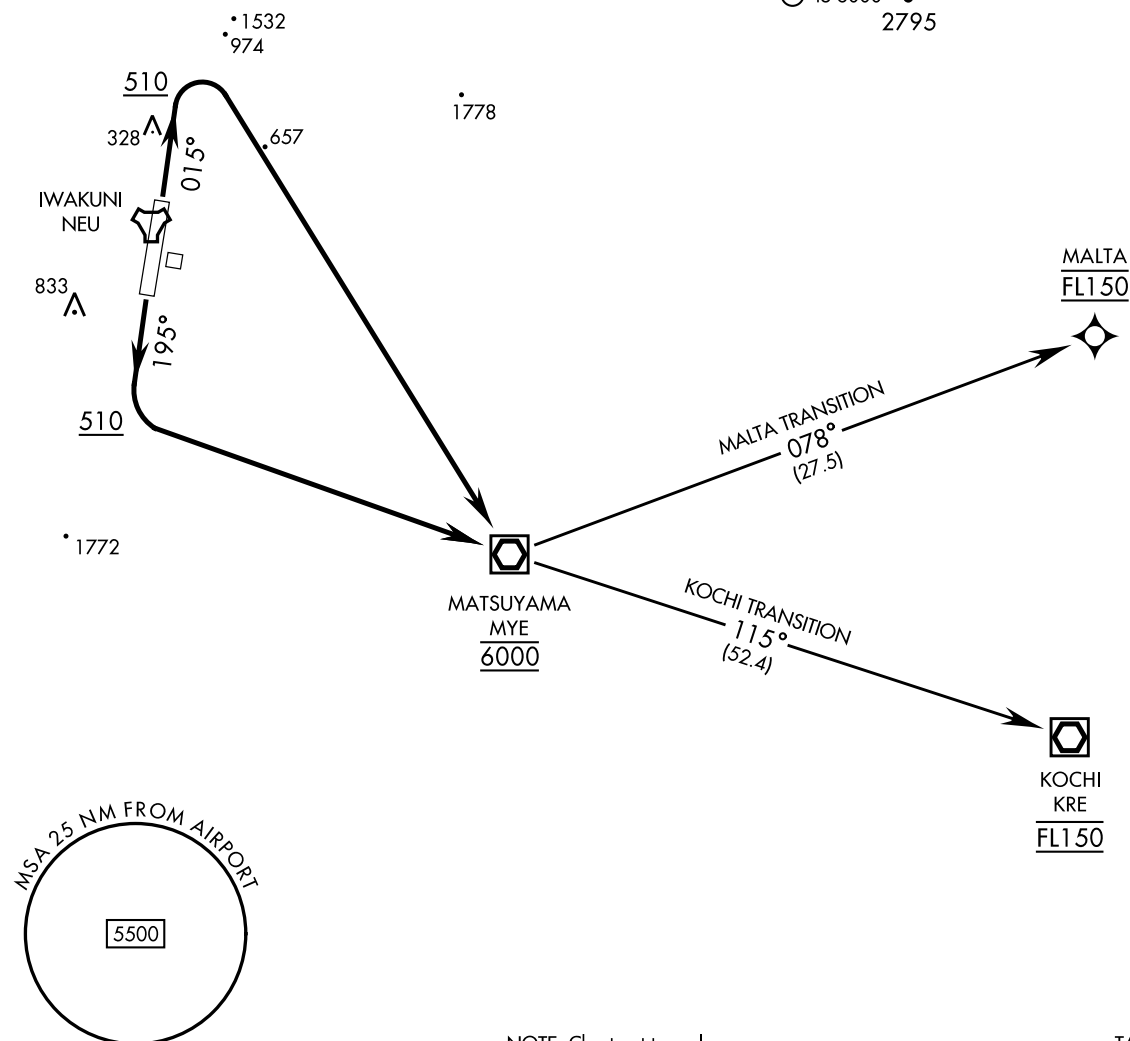

TA 14,000

T

MALTA TRANSITION: ...from over MYE VOR/DME climbing track 078° to cross MALTA at FL150. Maintain FL150 or higher as assigned.

CHANGE : Update.

17/4/25

RJOI / IWAKUNI

CHANGE : Update.

17/4/25

INSTRUMENT APPROACH CHART

RJOI / IWAKUNI

RNAV(GPS) RWY02

APCH CRS 015°	Rwy Idg 8007
	THRE 10
	Arpt Elev 10

RNP APCH

* When ALS inop, increase vis to 7/8 mile.

** When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1 1/8 miles.

*** Circling not authorized W of Rwy 02-20. CAT D circling remain within 2.8 NM.


ALS-1



MISSED APPROACH: Climb to 600 then climbing right turn to 6000 direct MYE VOR/DME and hold.

ATIS ★ 128.4 283.0	APP CON ★ 131.4 236.2	TOWER ★ 123.8 340.2	GND CON ★ 121.3 360.2	CLNC DEL ★ 135.7 310.6	ASR/PAR
------------------------------	---------------------------------	-------------------------------	---------------------------------	----------------------------------	---------

Knots	60	120	180	240	300	360
V/V(fpm)	220	440	660	880	1100	1320
Min climb of 220 ft/NM to 1500 - Controlling Obstacle 1317						

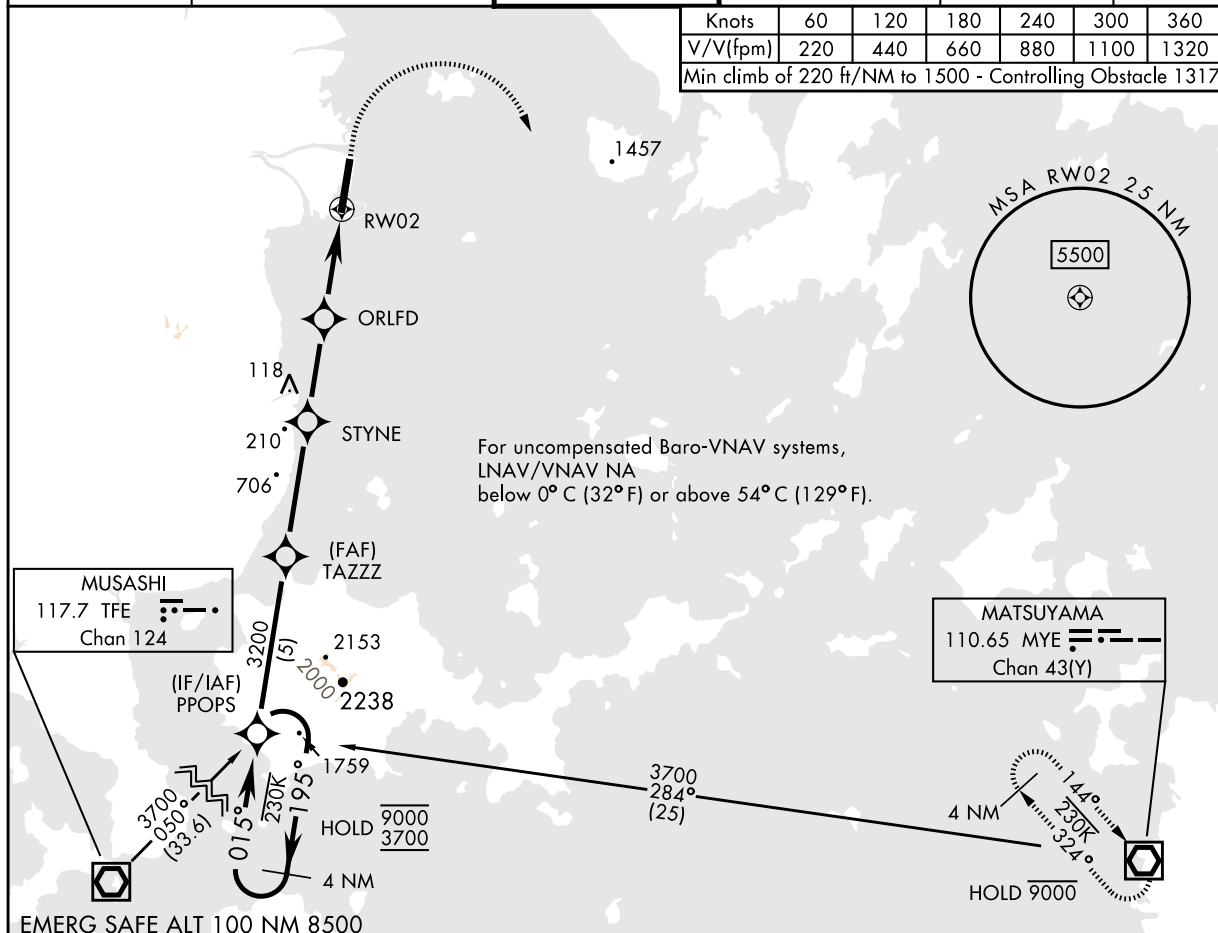VGSi and glidepath not coincident
(VGSi Angle 3.00/TCH 67).

ELEV 10

THRE 10

4 NM
Holding Pattern

PPOPS

9000
3700195°
015°

015°

TAZZZ

STYNE

ORLFD

1 NM to RW02

RW02

GP 3.00°
TCH 55

3200


1960

1040

3.8 NM

2.9 NM

3.1 NM

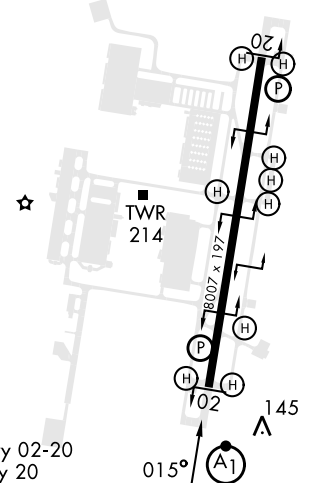TLv FL140
TA 14,000

CHANGE : Update.

CATEGORY	A	B	C	D
LNAV/ * VNAV DA	276-1/2 266 (300-1/2)	287-1/2 277 (300-1/2)	295-1/2 285 (300-1/2)	306-1/2 296 (300-1/2)
LNAV MDA**	400- 1/2 390 (400-1/2)	390 (400-1/2)	400-5/8 390 (400-5/8)	390 (400-5/8)
CIRCLING ***	460-1 450 (500-1)	450 (500-1)	460-1 1/2 450 (500-1 1/2)	560-2 550 (600-2)

NOTE: REPRINTING DOD FLIP

RJOI / IWAKUNI

RNAV(RNP)RWY20

MISSED APPROACH: Climb to 3700 on track 195° to PPOPS and hold, continue climb-in-hold to 3700.

CAUTION: Missed Approach
Minimum Climb Rate to 2500

Knots	60	120	180	240	300	360
V/V(fpm)	275	550	825	1100	1375	1650

Controlling Obstacle Unknown



EMERG SAFE ALT 100 NM 8500





7/8/25

INTENTIONALLY LEFT BLANK

RJOI / IWAKUNI

LDG CHART

SEALANE PATTERNS & VFR ARR PATTERNS

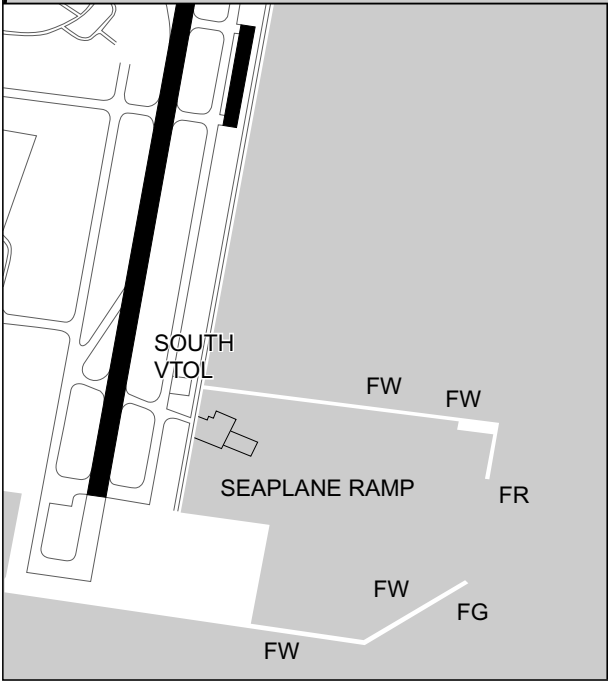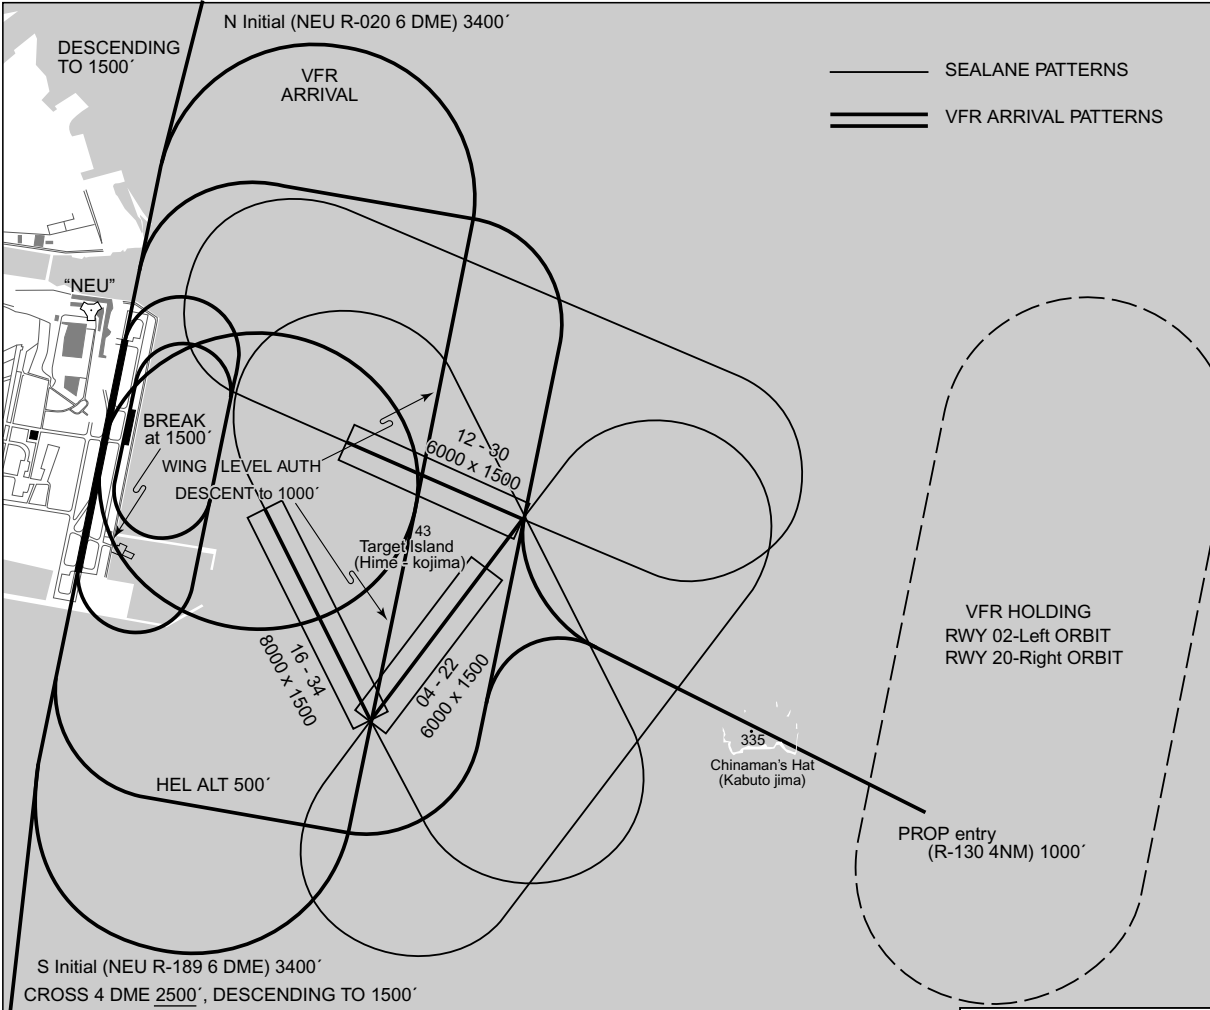

IWAKUNI SEALANE(TOWER) :
122.0 - 228.2 - 319.0

IWAKUNI APP : WEST
131.4 - 236.2
EAST 128.0 - 250.6

IWAKUNI TWR :
123.8 - 340.2


CHANGE : Update.

RJOI / IWAKUNI

Minimum Vectoring Altitude CHART

Altitude MSL	
S1	7300 ft
S2	5500 ft
S3	4100 ft
S4	3400 ft
S5	2800 ft
S6	2700 ft
S7	2600 ft
S8	4300 ft
S9	2400 ft

- Centered on NEU (Iwakuni TACAN)
- Radials from NEU

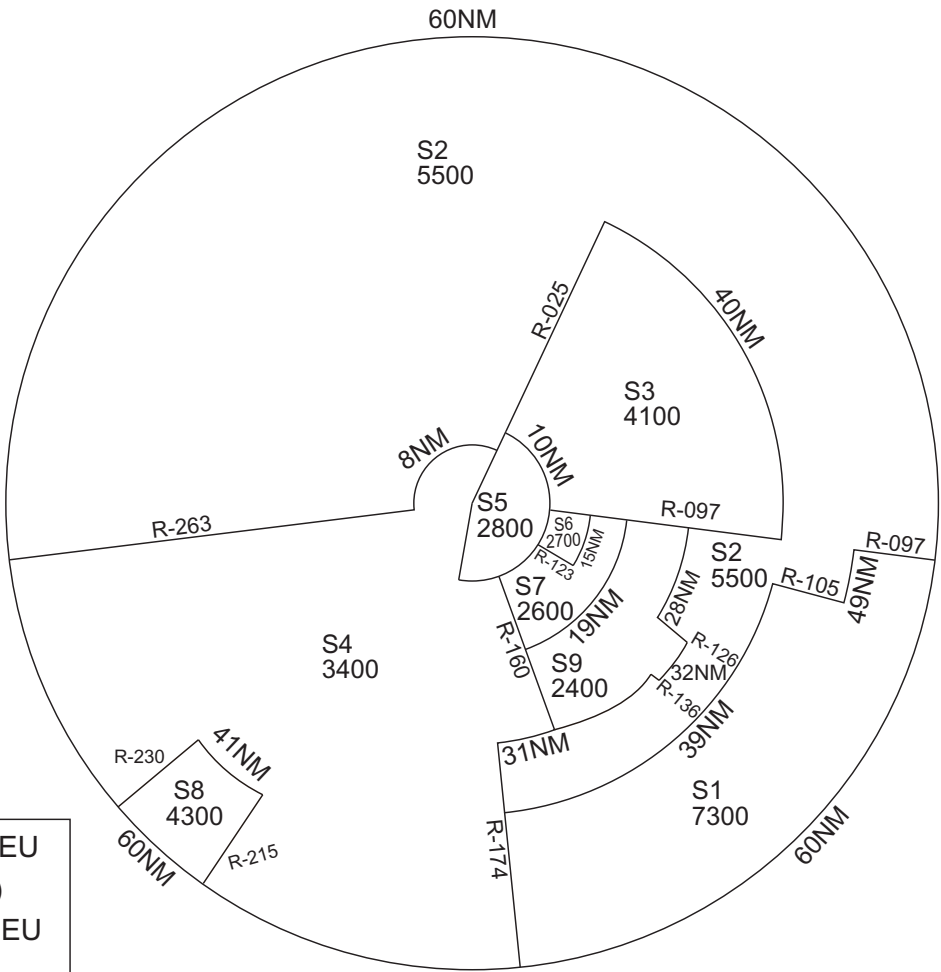

CHANGE : Update.