



AERODROME CHART

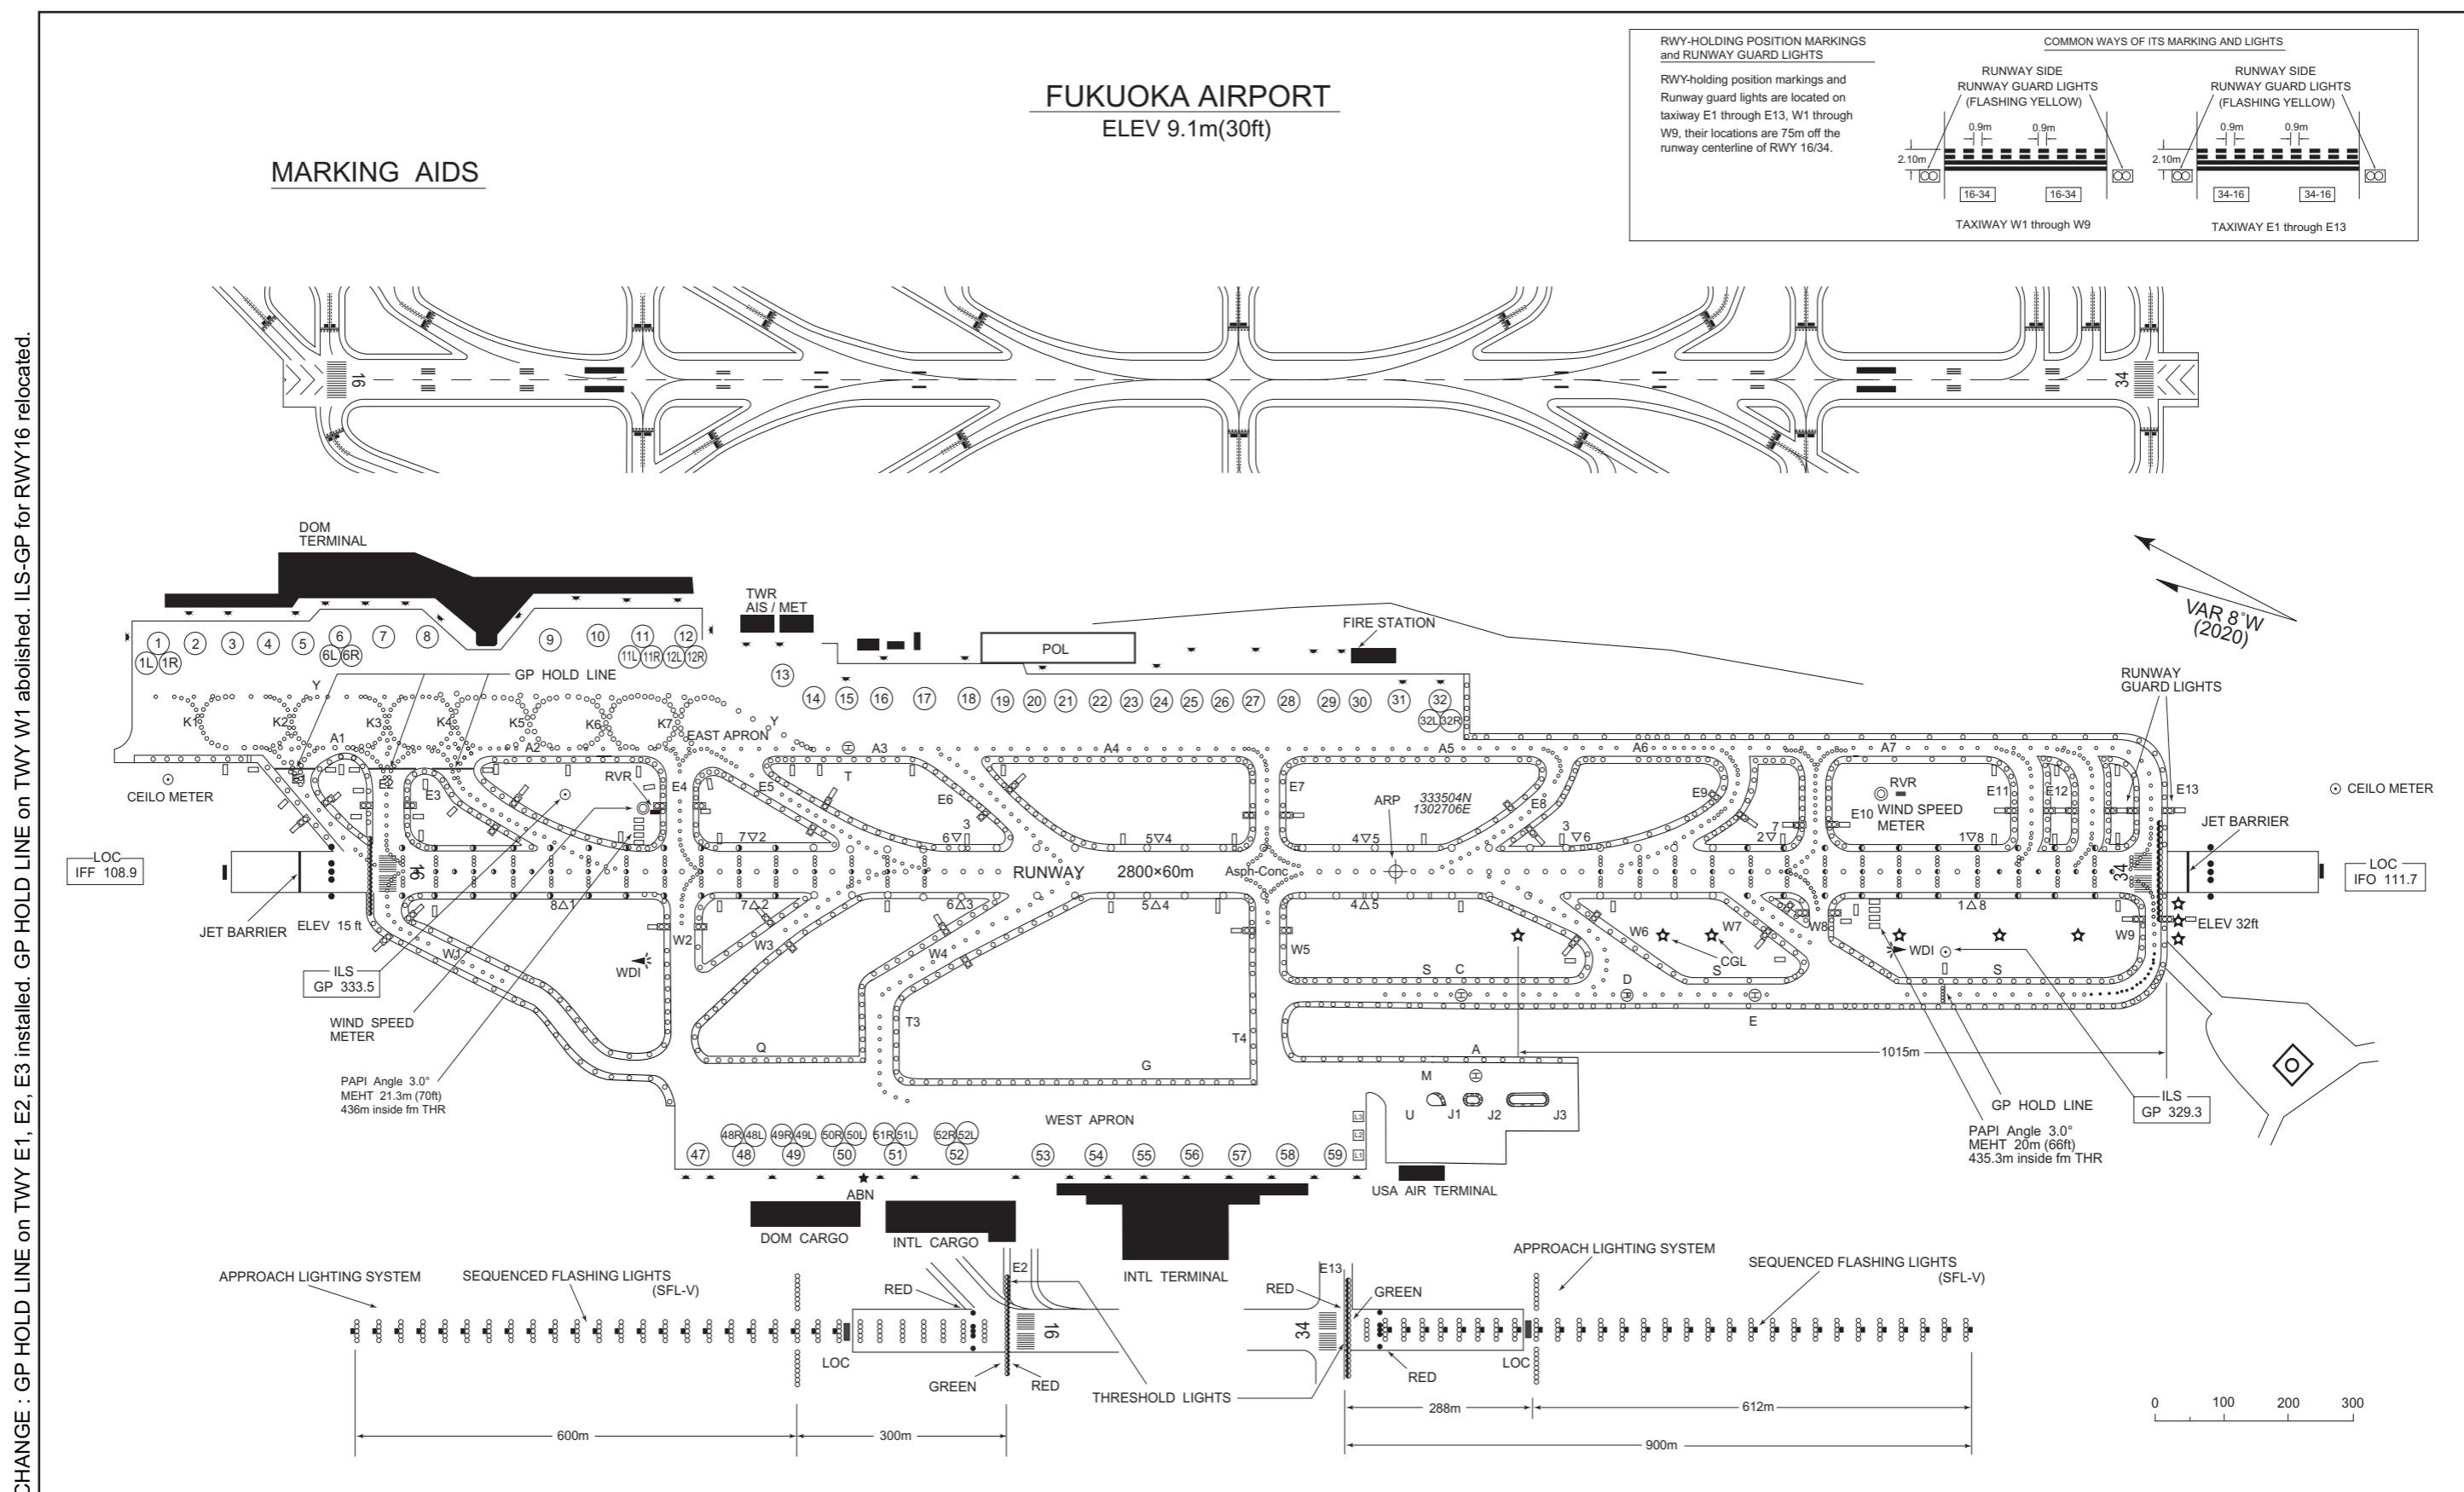

CHANGE : TWY C6 abolished. TWY J1 established. JSDF APRON abolished.

FUKUOKA AP
ELEV 9,1m(30ft)ARP

Designation	Call Sign	Frequency (MHz)
ATIS	Fukuoka Airport	127.2
DLVRY	Fukuoka Delivery	121.925
GND	Fukuoka Ground	256.0 121.7 236.8
TWR	Fukuoka Tower	118.4 126.2 236.8

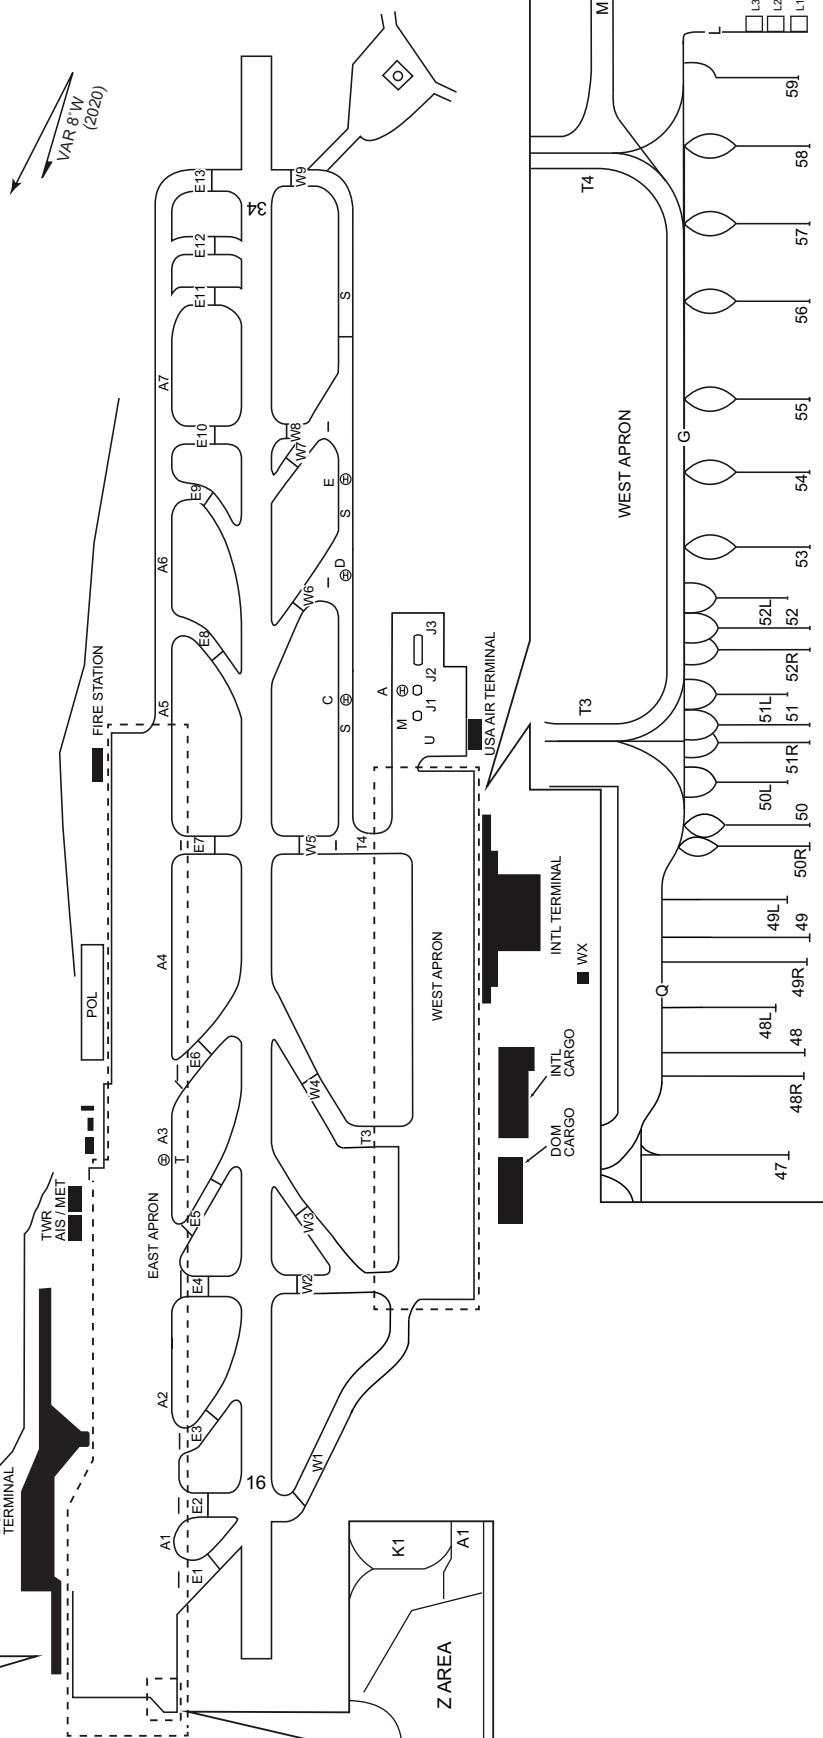

T3,T4,G,L,M,Q : Aircraft stand taxi lane

INTENTIONALLY LEFT BLANK

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC



CHANGE:Update

AERODROME OBSTACLE CHART-ICAO

TYPE A (OPERATING LIMITATIONS)

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC



AERODROME OBSTACLE CHART - ICAO TYPE B

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC



CHANGE:Update

STANDARD DEPARTURE CHART -INSTRUMENT

RJFF / FUKUOKA

SID

OGUNI EIGHT DEPARTURE

RWY 16 : Climb RWY HDG to 700FT, turn right, via DGC R160 to 30.0DME, turn left, via TFE R256 to OGUNI.

Cross DGC R160/28.0DME between FL150 and FL200.

RWY 34 : Climb RWY HDG to 3000FT, turn right HDG176° to intercept and proceed via DGC R146 to OGUNI.

Cross DGC R146/9.0DME at or below 10000FT, cross DGC R146/28.0DME at or below FL200, cross OGUNI at or above FL150.

Note RWY16 : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.



STANDARD DEPARTURE CHART -INSTRUMENT

RJFF / FUKUOKA

TRANSITION

MUSASHI TRANSITION

From over OGUNI, via TFE R256 to TFE VOR/DME.

Cross TFE R256/30.0DME at or above FL170.



STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

SID

YAMEK NINE DEPARTURE

RWY 16 : Climb RWY HDG to 700FT, turn right, via DGC R160 to YAMEK.

Cross YAMEK at or above 5000FT.

RWY 34 : Climb RWY HDG to 3000FT, turn right HDG 176° to intercept and proceed via DGC R146 to DGC 17.6DME, turn right, via SGE R058 to YAMEK.

Cross DGC R146/9.0DME at or below 10000FT, cross YAMEK at or above 5000FT.

Note RWY16 : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.



STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

SID

YAMGA SEVEN DEPARTURE

RWY 16 : Climb RWY HDG to 700FT, turn right, via DGC R160 to YAMGA.

Cross DGC R160/28.0DME at or below FL200, cross YAMGA at or above 13000FT.

RWY 34 : Climb RWY HDG to 3000FT, turn right HDG 176° to intercept and proceed via DGC R146 to YURRY, turn right, via KUE R351 to YAMGA.

Cross DGC R146/9.0DME at or below 10000FT, cross KUE R351/28.0DME at or below FL200, cross YAMGA at or above 13000FT.

Note RWY16 : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.



CHANGE : PROC renamed, ALT restriction at YAMGA.

STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

SID

FUKUOKA FOUR DEPARTURE

RWY 16 : Climb RWY HDG to 700FT, turn right, via DGC R160 to YAMEK, turn right,
via DGC R179 (MRA 7000FT) to DGC VORTAC.

Cross YAMEK at or above 5000FT.

RWY 34 : Climb direct to DGC VORTAC.

Note RWY16 : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.

VORTAC
FUKUOKA
114.5 DGC
CH-92X
33°40'34"N/130°23'23"E
100FT

FUKUOKA FOUR DEPARTURE



CHANGE : MRA added

STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

TRANSITION

KAGOSHIMA TRANSITION

From over YAMGA, proceed via HKC R012 to HKC VORTAC via KEIKA, IPUDO and AJISE.

Cross KEIKA at or below FL180.

KUMAMOTO TRANSITION

From over YAMGA, proceed via KUE R351 to KUE VOR/DME via ABECK.

Cross ABECK at assigned altitude.

SAGA TRANSITION

From over YAMEK, proceed via SGE R058 to SGE VOR/DME.

MIZMA TRANSITION

From over YAMEK, proceed via SGE R058 to MIZMA.

Cross MIZMA at or above 8000FT.


IKI TRANSITION

From over YAMEK, turn right, proceed via IKE R127 to IKE VOR/DME .

Cross IKE R127/37DME at or above 6000FT.

CHANGE : KAGOSHIMA TRANSITION.

STANDARD DEPARTURE CHART-INSTRUMENT

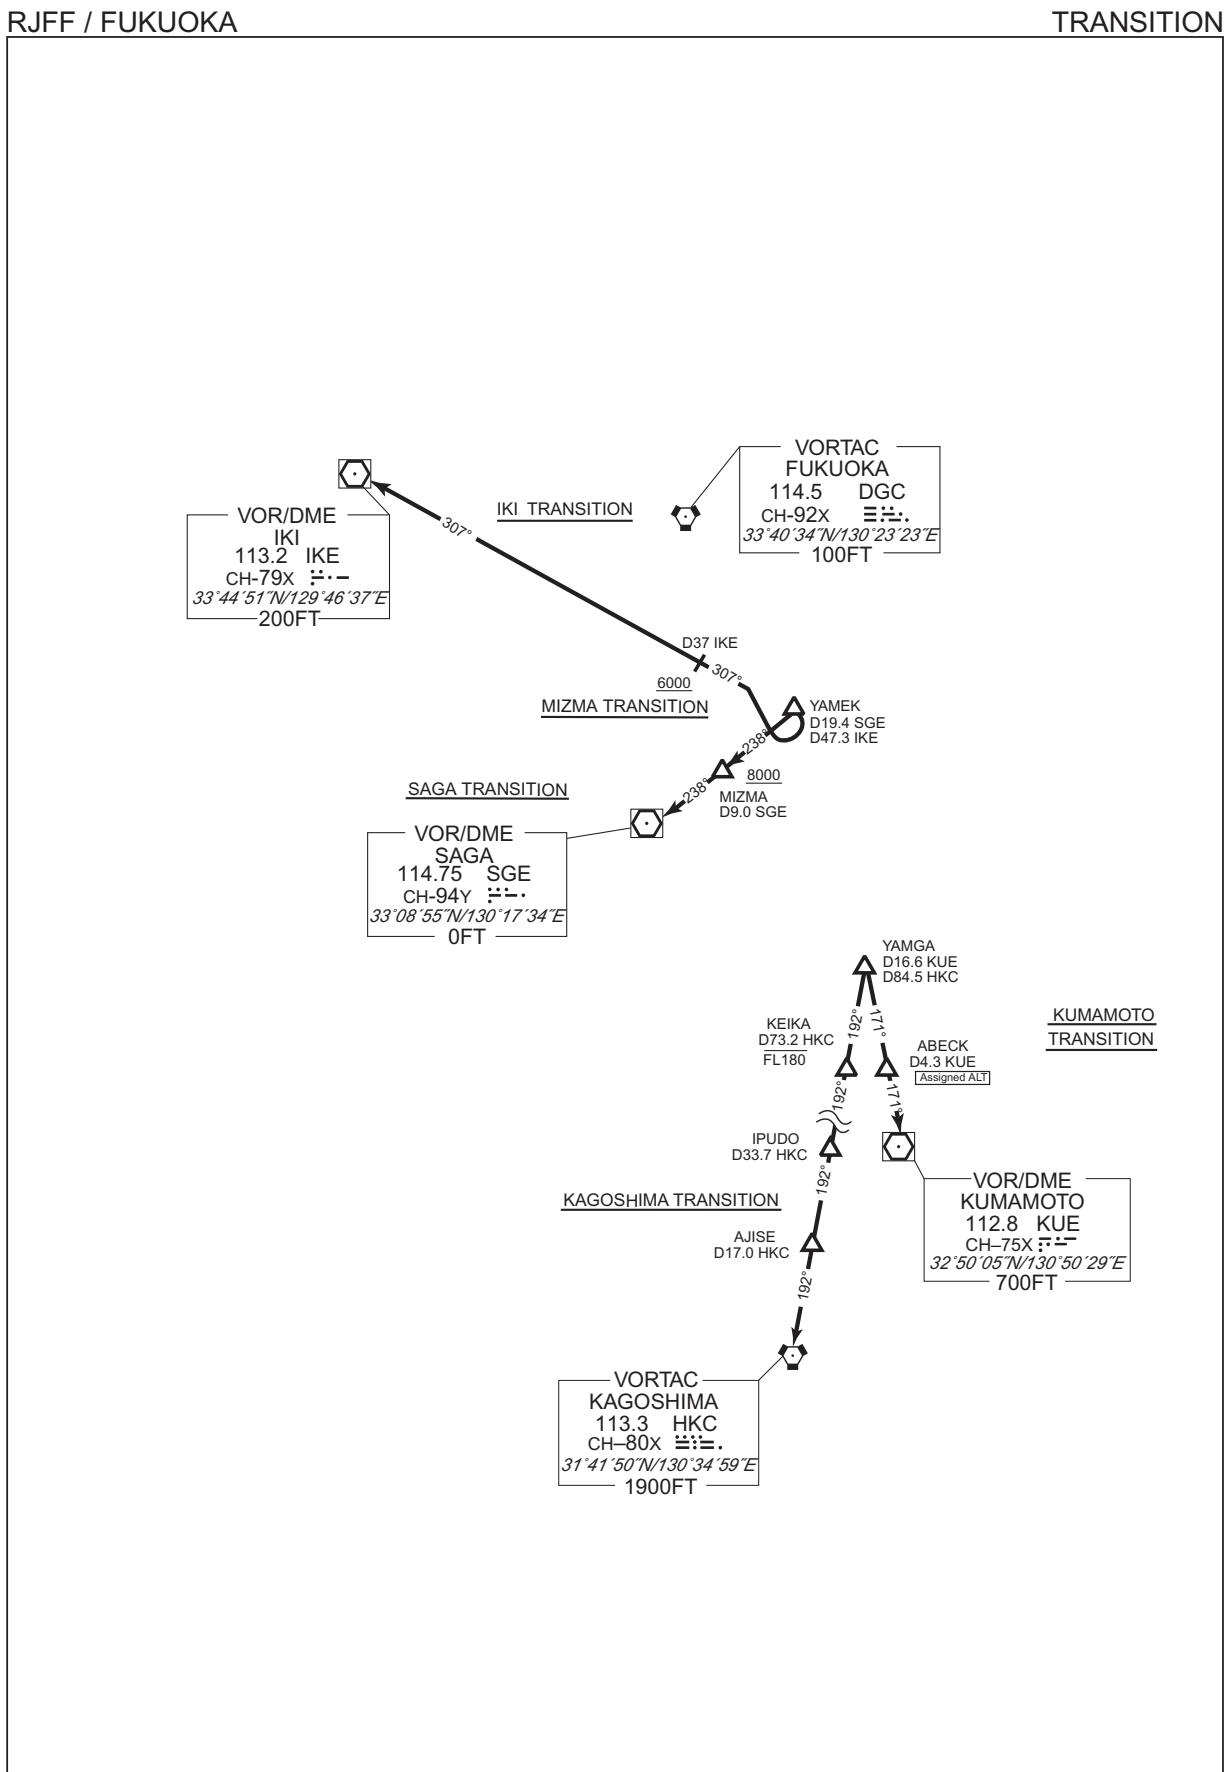


STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV SID

YOKAT FIVE DEPARTURE		RNAV 1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.	Critical DME	RWY16 : DGC "1.0NM FM DER~5.4NM FM DER" IKE "1.0NM FM DER~5.4NM FM DER" RWY34 : DGC "3.5NM to FF401~2.2NM to FF401" IKE "3.5NM to FF401~2.2NM to FF401"
	DME GAP	RWY16 : DER~1.0NM FM DER RWY34 : DER~0.9NM FM DER 2.2NM to FF401~FF403
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

VAR 8°W (2020)

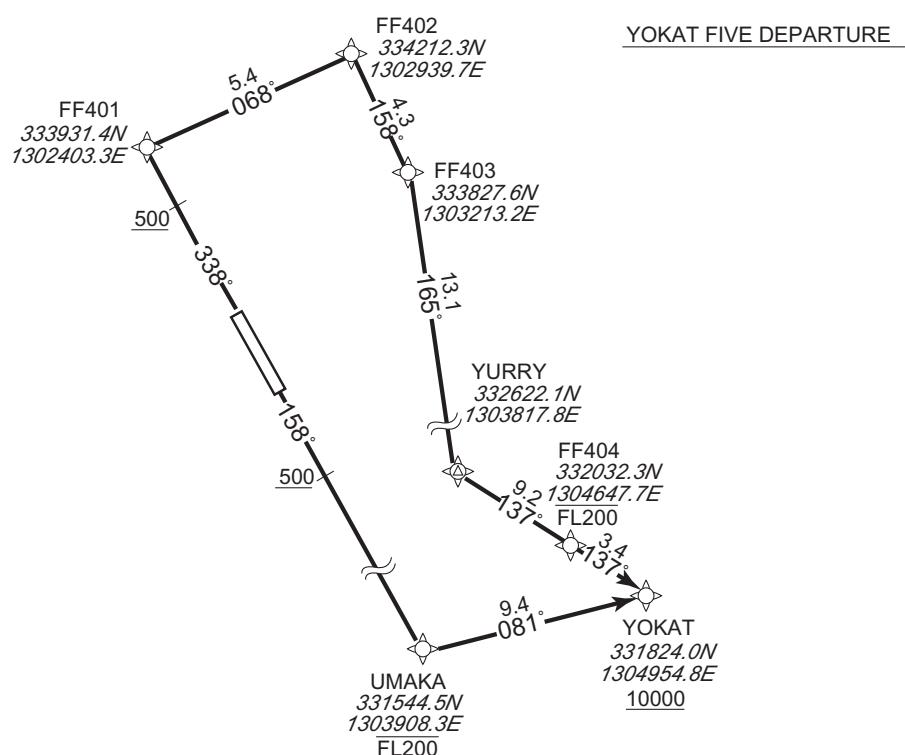

CHANGE : VAR, PROC renamed, PROC course.

YOKAT FIVE DEPARTURE

RWY34 : Climb on HDG 338° at or above 500FT, direct to FF401, to FF402, to FF403, to YURRY, to FF404 at or below FL200, to YOKAT at or above 10000FT.

RWY16 : Climb on HDG 158° at or above 500FT, direct to UMAKA at or below FL200, to YOKAT at or above 10000FT.

Note RWY34 : 7.0% climb gradient required up to 2800FT.

RWY16 : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.

STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV SID

YOKAT FIVE DEPARTURE

RWY34

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.3)	-7.7	—	—	+500	—	—	RNAV1
002	DF	FF401	—	—	-7.7	—	—	—	—	—	RNAV1
003	TF	FF402	—	068 (060.1)	-7.7	5.4	—	—	—	—	RNAV1
004	TF	FF403	—	158 (150.4)	-7.7	4.3	—	—	—	—	RNAV1
005	TF	YURRY	—	165 (157.2)	-7.7	13.1	—	—	—	—	RNAV1
006	TF	FF404	—	137 (129.4)	-7.7	9.2	—	-FL200	—	—	RNAV1
007	TF	YOKAT	—	137 (129.4)	-7.7	3.4	—	+10000	—	—	RNAV1

RWY16

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.3)	-7.7	—	—	+500	—	—	RNAV1
002	DF	UMAKA	—	—	-7.7	—	—	-FL200	—	—	RNAV1
003	TF	YOKAT	—	081 (073.5)	-7.7	9.4	—	+10000	—	—	RNAV1

CHANGE : VAR. PROC renamed. PROC course.

STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA		RNAV TRANSITION
BRAID TRANSITION / MATSUYAMA TRANSITION / SALTY TRANSITON YANKS TRANSITION / SPIDE TRANSITION / SABAR TRANSITION		RNAV 1
Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	Critical DME	SABAR TRANSITION : SWE "YOKAT ~ RUISA" SGE "HOSEN ~ RUISA"
	DME GAP	-
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVIDs for RNAV1
VAR 8°W (2020)		<p>The chart illustrates the RNAV 1 departure routes from YOKAT. Key waypoints include MARCO at 340446.0N 1320850.2E, KUGA at 34°04'48"N 132°08'50"E, CH-90X at 34°04'48"N 132°08'50"E, TACAN KUGA at 1177 IWT, VOR/DME MATSUYAMA at 110.65 MYE, SALTY at 335109.7N 1325530.8E, YANKS at 340749.0N 1342925.3E, CHOPP at 335111.0N 1332515.5E, SANJI at 335458.4N 1333940.0E, LUFFY at 333312.0N 1321837.3E, SPIDE at 333840.2N 1325818.0E, and SABAR at 331033.4N 1320749.3E. The routes involve transitions such as BRAID, MATSUYAMA, SALTY, SPIDE, and SABAR, each with specific headings (e.g., 057°, 078°/181.5°, 080°/192.9°, 087°, 104°, 105°, 16.9°, 31.6°) and flight levels (e.g., FL140, FL170, 2100FT). The chart also shows intermediate points like KOHZA, BRAID, AMAGA, HOSEN, and RUISA.</p>
BRAID TRANSITION		From YOKAT at or above 10000FT, to KOHZA at or above FL140, to BRAID at or above FL170, to MARCO.
MATSUYAMA TRANSITION		From YOKAT at or above 10000FT, to KOHZA at or above FL140, to BRAID at or above FL170, to MYE.
SALTY TRANSITION		From YOKAT at or above 10000FT, to KOHZA at or above FL140, to BRAID at or above FL170, to SALTY.
YANKS TRANSITION		From YOKAT at or above 10000FT, to KOHZA at or above FL140, to BRAID at or above FL170, to LUFFY, to CHOPP, to SANJI, to YANKS.
SPIDE TRANSITION		From YOKAT at or above 10000FT, to KOHZA at or above FL140, to BRAID at or above FL170, to LUFFY, to SPIDE.
SABAR TRANSITION		From YOKAT at or above 10000FT, to AMAGA at or above FL140, to HOSEN at or above FL170, to RUISA, to SABAR.

CHANGE : VAR, CHOPP established. Course FM BRAID to SALTY. Course FM RUISA to SABAR.

STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV TRANSITION

BRAID TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YOKAT	—	—	-7.7	—	—	+10000	—	—	RNAV1
002	TF	KOHZA	—	081 (073.6)	-7.7	9.9	—	+FL140	—	—	RNAV1
003	TF	BRAID	—	081 (073.8)	-7.7	6.9	—	+FL170	—	—	RNAV1
004	TF	MARCO	—	057 (049.7)	-7.7	64.8	—	—	—	—	RNAV1

MATUYAMA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YOKAT	—	—	-7.7	—	—	+10000	—	—	RNAV1
002	TF	KOHZA	—	081 (073.6)	-7.7	9.9	—	+FL140	—	—	RNAV1
003	TF	BRAID	—	081 (073.8)	-7.7	6.9	—	+FL170	—	—	RNAV1
004	TF	MYE	—	078 (070.4)	-7.7	81.5	—	—	—	—	RNAV1

SALTY TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YOKAT	—	—	-7.7	—	—	+10000	—	—	RNAV1
002	TF	KOHZA	—	081 (073.6)	-7.7	9.9	—	+FL140	—	—	RNAV1
003	TF	BRAID	—	081 (073.8)	-7.7	6.9	—	+FL170	—	—	RNAV1
004	TF	SALTY	—	080 (071.9)	-7.7	92.9	—	—	—	—	RNAV1

CHANGE : VAR. Course FM BRAID to SALTY.

STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV TRANSITION

YANKS TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YOKAT	—	—	-7.7	—	—	+10000	—	—	RNAV1
002	TF	KOHZA	—	081 (073.6)	-7.7	9.9	—	+FL140	—	—	RNAV1
003	TF	BRAID	—	081 (073.8)	-7.7	6.9	—	+FL170	—	—	RNAV1
004	TF	LUFFY	—	087 (079.8)	-7.7	58.8	—	—	—	—	RNAV1
005	TF	CHOPP	—	079 (071.7)	-7.7	58.3	—	—	—	—	RNAV1
006	TF	SANJI	—	080 (072.4)	-7.7	12.6	—	—	—	—	RNAV1
007	TF	YANKS	—	080 (072.5)	-7.7	43.2	—	—	—	—	RNAV1

SPIDE TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YOKAT	—	—	-7.7	—	—	+10000	—	—	RNAV1
002	TF	KOHZA	—	081 (073.6)	-7.7	9.9	—	+FL140	—	—	RNAV1
003	TF	BRAID	—	081 (073.8)	-7.7	6.9	—	+FL170	—	—	RNAV1
004	TF	LUFFY	—	087 (079.8)	-7.7	58.8	—	—	—	—	RNAV1
005	TF	SPIDE	—	088 (080.4)	-7.7	33.5	—	—	—	—	RNAV1

SABAR TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YOKAT	—	—	-7.7	—	—	+10000	—	—	RNAV1
002	TF	AMAGA	—	104 (096.5)	-7.7	10.5	—	+FL140	—	—	RNAV1
003	TF	HOSEN	—	104 (096.6)	-7.7	6.6	—	+FL170	—	—	RNAV1
004	TF	RUISA	—	104 (096.7)	-7.7	16.9	—	—	—	—	RNAV1
005	TF	SABAR	—	105 (096.9)	-7.7	31.6	—	—	—	—	RNAV1

CHANGE : VAR. CHOPP established. Course FM RUISA to SABAR.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID and TRANSITION

KURUME FOUR DEPARTURE GABAI TRANSITION / BRUIN TRANSITION / GENKAI TRANSITION		RNAV 1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.	Critical DME	RWY16 :DGC "1.0NM FM DER~5.4NM FM DER" IKE "1.0NM FM DER~5.4NM FM DER" RWY34 :DGC "3.5NM to FF401~2.2NM to FF401" IKE "3.5NM to FF401~2.2NM to FF401" BRUIN TRANSITION : DGC "2NM to OMUTA~OMUTA"
	DME GAP	RWY16 :DER~1.0NM FM DER RWY34 :DER~0.9NM FM DER 2.2NM to FF401~FF403 GABAI TRANSITION : 6.4NM to SGE~SGE
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVIDs for RNAV1
VAR 8°W (2020)		<p>The chart illustrates the RNAV SID and TRANSITION routes. It starts at RJFF/FUKUOKA and branches into three main transition routes:</p> <ul style="list-style-type: none"> GENKAI TRANSITION: Heads north along a 338° heading at 500ft, passing through FF401 (333931.4N, 1302403.3E) and FF402 (334212.3N, 1302939.7E). GABAI TRANSITION: Heads south along a 158° heading at 500ft, passing through DAIZE (331556.0N, 1302733.7E) and SAGA(SGE) (330855.0N, 1301734.4E). BRUIN TRANSITION: Heads east along a 240° heading at 8.5ft, passing through YURRY (332622.1N, 1303817.8E), YAMEK (332105.9N, 1303539.5E), and BRUIN (330609.6N, 1302818.4E). <p>Key waypoints include IKI(IKE) at 334451.0N, 1294636.7E; FF403 (333827.6N, 1303213.2E); and OMUTA (330332.2N, 1302701.4E). The chart also shows VOR/DME stations VOR/DME IKI (113.2) and VOR/DME SAGA (114.75) with their respective coordinates and frequencies.</p>
CHANGE : VAR. SID renamed. PROC course.		<p>KURUME FOUR DEPARTURE</p> <p>RWY34 : Climb on HDG 338° at or above 500FT, direct to FF401, to FF402, to FF403, to YURRY, to YAMEK.</p> <p>RWY16 : Climb on HDG 158° at or above 500FT, direct to YAMEK.</p> <p>Note RWY34 : 7.0% climb gradient required up to 2800FT.</p> <p>RWY16 : 5.8% climb gradient required up to 1100FT.</p> <p>OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.</p> <p>OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.</p> <p>BRUIN TRANSITION From YAMEK, to BRUIN, to OMUTA.</p> <p>GABAI TRANSITION From YAMEK, to SGE.</p> <p>GENKAI TRANSITION From YAMEK, to DAIZE to IKE.</p>

STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID

KURUME FOUR DEPARTURE

RWY34

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.3)	-7.7	—	—	+500	—	—	RNAV1
002	DF	FF401	—	—	-7.7	—	—	—	—	—	RNAV1
003	TF	FF402	—	068 (060.1)	-7.7	5.4	—	—	—	—	RNAV1
004	TF	FF403	—	158 (150.4)	-7.7	4.3	—	—	—	—	RNAV1
005	TF	YURRY	—	165 (157.2)	-7.7	13.1	—	—	—	—	RNAV1
006	TF	YAMEK	—	210 (202.7)	-7.7	5.7	—	—	—	—	RNAV1

RWY16

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.3)	-7.7	—	—	+500	—	—	RNAV1
002	DF	YAMEK	—	—	-7.7	—	—	—	—	—	RNAV1

CHANGE : VAR. SID renamed. PROC course.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV TRANSITION

BRUIN TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YAMEK	—	—	-7.7	—	—	—	—	—	RNAV1
002	TF	BRUIN	—	210 (202.4)	-7.7	16.2	—	—	—	—	RNAV1
003	TF	OMUTA	—	210 (202.3)	-7.7	2.8	—	—	—	—	RNAV1

GABAI TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YAMEK	—	—	-7.7	—	—	—	—	—	RNAV1
002	TF	SGE	—	239 (231.2)	-7.7	19.4	—	—	—	—	RNAV1

GENKAI TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YAMEK	—	—	-7.7	—	—	—	—	—	RNAV1
002	TF	DAIZE	—	240 (232.7)	-7.7	8.5	—	—	—	—	RNAV1
003	TF	IKE	—	318 (310.4)	-7.7	44.8	—	—	—	—	RNAV1

CHANGE : VAR. PROC course.



STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID and TRANSITION

MORIO FOUR DEPARTURE SATSUMA TRANSITION / SAKURA TRANSITION		RNAV 1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.	Critical DME	RWY16 :DGC "1.0NM FM DER~5.4NM FM DER" IKE "1.0NM FM DER~5.4NM FM DER" RWY34 :DGC "3.5NM to FF401~2.2NM to FF401" IKE "3.5NM to FF401~2.2NM to FF401"
2) RADAR service required.	DME GAP	RWY16 :DER~1.0NM FM DER RWY34 :DER~0.9NM FM DER 2.2NM to FF401~FF403
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVADs for RNAV1

VAR 8°W (2020)

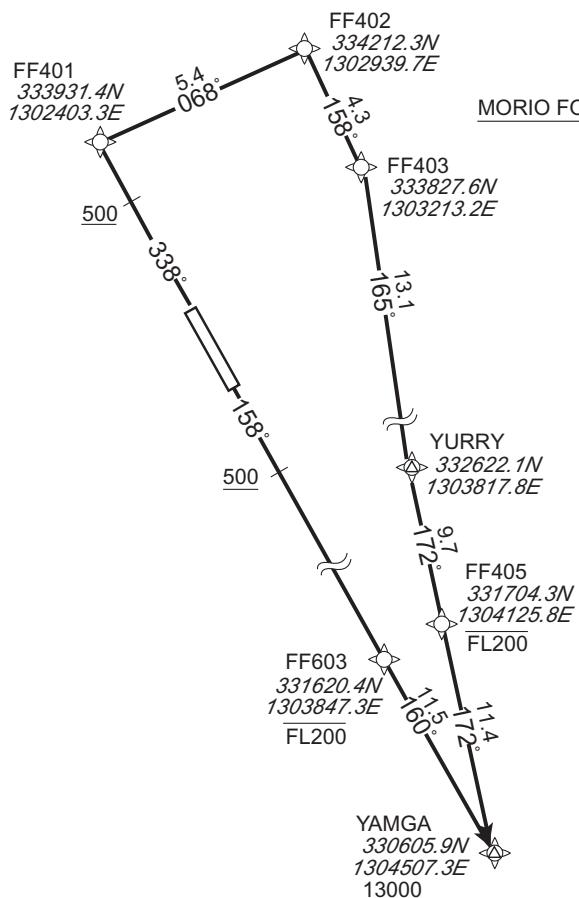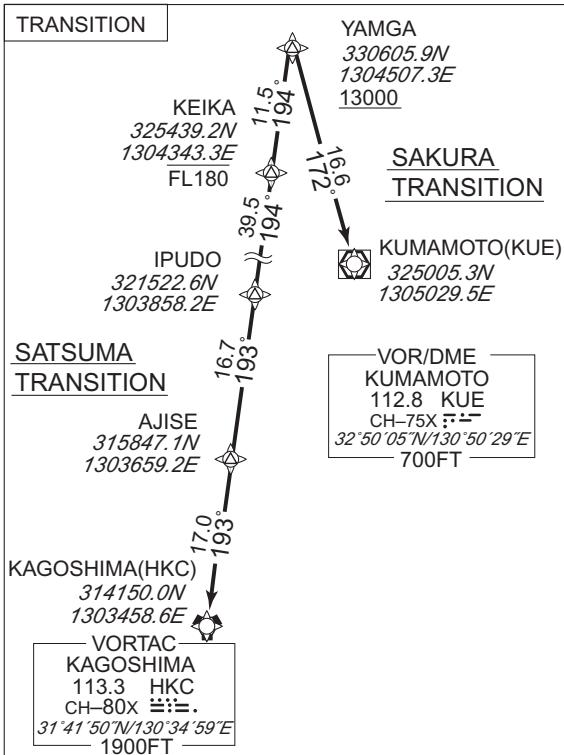MORIO FOUR DEPARTUREMORIO FOUR DEPARTURE

RWY34 : Climb on HDG 338° at or above 500FT, direct to FF401, to FF402, to FF403, to YURRY, to FF405 at or below FL200, to YAMGA at or above 13000FT.

RWY16 : Climb on HDG 158° at or above 500FT, direct to FF603 at or below FL200, to YAMGA at or above 13000FT.

Note RWY34 : 7.0% climb gradient required up to 2800FT.

RWY16 : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.

SAKURA TRANSITION

From YAMGA at or above 13000FT, to KUE.

SATSUMA TRANSITION

From YAMGA at or above 13000FT, to KEIKA at or below FL180, to IPUDO, to AJISE, to HKC.

CHANGE : IPUDO established. ALT restriction at KEIKA.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID

MORIO FOUR DEPARTURE

RWY34

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.3)	-7.7	—	—	+500	—	—	RNAV1
002	DF	FF401	—	—	-7.7	—	—	—	—	—	RNAV1
003	TF	FF402	—	068 (060.1)	-7.7	5.4	—	—	—	—	RNAV1
004	TF	FF403	—	158 (150.4)	-7.7	4.3	—	—	—	—	RNAV1
005	TF	YURRY	—	165 (157.2)	-7.7	13.1	—	—	—	—	RNAV1
006	TF	FF405	—	172 (164.3)	-7.7	9.7	—	-FL200	—	—	RNAV1
007	TF	YAMGA	—	172 (164.3)	-7.7	11.4	—	+13000	—	—	RNAV1

RWY16

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.3)	-7.7	—	—	+500	—	—	RNAV1
002	DF	FF603	—	—	-7.7	—	—	-FL200	—	—	RNAV1
003	TF	YAMGA	—	160 (152.6)	-7.7	11.5	—	+13000	—	—	RNAV1

CHANGE : VAR. PROC renamed. PROC course. ALT restriction at YAMGA.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV TRANSITION

SAKURA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YAMGA	—	—	-7.7	—	—	+13000	—	—	RNAV1
002	TF	KUE	—	172 (164.3)	-7.7	16.6	—	—	—	—	RNAV1

SATSUMA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YAMGA	—	—	-7.7	—	—	+13000	—	—	RNAV1
002	TF	KEIKA	—	194 (185.9)	-7.7	11.5	—	-FL180	—	—	RNAV1
003	TF	IPUDO	—	194 (185.8)	-7.7	39.5	—	—	—	—	RNAV1
004	TF	AJISE	—	193 (185.8)	-7.7	16.7	—	—	—	—	RNAV1
005	TF	HKC	—	193 (185.8)	-7.7	17.0	—	—	—	—	RNAV1

CHANGE : IPUDO established. ALT restriction at KEIKA.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID

HAKATA FOUR DEPARTURE		RNAV 1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.	Critical DME	RWY16 : DGC "1.0NM FM DER~5.4NM FM DER" IKE "1.0NM FM DER~5.4NM FM DER" RWY34 : DGC "4.6NM to DGC~3.0NM to DGC" IKE "4.6NM to DGC~3.0NM to DGC"
2) RADAR service required.	DME GAP	RWY16 : DER~1.0NM FM DER RWY34 : DER~4.6NM to DGC 3.0NM to DGC~DGC
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

VAR 8°W (2020)

CHANGE : VAR. PROC renamed. PROC course.



HAKATA FOUR DEPARTURE

RWY34 : Climb on HDG 338° at or above 500FT, direct to DGC.

RWY16 : Climb on HDG 158° at or above 500FT, direct to YAMEK, to FF601, to FF602 to DGC.

Note RWY16 : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID

HAKATA FOUR DEPARTURE

RWY34

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.3)	-7.7	—	—	+500	—	—	RNAV1
002	DF	DGC	—	—	-7.7	—	—	—	—	—	RNAV1

RWY16

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.3)	-7.7	—	—	+500	—	—	RNAV1
002	DF	YAMEK	—	—	-7.7	—	—	—	—	—	RNAV1
003	TF	FF601	—	251 (242.9)	-7.7	5.7	—	—	—	—	RNAV1
004	TF	FF602	—	314 (306.5)	-7.7	4.1	—	—	—	—	RNAV1
005	TF	DGC	—	002 (354.5)	-7.7	19.7	—	—	—	—	RNAV1

CHANGE : VAR. PROC renamed. PROC course.

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

STAR

LAGER ARRIVAL

From over LAGER, via DGC R338 to MALTS.

Cross LAGER at or above 3000FT, cross MALTS at or above 2000FT.

EBISU ARRIVAL


From over EBISU, via IKE R073 to intercept and proceed via DGC R338 to MALTS via LAGER.

Cross LAGER at or above 3000FT, cross MALTS at or above 2000FT.

IKI ARRIVAL

From over IKI VOR/DME, via IKE R073 to intercept and proceed via DGC R338 to MALTS via LAGER.

Cross LAGER at or above 3000FT, cross MALTS at or above 2000FT.

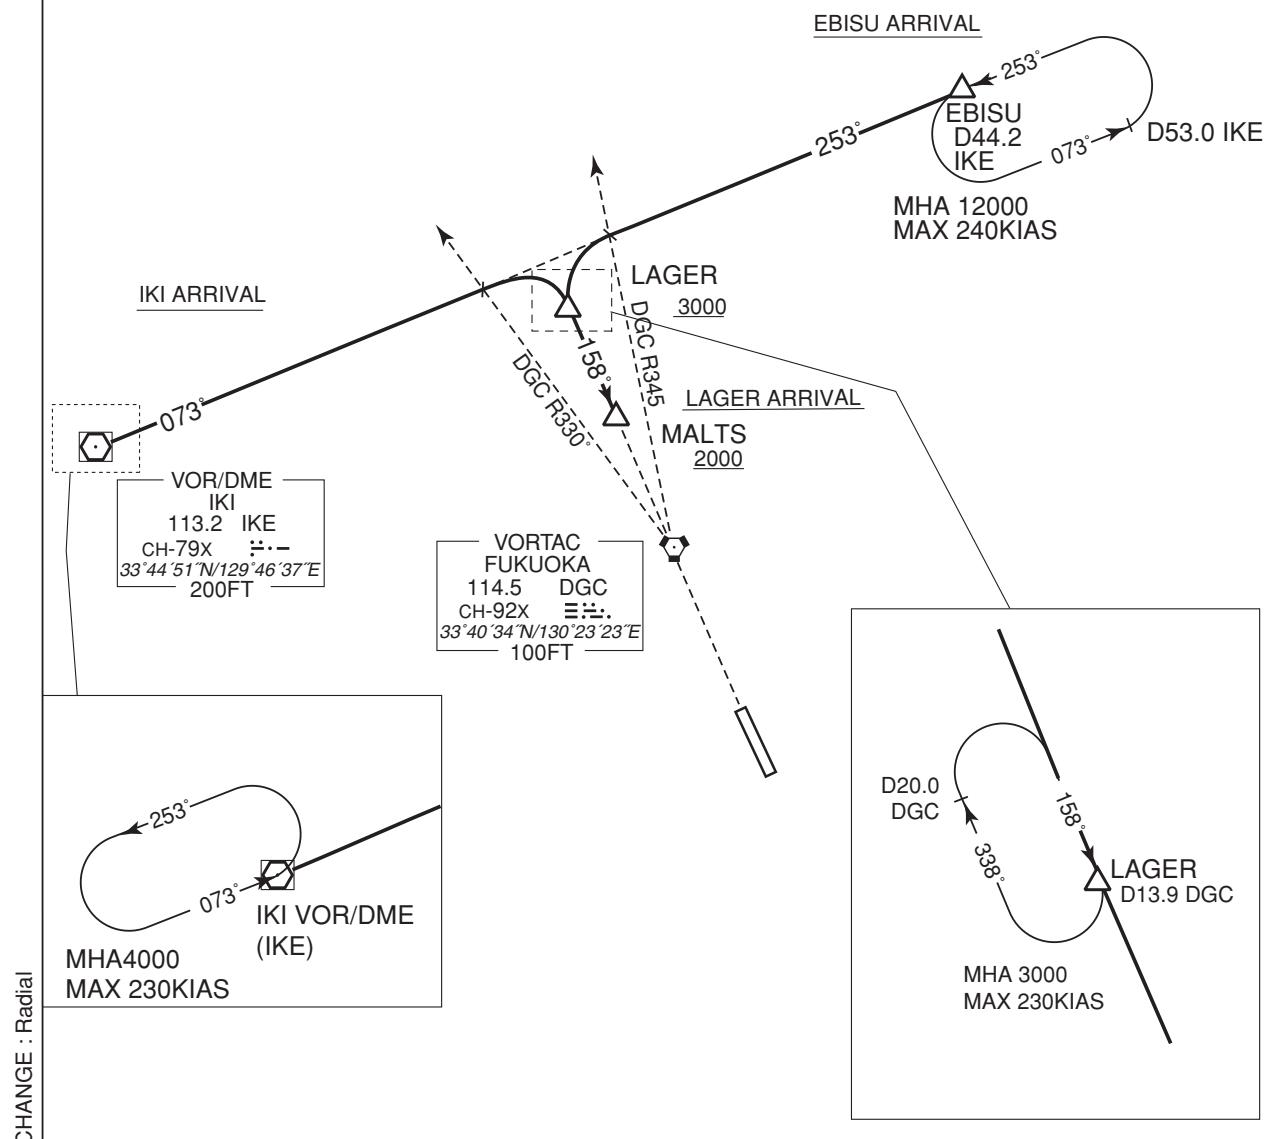

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

STAR

KAFRI EAST ARRIVAL


From over EBISU, proceed via IKE R073 to intercept and proceed via SGE R353 to KAFRI, via KUE R329 to intercept and proceed via SGE R064 to HAWKS.

Cross SGE R353/36.0DME between 7000FT and 10000FT, cross KUE R329/35.0DME at or above 6000FT, cross HAWKS at or above 4000FT.

KAFRI WEST ARRIVAL

From over IKE VOR/DME, proceed via IKE R073 to intercept and proceed via SGE R353 to KAFRI, via KUE R329, to intercept and proceed via SGE R064 to HAWKS.

Cross SGE R353/36.0DME between 7000FT and 10000FT, cross KUE R329/35.0DME at or above 6000FT, cross HAWKS at or above 4000FT.

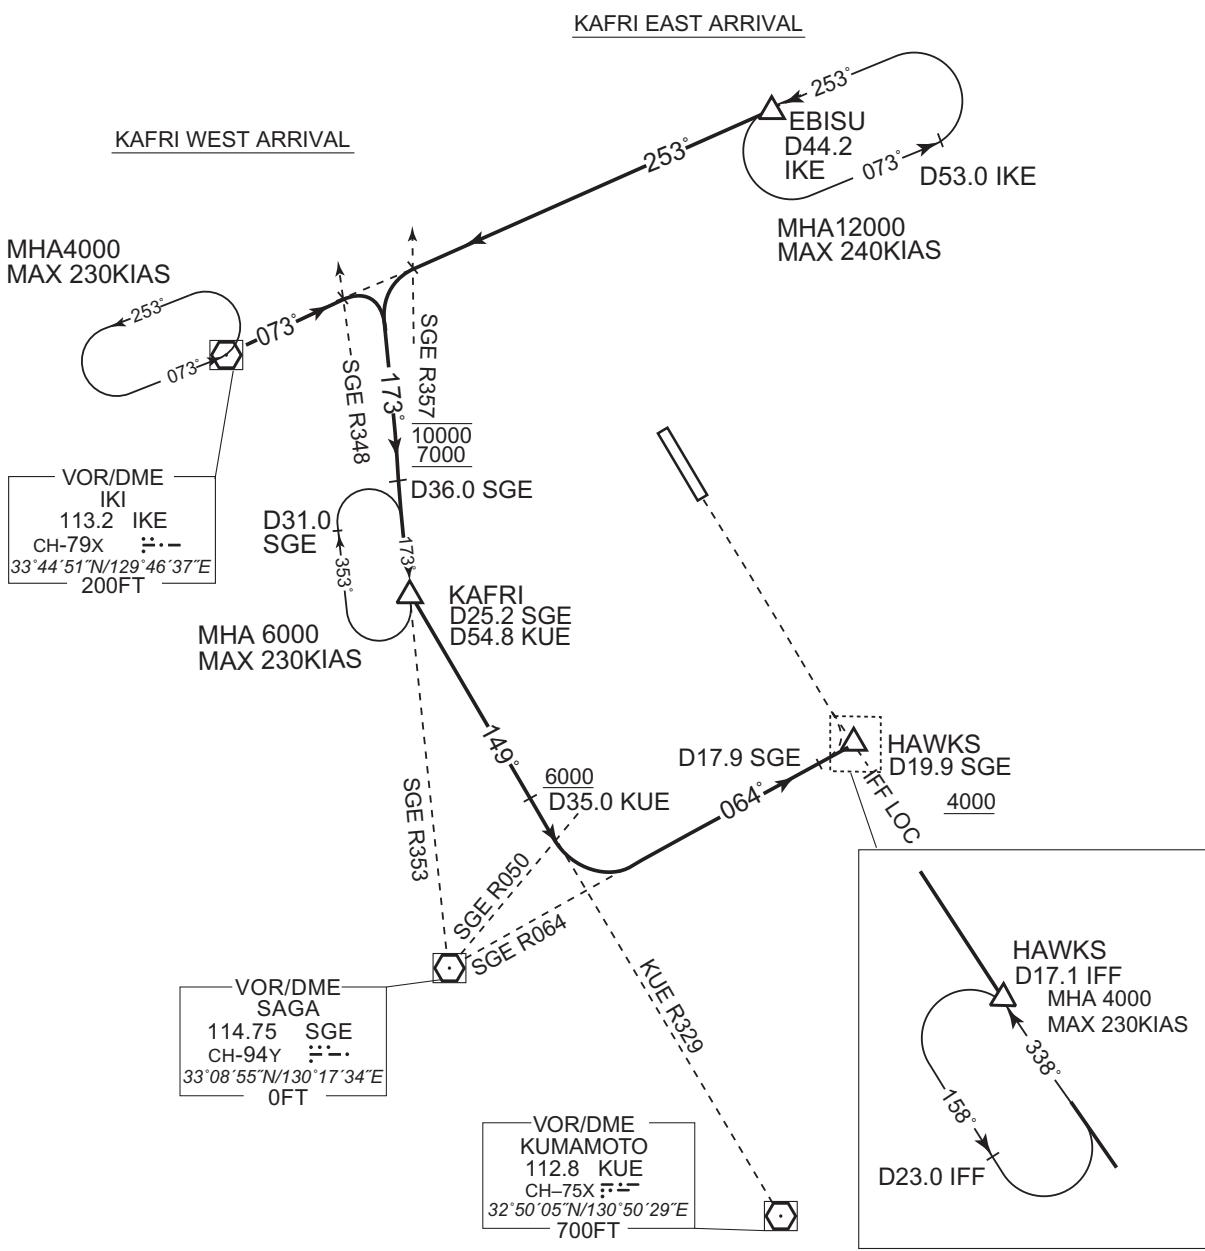

STANDARD ARRIVAL CHART-INSTRUMENT



STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34

HAWKS EAST ARRIVAL

From KIRIN at or above 12000FT, to ITODA between 10000FT and 8000FT, to KAHOC at or above 7000FT, to DAZAI at or above 5000FT, to HAWKS at or above 4000FT.

Critical DME	-	-
	-	-
	-	-
DME GAP	-	
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1	

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIRIN	-	-	-7.7	-	-	+12000	-	-	RNAV1
002	TF	ITODA	-	199 (191.0)	-7.7	25.1	-	-10000 +8000	-	-	RNAV1
003	TF	KAHOC	-	199 (191.0)	-7.7	14.2	-	+7000	-	-	RNAV1
004	TF	DAZAI	-	175 (167.3)	-7.7	6.9	-	+5000	-	-	RNAV1
005	TF	HAWKS	-	248 (240.3)	-7.7	4.5	-	+4000	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	KIRIN	227 (218.7)	-7.7	1.0(-14000) 1.5(+14001)	R	12000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAHOC	176 (167.3)	-7.7	1.0(-14000) 1.5(+14001)	R	7000	-	-230(-14000) -240(+14001)	RNAV1

HAWKS WEST ARRIVAL

From IKE, to ORONN, to NOKOH, to BEAMA, to SOFTO, to BANKU at or above 5000FT, to HAWKS at or above 4000FT.

Critical DME	DGC	IKE - 15.0NM to ORONN 6.0NM to ORONN - 5.0NM to NOKOH
	KUE	IKE - 15.0NM to ORONN
	IKE	6.0NM to ORONN - 5.0NM to NOKOH
	SGE	9.0NM to BEAMA - 6.0NM to BEAMA
DME GAP		15.0NM to ORONN - 6.0NM to ORONN 5.0NM to NOKOH - 9.0NM to BEAMA
Inappropriate Navaids		See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	IKE	-	-	-7.7	-	-	-	-	-	RNAV1
002	TF	ORONN	-	085 (077.7)	-7.7	17.3	-	-	-	-	RNAV1
003	TF	NOKOH	-	152 (144.7)	-7.7	8.2	-	-	-	-	RNAV1
004	TF	BEAMA	-	152 (144.8)	-7.7	9.9	-	-	-	-	RNAV1
005	TF	SOFTO	-	153 (144.9)	-7.7	9.9	-	-	-	-	RNAV1
006	TF	BANKU	-	153 (144.9)	-7.7	9.9	-	+5000	-210	-	RNAV1
007	TF	HAWKS	-	068 (060.2)	-7.7	4.3	-	+4000	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	BANKU	133 (125.0)	-7.7	1.0(-14000) 1.5(+14001)	R	5000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : VAR. PROC course. HLDG course.

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34

HAWKS NORTH ARRIVAL

From KIRIN, to EBISU at or above 12000FT, to LAGER at or above 6000FT, to NOKOH, to BEAMA, to SOFTO, to BANKU at or above 5000FT, to HAWKS at or above 4000FT.

Critical DME	IKE	4.0NM to LAGER - 3.0NM to NOKOH
	DGC	LAGER - 3.0NM to NOKOH
	SGE	9.0NM to BEAMA - 6.0NM to BEAMA
DME GAP		3.0NM to NOKOH - 9.0NM to BEAMA
Inappropriate Navaids		See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIRIN	-	-	-7.7	-	-	-	-	-	RNAV1
002	TF	EBISU	-	254 (246.7)	-7.7	12.5	-	+12000	-	-	RNAV1
003	TF	LAGER	-	248 (240.3)	-7.7	19.5	-	+6000	-	-	RNAV1
004	TF	NOKOH	-	198 (190.5)	-7.7	11.0	-	-	-	-	RNAV1
005	TF	BEAMA	-	152 (144.8)	-7.7	9.9	-	-	-	-	RNAV1
006	TF	SOFTO	-	153 (144.9)	-7.7	9.9	-	-	-	-	RNAV1
007	TF	BANKU	-	153 (144.9)	-7.7	9.9	-	+5000	-210	-	RNAV1
008	TF	HAWKS	-	068 (060.2)	-7.7	4.3	-	+4000	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	KIRIN	227 (218.7)	-7.7	1.0(-14000) 1.5(+14001)	R	12000	-	-230(-14000) -240(+14001)	RNAV1
Hold	BANKU	133 (125.0)	-7.7	1.0(-14000) 1.5(+14001)	R	5000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : VAR. PROC course. HLDG course.

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34

HAWKS SOUTH ARRIVAL

From OSTEP, to HONOK at or above 7000FT, to AMAOH, to KEYAH, to NOKOH, to BEAMA, to SOFTO, to BANKU at or above 5000FT, to HAWKS at or above 4000FT.

Critical DME	SGE	4.0NM to NOKOH - NOKOH 9.0NM to BEAMA - 6.0NM to BEAMA
DME GAP	NOKOH - 9.0NM to BEAMA	
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1	

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OSTEP	—	—	-7.7	—	—	—	—	—	RNAV1
002	TF	HONOK	—	333 (324.9)	-7.7	14.2	—	+7000	—	—	RNAV1
003	TF	AMAOH	—	333 (324.8)	-7.7	9.9	—	—	—	—	RNAV1
004	TF	KEYAH	—	332 (324.8)	-7.7	9.9	—	—	—	—	RNAV1
005	TF	NOKOH	—	062 (054.5)	-7.7	9.7	—	—	—	—	RNAV1
006	TF	BEAMA	—	152 (144.8)	-7.7	9.9	—	—	—	—	RNAV1
007	TF	SOFTO	—	153 (144.9)	-7.7	9.9	—	—	—	—	RNAV1
008	TF	BANKU	—	153 (144.9)	-7.7	9.9	—	+5000	-210	—	RNAV1
009	TF	HAWKS	—	068 (060.2)	-7.7	4.3	—	+4000	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	KEYAH	062 (054.5)	-7.7	1.0(-14000) 1.5(+14001)	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	BANKU	133 (125.0)	-7.7	1.0(-14000) 1.5(+14001)	R	5000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : VAR. PROC course. HLDG course(BANKU).

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34

ISKUP SOUTH ARRIVAL

From ISKUP at or above 7000FT, to KEYAH, to NOKOH, to BEAMA, to SOFTO, to BANKU at or above 5000FT, to HAWKS at or above 4000FT.

Critical DME	SGE	4.0NM to NOKOH - NOKOH 9.0NM to BEAMA - 6.0NM to BEAMA
DME GAP		NOKOH - 9.0NM to BEAMA
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1	


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M('T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ISKUP	—	—	-7.7	—	—	+7000	—	—	RNAV1
002	TF	KEYAH	—	062 (054.3)	-7.7	12.7	—	—	—	—	RNAV1
003	TF	NOKOH	—	062 (054.5)	-7.7	9.7	—	—	—	—	RNAV1
004	TF	BEAMA	—	152 (144.8)	-7.7	9.9	—	—	—	—	RNAV1
005	TF	SOFTO	—	153 (144.9)	-7.7	9.9	—	—	—	—	RNAV1
006	TF	BANKU	—	153 (144.9)	-7.7	9.9	—	+5000	-210	—	RNAV1
007	TF	HAWKS	—	068 (060.2)	-7.7	4.3	—	+4000	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M('T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	KEYAH	062 (054.5)	-7.7	1.0(-14000) 1.5(+14001)	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	BANKU	133 (125.0)	-7.7	1.0(-14000) 1.5(+14001)	R	5000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : New PROC.

INTENTIONALLY LEFT BLANK

STANDARD ARRIVAL CHART-INSTRUMENT

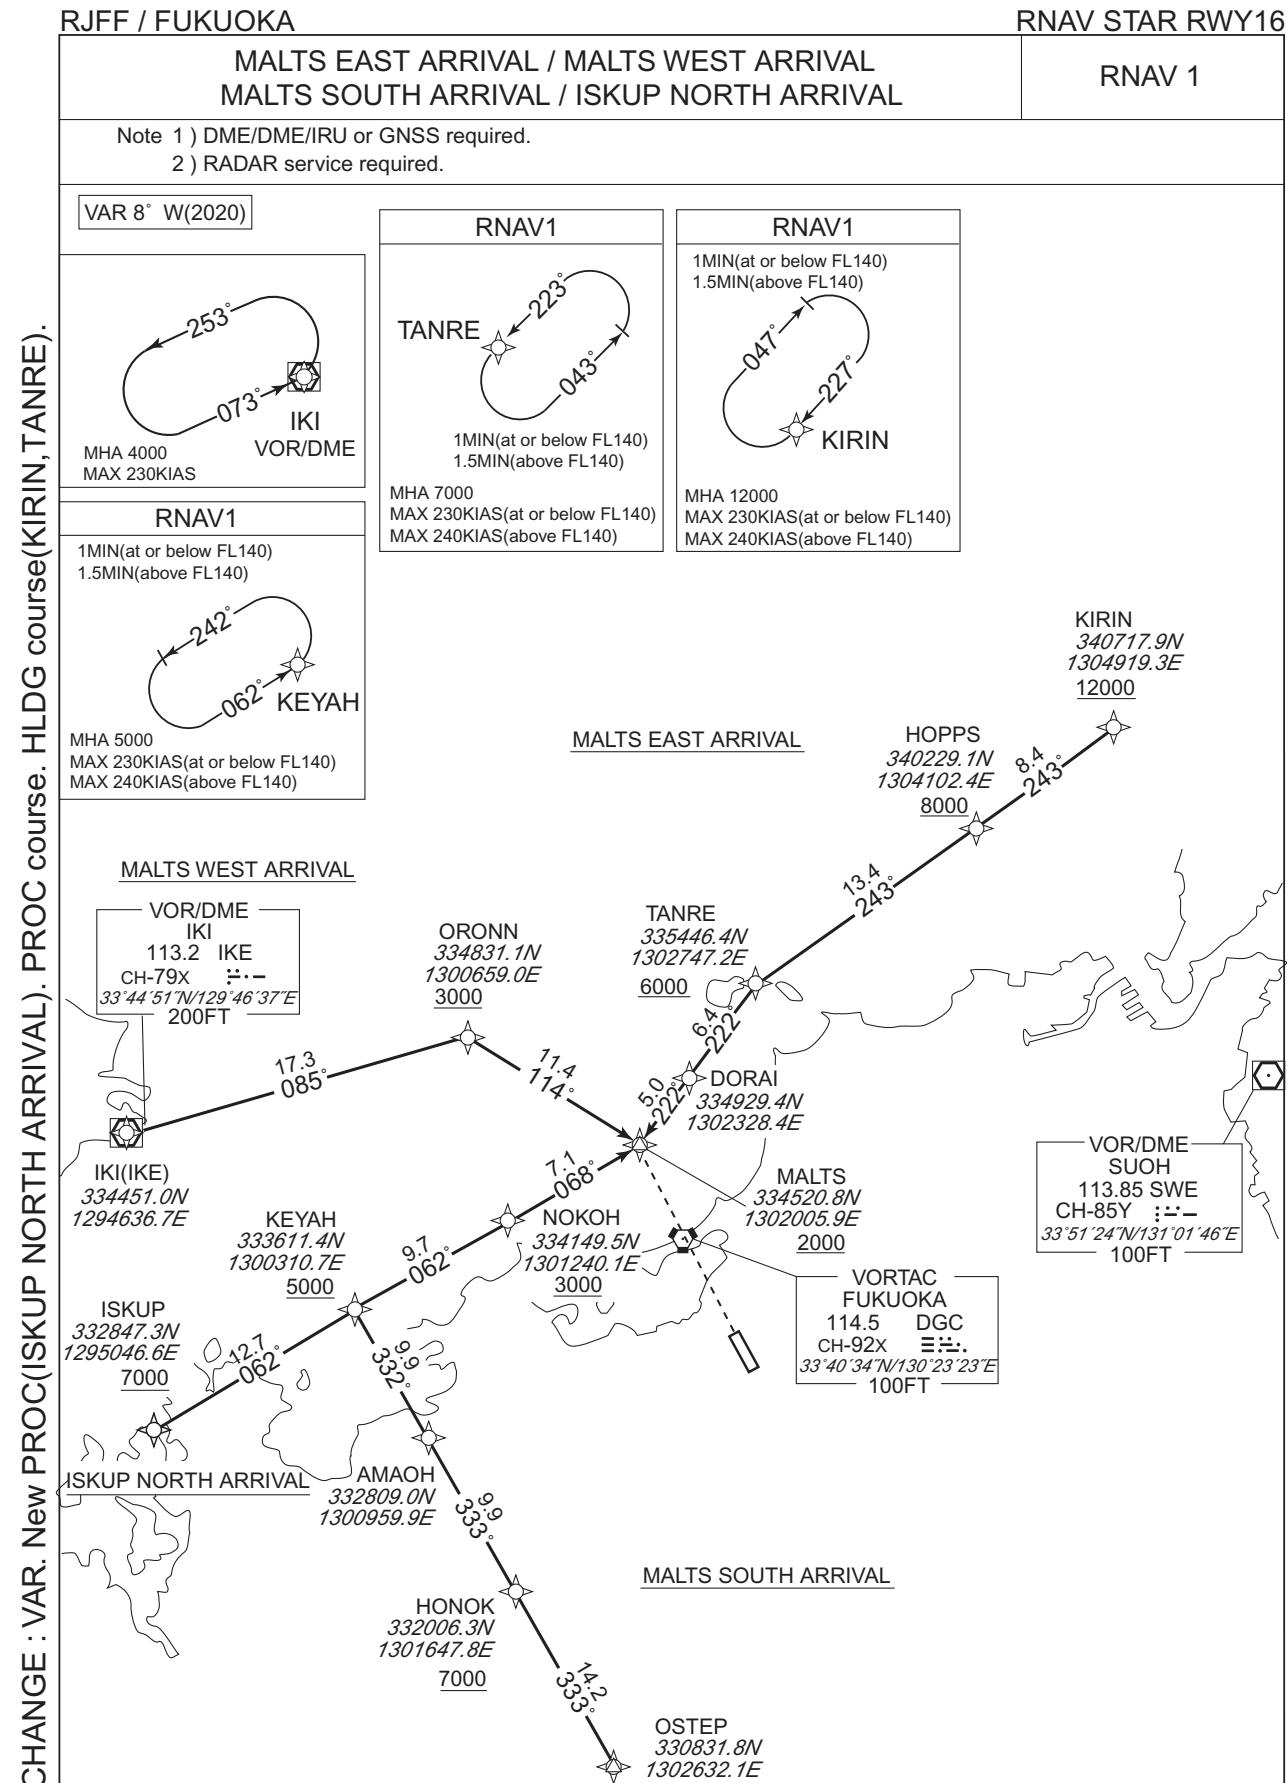

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY16

MALTS EAST ARRIVAL

From KIRIN at or above 12000FT, to HOPPS at or above 8000FT, to TANRE at or above 6000FT, to DORAI, to MALTS at or above 2000FT.

Critical DME	-	-
	DGC	TANRE - MALTS
DME GAP	-	
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1	

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIRIN	-	-	-7.7	-	-	+12000	-	-	RNAV1
002	TF	HOPPS	-	243 (235.0)	-7.7	8.4	-	+8000	-	-	RNAV1
003	TF	TANRE	-	243 (235.0)	-7.7	13.4	-	+6000	-	-	RNAV1
004	TF	DORAI	-	222 (214.2)	-7.7	6.4	-	-	-	-	RNAV1
005	TF	MALTS	-	222 (214.1)	-7.7	5.0	-	+2000	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	KIRIN	227 (218.7)	-7.7	1.0(-14000) 1.5(+14001)	R	12000	-	-230(-14000) -240(+14001)	RNAV1
Hold	TANRE	223 (214.2)	-7.7	1.0(-14000) 1.5(+14001)	L	7000	-	-230(-14000) -240(+14001)	RNAV1

MALTS WEST ARRIVAL

From IKE, to ORONN at or above 3000FT, to MALTS at or above 2000FT.

Critical DME	DGC	IKE - 15.0NM to ORONN 6.0NM to ORONN - MALTS
	KUE	IKE - 15.0NM to ORONN
	IKE	6.0NM to ORONN - MALTS
DME GAP		15NM to ORONN - 6.0NM to ORONN
Inappropriate Navaids		See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	IKE	-	-	-7.7	-	-	-	-	-	RNAV1
002	TF	ORONN	-	085 (077.7)	-7.7	17.3	-	+3000	-	-	RNAV1
003	TF	MALTS	-	114 (106.2)	-7.7	11.4	-	+2000	-	-	RNAV1

CHANGE : VAR. PROC course. HLDG course.

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY16

MALTS SOUTH ARRIVAL

From OSTEP, to HONOK at or above 7000FT, to AMAOH, to KEYAH at or above 5000FT, to NOKOH at or above 3000FT, to MALTS at or above 2000FT.

Critical DME	SGE	4.0NM to NOKOH - NOKOH
	IKE	2.0NM to MALTS - MALTS
	DGC	2.0NM to MALTS - MALTS
DME GAP	NOKOH - 2.0NM to MALTS	
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1	

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OSTEP	-	-	-7.7	-	-	-	-	-	RNAV1
002	TF	HONOK	-	333 (324.9)	-7.7	14.2	-	+7000	-	-	RNAV1
003	TF	AMAOH	-	333 (324.8)	-7.7	9.9	-	-	-	-	RNAV1
004	TF	KEYAH	-	332 (324.8)	-7.7	9.9	-	+5000	-	-	RNAV1
005	TF	NOKOH	-	062 (054.5)	-7.7	9.7	-	+3000	-	-	RNAV1
006	TF	MALTS	-	068 (060.3)	-7.7	7.1	-	+2000	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	KEYAH	062 (054.5)	-7.7	1.0(-14000) 1.5(+14001)	L	5000	-	-230(-14000) -240(+14001)	RNAV1

ISKUP NORTH ARRIVAL

From ISKUP at or above 7000FT, to KEYAH at or above 5000FT, to NOKOH at or above 3000FT, to MALTS at or above 2000FT.

Critical DME	SGE	4.0NM to NOKOH - NOKOH
	IKE	2.0NM to MALTS - MALTS
	DGC	2.0NM to MALTS - MALTS
DME GAP	NOKOH - 2.0NM to MALTS	
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1	

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ISKUP	-	-	-7.7	-	-	+7000	-	-	RNAV1
002	TF	KEYAH	-	062 (054.3)	-7.7	12.7	-	+5000	-	-	RNAV1
003	TF	NOKOH	-	062 (054.5)	-7.7	9.7	-	+3000	-	-	RNAV1
004	TF	MALTS	-	068 (060.3)	-7.7	7.1	-	+2000	-	-	RNAV1


Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	KEYAH	062 (054.5)	-7.7	1.0(-14000) 1.5(+14001)	L	5000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : VAR. New PROC(ISKUP NORTH ARRIVAL). PROC course.

INSTRUMENT APPROACH CHART

RJFF / FUKUOKA

FUKUOKA APP 119.65 - 121.125 - 127.9 261.2 - 270.8	ILS-LOC 108.9 IFF ::=: ILS-GP 329.3 ILS-DME 987(CH-26X)	FUKUOKA TOWER 118.4 - 126.2 236.8	RADAR AVBL ATIS 127.2
--	--	---	--------------------------

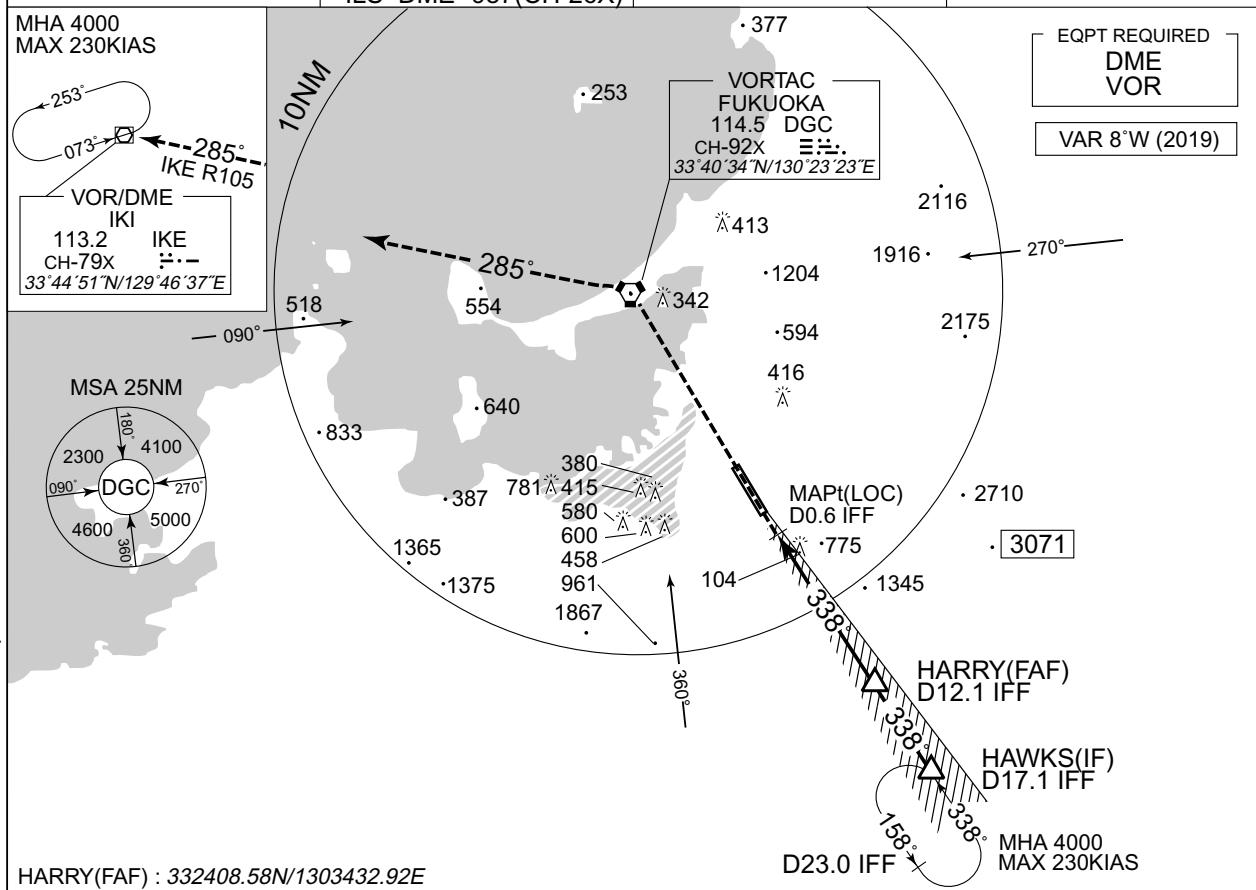


HARRY(FAF) : 332408.58N/1303432.92E

NM to IFF	MAPt	3	4	5	6	7	8	9	10	11	12	FAF
ALT (3.0° APCH Path)	—	981	1299	1618	1936	2255	2573	2891	3210	3528	3847	3871

MISSED APPROACH

Climb direct to DGC VORTAC,
turn left, via IKE R105 to IKE
VOR/DME and hold at 4000FT.
Contact FUKUOKA APP.

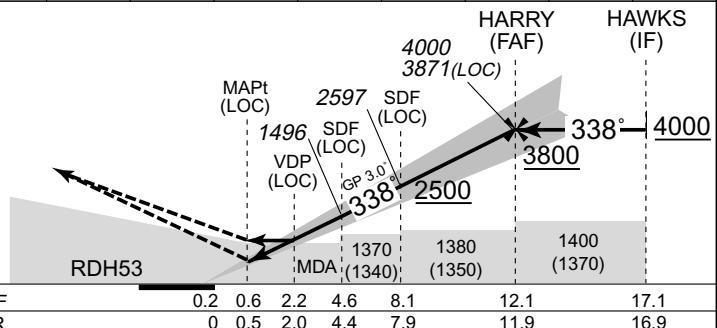

MINIMA		THR elev. 32		AD elev. 30		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	232 (200)	550	680 (650)	1200	830 (800)	1600
B				1400		1020 (990)
C				1800	1030 (1000)	2400
D						3200


Circling to WEST side of RWY only.

INSTRUMENT APPROACH CHART



INSTRUMENT APPROACH CHART

RJFF / FUKUOKA

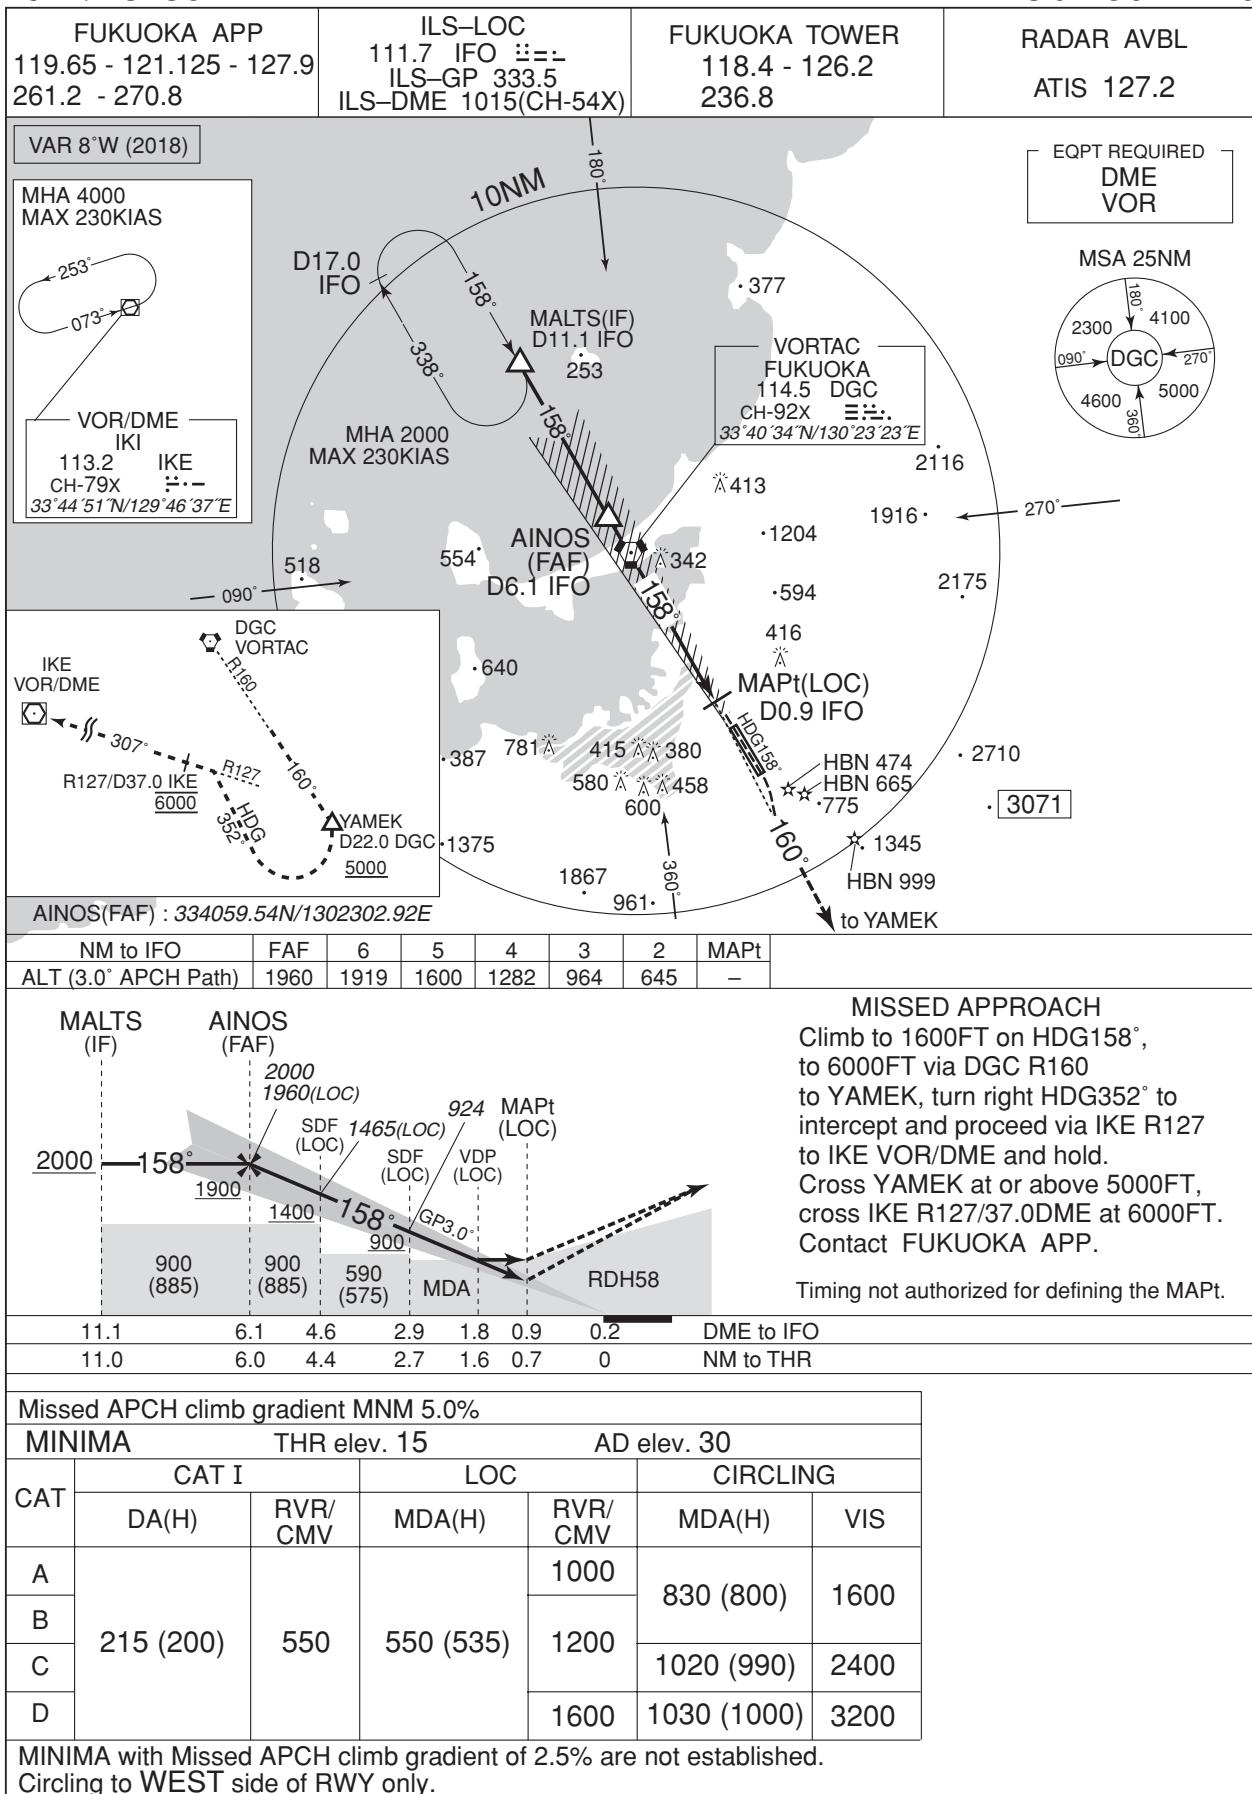

INSTRUMENT APPROACH CHART

RJFF / FUKUOKA

FUKUOKA APP
119.65 - 121.125 - 127.9
261.2 - 270.8

**1. DME/DME not authorized.
2. RADAR service required.
3. GNSS required.**

FUKUOKA TOWER
118.4 - 126.2
236.8

RADAR AVBL
ATIS 127.2

Baro-VNAV not authorized below -5°C

VAR 7°W (2016)

RNAV1
1MIN(at or below FL140)
1.5MIN(above FL140)

MALTS
ARP: 333504N/1302706E

NOKOH (IAF)
3000

AINOS (FAF)
554
158°(150.3°T)/1.6
158°(150.3°T)/1.7
158°(150.3°T)/2.7

OKINO (IAF)
4000
377

VORTAC FUKUOKA 114.5 DGC
CH-92X
33°40'34"N/130°23'23"E

FF651 (SDF)
594

FF652 (SDF)
416

RW16 (MAPt)
781
580
458
600
1867
961
to YAMEK

YAMEK (MATF)
342
775
104
1345

IKI (IKE) (MAHF)
22.8
308°
(300.4°T)

KAFRI (MATF)
307°
(322.9°T)

VOR/DME IKI 113.2 IKE CH-79X 33°44'51"N/129°46'37"E

DGC VORTAC
R160
HDG 158°

FF601 (SDF)
6000

YAMEK (MATF)
D22.0 DGC 5000

OKINO (IAF)
334844.46N
1302717.18E

NOKOH (IAF)
334149.51N
1301240.11E

MALTS (IF)
334520.80N
1302005.94E

AINOS (FAF)
334059.54N
1302302.92E

FF651 (SDF)
333938.51N
1302358.41E

FF652 (SDF)
333809.81N
1302459.12E

RW16 (MAPt)
333548.91N
1302635.47E

YAMEK (MATF)
332105.88N
1303539.52E

FF601 (MATF)
331830.45N
1302936.66E

KAFRI (MATF)
333320.84N
1301017.68E

IKI (IKE) (MAHF)
334451.04N
1294636.67E

	NM to Next Fix	FAF	5	4	3	2	MAPt
ALT (3.0° APCH Path)	1969	1665	1347	1028	710	-	


MISSED APPROACH

Direct to YAMEK at or above 5000FT, to FF601 at 6000FT, to KAFRI, to IKI(IKE) and hold at 6000FT. Contact EUKUOKA APP.

(For using VORTAC)

(or using VOR/RAC)
Climb to 1600FT on HDG158°, to 6000FT via DGC R160 to YAMEK, turn right HDG352° to intercept and proceed via IKE R127 to IKE VOR/DME and hold

VOR/DME and hold.
Cross YAMEK at or above 5000FT,
Cross IKE R127 / 37.0DME at 6000FT.
Contact FUKUOKA APP

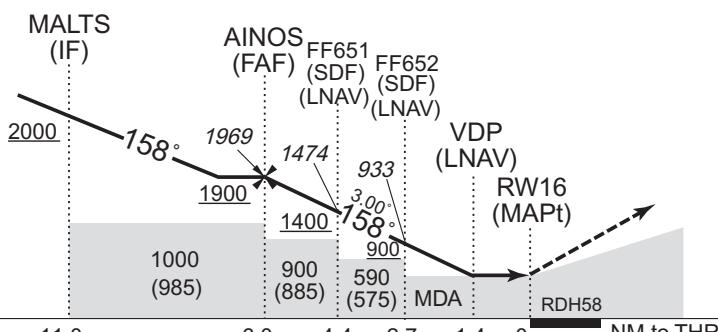

Missed APCH climb gradient MNM 5.0%


MINIMA		THR elev. 15		AD elev. 30		
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	490 (475)	1000	490 (475)	1000	830 (800)	1600
B		1200		1200		
C		1600		1600	1020 (990)	2400
D		1600		1030 (1000)	3200	

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to WEST side of RWY only.

INSTRUMENT APPROACH CHART

RJFF / FUKUOKA

VOR RWY16

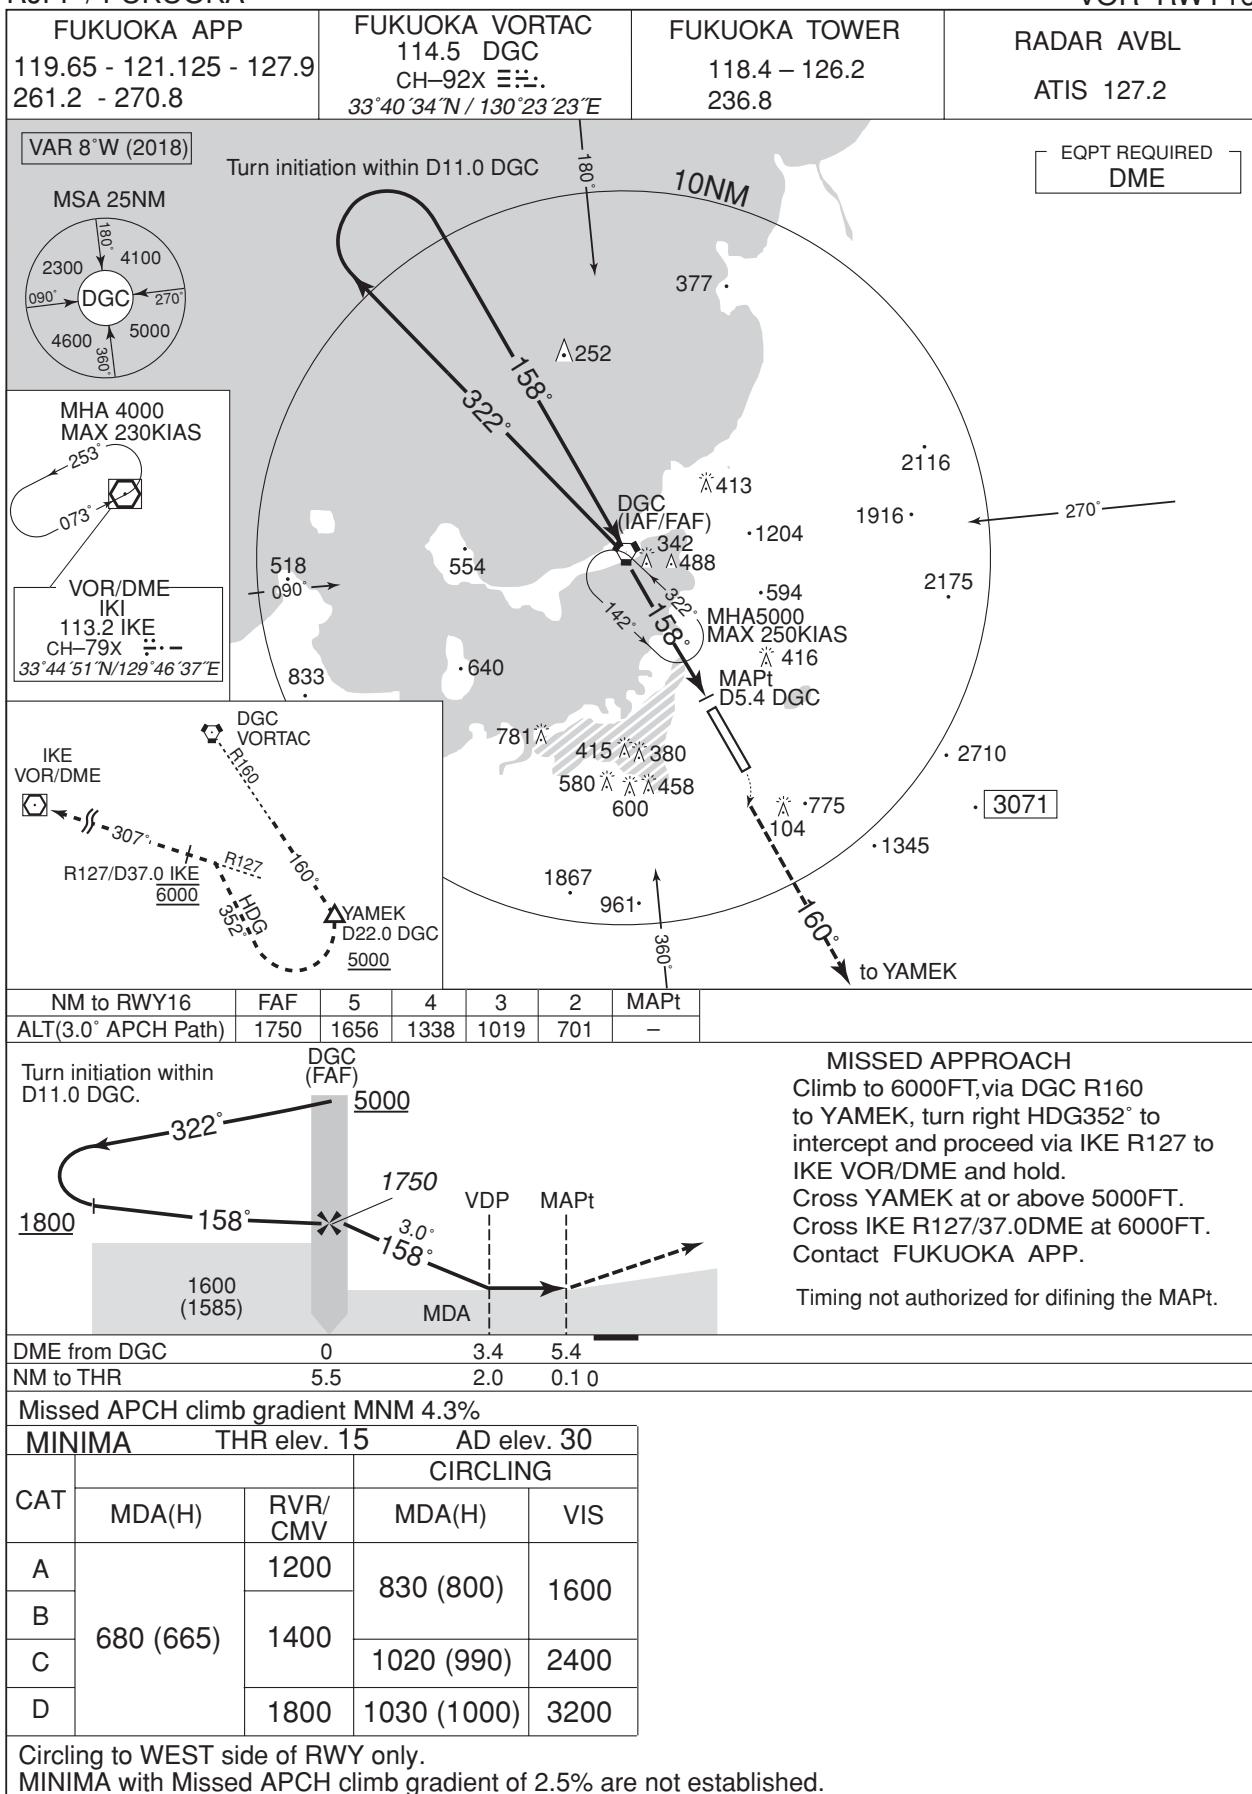

INSTRUMENT APPROACH CHART



RJFF

FUKUOKA Visual REP



CHANGE : Shape of FUKUOKA CONTROL ZONE.

Call sign	BRG / DIST from ARP	Remarks
古賀 koga	014° / 8.4NM	高速道路インターチェンジ Interchange
長者原 Chojabaru	046° / 2.3NM	ドーム型建造物 Dome
太宰府 Dazaifu	133° / 6.4NM	ゴルフ場 Golf Course
三沢 Mitusawa	153°/10.4NM	ゴルフ場 Golf Course
* 那珂川 Nakagawa	196° / 5.9NM	松尾橋 Bridge
室見 Muromi	273° / 5.5NM	室見川河口 River - Mouth
今津 Imazu	273° / 9 NM	今津橋 Bridge
志賀 Shika	303° / 8 NM	志賀島橋 Bridge
北崎 Kitazaki	288°/12 NM	漁港 Harbor

* ヘリコプター用 Use For Helicopter



RJFF / FUKUOKA

Minimum Vectoring Altitude CHART

