


RJTY / YOKOTA

AD CHART

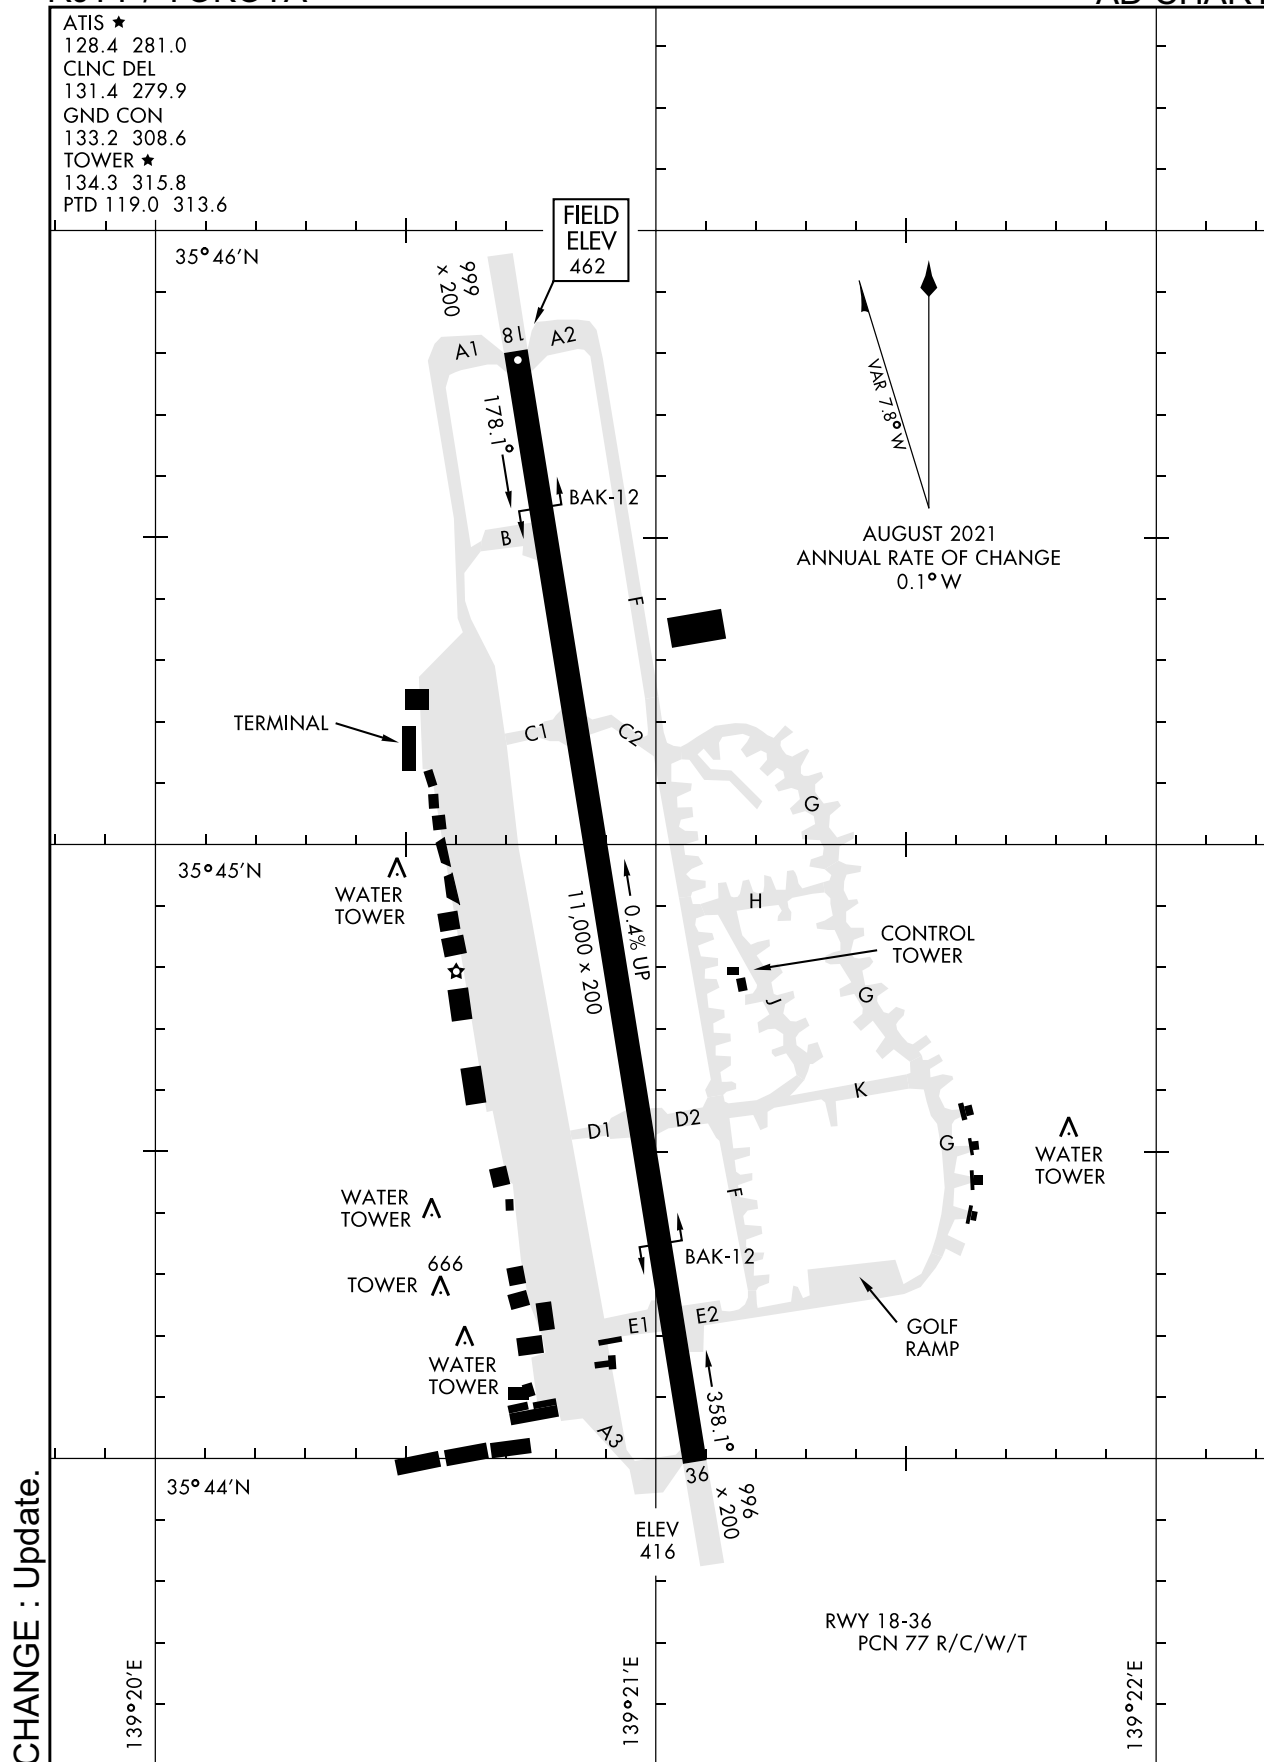


NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

BREEE FOUR DEPARTURE(OBSTACLE)

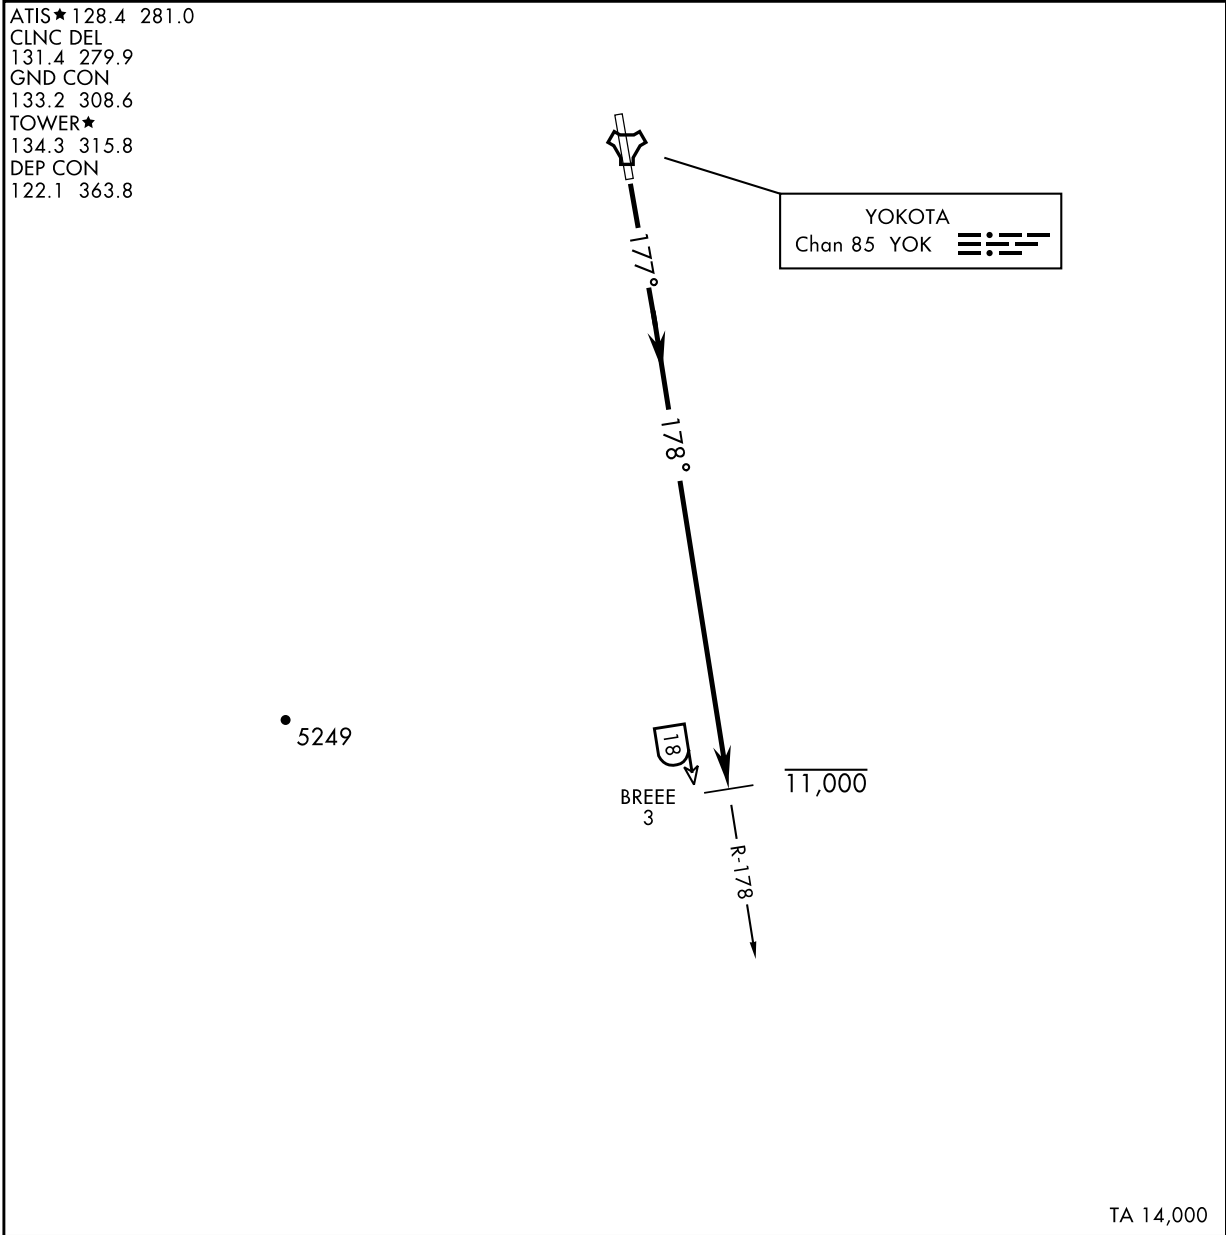

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 18: Climb to 4000, turn right to intercept YOK TACAN R-178 to BREEE.
Cross BREEE at or below 11,000. Continue as assigned by ATC.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY /YOKOTA

TIMAP FOUR DEPARTURE(OBSTACLE)

ATIS★128.4 281.0
 CLNC DEL
 131.4 279.9
 GND CON
 133.2 308.6
 TOWER★
 134.3 315.8
 DEP CON
 122.1 363.8



TA 14,000



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 36: Climb to 4000, turn right to intercept YOK TACAN R-003 to TIMAP. Cross TIMAP at or below 13,000. Continue as assigned by ATC.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

ATIS★128.4 281.0
CLNC DEL
131.4 279.9
GND CON
133.2 308.6
TOWER★
134.3 315.8
DEP CON
122.1 363.8

BUSYU ONE DEPARTURE

Rwy	Knots	60	120	180	240	300	360
* 18 ㉓	V/V(fpm)	360	720	1080	1440	1800	2160
† 18 ㉔	V/V(fpm)	465	930	1395	1860	2325	2790
* 36 ㉕	V/V(fpm)	383	766	1149	1532	1915	2298
† 36 ㉖	V/V(fpm)	476	952	1428	1904	2380	2856

* Minimum † ATC Climb Rate
㉓ to 8000
㉔ to 13,400
㉕ to 7900



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 18: Climbing right turn to intercept YOK TACAN R-283 to BUSYU.
Cross BUSYU at or above 13,400. Maintain ATC assigned altitude.

TAKE-OFF RWY 36: Climbing left turn to intercept YOK TACAN R-283 to BUSYU.
Cross BUSYU at or above 13,400. Maintain ATC assigned altitude.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT


RJTY / YOKOTA

FISAB TWO DEPARTURE(RNAV)

ATIS★128.4 281.0
 CLNC DEL
 131.4 279.9
 GND CON
 133.2 308.6
 TOWER★
 134.3 315.8
 DEP CON
 122.1 363.8

TAKE-OFF OBSTACLES:

- (1) RWY 36, building 3043' from DER, 1311' left of centerline, 53' AGL/527' MSL.
 (2) RWY 36, building with antenna 2153' from DER, 1095' right of centerline, 76' AGL/532' MSL.
 (3) RWY 36, misc natural 1583' from DER, 640' left of centerline, 53' AGL/522' MSL.

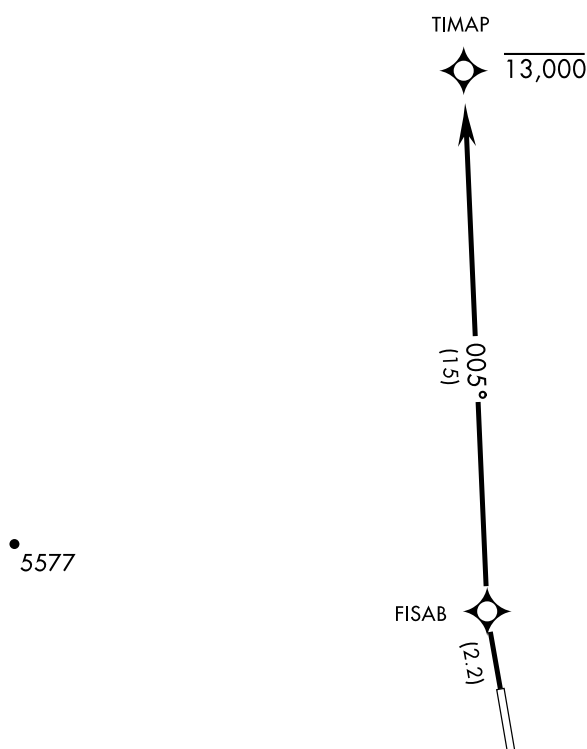

RNAV 1
 DME/DME RNP-0.3 NA

RADAR REQUIRED
 (for non-GPS Equipped Aircraft)

GPS REQUIRED

TA 14,000



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 36: Climb direct FISAB, then track 005° to TIMAP. Cross TIMAP at or below 13,000 or as assigned by ATC.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP


STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

GERGE TWO DEPARTURE(RNAV)

ATIS★128.4 281.0
CLNC DEL
131.4 279.9
GND CON
133.2 308.6
TOWER★
134.3 315.8
DEP CON
122.1 363.8

TAKE-OFF OSBTACLES:
(1) RWY 18, terrain within 15' from DER, 500' right of centerline, up to 417' MSL.
(2) RWY 18, building 3492' from DER, 1415' right of centerline, 90' AGL/512' MSL.
(3) RWY 18, building 6006' from DER, 1744' right of centerline, 145' AGL/529' MSL.
(4) RWY 18, pylon 4436' from DER 1410' right of centerline, 100' AGL/492' MSL.
(5) RWY 18, pylon 4870' from DER 1312' right of centerline, 100' AGL/502' MSL.
(6) RWY 18, MSL tree 2217' from DER 755' left of centerline, 90' AGL/494' MSL.

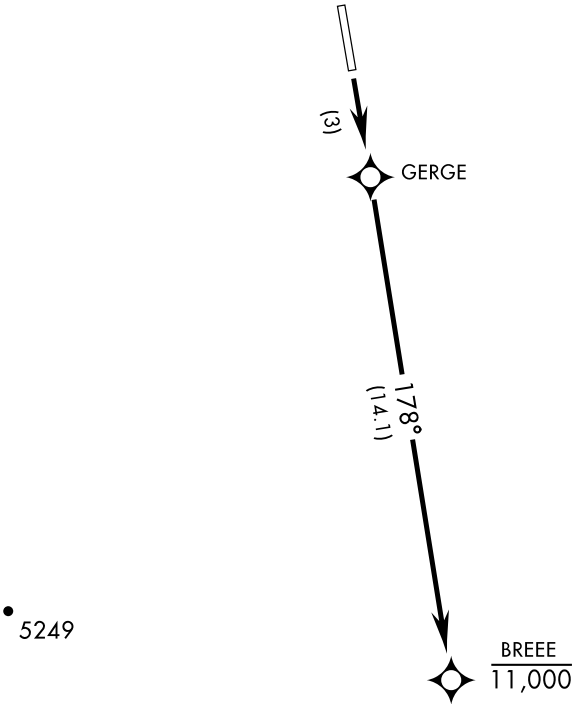

RNAV 1
DME/DME RNP-0.3 NA

RADAR REQUIRED
(for non-GPS Equipped Aircraft)

GPS REQUIRED

TA 14,000

CHANGE : Update.

▼

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 18: Climb direct GERGE, then track 178° to BREEE. Cross BREEE at or below 11,000.

NOTE: REPRINTING DOD FLIP

INTENTIONALLY LEFT BLANK

RJTY / YOKOTA

CHANGE : Update.

11/8/22

INSTRUMENT APPROACH CHART

RJTY / YOKOTA

LOC I-YAS 108.7	APCH CRS 177°	Rwy ldg 11,000 TDZE 460 Arpt Elev 462
---------------------------	-------------------------	------------------------------------------------------------------

ILS or LOC/DME RWY18

▼ * When ALS inop, increase CAT ABCDE RVR to 40, vis to ¾ mile.
 ** When ALS inop increase CAT AB RVR to 55, vis to 1 mile,
 CAT CDE vis to 1½ miles.
 *** Circling not authorized E of Rwy 18-36.




† MISSED APPROACH: Climb to 4000 on
YOK TACAN R-178 to BREEE and hold.

ATIS ★ 128.4 281.0	APP CON 118.3 270.6 Abv 5000 123.8 261.4 Blw 5000
------------------------------	-----------------------------------------------------------------------



TOWER ★
134.3 315.8

GND CON
133.2 308.6

CLNC DEL
131.4 279.9

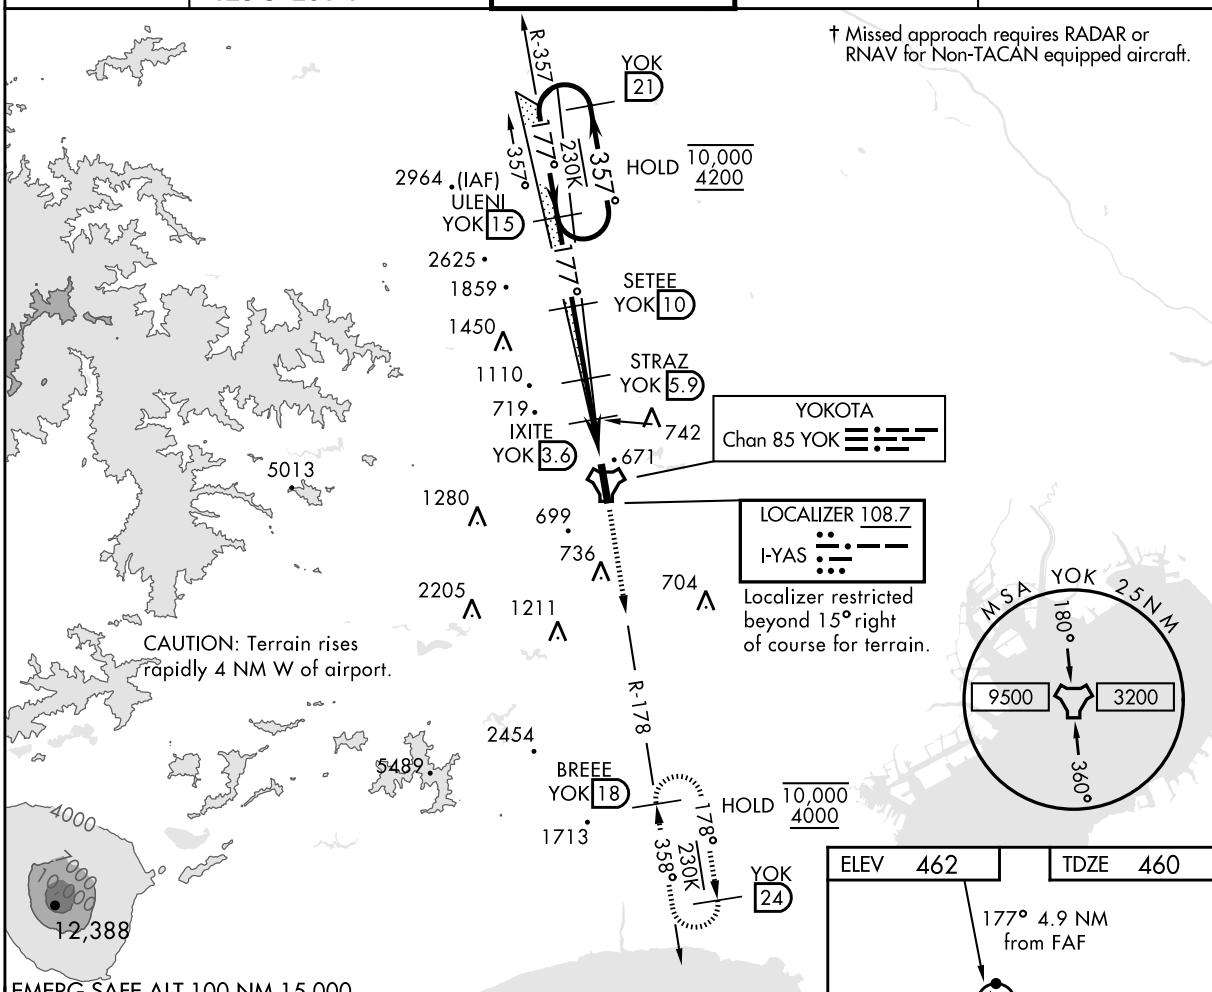

EMERG SAFE ALT 100 NM 15,000

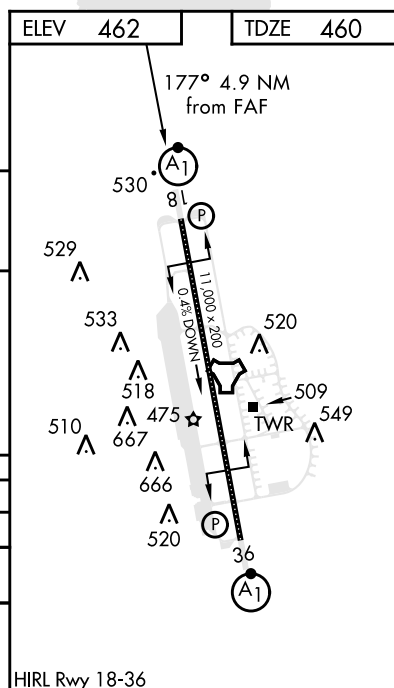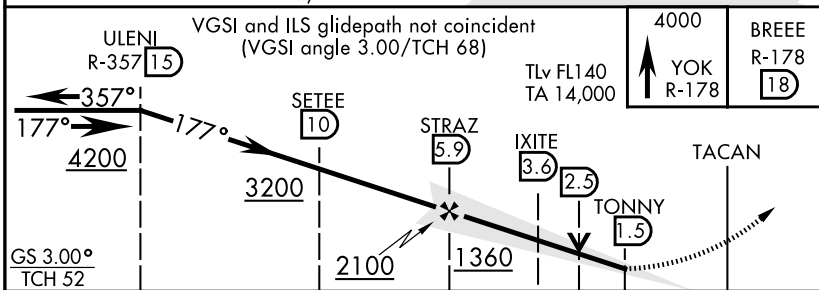

CHANGE : Update.


			←2.3 NM	←2.1 NM	0.6 NM	
CATEGORY	A	B	C	D	E	
S-ILS 18*	699/24		237	(300-½)		
S-LOC 18**	1040/24 578 (600-½)		1040-1¼ 578 (600-1¼)			
C *** CIRCLING	1040-1		1240-2¼	1380-3	1580-3	
	578 (600-1)		778 (800-2¼)	918 (1000-3)	1118 (1200-3)	

HIRL Rwy 18-36

NOTE: REPRINTING DOD FLIP


INSTRUMENT APPROACH CHART

RJTY / YOKOTA

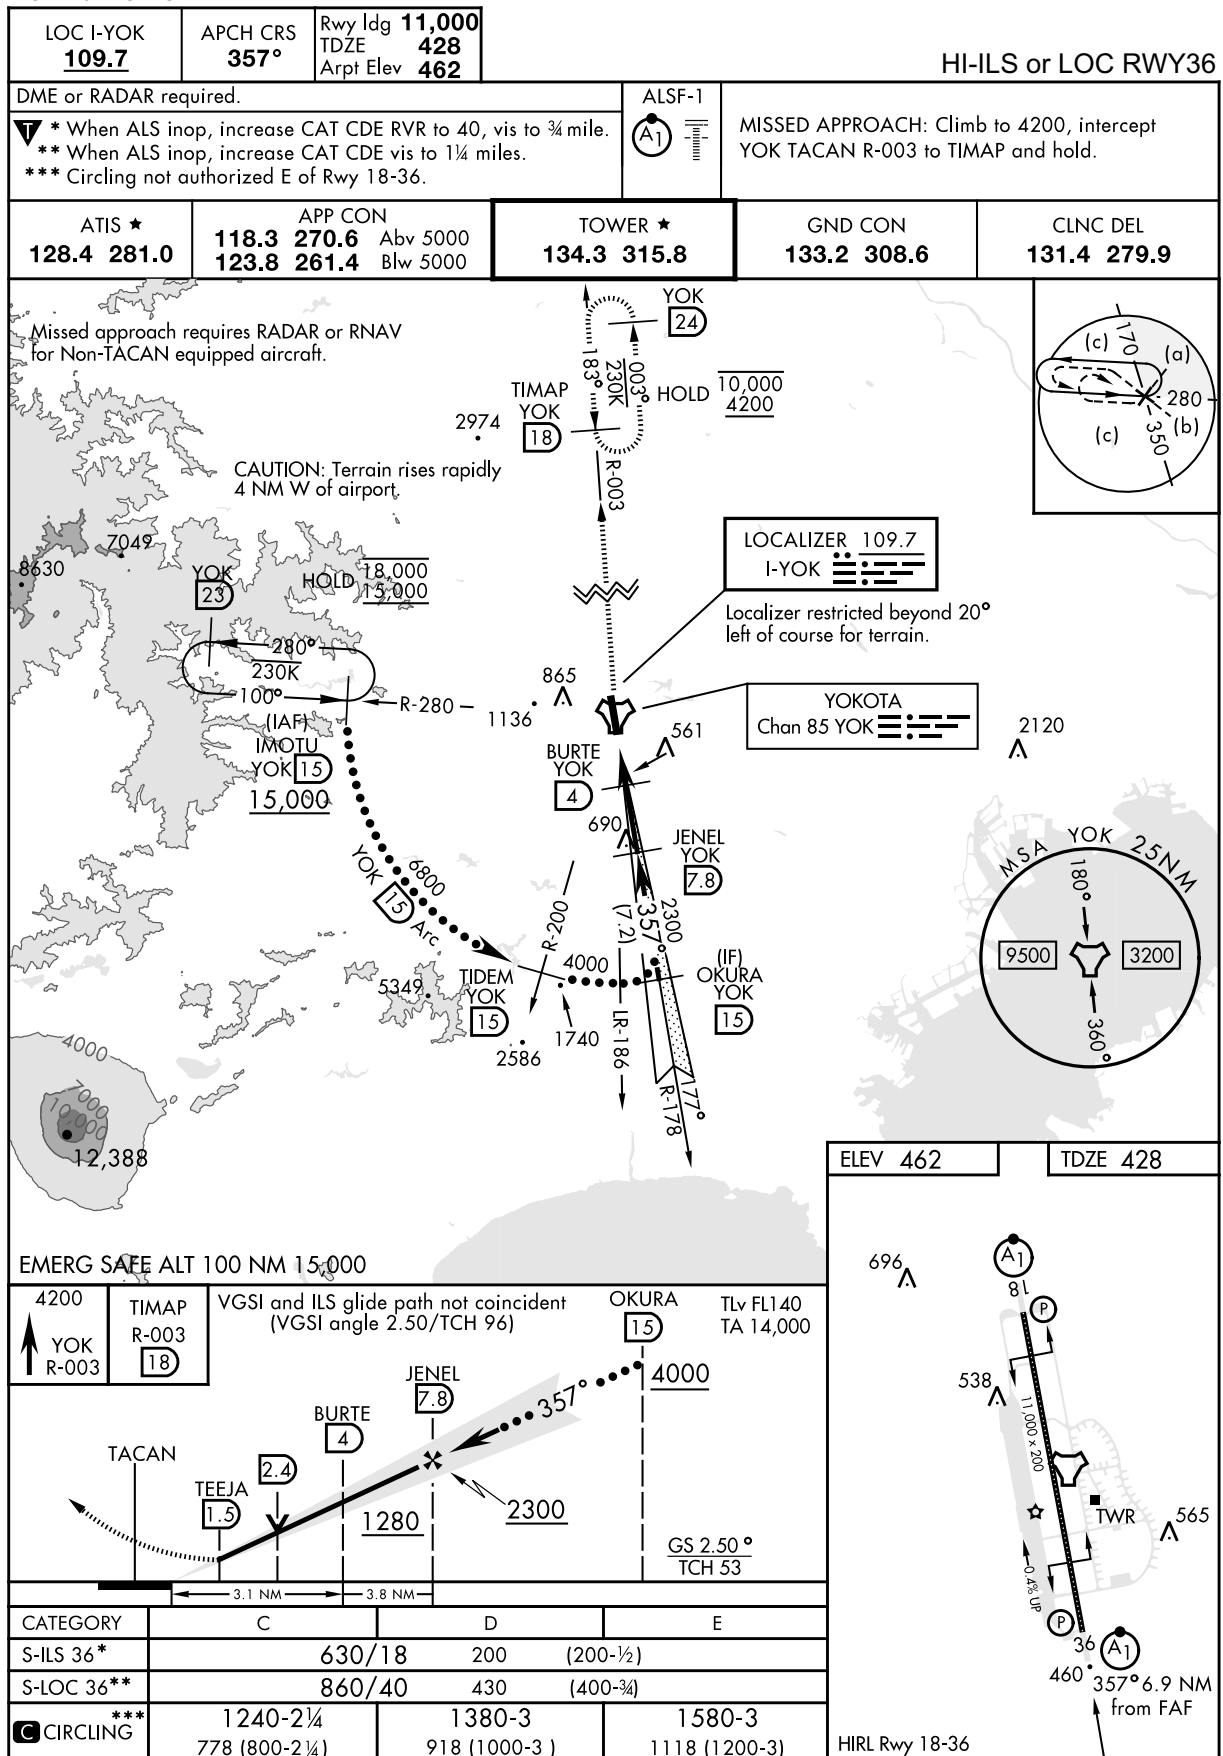

INSTRUMENT APPROACH CHART

RJTY / YOKOTA

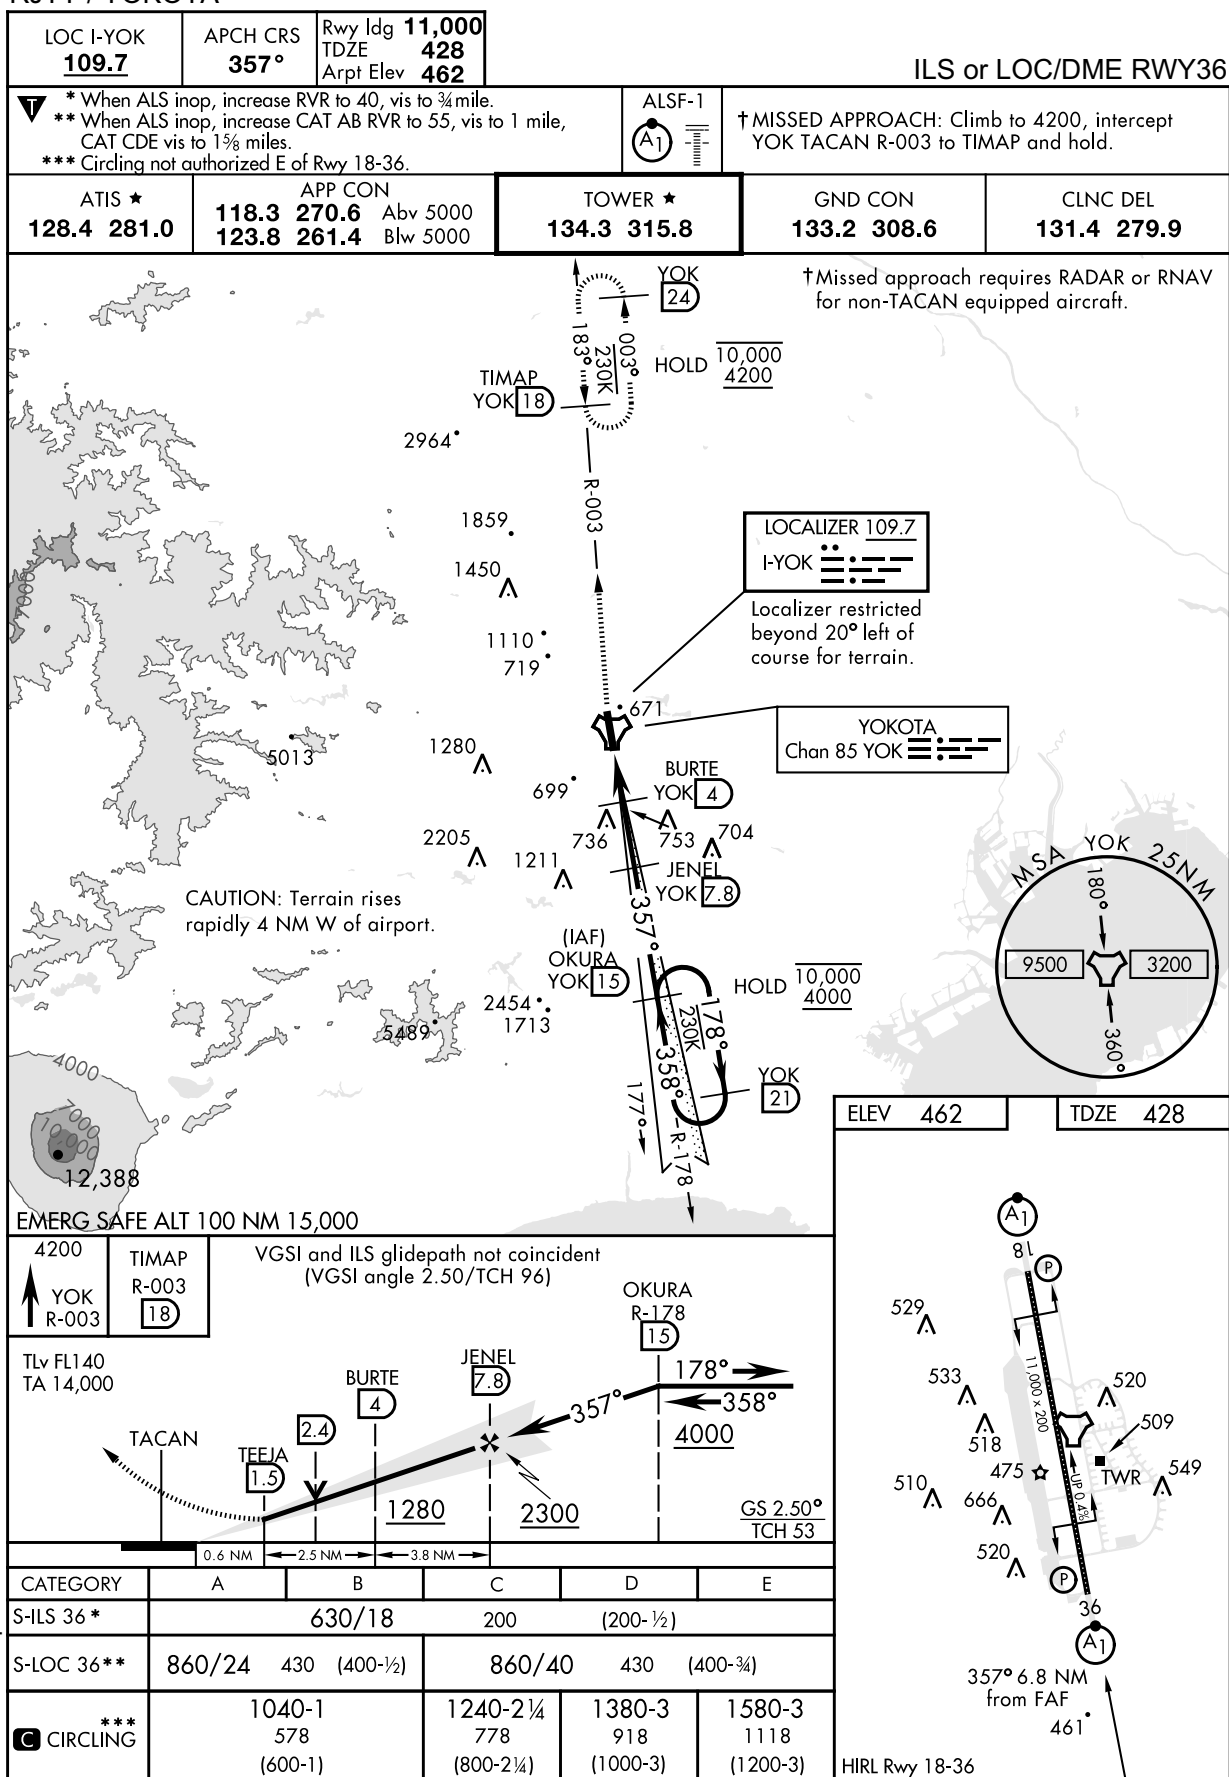

INSTRUMENT APPROACH CHART

RJTY / YOKOTA

APCH CRS	Rwy ldg	11,000
177°	TDZE	460
	Arpt Elev	462

RNAV(GPS) RWY18

<p>▼ *When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 3/8 miles.</p> <p>** Circling not authorized E of Rwy 18-36.</p>	<p>ALSIF-1</p> <p>(A1)</p>	<p>MISSED APPROACH: Climb to 4000 direct MESTR WPT and hold.</p>
-------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------	------------------------------------------------------------------

<p>ATIS ★</p> <p>128.4 281.0</p>	<p>APP CON</p> <p>118.3 270.6 Abv 5000</p> <p>123.8 261.4 Blw 5000</p>	<p>TOWER ★</p> <p>134.3 315.8</p>	<p>GND CON</p> <p>133.2 308.6</p>	<p>CLNC DEL</p> <p>131.4 279.9</p>
----------------------------------	------------------------------------------------------------------------	-----------------------------------	-----------------------------------	------------------------------------



CHANGE : Update.

<p>TLv FL140</p> <p>TA 14,000</p>				<p>4000</p>	<p>MESTR</p>	<p>ELEV 462</p>	<p>TDZE 460</p>
<p>10,000</p> <p>4200</p> <p>357°</p> <p>177°</p> <p>177°</p> <p>3.09°</p> <p>TCH 68</p>				<p>2500</p>	<p>1340</p>	<p>558</p>	<p>529</p>
<p>BODAI</p>				<p>RISSA</p>	<p>HANIV</p>	<p>533</p>	<p>520</p>
<p>1.4 NM to RW18</p>				<p>3.5 NM</p>	<p>2.5 NM</p>	<p>518</p>	<p>509</p>
<p>CATEGORY</p>				<p>A</p>	<p>B</p>	<p>C</p>	<p>D</p>
<p>LNAV MDA *</p>				<p>960/24</p>	<p>498 (500-1/2)</p>	<p>960/50</p>	<p>498 (500-1)</p>
<p>CIRCLING **</p>				<p>1020-1</p>	<p>1040-1</p>	<p>1240-2 3/4</p>	<p>1380-3</p>
				<p>558 (600 1)</p>	<p>578 (600 1)</p>	<p>778 (800 2 1/2)</p>	<p>918 (1000 3)</p>

HIRL Rwy 18-36

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RJTY / YOKOTA

APCH CRS	Rwy ldg	11,000
357°	TDZE	428
	Arpt Elev	462



RNAV(GPS) RWY36

▼ * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 3/8 miles.
** Circling not authorized East of Rwy 18-36.



MISSED APPROACH: Climb to 5300 direct BODAI WPT and hold, continue climb-in-hold to 5300.

ATIS★	APP CON	TOWER★	GND CON	CLNC DEL
128.4 281.0	118.3 270.6 (ABV 5000 MSL) 123.8 261.4 (BLW 5000 MSL)	134.3 315.8	133.2 308.6	131.4 279.9

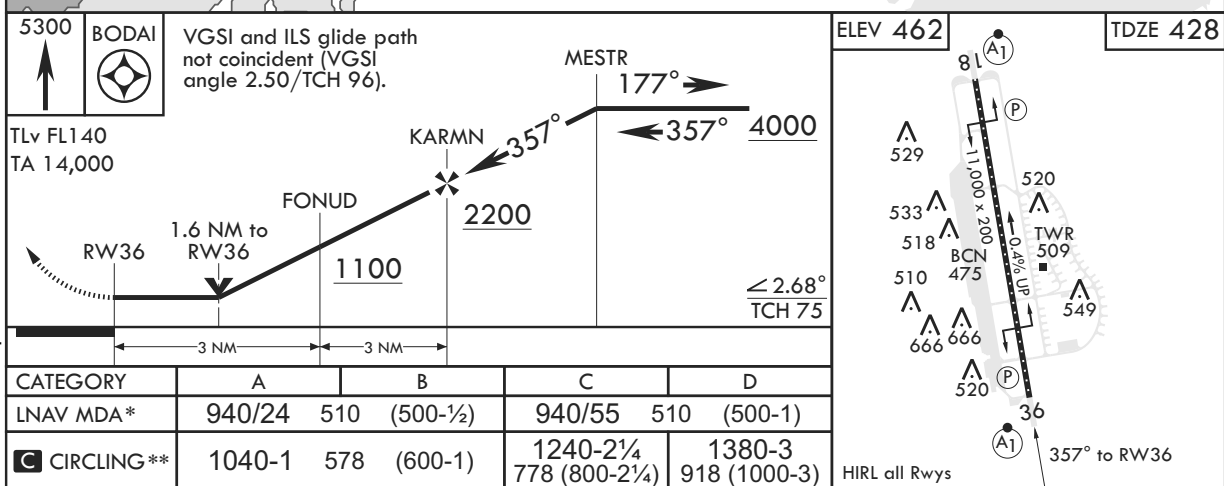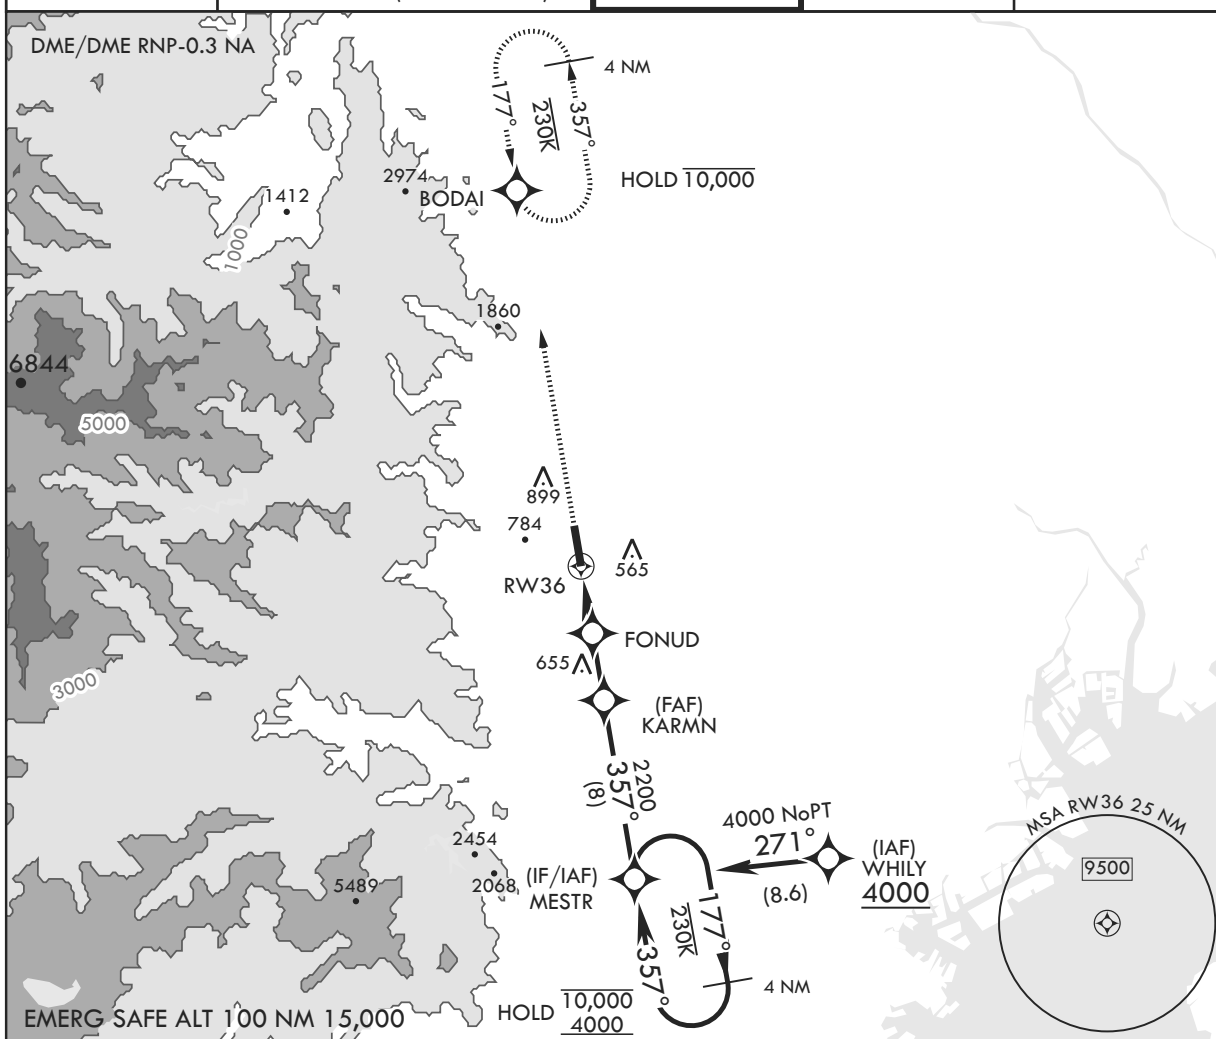

NOTE: REPRINTING DOD FLIP