


RJDA / AMAKUSA

AD CHART

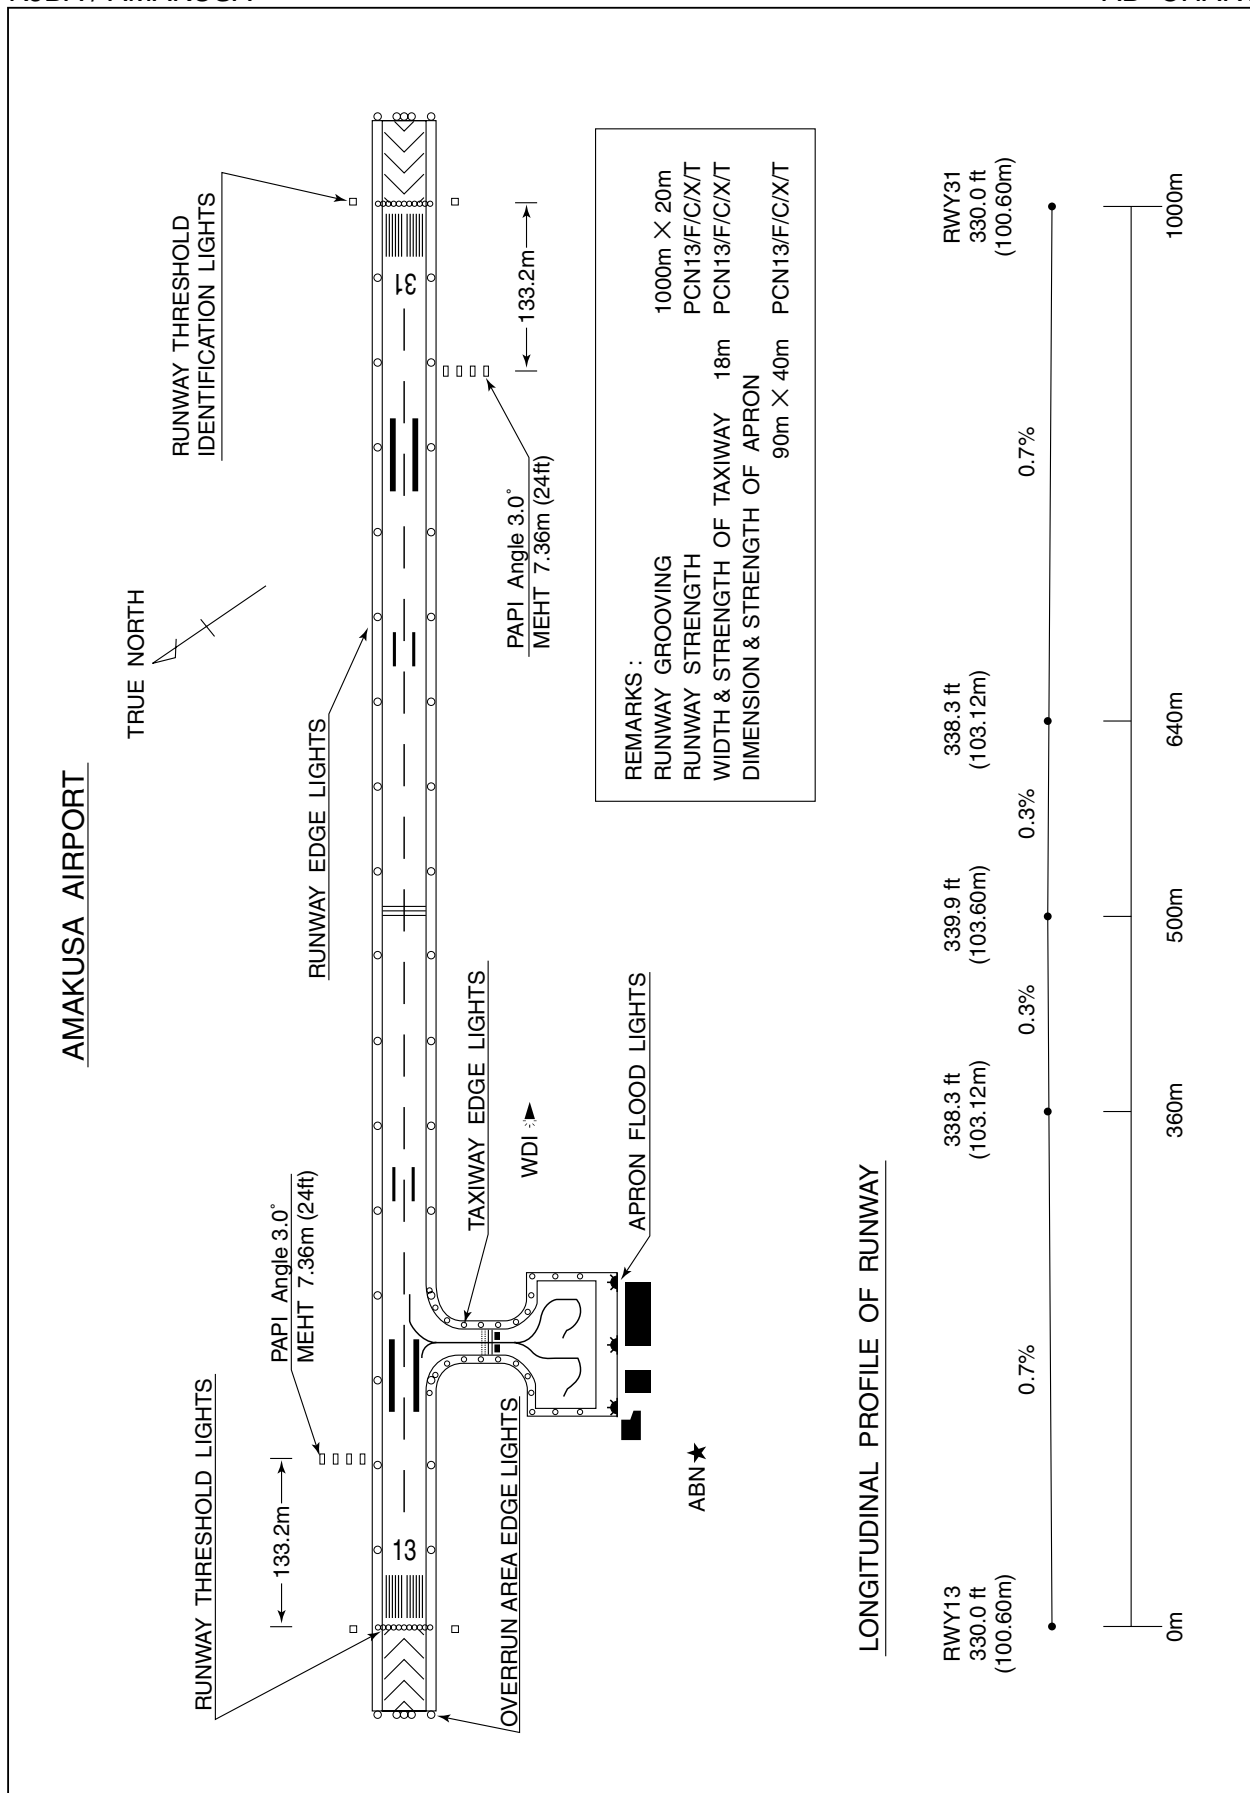

STANDARD DEPARTURE CHART - INSTRUMENT

RJDA / AMAKUSA

SID

AMAKUSA REVERSAL THREE DEPARTURE

RWY13 : Climb RWY HDG to 800FT, turn left HDG051°...

RWY31 : Climb on HDG322° to 1100FT, turn right HDG141°...

... to intercept and proceed via AKE R096 to 4000FT, turn right, direct to AKE VOR/DME.

Note RWY13 : 5.0% climb gradient required up to 1200FT.

OBST ALT 1994FT located at 9.0NM 098° FM end of RWY13.

RWY31 : 6.0% climb gradient required up to 1100FT.

OBST ALT 591FT located at 0.8NM 294° FM end of RWY31.



STANDARD DEPARTURE CHART - INSTRUMENT



STANDARD DEPARTURE CHART - INSTRUMENT

RJDA / AMAKUSA

RNAV SID and TRANSITION

HABOH TWO DEPARTURE

RWY13

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	132 (124.7)	-7.4	—	—	+800	—	—	Basic RNP1
002	DF	HABOH	—	—	-7.4	—	L	4000	—	—	Basic RNP1
003	TF	FUGEN	—	065 (058.0)	-7.4	7.5	—	—	—	—	Basic RNP1

RWY31

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	312 (304.7)	-7.4	—	—	+1400	—	—	Basic RNP1
002	DF	HABOH	—	—	-7.4	—	R	4000	—	—	Basic RNP1
003	TF	FUGEN	—	065 (058.0)	-7.4	7.5	—	—	—	—	Basic RNP1

NORTH TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	FUGEN	—	—	-7.4	—	—	—	—	—	Basic RNP1
002	TF	OMUTA	—	003 (355.2)	-7.4	24.3	—	+8000	—	—	Basic RNP1

EAST TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	FUGEN	—	—	-7.4	—	—	—	—	—	Basic RNP1
002	TF	MISMI	—	061 (053.7)	-7.4	10.3	—	—	—	—	Basic RNP1

CHANGE : VAR. Course FM FUGEN to OMUTA.

STANDARD ARRIVAL CHART - INSTRUMENT



INSTRUMENT APPROACH CHART

RJDA / AMAKUSA

VOR RWY31

KUMAMOTO APP	AMAKUSA VOR/DME		
119.0 – 126.5	113.45 AKE	—	NO RADAR
122.9 – 258.9	CH-81Y		
	32°28'49"N/130°09'39"E		



	NM to AKE	MAPt	2	3	4	5	6	7	FAF
ALT (3.0° APCH Path)	—	973	1291	1610	1928	2246	2565	2826	

MISSED APPROACH

Turn right, via AKE R102 to 7.0DME,
turn right, direct to AKE VOR/DME
and hold at 4000FT.
Contact KUMAMOTO APP.

Timing not authorized for defining the MAPt.
No turn before MAPt.



DME to AKE	0.1	0.9	1.7	2.9	5.1	7.8
NM to THR	0	0.8	1.6	2.8	5.0	7.7

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 330		AD elev. 340	
CAT			CIRCLING		
	MDA(H)	CMV	MDA(H)	VIS	
A	■ 830 (500)	1500	960 (620)	1600	
B			1020 (680)		
C	—	—	—	—	
D					

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to NORTH side of RWY only.

INSTRUMENT APPROACH CHART

RJDA / AMAKUSA

RNAV(GNSS) Z RWY13

KUMAMOTO APP

119.0 – 126.5

122.9 – 258.9

1. DME/DME RNP0.3 not authorized.

2. RNP0.3 required.

3. GNSS required.

—

NO RADAR

Baro-VNAV not authorized

VAR 7°W (2021)

MSA 25NM



ARP : 322856N/1300932E


TSUJI 323556.06N
(IAF) 1300624.98E

TOHMI 323438.41N
(IF) 1300312.63E

MIZKA 323139.29N
(FAF) 1300453.52E

RW13 322906.21N
(MAPt) 1300916.15E

FUGEN 323919.48N
(MAHF) 1302925.48E

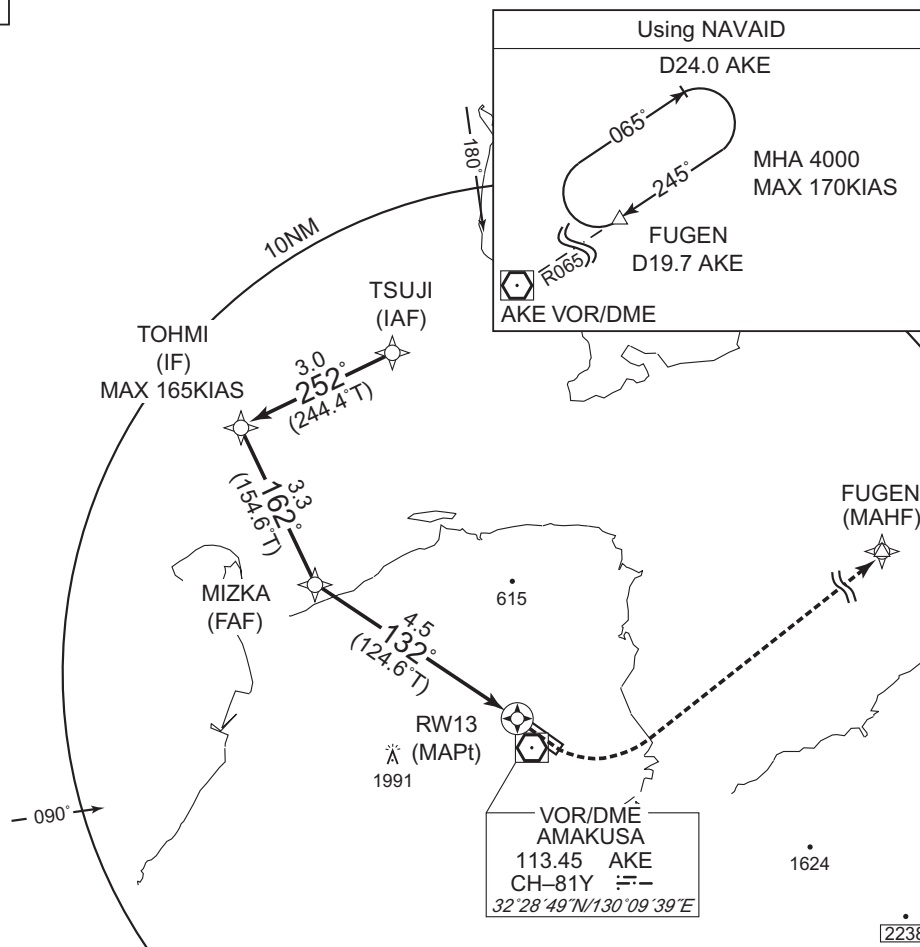

NM to Next Fix

FAF

4

3

MAPt

ALT(3.0° APCH Path)

1800

1643

1325

—

TSUJI
(IAF)TOHMI
(IF)MIZKA
(FAF)

AKE

RW13
(MAPt)

MISSED APPROACH

Turn left direct to FUGEN and hold at
4000FT.
Contact KUMAMOTO APP.

3000
2400

1800

1800

1800

1800

(1470)

MDA

4.5

2.9

0

NM to THR

MINIMA

THR elev. 330

AD elev. 340

CAT

LNAV/VNAV

LNAV

CIRCLING

DA(H)

CMV

MDA(H)

CMV

MDA(H)

VIS

A

Not applicable

1230(900)

1500

1230(890)

1600

B

Not applicable

1230(900)

1500

1230(890)

1600

C

Not applicable

1230(900)

1500

1230(890)

1600

D

Not applicable

1230(900)

1500

1230(890)

1600


Circling to NORTH side of RWY only.

CHANGE : Sensor for RNAV.

INSTRUMENT APPROACH CHART

RJDA / AMAKUSA

RNAV(GNSS) Z RWY31

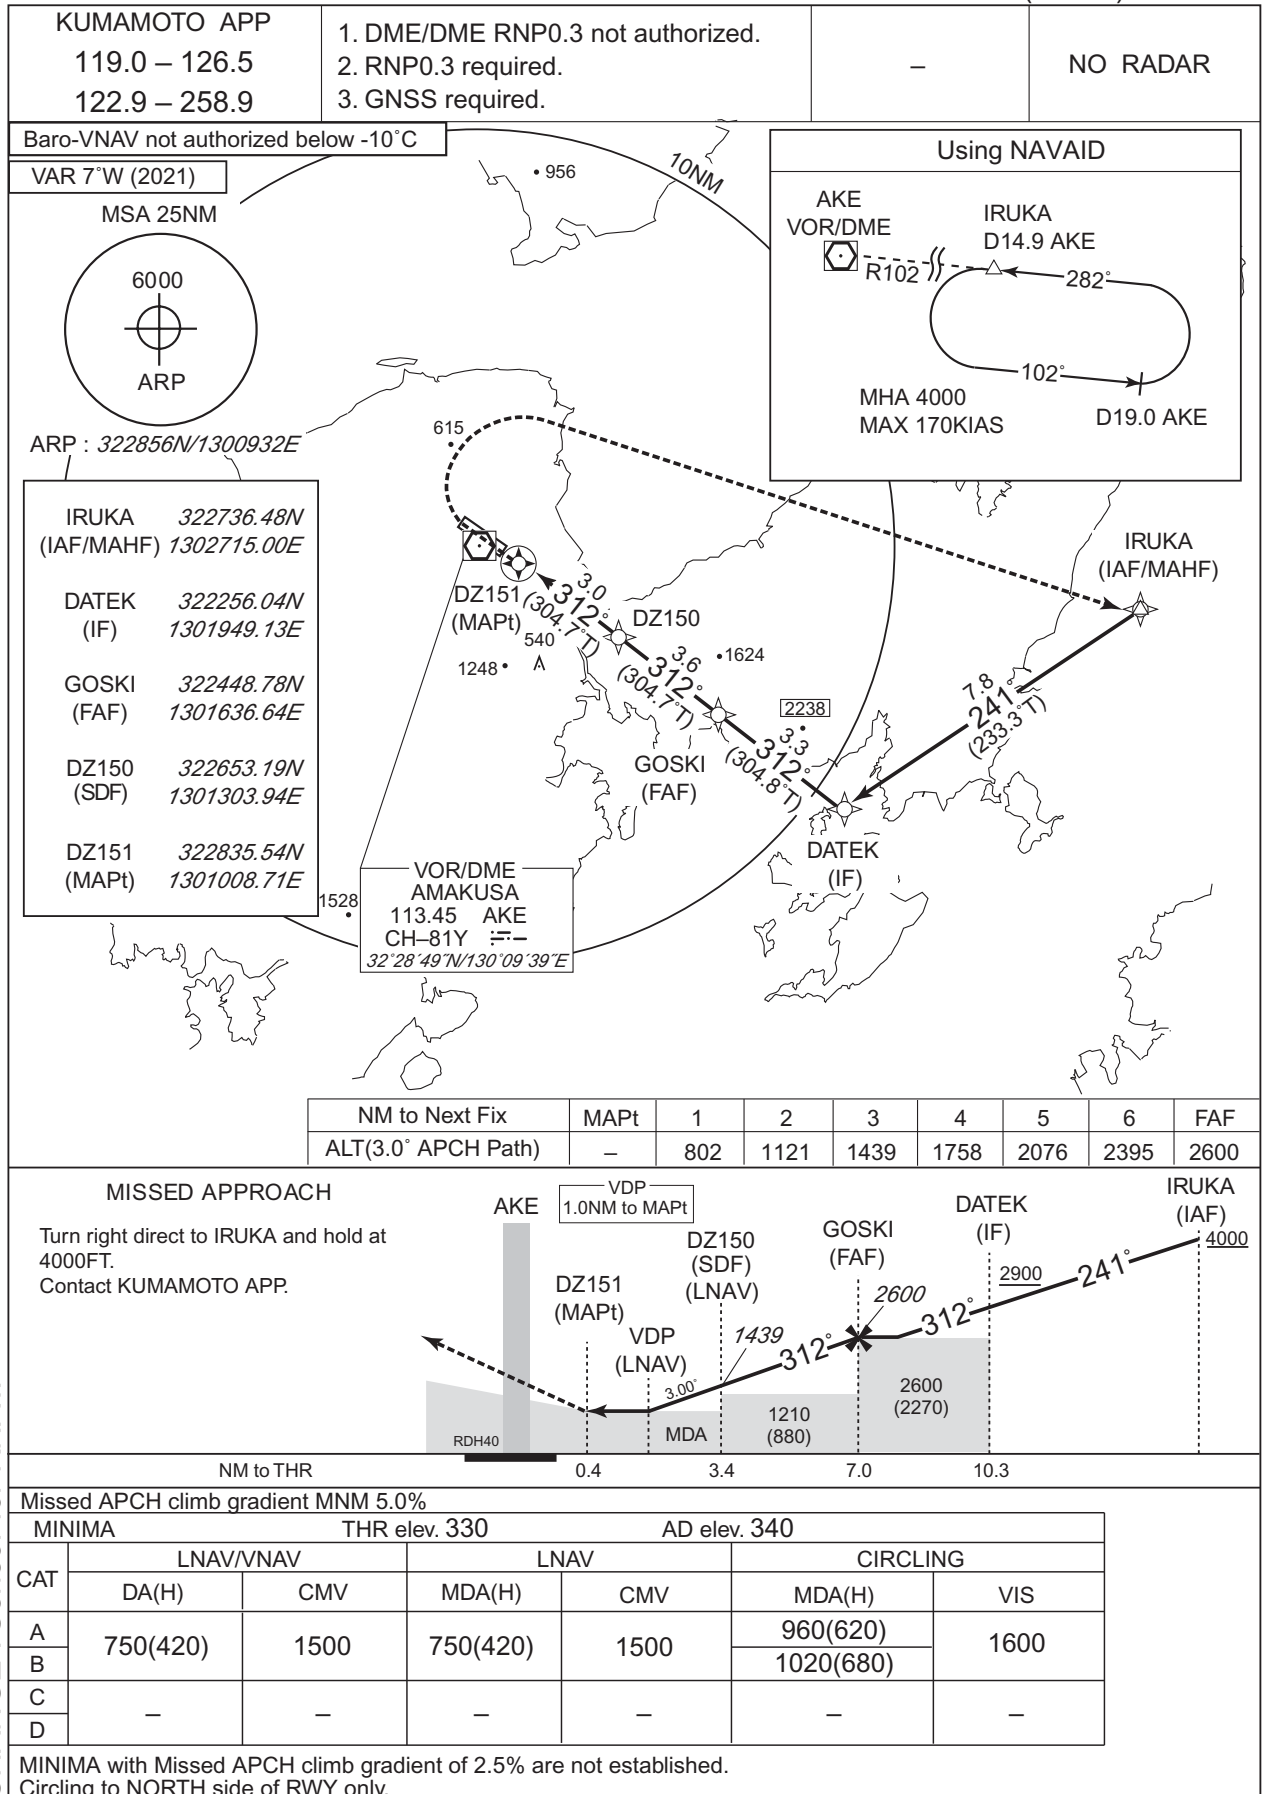

CHANGE : Sensor for RNAV.

RJDA/AMAKUKSA

Visual REP



※AMAKUSA FLIGHT SERVICE : 130.775MHz

Call sign	BRG / DIST from ARP	Remarks
口之津 Kuchinotsu	020° / 8.0NM	港 Port
湯島 Yushima	058° / 11.9NM	島 Island
通詞島 Tsuujishima	334° / 4.8NM	島 Island
島子 Shimago	101° / 4.6NM	漁港 Port
横島 Yokoshima	158° / 7.5NM	島 Island
富岡 Tomioka	299° / 7.7NM	岬 Cape

RJDA / AMAKUSA

LDG CHART



