


ROMD / MINAMIDAITO

AD CHART

CHANGE : WIND SPEED METER, CEILOMETER added.

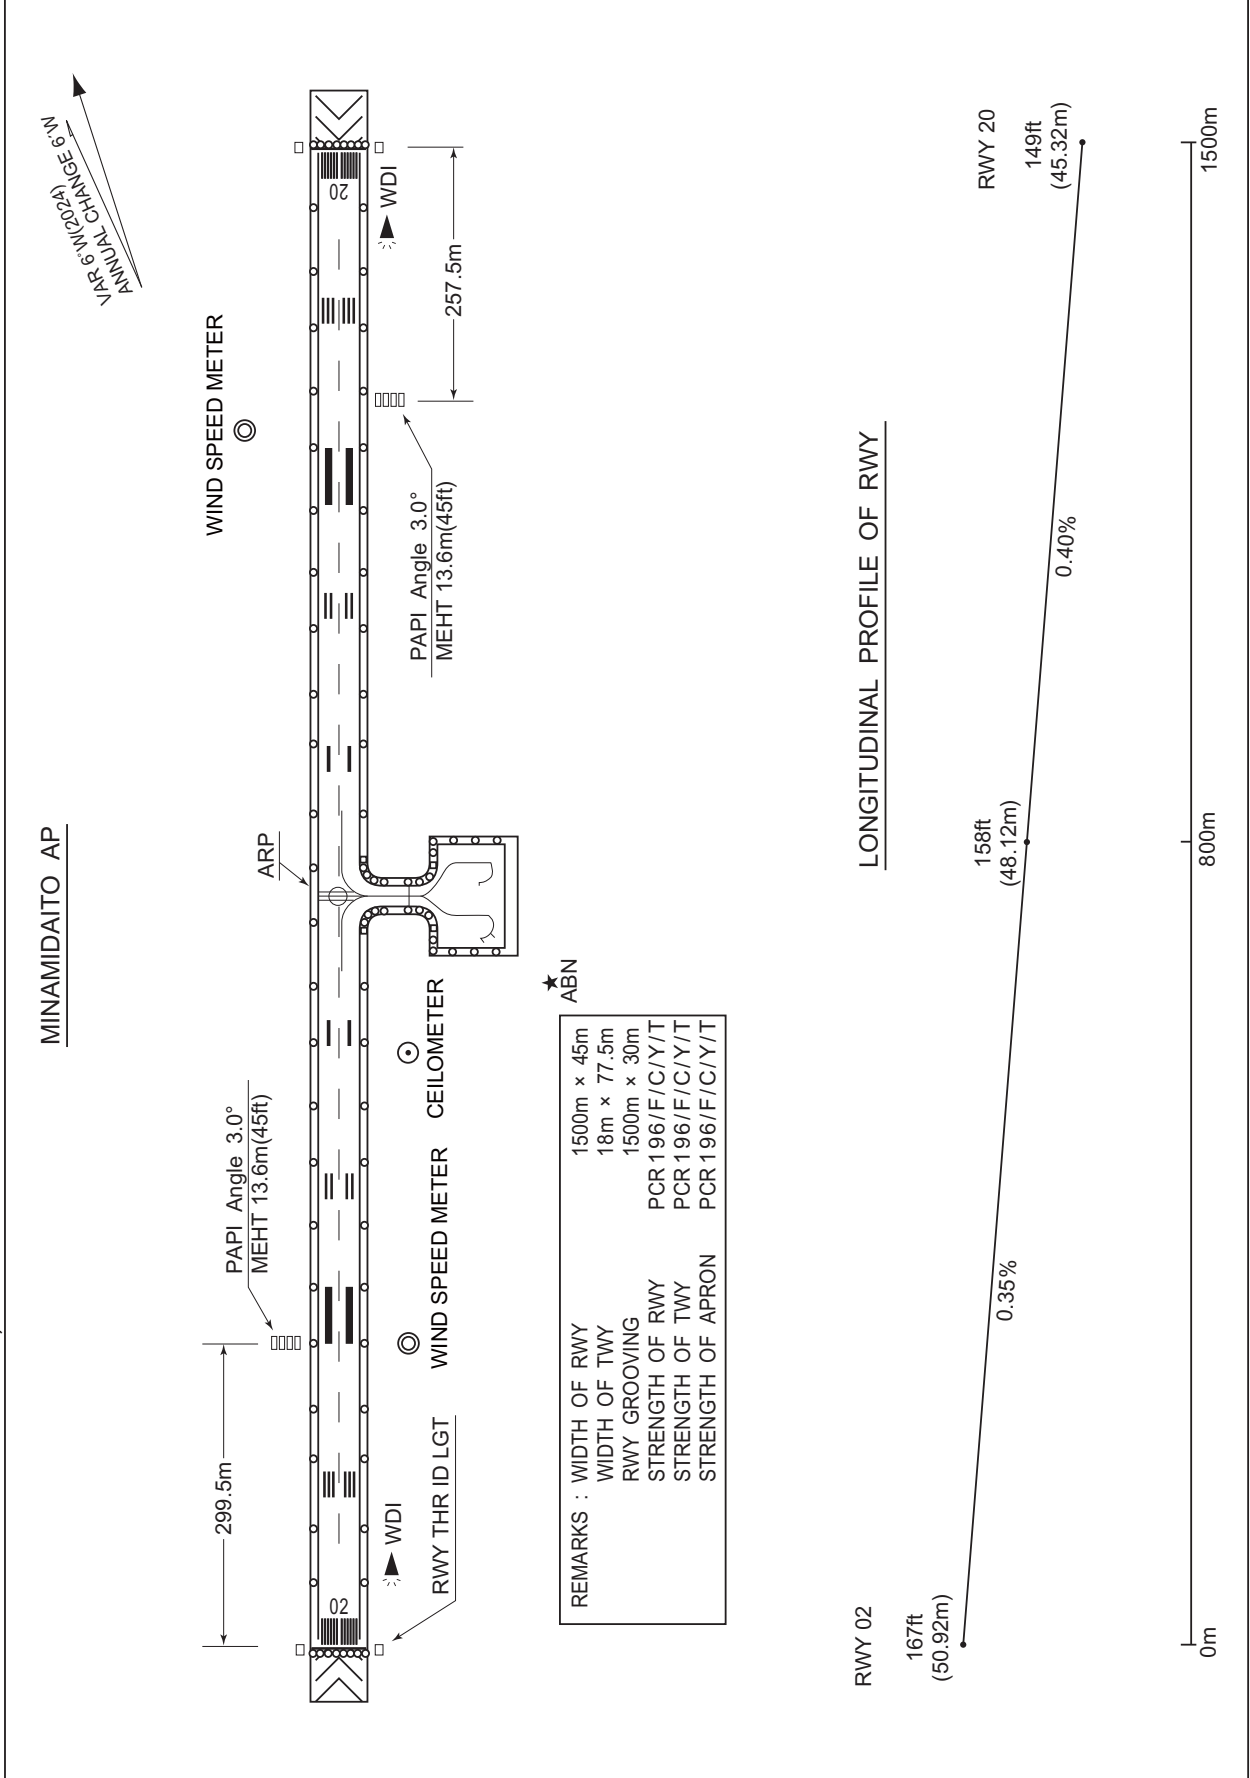

STANDARD DEPARTURE CHART -INSTRUMENT

ROMD / MINAMIDAITO

SID

TOPAT THREE DEPARTURE

RWY02 : Climb RWY HDG to 600FT, turn left HDG234°...  
RWY20 : Climb RWY HDG to 600FT, turn right HDG324°...  
... to intercept and proceed via MDE R279 to TOPAT.  
Cross TOPAT at or above 8000FT.



TOPAT THREE DEPARTURE

8000

△ ← 279°  
TOPAT  
R279/D97.8 MDE  
R103/D98.8 NHC

HDG234°

R279

HDG324°

VOR/DME  
MINAMIDAITO  
117.8 MDE  
CH-125X  
25°51'16"N/131°15'50"E  
200FT

600

600

## STANDARD DEPARTURE CHART -INSTRUMENT

ROMD / MINAMIDAITO

SID

MINAMIDAITO REVERSAL FOUR DEPARTURE

RWY 02 : Climb RWY HDG to 1000FT, turn right...

RWY 20 : Climb RWY HDG to 1000FT, turn left...

... direct to MDE VOR/DME.

Cross MDE VOR/DME at or above 2000FT.

MINAMIDAITO REVERSAL FOUR DEPARTURE

## STANDARD DEPARTURE CHART - INSTRUMENT

## ROMD / MINAMIDAITO

## RNAV SID

## CORCO SOUTH ONE DEPARTURE

## RNP1

Note GNSS required.

VAR 5°W (2015)

KITADAITO AP //

## CORCO SOUTH ONE DEPARTURE

CORCO  
255226.5N  
1305915.1E  
5000

VOR/DME  
MINAMIDAITO  
117.8 MDE  
CH-125X 33  
25°51'16"N/131°15'50"E  
200FT

201(43)

 $\Delta$  $\Delta_{185(27)}$ 

7185(27)

02 RWY

RWY02 : See TAKE OFF MINIMA

## CORCO SOUTH ONE DEPARTURE

RWY02 : Climb on HDG021° at or above 600FT, turn left direct to CORCO at or above 5000FT.

RWY20 : Climb on HDG201° at or above 600FT, turn right direct to CORCO at or above 5000FT.

## RWY02

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	021 (015.6)	-4.9	—	—	+600	—	—	RNP1
002	DF	CORCO	—	—	-4.9	—	L	+5000	—	—	RNP1

## RWY20

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	201 (195.6)	-4.9	—	—	+600	—	—	RNP1
002	DF	CORCO	—	—	-4.9	—	R	+5000	—	—	RNP1

CHANGE : Navigation Specification(Basic RNP1  $\rightarrow$  RNP1).

INSTRUMENT APPROACH CHART

ROMD / MINAMIDAITO

VOR RWY02



CHANGE : ATC call sign.

## INSTRUMENT APPROACH CHART

ROMD / MINAMIDAITO

VOR RWY20



CHANGE : ATC call sign.

## ROMD / MINAMIDAITO

RNP RWY02



## INSTRUMENT APPROACH CHART


ROMD / MINAMIDAITO

RNP RWY20



CHANGE:PROC renamed. Requirement for RNP.



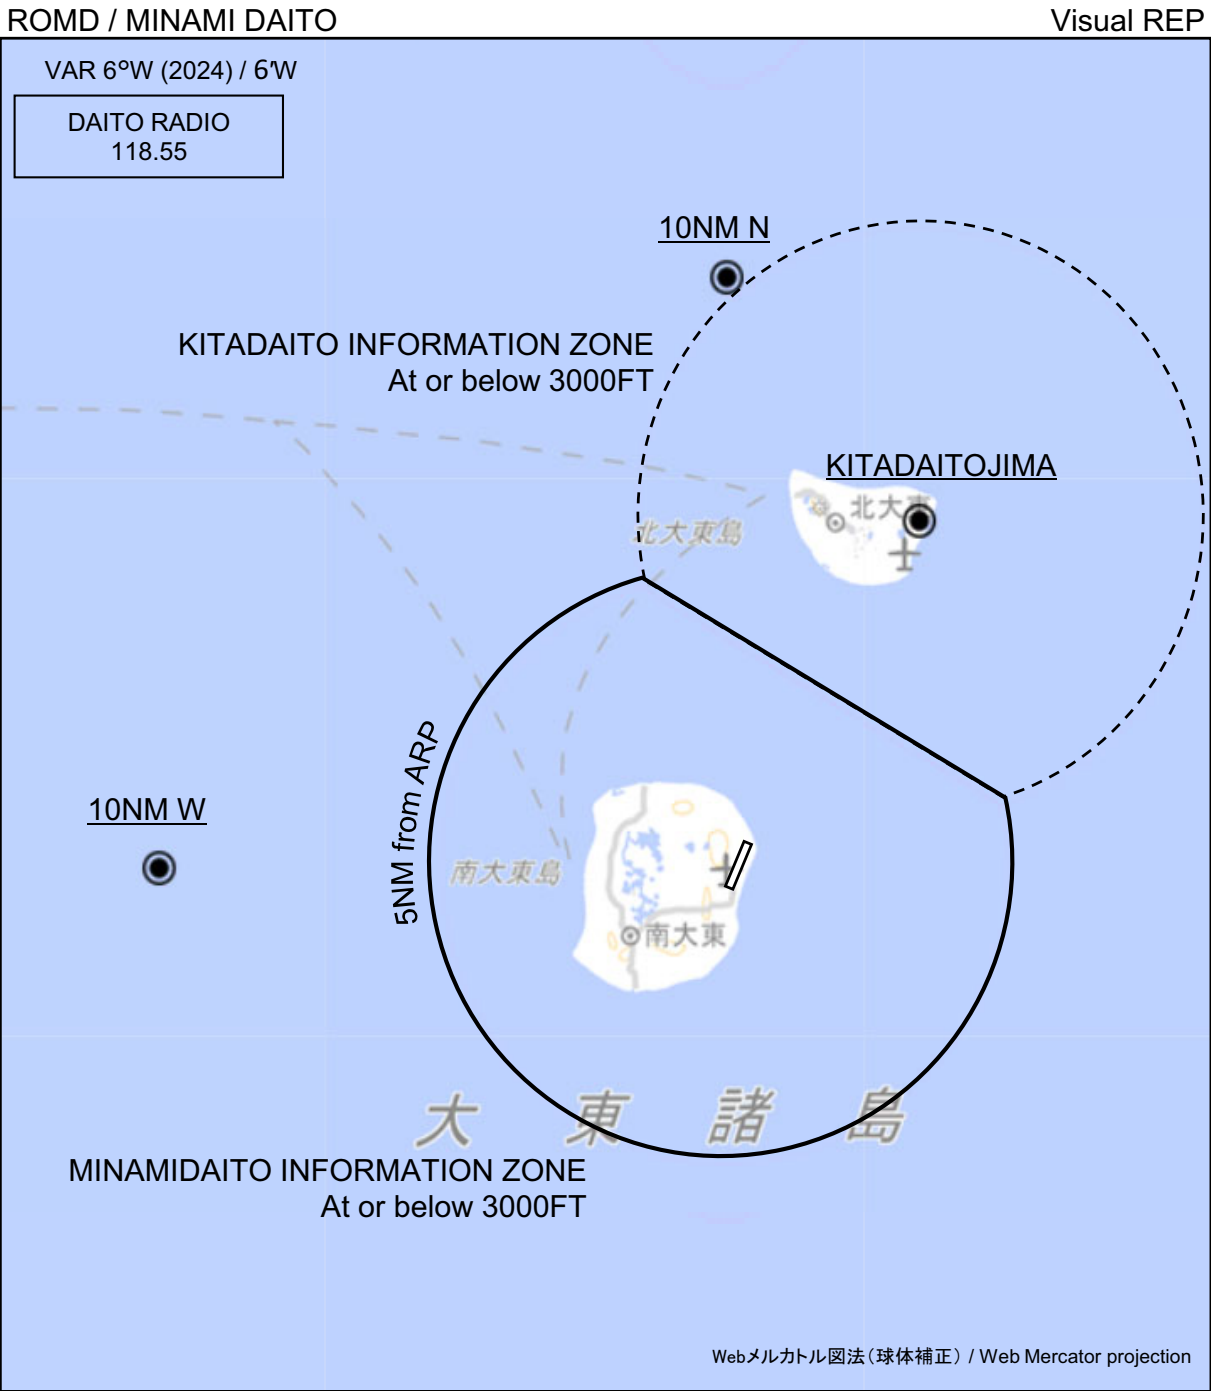

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
10NM N	360°T / 10.0NM	海上 Over the sea
北大東島 Kitadaitojima	030°T / 6.8NM	北大東空港 Kitadaito Airport
10NM W	270°T / 10.0NM	海上 Over the sea

ROMD / MINAMIDAITO

Minimum Vectoring Altitude CHART

CHANGE : Shape of segment. Minimum vectoring altitude.

