



RJOT / TAKAMATSU

## AD CHART

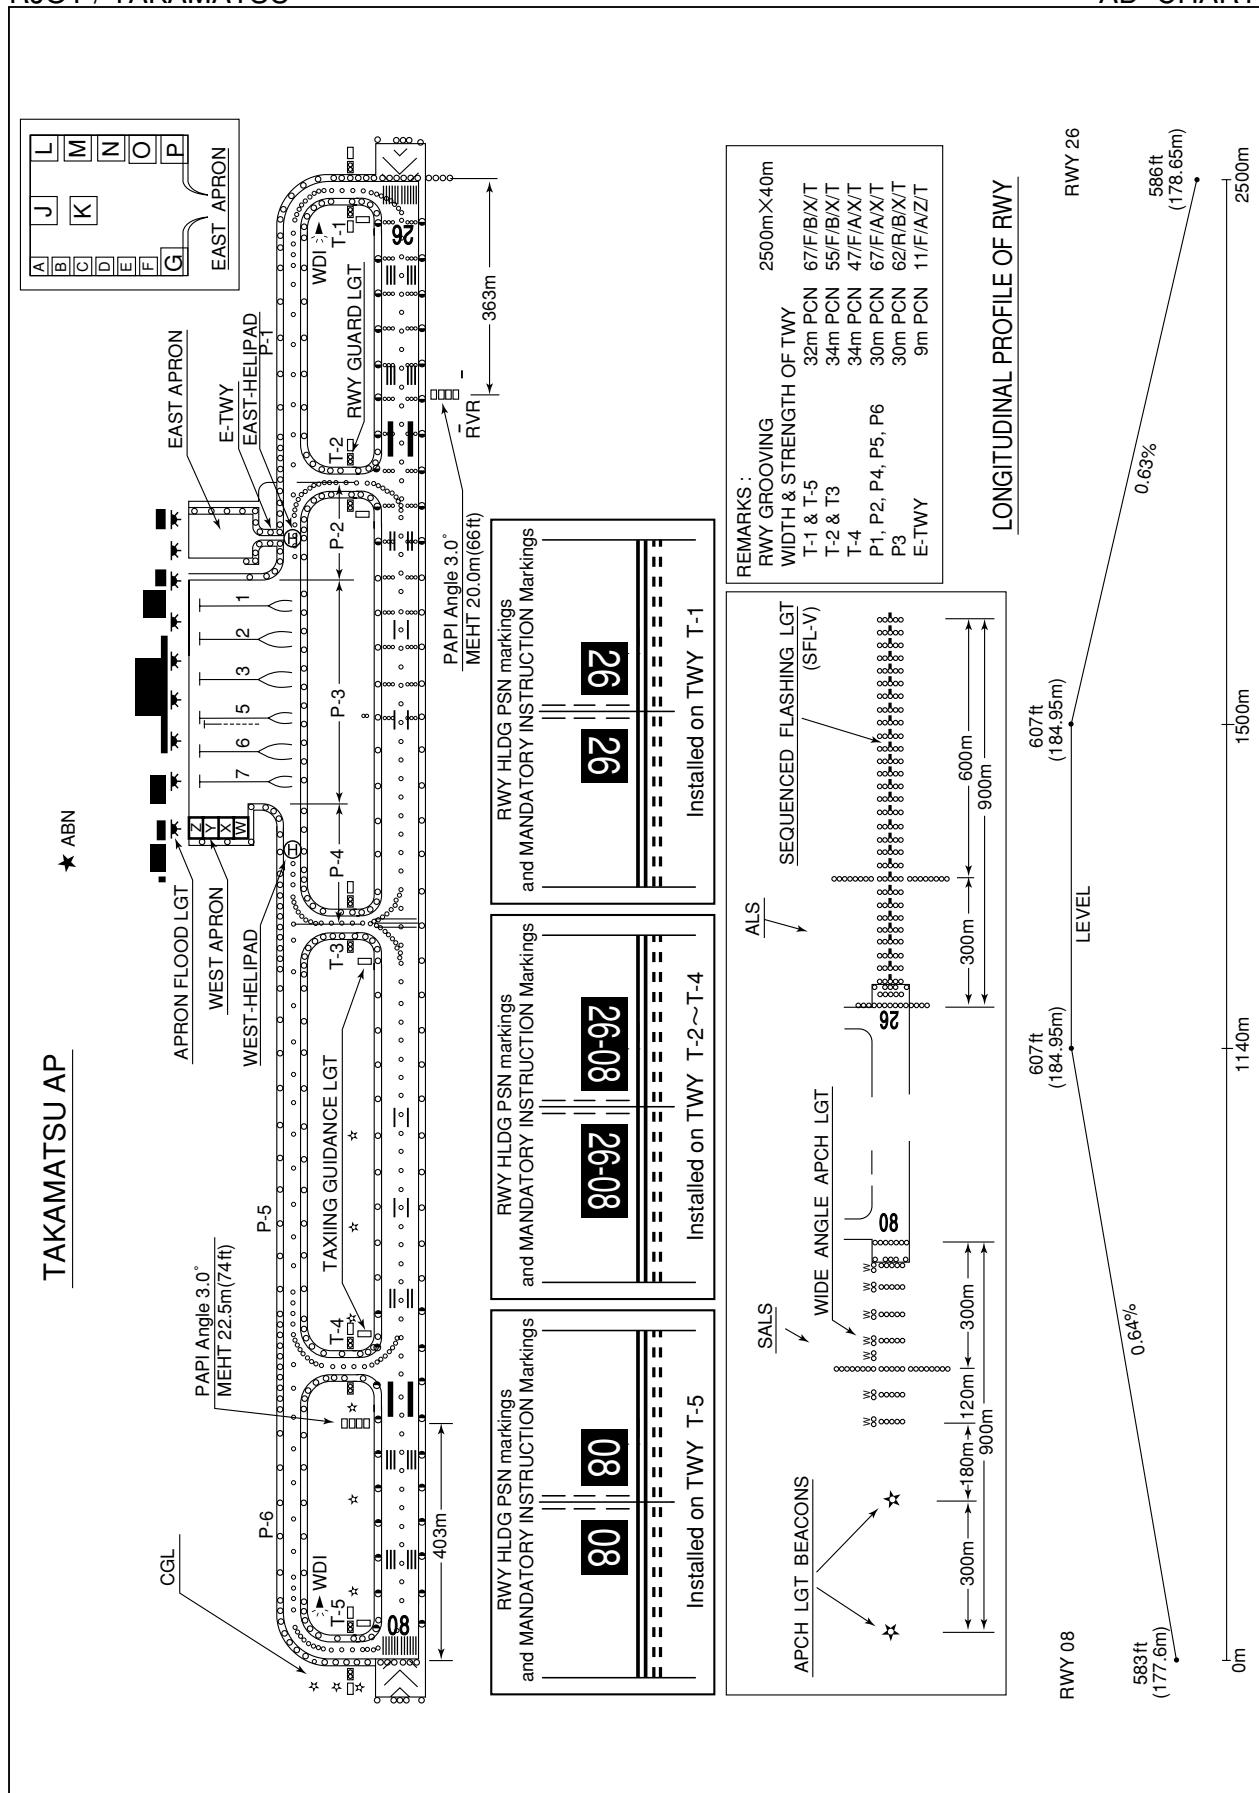

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

AERODROME OBSTACLE CHART-ICAO  
TYPE A (OPERATING LIMITATIONS)

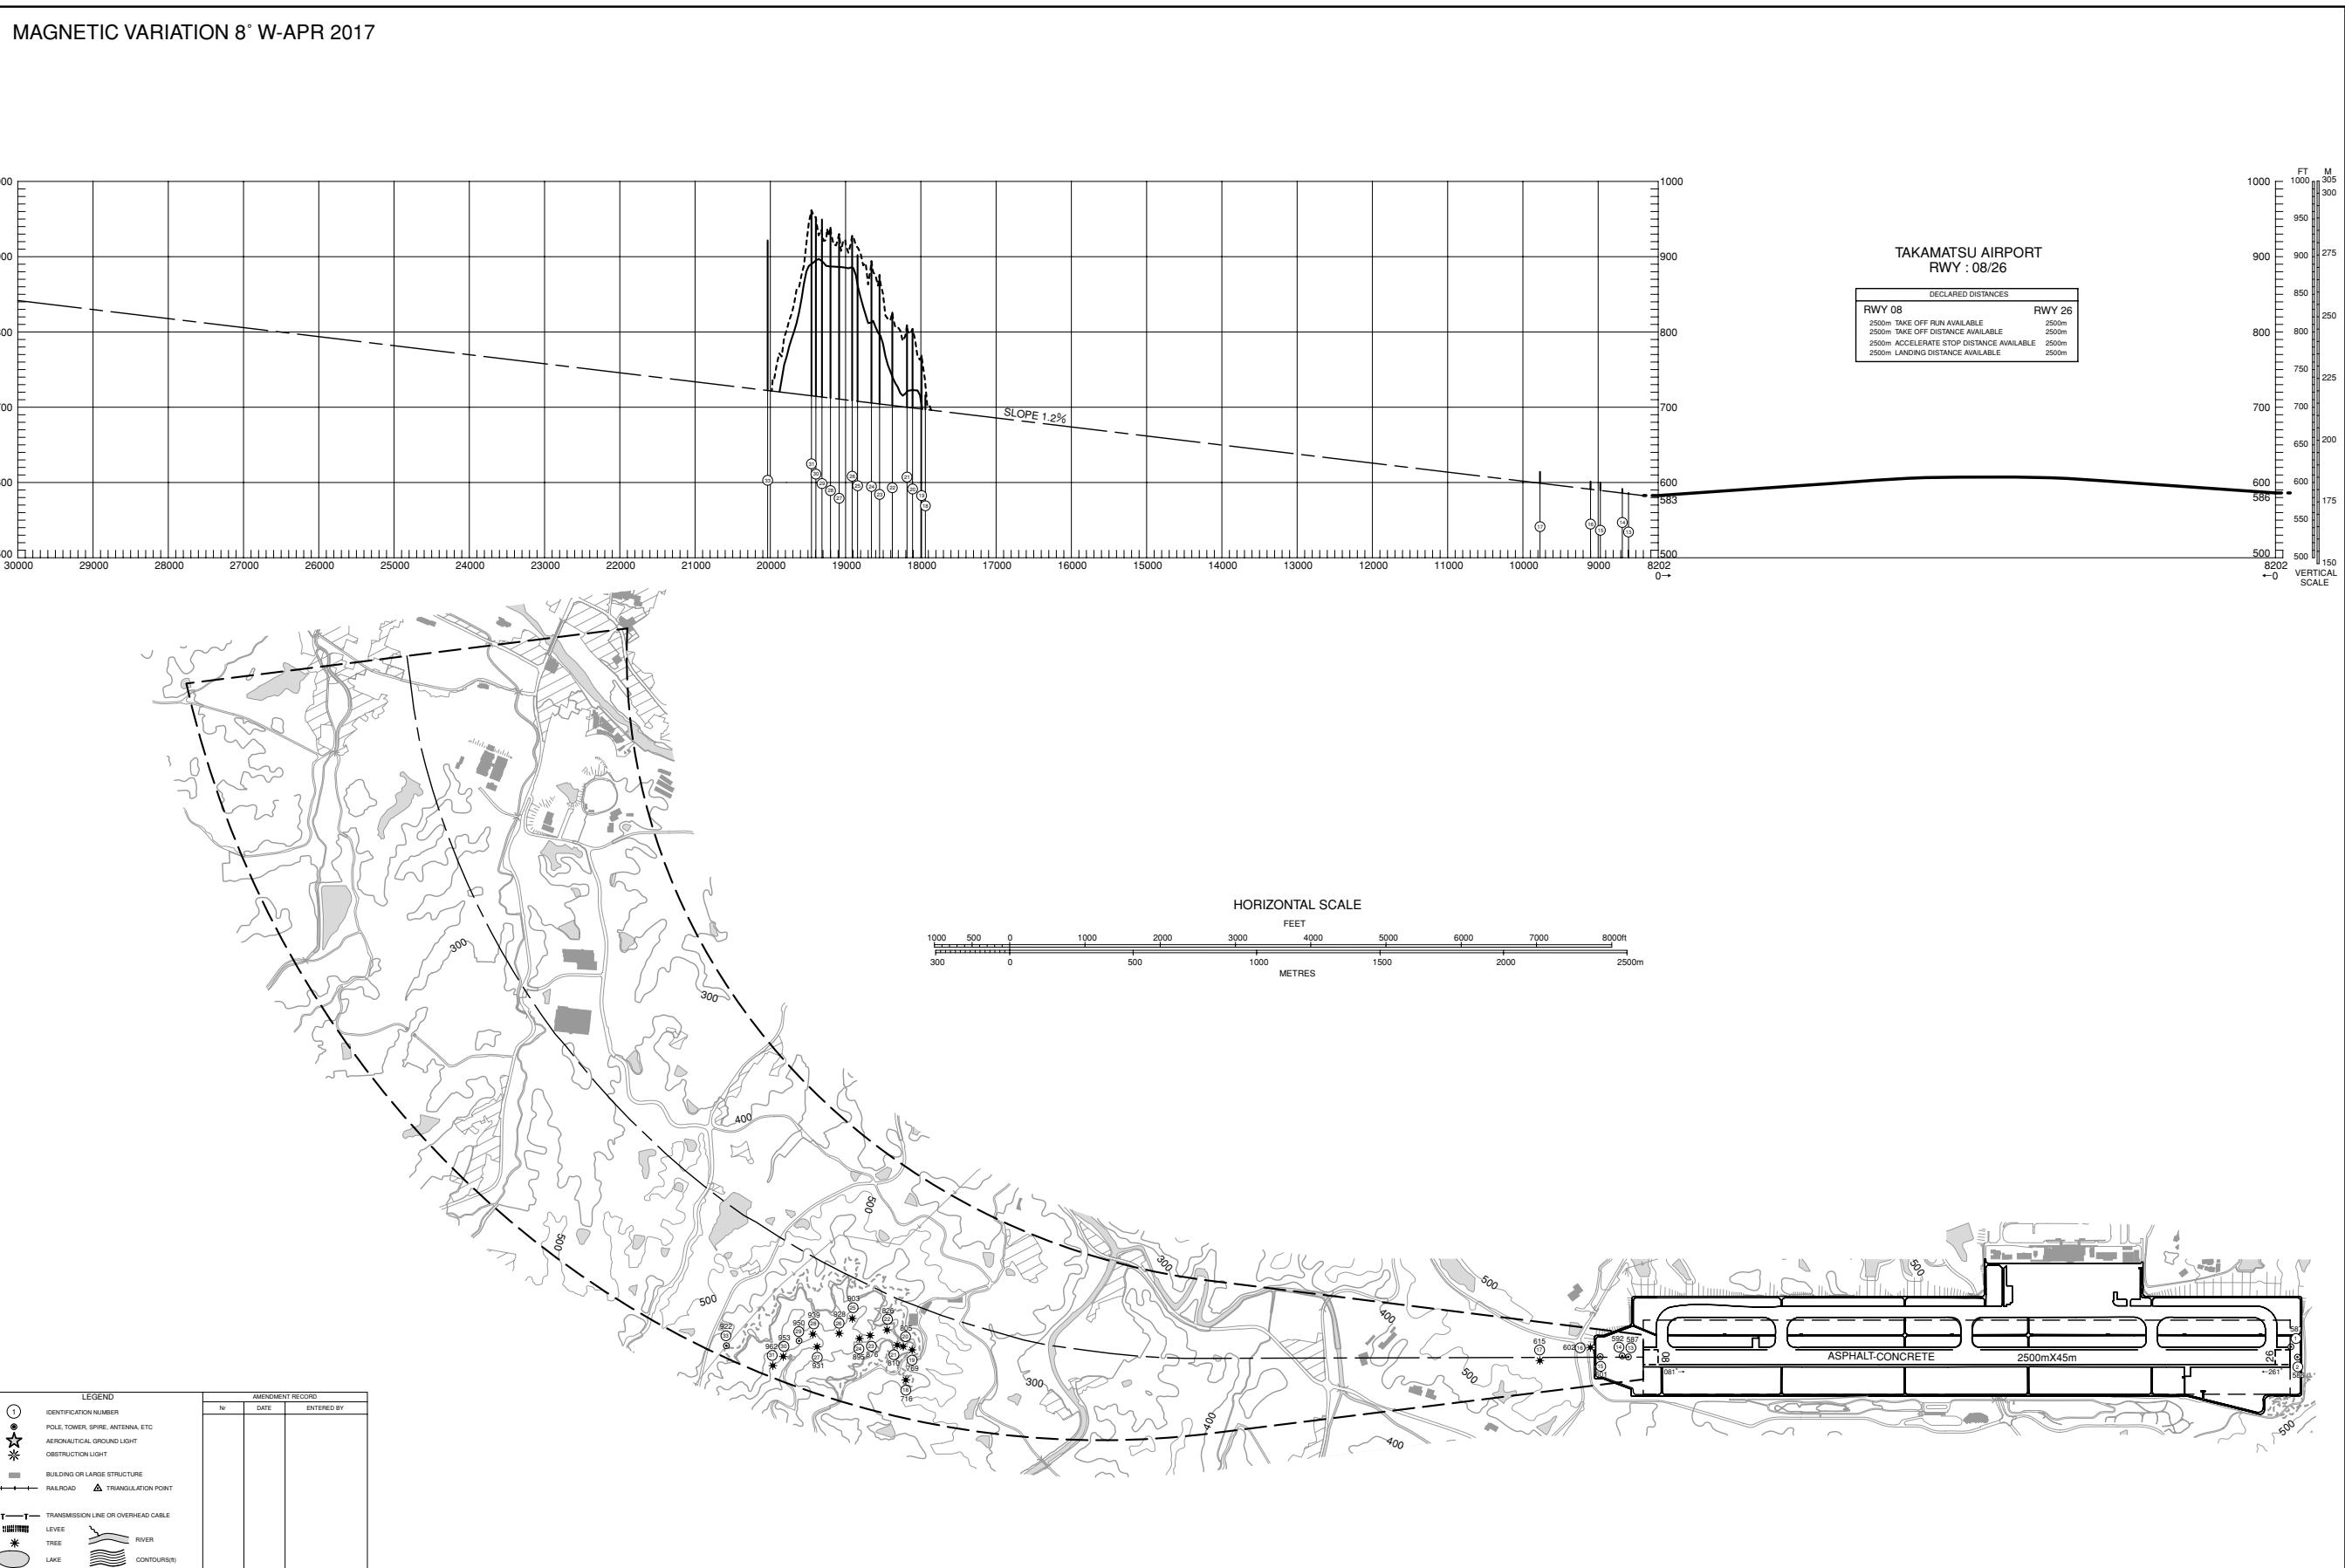

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

#### AERODROME OBSTACLE CHART-ICAO TYPE A (OPERATING LIMITATIONS)


MAGNETIC VARIATION 8° W-APR 2017



## AERODROME OBSTACLE CHART-ICAO TYPE B

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

AERODROME ELEVATION 607ft ARF

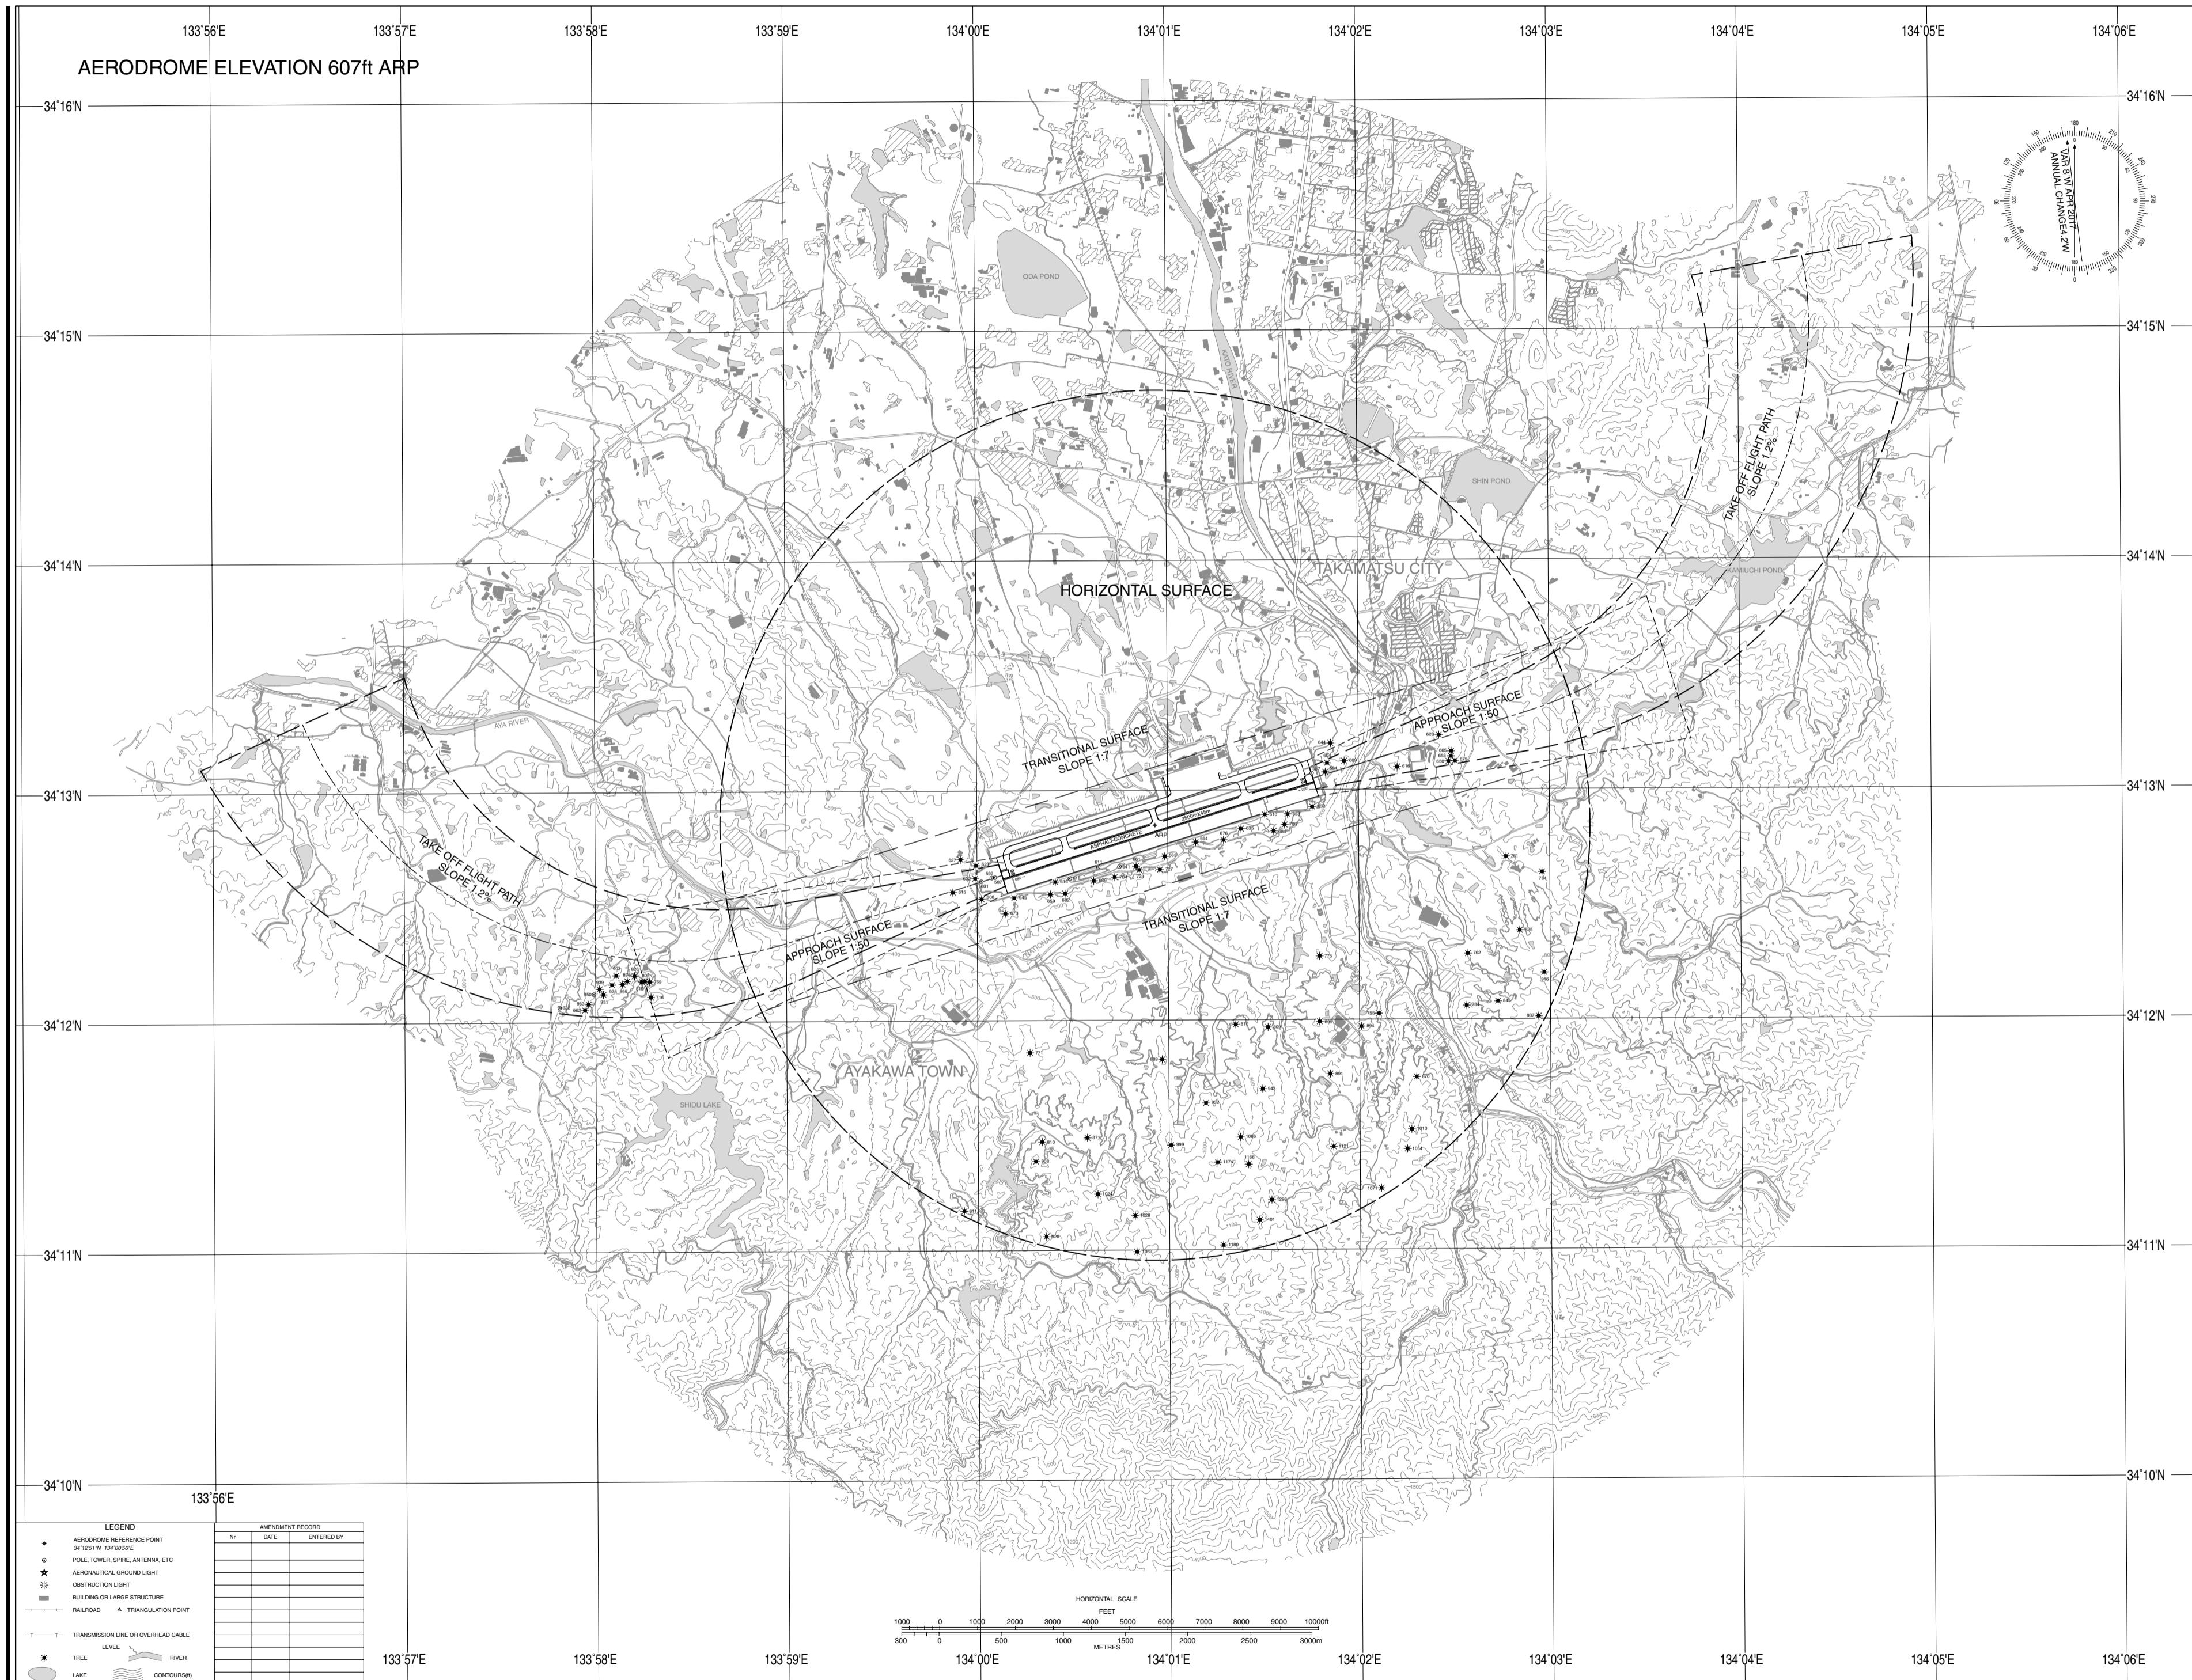

STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU

SID

KAGAWA NORTH THREE DEPARTURE

RWY 08 : Climb RWY HDG to 1700FT, turn left HDG307°...

RWY 26 : Climb RWY HDG to 2200FT, turn right HDG037°...

...to intercept and proceed via KTE R352 to OYE VOR/DME.

Note : RWY 08 : 5.0% climb gradient required up to 1700FT.

OBST ALT 755FT located at 0.7NM 100° FM end of RWY08.

RWY 26 : 6.6% climb gradient required up to 2200FT.

OBST ALT 1772FT located at 3.3NM 255° FM end of RWY26.

KAGAWA REVERSAL EIGHT DEPARTURE

RWY 08 : Climb RWY HDG to 1700FT, turn left HDG322°...

RWY 26 : Climb RWY HDG to 2200FT, turn right HDG052°...

...to intercept and proceed via KTE R007 to 13.0DME, turn left direct to KTE VOR/DME.

Note : RWY 08 : 5.0% climb gradient required up to 1700FT.

OBST ALT 755FT located at 0.7NM 100° FM end of RWY08.

RWY 26 : 6.6% climb gradient required up to 2200FT.

OBST ALT 1772FT located at 3.3NM 255° FM end of RWY26.

## STANDARD DEPARTURE CHART-INSTRUMENT



STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU		RNAV SID and TRANSITION
SAYOH TWO DEPARTURE MIYAZU TRANSITION		RNAV1
Note 1 ) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.	Critical DME	RWY08 STD : DER – 1NM from DER RWY26 STD : DER – 2NM from DER
2 ) RADAR service required.	DME GAP	MIYAZU TRANSITION 1.7NM to CHIZU – YME
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1
<p>VAR 8° W(2020)</p>		
<p><u>MIYAZU TRANSITION</u></p> <p>SAYOH 345516.6N 1342136.3E</p> <p>CHIZU 350146.2N 1343025.4E</p> <p>12000</p> <p>9.1 056°</p> <p>41.1 056°</p> <p>MIYAZU(YME) 352850.5N 1350813.3E</p> <p>VOR/DME MIYAZU 112.6 YME CH-73X 35°28'50"N/135°08'13"E 2400FT</p> <p><u>SAYOH TWO DEPARTURE</u></p> <p>261° 081°</p> <p>1700</p> <p>2200</p>		
<p><u>SAYOH TWO DEPARTURE</u></p> <p>RWY08 : Climb on HDG081° at or above 1700FT, turn left direct to SAYOH at or above 12000FT.</p> <p>RWY26 : Climb on HDG261° at or above 2200FT, turn right direct to SAYOH at or above 12000FT.</p> <p>Note RWY08 : 5.0% climb gradient required up to 1700FT. OBST ALT 755FT located at 0.7NM 100° FM end of RWY08.</p> <p>RWY26 : 6.6% climb gradient required up to 2200FT. OBST ALT 1772FT located at 3.3NM 255° FM end of RWY26.</p> <p><u>MIYAZU TRANSITION</u></p> <p>From SAYOH, to CHIZU, to YME.</p>		

CHANGE : VAR. SID renamed. PROC course. Critical DME. DME GAP . MIYAZU(FIX symbol).

## STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU

RNAV SID and TRANSITION

SAYOH TWO DEPARTURE

## RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	081 (072.9)	-7.8	—	—	+1700	—	—	RNAV1
002	DF	SAYOH	—	—	-7.8	—	L	+12000	—	—	RNAV1

## RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	261 (252.9)	-7.8	—	—	+2200	—	—	RNAV1
002	DF	SAYOH	—	—	-7.8	—	R	+12000	—	—	RNAV1

MIYAZU TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SAYOH	—	—	-7.8	—	—	—	—	—	RNAV1
002	TF	CHIZU	—	056 (048.0)	-7.8	9.7	—	—	—	—	RNAV1
003	TF	YME	—	056 (048.6)	-7.8	41.1	—	—	—	—	RNAV1


STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU

RNAV SID

WASYU THREE DEPARTURE		RNAV 1
Note 1 ) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.	Critical DME	RWY08 STD : DER – 1NM from DER RWY26 STD : DER – 2NM from DER
2 ) RADAR service required.	DME GAP	–
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

VAR 8° W(2020)

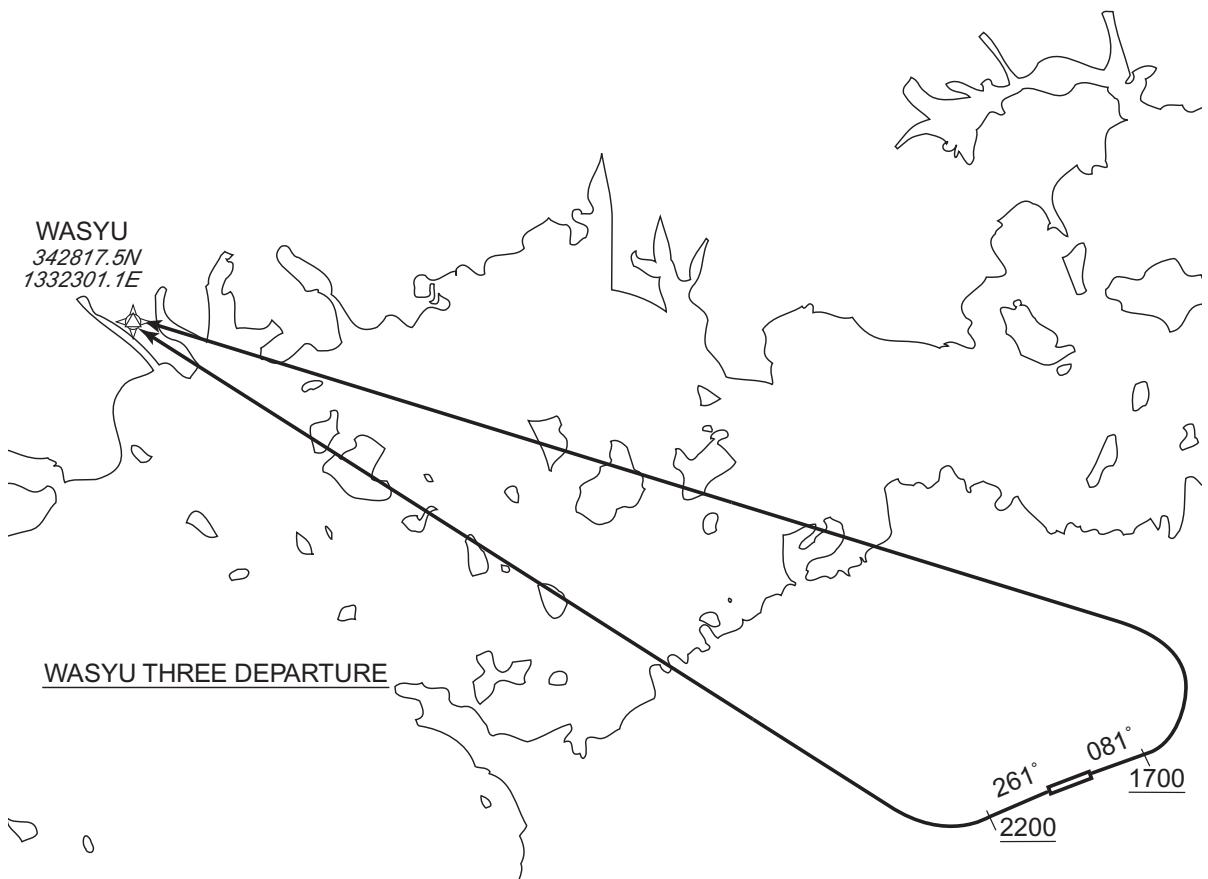

CHANGE : VAR. PROC renamed. PROC course.

WASYU THREE DEPARTURE

RWY08 : Climb on HDG081° at or above 1700FT, turn left direct to WASYU.

RWY26 : Climb on HDG261° at or above 2200FT, turn right direct to WASYU.

Note RWY08: 5.0% climb gradient required up to 1700FT.

OBST ALT 755FT located at 0.7NM 100° FM end of RWY08.

RWY26: 6.6% climb gradient required up to 2200FT.

OBST ALT 1772FT located at 3.3NM 255° FM end of RWY26.

## STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU

RNAV SID

WASYU THREE DEPARTURE

## RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	081 (072.9)	-7.8	—	—	+1700	—	—	RNAV1
002	DF	WASYU	—	—	-7.8	—	L	—	—	—	RNAV1

## RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	261 (252.9)	-7.8	—	—	+2200	—	—	RNAV1
002	DF	WASYU	—	—	-7.8	—	R	—	—	—	RNAV1

CHANGE : VAR. PROC renamed. PROC course.

STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU		RNAV SID and TRANSITION	
TAROH THREE DEPARTURE MIHO TRANSITION			RNAV 1
Note 1 ) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.	Critical DME	RWY08 STD : DER – 1NM from DER RWY26 STD : DER – 2NM from DER MIHO TRANSITION HGE : 50NM to MIHOU – 36NM to MIHOU OIE : 5NM to MIHOU – MIHOU	
2 ) RADAR service required.	DME GAP	–	
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1	
<p>VAR 8° W(2020)</p> <p>MIHOU 353152.0N 1330538.1E</p> <p>MIHO TRANSITION</p> <p>TAROH 344301.1N 1334627.1E</p> <p>TAROH THREE DEPARTURE</p> <p>081° 1700 261° 2200</p>			
<p><b>CHANGE : VAR. SID renamed. PROC course.</b></p> <p><b>TAROH THREE DEPARTURE</b></p> <p>RWY08 : Climb on HDG081° at or above 1700FT, turn left direct to TAROH. RWY26 : Climb on HDG261° at or above 2200FT, turn right direct to TAROH.</p> <p>Note RWY08: 5.0% climb gradient required up to 1700FT. OBST ALT 755FT located at 0.7NM 100° FM end of RWY08. RWY26: 6.6% climb gradient required up to 2200FT. OBST ALT 1772FT located at 3.3NM 255° FM end of RWY26.</p> <p><b>MIHO TRANSITION</b></p> <p>From TAROH, to MIHOU.</p>			

## STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU

RNAV SID and TRANSITION

TAROH THREE DEPARTURE

## RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	081 (072.9)	-7.8	—	—	+1700	—	—	RNAV1
002	DF	TAROH	—	—	-7.8	—	L	—	—	—	RNAV1

## RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	261 (252.9)	-7.8	—	—	+2200	—	—	RNAV1
002	DF	TAROH	—	—	-7.8	—	R	—	—	—	RNAV1

MIHO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TAROH	—	—	-7.8	—	—	—	—	—	RNAV1
002	TF	MIHOU	—	334 (325.8)	-7.8	59.2	—	—	—	—	RNAV1

STANDARD DEPARTURE CHART-INSTRUMENT


RJOT / TAKAMATSU

RNAV SID and TRANSITION

OLIVE TWO DEPARTURE SHTLE TRANSITION		RNAV 1
Note 1 ) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.	Critical DME	RWY08 STD : DER – 1NM from DER RWY26 STD : DER – 2NM from DER  SHTLE TRANSITION KCC : 35.0NM to SHTLE – 16.0NM to SHTLE YOE : 66.0NM to SHTLE – 63.0NM to SHTLE
2 ) RADAR service required.	DME GAP	SHTLE TRANSITION 50.0NM to SHTLE – 45.0NM to SHTLE
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

VAR 8° W(2020)

CHANGE : VAR, SID renamed, PROC course, Critical DME, DME GAP, HYOGO(FIX symbol).

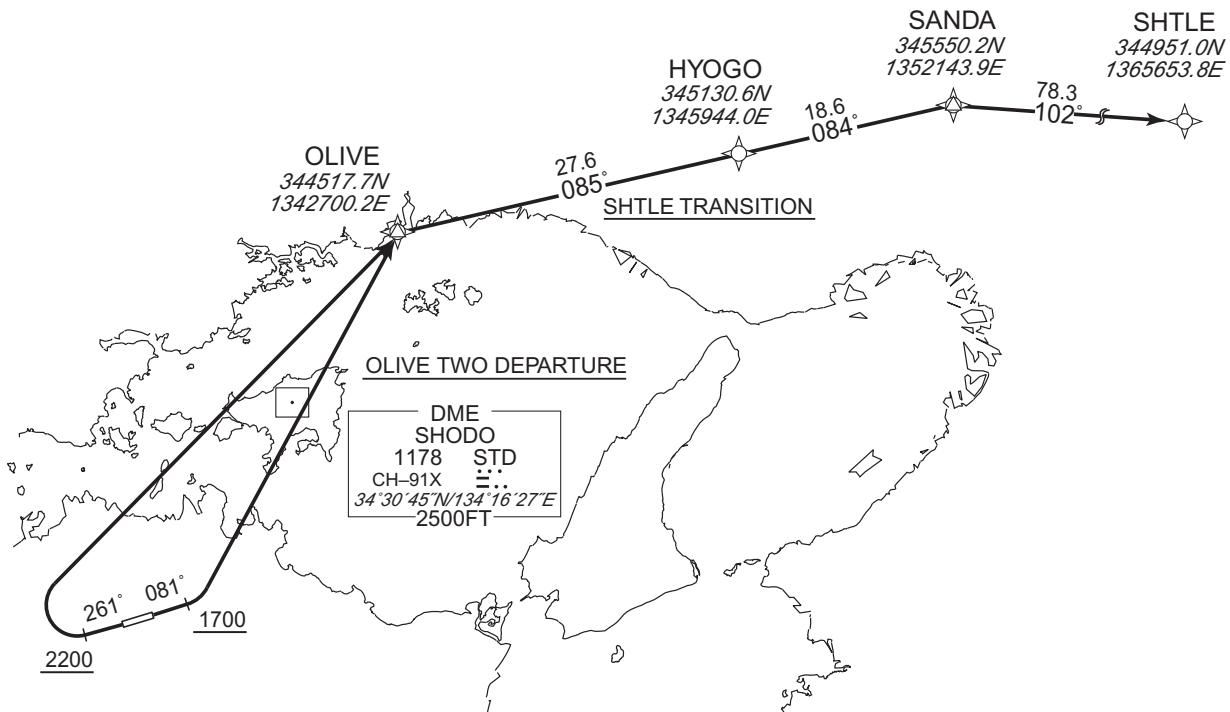

OLIVE TWO DEPARTURE

RWY08 : Climb on HDG 081° at or above 1700FT, turn left direct to OLIVE.  
RWY26 : Climb on HDG 261° at or above 2200FT, turn right direct to OLIVE.

NOTE RWY08: 5.0% climb gradient required up to 1700FT.  
OBST ALT 755FT located at 0.7NM 100° FM end of RWY08.  
RWY26: 6.6% climb gradient required up to 2200FT.  
OBST ALT 1772FT located at 3.3NM 255° FM end of RWY26.

SHTLE TRANSITION

From OLIVE, to HYOGO, to SANDA, to SHTLE.

## STANDARD DEPARTURE CHART-INSTRUMENT

RJOT / TAKAMATSU

RNAV SID and TRANSITION

OLIVE TWO DEPARTURE

## RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	081 (072.9)	-7.8	—	—	+1700	—	—	RNAV1
002	DF	OLIVE	—	—	-7.8	—	L	—	—	—	RNAV1

## RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	261 (252.9)	-7.8	—	—	+2200	—	—	RNAV1
002	DF	OLIVE	—	—	-7.8	—	R	—	—	—	RNAV1

SHTLE TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OLIVE	—	—	-7.8	—	—	—	—	—	RNAV1
002	TF	HYOGO	—	085 (076.8)	-7.8	27.6	—	—	—	—	RNAV1
003	TF	SANDA	—	084 (076.4)	-7.8	18.6	—	—	—	—	RNAV1
004	TF	SHTLE	—	102 (093.9)	-7.8	78.3	—	—	—	—	RNAV1

CHANGE : VAR, SID renamed. PROC course.


STANDARD ARRIVAL CHART-INSTRUMENT

RJOT / TAKAMATSU

STAR

KAGAWA ARRIVAL

From over WIMPY, via KTE R058 to KTE VOR/DME.  
Cross KTE VOR/DME at or above 5000FT.

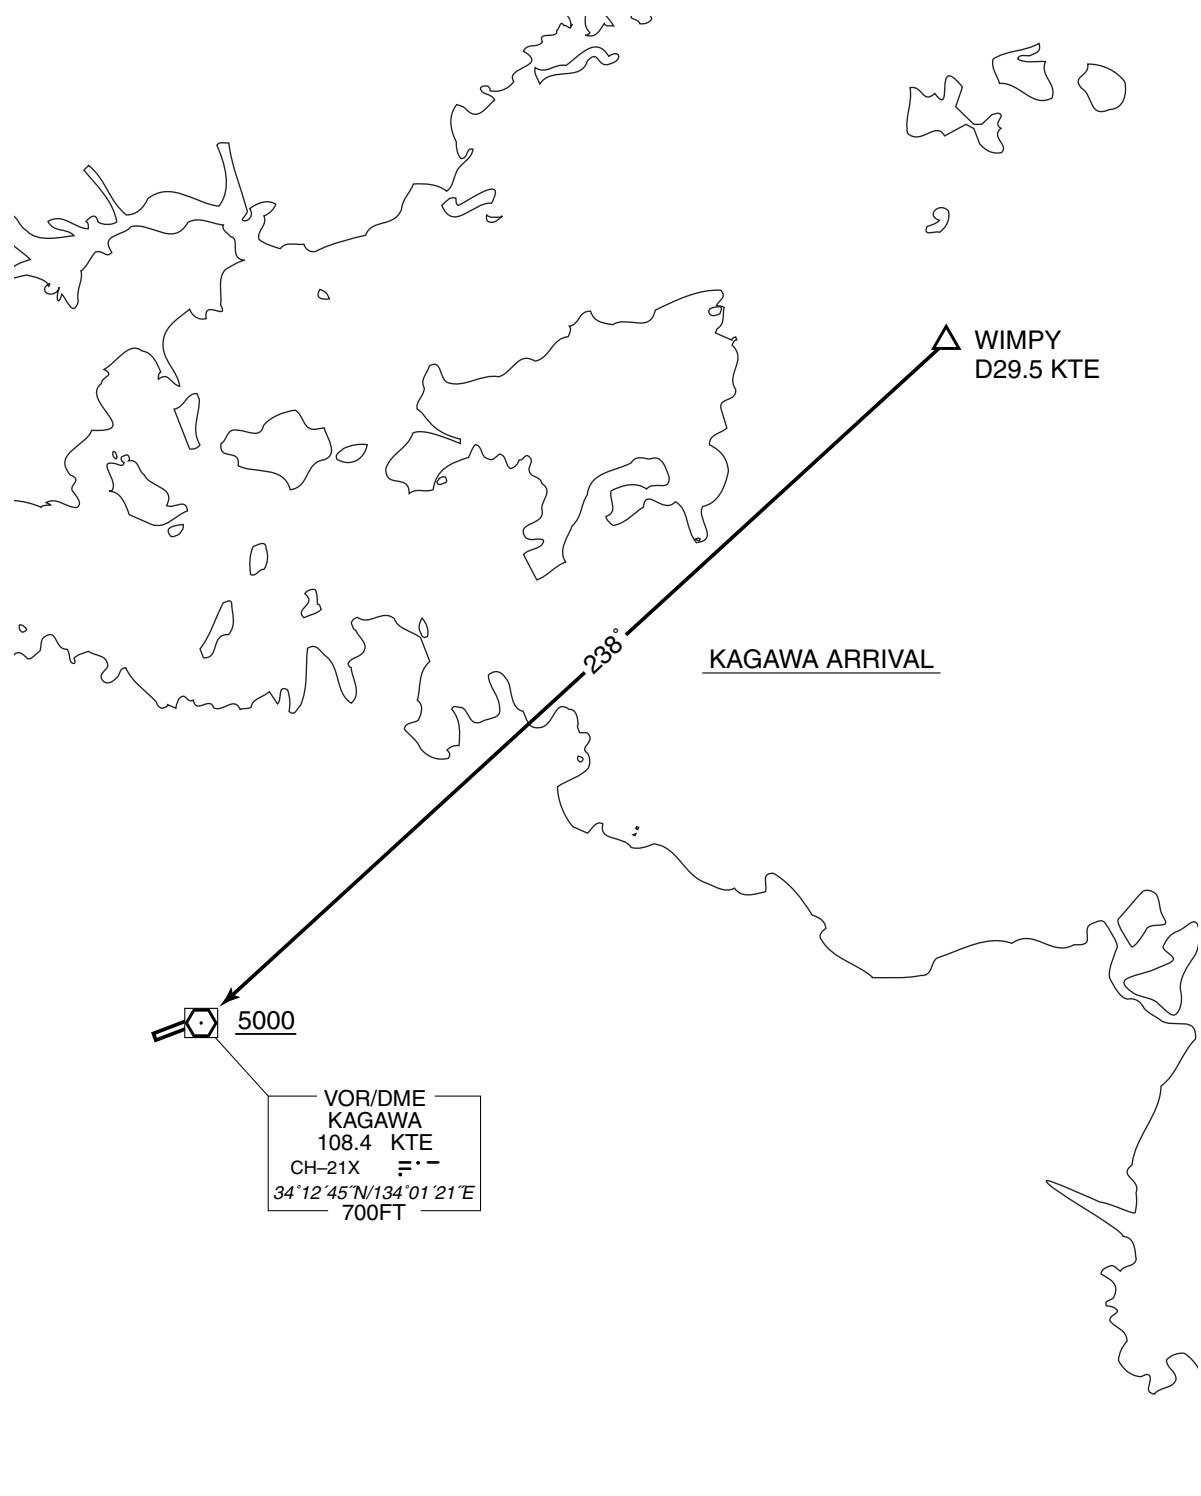

## STANDARD ARRIVAL CHART-INSTRUMENT

RJOT / TAKAMATSU


RNAV STAR RWY26

## POPAI ARRIVAL

RNAV1

- Note 1) DME/DME/IRU or GNSS required.  
2) RADAR service required.

VAR 8°W (2018)

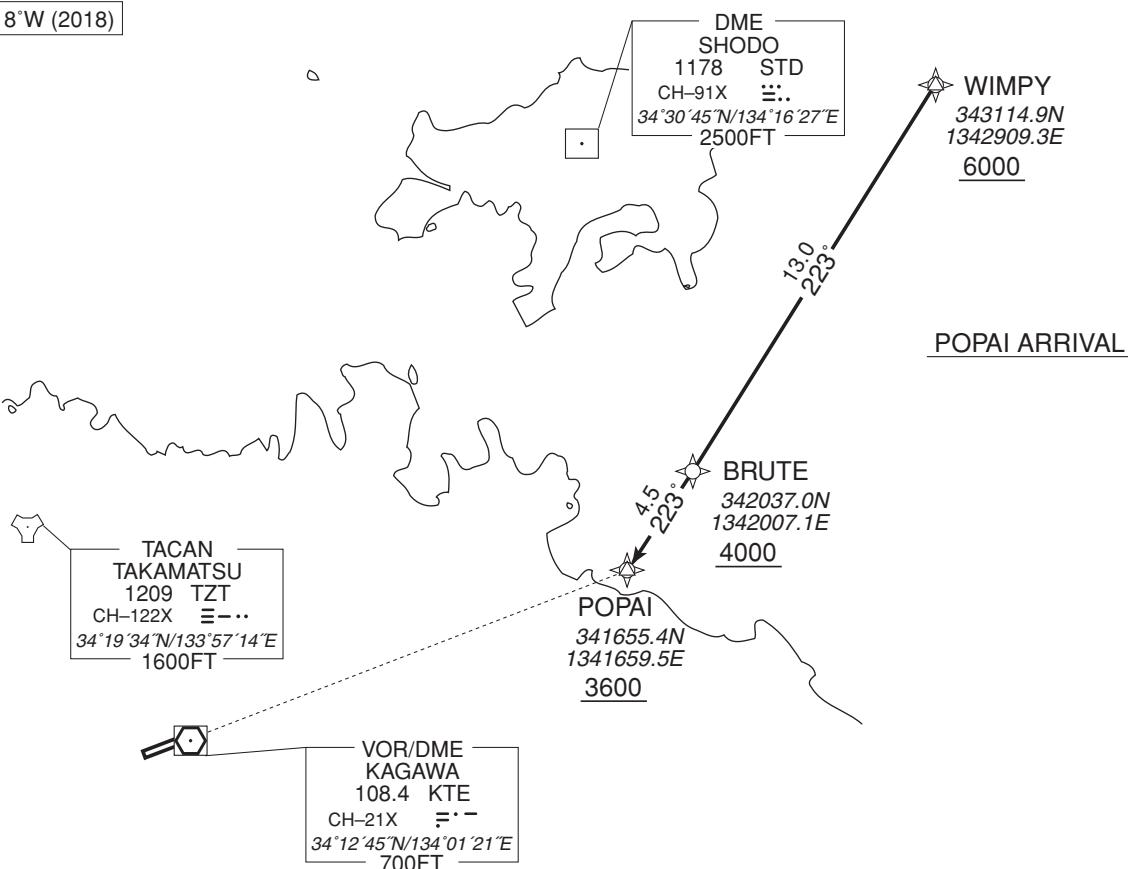POPAI ARRIVAL


From WIMPY at or above 6000FT, to BRUTE at or above 4000FT, to POPAI at or above 3600FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	WIMPY	-	-	-7.6	-	-	+6000	-	-	RNAV1
002	TF	BRUTE	-	223 (215.1)	-7.6	13.0	-	+4000	-	-	RNAV1
003	TF	POPAI	-	223 (215.0)	-7.6	4.5	-	+3600	-	-	RNAV1


CHANGE : VAR, POPAI

INSTRUMENT APPROACH CHART

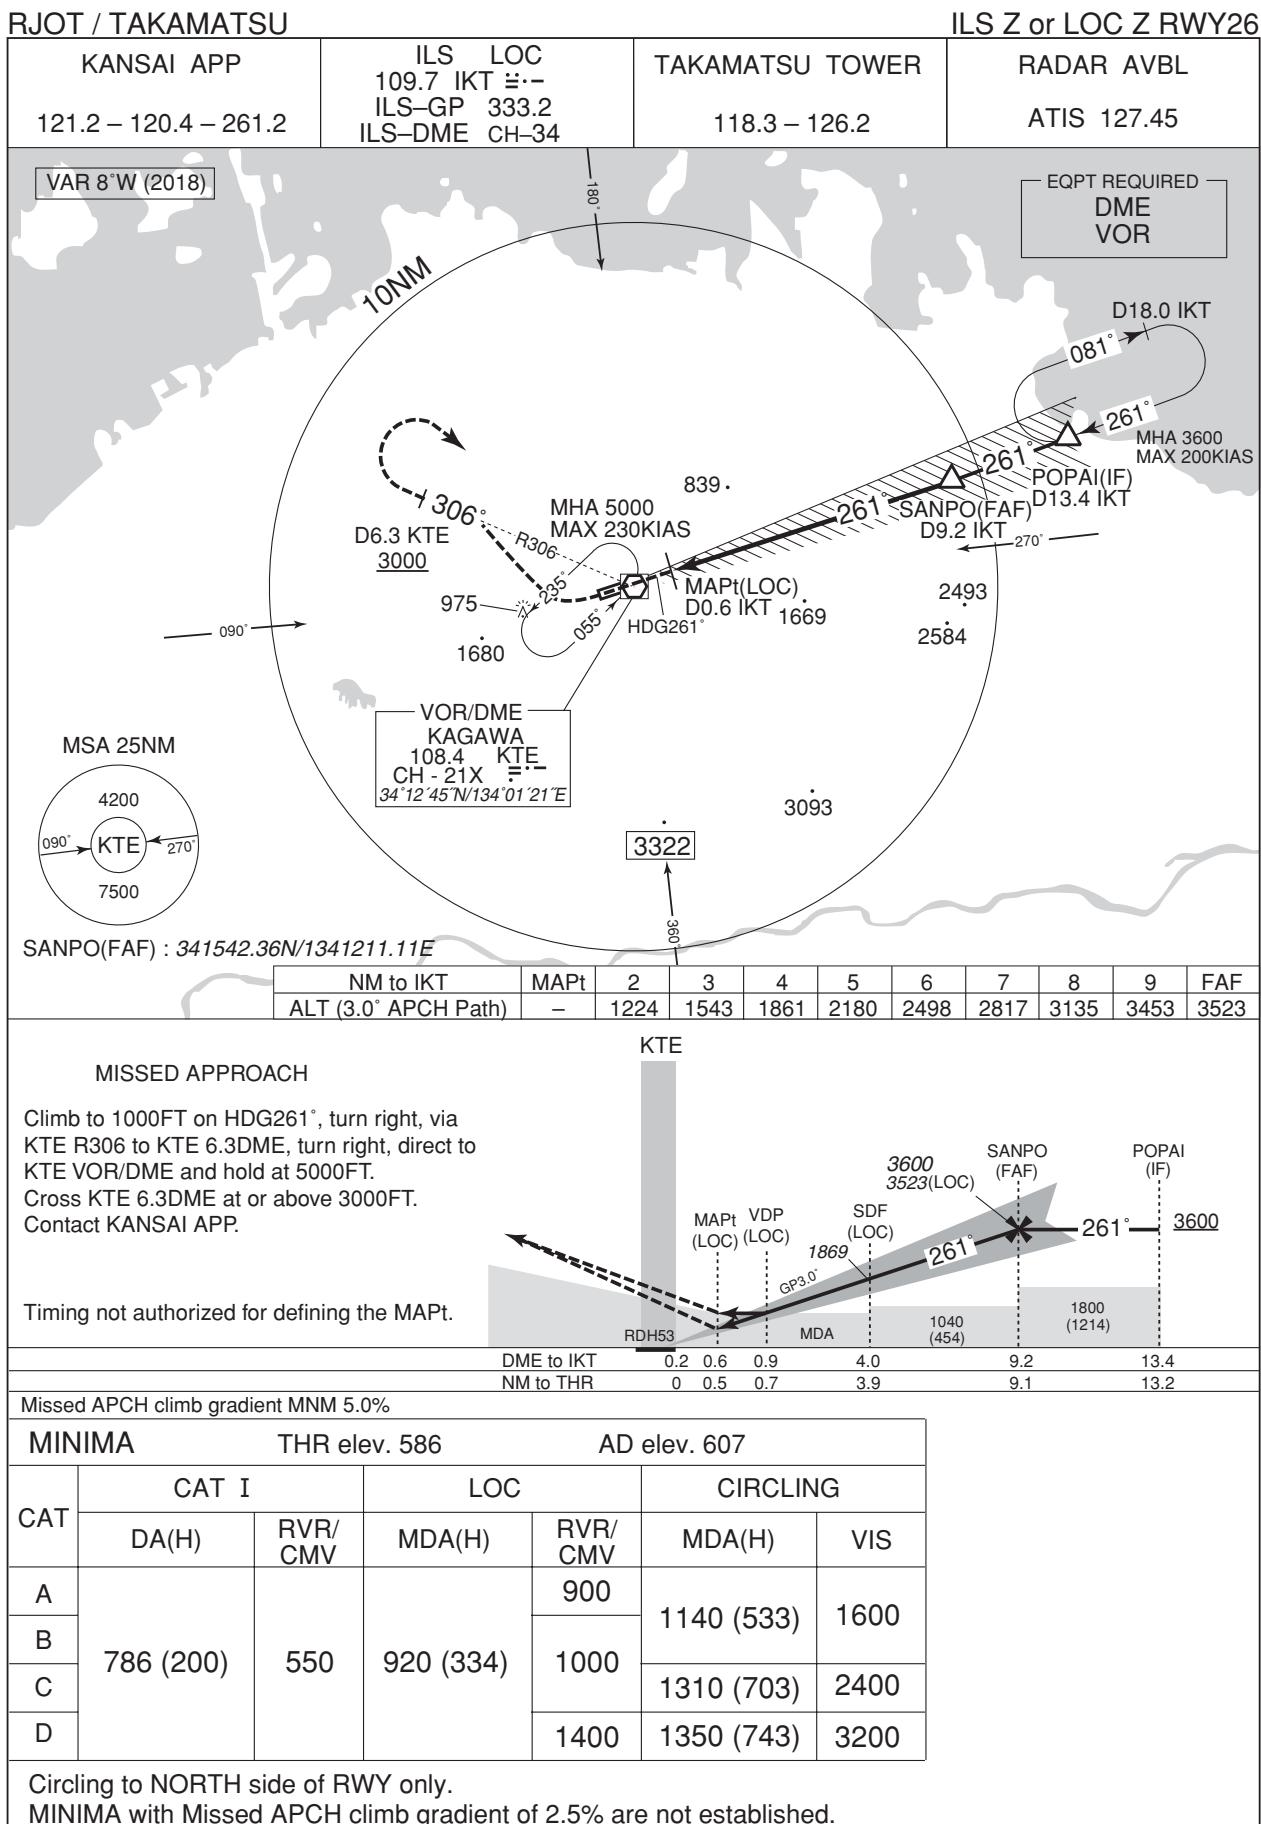

## INSTRUMENT APPROACH CHART

RJOT / TAKAMATSU

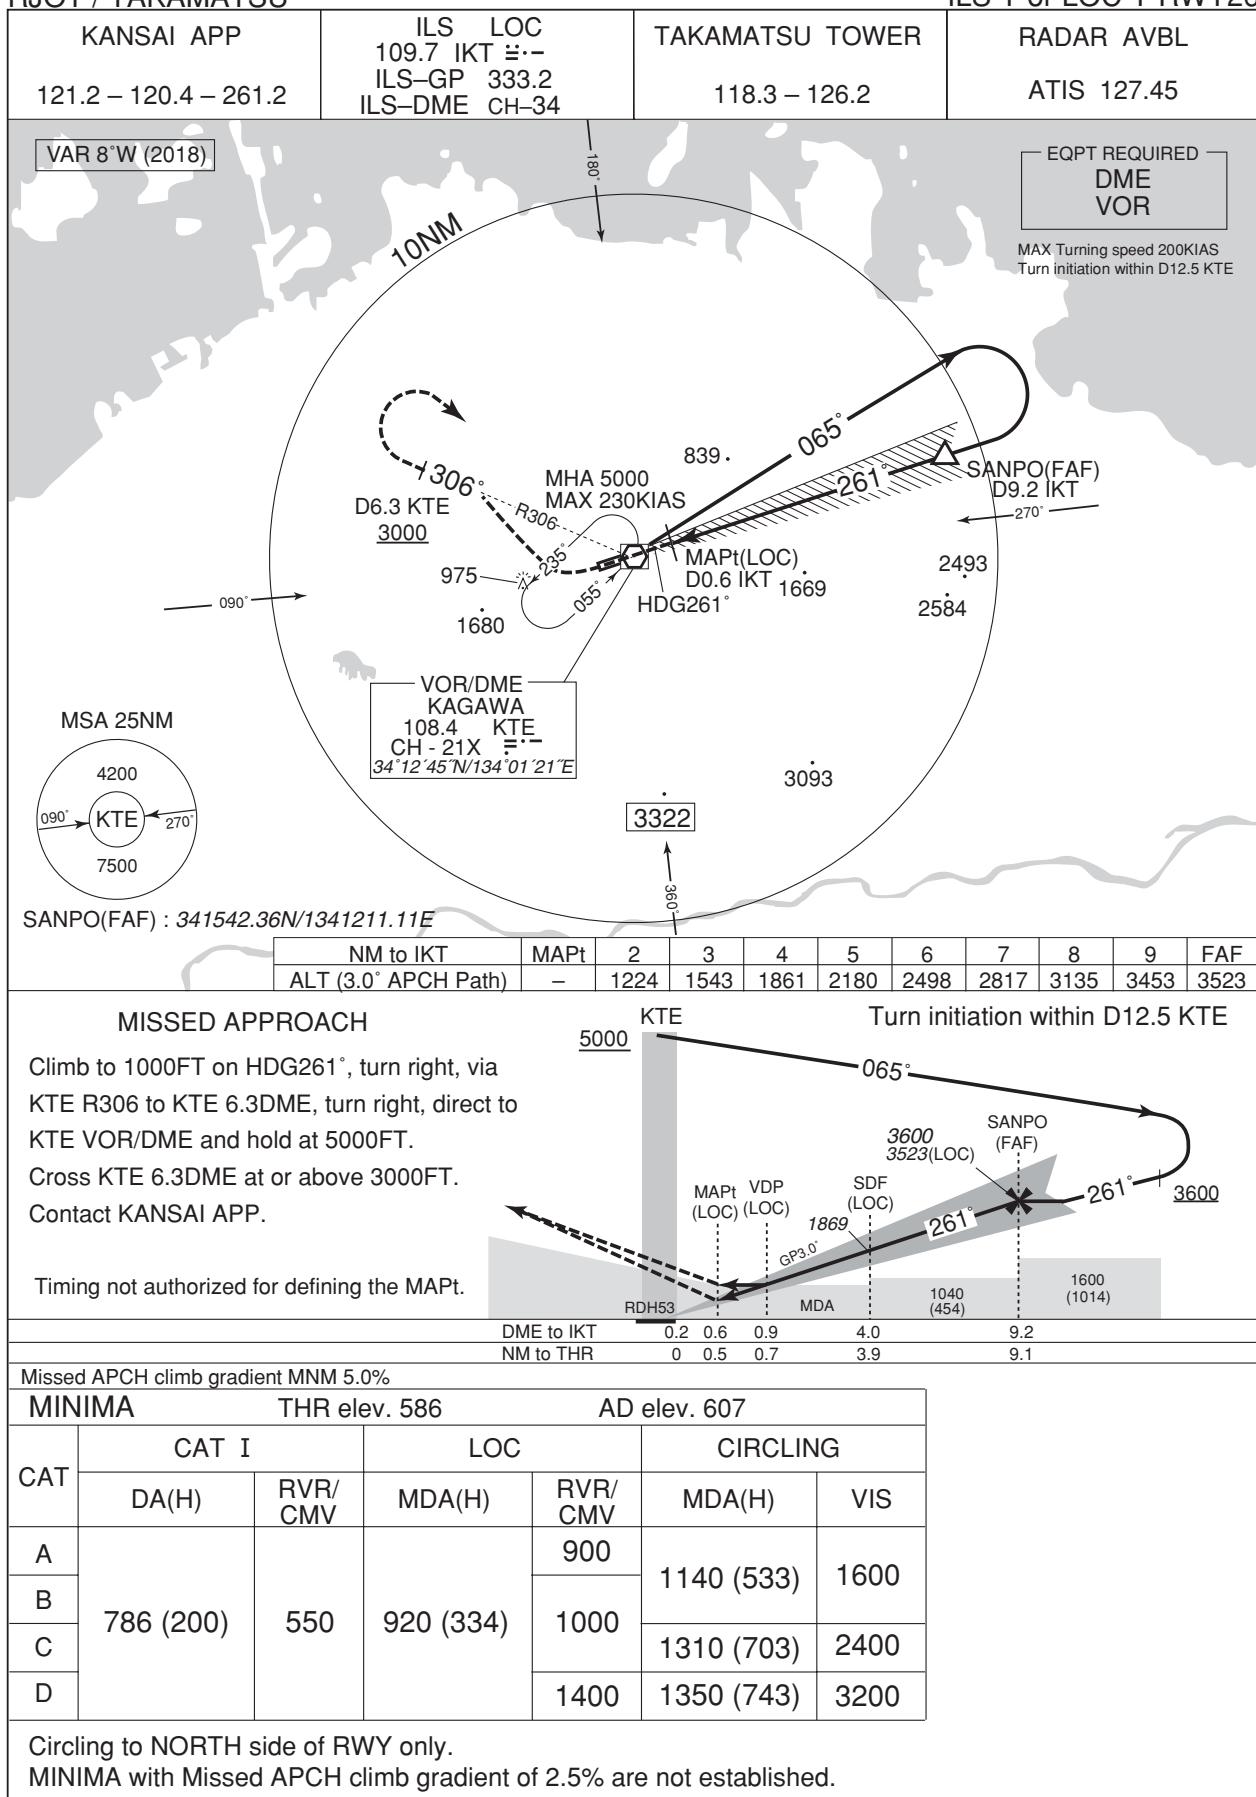



INSTRUMENT APPROACH CHART



## INSTRUMENT APPROACH CHART

RJOT / TAKAMATSU

VOR A

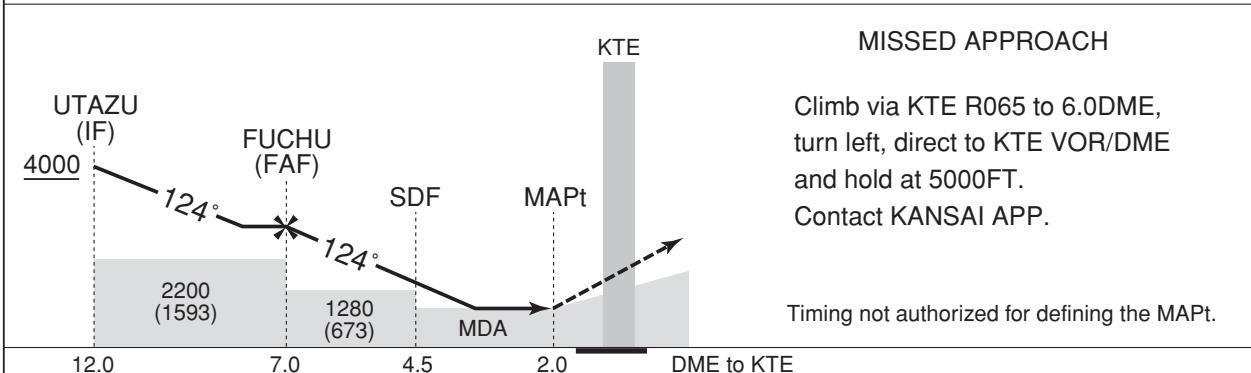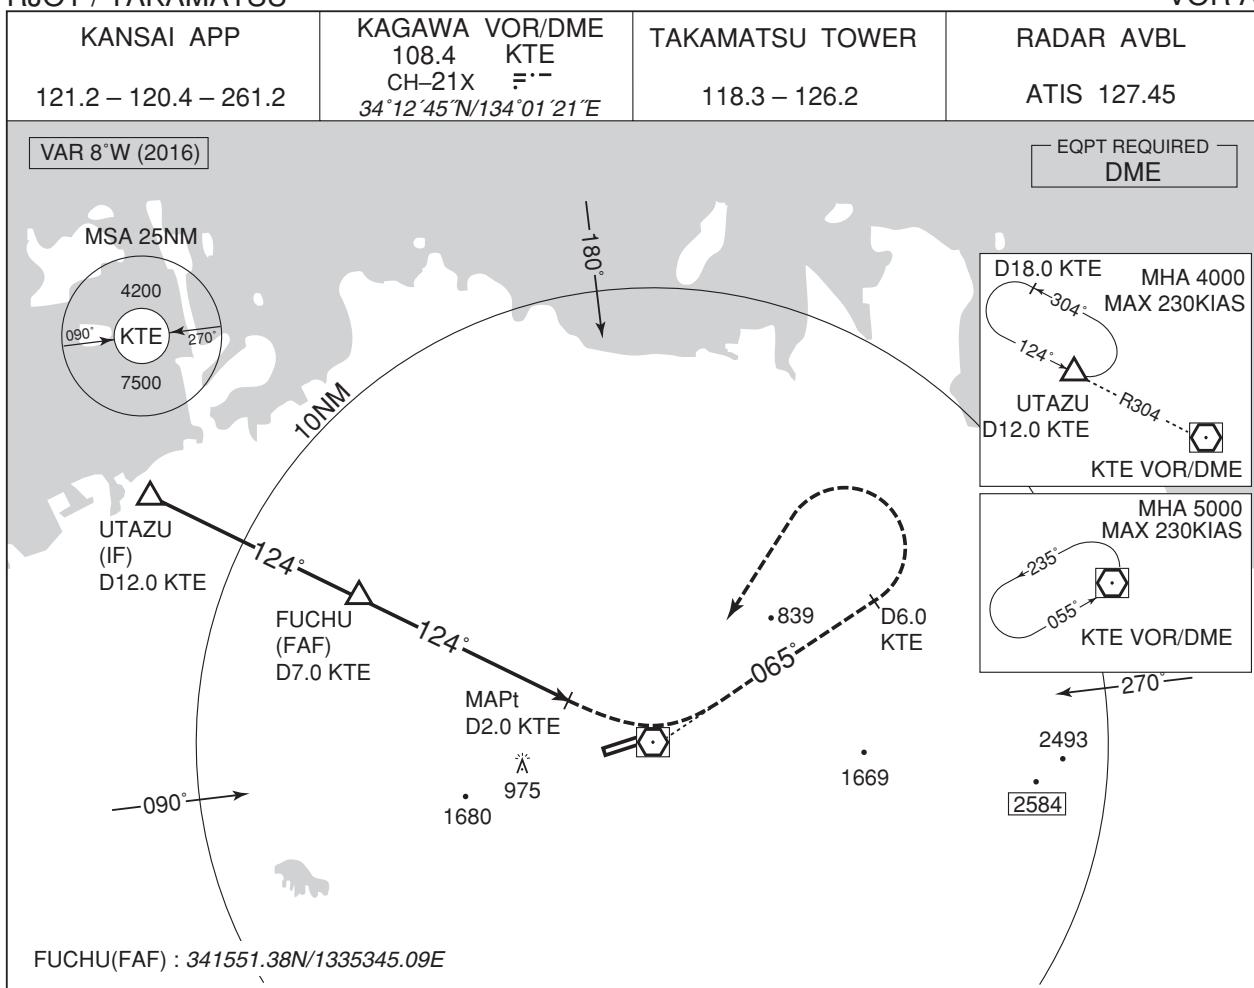

Missed APCH climb gradient MNM 5.0%

MINIMA AD elev. 607		
CAT	CIRCLING	
	MDA(H)	VIS
A	1060 (453)	1600
B		
C	1280 (673)	2400
D		3200

CHANGE : MSA

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling to NORTH side of RWY only.

RJOT/TAKAMATSU

Visual REP



Call sign	BRG / DIST from ARP	Remarks
高松 Takamatsu	017°/8.5NM	高松港 Harbor
林 Hayashi	044°/5NM	由良山 Mt. Yura
志度 Shido	058°/9NM	JR志度駅 JR Station
塩江 Shionoe	150°/4.5NM	内場池 Pond of Naiba
琴南 Kotonami	245°/5NM	四国電力開閉所 Switch station of Electric Power
琴平 Kotohira	267°/10NM	JR琴平駅 JR Station
滝宮 Takinomiya	296°/5NM	琴平電鉄滝宮駅 Station
坂出 Sakaide	311°/10NM	JR坂出駅 JR Station
檀紙 Danshi	359°/5NM	ガスタンク Gas tank

注：有視界飛行方式により高松空港に着陸しようとする航空機又は高松航空交通管制圏を通過しようとする航空機は、東方向から進入する場合は、志度ポイント上空で、西方向から进入する場合は、坂出ポイント又は琴平ポイント上空で、北方向から进入する場合は、高松ポイント上空において高松タワーに連絡すること。

NOTE: When VFR flight is going to enter the control zone for landing or passing through, the pilot should contact with the control tower over;

SHIDO in case of coming from east/

SAKAIDE or KOTOHIRA in case of coming from west/


TAKAMATSU in case of coming from north.



RJOT / TAKAMATSU

Minimum Vectoring Altitude CHART

VAR 7°W (2009)

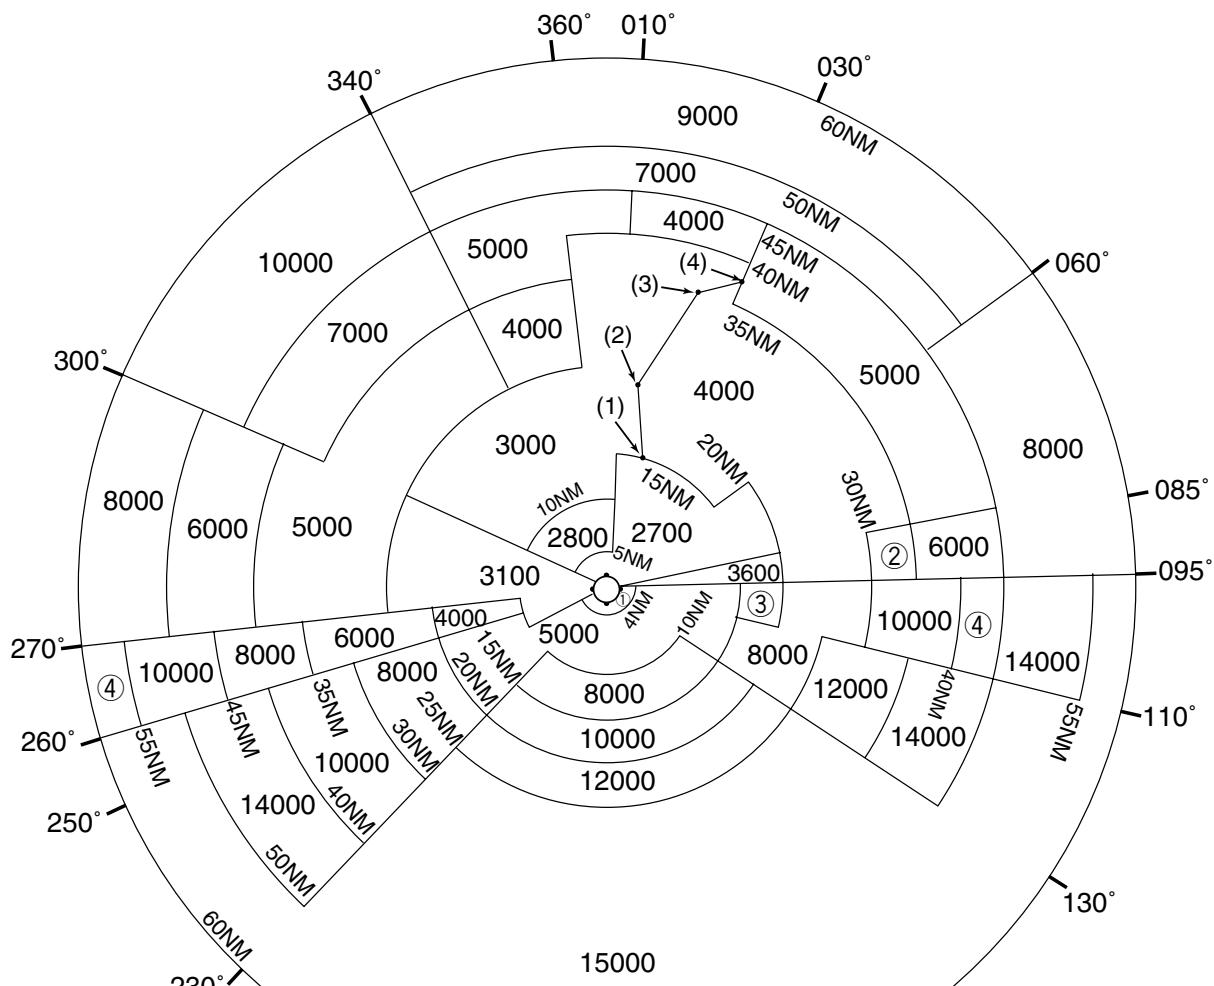

- ① 4000  
 ② 5000  
 ③ 6000  
 ④ 12000

- (1) 342745N/1340555E  
 (2) 343708N/1340544E  
 (3) 344652N/1341352E  
 (4) 344751N/1341904E

CENTER : 341315N/1340115E (RADAR SITE)