

## AD CHART



STANDARD DEPARTURE CHART -INSTRUMENT

RODN / KADENA

ATIS ★ 124.2 280.5  
CLNC DEL  
123.3 235.0  
GND CON  
118.5 275.8  
TOWER  
134.1 315.8  
NAHA DEP CON  
119.1 335.8 (NW)  
126.5 258.3 (SE)

JILEE THREE DEPARTURE

Rwy	Knots	60	120	180	240	300	360
05L	V/V(fpm)	221	442	663	884	1105	1326

Minimum Climb Rate to 2800



TLv FL140  
TA 14,000



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 05L/05R: Climb heading 055° to KAD VORTAC 5 DME then turn right to intercept the KAD R-066 outbound to JILEE. Cross JILEE at or above 2800 not to exceed 10,000 or altitude specified by ATC.

CHANGE:Update.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART -INSTRUMENT

RODN / KADENA

ATIS ★ 124.2 280.5  
CLNC DEL  
123.3 235.0  
GND CON  
118.5 275.8  
TOWER  
134.1 315.8  
NAHA DEP CON  
119.1 335.8 (NW)  
126.5 258.3 (SE)



TUCOF THREE DEPARTURE

Rwy	Knots	60	120	180	240	300	360
23L	V/V(fpm)	491	982	1473	1964	2455	2946
23R	V/V(fpm)	499	998	1497	1996	2495	2994

ATC Climb Rate to 2700 at 6.4 DME

666

KADENA  
112.0 KAD  
Chan 57

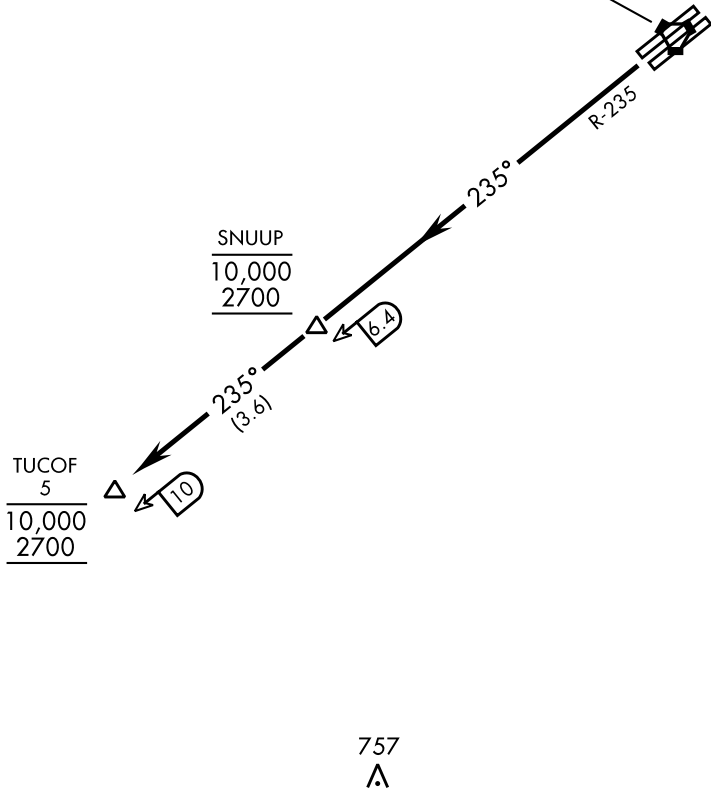

TLv FL140  
TA 14,000

DEPARTURE ROUTE DESCRIPTION

TAKEOFF Rwy 23L/23R: Climb on KAD R-235 to 10,000, cross SNUUP at or above 2700 and TUCOF at or below 10,000 or altitude specified by ATC.

NOTE: REPRINTING DOD FLIP

CHANGE : Update.

STANDARD DEPARTURE CHART -INSTRUMENT

RODN / KADENA



ATIS★ 124.2 280.5  
CLNC DEL  
123.3 235.0  
GND CON  
118.5 275.8  
TOWER  
134.1 315.8  
NAHA DEP CON  
119.1 335.8 (NW)  
126.5 258.3 (SW)

EKOLU TWO DEPARTURE

Rwy	Knots	60	120	180	240	300	360
23L ㊤	V/V(fpm)	205	410	615	820	1025	1230
23L ㊦	V/V(fpm)	455	910	1365	1820	2275	2730
23R ㊤	V/V(fpm)	206	412	618	824	1030	1236
23R ㊦	V/V(fpm)	460	920	1380	1840	2300	2760

ATC Climb Rate  
㊤ to EKOLU to 2700  
㊦ to EKAHI to 2000

1194

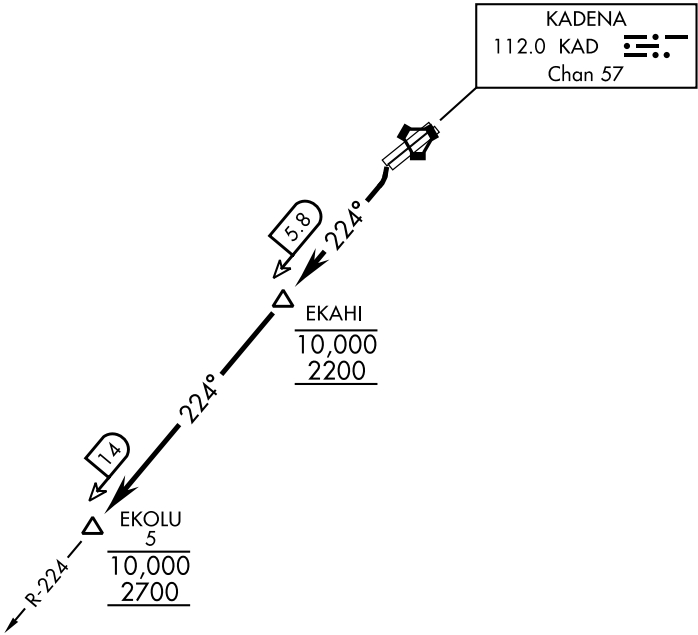

TLv FL140  
TA 14,000

CHANGE : Update.



DEPARTURE ROUTE DESCRIPTION


TAKEOFF RWY 23L/23R: Climb left turn to intercept KAD VORTAC R-224 to EKOLU. Cross EKAHI at or above 2200 not to exceed 10,000, cross EKOLU at or above 2700 not to exceed 10,000, or altitude specified by ATC.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART -INSTRUMENT

RODN / KADENA

CUNЕК FOUR DEPARTURE(RNAV1)

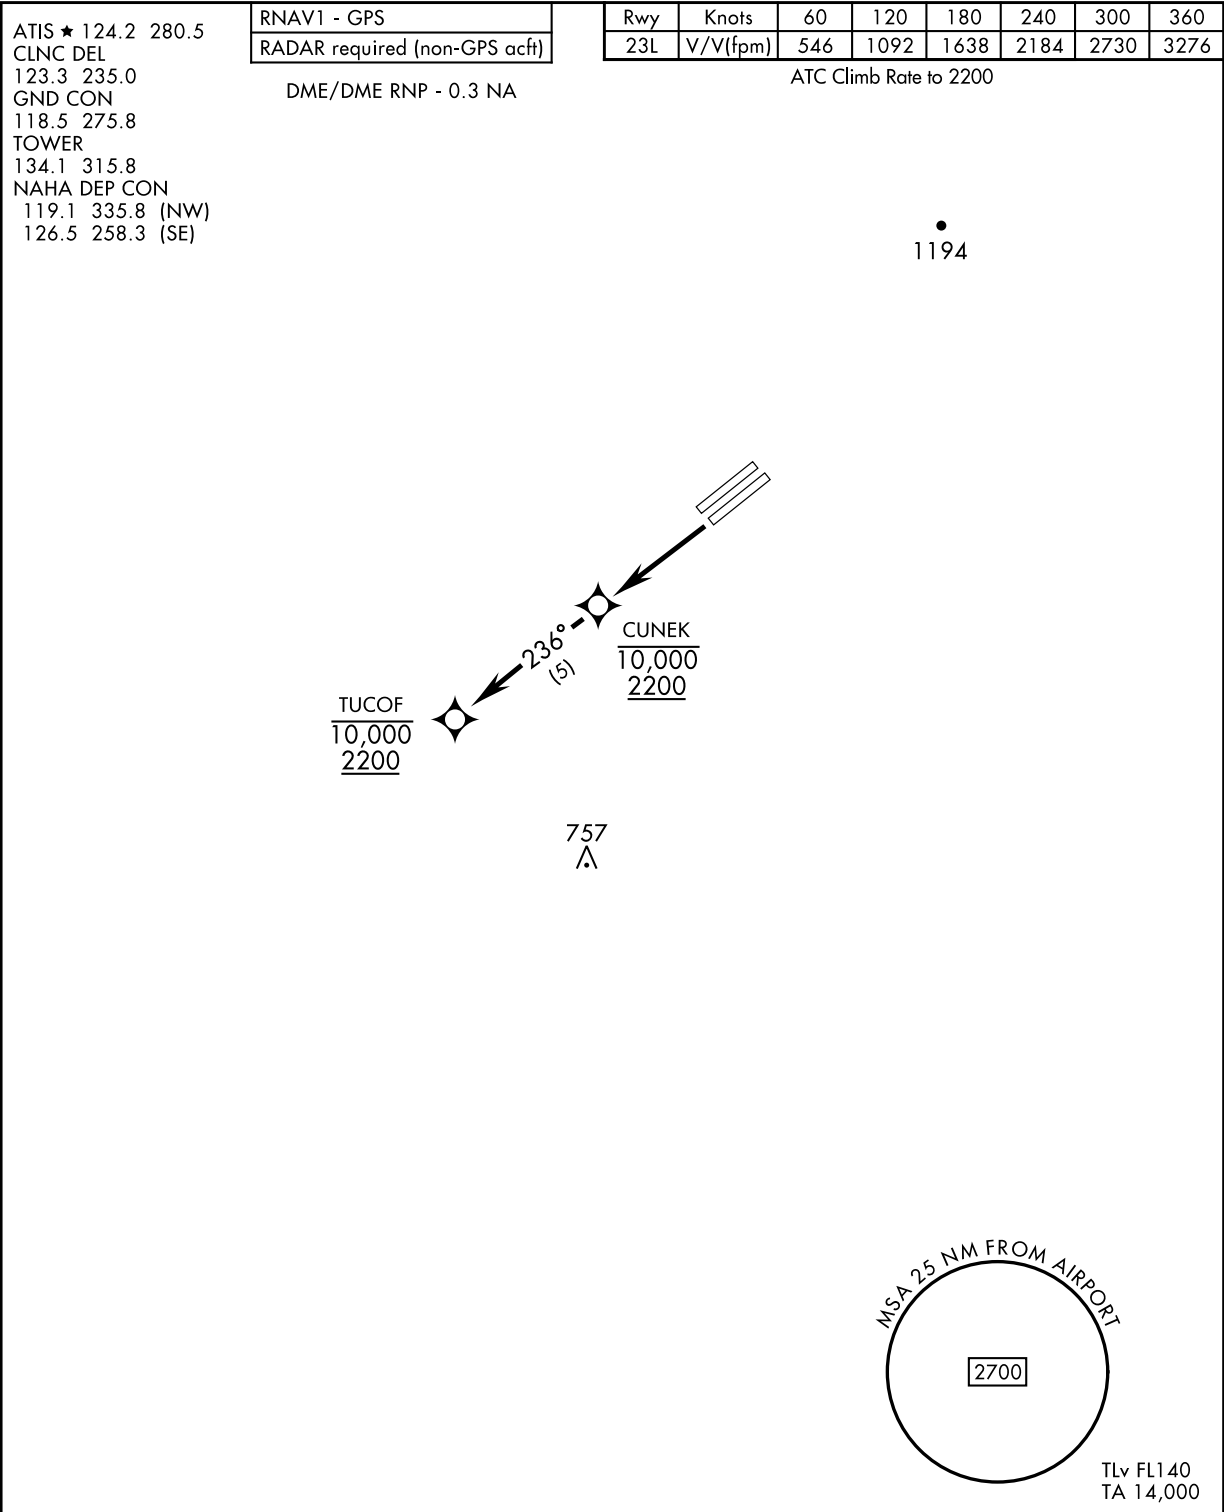

CHANGE : Update.

T

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 23L: Climb direct CUNЕК. Cross CUNЕК at or above 2200, not to exceed 10,000, then track 236° to TUCOF, cross TUCOF at or above 2200 not to exceed 10,000, or altitude assigned by ATC.

NOTE: REPRINTING DOD FLIP


STANDARD DEPARTURE CHART -INSTRUMENT

RODN / KADENA

ATIS ★ 124.2 280.5  
CLNC DEL  
123.3 235.0  
GND CON  
118.5 275.8  
TOWER  
134.1 315.8  
NAHA DEP CON  
119.1 335.8 (NW)  
126.5 258.3 (SE)

HIVAS FOUR DEPARTURE (RNAV1)

RNAV1 - GPS
RADAR required (for non-GPS acft)

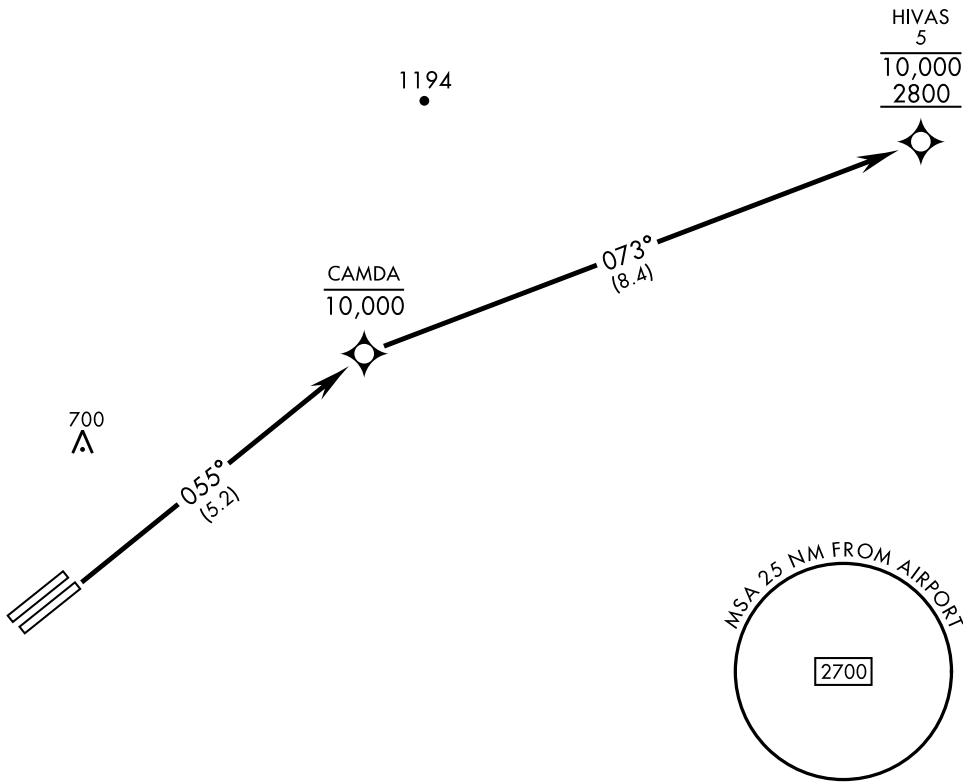

TLv FL140  
TA 14,000



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 05R: Climb direct CAMDA, then track 073° to HIVAS. Cross HIVAS at or above 2800 not to exceed 10,000, or altitude assigned by ATC.


CHANGE : Update.

NOTE: REPRINTING DOD FLIP

**INTENTIONALLY LEFT BLANK**

## INSTRUMENT APPROACH CHART

## RODN / KADENA

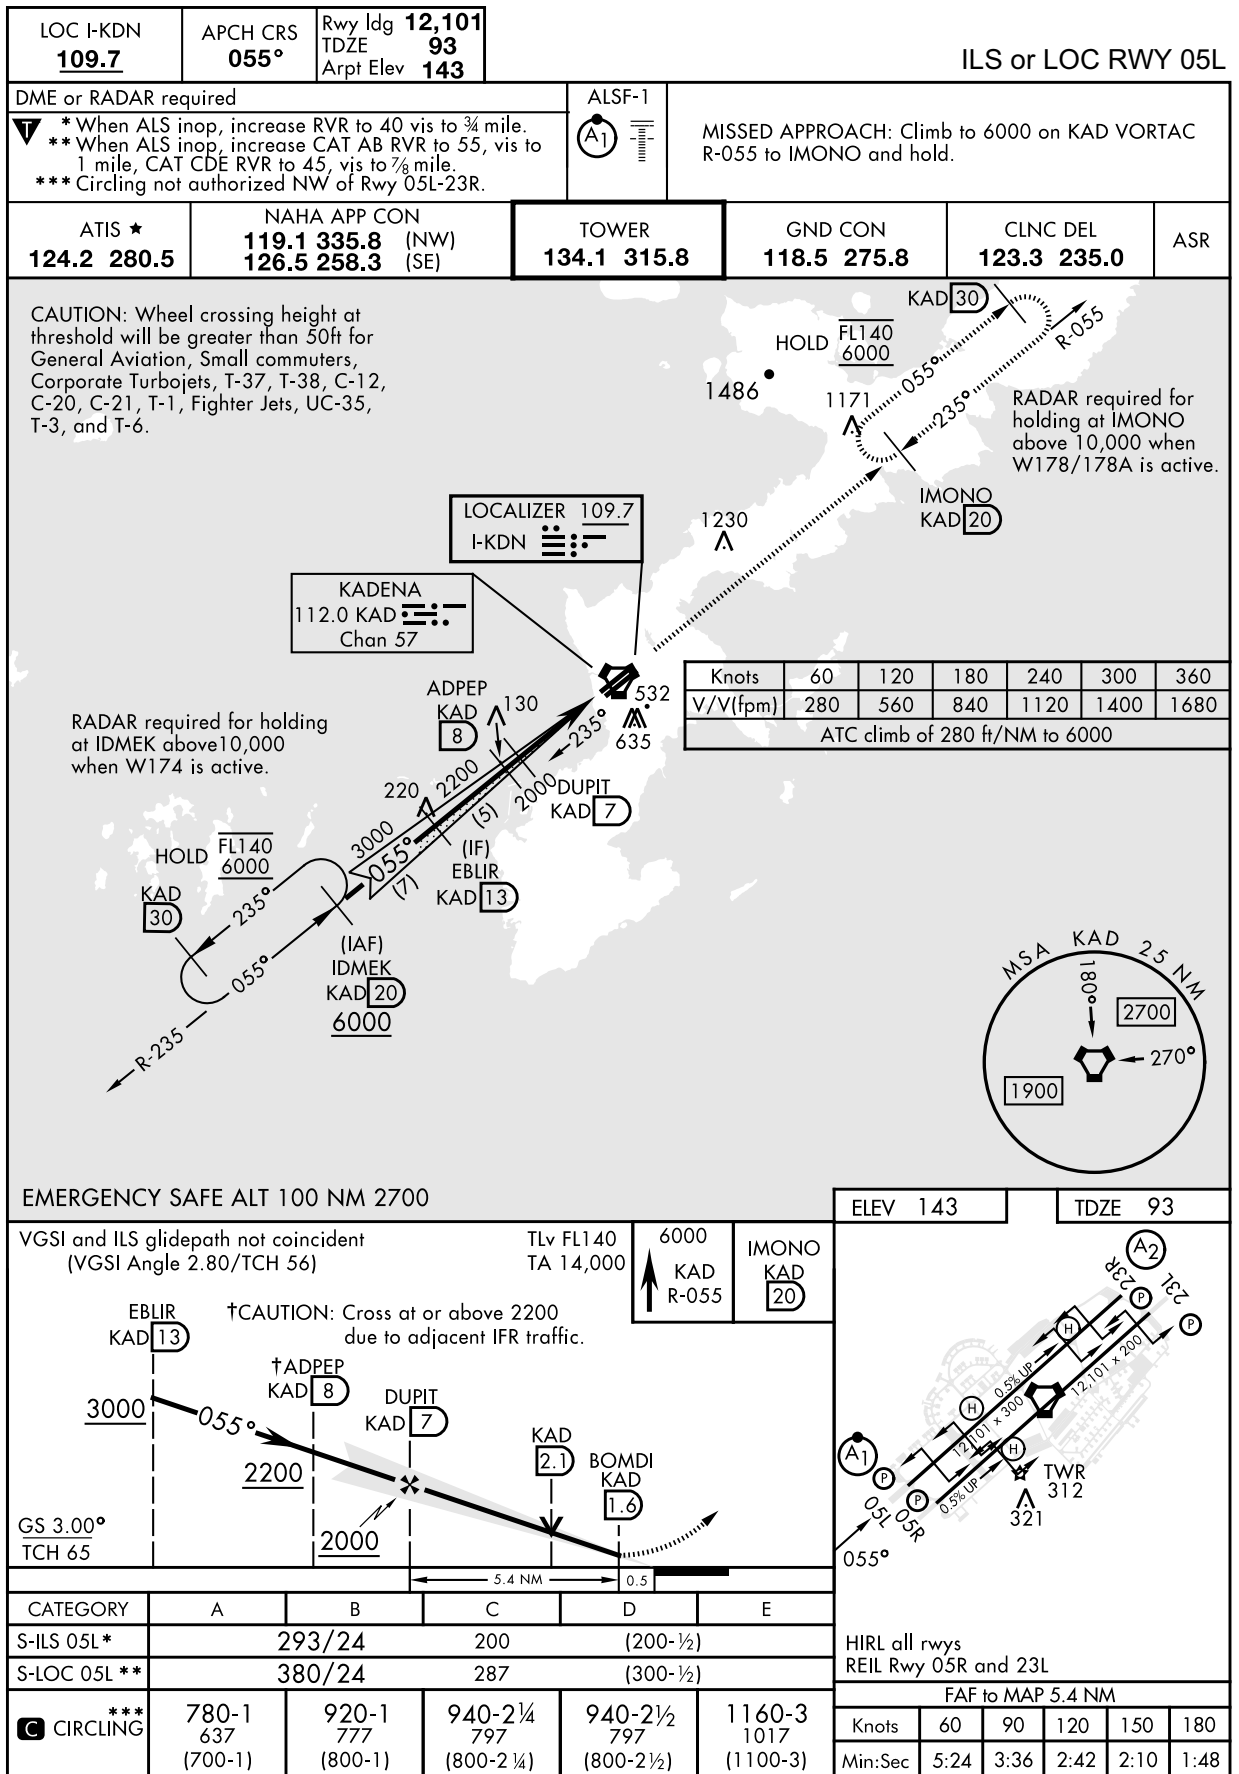


NOTE: REPRINTING DOD FLIP



## RODN / KADENA

VORTAC KAD <b>112.0</b> Chan <b>57</b>		APCH CRS <b>058°</b>		Rwy ldg <b>12,101</b> TDZE <b>93</b> Arprt Elev <b>143</b>		VOR or TACAN RWY05L							
DME required						<div>ALSF-1</div> <div><div>A1</div><div></div></div>		MISSED APPROACH: Climb to 6000 on KAD VORTAC R-055 to IMONO and hold.					
▼ *When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE vis to 1½ miles. **Circling NW of Rwy 05L-23R not authorized.													
ATIS ★ <b>124.2 280.5</b>		NAHA APP CON <b>119.1 335.8</b> (NW) <b>126.5 258.3</b> (SE)				TOWER <b>134.1 315.8</b>		GND CON <b>118.5 275.8</b>		CLNC DEL <b>123.3 235.0</b>		ASR	
Knots	60	120	180	240	300	360							
V/V(fpm)	260	520	780	1040	1300	1560							
ATC climb of 260 ft/NM to 6000							<div><div>KAD</div><div>30</div></div> <div>FL140</div> <div>R-055</div>						

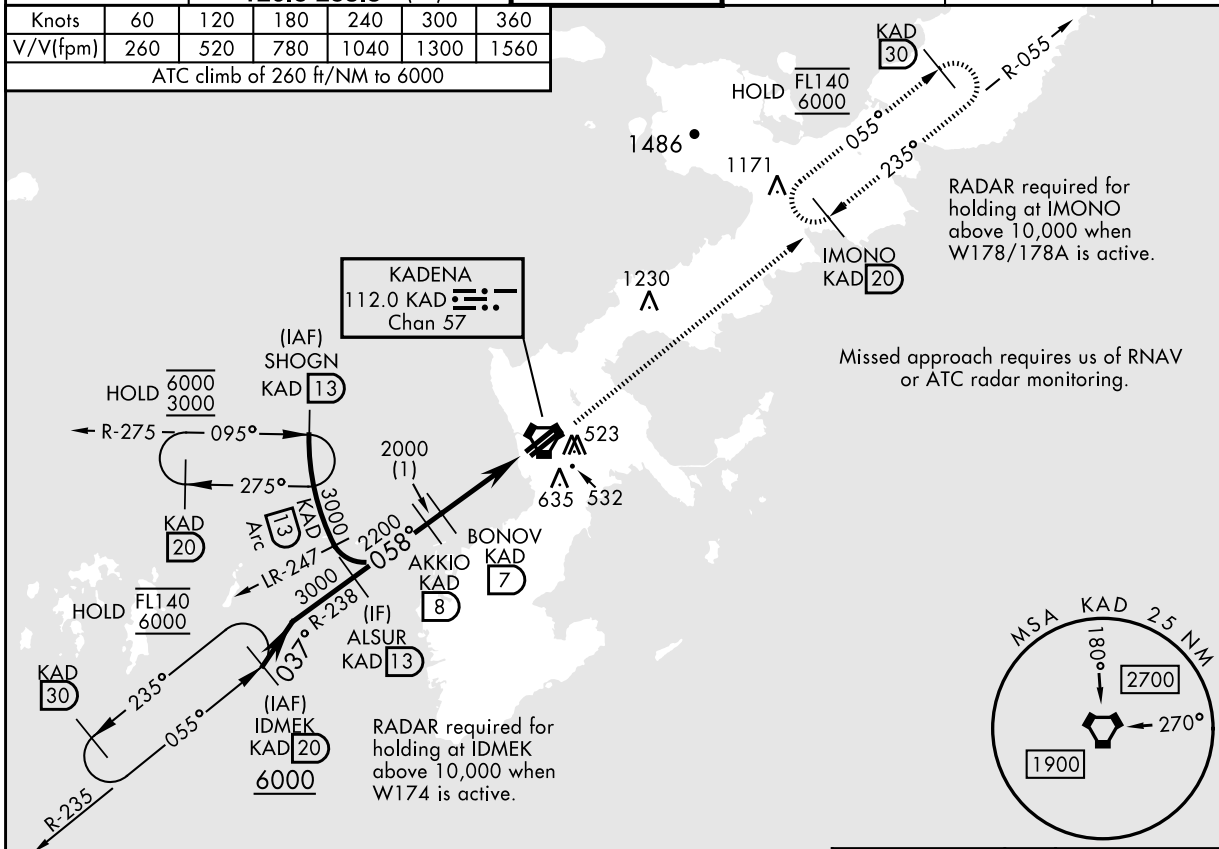


EMERGENCY SAFE ALT 100 NM 2700

ELEV 143		TDZE 93
----------	--	---------


VGSI and descent angles not coincident  
(VGSI Angle 2.80/TCH 56)

TLv FL140  
TA 14,000

6000  
↑ KAD  
R-055

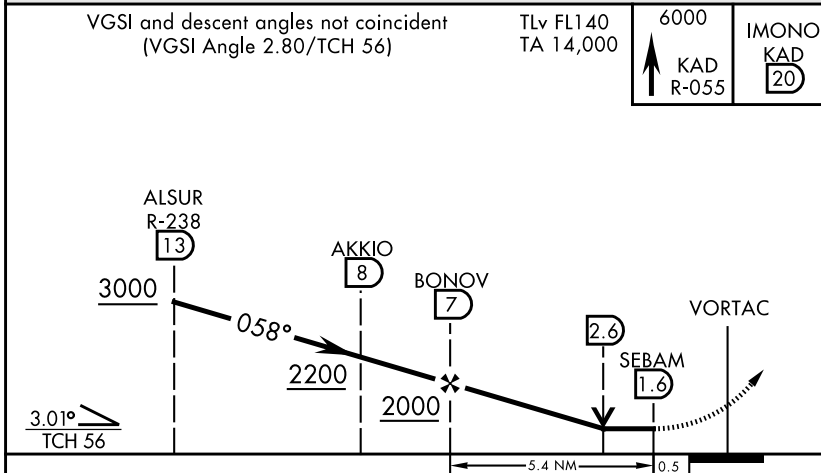IMONO  
KAD  
20

CATEGORY	A	B	C	D	E
S-05L *	560/24 467 (500-½)		560/50 467 (500-1)		
<div> <div></div> <div>**</div> <div>CIRCLING</div> </div>	780-1 637 (700-1)	920-1 777 (800-1)	940-2¼ 797 (800-2¼)	940-2 ½ 797 (800-2 ½)	1160-3 1017 (1100-3)

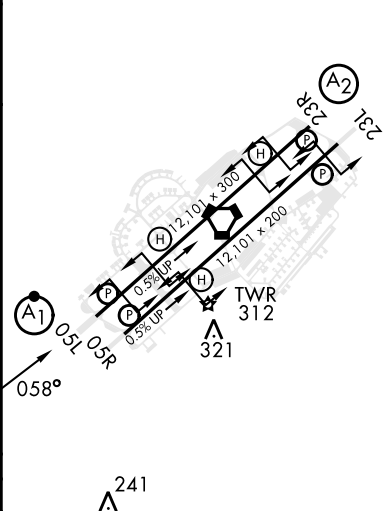

HIRL all rwys  
REIL Rwy 05R and 23L

CHANGE : Update.

**NOTE: REPRINTING DOD FLIP**

INSTRUMENT APPROACH CHART

RODN / KADENA

VORTAC KAD <b>112.0</b> Chan <b>57</b>	APCH CRS <b>050°</b>	Rwy Idg <b>12,101</b> TDZE <b>106</b> Arpt Elev <b>143</b>
--	-------------------------	--

VOR or TACAN RWY05R


DME required

\*Circling NW of Rwy 05L-23R not authorized.


MISSED APPROACH: Climb to 6000 on KAD VORTAC R-055 to IMONO and hold.

ATIS ★ <b>124.2 280.5</b>		NAHA APP CON <b>119.1 335.8</b> (NW) <b>126.5 258.3</b> (SE)					TOWER <b>134.1 315.8</b>		GND CON <b>118.5 275.8</b>		CLNC DEL <b>123.3 235.0</b>		ASR
Knots	60	120	180	240	300	360							
V/V(fpm)	260	520	780	1040	1300	1560							
ATC climb of 260 ft/NM to 6000													


ATC climb of 260 ft/NM to 6000

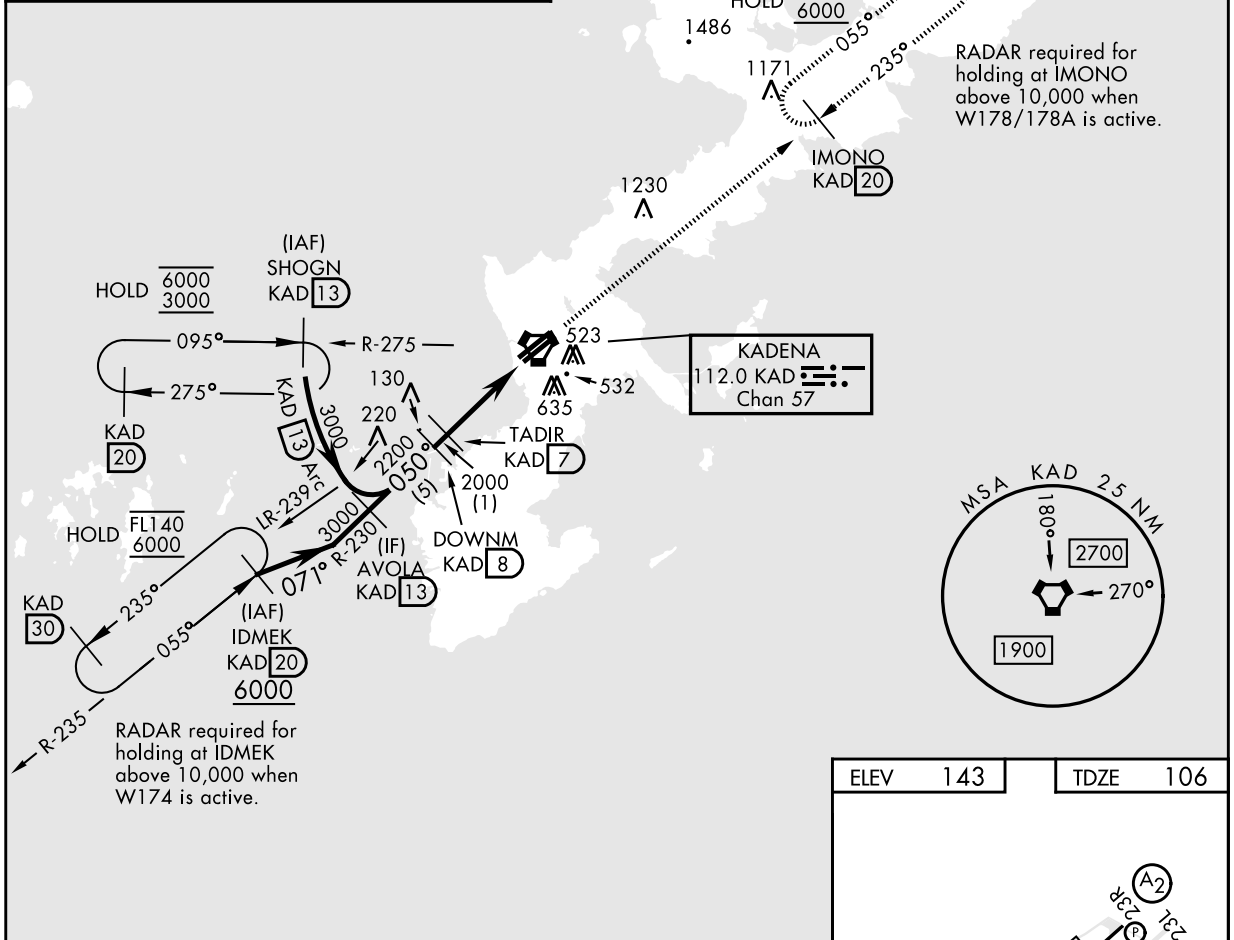

EMERGENCY SAFE ALT 100 NM 2700

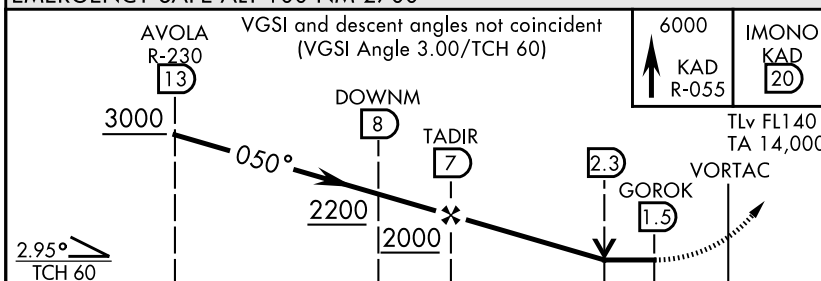

CATEGORY	A	B	C	D	E
S-05R	520/55	414 (400-1)	520/60	414 (400-1½)	
CIRCLING*	780-1 637 (700-1)	920-1 777 (800-1)	940-2¼ 797 (800-2¼)	940-2½ 797 (800-2½)	1160-3 1017 (1100-3)

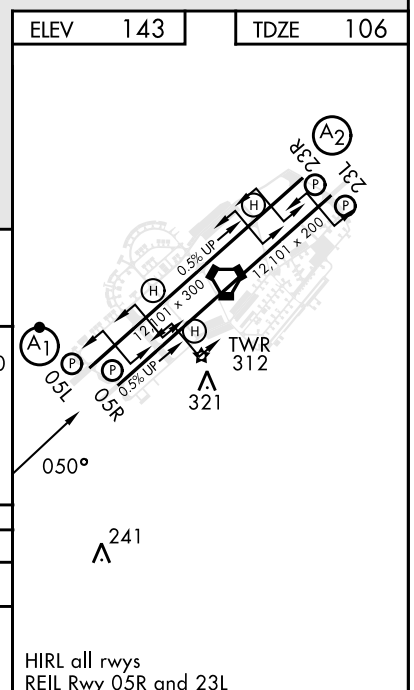

CHANGE: Update.

NOTE: REPRINTING DOD FLIP

## RODN / KADENA

LOC I-KZZ <b>108.7</b>		APCH CRS <b>235°</b>		Rwy Idg <b>12,101</b> THRE <b>129</b> Arpt Elev <b>143</b>		ILS or LOC RWY23R	
RADAR or DME required.						SALS	
<div> <div>T</div> <div>           * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile;            CAT CDE vis to 1½ miles.            ** Circling NW of Rwy 05L-23R not authorized.         </div> </div>						<div> <div>(A2)</div> <div> </div> </div>	
ATIS ★ <b>124.2 280.5</b>		NAHA APP CON <b>119.1 335.8</b> (NW) <b>126.5 258.3</b> (SE)		TOWER <b>134.1 315.8</b>		GND CON <b>118.5 275.8</b>	
						CLNC DEL <b>123.3 235.0</b>	
						ASR	

Knots	60	120	180	240	300	360
V/V(fpm)	280	560	840	1120	1400	1680

Knots	60	120	180	240	300	360
V/V(fpm)	280	560	840	1120	1400	1680

ATC climb of 280 ft/NM to 6000

LOCALIZER 108.7  
I-KZZ

KADENA  
112.0 KAD  
Chan 57

RADAR required for holding  
at IDMEK above 10,000  
when W174 is active.

RADAR required for  
holding at IMONO  
above 10,000 when  
W178/178A is active.

MSA KAD 25 NM  
180°  
270°  
1900  
2700

EMERGENCY SAFE ALT 100 NM 2700

Figure 1 is a 3D approach chart for a runway. The chart shows a 3D perspective view of the approach path, the runway, and the surrounding terrain. The chart also includes a 2D plan view of the approach path, the runway, and the surrounding terrain. The chart is labeled with various parameters such as MSL, AGL, and TCH. The chart is also labeled with various symbols such as the runway symbol, the approach path symbol, and the surrounding terrain symbol.

ELEV 143      THRE 129

235° 5.9 NM from FAF

0.5% UP

0.5% DOWN

12,101 x 300

12,101 x 200

TWR 312

321

HIRL all rwys  
REIL Rwy 05R and 23L

FAF to MAP 5.5 NM					
Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

CHANGE: Update

16/6/22

## RODN / KADENA


RNAV(GPS) RWY05L

ALSF-1


\*\* Circling NW of Rwy  
05L-23R not authorized


RADAR required for holding at ADYEK above 10,000 when W174 is active.

RADAR required for holding  
at BYYRD above 10,000  
when W178/178A is active.

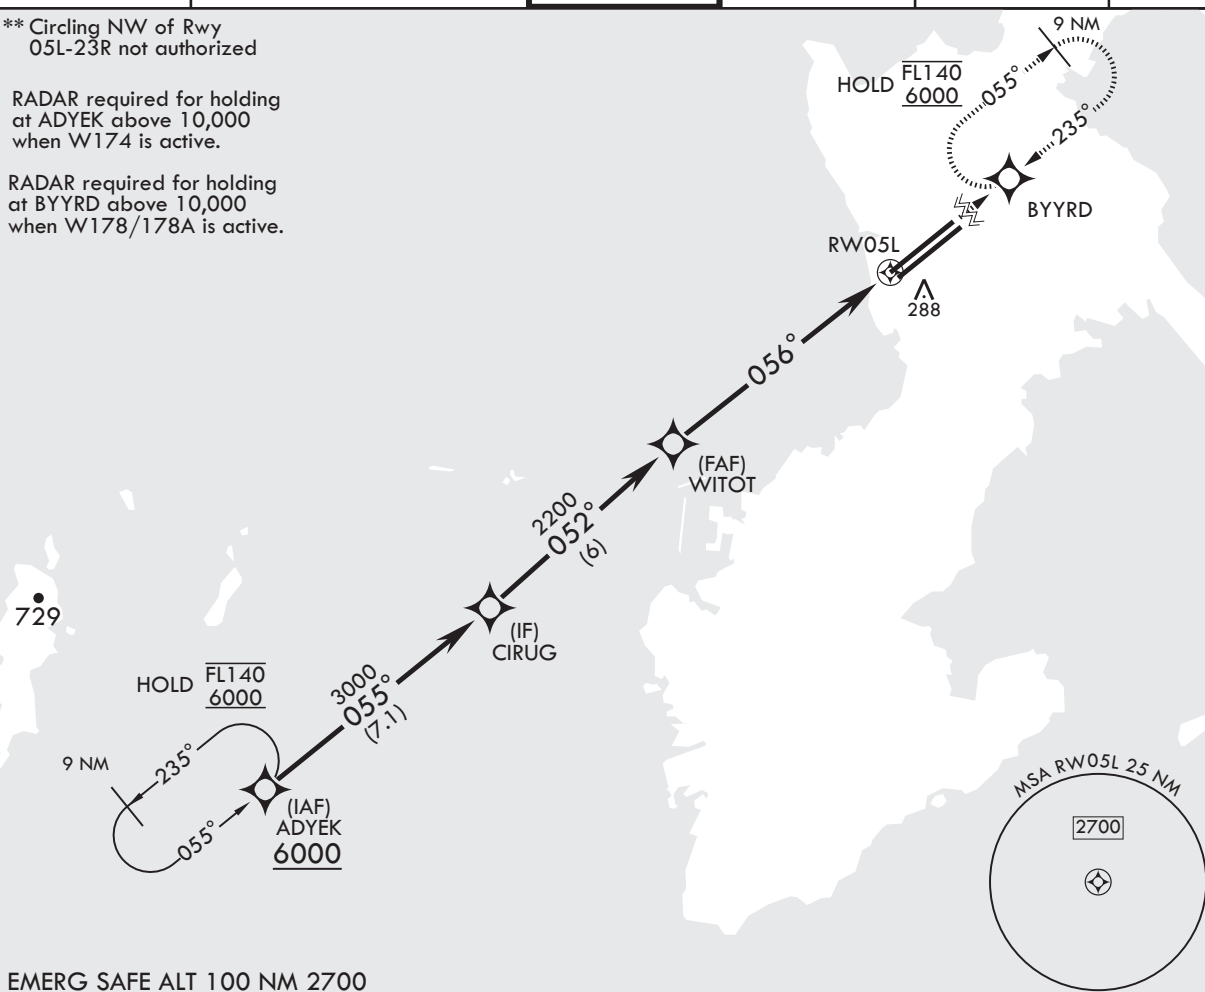


EMERG SAFE ALT 100 NM 2700

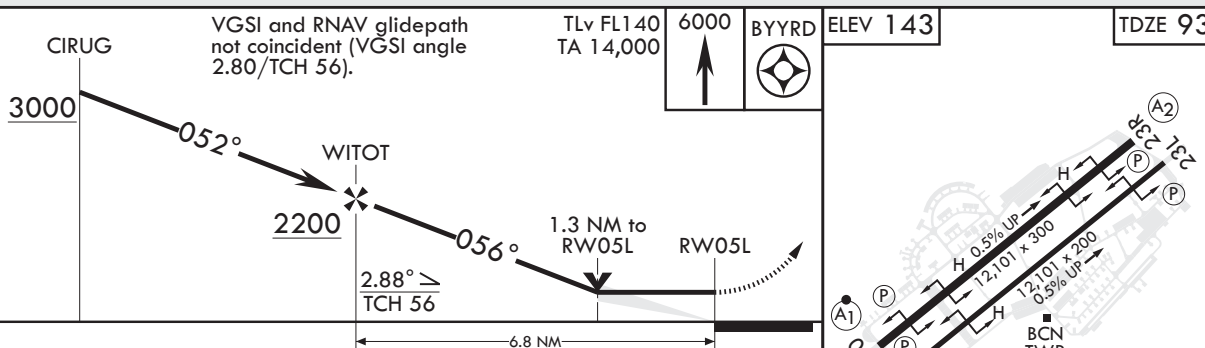

CATEGORY	A	B	C	D	E
LNAV MDA*	500/24 407 (400-½)		500/40 407		(400-¾)
 CIRCLING**	780-1 637 (700-1)	920-1 777 (800-1)	940-2¼ 797 (800-2¼)	940-2½ 797 (800-2½)	1160-3 1017 (1100-3)

CHANGE: Update

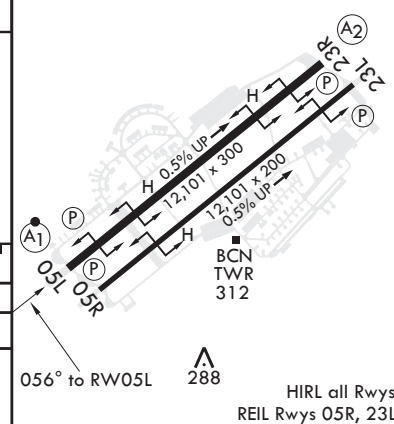

**NOTE: REPRINTING DOD FLIP**

## INSTRUMENT APPROACH CHART

## RODN / KADENA

APCH CRS 055°	Rwy Idg TDZE Arprt Elev	12,101 106 143
------------------	-------------------------------	----------------------

## RNAV(GPS) RWY05R

RNP APCH - GPS
----------------

RADAR required. DME/DME RNP - 0.3 NA.


**T** \* Circling not authorized NW of Rwy 05L-23R.

**MISSED APPROACH:** Climb to 6000 direct BYRD and hold. Continue climb in hold to 6000.


<p>ATIS★</p> <p>124.2 280.5</p>	<p>NAHA APP CON/DEP CON</p> <p>119.1 335.8 (NW)</p> <p>126.5 258.3 (SE)</p>	<p>TOWER</p> <p>134.1 315.8</p>	<p>GND CON</p> <p>118.5 275.8</p>	<p>CLNC DEL</p> <p>123.3 235.0</p>	<p>ASR</p>
---------------------------------	---	---------------------------------	-----------------------------------	------------------------------------	------------

**RADAR required for holding at ADYEK above 10,000 when W174 is active.**

**RADAR required for holding  
at BYYRD above 10,000  
when W178/178A is active.**

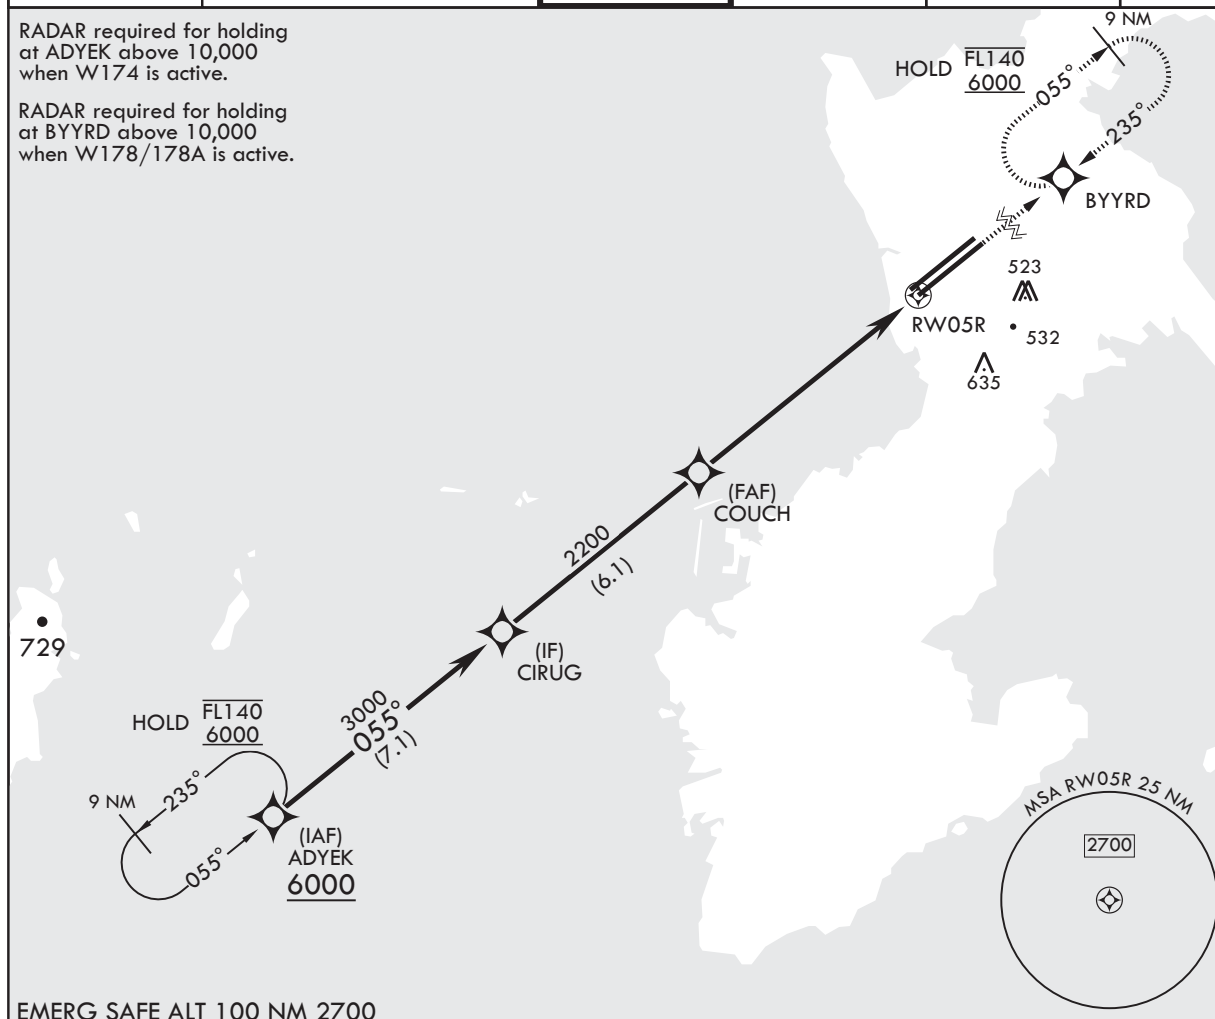

EMERG SAFE ALT 100 NM 2700

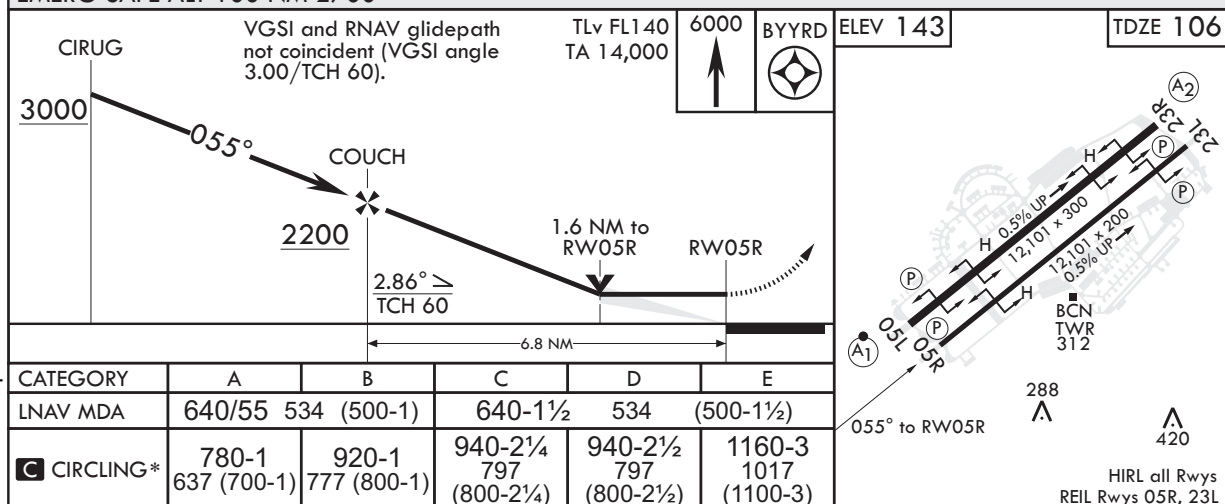

CHANGE: Update

**NOTE: REPRINTING DOD FLIP**

## INSTRUMENT APPROACH CHART

## RODN / KADENA

APCH CRS	Rwy Idg	12,101
235°	TDZE	143
	Arpt Elev	143

## RNAV(GPS) RWY23L

RNP APCH - GPS

RADAR required. DME/DME RNP - 0.3 NA.



MISSED APPROACH: Climb to 6000 direct ADYEK and hold. Continue climb-in-hold to 6000.

\* Circling not authorized NW of Rwy 05L-23R.

ATIS★ 124.2 280.5	NAHA APP CON/DEP CON 119.1 335.8 (NW) 126.5 258.3 (SE)	TOWER 134.1 315.8	GND CON 118.5 275.8	CLNC DEL 123.3 235.0	ASR
----------------------	--	----------------------	------------------------	-------------------------	-----

RADAR required for holding  
at ADYEK above 10,000  
when W174 is active.RADAR required for holding  
at BYYRD above 10,000  
when W178/178A is active.

6000	ADYEK	TLv FL140 TA 14,000	VGSI and Descent angles not coincident.	CITIK	ELEV 143	TDZE 143
------	-------	------------------------	--	-------	----------	----------

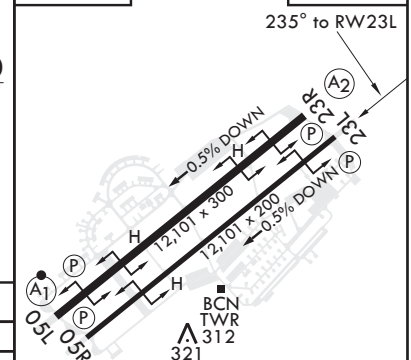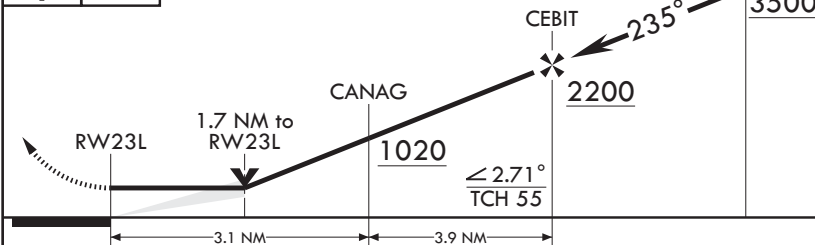

CHANGE: Update

CATEGORY	A	B	C	D	E
LNAV MDA	740/55	597 (600-1)	740-1 <sup>3</sup> / <sub>4</sub>	597 (600-1 <sup>3</sup> / <sub>4</sub> )	
CIRCLING*	780-1 637 (700-1)	920-1 777 (800-1)	940-2 <sup>1</sup> / <sub>4</sub> 797 (800-2 <sup>1</sup> / <sub>4</sub> )	940-2 <sup>1</sup> / <sub>2</sub> 797 (800-2 <sup>1</sup> / <sub>2</sub> )	1160-3 1017 (1100-3)

HIRL all Rwy  
REIL Rwy 05R, 23L

NOTE: REPRINTING DOD FLIP

## INSTRUMENT APPROACH CHART

## RODN / KADENA

APCH CRS <b>235°</b>	Rwy Idg <b>12,101</b>
TDZE <b>129</b>	Arprt Elev <b>143</b>

## RNAV(GPS) RWY23R

RNP APCH - GPS

RADAR required. DME/DME RNP - 0.3 NA.


\* When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1 3/4 miles.



MISSED APPROACH: Climbing left turn to 6000 direct ADYEK and hold. Continue climb-in-hold to 6000.

ATIS★ <b>124.2 280.5</b>	NAHA APP CON/DEP CON <b>119.1 335.8 (NW)</b> <b>126.5 258.3 (SE)</b>	TOWER <b>134.1 315.8</b>	GND CON <b>118.5 275.8</b>	CLNC DEL <b>123.3 235.0</b>	ASR
-----------------------------	--	-----------------------------	-------------------------------	--------------------------------	-----

\*\* Circling NA NW of Rwy 05L-23R.

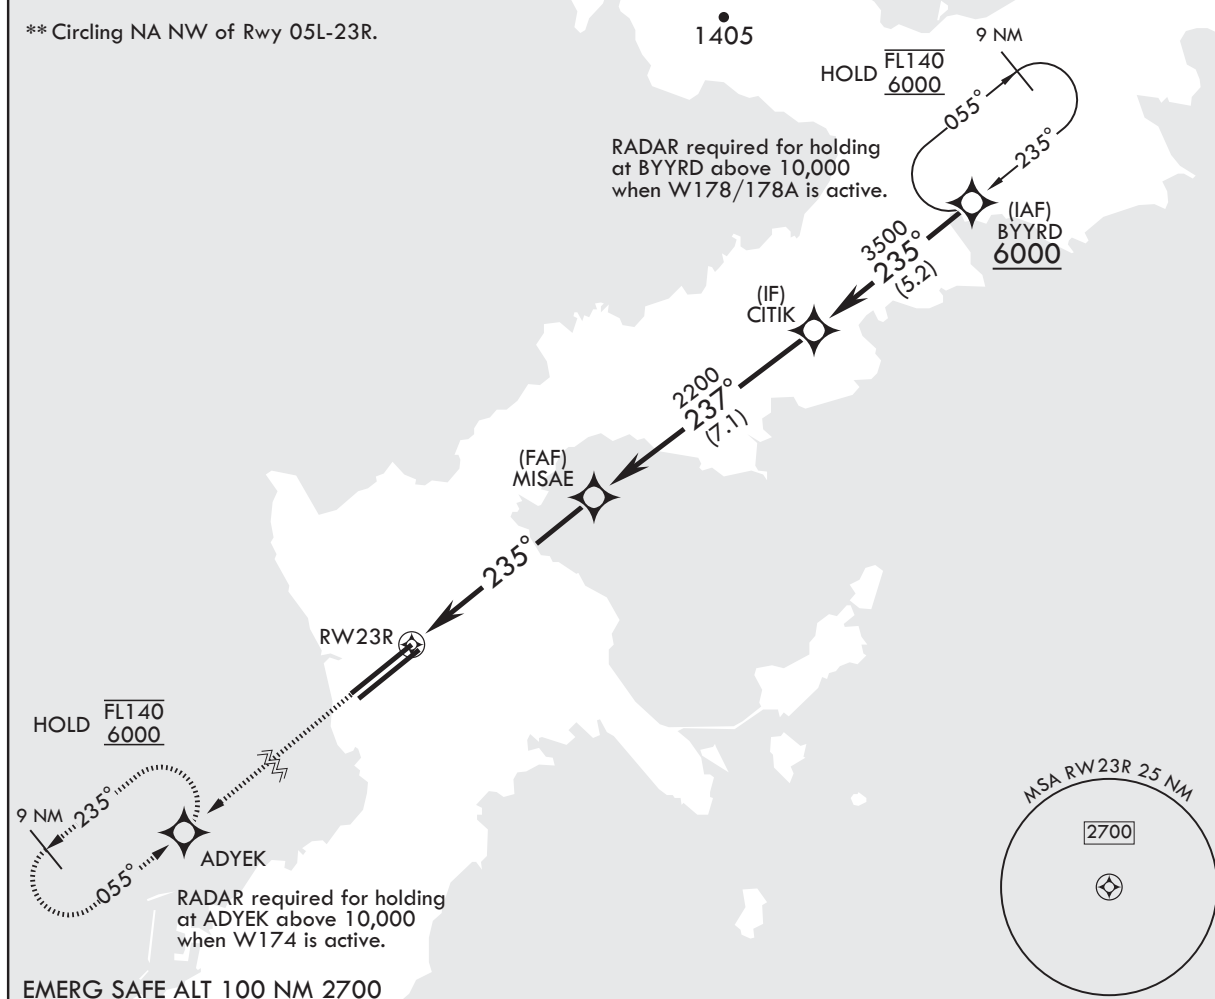

6000




TLv FL140  
TA 14,000

CITIK

ELEV 143

TDZE 129

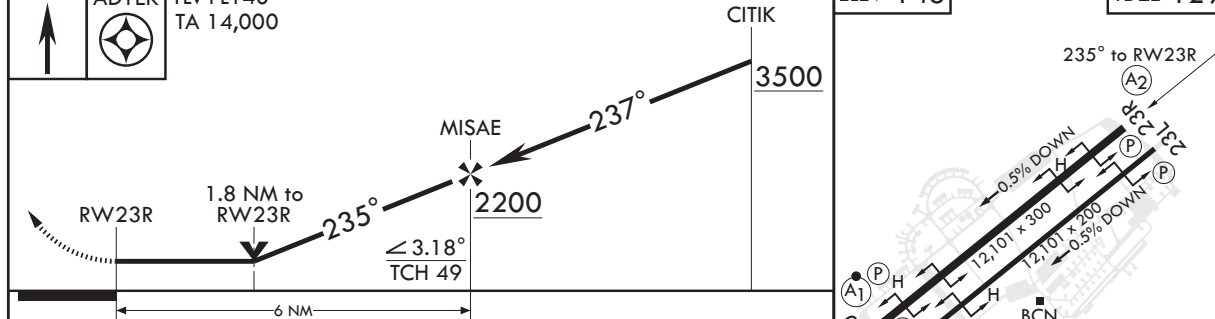

CHANGE: Update

CATEGORY	A	B	C	D	E
LNVA MDA*	740/40 611 (600-3/4)	740-1 611 (600-1 1/2)	740-1 1/2 611 (600-1 1/2)	740-1 1/2 611 (600-1 1/2)	740-1 1/2 611 (600-1 1/2)
CIRCLING**	780-1 637 (700-1)	920-1 777 (800-1)	940-2 1/4 797 (800-2 1/4)	940-2 1/2 797 (800-2 1/2)	1160-3 1017 (1100-3)

HIRL all Rwy  
REIL Rwy 05R, 23L

NOTE: REPRINTING DOD FLIP