

## AD 2 AERODROMES

### RJFN AD 2.1 AERODROME LOCATION INDICATOR AND NAME

#### RJFN - NYUTABARU

### RJFN AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	320501N/1312705E
2	Direction and distance from (city)	10.5NM N MIYAZAKI
3	Elevation/ Reference temperature	259ft / Nil
4	Geoid undulation at AD ELEV PSN	Nil
5	MAG VAR/ Annual change	Nil
6	AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses	JSDF-A
7	Types of traffic permitted (IFR/VFR)	IFR/VFR
8	Remarks	Nil

### RJFN AD 2.3 OPERATIONAL HOURS

1	AD Administration	H24
2	Customs and immigration	Nil
3	Health and sanitation	Nil
4	AIS Briefing Office	H24
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	H24
7	ATS	H24
8	Fuelling	Nil
9	Handling	Nil
10	Security	Nil
11	De-icing	Nil
12	Remarks	Nil

**RJFN AD 2.4 HANDLING SERVICES AND FACILITIES**

1	Cargo-handling facilities	Nil
2	Fuel/ oil types	JET A-1PLUS
3	Fuelling facilities/ capacity	To be issued later
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	(1)EXP DLY fuel SVC

**RJFN AD 2.5 PASSENGER FACILITIES**

1	Hotels	Nil
2	Restaurants	Nil
3	Transportation	Nil
4	Medical facilities	Nil
5	Bank and Post Office	Nil
6	Tourist Office	Nil
7	Remarks	Nil

**RJFN AD 2.6 RESCUE AND FIRE FIGHTING SERVICES**

1	AD category for fire fighting	Nil
2	Rescue equipment	Nil
3	Capability for removal of disabled aircraft	Nil
4	Remarks	Nil

**RJFN AD 2.7 SEASONAL AVAILABILITY-CLEARING**

1	Types of clearing equipment	Nil
2	Clearance priorities	Nil
3	Remarks	Nil

**RJFN AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA**

1	Apron surface and strength	To be issued later
2	Taxiway width, surface and strength	To be issued later
3	ACL and elevation	Not available
4	VOR checkpoints	Nil
5	INS checkpoints	Nil
6	Remarks	Nil

**RJFN AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS**

1	Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands	Nil
2	RWY and TWY markings and LGT	RWY: (RWY10/28) (LGT) RTHL, TKOF aiming LGT TWY: (LGT) TWY edge LGT
3	Stop bars	Nil
4	Remarks	Nil

**RJFN AD 2.10 AERODROME OBSTACLES**

RWY/Area affected	Obstacle type	Coordinates	Elevation	Markings/ LGT	Remarks
Nil					

## RJFN AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	NYUTABARU
2	Hours of service MET Office outside hours	H24
3	Office responsible for TAF preparation Periods of validity	Nil
4	Trend forecast Interval of issuance	Nil
5	Briefing/ consultation provided	Nil
6	Flight documentation Language(s) used	Nil
7	Charts and other information available for briefing or consultation	S. U
8	Supplementary equipment available for providing information	Doppler Radar for airport weather (See below figure)
9	ATS units provided with information	Nil
10	Additional information(limitation of service, etc.)	Nil

### Airspace for the advisory service concerning low level wind shear



UPPER LIMIT : 1600ft above FIELD ELEV LEVEL  
 LOWER LIMIT : FIELD ELEV LEVEL

## RJFN AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCN) and Surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
10	To be issued Later	2700x45	SW47000kg (103635lbs)	Nil	Nil
28		2700x45	DW101000kg (222705lbs) DTW146000kg (321930lbs) TTTW263000kg (579915lbs) Asphalt Concrete	Nil	Nil
Slope of RWY		Strip Dimensions (M)	Remarks		
7		10	12		
Nil		3300x450 3300x450			

## RJFN AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6

## RJFN AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	RTHL Color WBAR	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color							
1	2	3	4	5	6	7	8	9							
10	AVBL		PAPI 3.0 ° 360.0m 52ft												
28			PAPI 3.0 ° 370.3m 60ft												
Remarks															
10															
Nil															

**RJFN AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY**

1	ABN/IBN location, characteristics and hours of operation	ABN:320523N/1312748E, White/Green EV10sec, HO
2	LDI location and LGT Anemometer location and LGT	LDI: LGTD
3	TWY edge and center line lighting	Nil
4	Secondary power supply/ switch-over time	Nil
5	Remarks	WDI LGT, OBST LGT

**RJFN AD 2.16 HELICOPTER LANDING AREA**

To be issued later
--------------------

**RJFN AD 2.17 ATS AIRSPACE**

Designation and lateral limits		Vertical limits (ft)	Airspace classification	ATS unit call sign Language	Remarks
1		2	3	4	6
NYUTA CTR	Area within a radius of 5NM of NYUTABARU ARP (32°05'N131°27'E)	6000 or below	D	NYUTA TOWER En	

## RJFN AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
TWR	Nyuta Tower	236.8MHz 126.2MHz 304.5MHz 247.0MHz(1)(2) 138.05MHz(1) 123.1MHz(1)(2) 120.1MHz 243.0MHz(E) 121.5MHz(E)	H24	APP service provided by 1) KOBE CTL: 1300-2200 2) KAGOSHIMA APP: 2200-1300  (1) For rescue only (2) AVBL on request.
GCA-ASR -PAR	Nyuta GCA	335.6MHz 270.8MHz 134.1MHz 125.3MHz 307.2MHz 238.8MHz 289.4MHz 316.0MHz 243.0MHz(E) 121.5MHz(E)	H24	ASR,PAR RWY 28 Glide path 3.0°
GND	Nyuta Ground	275.8MHz	H24	
MET	Nyuta Metro	344.6MHz	H24	Pilot forecaster SER(MIL)

## RJFN AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
TACAN	NHT	1184MHz (CH-97X)	H24	320449.48N/ 1312713.62E	263ft	Unusable: R360-010 beyond 22NM BLW 8,000ft. R010-020 beyond 30NM BLW 8,000ft. R040-050 beyond 38NM BLW 5,000ft. R050-060 beyond 38NM BLW 4,000ft. R060-070 beyond 28NM BLW 2,000ft. R070-090 beyond 33NM BLW 2,000ft. R090-100 beyond 30NM BLW 2,000ft. R100-170 beyond 29NM BLW 2,000ft. R170-180 beyond 21NM BLW 5,000ft. R180-190 beyond 27NM BLW 6,000ft. R190-200 beyond 30NM BLW 6,000ft. R200-210 beyond 23NM BLW 6,000ft. R210-230 beyond 31NM BLW 6,000ft. R230-270 beyond 36NM BLW 8,000ft. R270-280 beyond 30NM BLW 8,000ft. R280-290 beyond 23NM BLW 7,000ft. R290-310 beyond 28NM BLW 8,000ft. R310-320 beyond 26NM BLW 8,000ft. R320-330 beyond 30NM BLW 8,000ft. R330-360 beyond 27NM BLW 8,000ft.
ILS-LOC 28	INH	111.3MHz	H24	320512N/ 1312604E		LOC:330m(1083ft) away FM RWY 10 THR, BRG(MAG)289°
ILS-GP 28	-	332.3MHz	H24	320451N/ 1312744E		GP:317.5m(1042ft) inside FM RWY 28 THR,120m(394ft) S of RCL. Angle 3.0°ILS Ref datum 16.5m(54ft).





---

## RJFN AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

Nil
-----

2. Taxiing to and from stands

Nil
-----

3. Parking area for small aircraft(General aviation)

Nil
-----

4. Parking area for helicopters

Nil
-----

5. Apron - taxiing during winter conditions

Nil
-----

6. Taxiing - limitations

Nil
-----

7. School and training flights - technical test flights - use of runways

Nil
-----

8. Helicopter traffic - limitation

Nil
-----

9. Removal of disabled aircraft from runways

Nil
-----

## RJFN AD 2.21 NOISE ABATEMENT PROCEDURES

Nil
-----

**RJFN AD 2.22 FLIGHT PROCEDURES****1. TAKE OFF MINIMA**

	RWY	REDL AVBL		REDL OUT	
		CEIL-RVR	CEIL-VIS	CEIL-RVR	CEIL-VIS
TKOF ALTN AP FILED	10	-	300'-1600M	-	300'-1600M
	28	300'-1600M	300'-1600M	-	300'-1600M
OTHER	10	AVBL LDG MINIMA			
	28				

**2. WX MINIMA CONCERNING PAR/ASR APCH PROCEDURE**

PAR RWY28

MINIMA	THR elev. 235		AD elev. 259	
CAT			CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	VIS
A	459(224)	750	740(481)	1600
B				2400
C				
D			860(601)	3200

ASR RWY28

MINIMA	THR elev. 235		AD elev. 259	
CAT			CIRCLING	
	MDA(H)	RVR/CMV	MDA(H)	VIS
A	700(465)	1400	740(481)	1600
B		1500		2400
C		1600		
D		1800	860(601)	3200

**3. Lost Communication Procedures for Arrival Aircraft under Radar Navigational Guidance.**

If radio communications with Kagoshima Approach/Radar or NYUTA GCA are lost for 1 minute or 5 seconds(PAR) / 15 seconds(ASR) on final approach, squawk Mode A/3 Code 7600 and;

- I
- 1) Contact Nyuta Tower.
  - 2) If unable, proceed in accordance with visual flight rules.
  - 3) If unable, proceed to ZARON at the last assigned altitude or 5,000ft whichever is higher and execute instrument approach.
- II Procedures other than above will be issued when situation required.

**RJFN AD 2.23 ADDITIONAL INFORMATION**

Nil

**RJFN AD 2.24 CHARTS RELATED TO AN AERODROME**

Standard Departure Chart - Instrument (NIPPO, YATOGL)  
 Standard Departure Chart - Instrument (TENSO)  
 Standard Arrival Chart - Instrument (TENSO)  
 Instrument Approach Chart (TACAN Z RWY28)  
 Instrument Approach Chart (TACAN Y RWY28)  
 Instrument Approach Chart (ILS Z or LOC Z RWY28)  
 Instrument Approach Chart (ILS Y or LOC Y RWY28)  
 Instrument Approach Chart (ILS X or LOC X RWY28)




## STANDARD DEPARTURE CHART-INSTRUMENT

RJFN / NYUTABARU

SID and TRANSITION

CHANGE : PROC renamed(NIPPO SIX DEPARTURE, YATOJI TWO DEPARTURE). PROC course(NIPPO SIX DEPARTURE, YATOJI TWO DEPARTURE, NOBEOKA TRANSITION).

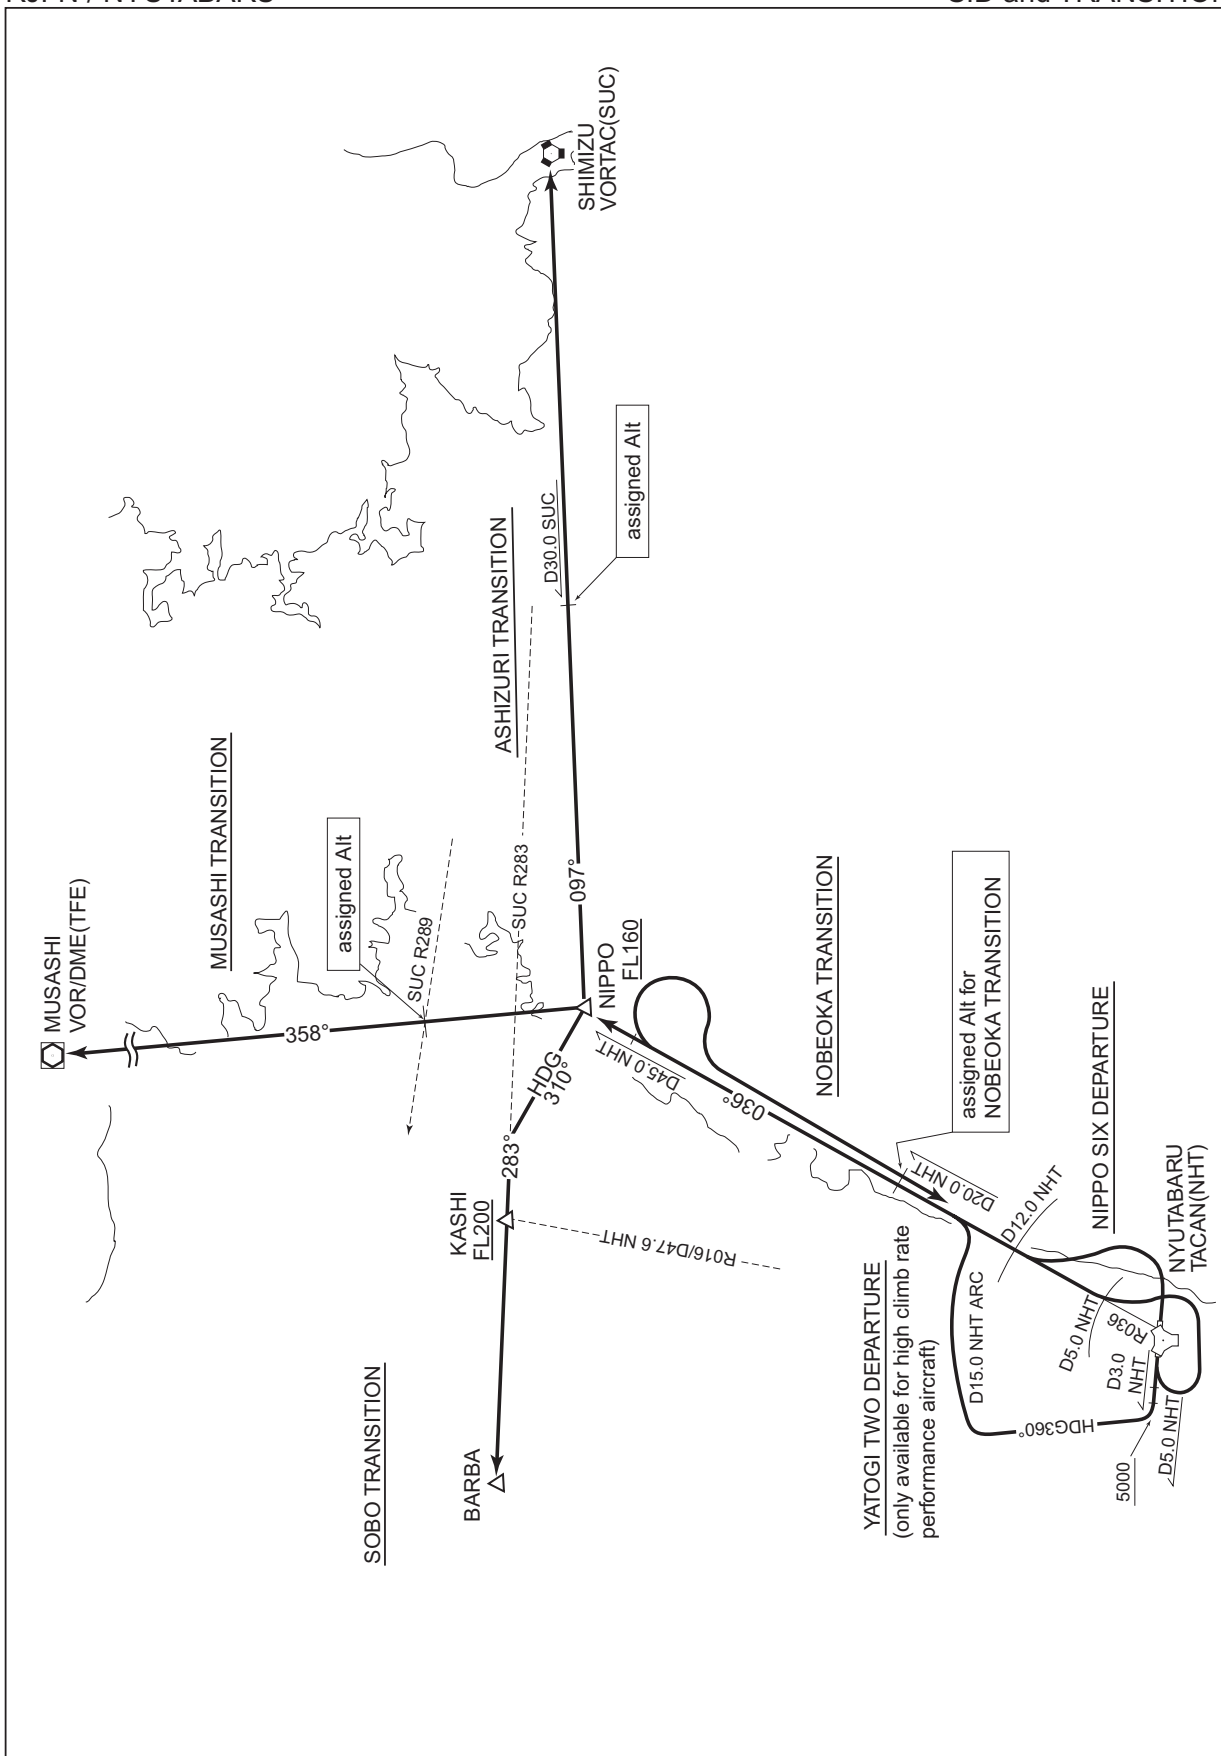

STANDARD DEPARTURE CHART-INSTRUMENT

RJFN / NYUTABARU

SID

TENSO THREE DEPARTURE


RWY 10 : Turn left within NHT 3.0DME to intercept NHT R066....

RWY 28 : Turn left within NHT 3.0DME to intercept NHT R066 within NHT 5.0DME....

...Climb via NHT R066 to NHT 30.0DME, then turn right via NHT 35.0DME clockwise ARC to intercept and proceed via NHT R086 to TENSO.

Cross NHT R076 at FL150 or specified altitude.

CHANGE : PROC renamed. PROC course.

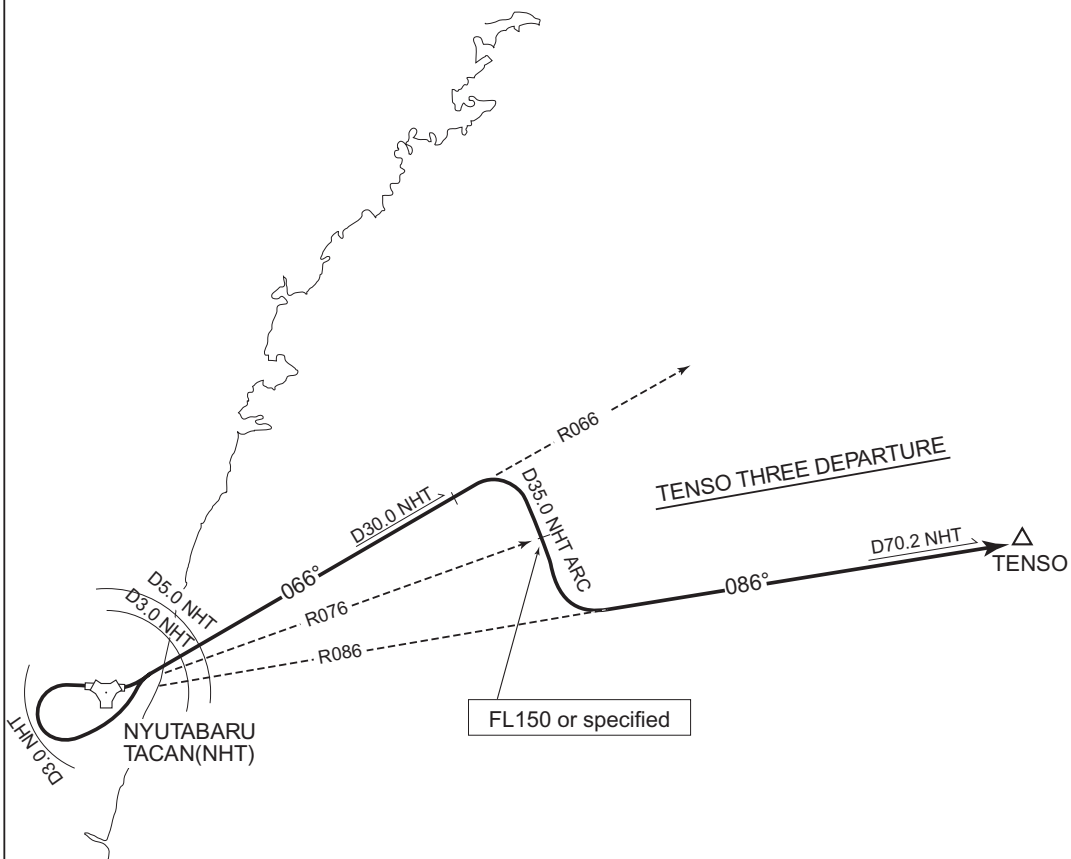


## STANDARD ARRIVAL CHART-INSTRUMENT

RJFN / NYUTABARU


STAR

TENSO ARRIVAL

From over TENSO, proceed via NHT R086 to NHT 40.0DME, then turn left to intercept and proceed via NHT R091 to HYUGA.

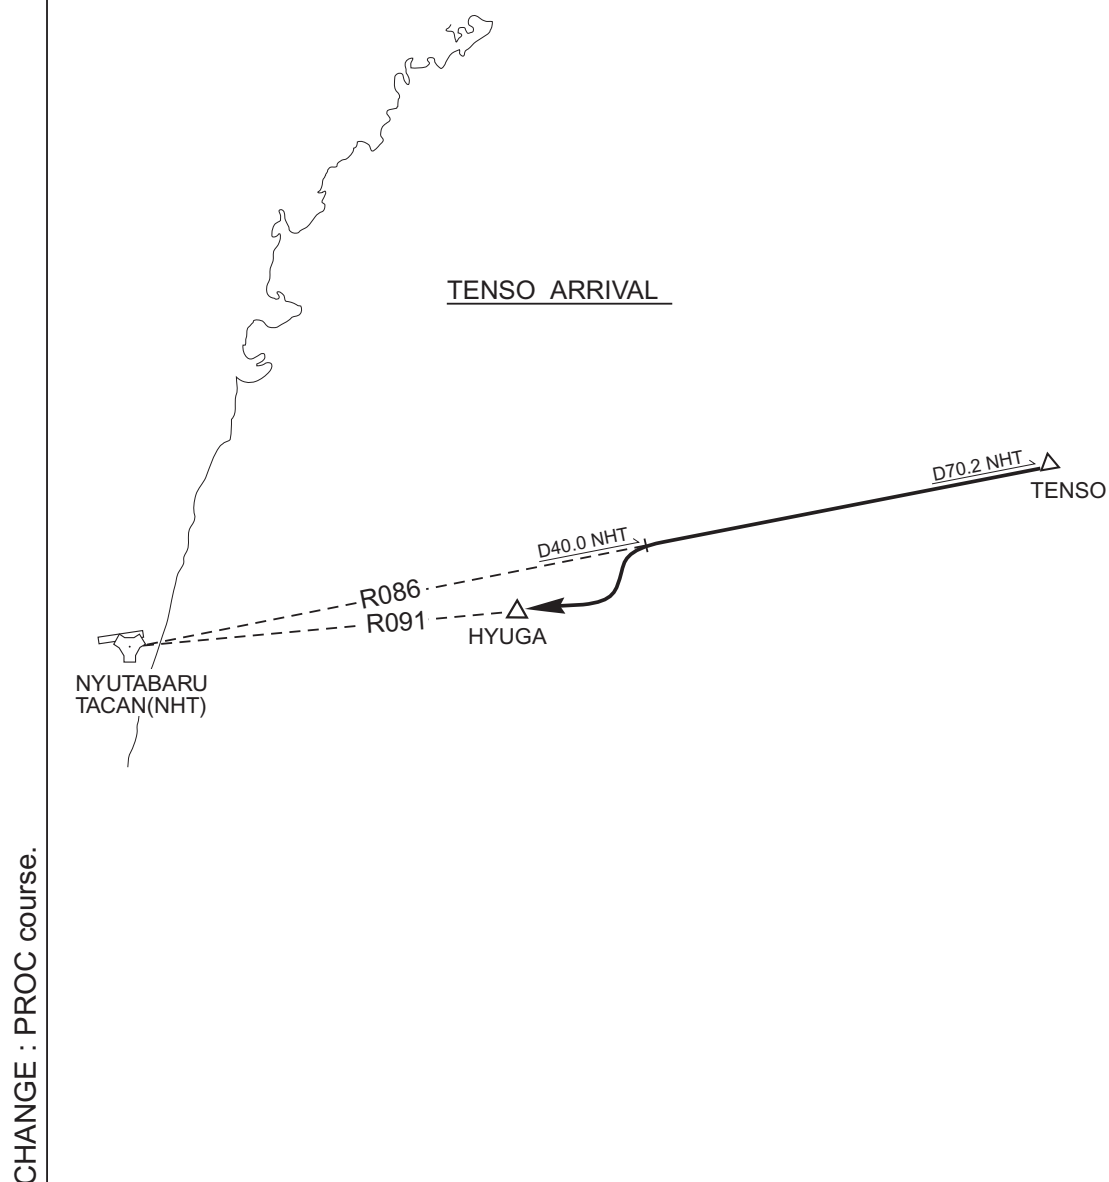


INSTRUMENT APPROACH CHART

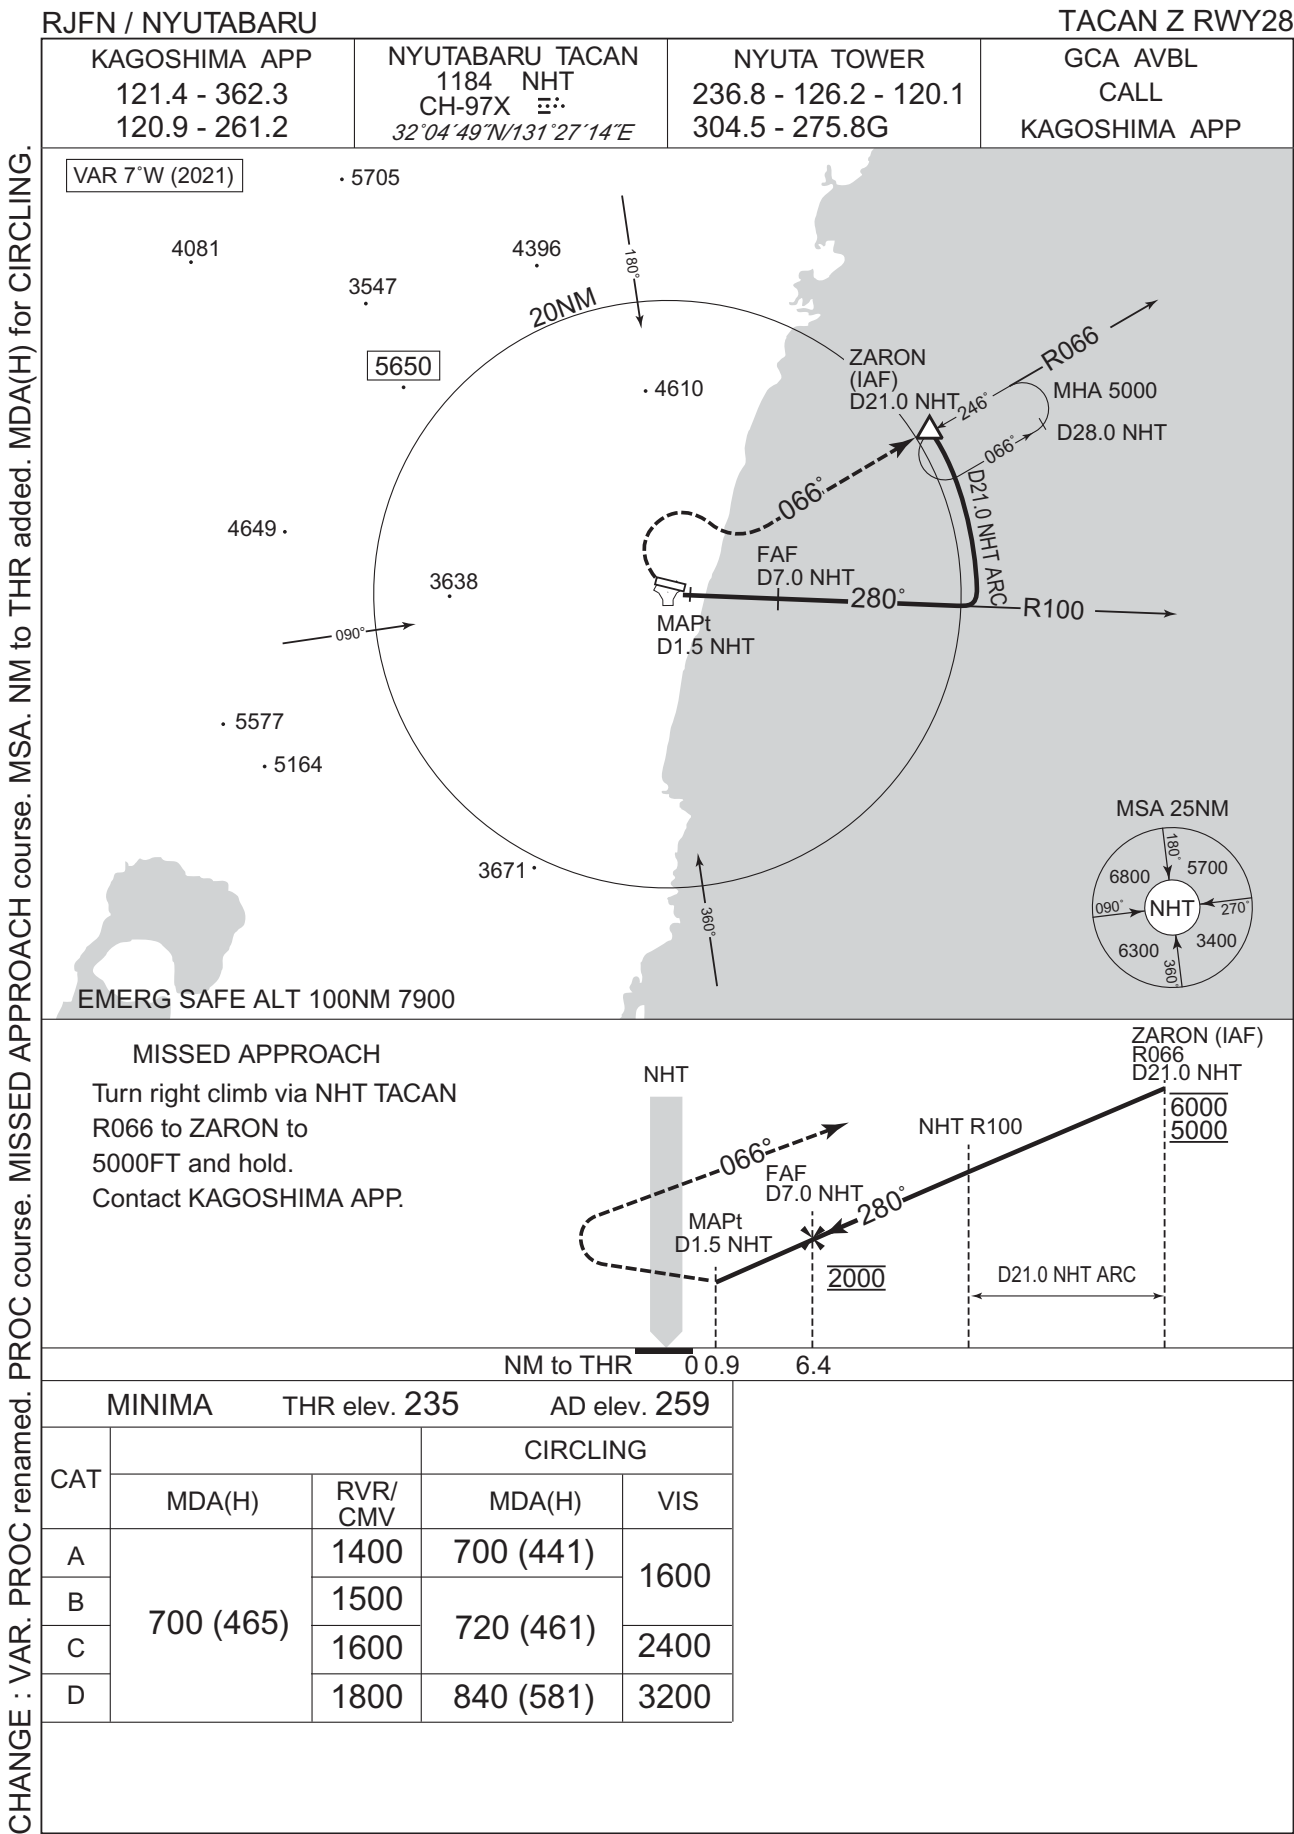

CHANGE : VAR. PROC renamed. PROC course. MISSED APPROACH course. MSA. NM to THR added. MDA(H) for CIRCLING.

INSTRUMENT APPROACH CHART

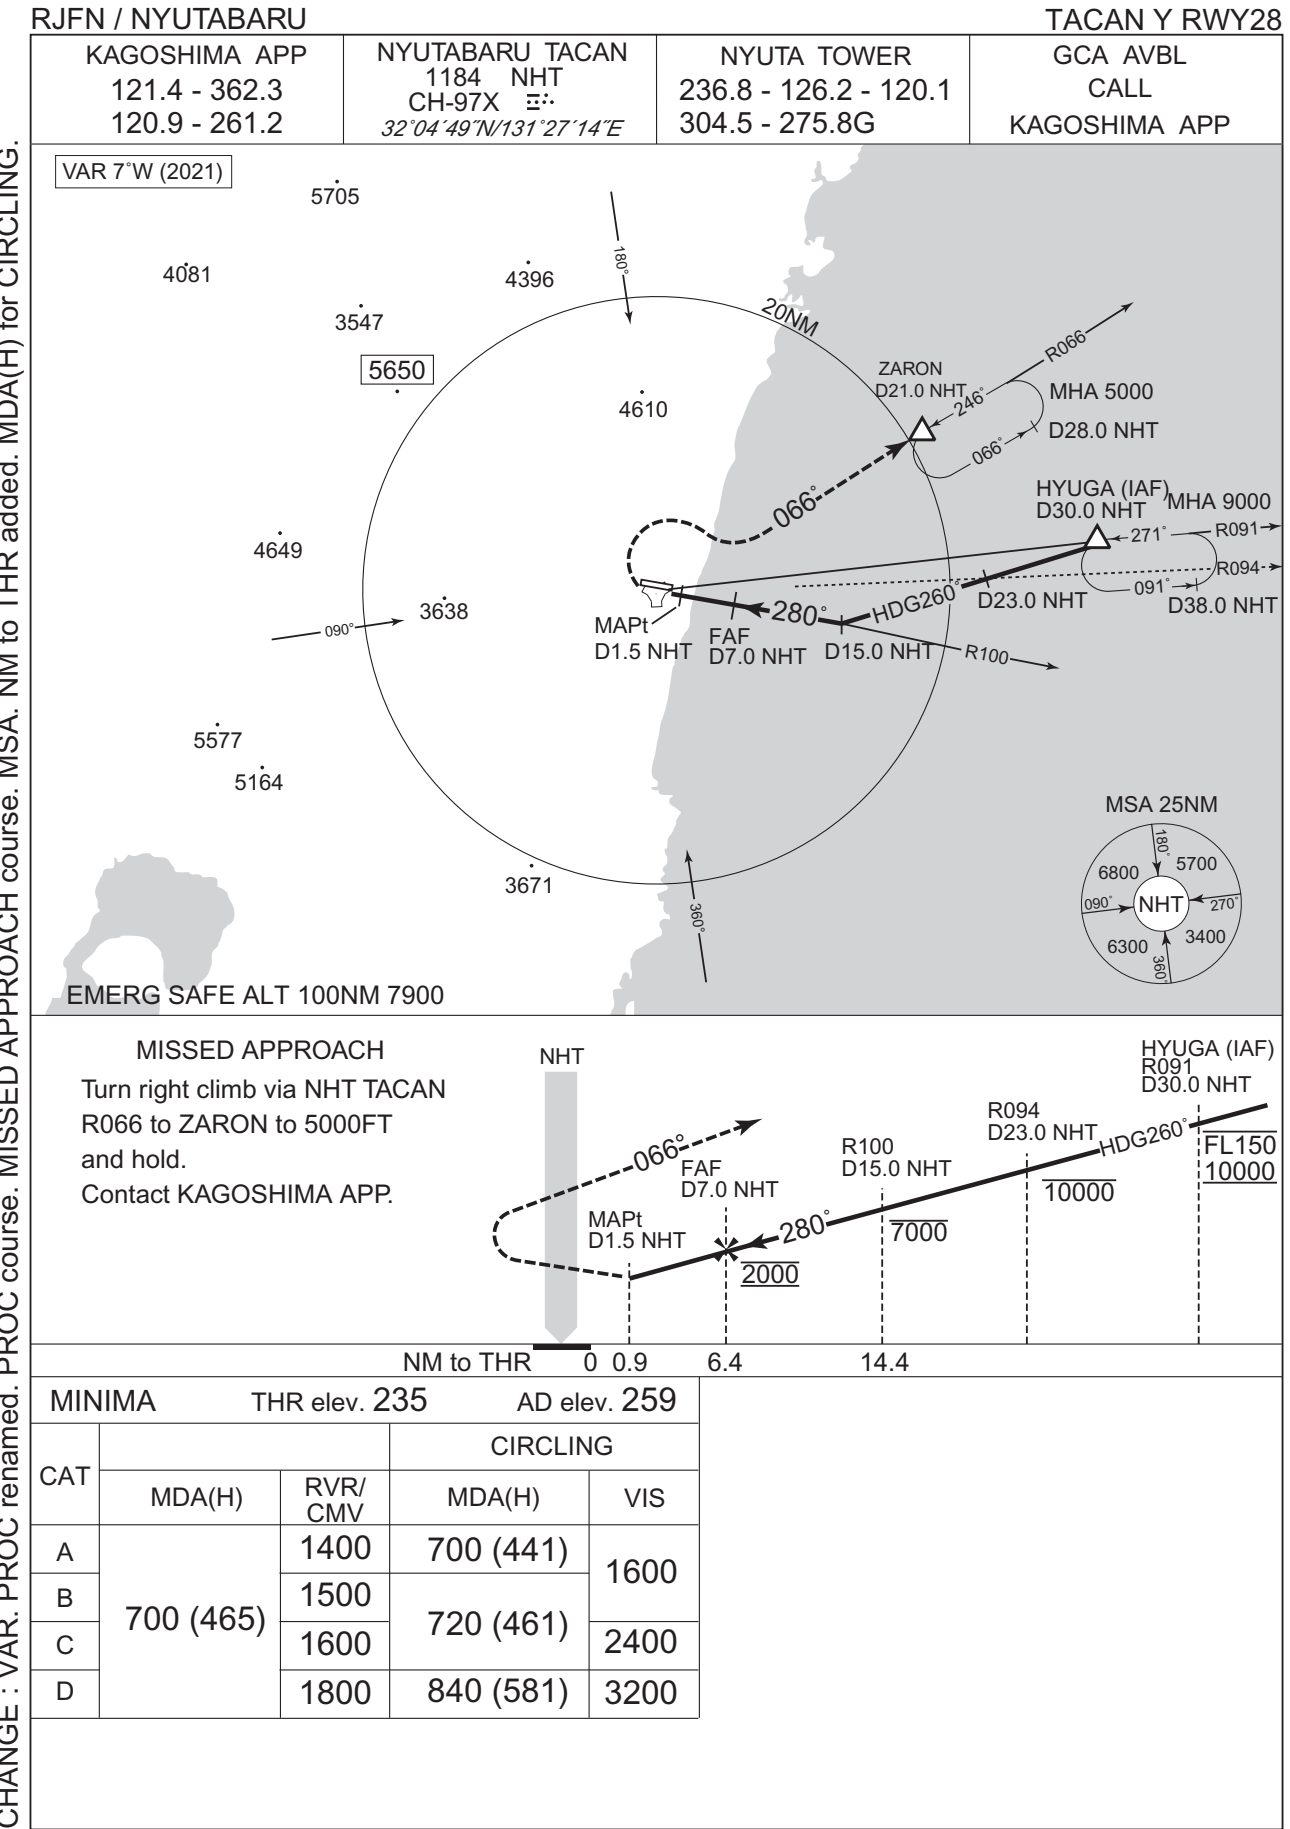



INSTRUMENT APPROACH CHART

CHANGE : VAR. PROC renamed. EQPT REQUIRED added. PROC course. MISSED APPROACH course. MSA.  
NM to THR added. MDA(H) for CIRCLING.



## INSTRUMENT APPROACH CHART


RJFN / NYUTABARU

ILS Y or LOC Y RWY28



## MISSED APPROACH

Climb to 700FT, turn right  
climb via NHT TACAN R066 to  
ZARON to 5000FT and hold.  
Contact KAGOSHIMA APP.

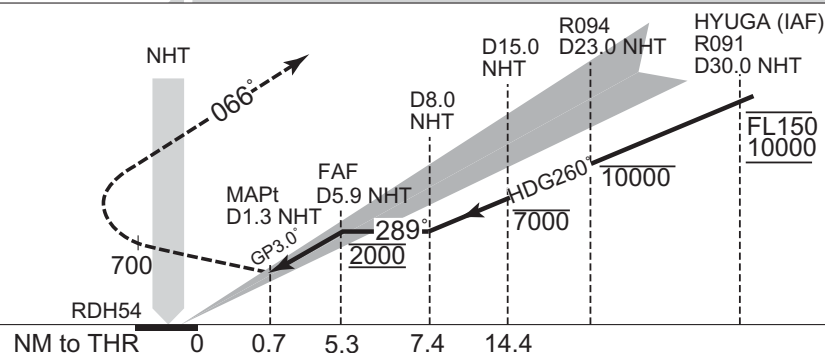

MINIMA		THR elev. 235		AD elev. 259		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	435 (200)	750	660 (425)	1200	700 (441)	1600
B				1300	720 (461)	
C				1400		2400
D						

CHANGE : VAR. PROC renamed. EQPT REQUIRED added. PROC course. MISSED APPROACH course. MSA.  
NM to THR added. MDA(H) for CIRCLING.

INSTRUMENT APPROACH CHART

