


CHANGE : Description of strength of pavement.

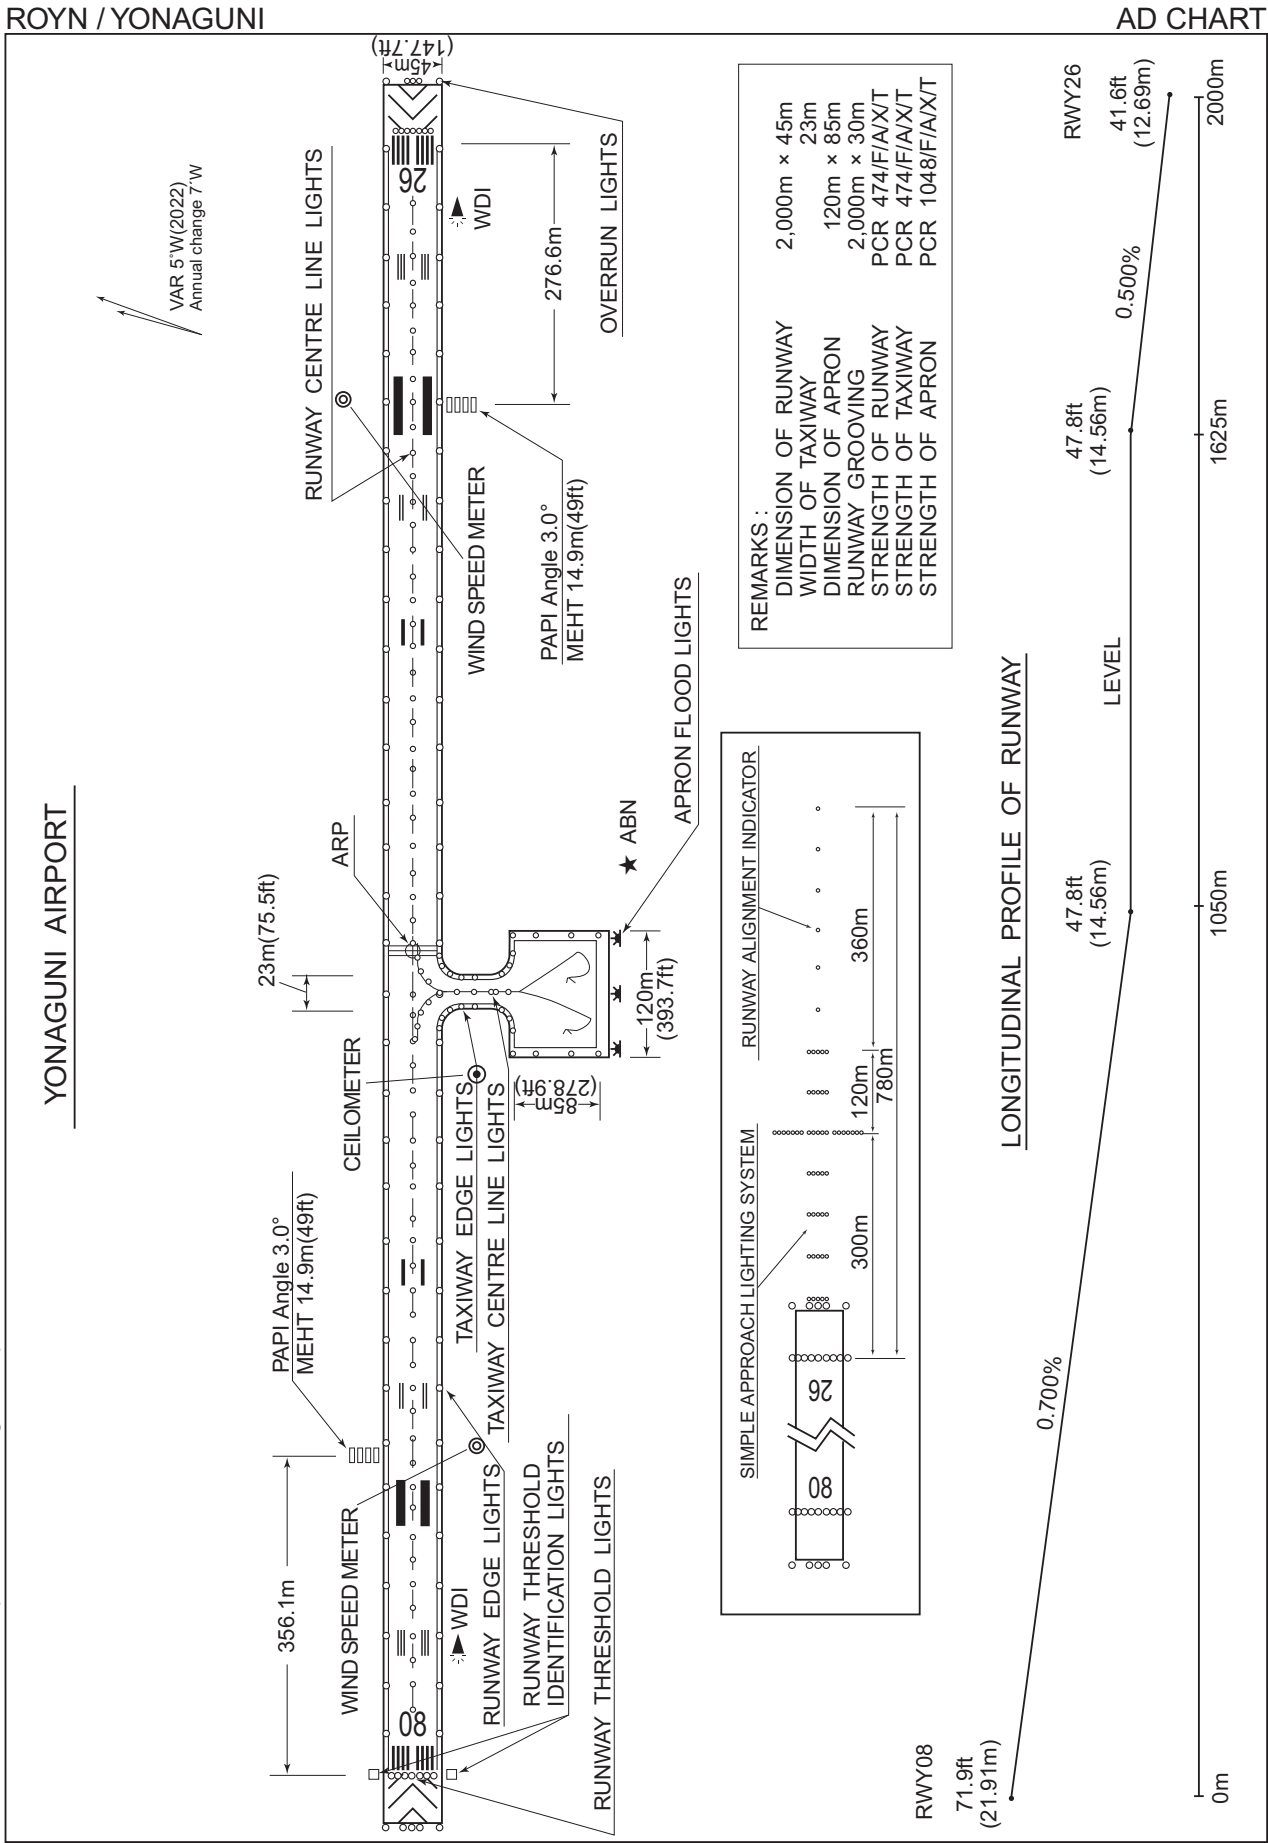

STANDARD DEPARTURE CHART -INSTRUMENT

ROYN / YONAGUNI

SID

TAKZO TWO DEPARTURE

RWY 08 : Climb RWY HDG until 3NM from RWY end/YNE 2.7DME, turn left,...

RWY 26 : Climb RWY HDG until 700FT, turn right,...

...climb via YNE R022 to TAKZO.

Note RWY08 : 6.7% climb gradient required up to 700FT.

OBST ALT 89FT located at 0.1NM 126° FM end of RWY08.

RWY26 : No turn before DER.

In case of climbing with 9.0 % gradient up to 900FT, another TKOF WX MINIMA is applicable.

OBST ALT 358FT located at 0.6NM 236° FM end of RWY26,

OBST ALT 912FT located at 2.1NM 115° FM end of RWY26.

ABASA TWO DEPARTURE

RWY 08 : Climb RWY HDG until 3NM from RWY end/YNE 2.7DME, turn right,...

RWY 26 : Climb RWY HDG until 700FT, turn right,...

...climb via YNE R101 to ABASA.

Note RWY08 : 6.7% climb gradient required up to 700FT.

OBST ALT 89FT located at 0.1NM 126° FM end of RWY08.

RWY26 : No turn before DER.

In case of climbing with 9.0 % gradient up to 900FT, another TKOF WX MINIMA is applicable.


OBST ALT 358FT located at 0.6NM 236° FM end of RWY26,

OBST ALT 912FT located at 2.1NM 115° FM end of RWY26.



CHANGE : PROC renamed. Radial FM YNE. Note RWY08 added. OBST chart added.

STANDARD DEPARTURE CHART -INSTRUMENT

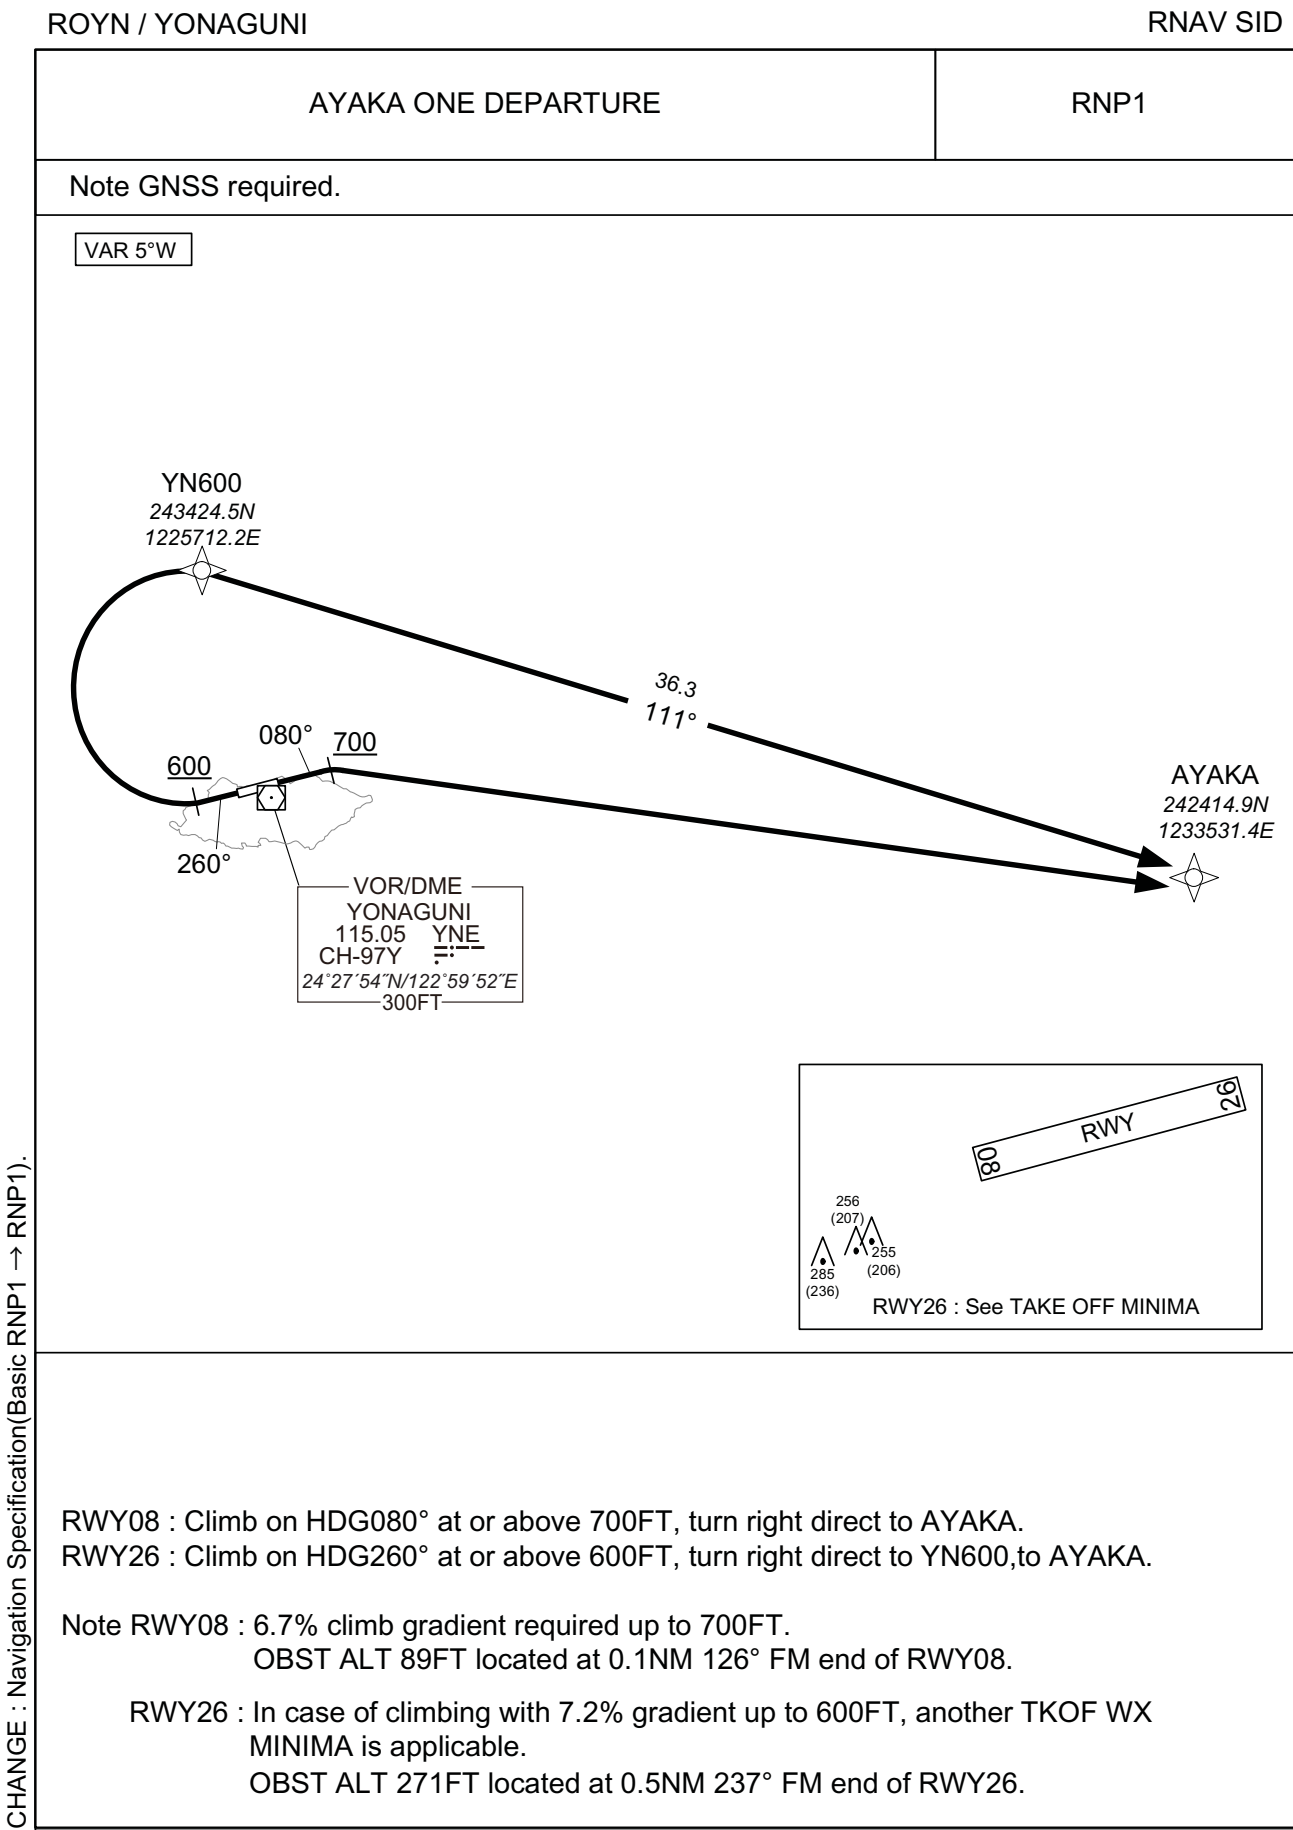

STANDARD DEPARTURE CHART -INSTRUMENT

ROYN / YONAGUNI

RNAV SID

AYAKA ONE DEPARTURE

RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	080 (075.2)	-4.6	-	-	+700	-	-	RNP1
002	DF	AYAKA	-	-	-4.6	-	R	-	-	-	RNP1

RWY26


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	260 (255.2)	-4.6	-	-	+600	-	-	RNP1
002	DF	YN600	-	-	-4.6	-	R	-	-	-	RNP1
003	TF	AYAKA	-	111 (106.1)	-4.6	36.3	-	-	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD ARRIVAL CHART-INSTRUMENT

ROYN / YONAGUNI


RNAV STAR RWY26

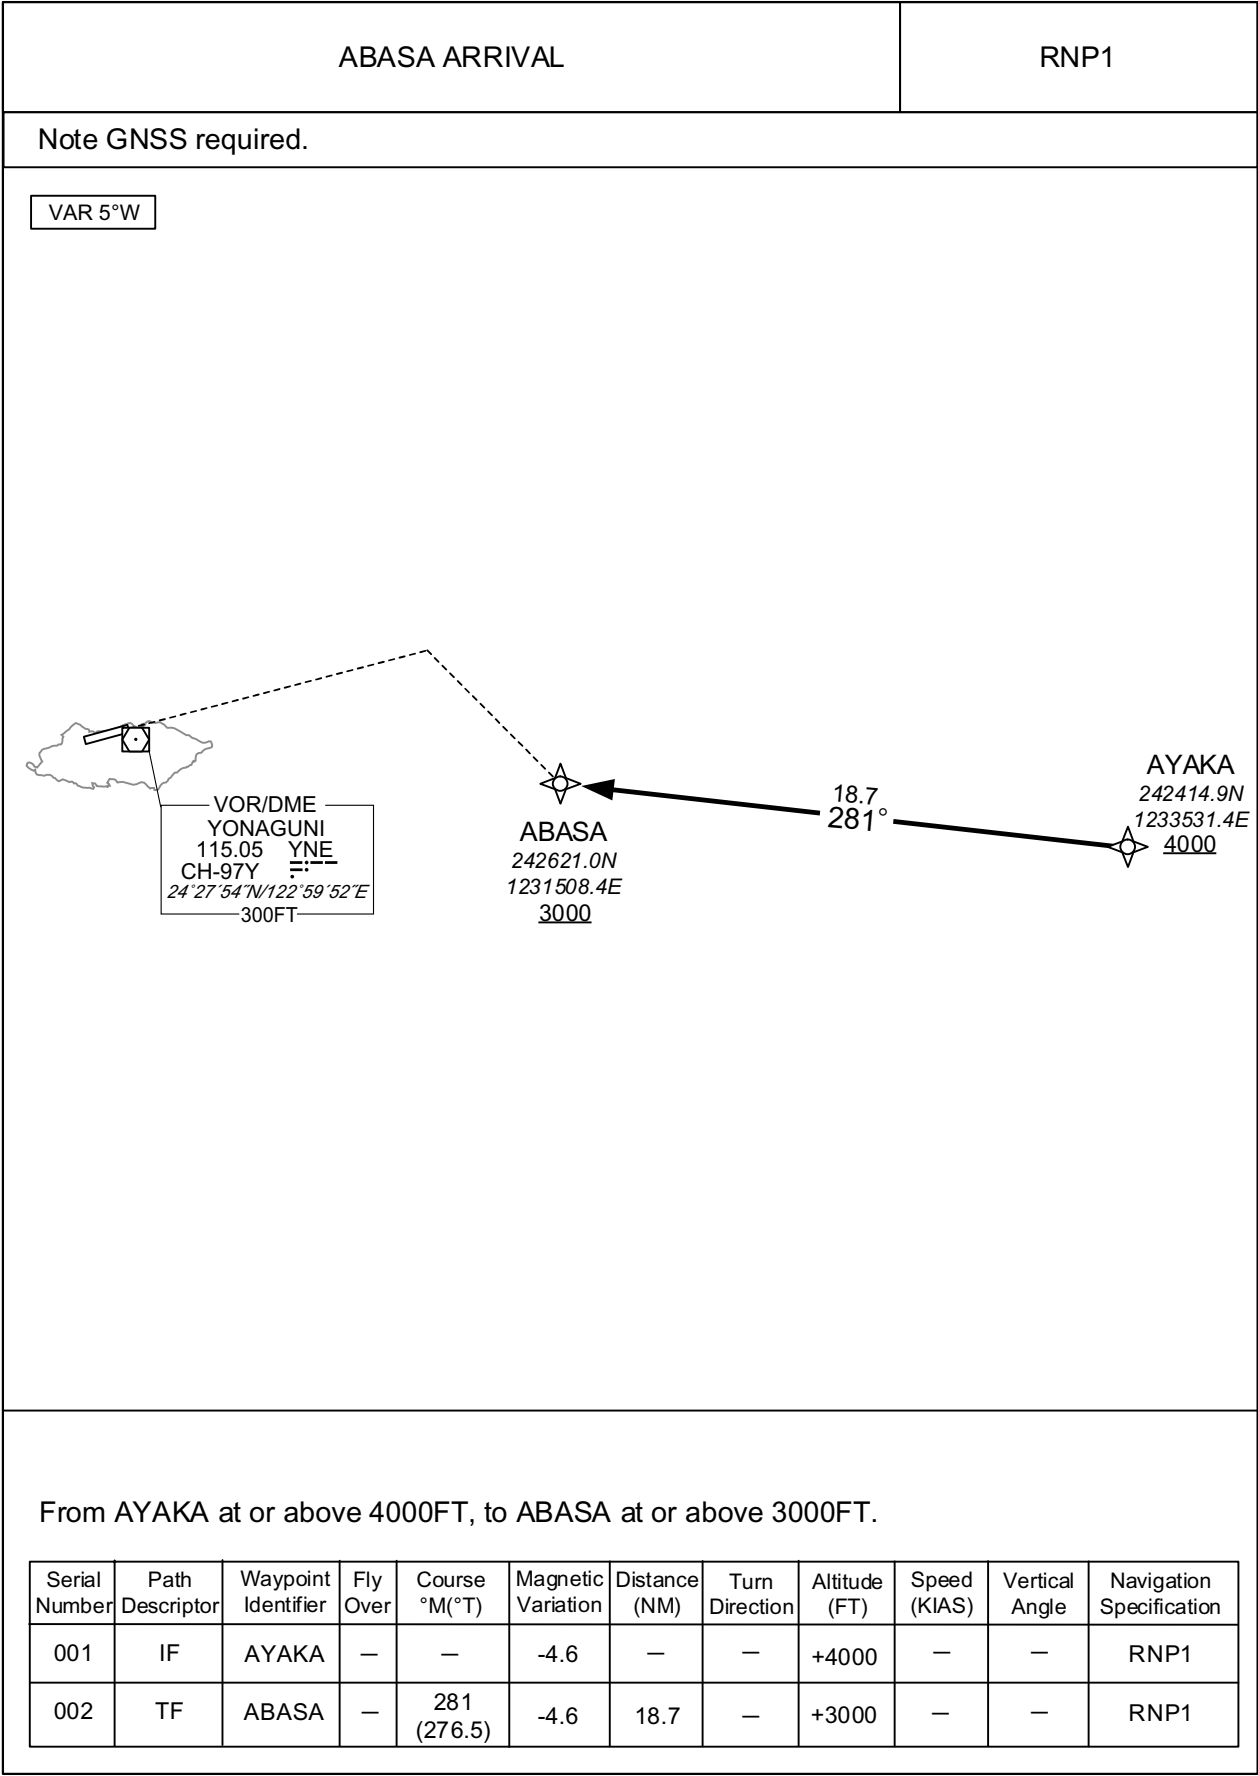

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

**INTENTIONALLY LEFT BLANK**

INSTRUMENT APPROACH CHART

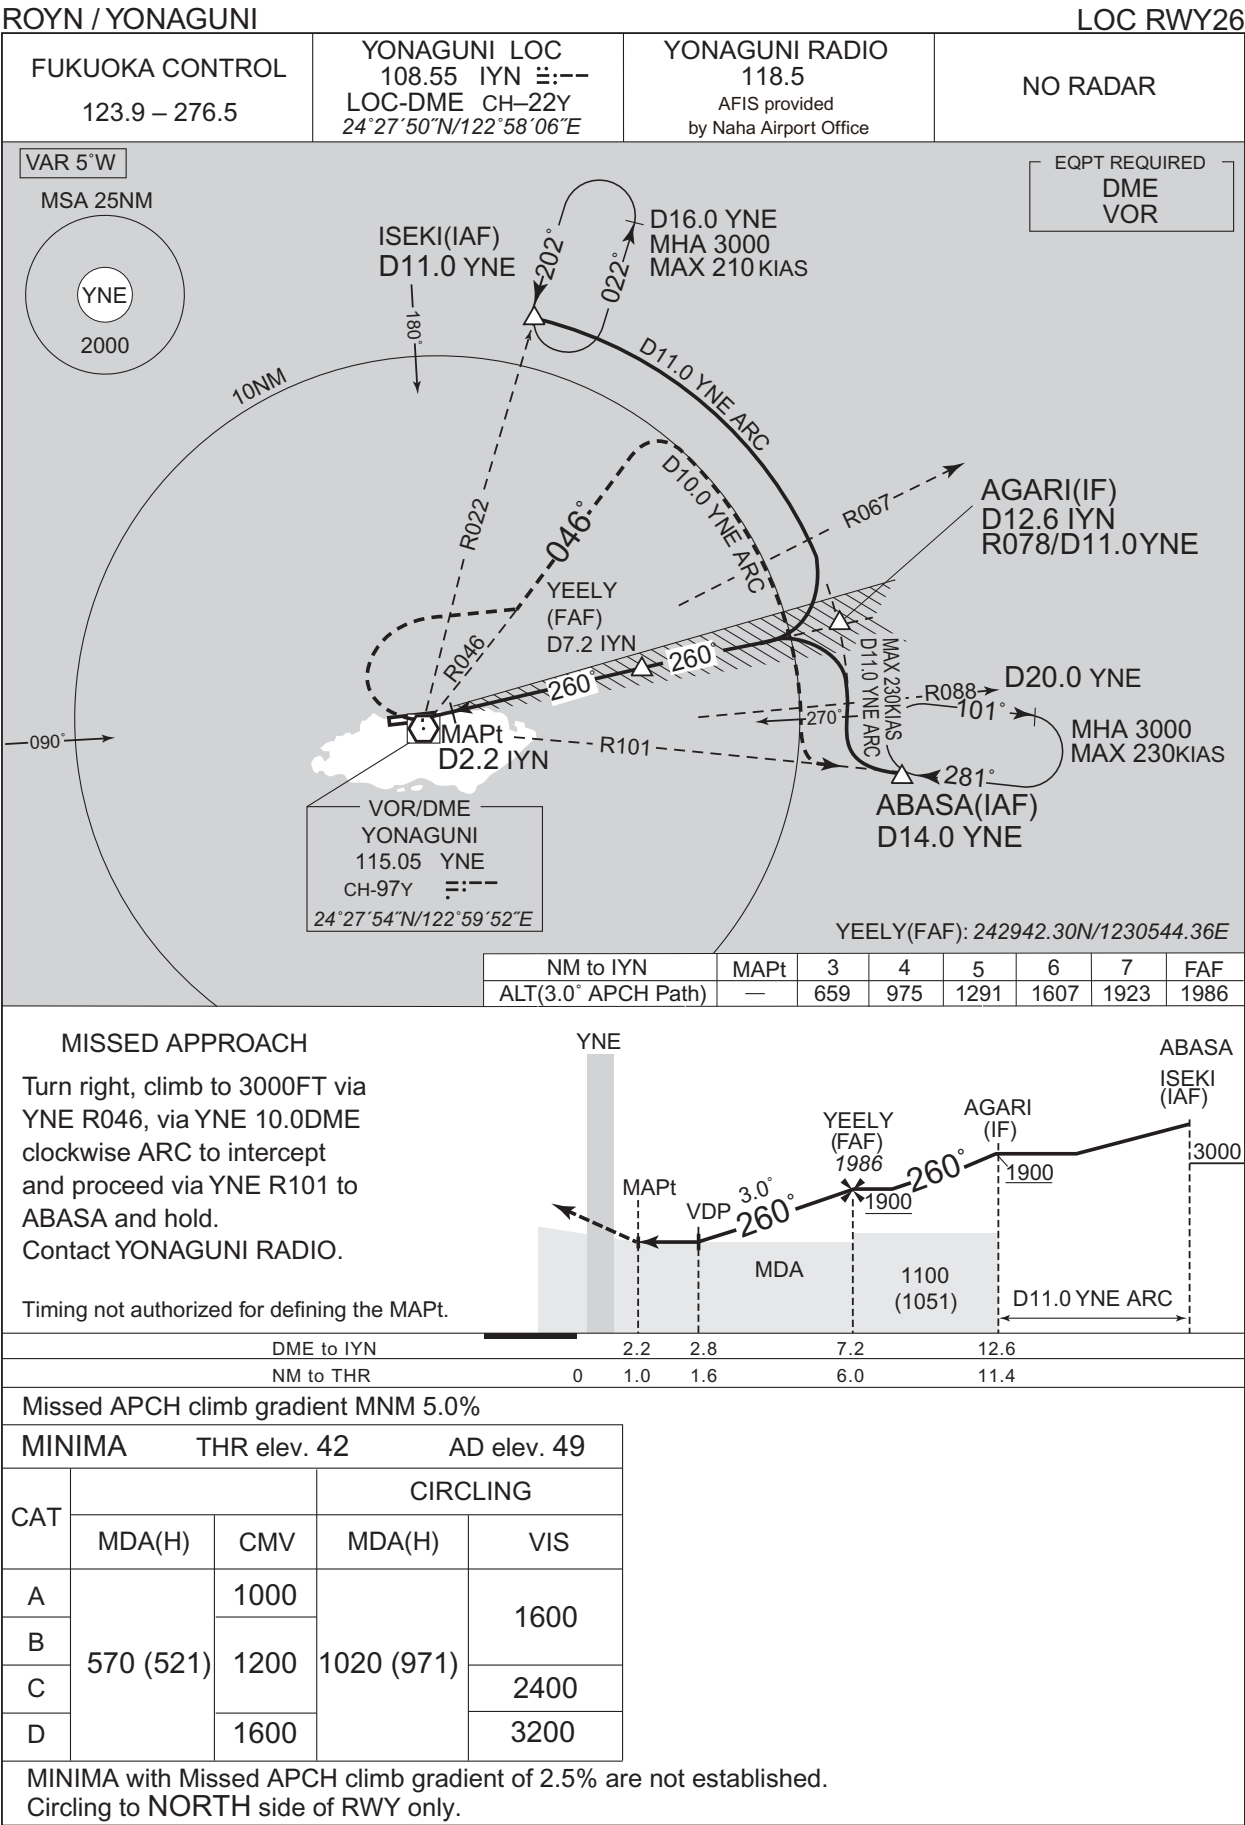

## INSTRUMENT APPROACH CHART

ROYN / YONAGUNI


VOR RWY26



## MISSED APPROACH

Turn right, climb to 3000FT via HDG 131° to intercept and proceed via YNE R101 to ABASA and hold.  
Contact YONAGUNI RADIO.

Timing not authorized for defining the MAPt.

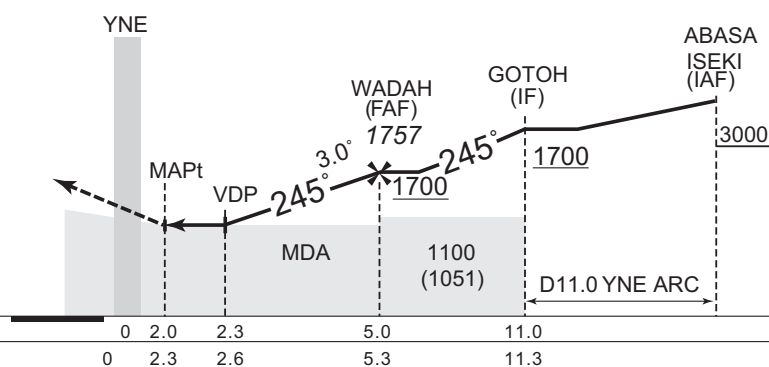

Missed APCH climb gradient MNM 5.0%

MINIMA THR elev. 42 AD elev. 49

CAT			CIRCLING	
	MDA(H)	CMV	MDA(H)	VIS
A	880 (831)	1200	1020 (971)	1600
B		1400		2400
C		1800		3200
D				

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling to NORTH side of RWY only.


CHANGE : Description of VAR.



INSTRUMENT APPROACH CHART

ROYN/YONAGUNI

RNP RWY26

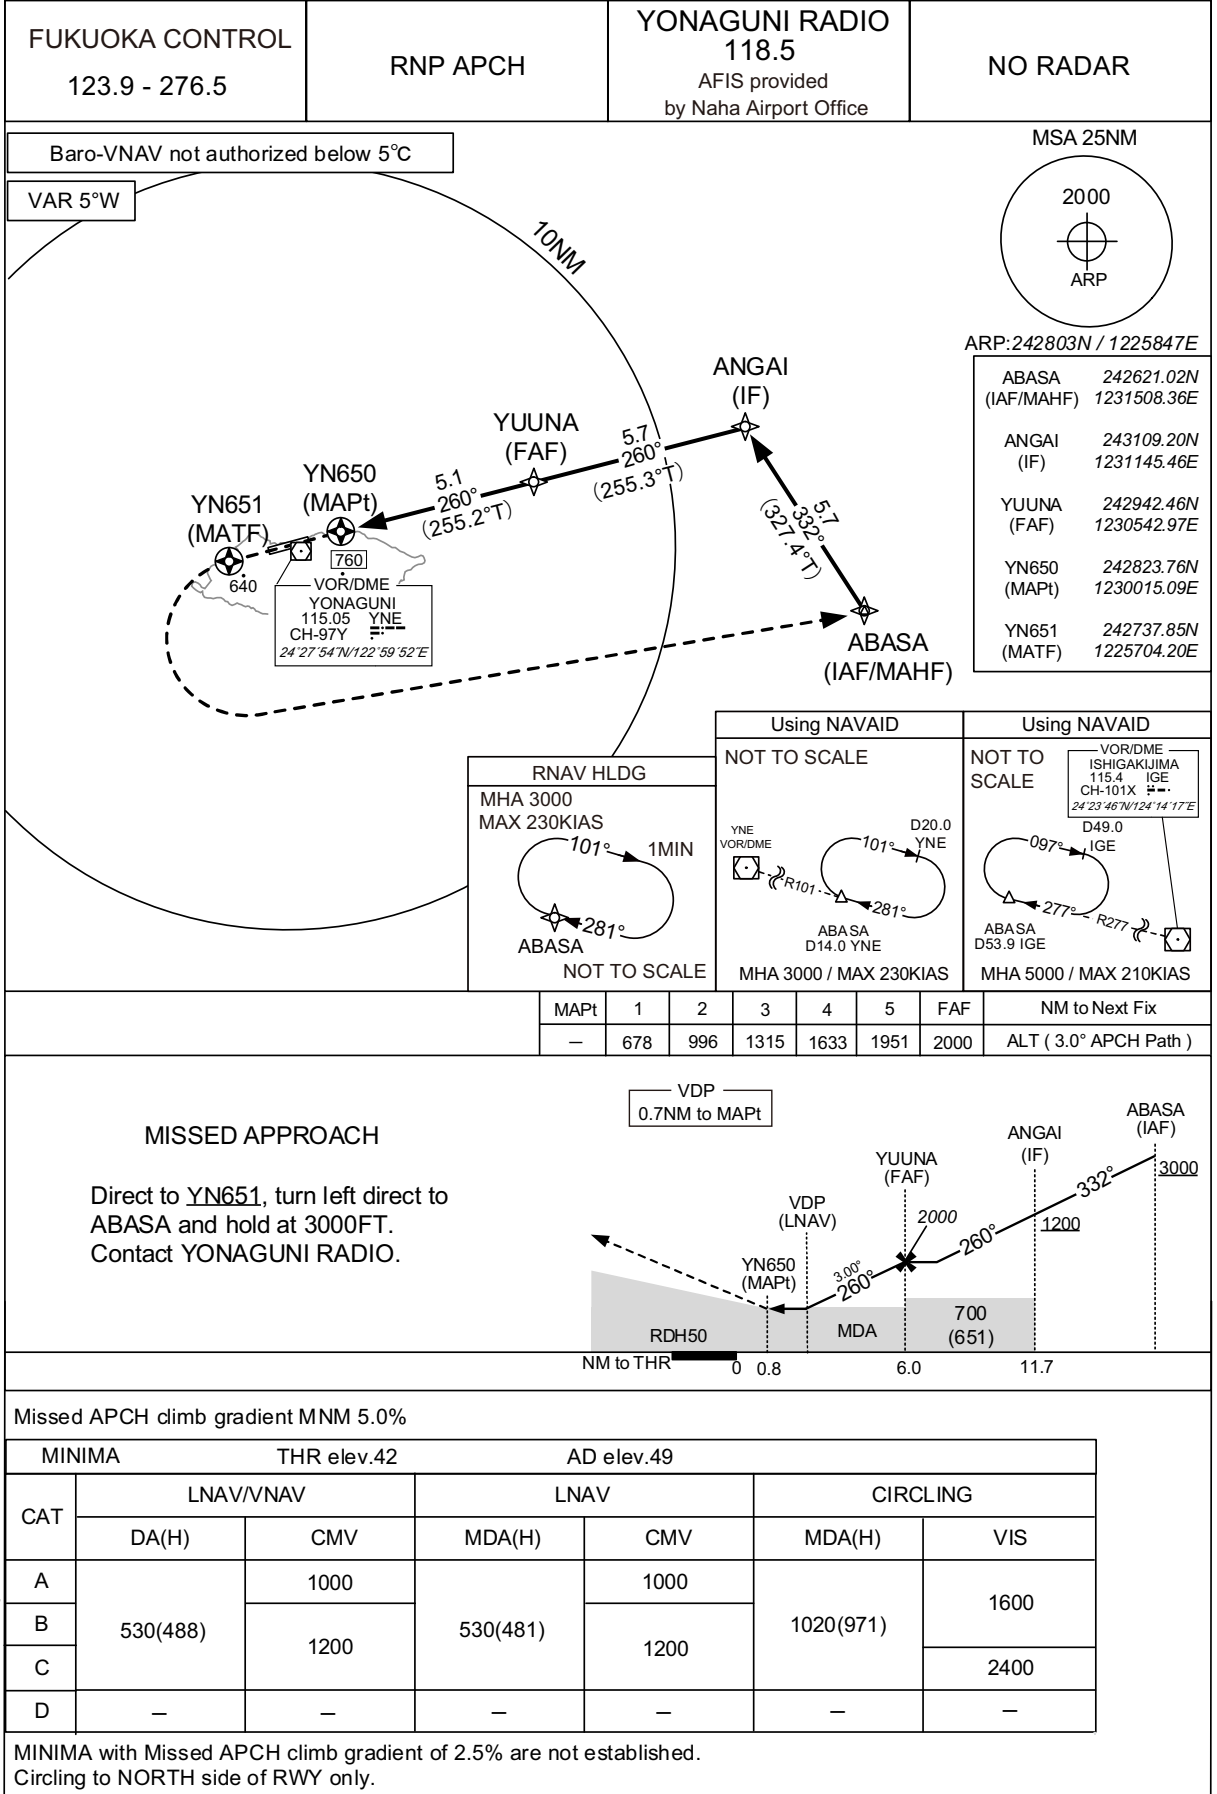

CHANGE : Description of VAR.

**INTENTIONALLY LEFT BLANK**

ROYN / YONAGUNI

Visual REP



CHANGE : Map updated. BRG/DIST from ARP.

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
10NM E	090°T / 10.0NM	海上 Over the sea

ROYN / YONAGUNI

Minimum Vectoring Altitude CHART

