

STANDARD DEPARTURE CHART - INSTRUMENT

RJFA / ASHIYA

SID

CHANGE : PROC renamed(MISHIMA THREE DEPARTURE). PROC course(MISHIMA THREE DEPARTURE).

ASHIYA REVERSAL TWO DEPARTURE

RWY 12 : Turn left,....

RWY 30 : Turn right,....

....climb via AHT R030, turn left to intercept and proceed via AHT R030 to AHT TACAN within AHT 35.0DME.

Cross AHT TACAN at assigned altitude.

Note : When take off RWY12 : climb gradient 300FT/NM until 1000FT.

ASHIYA EAST FIVE DEPARTURE

RWY 12 : Turn left,....

RWY 30 : Turn right,....

....climb via AHT R030 to AHT R030/23.0DME, turn right, proceed via IWT R287 to IWT TACAN.

Cross AHT R030/23.0DME at or above 8000FT, cross IWT R287 /56.0DME at or above FL170 or specified altitude and cross IWT R287 /41.0DME at assigned or specified altitude.

Note : When take off RWY12 : climb gradient 300FT/NM until 1000FT.

MISHIMA THREE DEPARTURE

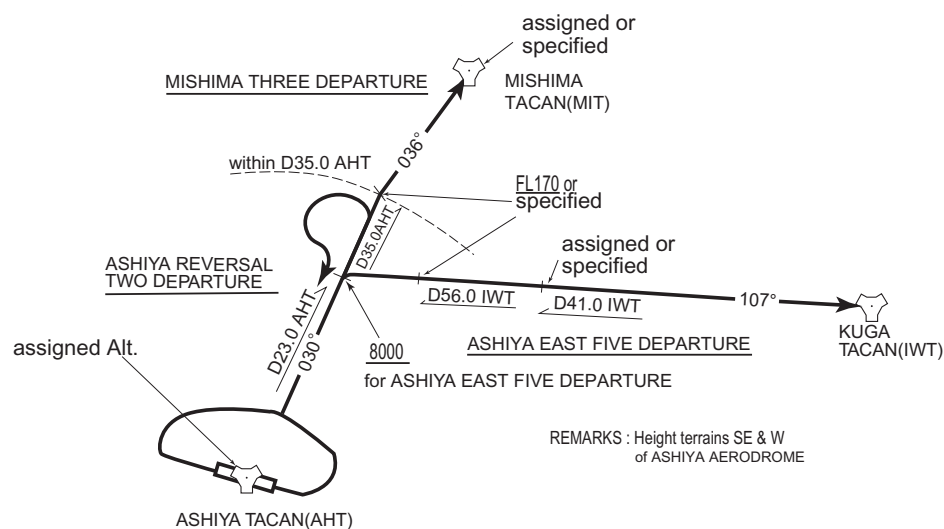
RWY 12 : Turn left,....

RWY 30 : Turn right,....

....climb via AHT R030 to AHT R030/35.0DME, turn right, proceed via MIT R216 to MIT TACAN.

Cross AHT R030/35.0DME at or above FL170 or specified altitude, cross MIT TACAN at assigned or specified altitude.

Note : When take off RWY12 : climb gradient 300FT/NM until 1000FT.



INTENTIONALLY LEFT BLANK

STANDARD ARRIVAL CHART - INSTRUMENT

RJFA / ASHIYA

STAR

KANMO ARRIVAL

From over KANMO, proceed via AHT R110 to AHT 12.0DME, then turn right via AHT 12.0DME counterclockwise ARC to HEIWA .

Cross KANMO at or above 5000FT or altitude specified by ATC, cross HEIWA at or above 5000FT.



KANDA ARRIVAL

From over KANDA, proceed via DGC R082 to intercept and proceed via AHT 15.0DME counterclockwise ARC to FUTAO .

Cross KANDA at or above 12000FT or altitude specified by ATC and cross FUTAO at or above 12000FT.



CHANGE : KANMO ARRIVAL, Editorial.

INTENTIONALLY LEFT BLANK

INSTRUMENT APPROACH CHART



CHANGE: ATC callsign changed (FUKUOKA APP → FUKUOKA RADAR, GCA AVAILABLE CALL FUKUOKA APP → GCA AVAILABLE).
ATC FREQ changed.

INSTRUMENT APPROACH CHART

RJFA / ASHIYA

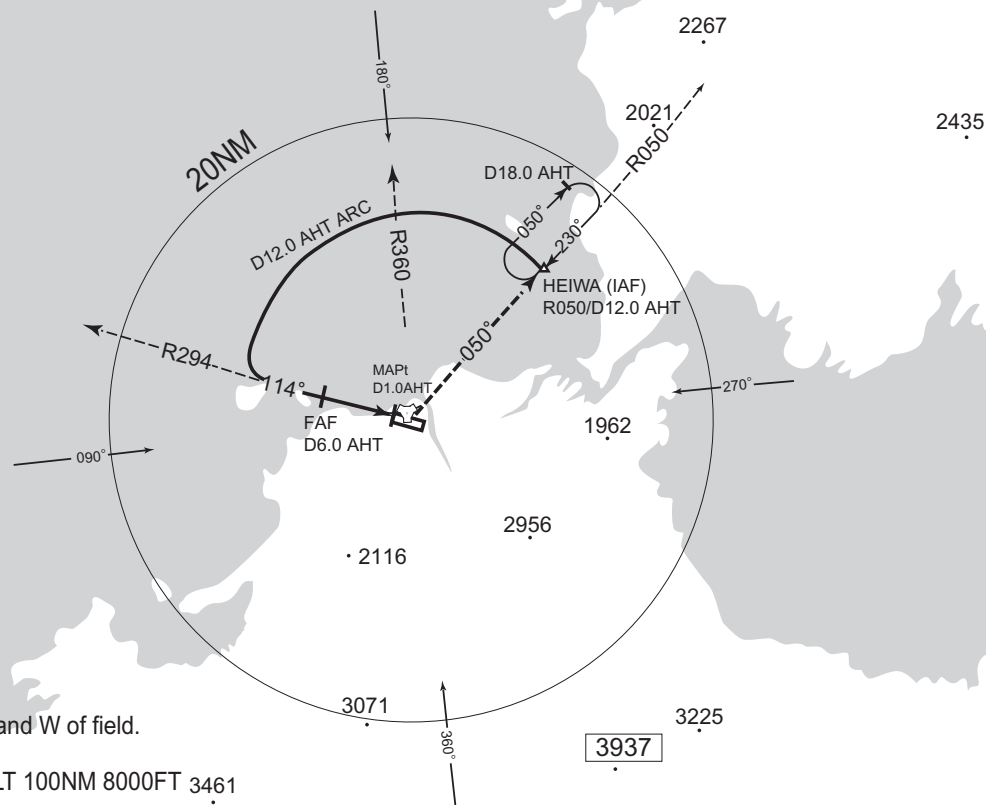

TACAN Y RWY12

FUKUOKA RADAR
279.2 - 119.7ASHIYA TACAN
984 AHT
CH-23
33°53'15"N/130°39'00"EASHIYA TOWER
236.8 - 126.2
305.7 - 275.8G

GCA AVAILABLE

VAR 8°W (2019)

MSA 25NM

HEIWA (IAF)
R050/D12.0 AHT

R360

AHT

MISSED APPROACH

Turn left, climb to 5000FT via
AHT R050 to HEIWA and hold.
Contact ASHIYA TOWER.

5000

4000

1800

1500

FAF
D6.0 AHTMAPt
D1.0 AHT

D12.0 AHT ARC

174°

CHANGE: ATC call sign changed (FUKUOKA APP → FUKUOKA RADAR, GCA AVAILABLE CALL FUKUOKA APP → GCA AVAILABLE).
ATC FREQ changed.

MINIMA

THR elev. 59

AD elev. 98

CAT	THR		CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	500 (441)	1500	540 (442)	1600
B			560 (462)	
C		1800	680 (582)	2400
D		2000		3200

RJFA / ASHIYA

LDG CHART



AERODROME LIGHTING

Aerodrome beacon : Alternating flashing
white / green

Runway edge light : white

Runway threshold light : green

Precision approach path indicator

Other lights : Blue taxiway edge lights,
Lighted wind direction,
Landing direction indicator,
Take-off target lights.