



STANDARD DEPARTURE CHART-INSTRUMENT

RJEB / MONBETSU

SID and TRANSITION

MONBETSU REVERSAL FIVE DEPARTURE

RWY14: Climb RWY HDG to 600FT, turn left HDG050°, to 2500FT turn left,...

RWY32 : Climb RWY HDG to 500FT, turn right HDG050°, to 2500FT turn right,...

...direct to MVE VOR/DME.

Cross MVE VOR/DME at or above 4000FT.

Note RWY14: 5.0% climb gradient required up to 900FT.


OBST ALT 591FT located at 2.7NM 156° FM end of RWY14.

RWY32: 4.3% climb gradient required up to 800FT.


OBST ALT 657FT located at 3.5NM 316° FM end of RWY32.

LUBEK TRANSITION

From over MVE VOR/DME, proceed via MVE R236 to LUBEK. Cross LUBEK at or above 8000FT.

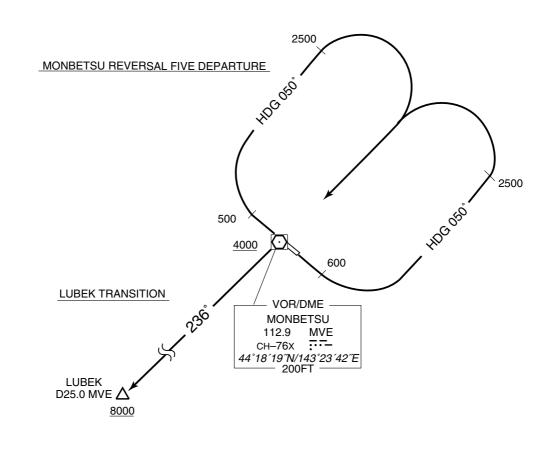

STANDARD DEPARTURE CHART-INSTRUMENT

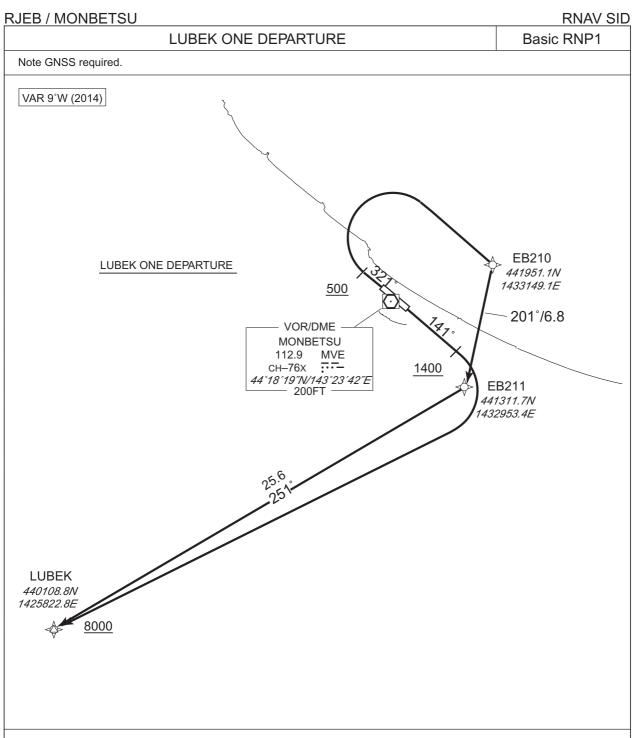

LUBEK ONE DEPARTURE

RWY14: Climb on HDG141° at or above 1400FT, turn right direct to LUBEK at or above 8000FT.

RWY32 : Climb on HDG321 $^{\circ}$ at or above 500FT, turn right direct to EB210, to EB211,

to LUBEK at or above 8000FT.

Note RWY14: 5.0% climb gradient required up to 1400FT.

OBST ALT 1182FT located at 2.9NM 172° FM end of RWY14.

RWY32: 5.0% climb gradient required up to 700FT.

OBST ALT 657FT located at 3.4NM 318° FM end of RWY32.

STANDARD DEPARTURE CHART-INSTRUMENT

RJEB / MONBETSU RNAV SID


LUBEK ONE DEPARTURE


RWY14

Serial Number	Path Descriptor	Waypoint Identifier			_		Turn Direction		•		Navigation Specification
001	VA	_	_	141 (132.0)	-9.2	_	_	+1400	_	_	Basic RNP1
002	DF	LUBEK	_	_	-9.2	_	R	+8000	_	_	Basic RNP1

RWY32

Seria Numb	l Path er Descriptor	Waypoint Identifier	, ,		Magnetic Variation		Turn Direction				Navigation Specification
001	VA	_	_	321 (312.0)	-9.2	_	_	+500	-	_	Basic RNP1
002	DF	EB210	_	_	-9.2	_	R	_	-	_	Basic RNP1
003	TF	EB211	_	201 (191.7)	-9.2	6.8	_	_	_	_	Basic RNP1
004	TF	LUBEK	_	251 (242.1)	-9.2	25.6	_	+8000	_	_	Basic RNP1

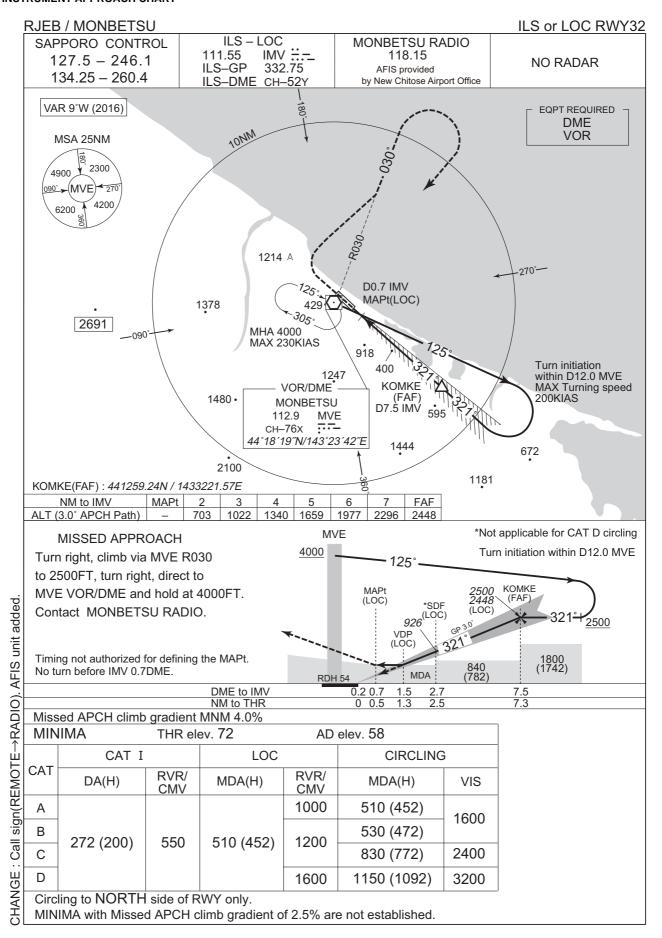

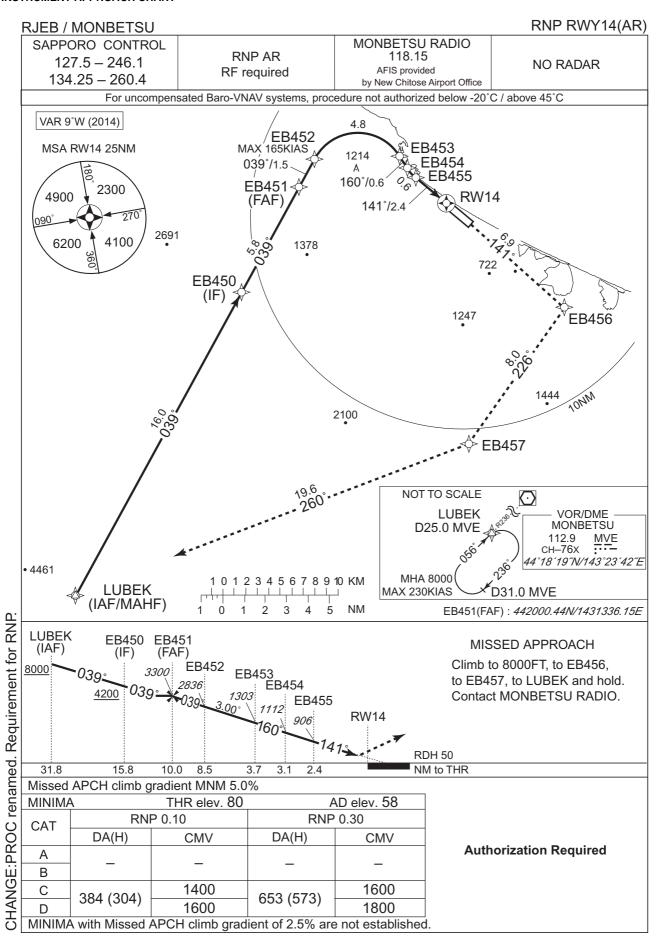

RJEB / MONBETSU


RNP RWY14(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	LUBEK	_	_	-9.2	_	_	+8000	_	-	_
002	TF	EB450	_	039 (030.0)	-9.2	16.0	_	+4200	_	1	1.0
003	TF	EB451	_	039 (030.1)	-9.2	5.8	_	3300	_	ı	1.0
004	TF	EB452	_	039 (030.2)	-9.2	1.5	_	2836	-165	-3.00	0.10 0.30
005	RF Center: EBRF1 r=2.30NM	EB453	-	-	-9.2	4.8	R	1303	_	-3.00	0.10 0.30
006	TF	EB454	_	160 (150.4)	-9.2	0.6	_	1112	_	-3.00	0.10 0.30
007	RF Center: EBRF2 r=2.01NM	EB455	_	_	-9.2	0.6	L	906	_	-3.00	0.10 0.30
008	TF	RW14	Υ	141 (132.0)	-9.2	2.4	_	130	_	-3.00/50	0.10 0.30
009	TF	EB456	_	141 (132.0)	-9.2	6.9	_	_	_	_	1.0
010	TF	EB457	_	226 (216.9)	-9.2	8.0	_	_	_	_	1.0
011	TF	LUBEK	_	260 (251.0)	-9.2	19.6	_	8000	_	-	1.0

Waypoint Coordinates

П				
	Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
	LUBEK	440108.77N/1425822.82E	EBRF1	442006.33N/1431723.55E
	EB450	441459.20N/1430931.88E	EBRF2	442143.27N/1432301.39E
	EB451	442000.44N/1431336.15E		
	EB452	442115.89N/1431437.46E		
	EB453	442114.78N/1432010.52E		
	EB454	442043.51N/1432035.39E		
	EB455	442013.50N/1432109.15E		
	RW14	441835.73N/1432340.93E		
	EB456	441358.25N/1433050.46E		
	EB457	440734.71N/1432409.46E		

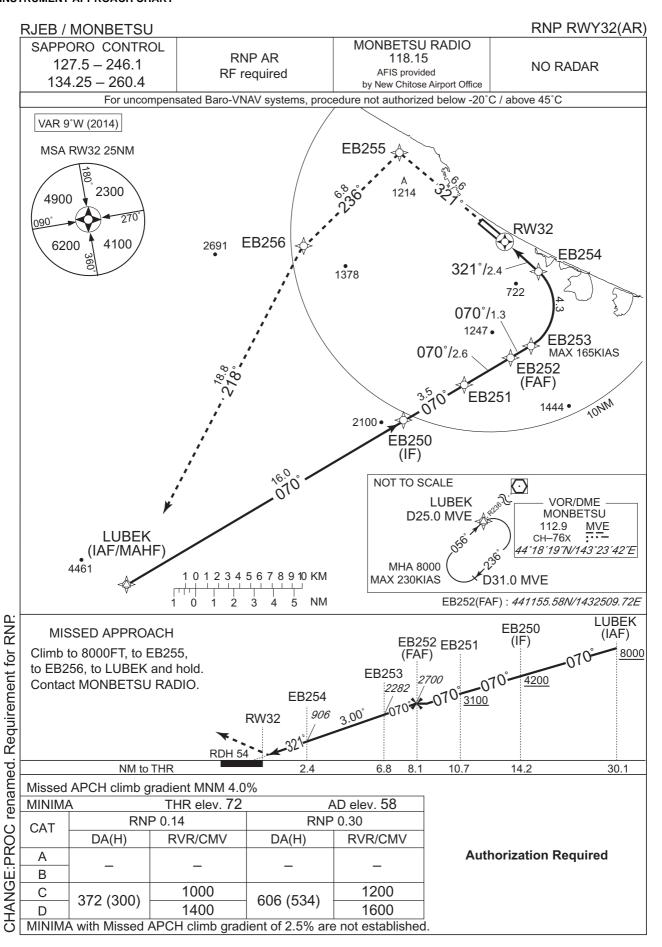

RJEB / MONBETSU


RNP RWY32(AR)

Coding Table


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	LUBEK		_	-9.2	_	-	+8000	_	_	_
002	TF	EB250	_	070 (060.6)	-9.2	16.0	_	+4200	_	_	1.0
003	TF	EB251	_	070 (060.8)	-9.2	3.5	_	+3100	_	_	1.0
004	TF	EB252	_	070 (060.8)	-9.2	2.6	_	2700	_	_	1.0
005	TF	EB253	_	070 (060.9)	-9.2	1.3	_	2282	-165	-3.00	0.14 0.30
006	RF Center: EBRF3 r=2.27NM	EB254		_	-9.2	4.3	L	906	-	-3.00	0.14 0.30
007	TF	RW32	Υ	321 (312.1)	-9.2	2.4	J	126	_	-3.00/54	0.14 0.30
008	TF	EB255		321 (312.0)	-9.2	6.6	_	_	_	_	1.0
009	TF	EB256	_	236 (226.8)	-9.2	6.8	_	_	_	_	1.0
010	TF	LUBEK	_	218 (208.8)	-9.2	18.8	_	8000	_	_	1.0

Waypoint Coordinates

ı				
	Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
	LUBEK	440108.77N/1425822.82E	EBRF3	441432.89N/1432513.59E
	EB250	440857.66N/1431745.13E		
	EB251	441039.77N/1432200.05E		
	EB252	441155.58N/1432509.72E		
	EB253	441233.80N/1432645.48E		
	EB254	441614.19N/1432720.26E		
	RW32	441752.44N/1432448.06E		
	EB255	442218.71N/1431754.45E		
	EB256	441739.47N/1431100.00E		

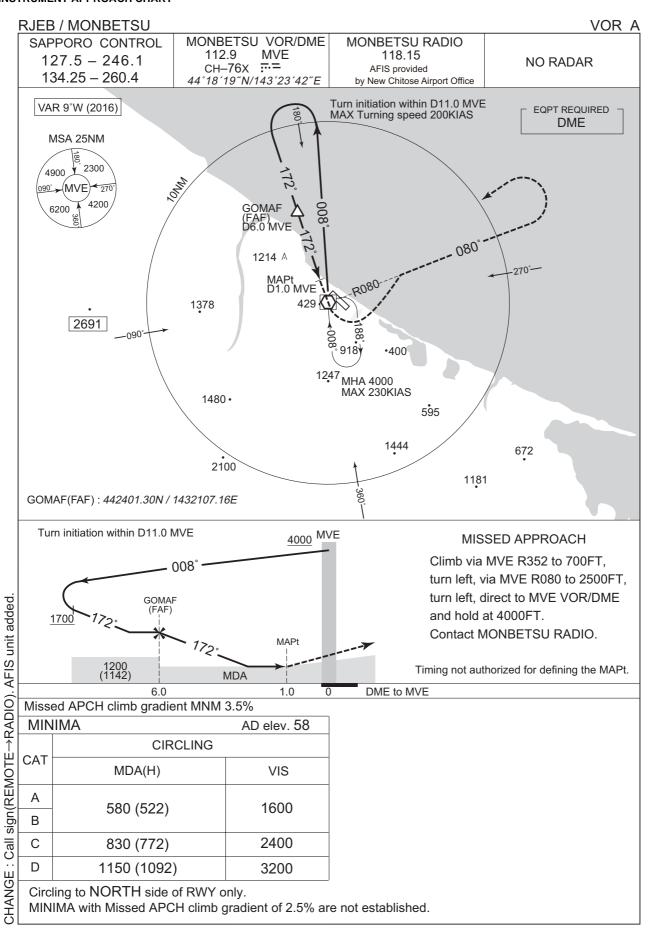

RJEB / MONBETSU Visual REP

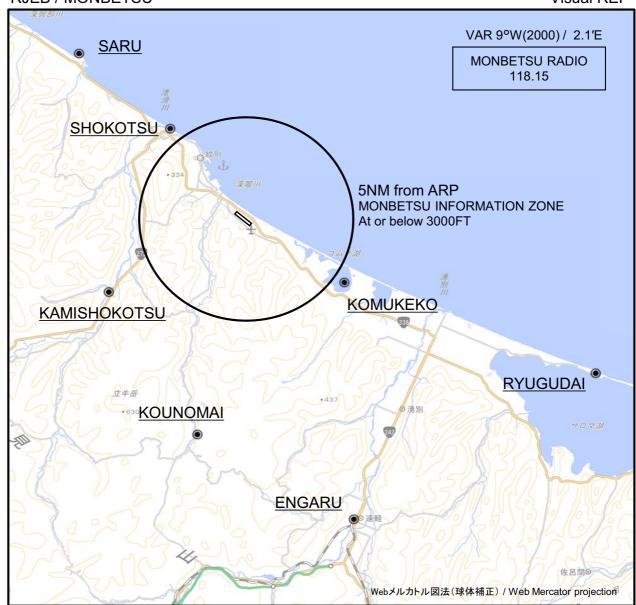

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

	Call sign	BRG / DIST from ARP	Remarks
→RADIO).	沙留 Saru	317°T / 11.3NM	岬 Cape
	渚滑 Shokotsu	323°T / 5.8NM	渚滑川河口 Mouth of Shokotsu river
Call sign(REMOTE	コムケ湖 Komukeko	123°T / 5.5NM	湖 Lake
gn(RE	上渚滑 Kamishokotsu	242°T / 7.3NM	橋 Bridge
Call si	竜宮台 Ryugudai	114°T / 18.0NM	灯台 Lighthouse
	鴻之舞 Kounomai	193°T / 10.6NM	発電所 Power Station
CHANGE	遠軽 Engaru	161°T / 15.5NM	駅 JR Station

