


RJKN / TOKUNOSHIMA

AD CHART

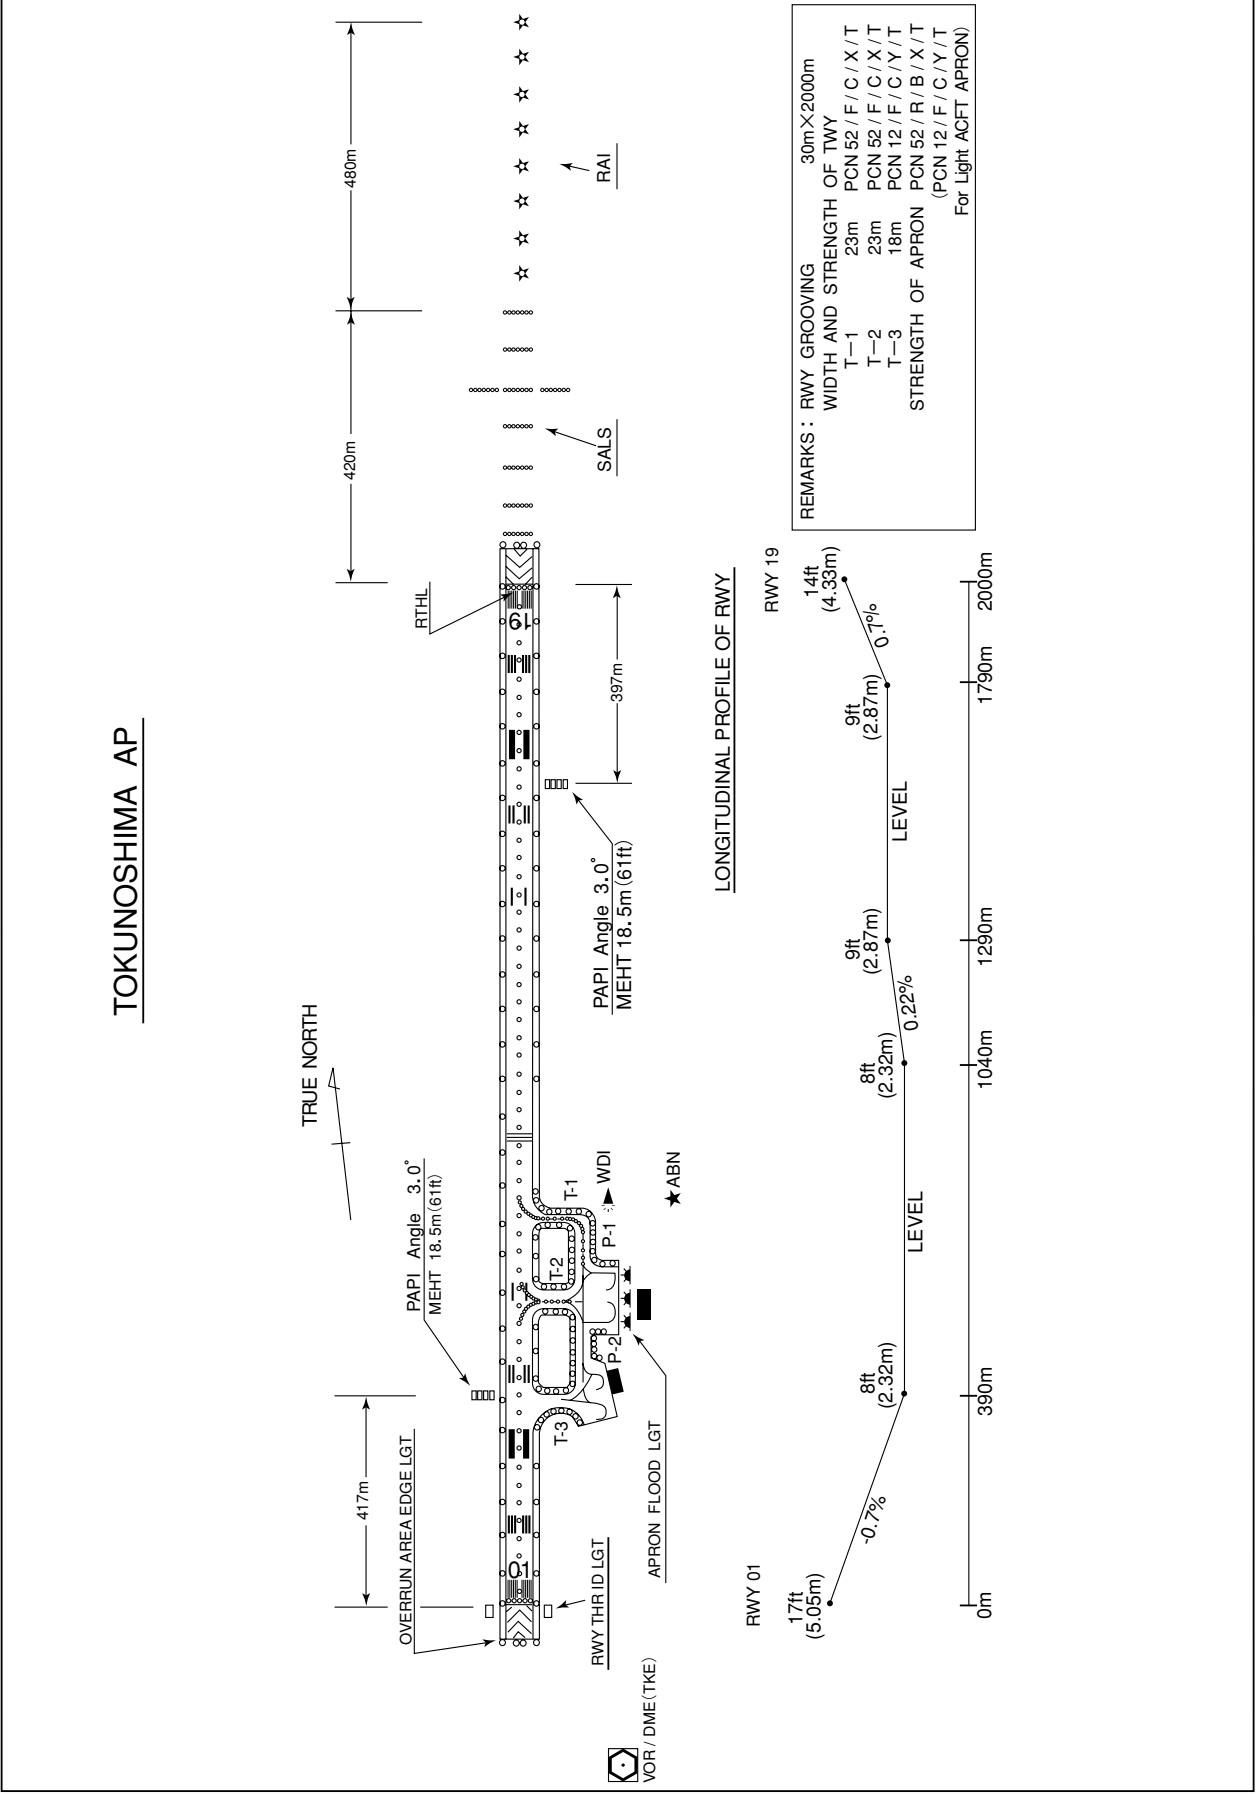

STANDARD DEPARTURE CHART -INSTRUMENT

RJKN / TOKUNOSHIMA

SID and TRANSITION

TOKUNOSHIMA FIVE DEPARTURE

RWY01 : Climb via TKE R359 to 5.0DME, turn left,...

RWY19 : Climb RWY HDG to 700FT, turn right,...

...direct to TKE VOR/DME.

Cross TKE VOR/DME at or above 3000FT.

Note RWY01 : 4.9% climb gradient required up to 1600FT.

OBST ALT 427FT located at 1.4NM 029° FM end of RWY01.

Note RWY19 : No turn before DER.

KUNIG TRANSITION

From over TKE VOR/DME, via TKE R209 to KUNIG or ONC VORTAC.

Cross KUNIG or ONC VORTAC at assigned altitude.

MEKAX TRANSITION

From over TKE VOR/DME, via TKE R025 to 15.0DME, via ONC R026 to MEKAX.

Cross MEKAX at or above 11000FT.

KASARI TRANSITION

From over TKE VOR/DME, via TKE R097 to PINNE, via AME R228 to YUWAN
or AME VOR/DME.

Cross PINNE at or above 6000FT, cross YUWAN or AME VOR/DME at assigned altitude.

CHANGE : PROC renamed(TOKUNOSHIMA FIVE DEPARTURE). PROC course(SID, TRANSITION).

STANDARD DEPARTURE CHART -INSTRUMENT


RJKN / TOKUNOSHIMA

SID and TRANSITION

CHANGE : PROC renamed(TOKUNOSHIMA FIVE DEPARTURE). PROC course(SID, TRANSITION).



STANDARD DEPARTURE CHART -INSTRUMENT

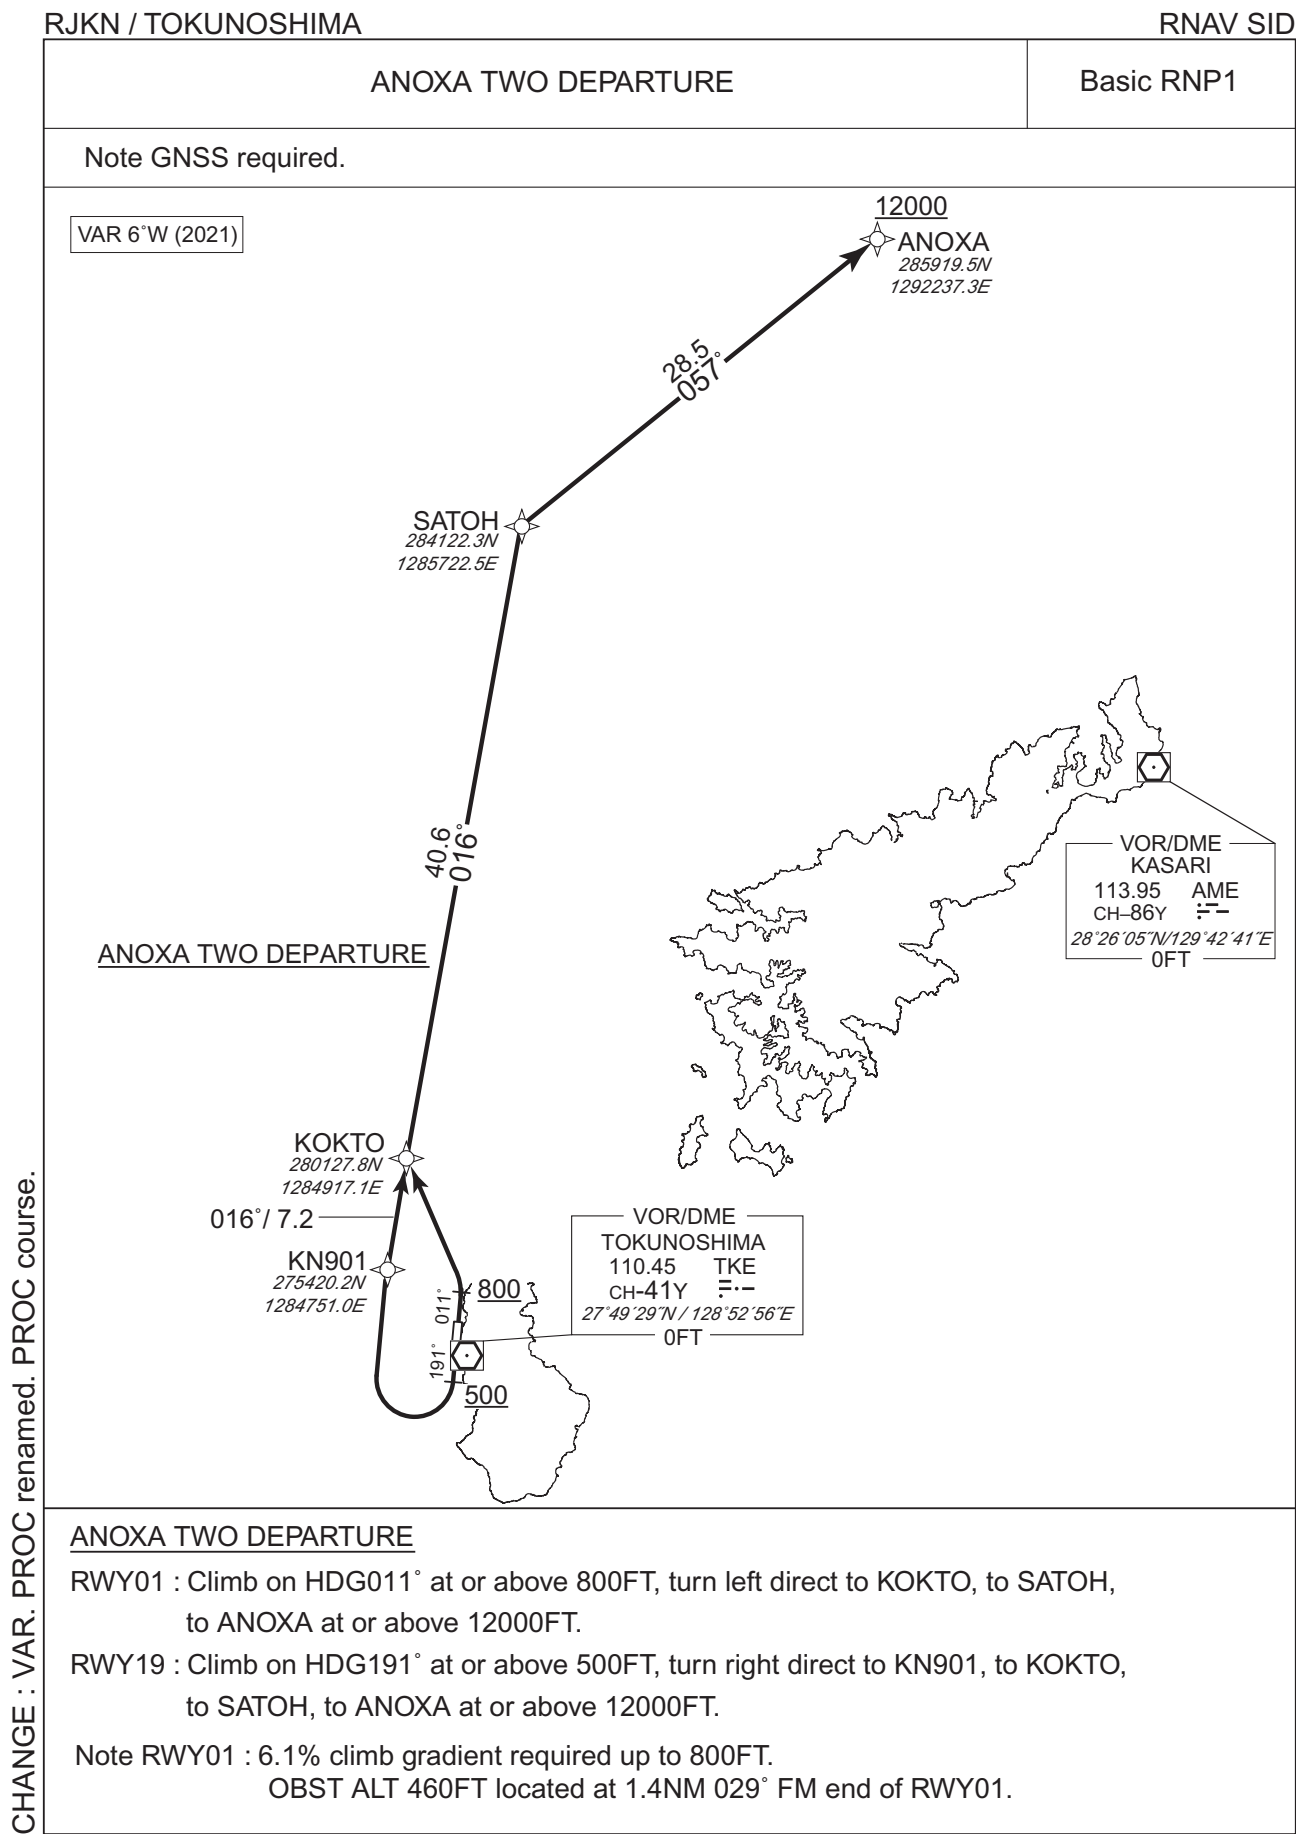

STANDARD DEPARTURE CHART -INSTRUMENT

RJKN / TOKUNOSHIMA

RNAV SID

ANOXA TWO DEPARTURE

RWY01


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	011 (005.1)	-6.1	—	—	+800	—	—	Basic RNP1
002	DF	KOKTO	—	—	-6.1	—	L	—	—	—	Basic RNP1
003	TF	SATOH	—	016 (010.1)	-6.1	40.6	—	—	—	—	Basic RNP1
004	TF	ANOXA	—	057 (050.8)	-6.1	28.5	—	+12000	—	—	Basic RNP1

RWY19

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	191 (185.1)	-6.1	—	—	+500	—	—	Basic RNP1
002	DF	KN901	—	—	-6.1	—	R	—	—	—	Basic RNP1
003	TF	KOKTO	—	016 (010.1)	-6.1	7.2	—	—	—	—	Basic RNP1
004	TF	SATOH	—	016 (010.1)	-6.1	40.6	—	—	—	—	Basic RNP1
005	TF	ANOXA	—	057 (050.8)	-6.1	28.5	—	+12000	—	—	Basic RNP1

CHANGE : VAR. PROC renamed. PROC course.

STANDARD DEPARTURE CHART -INSTRUMENT

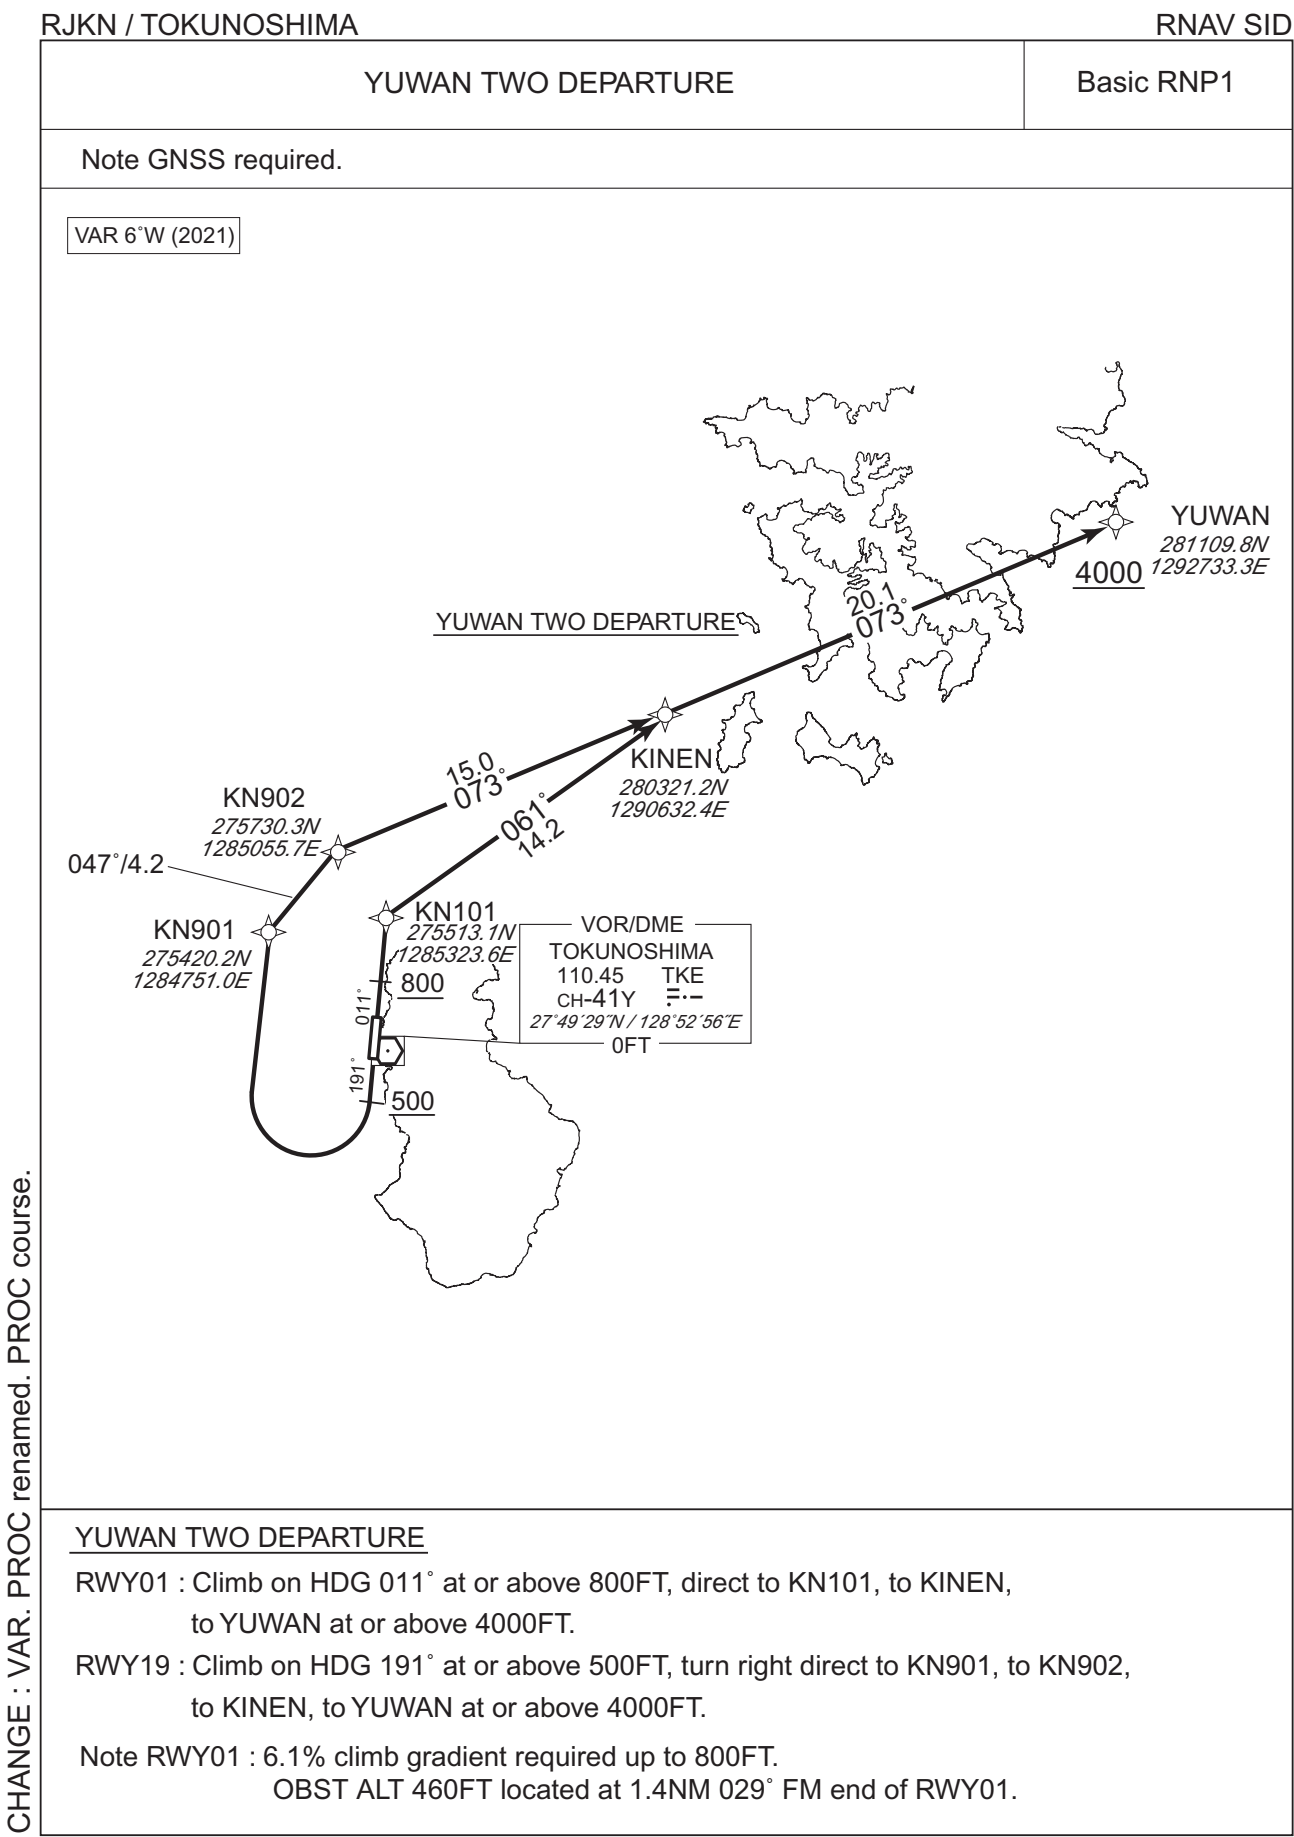

CHANGE : VAR. PROC renamed. PROC course.

STANDARD DEPARTURE CHART -INSTRUMENT

RJKN / TOKUNOSHIMA

RNAV SID

YUWAN TWO DEPARTURE

RWY01

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	011 (005.1)	-6.1	—	—	+800	—	—	Basic RNP1
002	DF	KN101	—	—	-6.1	—	—	—	—	—	Basic RNP1
003	TF	KINEN	—	061 (054.9)	-6.1	14.2	—	—	—	—	Basic RNP1
004	TF	YUWAN	—	073 (067.1)	-6.1	20.1	—	+4000	—	—	Basic RNP1

RWY19

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	191 (185.1)	-6.1	—	—	+500	—	—	Basic RNP1
002	DF	KN901	—	—	-6.1	—	R	—	—	—	Basic RNP1
003	TF	KN902	—	047 (040.6)	-6.1	4.2	—	—	—	—	Basic RNP1
004	TF	KINEN	—	073 (066.9)	-6.1	15.0	—	—	—	—	Basic RNP1
005	TF	YUWAN	—	073 (067.1)	-6.1	20.1	—	+4000	—	—	Basic RNP1

CHANGE : VAR. PROC renamed. PROC course.

STANDARD ARRIVAL CHART - INSTRUMENT

RJKN / TOKUNOSHIMA


RNAV STAR RWY01

SHODA ARRIVAL ISENN ARRIVAL	Basic RNP1
--------------------------------	------------

Note GNSS required.

VAR 6°W (2021)

CHANGE : VAR. PROC course.

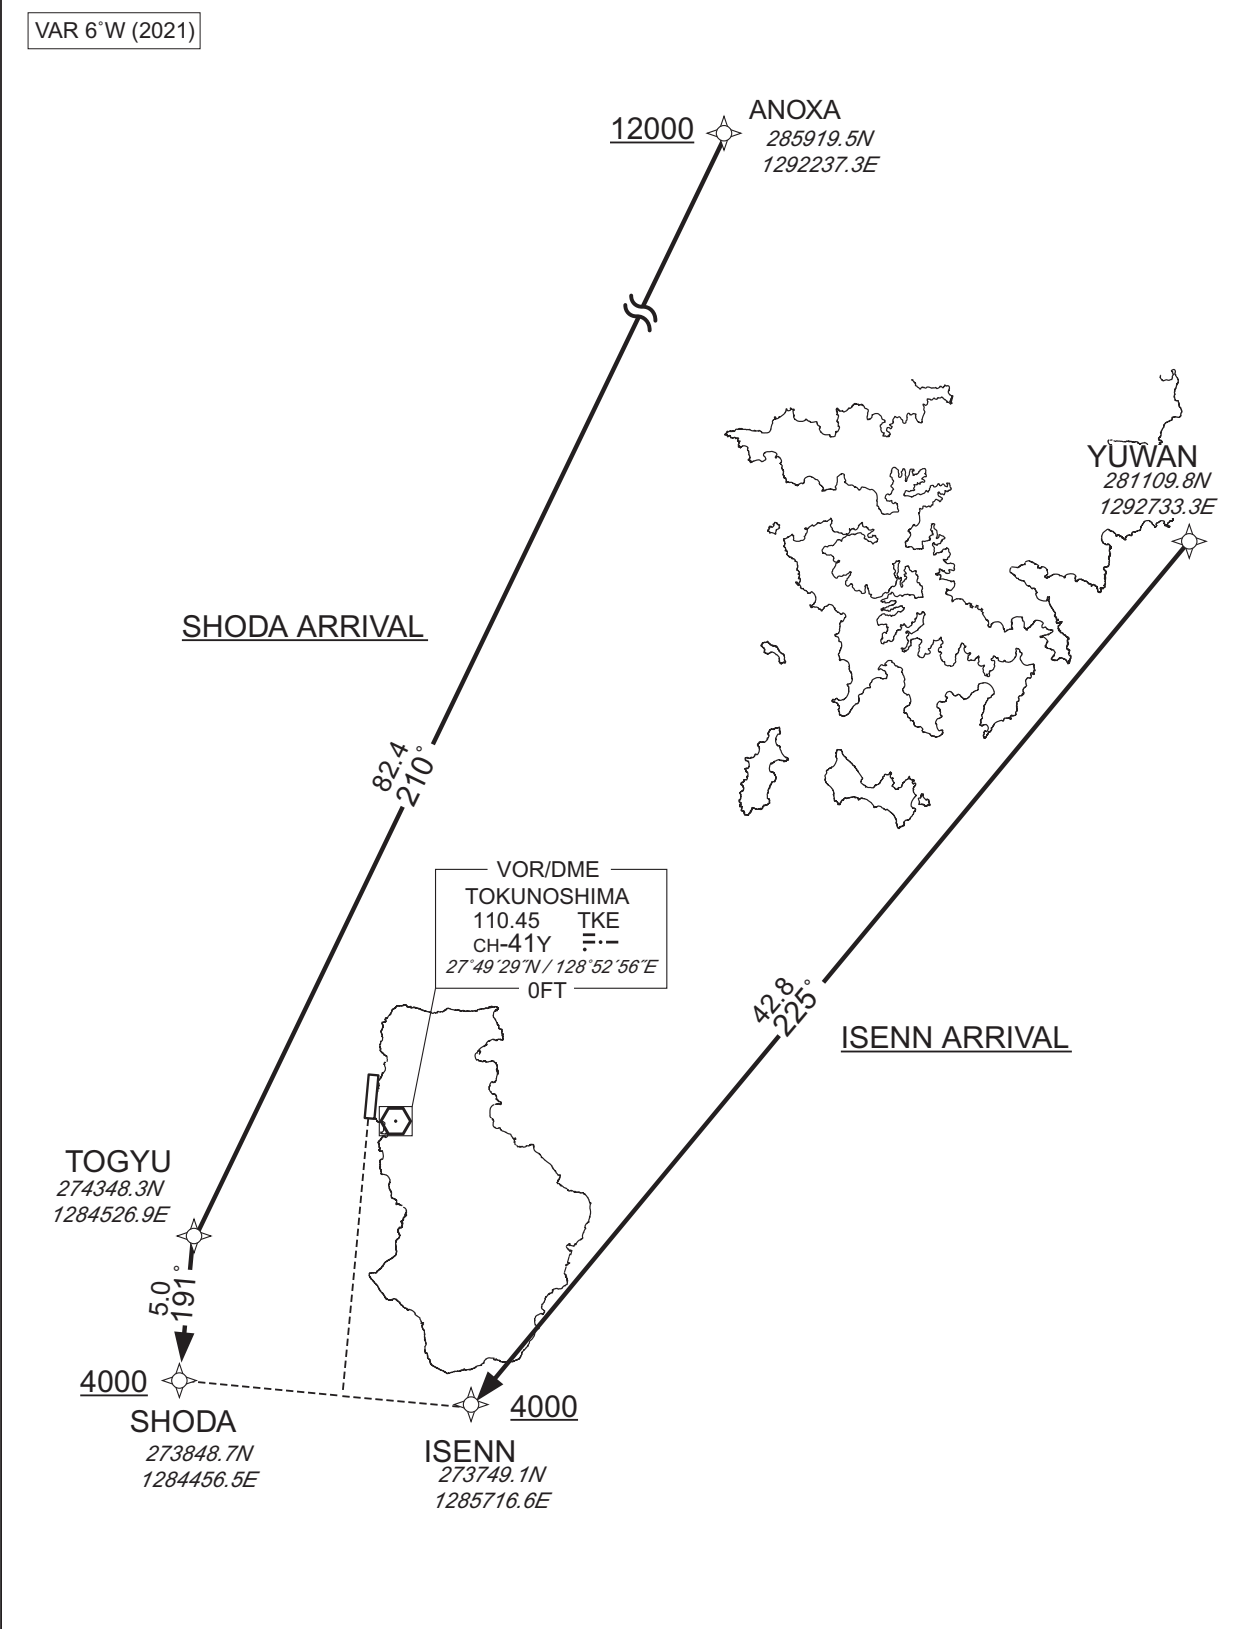

STANDARD ARRIVAL CHART - INSTRUMENT

RJKN / TOKUNOSHIMA

RNAV STAR RWY01

SHODA ARRIVAL

From ANOXA at or above 12000FT, to TOGYU, to SHODA at or above 4000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ANOXA	—	—	-6.1	—	—	+12000	—	—	Basic RNP1
002	TF	TOGYU	—	210 (203.6)	-6.1	82.4	—	—	—	—	Basic RNP1
003	TF	SHODA	—	191 (185.1)	-6.1	5.0	—	+4000	—	—	Basic RNP1

ISENN ARRIVAL

From YUWAN, to ISENN at or above 4000FT.


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YUWAN	—	—	-6.1	—	—	—	—	—	Basic RNP1
002	TF	ISENN	—	225 (218.9)	-6.1	42.8	—	+4000	—	—	Basic RNP1

CHANGE : VAR. PROC course.

STANDARD ARRIVAL CHART - INSTRUMENT

RJKN / TOKUNOSHIMA

RNAV STAR RWY19

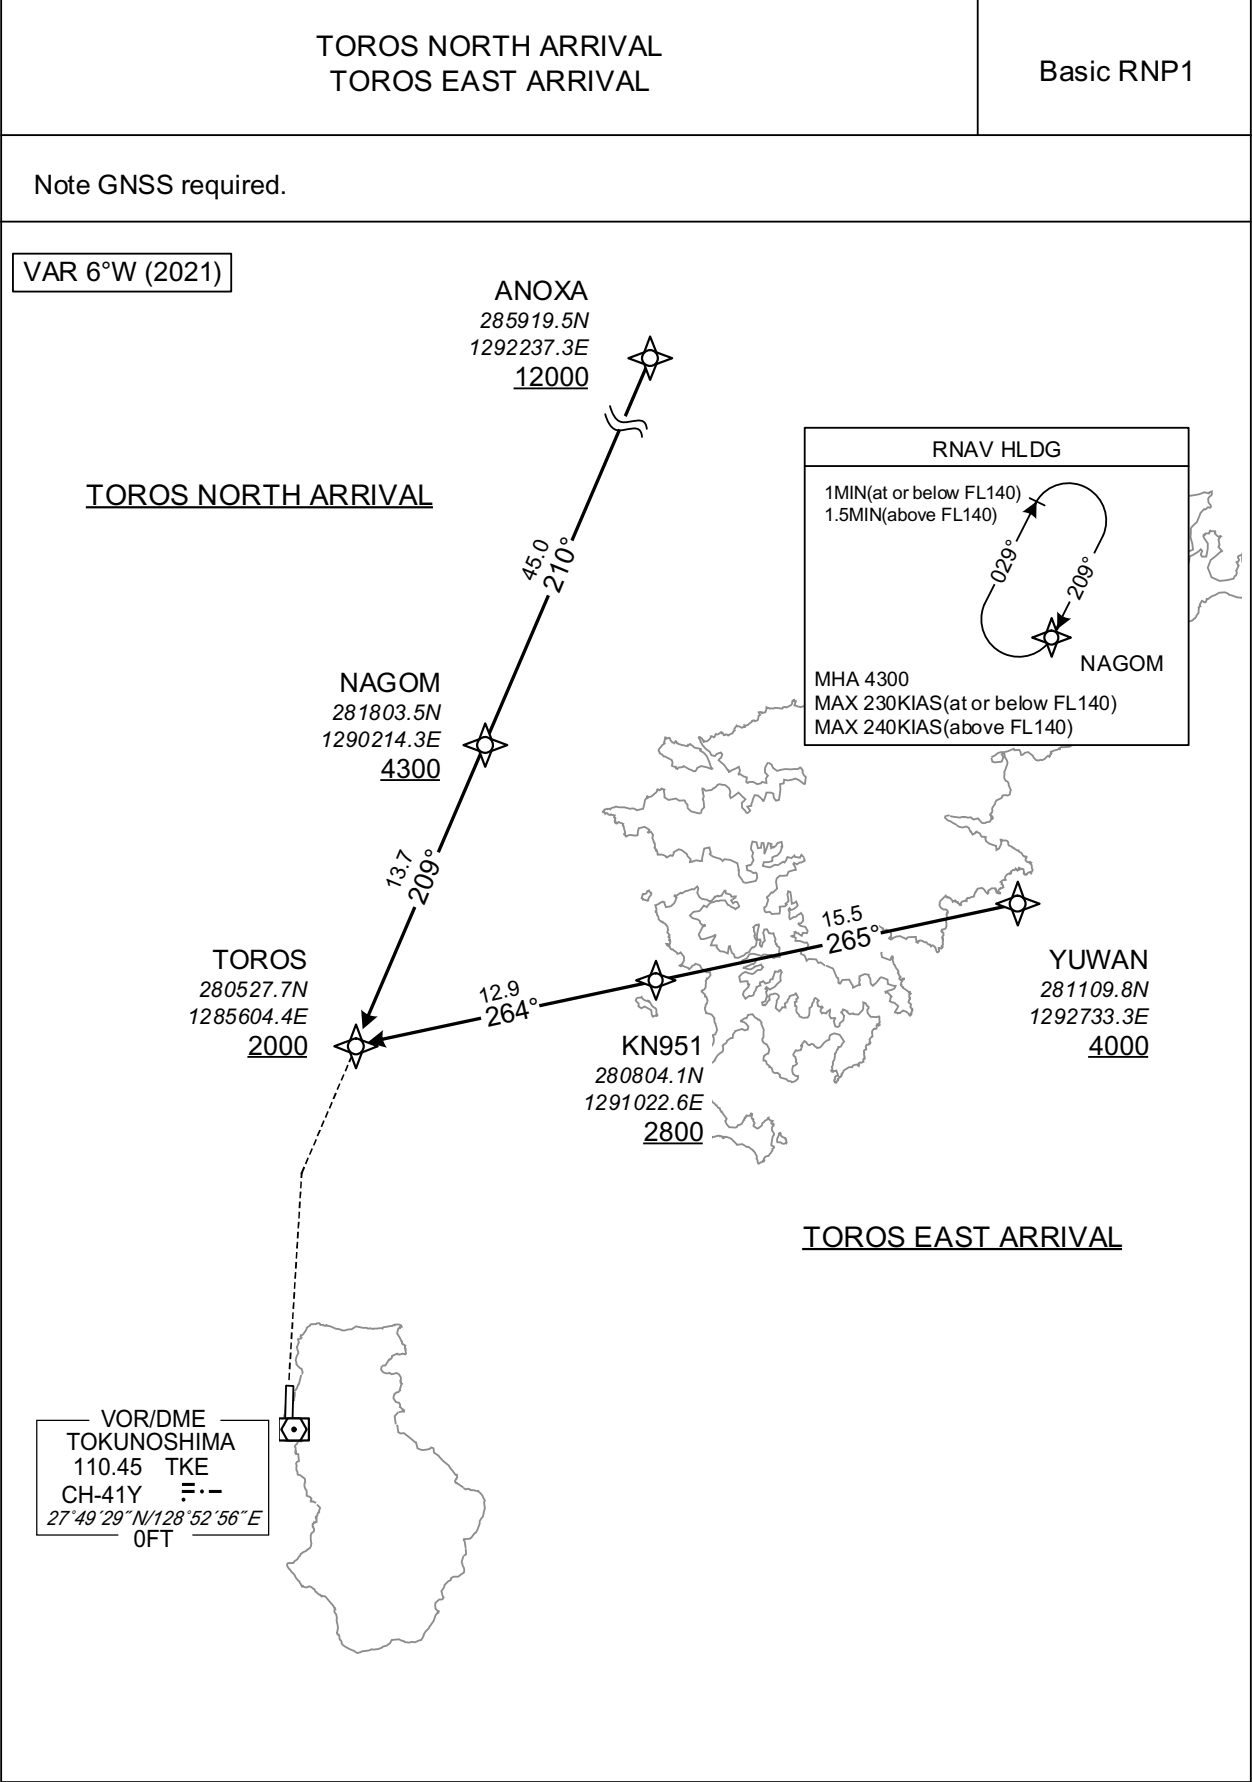

STANDARD ARRIVAL CHART - INSTRUMENT

RJKN / TOKUNOSHIMA

RNAV STAR RWY19

TOROS NORTH ARRIVAL

From ANOXA at or above 12000FT, to NAGOM at or above 4300FT, to TOROS at or above 2000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ANOXA	-	-	-6.1	-	-	+12000	-	-	Basic RNP1
002	TF	NAGOM	-	210 (203.5)	-6.1	45.0	-	+4300	-	-	Basic RNP1
003	TF	TOROS	-	209 (203.4)	-6.1	13.7	-	+2000	-	-	Basic RNP1

TOROS EAST ARRIVAL

From YUWAN at or above 4000FT, to KN951 at or above 2800FT, to TOROS at or above 2000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YUWAN	-	-	-6.1	-	-	+4000	-	-	Basic RNP1
002	TF	KN951	-	265 (258.5)	-6.1	15.5	-	+2800	-	-	Basic RNP1
003	TF	TOROS	-	264 (258.4)	-6.1	12.9	-	+2000	-	-	Basic RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	NAGOM	209 (203.4)	-6.1	1.0(-14000) 1.5(+14001)	R	4300	—	-230(-14000) -240(+14001)	Basic RNP1

CHANGE : VAR. PROC course.

STANDARD ARRIVAL CHART - INSTRUMENT

RJKN / TOKUNOSHIMA RNAV STAR RWY19



SOTEZ ARRIVAL

From HORAI, to MOHRO, to SOTEZ at or above 3000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	HORAI	-	-	-6.1	-	-	-	-	-	Basic RNP1
002	TF	MOHRO	-	345 (339.2)	-6.1	13.6	-	-	-	-	Basic RNP1
003	TF	SOTEZ	-	008 (002.1)	-6.1	9.2	-	+3000	-	-	Basic RNP1

CHANGE : New PROC.

INSTRUMENT APPROACH CHART

RJKN / TOKUNOSHIMA


LOC Z RWY19



INSTRUMENT APPROACH CHART


RJKN / TOKUNOSHIMA

LOC Y RWY19

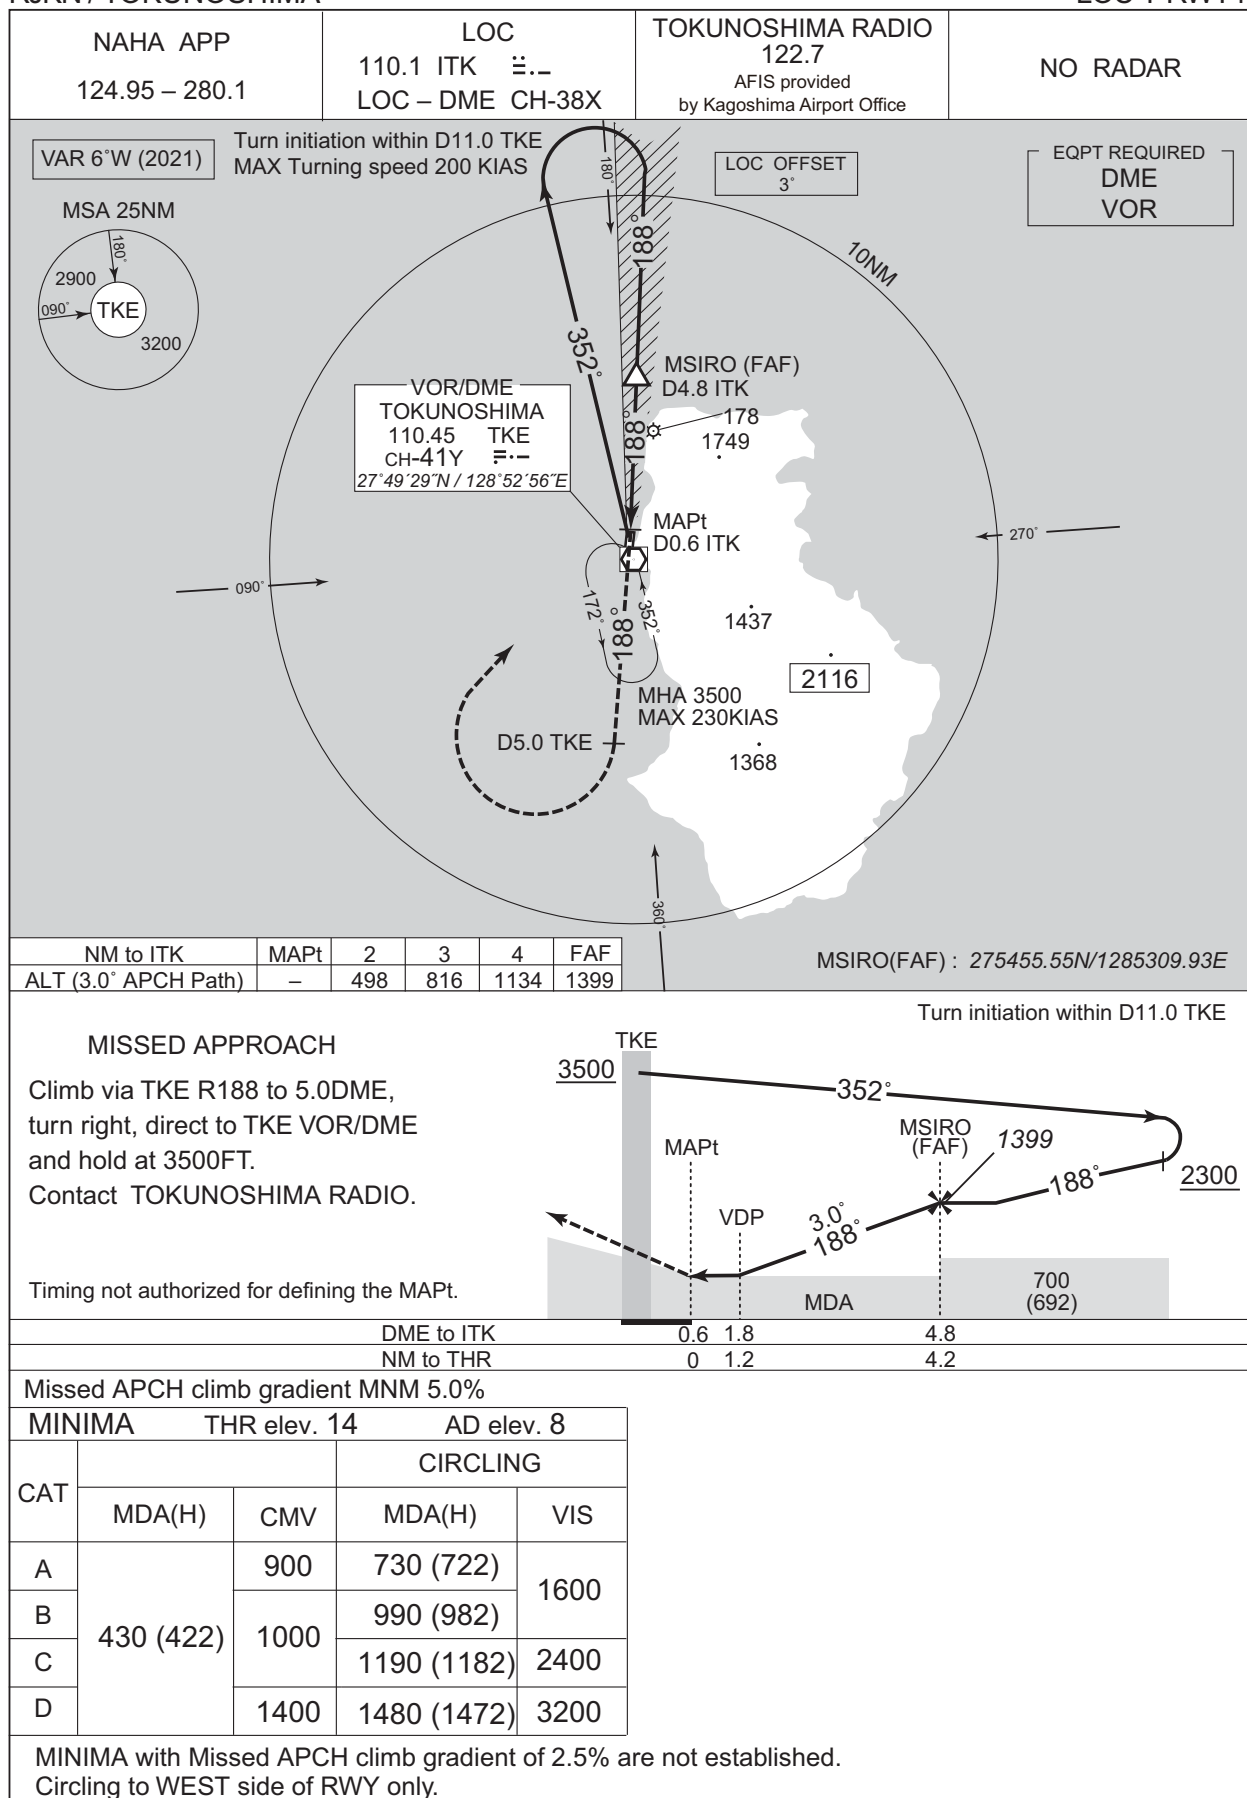

CHANGE : VAR. MSA BTN 180° and 270°. PROC course. MISSED APPROACH course. HLDG course.


INSTRUMENT APPROACH CHART

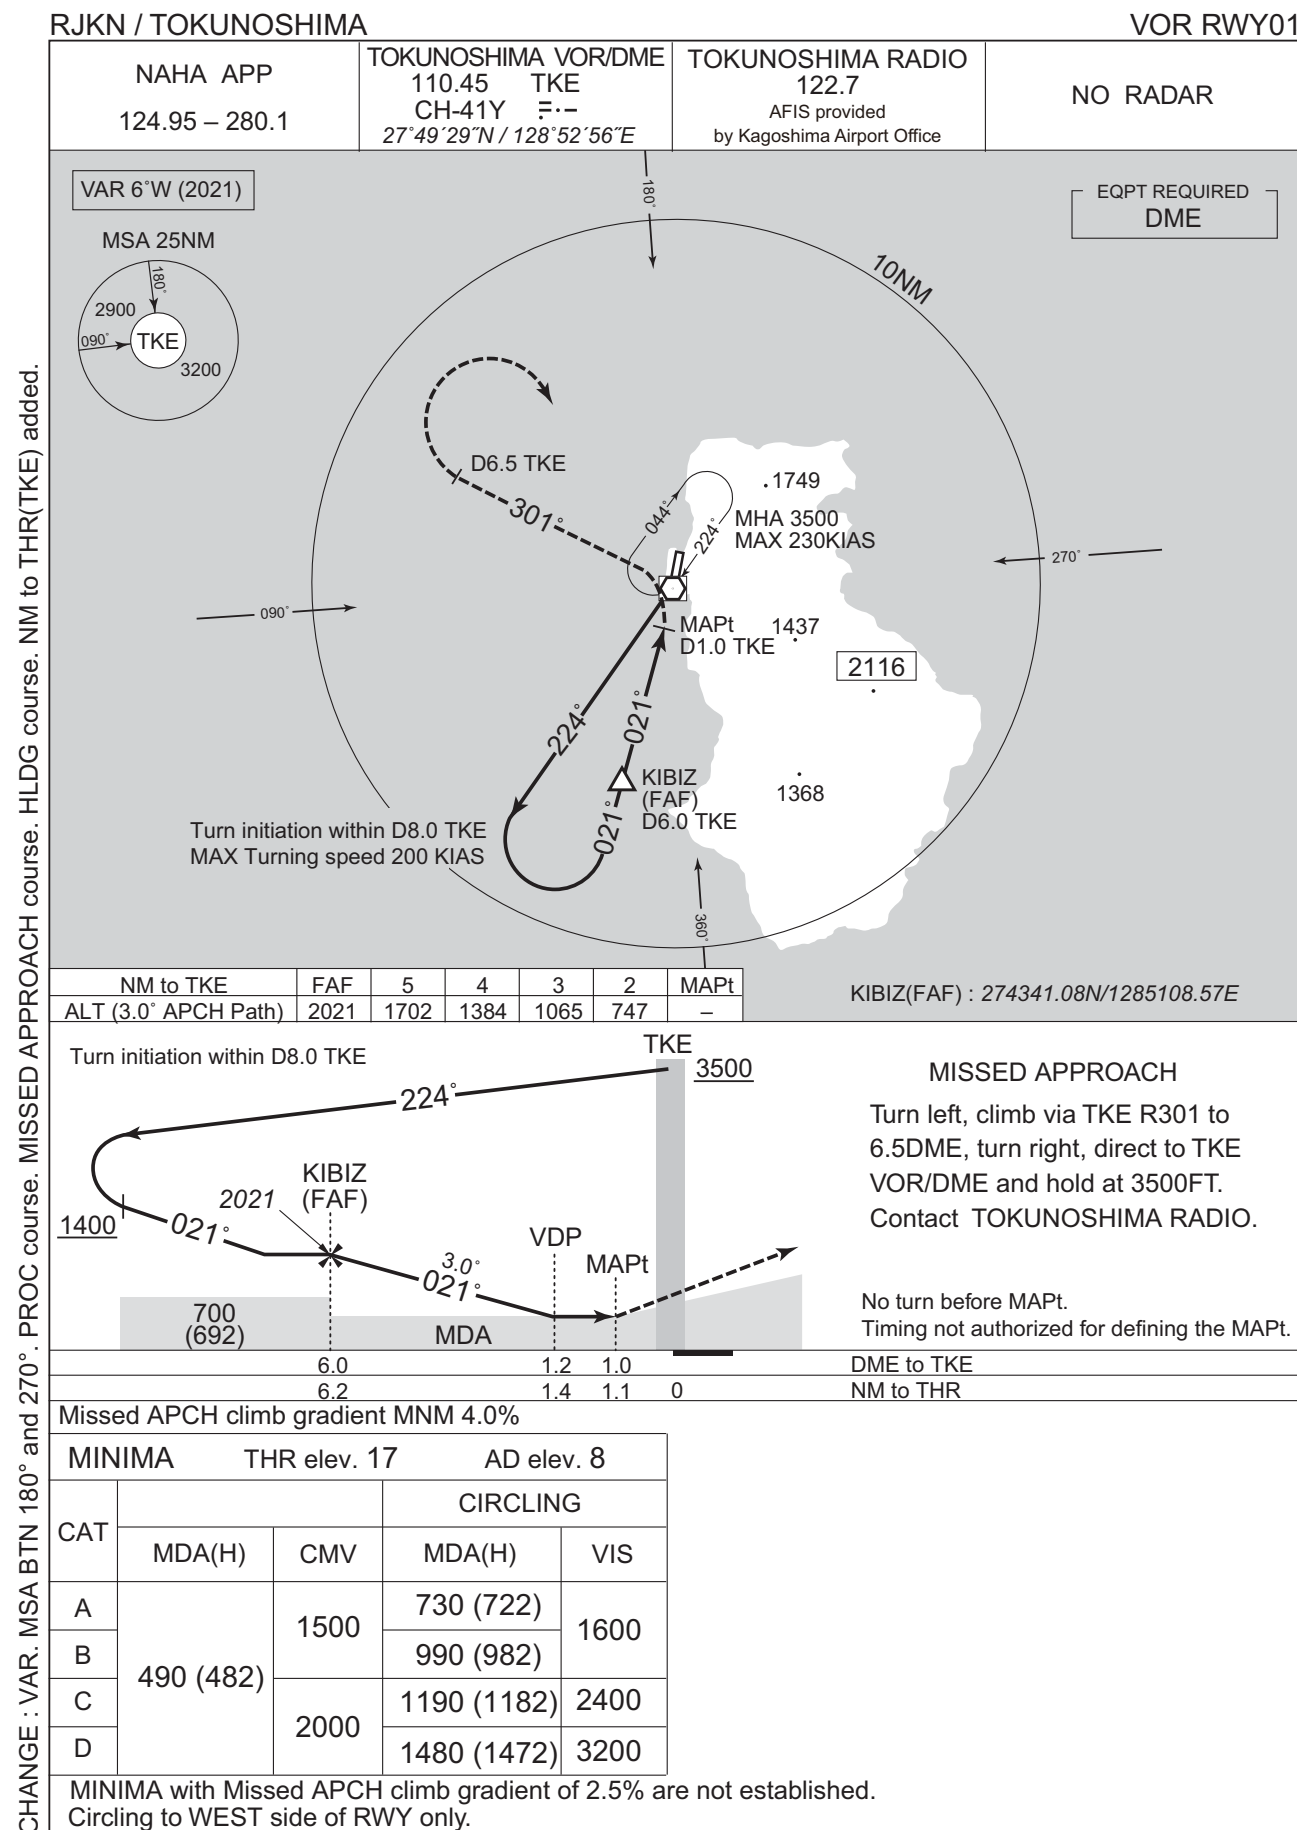

INSTRUMENT APPROACH CHART

RJKN / TOKUNOSHIMA

RNAV(GNSS) RWY01

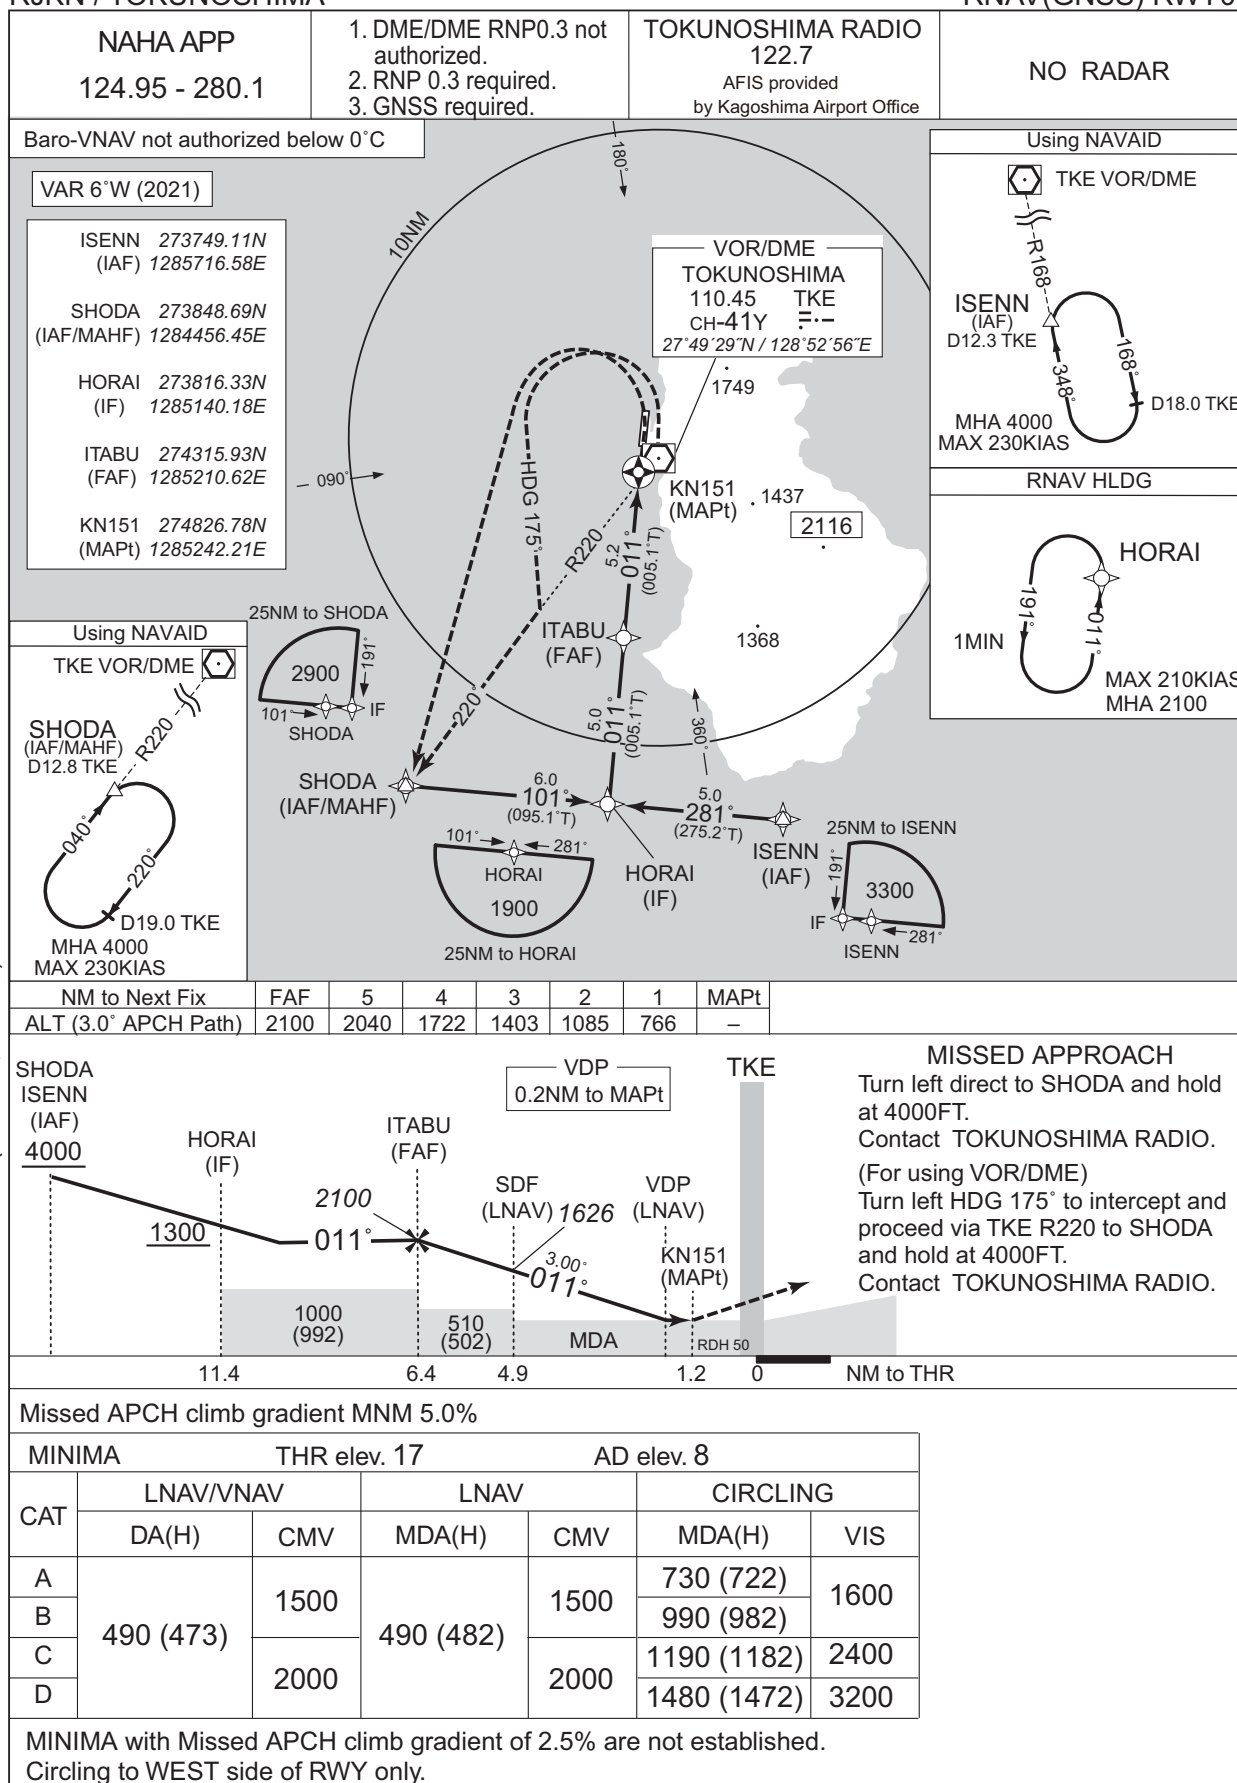

CHANGE : MISSED APPROACH course. HLDG course(SHODA, ISENN).

RJKN / TOKUNOSHIMA

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP.

Call sign	BRG / DIST from ARP	Remarks
金見崎 Kanamizaki	055°T / 5.8NM	灯台 Lighthouse
与名間崎 Yonamazaki	011°T / 2.8NM	灯台 Lighthouse
亀徳港 Kametokuko	127°T / 9.5NM	漁港 Harbor
犬田布崎 Inutabuzaki	179°T / 6.8NM	白い大きな慰霊碑 Big white monument

RJKN / TOKUNOSHIMA

Minimum Vectoring Altitude CHART

