



RJTT / TOKYO INTL

AD CHART

CHANGE: TWY CL marking for Y added. TWY CL marking for E4, U4 deleted.

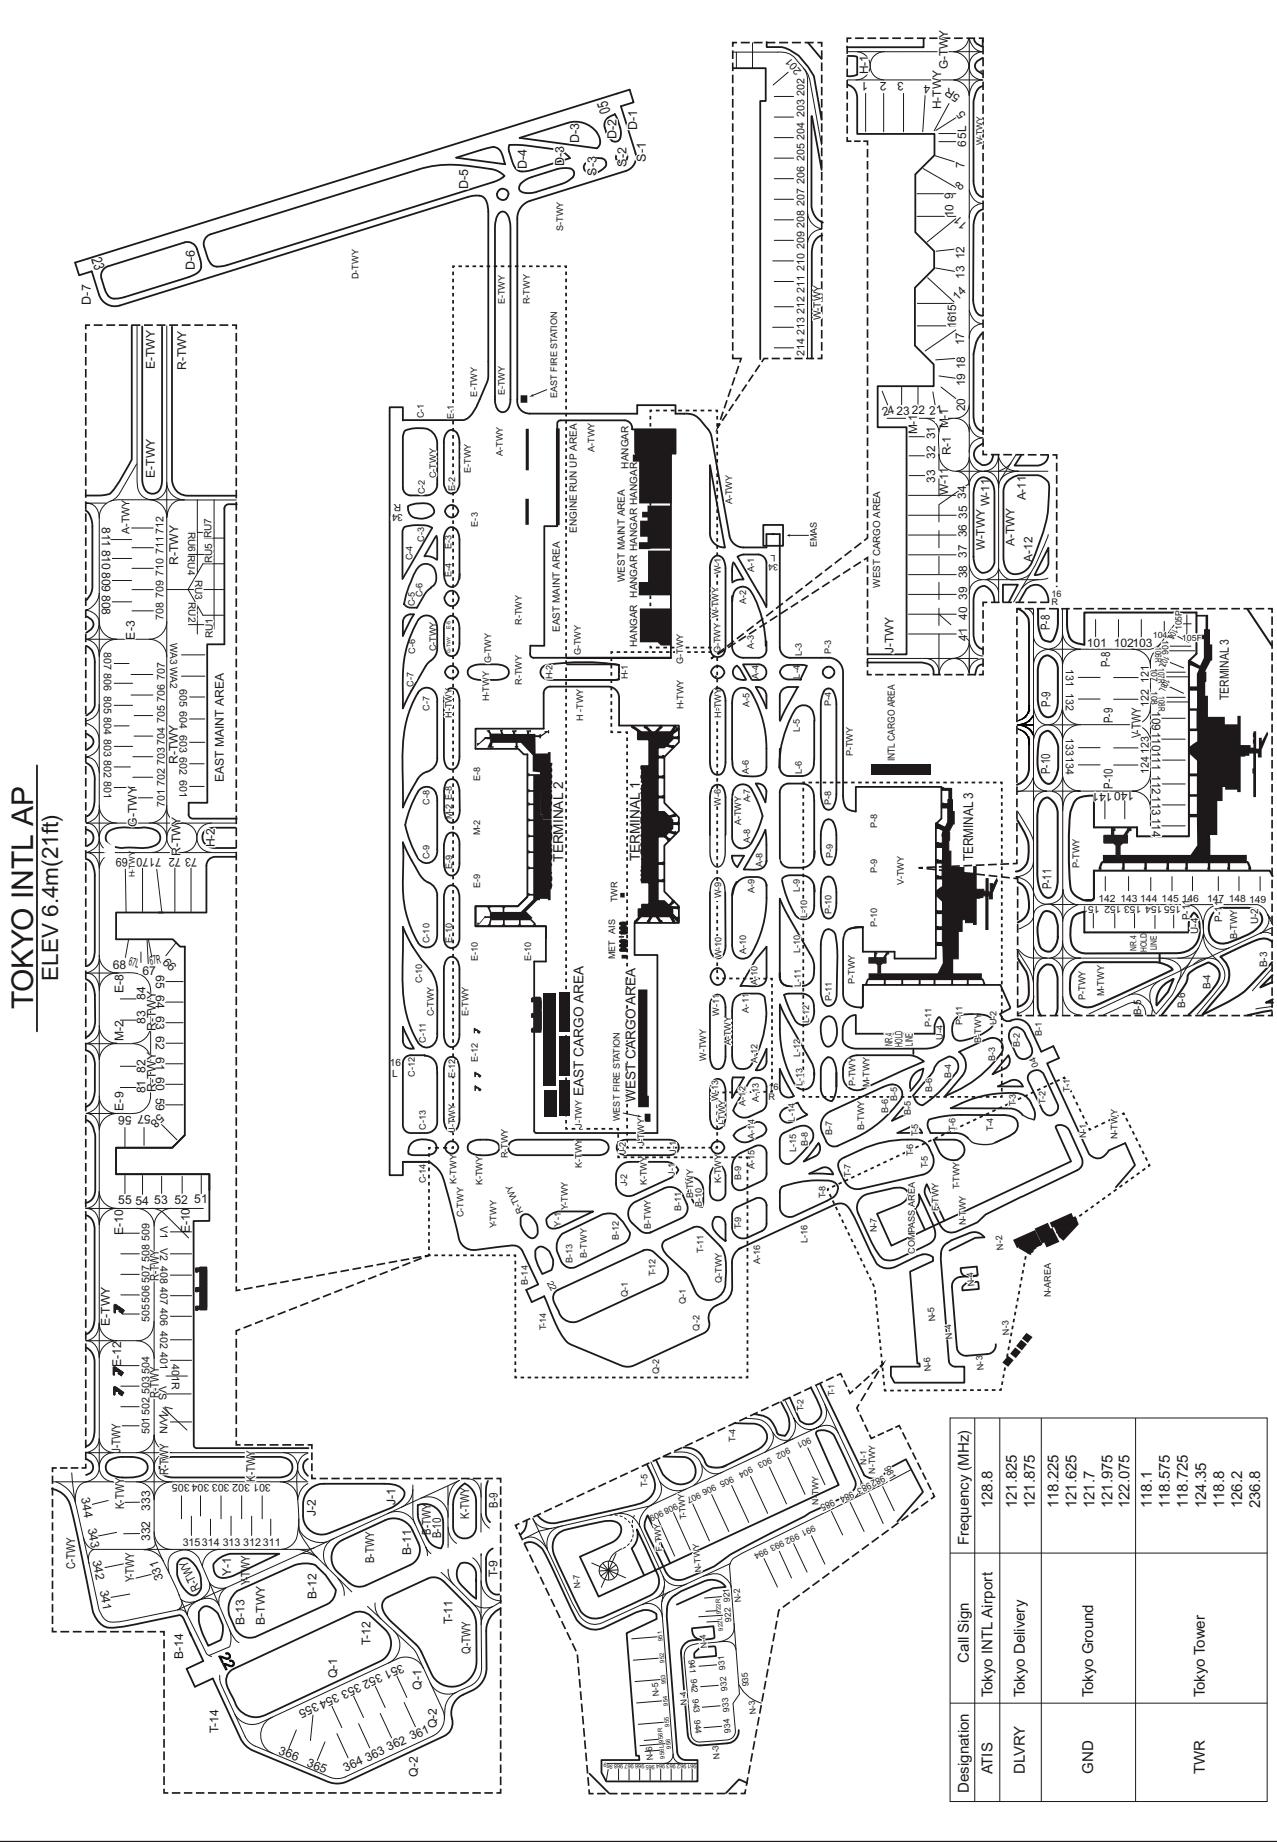

INTENTIONALLY LEFT BLANK

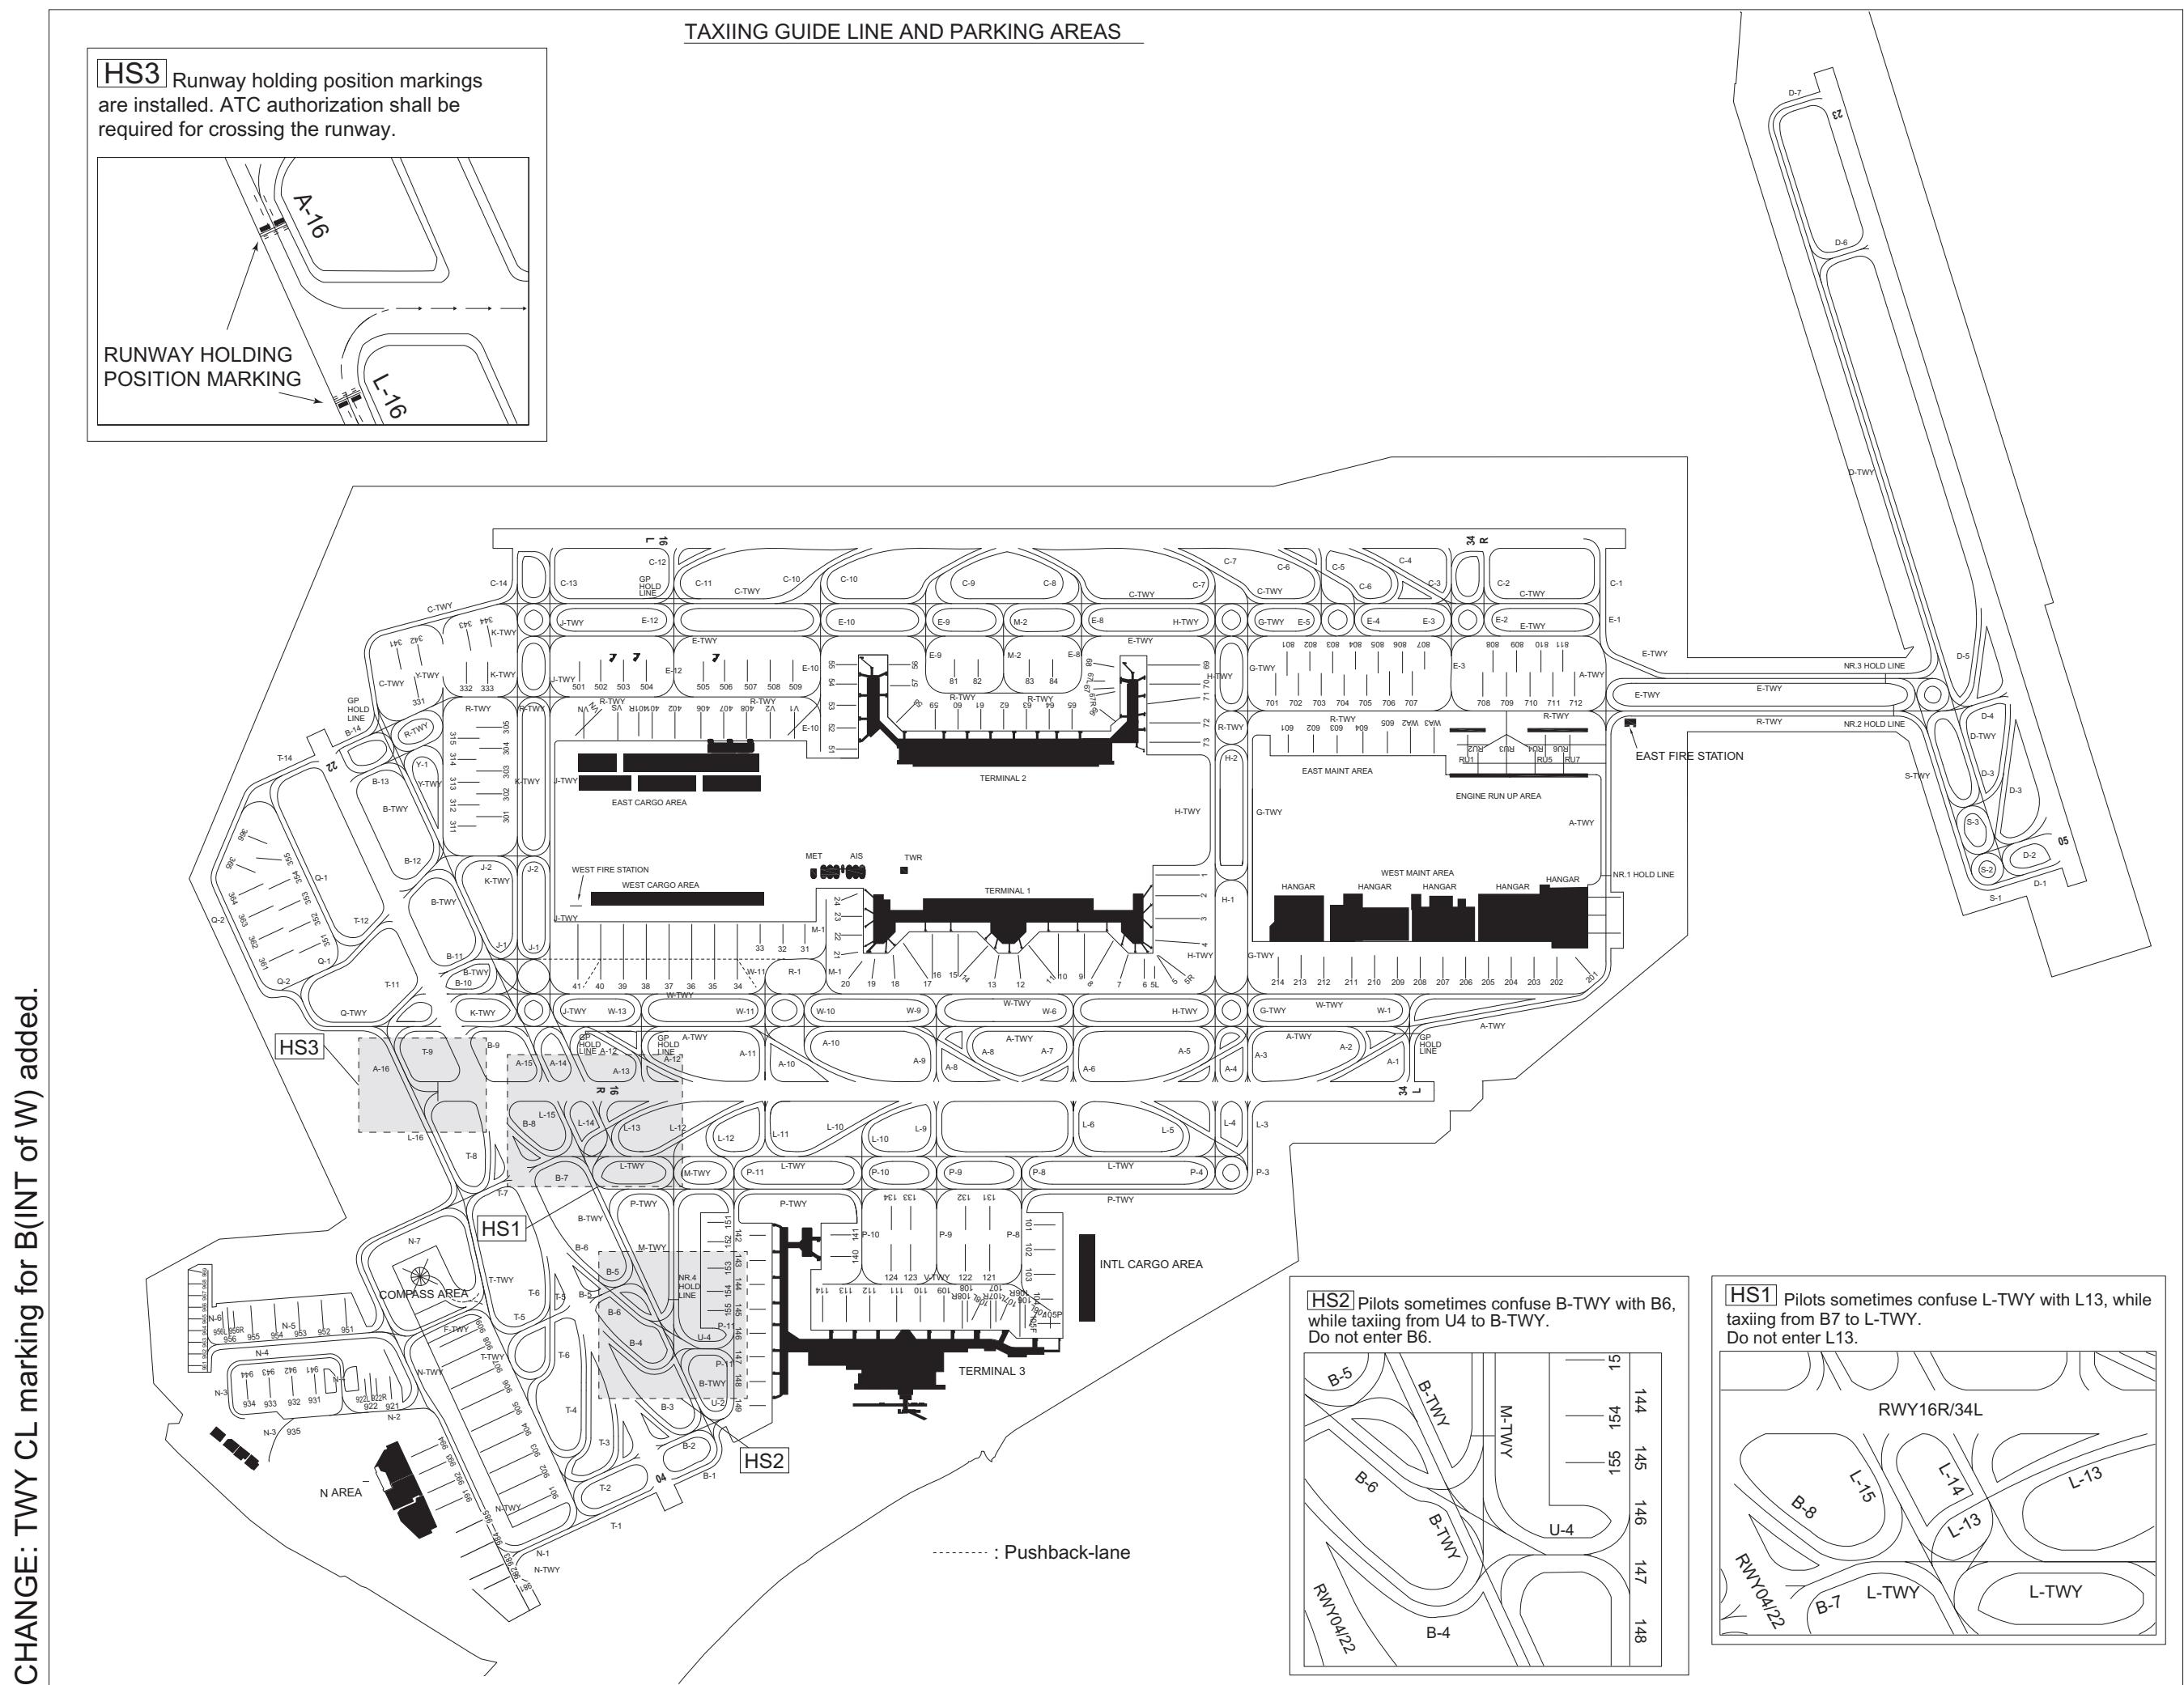

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

AERODROME OBSTACLE CHART-ICAO
TYPE A(OPERATING LIMITATIONS)



DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

AERODROME OBSTACLE CHART-ICAO
TYPE A(OPERATING LIMITATIONS)



DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 7°W-APR 2015




DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)




DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

AERODROME OBSTACLE CHART-ICAO
TYPE A(OPERATING LIMITATIONS)

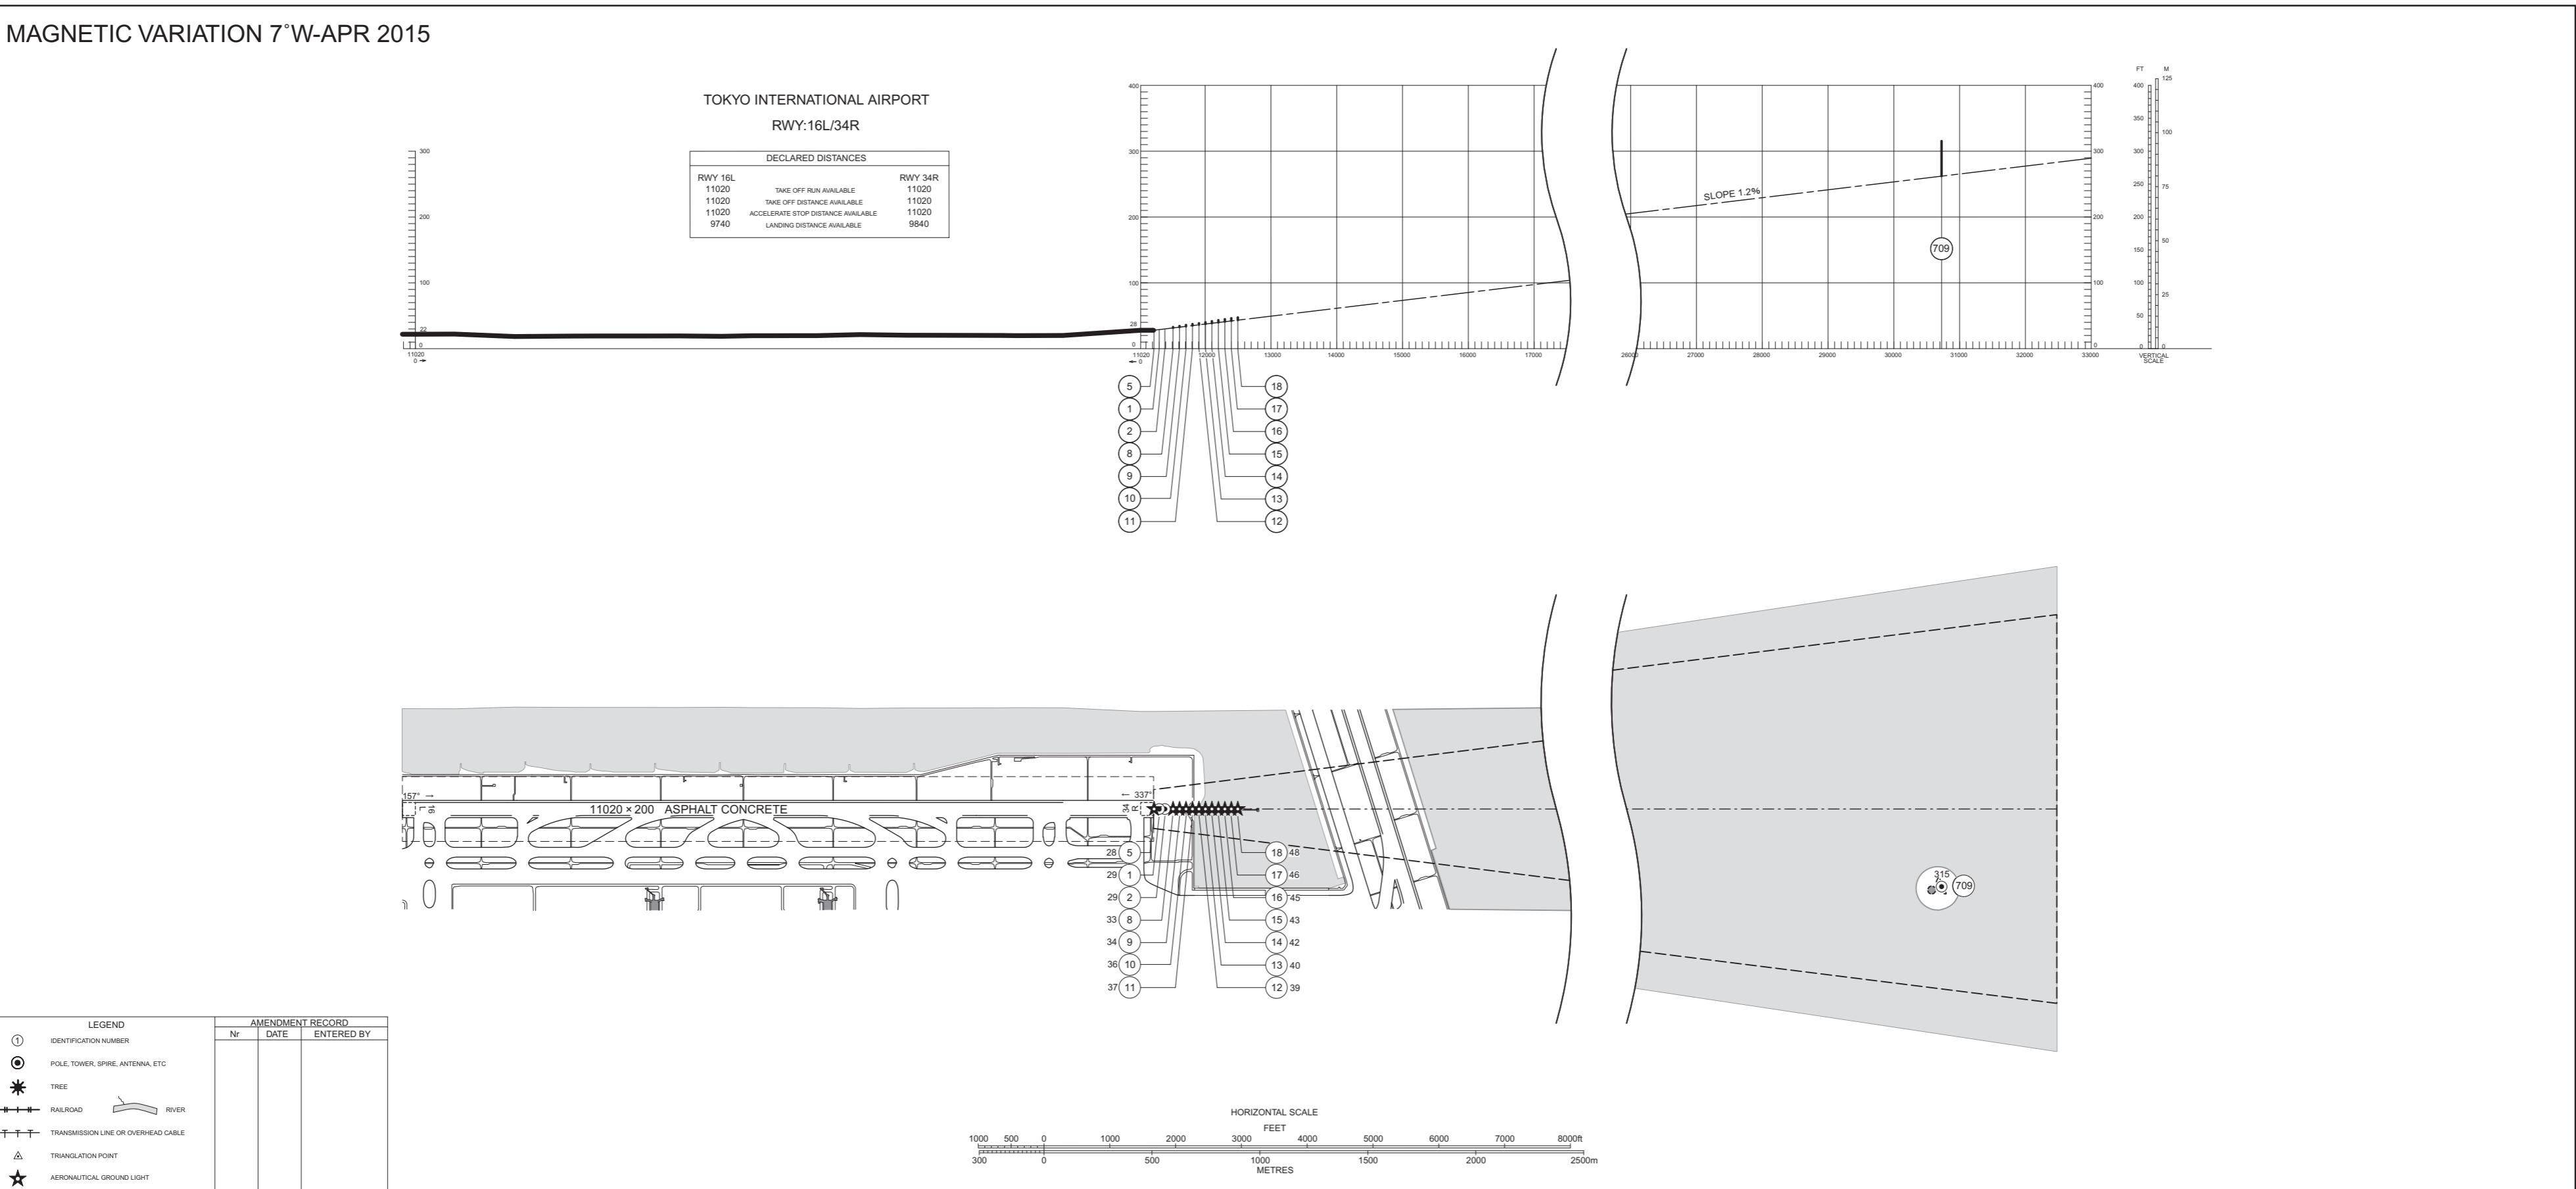


DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

AERODROME OBSTACLE CHART-ICAO
TYPE A(OPERATING LIMITATIONS)

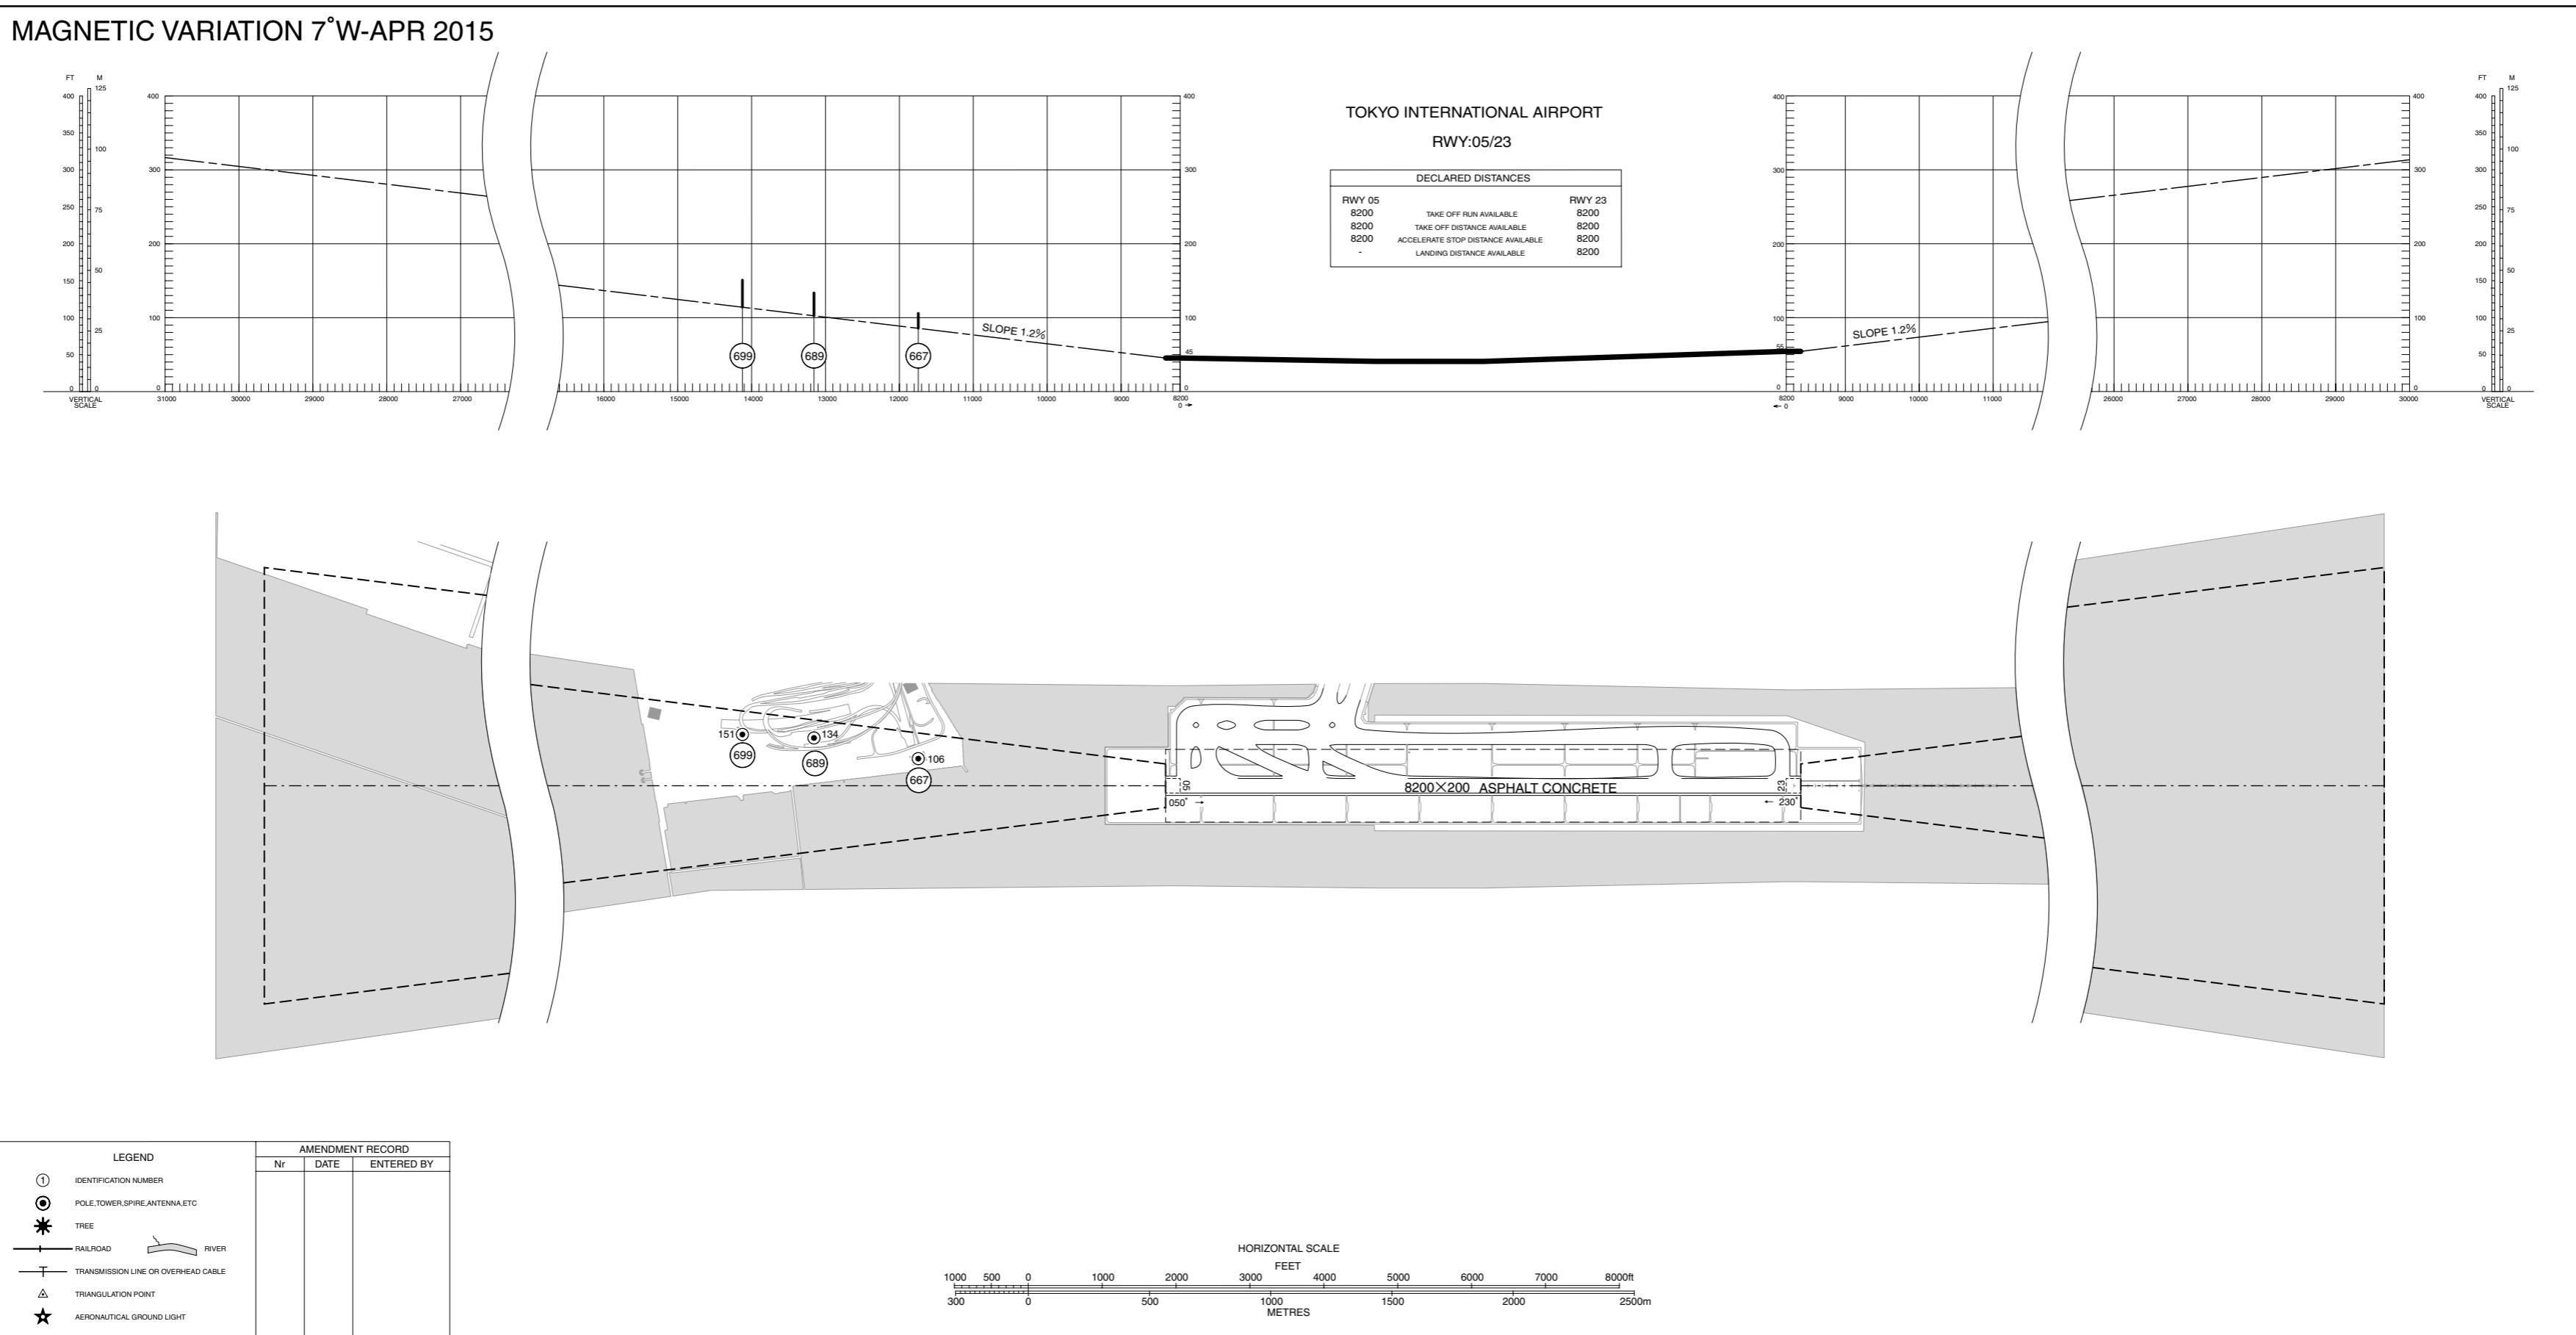

AERODROME OBSTACLE CHART-ICAO TYPE B

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

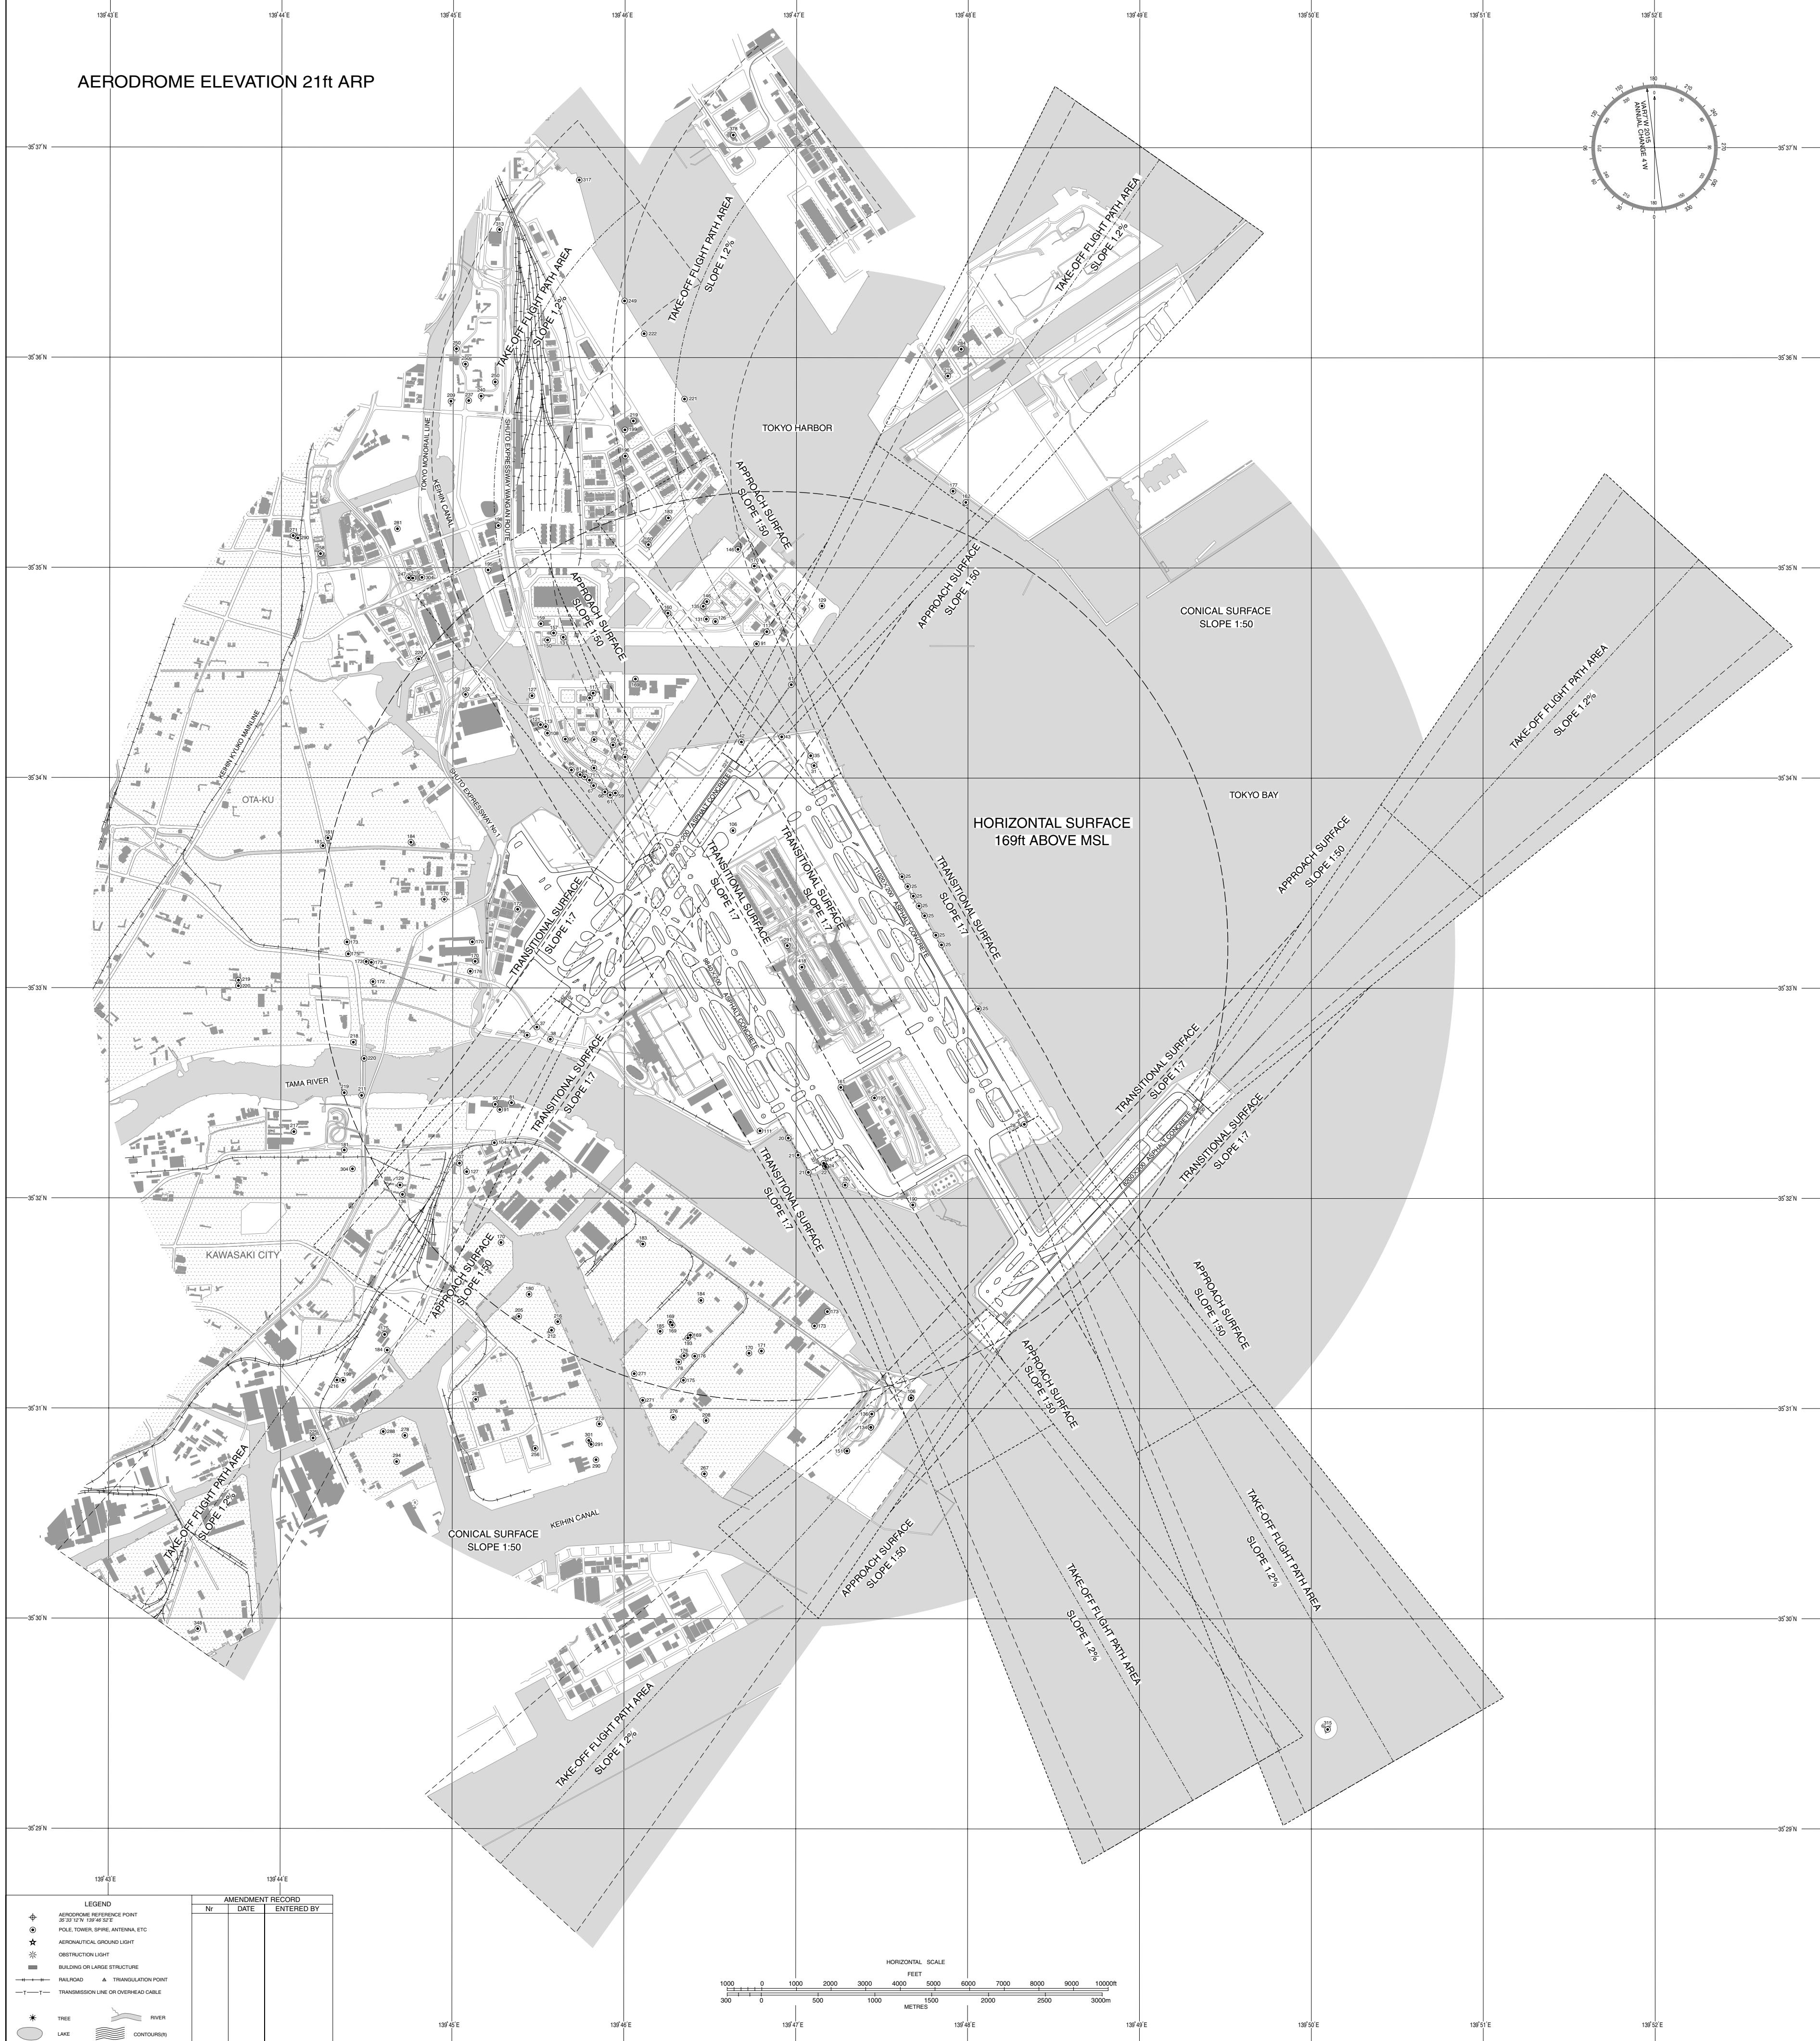

PRECISION APPROACH TERRAIN CHART



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

SID

SEKIYADO THREE DEPARTURE

RWY04/34R/34L: Climb RWY HDG to 700FT, turn right HDG100° to HME 9.0DME, turn left HDG017° to intercept and proceed via SYE R167 to SYE VOR/DME.
Cross SYE VOR/DME between 12000FT and FL150.

RWY16R/16L: Climb RWY HDG to intercept and proceed via HME 11.8DME counterclockwise ARC to HME R065, turn right HDG017° to intercept and proceed via SYE R167 to SYE VOR/DME.
Cross HME R116 at or above 6000FT, cross SYE VOR/DME between 12000FT and FL150.

RWY05 : Climb on HDG059° to HME 10.0DME, turn left HDG017° to intercept and proceed via SYE R167 to SYE VOR/DME.
Cross SYE VOR/DME between 12000FT and FL150.

Note RWY34R/34L/04: 5.0% climb gradient required up to 700FT.
RWY05: 5.0% climb gradient required up to 500FT.



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

SID

VADAR ONE DEPARTURE

RWY04/34R/34L: Climb RWY HDG to 700FT, turn right HDG100° to HME 9.0DME, turn right HDG222° to intercept and proceed via HME R177 to VADAR.
Cross HME R120 at or above 5000FT, cross VADAR at or above 9000FT.

RWY16R/16L: Climb RWY HDG to HME 7.0DME, turn right HDG207° to intercept and proceed via HME R177 to VADAR.
Cross VADAR at or above 9000FT.

RWY05: Climb RWY HDG to 1000FT, turn right HDG100° to HME 9.0DME, turn right HDG222° to intercept and proceed via HME R177 to VADAR.
Cross HME R120 at or above 5000FT, cross VADAR at or above 9000FT.

Note RWY04/34R/34L: 5.0% climb gradient required up to 700FT.

RWY05: 5.0% climb gradient required up to 1000FT.



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

SID

OPPAR THREE DEPARTURE

RWY04/34R/34L: Climb RWY HDG to 700FT, turn right within 4NM, climb via HDG110° to HME 7.0DME, turn right, via HME 8.0DME clockwise ARC to intercept and proceed via HME R194 to OPPAR.

Cross HME 7.0DME at or above 3000FT, cross HME R120 at or above 5000FT, cross OPPAR at or above 9000FT.

RWY16R/16L: Climb RWY HDG to 500FT, turn left climb via HME R140 to 8.0DME, turn left HDG239° within HME 12.0DME to intercept and proceed via HME R194 to OPPAR.


Cross OPPAR at or above 9000FT.

RWY05: Climb RWY HDG to HME 5.0DME, turn right, via HME 8.0DME clockwise ARC to intercept and proceed via HME R194 to OPPAR.

Cross HME R120 at or above 5000FT, cross OPPAR at or above 9000FT.

Note Aircraft taking off from RWY16R/16L are required to complete left turns south of HME R080.

RWY34R/34L/04: 5.0% climb gradient required up to 700FT.

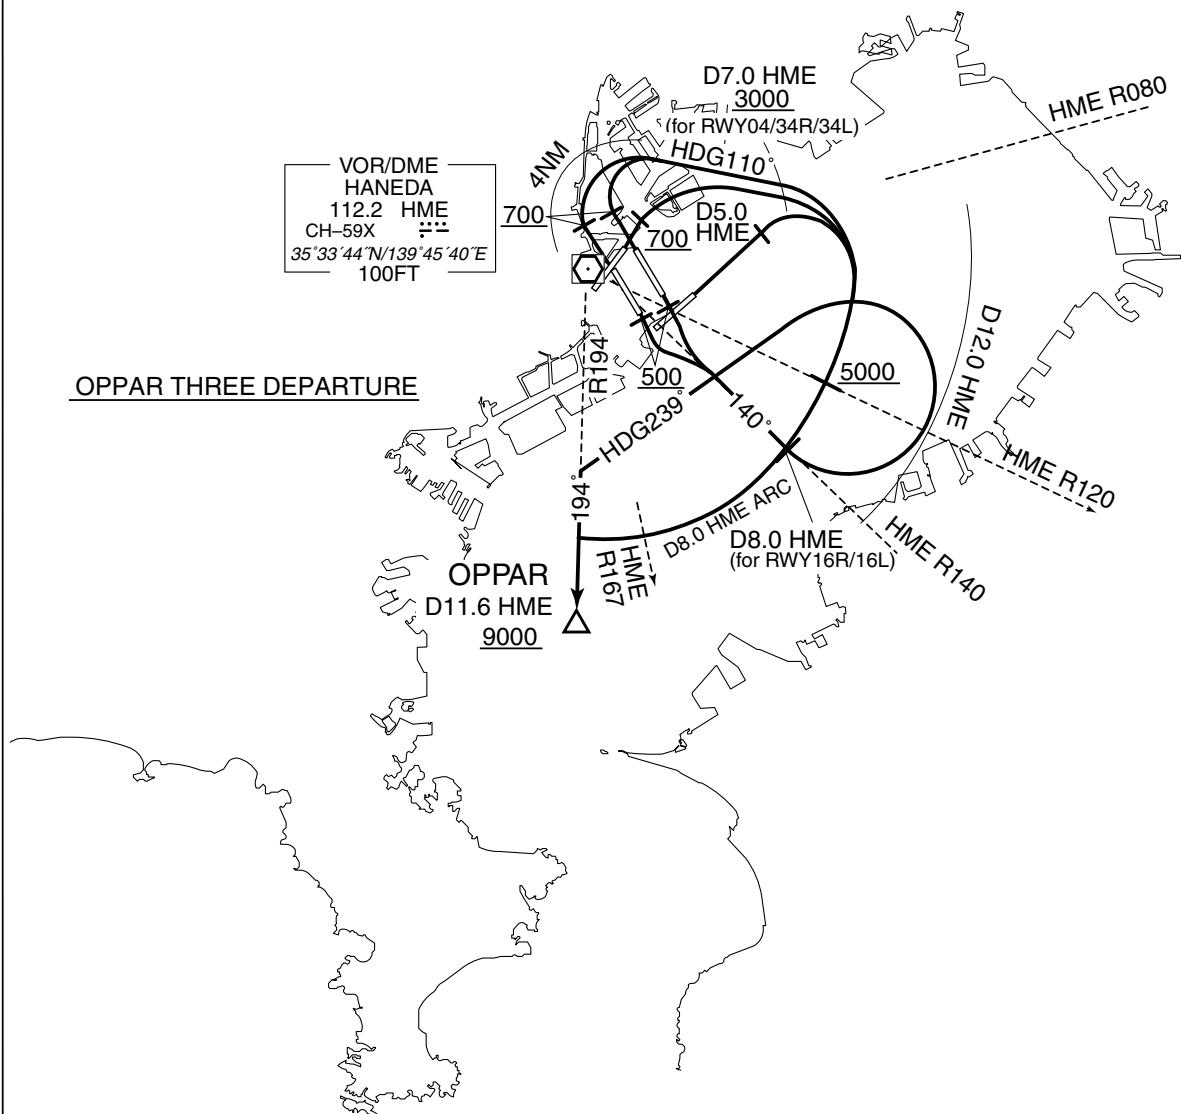

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV TRANSITION

JYOGA TRANSITION UTIBO TRANSITION		RNAV1
Note 1) DME/DME/IRU or GNSS required.	Critical DME	-
2) RADAR service required.	DME GAP	-
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

VAR 7° W(2016)

JYOGA TRANSITION

From OPPAR at or above 9000FT, to JYOGA at or above FL150.

UTIBO TRANSITION

From OPPAR at or above 9000FT, to UTIBO at or above FL150.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV TRANSITION

JYOGA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OPPAR	—	—	-7.4	—	—	+9000	—	—	RNAV1
002	TF	JYOGA	—	224 (217.1)	-7.4	16.9	—	+FL150	—	—	RNAV1

UTIBO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OPPAR	—	—	-7.4	—	—	+9000	—	—	RNAV1
002	TF	UTIBO	—	170 (162.7)	-7.4	26.7	—	+FL150	—	—	RNAV1

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

SID

ISOGO TWO DEPARTURE (FOR PROP ONLY)

RWY04/34R/34L: Climb RWY HDG to 700FT or above, turn left within 4NM, climb via HME R177 to VADAR.

RWY16R/16L: Climb RWY HDG to HME 7.0DME, turn right HDG207° to intercept and proceed via HME R177 to VADAR.

RWY05: Climb RWY HDG to 1000FT, turn right HDG100° to HME 9.0DME, turn right HDG222° to intercept and proceed via HME R177 to VADAR.
Cross HME R120 at or above 5000FT.

Note RWY34R/34L/04: 5.0% climb gradient required up to 700FT.

RWY05: 5.0% climb gradient required up to 1000FT.



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL


TRANSITION

OSHIMA TRANSITION

From over VADAR, via HME R177 to intercept and proceed via XAC R058 to XAC VORTAC.

CHIKURA TRANSITION

From over VADAR, via HME R177 to UTIBO.

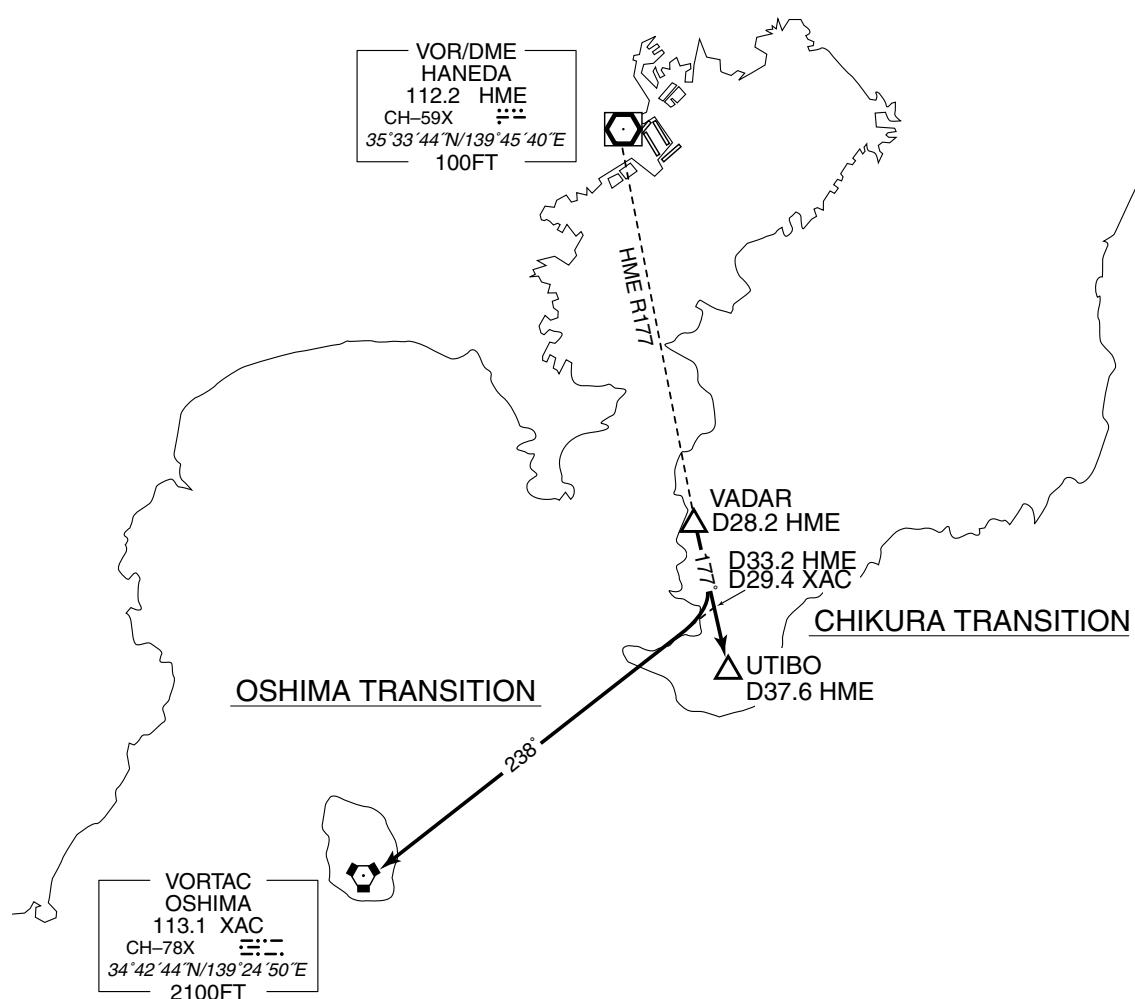

STANDARD DEPARTURE CHART-INSTRUMENT


RJTT/TOKYO INTL

RNAV SID

VAMOS THREE DEPARTURE		RNAV SID
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.	Critical DME	RWY16R:HME 1.2NM FM DER - 1.9NM to T6R11 RWY16L:HME 1.0NM FM DER - 2.4NM to T6L21 RWY34R:HME 1.0NM FM DER - 2.5NM to TT502 RWY34L:HME 0.5NM FM DER - 2.5NM to TT502 RWY04:HME 1.7NM FM DER - 2.5NM to TT502 RWY05:HME DER - 2.7NM to TT502
DME GAP RWY16R:DER - 1.2NM FM DER RWY16L:DER - 1.0NM FM DER RWY34R:DER - 1.0NM FM DER RWY34L:DER - 0.5NM FM DER RWY04:DER - 1.7NM FM DER RWY22:DER - 1.4NM FM DER		
Inappropriate Navaids See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1		

VAR8°W(2020)

CHANGE : PROC renamed. VAR. HDG after DEP FM RWY04,22. Course FM TT502 to LOCUP.

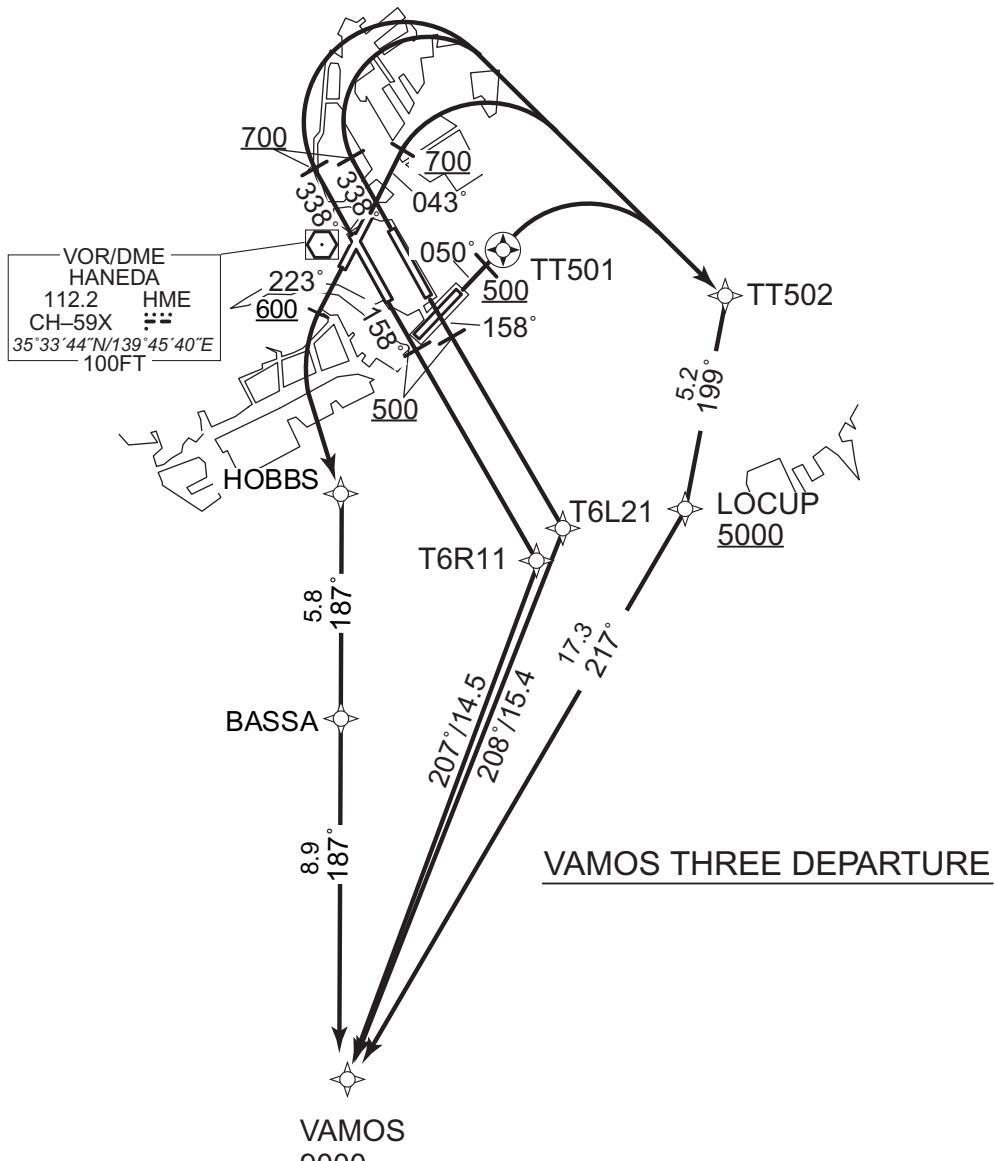

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAMOS THREE DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11, to VAMOS at or above 9000FT.

RWY16L : Climb on HDG 158° at or above 500FT, direct to T6L21, to VAMOS at or above 9000FT.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to TT502, to LOCUP at or above 5000FT, to VAMOS at or above 9000FT.

RWY04: Climb on HDG 043° at or above 700FT, turn right direct to TT502, to LOCUP at or above 5000FT, to VAMOS at or above 9000FT.

RWY05: Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to VAMOS at or above 9000FT.

RWY22: Climb on HDG 223° at or above 600FT, turn left direct to HOBBS, to BASSA, to VAMOS at or above 9000FT.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

RWY22 : 5.0% climb gradient required up to 600FT.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAMOS THREE DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6R11	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	VAMOS	—	207 (199.5)	-7.6	14.5	—	+9000	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6L21	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	VAMOS	—	208 (200.7)	-7.6	15.4	—	+9000	—	—	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.6	—	—	+700	—	—	RNAV1
002	DF	TT502	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	LOCUP	—	199 (190.9)	-7.6	5.2	—	+5000	—	—	RNAV1
004	TF	VAMOS	—	217 (209.5)	-7.6	17.3	—	+9000	—	—	RNAV1

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	043 (034.9)	-7.6	—	—	+700	—	—	RNAV1
002	DF	TT502	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	LOCUP	—	199 (190.9)	-7.6	5.2	—	+5000	—	—	RNAV1
004	TF	VAMOS	—	217 (209.5)	-7.6	17.3	—	+9000	—	—	RNAV1

CHANGE : PROC renamed. Magnetic Variation. RWY34L/RWY34R:NR003(Course), RWY04:NR001,003(Course).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M('T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.6	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.6	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.6	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.6	5.2	—	+5000	—	—	RNAV1
005	TF	VAMOS	—	217 (209.5)	-7.6	17.3	—	+9000	—	—	RNAV1

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M('T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	223 (214.9)	-7.6	—	—	+600	—	—	RNAV1
002	DF	HOBBS	—	—	-7.6	—	L	—	—	—	RNAV1
003	TF	BASSA	—	187 (179.9)	-7.6	5.8	—	—	—	—	RNAV1
004	TF	VAMOS	—	187 (179.9)	-7.6	8.9	—	+9000	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
BASSA	352108.8N / 1394542.2E	T6R11	352552.5N / 1395137.2E
HOBBS	352653.9N / 1394541.3E	TT501	353328.7N / 1395029.9E
LOCUP	352718.8N / 1395608.5E	TT502	353224.4N / 1395720.7E
T6L21	352639.1N / 1395222.0E	VAMOS	351215.5N / 1394543.6E

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL		RNAV TRANSITION
TATEYAMA TRANSITION / DRAKY TRANSITION		RNAV1
Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	Critical DME	—
DME GAP	—	—
Inappropriate Navaids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1	—
VAR8°W(2019)		
<p>The chart shows the departure routes from OSHIMA (XAC). The DRAKY TRANSITION route goes from OSHIMA (XAC) to DRAKY via a bearing of 218°, then to VAMOS (9000ft) via a bearing of 222°. The TATEYAMA TRANSITION route goes from OSHIMA (XAC) to TATEYAMA via a bearing of 218°, then to UTIBO via a bearing of 068°. The RNAV1 route goes directly from OSHIMA (XAC) to VAMOS (9000ft) via a bearing of 222°. The chart also includes information for VORTAC OSHIMA (113.1, CH-78X, 34°42'44"N/139°24'50"E, 2100FT), TACAN TATEYAMA (986, CH-25X, 34°58'15"N/139°50'17"E, 500FT), and DME TATEYAMA (1159, CH-72X, 34°56'46"N/139°53'43"E, 600FT).</p>		

CHANGE : New PROC

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV TRANSITION

TATEYAMA TRANSITION

From VAMOS at or above 9000FT, to UTIBO.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	VAMOS	–	–	-7.5	–	–	+9000	–	–	RNAV1
002	TF	UTIBO	–	165 (157.0)	-7.5	16.8	–	–	–	–	RNAV1

DRAKY TRANSITION

From VAMOS at or above 9000FT, to DRAKY, to XAC.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	VAMOS	–	–	-7.5	–	–	+9000	–	–	RNAV1
002	TF	DRAKY	–	218 (210.2)	-7.5	22.2	–	–	–	–	RNAV1
003	TF	XAC	–	218 (210.1)	-7.5	11.9	–	–	–	–	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
DRAKY	345301.7N / 1393205.5E	VAMOS	351215.5N / 1394543.6E
UTIBO	345647.0N / 1395343.9E	XAC	344244.1N / 1392450.5E

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

LAXAS THREE DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.	Critical DME	RWY16R: HME 1.2NM FM DER - 1.9NM to T6R11 HYD T6R11 - TAURA RWY16L: HME 1.0NM FM DER - 2.4NM to T6L21 HYD 9.0NM to TAURA - TAURA RWY34R: HME 1.0NM FM DER - 2.5NM to TT502 HYD 8.6NM to TAURA - TAURA RWY34L: HME 0.5NM FM DER - 2.5NM to TT502 HYD 8.6NM to TAURA - TAURA RWY04: HME 1.7NM FM DER - 2.5NM to TT502 HYD 8.6NM to TAURA - TAURA RWY05: HME DER - 2.7NM to TT502 HYD 8.6NM to TAURA - TAURA
DME GAP		RWY16R:DER - 1.2NM FM DER RWY16L:DER - 1.0NM FM DER RWY34R:DER - 1.0NM FM DER RWY34L:DER - 0.5NM FM DER RWY04:DER - 1.7NM FM DER RWY05:DER - 1.4NM FM DER
Inappropriate Navaids		See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1

VAR8°W(2020)

CHANGE : PROC renamed. VAR. HDG after DEP FM RWY04,22. Course FM TT502 to LOCUP. Course FM BASSA to UMUKI.



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

LAXAS THREE DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11, to TAURA at or above 9000FT, to IMOLA at or above FL150, to LAXAS at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, direct to T6L21, to TAURA at or above 9000FT, to IMOLA at or above FL150, to LAXAS at or above FL170.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to TT502, to LOCUP at or above 5000FT, to TAURA at or above 9000FT, to IMOLA at or above FL150, to LAXAS at or above FL170.

RWY04 : Climb on HDG 043° at or above 700FT, turn right direct to TT502, to LOCUP at or above 5000FT, to TAURA at or above 9000FT, to IMOLA at or above FL150, to LAXAS at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to TAURA at or above 9000FT, to IMOLA at or above FL150, to LAXAS at or above FL170.

RWY22 : Climb on HDG 223° at or above 600FT, turn left direct to HOBBS, to BASSA, to UMUKI, to PIPER at or above 9000FT, to SATOL, to IMOLA at or above FL150, to LAXAS at or above FL170.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

RWY22 : 5.0% climb gradient required up to 600FT.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

LAXAS THREE DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6R11	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	TAURA	—	226 (218.1)	-7.6	9.0	—	+9000	—	—	RNAV1
004	TF	IMOLA	—	228 (220.5)	-7.6	18.8	—	+FL150	—	—	RNAV1
005	TF	LAXAS	—	266 (258.6)	-7.6	12.8	—	+FL170	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6L21	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	TAURA	—	226 (218.1)	-7.6	10.0	—	+9000	—	—	RNAV1
004	TF	IMOLA	—	228 (220.5)	-7.6	18.8	—	+FL150	—	—	RNAV1
005	TF	LAXAS	—	266 (258.6)	-7.6	12.8	—	+FL170	—	—	RNAV1

CHANGE : PROC renamed. Magnetic Variation. RWY34L/RWY34R.NR003(Course).

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.6	—	—	+700	—	—	RNAV1
002	DF	TT502	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	LOCUP	—	199 (190.9)	-7.6	5.2	—	+5000	—	—	RNAV1
004	TF	TAURA	—	235 (227.3)	-7.6	12.6	—	+9000	—	—	RNAV1
005	TF	IMOLA	—	228 (220.5)	-7.6	18.8	—	+FL150	—	—	RNAV1
006	TF	LAXAS	—	266 (258.6)	-7.6	12.8	—	+FL170	—	—	RNAV1

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	043 (034.9)	-7.6	—	—	+700	—	—	RNAV1
002	DF	TT502	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	LOCUP	—	199 (190.9)	-7.6	5.2	—	+5000	—	—	RNAV1
004	TF	TAURA	—	235 (227.3)	-7.6	12.6	—	+9000	—	—	RNAV1
005	TF	IMOLA	—	228 (220.5)	-7.6	18.8	—	+FL150	—	—	RNAV1
006	TF	LAXAS	—	266 (258.6)	-7.6	12.8	—	+FL170	—	—	RNAV1

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.6	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.6	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.6	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.6	5.2	—	+5000	—	—	RNAV1
005	TF	TAURA	—	235 (227.3)	-7.6	12.6	—	+9000	—	—	RNAV1
006	TF	IMOLA	—	228 (220.5)	-7.6	18.8	—	+FL150	—	—	RNAV1
007	TF	LAXAS	—	266 (258.6)	-7.6	12.8	—	+FL170	—	—	RNAV1

CHANGE : Magnetic Variation. RWY04:NR001,003(Course). RWY05:NR004(Course).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	223 (214.9)	-7.6	—	—	+600	—	—	RNAV1
002	DF	HOBBS	—	—	-7.6	—	L	—	—	—	RNAV1
003	TF	BASSA	—	187 (179.9)	-7.6	5.8	—	—	—	—	RNAV1
004	TF	UMUKI	—	172 (163.9)	-7.6	9.2	—	—	—	—	RNAV1
005	TF	PIPER	—	235 (227.4)	-7.6	3.5	—	+9000	—	—	RNAV1
006	TF	SATOL	—	235 (227.4)	-7.6	5.5	—	—	—	—	RNAV1
007	TF	IMOLA	—	266 (258.7)	-7.6	9.1	—	+FL150	—	—	RNAV1
008	TF	LAXAS	—	266 (258.6)	-7.6	12.8	—	+FL170	—	—	RNAV1

CHANGE : Magnetic Variation. RWY22:NR001,004(Course).

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
BASSA	352108.8N / 1394542.2E	T6L21	352639.1N / 1395222.0E
HOBBS	352653.9N / 1394541.3E	T6R11	352552.5N / 1395137.2E
IMOLA	350426.0N / 1392951.0E	TAURA	351846.1N / 1394447.3E
LAXAS	350153.1N / 1391432.8E	TT501	353328.7N / 1395029.9E
LOCUP	352718.8N / 1395608.5E	TT502	353224.4N / 1395720.7E
PIPER	350958.3N / 1394542.0E	UMUKI	351219.1N / 1394849.2E
SATOL	350613.3N / 1394043.4E		

STANDARD DEPARTURE CHART-INSTRUMENT


RJTT/TOKYO INTL

RNAV SID

NINOX THREE DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		RWY16R : HME 1.2NM FM DER - 3.8NM to T6R12 HYD T6R12 - TT631 PQD 1.0NM to BAYGE - 6.5NM to SEIKO RWY16L : HME 1.0NM FM DER - 4.7NM to T6L22 HYD 5.6NM to TT631 - TT631 PQD 1.0NM to BAYGE - 6.5NM to SEIKO RWY34R : HME 1.0NM FM DER - 2.5NM to TT502 HYD 6.5NM to BAYGE - BAYGE PQD BAYGE - 6.5NM to SEIKO RWY34L : HME 0.5NM FM DER - 2.5NM to TT502 HYD 6.5NM to BAYGE - BAYGE PQD BAYGE - 6.5NM to SEIKO RWY04 : HME 1.7NM FM DER - 2.5NM to TT502 HYD 6.5NM to BAYGE - BAYGE PQD BAYGE - 6.5NM to SEIKO RWY05 : HME DER - 2.7NM to TT502 HYD 6.5NM to BAYGE - BAYGE PQD BAYGE - 6.5NM to SEIKO
DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 1.0NM FM DER RWY34L : DER - 0.5NM FM DER RWY04 : DER - 1.7NM FM DER RWY22 : DER - 1.4NM FM DER	Critical DME
Inappropriate Navaids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1	

VAR8°W(2020)

NINOX THREE DEPARTURE

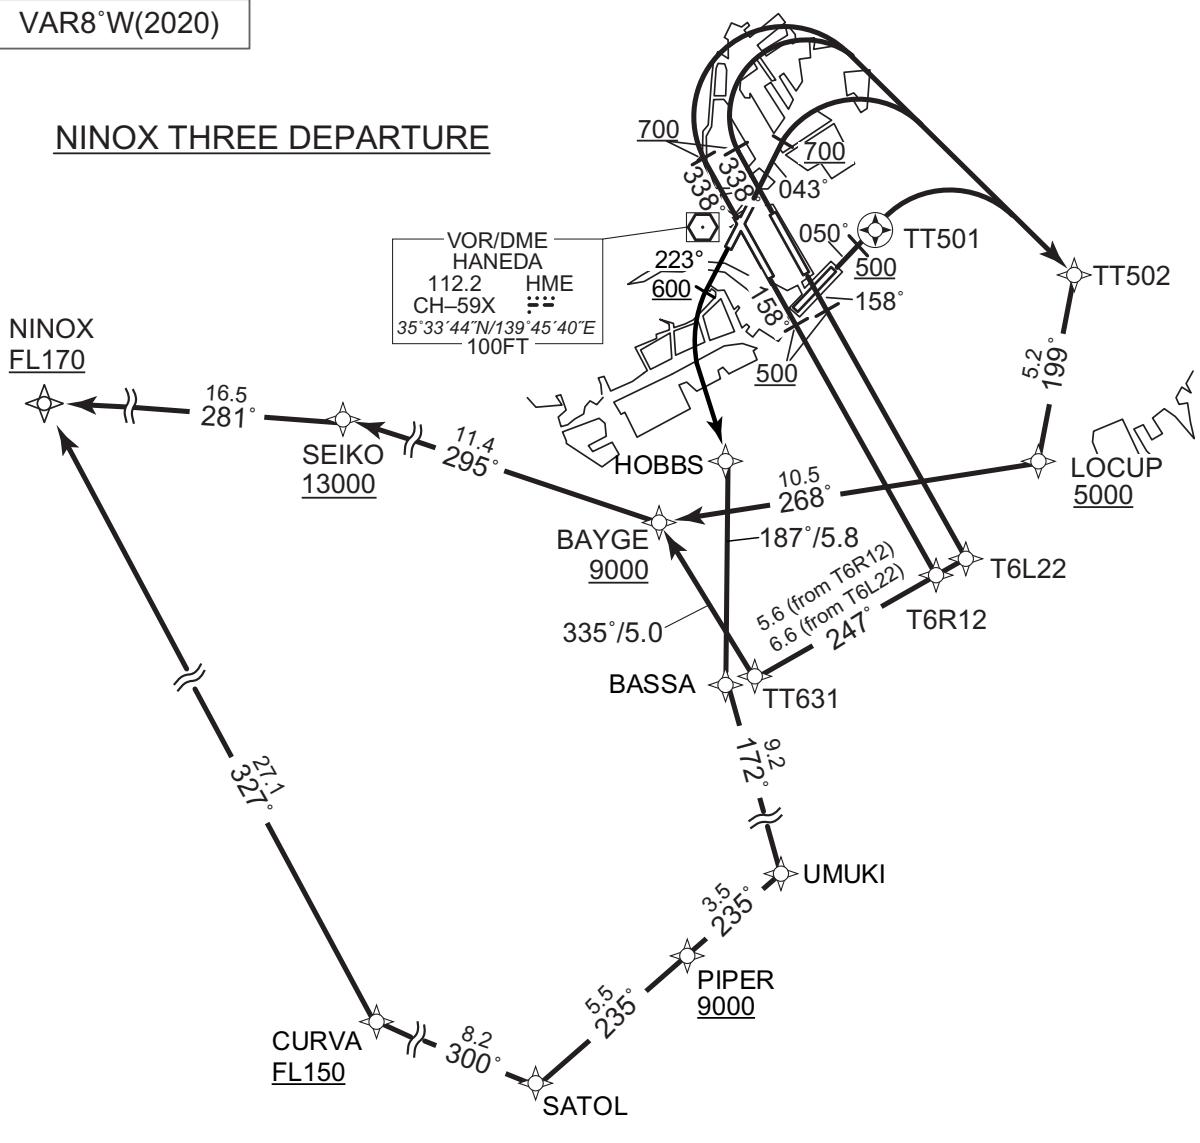

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

NINOX THREE DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R12, to TT631, to BAYGE at or above 9000FT, to SEIKO at or above 13000FT, to NINOX at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, direct to T6L22, to TT631, to BAYGE at or above 9000FT, to SEIKO at or above 13000FT, to NINOX at or above FL170.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to TT502, to LOCUP at or above 5000FT, to BAYGE at or above 9000FT, to SEIKO at or above 13000FT, to NINOX at or above FL170.

RWY04 : Climb on HDG 043° at or above 700FT, turn right direct to TT502, to LOCUP at or above 5000FT, to BAYGE at or above 9000FT, to SEIKO at or above 13000FT, to NINOX at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to BAYGE at or above 9000FT, to SEIKO at or above 13000FT, to NINOX at or above FL170.

RWY22 : Climb on HDG 223° at or above 600FT, turn left direct to HOBBS, to BASSA, to UMUKI, to PIPER at or above 9000FT, to SATOL, to CURVA at or above FL150, to NINOX at or above FL170.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

RWY22 : 5.0% climb gradient required up to 600FT.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

NINOX THREE DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6R12	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	TT631	—	247 (239.8)	-7.6	5.6	—	—	—	—	RNAV1
004	TF	BAYGE	—	335 (327.0)	-7.6	5.0	—	+9000	—	—	RNAV1
005	TF	SEIKO	—	295 (287.8)	-7.6	11.4	—	+13000	—	—	RNAV1
006	TF	NINOX	—	281 (272.9)	-7.6	16.5	—	+FL170	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6L22	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	TT631	—	247 (239.8)	-7.6	6.6	—	—	—	—	RNAV1
004	TF	BAYGE	—	335 (327.0)	-7.6	5.0	—	+9000	—	—	RNAV1
005	TF	SEIKO	—	295 (287.8)	-7.6	11.4	—	+13000	—	—	RNAV1
006	TF	NINOX	—	281 (272.9)	-7.6	16.5	—	+FL170	—	—	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.6	—	—	+700	—	—	RNAV1
002	DF	TT502	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	LOCUP	—	199 (190.9)	-7.6	5.2	—	+5000	—	—	RNAV1
004	TF	BAYGE	—	268 (260.6)	-7.6	10.5	—	+9000	—	—	RNAV1
005	TF	SEIKO	—	295 (287.8)	-7.6	11.4	—	+13000	—	—	RNAV1
006	TF	NINOX	—	281 (272.9)	-7.6	16.5	—	+FL170	—	—	RNAV1

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	043 (034.9)	-7.6	—	—	+700	—	—	RNAV1
002	DF	TT502	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	LOCUP	—	199 (190.9)	-7.6	5.2	—	+5000	—	—	RNAV1
004	TF	BAYGE	—	268 (260.6)	-7.6	10.5	—	+9000	—	—	RNAV1
005	TF	SEIKO	—	295 (287.8)	-7.6	11.4	—	+13000	—	—	RNAV1
006	TF	NINOX	—	281 (272.9)	-7.6	16.5	—	+FL170	—	—	RNAV1

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.6	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.6	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.6	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.6	5.2	—	+5000	—	—	RNAV1
005	TF	BAYGE	—	268 (260.6)	-7.6	10.5	—	+9000	—	—	RNAV1
006	TF	SEIKO	—	295 (287.8)	-7.6	11.4	—	+13000	—	—	RNAV1
007	TF	NINOX	—	281 (272.9)	-7.6	16.5	—	+FL170	—	—	RNAV1

CHANGE : Magnetic Variation. RWY04:NR001,003,006(Course). RWY05:NR004,007(Course).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M('T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	223 (214.9)	-7.6	—	—	+600	—	—	RNAV1
002	DF	HOBBS	—	—	-7.6	—	L	—	—	—	RNAV1
003	TF	BASSA	—	187 (179.9)	-7.6	5.8	—	—	—	—	RNAV1
004	TF	UMUKI	—	172 (163.9)	-7.6	9.2	—	—	—	—	RNAV1
005	TF	PIPER	—	235 (227.4)	-7.6	3.5	—	+9000	—	—	RNAV1
006	TF	SATOL	—	235 (227.4)	-7.6	5.5	—	—	—	—	RNAV1
007	TF	CURVA	—	300 (292.2)	-7.6	8.2	—	+FL150	—	—	RNAV1
008	TF	NINOX	—	327 (319.6)	-7.6	27.1	—	+FL170	—	—	RNAV1

CHANGE : Magnetic Variation. RWY22:NR001,004(Course).

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
BASSA	352108.8N / 1394542.2E	SEIKO	352904.5N / 1393005.0E
BAYGE	352535.4N / 1394327.4E	T6L22	352441.2N / 1395345.4E
CURVA	350919.0N / 1393124.4E	T6R12	352413.6N / 1395247.1E
HOBBS	352653.9N / 1394541.3E	TT501	353328.7N / 1395029.9E
LOCUP	352718.8N / 1395608.5E	TT502	353224.4N / 1395720.7E
NINOX	352953.4N / 1390953.1E	TT631	352123.4N / 1394648.6E
PIPER	350958.3N / 1394542.0E	UMUKI	351219.1N / 1394849.2E
SATOL	350613.3N / 1394043.4E		

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL


RNAV SID

RITLA TWO A DEPARTURE		RNAV SID
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		RNAV1
DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 1.0NM FM DER RWY34L : DER - 0.5NM FM DER RWY04 : DER - 1.7NM FM DER RWY05 : 3.8NM to KAMAT - 1.8NM to KAMAT	Critical DME
Inappropriate Navaids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1	

VAR8°W(2020)

RITLA TWO A DEPARTURE RWY16R/16L

CHANGE : PROC renamed. VAR. RTE after LAYER. TIARA established.

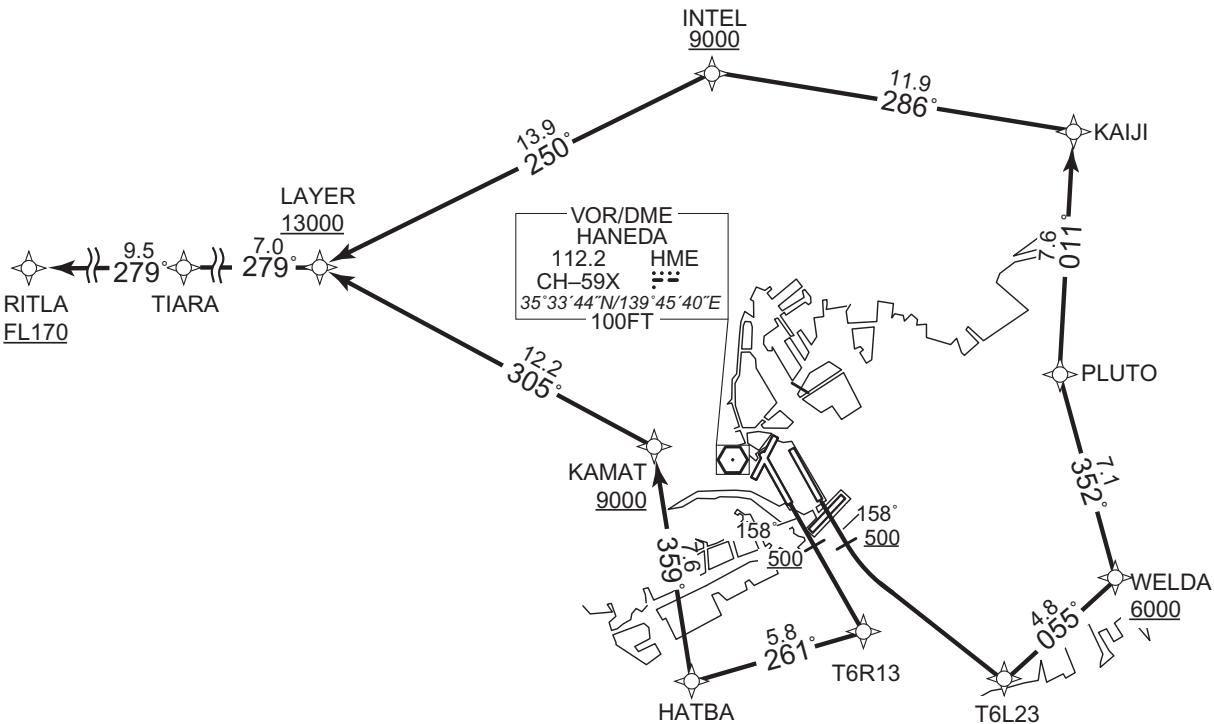


STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAR8°W(2020)

RITLA TWO A DEPARTURE RWY 34L/34R/04/05

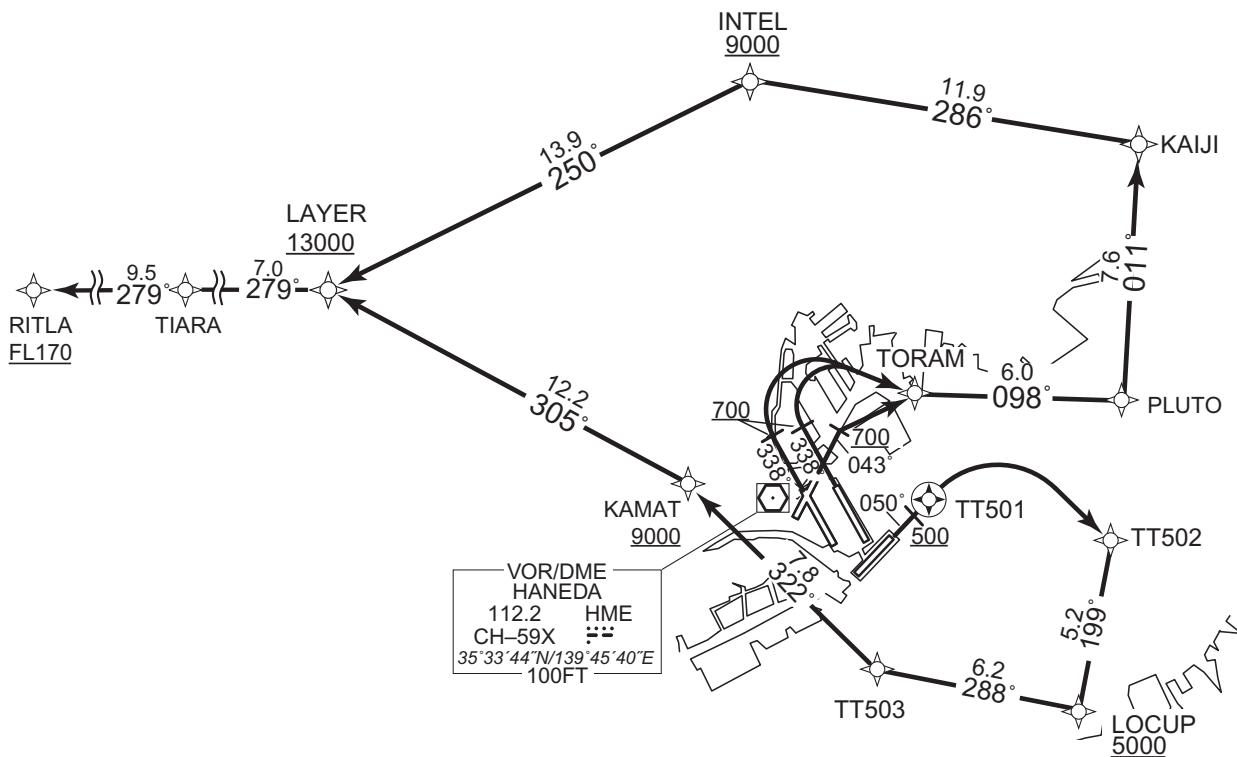

CHANGE : PROC renamed VAR RTE after LAYER. TIARA established HDG after DEP FM RWY04. Course FM TT502 to LOCUP.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RITLA TWO A DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R13, to HATBA, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to RITLA at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to RITLA at or above FL170.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to TORAM, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to RITLA at or above FL170.

RWY04 : Climb on HDG 043° at or above 700FT, direct to TORAM, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to RITLA at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to TT503, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to RITLA at or above FL170.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed. RTE after LAYER. TIARA established. HDG after DEP FM RWY04.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RITLA TWO A DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6R13	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	HATBA	—	261 (253.8)	-7.6	5.8	—	—	—	—	RNAV1
004	TF	KAMAT	—	359 (351.1)	-7.6	7.6	—	+9000	—	—	RNAV1
005	TF	LAYER	—	305 (297.1)	-7.6	12.2	—	+13000	—	—	RNAV1
006	TF	TIARA	—	279 (271.2)	-7.6	7.0	—	—	—	—	RNAV1
007	TF	RITLA	—	279 (271.1)	-7.6	9.5	—	+FL170	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6L23	—	—	-7.6	—	L	—	—	—	RNAV1
003	TF	WELDA	—	055 (047.3)	-7.6	4.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.6	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
006	TF	INTEL	—	286 (278.4)	-7.6	11.9	—	+9000	—	—	RNAV1
007	TF	LAYER	—	250 (242.4)	-7.6	13.9	—	+13000	—	—	RNAV1
008	TF	TIARA	—	279 (271.2)	-7.6	7.0	—	—	—	—	RNAV1
009	TF	RITLA	—	279 (271.1)	-7.6	9.5	—	+FL170	—	—	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.6	—	—	+700	—	—	RNAV1
002	DF	TORAM	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	PLUTO	—	098 (090.7)	-7.6	6.0	—	—	—	—	RNAV1
004	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
005	TF	INTEL	—	286 (278.4)	-7.6	11.9	—	+9000	—	—	RNAV1
006	TF	LAYER	—	250 (242.4)	-7.6	13.9	—	+13000	—	—	RNAV1
007	TF	TIARA	—	279 (271.2)	-7.6	7.0	—	—	—	—	RNAV1
008	TF	RITLA	—	279 (271.1)	-7.6	9.5	—	+FL170	—	—	RNAV1

CHANGE : PROC renamed. Magnetic Variation. RTE after LAYER. TIARA established.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	043 (034.9)	-7.6	—	—	+700	—	—	RNAV1
002	DF	TORAM	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	PLUTO	—	098 (090.7)	-7.6	6.0	—	—	—	—	RNAV1
004	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
005	TF	INTEL	—	286 (278.4)	-7.6	11.9	—	+9000	—	—	RNAV1
006	TF	LAYER	—	250 (242.4)	-7.6	13.9	—	+13000	—	—	RNAV1
007	TF	TIARA	—	279 (271.2)	-7.6	7.0	—	—	—	—	RNAV1
008	TF	RITLA	—	279 (271.1)	-7.6	9.5	—	+FL170	—	—	RNAV1

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.6	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.6	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.6	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.6	5.2	—	+5000	—	—	RNAV1
005	TF	TT503	—	288 (280.8)	-7.6	6.2	—	—	—	—	RNAV1
006	TF	KAMAT	—	322 (314.2)	-7.6	7.8	—	+9000	—	—	RNAV1
007	TF	LAYER	—	305 (297.1)	-7.6	12.2	—	+13000	—	—	RNAV1
008	TF	TIARA	—	279 (271.2)	-7.6	7.0	—	—	—	—	RNAV1
009	TF	RITLA	—	279 (271.1)	-7.6	9.5	—	+FL170	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
HATBA	352623.4N / 1394315.9E	T6L23	352627.6N / 1395539.1E
INTEL	354553.0N / 1394340.2E	T6R13	352800.8N / 1395006.4E
KAIJI	354409.6N / 1395806.6E	TIARA	353934.0N / 1391954.2E
KAMAT	353353.6N / 1394148.9E	TORAM	353636.8N / 1395011.0E
LAYER	353925.4N / 1392829.5E	TT501	353328.7N / 1395029.9E
LOCUP	352718.8N / 1395608.5E	TT502	353224.4N / 1395720.7E
PLUTO	353632.1N / 1395736.8E	TT503	352828.0N / 1394840.4E
RITLA	353944.8N / 1390813.1E	WELDA	352941.4N / 1395956.7E

CHANGE : Magnetic Variation. RTE after LAYER. TIARA established. RWY04:NR001(Route). RWY05:NR004(Course).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL


RNAV SID

RITLA TWO B DEPARTURE			RNAV1
<p>Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling.</p> <p>2) RADAR service required.</p>			<p>RWY16R : HME 1.2NM FM DER - HATBA HYD 2.8NM to HATBA - 1.6NM to HATBA KAMAT - 9.2NM to LAYER PQD HATBA - 1.6NM to KAMAT KAMAT - 9.2NM to LAYER SND 11.2NM to LAYER - LAYER</p> <p>RWY16L : HME 1.0NM FM DER - 3.5NM to T6L23 PQD 6.6NM to KAIJI - KAIJI NRE 6.9NM to INTEL - 6.9NM to LAYER</p> <p>RWY05 : HME DER - 2.7NM to TT502 TT503 - 3.8NM to KAMAT 1.8NM to KAMAT - KAMAT HYD 1.2NM to TT503 - TT503 4.8NM to KAMAT - 3.8NM to KAMAT PQD KAMAT - 9.2NM to LAYER SND 11.2NM to LAYER - LAYER</p>
DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 1.0NM FM DER RWY05 : 3.8NM to KAMAT - 1.8NM to KAMAT	Critical DME	
Inappropriate Nav aids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1		

VAR8°W(2020)

RITLA TWO B DEPARTURE RWY16R/16L

CHANGE : PROC renamed. VAR. RTE after LAYER. TIARA established.

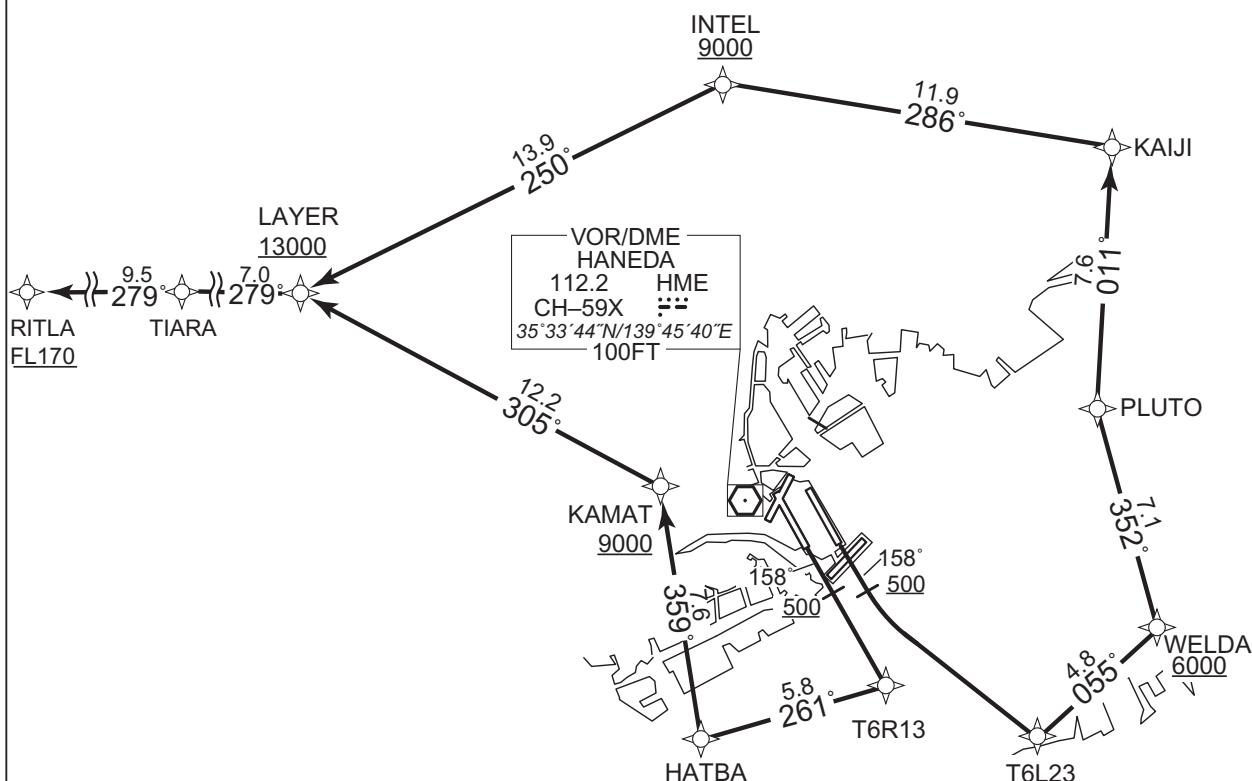

STANDARD DEPARTURE CHART-INSTRUMENT


RJTT/TOKYO INTL

RNAV SID

VAR8°W(2020)

RITLA TWO B DEPARTURE RWY 34R/05

CHANGE : PROC renamed. VAR. RTE after LAYER. TIARA established. Course FM TT502 to LOCUP.

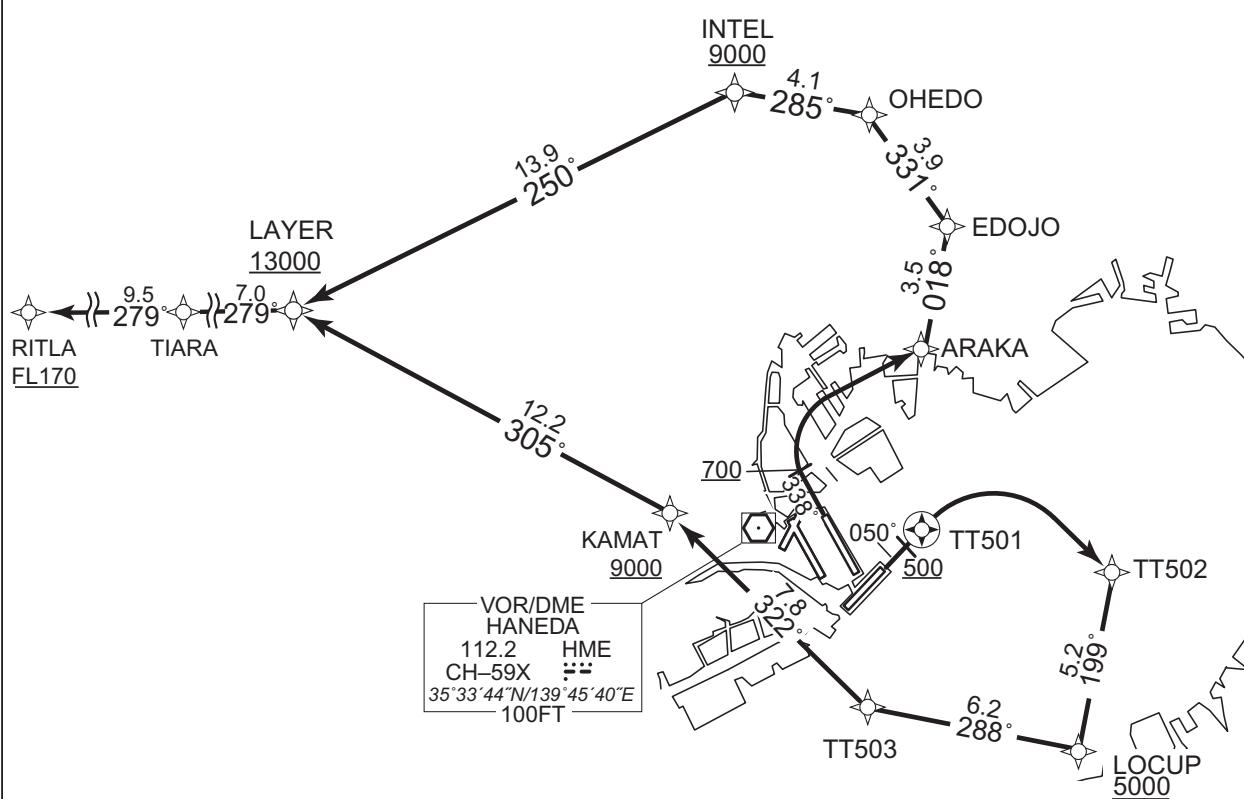

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RITLA TWO B DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R13, to HATBA, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to RITLA at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to RITLA at or above FL170.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA, to EDOJO, to OHEDO, to INTEL at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to RITLA at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to TT503, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to RITLA at or above FL170.

Note RWY34R : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RITLA TWO B DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6R13	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	HATBA	—	261 (253.8)	-7.6	5.8	—	—	—	—	RNAV1
004	TF	KAMAT	—	359 (351.1)	-7.6	7.6	—	+9000	—	—	RNAV1
005	TF	LAYER	—	305 (297.1)	-7.6	12.2	—	+13000	—	—	RNAV1
006	TF	TIARA	—	279 (271.2)	-7.6	7.0	—	—	—	—	RNAV1
007	TF	RITLA	—	279 (271.1)	-7.6	9.5	—	+FL170	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6L23	—	—	-7.6	—	L	—	—	—	RNAV1
003	TF	WELDA	—	055 (047.3)	-7.6	4.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.6	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
006	TF	INTEL	—	286 (278.4)	-7.6	11.9	—	+9000	—	—	RNAV1
007	TF	LAYER	—	250 (242.4)	-7.6	13.9	—	+13000	—	—	RNAV1
008	TF	TIARA	—	279 (271.2)	-7.6	7.0	—	—	—	—	RNAV1
009	TF	RITLA	—	279 (271.1)	-7.6	9.5	—	+FL170	—	—	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.6	—	—	+700	—	—	RNAV1
002	DF	ARAKA	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	EDOJO	—	018 (010.8)	-7.6	3.5	—	—	—	—	RNAV1
004	TF	OHEDO	—	331 (323.7)	-7.6	3.9	—	—	—	—	RNAV1
005	TF	INTEL	—	285 (277.0)	-7.6	4.1	—	+9000	—	—	RNAV1
006	TF	LAYER	—	250 (242.4)	-7.6	13.9	—	+13000	—	—	RNAV1
007	TF	TIARA	—	279 (271.2)	-7.6	7.0	—	—	—	—	RNAV1
008	TF	RITLA	—	279 (271.1)	-7.6	9.5	—	+FL170	—	—	RNAV1

CHANGE : PROC renamed. Magnetic Variation. RTE after LAYER. TIARA established.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.6	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.6	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.6	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.6	5.2	—	+5000	—	—	RNAV1
005	TF	TT503	—	288 (280.8)	-7.6	6.2	—	—	—	—	RNAV1
006	TF	KAMAT	—	322 (314.2)	-7.6	7.8	—	+9000	—	—	RNAV1
007	TF	LAYER	—	305 (297.1)	-7.6	12.2	—	+13000	—	—	RNAV1
008	TF	TIARA	—	279 (271.2)	-7.6	7.0	—	—	—	—	RNAV1
009	TF	RITLA	—	279 (271.1)	-7.6	9.5	—	+FL170	—	—	RNAV1

CHANGE : Magnetic Variation. RTE after LAYER. TIARA established. RWY05;NR004(Course).

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	PLUTO	353632.1N / 1395736.8E
EDOJO	354214.0N / 1395129.9E	RITLA	353944.8N / 1390813.1E
HATBA	352623.4N / 1394315.9E	T6L23	352627.6N / 1395539.1E
INTEL	354553.0N / 1394340.2E	T6R13	352800.8N / 1395006.4E
KAIJI	354409.6N / 1395806.6E	TIARA	353934.0N / 1391954.2E
KAMAT	353353.6N / 1394148.9E	TT501	353328.7N / 1395029.9E
LAYER	353925.4N / 1392829.5E	TT502	353224.4N / 1395720.7E
LOCUP	352718.8N / 1395608.5E	TT503	352828.0N / 1394840.4E
OHEDO	354523.4N / 1394838.6E	WELDA	352941.4N / 1395956.7E

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RITLA TWO C DEPARTURE

RNAV1

Note 1) DME/DME/IRU or GNSS required.

※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling.

2) RADAR service required.

DME GAP

RWY16R : DER - 1.2NM FM DER
RWY16L : DER - 1.0NM FM DER
RWY34R : DER - 1.0NM FM DER
RWY05 : 3.8NM to KAMAT - 1.8NM to KAMAT
RWY22 : DER - 1.4NM FM DER

Inappropriate Navaids

See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1


Critical DME

RWY16R : HME 1.2NM FM DER - 1.9NM to T6R11
PQD 6.6NM to KAIJI - KAIJI
NRE 6.9NM to INTEL - 6.9NM to LAYER
RWY16L : HME 1.0NM FM DER - 3.5NM to T6L23
PQD 6.6NM to KAIJI - KAIJI
NRE 6.9NM to INTEL - 6.9NM to LAYER
RWY05 : HME DER - 2.7NM to TT502
TT503 - 3.8NM to KAMAT
1.8NM to KAMAT - KAMAT
HYD 1.2NM to TT503 - TT503
4.8NM to KAMAT - 3.8NM to KAMAT
PQD KAMAT - 9.2NM to LAYER
SND 11.2NM to LAYER - LAYER

VAR8°W(2020)

RITLA TWO C DEPARTURE RWY16R/16L/22

CHANGE : PROC renamed. VAR. RTE after LAYER. TIARA established. HDG after DEP FM RWY22. Course FM BASSA to UMUKI.

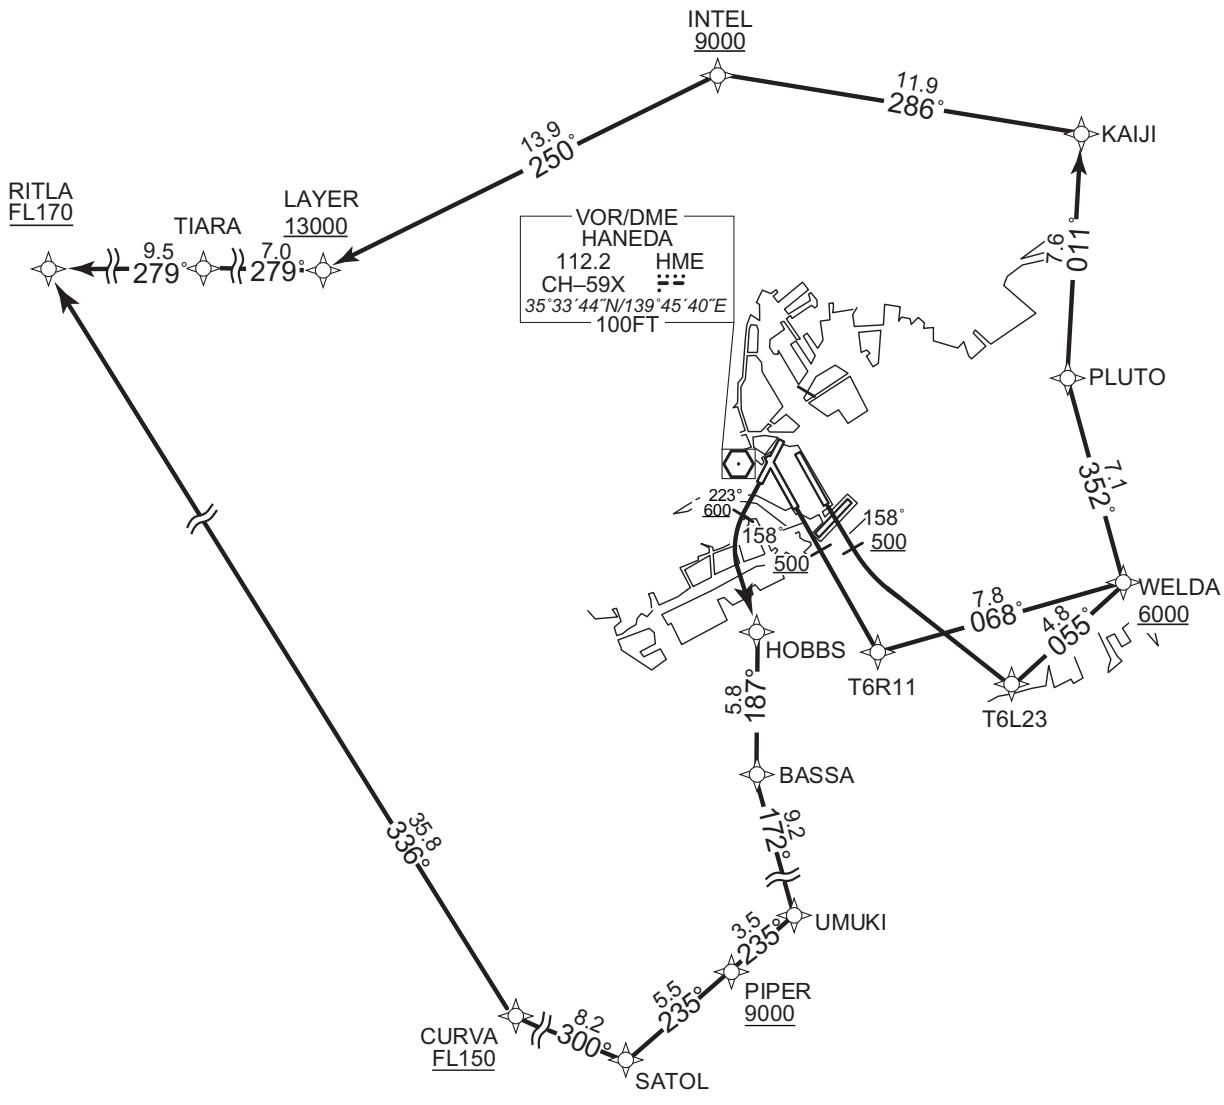

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAR8°W(2020)

RITLA TWO C DEPARTURE RWY 34R/05

CHANGE : PROC renamed. VAR. RTE after LAYER. TIARA established. Course FM TT502 to LOCUP.



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RITLA TWO C DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to RITLA at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to RITLA at or above FL170.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA, to EDOJO, to OHEDO, to INTEL at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to RITLA at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to TT503, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to TIARA, to RITLA at or above FL170.

RWY22 : Climb on HDG 223° at or above 600FT, turn left direct to HOBBS, to BASSA, to UMUKI, to PIPER at or above 9000FT, to SATOL, to CURVA at or above FL150, to RITLA at or above FL170.

Note RWY34R : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

RWY22 : 5.0% climb gradient required up to 600FT.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RITLA TWO C DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6R11	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	WELDA	—	068 (060.6)	-7.6	7.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.6	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
006	TF	INTEL	—	286 (278.4)	-7.6	11.9	—	+9000	—	—	RNAV1
007	TF	LAYER	—	250 (242.4)	-7.6	13.9	—	+13000	—	—	RNAV1
008	TF	TIARA	—	279 (271.2)	-7.6	7.0	—	—	—	—	RNAV1
009	TF	RITLA	—	279 (271.1)	-7.6	9.5	—	+FL170	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6L23	—	—	-7.6	—	L	—	—	—	RNAV1
003	TF	WELDA	—	055 (047.3)	-7.6	4.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.6	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
006	TF	INTEL	—	286 (278.4)	-7.6	11.9	—	+9000	—	—	RNAV1
007	TF	LAYER	—	250 (242.4)	-7.6	13.9	—	+13000	—	—	RNAV1
008	TF	TIARA	—	279 (271.2)	-7.6	7.0	—	—	—	—	RNAV1
009	TF	RITLA	—	279 (271.1)	-7.6	9.5	—	+FL170	—	—	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.6	—	—	+700	—	—	RNAV1
002	DF	ARAKA	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	EDOJO	—	018 (010.8)	-7.6	3.5	—	—	—	—	RNAV1
004	TF	OHEDO	—	331 (323.7)	-7.6	3.9	—	—	—	—	RNAV1
005	TF	INTEL	—	285 (277.0)	-7.6	4.1	—	+9000	—	—	RNAV1
006	TF	LAYER	—	250 (242.4)	-7.6	13.9	—	+13000	—	—	RNAV1
007	TF	TIARA	—	279 (271.2)	-7.6	7.0	—	—	—	—	RNAV1
008	TF	RITLA	—	279 (271.1)	-7.6	9.5	—	+FL170	—	—	RNAV1

CHANGE : PROC renamed. Magnetic Variation. RTE after LAYER. TIARA established.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.6	-	-	+500	-	-	RNAV1
002	DF	TT501	Y	-	-7.6	-	-	-	-	-	RNAV1
003	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
004	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
005	TF	TT503	-	288 (280.8)	-7.6	6.2	-	-	-	-	RNAV1
006	TF	KAMAT	-	322 (314.2)	-7.6	7.8	-	+9000	-	-	RNAV1
007	TF	LAYER	-	305 (297.1)	-7.6	12.2	-	+13000	-	-	RNAV1
008	TF	TIARA	-	279 (271.2)	-7.6	7.0	-	-	-	-	RNAV1
009	TF	RITLA	-	279 (271.1)	-7.6	9.5	-	+FL170	-	-	RNAV1

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	223 (214.9)	-7.6	-	-	+600	-	-	RNAV1
002	DF	HOBBS	-	-	-7.6	-	L	-	-	-	RNAV1
003	TF	BASSA	-	187 (179.9)	-7.6	5.8	-	-	-	-	RNAV1
004	TF	UMUKI	-	172 (163.9)	-7.6	9.2	-	-	-	-	RNAV1
005	TF	PIPER	-	235 (227.4)	-7.6	3.5	-	+9000	-	-	RNAV1
006	TF	SATOL	-	235 (227.4)	-7.6	5.5	-	-	-	-	RNAV1
007	TF	CURVA	-	300 (292.2)	-7.6	8.2	-	+FL150	-	-	RNAV1
008	TF	RITLA	-	336 (328.3)	-7.6	35.8	-	+FL170	-	-	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	PLUTO	353632.1N / 1395736.8E
BASSA	352108.8N / 1394542.2E	RITLA	353944.8N / 1390813.1E
CURVA	350919.0N / 1393124.4E	SATOL	350613.3N / 1394043.4E
EDOJO	354214.0N / 1395129.9E	T6L23	352627.6N / 1395539.1E
HOBBS	352653.9N / 1394541.3E	T6R11	352552.5N / 1395137.2E
INTEL	354553.0N / 1394340.2E	TIARA	353934.0N / 1391954.2E
KAIJI	354409.6N / 1395806.6E	TT501	353328.7N / 1395029.9E
KAMAT	353353.6N / 1394148.9E	TT502	353224.4N / 1395720.7E
LAYER	353925.4N / 1392829.5E	TT503	352828.0N / 1394840.4E
LOCUP	352718.8N / 1395608.5E	UMUKI	351219.1N / 1394849.2E
OHEDO	354523.4N / 1394838.6E	WELDA	352941.4N / 1395956.7E
PIPER	350958.3N / 1394542.0E		

CHANGE : Magnetic Variation. RTE after LAYER. TIARA established. RWY05:NR004(Course). RWY22:NR001,004(Course).

STANDARD DEPARTURE CHART-INSTRUMENT


RJTT/TOKYO INTL

RNAV SID

BEKLA TWO A DEPARTURE		RNAV SID
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		RNAV1
DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 1.0NM FM DER RWY34L : DER - 0.5NM FM DER RWY04 : DER - 1.7NM FM DER RWY05 : 3.8NM to KAMAT - 1.8NM to KAMAT	Critical DME
Inappropriate Navaids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1	RWY16R : HME 1.2NM FM DER - HATBA HYD 2.8NM to HATBA - 1.6NM to HATBA PQD HATBA - 1.6NM to KAMAT RWY16L : HME 1.0NM FM DER - 3.5NM to T6L23 PQD 6.6NM to KAIJI - KAIJI NRE 6.9NM to INTEL - INTEL RWY34R : HME 1.0NM FM DER - 1.1NM to PLUTO SND TORAM - 3.1NM to PLUTO PQD 6.6NM to KAIJI - KAIJI NRE 6.9NM to INTEL - INTEL RWY34L : HME 0.5NM FM DER - 1.1NM to PLUTO SND TORAM - 3.1NM to PLUTO PQD 6.6NM to KAIJI - KAIJI NRE 6.9NM to INTEL - INTEL RWY04 : HME 1.7NM FM DER - 1.1NM to PLUTO SND 2.2NM to TORAM - 3.1NM to PLUTO PQD 6.6NM to KAIJI - KAIJI NRE 6.9NM to INTEL - INTEL RWY05 : HME DER - 2.7NM to TT502 TT503 - 3.8NM to KAMAT 1.8NM to KAMAT - KAMAT HYD 1.2NM to TT503 - TT503 4.8NM to KAMAT - 3.8NM to KAMAT

VAR8°W(2020)

CHANGE : PROC renamed. VAR. RTE after KAMAT.

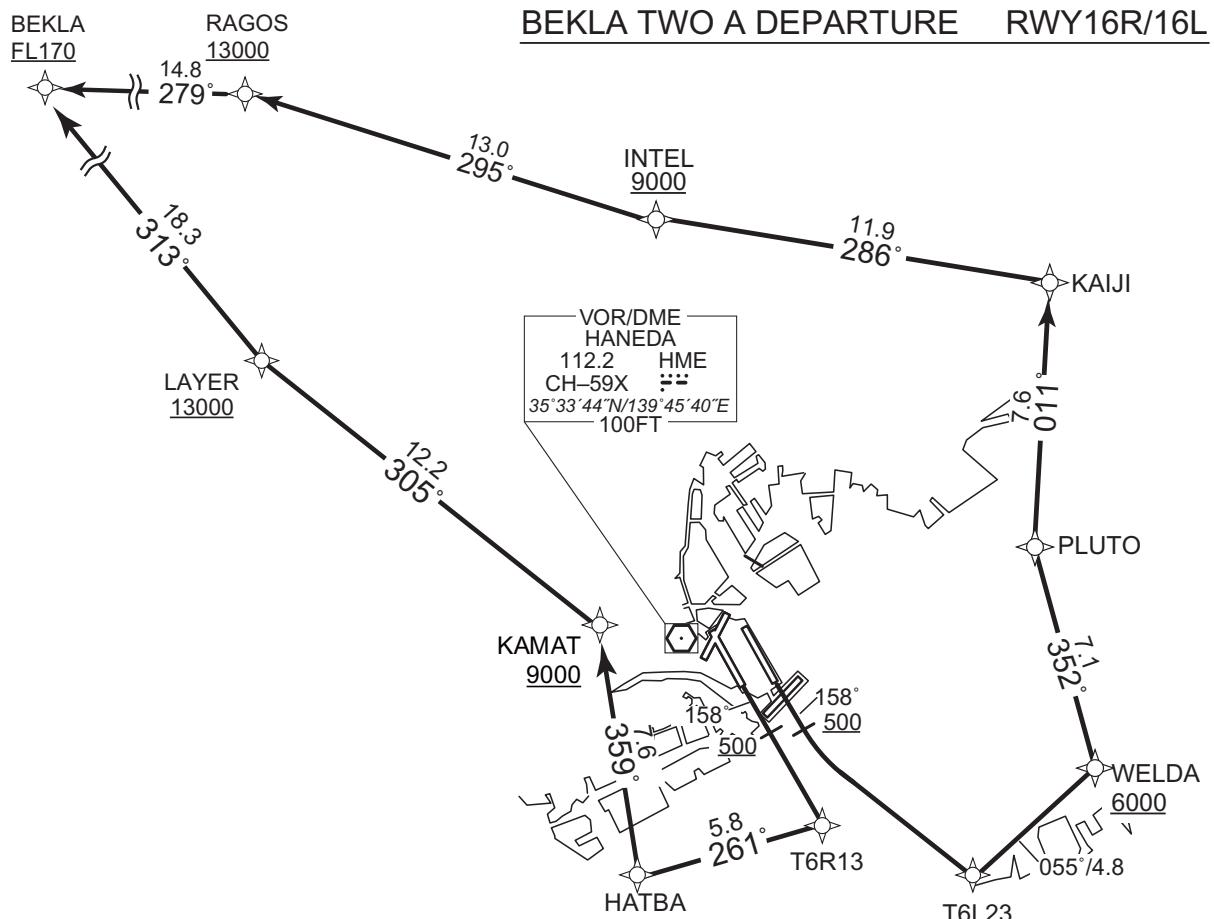

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA TWO A DEPARTURE RWY34L/34R/04/05

BEKLA **RAGOS**
FL170 **13000**
14.8

14.0°
 279°

13.0
295°

INTEL
9000

— 11.
28

LAYER
13000

12.2
305°

KAMAT
9000

TT503

**LOCUR
5000**

VOR/DME
HANEDA
112.2 HME
CH-59X :::
35°33'44"E/139°45'40"E
100FT

700

50

5.2
199°

LOCUR
5000

CHANGE : PROC renamed. VAR. RTE after KAMAT. Course FM TT502 to LOCUP. HDG after DEP FM RWY04.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA TWO A DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R13, to HATBA, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to BEKLA at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to TORAM, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY04 : Climb on HDG 043° at or above 700FT, direct to TORAM, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to TT503, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to BEKLA at or above FL170.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA TWO A DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6R13	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	HATBA	—	261 (253.8)	-7.6	5.8	—	—	—	—	RNAV1
004	TF	KAMAT	—	359 (351.1)	-7.6	7.6	—	+9000	—	—	RNAV1
005	TF	LAYER	—	305 (297.1)	-7.6	12.2	—	+13000	—	—	RNAV1
006	TF	BEKLA	—	313 (305.4)	-7.6	18.3	—	+FL170	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6L23	—	—	-7.6	—	L	—	—	—	RNAV1
003	TF	WELDA	—	055 (047.3)	-7.6	4.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.6	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
006	TF	INTEL	—	286 (278.4)	-7.6	11.9	—	+9000	—	—	RNAV1
007	TF	RAGOS	—	295 (287.2)	-7.6	13.0	—	+13000	—	—	RNAV1
008	TF	BEKLA	—	279 (271.2)	-7.6	14.8	—	+FL170	—	—	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.6	—	—	+700	—	—	RNAV1
002	DF	TORAM	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	PLUTO	—	098 (090.7)	-7.6	6.0	—	—	—	—	RNAV1
004	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
005	TF	INTEL	—	286 (278.4)	-7.6	11.9	—	+9000	—	—	RNAV1
006	TF	RAGOS	—	295 (287.2)	-7.6	13.0	—	+13000	—	—	RNAV1
007	TF	BEKLA	—	279 (271.2)	-7.6	14.8	—	+FL170	—	—	RNAV1

CHANGE : PROC renamed. Magnetic Variation. RWY16R; RTE after KAMAT.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	043 (034.9)	-7.6	—	—	+700	—	—	RNAV1
002	DF	TORAM	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	PLUTO	—	098 (090.7)	-7.6	6.0	—	—	—	—	RNAV1
004	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
005	TF	INTEL	—	286 (278.4)	-7.6	11.9	—	+9000	—	—	RNAV1
006	TF	RAGOS	—	295 (287.2)	-7.6	13.0	—	+13000	—	—	RNAV1
007	TF	BEKLA	—	279 (271.2)	-7.6	14.8	—	+FL170	—	—	RNAV1

RWY05											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.6	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.6	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.6	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.6	5.2	—	+5000	—	—	RNAV1
005	TF	TT503	—	288 (280.8)	-7.6	6.2	—	—	—	—	RNAV1
006	TF	KAMAT	—	322 (314.2)	-7.6	7.8	—	+9000	—	—	RNAV1
007	TF	LAYER	—	305 (297.1)	-7.6	12.2	—	+13000	—	—	RNAV1
008	TF	BEKLA	—	313 (305.4)	-7.6	18.3	—	+FL170	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
BEKLA	354958.7N / 1391009.5E	RAGOS	354942.2N / 1392821.2E
HATBA	352623.4N / 1394315.9E	T6L23	352627.6N / 1395539.1E
INTEL	354553.0N / 1394340.2E	T6R13	352800.8N / 1395006.4E
KAIJI	354409.6N / 1395806.6E	TORAM	353636.8N / 1395011.0E
KAMAT	353353.6N / 1394148.9E	TT501	353328.7N / 1395029.9E
LAYER	353925.4N / 1392829.5E	TT502	353224.4N / 1395720.7E
LOCUP	352718.8N / 1395608.5E	TT503	352828.0N / 1394840.4E
PLUTO	353632.1N / 1395736.8E	WELDA	352941.4N / 1395956.7E

CHANGE : Magnetic Variation. RWY04:NR001(Course), RWY05:NR004(Course), RTE after KAMAT. Waypoint Coordinates(LAYER added).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA TWO B DEPARTURE

RNAV1

Note 1) DME/DME/IRU or GNSS required.

※The aircraft equipped with only DME/DME/IRU
must be able to update its position without delay
at the starting point of take-off rolling.

2) RADAR service required.

DME GAP

RWY16R : DER - 1.2NM FM DER
RWY16L : DER - 1.0NM FM DER
RWY34R : DER - 1.0NM FM DER
RWY05 : 3.8NM to KAMAT - 1.8NM to KAMAT

Critical DME

RWY16R : HME 1.2NM FM DER - HATBA
HYD 2.8NM to HATBA - 1.6NM to HATBA
PQD HATBA - 1.6NM to KAMAT
RWY16L : HME 1.0NM FM DER - 3.5NM to T6L23
PQD 6.6NM to KAIJI - KAIJI
NRE 6.9NM to INTEL - INTEL
RWY05 : HME DER - 2.7NM to TT502
TT503 - 3.8NM to KAMAT
1.8NM to KAMAT - KAMAT
HYD 1.2NM to TT503 - TT503
4.8NM to KAMAT - 3.8NM to KAMAT

Inappropriate
Navaids

See AD1.1.6.10.3.Inappropriate NAVAIDs for
RNAV1

VAR8°W(2020)

BEKLA
FL170

RAGOS
13000

BEKLA TWO B DEPARTURE

RWY16R/16L

VOR/DME
HANEDA
112.2 HME
CH-59X :::
35°33'44"N/139°45'40"E
100FT

CHANGE : PROC renamed. VAR. RTE after KAMAT.



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAR8°W(2020)

BEKLA TWO B DEPARTURE RWY34R/05

CHANGE : PROC renamed. VAR RTE after KAMAT. Course FM TT502 to LOCUP.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA TWO B DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R13, to HATBA, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to BEKLA at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA, to EDOJO, to OHEDO, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to TT503, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to BEKLA at or above FL170.

Note RWY34R : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed. RTE after KAMAT (RWY16R,05).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA TWO B DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6R13	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	HATBA	—	261 (253.8)	-7.6	5.8	—	—	—	—	RNAV1
004	TF	KAMAT	—	359 (351.1)	-7.6	7.6	—	+9000	—	—	RNAV1
005	TF	LAYER	—	305 (297.1)	-7.6	12.2	—	+13000	—	—	RNAV1
006	TF	BEKLA	—	313 (305.4)	-7.6	18.3	—	+FL170	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6L23	—	—	-7.6	—	L	—	—	—	RNAV1
003	TF	WELDA	—	055 (047.3)	-7.6	4.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.6	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
006	TF	INTEL	—	286 (278.4)	-7.6	11.9	—	+9000	—	—	RNAV1
007	TF	RAGOS	—	295 (287.2)	-7.6	13.0	—	+13000	—	—	RNAV1
008	TF	BEKLA	—	279 (271.2)	-7.6	14.8	—	+FL170	—	—	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.6	—	—	+700	—	—	RNAV1
002	DF	ARAKA	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	EDOJO	—	018 (010.8)	-7.6	3.5	—	—	—	—	RNAV1
004	TF	OHEDO	—	331 (323.7)	-7.6	3.9	—	—	—	—	RNAV1
005	TF	INTEL	—	285 (277.0)	-7.6	4.1	—	+9000	—	—	RNAV1
006	TF	RAGOS	—	295 (287.2)	-7.6	13.0	—	+13000	—	—	RNAV1
007	TF	BEKLA	—	279 (271.2)	-7.6	14.8	—	+FL170	—	—	RNAV1

CHANGE : PROC renamed. Magnetic Variation. RWY16R,RTE after KAMAT.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.6	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.6	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.6	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.6	5.2	—	+5000	—	—	RNAV1
005	TF	TT503	—	288 (280.8)	-7.6	6.2	—	—	—	—	RNAV1
006	TF	KAMAT	—	322 (314.2)	-7.6	7.8	—	+9000	—	—	RNAV1
007	TF	LAYER	—	305 (297.1)	-7.6	12.2	—	+13000	—	—	RNAV1
008	TF	BEKLA	—	313 (305.4)	-7.6	18.3	—	+FL170	—	—	RNAV1

CHANGE : Magnetic Variation. RWY05:NR004(Course), RTE after KAMAT. Waypoint Coordinates(LAYER added).

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	OHEDO	354523.4N / 1394838.6E
BEKLA	354958.7N / 1391009.5E	PLUTO	353632.1N / 1395736.8E
EDOJO	354214.0N / 1395129.9E	RAGOS	354942.2N / 1392821.2E
HATBA	352623.4N / 1394315.9E	T6L23	352627.6N / 1395539.1E
INTEL	354553.0N / 1394340.2E	T6R13	352800.8N / 1395006.4E
KAIJI	354409.6N / 1395806.6E	TT501	353328.7N / 1395029.9E
KAMAT	353353.6N / 1394148.9E	TT502	353224.4N / 1395720.7E
LAYER	353925.4N / 1392829.5E	TT503	352828.0N / 1394840.4E
LOCUP	352718.8N / 1395608.5E	WELDA	352941.4N / 1395956.7E

STANDARD DEPARTURE CHART-INSTRUMENT


RJTT/TOKYO INTL

RNAV SID

BEKLA TWO C DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		
DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 1.0NM FM DER RWY05 : 3.8NM to KAMAT - 1.8NM to KAMAT	Critical DME
Inappropriate Navaids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1	

VAR8°W(2020)

CHANGE : PROC renamed. VAR.

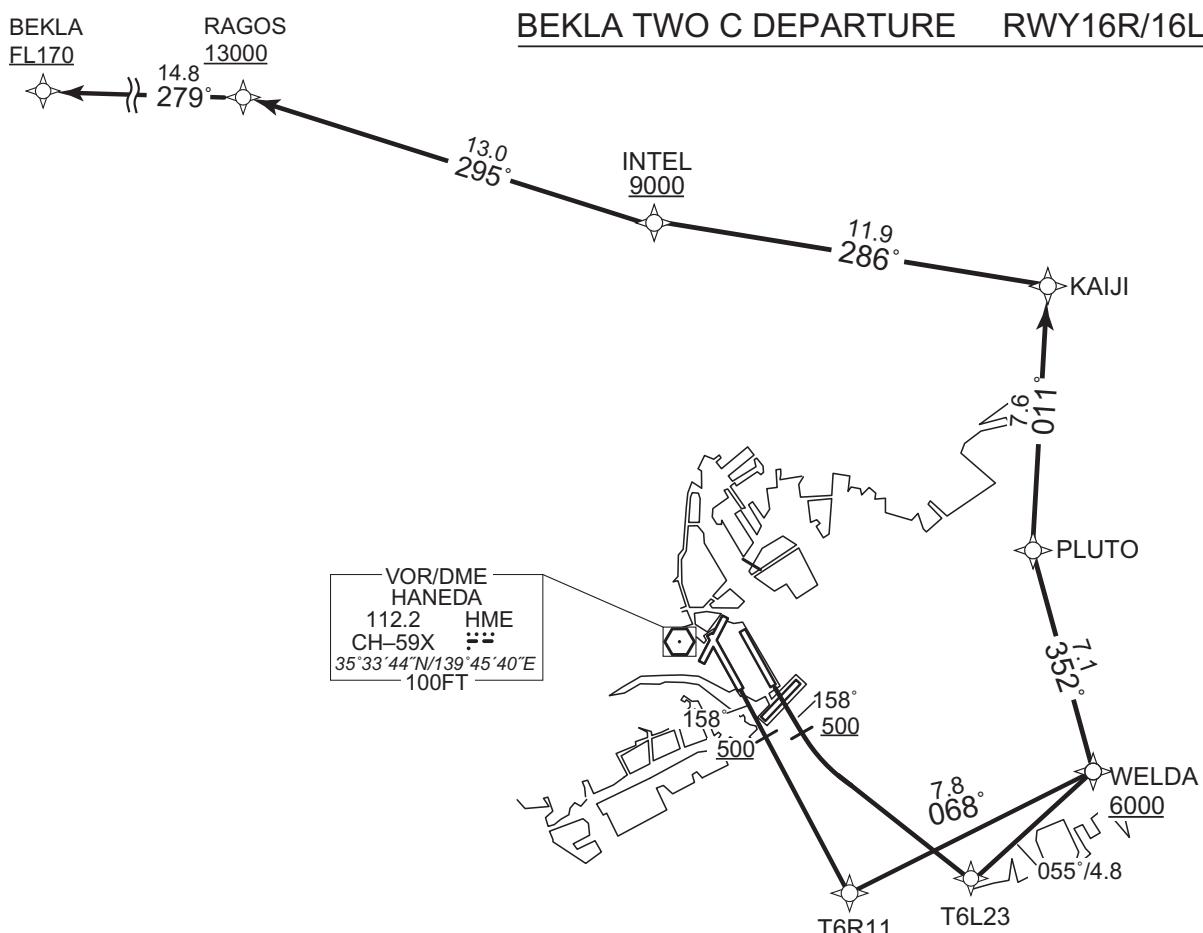

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAR8°W(2020)

BEKLA TWO C DEPARTURE RWY34R/05



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA TWO C DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA, to EDOJO, to OHEDO, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to TT503, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to BEKLA at or above FL170.

Note RWY34R : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA TWO C DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	–	–	158 (150.0)	-7.6	–	–	+500	–	–	RNAV1
002	DF	T6R11	–	–	-7.6	–	–	–	–	–	RNAV1
003	TF	WELDA	–	068 (060.6)	-7.6	7.8	–	+6000	–	–	RNAV1
004	TF	PLUTO	–	352 (344.5)	-7.6	7.1	–	–	–	–	RNAV1
005	TF	KAIJI	–	011 (003.0)	-7.6	7.6	–	–	–	–	RNAV1
006	TF	INTEL	–	286 (278.4)	-7.6	11.9	–	+9000	–	–	RNAV1
007	TF	RAGOS	–	295 (287.2)	-7.6	13.0	–	+13000	–	–	RNAV1
008	TF	BEKLA	–	279 (271.2)	-7.6	14.8	–	+FL170	–	–	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	–	–	158 (150.0)	-7.6	–	–	+500	–	–	RNAV1
002	DF	T6L23	–	–	-7.6	–	L	–	–	–	RNAV1
003	TF	WELDA	–	055 (047.3)	-7.6	4.8	–	+6000	–	–	RNAV1
004	TF	PLUTO	–	352 (344.5)	-7.6	7.1	–	–	–	–	RNAV1
005	TF	KAIJI	–	011 (003.0)	-7.6	7.6	–	–	–	–	RNAV1
006	TF	INTEL	–	286 (278.4)	-7.6	11.9	–	+9000	–	–	RNAV1
007	TF	RAGOS	–	295 (287.2)	-7.6	13.0	–	+13000	–	–	RNAV1
008	TF	BEKLA	–	279 (271.2)	-7.6	14.8	–	+FL170	–	–	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	–	–	338 (330.0)	-7.6	–	–	+700	–	–	RNAV1
002	DF	ARAKA	–	–	-7.6	–	R	–	–	–	RNAV1
003	TF	EDOJO	–	018 (010.8)	-7.6	3.5	–	–	–	–	RNAV1
004	TF	OHEDO	–	331 (323.7)	-7.6	3.9	–	–	–	–	RNAV1
005	TF	INTEL	–	285 (277.0)	-7.6	4.1	–	+9000	–	–	RNAV1
006	TF	RAGOS	–	295 (287.2)	-7.6	13.0	–	+13000	–	–	RNAV1
007	TF	BEKLA	–	279 (271.2)	-7.6	14.8	–	+FL170	–	–	RNAV1

CHANGE : PROC renamed. Magnetic Variation.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.6	-	-	+500	-	-	RNAV1
002	DF	TT501	Y	-	-7.6	-	-	-	-	-	RNAV1
003	DF	TT502	-	-	-7.6	-	R	-	-	-	RNAV1
004	TF	LOCUP	-	199 (190.9)	-7.6	5.2	-	+5000	-	-	RNAV1
005	TF	TT503	-	288 (280.8)	-7.6	6.2	-	-	-	-	RNAV1
006	TF	KAMAT	-	322 (314.2)	-7.6	7.8	-	+9000	-	-	RNAV1
007	TF	LAYER	-	305 (297.1)	-7.6	12.2	-	+13000	-	-	RNAV1
008	TF	BEKLA	-	313 (305.4)	-7.6	18.3	-	+FL170	-	-	RNAV1

CHANGE : Magnetic Variation. RWY05:NR004(Course),RTE after KAMAT. Waypoint Coordinates(LAYER added).

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	PLUTO	353632.1N / 1395736.8E
BEKLA	354958.7N / 1391009.5E	RAGOS	354942.2N / 1392821.2E
EDOJO	354214.0N / 1395129.9E	T6L23	352627.6N / 1395539.1E
INTEL	354553.0N / 1394340.2E	T6R11	352552.5N / 1395137.2E
KAIJI	354409.6N / 1395806.6E	TT501	353328.7N / 1395029.9E
KAMAT	353353.6N / 1394148.9E	TT502	353224.4N / 1395720.7E
LAYER	353925.4N / 1392829.5E	TT503	352828.0N / 1394840.4E
LOCUP	352718.8N / 1395608.5E	WELDA	352941.4N / 1395956.7E
OHEDO	354523.4N / 1394838.6E		

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO A DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		
DME GAP	RWY16R: DER - 1.2NM FM DER RWY16L: DER - 1.0NM FM DER RWY34R: DER - 1.0NM FM DER RWY34L: DER - 0.5NM FM DER RWY04: DER - 1.7NM FM DER	Critical DME
Inappropriate Navaids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1	RWY16R : HME 1.2NM FM DER - 1.9NM to T6R11 PQD 6.6NM to KAIJI - KAIJI RWY16L : HME 1.0NM FM DER - 3.5NM to T6L23 PQD 6.6NM to KAIJI - KAIJI RWY34R : HME 1.0NM FM DER - 1.1NM to PLUTO SND TORAM - 3.1NM to PLUTO PQD 6.6NM to KAIJI - KAIJI RWY34L : HME 0.5NM FM DER - 1.1NM to PLUTO SND TORAM - 3.1NM to PLUTO PQD 6.6NM to KAIJI - KAIJI RWY04 : HME 1.7NM FM DER - 1.1NM to PLUTO SND 2.2NM to TORAM - 3.1NM to PLUTO PQD 6.6NM to KAIJI - KAIJI RWY05 : HME DER - 2.2NM to PLUTO PQD 6.6NM to KAIJI - KAIJI

VAR8°W(2020)

ROVER TWO A DEPARTURE

CHANGE : PROC renamed. VAR. HDG after DEP FM RWY04.



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO A DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,
to WELDA at or above 6000FT, to PLUTO, to KAIJI,
to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23,
to WELDA at or above 6000FT, to PLUTO, to KAIJI,
to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to
TORAM, to PLUTO, to KAIJI, to SPOON at or below FL150,
to ROVER at or above 12000FT.

RWY04 : Climb on HDG 043° at or above 700FT, direct to TORAM, to PLUTO,
to KAIJI, to SPOON at or below FL150, to ROVER at or above
12000FT.

RWY05 :Climb on HDG 050° at or above 500FT, turn right direct to PLUTO,
to KAIJI, to SPOON at or below FL150, to ROVER at or above
12000FT.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO A DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	–	–	158 (150.0)	-7.6	–	–	+500	–	–	RNAV1
002	DF	T6R11	–	–	-7.6	–	–	–	–	–	RNAV1
003	TF	WELDA	–	068 (060.6)	-7.6	7.8	–	+6000	–	–	RNAV1
004	TF	PLUTO	–	352 (344.5)	-7.6	7.1	–	–	–	–	RNAV1
005	TF	KAIJI	–	011 (003.0)	-7.6	7.6	–	–	–	–	RNAV1
006	TF	SPOON	–	347 (339.2)	-7.6	11.0	–	-FL150	–	–	RNAV1
007	TF	ROVER	–	347 (339.1)	-7.6	5.2	–	+12000	–	–	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	–	–	158 (150.0)	-7.6	–	–	+500	–	–	RNAV1
002	DF	T6L23	–	–	-7.6	–	L	–	–	–	RNAV1
003	TF	WELDA	–	055 (047.3)	-7.6	4.8	–	+6000	–	–	RNAV1
004	TF	PLUTO	–	352 (344.5)	-7.6	7.1	–	–	–	–	RNAV1
005	TF	KAIJI	–	011 (003.0)	-7.6	7.6	–	–	–	–	RNAV1
006	TF	SPOON	–	347 (339.2)	-7.6	11.0	–	-FL150	–	–	RNAV1
007	TF	ROVER	–	347 (339.1)	-7.6	5.2	–	+12000	–	–	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	–	–	338 (330.0)	-7.6	–	–	+700	–	–	RNAV1
002	DF	TORAM	–	–	-7.6	–	R	–	–	–	RNAV1
003	TF	PLUTO	–	098 (090.7)	-7.6	6.0	–	–	–	–	RNAV1
004	TF	KAIJI	–	011 (003.0)	-7.6	7.6	–	–	–	–	RNAV1
005	TF	SPOON	–	347 (339.2)	-7.6	11.0	–	-FL150	–	–	RNAV1
006	TF	ROVER	–	347 (339.1)	-7.6	5.2	–	+12000	–	–	RNAV1

CHANGE : PROC renamed. Magnetic Variation.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	043 (034.9)	-7.6	—	—	+700	—	—	RNAV1
002	DF	TORAM	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	PLUTO	—	098 (090.7)	-7.6	6.0	—	—	—	—	RNAV1
004	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
005	TF	SPOON	—	347 (339.2)	-7.6	11.0	—	-FL150	—	—	RNAV1
006	TF	ROVER	—	347 (339.1)	-7.6	5.2	—	+12000	—	—	RNAV1

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.6	—	—	+500	—	—	RNAV1
002	DF	PLUTO	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
004	TF	SPOON	—	347 (339.2)	-7.6	11.0	—	-FL150	—	—	RNAV1
005	TF	ROVER	—	347 (339.1)	-7.6	5.2	—	+12000	—	—	RNAV1

CHANGE : Magnetic Variation. RWY04:NRW01(Course).

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
KAIJI	354409.6N / 1395806.6E	T6L23	352627.6N / 1395539.1E
PLUTO	353632.1N / 1395736.8E	T6R11	352552.5N / 1395137.2E
ROVER	355918.3N / 1395059.3E	TORAM	353636.8N / 1395011.0E
SPOON	355428.3N / 1395316.0E	WELDA	352941.4N / 1395956.7E

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO B DEPARTURE

RNAV1

Note 1) DME/DME/IRU or GNSS required.

※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling.

2) RADAR service required.

DME GAP

RWY16R: DER - 1.2NM FM DER
RWY16L: DER - 1.0NM FM DER
RWY34R: DER - 1.0NM FM DER

Inappropriate Navaids

See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1

Critical DME


RWY16R : HME 1.2NM FM DER - 1.9NM to T6R11
PQD 6.6NM to KAIJI - KAIJI
RWY16L : HME 1.0NM FM DER - 3.5NM to T6L23
PQD 6.6NM to KAIJI - KAIJI
RWY05 : HME DER - 2.2NM to PLUTO
PQD 6.6NM to KAIJI - KAIJI

VAR8°W(2020)

ROVER TWO B DEPARTURE

CHANGE : PROC renamed.

VOR/DME
HANEDA
112.2 HME
CH-59X
35°33'44"N/139°45'40"E
100FT

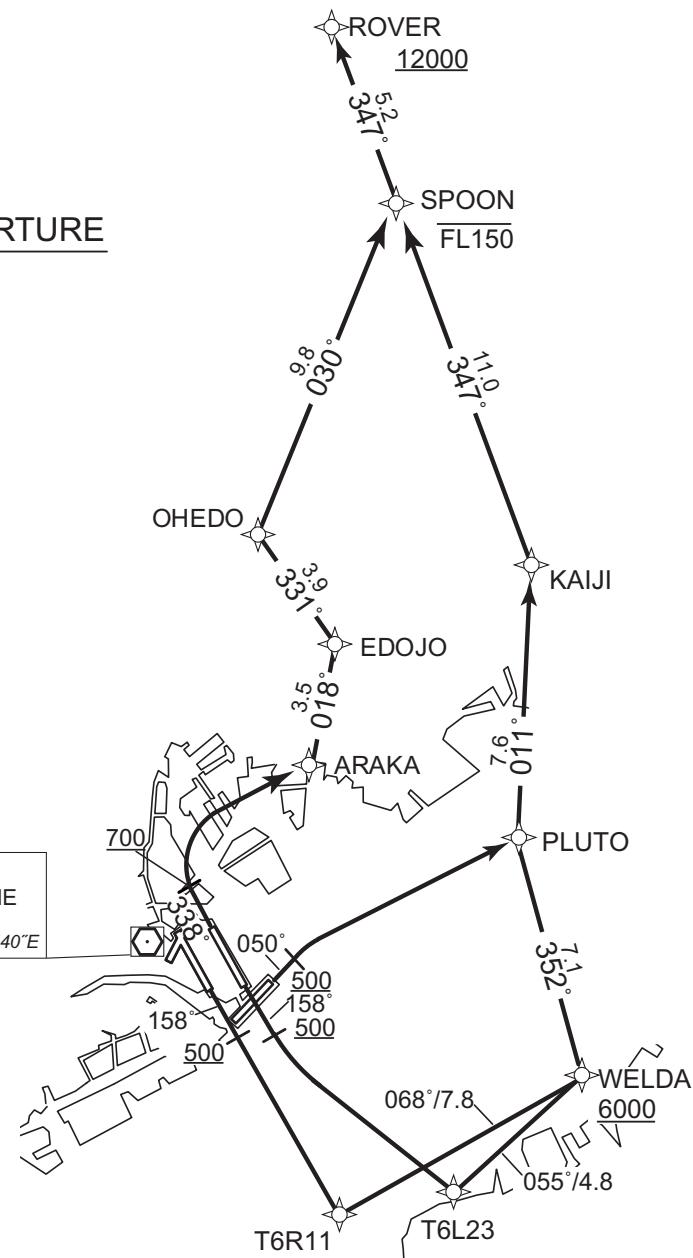

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO B DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA, to EDOJO, to OHEDO, to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY05 :Climb on HDG 050° at or above 500FT, turn right direct to PLUTO, to KAIJI, to SPOON at or below FL150, to ROVER at or above 12000FT.

Note RWY34R : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO B DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6R11	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	WELDA	—	068 (060.6)	-7.6	7.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.6	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
006	TF	SPOON	—	347 (339.2)	-7.6	11.0	—	-FL150	—	—	RNAV1
007	TF	ROVER	—	347 (339.1)	-7.6	5.2	—	+12000	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6L23	—	—	-7.6	—	L	—	—	—	RNAV1
003	TF	WELDA	—	055 (047.3)	-7.6	4.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.6	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
006	TF	SPOON	—	347 (339.2)	-7.6	11.0	—	-FL150	—	—	RNAV1
007	TF	ROVER	—	347 (339.1)	-7.6	5.2	—	+12000	—	—	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.6	—	—	+700	—	—	RNAV1
002	DF	ARAKA	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	EDOJO	—	018 (010.8)	-7.6	3.5	—	—	—	—	RNAV1
004	TF	OHEDO	—	331 (323.7)	-7.6	3.9	—	—	—	—	RNAV1
005	TF	SPOON	—	030 (022.4)	-7.6	9.8	—	-FL150	—	—	RNAV1
006	TF	ROVER	—	347 (339.1)	-7.6	5.2	—	+12000	—	—	RNAV1

CHANGE : PROC renamed.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.6	—	—	+500	—	—	RNAV1
002	DF	PLUTO	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
004	TF	SPOON	—	347 (339.2)	-7.6	11.0	—	-FL150	—	—	RNAV1
005	TF	ROVER	—	347 (339.1)	-7.6	5.2	—	+12000	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	ROVER	355918.3N / 1395059.3E
EDOJO	354214.0N / 1395129.9E	SPOON	355428.3N / 1395316.0E
KAIJI	354409.6N / 1395806.6E	T6L23	352627.6N / 1395539.1E
OHEDO	354523.4N / 1394838.6E	T6R11	352552.5N / 1395137.2E
PLUTO	353632.1N / 1395736.8E	WELDA	352941.4N / 1395956.7E

CHANGE : Magnetic Variation.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO C DEPARTURE

RNAV1

Note 1) DME/DME/IRU or GNSS required.
 ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling.
 2) RADAR service required.

DME GAP
 RWY16R: DER - 1.2NM FM DER
 RWY16L: DER - 1.0NM FM DER
 RWY34R: DER - 1.0NM FM DER

Inappropriate Navaids
 See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1

Critical DME

RWY16R : HME 1.2NM FM DER - 1.9NM to T6R11
 PQD 6.6NM to KAIJI - KAIJI

RWY05 : HME DER - 2.2NM to PLUTO
 PQD 6.6NM to KAIJI - KAIJI

VAR8°W(2020)

ROVER TWO C DEPARTURE

CHANGE : PROC renamed.



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO C DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L31, to DAMBO, to T6L32, to LESMO at or above 8000FT, to KAIJI, to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA, to EDOJO, to OHEDO, to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY05 : Climb on HDG 050° at or above 500FT, turn right direct to PLUTO, to KAIJI, to SPOON at or below FL150, to ROVER at or above 12000FT.

Note RWY34R : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER TWO C DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6R11	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	WELDA	—	068 (060.6)	-7.6	7.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.6	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
006	TF	SPOON	—	347 (339.2)	-7.6	11.0	—	-FL150	—	—	RNAV1
007	TF	ROVER	—	347 (339.1)	-7.6	5.2	—	+12000	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6L31	—	—	-7.6	—	L	—	—	—	RNAV1
003	TF	DAMBO	—	055 (047.5)	-7.6	8.7	—	—	—	—	RNAV1
004	TF	T6L32	—	317 (309.4)	-7.6	6.2	—	—	—	—	RNAV1
005	TF	LESMO	—	002 (354.1)	-7.6	3.0	—	+8000	—	—	RNAV1
006	TF	KAIJI	—	002 (354.1)	-7.6	3.0	—	—	—	—	RNAV1
007	TF	SPOON	—	347 (339.2)	-7.6	11.0	—	-FL150	—	—	RNAV1
008	TF	ROVER	—	347 (339.1)	-7.6	5.2	—	+12000	—	—	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.6	—	—	+700	—	—	RNAV1
002	DF	ARAKA	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	EDOJO	—	018 (010.8)	-7.6	3.5	—	—	—	—	RNAV1
004	TF	OHEDO	—	331 (323.7)	-7.6	3.9	—	—	—	—	RNAV1
005	TF	SPOON	—	030 (022.4)	-7.6	9.8	—	-FL150	—	—	RNAV1
006	TF	ROVER	—	347 (339.1)	-7.6	5.2	—	+12000	—	—	RNAV1

CHANGE : PROC renamed.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.6	—	—	+500	—	—	RNAV1
002	DF	PLUTO	—	—	-7.6	—	R	—	—	—	RNAV1
003	TF	KAIJI	—	011 (003.0)	-7.6	7.6	—	—	—	—	RNAV1
004	TF	SPOON	—	347 (339.2)	-7.6	11.0	—	-FL150	—	—	RNAV1
005	TF	ROVER	—	347 (339.1)	-7.6	5.2	—	+12000	—	—	RNAV1

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	ROVER	355918.3N / 1395059.3E
DAMBO	353416.5N / 1400443.4E	SPOON	355428.3N / 1395316.0E
EDOJO	354214.0N / 1395129.9E	T6L31	352822.8N / 1395648.0E
KAIJI	354409.6N / 1395806.6E	T6L32	353810.9N / 1395852.2E
LESMO	354110.3N / 1395829.4E	T6R11	352552.5N / 1395137.2E
OHEDO	354523.4N / 1394838.6E	WELDA	352941.4N / 1395956.7E
PLUTO	353632.1N / 1395736.8E		

CHANGE : Magnetic Variation.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL		RNAV TRANSITION
AKAGI TRANSITION / BRUCE TRANSITION/ INUBO TRANSITION		RNAV1
Note 1) DME/DME/IRU or GNSS required.		
2) RADAR service required.		
DME GAP	-	Critical DME
Inappropriate Navaids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1	-

VAR8°W(2019)

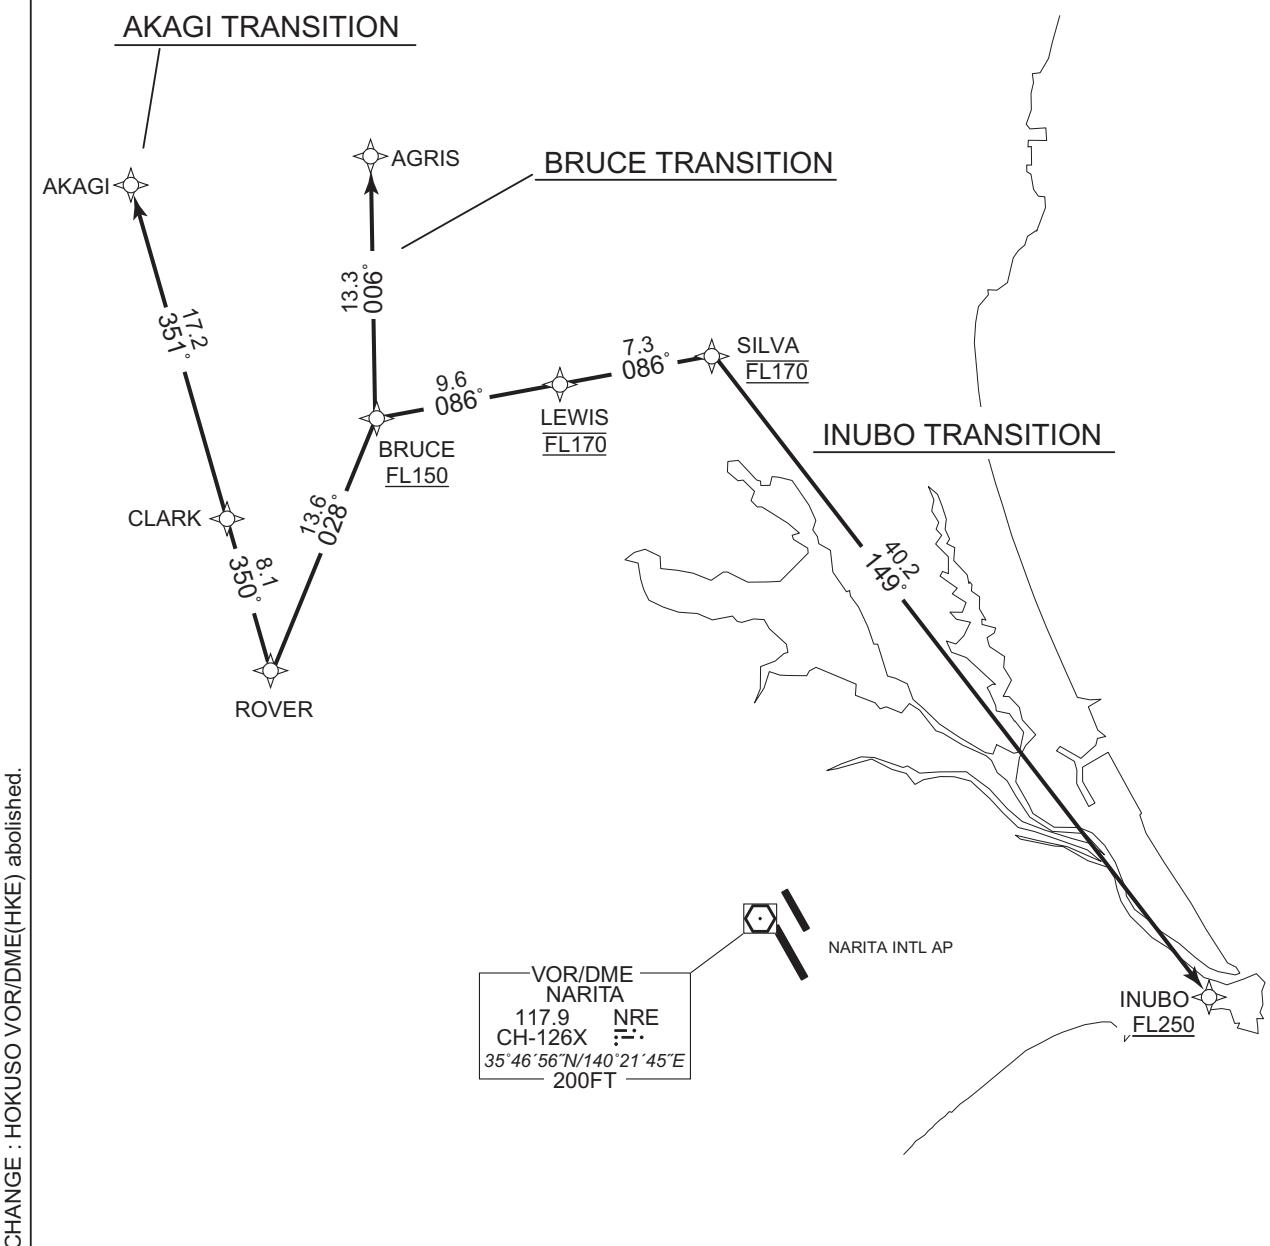

CHANGE : HOKUSO VOR/DME(HKE) abdissed.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV TRANSITION

AKAGI TRANSITION

From ROVER, to CLARK, to AKAGI.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ROVER	—	—	-7.5	—	—	—	—	—	RNAV1
002	TF	CLARK	—	350 (342.7)	-7.5	8.1	—	—	—	—	RNAV1
003	TF	AKAGI	—	351 (343.4)	-7.5	17.2	—	—	—	—	RNAV1

BRUCE TRANSITION

From ROVER, to BRUCE at or above FL150, to AGRIS.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ROVER	—	—	-7.5	—	—	—	—	—	RNAV1
002	TF	BRUCE	—	028 (020.7)	-7.5	13.6	—	+FL150	—	—	RNAV1
003	TF	AGRIS	—	006 (358.7)	-7.5	13.3	—	—	—	—	RNAV1

INUBO TRANSITION

From ROVER, to BRUCE at or above FL150, to LEWIS at FL170, to SILVA at FL170, to INUBO at or above FL250.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ROVER	—	—	-7.5	—	—	—	—	—	RNAV1
002	TF	BRUCE	—	028 (020.7)	-7.5	13.6	—	+FL150	—	—	RNAV1
003	TF	LEWIS	—	086 (078.6)	-7.5	9.6	—	FL170	—	—	RNAV1
004	TF	SILVA	—	086 (078.8)	-7.5	7.3	—	FL170	—	—	RNAV1
005	TF	INUBO	—	149 (141.9)	-7.5	40.2	—	+FL250	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AGRIS	362514.7N / 1395633.1E	INUBO	354335.3N / 1404757.9E
AKAGI	362328.3N / 1394156.3E	LEWIS	361353.2N / 1400834.7E
BRUCE	361200.4N / 1395655.9E	ROVER	355918.3N / 1395059.3E
CLARK	360702.0N / 1394800.5E	SILVA	361518.0N / 1401726.0E

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RUTAS TWO DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.	Critical DME	RWY16R : HME 1.2NM FM DER - 1.9NM to T6R11 RWY16L : HME 1.0NM FM DER - 2.4NM to T6L21 RWY34R : HME 1.0NM FM DER - 2.5NM to TT502 RWY34L : HME 0.5NM FM DER - 2.5NM to TT502 RWY04 : HME 1.7NM FM DER - 2.5NM to TT502 RWY05 : HME DER - 2.7NM to TT502
DME GAP RWY16R:DER - 1.2NM FM DER RWY16L:DER - 1.0NM FM DER RWY34R:DER - 1.0NM FM DER RWY34L:DER - 0.5NM FM DER RWY04:DER - 1.7NM FM DER		
Inappropriate Navaids See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1		

VAR8°W(2020)

CHANGE : PROC renamed. VAR. HDG after DEP FM RWY04. Course FM TT502 to LOCUP.



STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RUTAS TWO DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11, to VAMOS, to UTIBO at 6000FT, to RUTAS.

RWY16L : Climb on HDG 158° at or above 500FT, direct to T6L21, to VAMOS, to UTIBO at 6000FT, to RUTAS.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to TT502, to LOCUP at or above 5000FT, to VAMOS, to UTIBO at 6000FT, to RUTAS.

RWY04: Climb on HDG 043° at or above 700FT, turn right direct to TT502, to LOCUP at or above 5000FT, to VAMOS, to UTIBO at 6000FT, to RUTAS.

RWY05: Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to VAMOS, to UTIBO at 6000FT, to RUTAS.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6R11	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	VAMOS	—	207 (199.5)	-7.6	14.5	—	—	—	—	RNAV1
004	TF	UTIBO	—	165 (157.0)	-7.6	16.8	—	6000	—	—	RNAV1
005	TF	RUTAS	—	116 (108.4)	-7.6	40.6	—	—	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.6	—	—	+500	—	—	RNAV1
002	DF	T6L21	—	—	-7.6	—	—	—	—	—	RNAV1
003	TF	VAMOS	—	208 (200.7)	-7.6	15.4	—	—	—	—	RNAV1
004	TF	UTIBO	—	165 (157.0)	-7.6	16.8	—	6000	—	—	RNAV1
005	TF	RUTAS	—	116 (108.4)	-7.6	40.6	—	—	—	—	RNAV1

CHANGE : PROC renamed. Magnetic Variation. HDG after DEP FM RWY04.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RNAV SID											
RWY34L/RWY34R											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	–	–	338 (330.0)	-7.6	–	–	+700	–	–	RNAV1
002	DF	TT502	–	–	-7.6	–	R	–	–	–	RNAV1
003	TF	LOCUP	–	199 (190.9)	-7.6	5.2	–	+5000	–	–	RNAV1
004	TF	VAMOS	–	217 (209.5)	-7.6	17.3	–	–	–	–	RNAV1
005	TF	UTIBO	–	165 (157.0)	-7.6	16.8	–	6000	–	–	RNAV1
006	TF	RUTAS	–	116 (108.4)	-7.6	40.6	–	–	–	–	RNAV1

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	–	–	043 (034.9)	-7.6	–	–	+700	–	–	RNAV1
002	DF	TT502	–	–	-7.6	–	R	–	–	–	RNAV1
003	TF	LOCUP	–	199 (190.9)	-7.6	5.2	–	+5000	–	–	RNAV1
004	TF	VAMOS	–	217 (209.5)	-7.6	17.3	–	–	–	–	RNAV1
005	TF	UTIBO	–	165 (157.0)	-7.6	16.8	–	6000	–	–	RNAV1
006	TF	RUTAS	–	116 (108.4)	-7.6	40.6	–	–	–	–	RNAV1

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	–	–	050 (042.4)	-7.6	–	–	+500	–	–	RNAV1
002	DF	TT501	Y	–	-7.6	–	–	–	–	–	RNAV1
003	DF	TT502	–	–	-7.6	–	R	–	–	–	RNAV1
004	TF	LOCUP	–	199 (190.9)	-7.6	5.2	–	+5000	–	–	RNAV1
005	TF	VAMOS	–	217 (209.5)	-7.6	17.3	–	–	–	–	RNAV1
006	TF	UTIBO	–	165 (157.0)	-7.6	16.8	–	6000	–	–	RNAV1
007	TF	RUTAS	–	116 (108.4)	-7.6	40.6	–	–	–	–	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
LOCUP	352718.8N / 1395608.5E	TT501	353328.7N / 1395029.9E
RUTAS	344349.3N / 1404034.2E	TT502	353224.4N / 1395720.7E
T6L21	352639.1N / 1395222.0E	UTIBO	345647.0N / 1395343.9E
T6R11	352552.5N / 1395137.2E	VAMOS	351215.5N / 1394543.6E

INTENTIONALLY LEFT BLANK

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

STAR

SINGO ARRIVAL

From over STONE, via HME R036 to HME 22.2DME, via HME 22.2DME clockwise ARC to SINGO.

Cross STONE at 11000FT, cross HME R036/28.0DME at or above 8000FT.

DOYLE ARRIVAL

From over STONE, via HME R036 to HME 22.2DME, via HME 22.2DME clockwise ARC to intercept and proceed via ITL LOC course to DOYLE.

Cross STONE at 11000FT, cross HME R036/28.0DME at or above 8000FT.

ADDUM ARRIVAL

From over ADDUM, via HME R157 to HME 25.0DME, turn right, via IHA LOC course to ARLON.

Cross ADDUM at 10000FT.

BONUS ARRIVAL

From over ADDUM, via HME R157 to HME 22.2DME, via HME 22.2DME counterclockwise ARC to intercept and proceed via IKL LOC course to BONUS.

Cross ADDUM at 10000FT.

STANDARD ARRIVAL CHART-INSTRUMENT



STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

OSHIMA 1A ARRIVAL / OSHIMA 1K ARRIVAL
OSHIMA 2C ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.


2) RADAR service required.

VAR 8° W(2019)

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)



MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)



MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

WEDGE MHA 4000
120°

TACAN TATEYAMA
986 CH-25X
34°58'15"N/139°50'17"E
500FT

VORTAC OSHIMA
113.1 CH-78X
34°42'44"N/139°24'50"E
2100FT

XAC
5.0 069°
9.0 114°
7.0 090°
7.0 068°
15.9 068°
36.3 095°

OSHIMA (XAC)
MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

OSHIMA(XAC) MHA 5000
098°
278°


VOR/DME
HANEDA
112.2 HME
CH-59X
35°33'44"N/139°45'40"E
100FT

EPSON
7000
210KIAS
3.6°
3.1°
14.1°
21.1°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

CREAM
MHA 4000

111°
291°

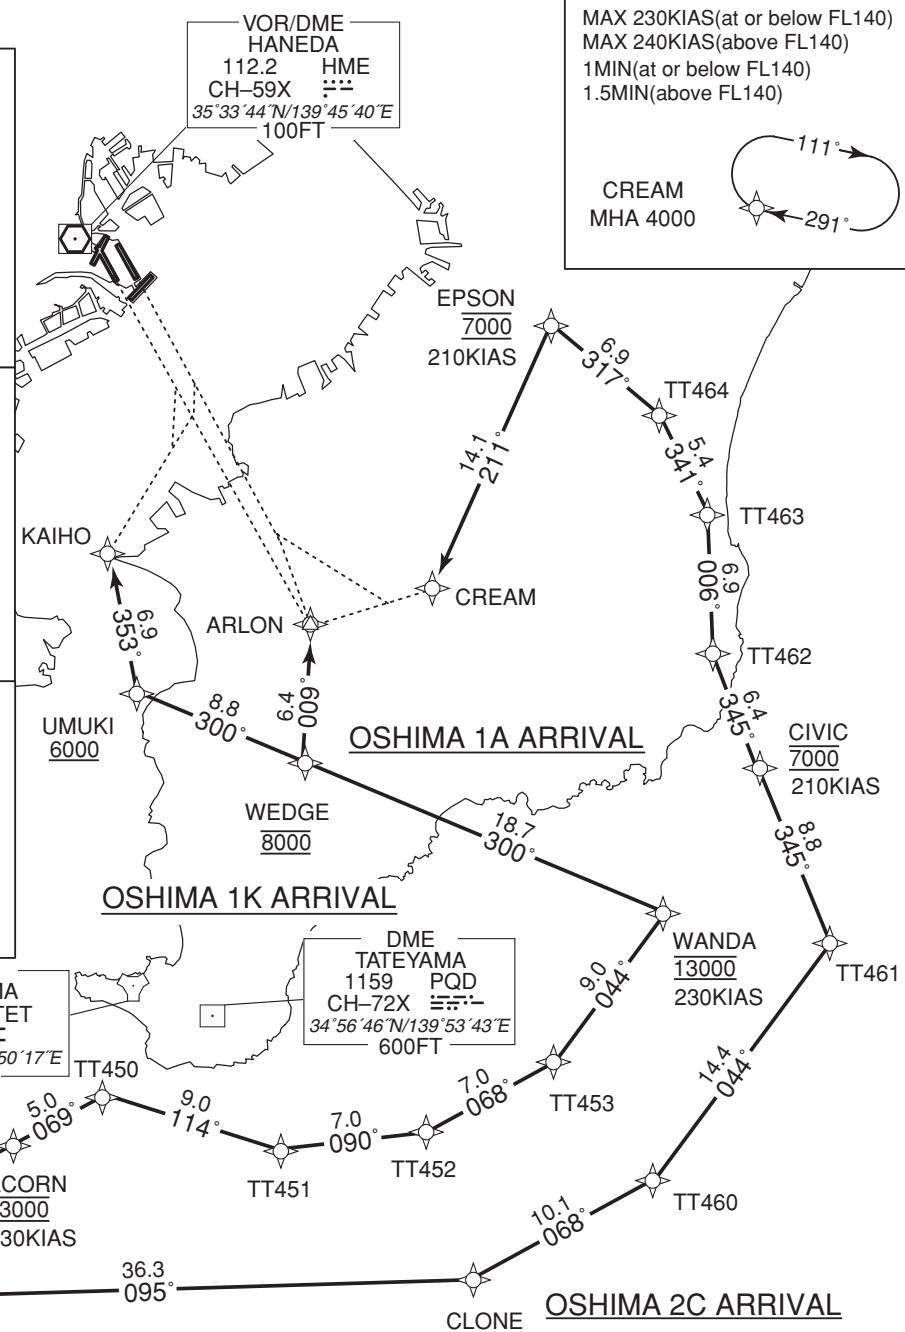

CHANGE : New PROC

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

CIVIC
MHA 4000

165°
345°
105°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

ACORN
MHA 5000
248°
068°

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

OSHIMA 1A ARRIVAL

From XAC, to ACORN at 13000FT, to TT450, to TT451, to TT452, to TT453, to WANDA at 13000FT, to WEDGE at 8000FT, to ARLON.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	—	—	-7.5	—	—	—	—	—	RNAV1
002	TF	ACORN	—	068 (060.8)	-7.5	15.9	—	13000	230	—	RNAV1
003	TF	TT450	—	069 (061.0)	-7.5	5.0	—	—	—	—	RNAV1
004	TF	TT451	—	114 (106.9)	-7.5	9.0	—	—	—	—	RNAV1
005	TF	TT452	—	090 (082.2)	-7.5	7.0	—	—	—	—	RNAV1
006	TF	TT453	—	068 (060.7)	-7.5	7.0	—	—	—	—	RNAV1
007	TF	WANDA	—	044 (036.0)	-7.5	9.0	—	13000	230	—	RNAV1
008	TF	WEDGE	—	300 (292.4)	-7.5	18.7	—	8000	—	—	RNAV1
009	TF	ARLON	—	009 (001.6)	-7.5	6.4	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ACORN	068 (060.8)	-7.5	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.5	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.5	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

OSHIMA 1K ARRIVAL

From XAC, to ACORN at 13000FT, to TT450, to TT451, to TT452, to TT453, to WANDA at 13000FT, to WEDGE at 8000FT, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	ACORN	-	068 (060.8)	-7.5	15.9	-	13000	230	-	RNAV1
003	TF	TT450	-	069 (061.0)	-7.5	5.0	-	-	-	-	RNAV1
004	TF	TT451	-	114 (106.9)	-7.5	9.0	-	-	-	-	RNAV1
005	TF	TT452	-	090 (082.2)	-7.5	7.0	-	-	-	-	RNAV1
006	TF	TT453	-	068 (060.7)	-7.5	7.0	-	-	-	-	RNAV1
007	TF	WANDA	-	044 (036.0)	-7.5	9.0	-	13000	230	-	RNAV1
008	TF	WEDGE	-	300 (292.4)	-7.5	18.7	-	8000	-	-	RNAV1
009	TF	UMUKI	-	300 (292.2)	-7.5	8.8	-	+6000	-	-	RNAV1
010	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ACORN	068 (060.8)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

OSHIMA 2C ARRIVAL

From XAC, to CLONE, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	—	—	-7.5	—	—	—	—	—	RNAV1
002	TF	CLONE	—	095 (087.8)	-7.5	36.3	—	—	—	—	RNAV1
003	TF	TT460	—	068 (060.7)	-7.5	10.1	—	—	—	—	RNAV1
004	TF	TT461	—	044 (036.1)	-7.5	14.4	—	—	—	—	RNAV1
005	TF	CIVIC	—	345 (337.7)	-7.5	8.8	—	7000	210	—	RNAV1
006	TF	TT462	—	345 (337.7)	-7.5	6.4	—	—	—	—	RNAV1
007	TF	TT463	—	006 (358.0)	-7.5	6.9	—	—	—	—	RNAV1
008	TF	TT464	—	341 (333.5)	-7.5	5.4	—	—	—	—	RNAV1
009	TF	EPSON	—	317 (309.0)	-7.5	6.9	—	7000	210	—	RNAV1
010	TF	CREAM	—	211 (203.6)	-7.5	14.1	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	345 (337.7)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ACORN	345028.8N / 1394146.7E	TT453	345438.5N / 1401325.9E
ARLON	351525.3N / 1395859.8E	TT460	344852.6N / 1401936.8E
CIVIC	350840.6N / 1402552.1E	TT461	350030.2N / 1402957.9E
CLONE	344357.8N / 1400856.0E	TT462	351433.3N / 1402254.8E
CREAM	351743.4N / 1400612.4E	TT463	352125.4N / 1402237.1E
EPSON	353036.2N / 1401305.9E	TT464	352617.6N / 1401938.6E
KAIHO	351857.8N / 1394642.4E	UMUKI	351219.1N / 1394849.2E
TT450	345254.0N / 1394706.0E	WANDA	350155.3N / 1401954.1E
TT451	345016.8N / 1395734.3E	WEDGE	350900.4N / 1395846.5E
TT452	345113.2N / 1400600.1E	XAC	344244.1N / 1392450.5E

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

Note 1) DME/DME/IRU or GNSS required.

2) RADAR service required.

VAR 8° W(2019)

VOR/DME
HANEDA
112.2 HME
CH-59X $\frac{1}{2}$
35°33'44"N/139°45'40"E

The diagram illustrates flight levels FL140 and FL180. A horizontal line at the top represents FL140, and a dashed line below it represents FL180. Above the solid line, the text 'MAX 230KIAS(at or below FL140)' is written. Below the dashed line, the text 'MAX 240KIAS(above FL140)' is written. To the right of the lines, there is a stylized bird-like shape labeled 'KAIHO'.

MAX 230KIAS(at or below FL140)
 MAX 240KIAS(above FL140)
 1MIN(at or below FL140)
 1.5MIN(above FL140)



MAX 230KIAS(at or below FL140)
 MAX 240KIAS(above FL140)
 1MIN(at or below FL140)
 1.5MIN(above FL140)

WEDGE
MHA 4000

MAX 230KIAS(at or below FL140)
 MAX 240KIAS(above FL140)
 1MIN(at or below FL140)
 1.5MIN(above FL140)




A ARRIVAL / AKSEL 1K ARRIVAL AKSEL 2C ARRIVAL

RNAV 1

AKSEL ZC ARRIVAL

RNAV STAR RWY34R/34L

CHANGE : WALL Y renamed

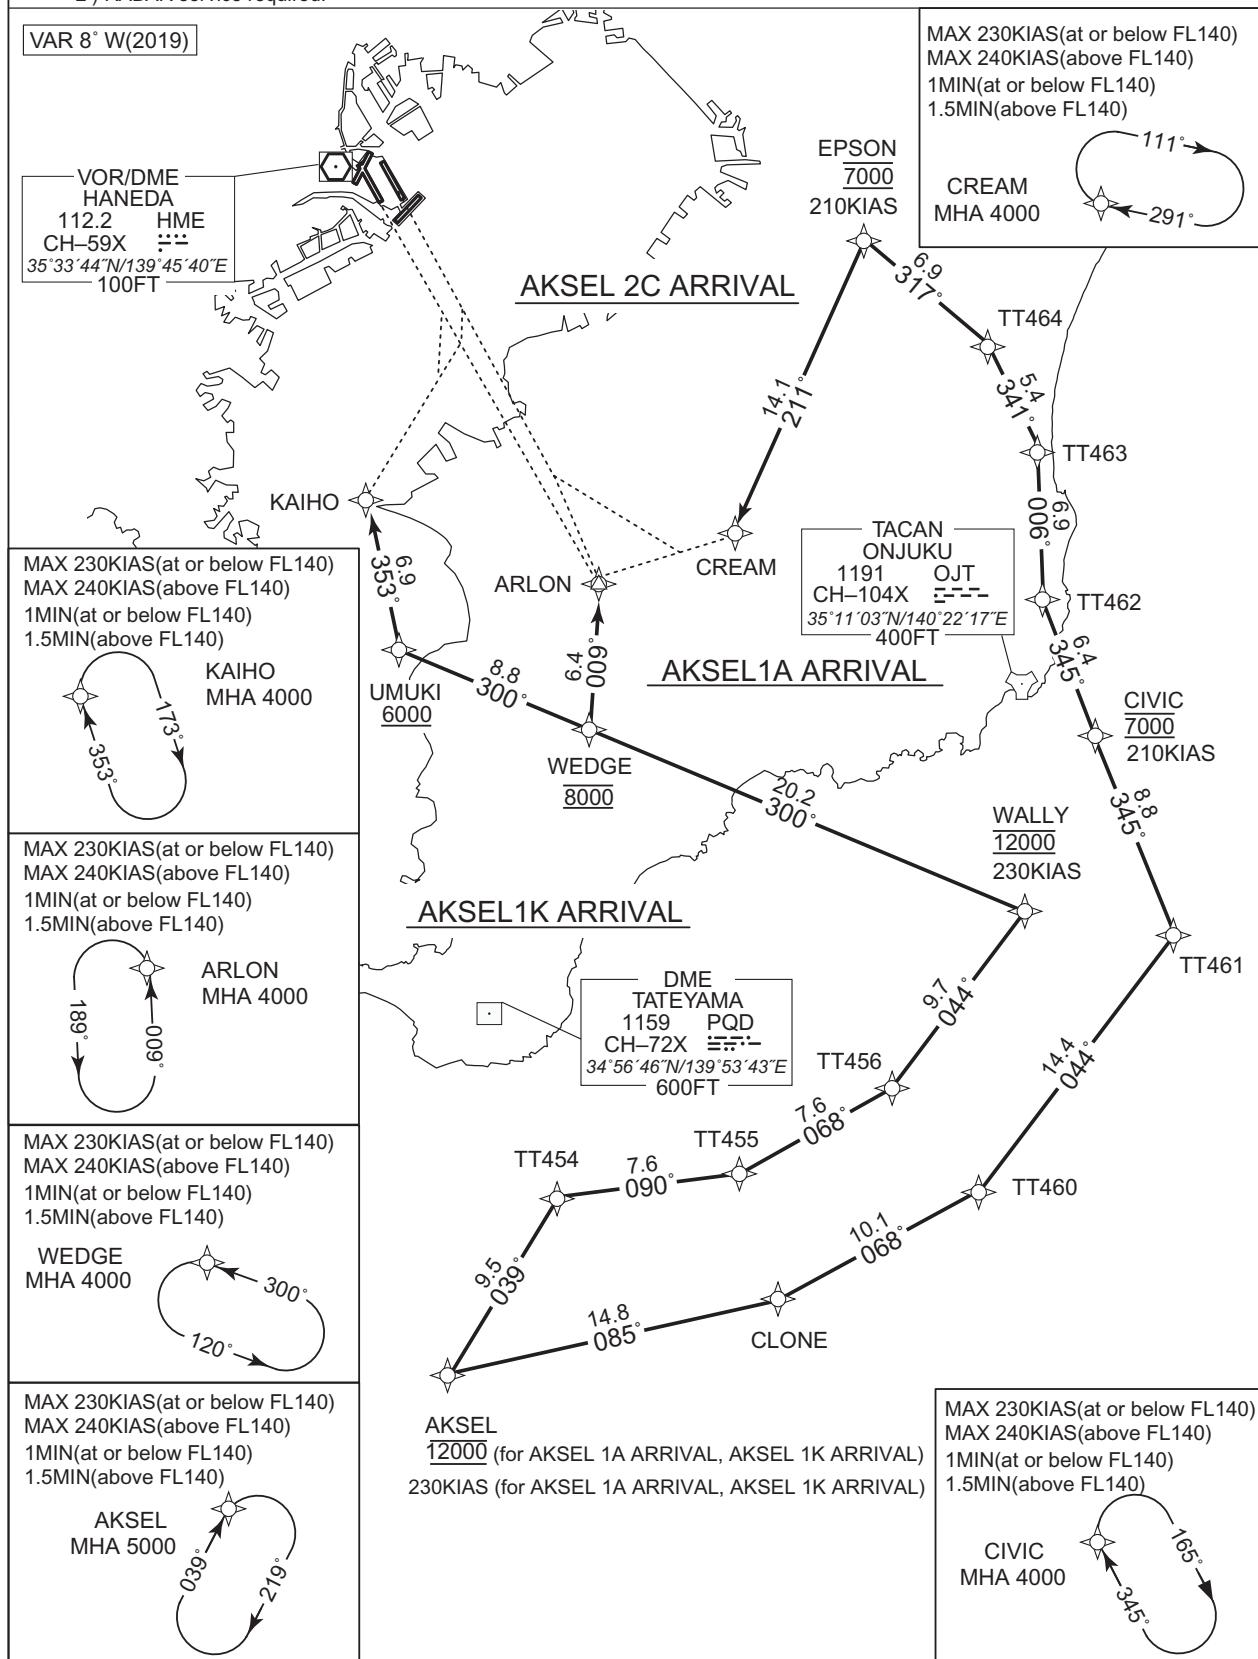

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AKSEL 1A ARRIVAL

From AKSEL at 12000FT, to TT454, to TT455, to TT456, to WALLY at 12000FT, to WEDGE at 8000FT, to ARLON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	12000	230	-	RNAV1
002	TF	TT454	-	039 (031.2)	-7.5	9.5	-	-	-	-	RNAV1
003	TF	TT455	-	090 (082.2)	-7.5	7.6	-	-	-	-	RNAV1
004	TF	TT456	-	068 (060.7)	-7.5	7.6	-	-	-	-	RNAV1
005	TF	WALLY	-	044 (036.0)	-7.5	9.7	-	12000	230	-	RNAV1
006	TF	WEDGE	-	300 (292.4)	-7.5	20.2	-	8000	-	-	RNAV1
007	TF	ARLON	-	009 (001.6)	-7.5	6.4	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : WALLY renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AKSEL 1K ARRIVAL

From AKSEL at 12000FT, to TT454, to TT455, to TT456, to WALLY at 12000FT, to WEDGE at 8000FT, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	—	—	-7.5	—	—	12000	230	—	RNAV1
002	TF	TT454	—	039 (031.2)	-7.5	9.5	—	—	—	—	RNAV1
003	TF	TT455	—	090 (082.2)	-7.5	7.6	—	—	—	—	RNAV1
004	TF	TT456	—	068 (060.7)	-7.5	7.6	—	—	—	—	RNAV1
005	TF	WALLY	—	044 (036.0)	-7.5	9.7	—	12000	230	—	RNAV1
006	TF	WEDGE	—	300 (292.4)	-7.5	20.2	—	8000	—	—	RNAV1
007	TF	UMUKI	—	300 (292.2)	-7.5	8.8	—	+6000	—	—	RNAV1
008	TF	KAIHO	—	353 (345.5)	-7.5	6.9	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.5	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : WALLY renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AKSEL 2C ARRIVAL

From AKSEL, to CLONE, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	CLONE	-	085 (077.0)	-7.5	14.8	-	-	-	-	RNAV1
003	TF	TT460	-	068 (060.7)	-7.5	10.1	-	-	-	-	RNAV1
004	TF	TT461	-	044 (036.1)	-7.5	14.4	-	-	-	-	RNAV1
005	TF	CIVIC	-	345 (337.7)	-7.5	8.8	-	7000	210	-	RNAV1
006	TF	TT462	-	345 (337.7)	-7.5	6.4	-	-	-	-	RNAV1
007	TF	TT463	-	006 (358.0)	-7.5	6.9	-	-	-	-	RNAV1
008	TF	TT464	-	341 (333.5)	-7.5	5.4	-	-	-	-	RNAV1
009	TF	EPSON	-	317 (309.0)	-7.5	6.9	-	7000	210	-	RNAV1
010	TF	CREAM	-	211 (203.6)	-7.5	14.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	345 (337.7)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	TT456	345329.3N / 1401440.2E
ARLON	351525.3N / 1395859.8E	TT460	344852.6N / 1401936.8E
CIVIC	350840.6N / 1402552.1E	TT461	350030.2N / 1402957.9E
CLONE	344357.8N / 1400856.0E	TT462	351433.3N / 1402254.8E
CREAM	351743.4N / 1400612.4E	TT463	352125.4N / 1402237.1E
EPSON	353036.2N / 1401305.9E	TT464	352617.6N / 1401938.6E
KAIHO	351857.8N / 1394642.4E	UMUKI	351219.1N / 1394849.2E
TT454	344844.8N / 1395725.3E	WALLY	350120.1N / 1402138.6E
TT455	344946.2N / 1400635.3E	WEDGE	350900.4N / 1395846.5E

CHANGE : WALLY renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AROSA 1A ARRIVAL

From AROSA, to AVEEY at 11000FT, to TT457, to TT458, to TT459, to WALTZ at 11000FT, to WEDGE at 8000FT, to ARLON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	TT457	-	325 (317.5)	-7.5	7.2	-	-	-	-	RNAV1
004	TF	TT458	-	286 (278.5)	-7.5	7.4	-	-	-	-	RNAV1
005	TF	TT459	-	270 (262.3)	-7.5	8.2	-	-	-	-	RNAV1
006	TF	WALTZ	-	295 (287.0)	-7.5	10.4	-	11000	230	-	RNAV1
007	TF	WEDGE	-	038 (030.6)	-7.5	21.8	-	8000	-	-	RNAV1
008	TF	ARLON	-	009 (001.6)	-7.5	6.4	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : AVEEY renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AROSA 1K ARRIVAL

From AROSA, to AVEEY at 11000FT, to TT457, to TT458, to TT459, to WALTZ at 11000FT, to WEDGE at 8000FT, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	TT457	-	325 (317.5)	-7.5	7.2	-	-	-	-	RNAV1
004	TF	TT458	-	286 (278.5)	-7.5	7.4	-	-	-	-	RNAV1
005	TF	TT459	-	270 (262.3)	-7.5	8.2	-	-	-	-	RNAV1
006	TF	WALTZ	-	295 (287.0)	-7.5	10.4	-	11000	230	-	RNAV1
007	TF	WEDGE	-	038 (030.6)	-7.5	21.8	-	8000	-	-	RNAV1
008	TF	UMUKI	-	300 (292.2)	-7.5	8.8	-	+6000	-	-	RNAV1
009	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : AVEEY renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AROSA 2C ARRIVAL

From AROSA, to AVEEY at 11000FT, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	TT460	-	352 (344.5)	-7.5	7.2	-	-	-	-	RNAV1
004	TF	TT461	-	044 (036.1)	-7.5	14.4	-	-	-	-	RNAV1
005	TF	CIVIC	-	345 (337.7)	-7.5	8.8	-	7000	210	-	RNAV1
006	TF	TT462	-	345 (337.7)	-7.5	6.4	-	-	-	-	RNAV1
007	TF	TT463	-	006 (358.0)	-7.5	6.9	-	-	-	-	RNAV1
008	TF	TT464	-	341 (333.5)	-7.5	5.4	-	-	-	-	RNAV1
009	TF	EPSON	-	317 (309.0)	-7.5	6.9	-	7000	210	-	RNAV1
010	TF	CREAM	-	211 (203.6)	-7.5	14.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	345 (337.7)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARLON	351525.3N / 1395859.8E	TT459	344712.8N / 1395716.3E
AROSA	344201.7N / 1404157.3E	TT460	344852.6N / 1401936.8E
AVEEY	344155.9N / 1402158.0E	TT461	350030.2N / 1402957.9E
CIVIC	350840.6N / 1402552.1E	TT462	351433.3N / 1402254.8E
CREAM	351743.4N / 1400612.4E	TT463	352125.4N / 1402237.1E
EPSON	353036.2N / 1401305.9E	TT464	352617.6N / 1401938.6E
KAIHO	351857.8N / 1394642.4E	UMUKI	351219.1N / 1394849.2E
TT457	344714.3N / 1401602.7E	WALTZ	345014.4N / 1394510.7E
TT458	344819.1N / 1400710.5E	WEDGE	350900.4N / 1395846.5E

CHANGE : AVEEY renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

GODIN 2A ARRIVAL / GODIN 2K ARRIVAL
GODIN 1C ARRIVAL


RNAV 1

Note 1) DME/DME/IRU or GNSS required.

2) RADAR service required.

VAR 8° W(2019)

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)



MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)



VOR/DME
HANEDA
112.2 HME
CH-59X :::
35°33'44"N/139°45'40"E
100FT

DME
MORIYA
1174 SND
CH-87X :::
35°56'05"N/139°58'53"E
100FT

TACAN
SHIMOFUSA
980 SHT
CH-19X :::
35°48'07"N/140°00'36"E
100FT

GODIN

CHIPS

13000

11.8

11.7

11.6

11.5

11.4

11.3

11.2

11.1

11.0

10.9

10.8

10.7

10.6

10.5

10.4

10.3

10.2

10.1

10.0

9.9

9.8

9.7

9.6

9.5

9.4

9.3

9.2

9.1

9.0

8.9

8.8

8.7

8.6

8.5

8.4

8.3

8.2

8.1

8.0

7.9

7.8

7.7

7.6

7.5

7.4

7.3

7.2

7.1

7.0

6.9

6.8

6.7

6.6

6.5

6.4

6.3

6.2

6.1

6.0

5.9

5.8

5.7

5.6

5.5

5.4

5.3

5.2

5.1

5.0

4.9

4.8

4.7

4.6

4.5

4.4

4.3

4.2

4.1

4.0

3.9

3.8

3.7

3.6

3.5

3.4

3.3

3.2

3.1

3.0

2.9

2.8

2.7

2.6

2.5

2.4

2.3

2.2

2.1

2.0

1.9

1.8

1.7

1.6

1.5

1.4

1.3

1.2

1.1

1.0

0.9

0.8

0.7

0.6

0.5

0.4

0.3

0.2

0.1

0.0

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

017° 197°

GODIN
MHA 8000

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

017° 197°

COLOR
MHA 8000

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

90° 98°

COACH
MHA 4000

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

111° 291°

CREAM
MHA 4000

TACAN
ONJUKU
1191 OJT
CH-104X :::
35°11'03"N/140°22'17"E
400FT

TT465

TT466

TT467

TT468

TT469

EDDIE
8000

210KIAS

DME
TATEYAMA
1159 PQD
CH-72X :::
34°56'46"N/139°53'43"E
600FT

TT469

TACAN
TATEYAMA
986 TET
CH-25X :::
34°58'15"N/139°50'17"E
500FT

CHANGE : HOKUSO VOR/DME(HKE) abolished.

GODIN 2K ARRIVAL

GODIN 2A ARRIVAL

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

GODIN 2A ARRIVAL

From GODIN, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to TT468, to TT469, to ARLON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	CHIPS	-	197 (189.1)	-7.5	11.8	-	-13000	-	-	RNAV1
003	TF	COLOR	-	197 (189.1)	-7.5	11.7	-	-11000	-	-	RNAV1
004	TF	COPSE	-	188 (180.8)	-7.5	14.3	-	-	-	-	RNAV1
005	TF	COACH	-	185 (177.8)	-7.5	9.4	-	8000	210	-	RNAV1
006	TF	TT465	-	187 (179.6)	-7.5	8.0	-	-	-	-	RNAV1
007	TF	TT466	-	136 (128.9)	-7.5	6.4	-	-	-	-	RNAV1
008	TF	TT467	-	161 (153.5)	-7.5	5.0	-	-	-	-	RNAV1
009	TF	EDDIE	-	186 (178.0)	-7.5	6.4	-	8000	210	-	RNAV1
010	TF	TT468	-	256 (248.1)	-7.5	6.7	-	-	-	-	RNAV1
011	TF	TT469	-	278 (270.2)	-7.5	6.9	-	-	-	-	RNAV1
012	TF	ARLON	-	308 (300.2)	-7.5	6.2	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

GODIN 2K ARRIVAL

From GODIN ,to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to TT468, to TT469, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	CHIPS	-	197 (189.1)	-7.5	11.8	-	-13000	-	-	RNAV1
003	TF	COLOR	-	197 (189.1)	-7.5	11.7	-	-11000	-	-	RNAV1
004	TF	COPSE	-	188 (180.8)	-7.5	14.3	-	-	-	-	RNAV1
005	TF	COACH	-	185 (177.8)	-7.5	9.4	-	8000	210	-	RNAV1
006	TF	TT465	-	187 (179.6)	-7.5	8.0	-	-	-	-	RNAV1
007	TF	TT466	-	136 (128.9)	-7.5	6.4	-	-	-	-	RNAV1
008	TF	TT467	-	161 (153.5)	-7.5	5.0	-	-	-	-	RNAV1
009	TF	EDDIE	-	186 (178.0)	-7.5	6.4	-	8000	210	-	RNAV1
010	TF	TT468	-	256 (248.1)	-7.5	6.7	-	-	-	-	RNAV1
011	TF	TT469	-	278 (270.2)	-7.5	6.9	-	-	-	-	RNAV1
012	TF	UMUKI	-	278 (270.2)	-7.5	13.7	-	+6000	-	-	RNAV1
013	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : New PROC

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

GODIN 1C ARRIVAL

From GODIN ,to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to CREAM.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	CHIPS	-	197 (189.1)	-7.5	11.8	-	-13000	-	-	RNAV1
003	TF	COLOR	-	197 (189.1)	-7.5	11.7	-	-11000	-	-	RNAV1
004	TF	COPSE	-	188 (180.8)	-7.5	14.3	-	-	-	-	RNAV1
005	TF	COACH	-	185 (177.8)	-7.5	9.4	-	8000	210	-	RNAV1
006	TF	TT465	-	187 (179.6)	-7.5	8.0	-	-	-	-	RNAV1
007	TF	TT466	-	136 (128.9)	-7.5	6.4	-	-	-	-	RNAV1
008	TF	TT467	-	161 (153.5)	-7.5	5.0	-	-	-	-	RNAV1
009	TF	EDDIE	-	186 (178.0)	-7.5	6.4	-	8000	210	-	RNAV1
010	TF	CREAM	-	291 (283.1)	-7.5	13.0	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARLON	351525.3N / 1395859.8E	KAIHO	351857.8N / 1394642.4E
CHIPS	361247.7N / 1401436.9E	TT465	352939.2N / 1401235.4E
COACH	353736.0N / 1401231.5E	TT466	352539.0N / 1401840.1E
COLOR	360116.3N / 1401219.8E	TT467	352110.2N / 1402124.4E
COPSE	354658.8N / 1401205.4E	TT468	351216.4N / 1401402.6E
CREAM	351743.4N / 1400612.4E	TT469	351217.9N / 1400534.7E
EDDIE	351447.4N / 1402140.9E	UMUKI	351219.1N / 1394849.2E
GODIN	362425.3N / 1401655.9E		

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

POLIX 2A ARRIVAL / POLIX 2K ARRIVAL
POLIX 1C ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8° W(2019)

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

KAIHO
MHA 4000

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

ARLON
MHA 4000

CHIPS
13000 9.5 279° POLIX
FL150

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

POLIX
MHA 11000 310° 130°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

COLOR
MHA 8000

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

COACH
MHA 4000

CHANGE : HOKUSO VOR/DME(HKE) abolished.

VOR/DME
HANEDA
112.2 HME
CH-59X 35°33'44"N/139°45'40"E
100FT

KAIHO

ARLON
13.7 278° 6.2 308° 278° 6.9 256°

UMUKI
6000

POLIX 2K ARRIVAL

TACAN
TATEYAMA
986 TET
CH-25X 34°58'15"N/139°50'17"E
500FT

POLIX 1C ARRIVAL

COPSE
9.4 185° COACH
8000 210KIAS
NARITA INTL AP
VOR/DME
NARITA
117.9 NRE
CH-126X 35°46'56"N/140°21'45"E
200FT

TT465 13.6° TT466 16.1° TT467 18.4° TT468 13.0 291°

CREAM
EDDIE
8000 210KIAS

TACAN
ONJUKU
1191 OJT
CH-104X 35°11'03"N/140°22'17"E
400FT

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

CREAM
MHA 4000 111° 291°

DME
TATEYAMA
1159 PQD
CH-72X 34°56'46"N/139°53'43"E
600FT

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

POLIX 2A ARRIVAL

From POLIX at FL150, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to TT468, to TT469, to ARLON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	-	-	-7.5	-	-	FL150	-	-	RNAV1
002	TF	CHIPS	-	279 (271.1)	-7.5	9.5	-	-13000	-	-	RNAV1
003	TF	COLOR	-	197 (189.1)	-7.5	11.7	-	-11000	-	-	RNAV1
004	TF	COPSE	-	188 (180.8)	-7.5	14.3	-	-	-	-	RNAV1
005	TF	COACH	-	185 (177.8)	-7.5	9.4	-	8000	210	-	RNAV1
006	TF	TT465	-	187 (179.6)	-7.5	8.0	-	-	-	-	RNAV1
007	TF	TT466	-	136 (128.9)	-7.5	6.4	-	-	-	-	RNAV1
008	TF	TT467	-	161 (153.5)	-7.5	5.0	-	-	-	-	RNAV1
009	TF	EDDIE	-	186 (178.0)	-7.5	6.4	-	8000	210	-	RNAV1
010	TF	TT468	-	256 (248.1)	-7.5	6.7	-	-	-	-	RNAV1
011	TF	TT469	-	278 (270.2)	-7.5	6.9	-	-	-	-	RNAV1
012	TF	ARLON	-	308 (300.2)	-7.5	6.2	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

POLIX 2K ARRIVAL

From POLIX at FL150, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to TT468, to TT469, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	-	-	-7.5	-	-	FL150	-	-	RNAV1
002	TF	CHIPS	-	279 (271.1)	-7.5	9.5	-	-13000	-	-	RNAV1
003	TF	COLOR	-	197 (189.1)	-7.5	11.7	-	-11000	-	-	RNAV1
004	TF	COPSE	-	188 (180.8)	-7.5	14.3	-	-	-	-	RNAV1
005	TF	COACH	-	185 (177.8)	-7.5	9.4	-	8000	210	-	RNAV1
006	TF	TT465	-	187 (179.6)	-7.5	8.0	-	-	-	-	RNAV1
007	TF	TT466	-	136 (128.9)	-7.5	6.4	-	-	-	-	RNAV1
008	TF	TT467	-	161 (153.5)	-7.5	5.0	-	-	-	-	RNAV1
009	TF	EDDIE	-	186 (178.0)	-7.5	6.4	-	8000	210	-	RNAV1
010	TF	TT468	-	256 (248.1)	-7.5	6.7	-	-	-	-	RNAV1
011	TF	TT469	-	278 (270.2)	-7.5	6.9	-	-	-	-	RNAV1
012	TF	UMUKI	-	278 (270.2)	-7.5	13.7	-	+6000	-	-	RNAV1
013	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : New PROC

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

POLIX 1C ARRIVAL

From POLIX at FL150, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to CREAM.

Critical DME	-		
DME GAP	-		
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1		

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	—	—	-7.5	—	—	FL150	—	—	RNAV1
002	TF	CHIPS	—	279 (271.1)	-7.5	9.5	—	-13000	—	—	RNAV1
003	TF	COLOR	—	197 (189.1)	-7.5	11.7	—	-11000	—	—	RNAV1
004	TF	COPSE	—	188 (180.8)	-7.5	14.3	—	—	—	—	RNAV1
005	TF	COACH	—	185 (177.8)	-7.5	9.4	—	8000	210	—	RNAV1
006	TF	TT465	—	187 (179.6)	-7.5	8.0	—	—	—	—	RNAV1
007	TF	TT466	—	136 (128.9)	-7.5	6.4	—	—	—	—	RNAV1
008	TF	TT467	—	161 (153.5)	-7.5	5.0	—	—	—	—	RNAV1
009	TF	EDDIE	—	186 (178.0)	-7.5	6.4	—	8000	210	—	RNAV1
010	TF	CREAM	—	291 (283.1)	-7.5	13.0	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	—	L	11000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARLON	351525.3N / 1395859.8E	POLIX	361237.1N / 1402622.5E
CHIPS	361247.7N / 1401436.9E	TT465	352939.2N / 1401235.4E
COACH	353736.0N / 1401231.5E	TT466	352539.0N / 1401840.1E
COLOR	360116.3N / 1401219.8E	TT467	352110.2N / 1402124.4E
COPSE	354658.8N / 1401205.4E	TT468	351216.4N / 1401402.6E
CREAM	351743.4N / 1400612.4E	TT469	351217.9N / 1400534.7E
EDDIE	351447.4N / 1402140.9E	UMUKI	351219.1N / 1394849.2E
KAIHO	351857.8N / 1394642.4E		

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

OSHIMA 2H ARRIVAL / AKSEL 2H ARRIVAL AROSA 2H ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.

2) RADAR service required.

VAR 8° W(2019)

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

VOR/DME
HANEDA
112.2 HME
CH-59X \ddots
35°33'44"N/139°45'40"E

CACAO
D14.0 HME
(D12.1 ITC)

MHA 4000/MAX 230KIAS

D19.0 HME

332°

135°

MHA 4000/MAX 230KIAS

VORTAC
OSHIMA
113.1 XAC
CH-78X 
34°42'44"N/139°24'50"E
2100FT

OSHIMA 2H ARRIVAL

OSHIMA
(XAC)

36.3°
095°

AKSEI

14.8°
085°

CLONE

AVEEY
11000
230KIAS

The logo consists of a stylized letter 'A' formed by two vertical bars with horizontal cross-bars at the top and bottom, and a central circle with a crosshair-like pattern.

AKSEL 2H ARRIVAL

AROSA 2H ARRIVAL

CHANGE : AVEEY renamed

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140) 

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

098° OSHIMA(XAC)
MHA 5000

0
039°
219°

AVEEY
MHA 5000

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

OSHIMA 2H ARRIVAL

From XAC, to CLONE, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM, to CLOAK, to CAMEL, to CACAO.

Note: When cleared HIGHWAY VISUAL RWY34R APPROACH, aircraft should fly via last routing cleared until CACAO.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	—	—	-7.5	—	—	—	—	—	RNAV1
002	TF	CLONE	—	095 (087.8)	-7.5	36.3	—	—	—	—	RNAV1
003	TF	TT460	—	068 (060.7)	-7.5	10.1	—	—	—	—	RNAV1
004	TF	TT461	—	044 (036.1)	-7.5	14.4	—	—	—	—	RNAV1
005	TF	CIVIC	—	345 (337.7)	-7.5	8.8	—	7000	210	—	RNAV1
006	TF	TT462	—	345 (337.7)	-7.5	6.4	—	—	—	—	RNAV1
007	TF	TT463	—	006 (358.0)	-7.5	6.9	—	—	—	—	RNAV1
008	TF	TT464	—	341 (333.5)	-7.5	5.4	—	—	—	—	RNAV1
009	TF	EPSON	—	317 (309.0)	-7.5	6.9	—	7000	210	—	RNAV1
010	TF	CREAM	—	211 (203.6)	-7.5	14.1	—	—	—	—	RNAV1
011	TF	CLOAK	—	247 (240.0)	-7.5	3.8	—	—	—	—	RNAV1
012	TF	CAMEL	—	308 (300.1)	-7.5	3.0	—	—	—	—	RNAV1
013	TF	CACAO	—	338 (330.1)	-7.5	5.7	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	345 (337.7)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : Note added.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AKSEL 2H ARRIVAL

From AKSEL, to CLONE, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM, to CLOAK, to CAMEL, to CACAO.

Note: When cleared HIGHWAY VISUAL RWY34R APPROACH, aircraft should fly via last routing cleared until CACAO.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	—	—	-7.5	—	—	—	—	—	RNAV1
002	TF	CLONE	—	085 (077.0)	-7.5	14.8	—	—	—	—	RNAV1
003	TF	TT460	—	068 (060.7)	-7.5	10.1	—	—	—	—	RNAV1
004	TF	TT461	—	044 (036.1)	-7.5	14.4	—	—	—	—	RNAV1
005	TF	CIVIC	—	345 (337.7)	-7.5	8.8	—	7000	210	—	RNAV1
006	TF	TT462	—	345 (337.7)	-7.5	6.4	—	—	—	—	RNAV1
007	TF	TT463	—	006 (358.0)	-7.5	6.9	—	—	—	—	RNAV1
008	TF	TT464	—	341 (333.5)	-7.5	5.4	—	—	—	—	RNAV1
009	TF	EPSON	—	317 (309.0)	-7.5	6.9	—	7000	210	—	RNAV1
010	TF	CREAM	—	211 (203.6)	-7.5	14.1	—	—	—	—	RNAV1
011	TF	CLOAK	—	247 (240.0)	-7.5	3.8	—	—	—	—	RNAV1
012	TF	CAMEL	—	308 (300.1)	-7.5	3.0	—	—	—	—	RNAV1
013	TF	CACAO	—	338 (330.1)	-7.5	5.7	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	345 (337.7)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : Note added

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AROSA 2H ARRIVAL

From AROSA, to AVEEY at 11000FT, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM, to CLOAK, to CAMEL, to CACAO.

Note: When cleared HIGHWAY VISUAL RWY34R APPROACH, aircraft should fly via last routing cleared until CACAO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	TT460	-	352 (344.5)	-7.5	7.2	-	-	-	-	RNAV1
004	TF	TT461	-	044 (036.1)	-7.5	14.4	-	-	-	-	RNAV1
005	TF	CIVIC	-	345 (337.7)	-7.5	8.8	-	7000	210	-	RNAV1
006	TF	TT462	-	345 (337.7)	-7.5	6.4	-	-	-	-	RNAV1
007	TF	TT463	-	006 (358.0)	-7.5	6.9	-	-	-	-	RNAV1
008	TF	TT464	-	341 (333.5)	-7.5	5.4	-	-	-	-	RNAV1
009	TF	EPSON	-	317 (309.0)	-7.5	6.9	-	7000	210	-	RNAV1
010	TF	CREAM	-	211 (203.6)	-7.5	14.1	-	-	-	-	RNAV1
011	TF	CLOAK	-	247 (240.0)	-7.5	3.8	-	-	-	-	RNAV1
012	TF	CAMEL	-	308 (300.1)	-7.5	3.0	-	-	-	-	RNAV1
013	TF	CACAO	-	338 (330.1)	-7.5	5.7	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	345 (337.7)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : Note added

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	CREAM	351743.4N / 1400612.4E
AROSA	344201.7N / 1404157.3E	EPSON	353036.2N / 1401305.9E
AVEEY	344155.9N / 1402158.0E	TT460	344852.6N / 1401936.8E
CACAO	352212.8N / 1395530.1E	TT461	350030.2N / 1402957.9E
CAMEL	351718.2N / 1395857.8E	TT462	351433.3N / 1402254.8E
CIVIC	350840.6N / 1402552.1E	TT463	352125.4N / 1402237.1E
CLOAK	351548.0N / 1400208.2E	TT464	352617.6N / 1401938.6E
CLONE	344357.8N / 1400856.0E	XAC	344244.1N / 1392450.5E

CHANGE : AVEEY renamed

INTENTIONALLY LEFT BLANK

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

GODIN 1H ARRIVAL
POLIX 1H ARRIVAL

RNAV STAR RWY34R/34L

RNAV 1

Note 1) DME/DME/IRU or GNSS required.

2) RADAR service required.

VAR 8° W(2019)

GODIN 1H ARRIVAL



POLIX 1H ARRIVAL

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)



POLIX MHA 11000
310°
730°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

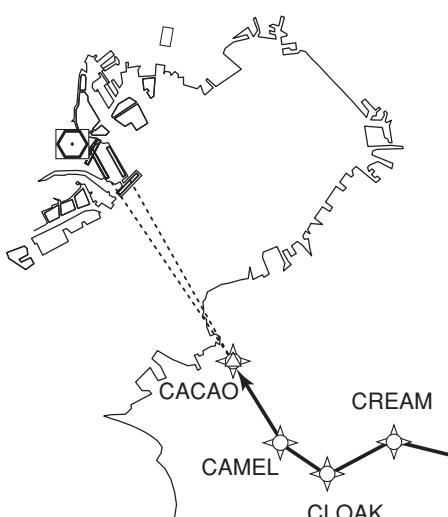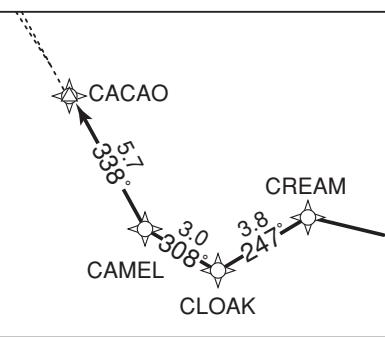

VOR/DME
HANEDA
112.2 HME
CH-59X
35°33'44"N/139°45'40"E
100FT

CHANGE : New PROC

CACAO
D14.0 HME
(D12.1 ITC)
332°
D19.0 HME
MHA 4000/MAX 230KIAS

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

CREAM
MHA 4000

TACAN
ONJUKU
1191 OJT
CH-104X
35°11'03"N/140°22'17"E
400FT

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

GODIN 1H ARRIVAL

From GODIN, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to CREAM, to CLOAK, to CAMEL, to CACAO.

Note: When cleared HIGHWAY VISUAL RWY34R APPROACH, aircraft should fly via last routing cleared until CACAO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	CHIPS	-	197 (189.1)	-7.5	11.8	-	-13000	-	-	RNAV1
003	TF	COLOR	-	197 (189.1)	-7.5	11.7	-	-11000	-	-	RNAV1
004	TF	COPSE	-	188 (180.8)	-7.5	14.3	-	-	-	-	RNAV1
005	TF	COACH	-	185 (177.8)	-7.5	9.4	-	8000	210	-	RNAV1
006	TF	TT465	-	187 (179.6)	-7.5	8.0	-	-	-	-	RNAV1
007	TF	TT466	-	136 (128.9)	-7.5	6.4	-	-	-	-	RNAV1
008	TF	TT467	-	161 (153.5)	-7.5	5.0	-	-	-	-	RNAV1
009	TF	EDDIE	-	186 (178.0)	-7.5	6.4	-	8000	210	-	RNAV1
010	TF	CREAM	-	291 (283.1)	-7.5	13.0	-	-	-	-	RNAV1
011	TF	CLOAK	-	247 (240.0)	-7.5	3.8	-	-	-	-	RNAV1
012	TF	CAMEL	-	308 (300.1)	-7.5	3.0	-	-	-	-	RNAV1
013	TF	CACAO	-	338 (330.1)	-7.5	5.7	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : Note added.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

POLIX 1H ARRIVAL

From POLIX at FL150, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to CREAM, to CLOAK, to CAMEL, to CACAO.

Note: When cleared HIGHWAY VISUAL RWY34R APPROACH, aircraft should fly via last routing cleared until CACAO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	-	-	-7.5	-	-	FL150	-	-	RNAV1
002	TF	CHIPS	-	279 (271.1)	-7.5	9.5	-	-13000	-	-	RNAV1
003	TF	COLOR	-	197 (189.1)	-7.5	11.7	-	-11000	-	-	RNAV1
004	TF	COPSE	-	188 (180.8)	-7.5	14.3	-	-	-	-	RNAV1
005	TF	COACH	-	185 (177.8)	-7.5	9.4	-	8000	210	-	RNAV1
006	TF	TT465	-	187 (179.6)	-7.5	8.0	-	-	-	-	RNAV1
007	TF	TT466	-	136 (128.9)	-7.5	6.4	-	-	-	-	RNAV1
008	TF	TT467	-	161 (153.5)	-7.5	5.0	-	-	-	-	RNAV1
009	TF	EDDIE	-	186 (178.0)	-7.5	6.4	-	8000	210	-	RNAV1
010	TF	CREAM	-	291 (283.1)	-7.5	13.0	-	-	-	-	RNAV1
011	TF	CLOAK	-	247 (240.0)	-7.5	3.8	-	-	-	-	RNAV1
012	TF	CAMEL	-	308 (300.1)	-7.5	3.0	-	-	-	-	RNAV1
013	TF	CACAO	-	338 (330.1)	-7.5	5.7	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : Note added.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
CACAO	352212.8N / 1395530.1E	CREAM	351743.4N / 1400612.4E
CAMEL	351718.2N / 1395857.8E	EDDIE	351447.4N / 1402140.9E
CHIPS	361247.7N / 1401436.9E	GODIN	362425.3N / 1401655.9E
CLOAK	351548.0N / 1400208.2E	POLIX	361237.1N / 1402622.5E
COACH	353736.0N / 1401231.5E	TT465	352939.2N / 1401235.4E
COLOR	360116.3N / 1401219.8E	TT466	352539.0N / 1401840.1E
COPSE	354658.8N / 1401205.4E	TT467	352110.2N / 1402124.4E

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL


OSHIMA 1N ARRIVAL
OSHIMA 2N ARRIVAL

RNAV STAR RWY22/23

RNAV 1

- Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8° W(2019)

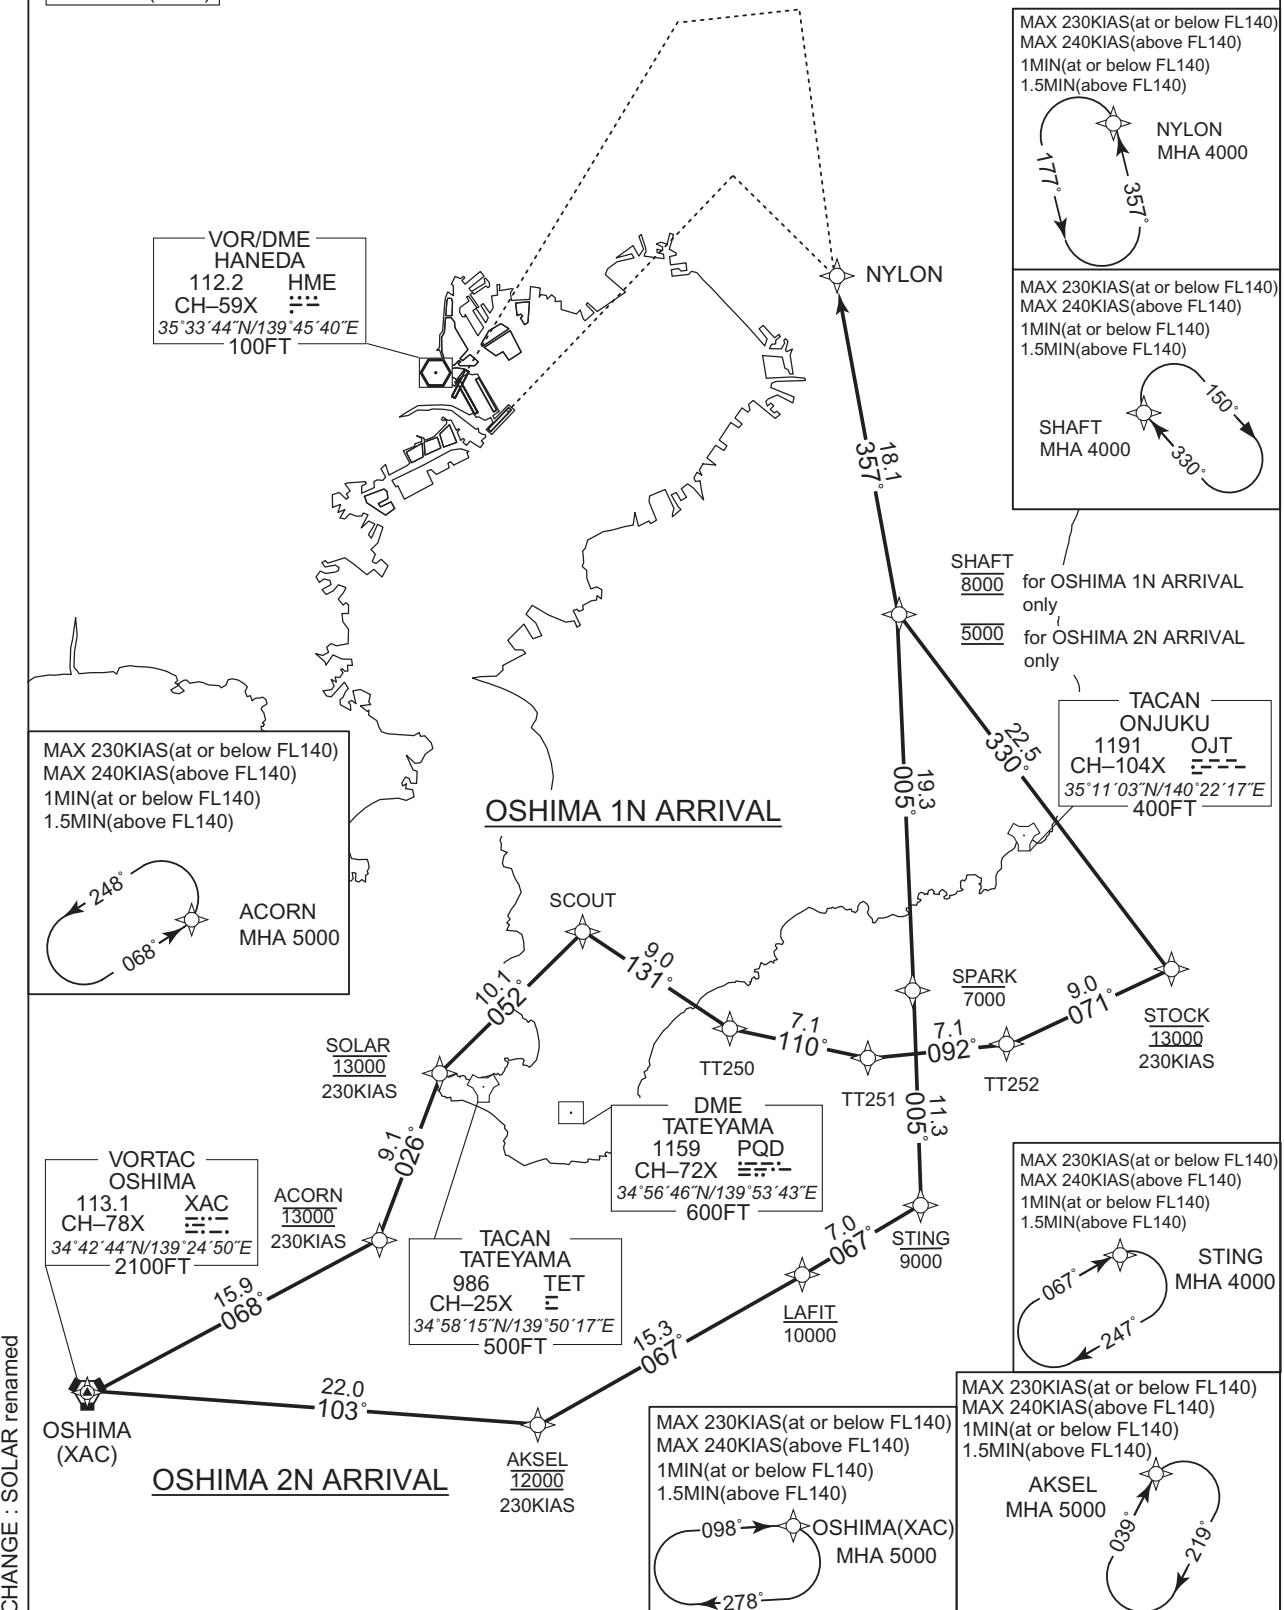

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

OSHIMA 1N ARRIVAL

From XAC, to ACORN at 13000FT, to SOLAR at 13000FT, to SCOUT, to TT250, to TT251, to TT252, to STOCK at 13000FT, to SHAFT at 8000FT, to NYLON.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	—	—	-7.5	—	—	—	—	—	RNAV1
002	TF	ACORN	—	068 (060.8)	-7.5	15.9	—	13000	230	—	RNAV1
003	TF	SOLAR	—	026 (018.4)	-7.5	9.1	—	13000	230	—	RNAV1
004	TF	SCOUT	—	052 (044.3)	-7.5	10.1	—	—	—	—	RNAV1
005	TF	TT250	—	131 (123.1)	-7.5	9.0	—	—	—	—	RNAV1
006	TF	TT251	—	110 (102.5)	-7.5	7.1	—	—	—	—	RNAV1
007	TF	TT252	—	092 (084.3)	-7.5	7.1	—	—	—	—	RNAV1
008	TF	STOCK	—	071 (063.6)	-7.5	9.0	—	13000	230	—	RNAV1
009	TF	SHAFT	—	330 (322.4)	-7.5	22.5	—	8000	—	—	RNAV1
010	TF	NYLON	—	357 (350.0)	-7.5	18.1	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ACORN	068 (060.8)	-7.5	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	357 (350.0)	-7.5	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : SOLAR renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

OSHIMA 2N ARRIVAL

From XAC, to AKSEL at 12000FT, to LAFIT at or below 10000FT, to STING at or below 9000FT, to SPARK at or below 7000FT, to SHAFT at 5000FT, to NYLON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AKSEL	-	103 (095.3)	-7.5	22.0	-	12000	230	-	RNAV1
003	TF	LAFIT	-	067 (059.5)	-7.5	15.3	-	-10000	-	-	RNAV1
004	TF	STING	-	067 (059.6)	-7.5	7.0	-	-9000	-	-	RNAV1
005	TF	SPARK	-	005 (357.4)	-7.5	11.3	-	-7000	-	-	RNAV1
006	TF	SHAFT	-	005 (357.4)	-7.5	19.3	-	5000	-	-	RNAV1
007	TF	NYLON	-	357 (350.0)	-7.5	18.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	STING	067 (059.6)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	357 (350.0)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ACORN	345028.8N / 1394146.7E	SPARK	350312.0N / 1401416.7E
AKSEL	344039.5N / 1395126.9E	STOCK	350438.7N / 1403002.9E
LAFIT	344826.0N / 1400732.4E	STING	345157.9N / 1401453.4E
NYLON	354018.5N / 1400919.9E	TT250	350129.7N / 1400308.5E
SCOUT	350624.1N / 1395356.8E	TT251	345957.7N / 1401136.0E
SHAFT	352227.4N / 1401313.3E	TT252	350039.9N / 1402013.0E
SOLAR	345909.2N / 1394518.5E	XAC	344244.1N / 1392450.5E

CHANGE : SOLAR renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23



CHANGE : SOLAR renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

OSHIMA 1B ARRIVAL

From XAC, to ACORN at 13000FT, to SOLAR at 13000FT, to SCOUT, to TT250, to TT251, to TT252, to STOCK at 13000FT, to SHAFT at 8000FT, to BACON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	ACORN	-	068 (060.8)	-7.5	15.9	-	13000	230	-	RNAV1
003	TF	SOLAR	-	026 (018.4)	-7.5	9.1	-	13000	230	-	RNAV1
004	TF	SCOUT	-	052 (044.3)	-7.5	10.1	-	-	-	-	RNAV1
005	TF	TT250	-	131 (123.1)	-7.5	9.0	-	-	-	-	RNAV1
006	TF	TT251	-	110 (102.5)	-7.5	7.1	-	-	-	-	RNAV1
007	TF	TT252	-	092 (084.3)	-7.5	7.1	-	-	-	-	RNAV1
008	TF	STOCK	-	071 (063.6)	-7.5	9.0	-	13000	230	-	RNAV1
009	TF	SHAFT	-	330 (322.4)	-7.5	22.5	-	8000	-	-	RNAV1
010	TF	BACON	-	003 (355.2)	-7.5	9.5	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ACORN	068 (060.8)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : SOLAR renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

OSHIMA 2B ARRIVAL

From XAC, to AKSEL at 12000FT, to LAFIT at or below 10000FT, to STING at or below 9000FT, to SPARK at or below 7000FT, to SHAFT at 5000FT, to BACON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AKSEL	-	103 (095.3)	-7.5	22.0	-	12000	230	-	RNAV1
003	TF	LAFIT	-	067 (059.5)	-7.5	15.3	-	-10000	-	-	RNAV1
004	TF	STING	-	067 (059.6)	-7.5	7.0	-	-9000	-	-	RNAV1
005	TF	SPARK	-	005 (357.4)	-7.5	11.3	-	-7000	-	-	RNAV1
006	TF	SHAFT	-	005 (357.4)	-7.5	19.3	-	5000	-	-	RNAV1
007	TF	BACON	-	003 (355.2)	-7.5	9.5	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	STING	067 (059.6)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ACORN	345028.8N / 1394146.7E	SPARK	350312.0N / 1401416.7E
AKSEL	344039.5N / 1395126.9E	STOCK	350438.7N / 1403002.9E
BACON	353155.0N / 1401215.1E	STING	345157.9N / 1401453.4E
LAFIT	344826.0N / 1400732.4E	TT250	350129.7N / 1400308.5E
SCOUT	350624.1N / 1395356.8E	TT251	345957.7N / 1401136.0E
SHAFT	352227.4N / 1401313.3E	TT252	350039.9N / 1402013.0E
SOLAR	345909.2N / 1394518.5E	XAC	344244.1N / 1392450.5E

CHANGE : SOLAR renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AKSEL 1N ARRIVAL
AKSEL 2N ARRIVAL


RNAV 1

Note 1) DME/DME/IRU or GNSS required.

2) RADAR service required.

VAR 8° W(2019)

VOR/DME
HANEDA
112.2 HME
CH-59X
35°33'44"N/139°45'40"E
100FT

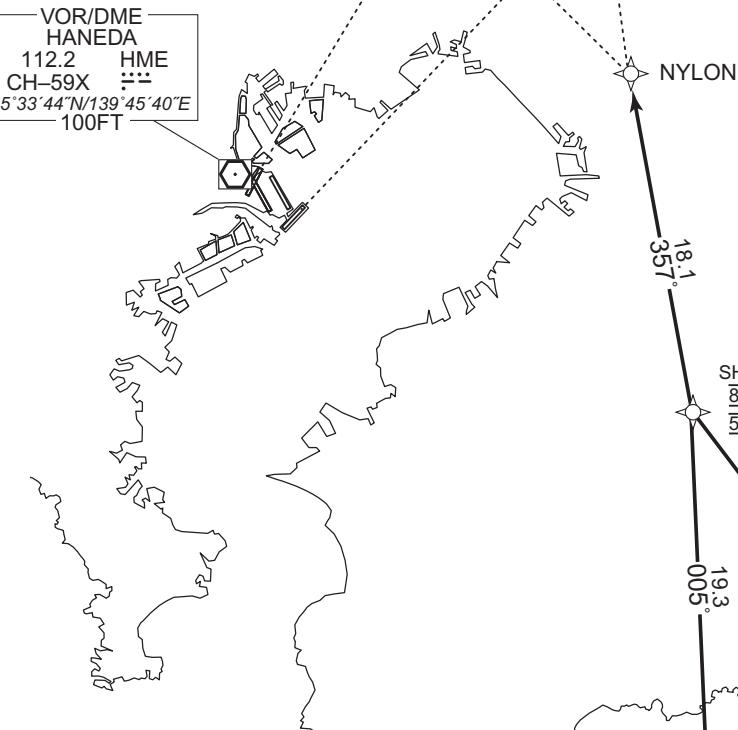

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

NYLON
MHA 4000
177° 357°


MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

SHAFT
MHA 4000
150° 330°

AKSEL 1N ARRIVAL

TACAN
TATEYAMA
986 TET
CH-25X
34°58'15"N/139°50'17"E
500FT

DME
TATEYAMA
1159 PQD
CH-72X
34°56'46"N/139°53'43"E
600FT

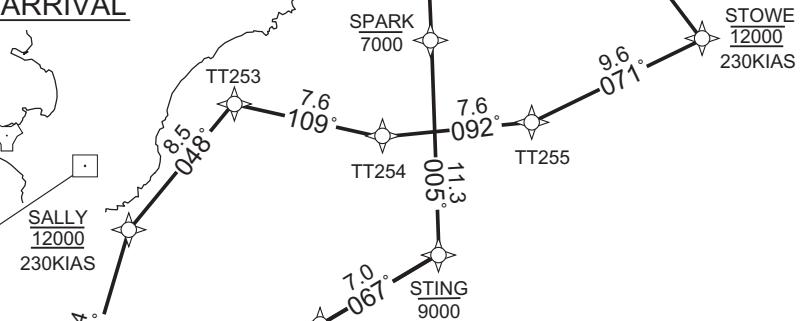

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AKSEL 1N ARRIVAL

From AKSEL at 12000FT, to SALLY at 12000FT, to TT253, to TT254, to TT255, to STOWE at 12000FT, to SHAFT at 8000FT, to NYLON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	12000	230	-	RNAV1
002	TF	SALLY	-	023 (015.0)	-7.5	13.4	-	12000	230	-	RNAV1
003	TF	TT253	-	048 (040.5)	-7.5	8.5	-	-	-	-	RNAV1
004	TF	TT254	-	109 (102.0)	-7.5	7.6	-	-	-	-	RNAV1
005	TF	TT255	-	092 (084.4)	-7.5	7.6	-	-	-	-	RNAV1
006	TF	STOWE	-	071 (063.6)	-7.5	9.6	-	12000	230	-	RNAV1
007	TF	SHAFT	-	330 (322.4)	-7.5	24.0	-	8000	-	-	RNAV1
008	TF	NYLON	-	357 (350.0)	-7.5	18.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	357 (350.0)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : STOWE renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AKSEL 2N ARRIVAL

From AKSEL at 12000FT, to LAFIT at or below 10000FT, to STING at or below 9000FT, to SPARK at or below 7000FT, to SHAFT at 5000FT, to NYLON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	12000	230	-	RNAV1
002	TF	LAFIT	-	067 (059.5)	-7.5	15.3	-	-10000	-	-	RNAV1
003	TF	STING	-	067 (059.6)	-7.5	7.0	-	-9000	-	-	RNAV1
004	TF	SPARK	-	005 (357.4)	-7.5	11.3	-	-7000	-	-	RNAV1
005	TF	SHAFT	-	005 (357.4)	-7.5	19.3	-	5000	-	-	RNAV1
006	TF	NYLON	-	357 (350.0)	-7.5	18.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	STING	067 (059.6)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	357 (350.0)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	STING	345157.9N / 1401453.4E
LAFIT	344826.0N / 1400732.4E	STOWE	350325.9N / 1403111.4E
NYLON	354018.5N / 1400919.9E	TT253	350001.4N / 1400224.6E
SALLY	345333.9N / 1395540.1E	TT254	345826.5N / 1401129.4E
SHAFT	352227.4N / 1401313.3E	TT255	345910.9N / 1402041.4E
SPARK	350312.0N / 1401416.7E		

CHANGE : STOWE renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AKSEL 1B ARRIVAL
AKSEL 2B ARRIVAL


RNAV 1

Note 1) DME/DME/IRU or GNSS required.

2) RADAR service required.

VAR 8° W(2019)

VOR/DME
HANEDA
112.2 HME
CH-59X
35°33'44"N/139°45'40"E
100FT

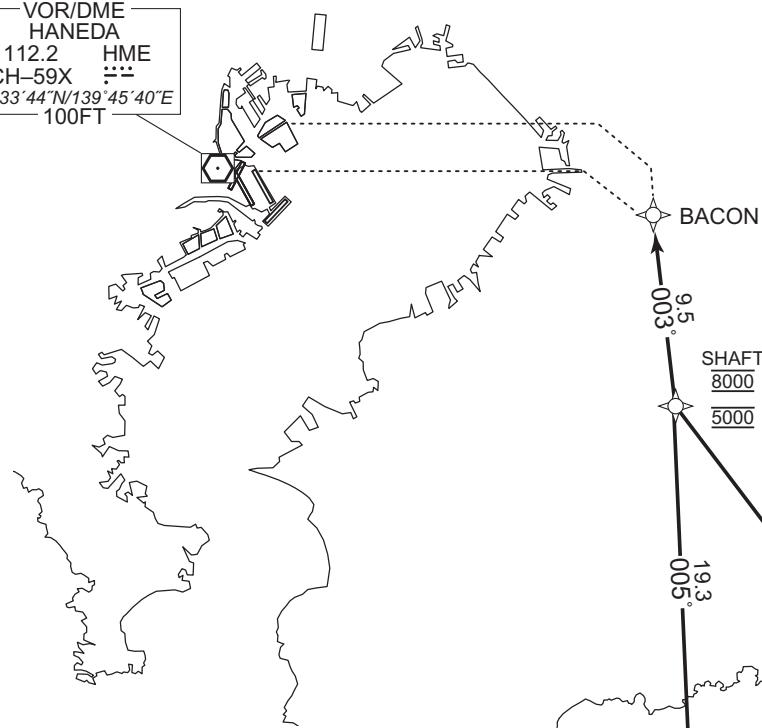

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

BACON
MHA 4000
183° ↘ 003°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

SHAFT
MHA 4000
150° ↘ 330°

SHAFT
8000 for AKSEL 1B ARRIVAL only
5000 for AKSEL 2B ARRIVAL only


TACAN
ONJUKU
1191 OJT
CH-104X
35°11'03"N/140°22'17"E
400FT

AKSEL 1B ARRIVAL

TACAN
TATEYAMA
986 TET
CH-25X
34°58'15"N/139°50'17"E
500FT

DME
TATEYAMA
1159 PQD
CH-72X
34°56'46"N/139°53'43"E
600FT

SALLY
12000
230KIAS

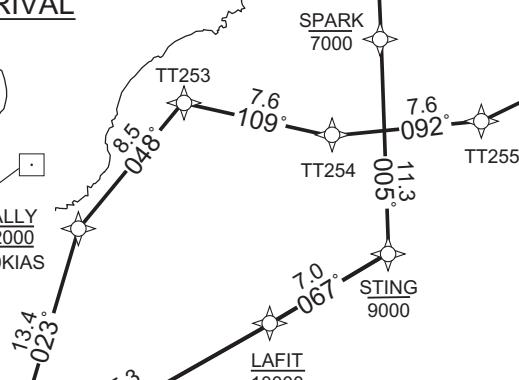

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

AKSEL
MHA 5000
039° ↗ 219°

AKSEL
12000
230KIAS

AKSEL 2B ARRIVAL

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

STING
MHA 4000
067° ↗ 241°

CHANGE : STOWE renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AKSEL 1B ARRIVAL

From AKSEL at 12000FT, to SALLY at 12000FT, to TT253, to TT254, to TT255, to STOWE at 12000FT, to SHAFT at 8000FT, to BACON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	12000	230	-	RNAV1
002	TF	SALLY	-	023 (015.0)	-7.5	13.4	-	12000	230	-	RNAV1
003	TF	TT253	-	048 (040.5)	-7.5	8.5	-	-	-	-	RNAV1
004	TF	TT254	-	109 (102.0)	-7.5	7.6	-	-	-	-	RNAV1
005	TF	TT255	-	092 (084.4)	-7.5	7.6	-	-	-	-	RNAV1
006	TF	STOWE	-	071 (063.6)	-7.5	9.6	-	12000	230	-	RNAV1
007	TF	SHAFT	-	330 (322.4)	-7.5	24.0	-	8000	-	-	RNAV1
008	TF	BACON	-	003 (355.2)	-7.5	9.5	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : STOWE renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AKSEL 2B ARRIVAL

From AKSEL at 12000FT, to LAFIT at or below 10000FT, to STING at or below 9000FT, to SPARK at or below 7000FT, to SHAFT at 5000FT, to BACON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	12000	230	-	RNAV1
002	TF	LAFIT	-	067 (059.5)	-7.5	15.3	-	-10000	-	-	RNAV1
003	TF	STING	-	067 (059.6)	-7.5	7.0	-	-9000	-	-	RNAV1
004	TF	SPARK	-	005 (357.4)	-7.5	11.3	-	-7000	-	-	RNAV1
005	TF	SHAFT	-	005 (357.4)	-7.5	19.3	-	5000	-	-	RNAV1
006	TF	BACON	-	003 (355.2)	-7.5	9.5	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	STING	067 (059.6)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	STING	345157.9N / 1401453.4E
BACON	353155.0N / 1401215.1E	STOWE	350325.9N / 1403111.4E
LAFIT	344826.0N / 1400732.4E	TT253	350001.4N / 1400224.6E
SALLY	345333.9N / 1395540.1E	TT254	345826.5N / 1401129.4E
SHAFT	352227.4N / 1401313.3E	TT255	345910.9N / 1402041.4E
SPARK	350312.0N / 1401416.7E		

CHANGE : STOWE renamed

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL


AROSA 1N ARRIVAL
AROSA 2N ARRIVAL

RNAV STAR RWY22/23

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8° W(2019)

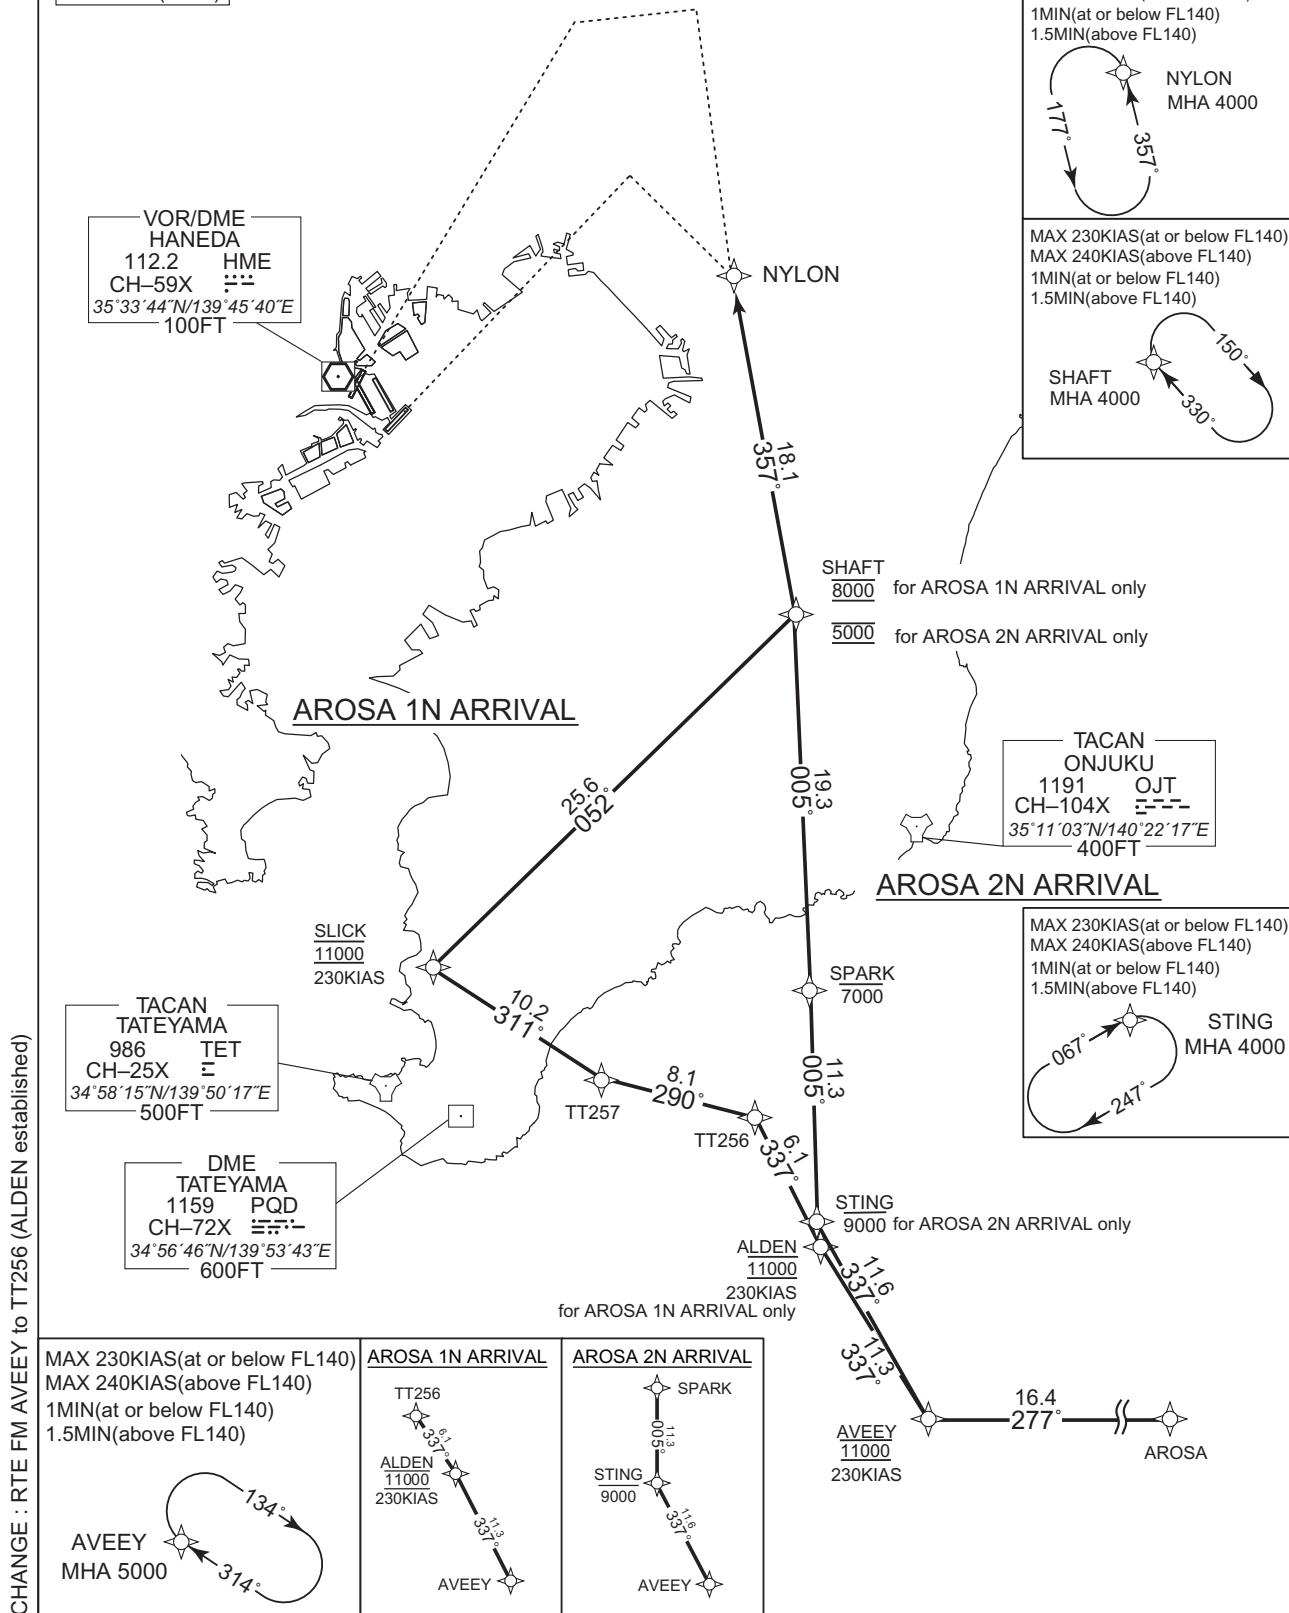

CHANGE : RTE FM AVEEY to TT256 (ALDEN established)

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 1N ARRIVAL

From AROSA, to AVEEY at 11000FT, to ALDEN at 11000FT, to TT256, to TT257, to SLICK at 11000FT, to SHAFT at 8000FT, to NYLON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	ALDEN	-	337 (330.0)	-7.5	11.3	-	11000	230	-	RNAV1
004	TF	TT256	-	337 (329.9)	-7.5	6.1	-	-	-	-	RNAV1
005	TF	TT257	-	290 (282.4)	-7.5	8.1	-	-	-	-	RNAV1
006	TF	SLICK	-	311 (303.1)	-7.5	10.2	-	11000	230	-	RNAV1
007	TF	SHAFT	-	052 (044.3)	-7.5	25.6	-	8000	-	-	RNAV1
008	TF	NYLON	-	357 (350.0)	-7.5	18.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	357 (350.0)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : RTE FM AVEEY to TT256 (ALDEN established). HLDG pattern at STING deleted.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 2N ARRIVAL

From AROSA, to AVEEY at 11000FT, to STING at or below 9000FT, to SPARK at or below 7000FT, to SHAFT at 5000FT, to NYLON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	STING	-	337 (330.0)	-7.5	11.6	-	-9000	-	-	RNAV1
004	TF	SPARK	-	005 (357.4)	-7.5	11.3	-	-7000	-	-	RNAV1
005	TF	SHAFT	-	005 (357.4)	-7.5	19.3	-	5000	-	-	RNAV1
006	TF	NYLON	-	357 (350.0)	-7.5	18.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	STING	067 (059.6)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	357 (350.0)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ALDEN	345141.1N / 1401505.3E	SLICK	350412.7N / 1395120.0E
AROSA	344201.7N / 1404157.3E	SPARK	350312.0N / 1401416.7E
AVEEY	344155.9N / 1402158.0E	STING	345157.9N / 1401453.4E
NYLON	354018.5N / 1400919.9E	TT256	345655.4N / 1401122.9E
SHAFT	352227.4N / 1401313.3E	TT257	345838.5N / 1400146.6E

CHANGE : ALDEN established

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL


RNAV STAR RWY22/23

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
 2) RADAR service required.

2) RADAR service required.

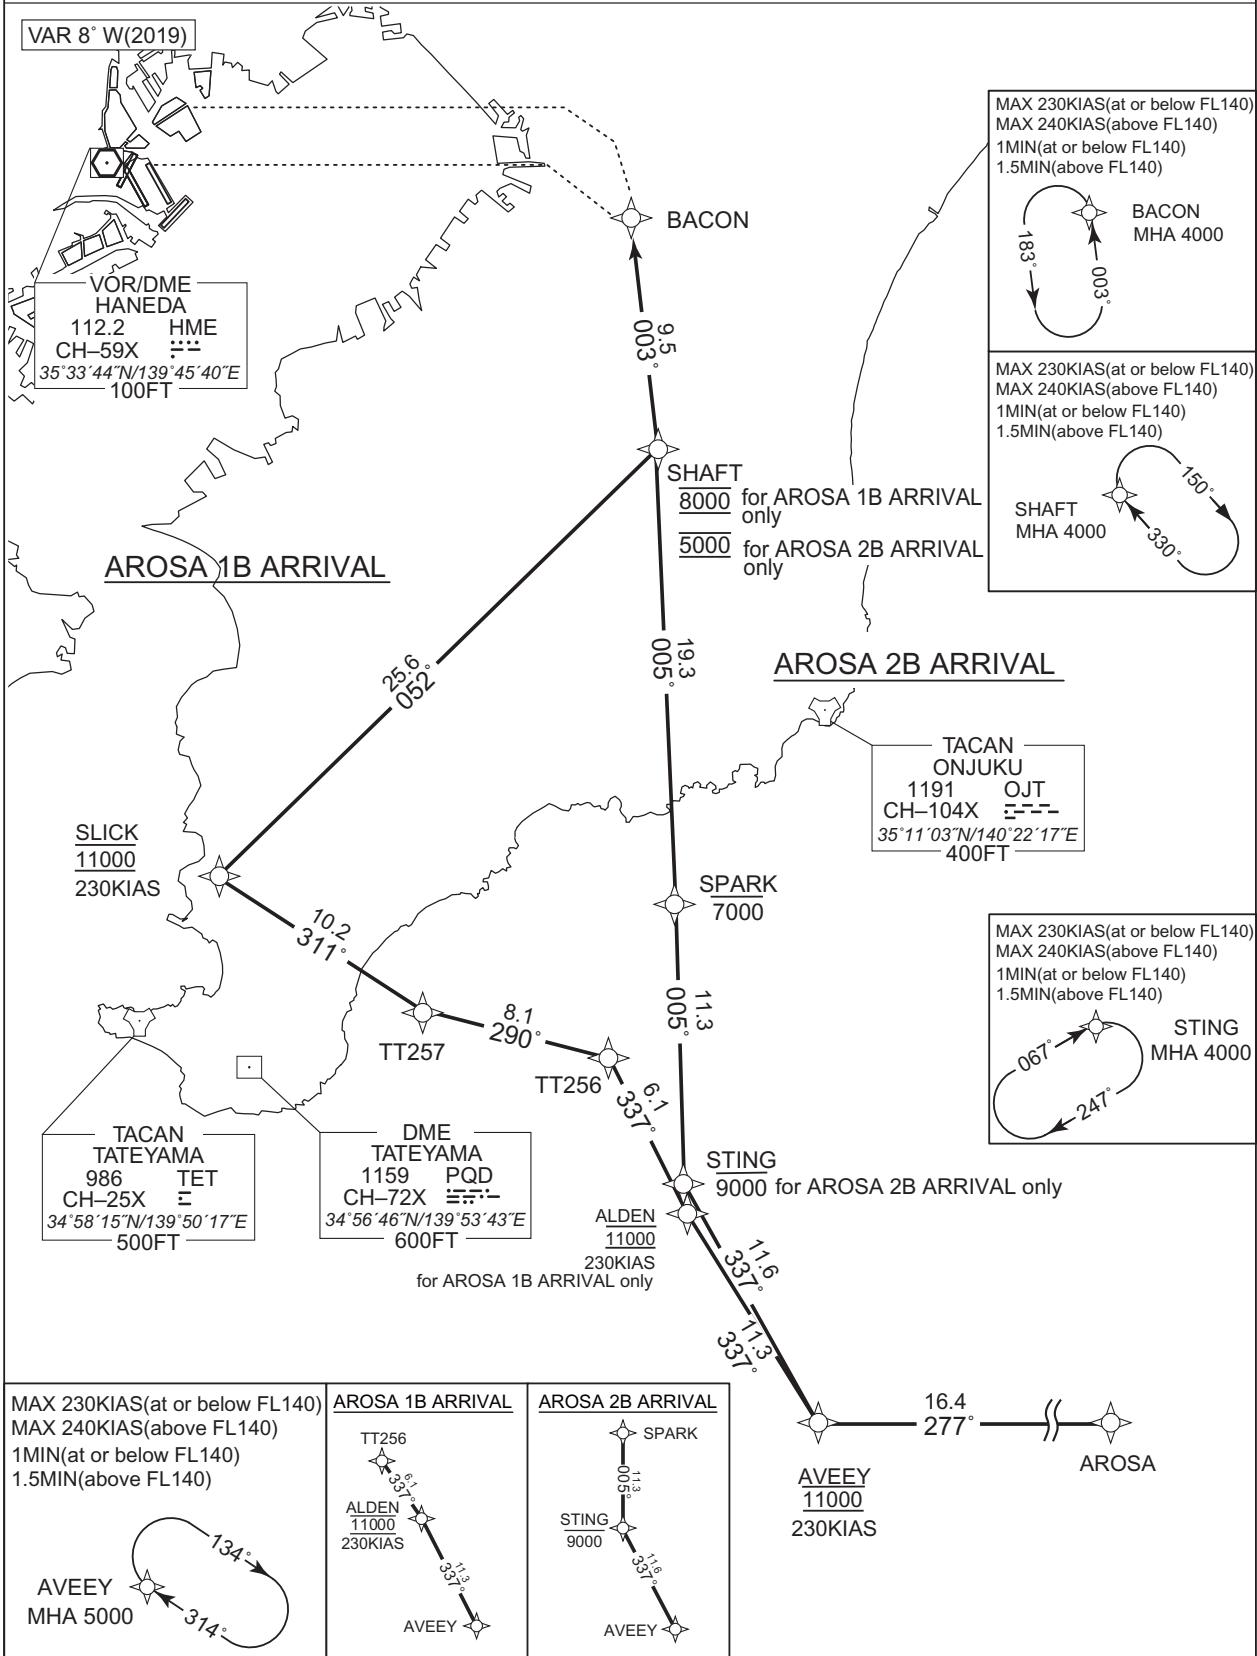

CHANGE : RTE FM AVEEY to TT256 (ALDEN established)

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 1B ARRIVAL

From AROSA, to AVEEY at 11000FT, to ALDEN at 11000FT, to TT256, to TT257, to SLICK at 11000FT, to SHAFT at 8000FT, to BACON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	ALDEN	-	337 (330.0)	-7.5	11.3	-	11000	230	-	RNAV1
004	TF	TT256	-	337 (329.9)	-7.5	6.1	-	-	-	-	RNAV1
005	TF	TT257	-	290 (282.4)	-7.5	8.1	-	-	-	-	RNAV1
006	TF	SLICK	-	311 (303.1)	-7.5	10.2	-	11000	230	-	RNAV1
007	TF	SHAFT	-	052 (044.3)	-7.5	25.6	-	8000	-	-	RNAV1
008	TF	BACON	-	003 (355.2)	-7.5	9.5	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : RTE FM AVEEY to TT256 (ALDEN established). HLDG pattern at STING deleted.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 2B ARRIVAL

From AROSA, to AVEEY at 11000FT, to STING at or below 9000FT , to SPARK at or below 7000FT, to SHAFT at 5000FT, to BACON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	STING	-	337 (330.0)	-7.5	11.6	-	-9000	-	-	RNAV1
004	TF	SPARK	-	005 (357.4)	-7.5	11.3	-	-7000	-	-	RNAV1
005	TF	SHAFT	-	005 (357.4)	-7.5	19.3	-	5000	-	-	RNAV1
006	TF	BACON	-	003 (355.2)	-7.5	9.5	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	STING	067 (059.6)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ALDEN	345141.1N / 1401505.3E	SLICK	350412.7N / 1395120.0E
AROSA	344201.7N / 1404157.3E	SPARK	350312.0N / 1401416.7E
AVEEY	344155.9N / 1402158.0E	STING	345157.9N / 1401453.4E
BACON	353155.0N / 1401215.1E	TT256	345655.4N / 1401122.9E
SHAFT	352227.4N / 1401313.3E	TT257	345838.5N / 1400146.6E

CHANGE : ALDEN established

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

GODIN 1S ARRIVAL
GODIN 1D ARRIVAL


RNAV STAR RWY22/23

RNAV 1

Note 1) DME/DME/IRU or GNSS required.

2) RADAR service required.

VAR 8° W(2019)

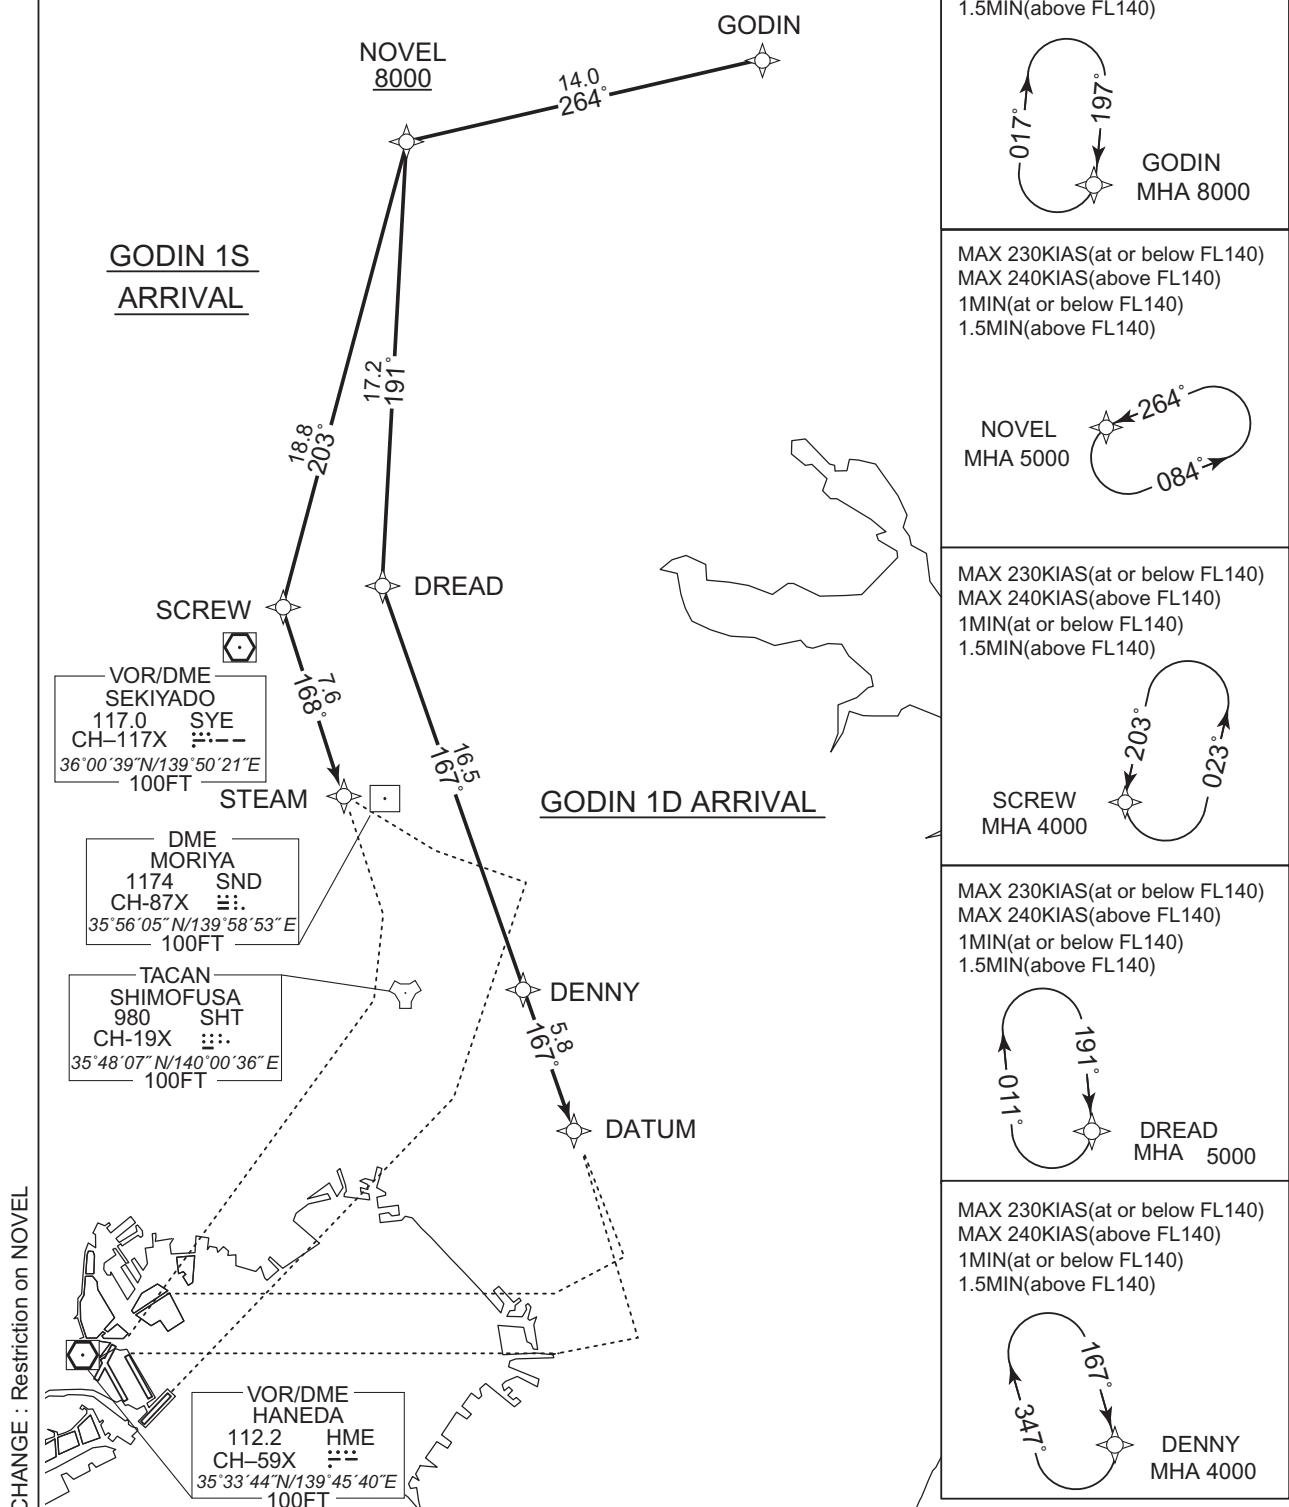

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

GODIN 1S ARRIVAL

From GODIN, to NOVEL at or above 8000FT, to SCREW, to STEAM.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	NOVEL	-	264 (256.4)	-7.5	14.0	-	+8000	-	-	RNAV1
003	TF	SCREW	-	203 (195.2)	-7.5	18.8	-	-	-	-	RNAV1
004	TF	STEAM	-	168 (160.4)	-7.5	7.6	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SCREW	203 (195.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

GODIN 1D ARRIVAL

From GODIN, to NOVEL at or above 8000FT, to DREAD, to DENNY, to DATUM.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	NOVEL	-	264 (256.4)	-7.5	14.0	-	+8000	-	-	RNAV1
003	TF	DREAD	-	191 (183.1)	-7.5	17.2	-	-	-	-	RNAV1
004	TF	DENNY	-	167 (159.9)	-7.5	16.5	-	-	-	-	RNAV1
005	TF	DATUM		167 (160.0)	-7.5	5.8	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	DREAD	191 (183.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	DENNY	167 (159.9)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
DATUM	354259.6N / 1400824.3E	NOVEL	362106.9N / 1400004.9E
DENNY	354828.8N / 1400556.4E	SCREW	360301.2N / 1395400.4E
DREAD	360359.2N / 1395856.9E	STEAM	355553.3N / 1395708.4E
GODIN	362425.3N / 1401655.9E		

CHANGE : Restriction on NOVEL

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

RNAV 1

Note 1) DMF/DMF/IRU or GNSS required.

2) RADAR service required.

VAR 8° W(2019)


POLIX 1S
ARRIVAL

POLIX 1D ARRIVAL

SCREW

DREAD

VOR/DME
SEKIYADO
117.0 SYE
CH-117X 
36°00'30"N/139°50'21"E

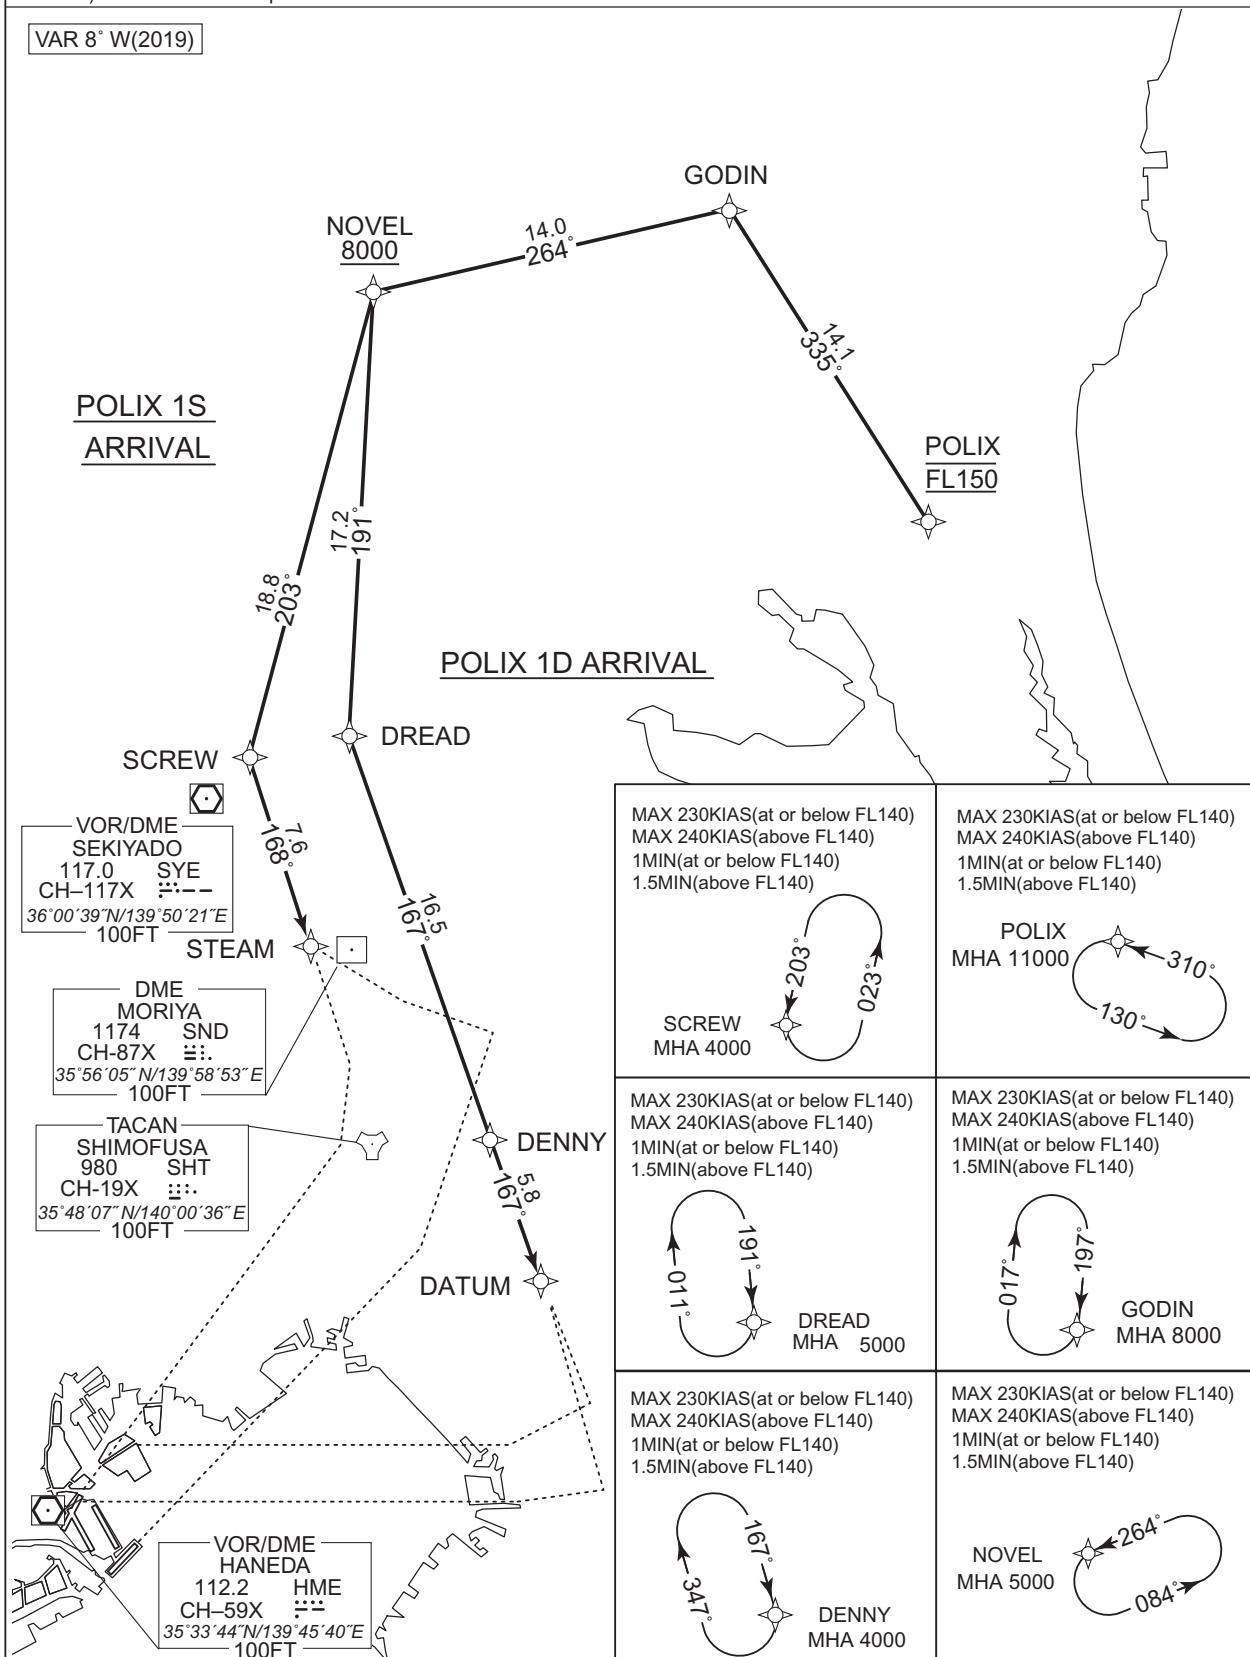

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

POLIX 1S ARRIVAL

From POLIX at FL150, to GODIN, to NOVEL at or above 8000FT, to SCREW, to STEAM.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	-	-	-7.5	-	-	FL150	-	-	RNAV1
002	TF	GODIN	-	335 (327.2)	-7.5	14.1	-	-	-	-	RNAV1
003	TF	NOVEL	-	264 (256.4)	-7.5	14.0	-	+8000	-	-	RNAV1
004	TF	SCREW	-	203 (195.2)	-7.5	18.8	-	-	-	-	RNAV1
005	TF	STEAM	-	168 (160.4)	-7.5	7.6	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SCREW	203 (195.2)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : Restriction on NOVEL

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

POLIX 1D ARRIVAL

From POLIX at FL150, to GODIN, to NOVEL at or above 8000FT, to DREAD, to DENNY, to DATUM.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	-	-	-7.5	-	-	FL150	-	-	RNAV1
002	TF	GODIN	-	335 (327.2)	-7.5	14.1	-	-	-	-	RNAV1
003	TF	NOVEL	-	264 (256.4)	-7.5	14.0	-	+8000	-	-	RNAV1
004	TF	DREAD	-	191 (183.1)	-7.5	17.2	-	-	-	-	RNAV1
005	TF	DENNY	-	167 (159.9)	-7.5	16.5	-	-	-	-	RNAV1
006	TF	DATUM	-	167 (160.0)	-7.5	5.8	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	DREAD	191 (183.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	DENNY	167 (159.9)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
DATUM	354259.6N / 1400824.3E	NOVEL	362106.9N / 1400004.9E
DENNY	354828.8N / 1400556.4E	POLIX	361237.1N / 1402622.5E
DREAD	360359.2N / 1395856.9E	SCREW	360301.2N / 1395400.4E
GODIN	362425.3N / 1401655.9E	STEAM	355553.3N / 1395708.4E

CHANGE : Restriction on NOVEL

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

OSHIMA L ARRIVAL
OSHIMA R ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.

2) RADAR service required.

VAR 8° W(2019)

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

NUMAN
MHA 4000

180°
360°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

SNARE
MHA 4000

177°
297°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

SPINE
MHA 4000

168°
348°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

NEURO
MHA 4000

110°
290°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

ACORN
MHA 5000

248°
068°

NURSE 9000 210KIAS
NIGEL 6000
NEURO 6000
NATTY 52°
SANDY T6L60
SNARE 6000
SOPPY 7000
NUMAN 9000 210KIAS
SHAFT 9000
SCOPE 10000
SCOUT
SNOKE
T6R70
T6R71
T6R72
NORIK
T6R73
T6R74
T6R75
T6R76
T6R77
T6R78
T6R79
T6R80
T6R81
T6R82
T6R83
T6R84
T6R85
T6R86
T6R87
T6R88
T6R89
T6R90
T6R91
T6R92
T6R93
T6R94
T6R95
T6R96
T6R97
T6R98
T6R99
T6R100
T6R101
T6R102
T6R103
T6R104
T6R105
T6R106
T6R107
T6R108
T6R109
T6R110
T6R111
T6R112
T6R113
T6R114
T6R115
T6R116
T6R117
T6R118
T6R119
T6R120
T6R121
T6R122
T6R123
T6R124
T6R125
T6R126
T6R127
T6R128
T6R129
T6R130
T6R131
T6R132
T6R133
T6R134
T6R135
T6R136
T6R137
T6R138
T6R139
T6R140
T6R141
T6R142
T6R143
T6R144
T6R145
T6R146
T6R147
T6R148
T6R149
T6R150
T6R151
T6R152
T6R153
T6R154
T6R155
T6R156
T6R157
T6R158
T6R159
T6R160
T6R161
T6R162
T6R163
T6R164
T6R165
T6R166
T6R167
T6R168
T6R169
T6R170
T6R171
T6R172
T6R173
T6R174
T6R175
T6R176
T6R177
T6R178
T6R179
T6R180
T6R181
T6R182
T6R183
T6R184
T6R185
T6R186
T6R187
T6R188
T6R189
T6R190
T6R191
T6R192
T6R193
T6R194
T6R195
T6R196
T6R197
T6R198
T6R199
T6R200
T6R201
T6R202
T6R203
T6R204
T6R205
T6R206
T6R207
T6R208
T6R209
T6R210
T6R211
T6R212
T6R213
T6R214
T6R215
T6R216
T6R217
T6R218
T6R219
T6R220
T6R221
T6R222
T6R223
T6R224
T6R225
T6R226
T6R227
T6R228
T6R229
T6R230
T6R231
T6R232
T6R233
T6R234
T6R235
T6R236
T6R237
T6R238
T6R239
T6R240
T6R241
T6R242
T6R243
T6R244
T6R245
T6R246
T6R247
T6R248
T6R249
T6R250
T6R251
T6R252
T6R253
T6R254
T6R255
T6R256
T6R257
T6R258
T6R259
T6R260
T6R261
T6R262
T6R263
T6R264
T6R265
T6R266
T6R267
T6R268
T6R269
T6R270
T6R271
T6R272
T6R273
T6R274
T6R275
T6R276
T6R277
T6R278
T6R279
T6R280
T6R281
T6R282
T6R283
T6R284
T6R285
T6R286
T6R287
T6R288
T6R289
T6R290
T6R291
T6R292
T6R293
T6R294
T6R295
T6R296
T6R297
T6R298
T6R299
T6R300
T6R301
T6R302
T6R303
T6R304
T6R305
T6R306
T6R307
T6R308
T6R309
T6R310
T6R311
T6R312
T6R313
T6R314
T6R315
T6R316
T6R317
T6R318
T6R319
T6R320
T6R321
T6R322
T6R323
T6R324
T6R325
T6R326
T6R327
T6R328
T6R329
T6R330
T6R331
T6R332
T6R333
T6R334
T6R335
T6R336
T6R337
T6R338
T6R339
T6R340
T6R341
T6R342
T6R343
T6R344
T6R345
T6R346
T6R347
T6R348
T6R349
T6R350
T6R351
T6R352
T6R353
T6R354
T6R355
T6R356
T6R357
T6R358
T6R359
T6R360
T6R361
T6R362
T6R363
T6R364
T6R365
T6R366
T6R367
T6R368
T6R369
T6R370
T6R371
T6R372
T6R373
T6R374
T6R375
T6R376
T6R377
T6R378
T6R379
T6R380
T6R381
T6R382
T6R383
T6R384
T6R385
T6R386
T6R387
T6R388
T6R389
T6R390
T6R391
T6R392
T6R393
T6R394
T6R395
T6R396
T6R397
T6R398
T6R399
T6R400
T6R401
T6R402
T6R403
T6R404
T6R405
T6R406
T6R407
T6R408
T6R409
T6R410
T6R411
T6R412
T6R413
T6R414
T6R415
T6R416
T6R417
T6R418
T6R419
T6R420
T6R421
T6R422
T6R423
T6R424
T6R425
T6R426
T6R427
T6R428
T6R429
T6R430
T6R431
T6R432
T6R433
T6R434
T6R435
T6R436
T6R437
T6R438
T6R439
T6R440
T6R441
T6R442
T6R443
T6R444
T6R445
T6R446
T6R447
T6R448
T6R449
T6R450
T6R451
T6R452
T6R453
T6R454
T6R455
T6R456
T6R457
T6R458
T6R459
T6R460
T6R461
T6R462
T6R463
T6R464
T6R465
T6R466
T6R467
T6R468
T6R469
T6R470
T6R471
T6R472
T6R473
T6R474
T6R475
T6R476
T6R477
T6R478
T6R479
T6R480
T6R481
T6R482
T6R483
T6R484
T6R485
T6R486
T6R487
T6R488
T6R489
T6R490
T6R491
T6R492
T6R493
T6R494
T6R495
T6R496
T6R497
T6R498
T6R499
T6R500
T6R501
T6R502
T6R503
T6R504
T6R505
T6R506
T6R507
T6R508
T6R509
T6R510
T6R511
T6R512
T6R513
T6R514
T6R515
T6R516
T6R517
T6R518
T6R519
T6R520
T6R521
T6R522
T6R523
T6R524
T6R525
T6R526
T6R527
T6R528
T6R529
T6R530
T6R531
T6R532
T6R533
T6R534
T6R535
T6R536
T6R537
T6R538
T6R539
T6R540
T6R541
T6R542
T6R543
T6R544
T6R545
T6R546
T6R547
T6R548
T6R549
T6R550
T6R551
T6R552
T6R553
T6R554
T6R555
T6R556
T6R557
T6R558
T6R559
T6R560
T6R561
T6R562
T6R563
T6R564
T6R565
T6R566
T6R567
T6R568
T6R569
T6R570
T6R571
T6R572
T6R573
T6R574
T6R575
T6R576
T6R577
T6R578
T6R579
T6R580
T6R581
T6R582
T6R583
T6R584
T6R585
T6R586
T6R587
T6R588
T6R589
T6R590
T6R591
T6R592
T6R593
T6R594
T6R595
T6R596
T6R597
T6R598
T6R599
T6R600
T6R601
T6R602
T6R603
T6R604
T6R605
T6R606
T6R607
T6R608
T6R609
T6R610
T6R611
T6R612
T6R613
T6R614
T6R615
T6R616
T6R617
T6R618
T6R619
T6R620
T6R621
T6R622
T6R623
T6R624
T6R625
T6R626
T6R627
T6R628
T6R629
T6R630
T6R631
T6R632
T6R633
T6R634
T6R635
T6R636
T6R637
T6R638
T6R639
T6R640
T6R641
T6R642
T6R643
T6R644
T6R645
T6R646
T6R647
T6R648
T6R649
T6R650
T6R651
T6R652
T6R653
T6R654
T6R655
T6R656
T6R657
T6R658
T6R659
T6R660
T6R661
T6R662
T6R663
T6R664
T6R665
T6R666
T6R667
T6R668
T6R669
T6R670
T6R671
T6R672
T6R673
T6R674
T6R675
T6R676
T6R677
T6R678
T6R679
T6R680
T6R681
T6R682
T6R683
T6R684
T6R685
T6R686
T6R687
T6R688
T6R689
T6R690
T6R691
T6R692
T6R693
T6R694
T6R695
T6R696
T6R697
T6R698
T6R699
T6R700
T6R701
T6R702
T6R703
T6R704
T6R705
T6R706
T6R707
T6R708
T6R709
T6R710
T6R711
T6R712
T6R713
T6R714
T6R715
T6R716
T6R717
T6R718
T6R719
T6R720
T6R721
T6R722
T6R723
T6R724
T6R725
T6R726
T6R727
T6R728
T6R729
T6R730
T6R731
T6R732
T6R733
T6R734
T6R735
T6R736
T6R737
T6R738
T6R739
T6R740
T6R741
T6R742
T6R743
T6R744
T6R745
T6R746
T6R747
T6R748
T6R749
T6R750
T6R751
T6R752
T6R753
T6R754
T6R755
T6R756
T6R757
T6R758
T6R759
T6R760
T6R761
T6R762
T6R763
T6R764
T6R765
T6R766
T6R767
T6R768
T6R769
T6R770
T6R771
T6R772
T6R773
T6R774
T6R775
T6R776
T6R777
T6R778
T6R779
T6R780
T6R781
T6R782
T6R783
T6R784
T6R785
T6R786
T6R787
T6R788
T6R789
T6R790
T6R791
T6R792
T6R793
T6R794
T6R795
T6R796
T6R797
T6R798
T6R799
T6R800
T6R801
T6R802
T6R803
T6R804
T6R805
T6R806
T6R807
T6R808
T6R809
T6R810
T6R811
T6R812
T6R813
T6R814
T6R815
T6R816
T6R817
T6R818
T6R819
T6R820
T6R821
T6R822
T6R823
T6R824
T6R825
T6R826
T6R827
T6R828
T6R829
T6R830
T6R831
T6R832
T6R833
T6R834
T6R835
T6R836
T6R837
T6R838
T6R839
T6R840
T6R841
T6R842
T6R843
T6R844
T6R845
T6R846
T6R847
T6R848
T6R849
T6R850
T6R851
T6R852
T6R853
T6R854
T6R855
T6R856
T6R857
T6R858
T6R859
T6R860
T6R861
T6R862
T6R863
T6R864
T6R865
T6R866
T6R867
T6R868
T6R869
T6R870
T6R871
T6R872
T6R873
T6R874
T6R875
T6R876
T6R877
T6R878
T6R879
T6R880
T6R881
T6R882
T6R883
T6R884
T6R885
T6R886
T6R887
T6R888
T6R889
T6R890
T6R891
T6R892
T6R893
T6R894
T6R895
T6R896
T6R897
T6R898
T6R899
T6R900
T6R901
T6R902
T6R903
T6R904
T6R905
T6R906
T6R907
T6R908
T6R909
T6R910
T6R911
T6R912
T6R913
T6R914
T6R915
T6R916
T6R917
T6R918
T6R919
T6R920
T6R921
T6R922
T6R923
T6R924
T6R925
T6R926
T6R927
T6R928
T6R929
T6R930
T6R931
T6R932
T6R933
T6R934
T6R935
T6R936
T6R937
T6R938
T6R939
T6R940
T6R941
T6R942
T6R943
T6R944
T6R945
T6R946
T6R947
T6R948
T6R949
T6R950
T6R951
T6R952
T6R953
T6R954
T6R955
T6R956
T6R957
T6R958
T6R959
T6R960
T6R961
T6R962
T6R963
T6R964
T6R965
T6R966
T6R967
T6R968
T6R969
T6R970
T6R971
T6R972
T6R973
T6R974
T6R975
T6R976
T6R977
T6R978
T6R979
T6R980
T6R981
T6R982
T6R983
T6R984
T6R985
T6R986
T6R987
T6R988
T6R989
T6R990
T6R991
T6R992
T6R993
T6R994
T6R995
T6R996
T6R997
T6R998
T6R999
T6R1000
T6R1001
T6R1002
T6R1003
T6R1004
T6R1005
T6R1006
T6R1007
T6R1008
T6R1009
T6R1010
T6R1011
T6R1012
T6R1013
T6R1014
T6R1015
T6R1016
T6R1017
T6R1018
T6R1019
T6R1020
T6R1021
T6R1022
T6R1023
T6R1024
T6R1025
T6R1026
T6R1027
T6R1028
T6R1029
T6R1030
T6R1031
T6R1032
T6R1033
T6R1034
T6R1035
T6R1036
T6R1037
T6R1038
T6R1039
T6R1040
T6R1041
T6R1042
T6R1043
T6R1044
T6R1045
T6R1046
T6R1047
T6R1048
T6R1049
T6R1050
T6R1051
T6R1052
T6R1053
T6R1054
T6R1055
T6R1056
T6R1057
T6R1058
T6R1059
T6R1060
T6R1061
T6R1062
T6R1063
T6R1064
T6R1065
T6R1066
T6R1067
T6R1068
T6R1069
T6R1070
T6R1071
T6R1072
T6R1073
T6R1074
T6R1075
T6R1076
T6R1077
T6R1078
T6R1079
T6R1080
T6R1081
T6R1082
T6R1083
T6R1084
T6R1085
T6R1086
T6R1087
T6R1088
T6R1089
T6R1090
T6R1091
T6R1092
T6R1093
T6R1094
T6R1095
T6R1096
T6R1097
T6R1098
T6R1099
T6R1100
T6R1101
T6R1102
T6R1103
T6R1104
T6R1105
T6R1106
T6R1107
T6R1108
T6R1109
T6R1110
T6R1111
T6R1112
T6R1113
T6R1114
T6R1115
T6R1116
T6R1117
T6R1118
T6R1119
T6R1120
T6R1121
T6R1122
T6R1123
T6R1124
T6R1125
T6R1126
T6R1127
T6R1128
T6R1129
T6R1130
T6R1131
T6R1132
T6R1133
T6R1134
T6R1135
T6R1136
T6R1137
T6R1138
T6R1139
T6R1140
T6R1141
T6R1142
T6R1143
T6R1144
T6R1145
T6R1146
T6R1147
T6R1148
T6R1149
T6R1150
T6R1151
T6R1152
T6R1153
T6R1154
T6R1155
T6R1156
T6R1157
T6R1158
T6R1159
T6R1160
T6R1161
T6R1162
T6R1163
T6R1164
T6R1165
T6R1166
T6R1167
T6R1168
T6R1169
T6R1170
T6R1171
T6R1172
T6R1173
T6R1174
T6R1175
T6R1176
T6R1177
T6R1178
T6R1179
T6R1180
T6R1181
T6R1182
T6R1183
T6R1184
T6R1185
T6R1186
T6R1187
T6R1188
T6R1189
T6R1190
T6R1191
T6R1192
T6R1193
T6R1194
T6R1195
T6R1196
T6R1197
T6R1198
T6R1199
T6R1200
T6R1201
T6R1202
T6R1203
T6R1204
T6R1205
T6R1206
T6R1207
T6R1208
T6R1209
T6R1210
T6R1211
T6R1212
T6R1213
T6R1214
T6R1215
T6R1216
T6R1217
T6R1218
T6R1219
T6R1220
T6R1221
T6R1222
T6R1223
T6R1224
T6R1225
T6R1226
T6R1227
T6R1228
T6R1229
T6R1230
T6R1231
T6R1232
T6R1233
T6R1234
T6R1235
T6R1236
T6R1237
T6R1238
T6R1239
T6R1240
T6R1241
T6R1242
T6R1243
T6R1244
T6R1245
T6R1246
T6R1247
T6R1248
T6R1249
T6R1250
T6R1251
T6R1252
T6R1253
T6R1254
T6R1255
T6R1256
T6R1257
T6R1258
T6R1259
T6R1260
T6R1261
T6R1262
T6R1263
T6R1264
T6R1265
T6R1266
T6R1267
T6R1268
T6R1269
T6R1270
T6R1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

OSHIMA L ARRIVAL

From XAC, to ACORN, to SOLAR at 13000FT, to SCOUT, to TT250, to TT251, to TT252, to STOCK at 13000FT, to SHAFT at 9000FT, to SNOKE, to SPINE, to SOPPY at or below 7000FT, to SNARE at 6000FT, to T6L60, to SANDY.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	ACORN	-	068 (060.8)	-7.5	15.9	-	-	-	-	RNAV1
003	TF	SOLAR	-	026 (018.4)	-7.5	9.1	-	13000	230	-	RNAV1
004	TF	SCOUT	-	052 (044.3)	-7.5	10.1	-	-	-	-	RNAV1
005	TF	TT250	-	131 (123.1)	-7.5	9.0	-	-	-	-	RNAV1
006	TF	TT251	-	110 (102.5)	-7.5	7.1	-	-	-	-	RNAV1
007	TF	TT252	-	092 (084.3)	-7.5	7.1	-	-	-	-	RNAV1
008	TF	STOCK	-	071 (063.6)	-7.5	9.0	-	13000	230	-	RNAV1
009	TF	SHAFT	-	330 (322.4)	-7.5	22.5	-	9000		-	RNAV1
010	TF	SNOKE	-	011 (003.4)	-7.5	13.4	-	-	-	-	RNAV1
011	TF	SPINE	-	348 (340.6)	-7.5	6.8	-	-	-	-	RNAV1
012	TF	SOPPY	-	297 (289.2)	-7.5	8.4	-	-7000	-	-	RNAV1
013	TF	SNARE	-	297 (289.1)	-7.5	7.8	-	6000	-	-	RNAV1
014	TF	T6L60	-	297 (289.0)	-7.5	3.4	-	-	-	-	RNAV1
015	TF	SANDY	-	288 (280.0)	-7.5	3.8	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ACORN	068 (060.8)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SPINE	348 (340.6)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : New PROC

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

OSHIMA R ARRIVAL

From XAC, to ACORN, to SOLAR, to SCOUT, to SCOPE at 10000FT, to T6R70, to NUMAN at 9000FT, to NORIK, to T6R71, to T6R72, to NURSE at 9000FT, to NEURO at 6000FT, to NIGEL at 6000FT, to NATTY.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	ACORN	-	068 (060.8)	-7.5	15.9	-	-	-	-	RNAV1
003	TF	SOLAR	-	026 (018.4)	-7.5	9.1	-	-	230	-	RNAV1
004	TF	SCOUT	-	052 (044.3)	-7.5	10.1	-	-	-	-	RNAV1
005	TF	SCOPE	-	036 (028.5)	-7.5	20.0	-	10000	-	-	RNAV1
006	TF	T6R70	-	036 (028.6)	-7.5	14.0	-	-	-	-	RNAV1
007	TF	NUMAN	-	360 (352.5)	-7.5	11.1	-	9000	210	-	RNAV1
008	TF	NORIK	-	360 (352.5)	-7.5	7.3	-	-	-	-	RNAV1
009	TF	T6R71	-	006 (358.9)	-7.5	6.5	-	-	-	-	RNAV1
010	TF	T6R72	-	342 (334.4)	-7.5	5.0	-	-	-	-	RNAV1
011	TF	NURSE	-	317 (309.8)	-7.5	6.5	-	9000	210	-	RNAV1
012	TF	NEURO	-	213 (205.5)	-7.5	13.5	-	6000	-	-	RNAV1
013	TF	NIGEL	-	252 (244.1)	-7.5	3.1	-	6000	-	-	RNAV1
014	TF	NATTY	-	252 (244.1)	-7.5	5.2	-	-	-	-	RNAV1

CHANGE : Correction of misdescription (Waypoint Identifier of the row with Serial Number 006)

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ACORN	068 (060.8)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NUMAN	360 (352.5)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	290 (282.9)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ACORN	345028.8N / 1394146.7E	SOLAR	345909.2N / 1394518.5E
NATTY	355350.9N / 1394531.3E	SOPPY	354458.8N / 1400140.3E
NEURO	355727.6N / 1395441.3E	SPINE	354213.5N / 1401125.8E
NIGEL	355607.5N / 1395117.8E	STOCK	350438.7N / 1403002.9E
NORIK	355428.9N / 1401054.5E	T6L60	354838.2N / 1394838.4E
NUMAN	354714.4N / 1401204.9E	T6R70	353614.4N / 1401351.4E
NURSE	360939.3N / 1400153.3E	T6R71	360059.5N / 1401045.1E
SANDY	354917.5N / 1394402.8E	T6R72	360530.2N / 1400804.3E
SCOPE	352358.4N / 1400538.3E	TT250	350129.7N / 1400308.5E
SCOUT	350624.1N / 1395356.8E	TT251	345957.7N / 1401136.0E
SHAFT	352227.4N / 1401313.3E	TT252	350039.9N / 1402013.0E
SNARE	354731.1N / 1395238.1E	XAC	344244.1N / 1392450.5E
SNOKE	353551.6N / 1401411.7E		

CHANGE : New PROC

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

AKSEL L ARRIVAL
AKSEL R ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.

2) RADAR service required.

VAR 8° W(2019)

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

NUMAN
MHA 4000
180°
360°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

NEURO
MHA 4000
110°
290°

AKSEL L ARRIVAL
AKSEL R ARRIVAL

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

SNARE
MHA 4000

717°
297°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

SPINE
MHA 4000
168°
348°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

SHAFT
MHA 4000
150°
330°

VOR/DME
HANEDA
112.2 HME
CH-59X
35°33'44"N/139°45'40"E
100FT

AKSEL R ARRIVAL

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

AKSEL
MHA 5000
039°
219°

NURSE 9000
210KIAS
252°/3.1NM
NIGEL 6000
252°/3.8NM
NEURO 6000
252°/3.4NM
NATTY 5.2
252°
SANDY T6L60
288°/3.8NM
SNARE 6000
297°/3.4NM
SOPPY 7000
297°
NEURO MHA 4000
290°
NUMAN 9000
210KIAS
360°
T6R72
342°
T6R71
342°
NORIK
360°
SPINE
348°
SNOKE
348°
SCOPE 10000
036°
SHAFT 9000
036°
SCOUT
100°
STOWE 12000
230KIAS
071°
TT253
048°
TT254
109°
TT255
092°
SALLY 230KIAS
12000 for AKSEL L ARRIVAL only
AKSEL
039°
219°

AKSEL L ARRIVAL

SPINE
348°
SNOKE
111°
134°
SHAFT
9000

AKSEL R ARRIVAL

NUMAN 9000
210KIAS
360°
T6R70
140°
SCOPE 10000
036°

CHANGE : New PROC

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

AKSEL L ARRIVAL

From AKSEL, to SALLY at 12000FT, to TT253, to TT254, to TT255, to STOWE at 12000FT, to SHAFT at 9000FT, to SNOKE, to SPINE, to SOPPY at or below 7000FT, to SNARE at 6000FT, to T6L60, to SANDY.

Critical DME	-		
DME GAP	-		
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1		

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	—	—	-7.5	—	—	—	—	—	RNAV1
002	TF	SALLY	—	023 (015.0)	-7.5	13.4	—	12000	230	—	RNAV1
003	TF	TT253	—	048 (040.5)	-7.5	8.5	—	—	—	—	RNAV1
004	TF	TT254	—	109 (102.0)	-7.5	7.6	—	—	—	—	RNAV1
005	TF	TT255	—	092 (084.4)	-7.5	7.6	—	—	—	—	RNAV1
006	TF	STOWE	—	071 (063.6)	-7.5	9.6	—	12000	230	—	RNAV1
007	TF	SHAFT	—	330 (322.4)	-7.5	24.0	—	9000	—	—	RNAV1
008	TF	SNOKE	—	011 (003.4)	-7.5	13.4	—	—	—	—	RNAV1
009	TF	SPINE	—	348 (340.6)	-7.5	6.8	—	—	—	—	RNAV1
010	TF	SOPPY	—	297 (289.2)	-7.5	8.4	—	-7000	—	—	RNAV1
011	TF	SNARE	—	297 (289.1)	-7.5	7.8	—	6000	—	—	RNAV1
012	TF	T6L60	—	297 (289.0)	-7.5	3.4	—	—	—	—	RNAV1
013	TF	SANDY	—	288 (280.0)	-7.5	3.8	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SPINE	348 (340.6)	-7.5	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

AKSEL R ARRIVAL

From AKSEL, to SALLY, to SCOUT, to SCOPE at 10000FT, to T6R70, to NUMAN at 9000FT, to NORIK, to T6R71, to T6R72, to NURSE at 9000FT, to NEURO at 6000FT, to NIGEL at 6000FT, to NATTY.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	—	—	-7.5	—	—	—	—	—	RNAV1
002	TF	SALLY	—	023 (015.0)	-7.5	13.4	—	—	230	—	RNAV1
003	TF	SCOUT	—	001 (353.7)	-7.5	12.9	—	—	—	—	RNAV1
004	TF	SCOPE	—	036 (028.5)	-7.5	20.0	—	10000	—	—	RNAV1
005	TF	T6R70	—	036 (028.6)	-7.5	14.0	—	—	—	—	RNAV1
006	TF	NUMAN	—	360 (352.5)	-7.5	11.1	—	9000	210	—	RNAV1
007	TF	NORIK	—	360 (352.5)	-7.5	7.3	—	—	—	—	RNAV1
008	TF	T6R71	—	006 (358.9)	-7.5	6.5	—	—	—	—	RNAV1
009	TF	T6R72	—	342 (334.4)	-7.5	5.0	—	—	—	—	RNAV1
010	TF	NURSE	—	317 (309.8)	-7.5	6.5	—	9000	210	—	RNAV1
011	TF	NEURO	—	213 (205.5)	-7.5	13.5	—	6000	—	—	RNAV1
012	TF	NIGEL	—	252 (244.1)	-7.5	3.1	—	6000	—	—	RNAV1
013	TF	NATTY	—	252 (244.1)	-7.5	5.2	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NUMAN	360 (352.5)	-7.5	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	290 (282.9)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : New PROC

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	SNARE	354731.1N / 1395238.1E
NATTY	355350.9N / 1394531.3E	SNOKE	353551.6N / 1401411.7E
NEURO	355727.6N / 1395441.3E	SOPPY	354458.8N / 1400140.3E
NIGEL	355607.5N / 1395117.8E	SPINE	354213.5N / 1401125.8E
NORIK	355428.9N / 1401054.5E	STOWE	350325.9N / 1403111.4E
NUMAN	354714.4N / 1401204.9E	T6L60	354838.2N / 1394838.4E
NURSE	360939.3N / 1400153.3E	T6R70	353614.4N / 1401351.4E
SALLY	345333.9N / 1395540.1E	T6R71	360059.5N / 1401045.1E
SANDY	354917.5N / 1394402.8E	T6R72	360530.2N / 1400804.3E
SCOPE	352358.4N / 1400538.3E	TT253	350001.4N / 1400224.6E
SCOUT	350624.1N / 1395356.8E	TT254	345826.5N / 1401129.4E
SHAFT	352227.4N / 1401313.3E	TT255	345910.9N / 1402041.4E

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

AROSA L ARRIVAL
AROSA R ARRIVAL

RNAV 1

- Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8° W(2019)

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

NUMAN
MHA 4000

081°
096°
108°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

NEURO
MHA 4000

110°
290°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

SNARE
MHA 4000

717°
297°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

SPINE
MHA 4000

89°
84°
83°


AROSA L ARRIVAL

SPINE
SNOKE
SHAFT
9000
13.4
011°
84°
83°
89°

AROSA R ARRIVAL

NUMAN
9000
210KIAS
096°
111°
14°
036°
SCOPE
10000

VOR/DME
HANEDA
112.2 HME
CH-59X
35°33'44"N/139°45'40"E
100FT

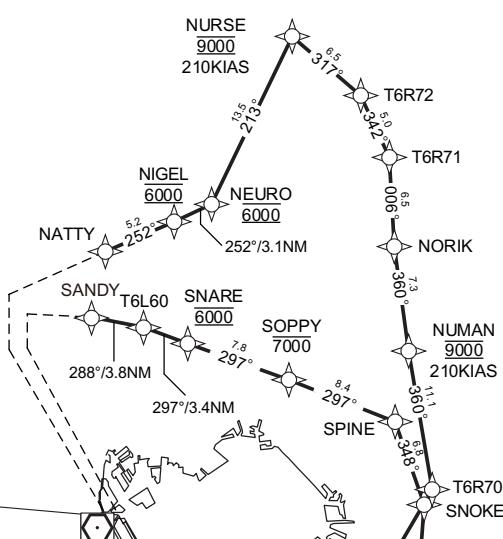

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

SHAFT
MHA 4000

150°
330°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

AVEEY
MHA 5000

134°
314°

CHANGE : New PROC

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

AROSA L ARRIVAL

From AROSA, to AVEEY at 11000FT, to ALDEN at 11000FT, to TT256, to TT257, to SLICK at 11000FT, to SHAFT at 9000FT, to SNOKE, to SPINE, to SOPPY at or below 7000FT, to SNARE at 6000FT, to T6L60, to SANDY.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	ALDEN	-	337 (330.0)	-7.5	11.3	-	11000	230	-	RNAV1
004	TF	TT256	-	337 (329.9)	-7.5	6.1	-	-	-	-	RNAV1
005	TF	TT257	-	290 (282.4)	-7.5	8.1	-	-	-	-	RNAV1
006	TF	SLICK	-	311 (303.1)	-7.5	10.2	-	11000	230	-	RNAV1
007	TF	SHAFT	-	052 (044.3)	-7.5	25.6	-	9000	-	-	RNAV1
008	TF	SNOKE	-	011 (003.4)	-7.5	13.4	-	-	-	-	RNAV1
009	TF	SPINE	-	348 (340.6)	-7.5	6.8	-	-	-	-	RNAV1
010	TF	SOPPY	-	297 (289.2)	-7.5	8.4	-	-7000	-	-	RNAV1
011	TF	SNARE	-	297 (289.1)	-7.5	7.8	-	6000	-	-	RNAV1
012	TF	T6L60	-	297 (289.0)	-7.5	3.4	-	-	-	-	RNAV1
013	TF	SANDY	-	288 (280.0)	-7.5	3.8	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SPINE	348 (340.6)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

AROSA R ARRIVAL

From AROSA, to AVEEY at 11000FT, to ALDEN at 11000FT, to TT256, to TT257, to SCOUT, to SCOPE at 10000FT, to T6R70, to NUMAN at 9000FT, to NORIK, to T6R71, to T6R72, to NURSE at 9000FT, to NEURO at 6000FT, to NIGEL at 6000FT, to NATTY.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	11000	230	-	RNAV1
003	TF	ALDEN	-	337 (330.0)	-7.5	11.3	-	11000	230	-	RNAV1
004	TF	TT256	-	337 (329.9)	-7.5	6.1	-	-	-	-	RNAV1
005	TF	TT257	-	290 (282.4)	-7.5	8.1	-	-	-	-	RNAV1
006	TF	SCOUT	-	328 (320.5)	-7.5	10.1	-	-	-	-	RNAV1
007	TF	SCOPE	-	036 (028.5)	-7.5	20.0	-	10000	-	-	RNAV1
008	TF	T6R70	-	036 (028.6)	-7.5	14.0	-	-	-	-	RNAV1
009	TF	NUMAN	-	360 (352.5)	-7.5	11.1	-	9000	210	-	RNAV1
010	TF	NORIK	-	360 (352.5)	-7.5	7.3	-	-	-	-	RNAV1
011	TF	T6R71	-	006 (358.9)	-7.5	6.5	-	-	-	-	RNAV1
012	TF	T6R72	-	342 (334.4)	-7.5	5.0	-	-	-	-	RNAV1
013	TF	NURSE	-	317 (309.8)	-7.5	6.5	-	9000	210	-	RNAV1
014	TF	NEURO	-	213 (205.5)	-7.5	13.5	-	6000	-	-	RNAV1
015	TF	NIGEL	-	252 (244.1)	-7.5	3.1	-	6000	-	-	RNAV1
016	TF	NATTY	-	252 (244.1)	-7.5	5.2	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NUMAN	360 (352.5)	-7.5	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	290 (282.9)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : New PROC

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ALDEN	345141.1N / 1401505.3E	SHAFT	352227.4N / 1401313.3E
AROSA	344201.7N / 1404157.3E	SLICK	350412.7N / 1395120.0E
AVEEY	344155.9N / 1402158.0E	SNARE	354731.1N / 1395238.1E
NATTY	355350.9N / 1394531.3E	SNOKE	353551.6N / 1401411.7E
NEURO	355727.6N / 1395441.3E	SOPPY	354458.8N / 1400140.3E
NIGEL	355607.5N / 1395117.8E	SPINE	354213.5N / 1401125.8E
NORIK	355428.9N / 1401054.5E	T6L60	354838.2N / 1394838.4E
NUMAN	354714.4N / 1401204.9E	T6R70	353614.4N / 1401351.4E
NURSE	360939.3N / 1400153.3E	T6R71	360059.5N / 1401045.1E
SANDY	354917.5N / 1394402.8E	T6R72	360530.2N / 1400804.3E
SCOPE	352358.4N / 1400538.3E	TT256	345655.4N / 1401122.9E
SCOUT	350624.1N / 1395356.8E	TT257	345838.5N / 1400146.6E

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL



GODIN L ARRIVAL
GODIN R ARRIVAL

RNAV STAR RWY16L/16R

RNAV 1


- Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8° W(2019)





MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

NOVEL
MHA 5000




MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

GODIN
MHA 8000

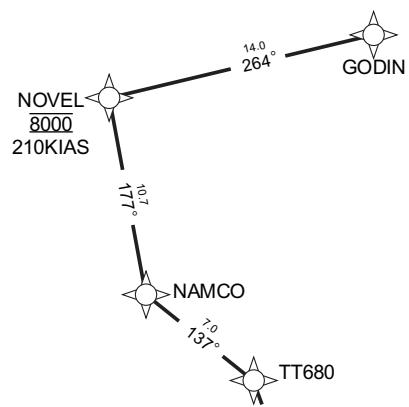


GODIN R ARRIVAL

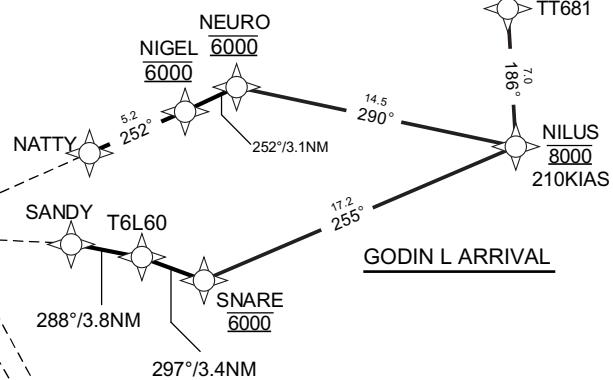

VOR/DME
HANEDA
112.2 HME
CH-59X
35°33'44"N/139°45'40"E
100FT

CHANGE : New PROC

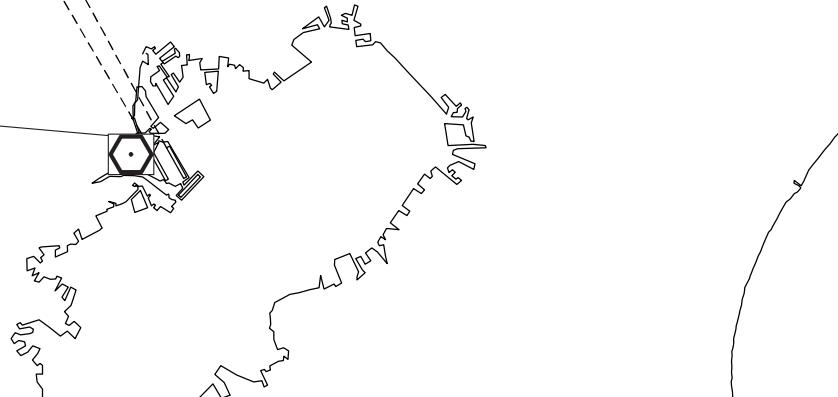

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

GODIN L ARRIVAL

From GODIN, to NOVEL at 8000FT, to NAMCO, to TT680, to TT681, to NILUS at 8000FT, to SNARE at 6000FT, to T6L60, to SANDY.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	NOVEL	-	264 (256.4)	-7.5	14.0	-	8000	210	-	RNAV1
003	TF	NAMCO	-	177 (169.8)	-7.5	10.7	-	-	-	-	RNAV1
004	TF	TT680	-	137 (129.7)	-7.5	7.0	-	-	-	-	RNAV1
005	TF	TT681	-	162 (154.3)	-7.5	5.4	-	-	-	-	RNAV1
006	TF	NILUS	-	186 (178.9)	-7.5	7.0	-	8000	210	-	RNAV1
007	TF	SNARE	-	255 (247.0)	-7.5	17.2	-	6000	-	-	RNAV1
008	TF	T6L60	-	297 (289.0)	-7.5	3.4	-	-	-	-	RNAV1
009	TF	SANDY	-	288 (280.0)	-7.5	3.8	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

GODIN R ARRIVAL

From GODIN, to NOVEL at 8000FT, to NAMCO, to TT680, to TT681, to NILUS at 8000FT, to NEURO at 6000FT, to NIGEL at 6000FT, to NATTY.

Critical DME	–
DME GAP	–
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	–	–	-7.5	–	–	–	–	–	RNAV1
002	TF	NOVEL	–	264 (256.4)	-7.5	14.0	–	8000	210	–	RNAV1
003	TF	NAMCO	–	177 (169.8)	-7.5	10.7	–	–	–	–	RNAV1
004	TF	TT680	–	137 (129.7)	-7.5	7.0	–	–	–	–	RNAV1
005	TF	TT681	–	162 (154.3)	-7.5	5.4	–	–	–	–	RNAV1
006	TF	NILUS	–	186 (178.9)	-7.5	7.0	–	8000	210	–	RNAV1
007	TF	NEURO	–	290 (282.9)	-7.5	14.5	–	6000	–	–	RNAV1
008	TF	NIGEL	–	252 (244.1)	-7.5	3.1	–	6000	–	–	RNAV1
009	TF	NATTY	–	252 (244.1)	-7.5	5.2	–	–	–	–	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	–	R	8000	–	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	–	L	5000	–	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	290 (282.9)	-7.5	1.0(-14000) 1.5(+14001)	–	R	4000	–	-230(-14000) -240(+14001)	RNAV1

CHANGE : New PROC

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
GODIN	362425.3N / 1401655.9E	NOVEL	362106.9N / 1400004.9E
NAMCO	361035.1N / 1400226.3E	SANDY	354917.5N / 1394402.8E
NATTY	355350.9N / 1394531.3E	SNARE	354731.1N / 1395238.1E
NEURO	355727.6N / 1395441.3E	T6L60	354838.2N / 1394838.4E
NIGEL	355607.5N / 1395117.8E	TT680	360608.2N / 1400904.0E
NILUS	355415.2N / 1401208.8E	TT681	360113.8N / 1401158.7E

CHANGE : New PROC

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

POLIX L ARRIVAL
POLIX R ARRIVAL


RNAV STAR RWY16L/16R

RNAV 1

Note 1) DME/DME/IRU or GNSS required.


2) RADAR service required.

VAR 8° W(2019)




MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

NOVEL
MHA 5000






MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

GODIN
MHA 8000




MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)


POLIX
MHA 11000

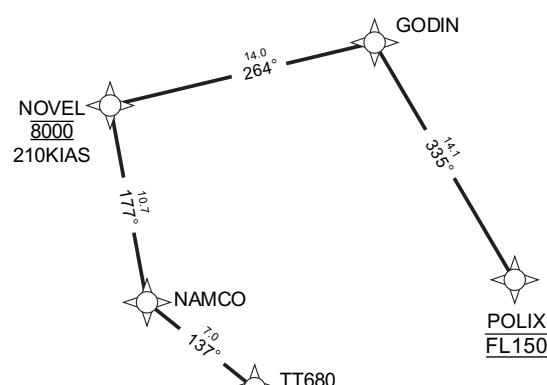

POLIX R ARRIVAL

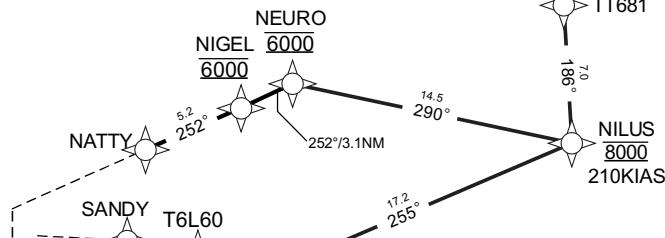

POLIX L ARRIVAL

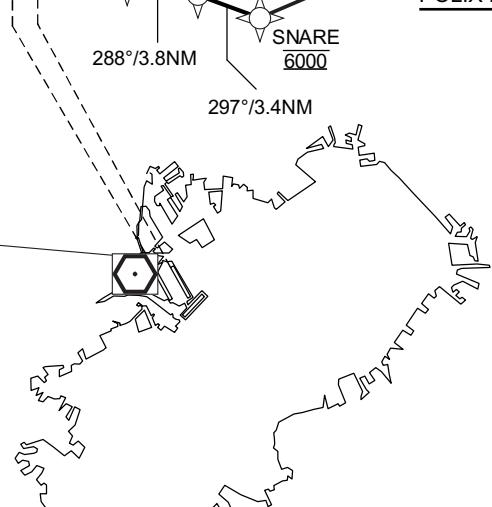

VOR/DME
HANEDA
112.2 HME
CH-59X
35°33'44"N/139°45'40"E
100FT

CHANGE : New PROC

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

POLIX L ARRIVAL

From POLIX at FL150, to GODIN, to NOVEL at 8000FT, to NAMCO, to TT680, to TT681, to NILUS at 8000FT, to SNARE at 6000FT, to T6L60, to SANDY.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	—	—	-7.5	—	—	FL150	—	—	RNAV1
002	TF	GODIN	—	335 (327.2)	-7.5	14.1	—	—	—	—	RNAV1
003	TF	NOVEL	—	264 (256.4)	-7.5	14.0	—	8000	210	—	RNAV1
004	TF	NAMCO	—	177 (169.8)	-7.5	10.7	—	—	—	—	RNAV1
005	TF	TT680	—	137 (129.7)	-7.5	7.0	—	—	—	—	RNAV1
006	TF	TT681	—	162 (154.3)	-7.5	5.4	—	—	—	—	RNAV1
007	TF	NILUS	—	186 (178.9)	-7.5	7.0	—	8000	210	—	RNAV1
008	TF	SNARE	—	255 (247.0)	-7.5	17.2	—	6000	—	—	RNAV1
009	TF	T6L60	—	297 (289.0)	-7.5	3.4	—	—	—	—	RNAV1
010	TF	SANDY	—	288 (280.0)	-7.5	3.8	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	—	L	11000	—	-230(-14000) -240(+14001)	RNAV1
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

POLIX R ARRIVAL

From POLIX at FL150, to GODIN, to NOVEL at 8000FT, to NAMCO, to TT680, to TT681, to NILUS at 8000FT, to NEURO at 6000FT, to NIGEL at 6000FT, to NATTY.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	-	-	-7.5	-	-	FL150	-	-	RNAV1
002	TF	GODIN	-	335 (327.2)	-7.5	14.1	-	-	-	-	RNAV1
003	TF	NOVEL	-	264 (256.4)	-7.5	14.0	-	8000	210	-	RNAV1
004	TF	NAMCO	-	177 (169.8)	-7.5	10.7	-	-	-	-	RNAV1
005	TF	TT680	-	137 (129.7)	-7.5	7.0	-	-	-	-	RNAV1
006	TF	TT681	-	162 (154.3)	-7.5	5.4	-	-	-	-	RNAV1
007	TF	NILUS	-	186 (178.9)	-7.5	7.0	-	8000	210	-	RNAV1
008	TF	NEURO	-	290 (282.9)	-7.5	14.5	-	6000	-	-	RNAV1
009	TF	NIGEL	-	252 (244.1)	-7.5	3.1	-	6000	-	-	RNAV1
010	TF	NATTY	-	252 (244.1)	-7.5	5.2	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	290 (282.9)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : New PROC

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
GODIN	362425.3N / 1401655.9E	POLIX	361237.1N / 1402622.5E
NAMCO	361035.1N / 1400226.3E	SANDY	354917.5N / 1394402.8E
NATTY	355350.9N / 1394531.3E	SNARE	354731.1N / 1395238.1E
NEURO	355727.6N / 1395441.3E	T6L60	354838.2N / 1394838.4E
NIGEL	355607.5N / 1395117.8E	TT680	360608.2N / 1400904.0E
NILUS	355415.2N / 1401208.8E	TT681	360113.8N / 1401158.7E
NOVEL	362106.9N / 1400004.9E		

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

OSHIMA NIGHT ARRIVAL / AKSEL NIGHT ARRIVAL
AROSA NIGHT ARRIVAL / MESSE NIGHT ARRIVAL

RNAV 1

- Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8° W(2019)

VOR/DME
HANEDA
112.2 HME
CH-59X ---
35°33'44"N/139°45'40"E
100FT

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

KAIHO
MHA 4000

353°
353°

DME
YOKOSUKA
1196 HYD
CH-109X ---
35°15'20"N/139°35'15"E
500FT

TACAN
TATEYAMA
986 TET
CH-25X ---
34°58'15"N/139°50'17"E
500FT

OSHIMA NIGHT ARRIVAL

VORTAC
OSHIMA
113.1 XAC
CH-78X ---
34°42'44"N/139°24'50"E
2100FT

OSHIMA
(XAC)

UMUKI
6000

UTIBO

AKSEL

MESSE NIGHT ARRIVAL

TACAN
ONJUKU
1191 OJT
CH-104X ---
35°11'03"N/140°22'17"E
400FT

DME
TATEYAMA
1159 PQD
CH-72X ---
34°56'46"N/139°53'43"E
600FT

AROSA NIGHT ARRIVAL
AVEEY
16.4 277°
AROSA

AKSEL NIGHT ARRIVAL

AKSEL
MHA 5000

039°
219°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

OSHIMA(XAC)
MHA 5000

098°
278°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

AKSEL

5000

039°
219°

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

AVEEY
MHA 5000

134°
314°

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

OSHIMA NIGHT ARRIVAL

From XAC, to UTIBO, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	UTIBO	-	067 (059.2)	-7.5	27.6	-	-	-	-	RNAV1
003	TF	UMUKI	-	353 (345.5)	-7.5	16.1	-	+6000	-	-	RNAV1
004	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

AKSEL NIGHT ARRIVAL

From AKSEL, to UTIBO, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	UTIBO	-	014 (006.6)	-7.5	16.2	-	-	-	-	RNAV1
003	TF	UMUKI	-	353 (345.5)	-7.5	16.1	-	+6000	-	-	RNAV1
004	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

AROSA NIGHT ARRIVAL

From AROSA, to AVEEY, to UTIBO, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	-	-	-	RNAV1
003	TF	UTIBO	-	310 (302.8)	-7.5	27.5	-	-	-	-	RNAV1
004	TF	UMUKI	-	353 (345.5)	-7.5	16.1	-	+6000	-	-	RNAV1
005	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

MESSE NIGHT ARRIVAL

From MESSE, to UTIBO, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MESSE	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	UTIBO	-	246 (238.8)	-7.5	27.4	-	-	-	-	RNAV1
003	TF	UMUKI	-	353 (345.5)	-7.5	16.1	-	+6000	-	-	RNAV1
004	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	MESSE	246 (238.8)	-7.5	1.0(-14000) 1.5(+14001)	-	L	6000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	MESSE	351100.8N / 1402214.7E
AROSA	344201.7N / 1404157.3E	UMUKI	351219.1N / 1394849.2E
AVEEY	344155.9N / 1402158.0E	UTIBO	345647.0N / 1395343.9E
KAIHO	351857.8N / 1394642.4E	XAC	344244.1N / 1392450.5E

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR


**OSHIMA V ARRIVAL / AKSEL V ARRIVAL
AROSA V ARRIVAL / MESSE V ARRIVAL**

RNAV 1

Note 1) DME/DME/IRU or GNSS required.

2) RADAR service required.

VAR 8° W(2019)

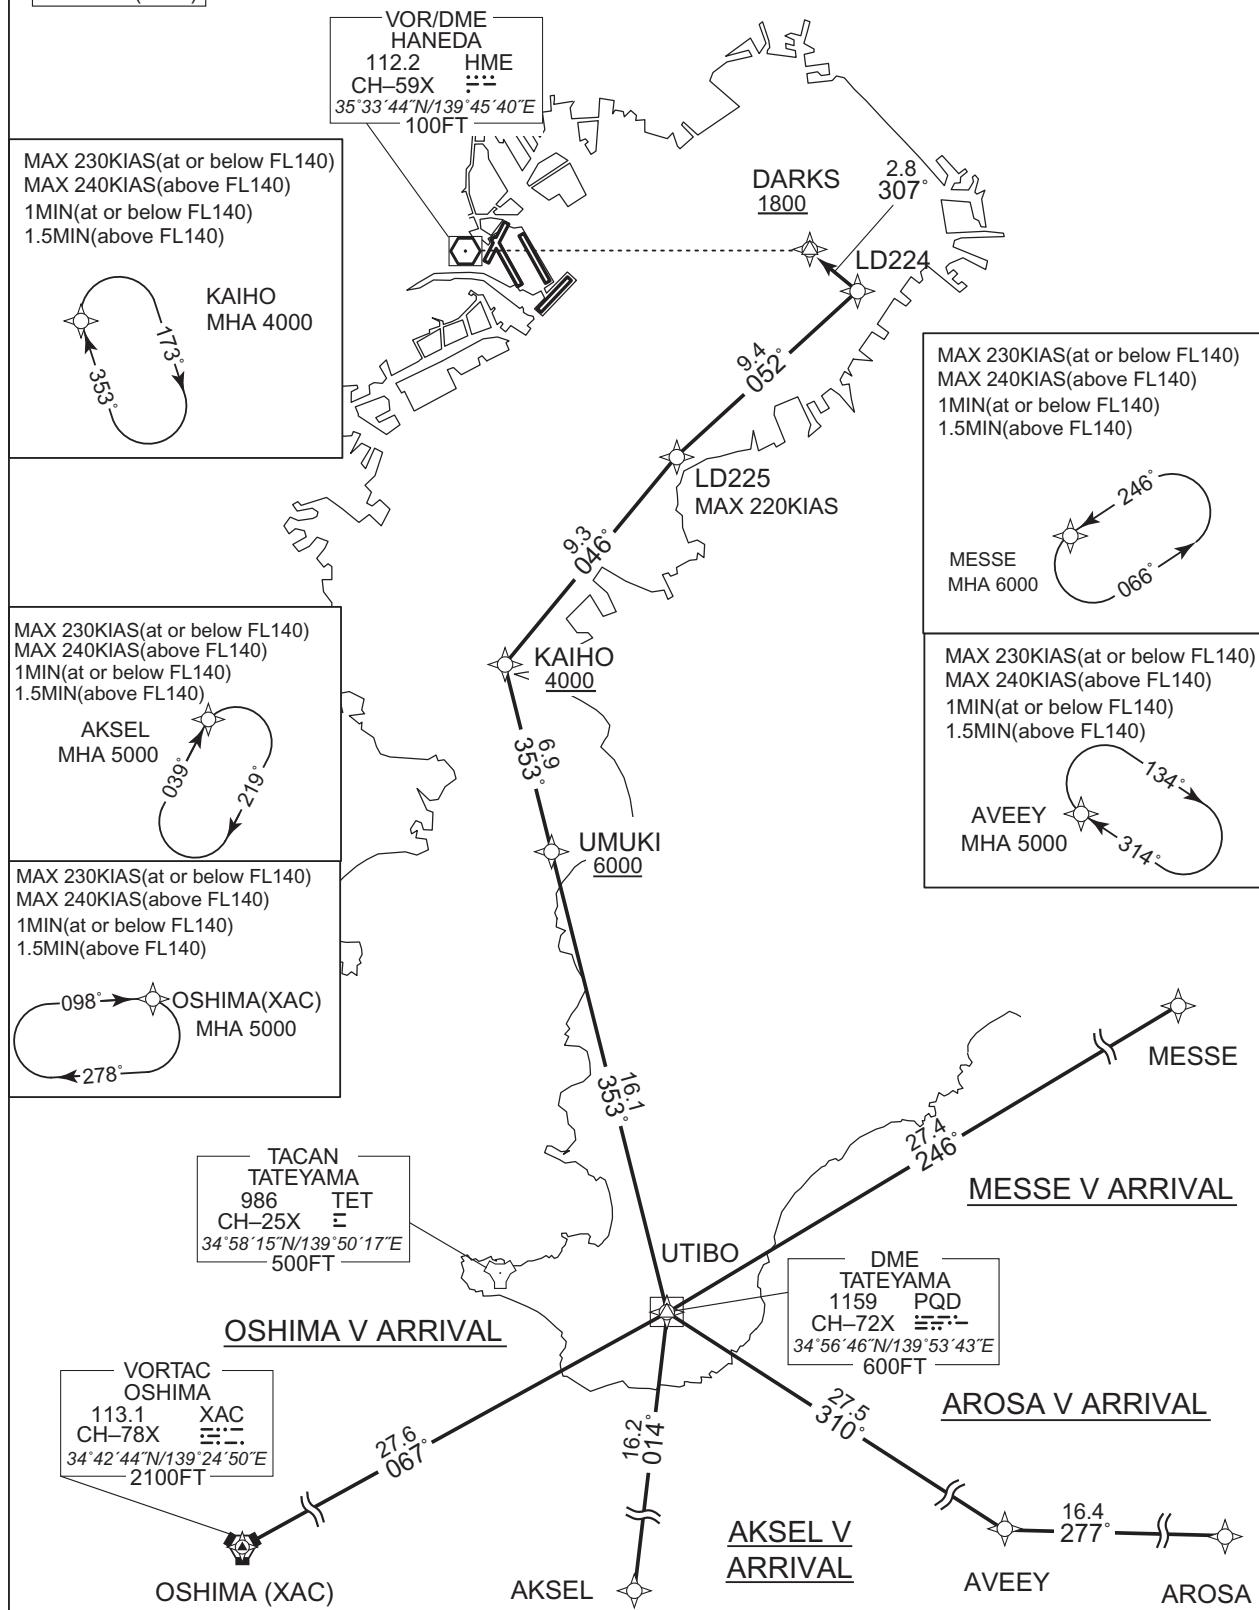

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

OSHIMA V ARRIVAL

From XAC, to UTIBO, to UMUKI at or above 6000FT, to KAIHO at or above 4000FT, to LD225, to LD224, to DARKS at or above 1800FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	UTIBO	-	067 (059.2)	-7.5	27.6	-	-	-	-	RNAV1
003	TF	UMUKI	-	353 (345.5)	-7.5	16.1	-	+6000	-	-	RNAV1
004	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	+4000	-	-	RNAV1
005	TF	LD225	-	046 (038.9)	-7.5	9.3	-	-	-220	-	RNAV1
006	TF	LD224	-	052 (044.9)	-7.5	9.4	-	-	-	-	RNAV1
007	TF	DARKS	-	307 (299.7)	-7.5	2.8	-	+1800	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

AKSEL V ARRIVAL

From AKSEL, to UTIBO, to UMUKI at or above 6000FT, to KAIHO at or above 4000FT, to LD225, to LD224, to DARKS at or above 1800FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course 'M('T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	UTIBO	-	014 (006.6)	-7.5	16.2	-	-	-	-	RNAV1
003	TF	UMUKI	-	353 (345.5)	-7.5	16.1	-	+6000	-	-	RNAV1
004	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	+4000	-	-	RNAV1
005	TF	LD225	-	046 (038.9)	-7.5	9.3	-	-	-220	-	RNAV1
006	TF	LD224	-	052 (044.9)	-7.5	9.4	-	-	-	-	RNAV1
007	TF	DARKS	-	307 (299.7)	-7.5	2.8	-	+1800	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course 'M('T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

AROSA V ARRIVAL

From AROSA, to AVEEY, to UTIBO, to UMUKI at or above 6000FT, to KAIHO at or above 4000FT, to LD225, to LD224, to DARKS at or above 1800FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	277 (269.8)	-7.5	16.4	-	-	-	-	RNAV1
003	TF	UTIBO	-	310 (302.8)	-7.5	27.5	-	-	-	-	RNAV1
004	TF	UMUKI	-	353 (345.5)	-7.5	16.1	-	+6000	-	-	RNAV1
005	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	+4000	-	-	RNAV1
006	TF	LD225	-	046 (038.9)	-7.5	9.3	-	-	-220	-	RNAV1
007	TF	LD224	-	052 (044.9)	-7.5	9.4	-	-	-	-	RNAV1
008	TF	DARKS	-	307 (299.7)	-7.5	2.8	-	+1800	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

MESSE V ARRIVAL

From MESSE, to UTIBO, to UMUKI at or above 6000FT, to KAIHO at or above 4000FT, to LD225, to LD224, to DARKS at or above 1800FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MESSE	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	UTIBO	-	246 (238.8)	-7.5	27.4	-	-	-	-	RNAV1
003	TF	UMUKI	-	353 (345.5)	-7.5	16.1	-	+6000	-	-	RNAV1
004	TF	KAIHO	-	353 (345.5)	-7.5	6.9	-	+4000	-	-	RNAV1
005	TF	LD225	-	046 (038.9)	-7.5	9.3	-	-	-220	-	RNAV1
006	TF	LD224	-	052 (044.9)	-7.5	9.4	-	-	-	-	RNAV1
007	TF	DARKS	-	307 (299.7)	-7.5	2.8	-	+1800	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	MESSE	246 (238.8)	-7.5	1.0(-14000) 1.5(+14001)	-	L	6000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1


Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	LD225	352614.1N / 1395353.4E
AROSA	344201.7N / 1404157.3E	MESSE	351100.8N / 1402214.7E
AVEEY	344155.9N / 1402158.0E	UMUKI	351219.1N / 1394849.2E
DARKS	353414.8N / 1395902.9E	UTIBO	345647.0N / 1395343.9E
KAIHO	351857.8N / 1394642.4E	XAC	344244.1N / 1392450.5E
LD224	353252.5N / 1400200.0E		


INSTRUMENT APPROACH CHART



INSTRUMENT APPROACH CHART

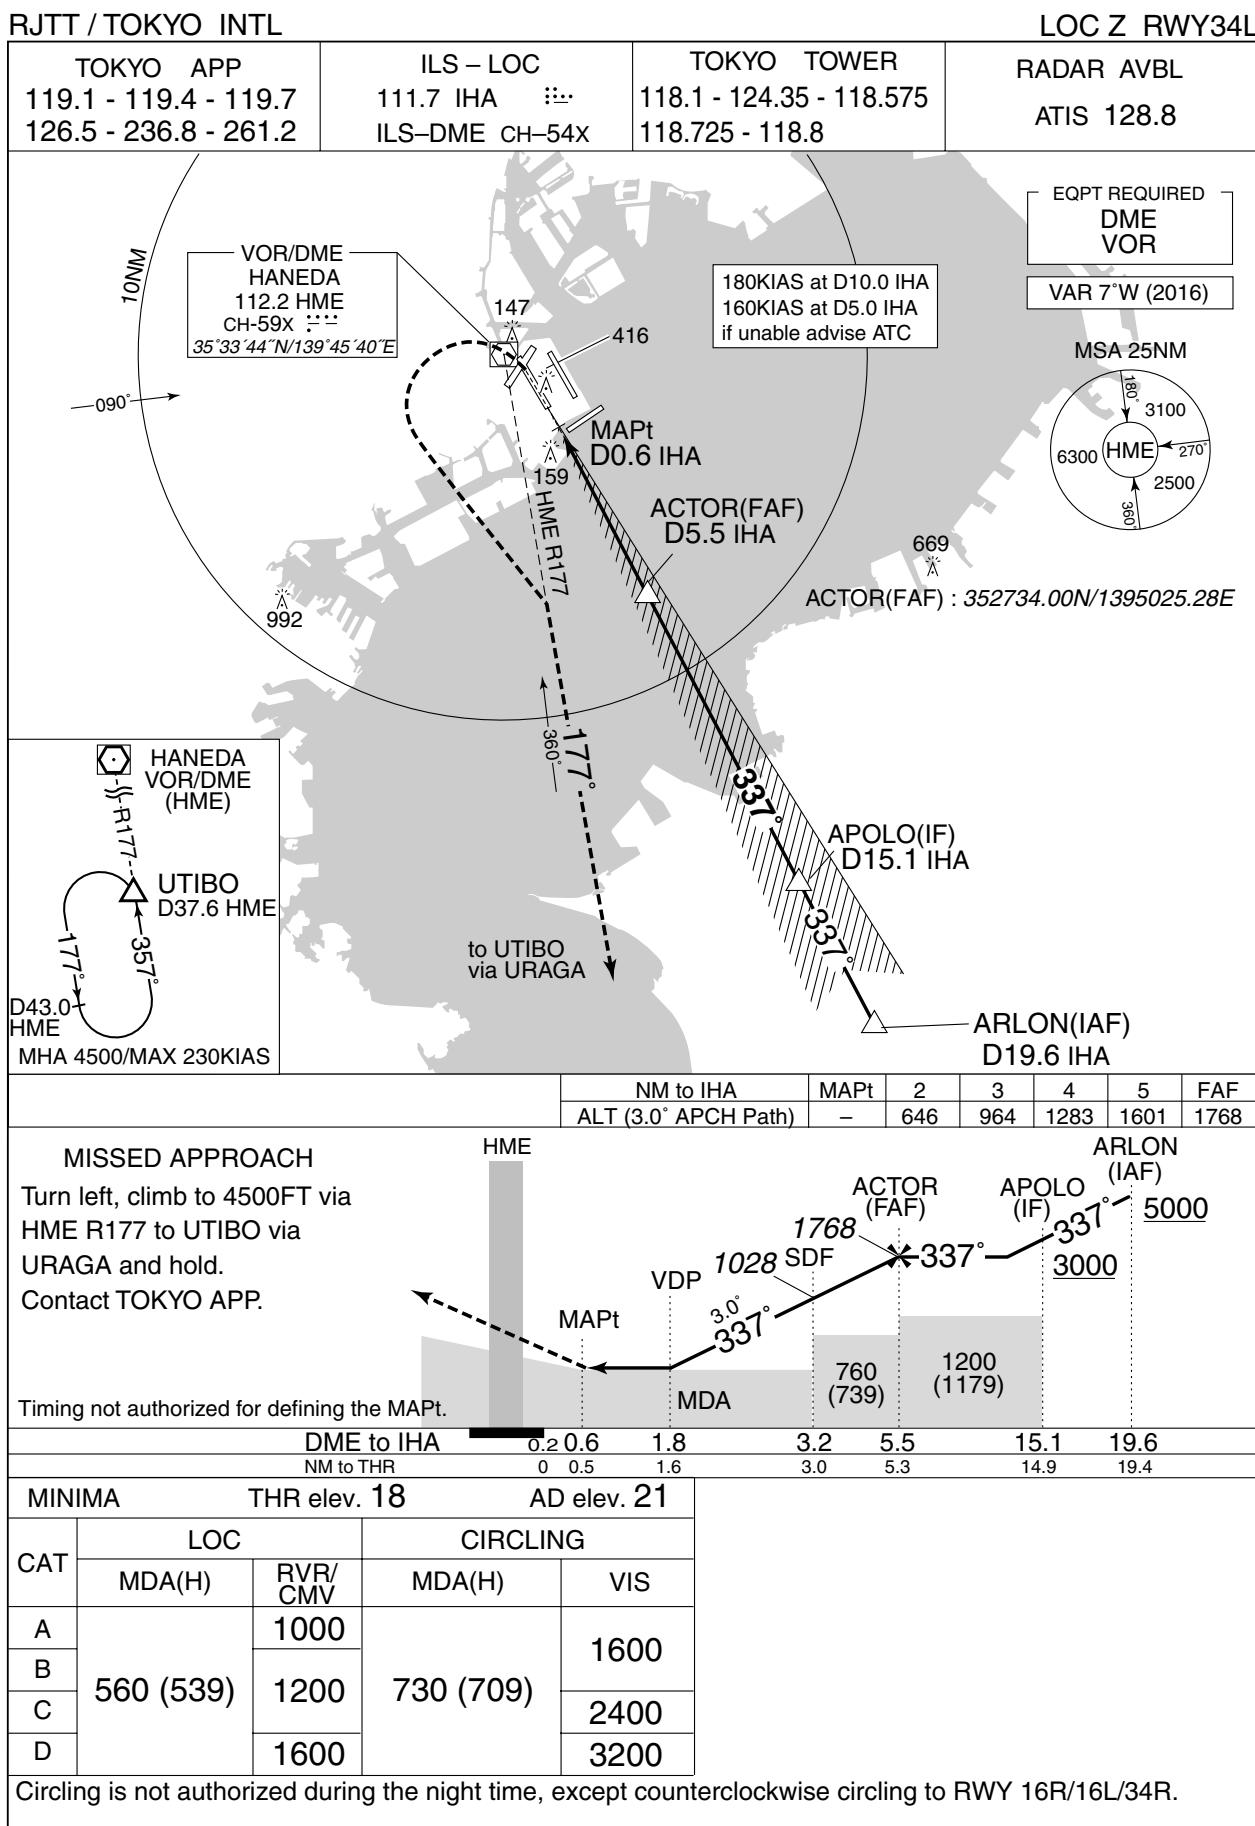

INSTRUMENT APPROACH CHART

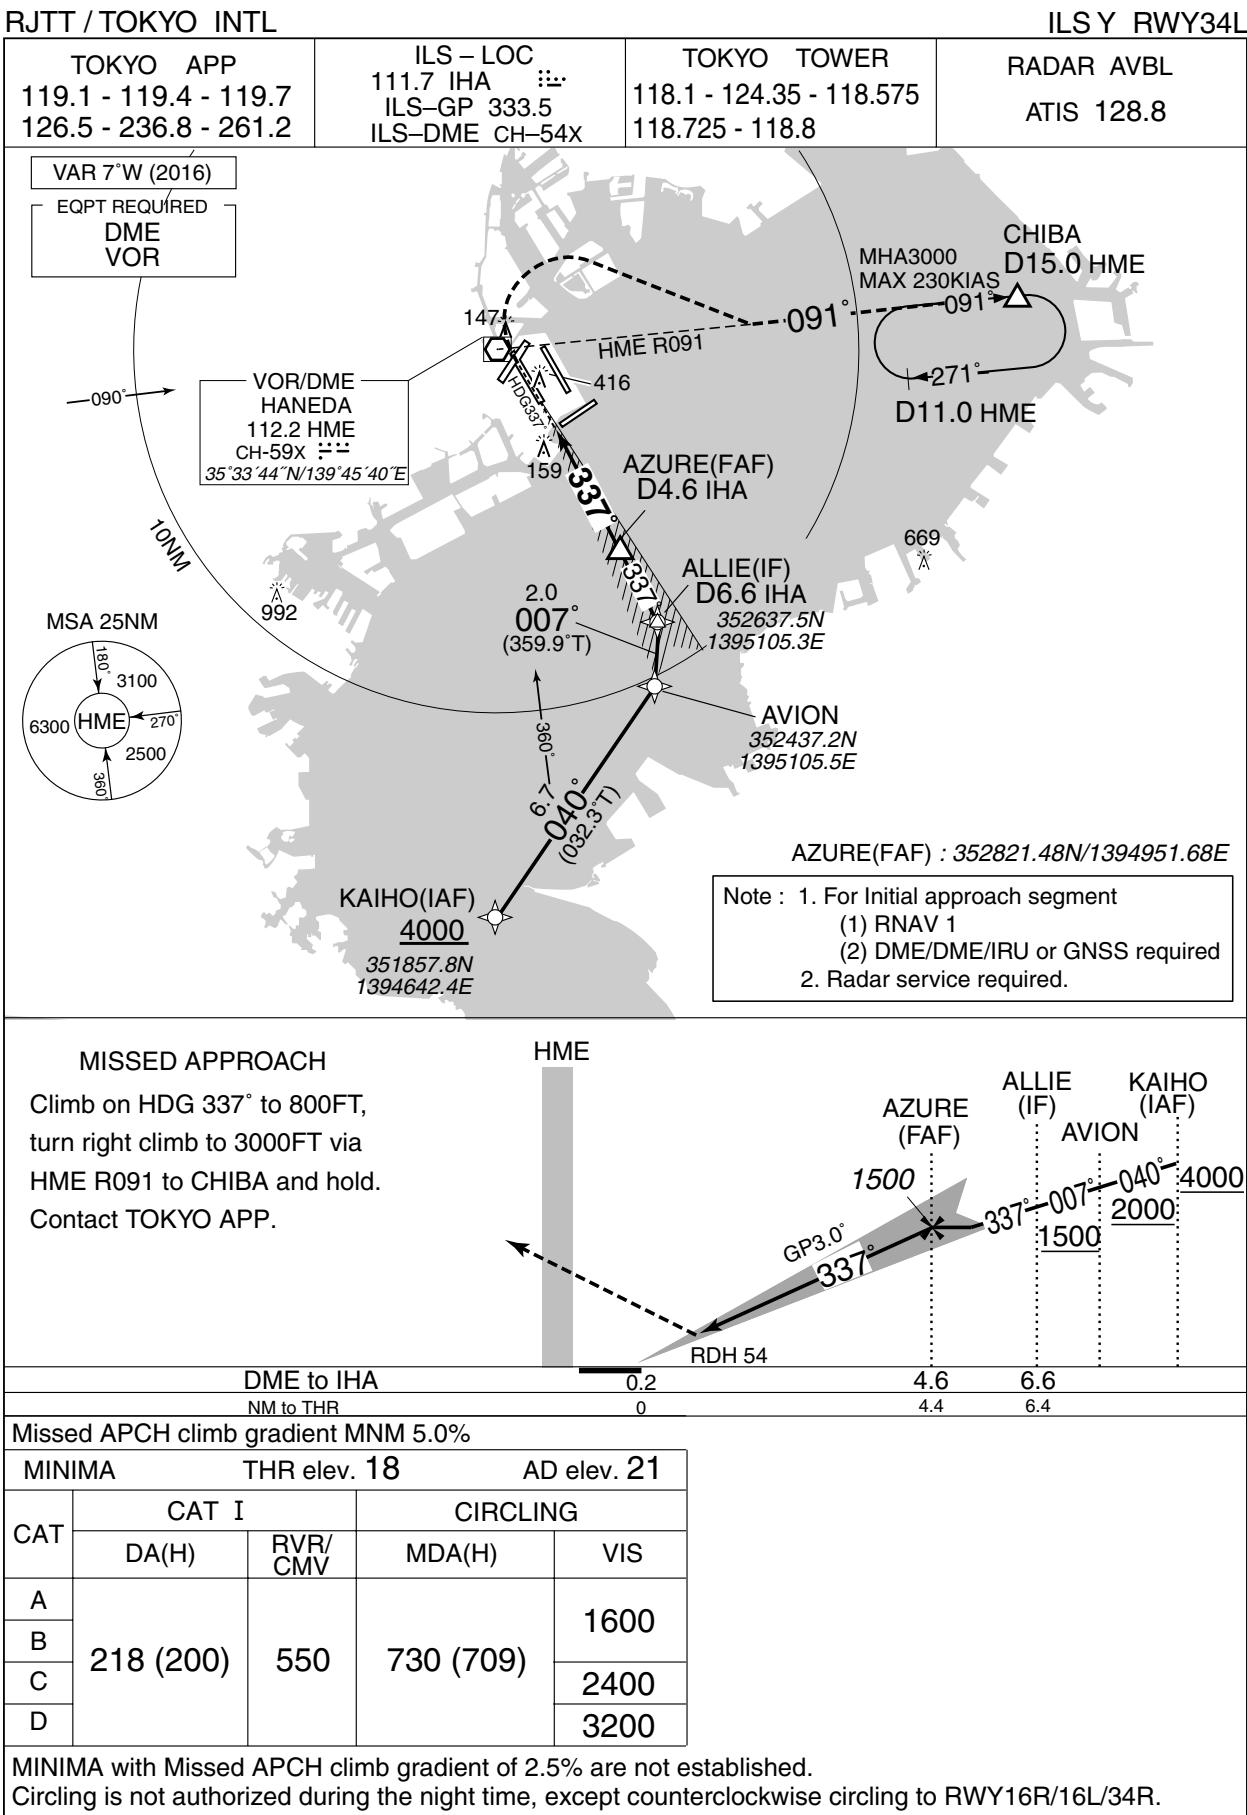

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LOC Y RWY34L



INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


ILS X RWY34L



INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


LOC X RWY34L

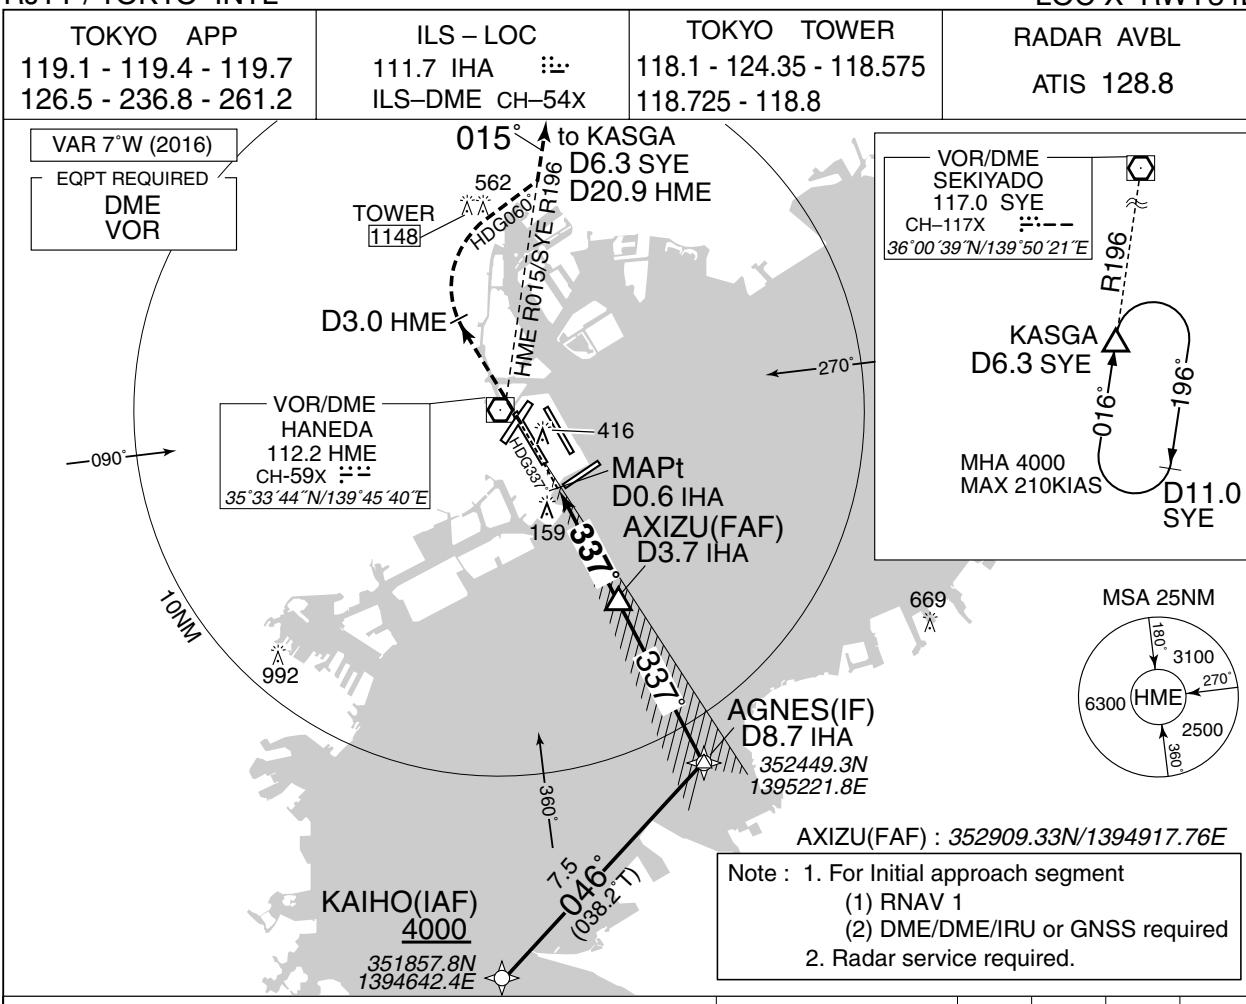

NM to IHA	MAPt	2	3	FAF
ALT (3.0° APCH Path)	-	646	964	1184

MISSSED APPROACH

Climb on HDG 337° to HME 3.0DME, turn right HDG 060° to intercept and proceed via HME R015/SYE R196 to KASGA and hold at 4000FT. Contact TOKYO APP.

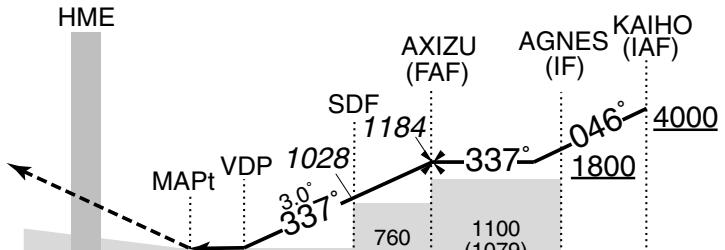

Timing not authorized for defining the MAPt.

MAPt VDP 1028 331° 1.5 046° 4000

SDF 1184 1028 3.0 3.7 8.7

MDA 760 (739) 1100 (1079) 3.5 8.5

DME to IHA 0.2 0.6 1.8 3.2 3.7 8.7

NM to THR 0 0.5 1.6 3.0 3.5 8.5

Missed APCH climb gradient MNM 3.0%

MINIMA THR elev. 18 AD elev. 21

CAT	LOC		CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	1000		1600	
B	560 (539)	1200	730 (709)	2400
C				3200
D	1600			

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling is not authorized during the night time, except counterclockwise circling to RWY16R/16L/34R.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


VOR RWY34L



INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

ILS Z RWY34R (CAT II & III)

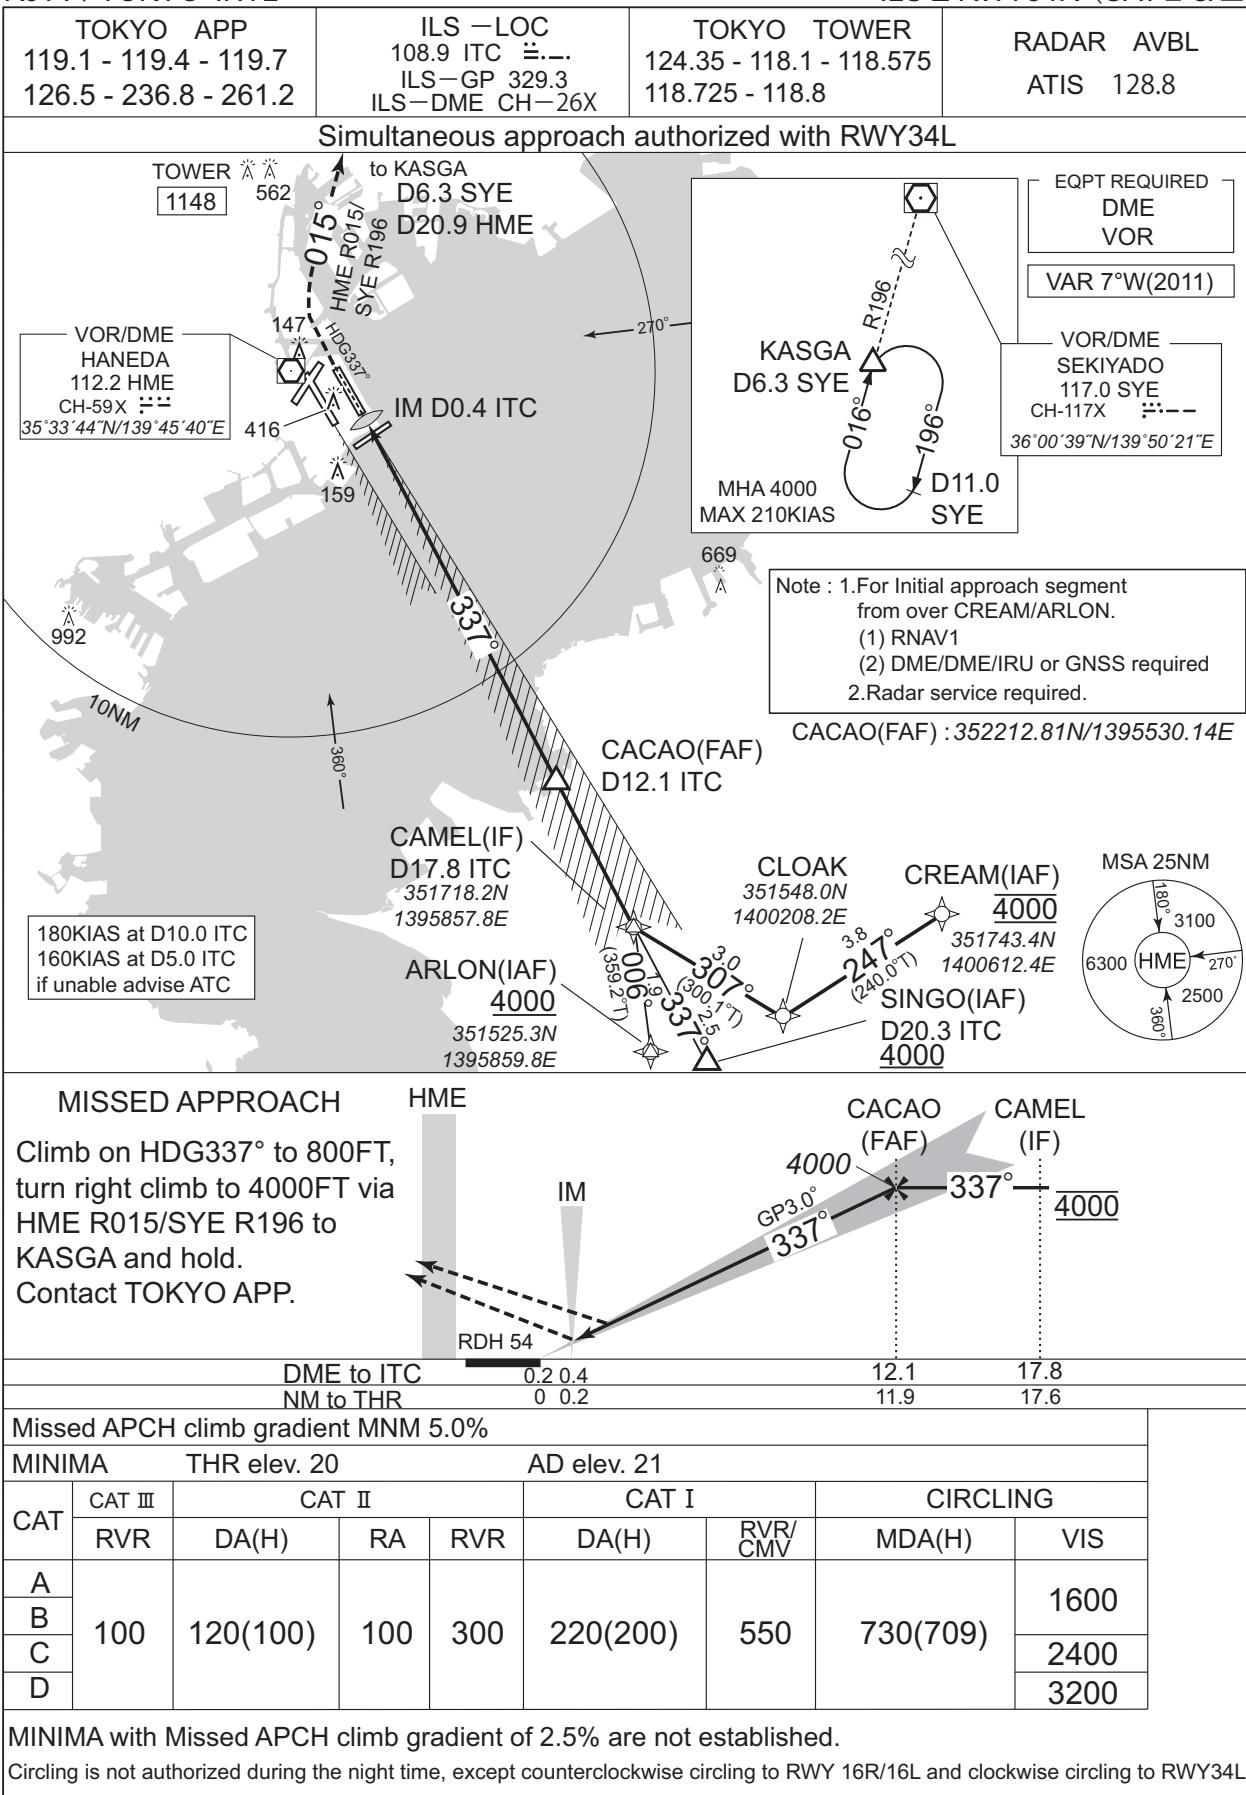

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LOC Z RWY34R



INSTRUMENT APPROACH CHART


RJTT / TOKYO INTL

ILS Y RWY34R (CAT II & III)



MISSED APPROACH

Climb on HDG337° to 800FT, turn right climb to 3000FT via HME R091 to CHIBA and hold. Contact TOKYO APP.

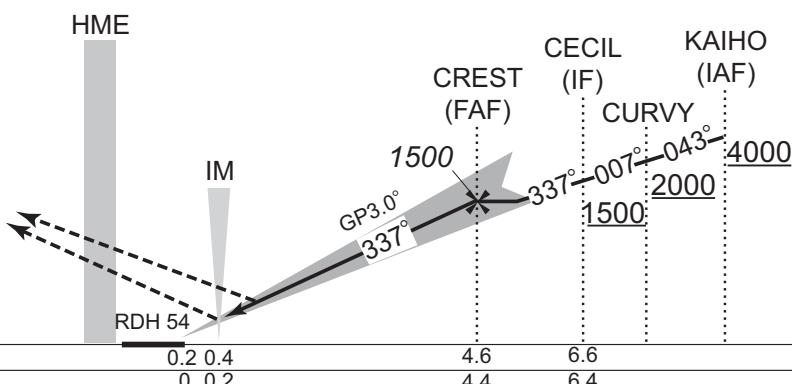

Missed APCH climb gradient MNM 5.0%

MINIMA THR elev. 20 AD elev. 21

CAT	CAT III	CAT II			CAT I		CIRCLING	
	RVR	DA(H)	RA	RVR	DA(H)	RVR/CMV	MDA(H)	VIS
A								1600
B	100	120(100)	100	300	220(200)	550	730(709)	2400
C								3200
D								

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling is not authorized during the night time, except counterclockwise circling to RWY 16R/16L and clockwise circling to RWY34L.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


LOC Y RWY34R



MISSED APPROACH

Turn right, climb to 3000FT via HME R091 to CHIBA and hold. Contact TOKYO APP.

Timing not authorized for defining the MAPt.
No turn before MAPt.

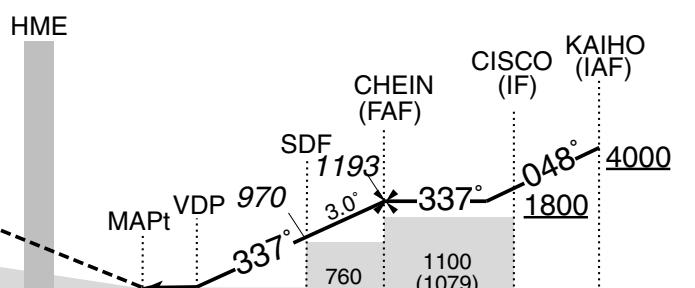

DME to ITC	0.2	0.6	2.1	3.0	3.7	8.7
NM to THR	0	0.5	1.9	2.8	3.5	8.5

MINIMA		THR elev. 20	AD elev. 21	
CAT	LOC	CIRCLING		
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A		1200		
B	700 (679)	1400	730 (709)	1600
C				2400
D		1800		3200

Circling is not authorized during the night time, except counterclockwise circling to RWY 16R/16L and clockwise circling to RWY 34L.

INSTRUMENT APPROACH CHART



INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LOC RWY22



MISSSED APPROACH

Turn right, climb to 4000FT via HME
R015 /SYE R196 to KASGA and hold.
Contact TOKYO APP.

Timing not authorized for defining the MAPt.
No turn before MAPt.



Missed APCH climb gradient MNM 4.0%

MINIMA THR elev. 35 AD elev. 21

CAT	LOC		CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	1000			1600
B	600 (579)	1200	730 (709)	2400
C				3200
D	1600			

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Circling is not authorized during the night time, except counterclockwise circling to RWY16R/16L and clockwise circling to RWY23,RWY34R/34L.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA Z RWY22



MISSED APPROACH

At MAPt, turn right climb to 4000FT via HME R015 / SYE R196 to KASGA and hold.
Contact TOKYO APP.

Timing not authorized for defining the MAPt.



Missed APCH climb gradient MNM 4.0%

MINIMA	THR elev. 35	AD elev. 21
CAT	MDA(H)	VIS
A		
B		
C	1000 (979)	6000
D		

**Do Not turn left
until D1.1 IKL**

**SO AS NOT TO MISUNDERSTAND
THE RUNWAY**

MINIMA with Missed APCH climb gradient of 2.5% are not established.
MINIMA APPLICATION CRITERIA in AD1.1.6.10.1.4 are not applicable.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA Z RWY22

Visual Prescribed Track for LDA Z RWY22

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.


Note : Remain on the LDA until passing MAPt so as not to penetrate the NTZ, and to avoid the RWY23 traffic.



In case of GO AROUND, pilot should report ATC as soon as practicable.

Until receiving ATC instructions, aircraft turn right for joining HME R015/SYE R196 and missed approach procedure.

INSTRUMENT APPROACH CHART

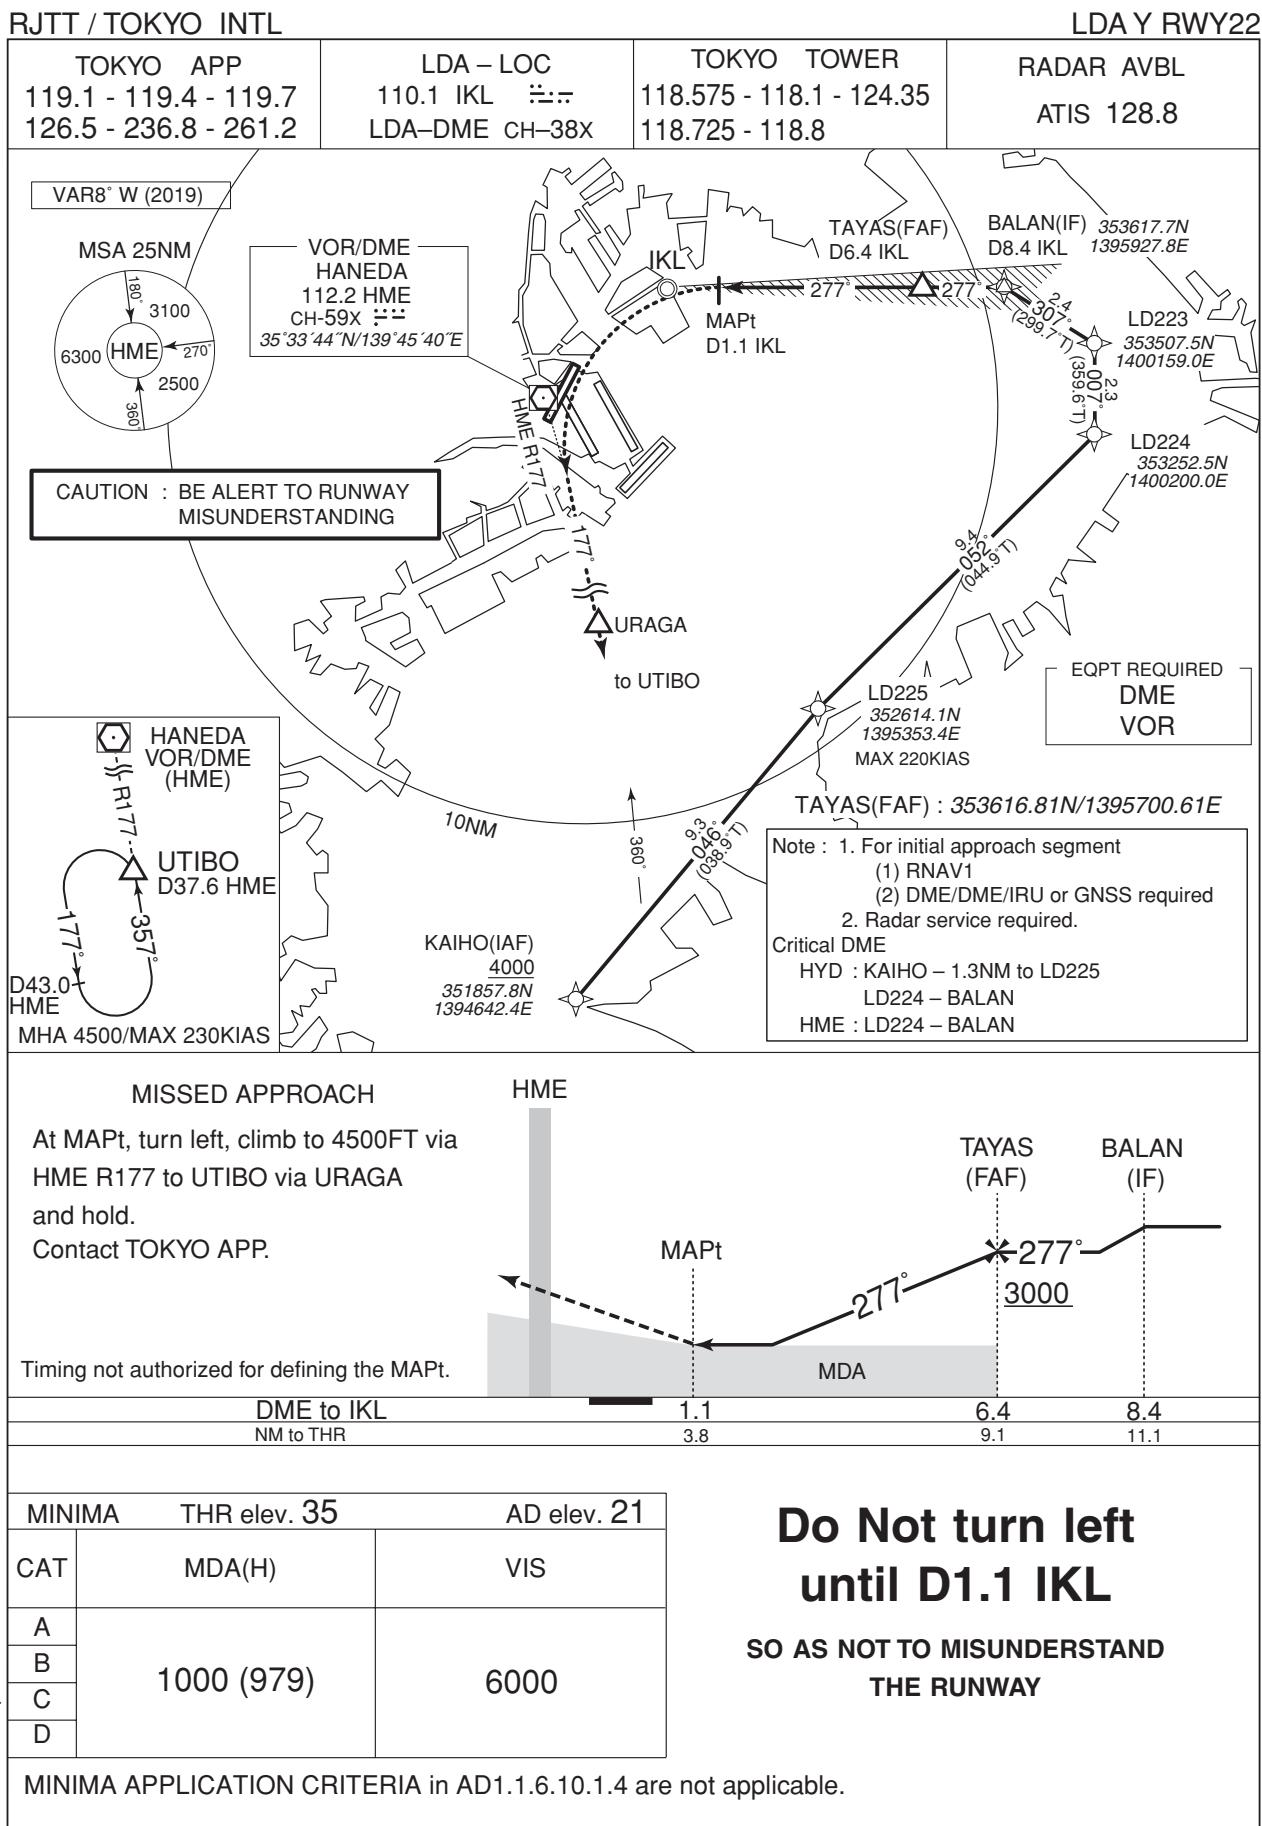

CHANGE : Update

INSTRUMENT APPROACH CHART


RJTT / TOKYO INTL

LDA Y RWY22

Visual Prescribed Track for LDA Y RWY22

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.

Note : Remain on the LDA until passing MAPt so as not to penetrate the NTZ, and to avoid the RWY23 traffic.

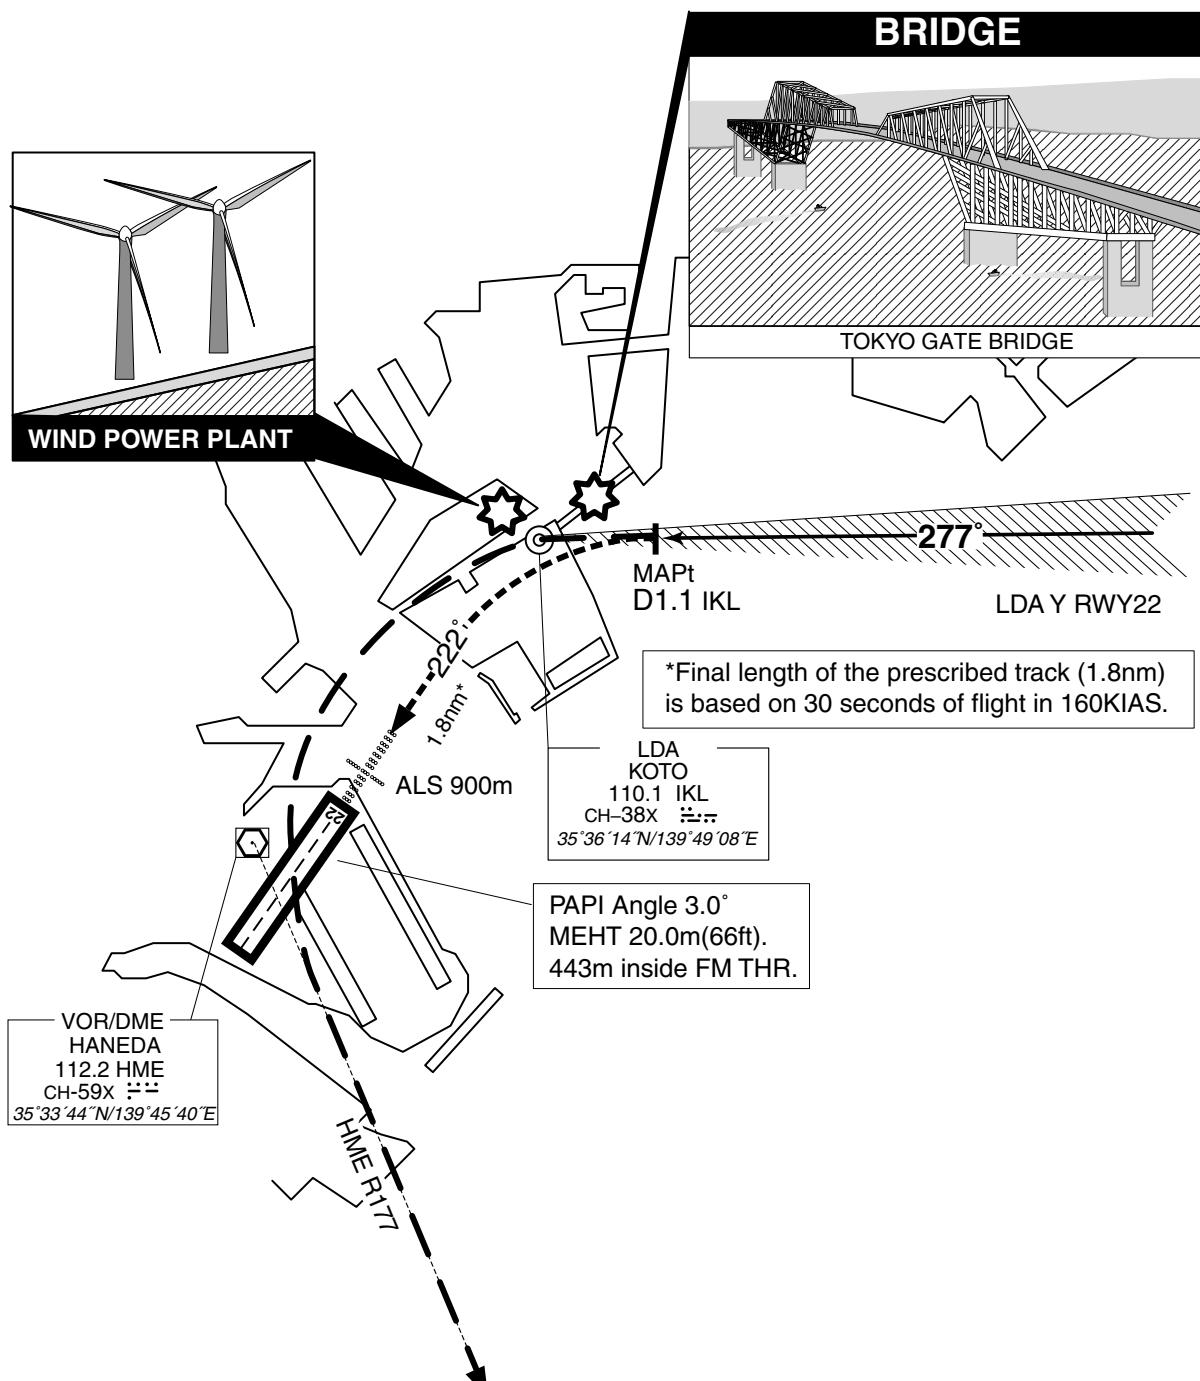

In case of GO AROUND, pilot should report ATC as soon as practicable.

Until receiving ATC instructions, aircraft turn left for joining HME R177 and missed approach procedure.

INSTRUMENT APPROACH CHART



INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA X RWY22

Visual Prescribed Track for LDA X RWY22

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.

Note : Remain on the LDA until passing MAPt so as not to penetrate the NTZ, and to avoid the RWY23 traffic.



In case of GO AROUND, pilot should report ATC as soon as practicable.

Until receiving ATC instructions, aircraft turn right for joining HME R015/SYE R196 and missed approach procedure.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA W RWY22



INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA W RWY22

Visual Prescribed Track for LDA W RWY22

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.

Note : Remain on the LDA until passing MAPt so as not to penetrate the NTZ, and to avoid the RWY23 traffic.



In case of GO AROUND, pilot should report ATC as soon as practicable.

Until receiving ATC instructions, aircraft turn right for joining HME R015/SYE R196 and missed approach procedure.

INSTRUMENT APPROACH CHART



INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LOC Z RWY23



INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


ILS Y or LOC Y RWY23



INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


LDA Z RWY23

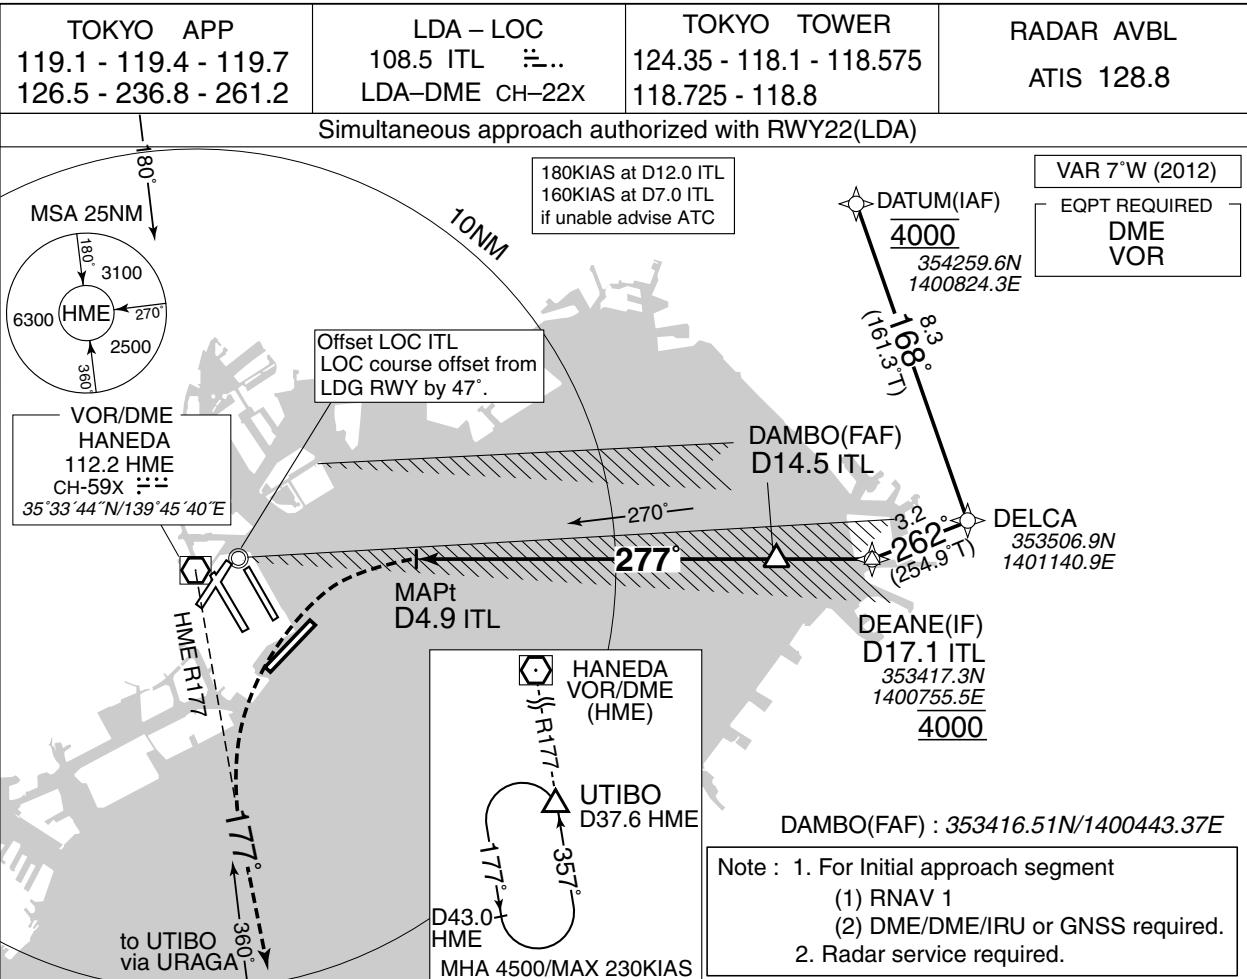

MISSED APPROACH

At MAPt, turn left climb to 4500FT via HME R177 to UTIBO via Uraga and hold. Contact TOKYO APP.

Timing not authorized for defining the MAPt.

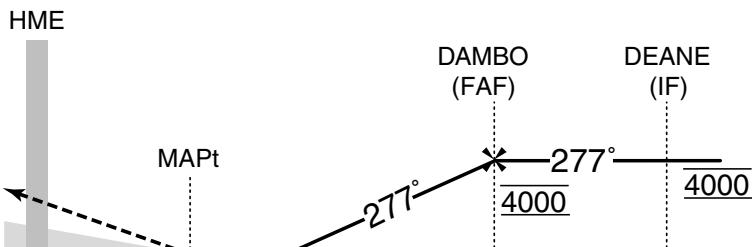

MINIMA		THR elev. 55	AD elev. 21
CAT	MDA(H)	VIS	
A			
B			
C			
D	1000 (979)	6000	

MINIMA APPLICATION CRITERIA in AD1.1.6.10.1.4 are not applicable.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA Z RWY23

Visual Prescribed Track for LDA Z RWY23

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.

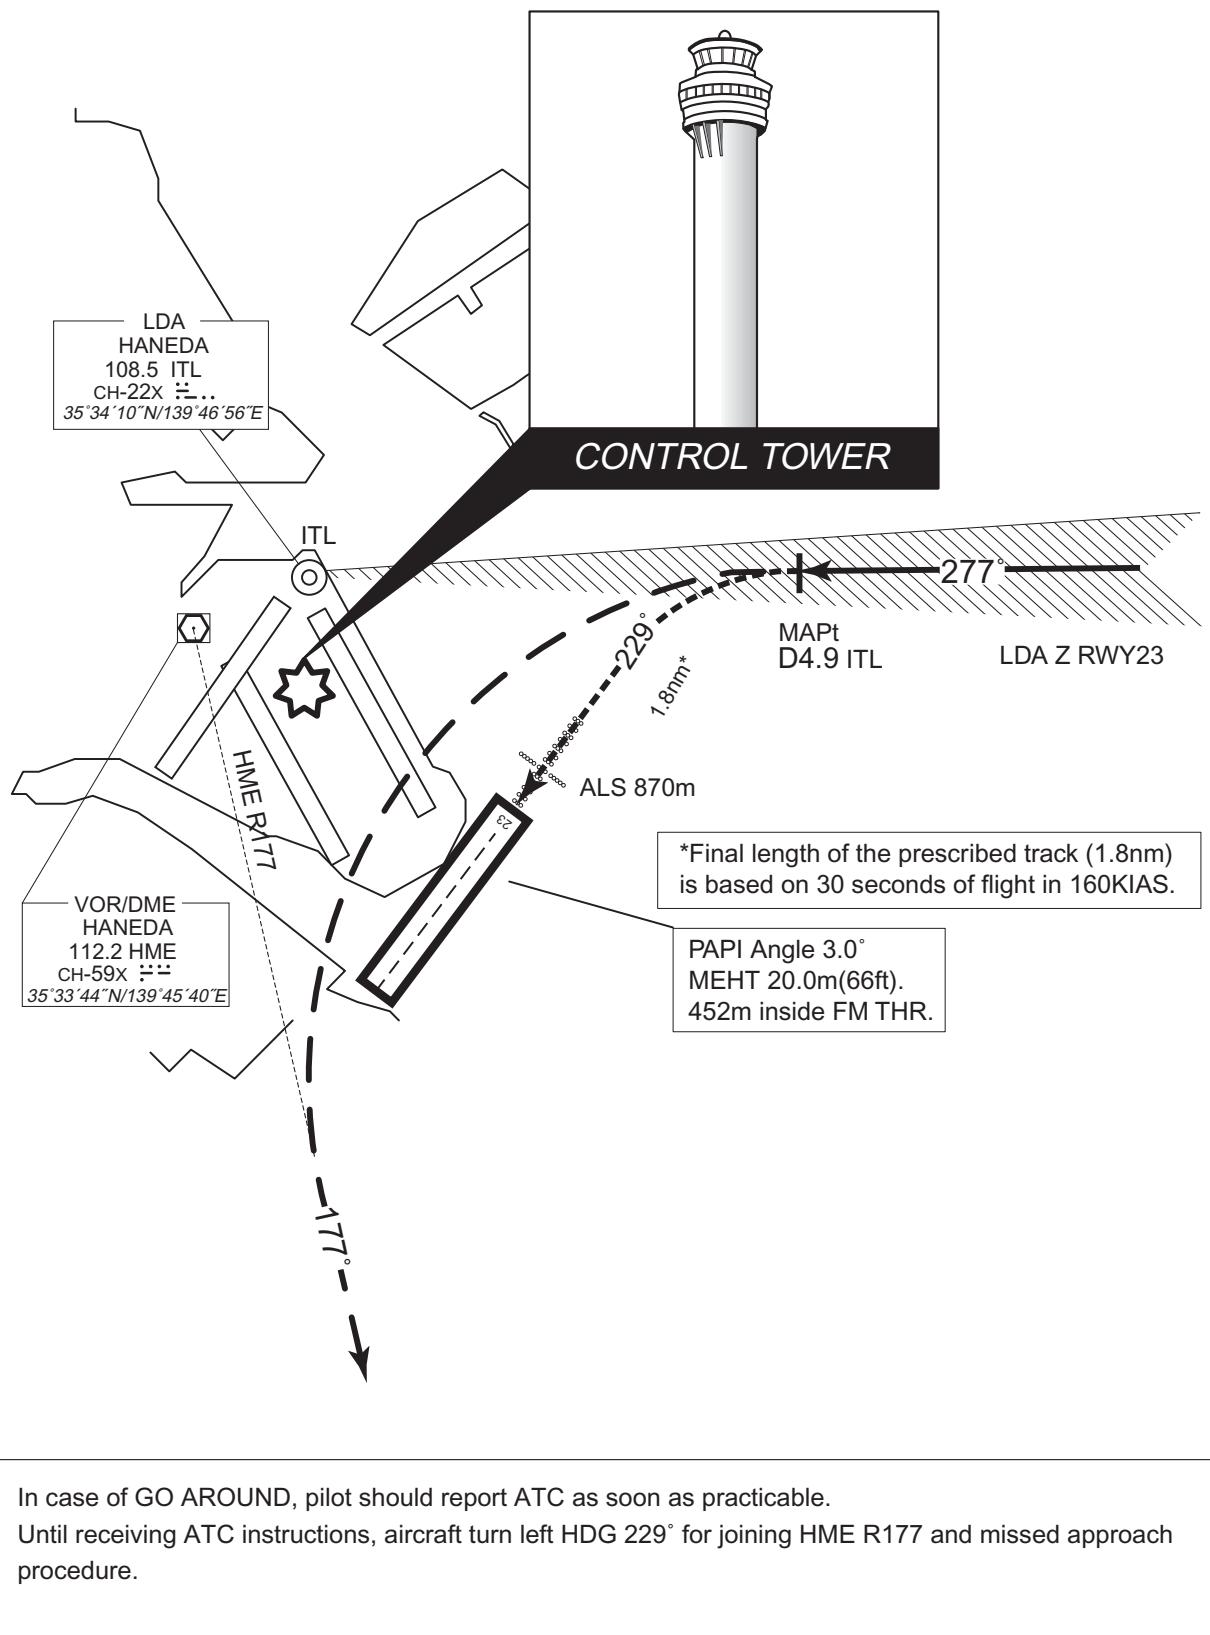

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA Y RWY23



MISSED APPROACH

At MAPt, turn left climb to 4500FT via
HME R177 to UTIBO via URAGA
and hold.
Contact TOKYO APP.

HME

DOME(L)(FAF)
DARKS
(IF)

Timing not authorized for defining the MAPt.

MAPt

MDA

4.9

7.9

9.9

1800

DME to ITL
NM to THR

3.4

6.4

8.4

MINIMA		THR elev. 55	AD elev. 21
CAT	MDA(H)	VIS	
A			
B			
C			
D	1000 (979)	6000	

MINIMA APPLICATION CRITERIA in AD1.1.6.10.1.4 are not applicable.

CHANGE : Update

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA Y RWY23

Visual Prescribed Track for LDA Y RWY23

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.



CHANGE : Correction of misdescription (ITL COORD).

In case of GO AROUND, pilot should report ATC as soon as practicable.
Until receiving ATC instructions, aircraft turn left HDG 229° for joining HME R177 and missed approach procedure.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


LDA X RWY23



MISSED APPROACH

At MAPt, turn left climb to 4500FT via HME R177 to UTIBO via Uraga and hold. Contact TOKYO APP.

Timing not authorized for defining the MAPt.

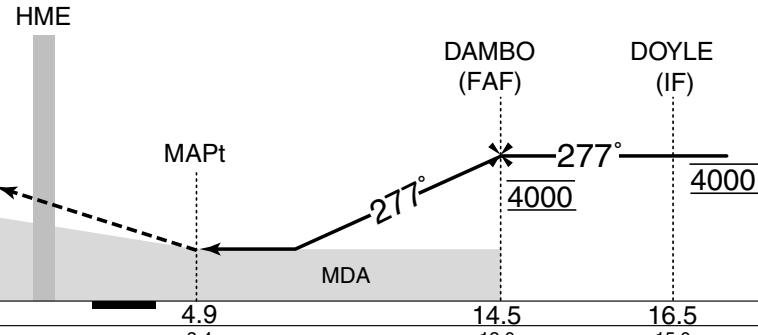

	MINIMA	THR elev. 55	AD elev. 21
CAT	MDA(H)	VIS	
A			
B	1000 (979)	6000	
C			
D			

MINIMA APPLICATION CRITERIA in AD1.1.6.10.1.4 are not applicable.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA X RWY23

Visual Prescribed Track for LDA X RWY23

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.

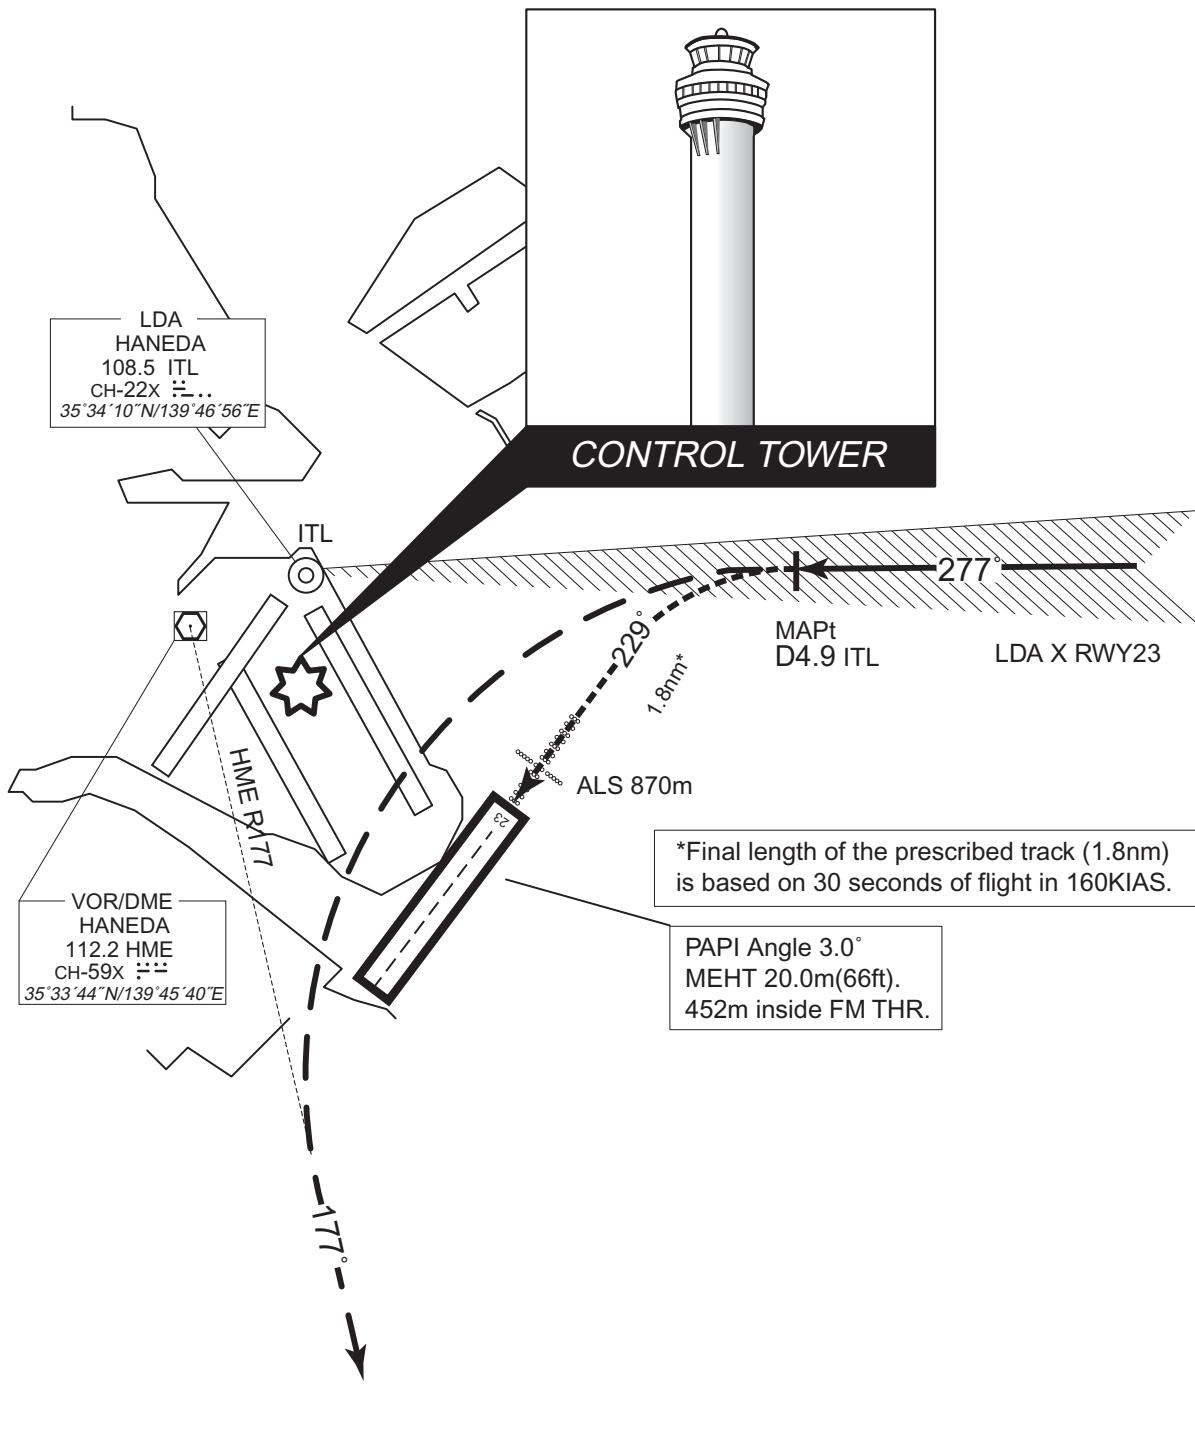

CHANGE : Correction of misdescription (ITL COORD).

In case of GO AROUND, pilot should report ATC as soon as practicable.
Until receiving ATC instructions, aircraft turn left HDG 229° for joining HME R177 and missed approach procedure.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA W RWY23



MINIMA	THR elev. 55	AD elev. 21
CAT	MDA(H)	VIS
A		
B	1000 (979)	6000
C		
D		

MINIMA APPLICATION CRITERIA in AD1.1.6.10.1.4 are not applicable.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA W RWY23

Visual Prescribed Track for LDA W RWY23


Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.

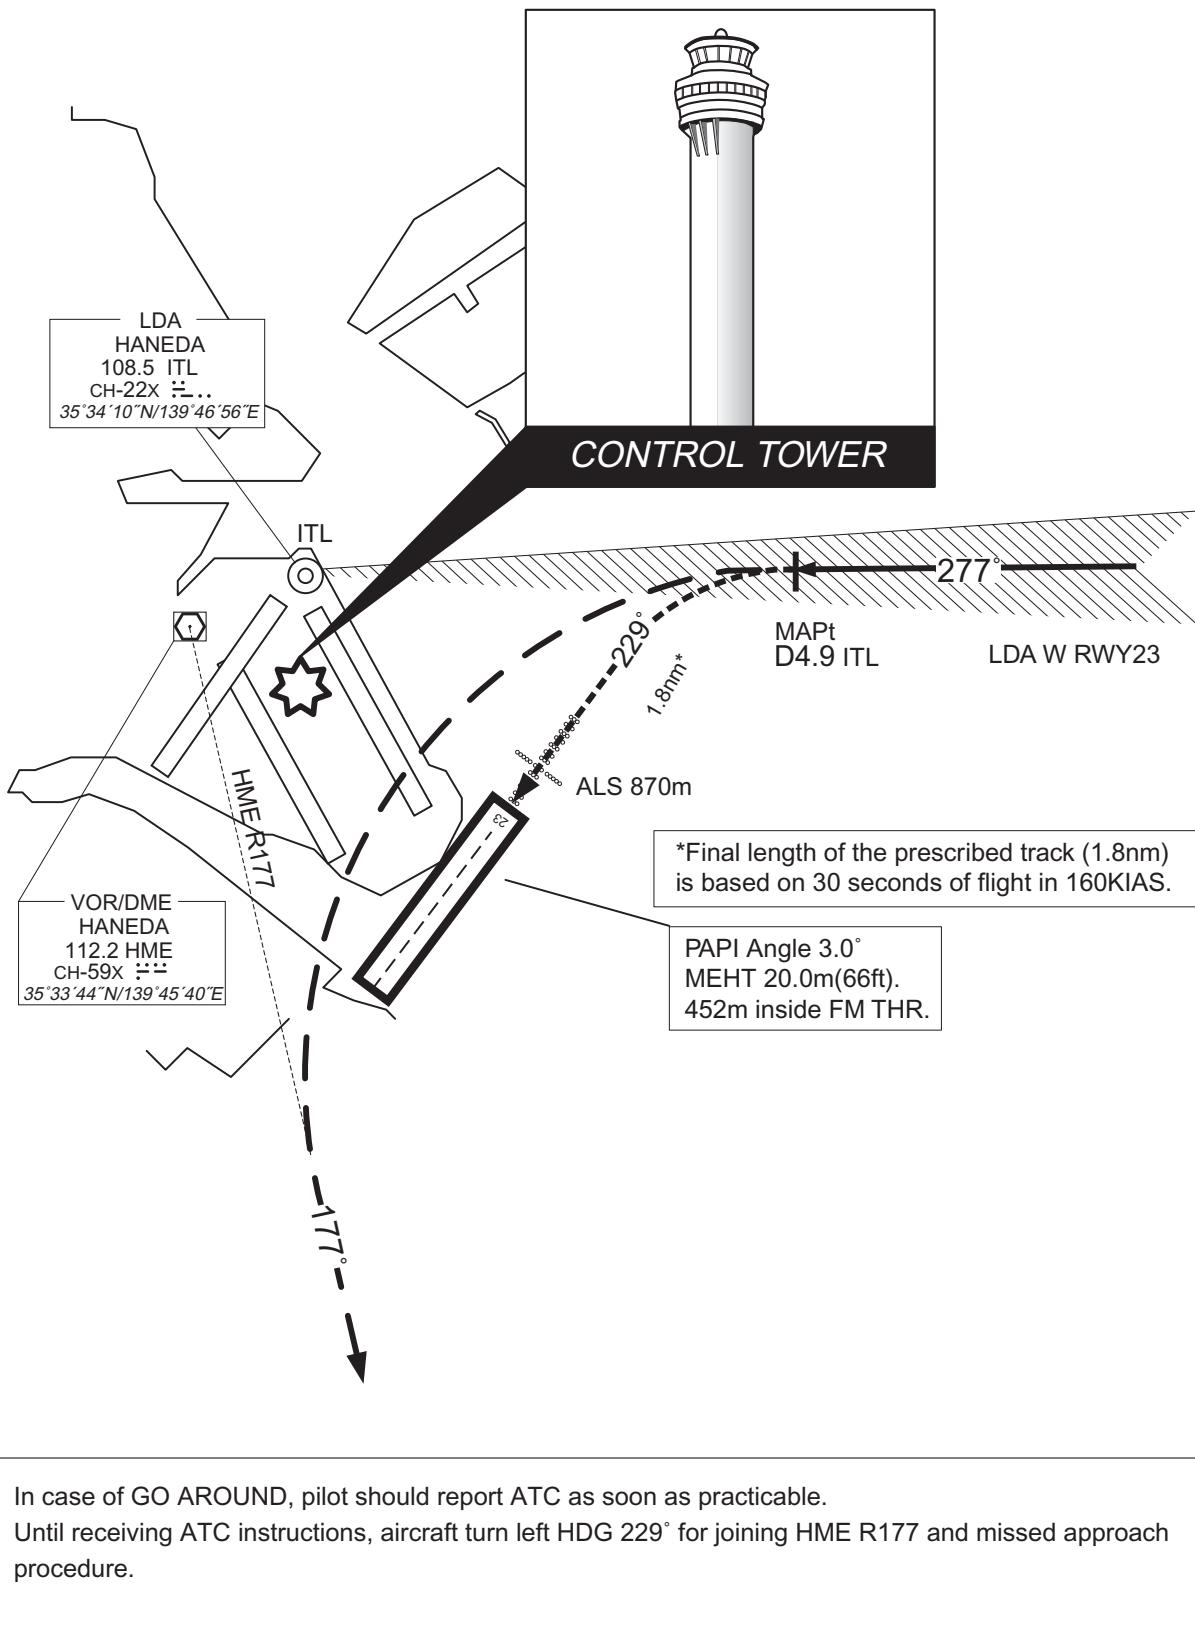

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

RNAV (RNP) RWY23

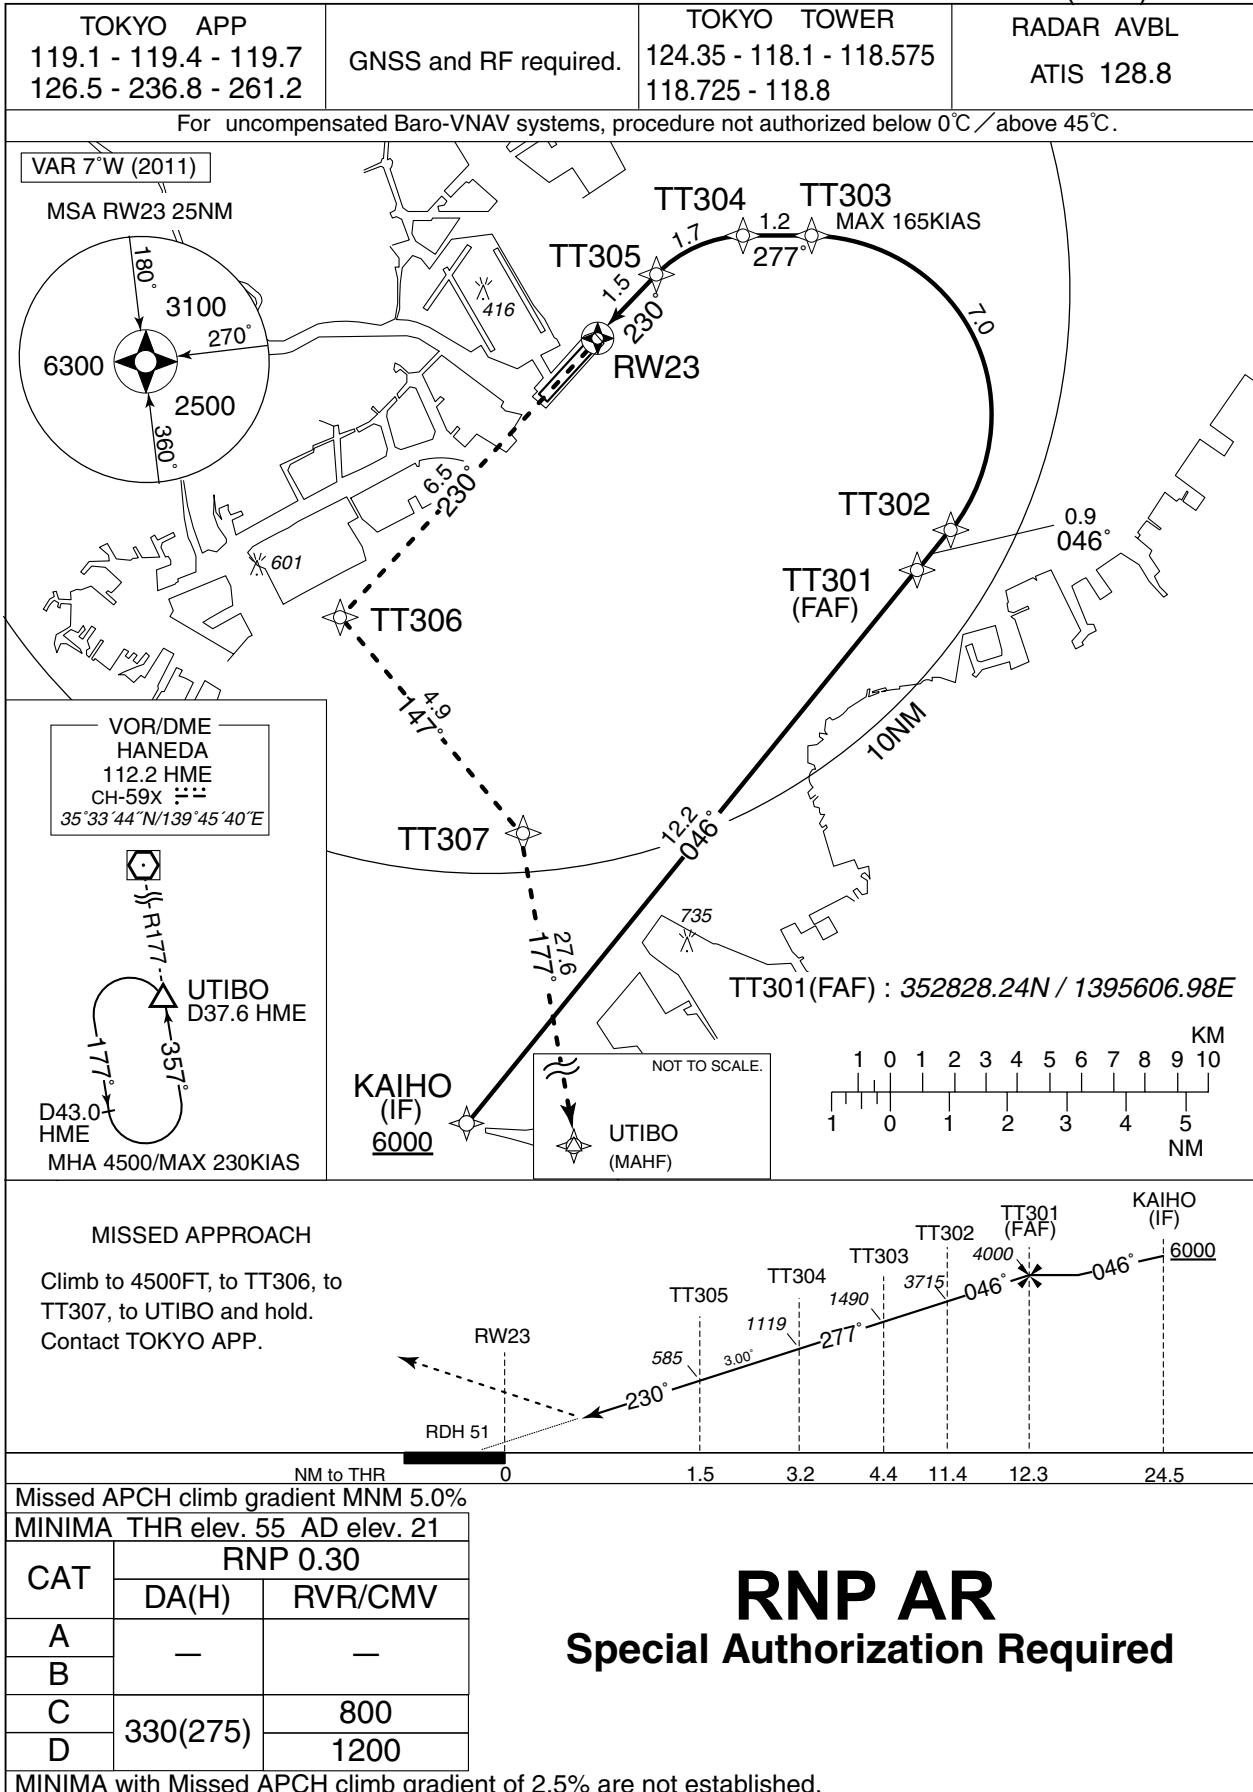

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

RNAV (RNP) RWY23

RNAV (RNP) RWY23Coding Table


Serial Number	Path Descriptor	Waypoint Identifier	Fly over	Course [°M(°T)]	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KT)	VPA/RDH (°/FT)	RNP Value
001	IF	KAIHO	—	—	-7.2	—	—	+6000	—	—	—
002	TF	TT301	—	046 (038.8)	-7.2	12.2	—	4000	—	—	1.0
003	TF	TT302	—	046 (038.8)	-7.2	0.9	—	3715	—	-3.00	0.3
004	RF Center: TTRF1 r=3.10NM	TT303	—	—	-7.2	7.0	L	1490	-165	-3.00	0.3
005	TF	TT304	—	277 (269.6)	-7.2	1.2	—	1119	—	-3.00	0.3
006	RF Center: TTRF2 r=2.00NM	TT305	—	—	-7.2	1.7	L	585	—	-3.00	0.3
007	TF	RW23	Y	230 (222.5)	-7.2	1.5	—	106	—	-3.00/51	0.3
008	TF	TT306	—	230 (222.5)	-7.2	6.5	—	—	—	—	1.0
009	TF	TT307	—	147 (139.9)	-7.2	4.9	—	—	—	—	1.0
010	TF	UTIBO	—	177 (169.9)	-7.2	27.6	—	4500	—	—	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
KAIHO	351857.83N / 1394642.43E	TTRF1	353106.44N / 1395349.88E
TT301	352828.24N / 1395606.98E	TTRF2	353212.62N / 1395225.48E
TT302	352909.99N / 1395647.99E		
TT303	353413.28N / 1395350.00E		
TT304	353412.77N / 1395224.45E		
TT305	353332.98N / 1395034.74E		
RW23	353226.15N / 1394919.61E		
TT306	352740.05N / 1394357.98E		
TT307	352356.01N / 1394749.03E		
UTIBO	345647.02N / 1395343.90E		

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

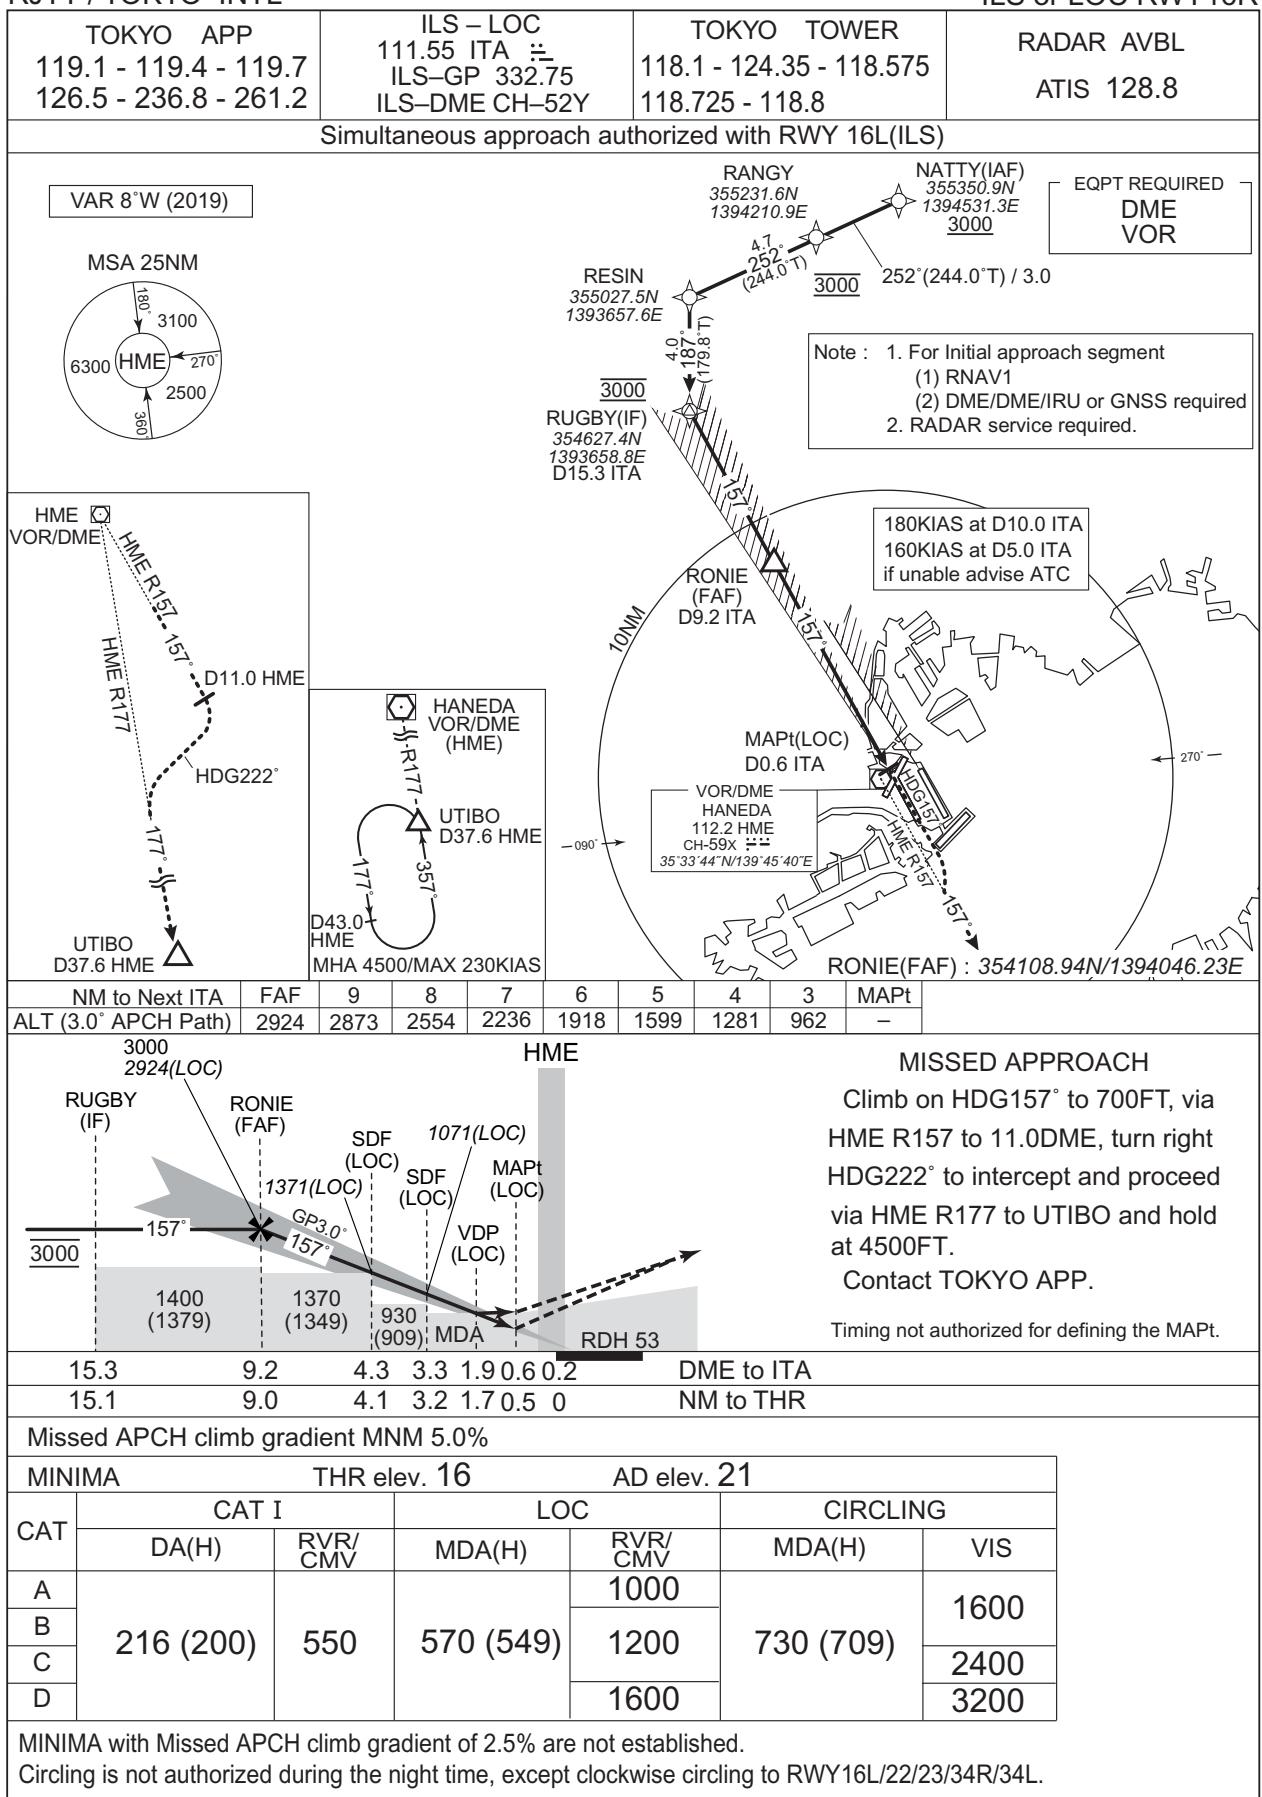

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

RNAV (GNSS) RWY16R





CHANGE : New PROC

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

ILS or LOC RWY16L

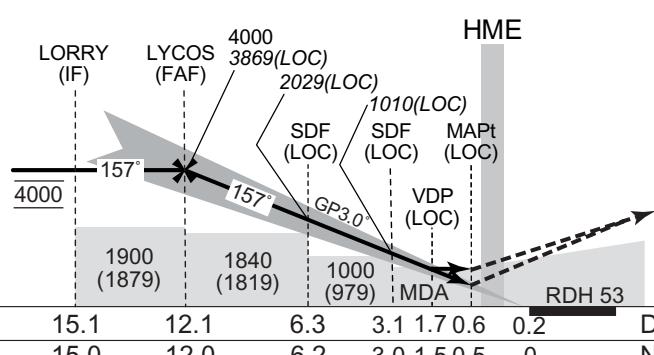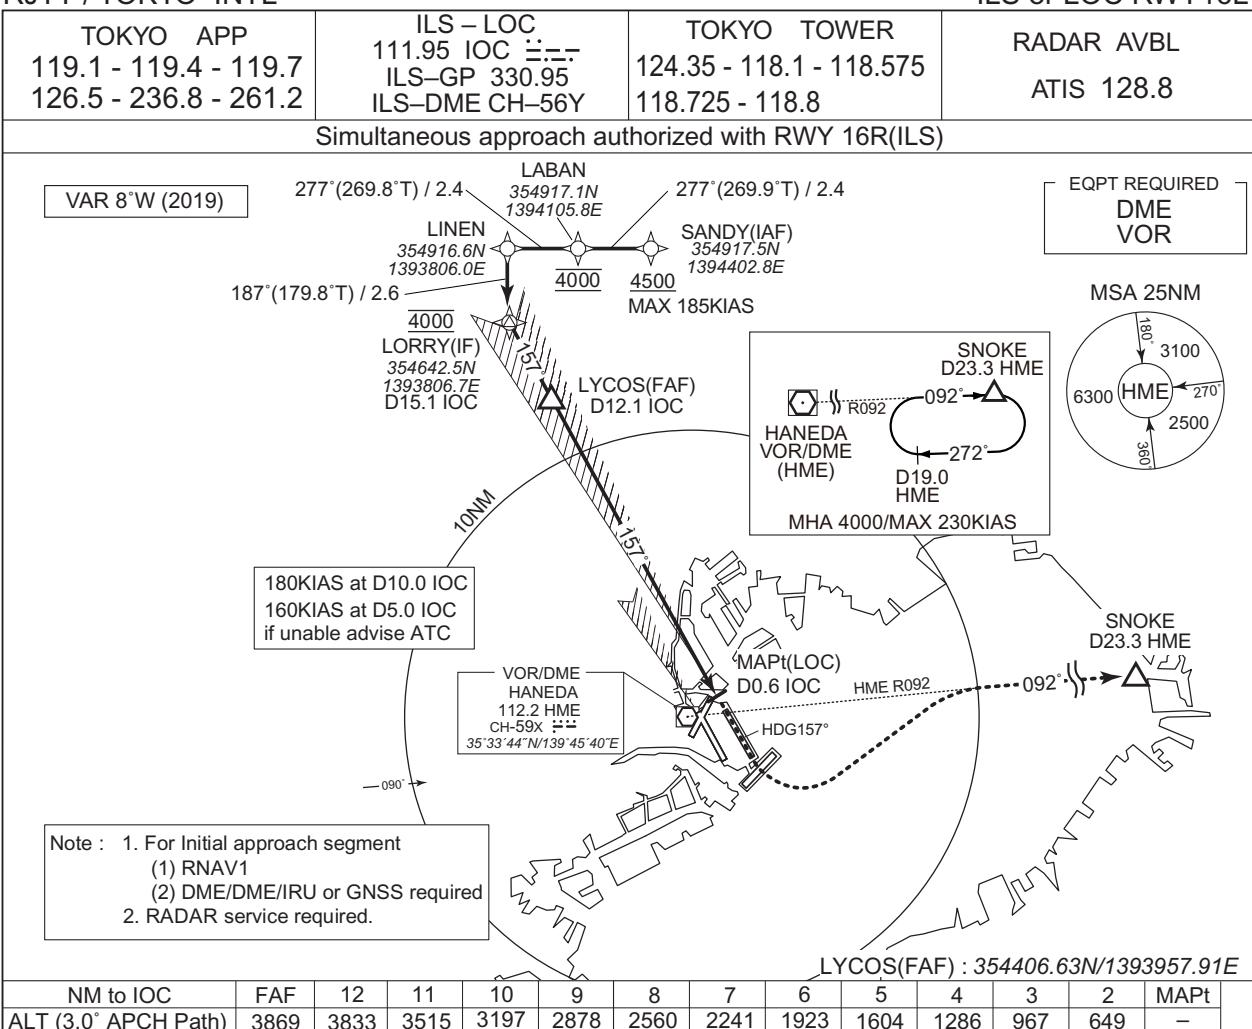

MISSED APPROACH

Climb on HDG157° to 700FT, turn left to intercept and proceed via HME R092 to SNOKE and hold at 4000FT.

Contact TOKYO APP.

No turn before IOC 0.6DME.
Timing not authorized for defining the MAPt.

Missed APCH climb gradient MNM 5.0%

MINIMA THR elev. 19 AD elev. 21

CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A				1000		
B				1200		
C	219 (200)	550	530 (509)		730 (709)	1600
D				1600		2400
						3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.



Circling is not authorized during the night time, except counterclockwise circling to RWY16R, clockwise circling to 22/23/34R/34L.

CHANGE : New PROC

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

VOR A (for RWY16R/RWY16L)

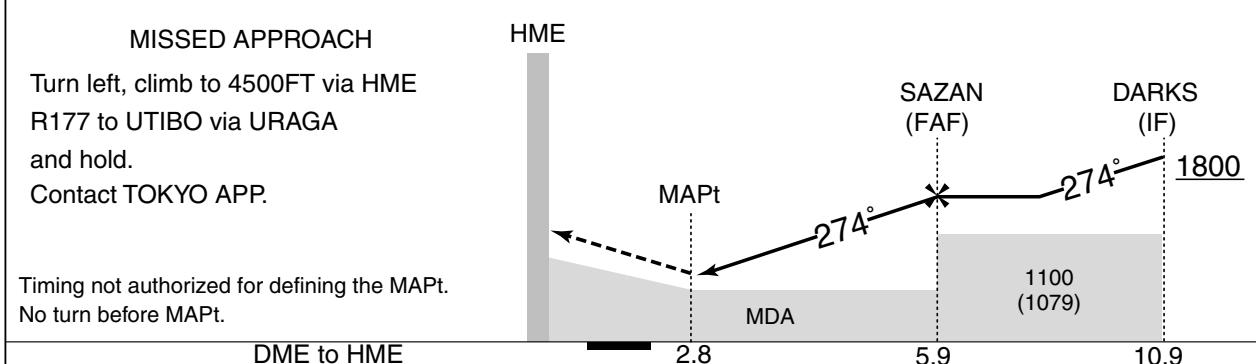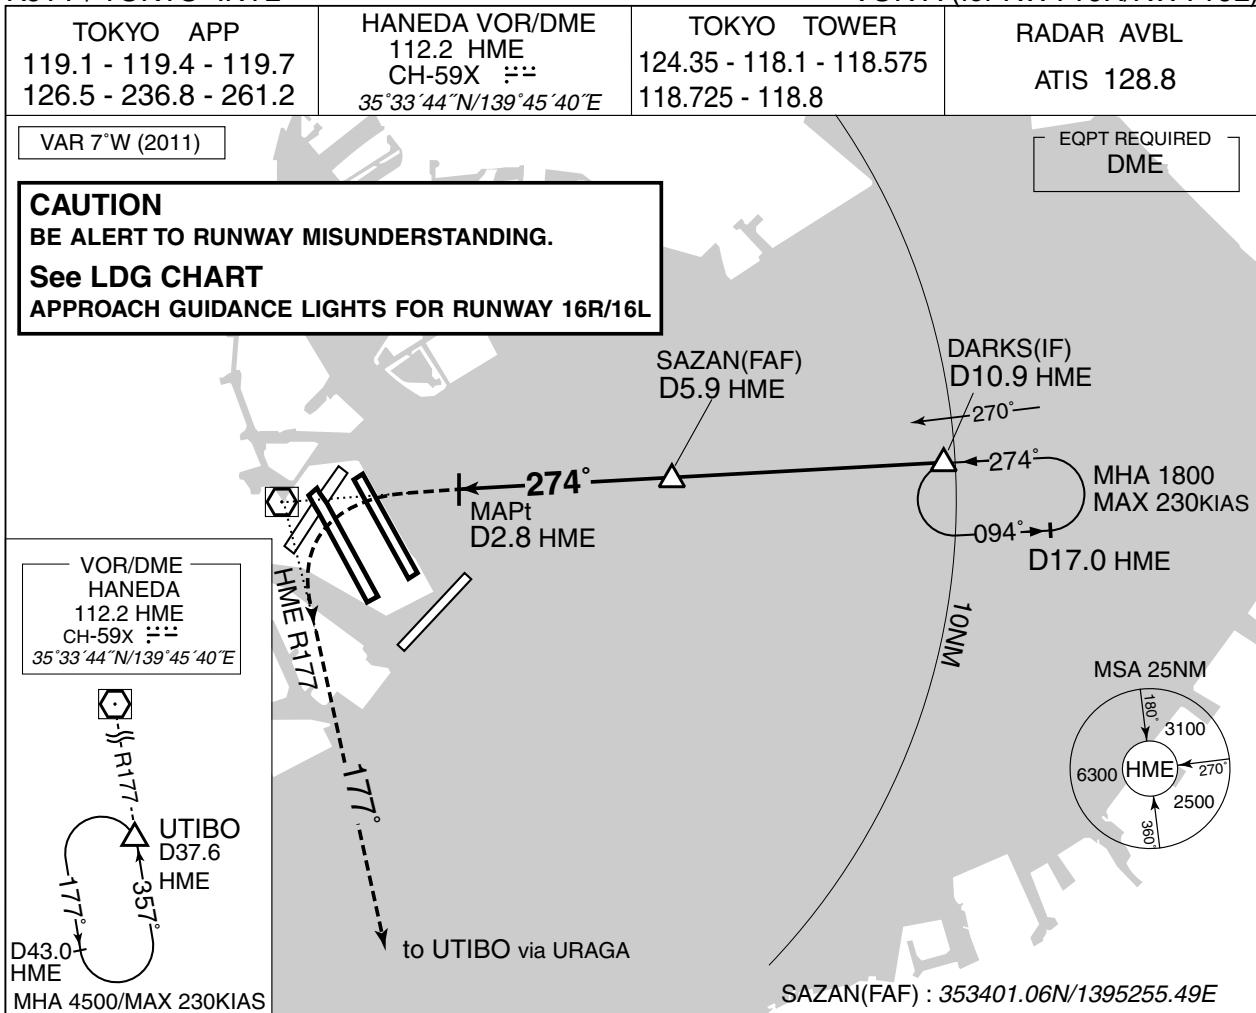

MINIMA		AD elev. 21	
CAT	CIRCLING		
	MDA(H)	VIS	
A		1600	
B	760 (739)		
C		2400	
D		3200	

INTENTIONALLY LEFT BLANK



RJTT / TOKYO INTL

HLDG PATTERN



CHANGE : SNOKE established

RJTT / TOKYO INTL

RNAV HLDG PATTERN

Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.		RNAV 1
1. Outbound Time / Distance 2. Speed → See Tabular Description.		
ARLON MHA 4000	BACON MHA 4000	<p>Map details: - VOR/DME SEKIYADO: 117.0 SYE CH-117X, 36°00'39"N/139°50'21"E, 100FT. Reference marker: ♦ - VOR/DME HANEDA: 112.2 HME CH-59X, 35°33'44"N/139°45'40"E, 100FT. Reference marker: ♦ - Points: NOVEL MHA 5000, GODIN MHA 8000, POLIX MHA 11000, DREAD, SCREW, NEURO, SNARE, SPINE, NYLON, COACH, SHAFT, CREAM, ARRON, MESSE, WEDGE, STING, AVEEY, SPINE. - Headings: Various headings like 084°, 197°, 264°, etc., are shown around the points. - Labels: "CHANGE : NEURO, NUMAN, SNARE, SPINE established" is written vertically on the left side of the map area.</p>
COACH MHA 4000	CREAM MHA 4000	
DREAD MHA 5000	MESSE MHA 6000	
SCREW MHA 4000	STING MHA 4000	
NUMAN MHA 4000	OSHIMA(XAC) MHA 5000	
NEURO MHA 4000		

RJTT / TOKYO INTL

RNAV HLDG PATTERN

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	ACORN	068 (060.8)	-7.5	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	AKSEL	039 (031.2)	-7.5	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.5	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	AVEEY	314 (306.1)	-7.5	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.5	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	345 (337.7)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	185 (177.8)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.5	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	DENNY	167 (159.9)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	DREAD	191 (183.1)	-7.5	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	GODIN	197 (189.2)	-7.5	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	MESSE	246 (238.8)	-7.5	1.0(-14000) 1.5(+14001)	—	L	6000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	290 (282.9)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.5	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NUMAN	360 (352.5)	-7.5	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	357 (350.0)	-7.5	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	POLIX	310 (302.3)	-7.5	1.0(-14000) 1.5(+14001)	—	L	11000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SCREW	203 (195.2)	-7.5	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SPINE	348 (340.6)	-7.5	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	STING	067 (059.6)	-7.5	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.5	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	XAC	098 (090.3)	-7.5	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : NEURO, NUMAN, SNARE, SPINE established

RJTT / TOKYO INTL

RNAV HLDG PATTERN

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ACORN	345028.8N / 1394146.7E	MESSE	351100.8N / 1402214.7E
AKSEL	344039.5N / 1395126.9E	NEURO	355727.6N / 1395441.3E
ARLON	351525.3N / 1395859.8E	NOVEL	362106.9N / 1400004.9E
AVEEY	344155.9N / 1402158.0E	NUMAN	354714.4N / 1401204.9E
BACON	353155.0N / 1401215.1E	NYLON	354018.5N / 1400919.9E
CIVIC	350840.6N / 1402552.1E	POLIX	361237.1N / 1402622.5E
COACH	353736.0N / 1401231.5E	SCREW	360301.2N / 1395400.4E
COLOR	360116.3N / 1401219.8E	SHAFT	352227.4N / 1401313.3E
CREAM	351743.4N / 1400612.4E	SNARE	354731.1N / 1395238.1E
DENNY	354828.8N / 1400556.4E	SPINE	354213.5N / 1401125.8E
DREAD	360359.2N / 1395856.9E	STING	345157.9N / 1401453.4E
GODIN	362425.3N / 1401655.9E	WEDGE	350900.4N / 1395846.5E
KAIHO	351857.8N / 1394642.4E	XAC	344244.1N / 1392450.5E

CHANGE : NEURO, NUMAN, SNARE, SPINE established

RJTT / TOKYO INTL

Visual REP



RJTT / TOKYO INTL

Visual REP


Call sign	BRG/DIST from ARP	Remarks
品川 Shinagawa	353°/5.0NM	JR駅 JR Station
洗足 Senzoku	311°/5.2NM	池 Pond
扇島 Ohgijima	225°/5.9NM	扇島の西端 West edge of the island
大師橋 Daishibashi	257°/1.9NM	橋 Bridge
六郷橋 Rokugobashi	261°/3.6NM	橋 Bridge
新川崎 Shinkawasaki	276°/5.3NM	JR駅 JR Station
丸子橋 Marukobashi	296°/5.7NM	橋 Bridge
渋谷 Shibuya	336°/7.3NM	JR駅 JR Station
ベイブリッジ Bay Bridge	227°/8.0NM	(首都高速湾岸線)橋 Bridge
多摩川大橋 Tamagawaohashi	280°/4.2NM	橋 Bridge

CHANGE: MATSUDO abolished. TAMAGAWAOHASHI established.

RJTT / TOKYO INTL

Minimum Vectoring Altitude CHART

VAR 8°W (2019)

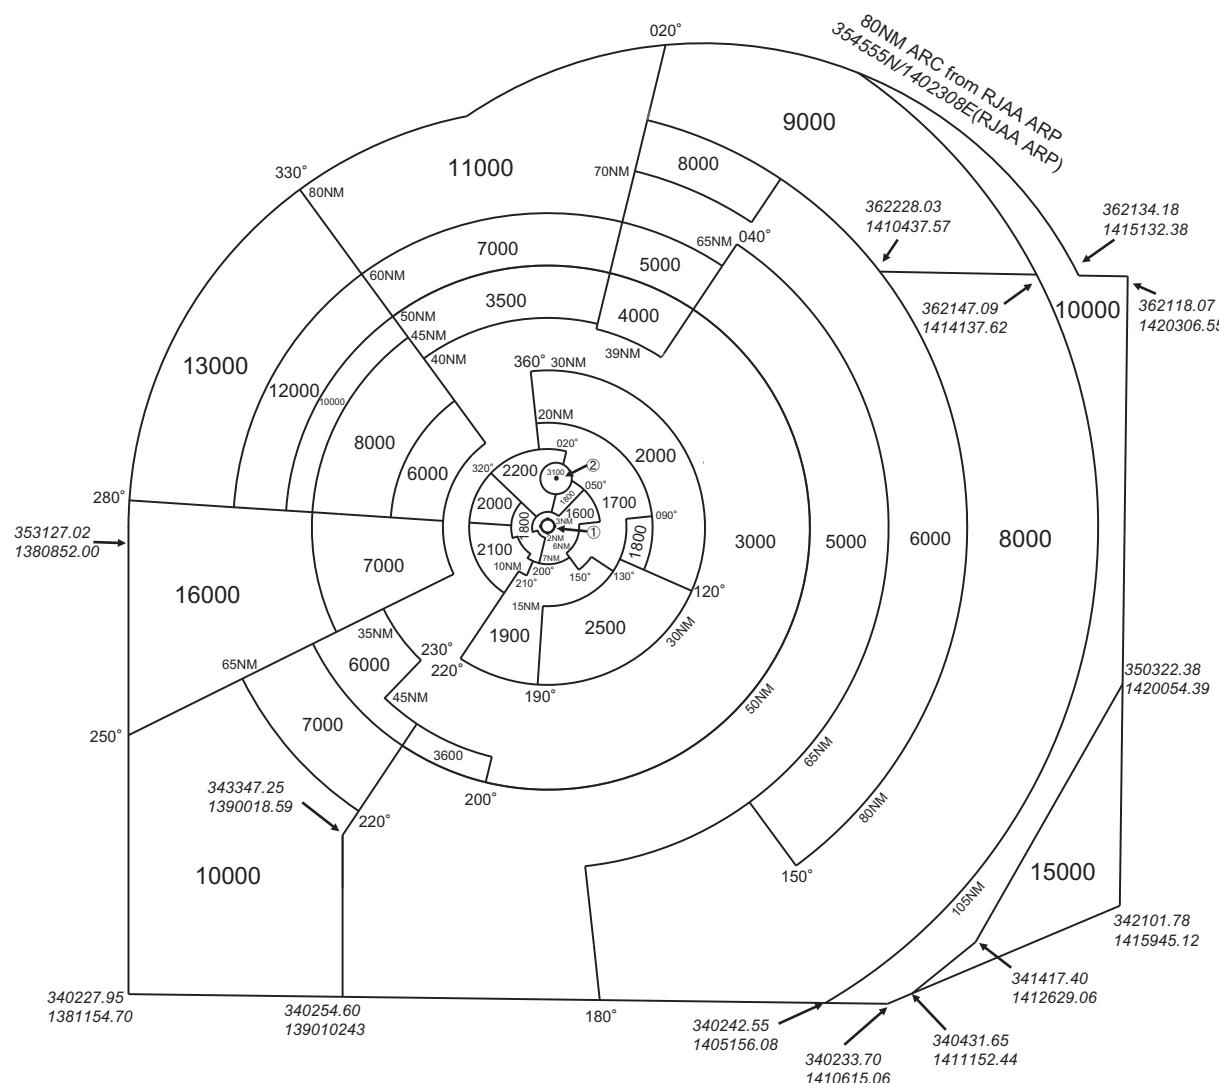

①CENTER : 353312N/1394652E(RJTT ARP)
②354236N/1394839E RADIUS : 3NM

CHANGE : Update



PAPI:

RWY 16L-3.0°, MEHT 19.9m (65ft)
412m inside from THR.
RWY34R-3.0°, MEHT 20.0m (66ft)
416m inside from THR.
RWY16R-3.0°, MEHT 19.9m (65ft)
432m inside from THR.
RWY34L-3.0°, MEHT 20.0m (66ft)
449m inside from THR.
RWY04-3.0°, MEHT 18.5m (61ft)
369m inside from THR.
RWY 22-3.0°, MEHT 19.5m (63ft)
438m inside from THR.
RWY 23-3.0°, MEHT 20.0m (66ft)
452m inside from THR.

RWY Grooving :

RWY 16L/34R 3360m X 40m
RWY 16R/34L 3000m X 40m
RWY 04/22 2500m X 40m
RWY 05/23 2500m X 40m

INTENTIONALLY LEFT BLANK

Attachment-1

