


RJOA / HIROSHIMA

AD CHART

CHANGE : Spot L, C, R abolished.

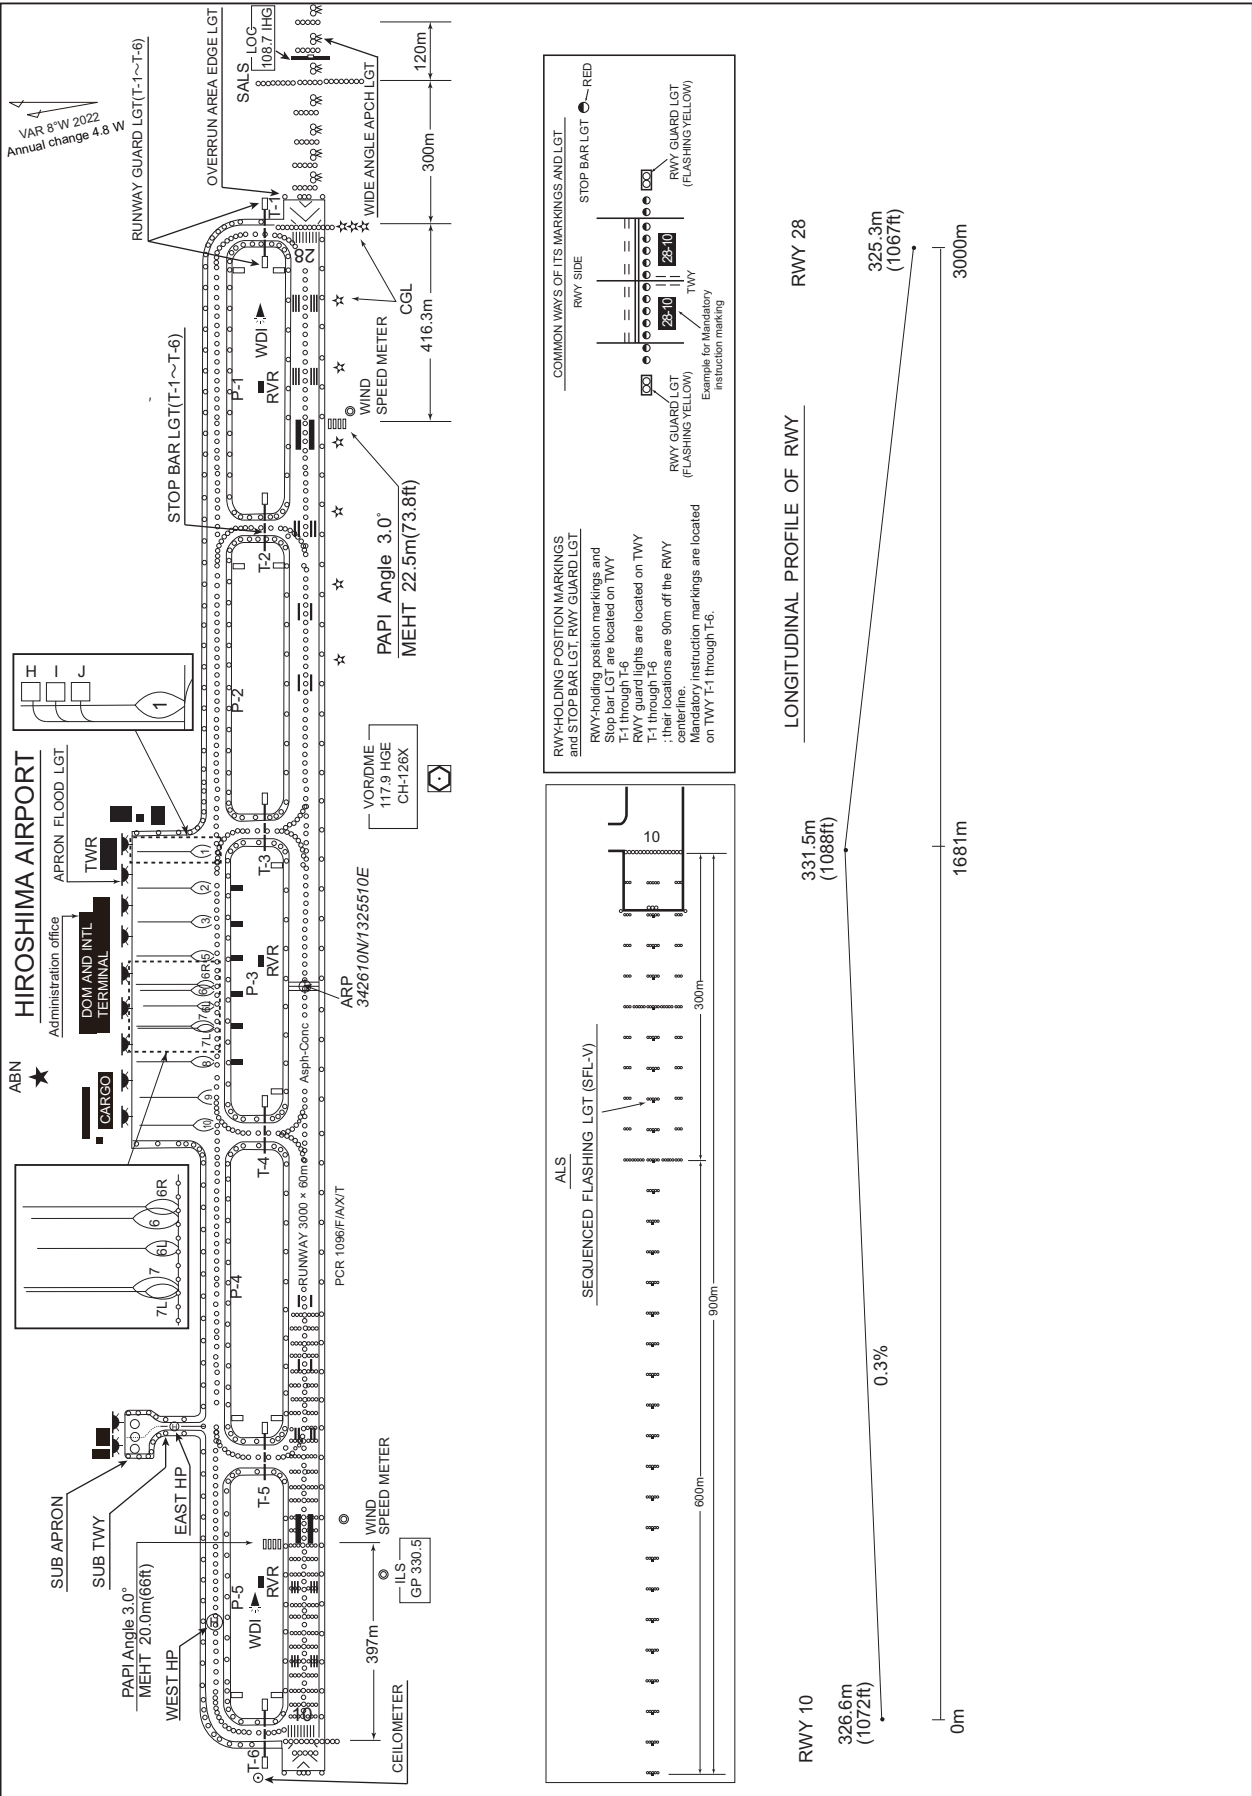

INTENTIONALLY LEFT BLANK

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

HIROSHIMA AIRPORT
RWY : 10/28

HIROSHIMA AIRPORT
RWY : 10/28

DECLARED DISTANCES	
RWY 10	RWY 28
3000m TAKE OFF RUN AVAILABLE	3000m
3000m TAKE OFF DISTANCE AVAILABLE	3000m
3000m ACCELERATE STOP DISTANCE AVAILABLE	3000m
3000m LANDING DISTANCE AVAILABLE	3000m

SLOPE 1.2%

1072

1067

9842

0

16000

15000

14000

13000

12000

11000

9842

0

10000

11000

12000

13000

14000

15000

16000

17000

18000

19000

20000

21000

22000

23000

24000

25000

26000

27000

28000

29000

30000

31000

32000

33000

34000

35000

36000

37000

38000

39000

40000

41000

42000

43000

44000

45000

46000

47000

48000

49000

50000

51000

52000

53000

54000

55000

56000

57000

58000

59000

60000

61000

62000

63000

64000

65000

66000

67000

68000

69000

70000

71000

72000

73000

74000

75000

76000

77000

78000

79000

80000

81000

82000

83000

84000

85000

86000

87000

88000

89000

90000

91000

92000

93000

94000

95000

96000

97000

98000

99000

100000

101000

102000

103000

104000

105000

106000

107000

108000

109000

110000

111000

112000

113000

114000

115000

116000

117000

118000

119000

120000

121000

122000

123000

124000

125000

126000

127000

128000

129000

130000

131000

132000

133000

134000

135000

136000

137000

138000

139000

140000

141000

142000

143000

144000

145000

146000

147000

148000

149000

150000

151000

152000

153000

154000

155000

156000

157000

158000

159000

160000

161000

162000

163000

164000

165000

166000

167000

168000

169000

170000

171000

172000

173000

174000

175000

176000

177000

178000

179000

180000

181000

182000

183000

184000

185000

186000

187000

188000

189000

190000

191000

192000

193000

194000

195000

196000

197000

198000

199000

200000

201000

202000

203000

204000

205000

206000



207000

208000

209000

210000

21100

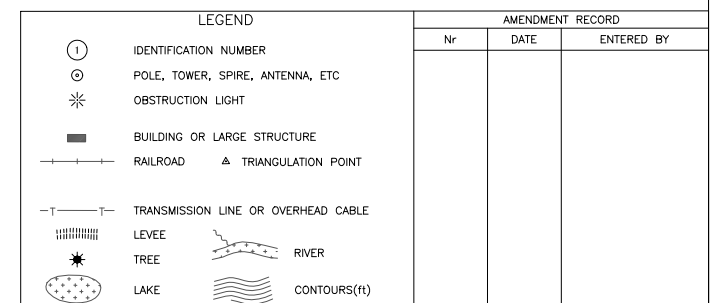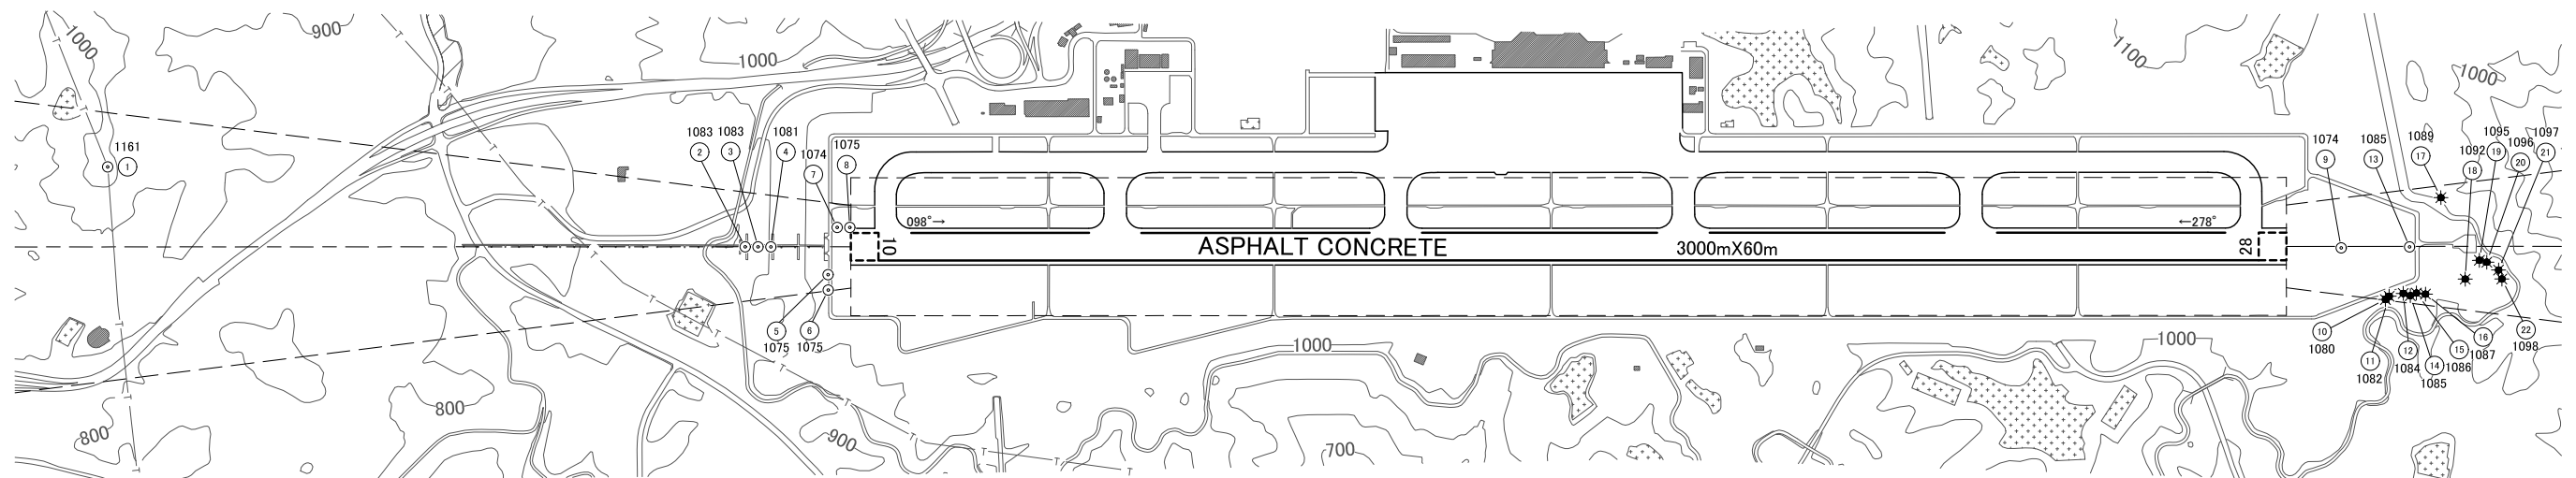


11/8/22

AERODROME OBSTACLE CHART-ICAO
TYPE B (OPERATING LIMITATIONS)

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

AERODROME ELEVATION 1086ft ARP

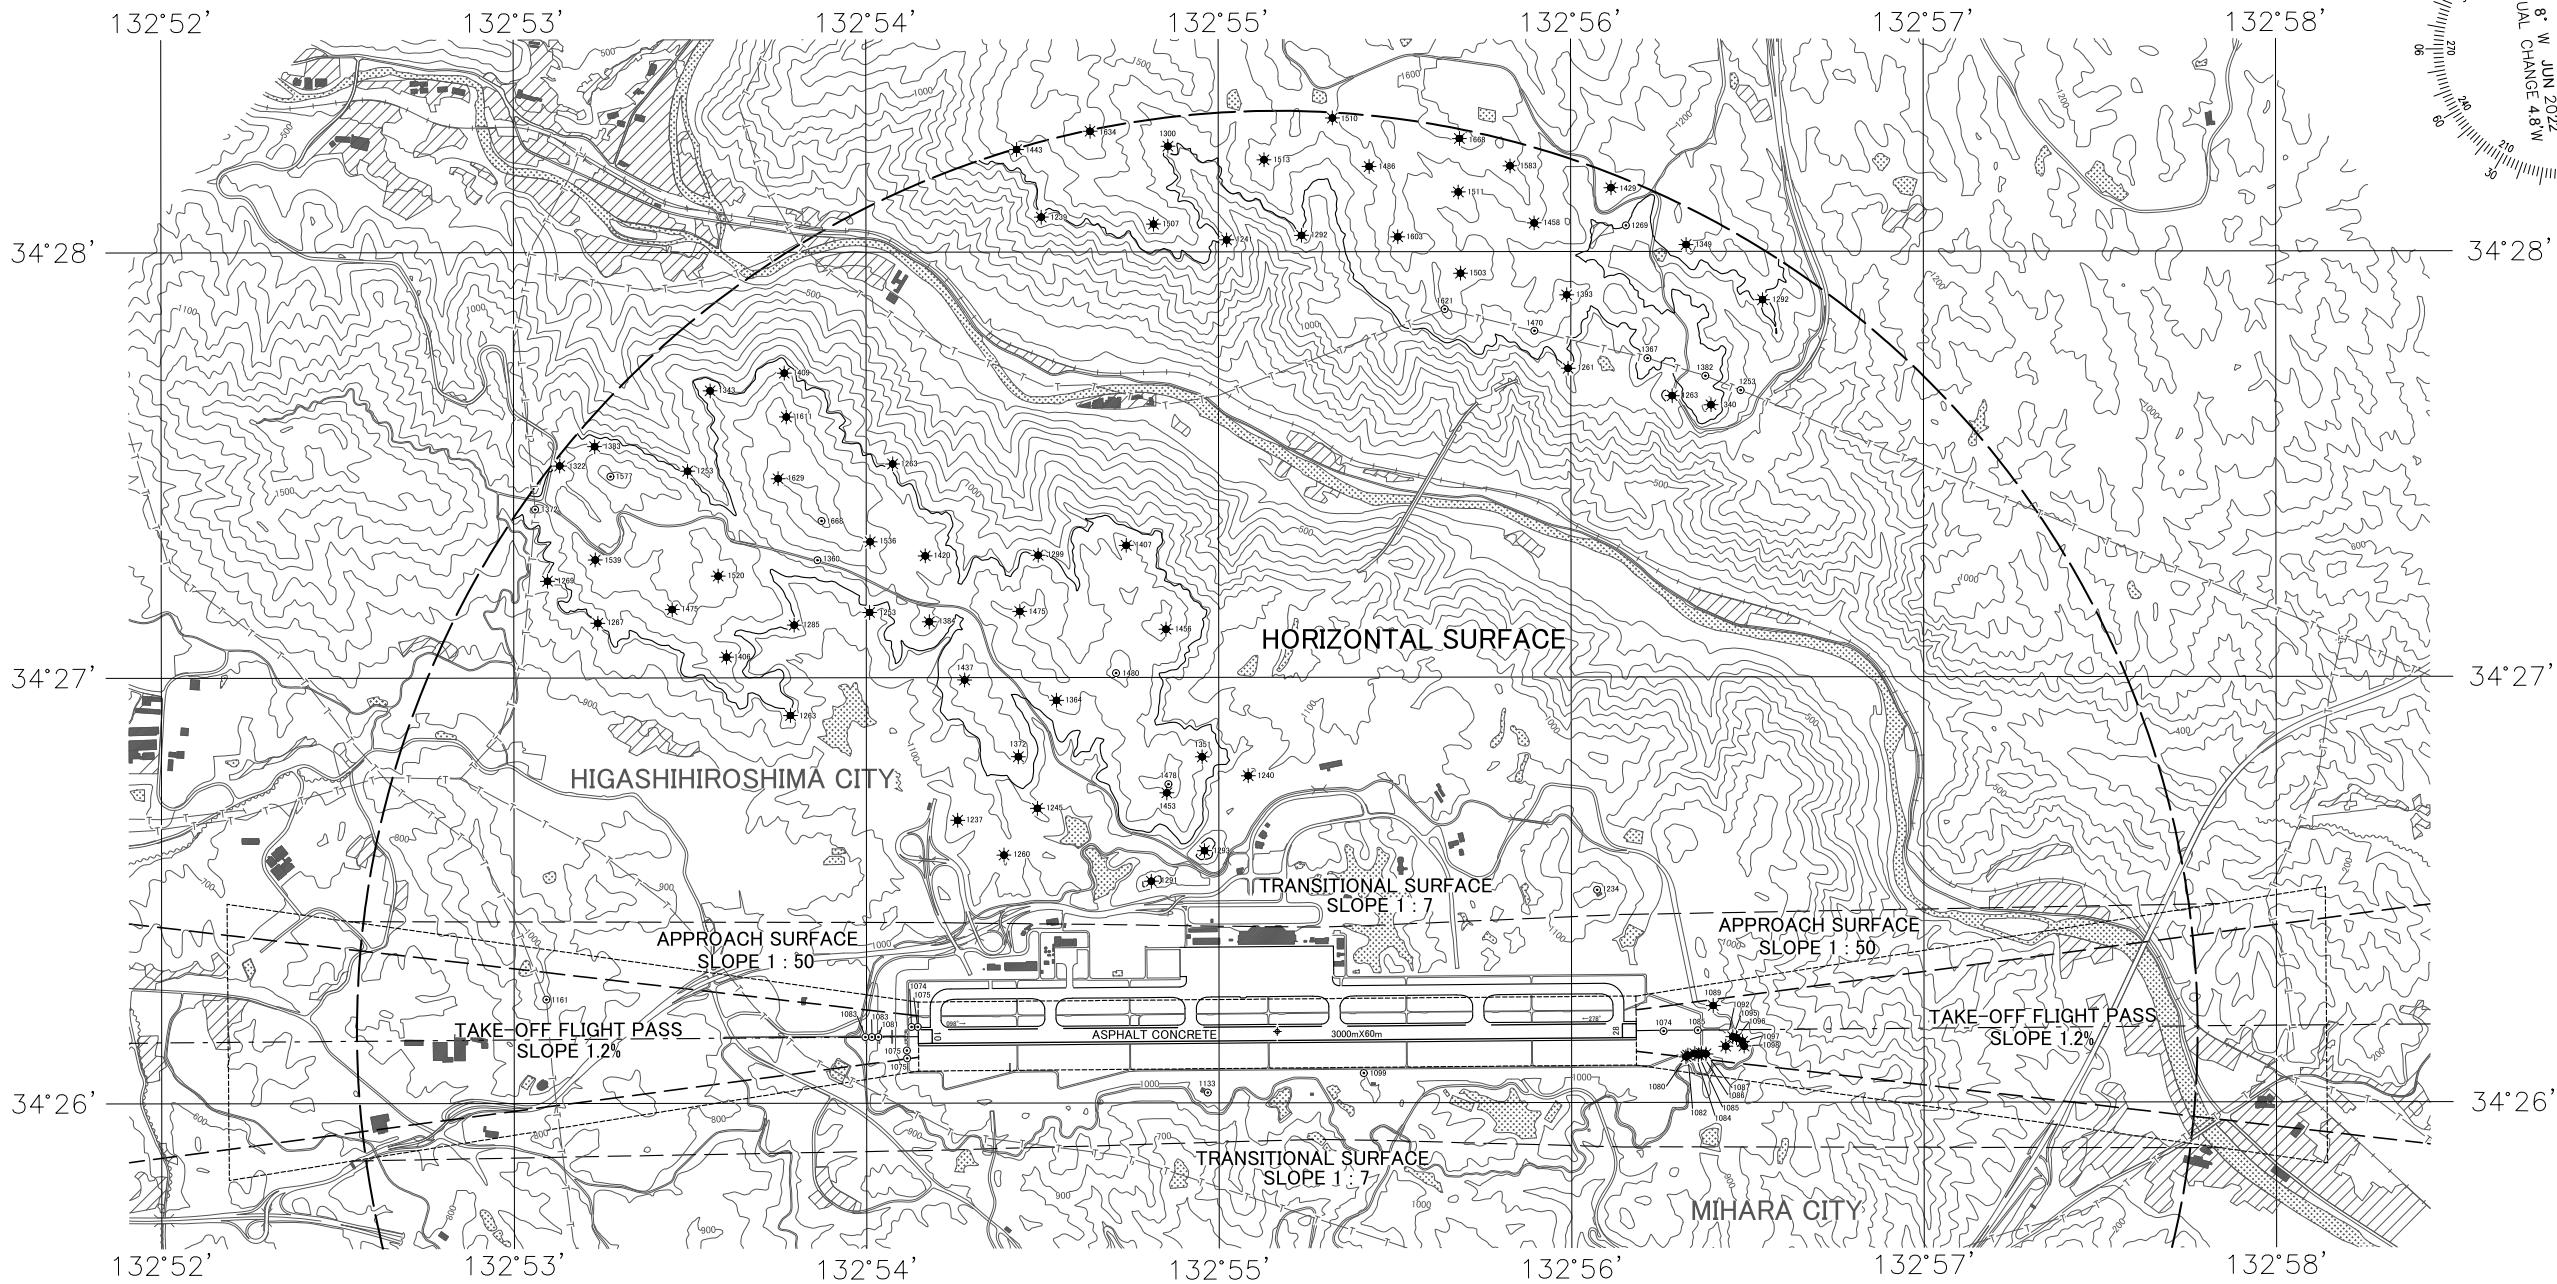


LEGEND	AMENDMENT RECORD		
	NO	DATE	ENTERED BY
✦ AERODROME REFERENCE POINT 54°26'10"N 132°55'10"E			
⊙ POLE, TOWER, SPIRE, ANTENNA, ETC			
★ AERONAUTICAL GROUND LIGHT			
✧ OBSTRUCTION LIGHT			
■ BUILDING OR LARGE STRUCTURE			
—+—+— TERRAIN PENETRATING OBSTACLE PLANE			
—T—T— TRANSMISSION LINE OR OVERHEAD CABLE			
— LEVEE			
✧ TREE			
⊙ LAKE			
— RIVER			
— CONTOURS(11)			

CHANGE : VAR.

PRECISION APPROACH TERRAIN CHART-ICAO

PRECISION APPROACH TERRAIN CHART

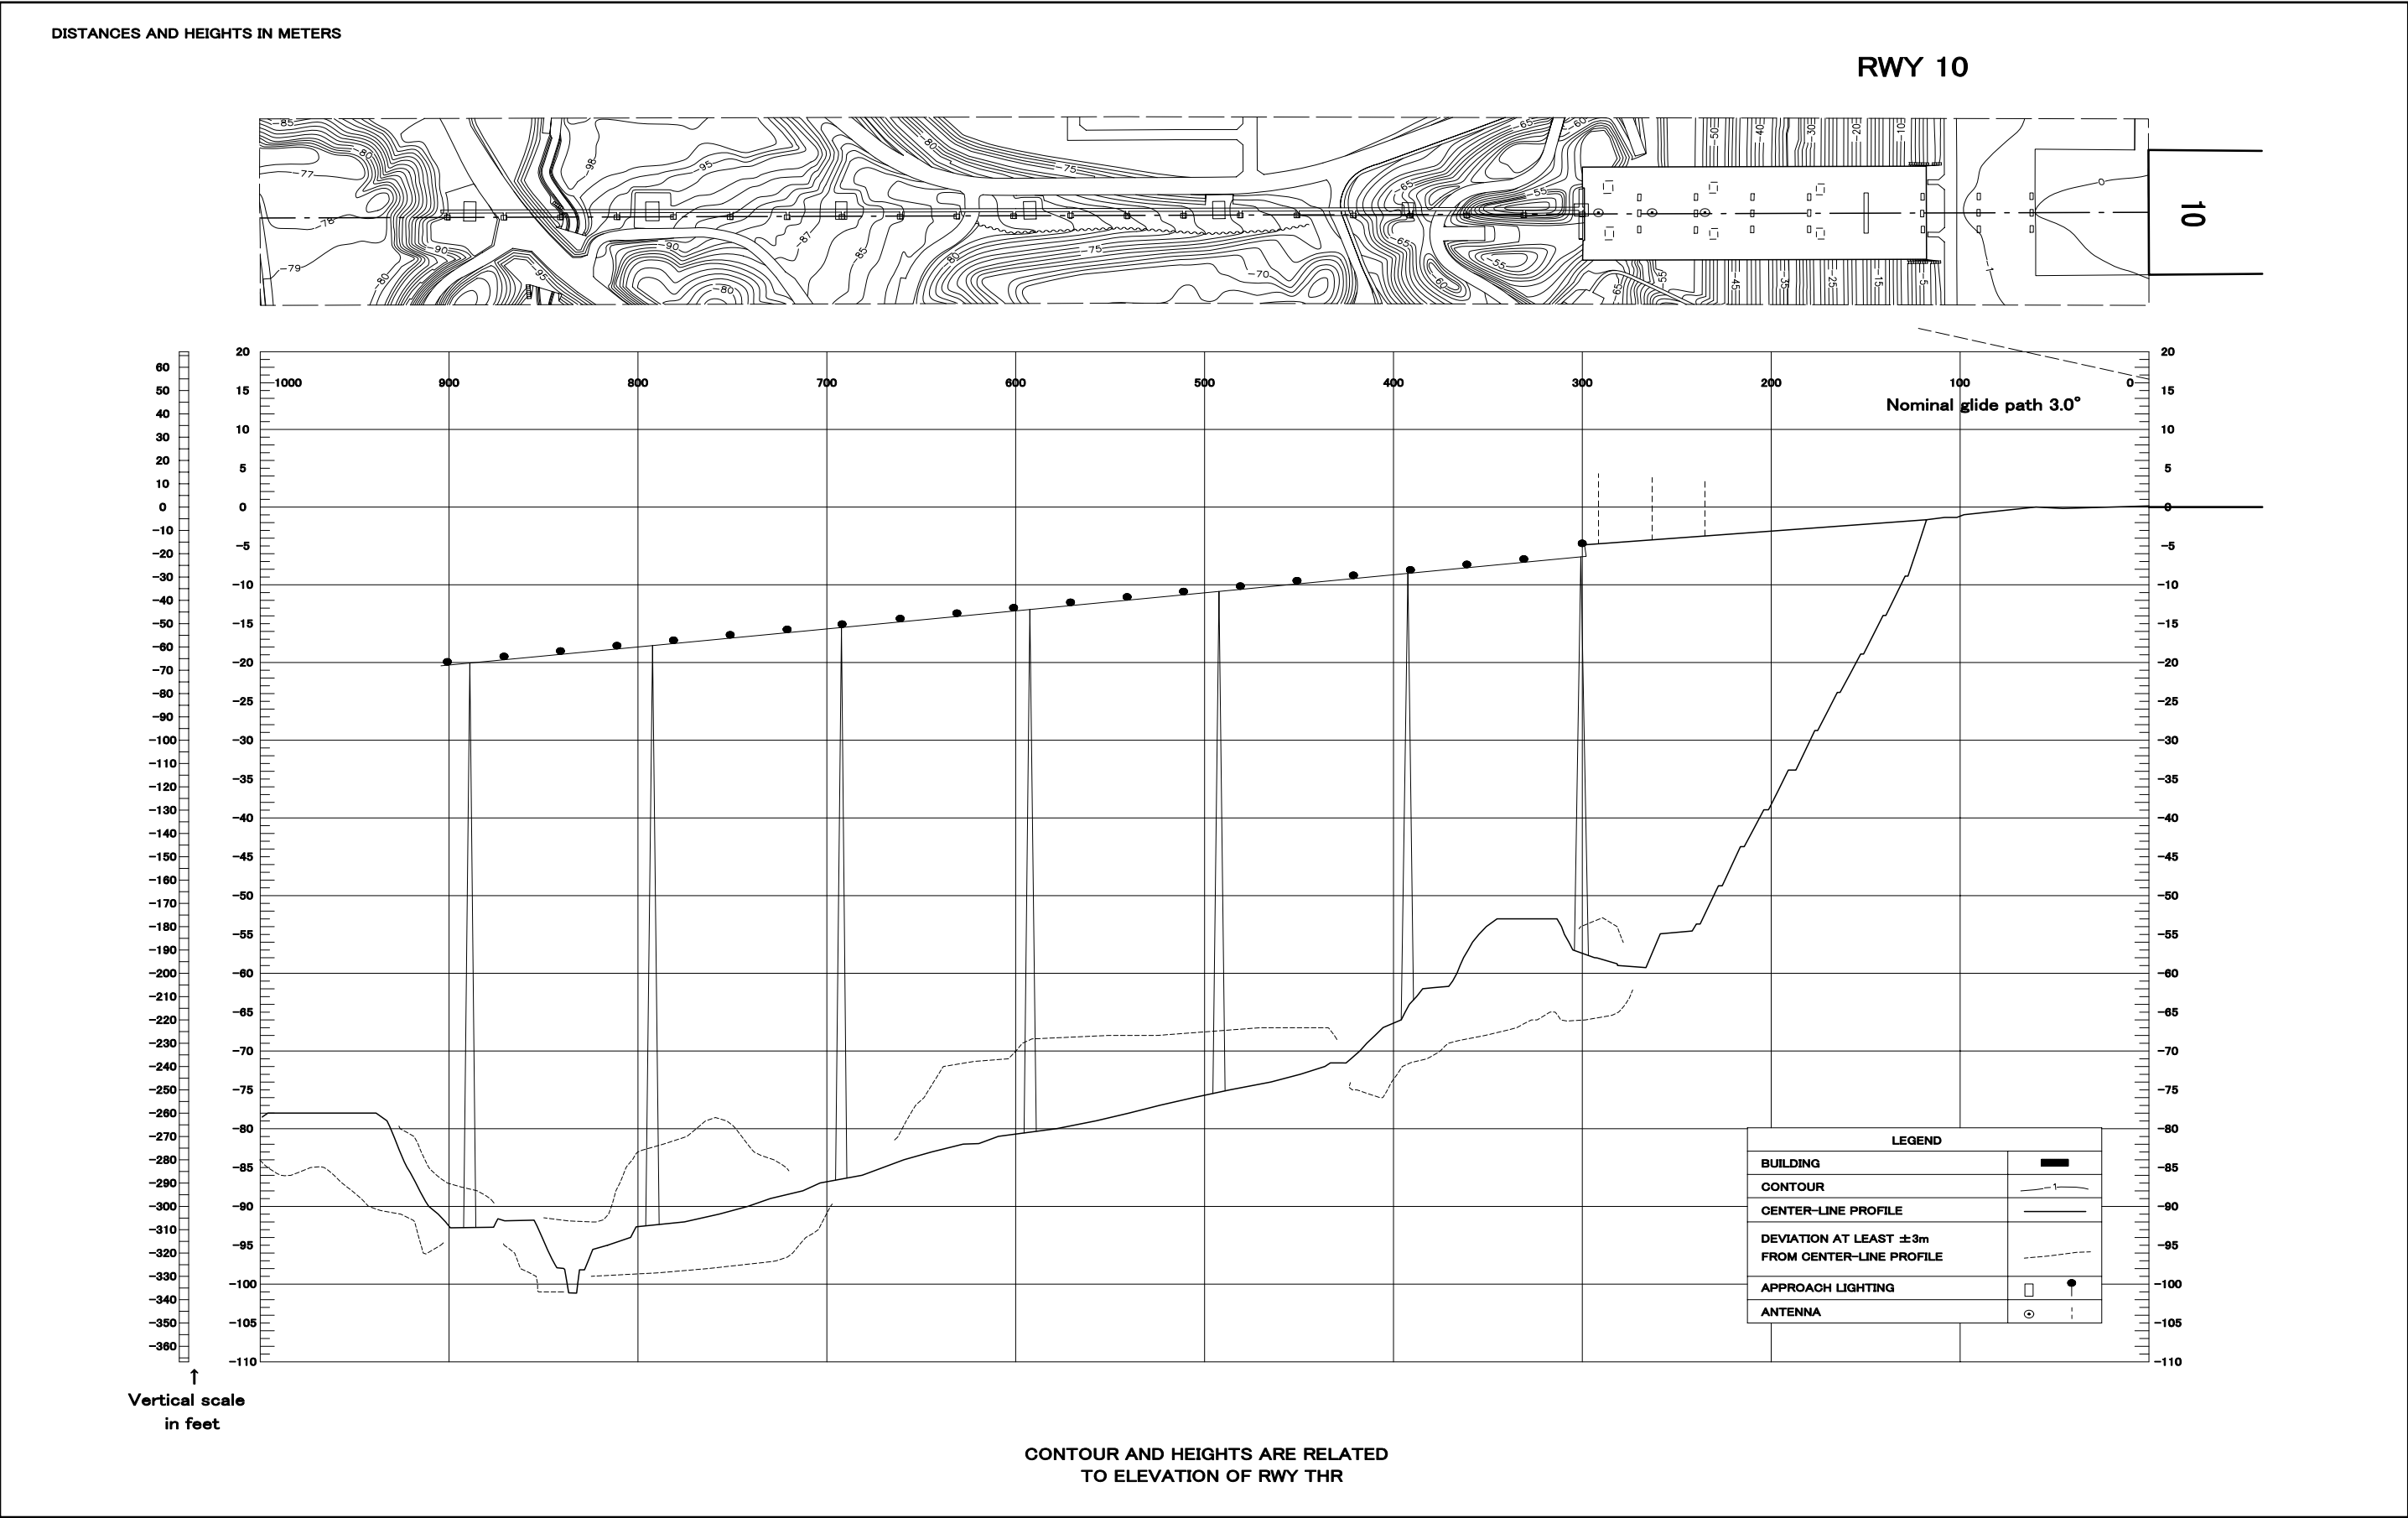

STANDARD DEPARTURE CHART - INSTRUMENT


RJOA / HIROSHIMA

SID

HONGO REVERSAL FOUR DEPARTURE

RWY 10 : Climb RWY HDG to HGE 4.6DME(4.0NM FM DER), turn left....,
RWY 28 : Climb on HDG 271° to HGE 5.0DME(4.0NM FM DER), turn right....,
....direct to HGE VOR/DME. Cross HGE VOR/DME at or above 5000FT.

Note : RWY10 : 3.8% climb gradient required up to 2300FT.
OBST ALT 2002FT located at 088°/5.7NM FM DER.
RWY28 : 3.8% climb gradient required up to 1600FT.
OBST ALT 2559FT located at 338°/7.7NM FM DER.

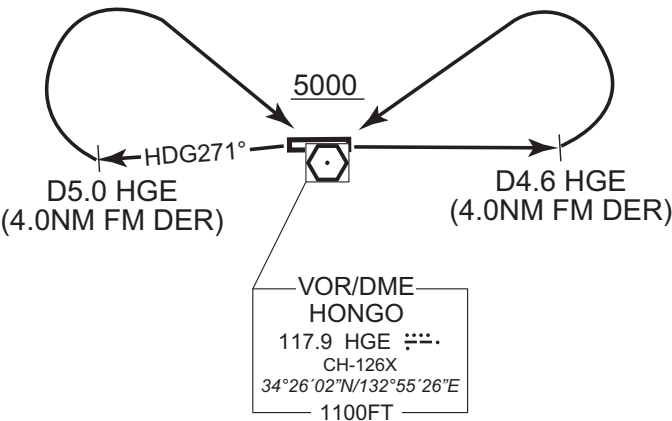

CHANGE : PROC renamed. PROC course. Note RWY10(OBST). Note RWY28(Climb gradient, OBST).

STANDARD DEPARTURE CHART - INSTRUMENT


RJOA / HIROSHIMA

RNAV SID

MARCO TWO DEPARTURE

RNP1

Note GNSS required.

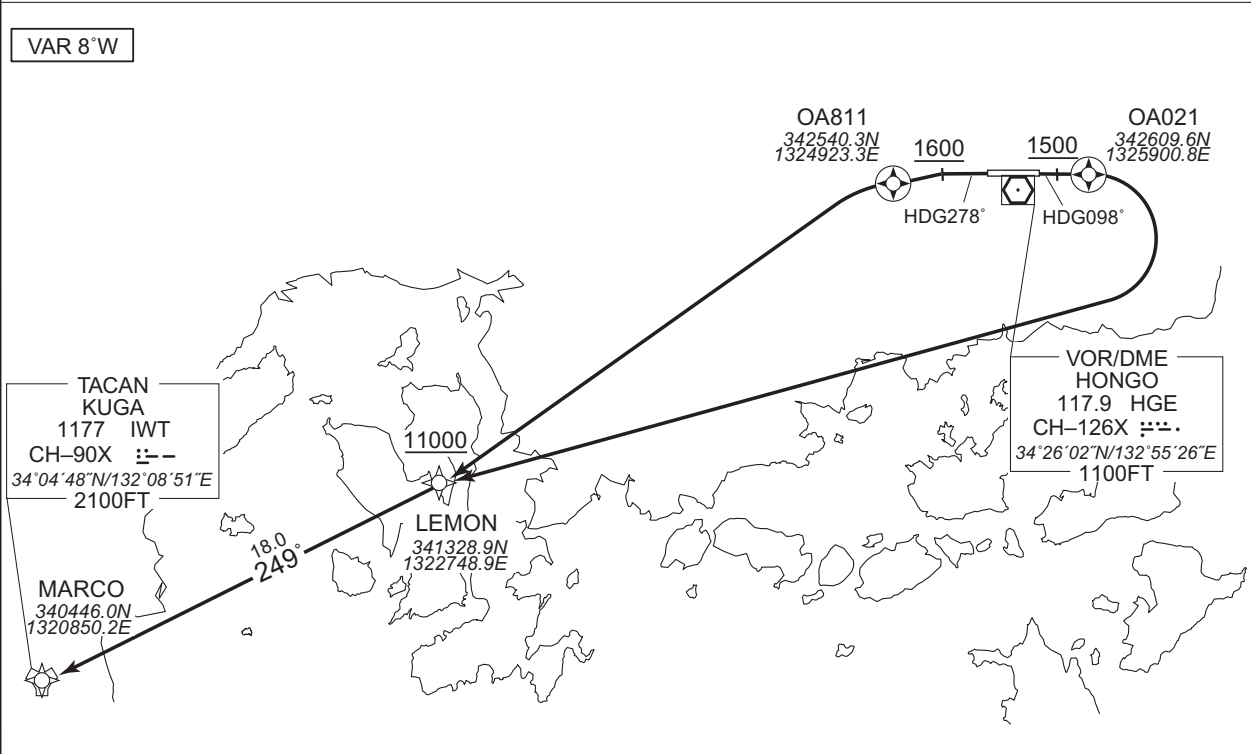

RWY10 : Climb on HDG098° at or above 1500FT, direct to OA021, turn right direct to LEMON at or above 11000FT, to MARCO.

RWY28 : Climb on HDG278° at or above 1600FT, direct to OA811, turn left direct to LEMON at or above 11000FT, to MARCO.

NOTE RWY10 : 5.0% climb gradient required up to 1500FT.
RWY28 : 3.6% climb gradient required up to 1600FT.

RWY10											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	098 (090.0)	-8.1	—	—	+1500	—	—	RNP1
002	DF	OA021	Y	—	-8.1	—	—	—	—	—	RNP1
003	DF	LEMON	—	—	-8.1	—	R	+11000	—	—	RNP1
004	TF	MARCO	—	249 (241.1)	-8.1	18.0	—	—	—	—	RNP1


RWY28											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	278 (270.0)	-8.1	—	—	+1600	—	—	RNP1
002	DF	OA811	Y	—	-8.1	—	—	—	—	—	RNP1
003	DF	LEMON	—	—	-8.1	—	L	+11000	—	—	RNP1
004	TF	MARCO	—	249 (241.1)	-8.1	18.0	—	—	—	—	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART - INSTRUMENT

RJOA / HIROSHIMA

RNAV SID and TRANSITION

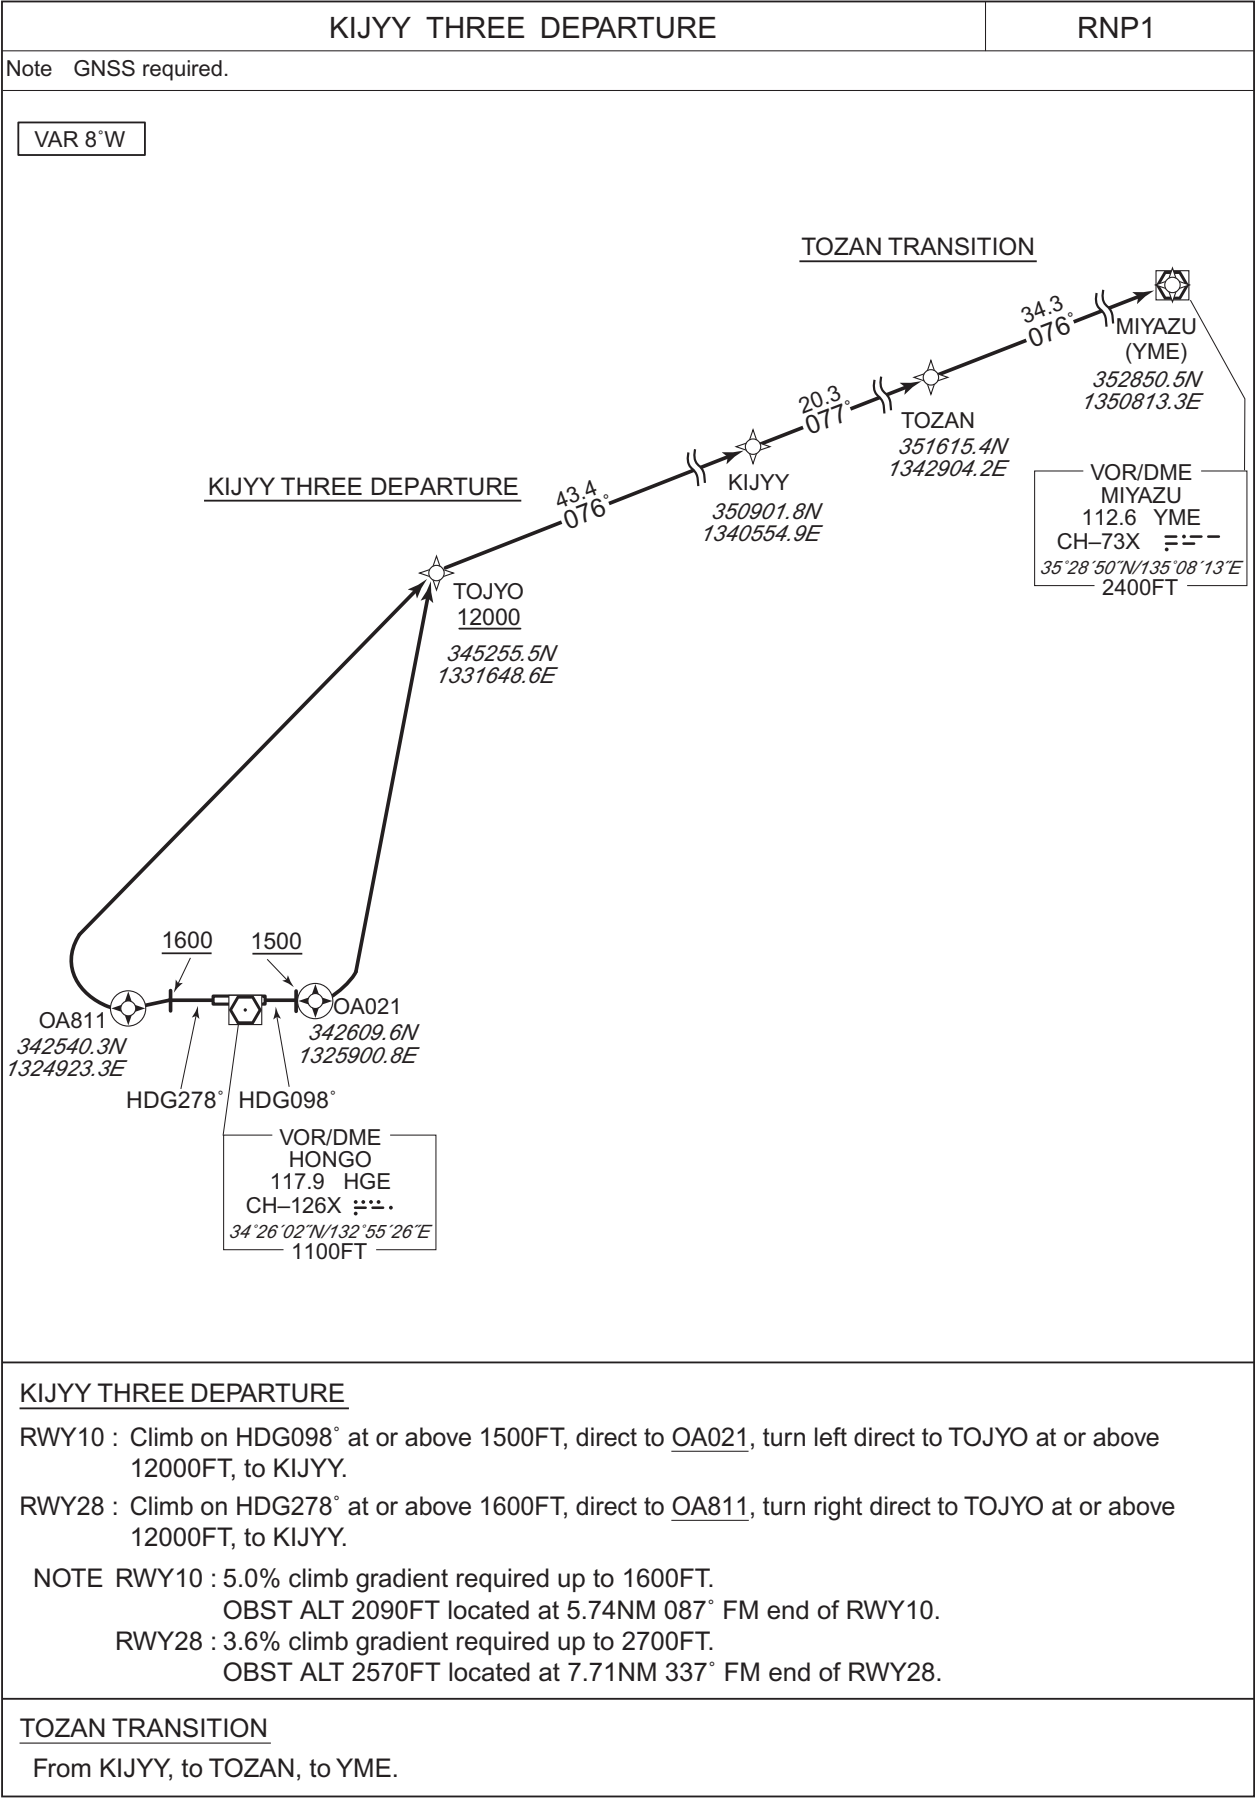

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART - INSTRUMENT

RJOA / HIROSHIMA

RNAV SID and TRANSITION

KIJYY THREE DEPARTURE

RWY10

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	098 (090.0)	-8.1	-	-	+1500	-	-	RNP1
002	DF	OA021	Y	-	-8.1	-	-	-	-	-	RNP1
003	DF	TOJYO	-	-	-8.1	-	L	+12000	-	-	RNP1
004	TF	KIJYY	-	076 (067.9)	-8.1	43.4	-	-	-	-	RNP1

RWY28

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	278 (270.0)	-8.1	-	-	+1600	-	-	RNP1
002	DF	OA811	Y	-	-8.1	-	-	-	-	-	RNP1
003	DF	TOJYO	-	-	-8.1	-	R	+12000	-	-	RNP1
004	TF	KIJYY	-	076 (067.9)	-8.1	43.4	-	-	-	-	RNP1

TOZAN TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIJYY	-	-	-8.1	-	-	-	-	-	RNP1
002	TF	TOZAN	-	077 (069.0)	-8.1	20.3	-	-	-	-	RNP1
003	TF	YME	-	076 (068.3)	-8.1	34.3	-	-	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

RJOA / HIROSHIMA
RNAV SID and TRANSITION

BOLIG TWO DEPARTURE MIDER TRANSITION	RNP1
Note GNSS required.	
<div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 10px;">VAR 8°W</div> <div style="text-align: center; margin-bottom: 10px;"> <u>MIDER TRANSITION</u> </div> <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p style="text-align: center;"><u>BOLIG TWO DEPARTURE</u></p> </div> <div style="width: 50%;"> <p style="text-align: center;"><u>MIDER TRANSITION</u></p> <p>From BOLIG, to IKUNO, to MIDER.</p> </div> </div>	
<p><u>BOLIG TWO DEPARTURE</u></p> <p>RWY10 : Climb on HDG098° at or above 1500FT, direct to <u>OA021</u>, turn left direct to TOJYO at or above 12000FT, to BOLIG.</p> <p>RWY28 : Climb on HDG278° at or above 1600FT, direct to <u>OA811</u>, turn right direct to TOJYO at or above 12000FT, to BOLIG.</p> <p>NOTE RWY10 : 5.0% climb gradient required up to 1600FT. OBST ALT 2090FT located at 5.74NM 087° FM end of RWY10. RWY28 : 3.6% climb gradient required up to 2700FT. OBST ALT 2570FT located at 7.71NM 337° FM end of RWY28.</p>	
<p><u>MIDER TRANSITION</u></p> <p>From BOLIG, to IKUNO, to MIDER.</p>	

CHANGE : PROC renamed. Note. Navigation Specification.

STANDARD DEPARTURE CHART - INSTRUMENT

RJOA / HIROSHIMA

RNAV SID and TRANSITION

BOLIG TWO DEPARTURE

RWY10

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	098 (090.0)	-8.2	—	—	+1500	—	—	RNP1
002	DF	OA021	Y	—	-8.2	—	—	—	—	—	RNP1
003	DF	TOJYO	—	—	-8.2	—	L	+12000	—	—	RNP1
004	TF	BOLIG	—	084 (075.7)	-8.2	45.4	—	—	—	—	RNP1

RWY28


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	278 (270.0)	-8.2	—	—	+1600	—	—	RNP1
002	DF	OA811	Y	—	-8.2	—	—	—	—	—	RNP1
003	DF	TOJYO	—	—	-8.2	—	R	+12000	—	—	RNP1
004	TF	BOLIG	—	084 (075.7)	-8.2	45.4	—	—	—	—	RNP1

MIDER TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	BOLIG	—	—	-8.2	—	—	—	—	—	RNP1
002	TF	IKUNO	—	084 (076.2)	-8.2	34.4	—	—	—	—	RNP1
003	TF	MIDER	—	111 (102.8)	-8.2	48.9	—	—	—	—	RNP1

CHANGE : PROC renamed. Navigation Specification.

STANDARD DEPARTURE CHART -INSTRUMENT

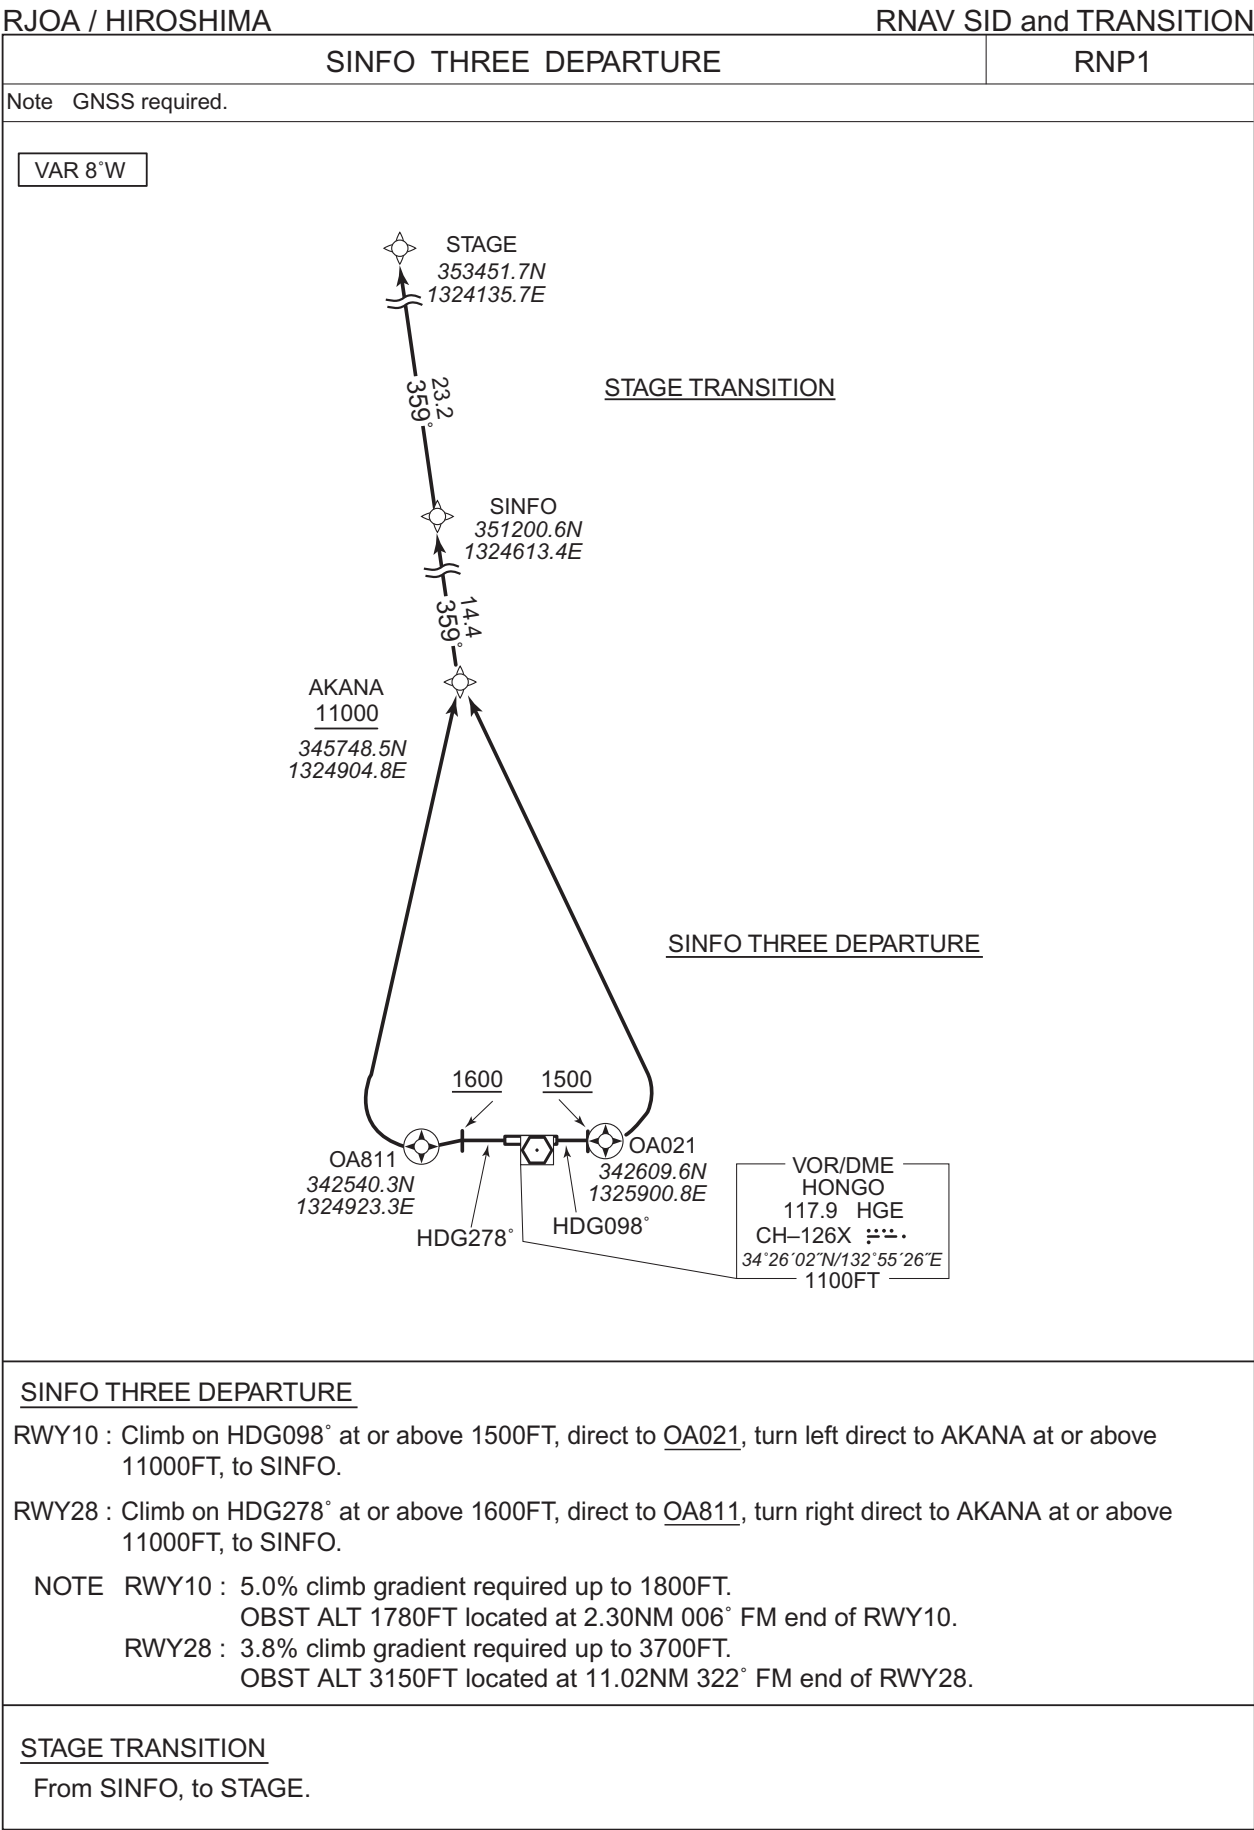

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART -INSTRUMENT

RJOA / HIROSHIMA

RNAV SID and TRANSITION


SINFO THREE DEPARTURE											
RWY10											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	098 (090.0)	-8.1	-	-	+1500	-	-	RNP1
002	DF	OA021	Y	-	-8.1	-	-	-	-	-	RNP1
003	DF	AKANA	-	-	-8.1	-	L	+11000	-	-	RNP1
004	TF	SINFO	-	359 (350.7)	-8.1	14.4	-	-	-	-	RNP1
RWY28											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	278 (270.0)	-8.1	-	-	+1600	-	-	RNP1
002	DF	OA811	Y	-	-8.1	-	-	-	-	-	RNP1
003	DF	AKANA	-	-	-8.1	-	R	+11000	-	-	RNP1
004	TF	SINFO	-	359 (350.7)	-8.1	14.4	-	-	-	-	RNP1
STAGE TRANSITION											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SINFO	-	-	-8.1	-	-	-	-	-	RNP1
002	TF	STAGE	-	359 (350.6)	-8.1	23.2	-	-	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

RJOA / HIROSHIMA

STAR

From over HGE VOR/DME, via HGE R249 to intercept and proceed via HGE 14.0DME clockwise ARC to MISEN.
Cross MISEN at or above 4100FT.

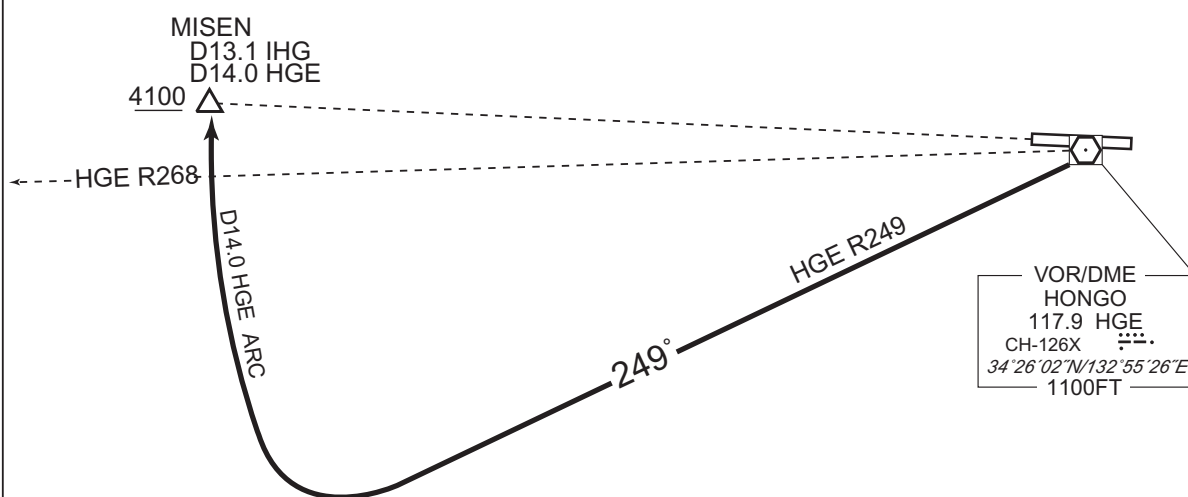


CHANGE : Course FM HGE to MISEN.

STANDARD ARRIVAL CHART -INSTRUMENT

RJOA / HIROSHIMA

RNAV STAR RWY10

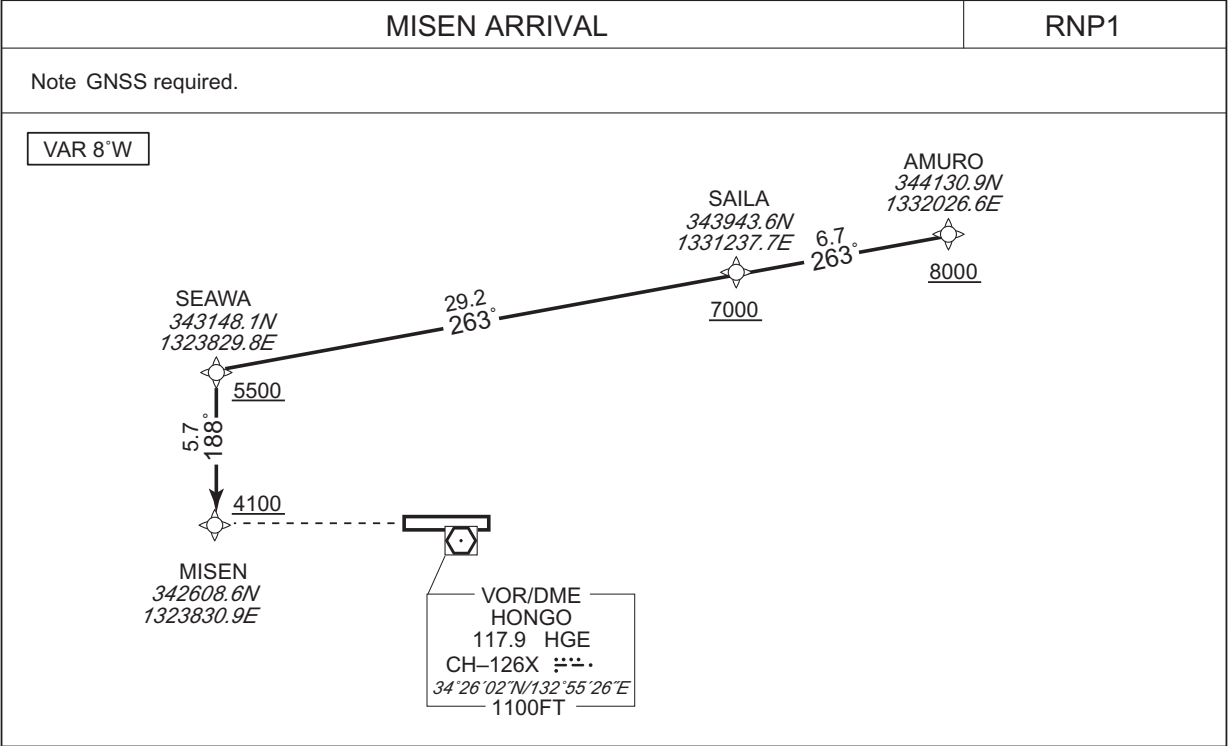

From AMURO at or above 8000FT, to SAILA at or above 7000FT, to SEAWA at or above 5500FT, to MISEN at or above 4100FT.

CHANGE : PROC course. Note. Navigation Specification. VAR.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AMURO	—	—	-8.1	—	—	+8000	—	—	RNP1
002	TF	SAILA	—	263 (254.5)	-8.1	6.7	—	+7000	—	—	RNP1
003	TF	SEAWA	—	263 (254.4)	-8.1	29.2	—	+5500	—	—	RNP1
004	TF	MISEN	—	188 (179.8)	-8.1	5.7	—	+4100	—	—	RNP1

STANDARD ARRIVAL CHART-INSTRUMENT

RJOA / HIROSHIMA


RNAV STAR RWY10

AXELA ARRIVAL

RNP1

Note GNSS required.

VAR 8°W

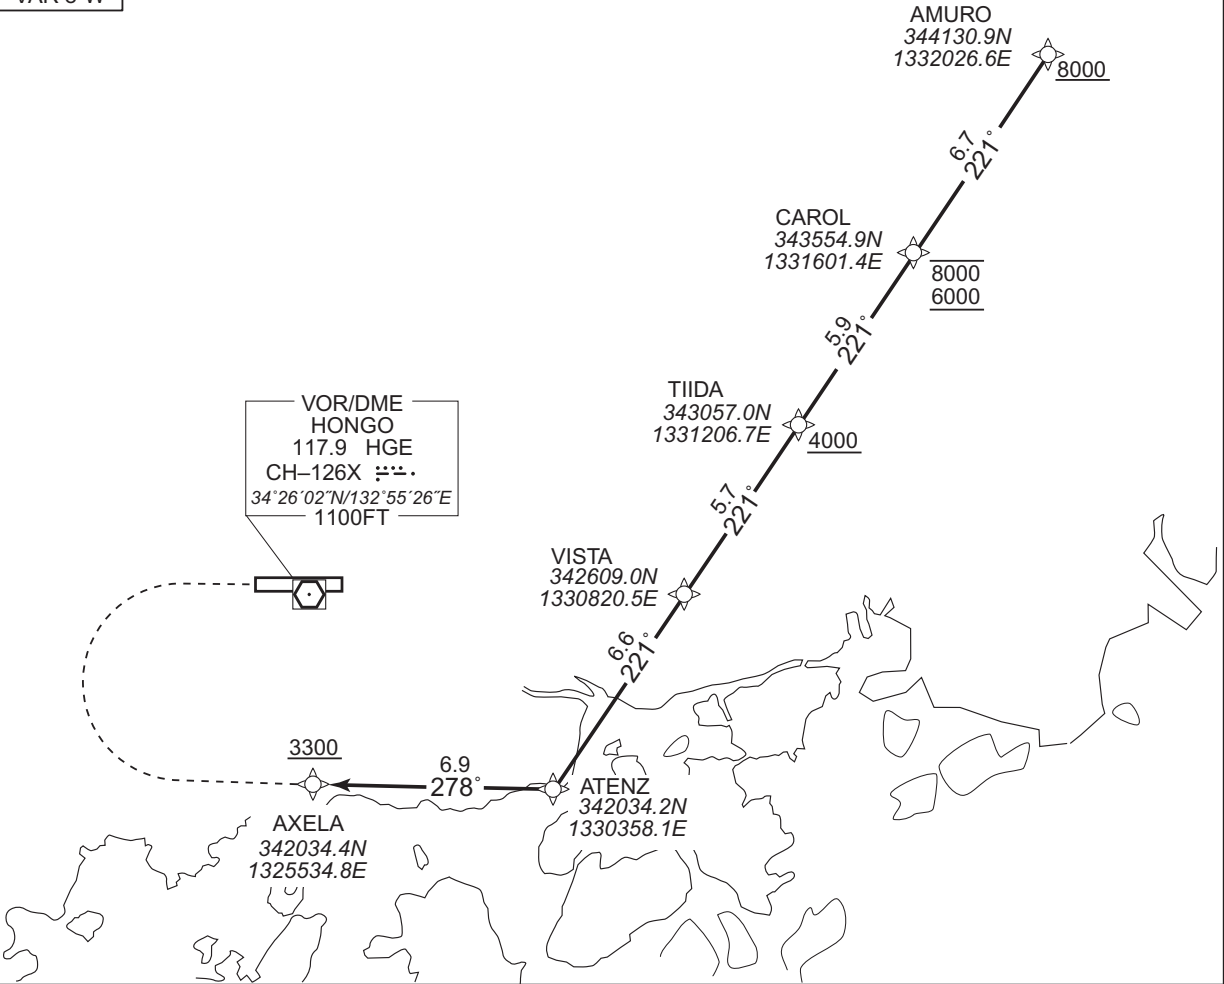

From AMURO at or above 8000FT, to CAROL between 8000FT and 6000FT, to TIIDA at or above 4000FT, to VISTA, to ATENZ, to AXELA at or above 3300FT.


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AMURO	—	—	-8.1	—	—	+8000	—	—	RNP1
002	TF	CAROL	—	221 (213.0)	-8.1	6.7	—	-8000 +6000	—	—	RNP1
003	TF	TIIDA	—	221 (213.0)	-8.1	5.9	—	+4000	—	—	RNP1
004	TF	VISTA	—	221 (212.9)	-8.1	5.7	—	—	—	—	RNP1
005	TF	ATENZ	—	221 (212.9)	-8.1	6.6	—	—	—	—	RNP1
006	TF	AXELA	—	278 (270.1)	-8.1	6.9	—	+3300	—	—	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD ARRIVAL CHART-INSTRUMENT

RJOA / HIROSHIMA

RNAV STAR RWY10

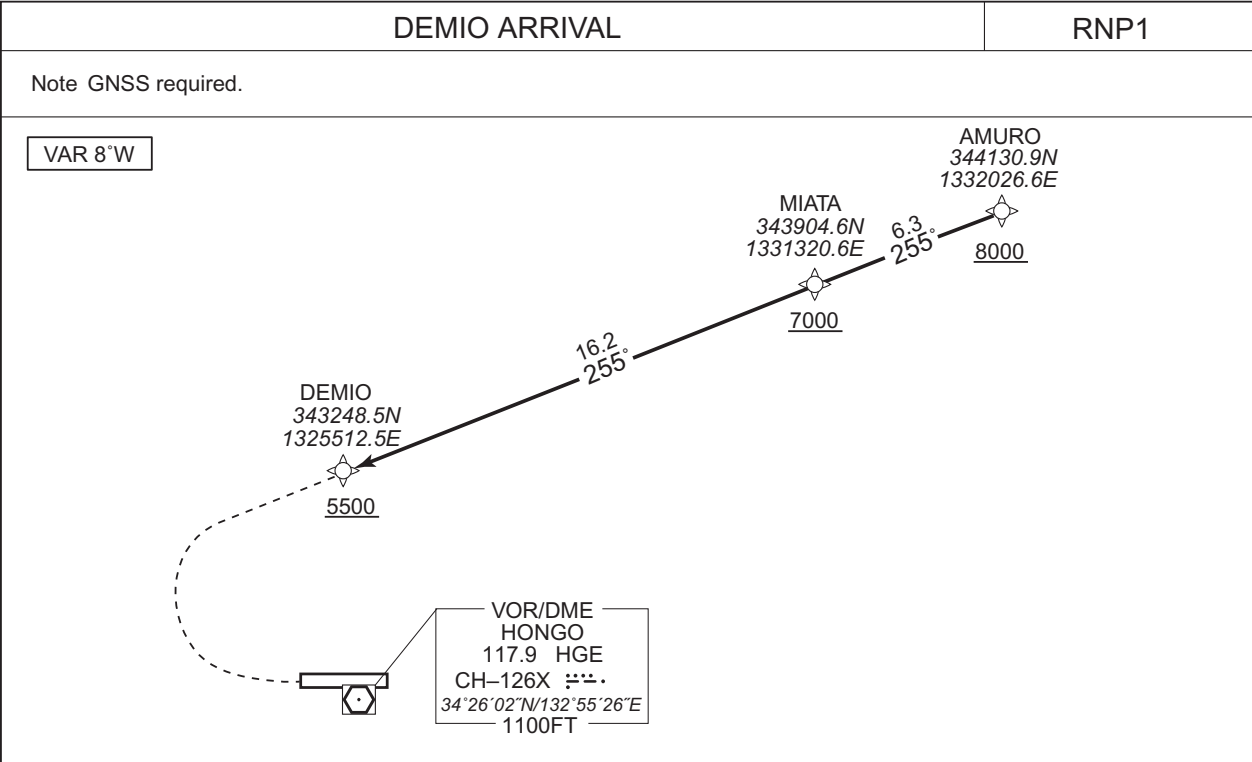

From AMURO at or above 8000FT, to MIATA at or above 7000FT, to DEMIO at or above 5500FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AMURO	—	—	-8.1	—	—	+8000	—	—	RNP1
002	TF	MIATA	—	255 (247.4)	-8.1	6.3	—	+7000	—	—	RNP1
003	TF	DEMIO	—	255 (247.3)	-8.1	16.2	—	+5500	—	—	RNP1


CHANGE : Navigation Specification(Basic RNP1 → RNP1).

RJOA / HIROSHIMA

RNAV STAR RWY28

RNP1

VAR 8°W

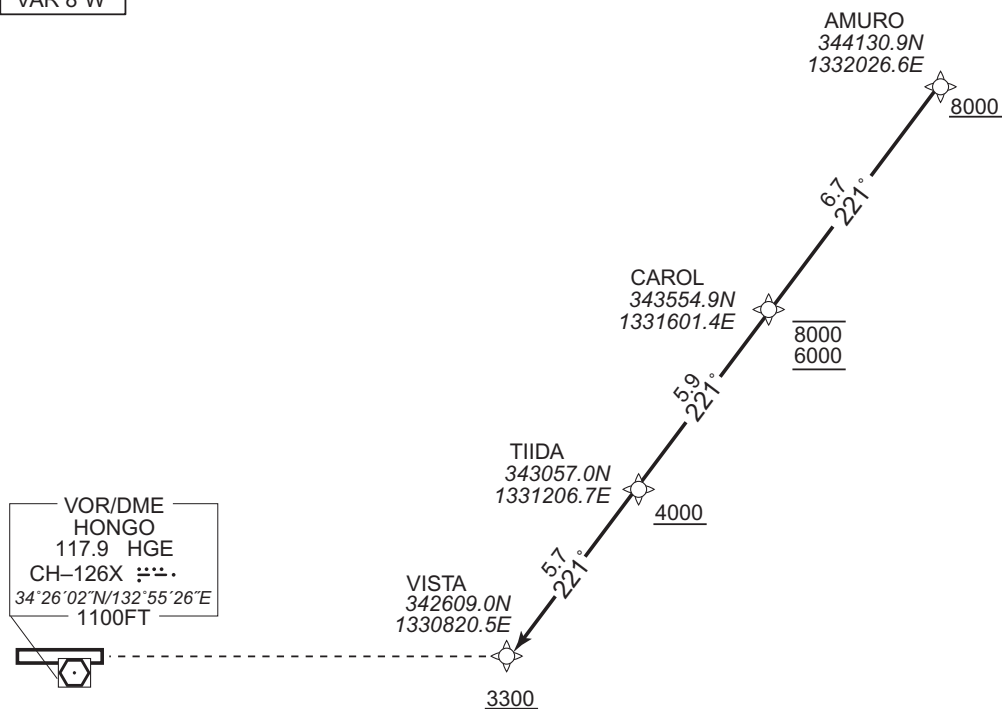

CHANGE : VAR. Navigation Specification.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AMURO	—	—	-8.1	—	—	+8000	—	—	RNP1
002	TF	CAROL	—	221 (213.0)	-8.1	6.7	—	-8000 +6000	—	—	RNP1
003	TF	TIIDA	—	221 (213.0)	-8.1	5.9	—	+4000	—	—	RNP1
004	TF	VISTA	—	221 (212.9)	-8.1	5.7	—	+3300	—	—	RNP1

STANDARD ARRIVAL CHART -INSTRUMENT


RJOA / HIROSHIMA

RNAV STAR RWY10

PUNUP ARRIVAL	RNP1
---------------	------

Note GNSS required.

VAR 8°W

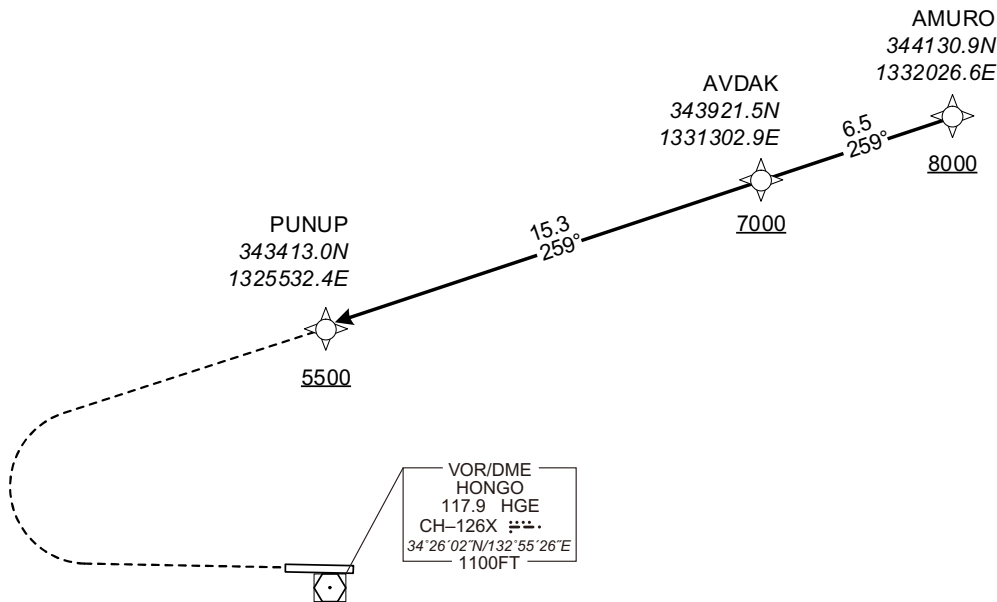

From AMURO at or above 8000FT, to AVDAK at or above 7000FT, to PUNUP at or above 5500FT.


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AMURO	—	—	-8.1	—	—	+8000	—	—	RNP1
002	TF	AVDAK	—	259 (250.5)	-8.1	6.5	—	+7000	—	—	RNP1
003	TF	PUNUP	—	259 (250.4)	-8.1	15.3	—	+5500	—	—	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

ILS Z or LOC RWY10 (CAT III)

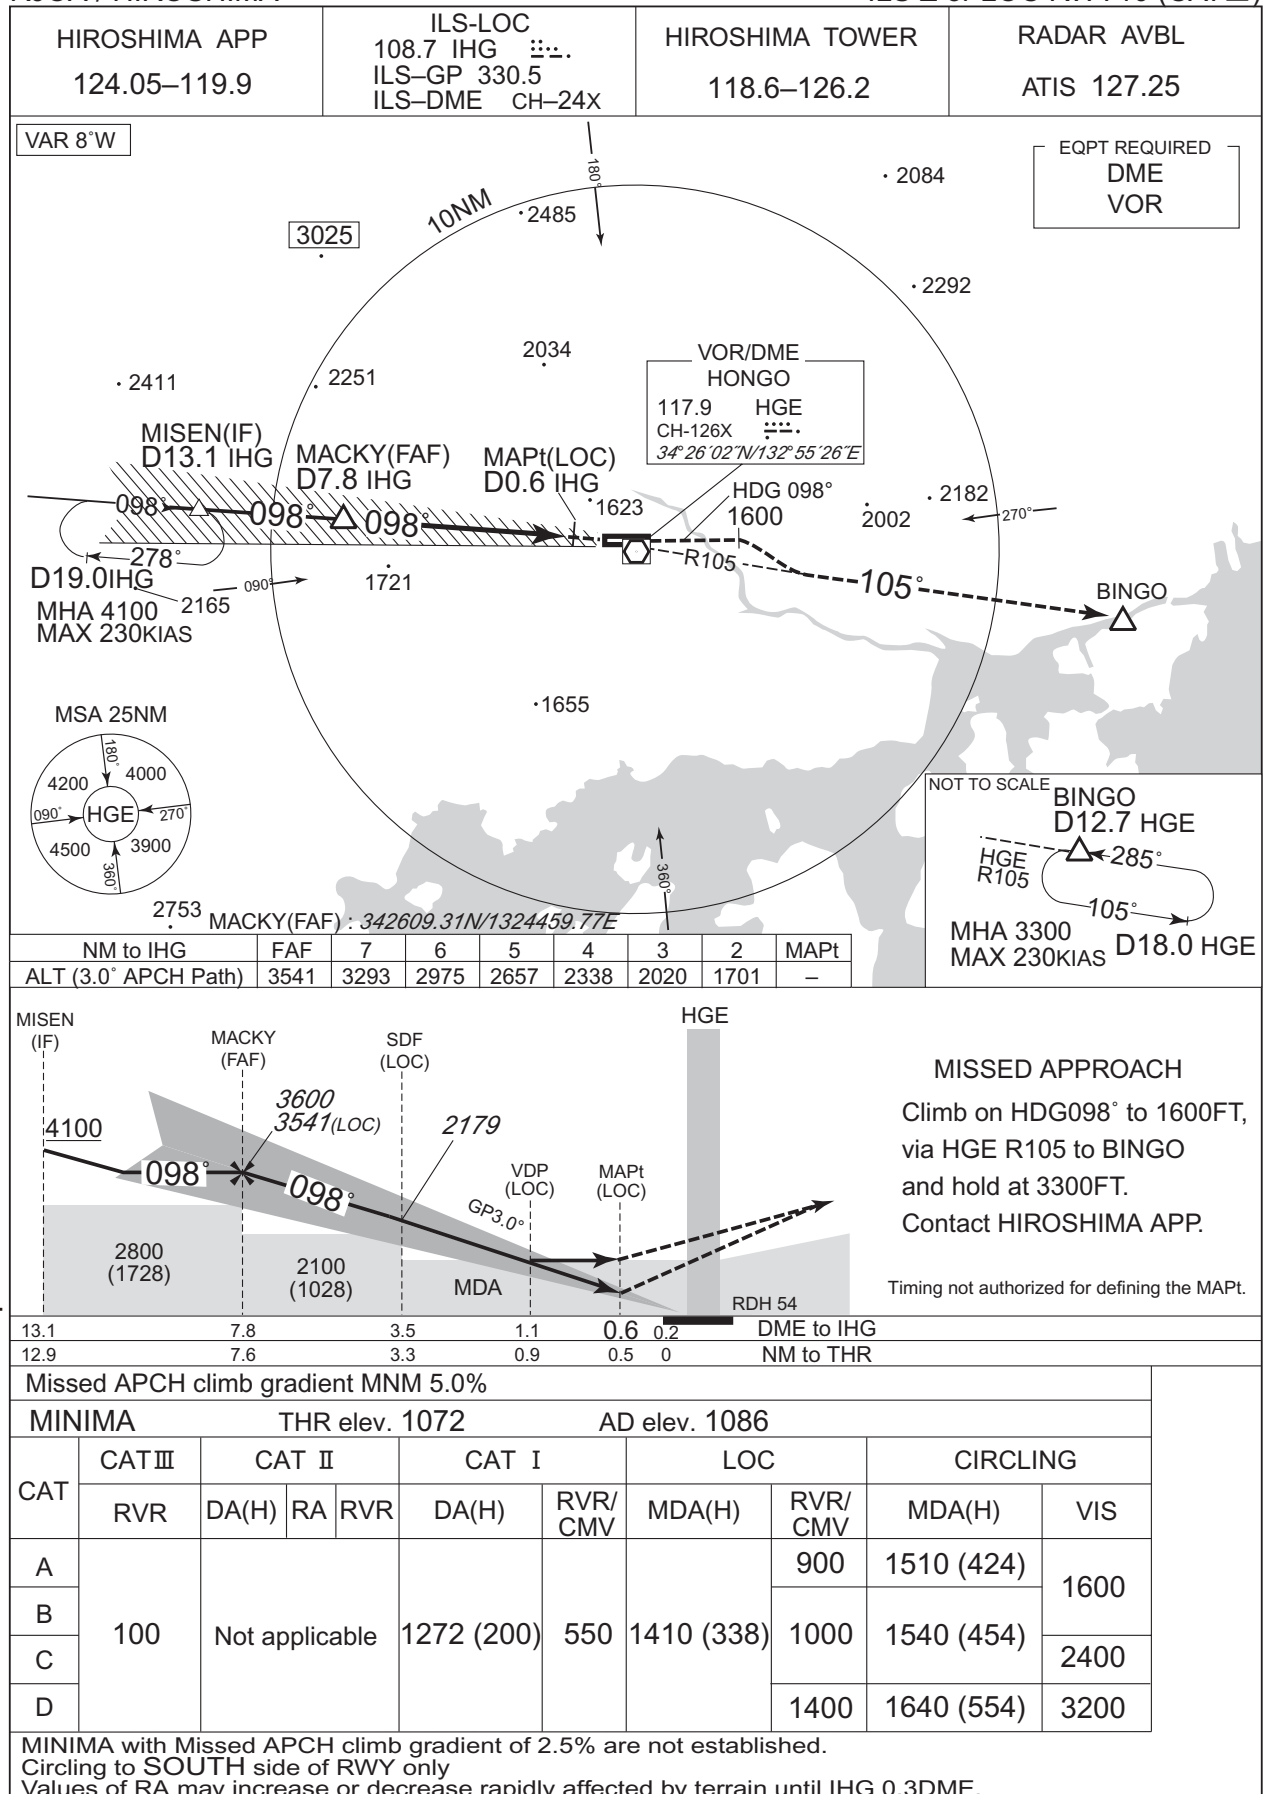


CHANGE : PROC renamed. Description of VAR.


INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

ILS Y RWY10(CATⅢ)

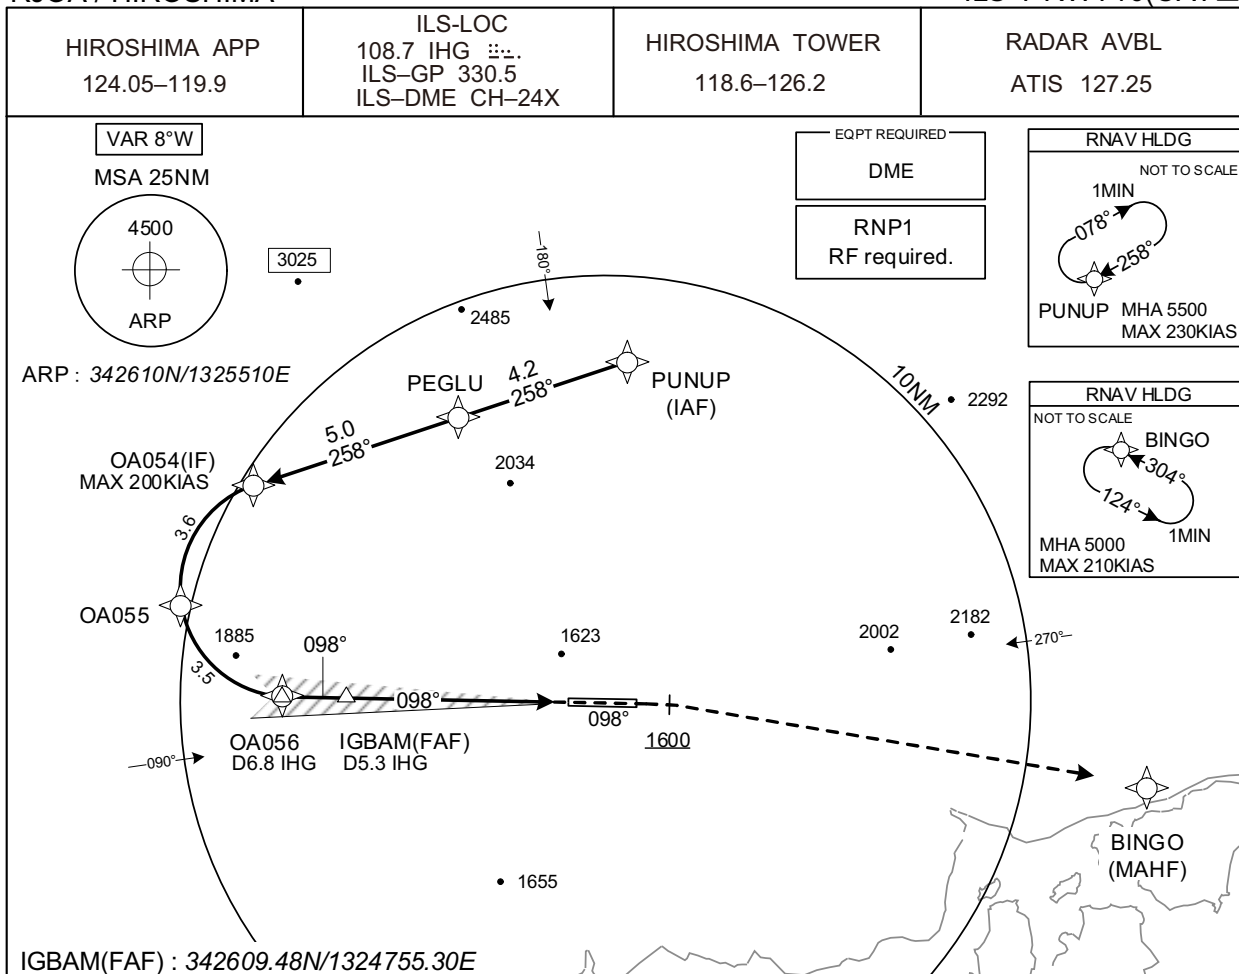

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

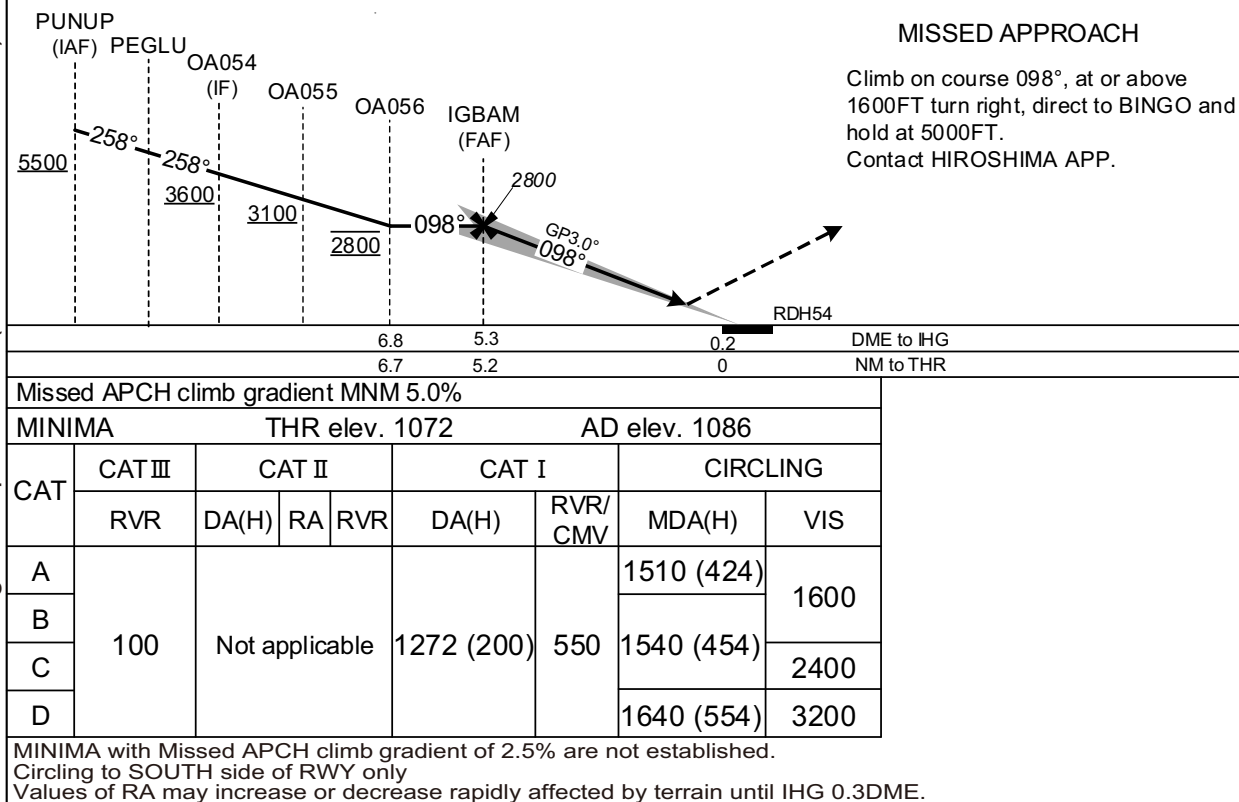

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

ILS Y RWY10(CATⅢ)

CHANGE : Correction of misdescription(HLDG speed, Minimum ALT at BINGO).

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	PUNUP	-	-	-8.1	-	-	+5500	-	-	RNP1
002	TF	PEGLU	-	258 (250.3)	-8.1	4.2	-	-	-	-	RNP1
003	TF	OA054	-	258 (250.2)	-8.1	5.0	-	+3600	-200	-	RNP1
004	RF Center: OARF3 r=2.55NM	OA055	-	-	-8.1	3.6	L	+3100	-	-	RNP1
005	RF Center: OARF3 r=2.55NM	OA056	-	-	-8.1	3.5	L	2800	-	-	RNP1
001	CA	-	-	098 (090.0)	-8.1	-	-	+1600	-	-	RNP1
002	DF	BINGO	-	-	-8.1	-	R	5000	-	-	RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	PUNUP	258 (250.3)	-8.1	1.0 (-14000)	R	5500	FL140	-230 (-14000)	RNP1
Hold	BINGO	304 (296.1)	-8.1	1.0 (-14000)	L	5000	FL140	-210 (-14000)	RNP1


Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
PUNUP	343412.97N / 1325532.36E	OARF3	342842.60N / 1324606.23E
PEGLU	343248.19N / 1325045.55E		
OA054	343106.85N / 1324503.74E		
OA055	342814.80N / 1324304.26E		
OA056	342609.36N / 1324606.51E		
BINGO	342425.72N / 1331040.68E		

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

VOR RWY10

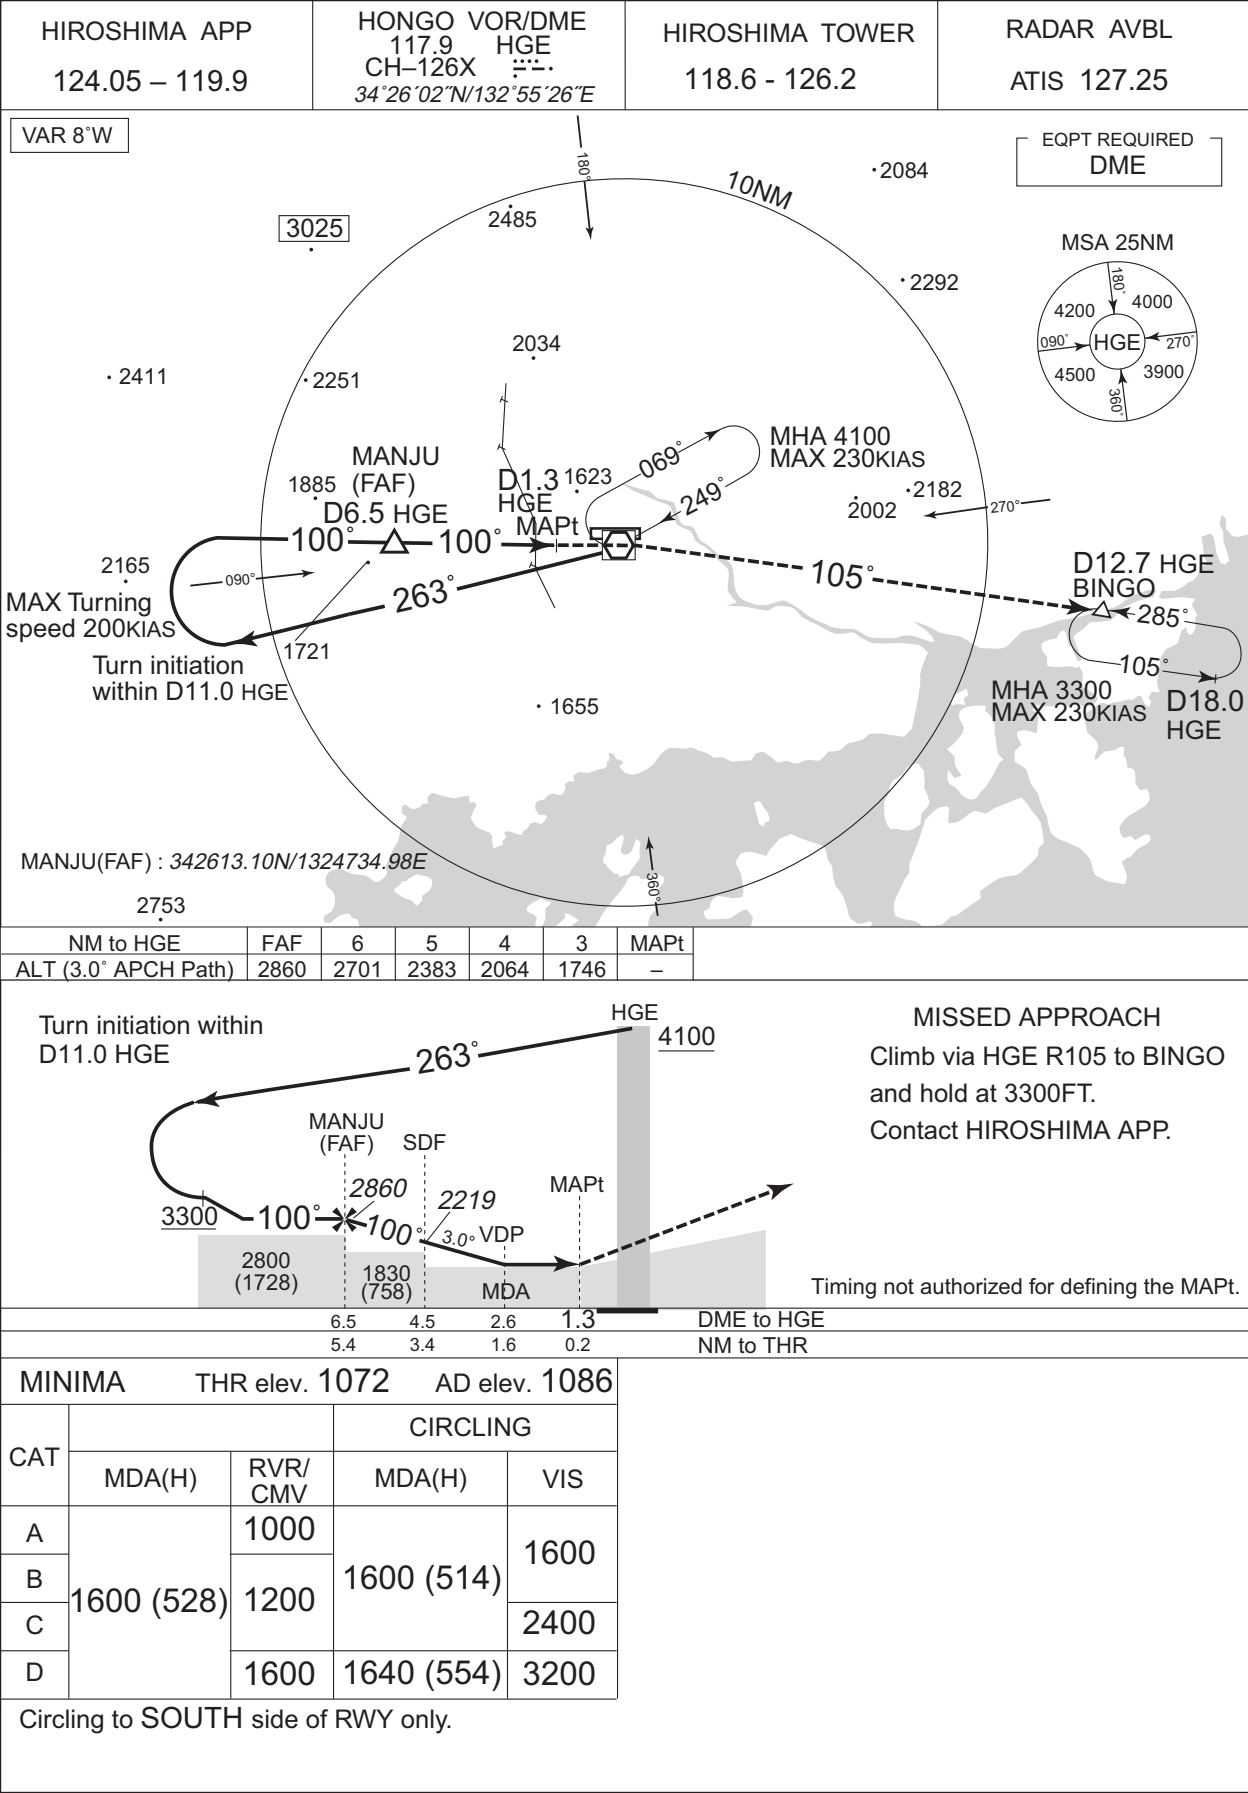


CHANGE : Description of VAR.

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA


VOR RWY28

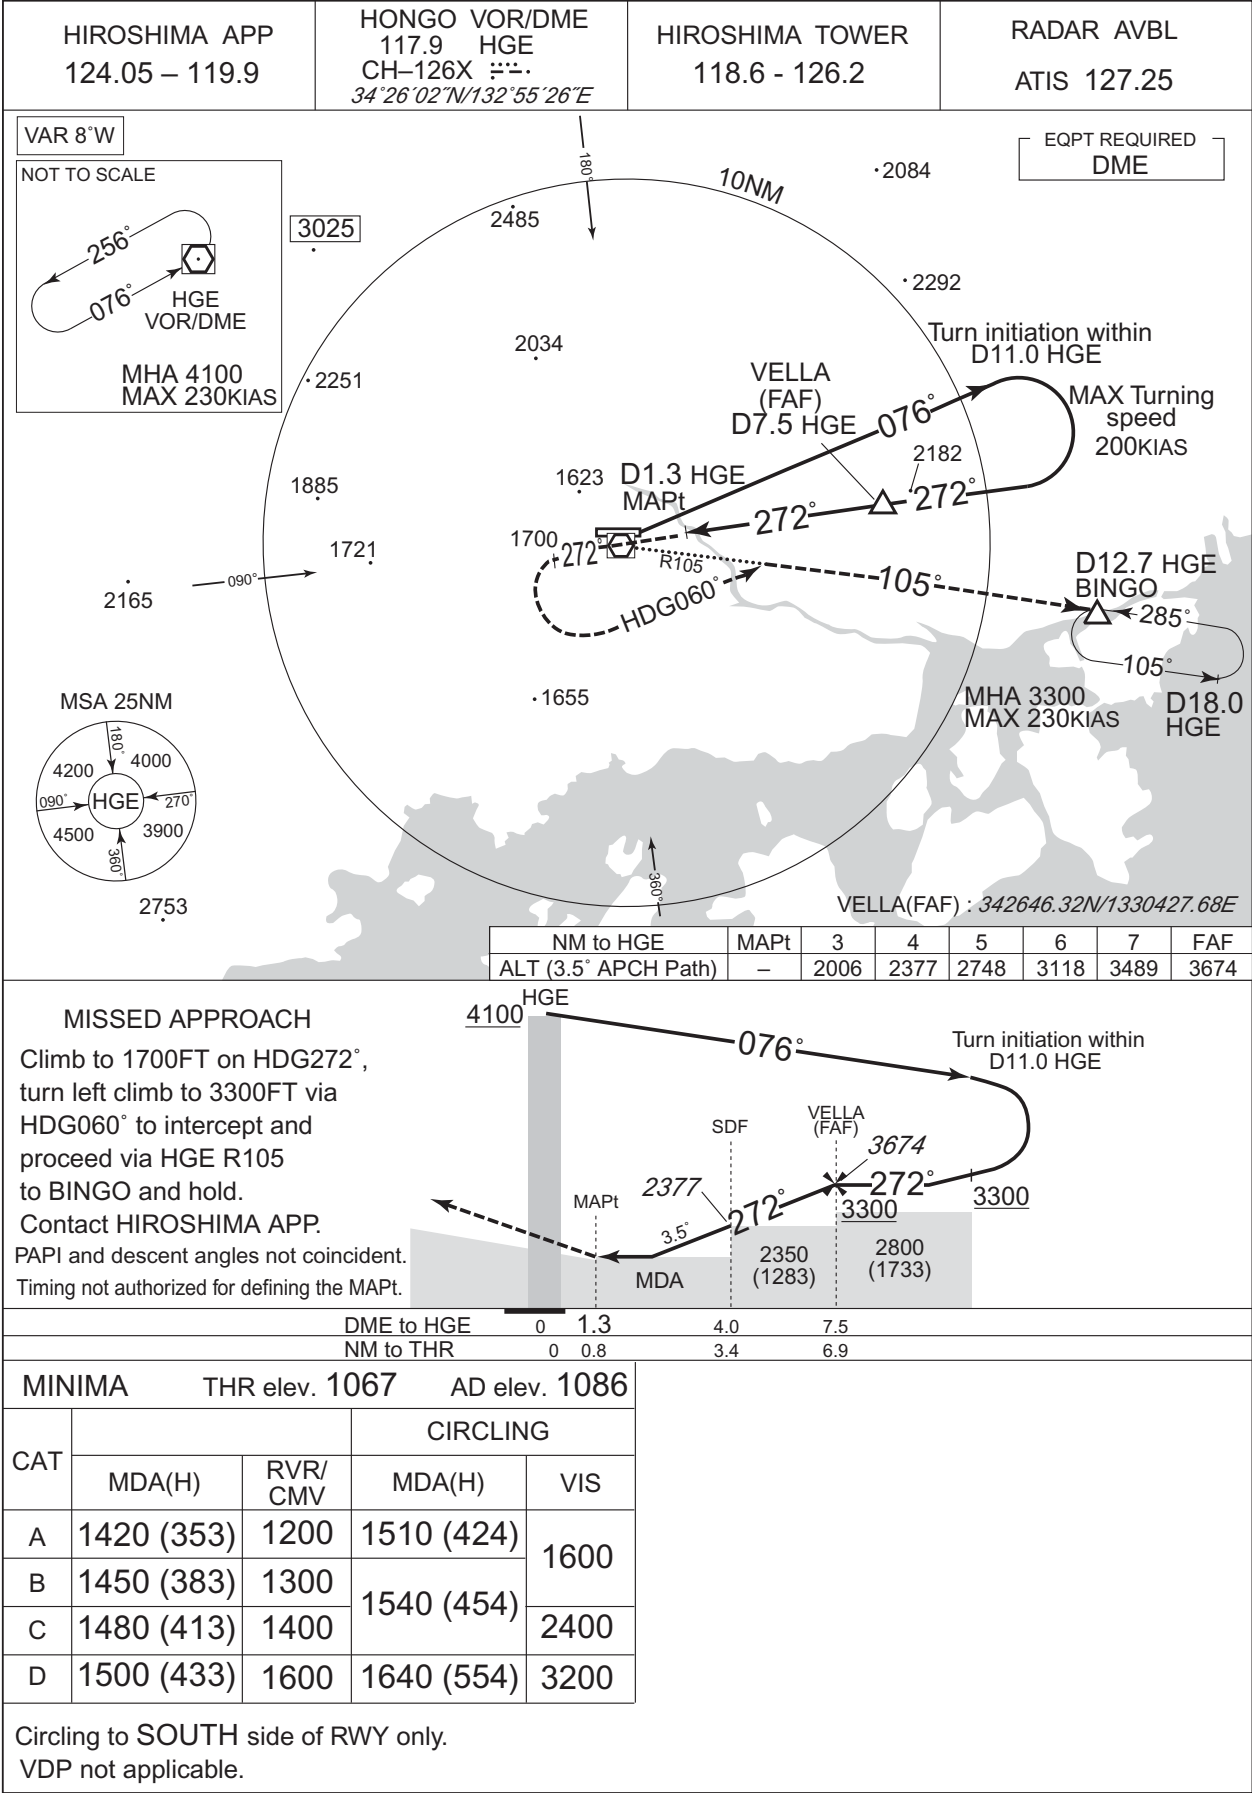

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA


RNP RWY28

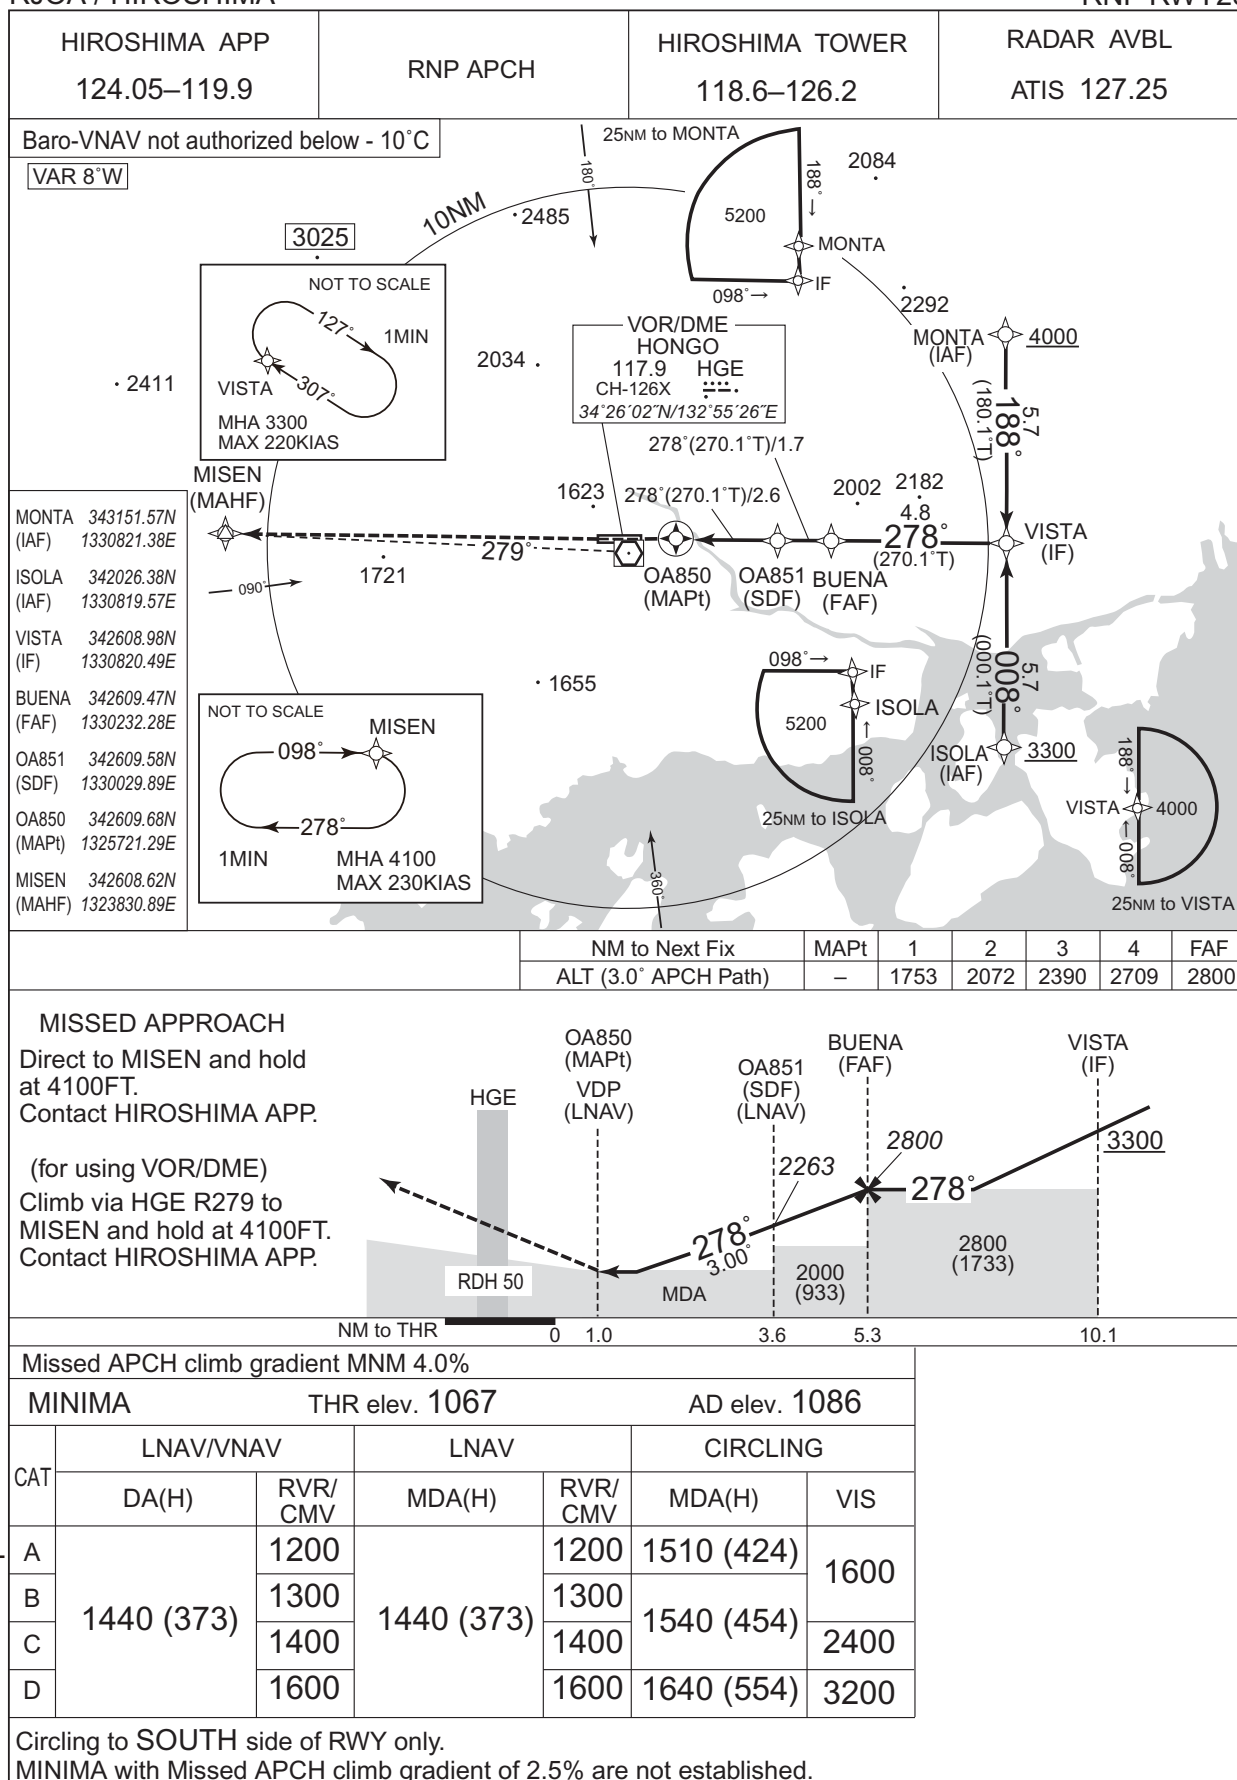

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

RNP Z RWY10(AR)

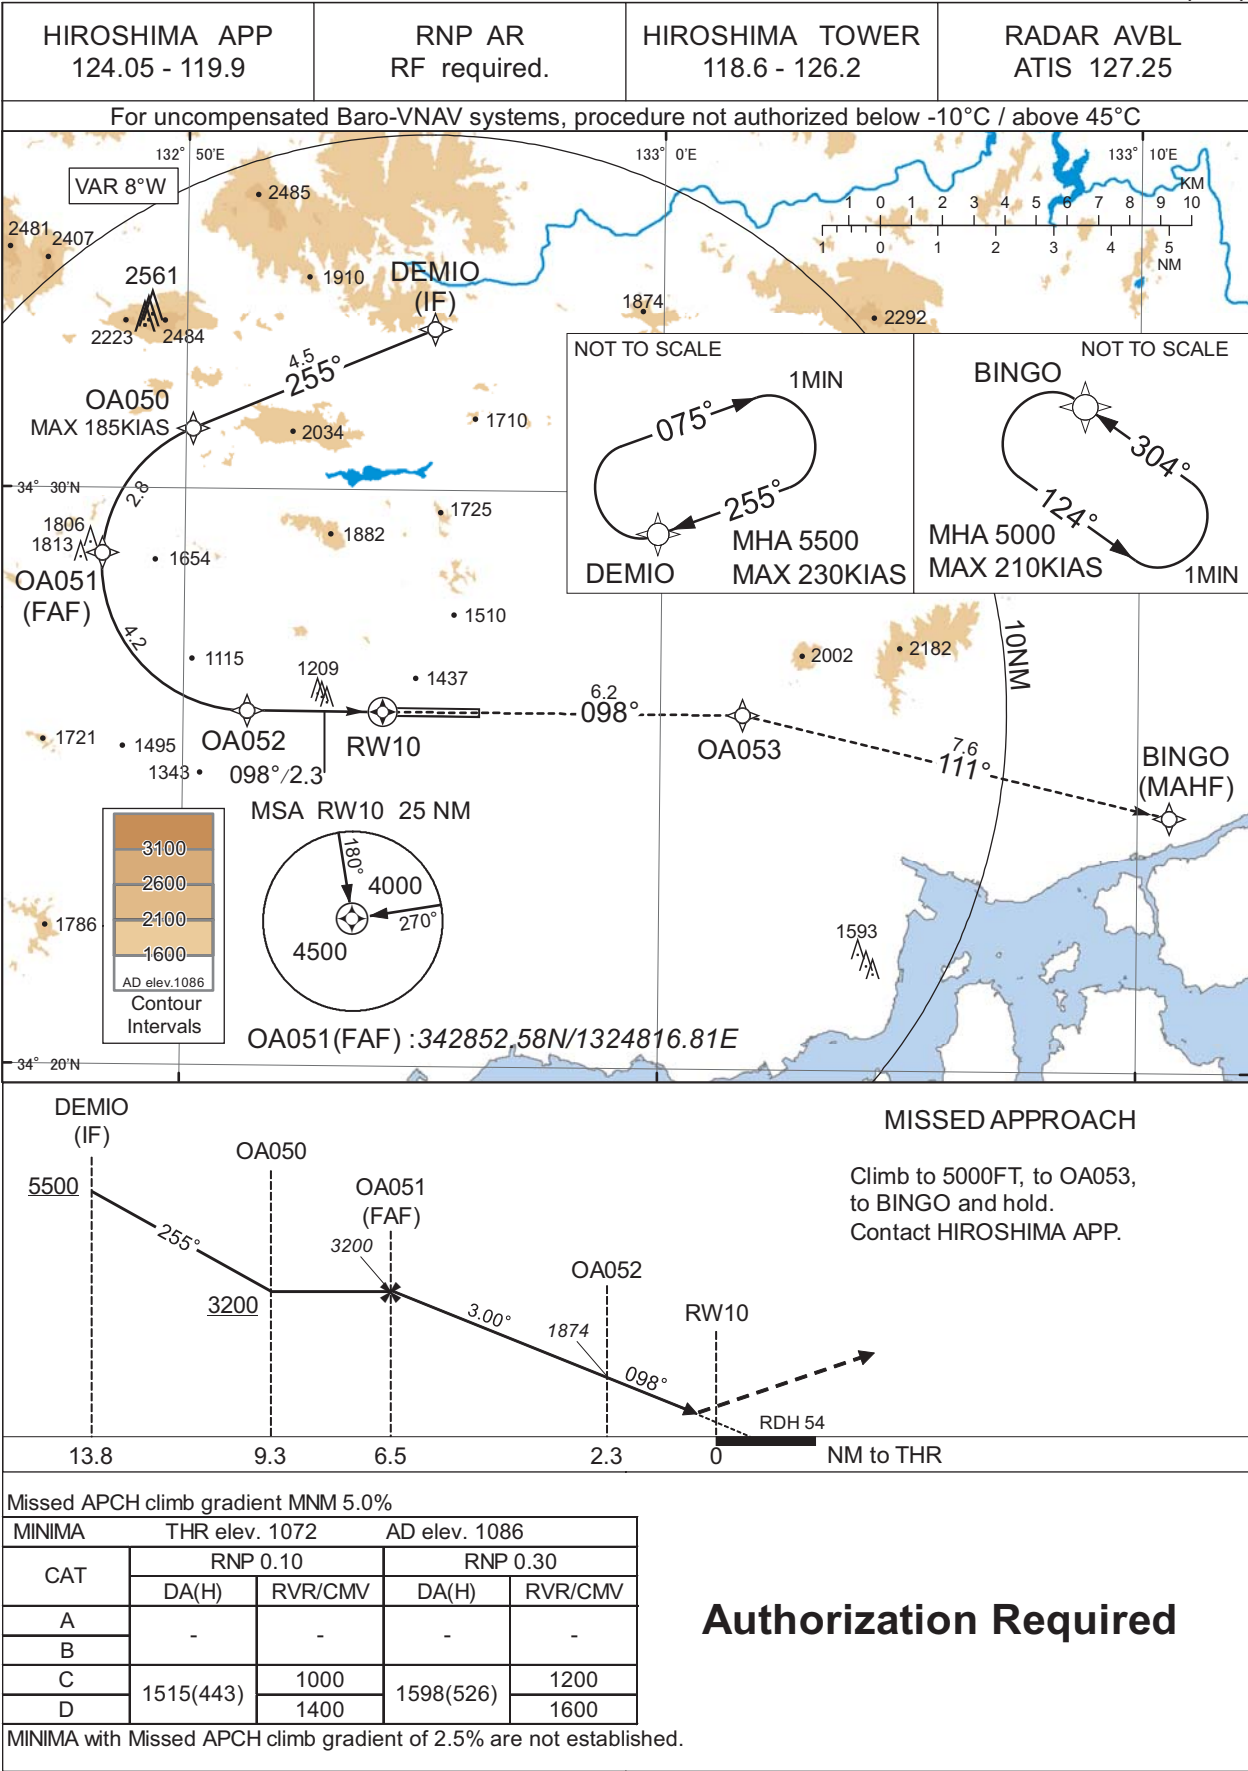

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

RNP Z RWY10(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	DEMIO	-	-	-8.1	-	-	+5500	-	-	-
002	TF	OA050	-	255 (247.1)	-8.1	4.5	-	+3200	-185	-	1.0
003	RF Center: OARF1 r=2.54NM	OA051	-	-	-8.1	2.8	L	3200	-	-	1.0
004	RF Center: OARF1 r=2.54NM	OA052	-	-	-8.1	4.2	L	1874	-	-3.00	0.10 0.30
005	TF	RW10	Y	098 (090.0)	-8.1	2.3	-	1126	-	-3.00/54	0.10 0.30
006	TF	OA053	-	098 (090.0)	-8.1	6.2	-	-	-	-	1.0
007	TF	BINGO	-	111 (103.2)	-8.1	7.6	-	5000	-	-	1.0


Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	DEMIO	255 (247.1)	-8.1	1.0 (-14000)	R	5500	FL140	-230(-14000)	1.0
Hold	BINGO	304 (296.1)	-8.1	1.0 (-14000)	L	5000	FL140	-210(-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
DEMIO	343248.47N / 1325512.50E	OARF1	342842.28N / 1325120.72E
OA050	343102.99N / 1325009.23E		
OA051	342852.58N / 1324816.81E		
OA052	342609.63N / 1325120.84E		
RW10	342609.69N / 1325411.25E		
OA053	342609.67N / 1330143.51E		
BINGO	342425.72N / 1331040.68E		

RJOA / HIROSHIMA

RNP Y RWY10(AR)



INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

RNP Y RWY10(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	AXELA	-	-	-8.1	-	-	+3300	-	-	1.0
002	TF	OA061	-	278 (270.0)	-8.1	3.5	-	+3200	-185	-	1.0
003	RF Center: OARF2 r=2.79NM	OA062	-	-	-8.1	4.6	R	3200	-	-	1.0
004	RF Center: OARF2 r=2.79NM	OA052	-	-	-8.1	4.2	R	1874	-	-3.00	0.10 0.30
005	TF	RW10	Y	098 (090.0)	-8.1	2.3	-	1126	-	-3.00/54	0.10 0.30
006	TF	OA053	-	098 (090.0)	-8.1	6.2	-	-	-	-	1.0
007	TF	BINGO	-	111 (103.2)	-8.1	7.6	-	5000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	AXELA	278 (270.0)	-8.1	1.0 (-14000)	L	3300	FL140	-230(-14000)	1.0
Hold	BINGO	304 (296.1)	-8.1	1.0 (-14000)	L	5000	FL140	-210(-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
AXELA	342034.40N / 1325534.80E	OARF2	342321.96N / 1325120.96E
OA061	342034.29N / 1325121.21E		
OA062	342334.91N / 1324759.36E		
OA052	342609.63N / 1325120.84E		
RW10	342609.69N / 1325411.25E		
OA053	342609.67N / 1330143.51E		
BINGO	342425.72N / 1331040.68E		

RJOA / HIROSHIMA


Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : VAR.


Call sign	BRG / DIST from ARP	Remarks
白竜 Hakuryu	345°T / 4.3NM	湖 Lake
小佐木 Kosagi	115°T / 10.1NM	小佐木島 Kosagi - Island
竹原 Takehara	184°T / 5.8NM	竹原駅 Railway Station
三永サウス Minaga South	251°T / 8.4NM	東広島駅 Railway Station
新庄 Shinjo	209°T / 2.9NM	新庄交差点 Shinjo Intersection

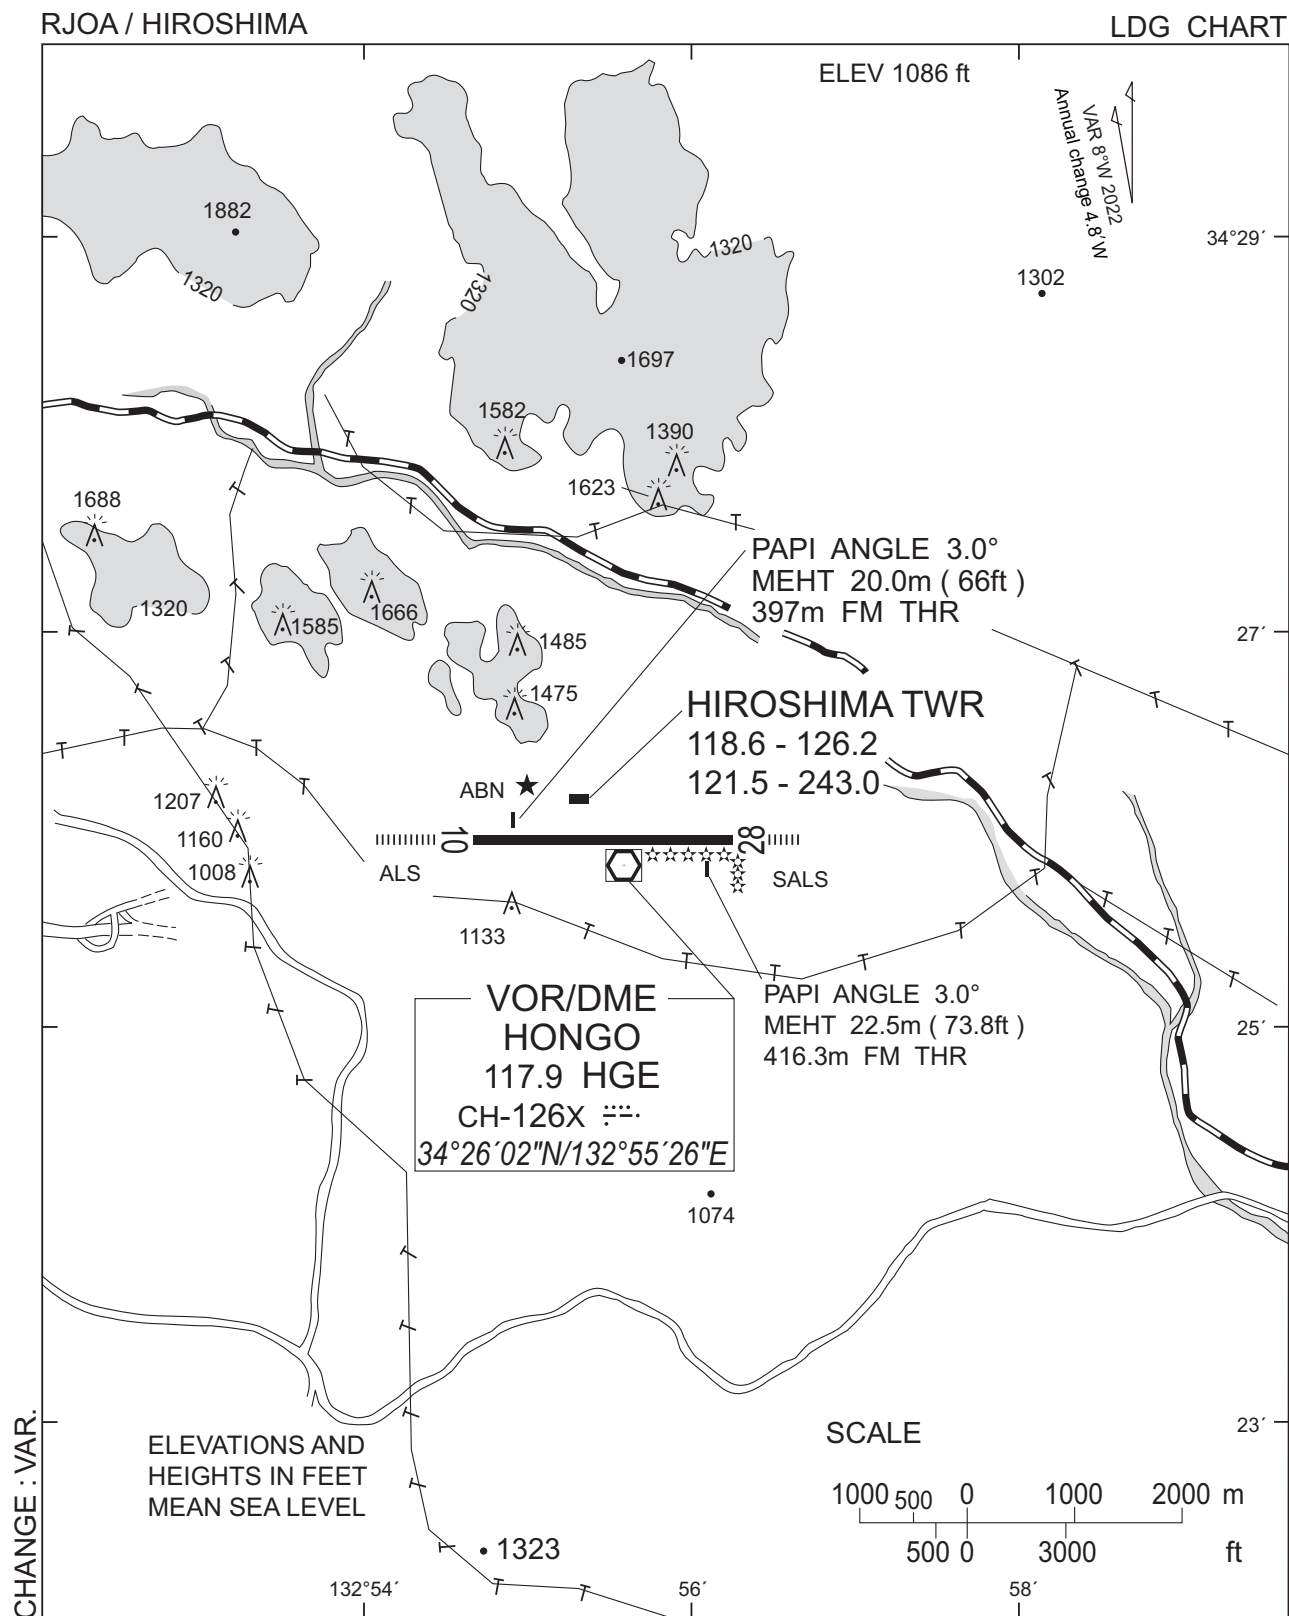

RJOA / HIROSHIMA

Minimum Vectoring Altitude CHART

VAR 8°W (2022)

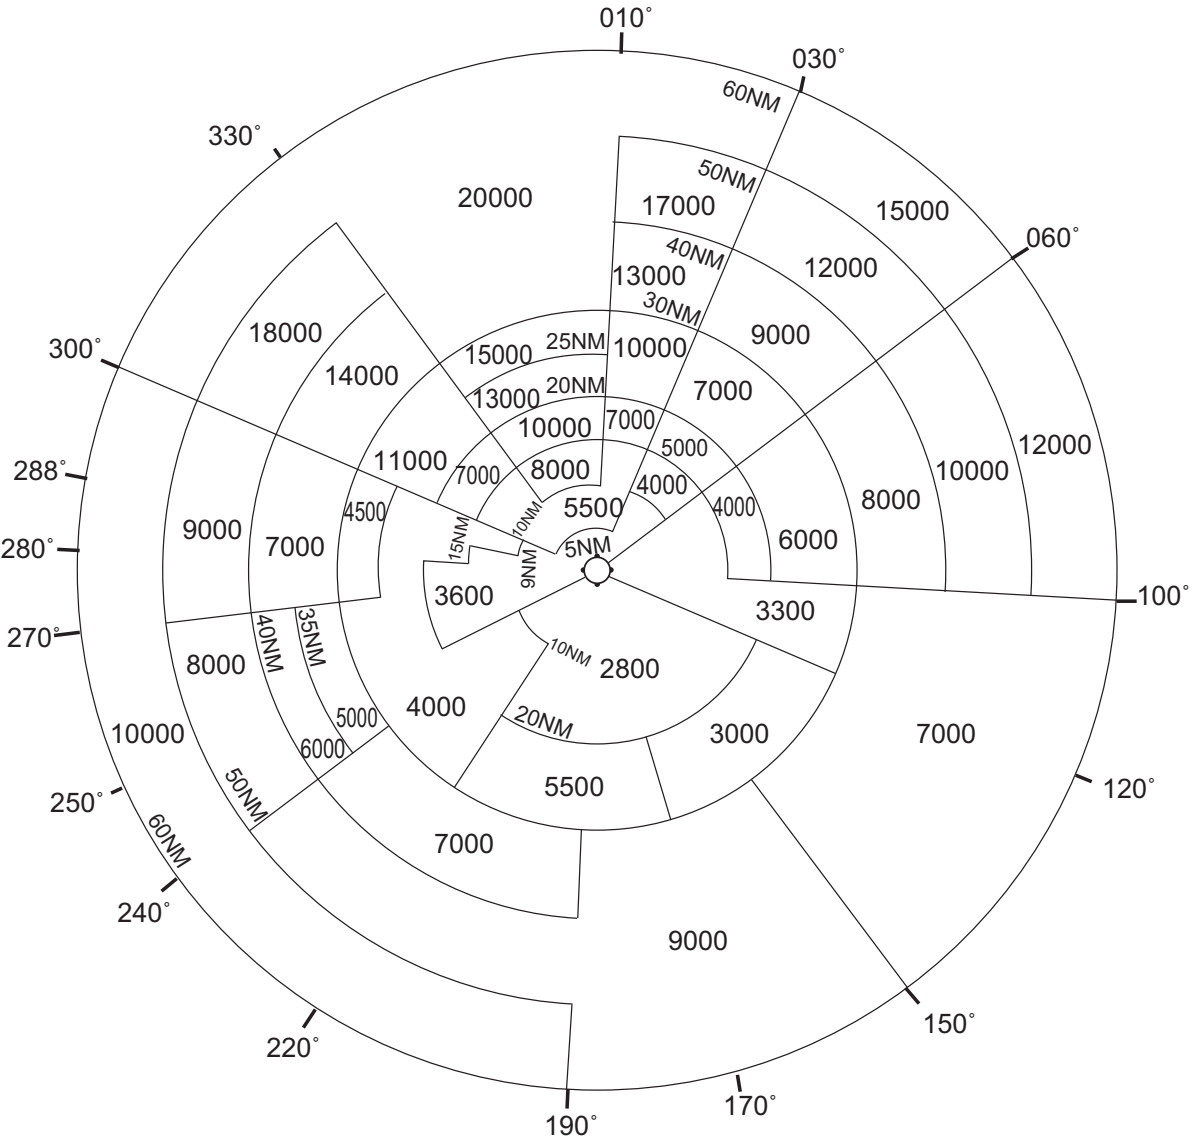

CENTER : 342602N/1325458E (RADAR SITE)

CHANGE : VAR.