

## STANDARD DEPARTURE CHART - INSTRUMENT

RJFY / KANOYA

SID

EAST REVERSAL TWO DEPARTURE

RWY08R : Climb via JAT R083 to 4000FT or above within 13NM  
from RWY end(JAT 14DME), then turn right proceed to JAT TACAN.  
RWY26L : Not established.

## Note:

- 1 Following climb gradient should be maintained until passing 2000FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

- 2 SHIBUSHI PETROLEUM COMBINAT at JAT R094 10DME.

- 3 Obstructions exist,  
a 229FT MSL height group of trees at 0.76NM E from ARP.  
b 1934FT MSL height mountain at 10.8NM ESE from ARP.

CHANGE : PROC renamed. NDB (JA) deleted. Radial FM JAT (SHIBUSHI PETROLEUM COMBINAT).



## STANDARD DEPARTURE CHART - INSTRUMENT

RJFY / KANOYA

SID

WEST REVERSAL TWO DEPARTURE

RWY08R : Not established.

RWY26L : Climb via JAT R270 to 4000FT or above within 13NM from RWY end  
(JAT 13DME), then turn left proceed to JAT TACAN.

Note:

- 1 Following climb gradient should be maintained until passing 600FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

- 2 Obstructions exist,

- a 582FT MSL height hill at 1NM SW from ARP.
- b 630FT MSL height antenna tower at 1.1NM SW from ARP.
- c 493FT MSL height antenna tower at 1.8NM W from ARP.
- d 555FT MSL height hill at 2.2NM W from ARP.

CHANGE : SID (RWY26L). Note:2 Obstructions. NDB (JA) deleted.



## STANDARD DEPARTURE CHART - INSTRUMENT

RJFY / KANOYA

SID

EKORU ONE DEPARTURE

RWY08R : Climb via JAT R084 to EKORU.

RWY26L : Climb RWY HDG until 3.5NM from RWY end (JAT 3.6DME) to 1000FT  
or above, turn left proceed to JAT TACAN, via JAT R084 to EKORU.

Note:

- 1 Following climb gradient should be maintained,
  - a until passing 2000FT when take off RWY08R.
  - b until passing 1600FT when take off RWY26L.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

- 2 SHIBUSHI PETROLEUM COMBINAT at JAT R094 10DME.

- 3 Obstructions exist,

- a when take off RWY08R,
  - (a)229FT MSL height group of trees at 0.76NM E from ARP.
  - (b)1934FT MSL height mountain at 10.8NM ESE from ARP.
- b when take off RWY26L,
  - (a)582FT MSL height hill at 1NM SW from ARP.
  - (b)630FT MSL height antenna tower at 1.1NM SW from ARP.
  - (c)493FT MSL height antenna tower at 1.8NM W from ARP.
  - (d)555FT MSL height hill at 2.2NM W from ARP.
  - (e)814FT MSL height mountain at 3.0NM SW from ARP.
  - (f)837FT MSL height mountain at 3.2NM SW from ARP.
  - (g)1378FT MSL height mountain at 3.5NM S from ARP.
  - (h)1582FT MSL height mountain at 3.9NM S from ARP.

CHANGE : New PROC



## STANDARD DEPARTURE CHART - INSTRUMENT

RJFY / KANOYA

SID

MAKRA THREE DEPARTURE

RWY08R : Not established.

RWY26L : Climb RWY HDG until 1NM from RWY end (JAT 1.0DME), climb via  
JAT R263 to MAKRA.

Note:


- 1 Following climb gradient should be maintained until passing 600FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

- 2 Obstructions exist,

- a 493FT MSL height antenna tower at 1.8NM W from ARP.  
b 555FT MSL height hill at 2.2NM W from ARP.

CHANGE : PROC renamed. NDB(JA) abolished.

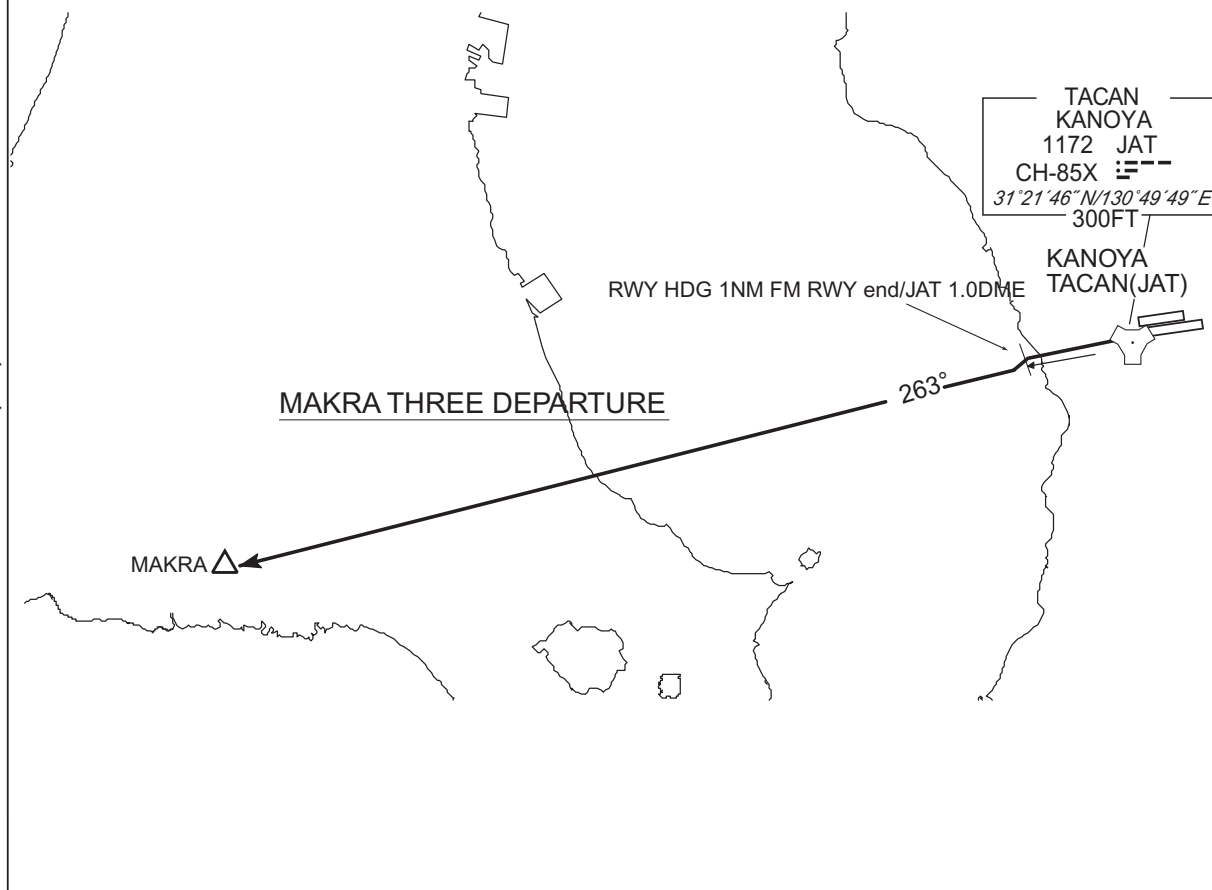

## STANDARD DEPARTURE CHART - INSTRUMENT

RJFY / KANOYA

SID

**QUEEN FOUR DEPARTURE**

RWY08R : Climb via JAT R083 to intercept and proceed via HKC R127 to QUEEN.

RWY26L : Climb RWY HDG until 3.5NM from RWY end (JAT 3.6DME) to 1000FT or above, turn left proceed to JAT TACAN then, climb via JAT R083 to intercept and proceed via HKC R127 to QUEEN.

**Note:**

- 1 Following climb gradient should be maintained,
  - a. until passing 2000FT when take off RWY08R.
  - b. until passing 3000FT when take off RWY26L.


Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

- 2 SHIBUSHI PETROLEUM COMBINAT at JAT R094 10DME.

- 3 Obstructions exist,

- a. when take off RWY08R,
  - (a)229FT MSL height group of trees at 0.76NM E from ARP.
  - (b)1934FT MSL height mountain at 10.8NM ESE from ARP.
- b. when take off RWY26L,
  - (a)582FT MSL height hill at 1NM SW from ARP.
  - (b)630FT MSL height antenna tower at 1.1NM SW from ARP.
  - (c)493FT MSL height antenna tower at 1.8NM W from ARP.
  - (d)555FT MSL height hill at 2.2NM W from ARP.
  - (e)814FT MSL height mountain at 3.0NM SW from ARP.
  - (f)837FT MSL height mountain at 3.2NM SW from ARP.
  - (g)1378FT MSL height mountain at 3.5NM S from ARP.
  - (h)1582FT MSL height mountain at 3.9NM S from ARP.
  - (i)2907FT MSL height mountain at 10NM SE from ARP.

CHANGE : PROC renamed. Radial FM HKC.

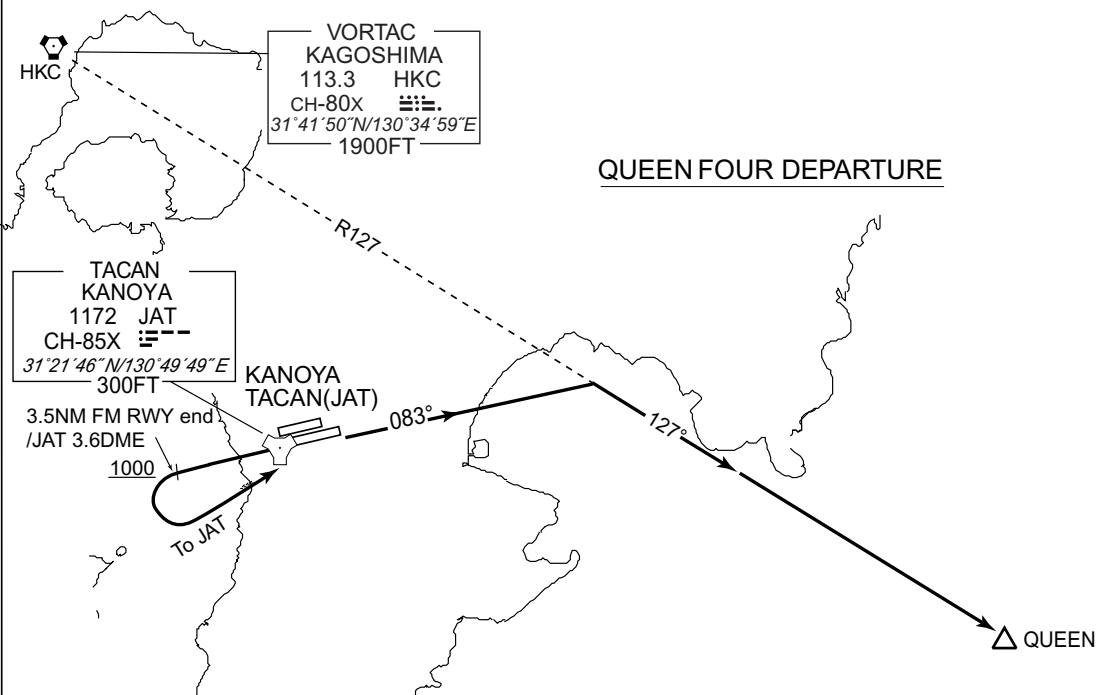

**INTENTIONALLY LEFT BLANK**

STANDARD ARRIVAL CHART - INSTRUMENT

RJFY / KANOYA

STAR

AIRAH ARRIVAL

From over JAT TACAN, proceed via JAT R125 to AIRAH (JAT R125 16.0DME), maintain last assigned altitude until 2DME from JAT TACAN, cross AIRAH at or above 6000FT or specified altitude.



CHANGE : KANOYA ARRIVAL abolished.

**INTENTIONALLY LEFT BLANK**



## RJFY / KANOYA

ILS Z or LOC Z RWY 26L

Diagram illustrating a runway layout. A dashed line indicates a heading of 272°. A vertical line is labeled RDH 51. A point is labeled MM. A line segment is labeled GP 3.0°. An angle of 265° is shown. A distance of 2200 is marked twice.

MINIMA		THR elev. 187	AD elev. 202			
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	450 (263)	800	680 (493)	1400	940 (738)	1600
B				1500		
C				1600	1380 (1178)	2400
D				1800		3200

23/2/23


## RJFY / KANOYA

KANOYA APP  
122.15 - 126.2  
284.6 - 321.2


ILS / LOC  
110.3 IJA :±--  
ILS - GP 335.0

KANOYA TOWER  
126.2 - 133.4  
228.2 - 236.8

RADAR AVBL  
CALL  
KANOYA APP

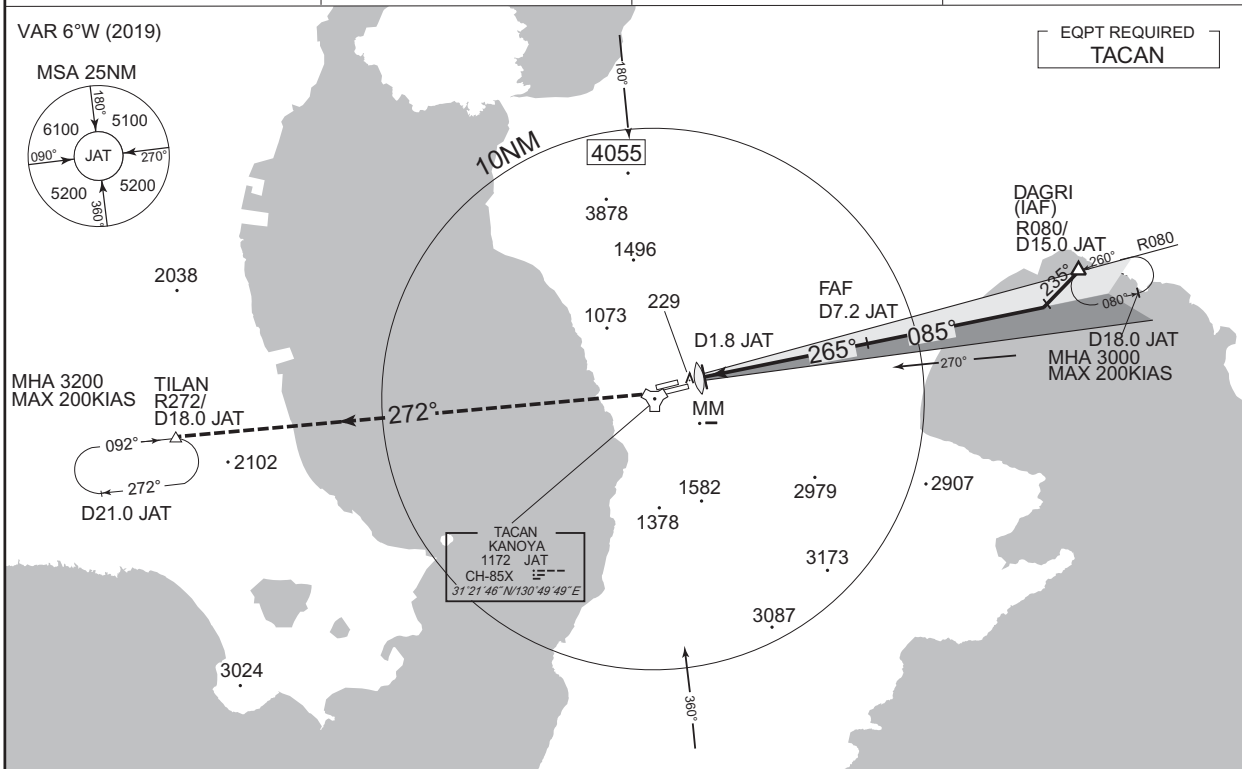

At DA, climb to 3200FT via JAT R272  
to TILAN and hold.  
Contact KANOYA APP.

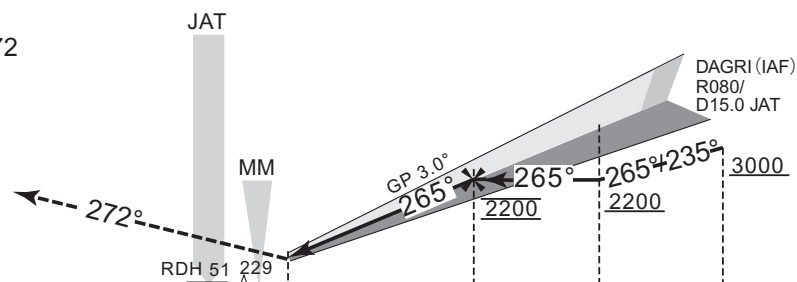

DME to JAT

NM to THR

7.2

6.1

---

10.0

8.9

MINIMA		THR elev. 187		AD elev. 202		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	450 (263)	800	680 (493)	1400	940 (738)	1600
B				1500		
C				1600	1380 (1178)	2400
D				1800		3200

**Civil Aviation Bureau, Japan (EFF:23 MAR 2023)**

## RJFY / KANOYA

ILS X or LOC X RWY 26L

CHANGE : MDA(H) for circling. OBST HGT(1207→1073).

INSTRUMENT APPROACH CHART


RJFY / KANOYA

TACAN Z RWY 26L



MISSED APPROACH

At 1.0DME prior to JAT TACAN,  
climb to 3200FT via JAT R272  
to TILAN and hold.  
Contact KANOYA APP.

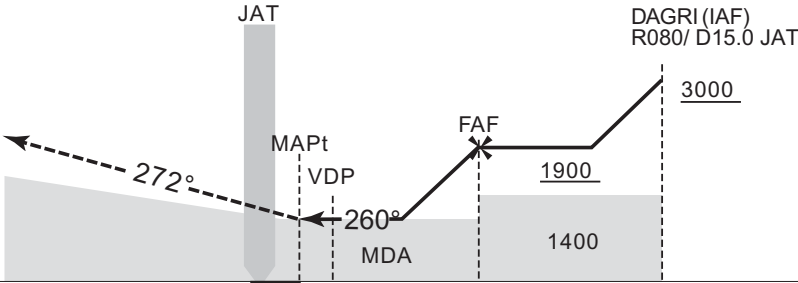

DME to JAT	1.0	2.7	8.0	15.0
NM to THR	1.6	6.9	13.9	

MINIMA		THR elev. 187	AD elev. 202	
CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	700 (513)	1400	940 (738)	1600
B		1500		
C		1600	1380 (1178)	2400
D		1800		

CHANGE : MDA(H) for circling. OBST HGT(1207→1073).

## RJFY / KANOYA

TACAN Y RWY 26L

VAR 6°W (2019)

EQPT REQUIRED

MSA 25NM

JAT

6100

5100

270°

090°

5200

360°

2038

MHA 3200  
MAX 200KIAS

TILAN  
R272/  
D18.0 JAT

092°

272°

D21.0 JAT

2102

3024

10NM

4055

3878

1496

1073

229

MAPt  
D1.0 JAT

1582

1378

3173

3087

2979

2907

260°

270°

FAF  
D8.0 JAT

DAGRI  
R080/  
D15.0 JAT

260°

080°

D18.0 JAT

D16.0 JAT ARC

AIRAH  
(IAF)  
R125/  
D16.0 JAT

305°


125°

D19.0 JAT

MHA 6000  
MAX 200KIAS

NM to JAT	MAPt	3	4	5	6	7	FAF
ALT (3.0° APCH Path)	—	840	1158	1477	1795	2114	2433


At 1.0DME prior to JAT TACAN,  
climb to 3200FT via JAT R272  
to TILAN and hold.  
Contact KANOYA APP,

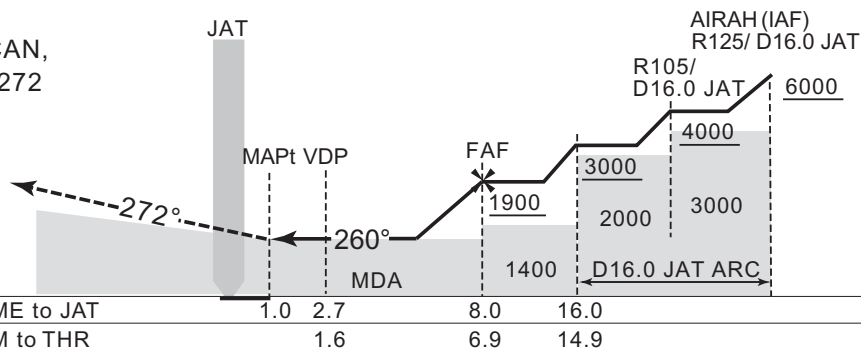

MINIMA		THR elev. 187	AD elev. 202	
CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	700 (513)	1400	940 (738)	1600
B		1500		
C		1600	1380 (1178)	2400
D		1800		3200

CHANGE : MDA(H) for circling. OBST HGT(1207→1073).

## RJFY / KANOYA

KANOYA APP 122.15 - 126.2 284.6 - 321.2	KANOYA TACAN 1172 JAT CH-85X  <i>31°21'46"N/130°49'49"E</i>	KANOYA TOWER 126.2 - 133.4 228.2 - 236.8	RADAR AVBL CALL KANOYA APP
---	---	--	----------------------------------

