

AD 2 AERODROMES

RJCM AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RJCM - MEMANBETSU

RJCM AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	435250N / 1440951E 175° / 1.25km from RWY 18 THR
2	Direction and distance from (city)	9.7nm SSW ABASHIRI
3	Elevation/ Reference temperature	109FT / 26°C (2004-2008)
4	Geoid undulation at AD ELEV PSN	99FT
5	MAG VAR/ Annual change	9° W(2009) / 2.1'E
6	AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses	Hokkaido Airports Co.,Ltd. Memanbetsu Airport Office 256-3, Chuo, Memanbetsu, Ozora-cho Abashiri-gun, Hokkaido TEL: 0152-74-2222 FAX: 0152-74-3674 e-MAIL: hap-mmb-unjyo@hokkaido-airports.co.jp
7	Types of traffic permitted(IFR/VFR)	IFR/VFR
8	Remarks	Memanbetsu Airport Branch (CAB) 256, Chuo, Memanbetsu, Ozora-cho Abashiri-gun, Hokkaido TEL:0152-74-2673

RJCM AD 2.3 OPERATIONAL HOURS

1	AD Administration	2300-1200
2	Customs and immigration	On request Customs: 0154-22-3730 Immigration: 0154-22-2430
3	Health and sanitation	Quarantine(human): On request(0154-23-3340) Quarantine(animal, plant): Nil
4	AIS Briefing Office	Nil
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	H24 (NEW CHITOSE)
7	ATS	2300-1200
8	Fuelling	2300-1200
9	Handling	2300-1200
10	Security	2300-1200
11	De-icing	Nil
12	Remarks	Nil

RJCM AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	All the modern institutions that deal with the weight thing to a A306 type freighter
2	Fuel/ oil types	JET A-1
3	Fuelling facilities/ capacity	Fuel truck refueling, 22L/sec
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

RJCM AD 2.5 PASSENGER FACILITIES

1	Hotels	Nil
2	Restaurants	At airport
3	Transportation	Buses and taxis
4	Medical facilities	Hospital in Ozora-town, 5km from AP
5	Bank and Post Office	Nil
6	Tourist Office	At airport
7	Remarks	Nil

RJCM AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT 8
2	Rescue equipment	Chemical fire fighting truck x 3 Emergency medical equipments conveyance truck x 1
3	Capability for removal of disabled aircraft	Nil
4	Remarks	Nil

RJCM AD 2.7 SEASONAL AVAILABILITY-CLEARING

1	Types of clearing equipment	Snow removal equipment: 42
2	Clearance priorities	1) RWY 18/36, T1, T6, P1-P6, Apron A 2) T2-T5, TB, Apron B
3	Remarks	Nil

RJCM AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	Apron surface and strength	Apron A : Surface:Cement-concrete, Strength:PCR 1132/R/B/W/T Apron B : Surface:Cement-concrete, Strength:PCR 257/R/B/W/T
2	Taxiway width, surface and strength	T1-T6, P1-P6 : Surface:Asphalt-concrete, Width:30m, Strength:PCR 1170/F/C/X/T TB : Surface:Asphalt-concrete, Width:9m, Strength:PCR 273/F/C/X/T
3	ACL and elevation	Not available
4	VOR checkpoints	Not available
5	INS checkpoints	(Spot NR) 1 : 435257.24N/1440933.47E 2 : 435255.56N/1440933.89E 3 : 435253.47N/1440934.16E 4 : 435251.21N/1440934.53E 5 : 435248.95N/1440934.82E 6 : 435246.85N/1440935.01E
6	Remarks	Nil

RJCM AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands	Aircraft stand ID sign : Nil ACFT stand taxi lane marking : See AD2.24. AD chart Visual docking guidance system : Nil
2	RWY and TWY markings and LGT	RWY: RWY18/36 (Marking) RWY designation, RWY CL, RWY THR, Aiming point, TDZ, RWY side stripe (LGT) RCLL, REDL, RTHL, RENL, RTZL, RWY DIST marker LGT, WBAR TWY: ALL (Marking) TWY CL, TWY side stripe (LGT) TWY edge LGT TWY: T1-T6 (Marking) RWY HLDG PSN, Mandatory instruction (LGT) TWY CL LGT, RWY guard LGT, Taxiing guidance sign TWY: P1-P6 (LGT) TWY CL LGT TWY: TB (Marking) RWY HLDG PSN, Mandatory instruction (LGT) RWY guard LGT, Taxiing guidance sign
3	Stop bars	Nil
4	Remarks	(Marking) Overrun area (LGT) Apron flood LGT

RJCM AD 2.10 AERODROME OBSTACLES

In Area2 See Obstacle data


In Area3 To be developed

RJCM AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	NEW CHITOSE
2	Hours of service MET Office outside hours	H24 (NEW CHITOSE)
3	Office responsible for TAF preparation Periods of validity	NEW CHITOSE 30 Hours
4	Trend forecast Interval of issuance	Nil
5	Briefing/ consultation provided	Briefing is available upon inquiry at NEW CHITOSE
6	Flight documentation Language(s) used	C En
7	Charts and other information available for briefing or consultation	S ₆ , U ₈₅ , U ₇ , U ₅ , U ₃ , U ₂₅ , U ₂ /T _r , P _s , P ₅ , P ₃ , P ₂₅ , P _{SWE} , P _{SWF} , P _{SWG} , P _{SWI} , P _{SWM} , P _{SW} (domestic), E, C, W _E , W _F , W _G , W _I , W, N
8	Supplementary equipment available for providing information	Nil
9	ATS units provided with information	TWR
10	Additional information(limitation of service, etc.)	Nil

RJCM AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCR) and Surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
18	174.66°	2500x45	PCR 1027/F/D/X/T Asphalt-concrete	435330.51N/1440945.38E 98.8FT	THR ELEV: 102.0FT TDZ ELEV: 108FT
36	354.66°	2500x45		435209.85N/1440955.80E 98.8FT	THR ELEV: 135.2FT TDZ ELEV: 131FT
Slope of RWY		Strip Dimensions(M)	RESA (Overrun) Dimensions (M)		Remarks
7		10	11		14
See below figure		2620x300	190x(MNM:140 MAX:300)*		RWY Grooving 2500m x 45m
		2620x300	90x(MNM:90 MAX:300)* *For detail, ask airport administrator		

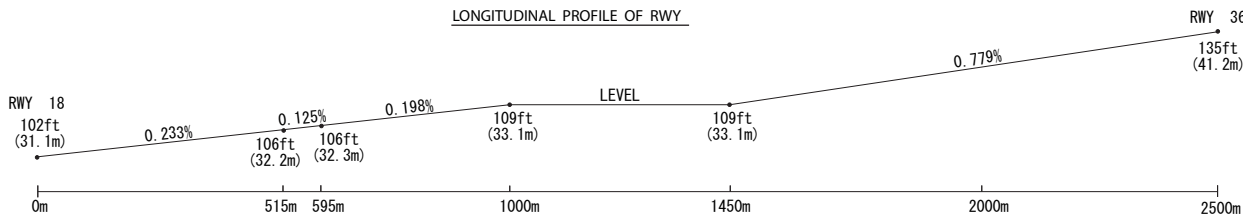

RJCM AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6
18	2500	2500	2500	2500	Nil
36	2500	2500	2500	2500	Nil

RJCM AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	RTHL Color WBAR	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color
1	2	3	4	5	6	7	8	9
18	PALS (CAT I) 900m LIH	Green Green	PAPI 3.0°/Left 404.5m 65.6ft	900m	2500m 30m Coded color (White/Red) LIH	2500m 60m Coded color (White/Yellow) LIH	Red	Nil(*1)
36	PALS (CAT I) 900m LIH	Green Green	PAPI 3.0°/Left 499.2m 65.6ft	900m	2500m 30m Coded color (White/Red) LIH	2500m 60m Coded color (White/Yellow) LIH	Red	Nil(*1)
Remarks								
10								
Overrun area edge LGT(LEN:60m, Color:Red)(*1)								

RJCM AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	ABN: 435259N /1440926E , ALTN FLG(2)WG EV 4.3SEC, HO
2	LDI location and LGT Anemometer location and LGT	LDI : Nil Anemometer : RWY 18: 285m from RWY 18 THR RWY 36: 289m from RWY 36 THR
3	TWY edge and center line lighting	TWY edge and center line lights installed, see AD2.9
4	Secondary power supply / switch-over time	Within 1sec : REDL, RENL, RTHL, WBAR, RCLL, Overrun area edge LGT Within 15sec : Other LGT
5	Remarks	WDI LGT

RJCM AD 2.16 HELICOPTER LANDING AREA

Nil

RJCM AD 2.17 ATS AIRSPACE

Designation and lateral limits		Vertical limits (ft)	Airspace classification	ATS unit call sign Language	Remarks
1		2	3	4	6
Memambetsu CTR	Area within a radius of 5nm(9km) of Memambetsu ARP (4353N/14410E)	3000 or below	D	Memambetsu TWR En	
Hidaka ACA	See RJEC attached chart		E	Hidaka APP En	

RJCM AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
APP	Hidaka Approach	128.325MHz 246.1MHz 134.55MHz 121.5MHz (E) 243.0MHz (E)	2230 - 1200	
TWR	Memambetsu tower	118.85MHz(1) 126.2MHz	2300 - 1200 (1)Primary	

RJCM AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid (VOR declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
VOR (9°W/2010)	TBE	110.85MHz	H24	435305.67N/ 1440958.26E		
DME	TBE	1132MHz (CH-45Y)	H24	435305.67N/ 1440958.26E	132ft	
ILS-LOC 18	ITB	110.1MHz	2300 - 1200	435202.26N/ 1440956.74E		LOC: 235m (771ft) away FM RWY 36 THR, BRG (MAG) 184°
ILS-GP 18	-	334.4MHz	2300 - 1200	435320.20N/ 1440952.07E		GP: 329m (1079ft) inside FM RWY 18 THR, 120m (394ft) E of RCL. Angle 3.0°, HGT of ILS reference datum 16.5m (54ft)
ILS-DME 18	ITB	999MHz (CH-38X)	2300 - 1200	435320.16N/ 1440952.39E	119ft	DME: 331m (1086ft) inside FM RWY 18 THR, 130m(427ft) E of RCL.
ILS-LOC 36	IHM	110.3MHz	2300 - 1200	435316.40N/ 1440950.98E		LOC: 445m(1460ft) inside FM RWY 18 THR, 85m(279ft) E of RCL. LOC offset angle 1.74° BRG(MAG) 5.90° LOC unusable: beyond 17nm from LOC antenna
ILS-GP 36	-	335MHz	2300 - 1200	435221.40N/ 1440948.65E		GP: 370m(1214ft) inside FM RWY 36 THR, 125m(410ft) W of RCL. HGT of ILS REF datum: 16.5m(54ft). GP angle 3.0°.
ILS-DME 36	IHM	1001MHz (CH-40X)	2300 - 1200	435221.65N/ 1440948.07E	137ft	DME: 379m(1243ft) inside FM RWY 36, 136m(446ft) W of RCL.
MSAS		1575.42MHz	H24			Transmitting antennas are satellite based.

ILS for RWY18

REMARKS : 1. LOC beam BRG(MAG) 184°
 2. HGT of ILS REF datum 16.5m(54ft)
 3. GP Angle 3.0°
 4. ELEV of ILS-DME 36.2m(119ft)

ILS for RWY36

REMARKS : 1. LOC OFFSET ANGLE 1.74°
 2. LOC beam BRG(MAG) 5.90°
 3. HGT of ILS REF datum 16.5m(54ft)
 4. GP Angle 3.0°
 5. ELEV of ILS-DME 41.7m (137ft)



LOC unusable in the following area : BEY 17NM FM LOC ANT.

RJCM AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

PPR

Prior permission is required for transient aircraft due to parking congestion except scheduled and/or emergency flight.
Tel: Hokkaido Airports Co.,Ltd. Memanbetsu Airport Office 0152-74-2222

2. Taxiing to and from stands

Nil

3. Parking area for small aircraft(General aviation)

Nil

4. Parking area for helicopters

Nil

5. Apron - taxiing during winter conditions

Nil

6. Taxiing - limitations

Nil

7. School and training flights - technical test flights - use of runways

Nil

8. Helicopter traffic - limitation

Nil

9. Removal of disabled aircraft from runways

Nil

RJCM AD 2.21 NOISE ABATEMENT PROCEDURES

Nil

RJCM AD 2.22 FLIGHT PROCEDURES

1.TAKE OFF MINIMA

	RWY	REDL & RCLL		REDL or RCLL or RCL Marking		NIL (DAY ONLY)	
		RVR	VIS	RVR	VIS	RVR	VIS
Multi-Engine ACFT with TKOF ALTN AP Filed	18/36	400m		400m	400m	-	500m
OTHER	18/36	AVBL LDG MINIMA					

2. Lost communication procedures for arrival aircraft under radar navigational guidance

- If radio communications with Hidaka Approach are lost for 1 minute, squawk Mode A/3 Code 7600 and;
- (I)

1. Contact Memanbetsu Tower.

2. If unable, proceed in accordance with visual flight rules.

3. If unable, proceed to MEMANBETSU VOR/DME at last assigned altitude or 4,000 feet whichever is higher, and execute instrument approach.
- (II)

Procedures other than above will be issued when situation requires.

RJCM AD 2.23 ADDITIONAL INFORMATION

双方向に設置されている ILS の輻射について

ILS 18/36
RWY18 および 36 ILS は同時に輻射する。

Two separate ILS radiate at opposite ends of a single runway

ILS 18/36
RWY18 and 36 ILS radiate simultaneously.

RJCM AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome/Heliport Chart
Standard Departure Chart (MEMANBETSU REVERSAL)
Standard Departure Chart (MENIB-RNAV)
Standard Departure Chart (NICOL-RNAV)
Standard Departure Chart (NULKI-RNAV)
Instrument Approach Chart (ILS Z or LOC Z RWY18)
Instrument Approach Chart (ILS Y or LOC Y RWY18)
Instrument Approach Chart (ILS X RWY18)
Instrument Approach Chart (ILS or LOC RWY36)
Instrument Approach Chart (VOR RWY18)
Instrument Approach Chart (VOR RWY36)
Instrument Approach Chart (RNP Z RWY18)
Instrument Approach Chart (RNP Y RWY18 (AR))
Instrument Approach Chart (RNP RWY36)
Other Chart (Visual REP)
Other Chart (LDG CHART)
Other Chart (MVA CHART)

RJC/M / MEMANBETSU AD

MEMANBETSU AD
ELEV 109ft

VAR 9°W(2009)
Annual change 2.1°E

OVERRUN AREA
RVR EDGE LGT CEILO METER

WIND SPEED METER
RVR DIST 435209.85N/1440955.80E

MARKER LGT
RWY 18/36

PAPI Angle 3.0°
MEHT 20.0 m(66ft)

APRON A
APRON B

TOWER
★ ABN

APRON FLOOD LGT

TERMINAL

SEQUENCED FLASHING LGT (SFL-V)

LONGITUDINAL PROFILE OF RWY

LEVEL

0.233%
0.125%
0.198%

0.779%

18-36
18-36

Installed on TWY T-1~T-6, T-B.

118.85 - 126.2
TWR

435330.51N/1440945.39E
VOR/DME(TBE)

404.5m
PAPI Angle 3.0°
MEHT 20.0 m(66ft)

7Δ1
WIND SPEED METER
CEILO METER
P1

7Δ2
P2

6Δ2
P3

5Δ3
P4

4Δ4
P5

3Δ5
P6

2Δ6
P7

1Δ7
P8

1Δ7
P9

1Δ7
P10

1Δ7
P11

1Δ7
P12

1Δ7
P13

1Δ7
P14

1Δ7
P15

1Δ7
P16

1Δ7
P17

1Δ7
P18

1Δ7
P19

1Δ7
P20

1Δ7
P21

1Δ7
P22

1Δ7
P23

1Δ7
P24

1Δ7
P25

1Δ7
P26

1Δ7
P27

1Δ7
P28

1Δ7
P29

1Δ7
P30

1Δ7
P31

1Δ7
P32

1Δ7
P33

1Δ7
P34

1Δ7
P35

1Δ7
P36

1Δ7
P37

1Δ7
P38

1Δ7
P39

1Δ7
P40

1Δ7
P41

1Δ7
P42

1Δ7
P43

1Δ7
P44

1Δ7
P45

1Δ7
P46

1Δ7
P47

1Δ7
P48

1Δ7
P49

1Δ7
P50

1Δ7
P51

1Δ7
P52

1Δ7
P53

1Δ7
P54

1Δ7
P55

1Δ7
P56

1Δ7
P57

1Δ7
P58

1Δ7
P59

1Δ7
P60

1Δ7
P61

1Δ7
P62

1Δ7
P63

1Δ7
P64

1Δ7
P65

1Δ7
P66

1Δ7
P67

1Δ7
P68

1Δ7
P69

1Δ7
P70

1Δ7
P71

1Δ7
P72

1Δ7
P73

1Δ7
P74

1Δ7
P75

1Δ7
P76

1Δ7
P77

1Δ7
P78

1Δ7
P79

1Δ7
P80

1Δ7
P81

1Δ7
P82

1Δ7
P83

1Δ7
P84

1Δ7
P85

1Δ7
P86

1Δ7
P87

1Δ7
P88

1Δ7
P89

1Δ7
P90

1Δ7
P91

1Δ7
P92

1Δ7
P93

1Δ7
P94

1Δ7
P95

1Δ7
P96

1Δ7
P97

1Δ7
P98

1Δ7
P99

1Δ7
P100

1Δ7
P101

1Δ7
P102

1Δ7
P103

1Δ7
P104

1Δ7
P105

1Δ7
P106

1Δ7
P107

1Δ7
P108

1Δ7
P109

1Δ7
P110

1Δ7
P111

1Δ7
P112

1Δ7
P113

1Δ7
P114

1Δ7
P115

1Δ7
P116

1Δ7
P117

1Δ7
P118

1Δ7
P119

1Δ7
P120

1Δ7
P121

1Δ7
P122

1Δ7
P123

1Δ7
P124

1Δ7
P125

1Δ7
P126

1Δ7
P127

1Δ7
P128

1Δ7
P129

1Δ7
P130

1Δ7
P131

1Δ7
P132

1Δ7
P133

1Δ7
P134

1Δ7
P135

1Δ7
P136

1Δ7
P137

1Δ7
P138

1Δ7
P139

1Δ7
P140

1Δ7
P141

1Δ7
P142

1Δ7
P143

1Δ7
P144

1Δ7
P145

1Δ7
P146

1Δ7
P147

1Δ7
P148

1Δ7
P149

1Δ7
P150

1Δ7
P151

1Δ7
P152

1Δ7
P153

1Δ7
P154

1Δ7
P155

1Δ7
P156

1Δ7
P157

1Δ7
P158

1Δ7
P159

1Δ7
P160

1Δ7
P161

1Δ7
P162

1Δ7
P163

1Δ7
P164

1Δ7
P165

1Δ7
P166

1Δ7
P167

1Δ7
P168

1Δ7
P169

1Δ7
P170

1Δ7
P171

1Δ7
P172

1Δ7
P173

1Δ7
P174

1Δ7
P175

1Δ7
P176

1Δ7


STANDARD DEPARTURE CHART-INSTRUMENT

RJCM / MEMANBETSU

SID

MEMANBETSU REVERSAL THREE DEPARTURE

RWY 18 : Climb via TBE R187 to TBE 5.0DME, turn left....
RWY 36 : Climb via TBE R001 to TBE 5.0DME, turn right,....
....Proceed to TBE VOR/DME. Cross TBE VOR/DME at or above 4000FT.

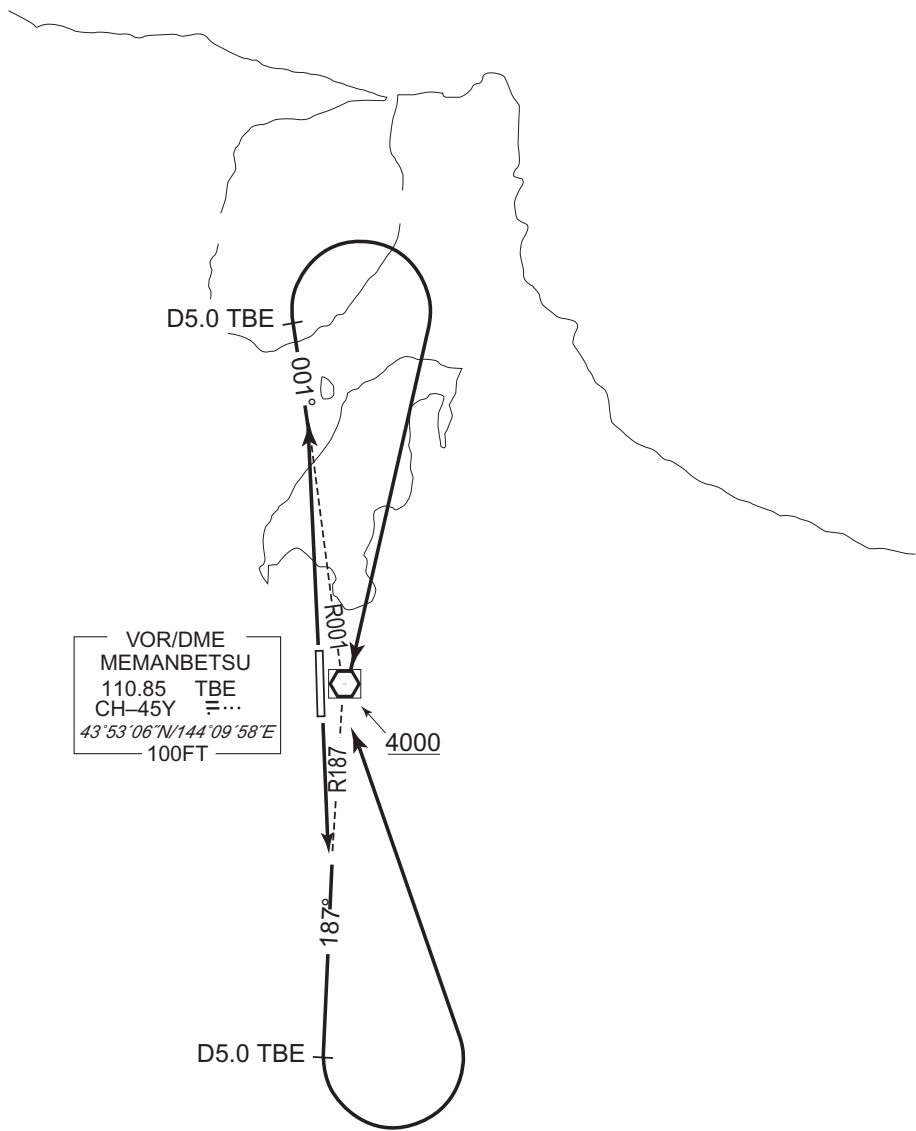


CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART-INSTRUMENT

RJCM / MEMANBETSU

RNAV SID

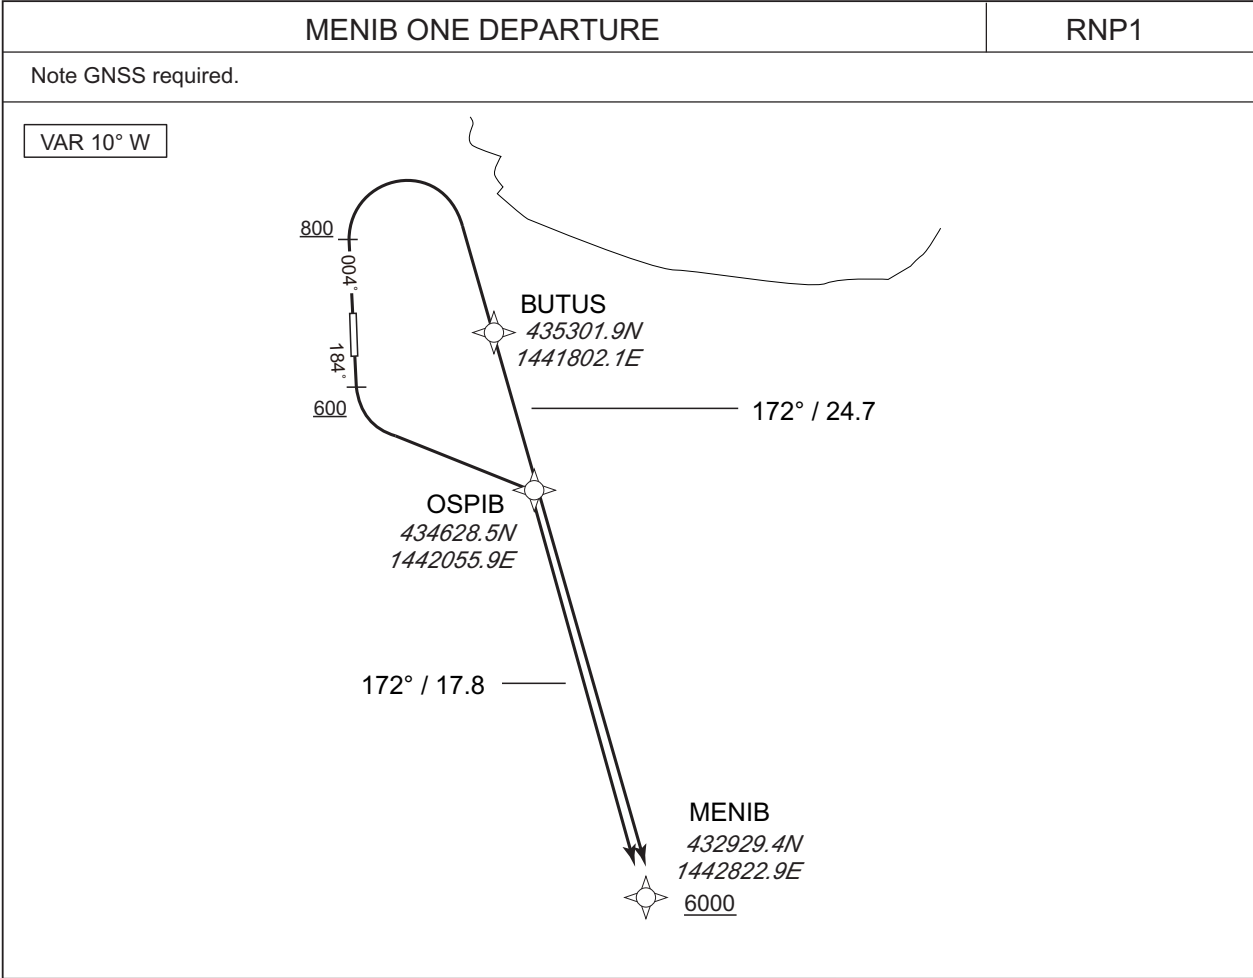

RWY18 : Climb on HDG184° at or above 600FT, turn left direct to OSPIB, to MENIB at or above 6000FT.
RWY36 : Climb on HDG004° at or above 800FT, turn right direct to BUTUS, to MENIB at or above 6000FT.
Note RWY18 : 5.0% climb gradient required up to 2300FT.
OBST ALT 3314FT located at 12.2NM 153° FM end of RWY18.

RWY18


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	184 (174.7)	-9.6	—	—	+600	—	—	RNP1
002	DF	OSPIB	—	—	-9.6	—	L	—	—	—	RNP1
003	TF	MENIB	—	172 (162.3)	-9.6	17.8	—	+6000	—	—	RNP1

RWY36

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	004 (354.7)	-9.6	—	—	+800	—	—	RNP1
002	DF	BUTUS	—	—	-9.6	—	R	—	—	—	RNP1
003	TF	MENIB	—	172 (162.3)	-9.6	24.7	—	+6000	—	—	RNP1

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

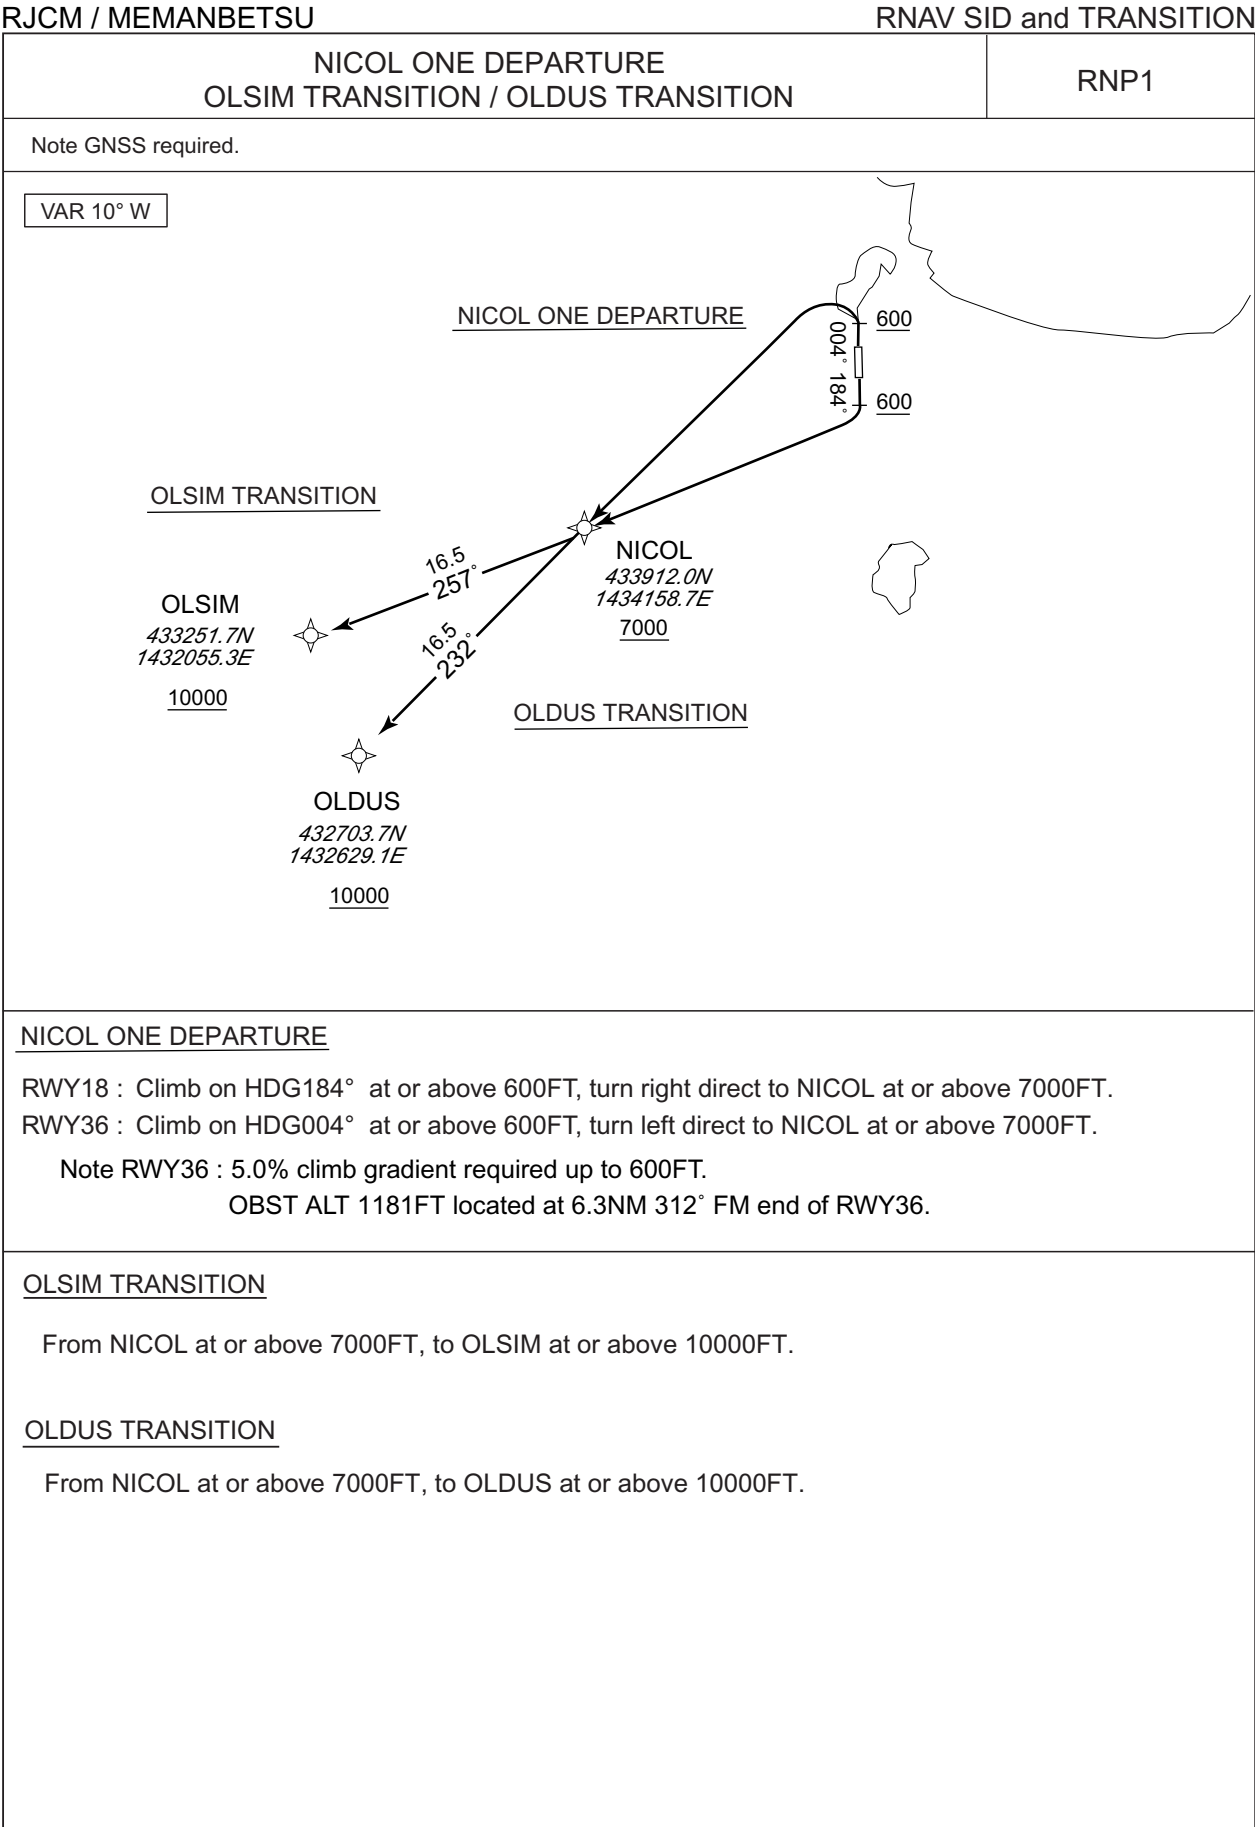

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

RJCM / MEMANBETSU

RNAV SID and TRANSITION

NICOL ONE DEPARTURE											
RWY18											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	184 (174.7)	-9.6	-	-	+600	-	-	RNP1
002	DF	NICOL	-	-	-9.6	-	R	+7000	-	-	RNP1
RWY36											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	004 (354.7)	-9.6	-	-	+600	-	-	RNP1
002	DF	NICOL	-	-	-9.6	-	L	+7000	-	-	RNP1
OLSIM TRANSITION											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	NICOL	-	-	-9.6	-	-	+7000	-	-	RNP1
002	TF	OLSIM	-	257 (247.6)	-9.6	16.5	-	+10000	-	-	RNP1
OLDUS TRANSITION											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	NICOL	-	-	-9.6	-	-	+7000	-	-	RNP1
002	TF	OLDUS	-	232 (222.9)	-9.6	16.5	-	+10000	-	-	RNP1

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

RJCM / MEMANBETSU


RNAV SID

NULKI ONE DEPARTURE

RNP1

Note GNSS required.

VAR 10° W

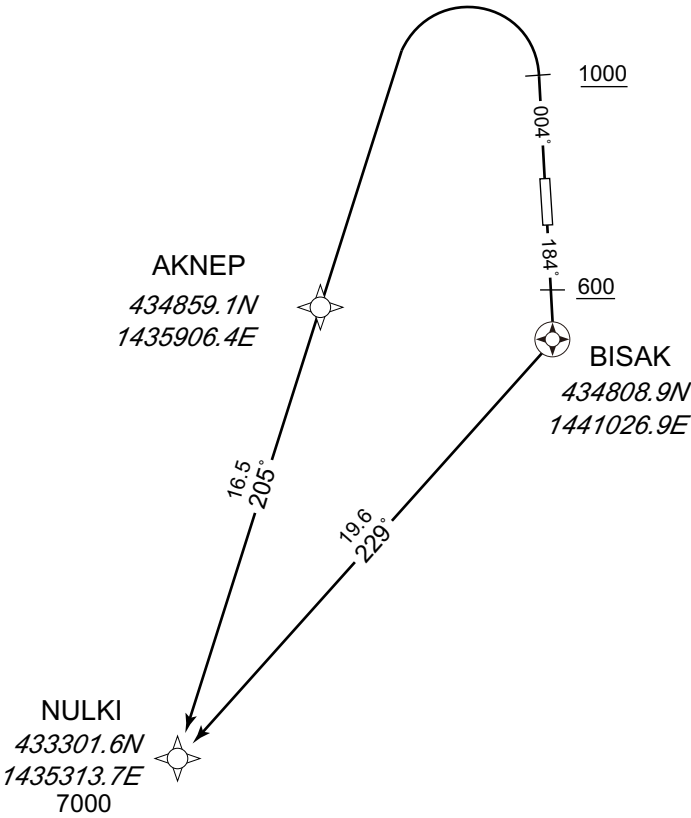

RWY18 : Climb on HDG184° at or above 600FT, direct to BISAQ, to NULKI at or above 7000FT.
RWY36 : Climb on HDG004° at or above 1000FT, turn left direct to AKNEP, to NULKI at or above 7000FT.
Note RWY36 : 3.9% climb gradient required up to 1500FT.
OBST ALT 1673FT located at 8.2NM 320° FM end of RWY36.

RWY18

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	184 (174.7)	-9.6	—	—	+600	—	—	RNP1
002	DF	BISAQ	Y	—	-9.6	—	—	—	—	—	RNP1
003	TF	NULKI	—	229 (219.6)	-9.6	19.6	—	+7000	—	—	RNP1

RWY36

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	004 (354.7)	-9.6	—	—	+1000	—	—	RNP1
002	DF	AKNEP	—	—	-9.6	—	L	—	—	—	RNP1
003	TF	NULKI	—	205 (194.9)	-9.6	16.5	—	+7000	—	—	RNP1

CHANGE : New PROC.

INTENTIONALLY LEFT BLANK

RJCM / MEMANBETSU

HIDAKA APP 128.325 - 246.1 - 134.55	ILS - LOC 110.1 ITB ... ILS-GP 334.4 ILS - DME CH-38X	MEMANBETSU TOWER 118.85 - 126.2	RADAR AVBL
--	--	------------------------------------	------------

VAR 9°W

EQPT REQUIRED
DME
VOR

NOTE : For Initial approach segment
(1) RNP1.
(2) GNSS required.

RNAV HLDG
NOT TO SCALE
GINGA
MHA 5400
MAX 230KIAS

RNAV HLDG
NOT TO SCALE
RAUSU
MHA 3100
MAX 230KIAS

RNAV HLDG
NOT TO SCALE
OZORA
MHA 7000
MAX 230KIAS

Using NAVAID
NOT TO SCALE
RAUSU
D13.0 TBE
TBE
VOR/DME
MHA 3100
MAX 230KIAS

MISSED APPROACH
Climb to 700FT on HDG184°, turn left HDG001° to intercept and proceed via TBE R046 to RAUSU and hold at 3100FT.
Contact HIDAKA APP.
Timing not authorized for defining the MAPt.

NM to ITB	FAF	4	3	2	MAPt
ALT (3.0° APCH Path)	1675	1368	1049	731	-

MINIMA		THR elev. 102		AD elev. 109		
CAT	CAT I	LOC	CIRCLING			
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H) VIS	
A	302 (200)	550	450 (341)	900	640 (531) 1600	
B				1000		
C						750 (641) 2400
D						1400

CHANGE : ATC call sign and FREQ. Description of RADAR Service. Missed APCH PROC.



RJCM / MEMANBETSU

HIDAKA APP 128.325 - 246.1 - 134.55	ILS - LOC 110.1 ITB ... ILS-GP 334.4 ILS - DME CH-38X	MEMANBETSU TOWER 118.85 - 126.2	ILS X RWY18
--	--	------------------------------------	-------------

VAR 9°W

MSA 25NM
ARP : 435250N/1440951E
• 2290

EQPT REQUIRED
DME
RNP1
RF required.

RNAV HLDG
NOT TO SCALE
GINGA
MHA 5400
MAX 230KIAS

RNAV HLDG
NOT TO SCALE
RAUSU
MHA 3100
MAX 230KIAS

RNAV HLDG
NOT TO SCALE
OZORA
MHA 7000
MAX 230KIAS

TEBES(FAF) : 435816.30N / 1440908.38E

MISSED APPROACH

Climb on course 184°, at or above 700FT turn left, direct to RAUSU and hold at 3100FT. Contact HIDAKA APP.

MINIMA		THR elev. 102	AD elev. 109	
CAT	CAT I		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	VIS
A	302 (200)	550	640 (531)	1600
B			750 (641)	2400
C			760 (651)	3200
D				

INSTRUMENT APPROACH CHART

RJCM / MEMANBETSU


ILS X RWY18

Coding Table											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GINGA	-	-	-9.6	-	-	+5000	-	-	RNP1
002	TF	KILOX	-	021 (011.9)	-9.6	17.2	-	-	-	-	RNP1
003	TF	CM853	-	009 (359.2)	-9.6	5.0	-	+2700	-200	-	RNP1
001	IF	OZORA	-	-	-9.6	-	-	+7000	-	-	RNP1
002	TF	KIMUA	-	351 (341.4)	-9.6	18.9	-	+4200	-	-	RNP1
003	TF	KILOX	-	002 (352.2)	-9.6	7.6	-	-	-	-	RNP1
004	TF	CM853	-	009 (359.2)	-9.6	5.0	-	+2700	-200	-	RNP1
001	IF	CM853	-	-	-9.6	-	-	+2700	-200	-	RNP1
002	RF Center: CMRF2 r=2.51NM	CM854	-	-	-9.6	3.8	R	+2200	-	-	RNP1
003	RF Center: CMRF2 r=2.51NM	CM855	-	-	-9.6	3.8	R	1700	-	-	RNP1
001	CA	-	-	184 (174.7)	-9.6	-	-	+700	-	-	RNP1
002	DF	RAUSU	-	-	-9.6	-	L	3100	-	-	RNP1
Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification		
Hold	GINGA	040 (030.8)	-9.5	1.0 (-14000)	R	5400	FL140	-230 (-14000)	RNP1		
Hold	OZORA	006 (356.7)	-9.5	1.0 (-14000)	R	7000	FL140	-230 (-14000)	RNP1		
Hold	RAUSU	227 (217.0)	-9.5	1.0 (-14000)	L	3100	FL140	-230 (-14000)	RNP1		

Waypoint Coordinates			
Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
GINGA	433738.73N / 1435710.93E	CMRF2	435931.80N / 1440529.11E
OZORA	432908.24N / 1441153.19E		
KIMUA	434701.35N / 1440331.41E		
KILOX	435429.92N / 1440206.12E		
CM853	435929.83N / 1440200.57E		
CM854	440202.15N / 1440517.96E		
CM855	435945.90N / 1440856.76E		
RAUSU	440327.56N / 1442052.43E		

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

INSTRUMENT APPROACH CHART

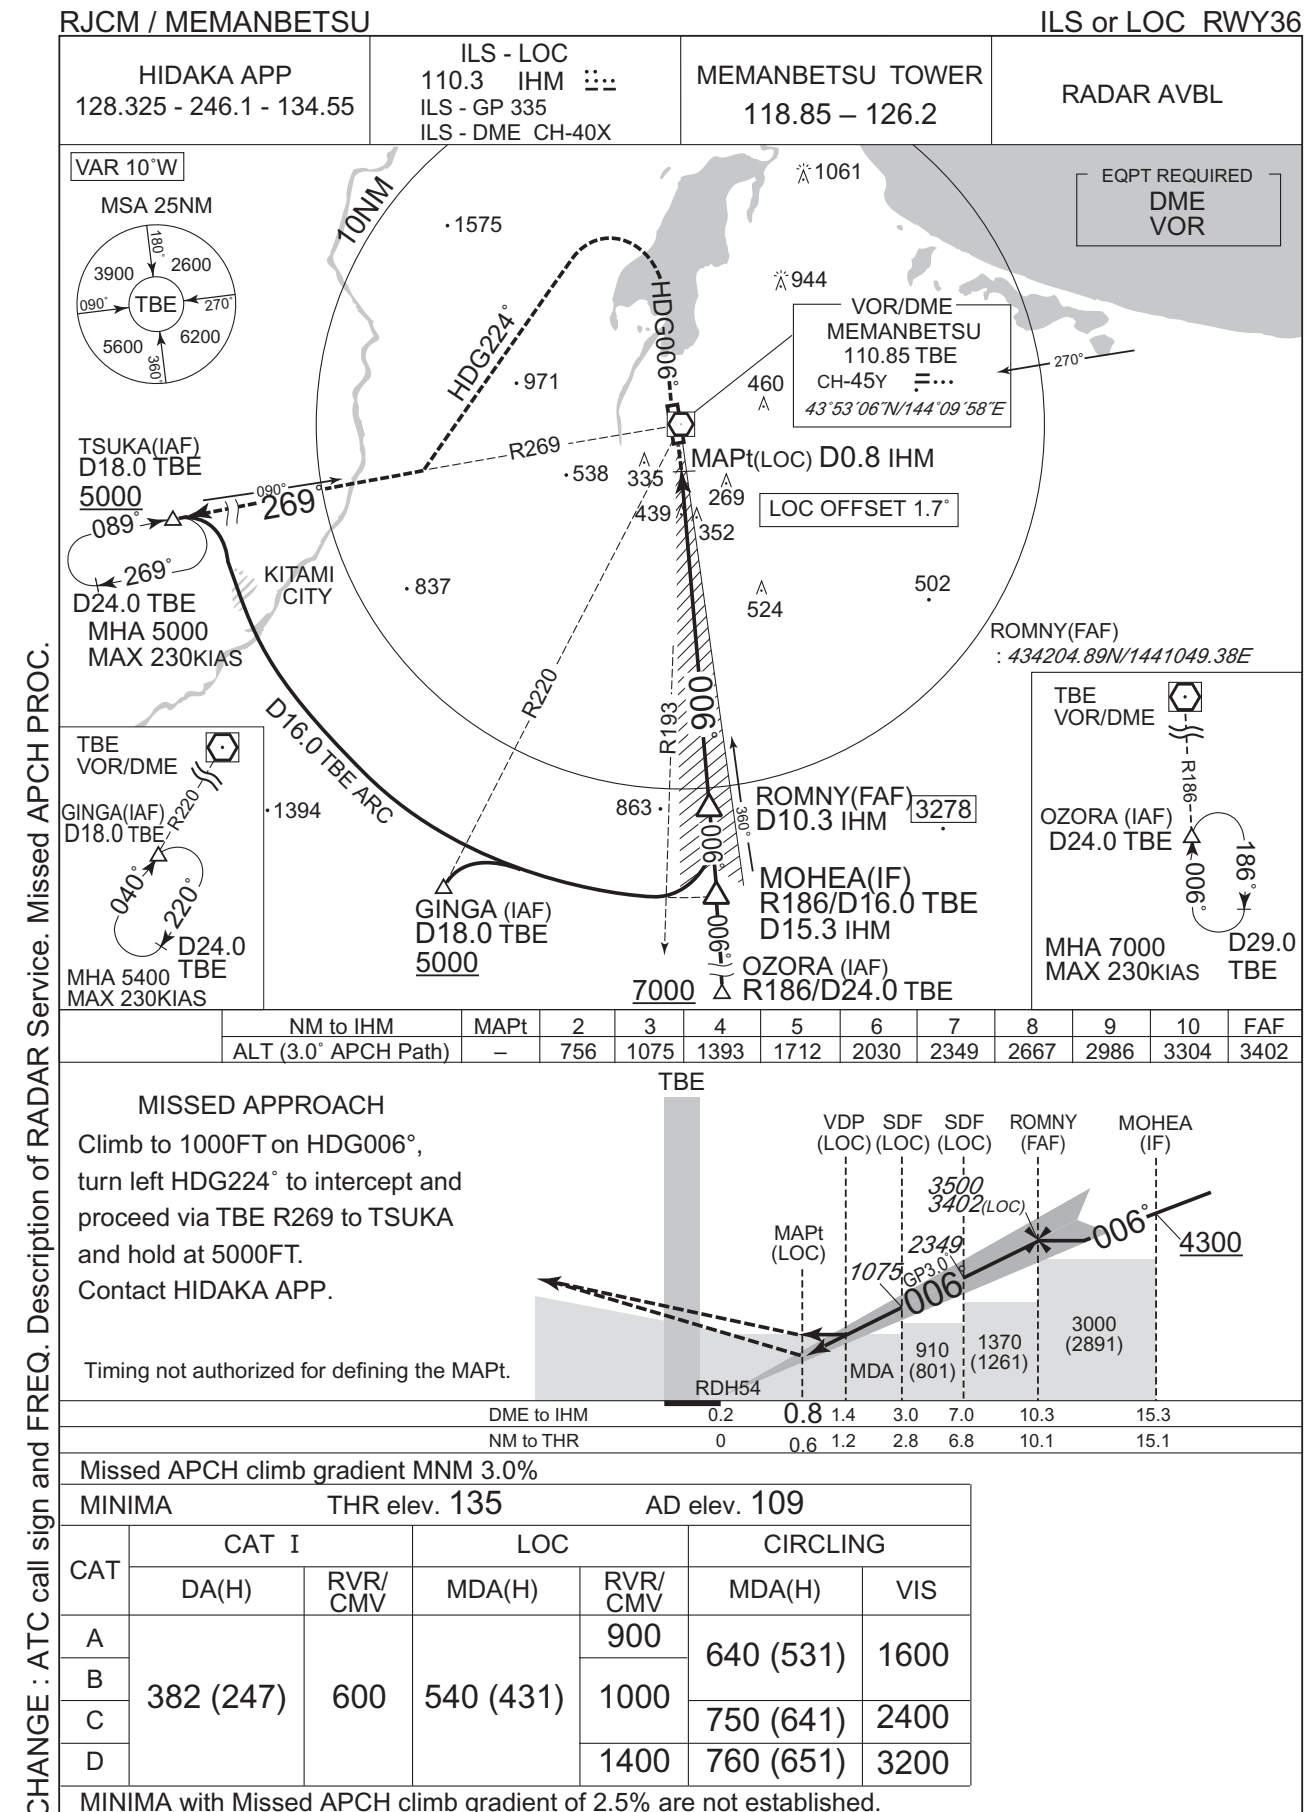


CHANGE : ATC call sign and FREQ. Description of RADAR Service. Missed APCH PROC.



CHANGE : ATC call sign and FREQ. Description of RADAR Service. Missed APCH PROC.



INSTRUMENT APPROACH CHART

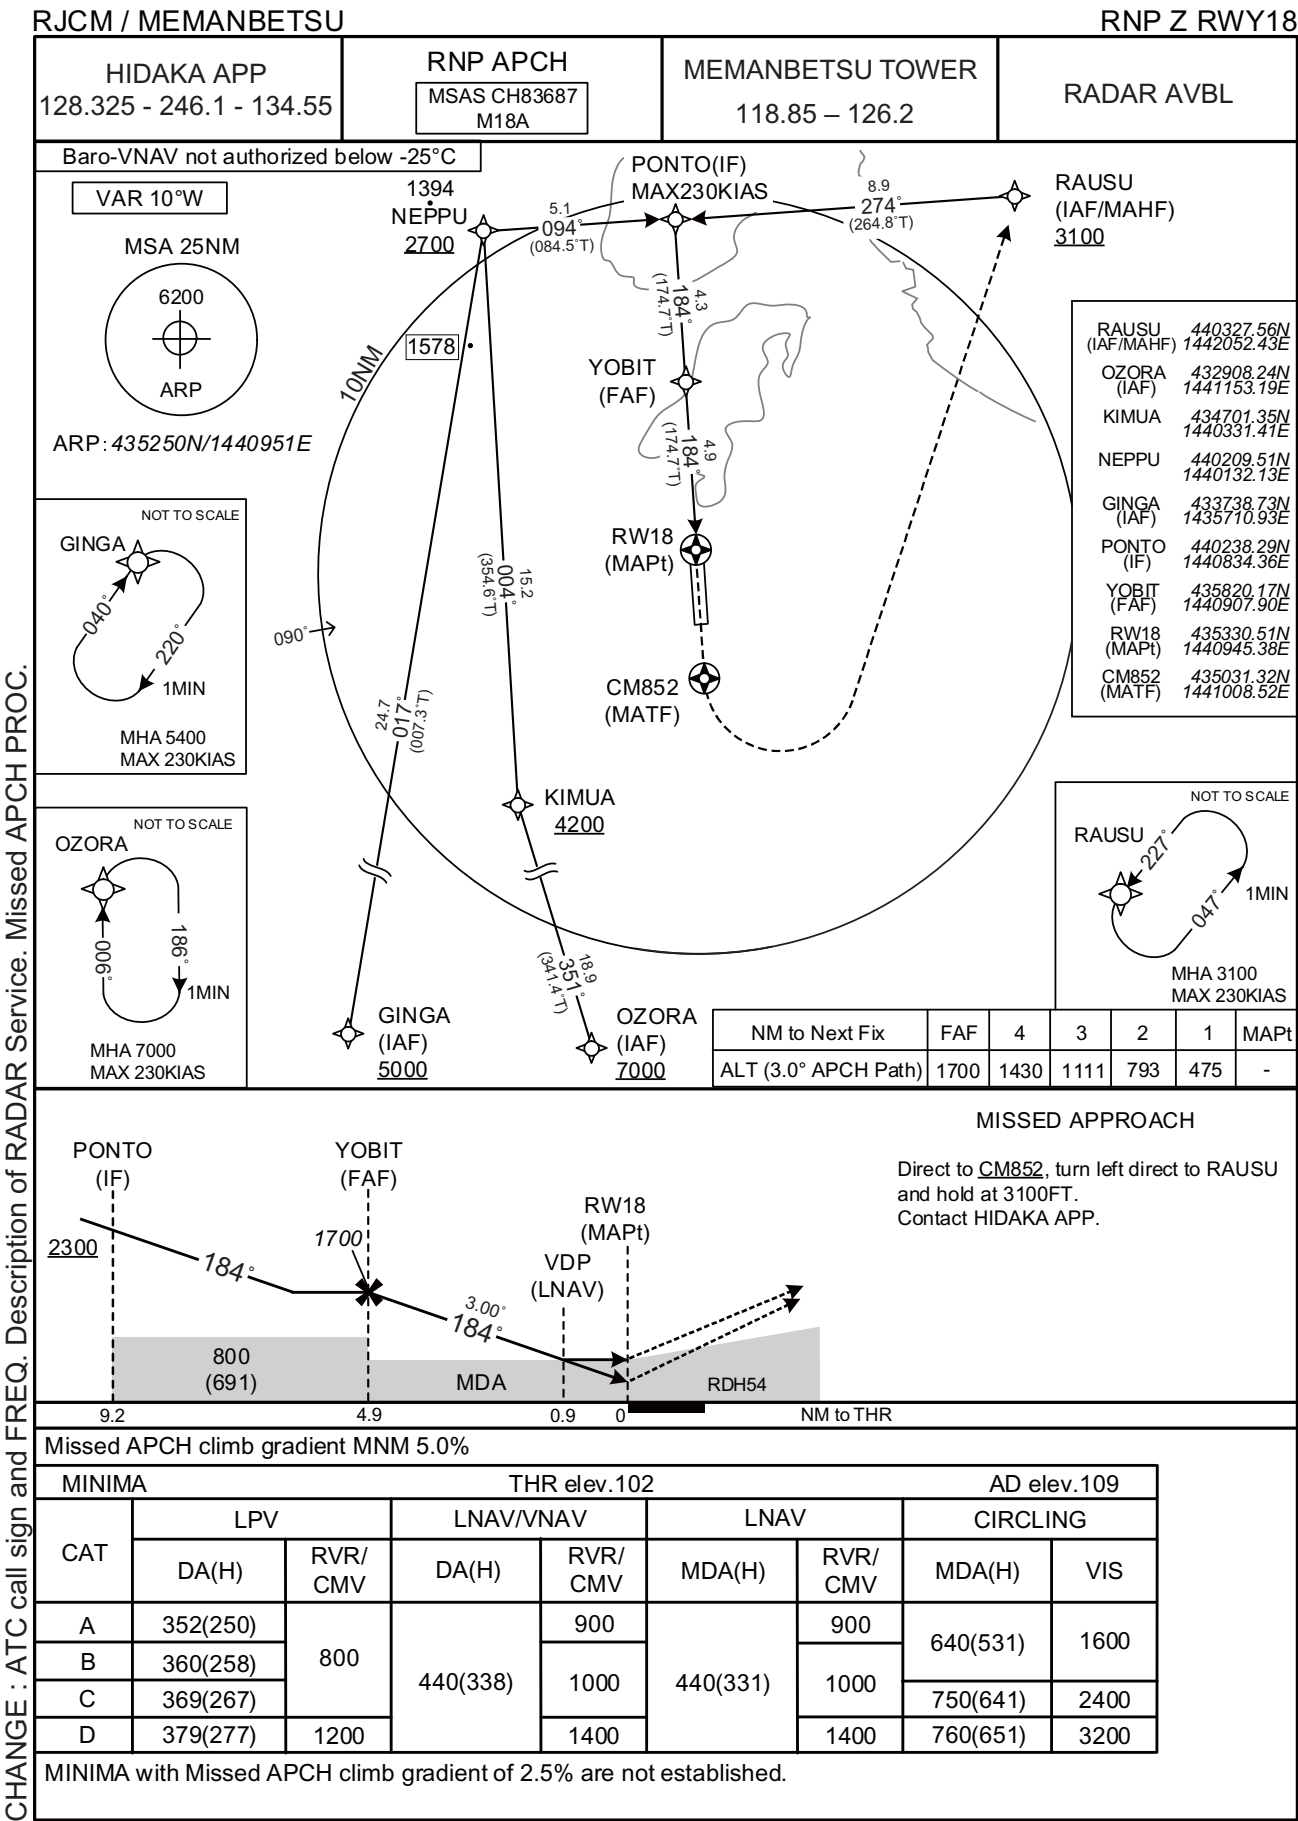

INSTRUMENT APPROACH CHART

RJCM / MEMANBETSU

RNP Z RWY18

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00618
SBAS service provider identifier	2	FPAP latitude	435209.8350N
Airport identifier	RJCM	FPAP longitude	1440955.7670E
Runway	18	Threshold crossing height	00016.5
Approach performance designator	0	TCH units selector	1
Route indicator	Z	Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M18A	∠ length offset	0000
LTP/FTP latitude	435330.4920N	HAL	40.0
LTP/FTP longitude	1440945.3395E	VAL	50.0
CRC remainder	257C1F8B		

Required additional data


LTP/FTP orthometric height	31.0
----------------------------	------

RJCM / MEMANBETSU


RNP Y RWY18(AR)

HIDAKA APP 128.325 - 246.1 - 134.55	RNP AR RF required	MEMANBETSU TOWER 118.85 - 126.2	RADAR AVBL
--	-----------------------	------------------------------------	------------

For uncompensated Baro-VNAV systems, procedure not authorized below -25°C / above 45°C

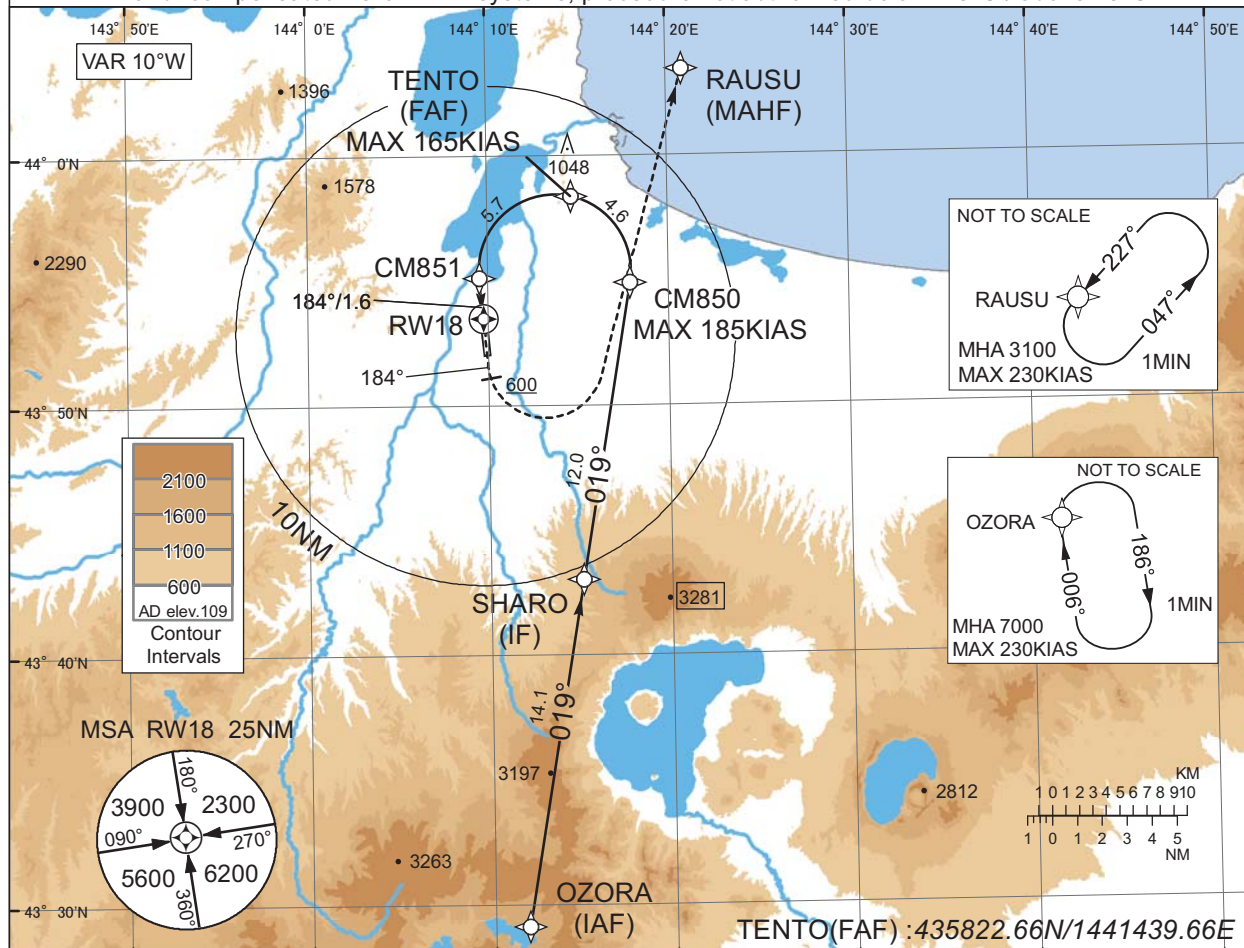

From RW18 on track 184°, at or above 600FT turn left, direct to RAUSU and hold at 3100FT.
Contact HIDAKA APP.

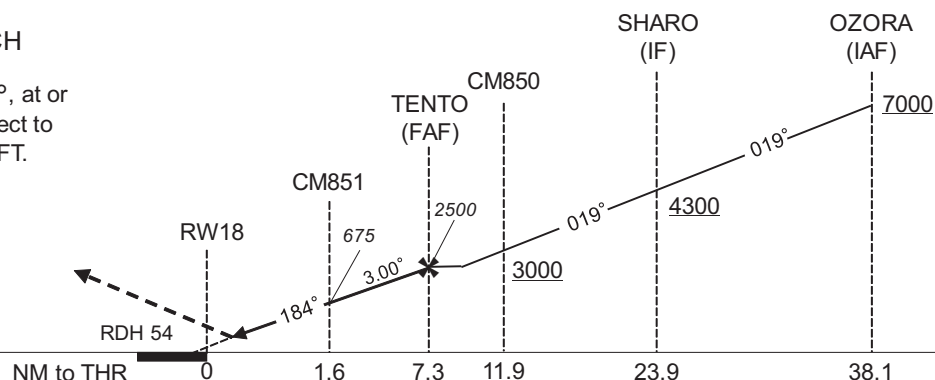

Missed APCH climb gradient MNM 3.0%	NM to NMK
-------------------------------------	-----------

MINIMA	THR elev. 102	AD elev. 109
CAT	RNP 0.30	
	DA(H)	RVR/CMV
A	-	-
B		
C	402(300)	1000
D		1400

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Authorization Required

INSTRUMENT APPROACH CHART

RJCM / MEMANBETSU

RNP Y RWY18(AR)

Coding Table


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	OZORA	-	-	-9.5	-	-	+7000	-	-	-
002	TF	SHARO	-	019 (009.5)	-9.5	14.1	-	+4300	-	-	1.0
003	TF	CM850	-	019 (009.6)	-9.5	12.0	-	+3000	-185	-	1.0
004	RF Center: CMRF1 r=3.04NM	TENTO	-	-	-9.5	4.6	L	2500	-165	-	1.0
005	RF Center: CMRF1 r=3.04NM	CM851	-	-	-9.5	5.7	L	675	-	-3.00	0.3
006	TF	RW18	Y	184 (174.7)	-9.5	1.6	-	156	-	-3.00/54	0.3
007	FA	-	-	184 (174.7)	-9.5	-	-	+600	-	-	1.0
008	DF	RAUSU	-	-	-9.5	-	L	3100	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	OZORA	006 (356.7)	-9.5	1.0 (-14000)	R	7000	FL140	-230 (-14000)	1.0
Hold	RAUSU	227 (217.0)	-9.5	1.0 (-14000)	L	3100	FL140	-230 (-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
OZORA	432908.24N / 1441153.19E	CMRF1	435524.66N / 1441344.15E
SHARO	434301.91N / 1441506.66E		
CM850	435454.27N / 1441753.05E		
TENTO	435822.66N / 1441439.66E		
CM851	435507.75N / 1440932.81E		
RW18	435330.51N / 1440945.38E		
RAUSU	440327.56N / 1442052.43E		

INSTRUMENT APPROACH CHART

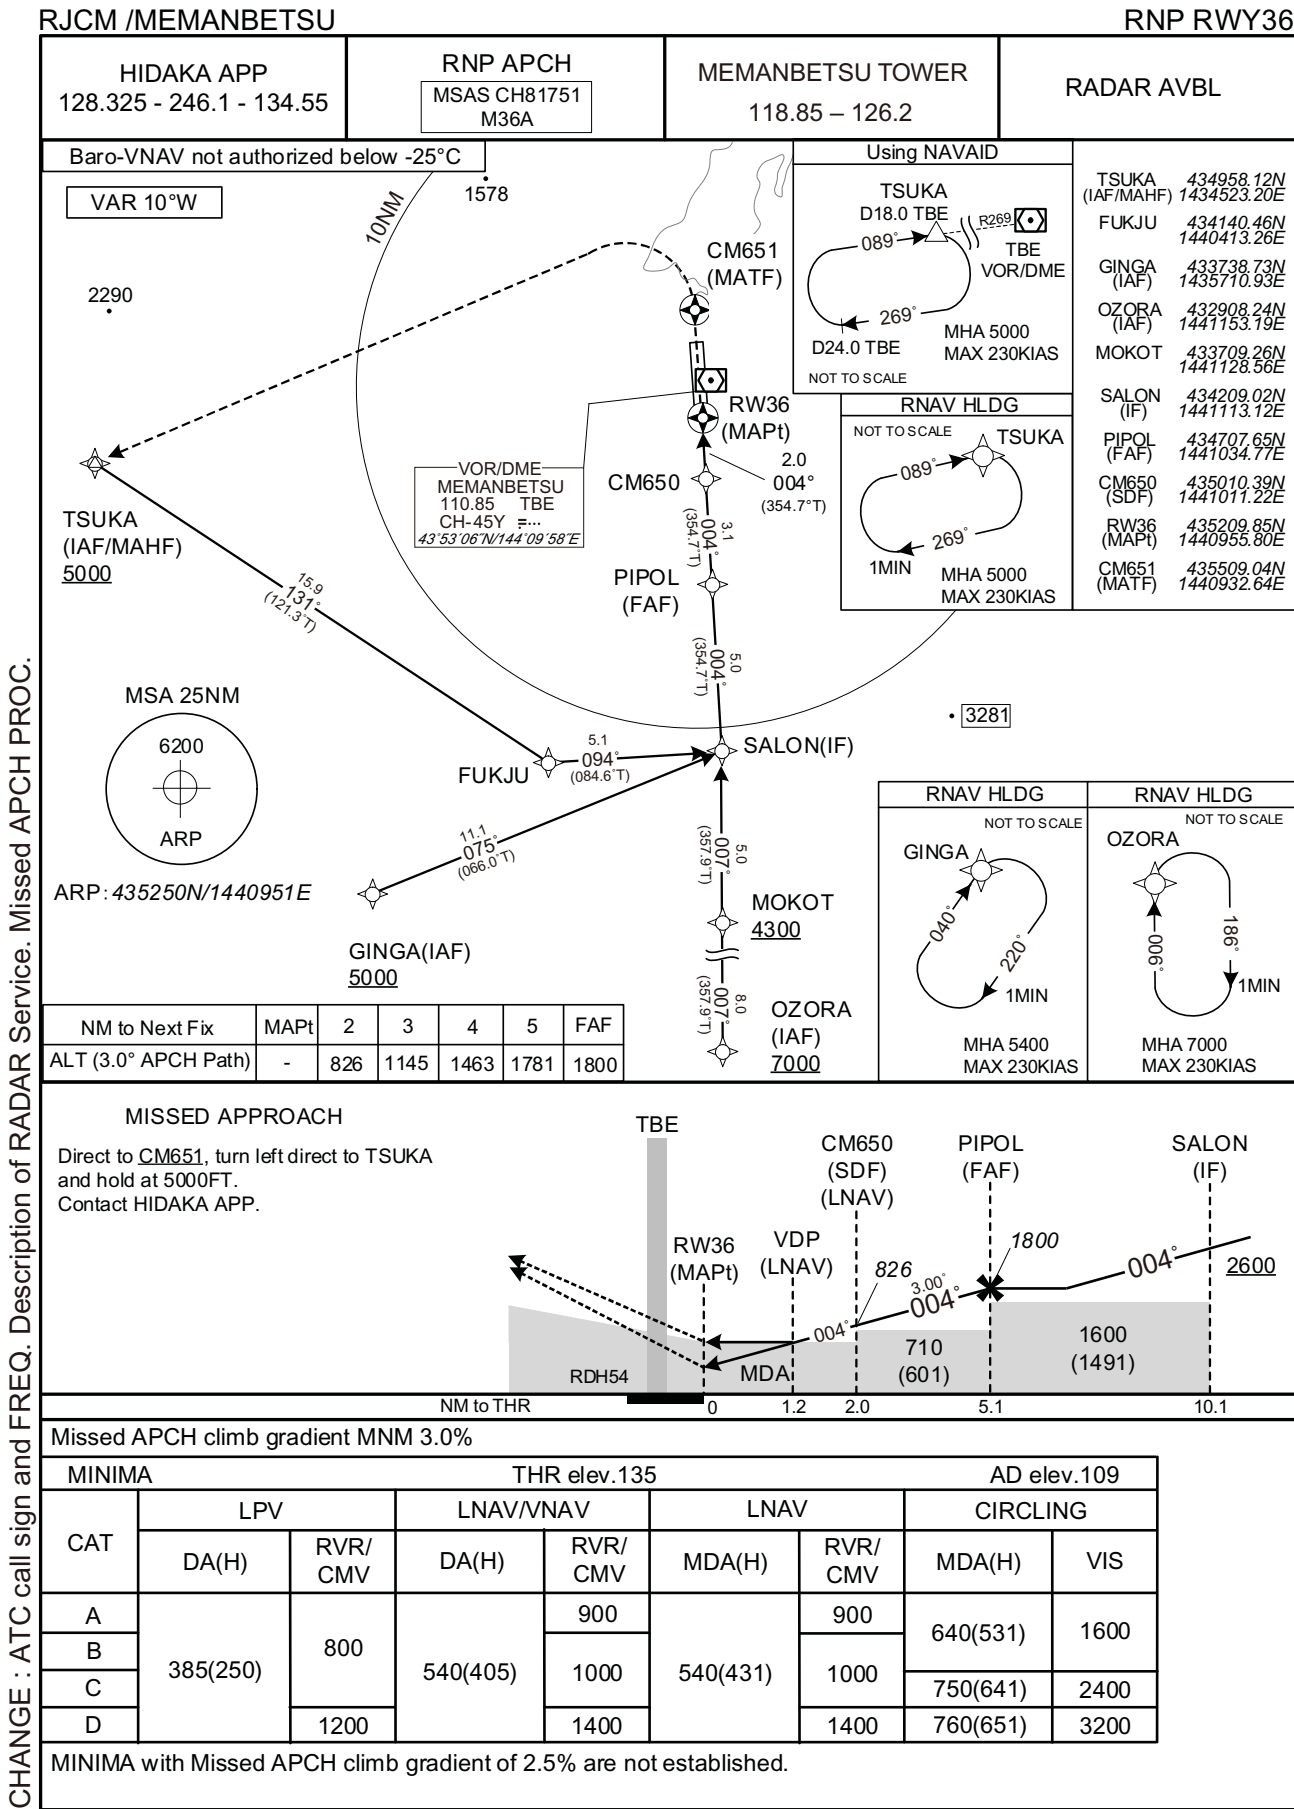

INSTRUMENT APPROACH CHART

RJCM / MEMANBETSU

RNP RWY36

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00719
SBAS service provider identifier	2	FPAP latitude	435330.4920N
Airport identifier	RJCM	FPAP longitude	1440945.3395E
Runway	36	Threshold crossing height	00016.5
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M36A	∠ length offset	0000
LTP/FTP latitude	435209.8350N	HAL	40.0
LTP/FTP longitude	1440955.7670E	VAL	50.0
CRC remainder	28C6AB24		

Required additional data

LTP/FTP orthometric height	41.1
----------------------------	------

RJCM / MEMANBETSU

Visual REP




※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP.

Call sign	BRG / DIST from ARP	Remarks
網走 Abashiri	025°T / 9.2NM	JR駅 Station
湧湖 Tofutsuko	074°T / 10.5NM	湖 Lake
小清水 Koshimizu	097°T / 13.3NM	学校 School
東藻琴 Higashimokoto	110°T / 6.1NM	市街地 Town
美幌峠 Bihoro Toge	165°T / 14.4NM	峠 Pass
津別 Tsubetsu	210°T / 12.2NM	市街地 Town
美幌ステーション Bihoro Station	223°T / 3.7NM	JR駅 Station
北見 Kitami	248°T / 12.4NM	JR駅 Station
浜佐呂間 Hamasaroma	321°T / 15.5NM	佐呂間大橋 Bridge

RJCM / MEMANBETSU

LDG CHART

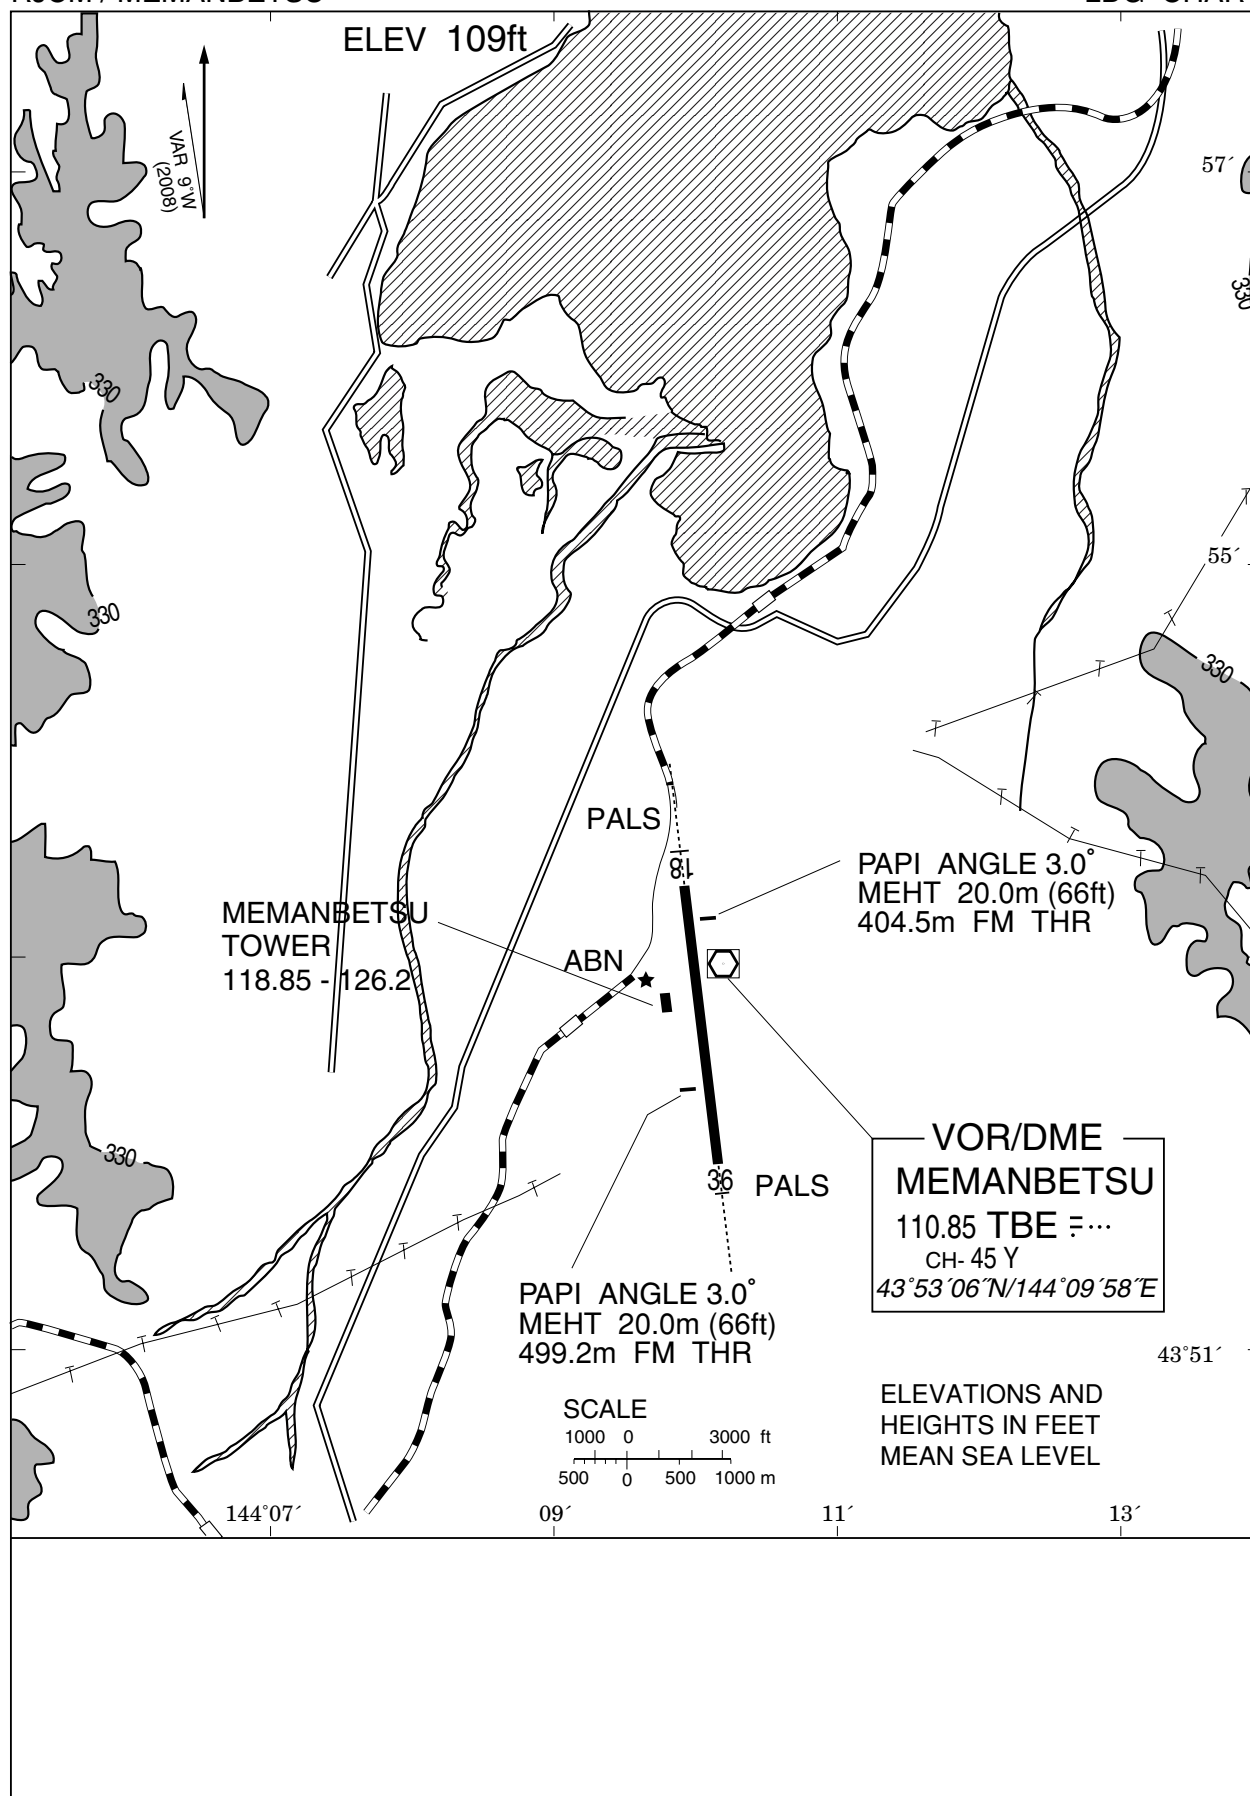

RJCM / MEMANBETSU

Minimum Vectoring Altitude CHART

