


RJCM / MEMANBETSU

AD CHART

CHANGE : STRENGTH OF APRON(APRON B).

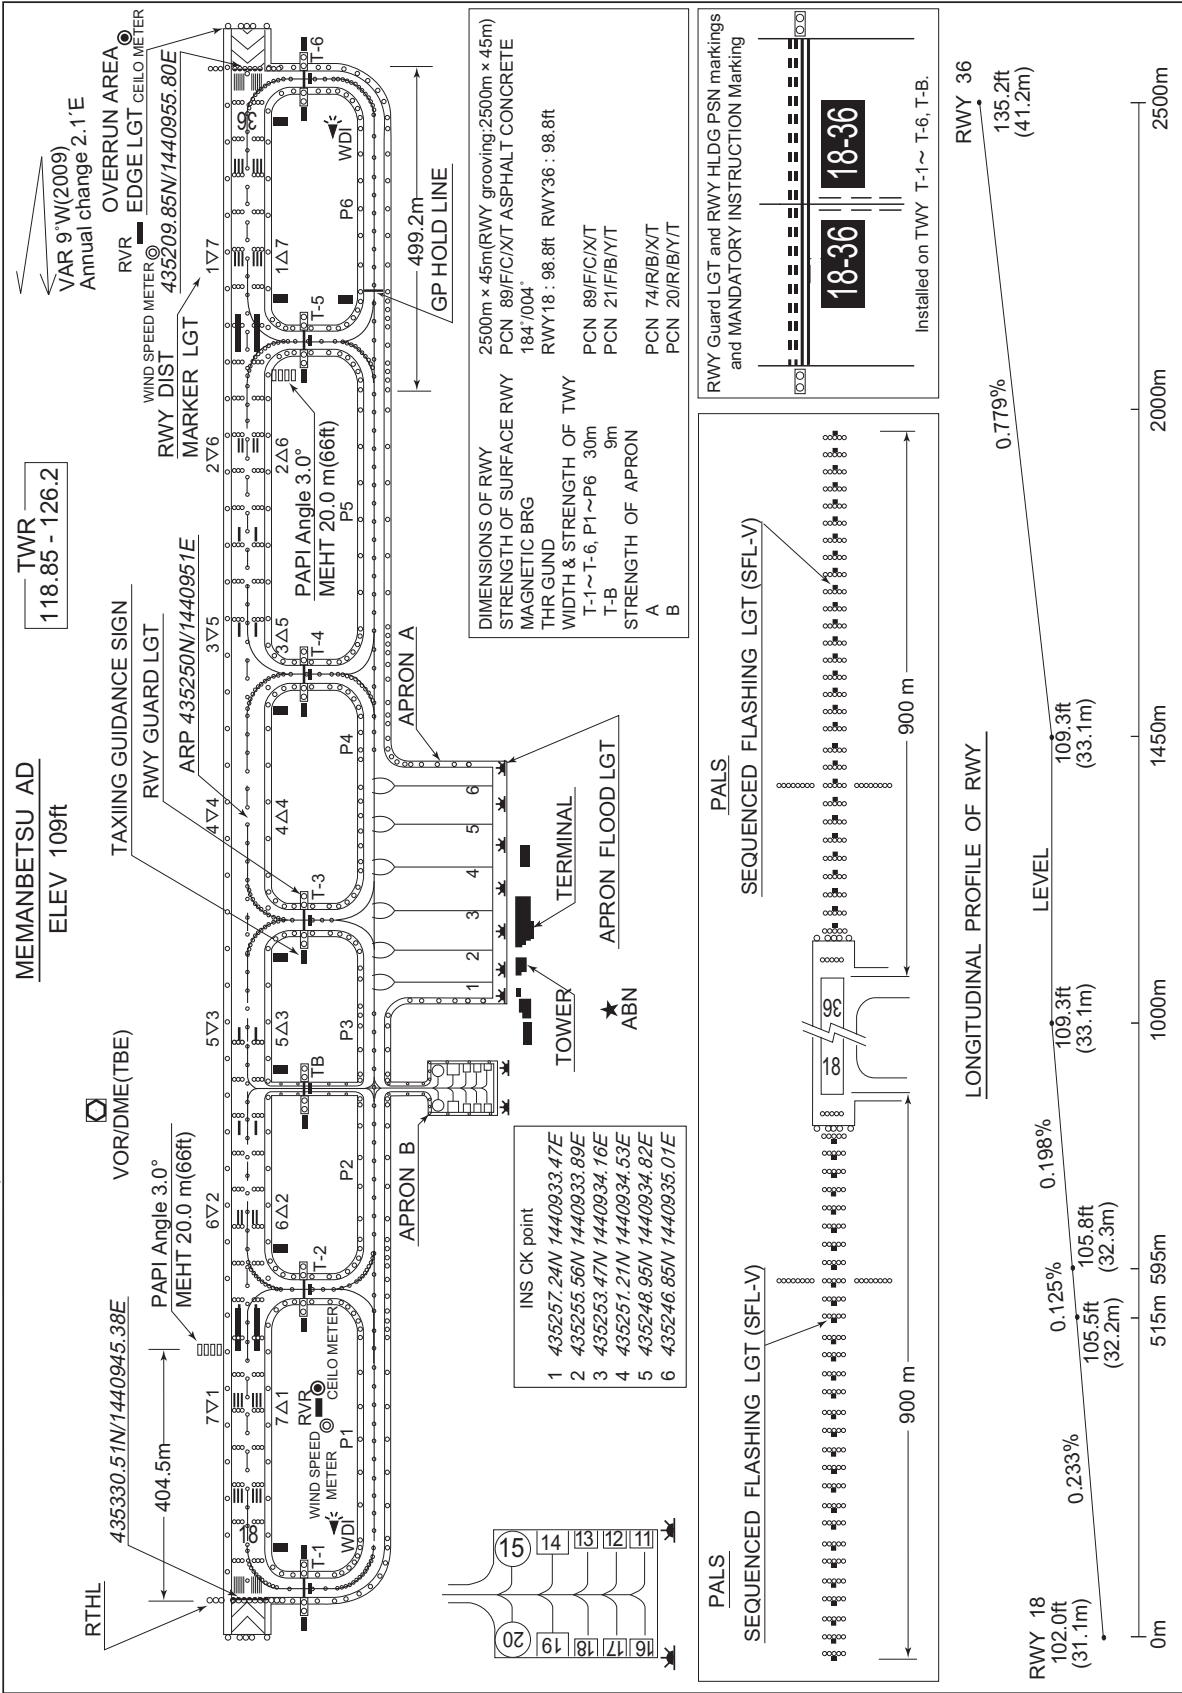

STANDARD DEPARTURE CHART -INSTRUMENT

RJCM / MEMANBETSU

SID

KUSHIRO THREE DEPARTURE

RWY 18 : Climb via TBE R187/KSE R007 to KSE VOR/DME.

RWY 36 : Climb RWY HDG to 800FT, turn right HDG 217° to intercept and proceed via TBE R187/KSE R007 to KSE VOR/DME.

Note RWY18 : 3.9% climb gradient required up to 4500FT.

OBST ALT 3281FT located at 17.0NM 179° FM end of RWY18.



STANDARD DEPARTURE CHART-INSTRUMENT

RJCM / MEMANBETSU

SID

EATAK THREE DEPARTURE

RWY 18 : Climb RWY HDG to 800FT, turn right climb via TBE R220/OBE R039 to EATAK....

RWY 36 : Climb RWY HDG to 1000FT, turn left HDG 175° to intercept and proceed via
TBE R220/OBE R039 to EATAK....

....Cross EATAK at or above 6000FT.

Note RWY36 : 3.9% climb gradient required up to 2000FT.

OBST ALT 1181FT located at 4.5NM 290° FM end of RWY36.



STANDARD DEPARTURE CHART-INSTRUMENT

RJCM / MEMANBETSU

SID

MEMANBETSU REVERSAL THREE DEPARTURE

RWY 18 : Climb via TBE R187 to TBE 5.0DME, turn left....

RWY 36 : Climb via TBE R001 to TBE 5.0DME, turn right,....

....Proceed to TBE VOR/DME. Cross TBE VOR/DME at or above 4000FT.



STANDARD DEPARTURE CHART-INSTRUMENT

RJCM / MEMANBETSU

RNAV SID

SHIBARE ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 9° W(2016)

SHIBARE ONE DEPARTURE



SHIBARE ONE DEPARTURE

RWY18: Climb on HDG184° at or above 600FT, turn right direct to NICOL at or above 7000FT, to NOTAK at or above 9000FT.

RWY36: Climb on HDG004° at or above 600FT, turn left direct to NICOL at or above 7000FT, to NOTAK at or above 9000FT.

Note RWY36 : 5.0% climb gradient required up to 600FT.

OBST ALT 1181FT located at 6.3NM 312° FM end of RWY36.

RWY18

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	184 (174.7)	-9.2	—	—	+600	—	—	Basic RNP1
002	DF	NICOL	—	—	-9.2	—	R	+7000	—	—	Basic RNP1
003	TF	NOTAK	—	231 (222.1)	-9.2	45.3	—	+9000	—	—	Basic RNP1

RWY36

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	004 (354.7)	-9.2	—	—	+600	—	—	Basic RNP1
002	DF	NICOL	—	—	-9.2	—	L	+7000	—	—	Basic RNP1
003	TF	NOTAK	—	231 (222.1)	-9.2	45.3	—	+9000	—	—	Basic RNP1


STANDARD ARRIVAL CHART-INSTRUMENT

RJCM / MEMANBETSU

STAR

QURIO ARC ARRIVAL

From over GINGA or TSUKA, turn left via TBE 13.0DME clockwise ARC to QURIO.
Cross QURIO at or above 4000FT.

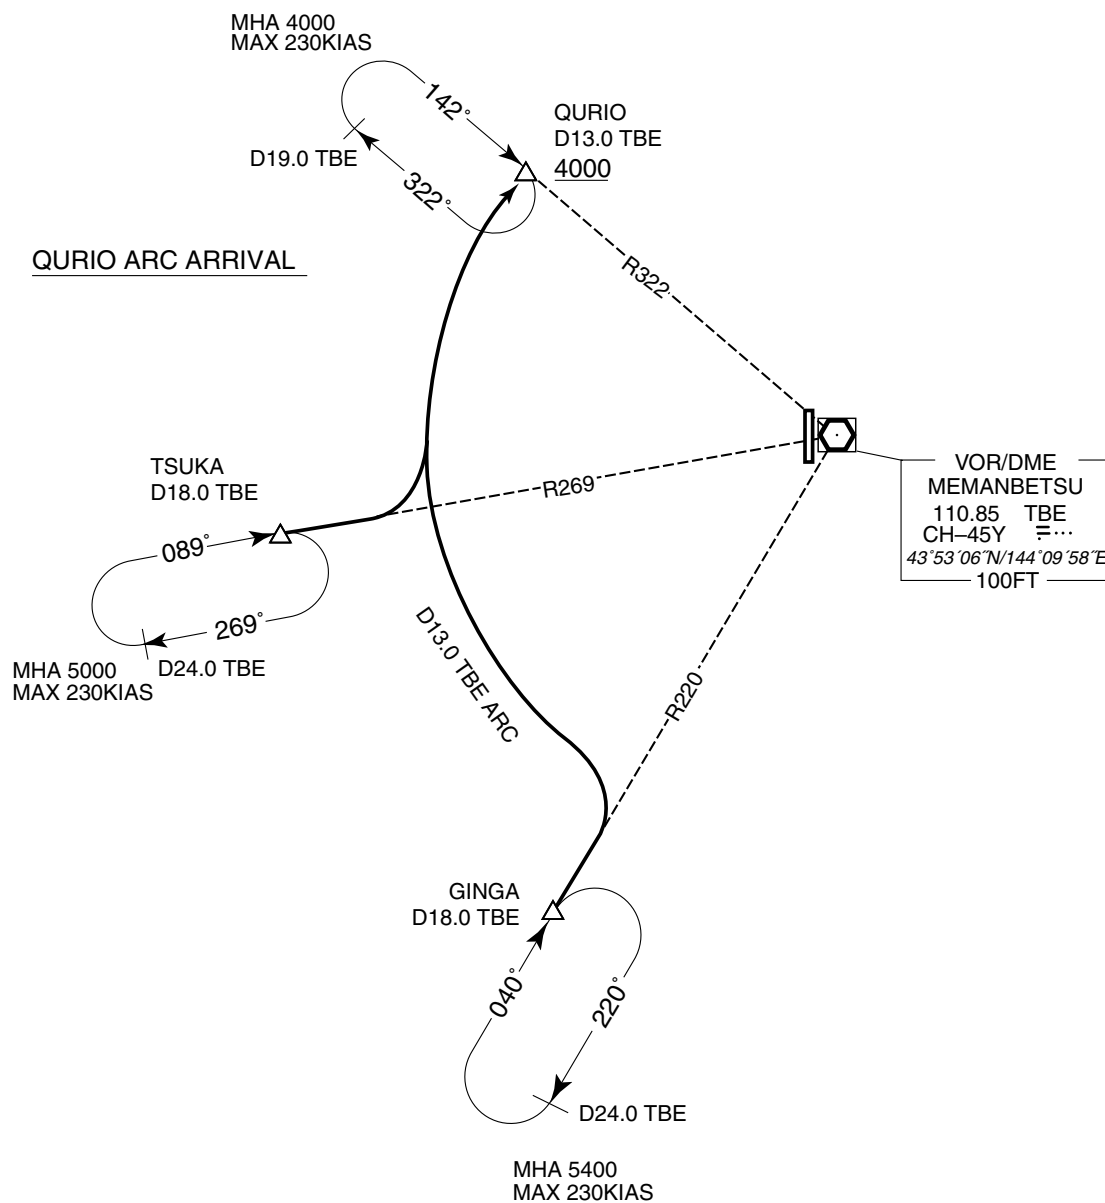

INSTRUMENT APPROACH CHART

RJCM / MEMANBETSU


ILS Z or LOC Z RWY18



INSTRUMENT APPROACH CHART

RJCM / MEMANBETSU


ILS Y or LOC Y RWY18

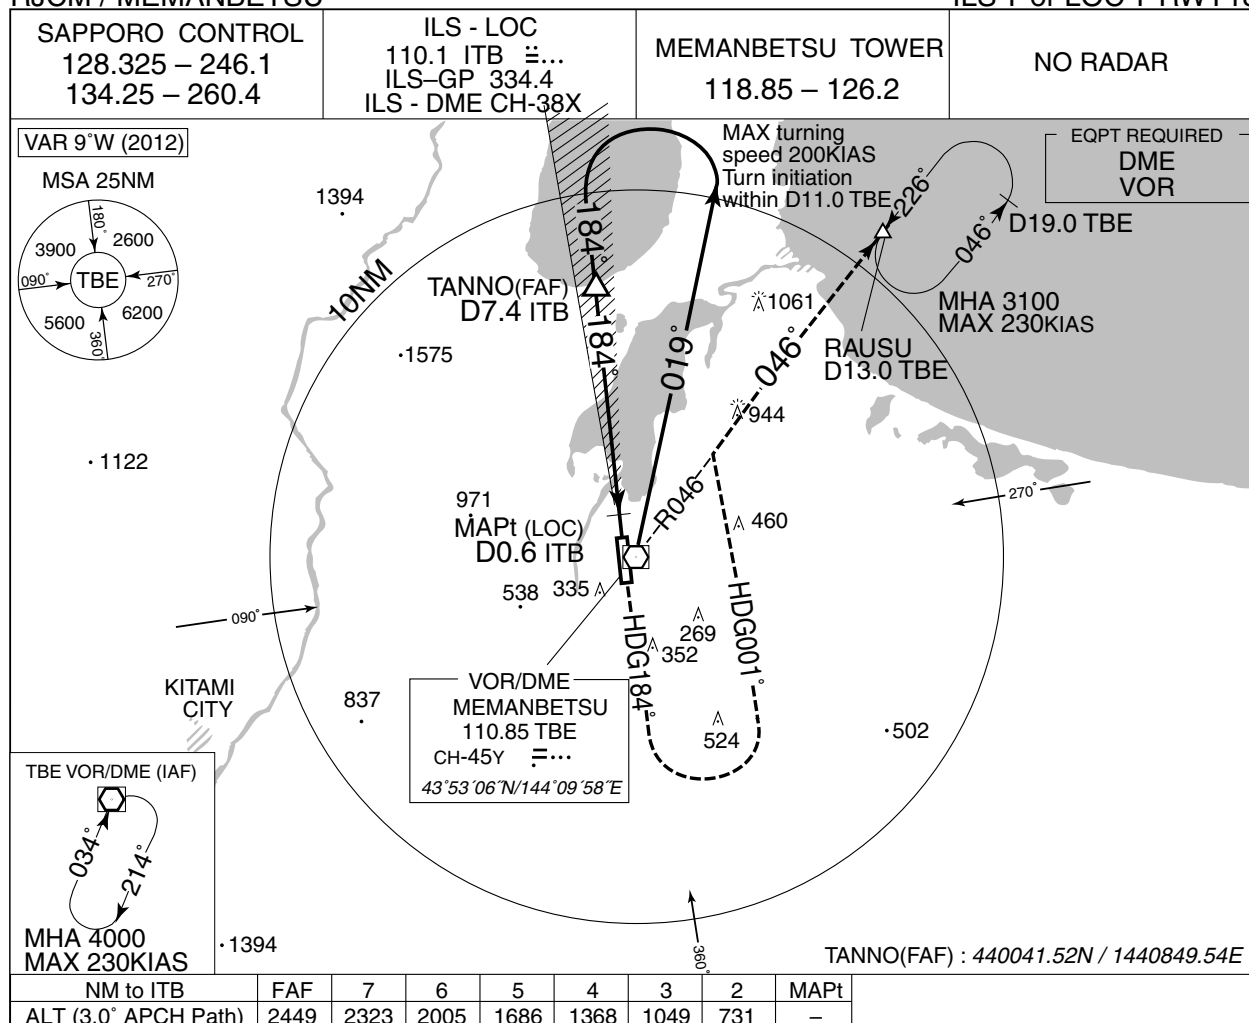

MINIMA		THR elev. 102		AD elev. 109		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	302 (200)	550	450 (341)	900	640 (531)	1600
B				1000		
C					750 (641)	2400
D					1400	760 (651)

RJCM / MEMANBETSU

ILS or LOC RWY36



INSTRUMENT APPROACH CHART

RJCM / MEMANBETSU



VOR RWY18



INSTRUMENT APPROACH CHART

RJCM / MEMANBETSU

VOR RWY36

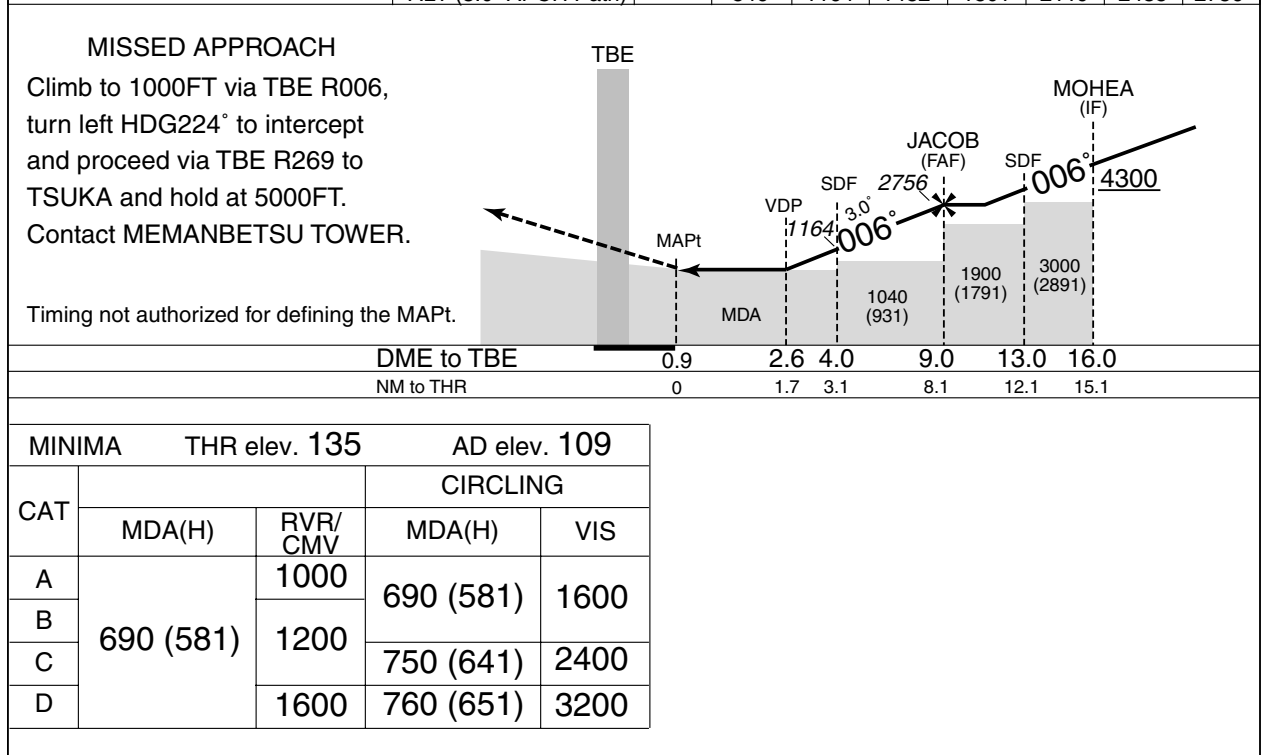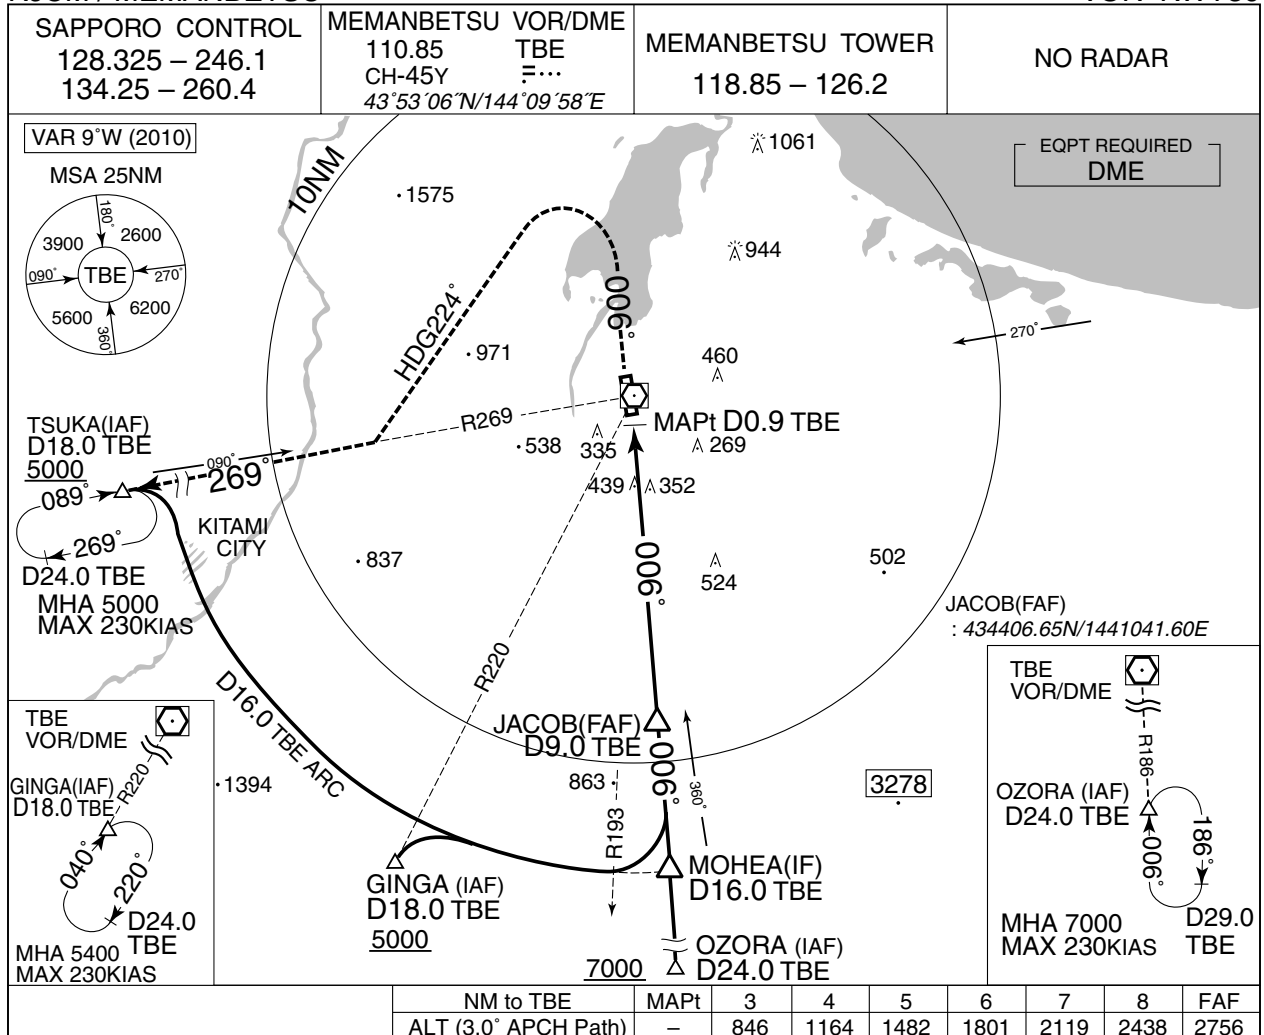

INSTRUMENT APPROACH CHART

RJCM / MEMANBETSU


RNP RWY18(AR)

SAPPORO CONTROL
128.325 – 246.1
134.25 – 260.4RNP AR
RF requiredMEMANBETSU TOWER
118.85 – 126.2

NO RADAR


For uncompensated Baro-VNAV systems, procedure not authorized below -25°C / above 45°C

VAR 9°W (2017)

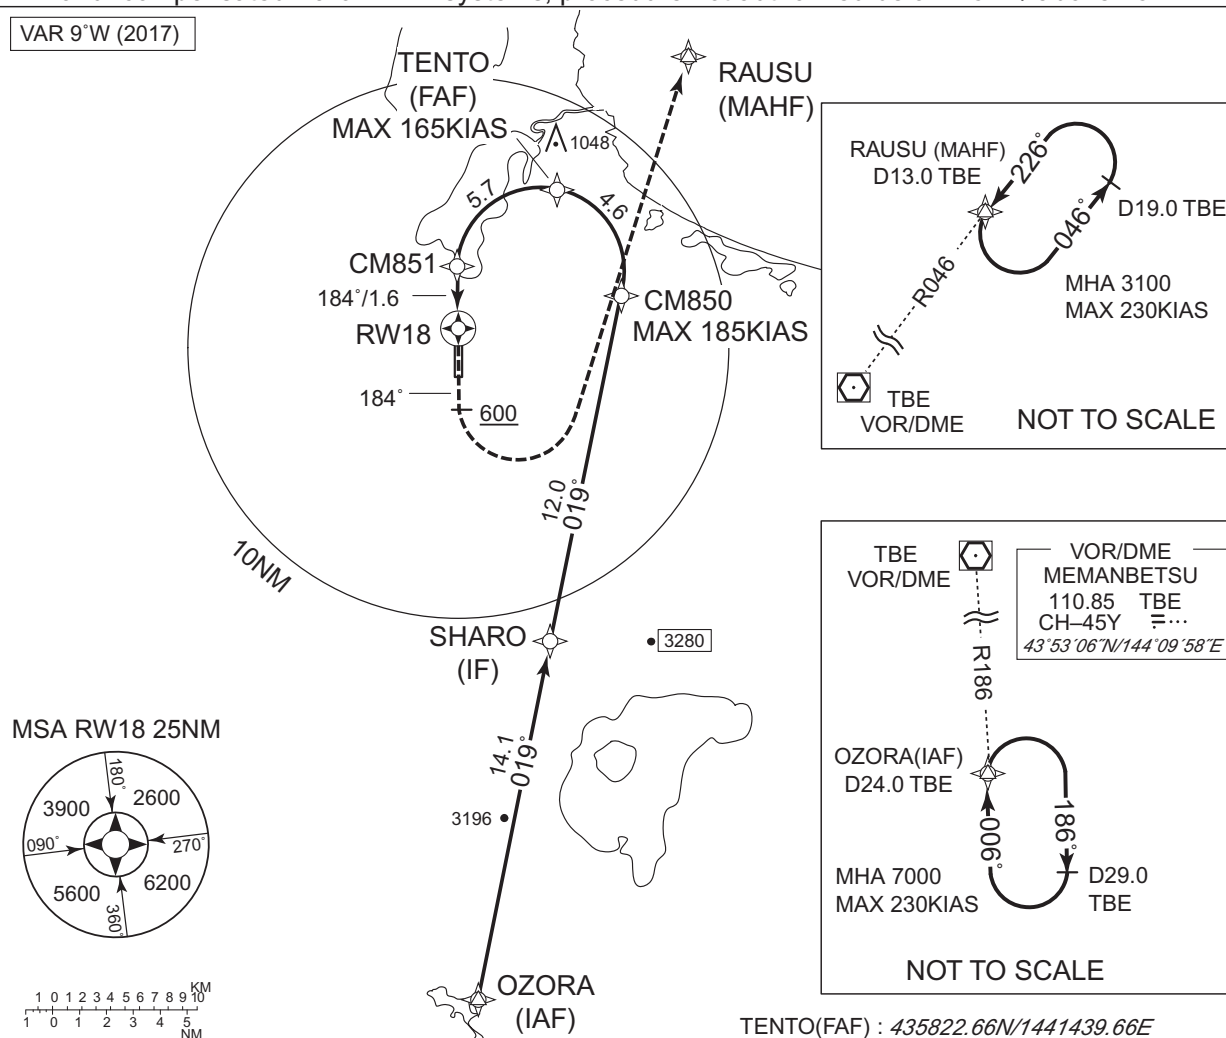

MISSED APPROACH

From RW18 on track 184°, at or above 600FT turn left, direct to RAUSU and hold at 3100FT.
Contact MEMANBETSU TOWER.

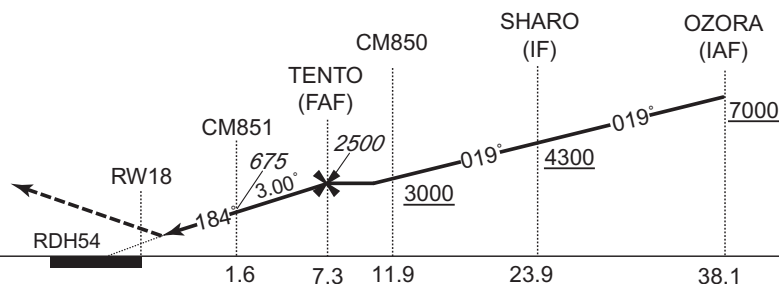

Missed APCH climb gradient MNM 3.0%

MINIMA	THR elev. 102	AD elev. 109
CAT	RNP 0.30	
	DA(H)	RVR/CMV
A	—	—
B	—	—
C	402 (300)	1000
D	—	1400

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Authorization Required

CHANGE:PROC renamed. Requirement for RNP.

INSTRUMENT APPROACH CHART

RJCM / MEMANBETSU

RNP RWY18(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH ('/FT)	RNP Value
001	IF	OZORA	—	—	-9.2	—	—	+7000	—	—	—
002	TF	SHARO	—	019 (009.5)	-9.2	14.1	—	+4300	—	—	1.0
003	TF	CM850	—	019 (009.6)	-9.2	12.0	—	+3000	-185	—	1.0
004	RF Center: CMRF1 r=3.04	TENTO	—	—	-9.2	4.6	L	2500	-165	—	1.0
005	RF Center: CMRF1 r=3.04	CM851	—	—	-9.2	5.7	L	675	—	-3.00	0.3
006	TF	RW18	Y	184 (174.7)	-9.2	1.6	—	156	—	-3.00/54	0.3
007	FA	—	—	184 (174.7)	-9.2	—	—	+600	—	—	1.0
008	DF	RAUSU	—	—	-9.2	—	L	3100	—	—	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
OZORA	432908.24N / 1441153.19E	CMRF1	435524.66N / 1441344.15E
SHARO	434301.91N / 1441506.66E		
CM850	435454.27N / 1441753.05E		
TENTO	435822.66N / 1441439.66E		
CM851	435507.75N / 1440932.81E		
RW18	435330.51N / 1440945.38E		
RAUSU	440327.56N / 1442052.43E		

CHANGE:PROC renamed.

RJCM / MEMANBETSU

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP.

Call sign	BRG / DIST from ARP	Remarks
網走 Abashiri	025°T / 9.2NM	JR駅 Station
湧沸湖 Tofutsuko	074°T / 10.5NM	湖 Lake
小清水 Koshimizu	097°T / 13.3NM	学校 School
東藻琴 Higashimokoto	110°T / 6.1NM	市街地 Town
美幌峠 Bihoro Toge	165°T / 14.4NM	峠 Pass
津別 Tsubetsu	210°T / 12.2NM	市街地 Town
美幌ステーション Bihoro Station	223°T / 3.7NM	JR駅 Station
北見 Kitami	248°T / 12.4NM	JR駅 Station
浜佐呂間 Hamasaroma	321°T / 15.5NM	佐呂間大橋 Bridge

RJCM / MEMANBETSU

LDG CHART



RJCM / MEMANBETSU

Minimum Vectoring Altitude CHART

