

STANDARD DEPARTURE CHART-INSTRUMENT

RJOZ / OZUKI	SID
<p><u>OZUKI REVERSAL FOUR DEPARTURE</u></p> <p>RWY 17: Climb via OCT R170, turn left to OCT TACAN within 10.0DME. Cross OCT TACAN at or above 4000FT. Then proceed via OCT R330, turn right to OCT TACAN within 5.0DME. Cross OCT TACAN at or above 5000FT or specified altitude.</p> <p>RWY 35: Not established.</p> <p><u>KUGA TRANSITION</u></p> <p>From over OCT TACAN, via OCT R170 to intercept and proceed via IWT R267 to IWT TACAN.</p> <p><u>FUKUOKA TRANSITION</u></p> <p>From over OCT TACAN, via OCT R170 to intercept and proceed via DGC R080 (MRA 11000FT) to DGC VORTAC. Note: This TRANSITION is for TACAN equipped aircraft only.</p>	


CHANGE : PROC course(OZUKI REVERSAL FOUR DEPARTURE). PROC renamed(OZUKI REVERSAL FOUR DEPARTURE). Note deleted.

STANDARD DEPARTURE CHART-INSTRUMENT

RJOZ / OZUKI

SID

CHANGE : PROC course(OZUKI REVERSAL FOUR DEPARTURE). PROC renamed(OZUKI REVERSAL FOUR DEPARTURE).

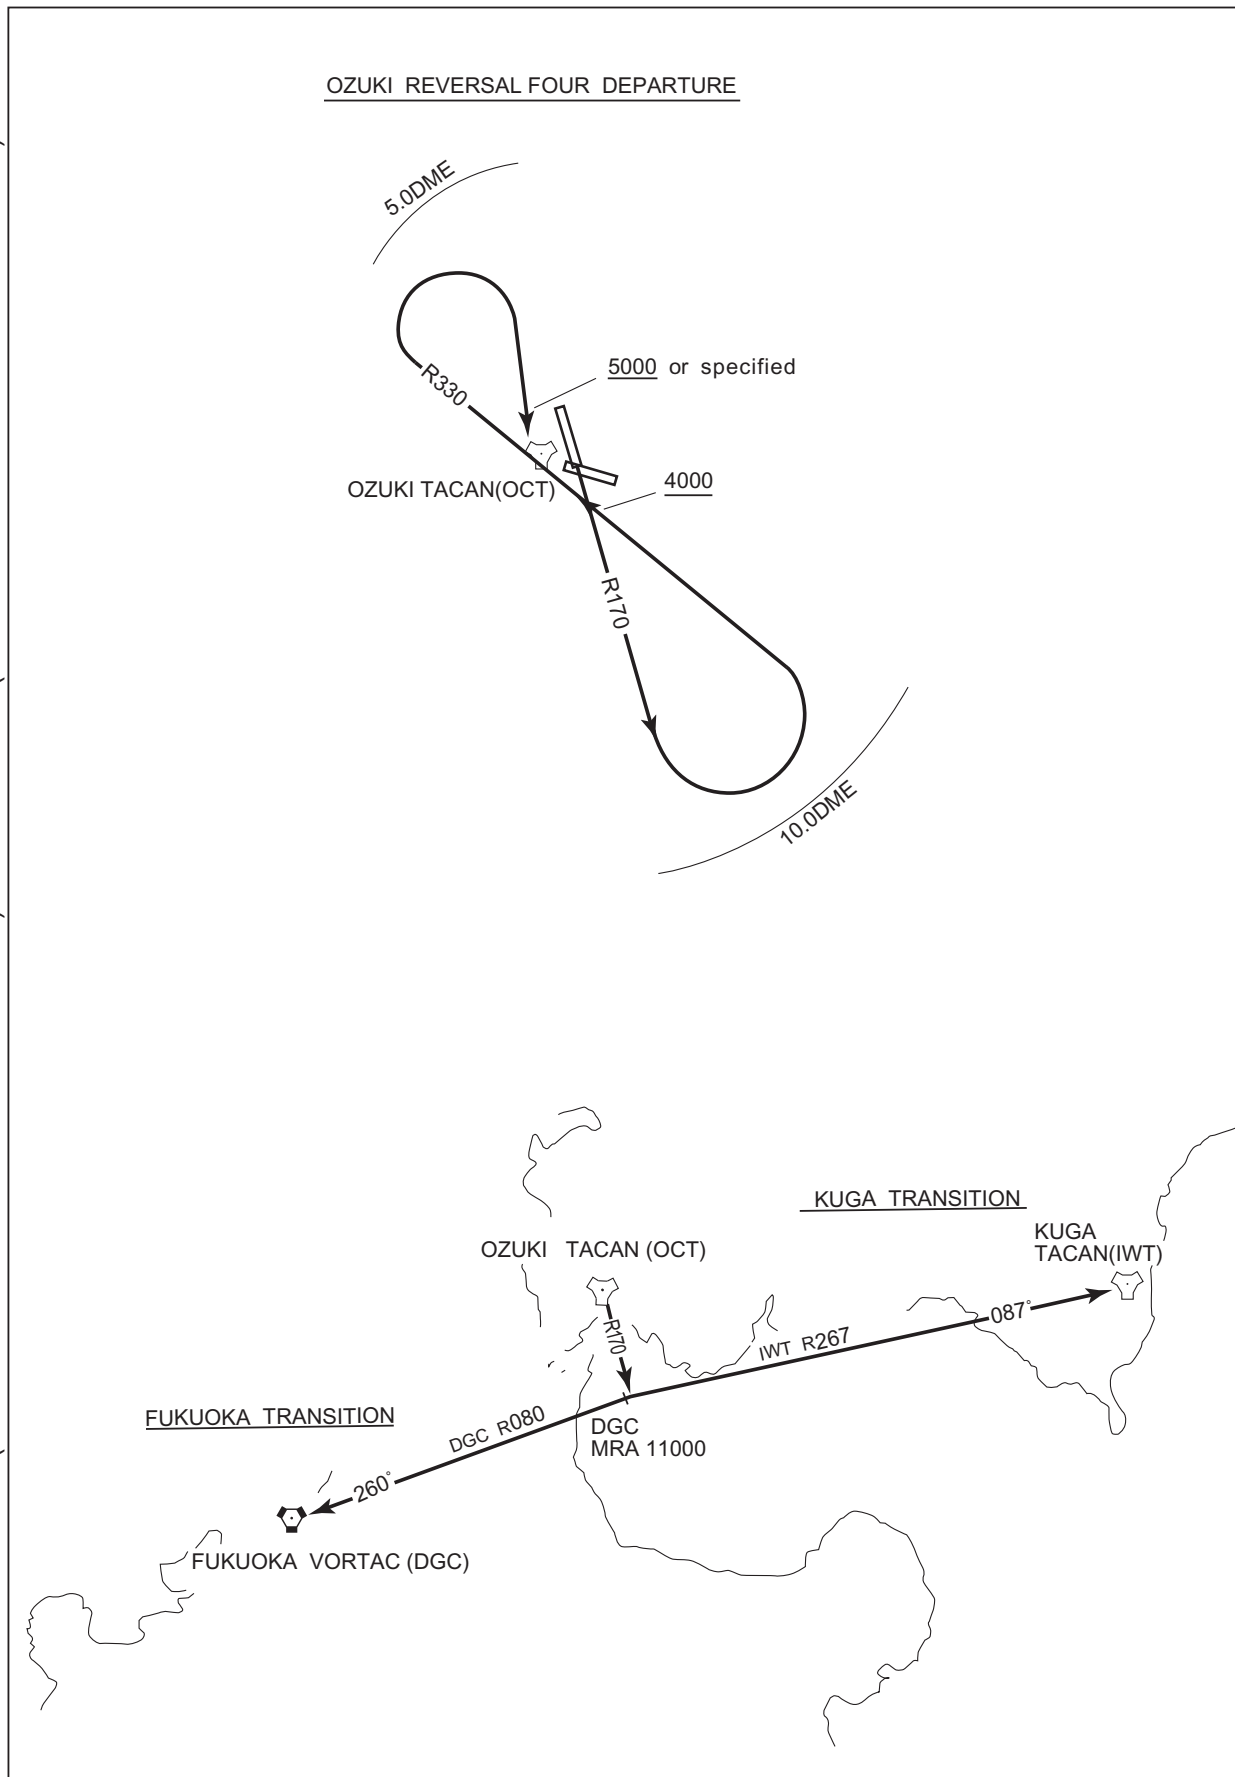

RJOZ / OZUKI

TSUIKI APP 119.225 – 315.9	OZUKI TACAN CH-58Y OCT $\Xi \cdot \cdot \cdot$ <i>34°02'39"N/131°02'59"E</i>	OZUKI TOWER 228.2 - 122.0 - 302.2	RADAR AVBL CALL TSUIKI APP
--------------------------------------	---	---	---

MINIMA		AD elev. 13
CAT	CIRCLING	
	MDA(H)	VIS
A	980 (967)	1600
B		
C	—	—
D		

CHANGE : OBST. MHA. MINIMA for MDA(H). Circling restriction.

RJOZ / OZUKI


[illegible]

MINIMA		AD elev. 13
CAT	CIRCLING	
	MDA(H)	VIS
A	900 (887)	1600
B		
C	—	—
D		

1/12/22

RJOZ / OZUKI

LDG CHART

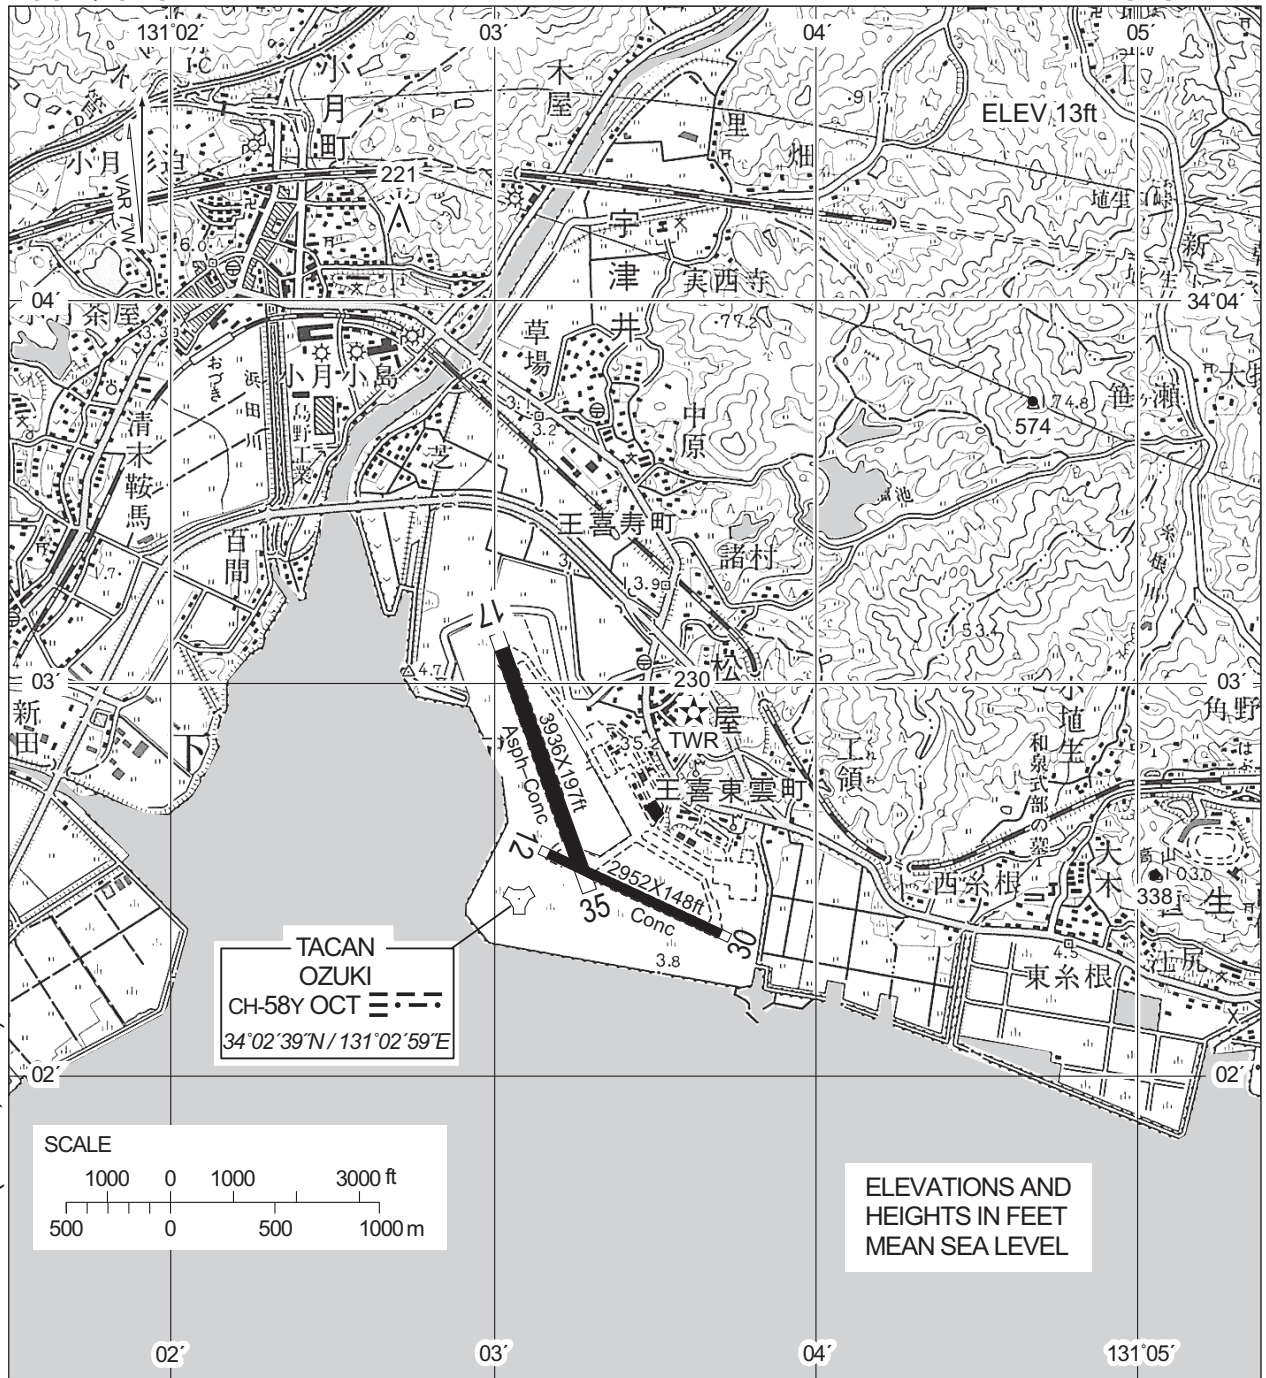

AERODROME LIGHTING

Aerodrome beacon : Alternating flashing
white / green

Runway edge lights : white

Threshold lighting : green

Other lighting : Blue taxiway edge lights,
lighted wind direction in-
dicator, obstruction light,
take-off target light,
angle of approach lights.

RADIO DATA

TWR 122.0, 228.2, 302.2, EU-EV

FACILITIES AVAILABLE

Weather, fuel (JETA-1 PLUS), Hangar

CHANGE : FREQ of OZUKI TOWER abolished(126.2,236.8) .