

AD CHART

KOZUSHIMA AP

VAR 8°W (2024)
Annual change 4°W

CEILOMETER

WDI

WDI

WIND SPEED METER

PAPI Angle 3.0°
MEHT 5.47m (18 ft)

PAPI Angle 3.0°
MEHT 5.47m (18 ft)

ARP

RWY THR ID LGT

11

29

145m

WIND SPEED METER

143.6m

1.3%

800m

REMARKS : RWY GROOVING 800mX17m
RWY STRENGTH: PCR 67/F/C/Y/T
WIDTH & STRENGTH OF TWY:
9m PCR 67/F/C/Y/T
DIMENSION & STRENGTH OF APRON:
40mX75m PCR 67/F/C/Y/T

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART-INSTRUMENT



CHANGE : Navigation Specification(Basic RNP1 → RNP1). NIIJIMA TACAN abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJAZ / KOZUSHIMA

RNAV SID

KOZU ONE DEPARTURE											
RWY11											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	112 (105.2)	-7.1	-	-	+1800	-	-	RNP1
002	DF	XAC	-	-	-7.1	-	L	-	-	-	RNP1
RWY29											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	292 (285.2)	-7.1	-	-	+1700	-	-	RNP1
002	DF	XAC	-	-	-7.1	-	R	-	-	-	RNP1


CHANGE : Navigation Specification(Basic RNP1 → RNP1).

RJAZ / KOZUSHIMA

RNP RWY11



INSTRUMENT APPROACH CHART

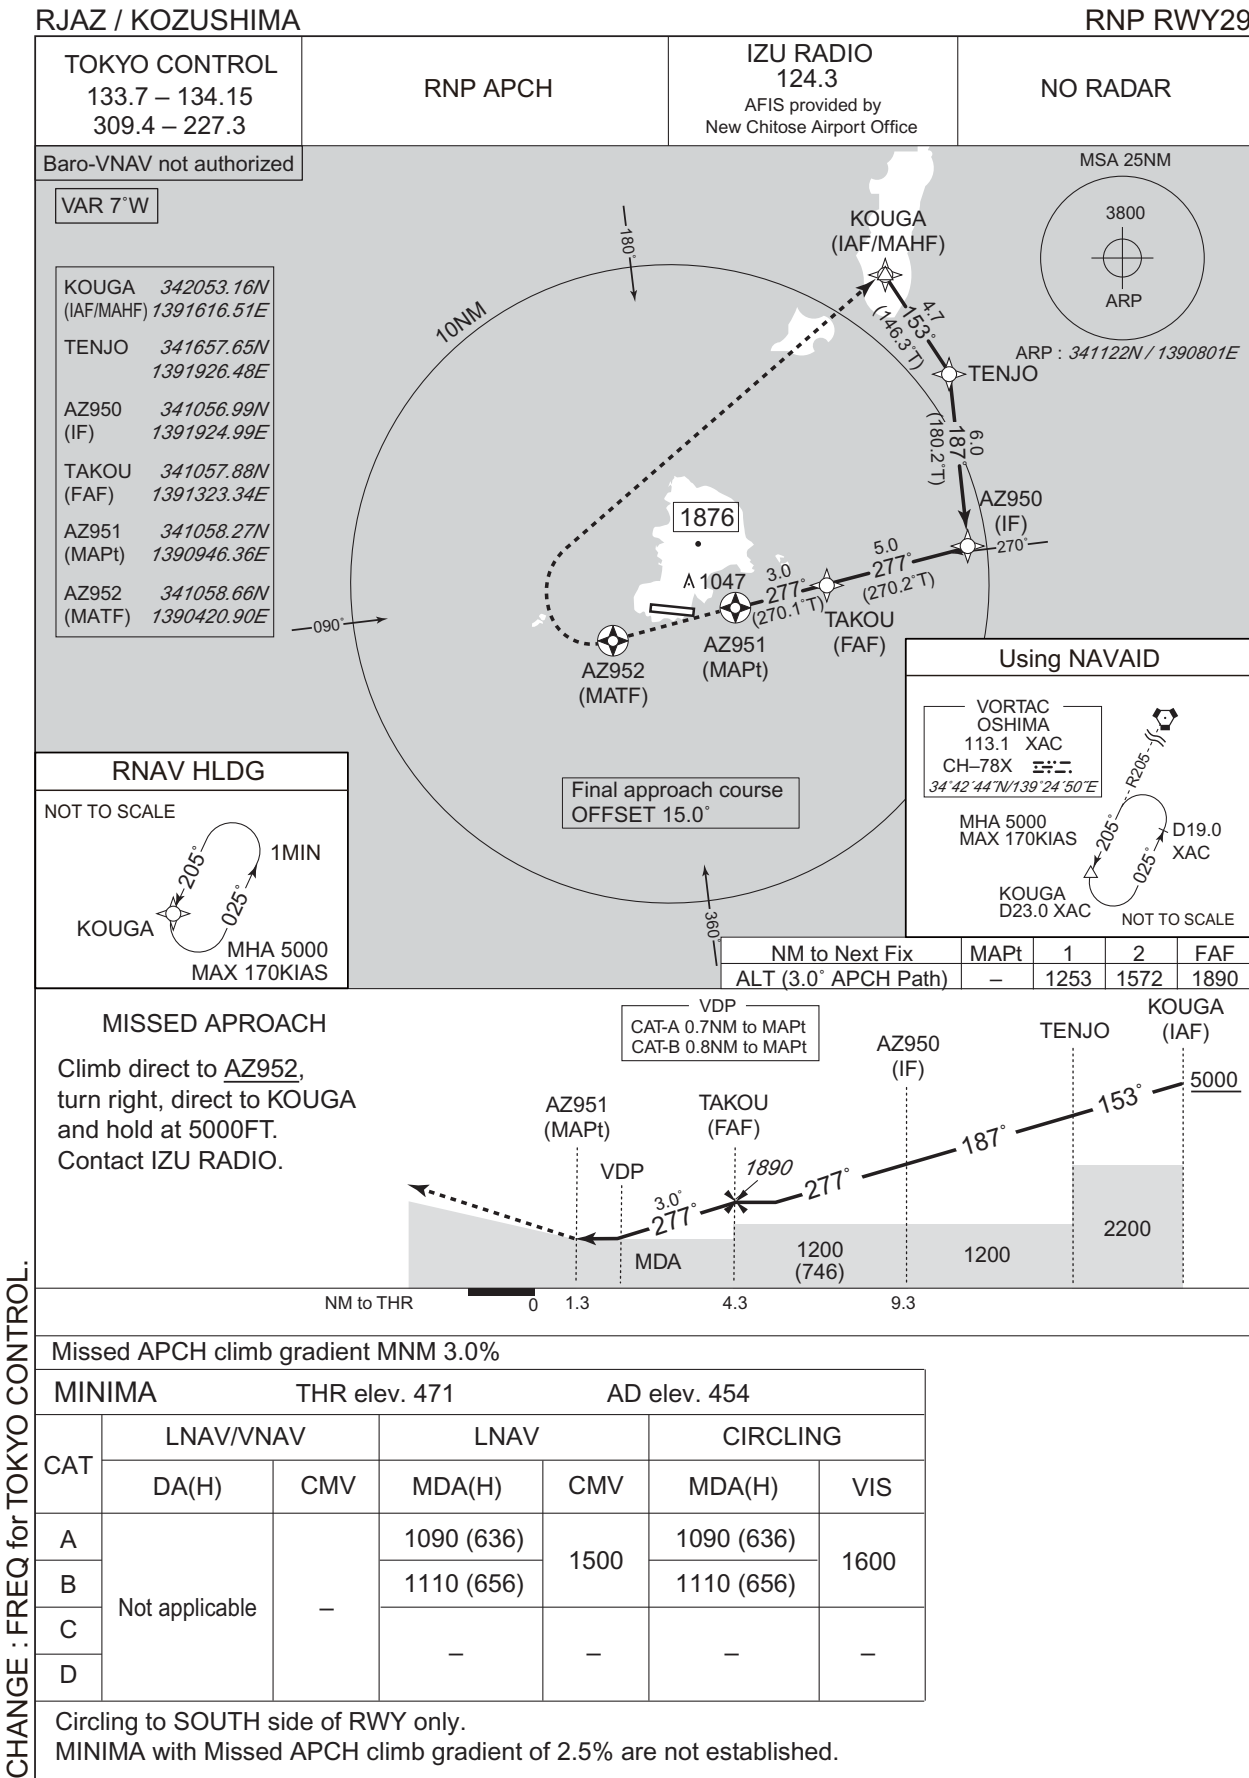

RJAZ / KOZUSHIMA

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
10NM N	360°T / 10.0NM	海上 Over the sea
赤崎 Akasaki	003°T / 3.1NM	岬 Cape
祇苗島 Tadanaejima	069°T / 3.0NM	島 Island
10NM SE	135°T / 10.0NM	海上 Over the sea

RJAZ / KOZUSHIMA

Minimum Vectoring Altitude CHART



CENTER : 341122N/1390801E (ARP)