AD 2 AERODROMES

ROIG AD 2.1 AERODROME LOCATION INDICATOR AND NAME

ROIG - ISHIGAKI

ROIG AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	*242347N/1241442E* 0.7km 2° of TWR
2	Direction and distance from (city)	11km NE from Ishigaki City office
3	Elevation/ Reference temperature	102ft / 31°C (2006-2010)
4	Geoid undulation at AD ELEV PSN	89ft
5	MAG VAR/ Annual change	5°W (2022) / 7' W
6	AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses	OKINAWA PREF. Public AP ISHIGAKI AD Administration 222-75 Moriyama, Ishigaki, Okinawa Tel: 0980-87-0793 Fax: 0980-86-7601
7	Types of traffic permitted(IFR/VFR)	IFR/VFR
8	Remarks	ISHIGAKI Airport Branch(CAB) 222-72 Moriyama, Ishigaki, Okinawa Tel: 0980-84-4300 Fax: 0980-84-4306

ROIG AD 2.3 OPERATIONAL HOURS

1	AD Administration	2300 - 1200
2	Customs and immigration	INTL SKED FLT hours only
3	Health and sanitation	Quarantine (human): On request (0980-82-4940) Quarantine (animal, plant): INTL SKED FLT hours only
4	AIS Briefing Office	Nil
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	H24 (NAHA)
7	ATS	2300 - 1200
8	Fuelling	2300 - 1200
9	Handling	2230 - 1130
10	Security	2200 - 1100
11	De-icing	Nil
12	Remarks	Nil

ROIG AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	Conveyer belt, Lift for loading etc.
2	Fuel/ oil types	Fuel Grades: JET A-1
3	Fuelling facilities/ capacity	Fuel truck refueling
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

ROIG AD 2.5 PASSENGER FACILITIES

1	Hotels	Hotels in Ishigaki City
2	Restaurants	Available, Not continuous, during scheduled flight hours only
3	Transportation	Busses and Taxis to Ishigaki City
4	Medical facilities	Hospital in Ishigaki City 14km
5	Bank and Post Office	Bank ATM at airport
6	Tourist Office	At airport
7	Remarks	Nil

ROIG AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT 9
2	Rescue equipment	Chemical fire fighting truck (6,100-Liter Class) × 1 Chemical fire fighting truck (10,500-Liter Class) × 2 Emergency medical equipmemt conveyance truck (125 type) ×1
3	Capability for removal of disabled aircraft	Nil
4	Remarks	Nil

ROIG AD 2.7 SEASONAL AVAILABILITY-CLEARING

1	Types of clearing equipment	Nil
2	Clearance priorities	Nil
3	Remarks	Nil

ROIG AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	Apron surface and strength	Surface: Concrete Strength: Spot 1-2B, 5-10 PCR 830/R/B/W/T
2	Taxiway width, surface and strength	Surface: Asphalt-concrete T1 . . . Width: 26.5m Strength: PCR 734/F/C/X/T T2 . . . Width: 30m Strength: PCR 579/F/B/X/T T3 . . . Width: 30m Strength: PCR 615/F/C/X/T T4 . . . Width: 30m Strength: PCR 615/F/C/X/T T5 . . . Width: 26.5m Strength: PCR 734/F/C/X/T P1, P2, P3, P4 . . . Width: 23m Strength: PCR 701/F/B/X/T
3	ACL and elevation	Not available
4	VOR checkpoints	Not available
5	INS checkpoints	Spot NR 1: *242323.10N 1241437.71E* 2A: *242323.39N 1241439.23E* 2: *242323.93N 1241439.64E* 2B: *242324.45N 1241440.08E* 5: *242325.71N 1241440.62E* 6: *242327.12N 1241442.00E* 7: *242329.74N 1241443.09E* 8: *242329.95N 1241444.36E* 9: *242331.67N 1241445.38E* 10: *242332.86N 1241446.71E*
6	Remarks	Nil

ROIG AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands	Aircraft stand identification signs: Spot 5-9
2	RWY and TWY markings and LGT	RWY: 04/22 (Marking) RWY designation, RWY CL, RWY THR, RWY middle point, Aiming point, TDZ, RWY side stripe (LGT) RCLL, REDL, RTHL, WBAR(RWY04), RTZL(RWY04) TWY: T1-T5 (Marking) TWY CL, RWY HLDG PSN, TWY side stripe, Mandatory instruction marking (LGT) TWY edge LGT, TWY CL LGT, Taxiing guidance sign, RWY guard LGT TWY: P1-P4 (Marking) TWY CL, TWY side stripe (LGT) TWY edge LGT, TWY CL LGT
3	Stop bars	Nil
4	Remarks	(Marking) Overrun area (LGT) Apron flood LGT

ROIG AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas

RWY/Area affected	Obstacle type	Coordinates	Elevation	Markings/ LGT	Remarks
RWY04	Utility Pole	*242239.57N 1241343.63E*	231ft	-/LIL	under approach surface
RWY04	Utility Pole	*242221.82N 1241320.95E*	284ft	-/LIL	under approach surface
RWY22	Utility Pole	*242424.58N 1241506.91E*	125ft	-/LIL	under approach surface

In circling area and at AD

Obstacle type	Coordinates	Elevation	Markings/ LGT	Remarks
Utility Pole	*242402.58N 1241420.19E*	251ft	-/-	above horizontal surface
Utility Pole	*242403.47N 1241418.91E*	250ft	-/-	above horizontal surface
Utility Pole	*242409.14N 1241429.40E*	251ft	-/-	above horizontal surface
Utility Pole	*242407.38N 1241427.50E*	251ft	-/-	above horizontal surface
Utility Pole	*242406.37N 1241426.78E*	253ft	-/-	above horizontal surface
Utility Pole	*242405.28N 1241426.27E*	253ft	-/-	above horizontal surface
Utility Pole	*242403.83N 1241425.92E*	252ft	-/-	above horizontal surface
Utility Pole	*242402.94N 1241425.90E*	250ft	-/-	above horizontal surface
Steel Tower	*242420.00N 1241315.00E*	499ft	-/LIL	above horizontal surface
Hill	*242426.33N 1241356.34E*	540ft	-/LIL	above horizontal surface
Hill	*242405.52N 1241422.01E*	414ft	-/LIL	above horizontal surface
Hill	*242432.66N 1241454.98E*	456ft	-/LIL	above horizontal surface
Steel Tower	*242400.08N 1241427.99E*	298ft	-/LIL	above horizontal surface
Steel Tower	*242408.00N 1241429.00E*	299ft	-/LIL	above horizontal surface

ROIG AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	NAHA
2	Hours of service MET Office outside hours	H24 (NAHA)
3	Office responsible for TAF preparation Periods of validity	NAHA 30 Hours
4	Trend forecast Interval of issuance	Nil
5	Briefing/ consultation provided	Briefing is available upon inquiry at NAHA
6	Flight documentation Language(s) used	C En
7	Charts and other information available for briefing or consultation	S_6, U_{85}, U_7, U_5, U_3, U_{25}, U_2/T_r, P_S, P_5, P_3, P_{25}, P_{SWE}, P_{SWF}, P_{SWG}, P_{SWI}, P_{SWM}, P_{SW}(domestic), E, C, W_E, W_F, W_G, W_I, W, N
8	Supplementary equipment available for providing information	Nil
9	ATS units provided with information	TWR
10	Additional information(limitation of service, etc.)	Nil

ROIG AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCR) and surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
04	035.87°	2000×45	PCR 701/F/B/X/T Asphalt-Concrete	*242320.91N* *1241421.64E* 88.9ft	THR ELEV: 126ft
22	215.87°	2000×45	PCR 734/F/C/X/T Asphalt-Concrete	*242413.59N* *1241503.24E* 89.4ft	THR ELEV: 110ft

Slope of RWY	Strip Dimensions(M)	RESA (Overrun) Dimensions (M)	Remarks
7	10	11	14
See AD2.24 AD chart	2120×300	192×(MNM:165 MAX:305)*	RWY grooving: 2000×45
	2120×300	92×305 *For detail, ask airport administrator	

ROIG AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6
04	2000	2000	2000	2000	Nil
22	2000	2000	2000	2000	Nil

ROIG AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	RTHL Color WBAR	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color
1	2	3	4	5	6	7	8	9
04	PALS (CAT I) 900m LIH	Green Green	PAPI 3°/Left 453m 61ft	900m	2000m 30m Coded color (White/Red) LIH	2000m 60m Coded color (White/Yellow) LIH	Red	Nil (*2)
22	SALS (*1) 420m LIH	Green -	PAPI 3°/Left 439.8m 61ft	-	2000m 30m Coded color (White/Red) LIH	2000m 60m Coded color (White/Yellow) LIH	Red	Nil (*2)

Remarks
10
SALS with APCH LGT beacon(600m and 900m FM RWY THR)(*1) Overrun area edge LGT(LEN:60m Color:Red)(*2)

ROIG AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	ABN: *242331N/1241453E*, White/Green EV4.3sec, HO
2	LDI location and LGT Anemometer location and LGT	LDI: Nil Anemometer: RWY04: 300m from RWY04 THR, lighted RWY22: 300m from RWY22 THR, lighted
3	TWY edge and center line lighting	TWY edge and center line lights installed, see AD2.9
4	Secondary power supply/ switch-over time	Within 1 sec: REDL, RTHL, WBAR, RCLL, Overrun area edge LGT Within 15 sec: Other LGT
5	Remarks	WDI LGT

ROIG AD 2.16 HELICOPTER LANDING AREA

Nil

ROIG AD 2.17 ATS AIRSPACE

Designation and lateral limits		Vertical limits (ft)	Airspace classification	ATS unit call sign Language	Remarks
1		2	3	4	6
Ishigaki CTR	Area within a radius of 5nm ISHIGAKI ARP	3,000 or below	D	Ishigaki TWR En	
Sakishima ACA	See ROMY attached chart		E	Sakishima APP Sakishima DEP Sakishima RADAR En	

ROIG AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
APP/ASR	Sakishima Approach/ Sakishima Radar	120.3MHz 121.2MHz 125.0MHz 133.7MHz 315.7MHz 121.5MHz(E) 243.0MHz(E)	2230 - 1200	APP service provided by Sakishima APP.
TWR	Ishigaki Tower	118.0MHz(1) 126.2MHz 121.5MHz(E)	2300 - 1200	(1)Primary
ATIS	Ishigaki Airport	128.675MHz	2300 - 1200	

ROIG AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid (VOR declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
VOR (4°W/2012)	IGE	115.4MHz	H24	*242345.64N/ 1241416.63E*		VOR Unusable: 000°-020° beyond 20NM BLW 4,000ft 290°-325° beyond 15NM BLW 4,000ft 325°-360° beyond 20NM BLW 4,000ft
DME	IGE	1188MHz (CH-101X)	H24	*242345.64N/ 1241416.63E*	208.3ft	DME Unusable: 000°-020° beyond 20NM BLW 4,000ft 290°-335° beyond 20NM BLW 4,000ft 335°-345° beyond 15NM BLW 4,000ft 345°-360° beyond 20NM BLW 4,000ft
ILS-LOC 04	IIG	110.75MHz	2300-1200	*242419.38N/ 1241507.81E*		LOC: 220m(722ft) away FM RWY22 THR, BRG(MAG) 40°.
ILS-GP 04	-	330.05MHz	2300-1200	*242332.77N/ 1241425.74E*		GP: 363.4m(1192ft) inside FM RWY04 THR. 120m(394ft)W of RCL. HGT of ILS Ref datum 16.5m(54ft). GP angle 3.0°.
ILS-DME 04	IIG	1131MHz (CH-44Y)	2300-1200	*242333.04N/ 1241425.94E*	126.4ft	DME: 373.2m(1224ft) inside FM RWY04 THR. 120m(394ft)W of RCL.
MSAS		1575.42MHz	H24			Transmitting antennas are satellite based

ILS

ISHIGAKI AP

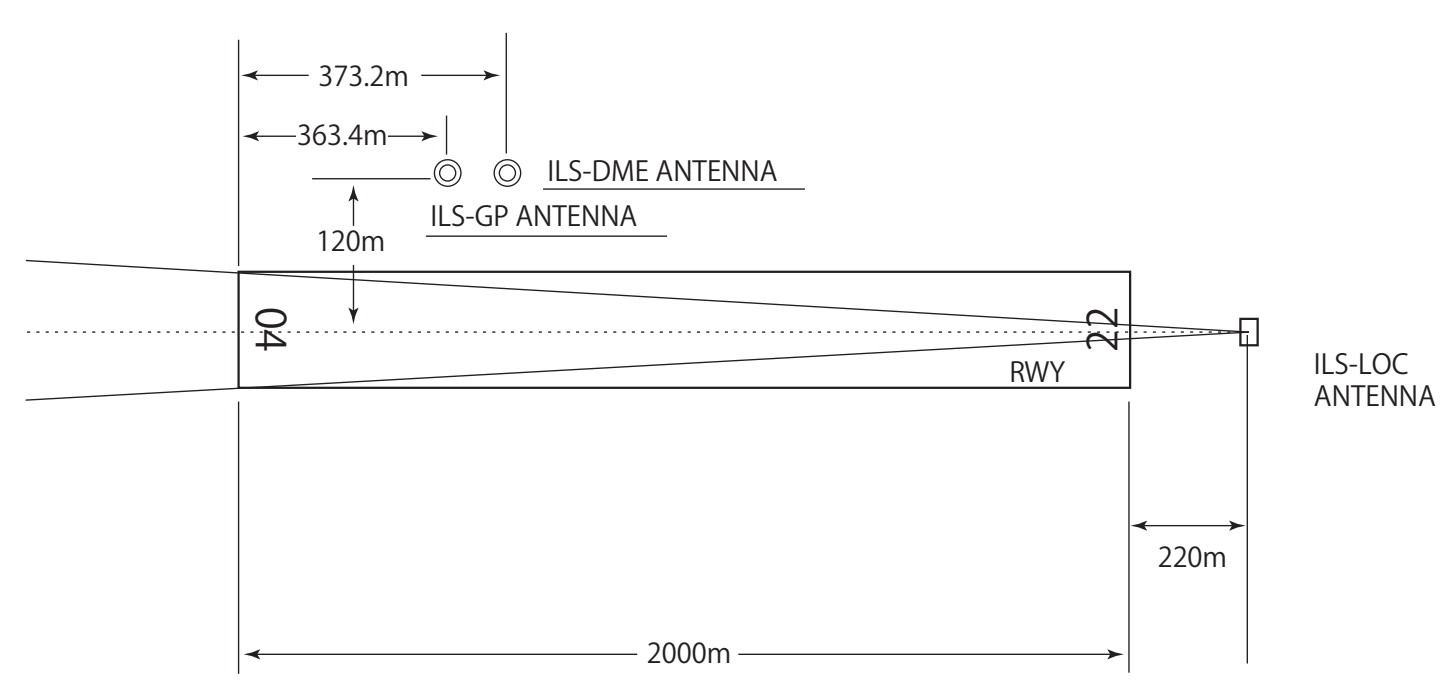

REMARKS :
1. LOC beam BRG(MAG) 040°
2. GP Angle 3.0°
3. HGT of ILS REF datum 16.5m(54ft)
4. ELEV of ILS-DME 38.52m(126ft)

ROIG AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

PPR for all transient aircraft due to Apron congestion. TEL:0980-87-0793

2. Taxiing to and from stands

Nil

3. Parking area for small aircraft(General aviation)

Nil

4. Parking area for helicopters

Nil

5. Apron - taxiing during winter conditions

Nil

6. Taxiing - limitations

Safety measures
In order to keep clearance from other aircraft and obstacles, aircraft with wing span of 47-56m shall reduce taxiing speed and follow the taxiway center line strictly on TWY P1 and P2.
全幅が 47m 以上 56m 以下の航空機は、他の航空機又は障害物とのクリアランスを確保するため、誘導路 P1 及び P2 を走行する場合は十分に減速し、誘導路中心線を確保した走行を行うこと。

7. School and training flights - technical test flights - use of runways

Nil

8. Helicopter traffic - limitation

Nil

9. Removal of disabled aircraft from runways

Ask AD administration

ROIG AD 2.21 NOISE ABATEMENT PROCEDURES

Nil

ROIG AD 2.22 FLIGHT PROCEDURES

1. TAKE OFF MINIMA

	RWY	ACFT CAT	REDL & RCLL		REDL or RCLL or RCL Marking		NIL (DAYTIME ONLY)	
			RVR	VIS	RVR	VIS	RVR	VIS
Multi-Engine ACFT with TKOF ALTN AP FILED	04	A,B,C,D	400m	400m	400m	400m	-	500m
	22	A,B,C,D	-	400m	-	400m	-	500m
OTHER	04	A,B,C,D	AVBL LDG MINIMA					
	22							

2. Lost Communication Procedures for Arrival Aircraft under radar navigational guidance

If radio communications with Sakishima Approach/Radar are lost for one minute, squawk Mode A/3 Code 7600 and ;

1. Contact Ishigaki Tower.
2. If unable, proceed in accordance with visual flight rules.
3. If unable, proceed to Ishigakijima VOR at the last assigned altitude, or 3,000 feet which is higher, and execute instrument approach.
   Note: Procedures other than above will be issued when situation requires.

3. Trajectorized Airport Traffic Data Processing System (TAPS)

先島アプローチの指示のもとに、当該進入管制区を飛行する航空機は、モード A/3 の二次レーダー個別コード及びモード C による応答を指示される。

二次レーダー個別コードを搭載していない航空機が当該コードによる応答を指示された場合は、管制官に対しその旨通報すること。

Aircraft flying under control of Sakishima approach control in the approach control area will be instructed to reply with discrete code on Mode A/3 and Mode C.

If an aircraft with non-discrete code capability be instructed to reply with the discrete code, it shall report a controller accordingly.

ROIG AD 2.23 ADDITIONAL INFORMATION

1. Helicopter Landing Area

Location:
North HELIPAD: On PARL TWY P2
South HELIPAD: On PARL TWY P1
Lighting: Nill
(See AD2.24 AD CHART)

ROIG AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome/Heliport Chart Standard Departure Chart - Instrument (GUSUK, MIYAKO) Standard Departure Chart - Instrument (ISHIGAKI REVERSAL) Standard Departure Chart - Instrument (KOHAM) Standard Departure Chart - Instrument (GAHRA-RNAV) Standard Departure Chart - Instrument (AYAKA-RNAV) Standard Arrival Chart - Instrument (MASAN-RNAV) Standard Arrival Chart - Instrument (YUNTA NORTH-RNAV) Standard Arrival Chart - Instrument (DENSA, JOTTO WEST-RNAV) Instrument Approach Chart (ILS Z or LOC Z RWY04) Instrument Approach Chart (ILS Y or LOC Y RWY04) Instrument Approach Chart (ILS X RWY04) Instrument Approach Chart (VOR RWY04) Instrument Approach Chart (VOR Z RWY22) Instrument Approach Chart (VOR Y RWY22) Instrument Approach Chart (RNP RWY04(AR)) Instrument Approach Chart (RNP Z RWY22) Instrument Approach Chart (RNP Y RWY22(AR)) Other Chart (VISUAL REP) Other Chart (LDG CHART) Other Chart (MVA CHART)

INTENTIONALLY LEFT BLANK

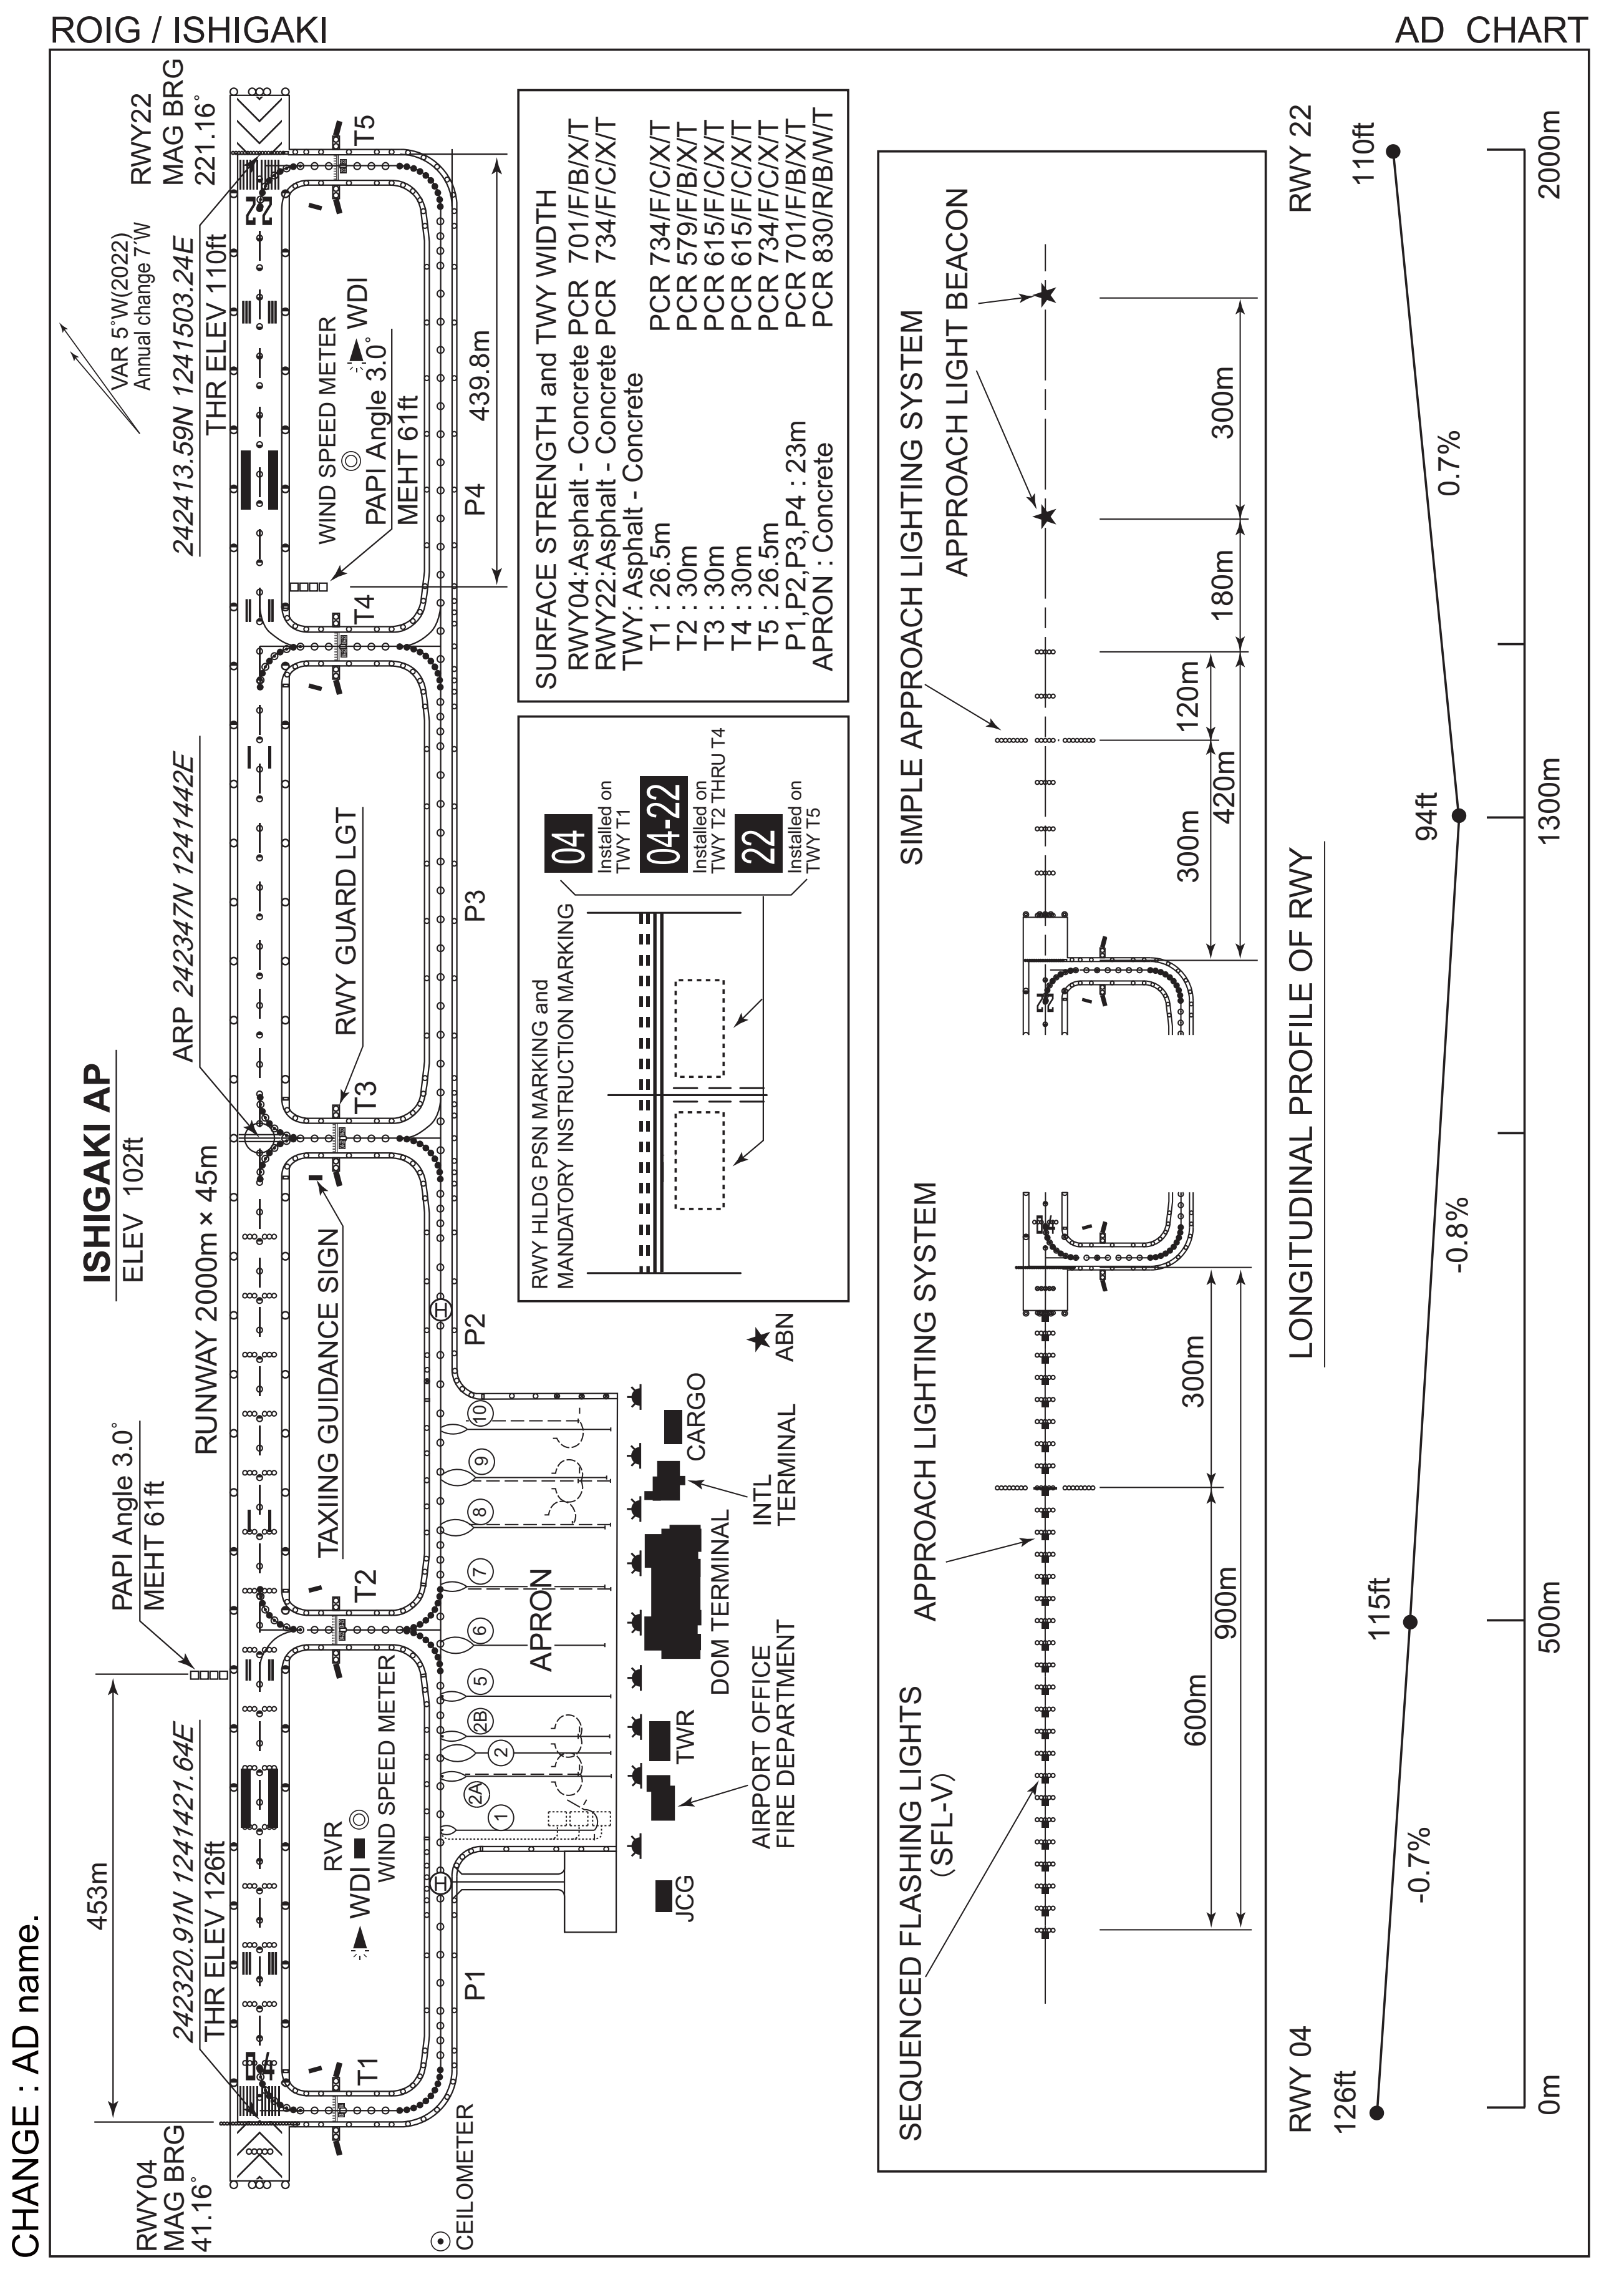
ROIG / ISHIGAKI
AD CHART
CHANGE : AD name.
ISHIGAKI AP
ELEV 102ft
RUNWAY 2000m × 45m
ARP 242347N 1241442E
RWY04 MAG BRG 41.16°
RWY22 MAG BRG 221.16°
VAR 5°W(2022) Annual change 7'W
242413.59N 1241503.24E
THR ELEV 110ft
242320.91N 1241421.64E
THR ELEV 126ft
PAPI Angle 3.0°
MEHT 61ft
WIND SPEED METER
WDI
RVR
RWY GUARD LGT
TAXIING GUIDANCE SIGN
439.8m
453m
T1
T2
T3
T4
T5
P1
P2
P3
P4
APRON
CARGO
INTL TERMINAL
DOM TERMINAL
TWR
AIRPORT OFFICE
FIRE DEPARTMENT
JCG
ABN
CEILOMETER
1
2A
2
2B
5
6
7
8
9
10
SURFACE STRENGTH and TWY WIDTH
RWY04:Asphalt - Concrete PCR 701/F/B/X/T
RWY22:Asphalt - Concrete PCR 734/F/C/X/T
TWY: Asphalt - Concrete
T1 : 26.5m PCR 734/F/C/X/T
T2 : 30m PCR 579/F/B/X/T
T3 : 30m PCR 615/F/C/X/T
T4 : 30m PCR 615/F/C/X/T
T5 : 26.5m PCR 734/F/C/X/T
P1,P2,P3,P4 : 23m PCR 701/F/B/X/T
APRON : Concrete PCR 830/R/B/W/T
RWY HLDG PSN MARKING and
MANDATORY INSTRUCTION MARKING
04
Installed on TWY T1
04-22
Installed on TWY T2 THRU T4
22
Installed on TWY T5
SIMPLE APPROACH LIGHTING SYSTEM
APPROACH LIGHT BEACON
300m
180m
120m
420m
300m
APPROACH LIGHTING SYSTEM
SEQUENCED FLASHING LIGHTS (SFL-V)
300m
900m
600m
LONGITUDINAL PROFILE OF RWY
RWY 22
110ft
RWY 04
126ft
115ft
94ft
-0.7%
-0.8%
0.7%
0m
500m
1300m
2000m

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART -INSTRUMENT

ROIG / ISHIGAKI SID

GUSUK ONE DEPARTURE

RWY04 : Climb RWY HDG to 600FT, turn right,...

RWY22 : Climb RWY HDG to 600FT, via IGE R214 to IGE R214/2.8DME,turn left HDG027˚...

... to intercept and proceed via IGE R072 to GUSUK.

Cross GUSUK at or above 3000FT.

MIYAKO TWO DEPARTURE

RWY04 : Climb RWY HDG to 600FT, turn right HDG175˚...

RWY22 : Climb RWY HDG to 600FT, via IGE R214 to IGE R214/2.8DME,turn left HDG085˚...

... to intercept and proceed via IGE R130 to IGE 14.0DME, turn left, via MJC R241 to MJC VORTAC.

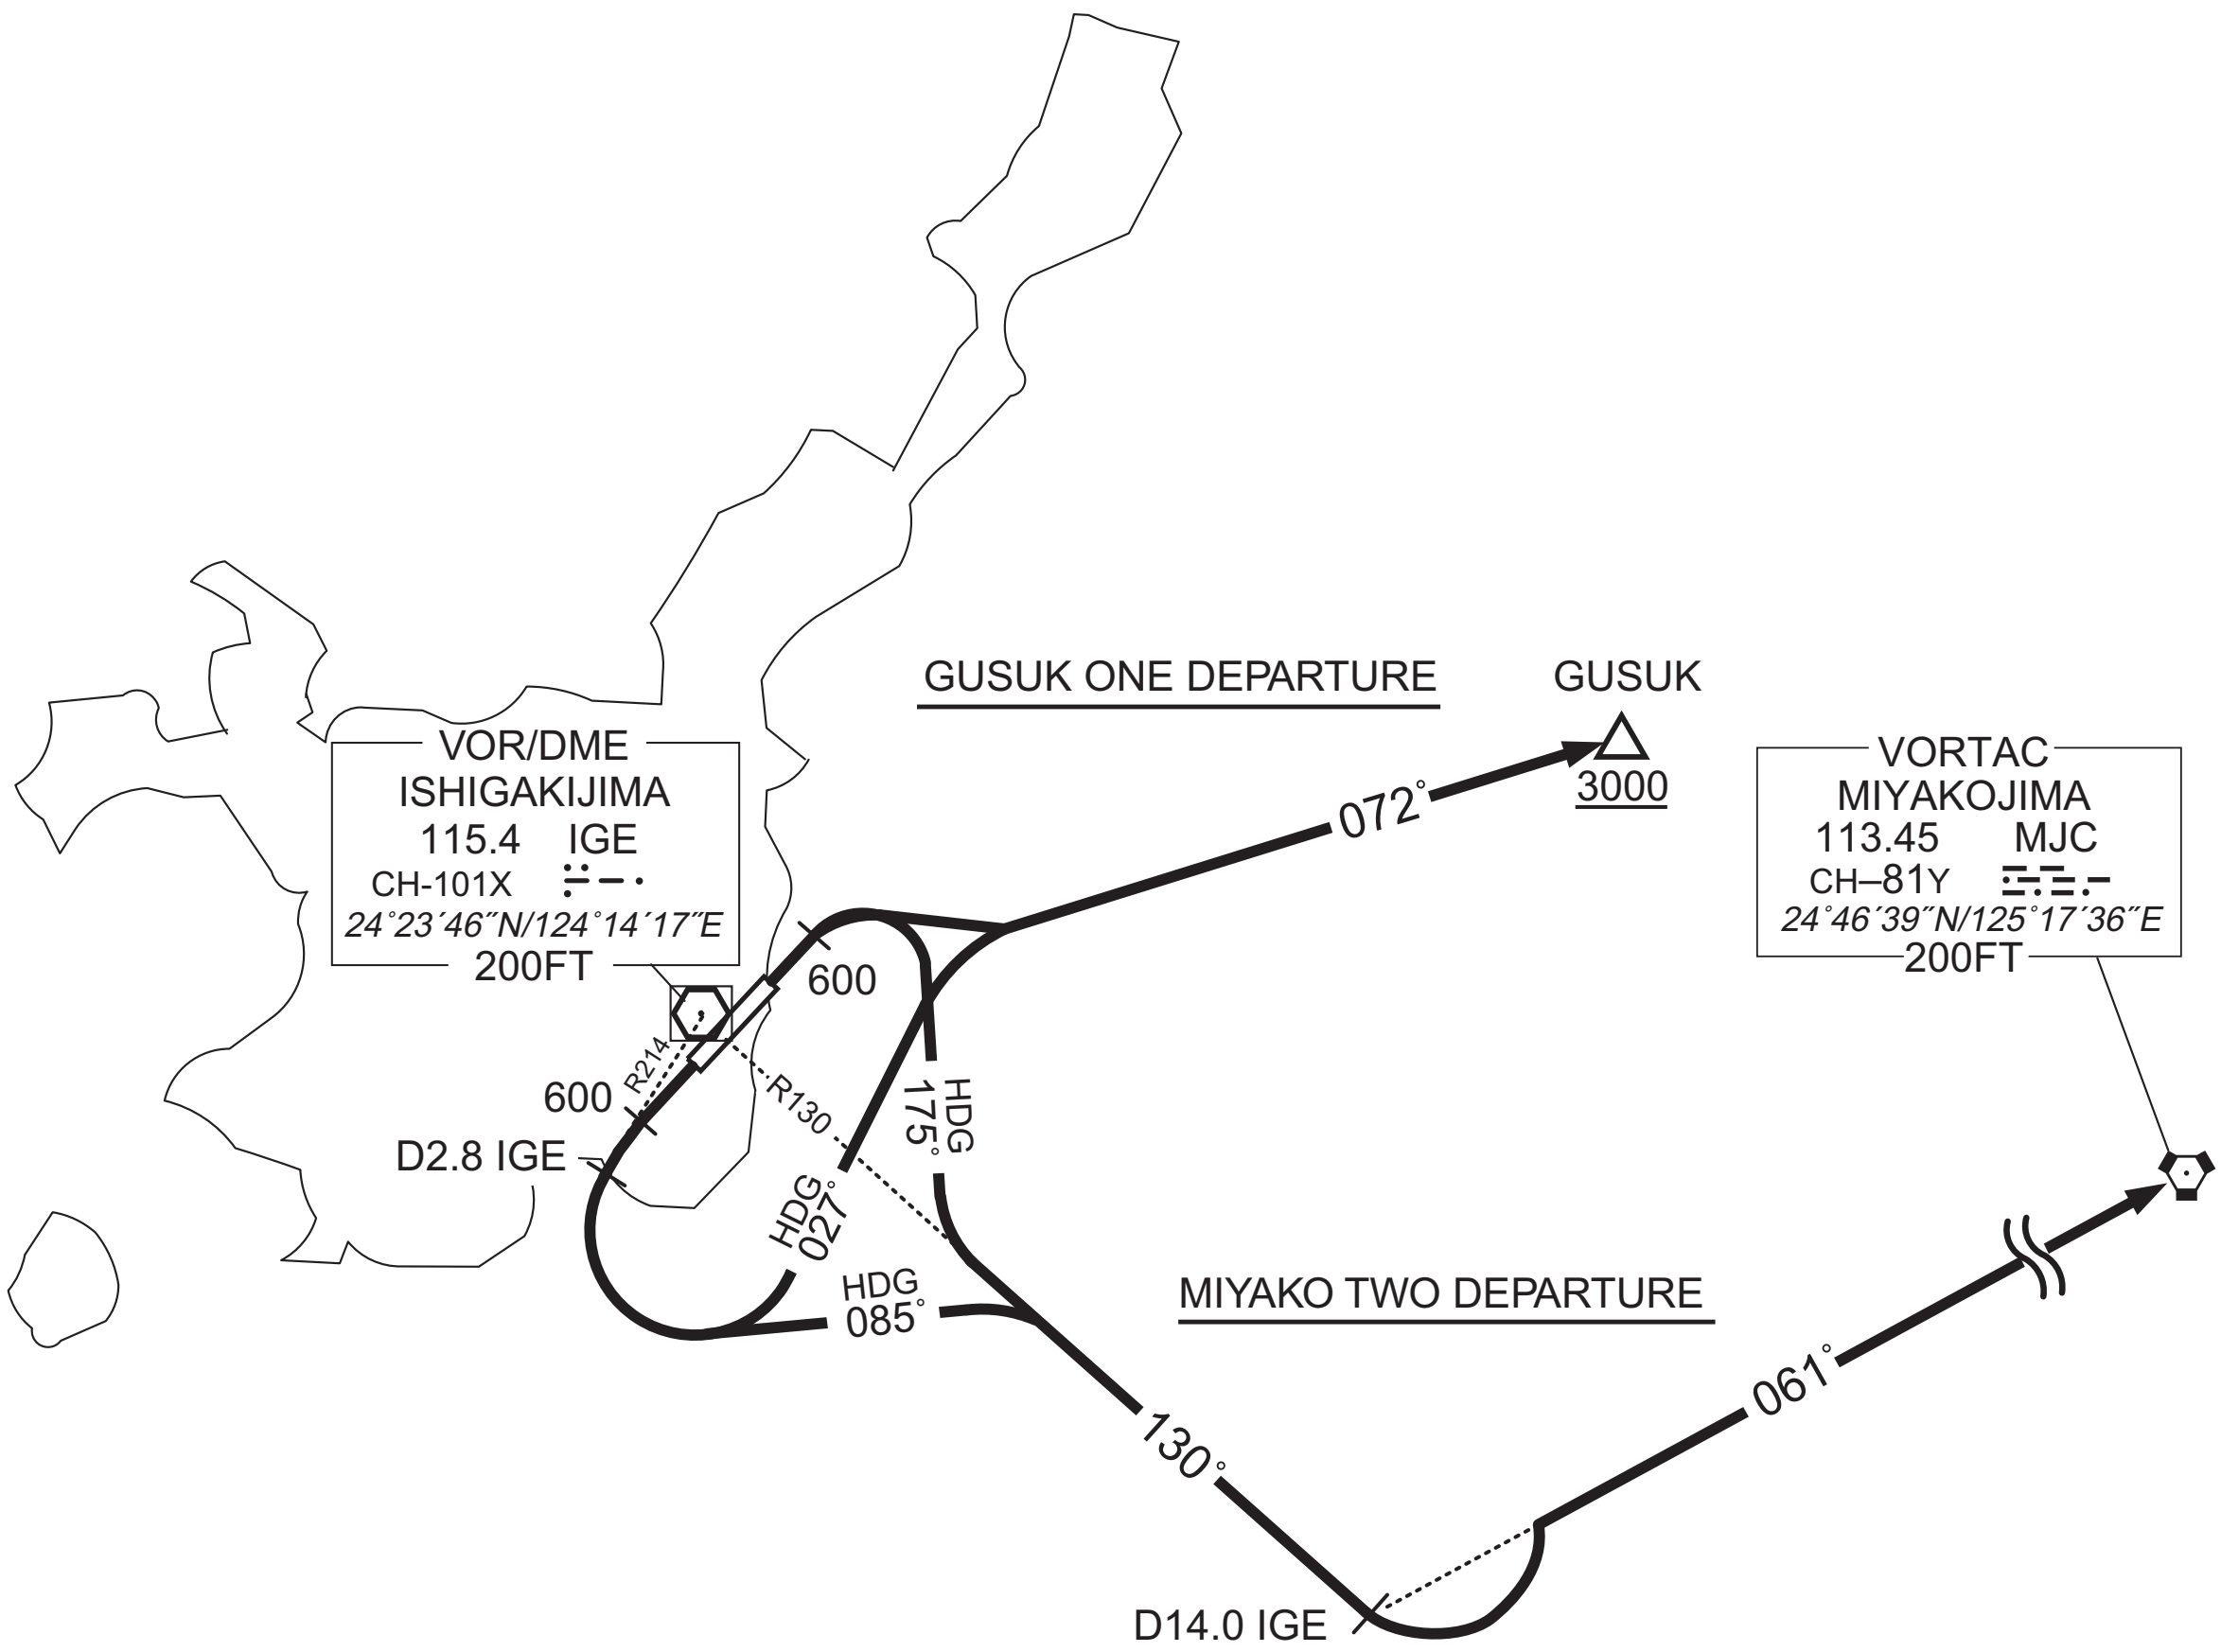

CHANGE : AD name.

STANDARD DEPARTURE CHART -INSTRUMENT

ROIG / ISHIGAKI SID

ISHIGAKI REVERSAL ONE DEPARTURE

RWY04 : Climb RWY HDG to 800FT, turn left to intercept and proceed via IGE R040 to 2000FT,
turn right,direct to IGE VOR/DME.
Cross IGE VOR/DME at or above 4000FT.

RWY22 : Climb RWY HDG to 600FT,via IGE R214 to IGE R214/5.5DME,turn left, direct to IGE VOR/DME.
Cross IGE VOR/DME at or above 4000FT.

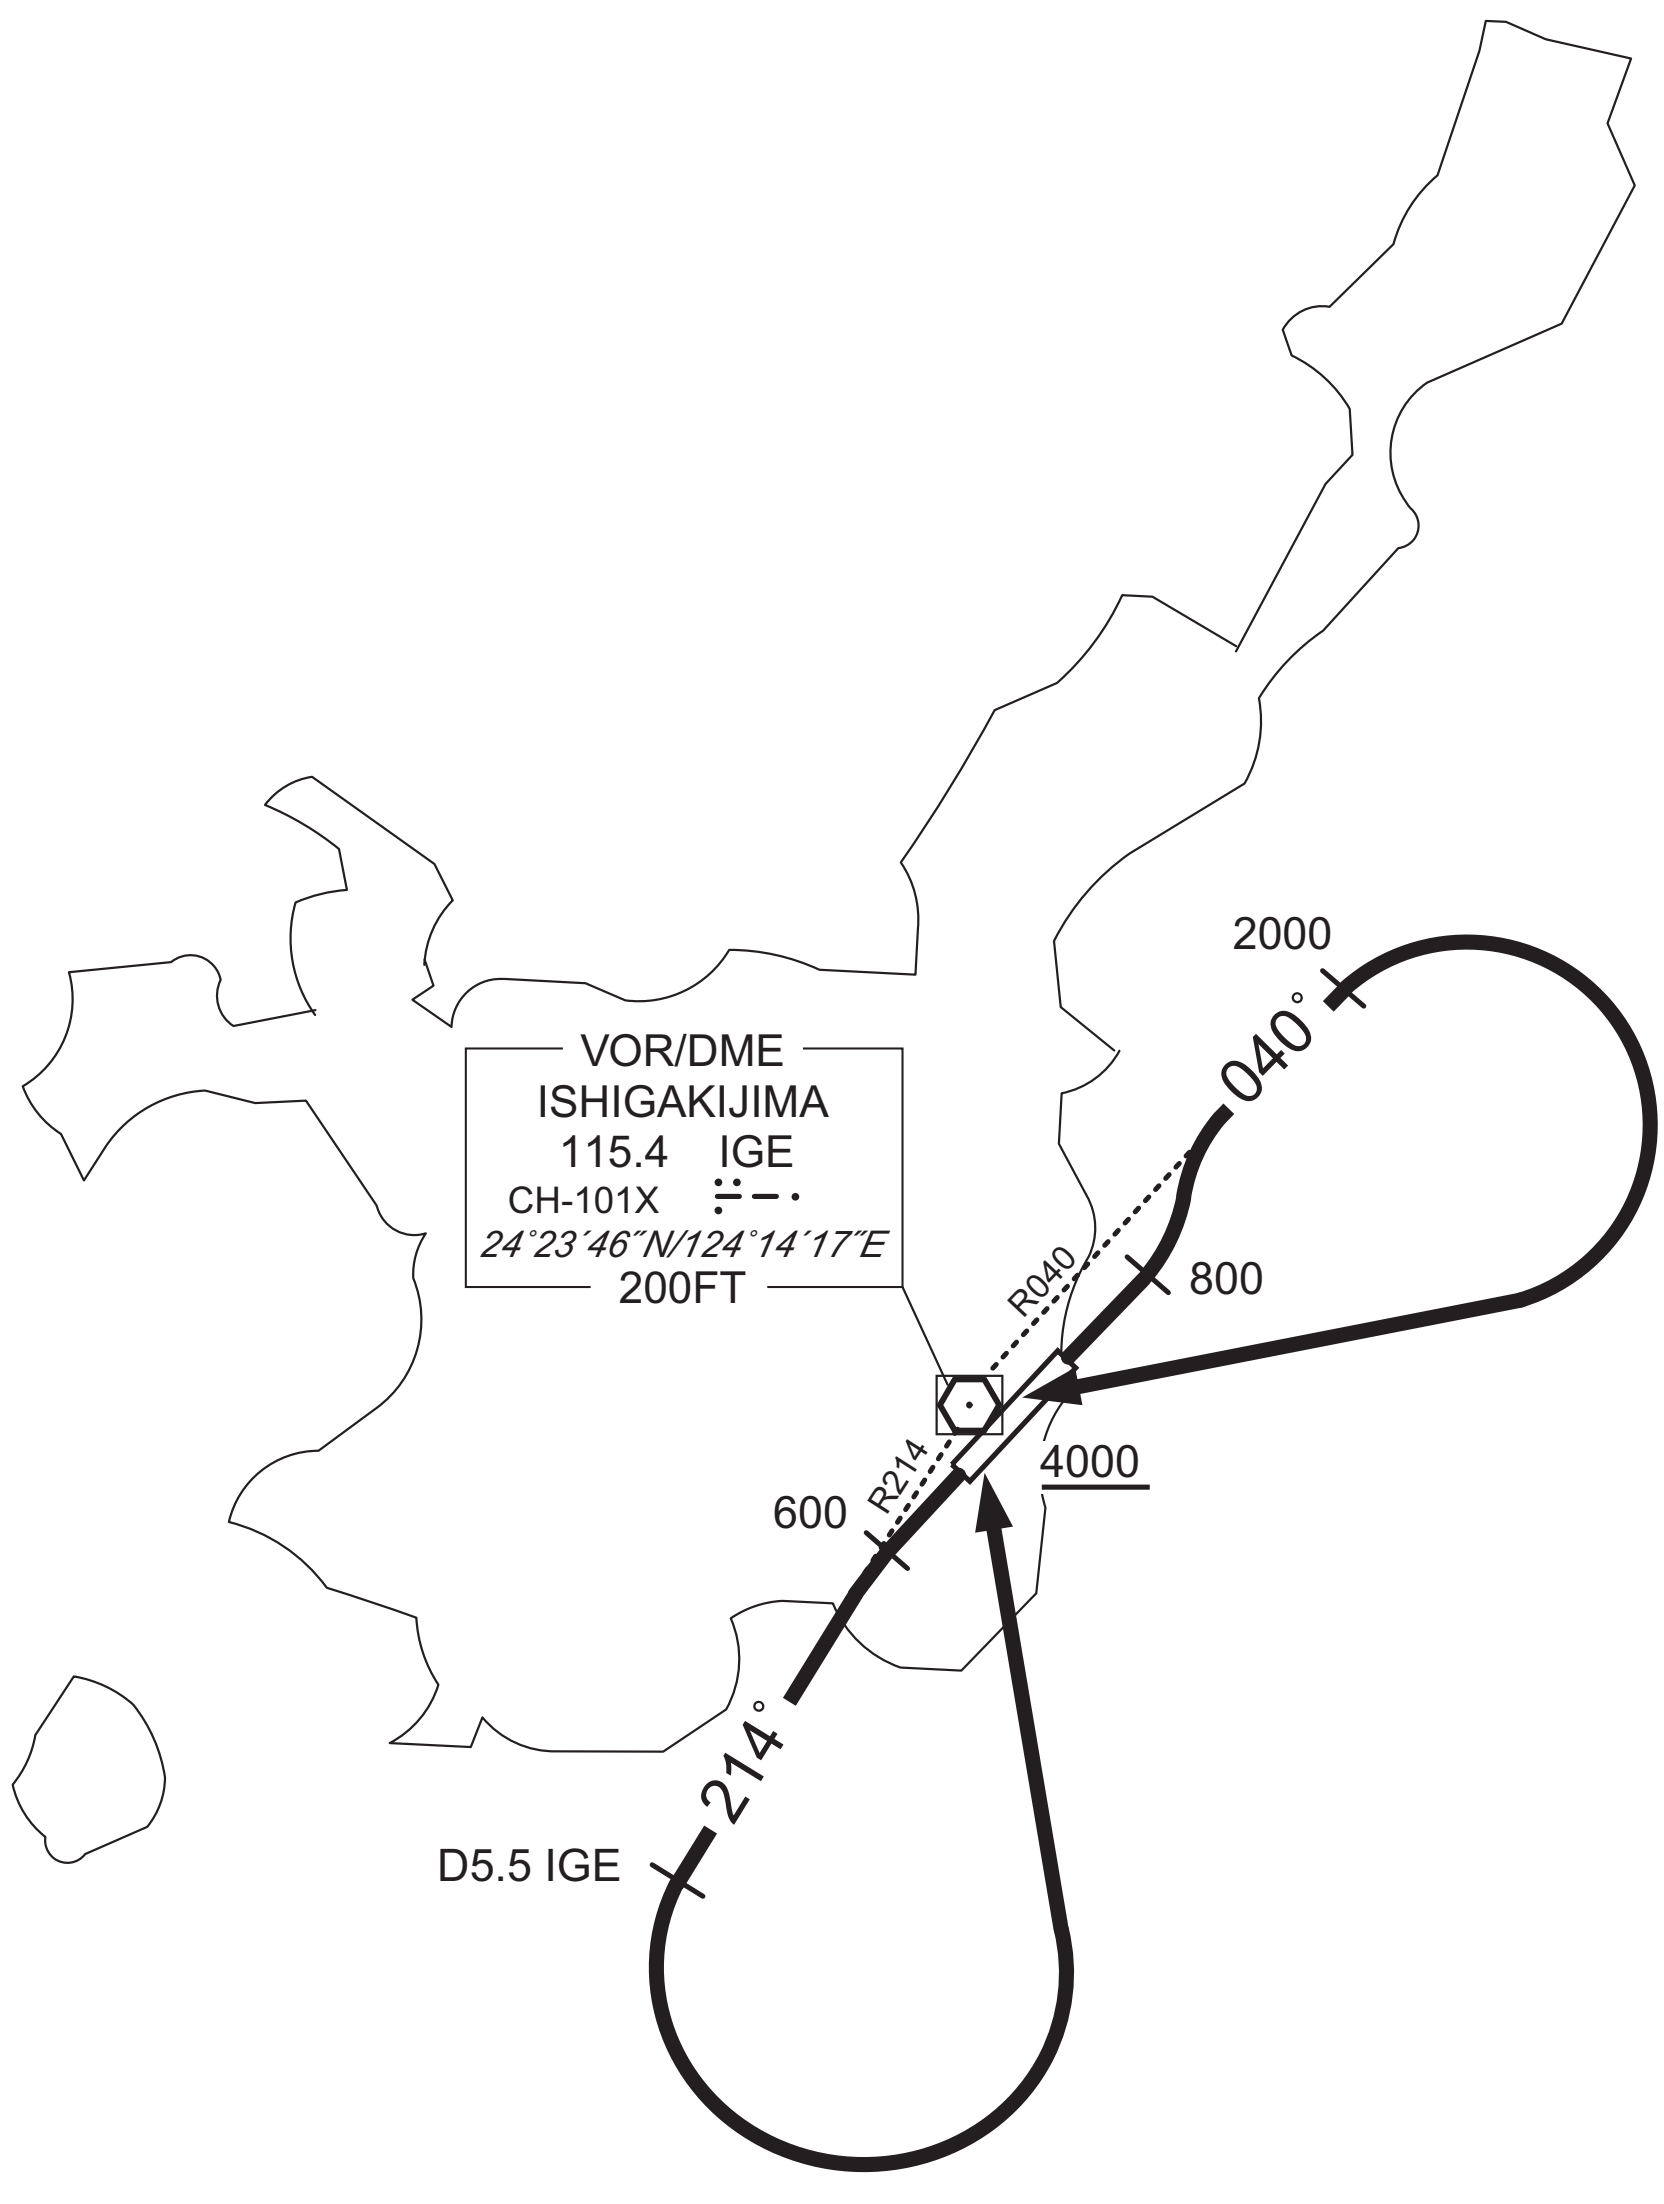

CHANGE : AD name.

STANDARD DEPARTURE CHART -INSTRUMENT

ROIG / ISHIGAKI SID

KOHAM ONE DEPARTURE

RWY04 : Climb RWY HDG to 800FT, turn left to intercept and proceed via IGE R040 to IGE R040/5.5DME, turn left, via IGE 8.0DME counterclockwise ARC,turn right to intercept and proceed via IGE R275 to KOHAM.
Cross KOHAM at or above 4000FT.

RWY22 : Climb RWY HDG to 600FT,via IGE R214 to IGE R214/5.5DME,turn right, via IGE 8.0DME clockwise ARC,turn left to intercept and proceed via IGE R275 to KOHAM.
Cross KOHAM at or above 4000FT.

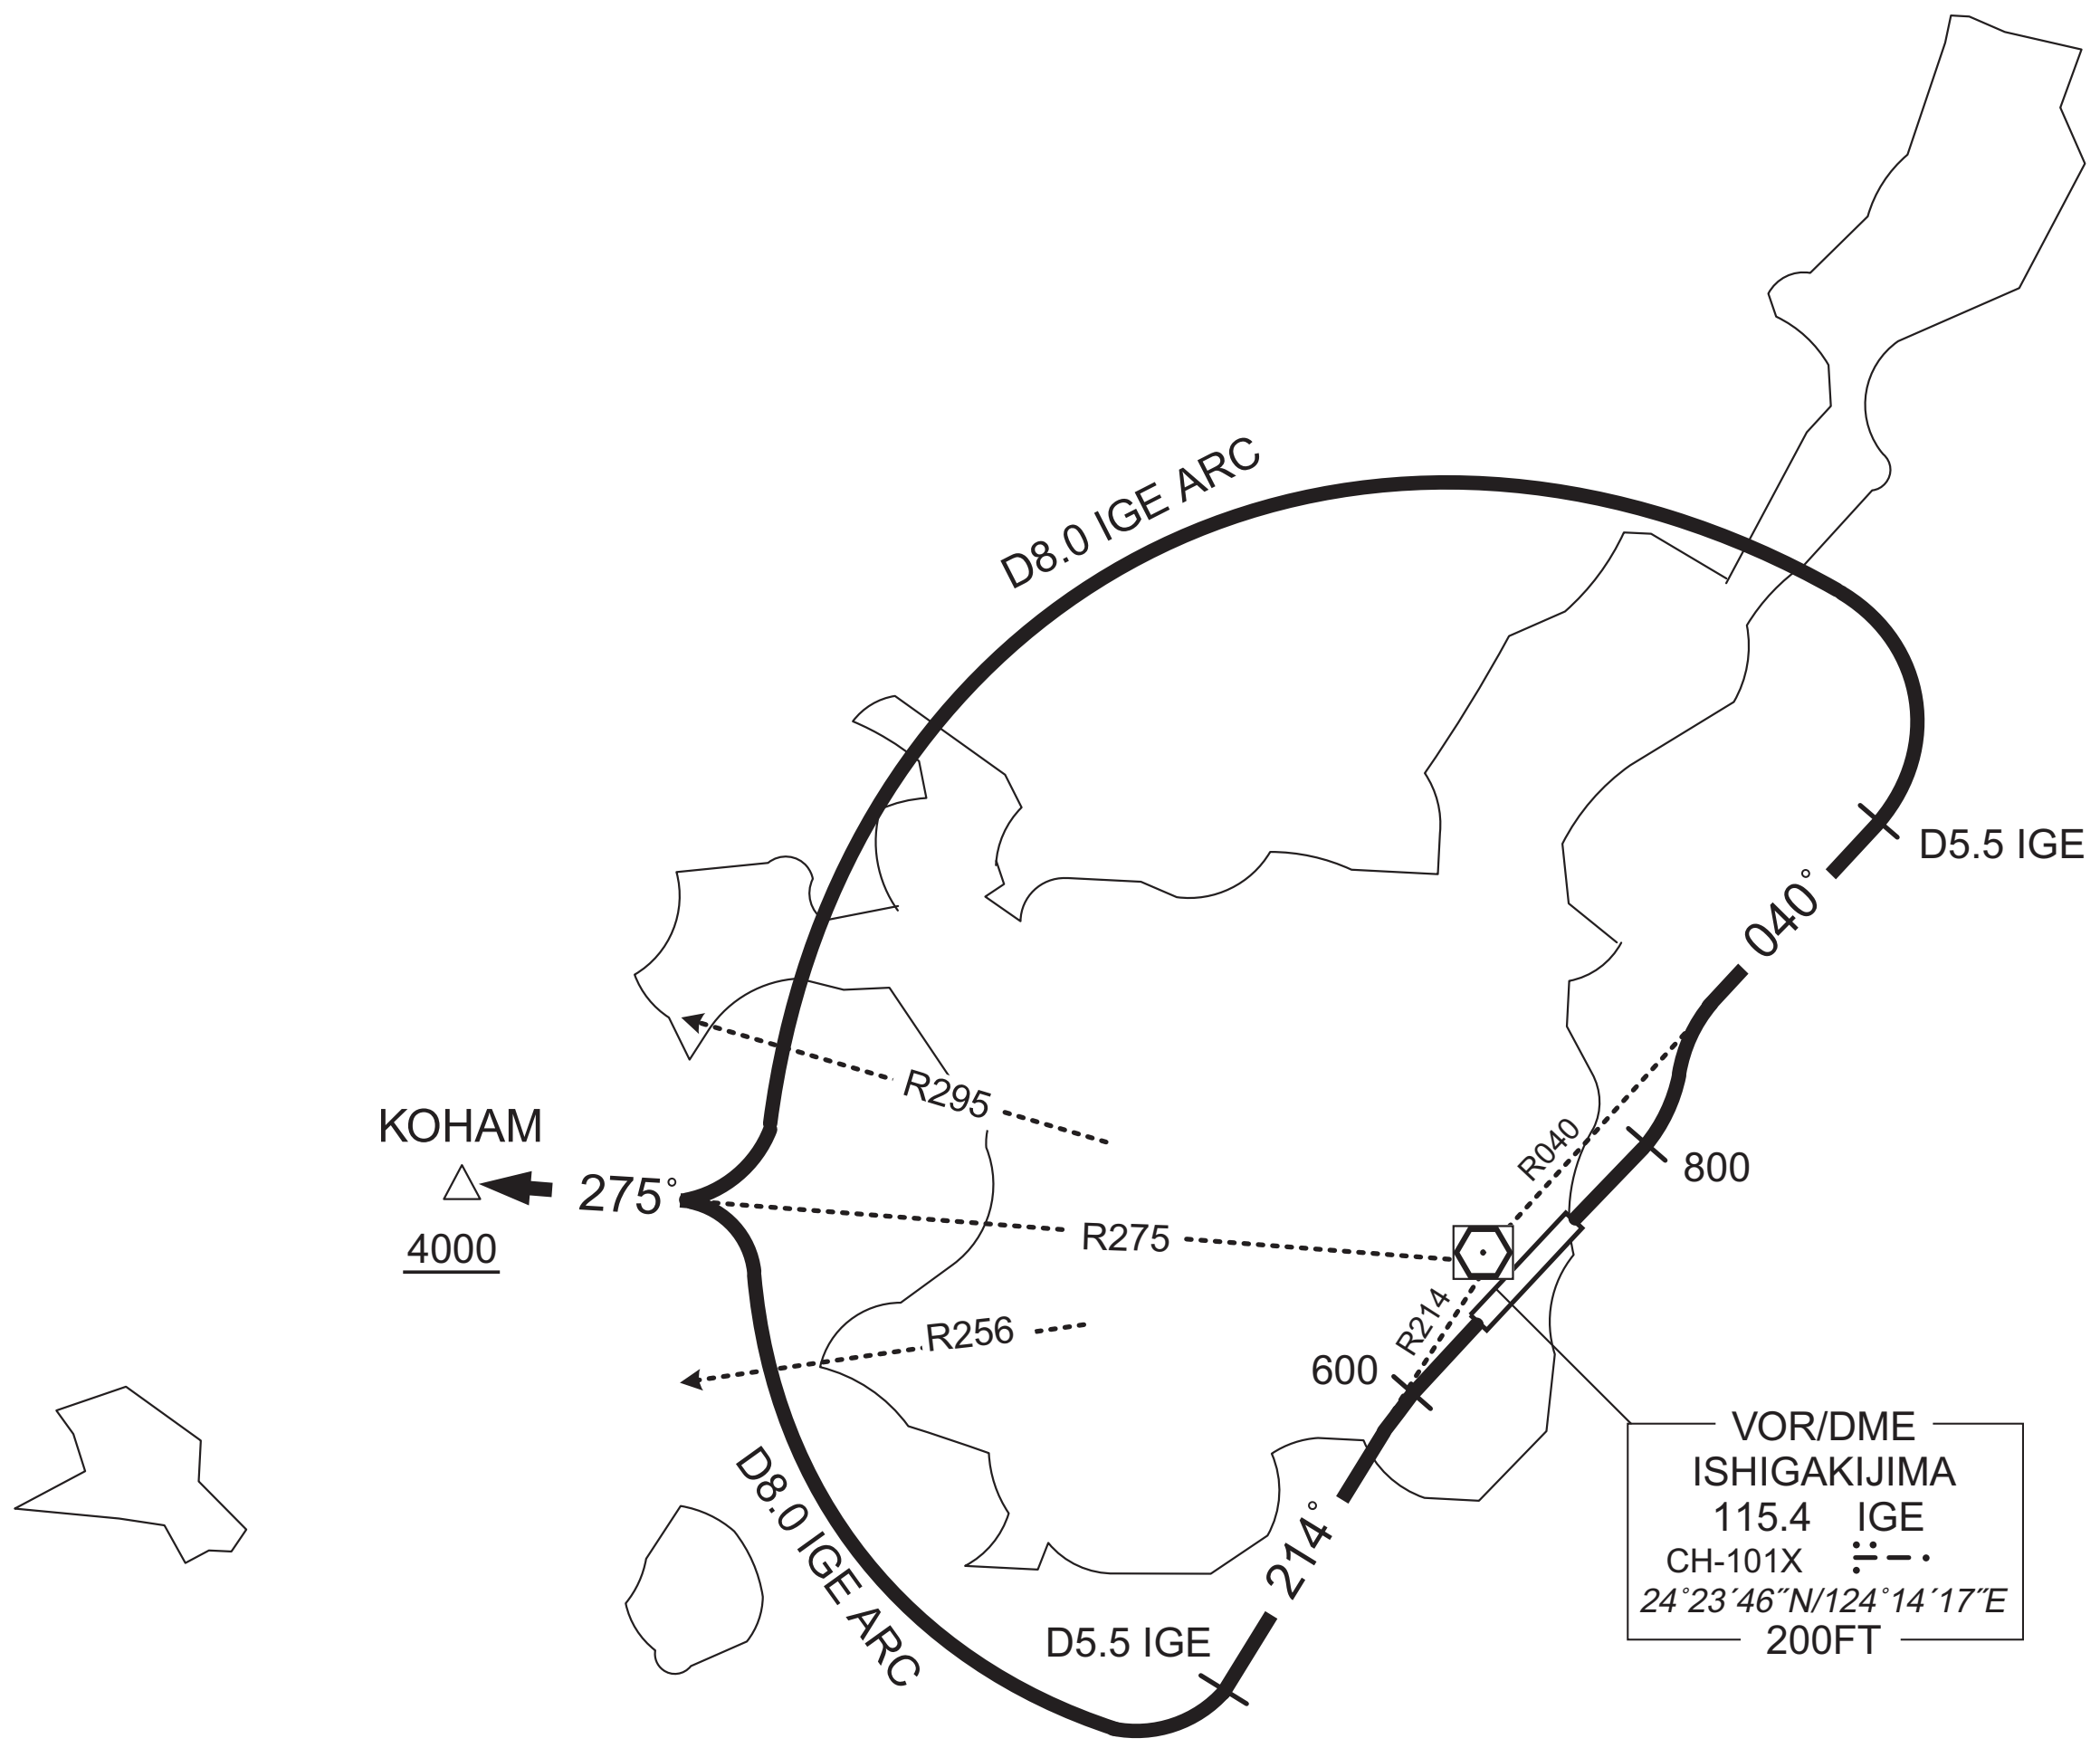

CHANGE : AD name.

STANDARD DEPARTURE CHART -INSTRUMENT

ROIG / ISHIGAKI RNAV SID and TRANSITION

GAHRA THREE DEPARTURE MIYAKOJIMA TRANSITION	RNP1

Note GNSS required.

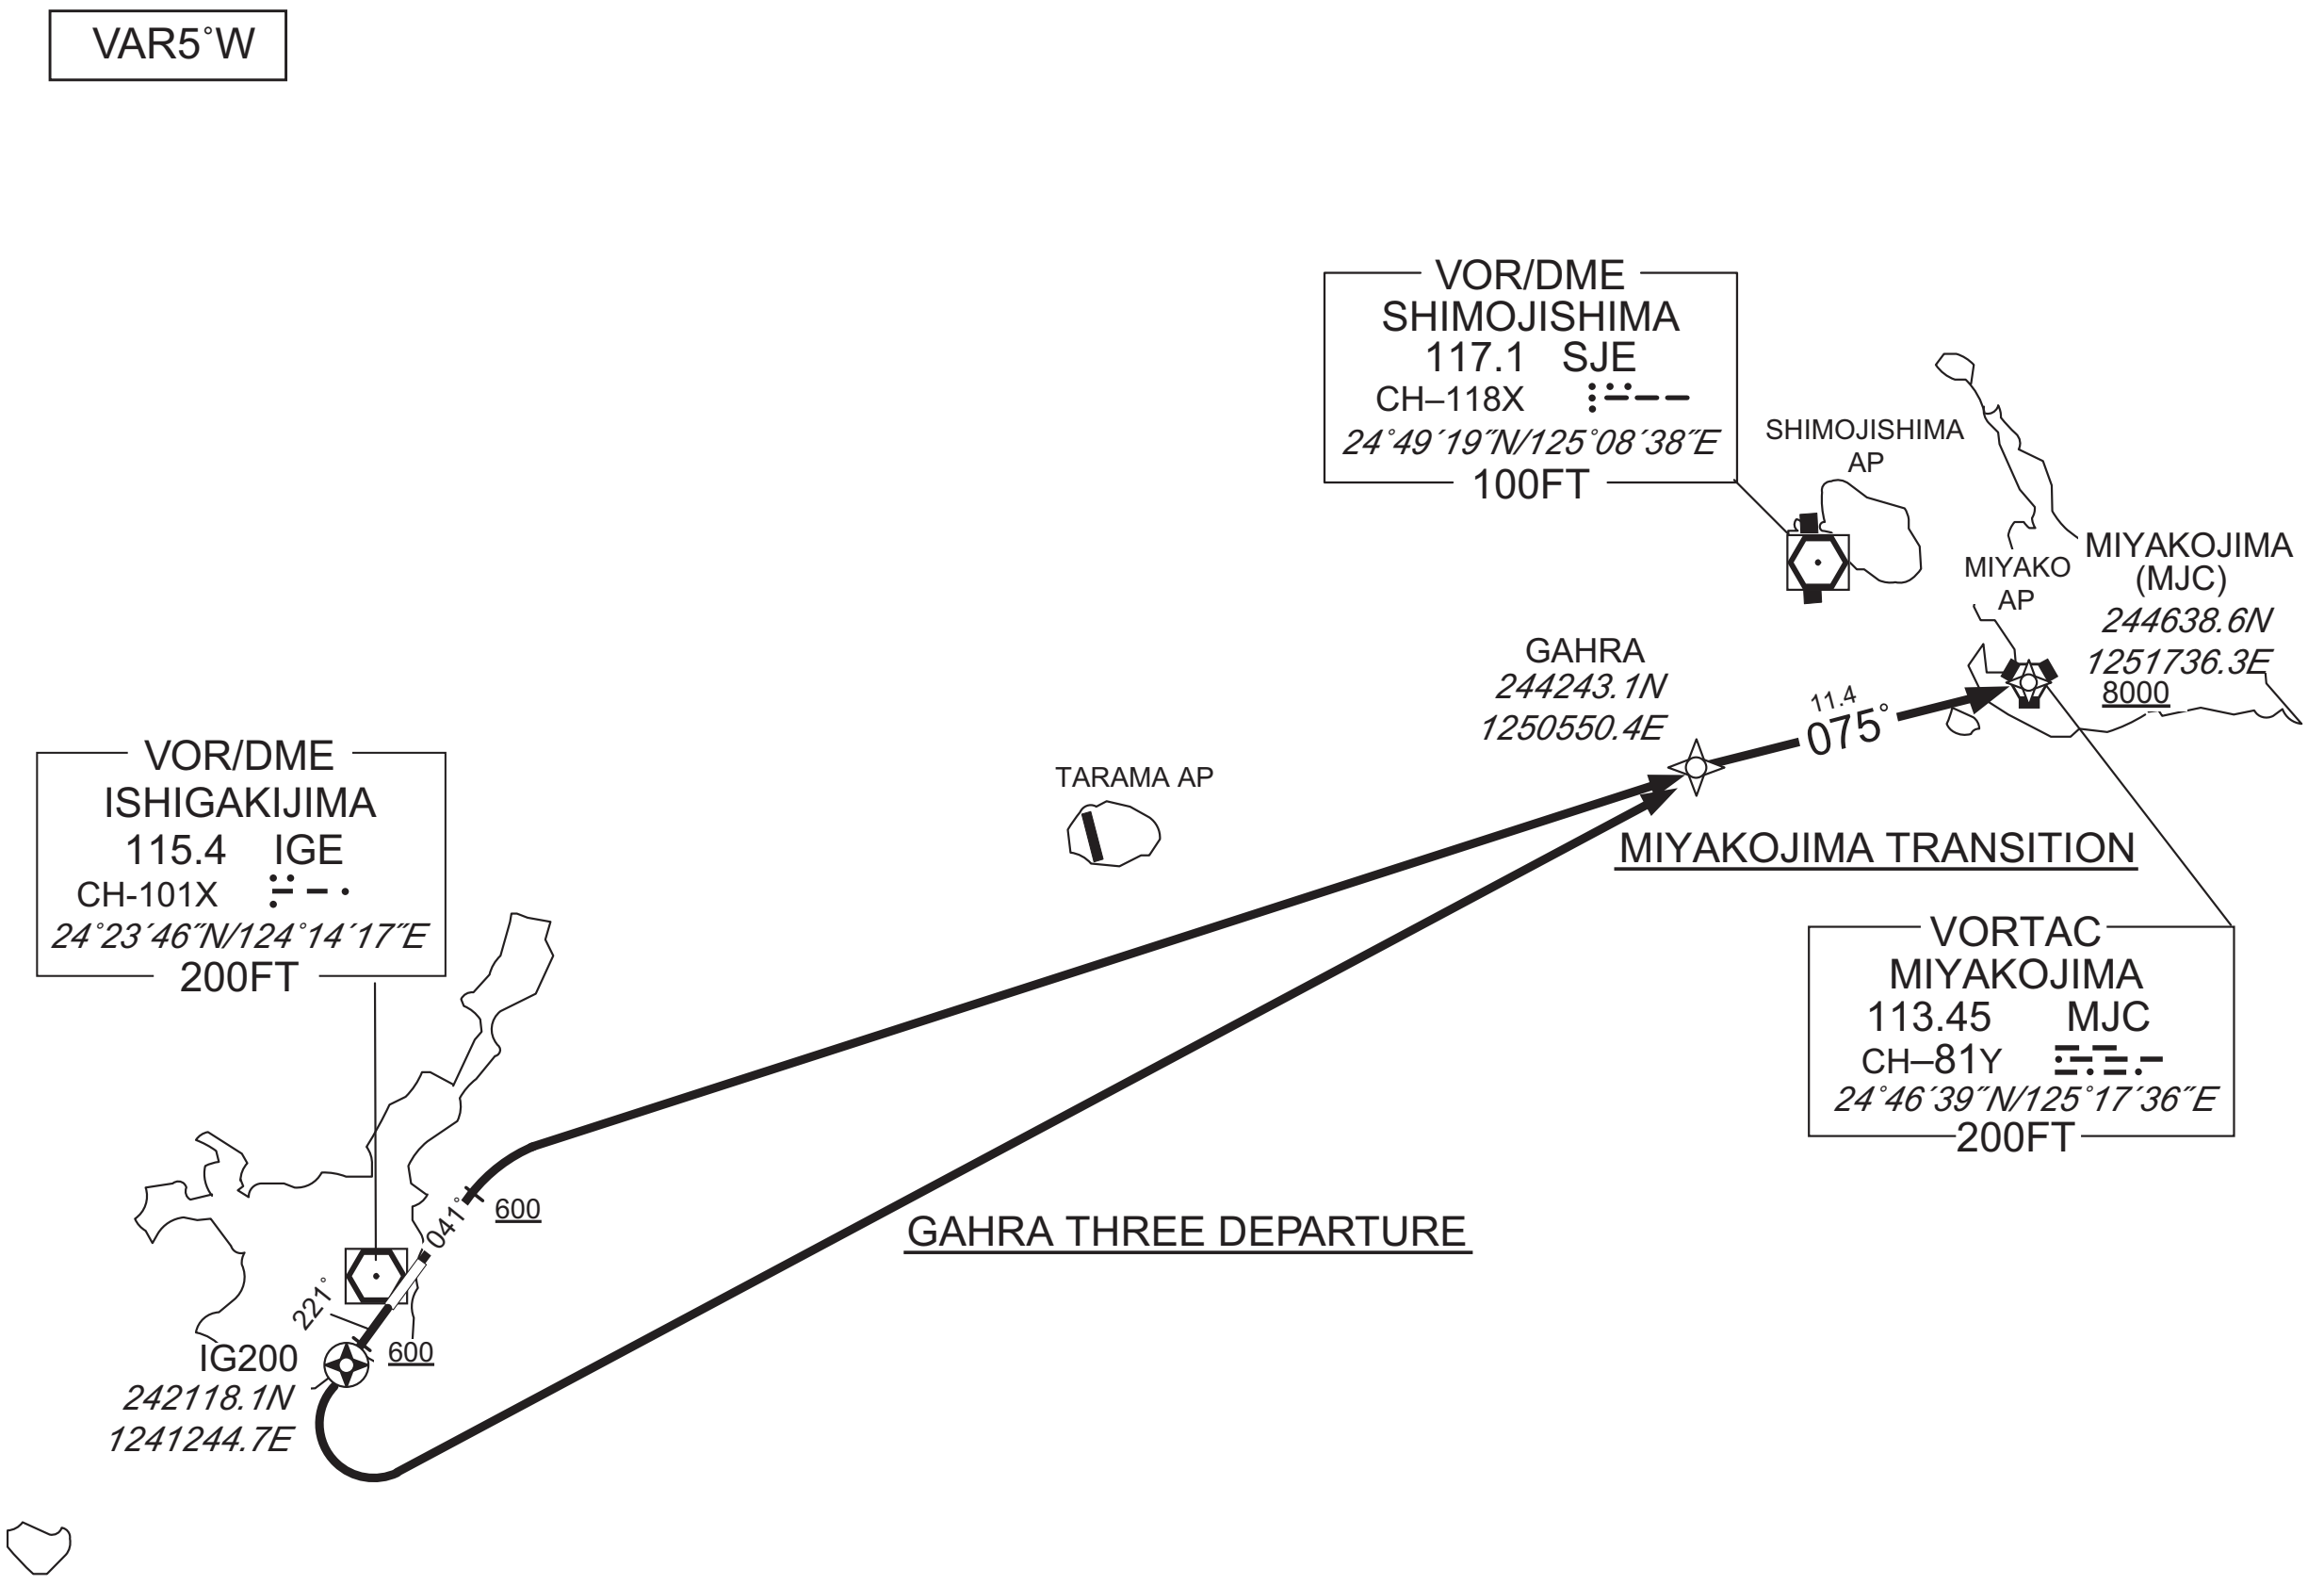

GAHRA THREE DEPARTURE

RWY04 : Climb on HDG 041˚ at or above 600FT, turn right direct to GAHRA.

RWY22 : Climb on HDG 221˚ at or above 600FT, direct to IG200, turn left direct to GAHRA.

MIYAKOJIMA TRANSITION

From GAHRA, to MJC at or above 8000FT.

CHANGE : AD name.

STANDARD DEPARTURE CHART -INSTRUMENT

ROIG / ISHIGAKI RNAV SID and TRANSITION

GAHRA THREE DEPARTURE

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	041 (035.9)	-4.9	-	-	+600	-	-	RNP1
002	DF	GAHRA	-	-	-4.9	-	R	-	-	-	RNP1

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	221 (215.9)	-4.9	-	-	+600	-	-	RNP1
002	DF	IG200	Y	-	-4.9	-	-	-	-	-	RNP1
003	DF	GAHRA	-	-	-4.9	-	L	-	-	-	RNP1

MIYAKOJIMA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GAHRA	-	-	-4.9	-	-	-	-	-	RNP1
002	TF	MJC	-	075 (069.8)	-4.9	11.4	-	+8000	-	-	RNP1

CHANGE : AD name.

STANDARD DEPARTURE CHART -INSTRUMENT

ROIG / ISHIGAKI | RNAV SID

AYAKA THREE DEPARTURE	RNP1
Note GNSS required.	

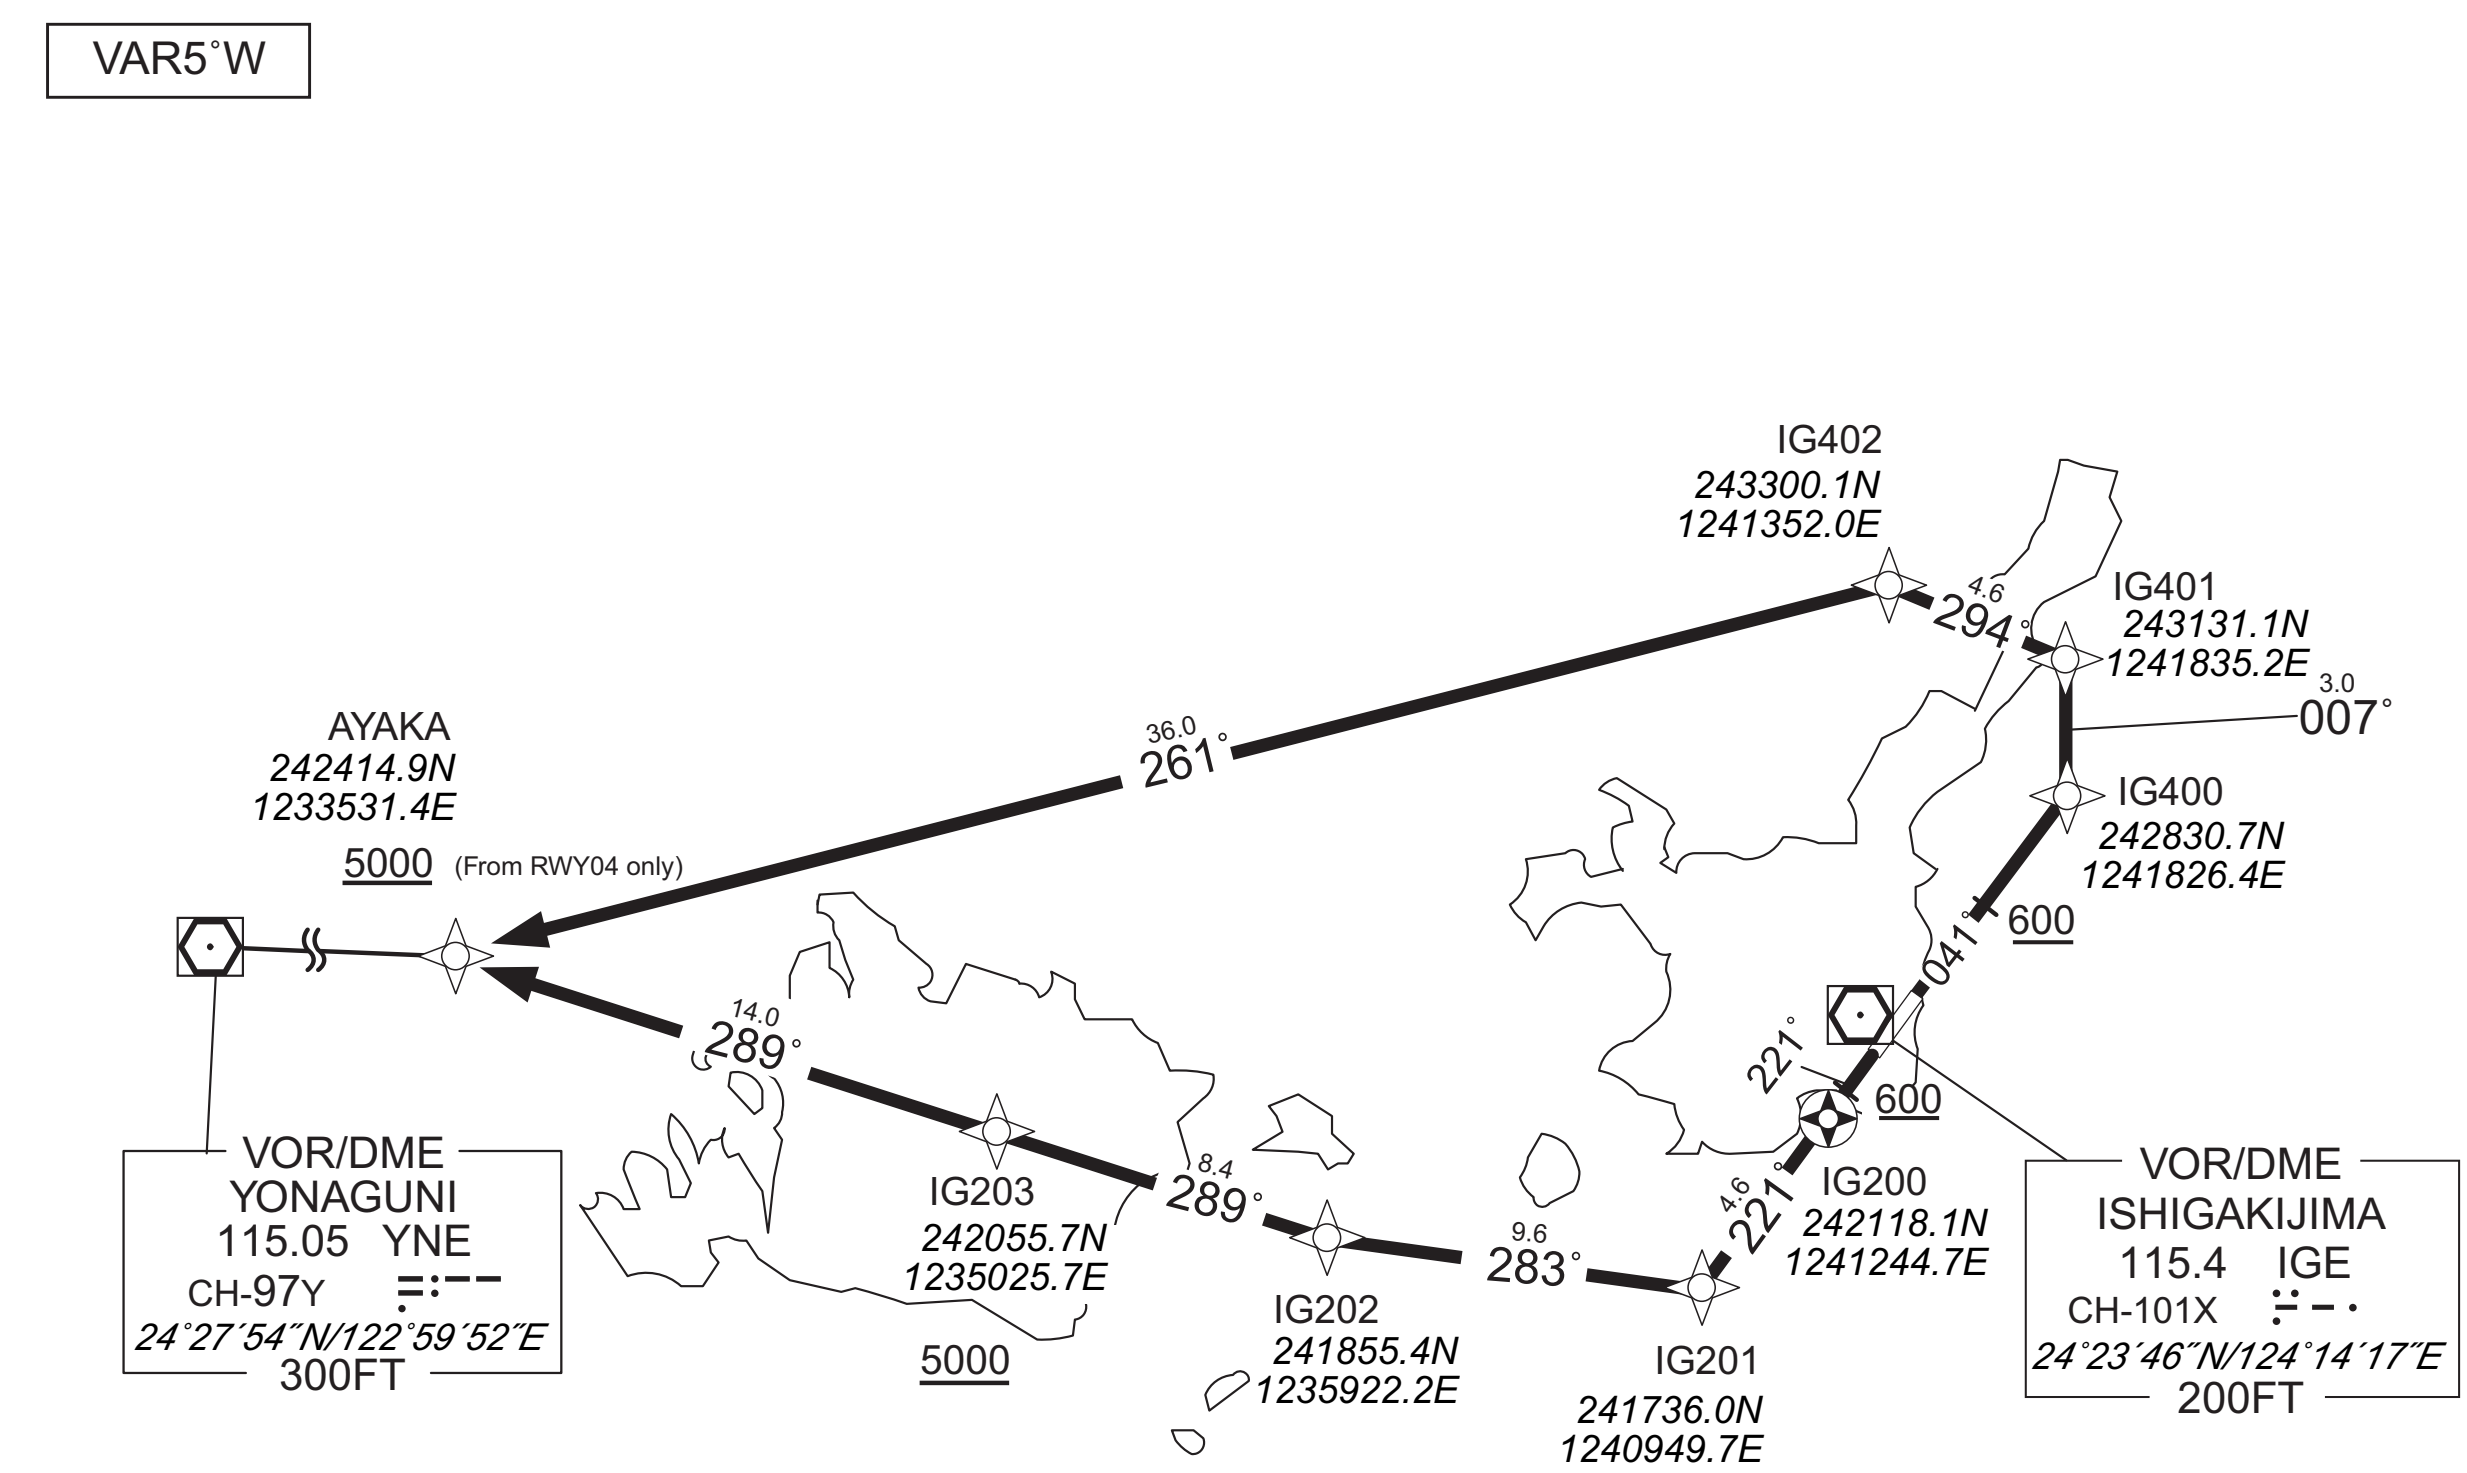

RWY04 : Climb on HDG 041˚ at or above 600FT, direct to IG400, to IG401, to IG402, to AYAKA at or above 5000FT.

RWY22 : Climb on HDG 221˚ at or above 600FT, direct to IG200, to IG201, to IG202, to IG203 at or above 5000FT, to AYAKA.

NOTE RWY04 : 4.0% climb gradient required up to 2000FT.
OBST ALT 836FT at 9.53NM 021˚ FM end of RWY04.

CHANGE : AD name.

STANDARD DEPARTURE CHART -INSTRUMENT

ROIG / ISHIGAKI

RNAV SID

AYAKA THREE DEPARTURE

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	041 (035.9)	-4.9	-	-	+600	-	-	RNP1
002	DF	IG400	-	-	-4.9	-	-	-	-	-	RNP1
003	TF	IG401	-	007 (002.6)	-4.9	3.0	-	-	-	-	RNP1
004	TF	IG402	-	294 (289.1)	-4.9	4.6	-	-	-	-	RNP1
005	TF	AYAKA	-	261 (256.1)	-4.9	36.0	-	+5000	-	-	RNP1

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	221 (215.9)	-4.9	-	-	+600	-	-	RNP1
002	DF	IG200	Y	-	-4.9	-	-	-	-	-	RNP1
003	TF	IG201	-	221 (215.7)	-4.9	4.6	-	-	-	-	RNP1
004	TF	IG202	-	283 (277.9)	-4.9	9.6	-	-	-	-	RNP1
005	TF	IG203	-	289 (283.9)	-4.9	8.4	-	+5000	-	-	RNP1
006	TF	AYAKA	-	289 (283.8)	-4.9	14.0	-	-	-	-	RNP1

CHANGE : AD name.

STANDARD ARRIVAL CHART-INSTRUMENT

ROIG / ISHIGAKI

RNAV STAR RWY04 / RWY22

MASAN ARRIVAL

RNP1

Note GNSS required.

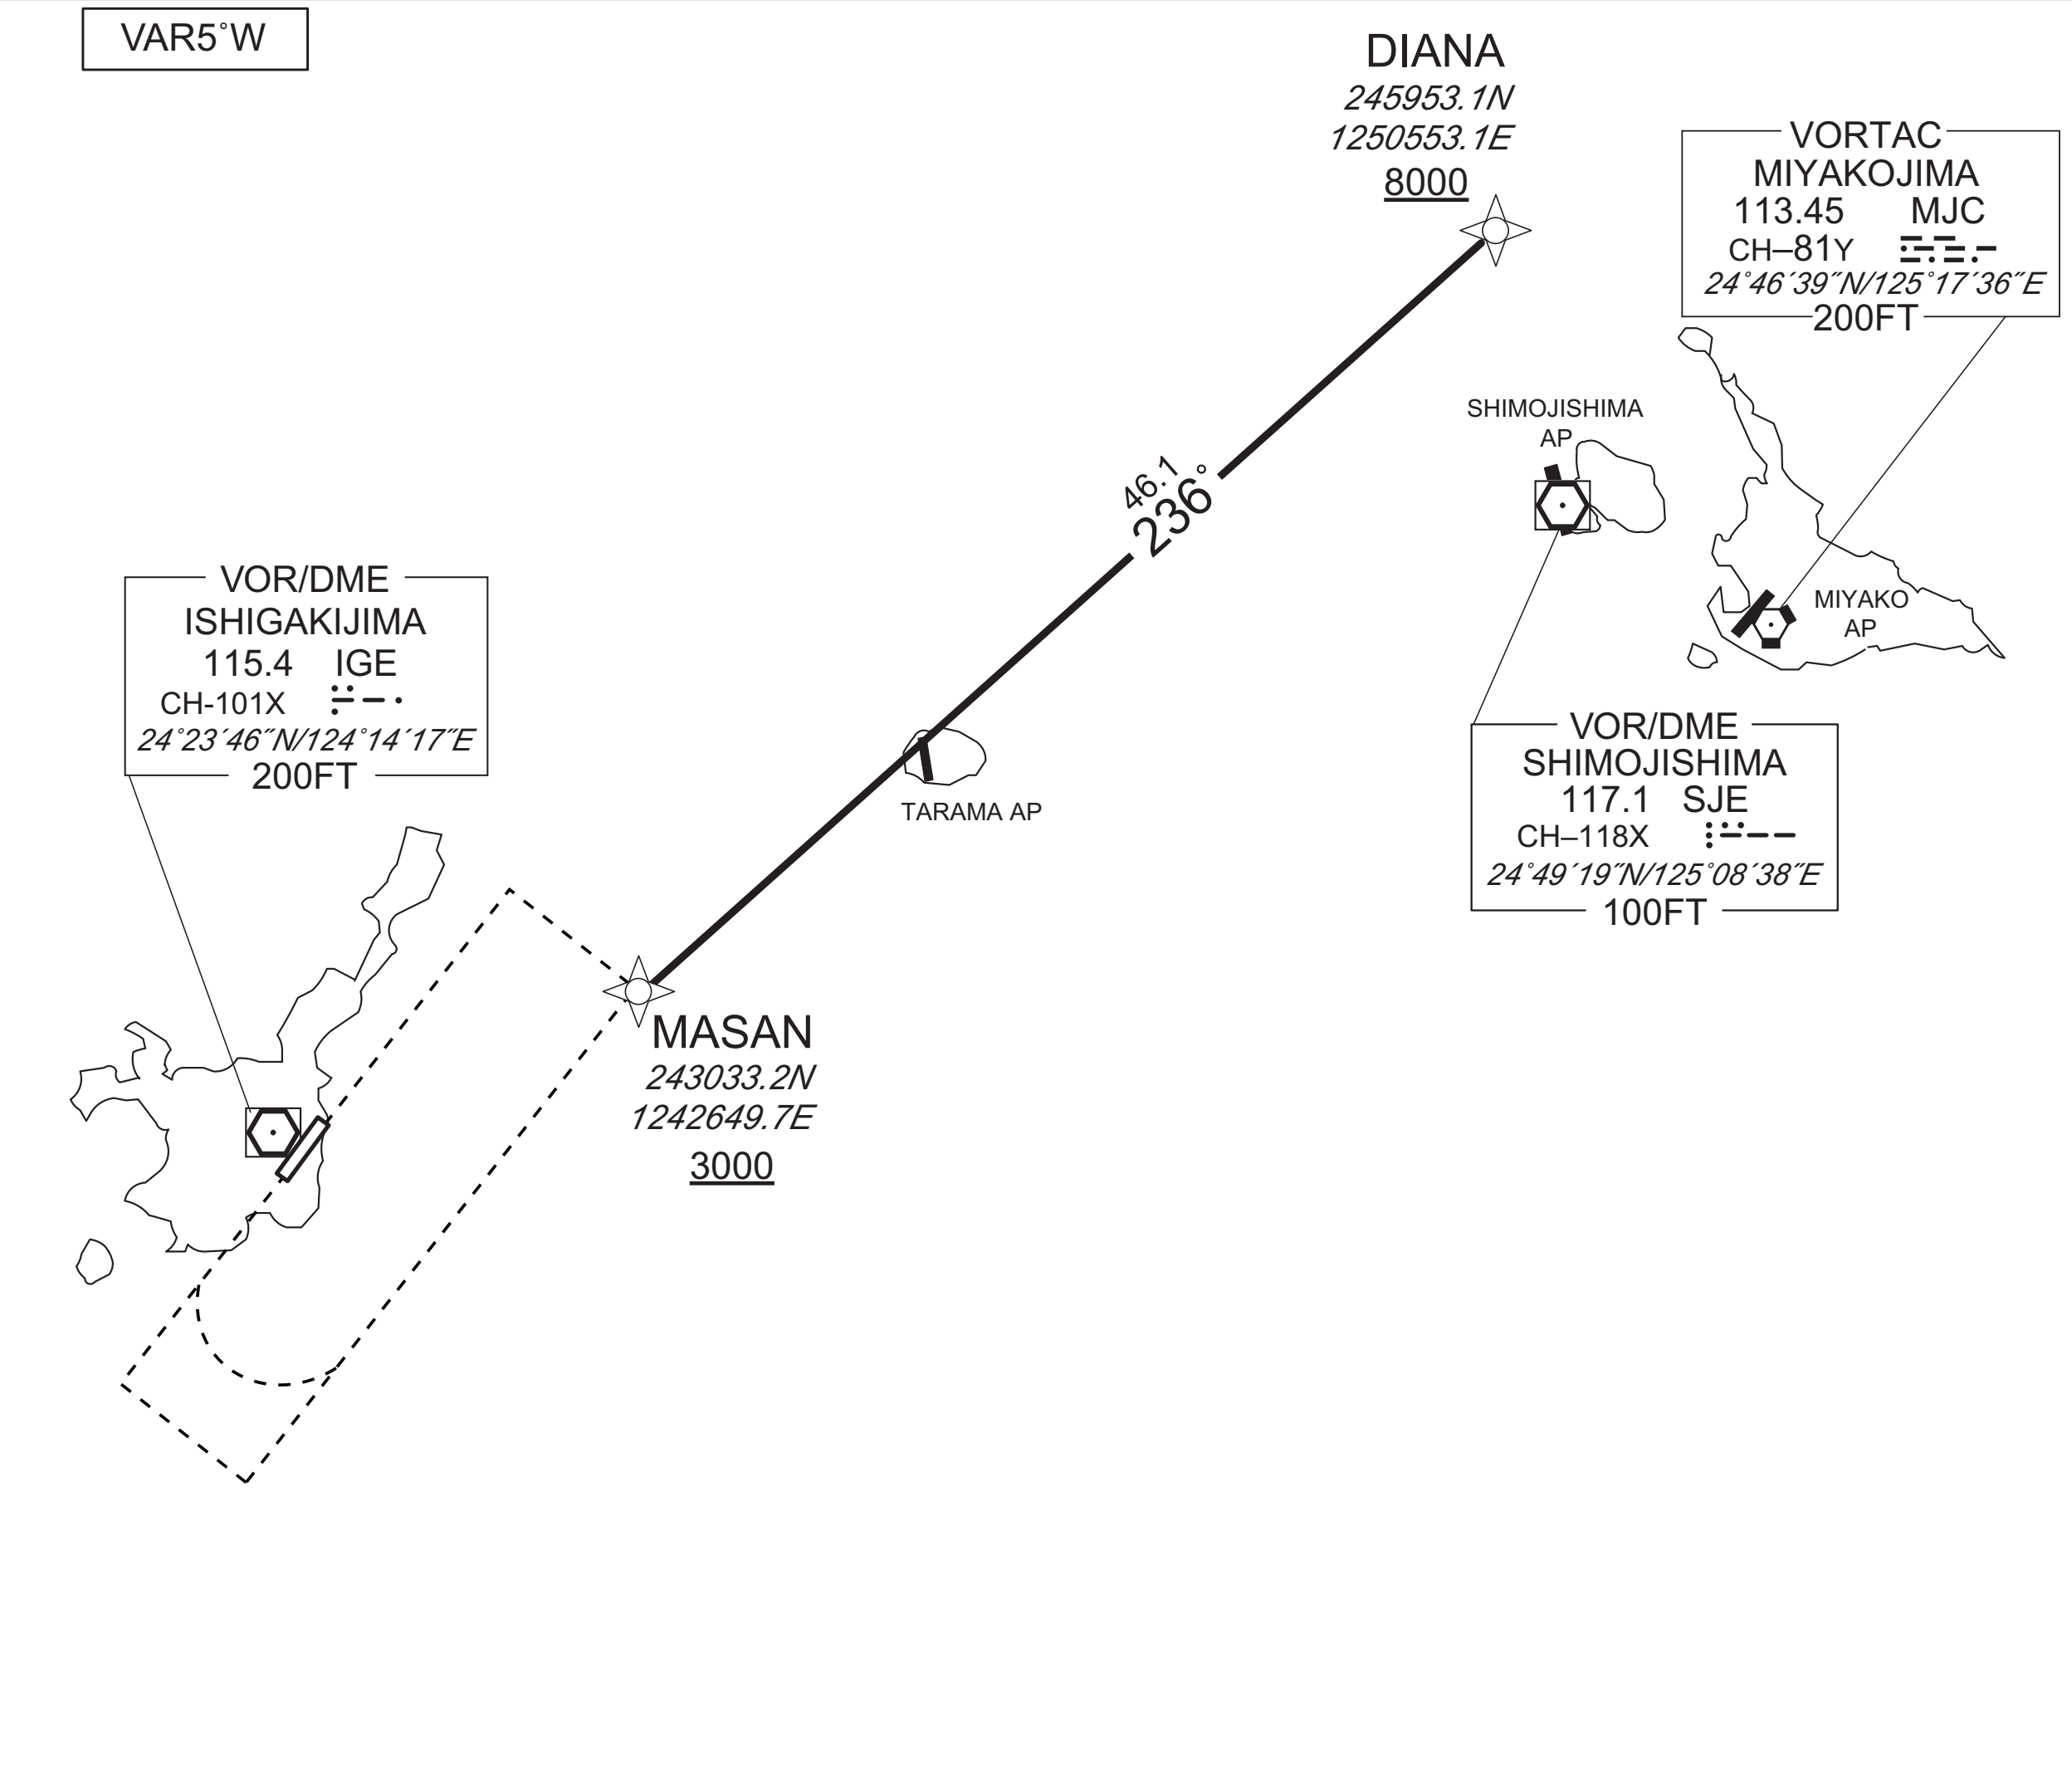

From DIANA at or above 8000FT, to MASAN at or above 3000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course ˚M(˚T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	DIANA	—	—	-5.1	—	—	+8000	—	—	RNP1
002	TF	MASAN	—	236 (230.5)	-5.1	46.1	—	+3000	—	—	RNP1

CHANGE : AD name.

STANDARD ARRIVAL CHART-INSTRUMENT

ROIG / ISHIGAKI RNAV STAR RWY22

YUNTA NORTH ARRIVAL RNP1

Note GNSS required.

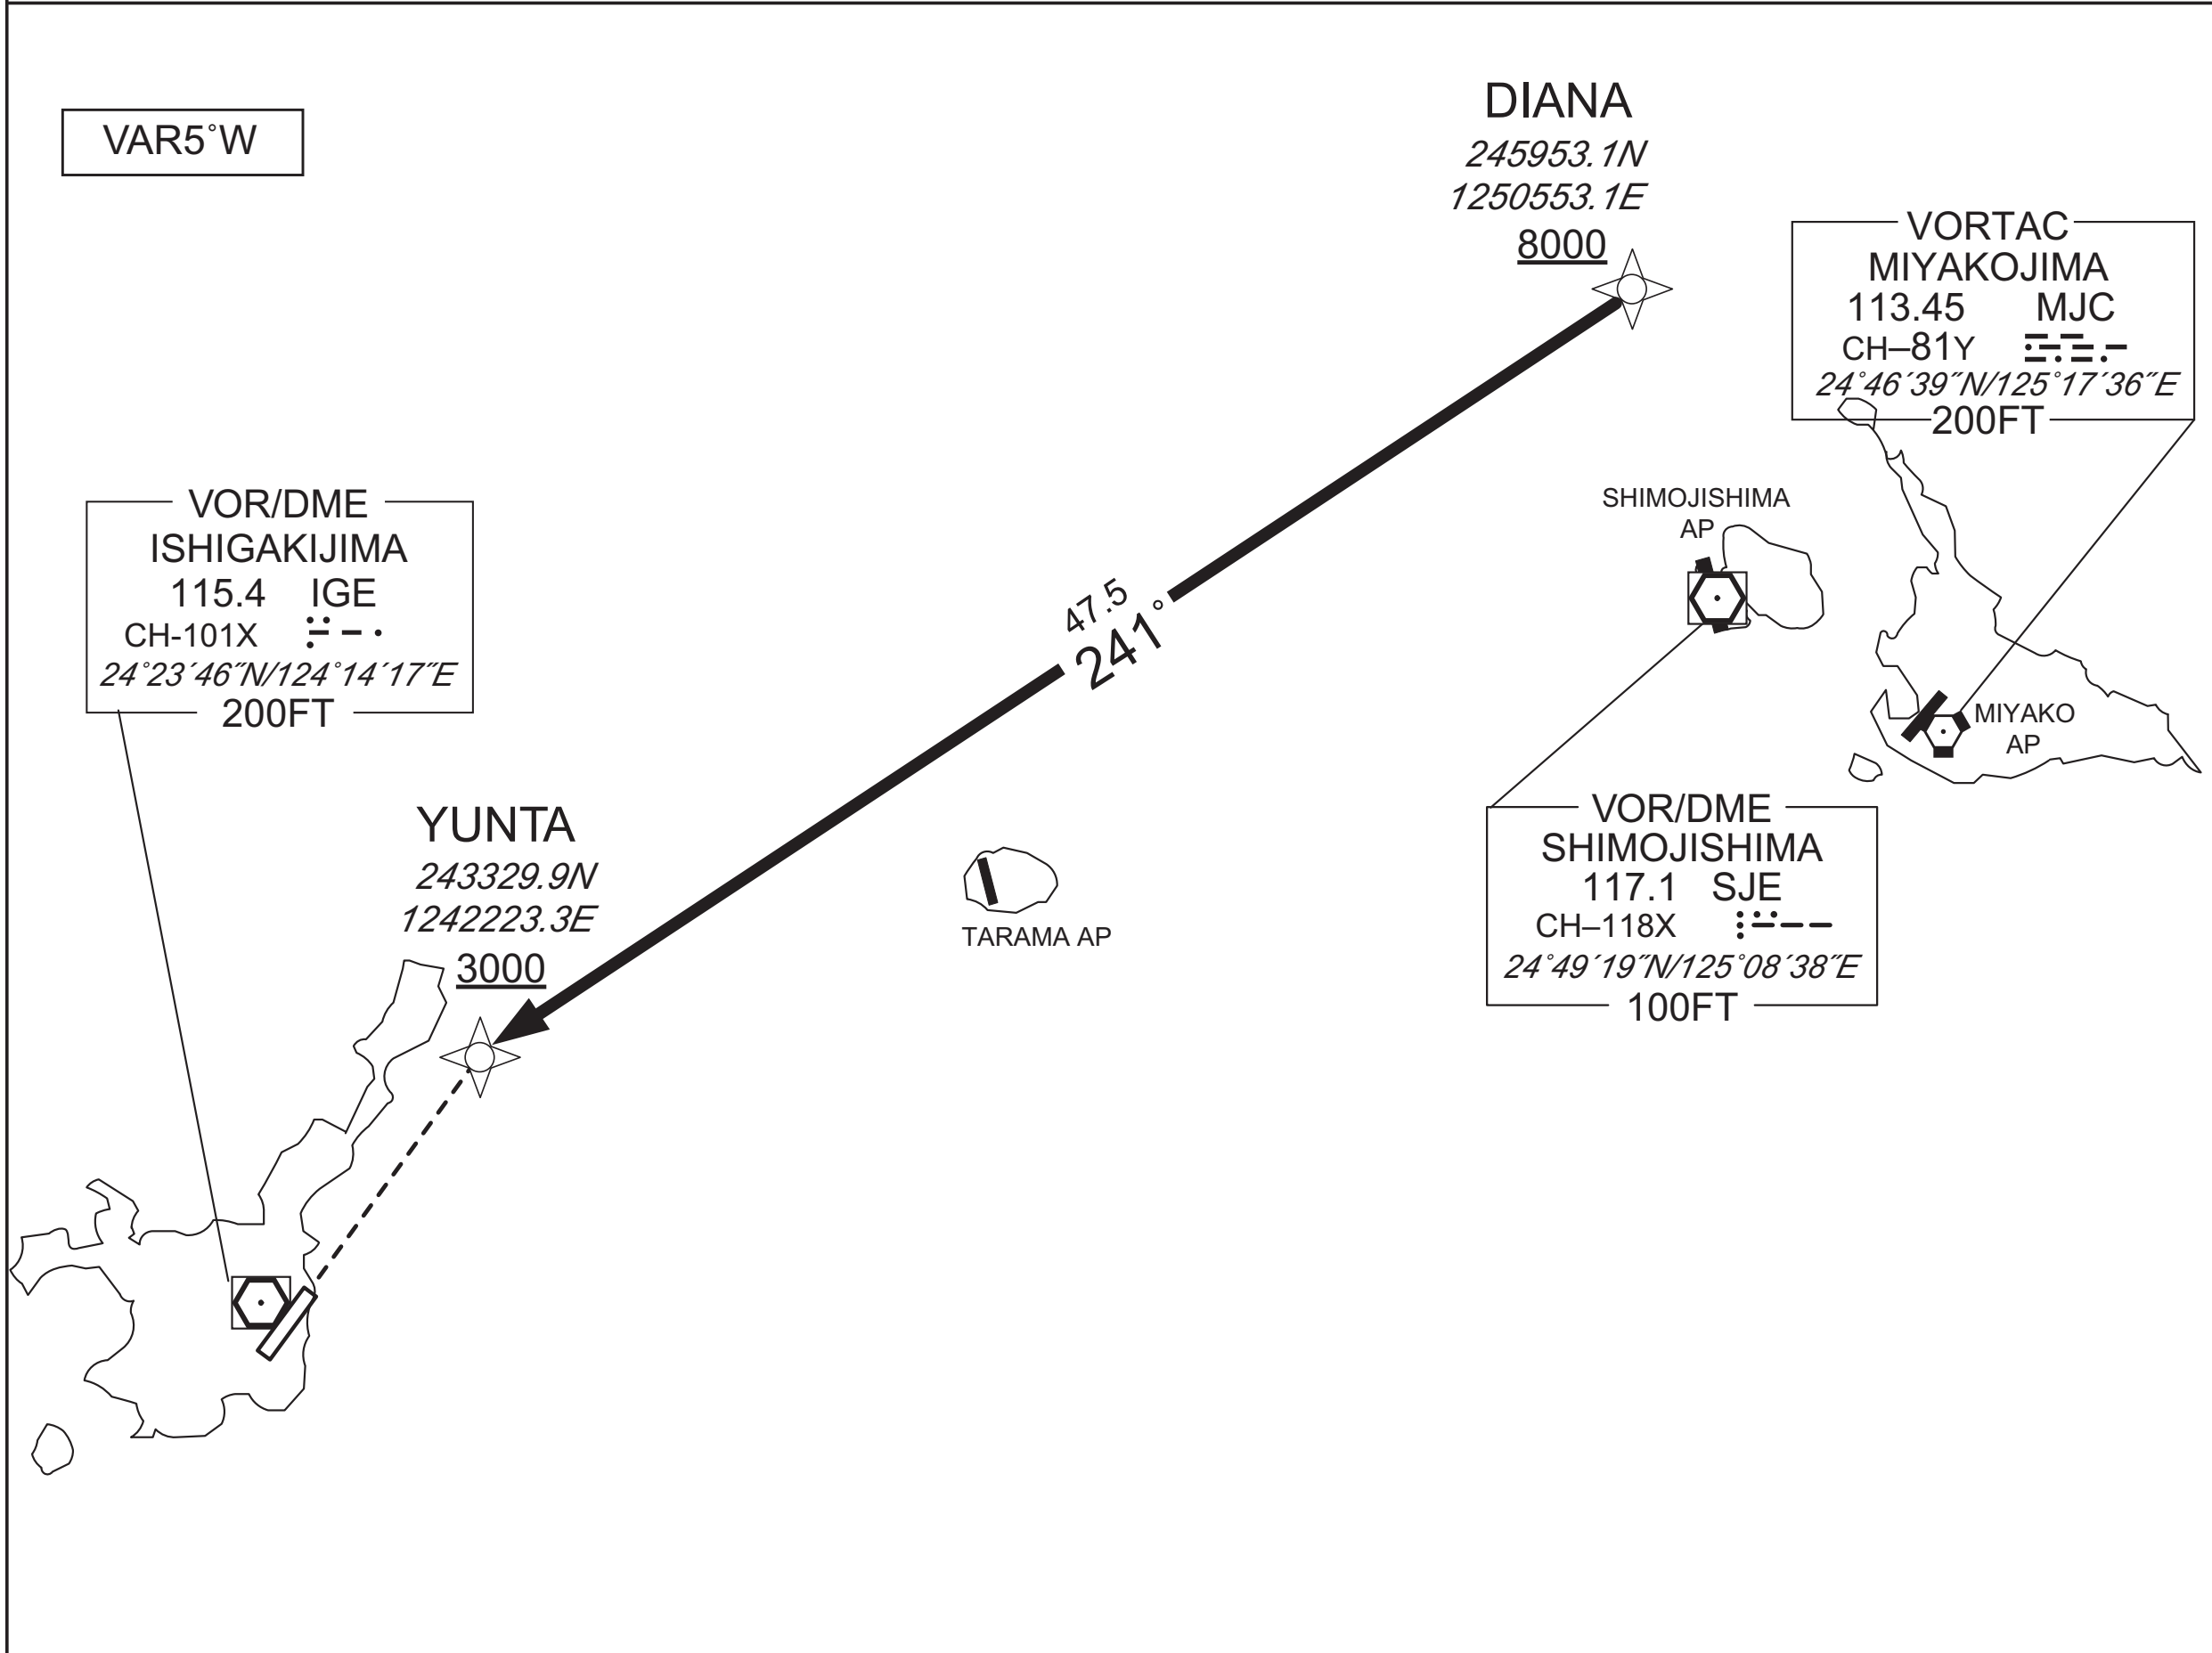

From DIANA at or above 8000FT, to YUNTA at or above 3000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course ˚M(˚T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	DIANA	–	–	-4.9	–	–	+8000	–	–	RNP1
002	TF	YUNTA	–	241 (236.4)	-4.9	47.5	–	+3000	–	–	RNP1

CHANGE : AD name.

STANDARD ARRIVAL CHART-INSTRUMENT

ROIG / ISHIGAKI RNAV STAR RWY04/RWY22

DENSA ARRIVAL / JOTTO WEST ARRIVAL	RNP1

Note GNSS required.

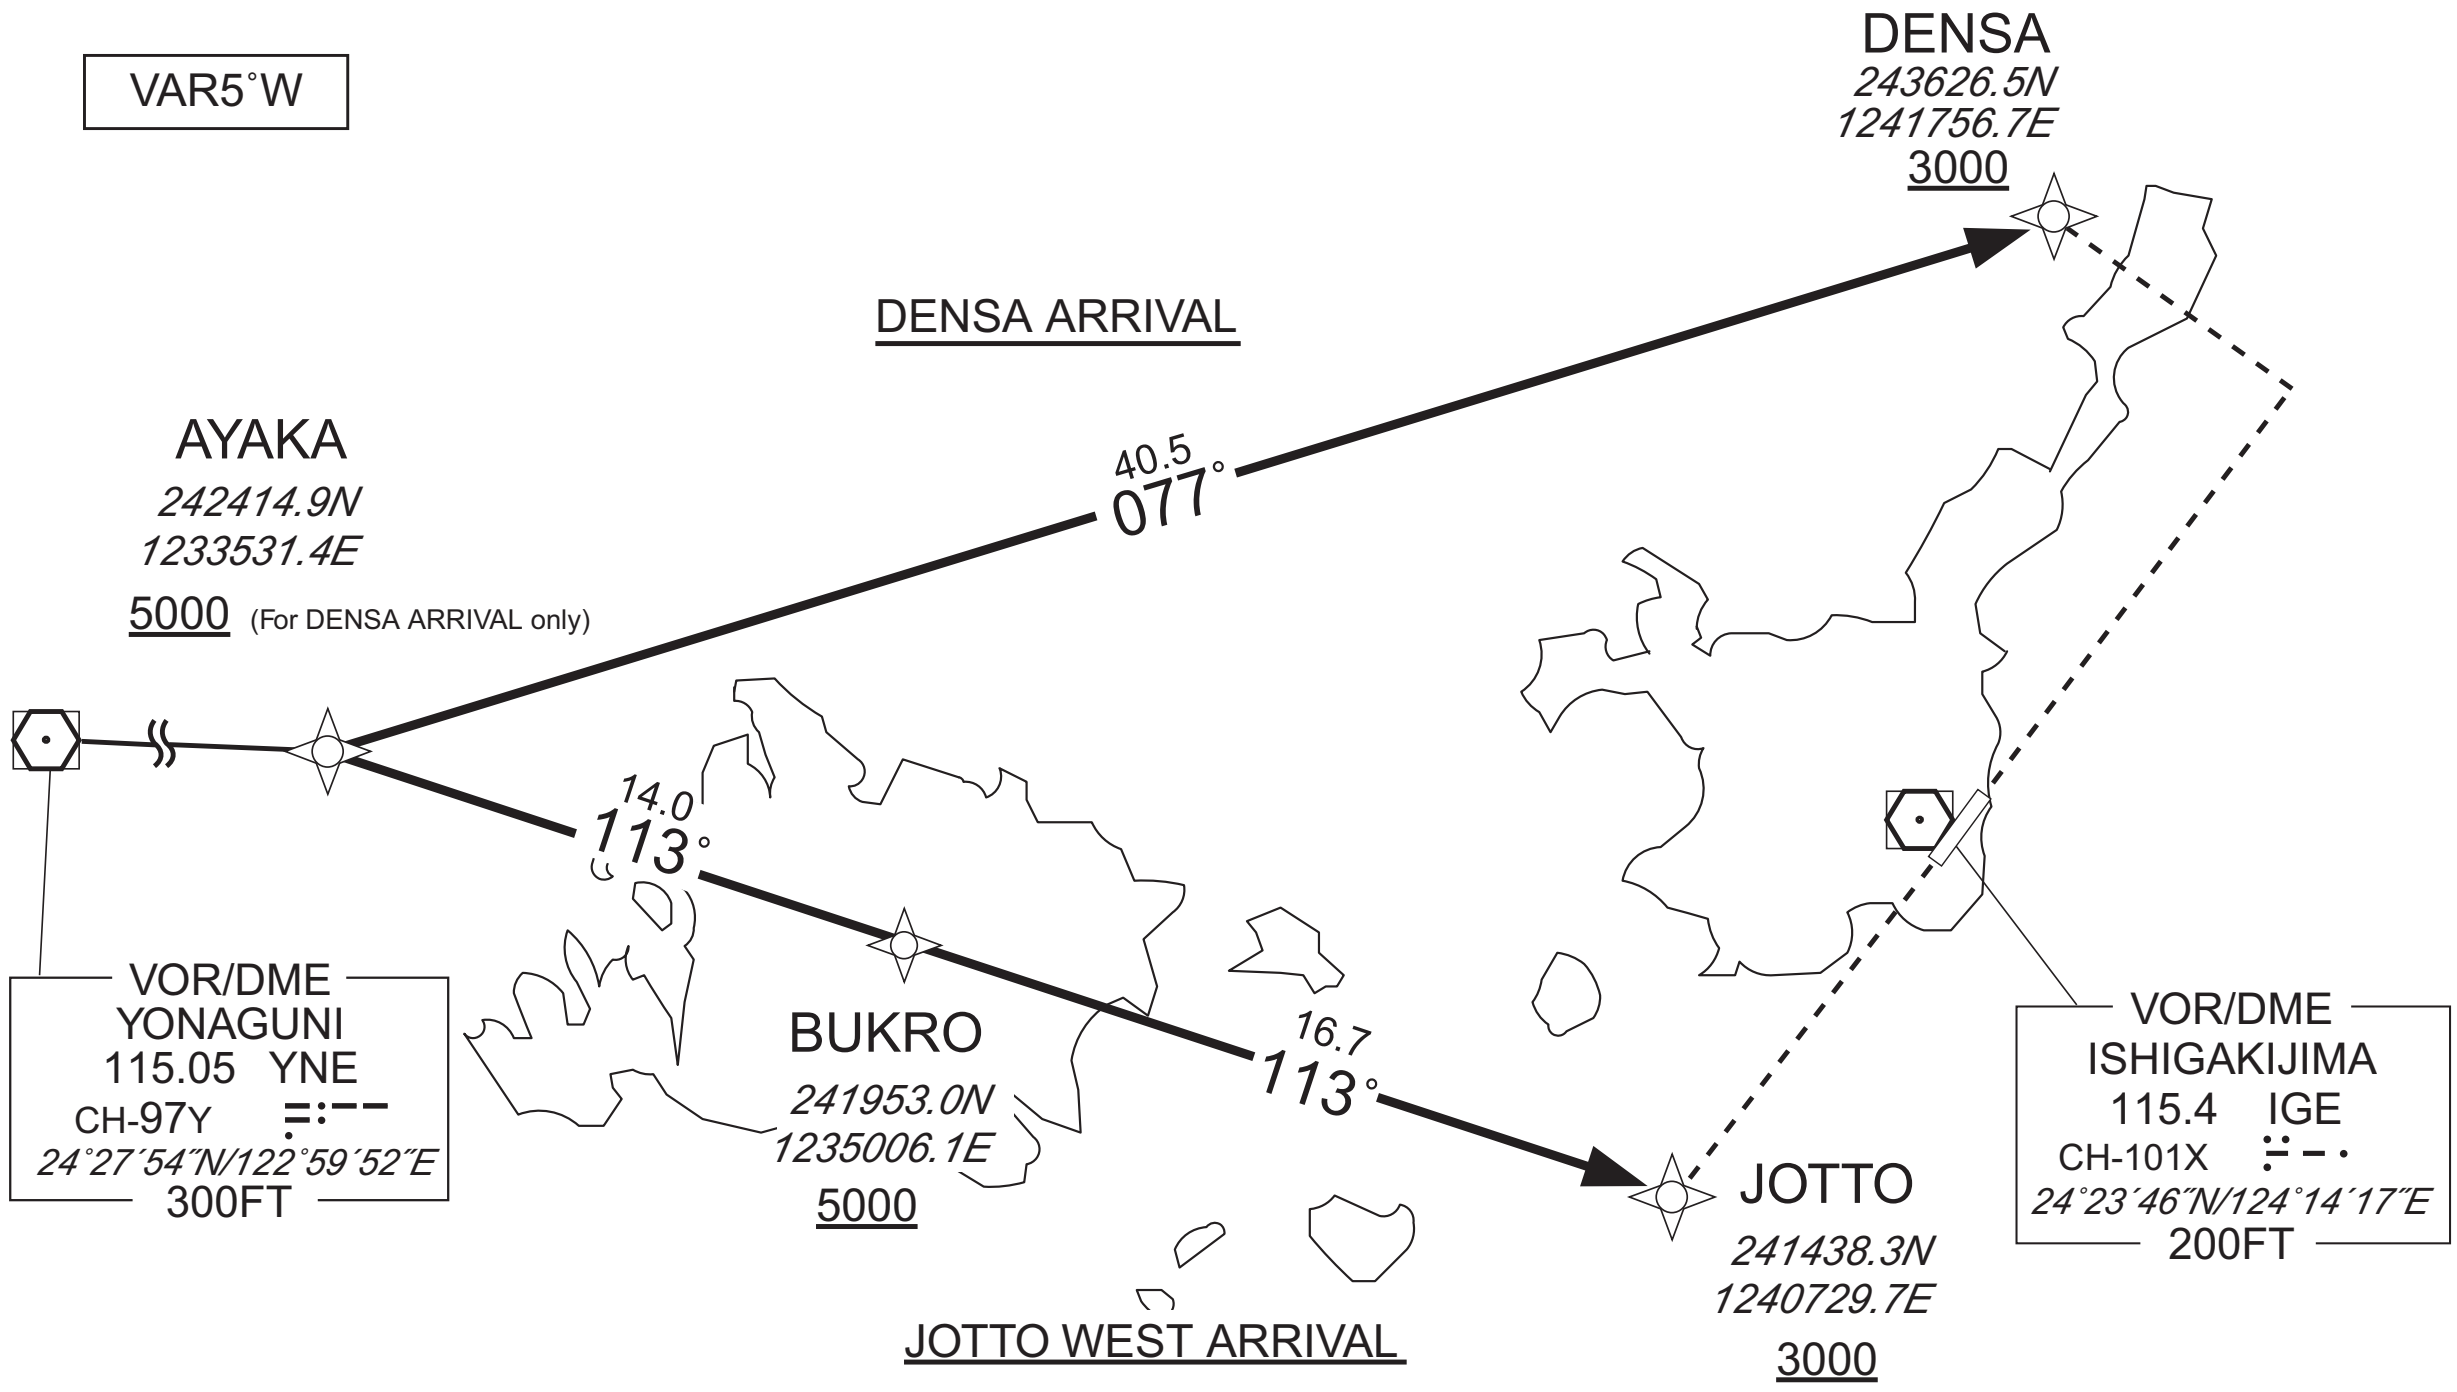

DENSA ARRIVAL

From AYAKA at or above 5000FT, to DENSA at or above 3000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course ˚M(˚T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AYAKA	—	—	-4.9	—	—	+5000	—	—	RNP1
002	TF	DENSA	—	077 (072.3)	-4.9	40.5	—	+3000	—	—	RNP1

JOTTO WEST ARRIVAL

From AYAKA, to BUKRO at or above 5000FT, to JOTTO at or above 3000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course ˚M(˚T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AYAKA	—	—	-4.9	—	—	—	—	—	RNP1
002	TF	BUKRO	—	113 (108.1)	-4.9	14.0	—	+5000	—	—	RNP1
003	TF	JOTTO	—	113 (108.2)	-4.9	16.7	—	+3000	—	—	RNP1

CHANGE : AD name.

INSTRUMENT APPROACH CHART

ROIG / ISHIGAKI — ILS Z or LOC Z RWY04

SAKISHIMA APP	ILS - LOC 110.75 IIG	ISHIGAKI TOWER	RADAR AVBL
120.3 – 121.2	ILS - GP 330.05 ILS - DME CH–44Y	118.0 – 126.2	ATIS 128.675

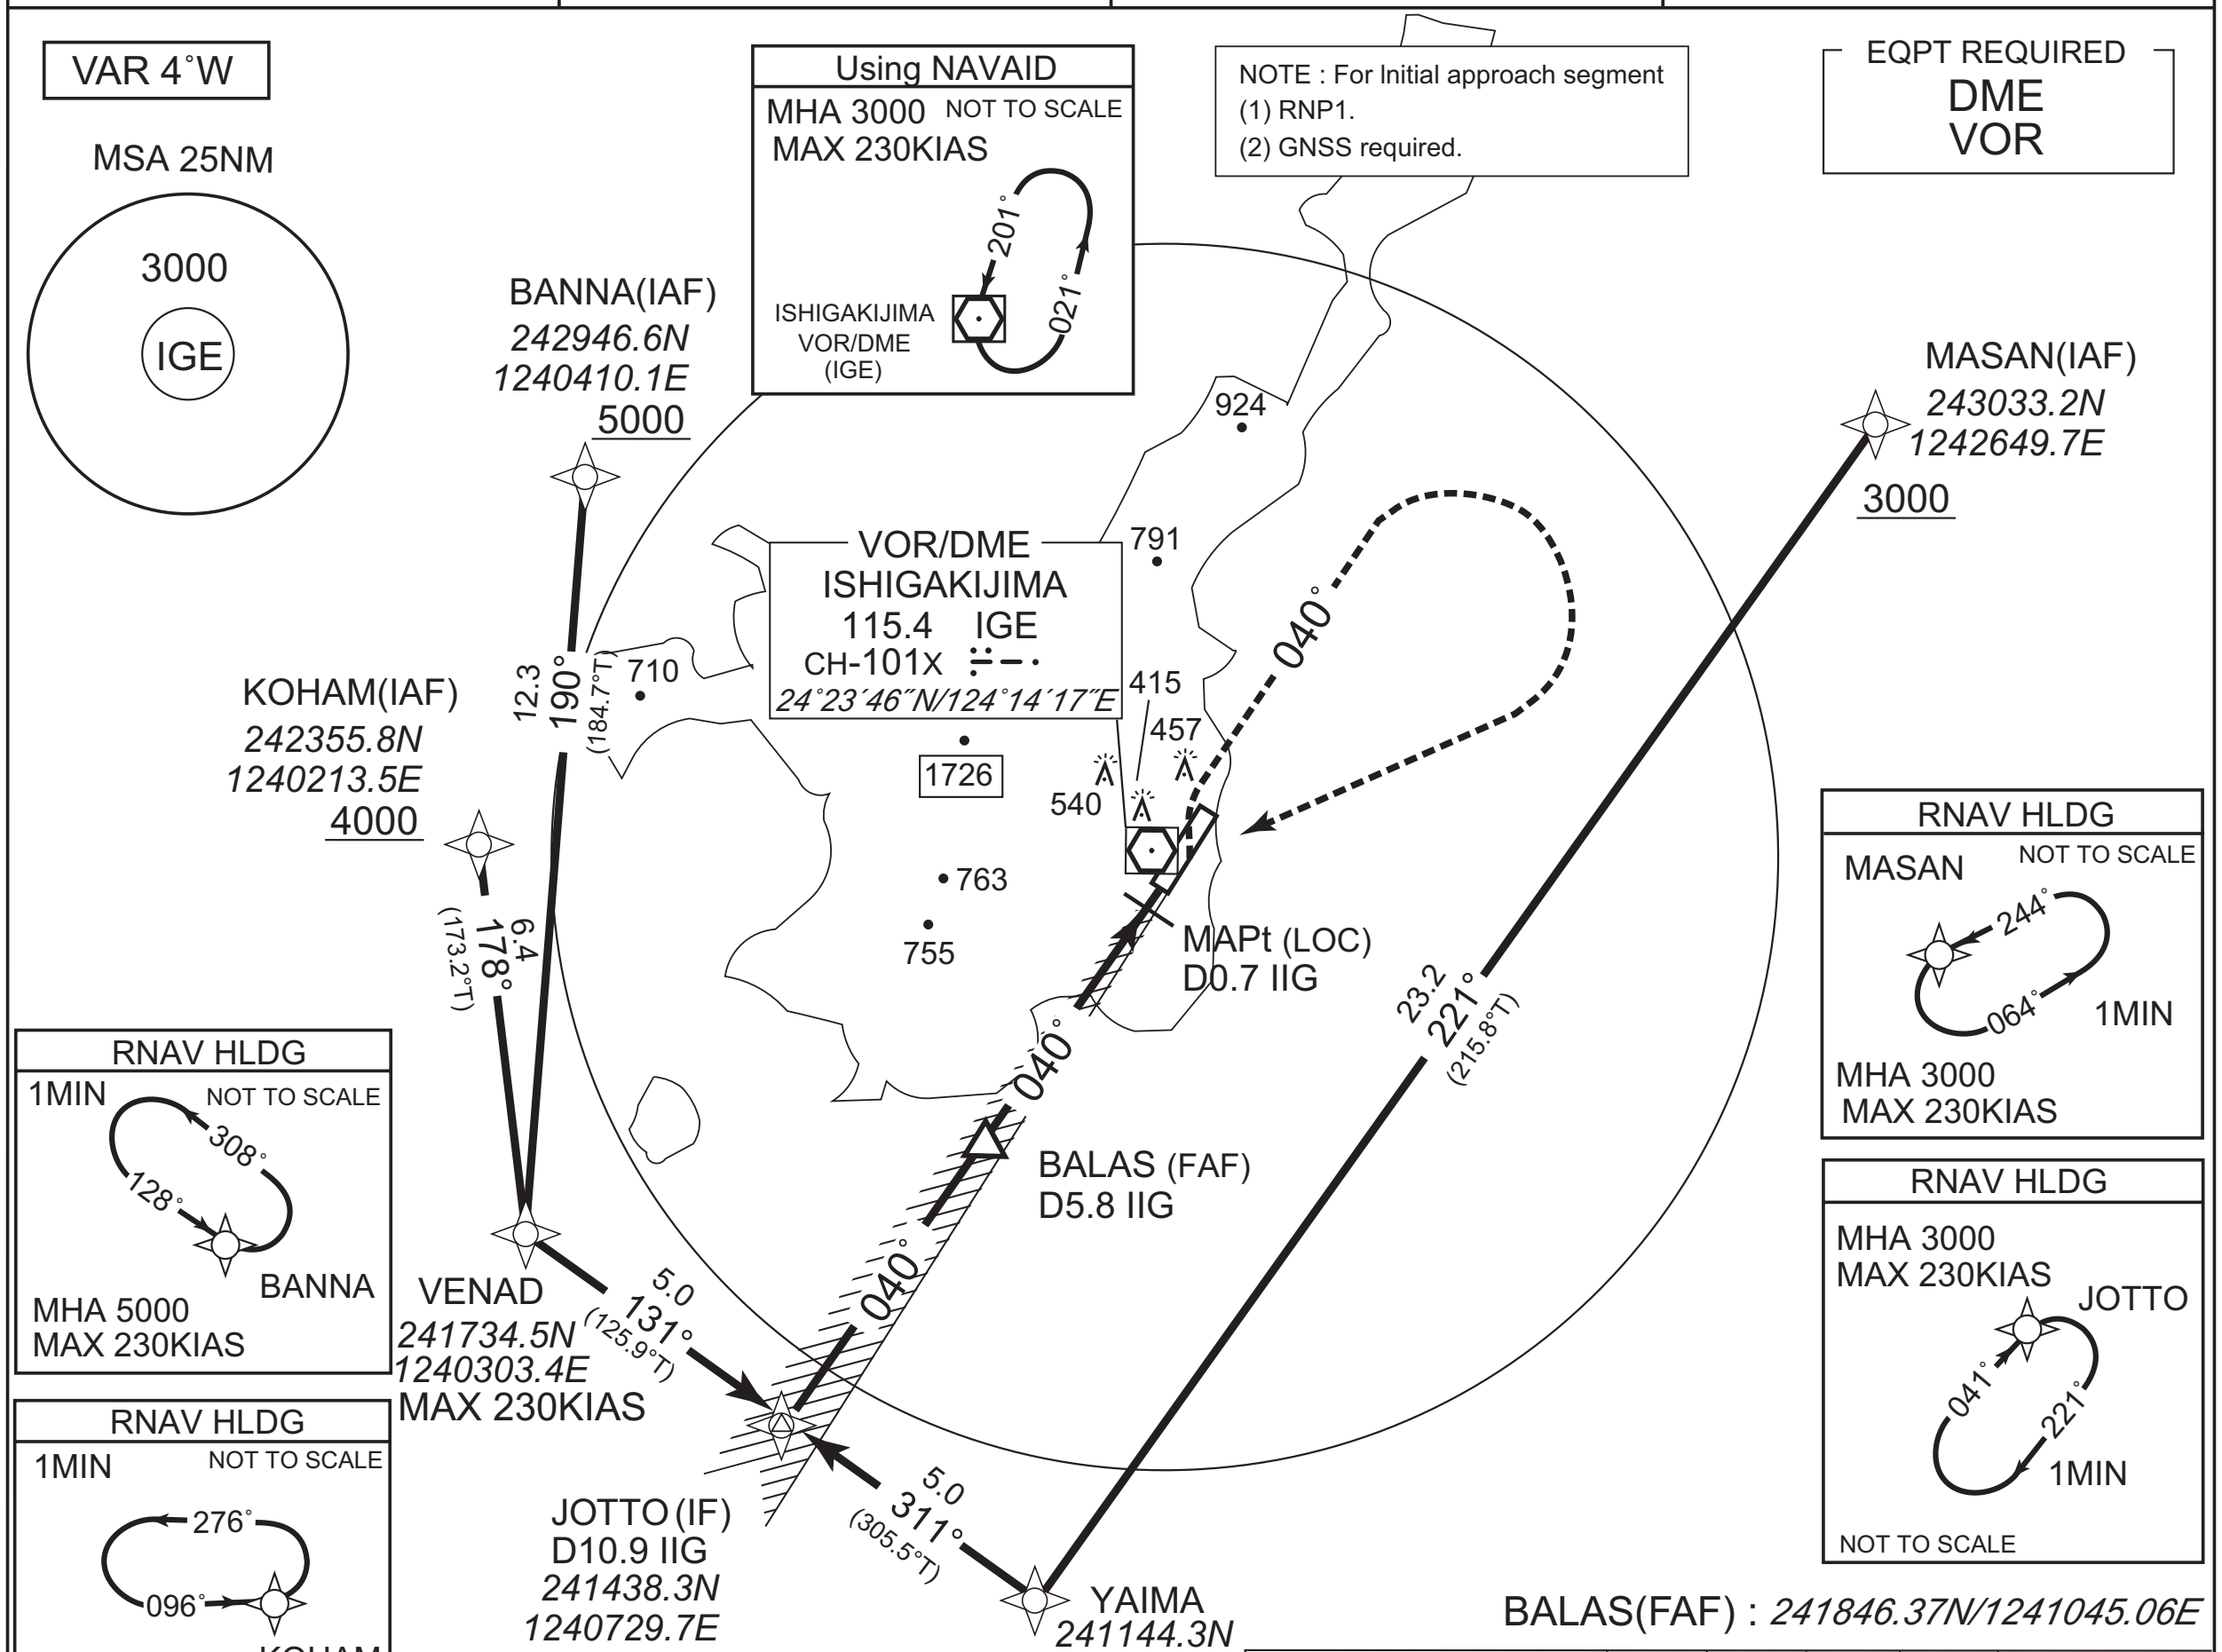

BALAS(FAF) : *241846.37N/1241045.06E*

NM to IIG	FAF	5	4	3	2	MAPt
ALT (3.0˚ APCH Path)	1971	1705	1387	1068	750	–

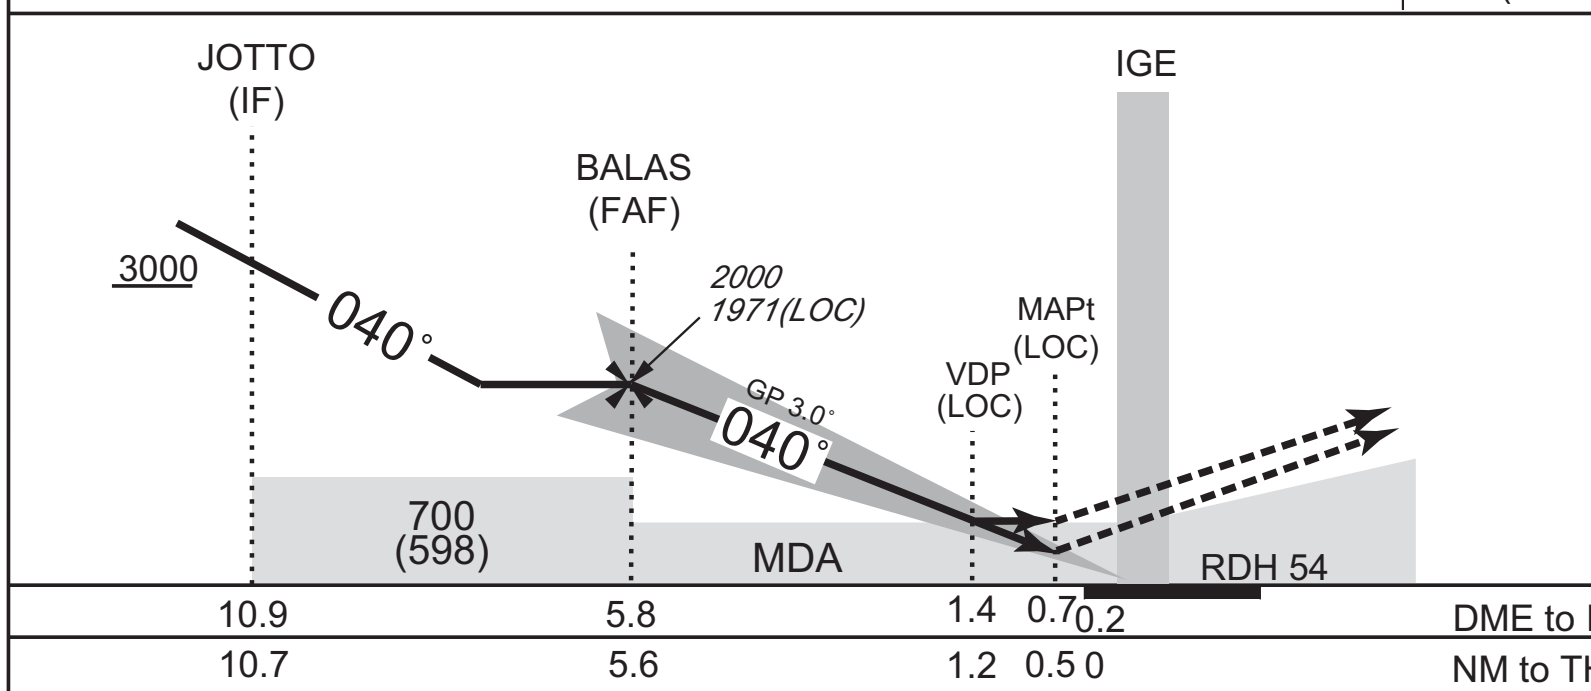

MISSED APPROACH

Climb to 800FT on HDG040˚, turn left,via IGE R040 to 2000FT, turn right, direct to IGE VOR/DME and hold at 3000FT.
Contact SAKISHIMA APP.

Timing not authorized for defining the MAPt.

Missed APCH climb gradient MNM 5.0%

MINIMA — THR elev. 126 — AD elev. 102

CAT	CAT I DA(H)	CAT I RVR/CMV	LOC MDA(H)	LOC RVR/CMV	CIRCLING MDA(H)	CIRCLING VIS
A	326(200)	550	530(428)	900	580(478)	1600
B	326(200)	550	530(428)	1000	580(478)	1600
C	326(200)	550	530(428)	1000	660(558)	2400
D	336(210)	600	530(428)	1400	660(558)	3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to EAST side of RWY only.

CHANGE : AD name.

INSTRUMENT APPROACH CHART

ROIG / ISHIGAKI — ILS Y or LOC Y RWY04

SAKISHIMA APP	ILS - LOC	ISHIGAKI TOWER	RADAR AVBL
120.3 – 121.2	110.75 IIG ILS - GP 330.05 ILS - DME CH–44Y	118.0 – 126.2	ATIS 128.675

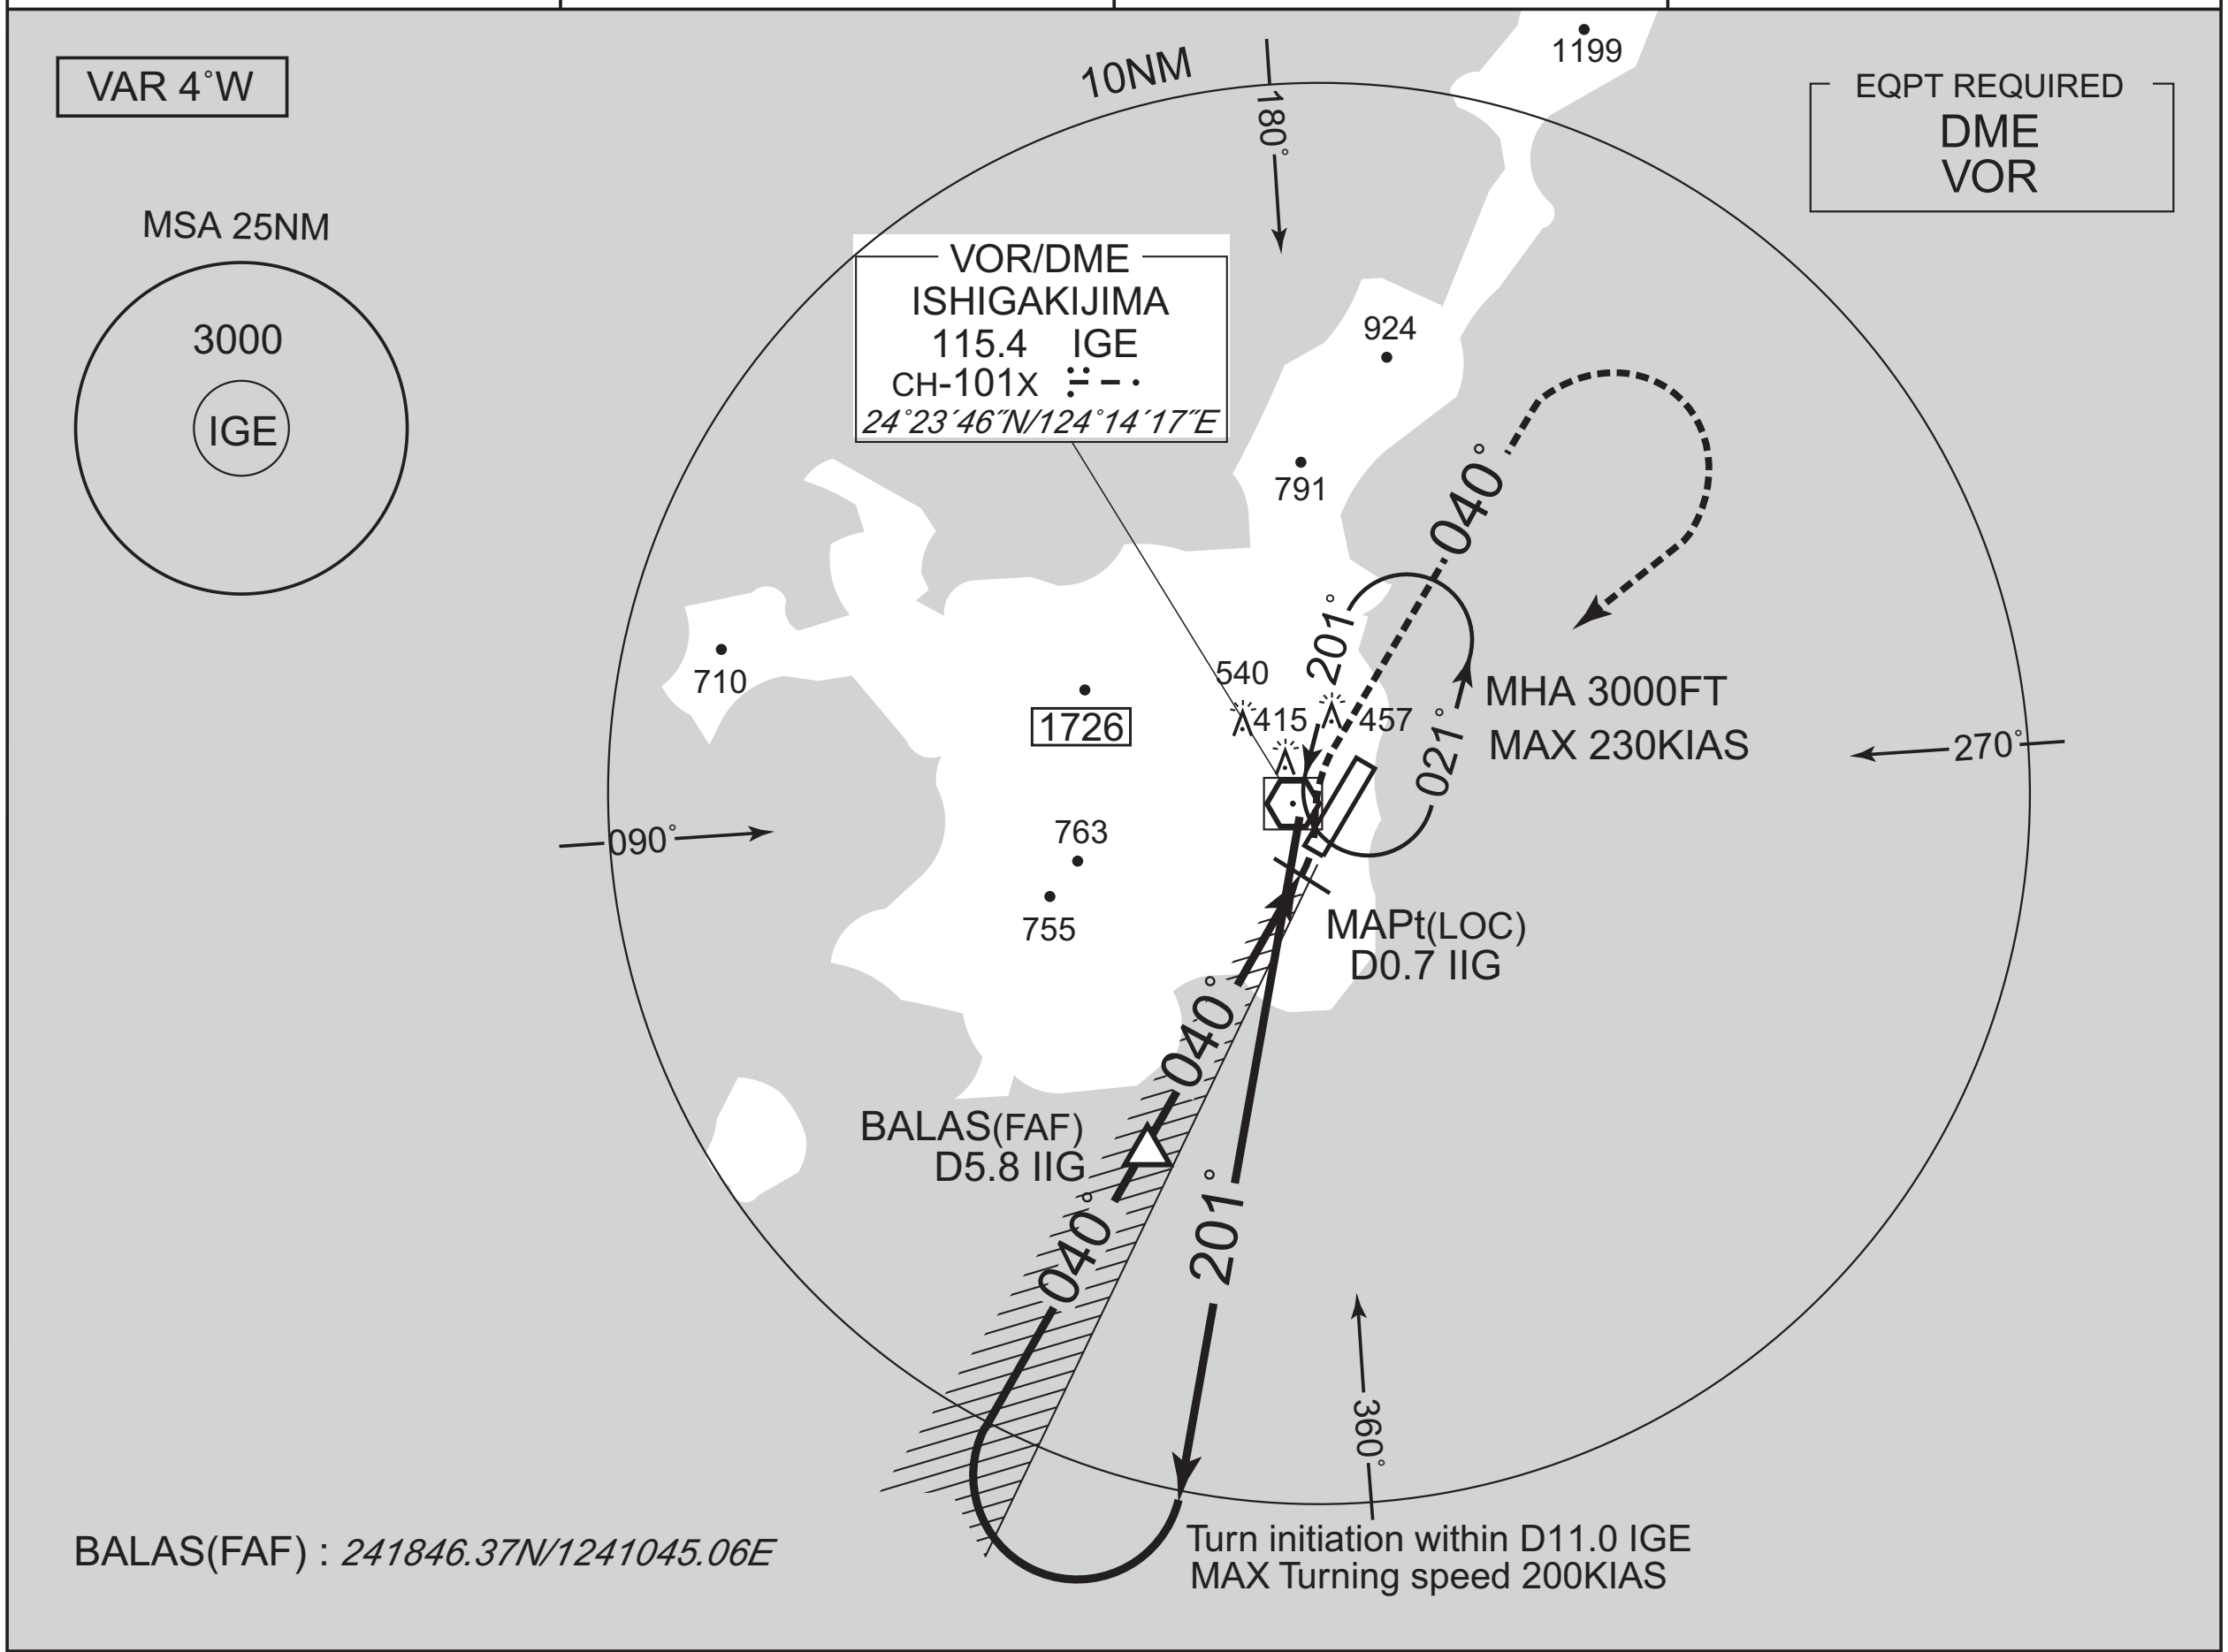

NM to IIG	FAF	5	4	3	2	MAPt
ALT (3.0° APCH Path)	1971	1705	1387	1068	750	–

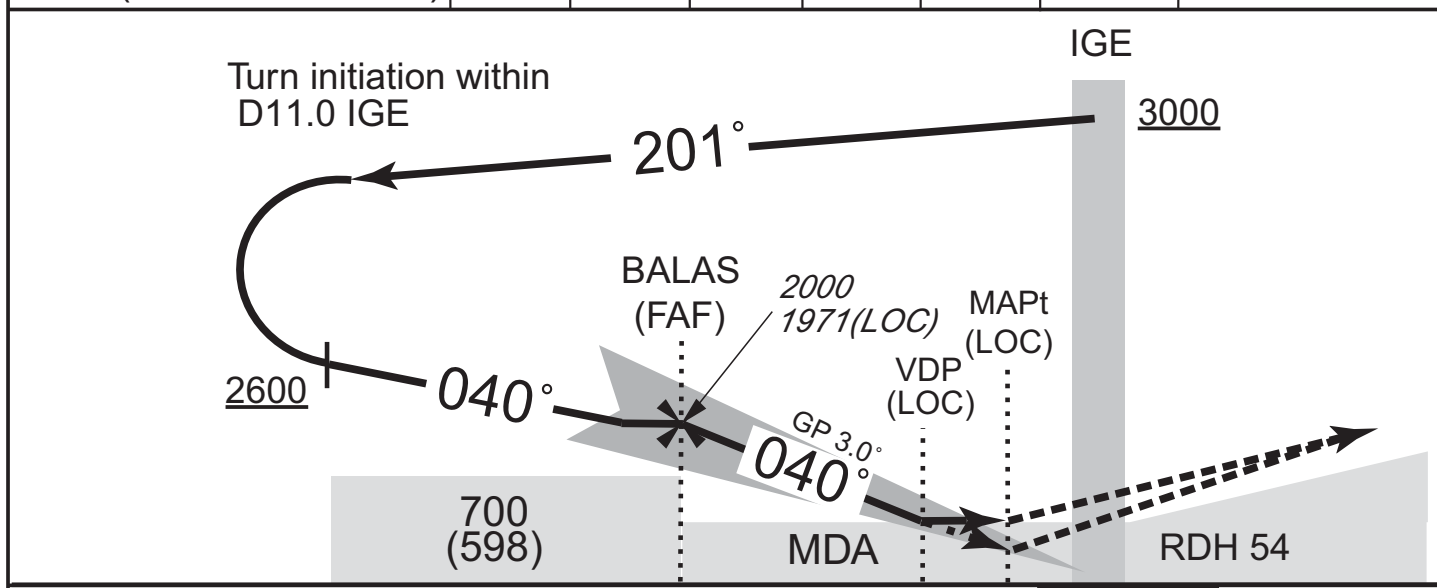

5.8	1.4	0.7		DME to IIG
5.6	1.2	0.5	0	NM to THR

MISSED APPROACH

Climb to 800FT on HDG040°, turn left, via IGE R040 to 2000FT, turn right,direct to IGE VOR/DME and hold at 3000FT. Contact SAKISHIMA APP.

Timing not authorized for defining the MAPt.

Missed APCH climb gradient MNM 5.0%

MINIMA — THR elev. 126 — AD elev. 102

CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A	326(200)	550	530(428)	900	580(478)	1600
B				1000		
C					660(558)	2400
D	336(210)	600		1400		3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to EAST side of RWY only.

CHANGE : AD name.

INSTRUMENT APPROACH CHART

ROIG / ISHIGAKI — ILS X RWY04

SAKISHIMA APP	ILS - LOC	ISHIGAKI TOWER	RADAR AVBL
120.3 – 121.2	110.75 IIG ILS - GP 330.05 ILS - DME CH–44Y	118.0 – 126.2	ATIS 128.675

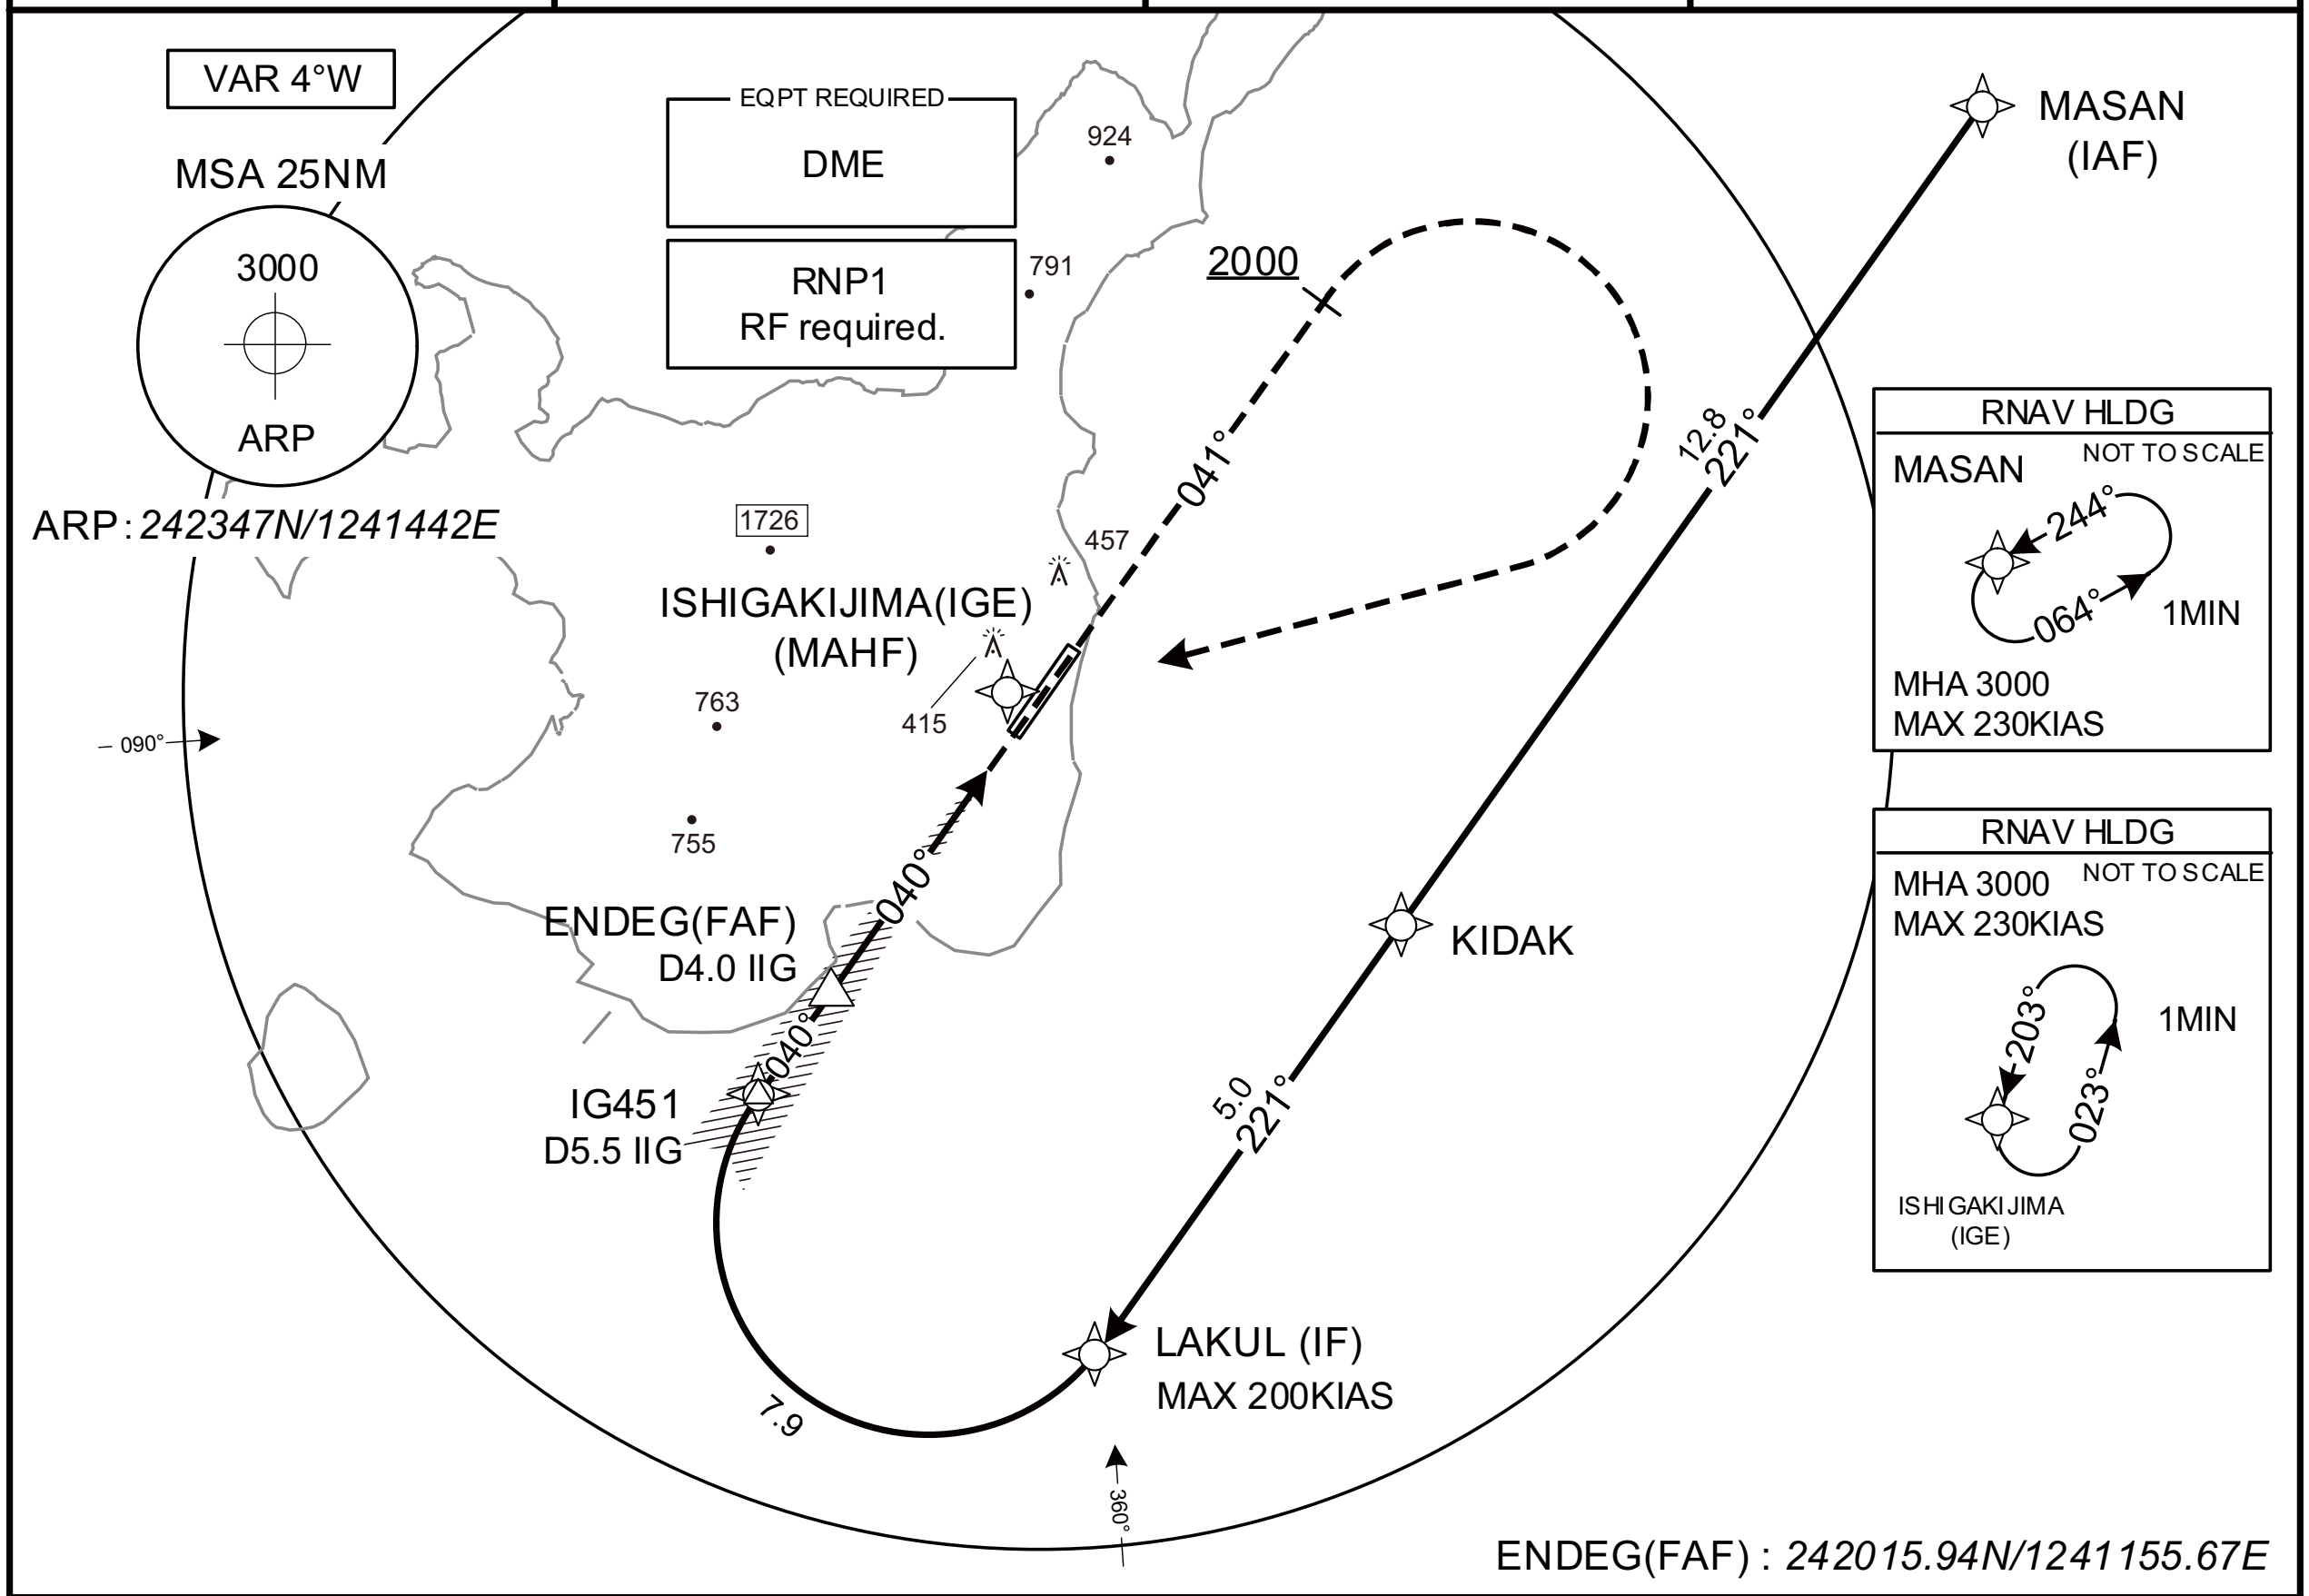

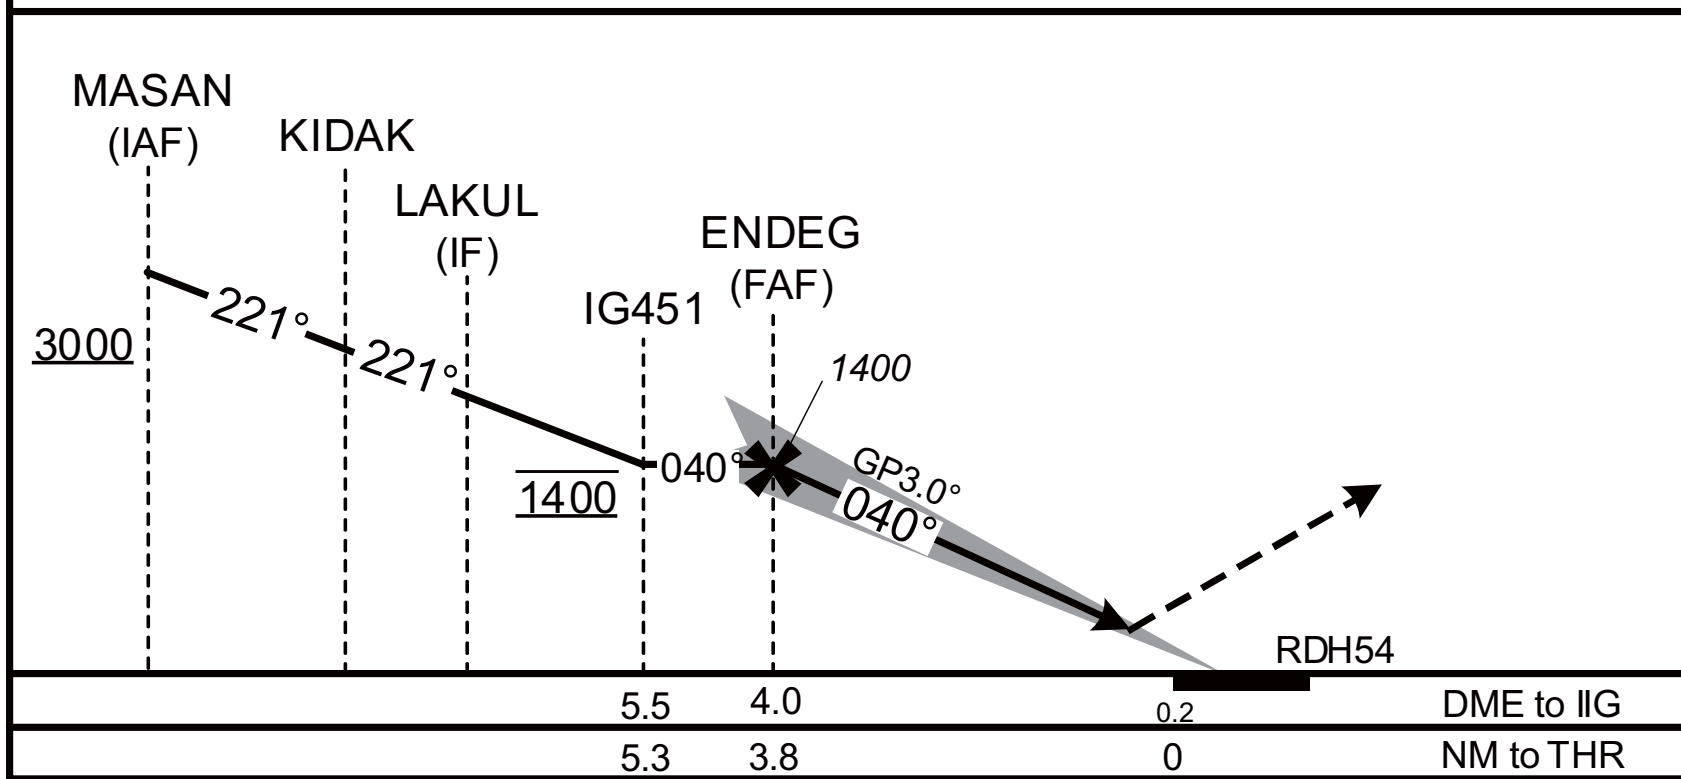

MISSED APPROACH

Climb on course 041°, at or above 2000FT turn right, direct to IGE and hold at 3000FT. Contact SAKISHIMA APP.

Missed APCH climb gradient MNM 5.0%

<table>
<tr><th colspan="5">MINIMA THR elev. 126 AD elev. 102</th></tr>
<tr><th rowspan="2">CAT</th><th colspan="2">CAT I</th><th colspan="2">CIRCLING</th></tr>
<tr><th>DA(H)</th><th>RVR/CMV</th><th>MDA(H)</th><th>VIS</th></tr>
<tr><td>A</td><td rowspan="3">326(200)</td><td rowspan="3">550</td><td rowspan="2">580(478)</td><td rowspan="2">1600</td></tr>
<tr><td>B</td></tr>
<tr><td>C</td><td rowspan="2">660(558)</td><td>2400</td></tr>
<tr><td>D</td><td>336(210)</td><td>600</td><td>3200</td></tr>
</table>

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to EAST side of RWY only.

CHANGE : AD name.

INSTRUMENT APPROACH CHART

ROIG / ISHIGAKI

ILS X RWY04

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MASAN	-	-	-5.1	-	-	+3000	-	-	RNP1
002	TF	KIDAK	-	221 (215.8)	-5.1	12.8	-	-	-	-	RNP1
003	TF	LAKUL	-	221 (215.7)	-5.1	5.0	-	-	-200	-	RNP1
004	RF Center: IGRF2 r=2.50NM	IG451	-	-	-5.1	7.9	R	1400	-	-	RNP1
001	CA	-	-	041 (035.7)	-5.1	-	-	+2000	-	-	RNP1
002	DF	IGE	-	-	-5.1	-	R	3000	-	-	RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	MASAN	244 (239.3)	-5.1	1.0 (-14000)	L	3000	FL140	-230 (-14000)	RNP1
Hold	IGE	203 (197.8)	-5.1	1.0 (-14000)	L	3000	FL140	-230 (-14000)	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
MASAN	*243033.23N / 1242649.67E*	IGRF2	*241734.58N / 1241311.07E*
KIDAK	*242010.28N / 1241836.67E*		
LAKUL	*241606.39N / 1241524.14E*		
IG451	*241902.74N / 1241057.95E*		
IGE	*242345.64N / 1241416.63E*		

CHANGE : AD name.

INSTRUMENT APPROACH CHART

ROIG / ISHIGAKI — VOR RWY04

SAKISHIMA APP	ISHIGAKIJIMA VOR/DME	ISHIGAKI TOWER	RADAR AVBL
120.3 – 121.2	115.4 IGE CH–101X *24°23´46″N/124°14´17″E*	118.0 – 126.2	ATIS 128.675

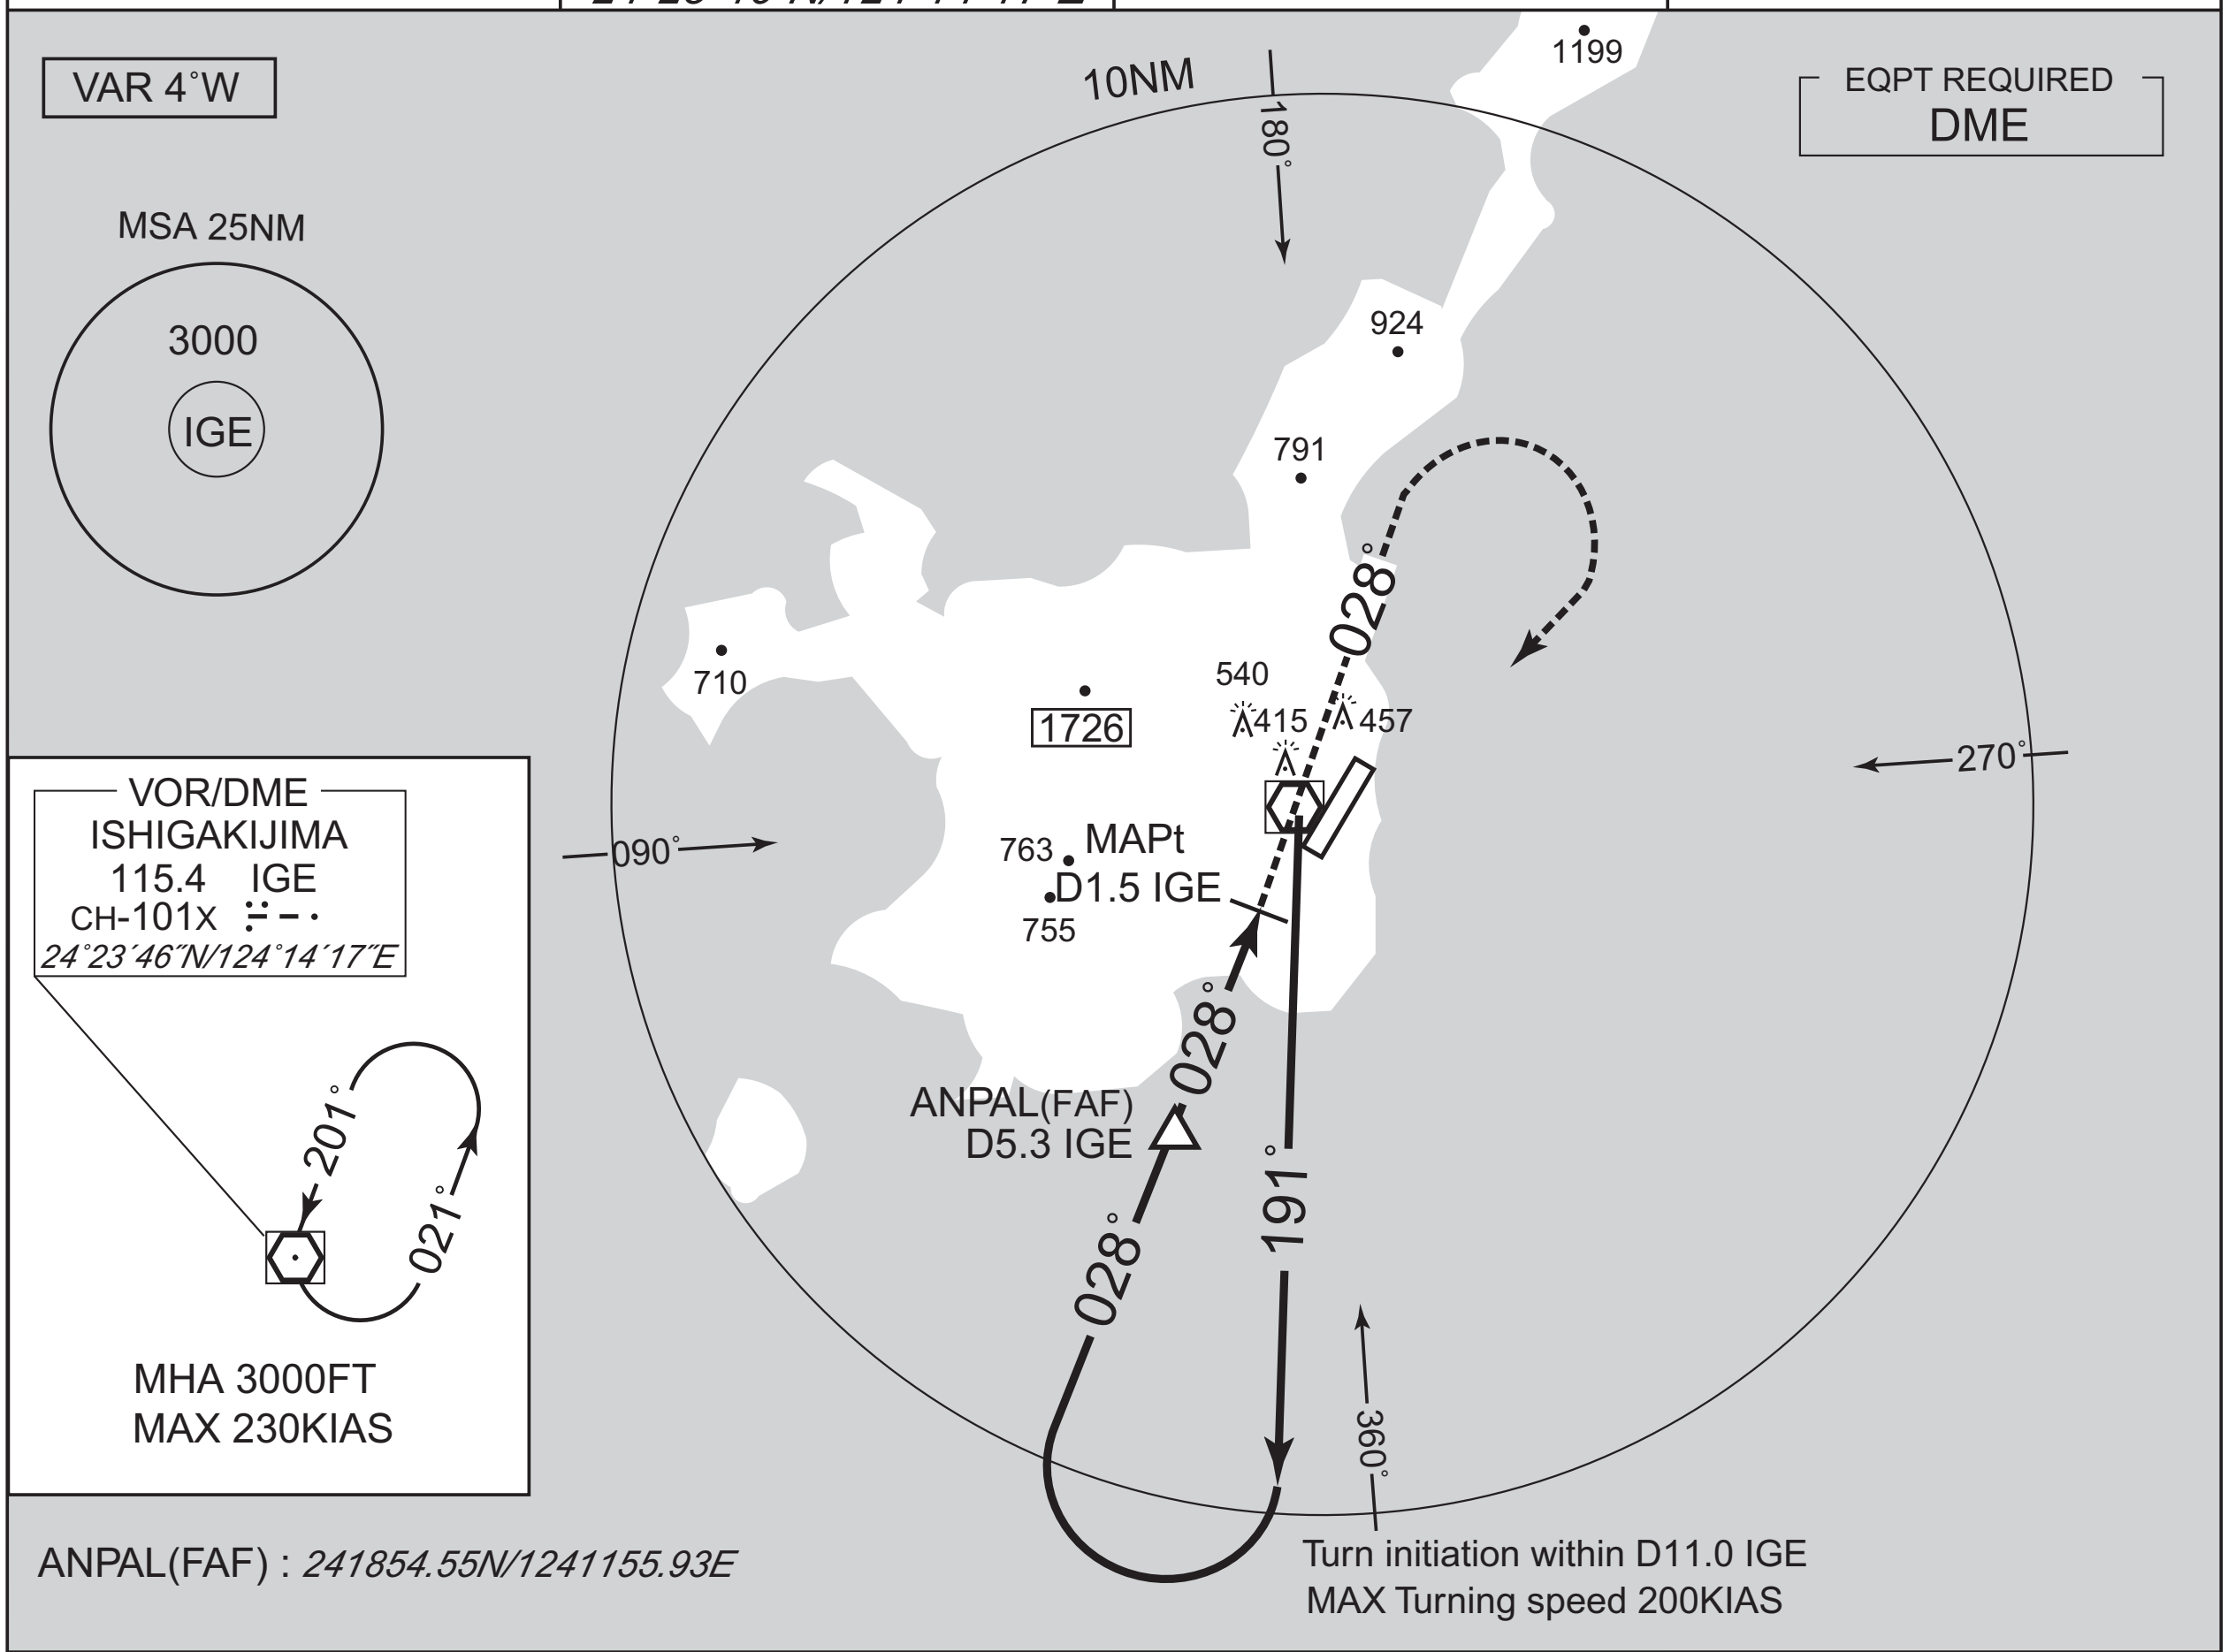

NM to IGE	FAF	5	4	3	2	MAPt
ALT (3.0° APCH Path)	1763	1666	1347	1029	711	–

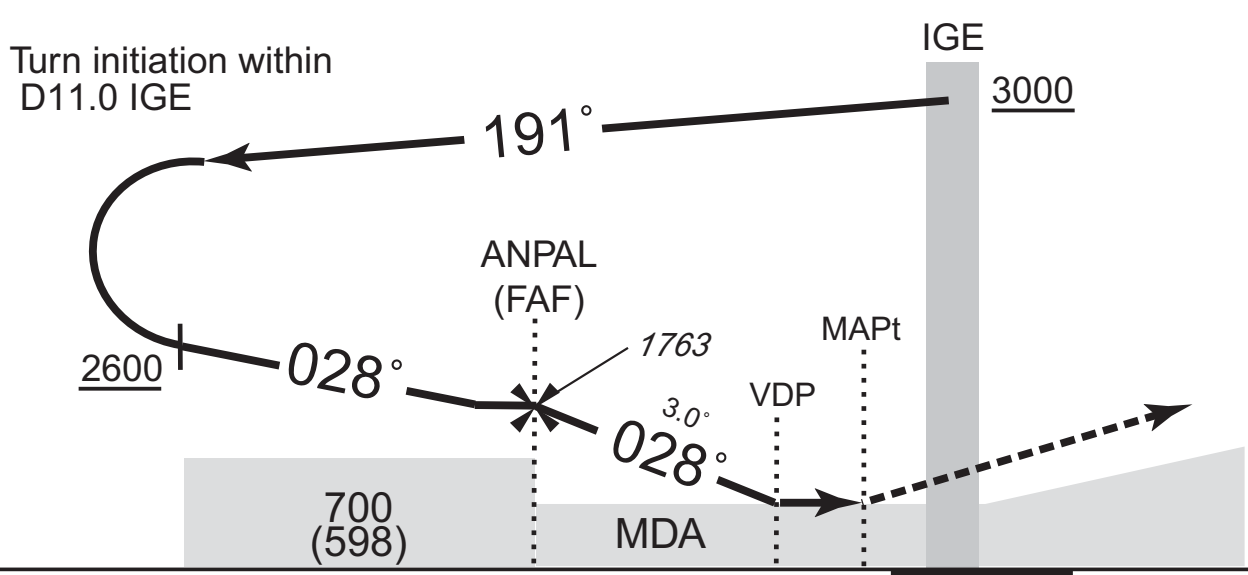

DME to IGE	5.3	1.5	1.5	
NM to THR	5.0	1.2	1.1	0

MISSED APPROACH

Climb to 2000FT via IGE R028, turn right, direct to IGE VOR/DME and hold at 3000FT.
Contact SAKISHIMA APP.

Timing not authorized for defining the MAPt.

MINIMA — THR elev. 126 — AD elev. 102

CAT	MDA(H)	RVR/CMV	CIRCLING MDA(H)	CIRCLING VIS
A	540(438)	900	580(478)	1600
B	540(438)	1000	580(478)	1600
C	540(438)	1000	660(558)	2400
D	540(438)	1400	660(558)	3200

Circling to EAST side of RWY only.

CHANGE : AD name.

INSTRUMENT APPROACH CHART

ROIG / ISHIGAKI — VOR Z RWY22

SAKISHIMA APP	ISHIGAKIJIMA VOR/DME	ISHIGAKI TOWER	RADAR AVBL
120.3 – 121.2	115.4 IGE CH–101X 24°23´46˝N/124°14´17˝E	118.0 – 126.2	ATIS 128.675

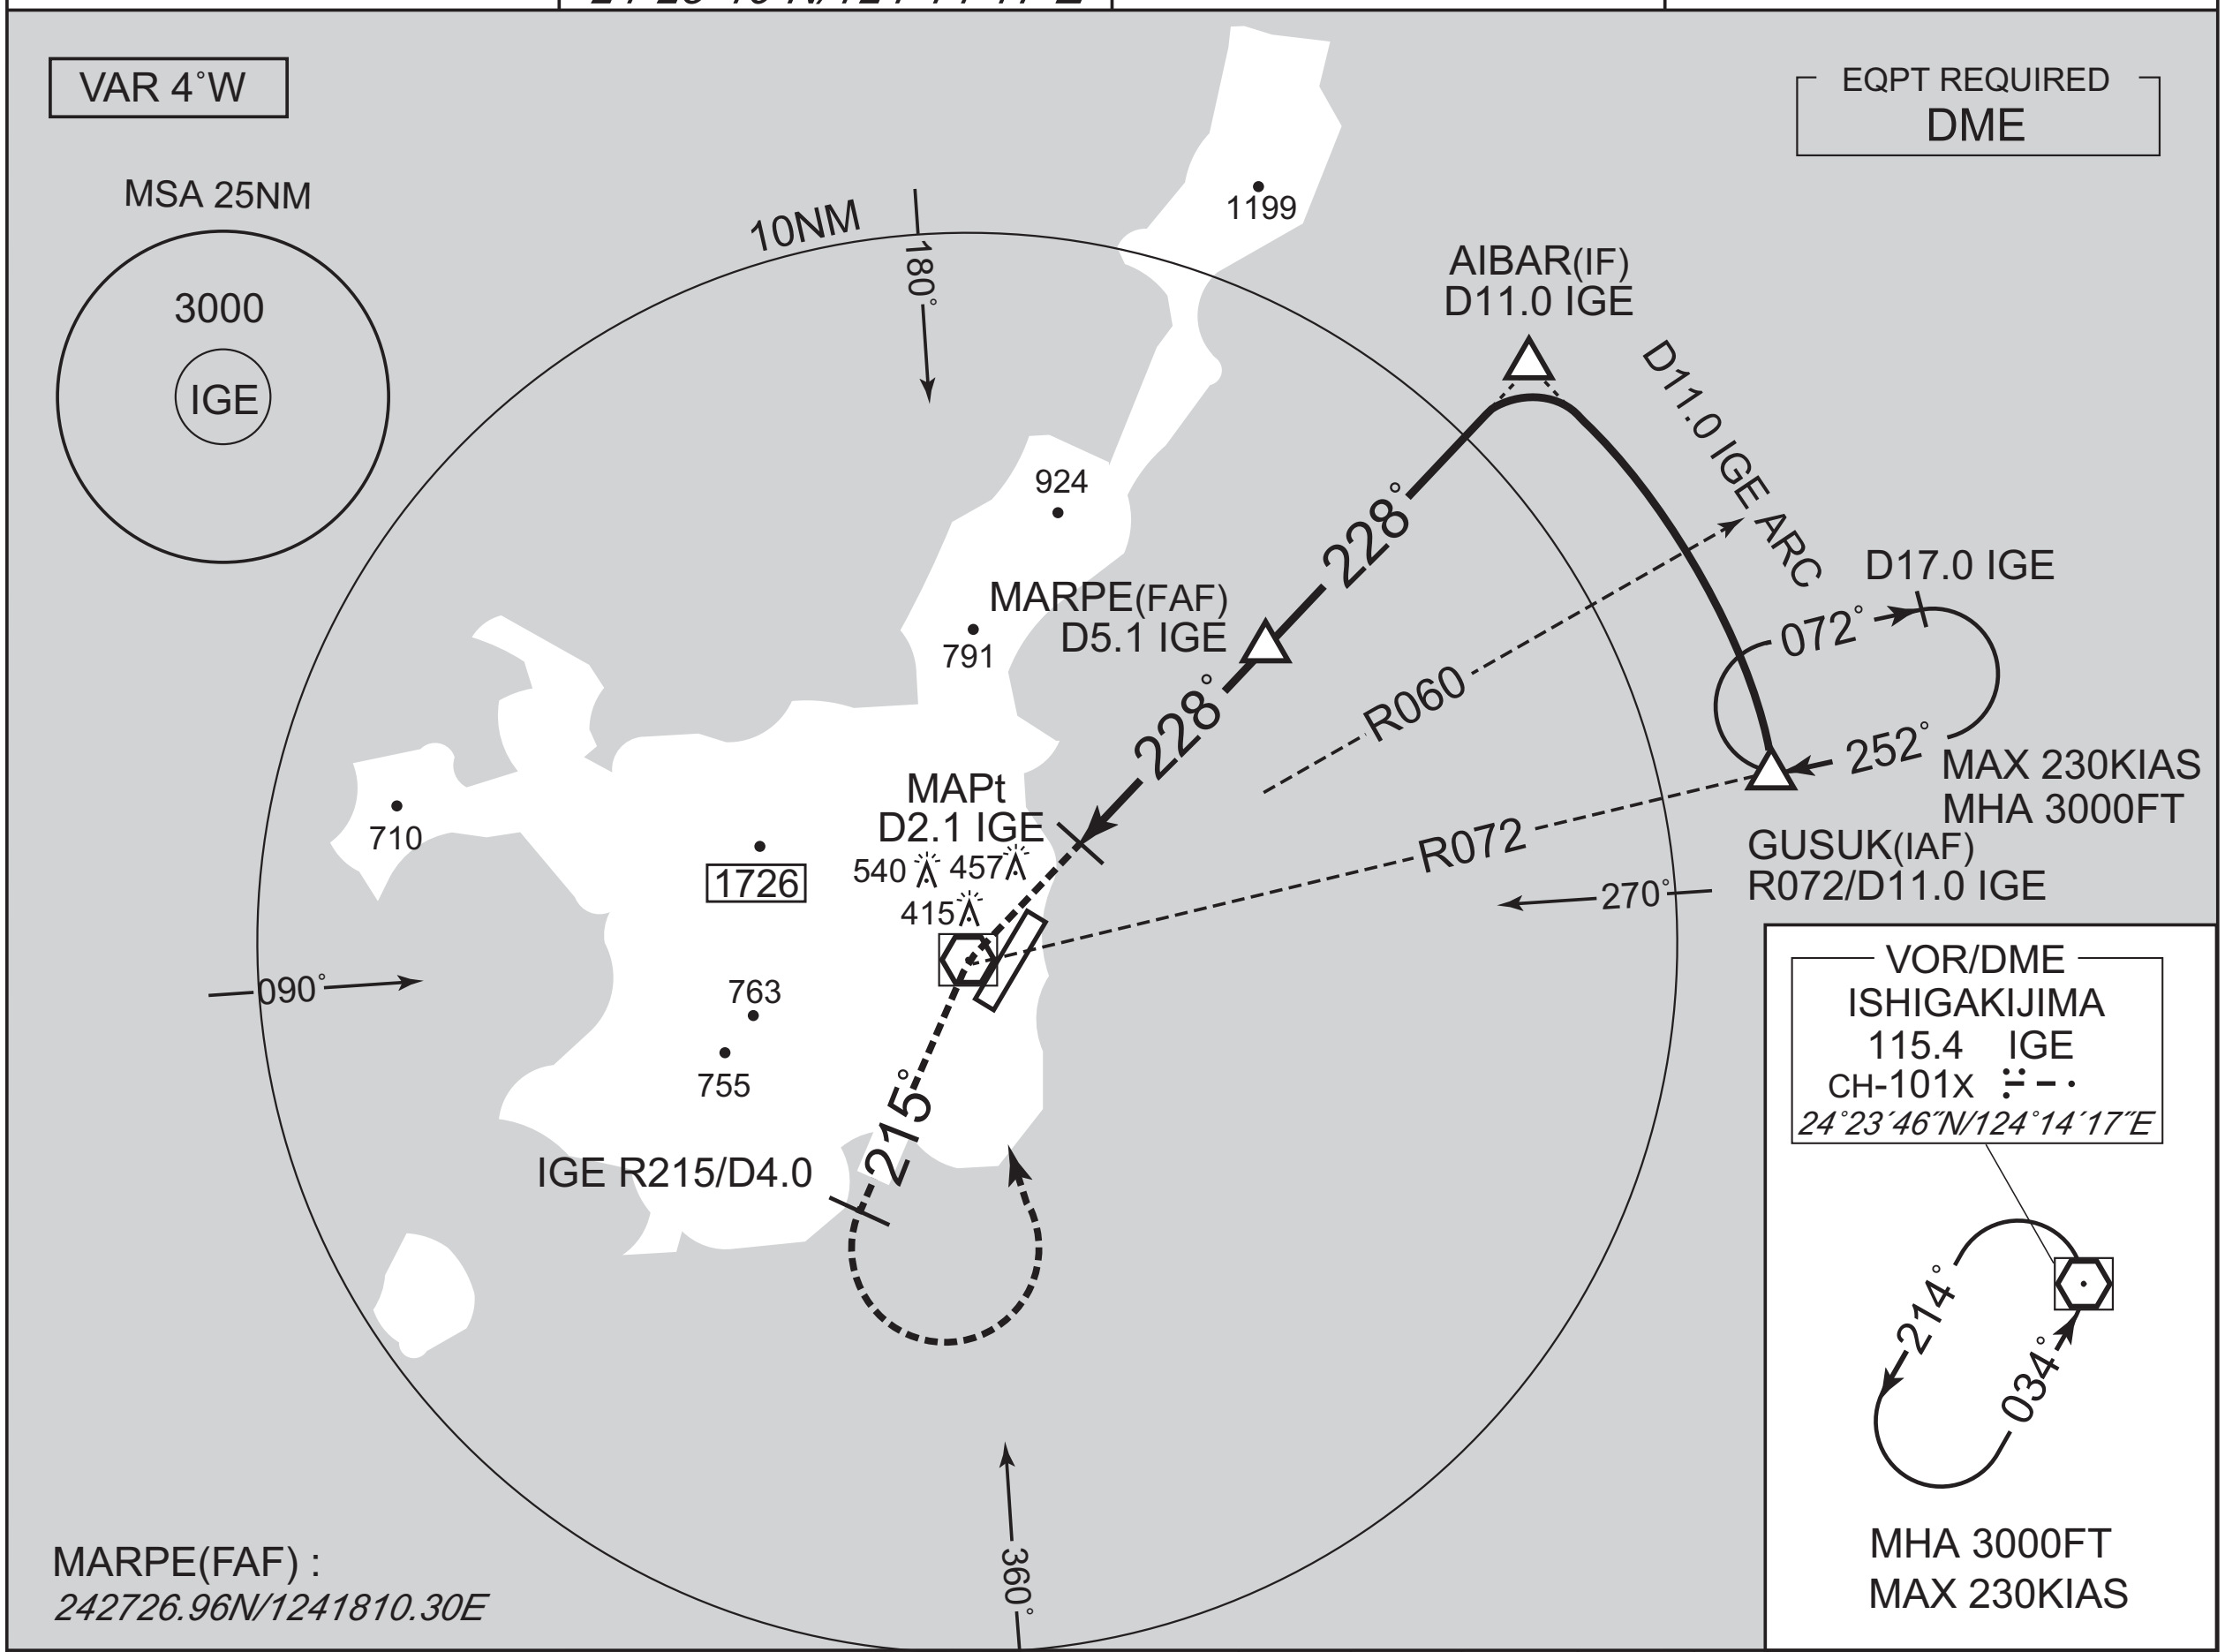

MAPt	3	4	5	FAF	NM to IGE
–	845	1163	1481	1520	ALT (3.0° APCH Path)

MISSED APPROACH

Climb via IGE R215 to IGE 4.0DME, turn left, direct to IGE VOR/DME and hold at 3000FT. Contact SAKISHIMA APP.

Timing not authorized for defining the MAPt.

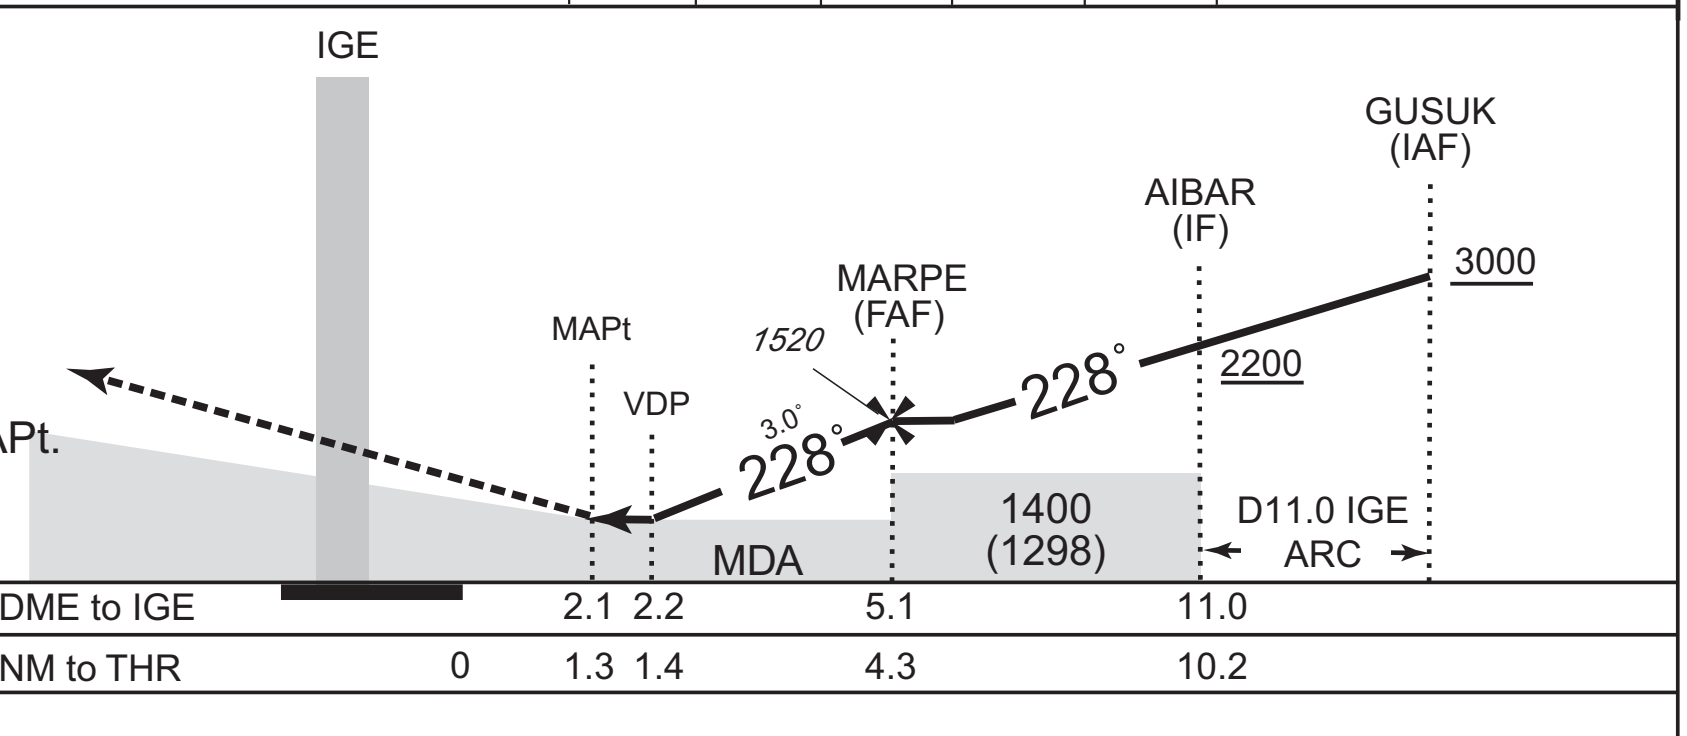

MINIMA		THR elev. 110		AD elev. 102
CAT			CIRCLING	
	MDA(H)	CMV	MDA(H)	VIS
A	580(478)	1400	580(478)	1600
B	580(478)	1500	580(478)	1600
C	580(478)	1600	660(558)	2400
D	580(478)	1800	660(558)	3200

Circling to EAST side of RWY only.

CHANGE : AD name.

INSTRUMENT APPROACH CHART

ROIG / ISHIGAKI — VOR Y RWY22

SAKISHIMA APP	ISHIGAKIJIMA VOR/DME	ISHIGAKI TOWER	RADAR AVBL
120.3 – 121.2	115.4 IGE CH–101X *24°23´46˝N/124°14´17˝E*	118.0 – 126.2	ATIS 128.675

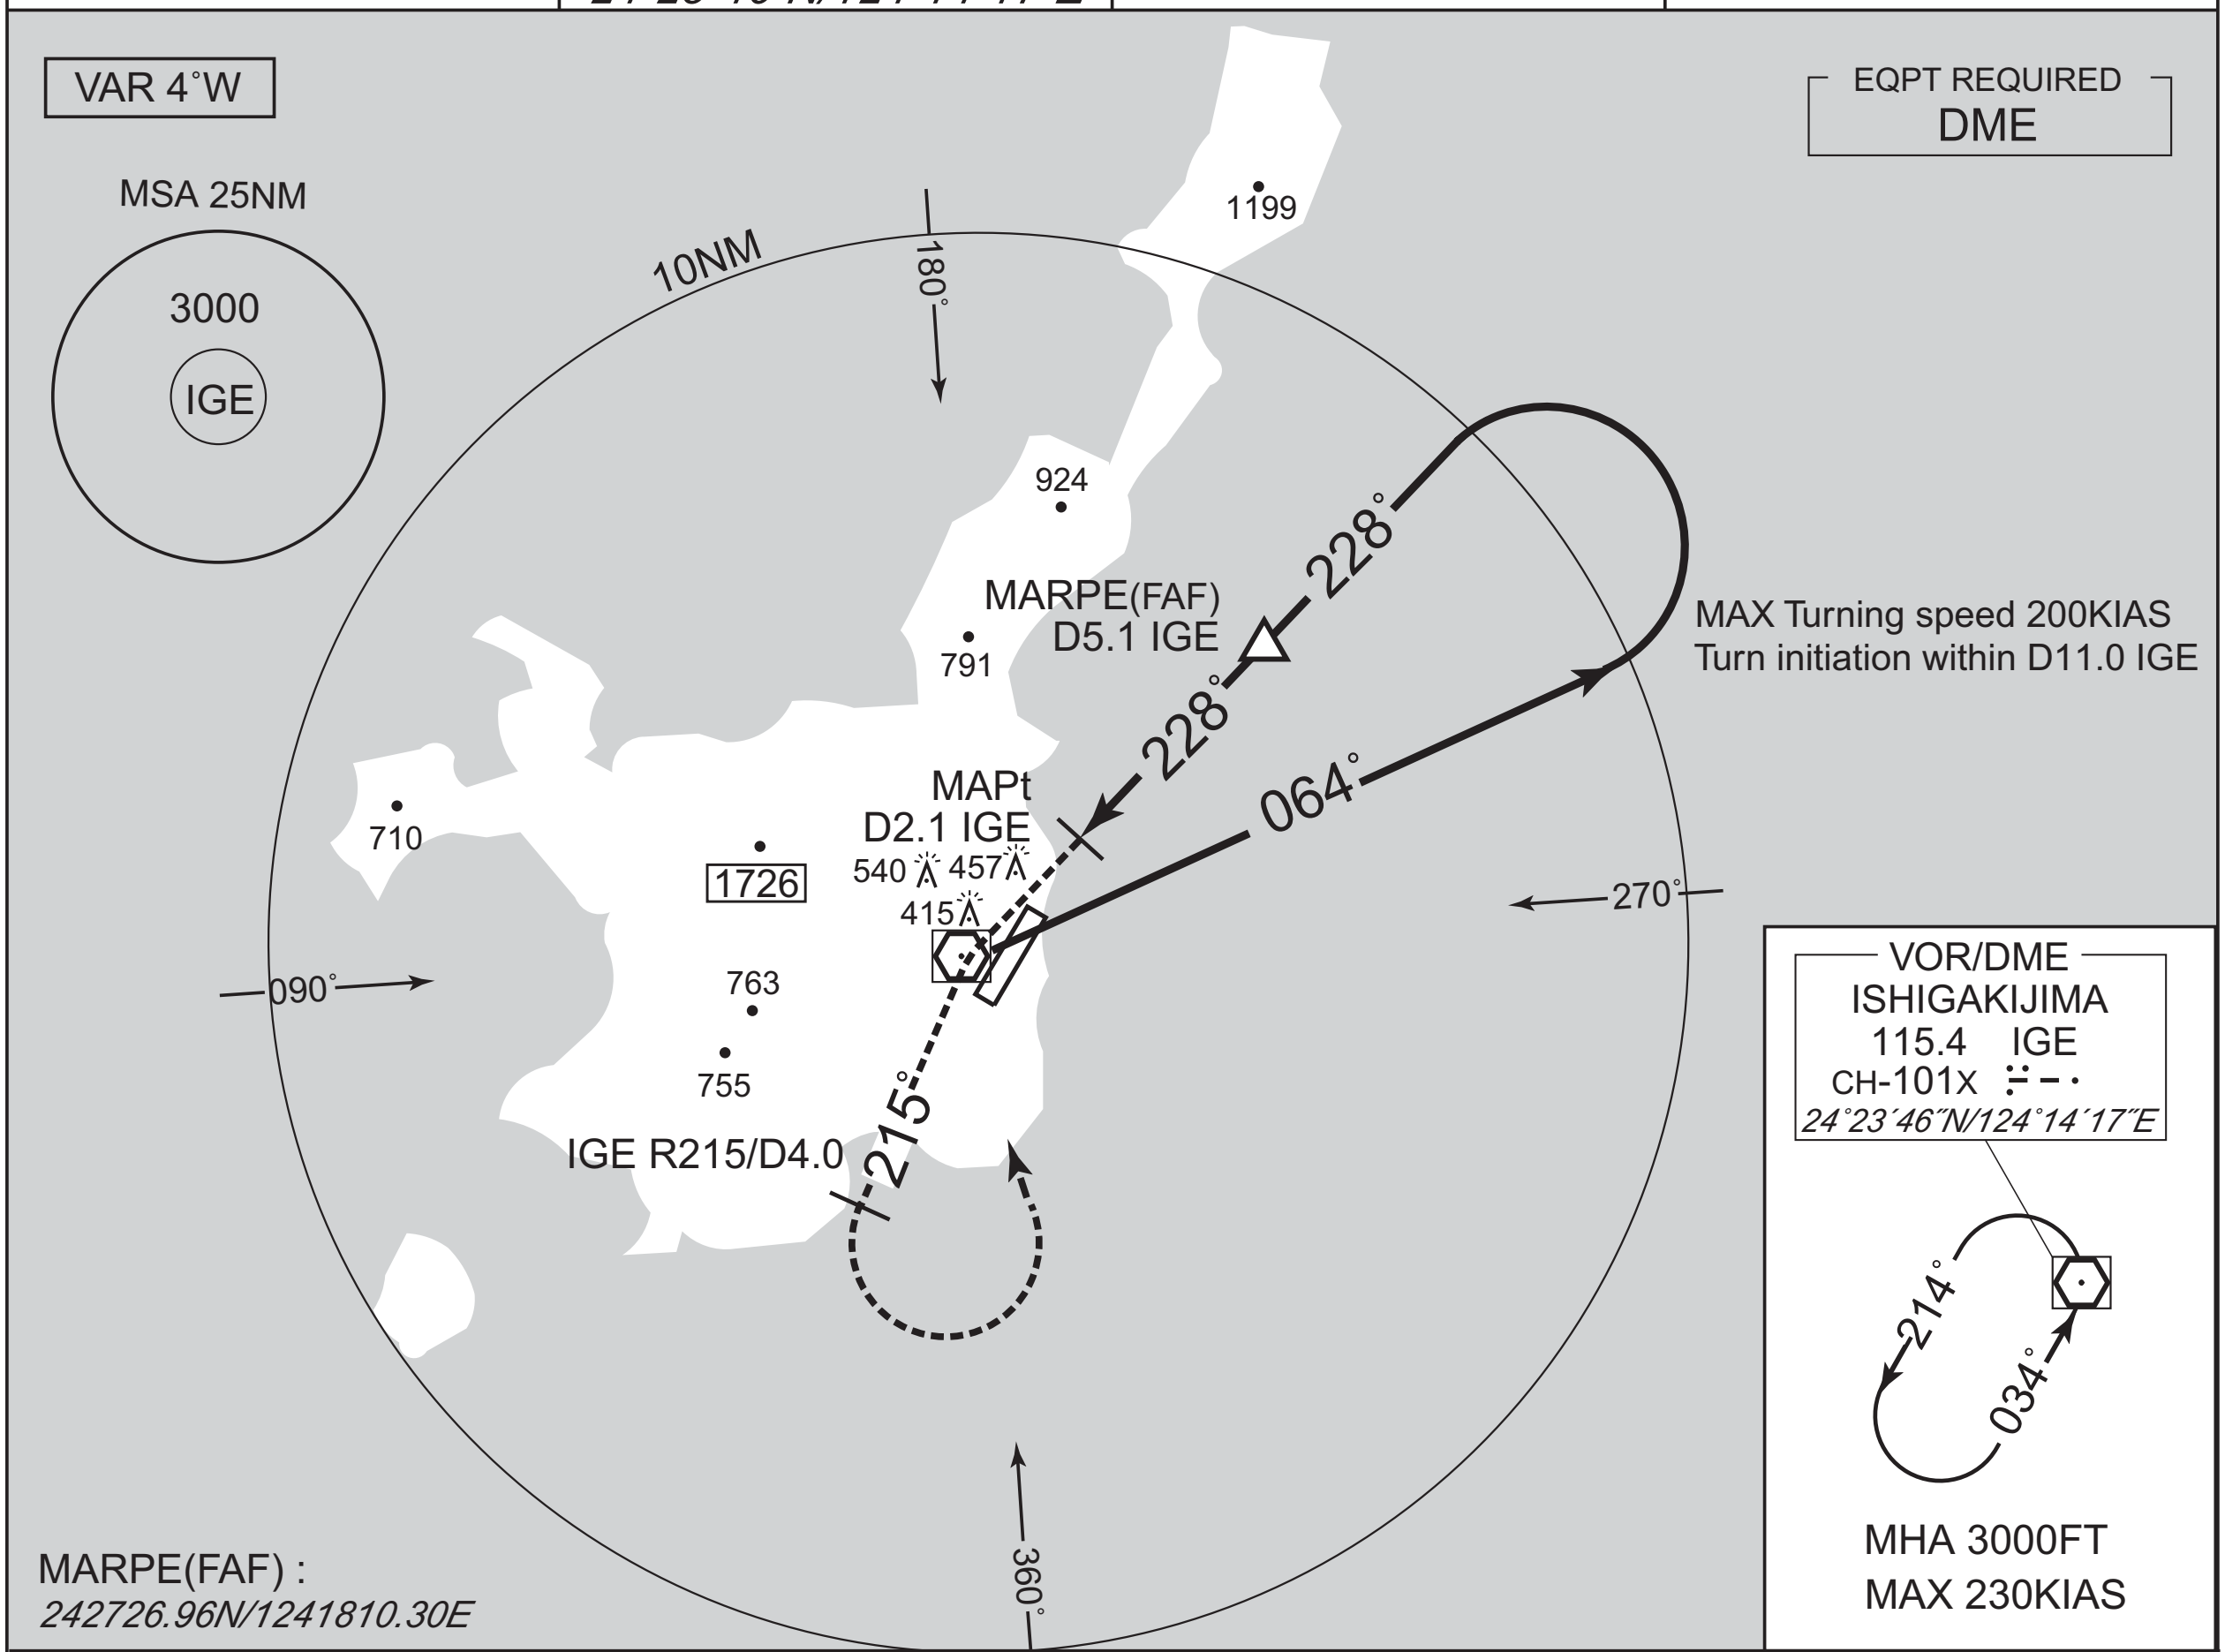

MAPt	3	4	5	FAF	NM to IGE
–	845	1163	1481	1520	ALT (3.0° APCH Path)

MISSED APPROACH
Climb via IGE R215 to IGE 4.0DME, turn left,direct to IGE VOR/DME and hold at 3000FT.
Contact SAKISHIMA APP.

Timing not authorized for defining the MAPt.

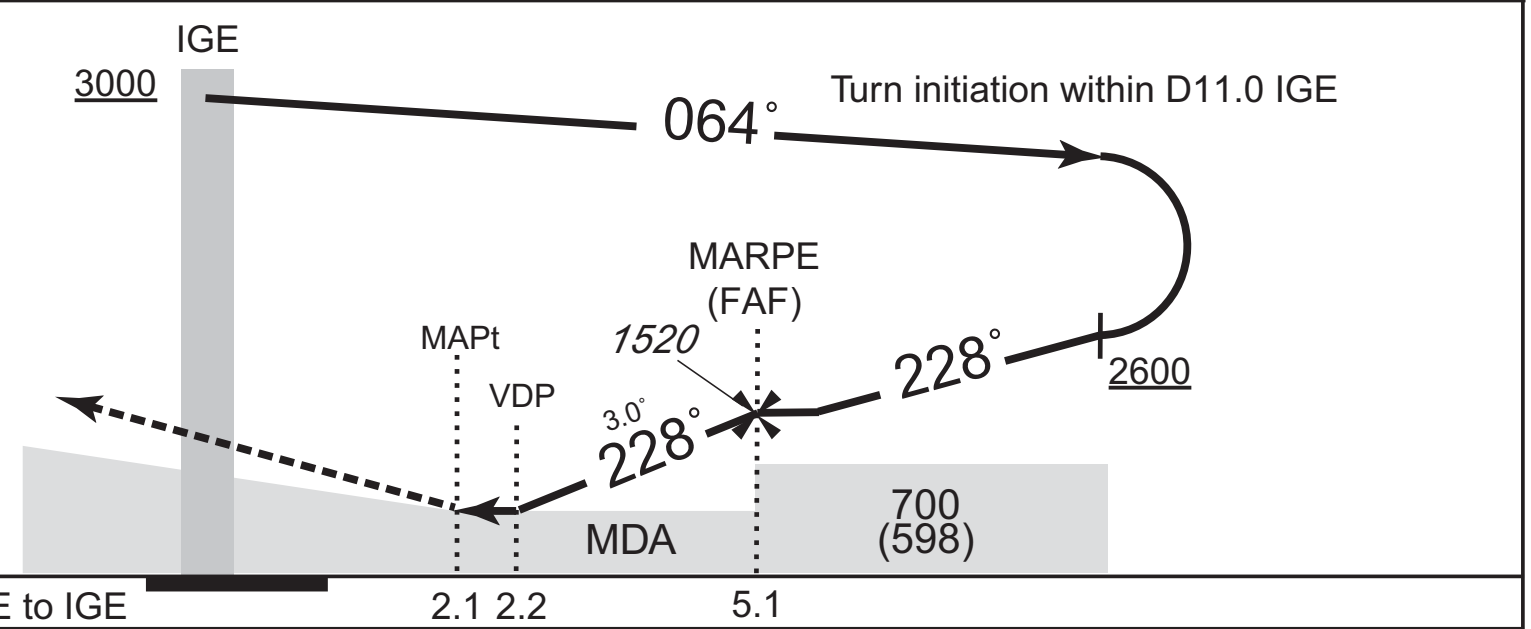

DME to IGE		2.1	2.2	5.1
NM to THR	0	1.3	1.4	4.3

MINIMA — THR elev. 110 — AD elev. 102

CAT	MDA(H)	CMV	CIRCLING MDA(H)	CIRCLING VIS
A	580(478)	1400	580(478)	1600
B		1500		
C		1600	660(558)	2400
D		1800		3200

Circling to EAST side of RWY only.

CHANGE : AD name.

INSTRUMENT APPROACH CHART

ROIG / ISHIGAKI — RNP RWY04(AR)

SAKISHIMA APP	RNP AR	ISHIGAKI TOWER	RADAR AVBL
120.3 - 121.2	RF required.	118.0 - 126.2	ATIS 128.675

For uncompensated Baro-VNAV systems, procedure not authorized below 5°C / above 45°C

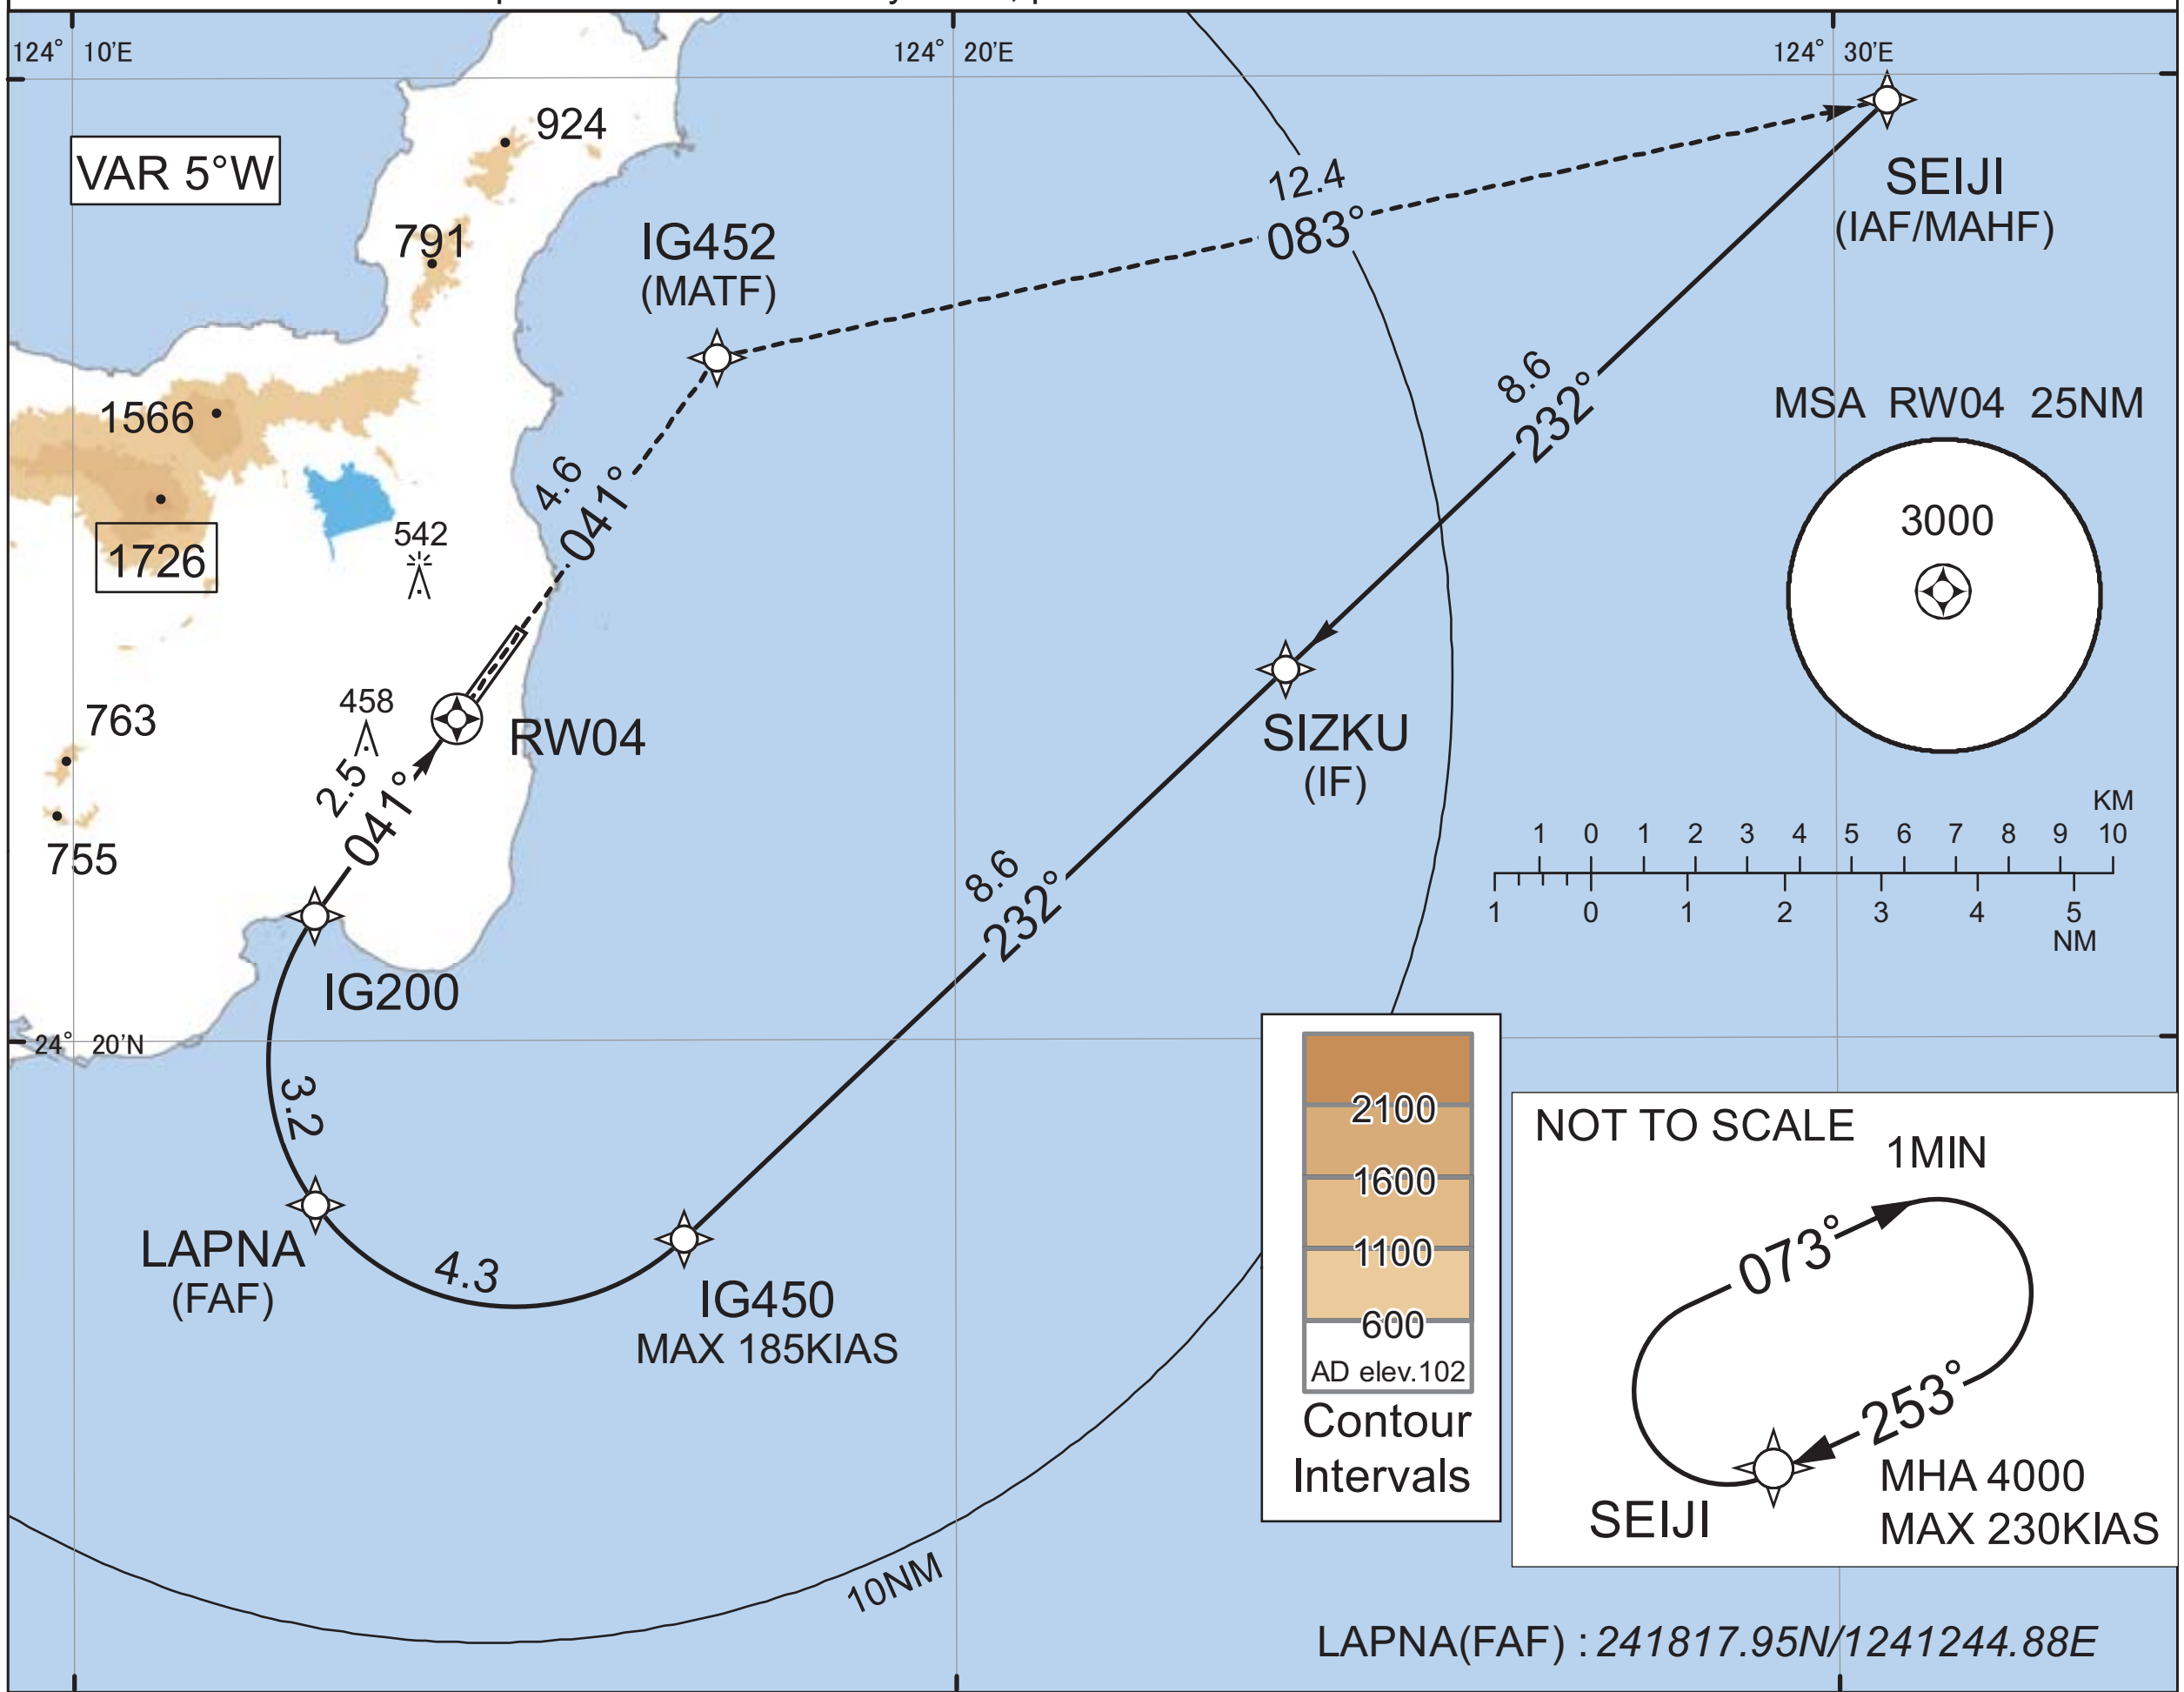

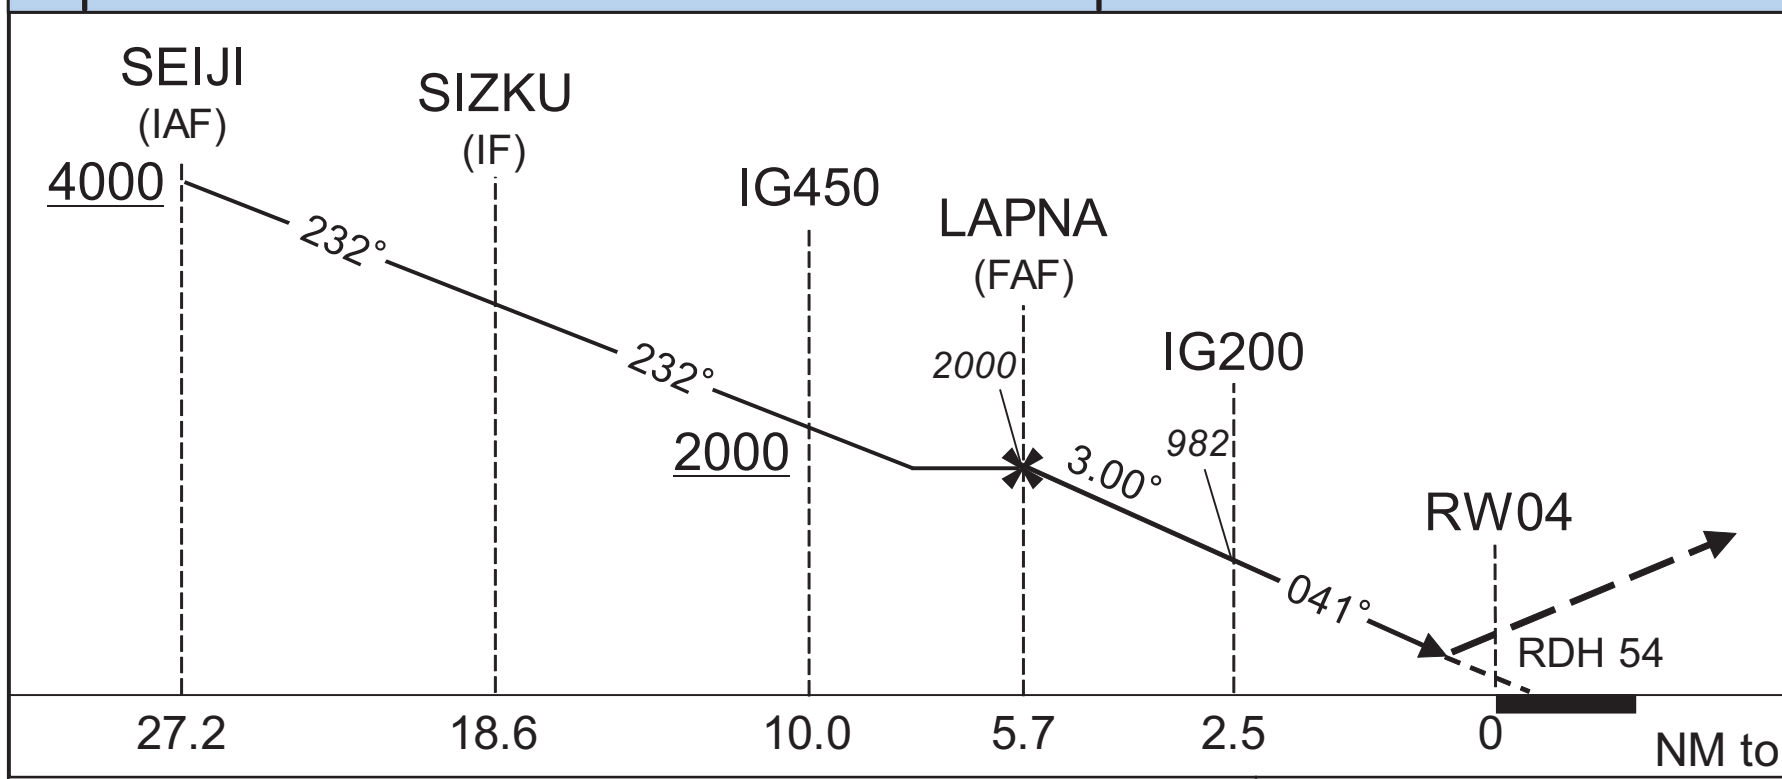

MISSED APPROACH

Climb to 4000FT, to IG452, to SEIJI and hold.
Contact SAKISHIMA APP.

Missed APCH climb gradient MNM 5.0%

MINIMA	THR elev. 126	AD elev. 102
CAT	RNP 0.30	
	DA(H)	RVR/CMV
A	-	-
B	-	-
C	545(419)	1000
D	567(441)	1400

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Authorization Required

CHANGE : AD name.

INSTRUMENT APPROACH CHART

ROIG / ISHIGAKI

RNP RWY04(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	SEIJI	-	-	-5.0	-	-	+4000	-	-	-
002	TF	SIZKU	-	232 (226.6)	-5.0	8.6	-	-	-	-	1.0
003	TF	IG450	-	232 (226.6)	-5.0	8.6	-	+2000	-185	-	1.0
004	RF Center: IGRF1 r=2.55NM	LAPNA	-	-	-5.0	4.3	R	2000	-	-	1.0
005	RF Center: IGRF1 r=2.55NM	IG200	-	-	-5.0	3.2	R	982	-	-3.00	0.3
006	TF	RW04	Y	041 (035.7)	-5.0	2.5	-	180	-	-3.00/54	0.3
007	TF	IG452	-	041 (035.7)	-5.0	4.6	-	-	-	-	1.0
008	TF	SEIJI	-	083 (077.6)	-5.0	12.4	-	4000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	SEIJI	253 (248.2)	-5.0	1.0 (-14000)	R	4000	FL140	-230 (-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
SEIJI	*242944.43N/1243036.57E*	IGRF1	*241948.12N/1241500.55E*
SIZKU	*242350.59N/1242345.74E*		
IG450	*241756.41N/1241655.55E*		
LAPNA	*241817.95N/1241244.88E*		
IG200	*242118.09N/1241244.70E*		
RW04	*242320.91N/1241421.64E*		
IG452	*242705.63N/1241719.18E*		

CHANGE : AD name.

INSTRUMENT APPROACH CHART

ROIG / ISHIGAKI

RNP Z RWY22

SAKISHIMA APP	RNP APCH	ISHIGAKI TOWER	RADAR AVBL
120.3 – 121.2		118.0 – 126.2	ATIS 128.675

Baro-VNAV not authorized below 10˚C

VAR 5˚W

MASAN (IAF/MAHF)	243033.23N 1242649.67E
DENSA (IAF)	243626.47N 1241756.68E
YUNTA (IF)	243329.91N 1242223.28E
ORION (FAF)	242926.13N 1241910.28E
IG250 (MAPt)	242517.00N 1241553.33E
IG200 (MATF)	242118.09N 1241244.70E

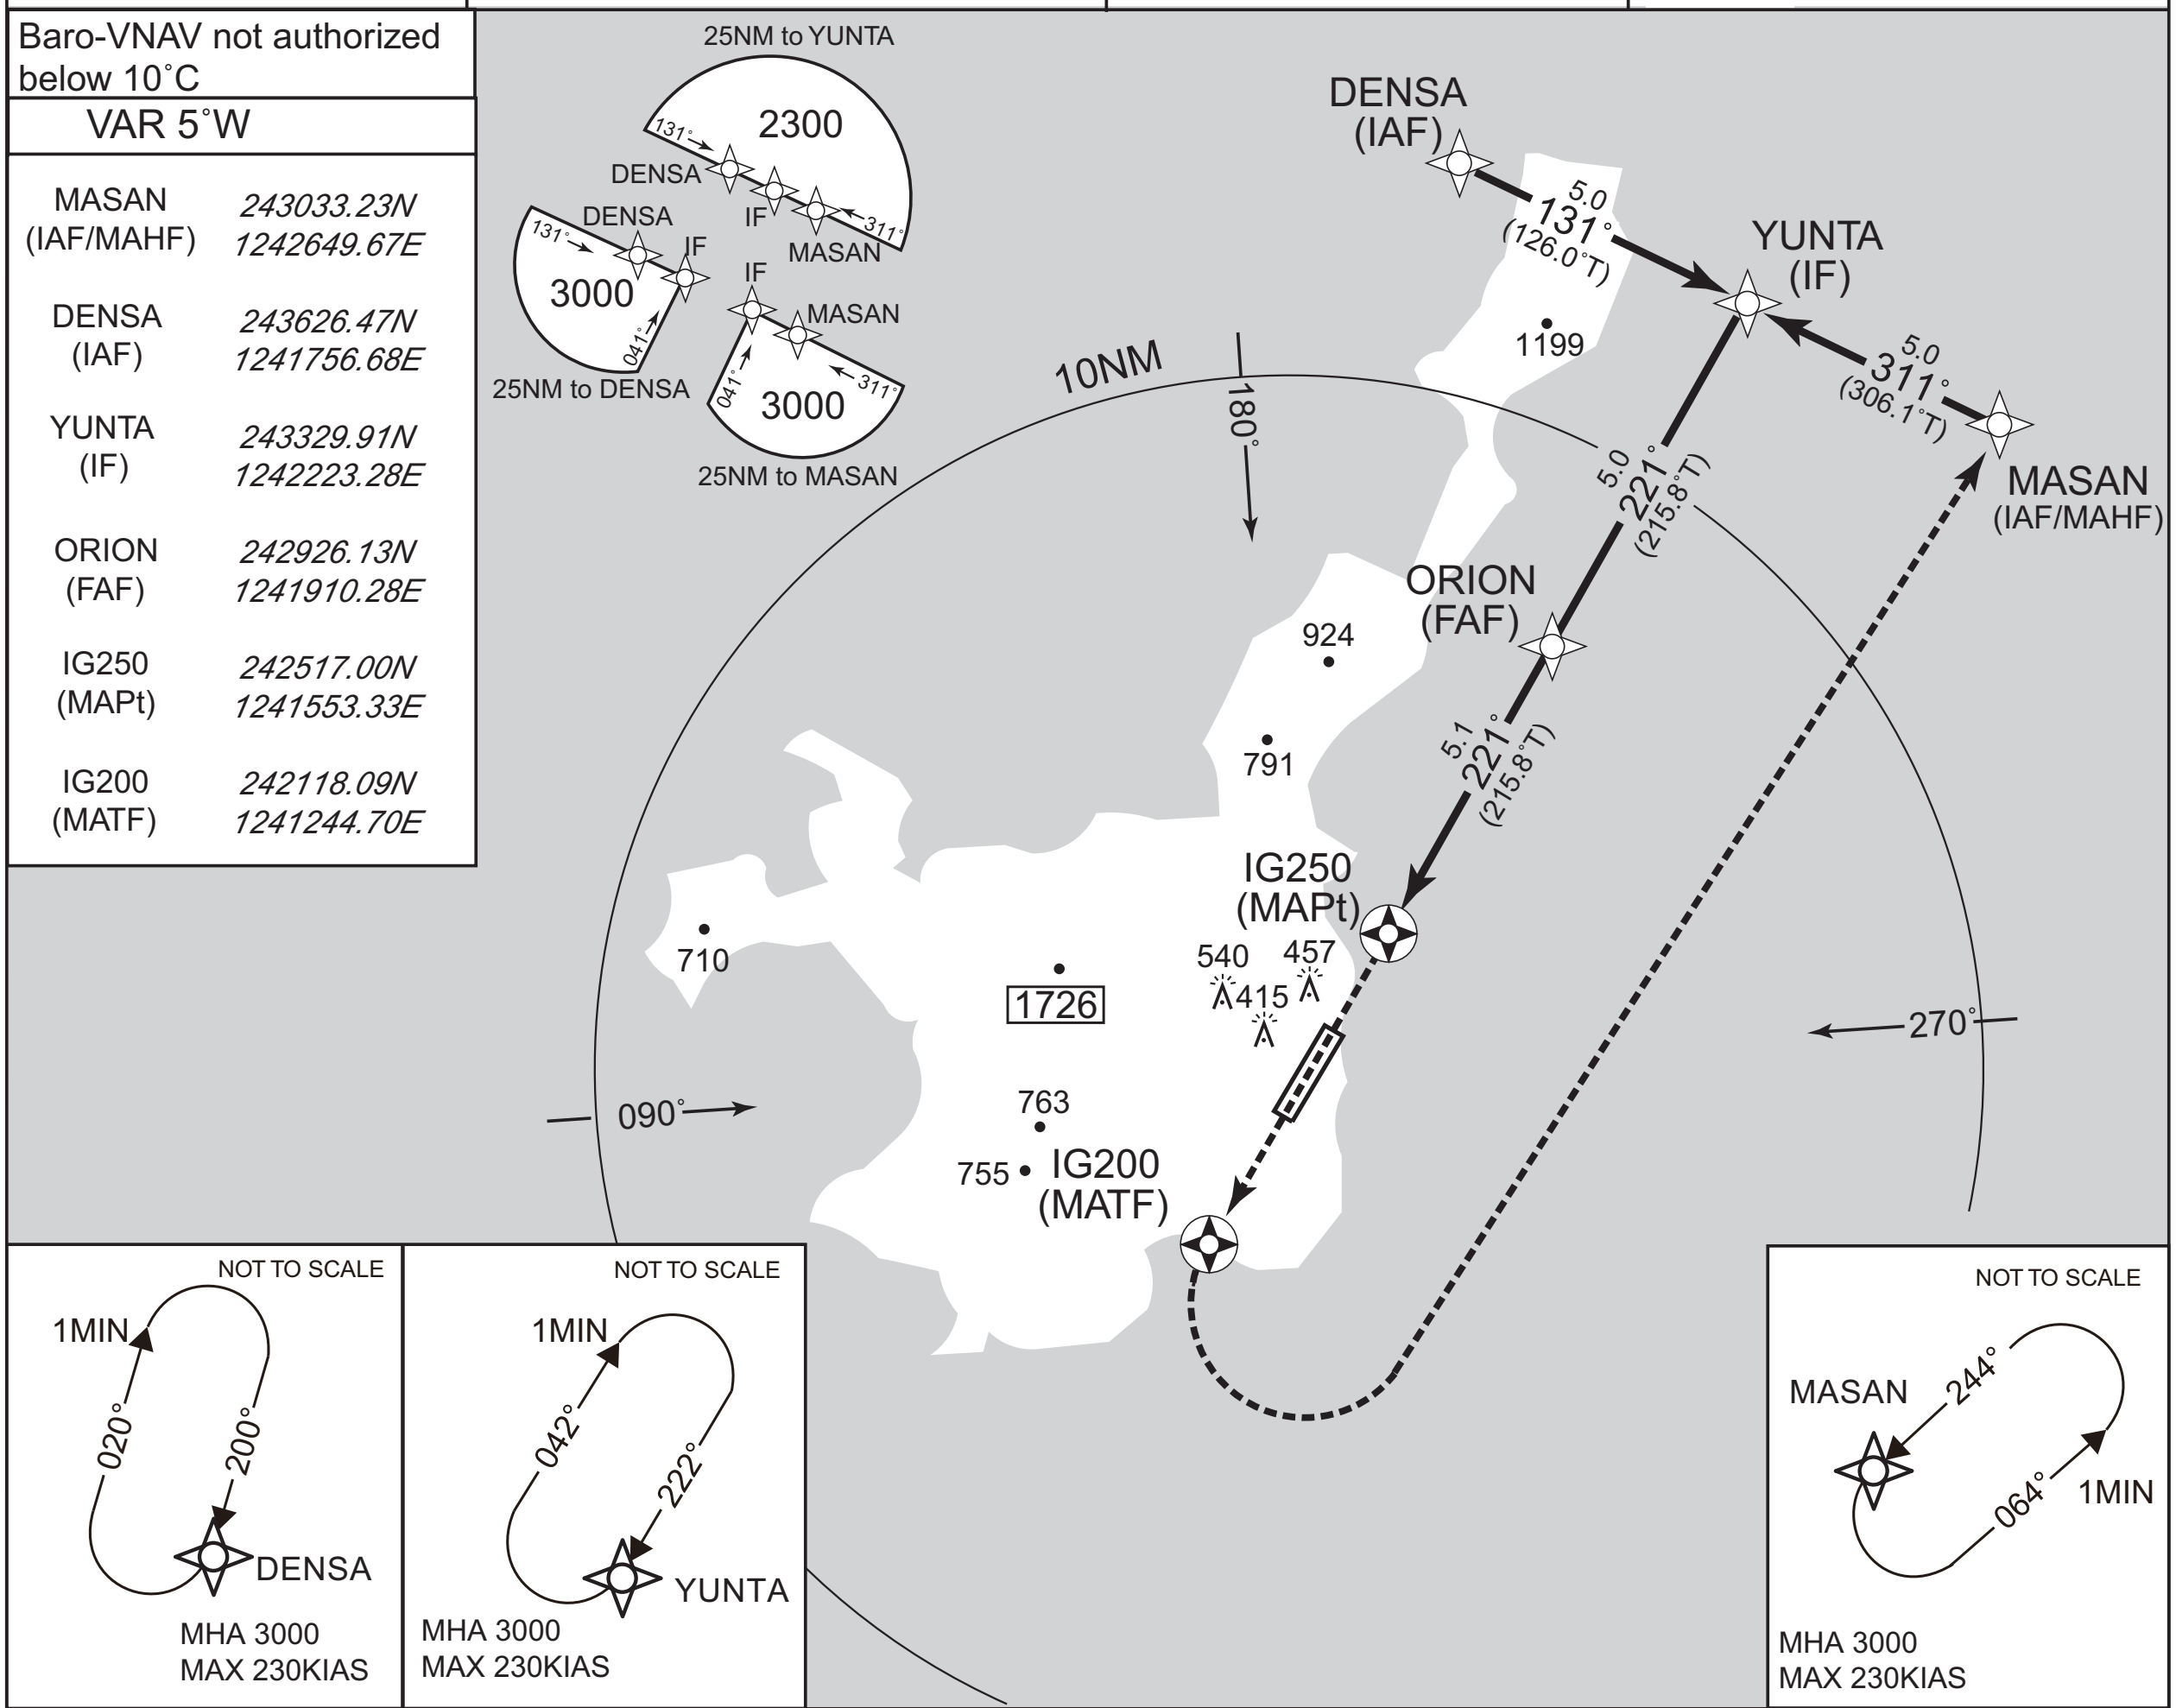

MAPt	1	2	3	4	5	FAF	NM to Next Fix
–	892	1210	1528	1847	2165	2200	ALT (3.0˚ APCH Path)

MISSED APPROACH

Climb direct to IG200,turn left direct to MASAN and hold at 3000FT.
Contact SAKISHIMA APP.

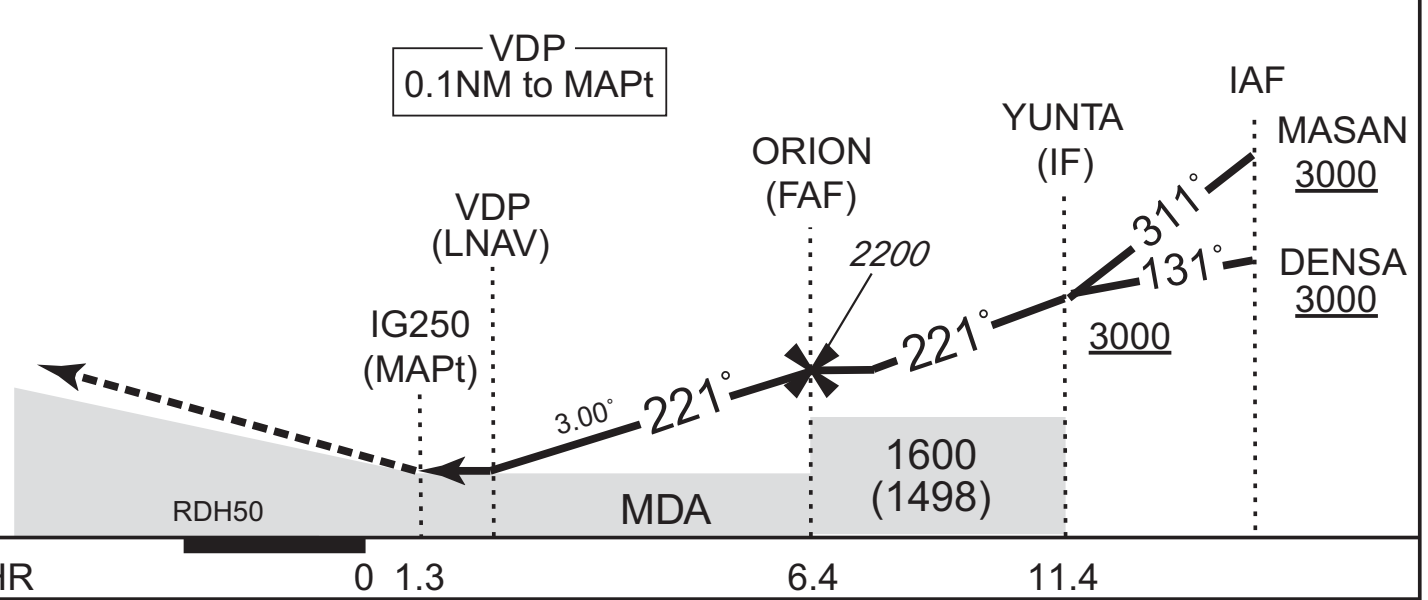

MINIMA	THR elev.110		AD elev.102			
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	MDA(H)	CMV	MDA (H)	VIS
A	580(470)	1400	580(478)	1400	580(478)	1600
B		1500		1500		
C		1600		1600	660(558)	2400
D		1800		1800		3200

Circling to EAST side of RWY only.

CHANGE : AD name.

INSTRUMENT APPROACH CHART

ROIG / ISHIGAKI

RNP Y RWY22(AR)

SAKISHIMA APP 120.3 - 121.2	RNP AR RF required.	ISHIGAKI TOWER 118.0 - 126.2	RADAR AVBL ATIS 128.675

For uncompensated Baro-VNAV systems, procedure not authorized below 5°C / above 45°C

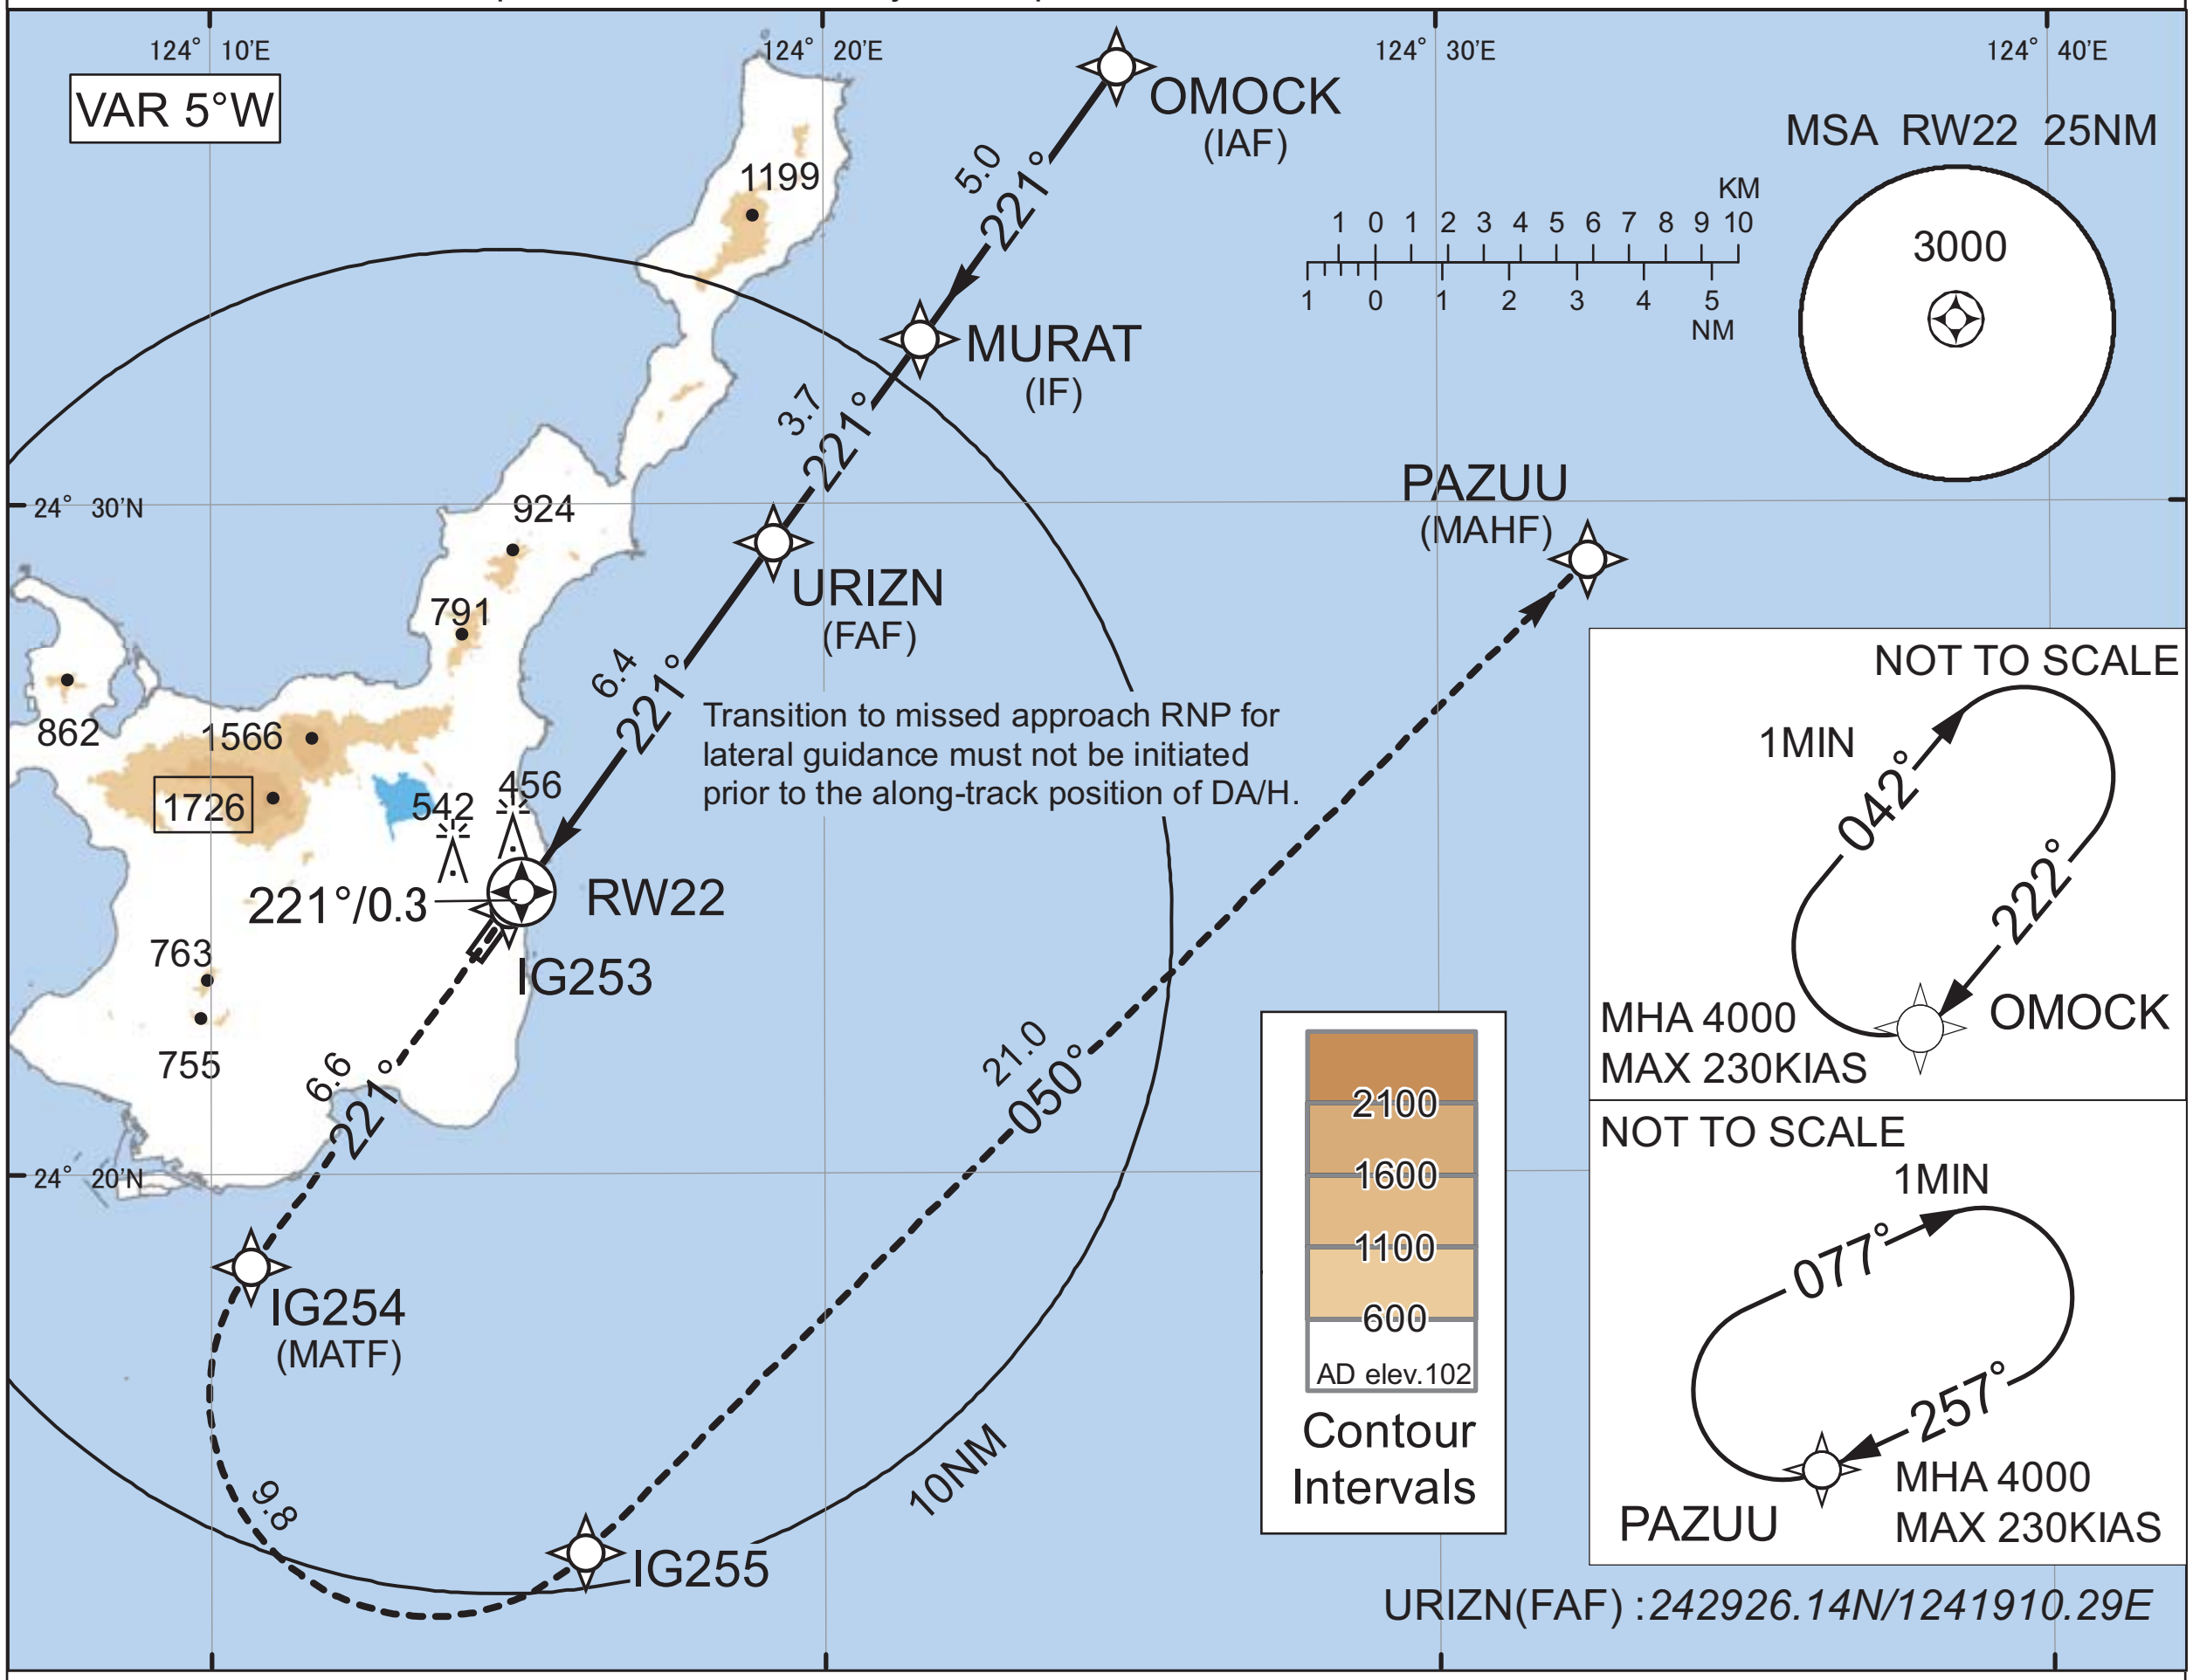

MISSED APPROACH

Climb to 4000FT, to IG253, to IG254,
to IG255 via fixed radius turn,
to PAZUU and hold.
Contact SAKISHIMA APP.

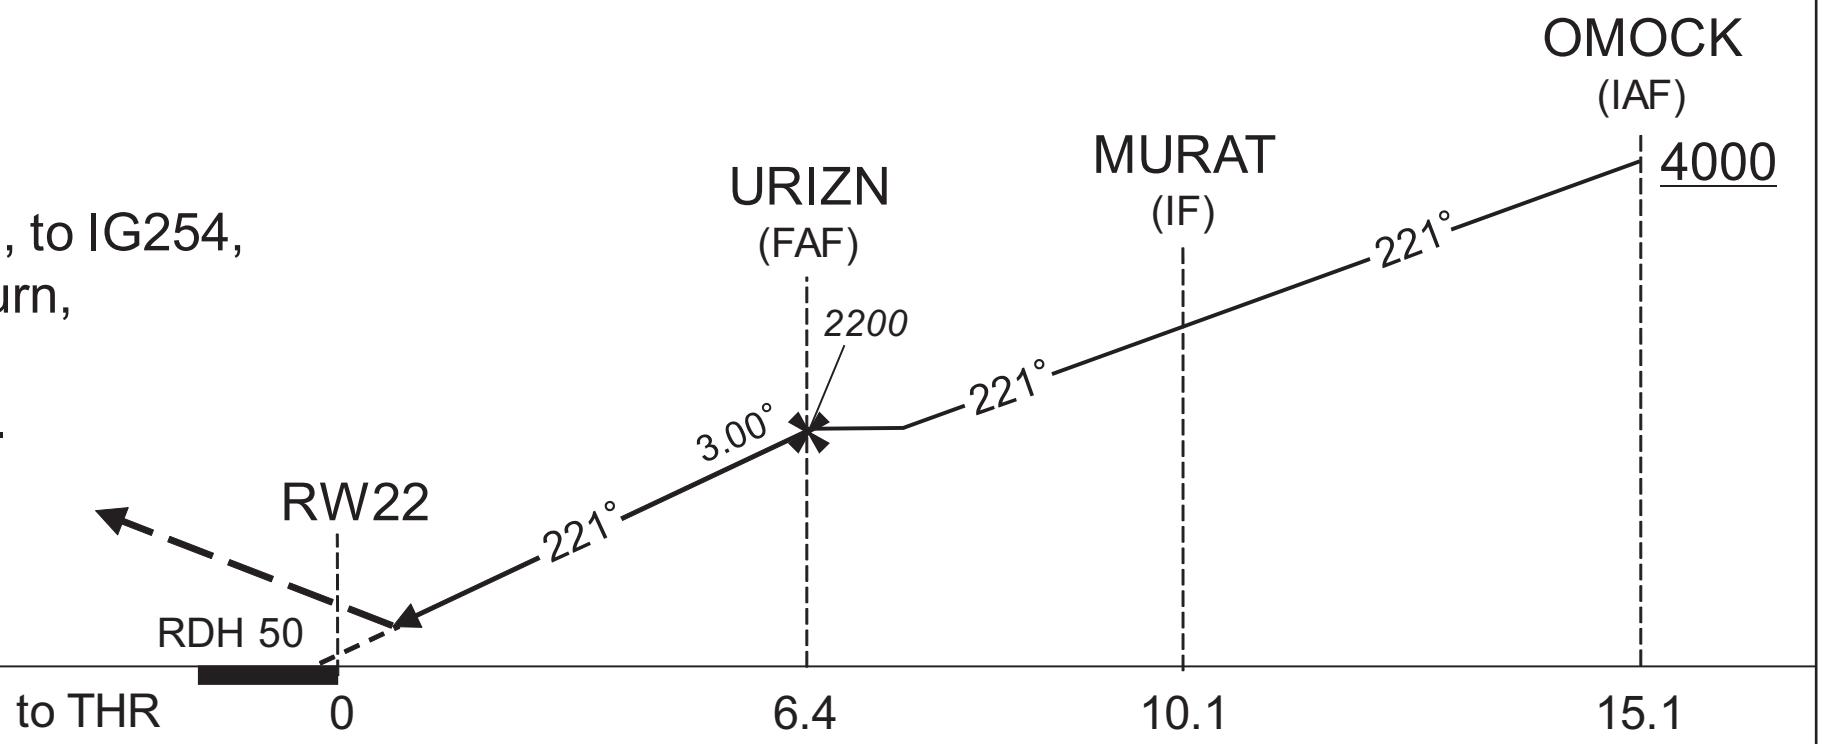

Missed APCH climb gradient MNM 5.0%

MINIMA THR elev.110 AD elev.102

CAT	RNP 0.12		RNP 0.30	
	DA(H)	CMV	DA(H)	CMV
A	-	-	-	-
B				
C	545(435)	1400	608(498)	1600
D	559(449)	1600	618(508)	1800

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Authorization Required

CHANGE : AD name.

INSTRUMENT APPROACH CHART

ROIG / ISHIGAKI

RNP Y RWY22(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	OMOCK	-	-	-5.0	-	-	+4000	-	-	-
002	TF	MURAT	-	221 (215.8)	-5.0	5.0	-	-	-	-	1.0
003	TF	URIZN	-	221 (215.8)	-5.0	3.7	-	2200	-	-	1.0
004	TF	RW22	Y	221 (215.8)	-5.0	6.4	-	160	-	-3.00/50	0.12 0.30
005	TF	IG253	-	221 (215.7)	-5.0	0.3	-	-	-	-	0.12 0.30
006	TF	IG254	-	221 (215.7)	-5.0	6.6	-	-	-	-	1.0
007	RF Center: IGRF3 r=3.28NM	IG255	-	-	-5.0	9.8	L	-	-	-	1.0
008	TF	PAZUU	-	050 (045.2)	-5.0	21.0	-	4000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	OMOCK	222 (216.9)	-5.0	1.0 (-14000)	R	4000	FL140	-230 (-14000)	1.0
Hold	PAZUU	257 (252.1)	-5.0	1.0 (-14000)	R	4000	FL140	-230 (-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
OMOCK	*243631.66N/1242447.35E*	IGRF3	*241641.99N/1241333.15E*
MURAT	*243227.94N/1242134.19E*		
URIZN	*242926.14N/1241910.29E*		
RW22	*242413.59N/1241503.24E*		
IG253	*242357.98N/1241450.93E*		
IG254	*241837.84N/1241038.29E*		
IG255	*241421.38N/1241604.82E*		
PAZUU	*242908.99N/1243226.97E*		

CHANGE : AD name.

ROIG / ISHIGAKI

Visual REP

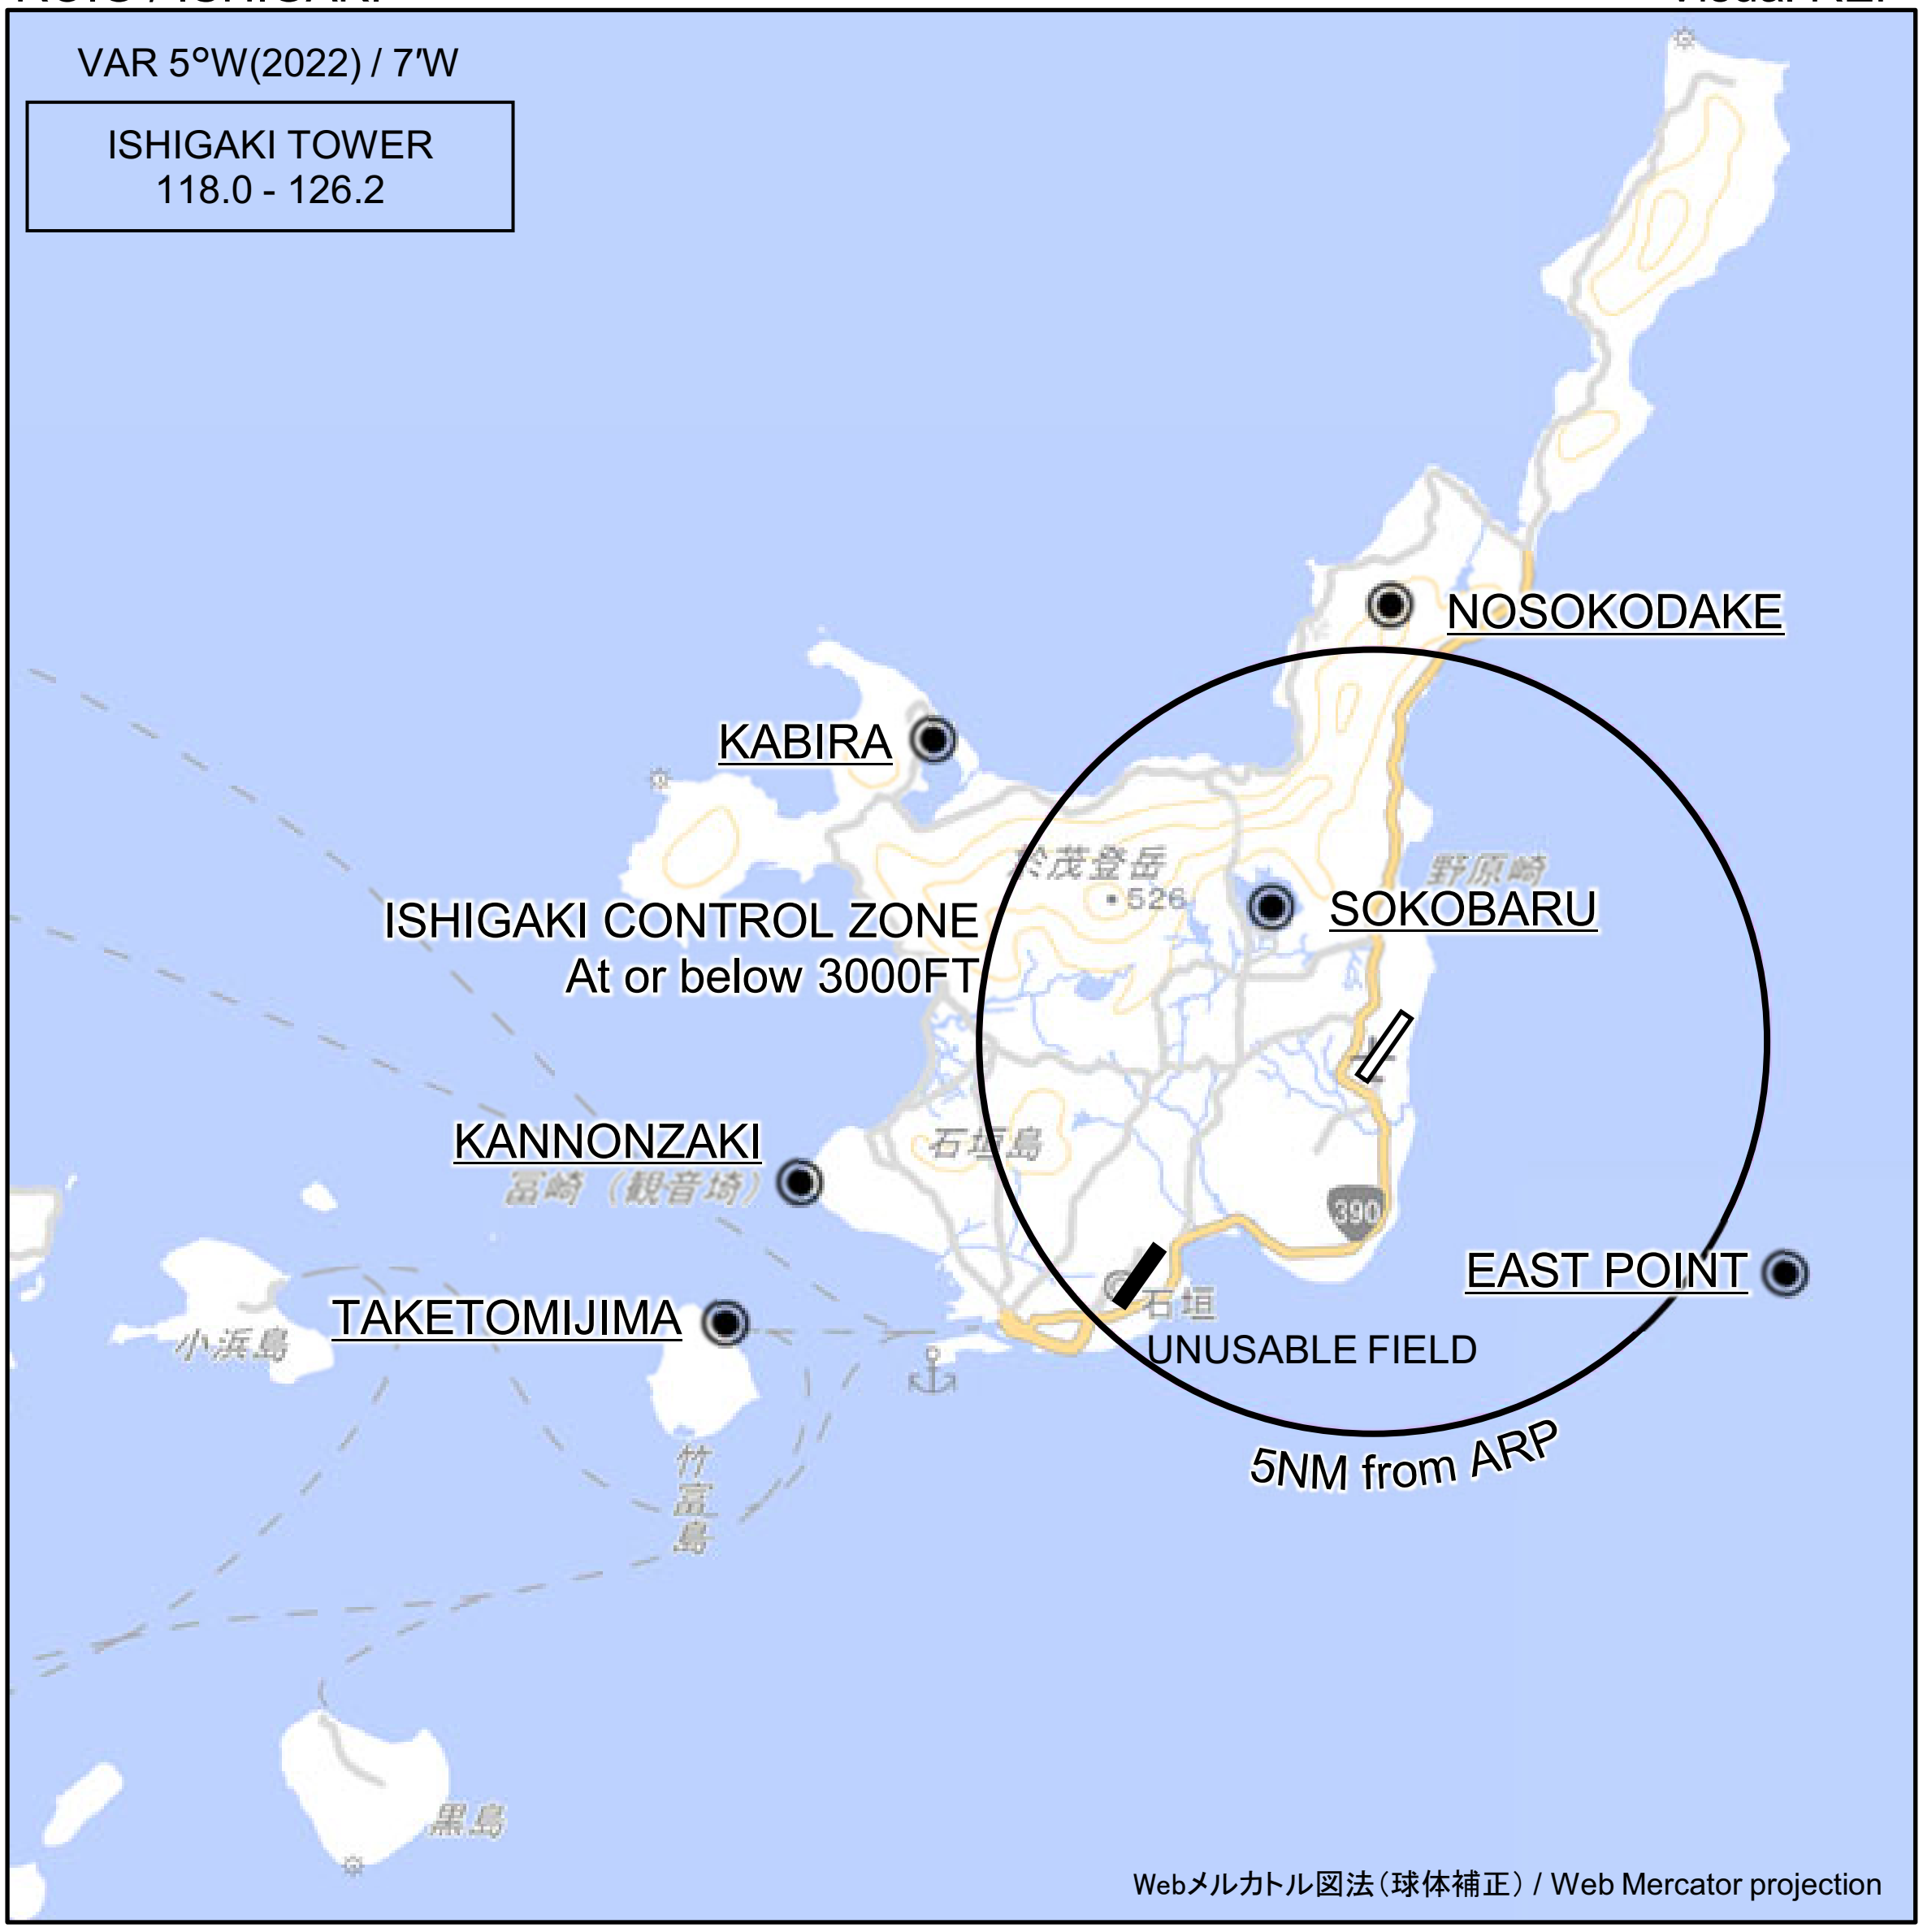

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : AD and CONTROL ZONE name.

Call sign	BRG / DIST from ARP	Remarks
野底岳 Nosokodake	002°T / 5.5NM	山 Mountain
イーストポイント East Point	120°T / 6.0NM	海上 Over the sea
竹富島 Taketomijima	246°T / 9.0NM	高速艇船着場 Port
観音崎 Kannonzaki	256°T / 7.5NM	灯台 Light house
川平 Kabira	304°T / 6.8NM	川平湾グラスボート乗り場 Kabira Bay Boat pier
底原 Sokobaru	322°T / 2.1NM	ダム Dam

ROIG / ISHIGAKI

LDG CHART

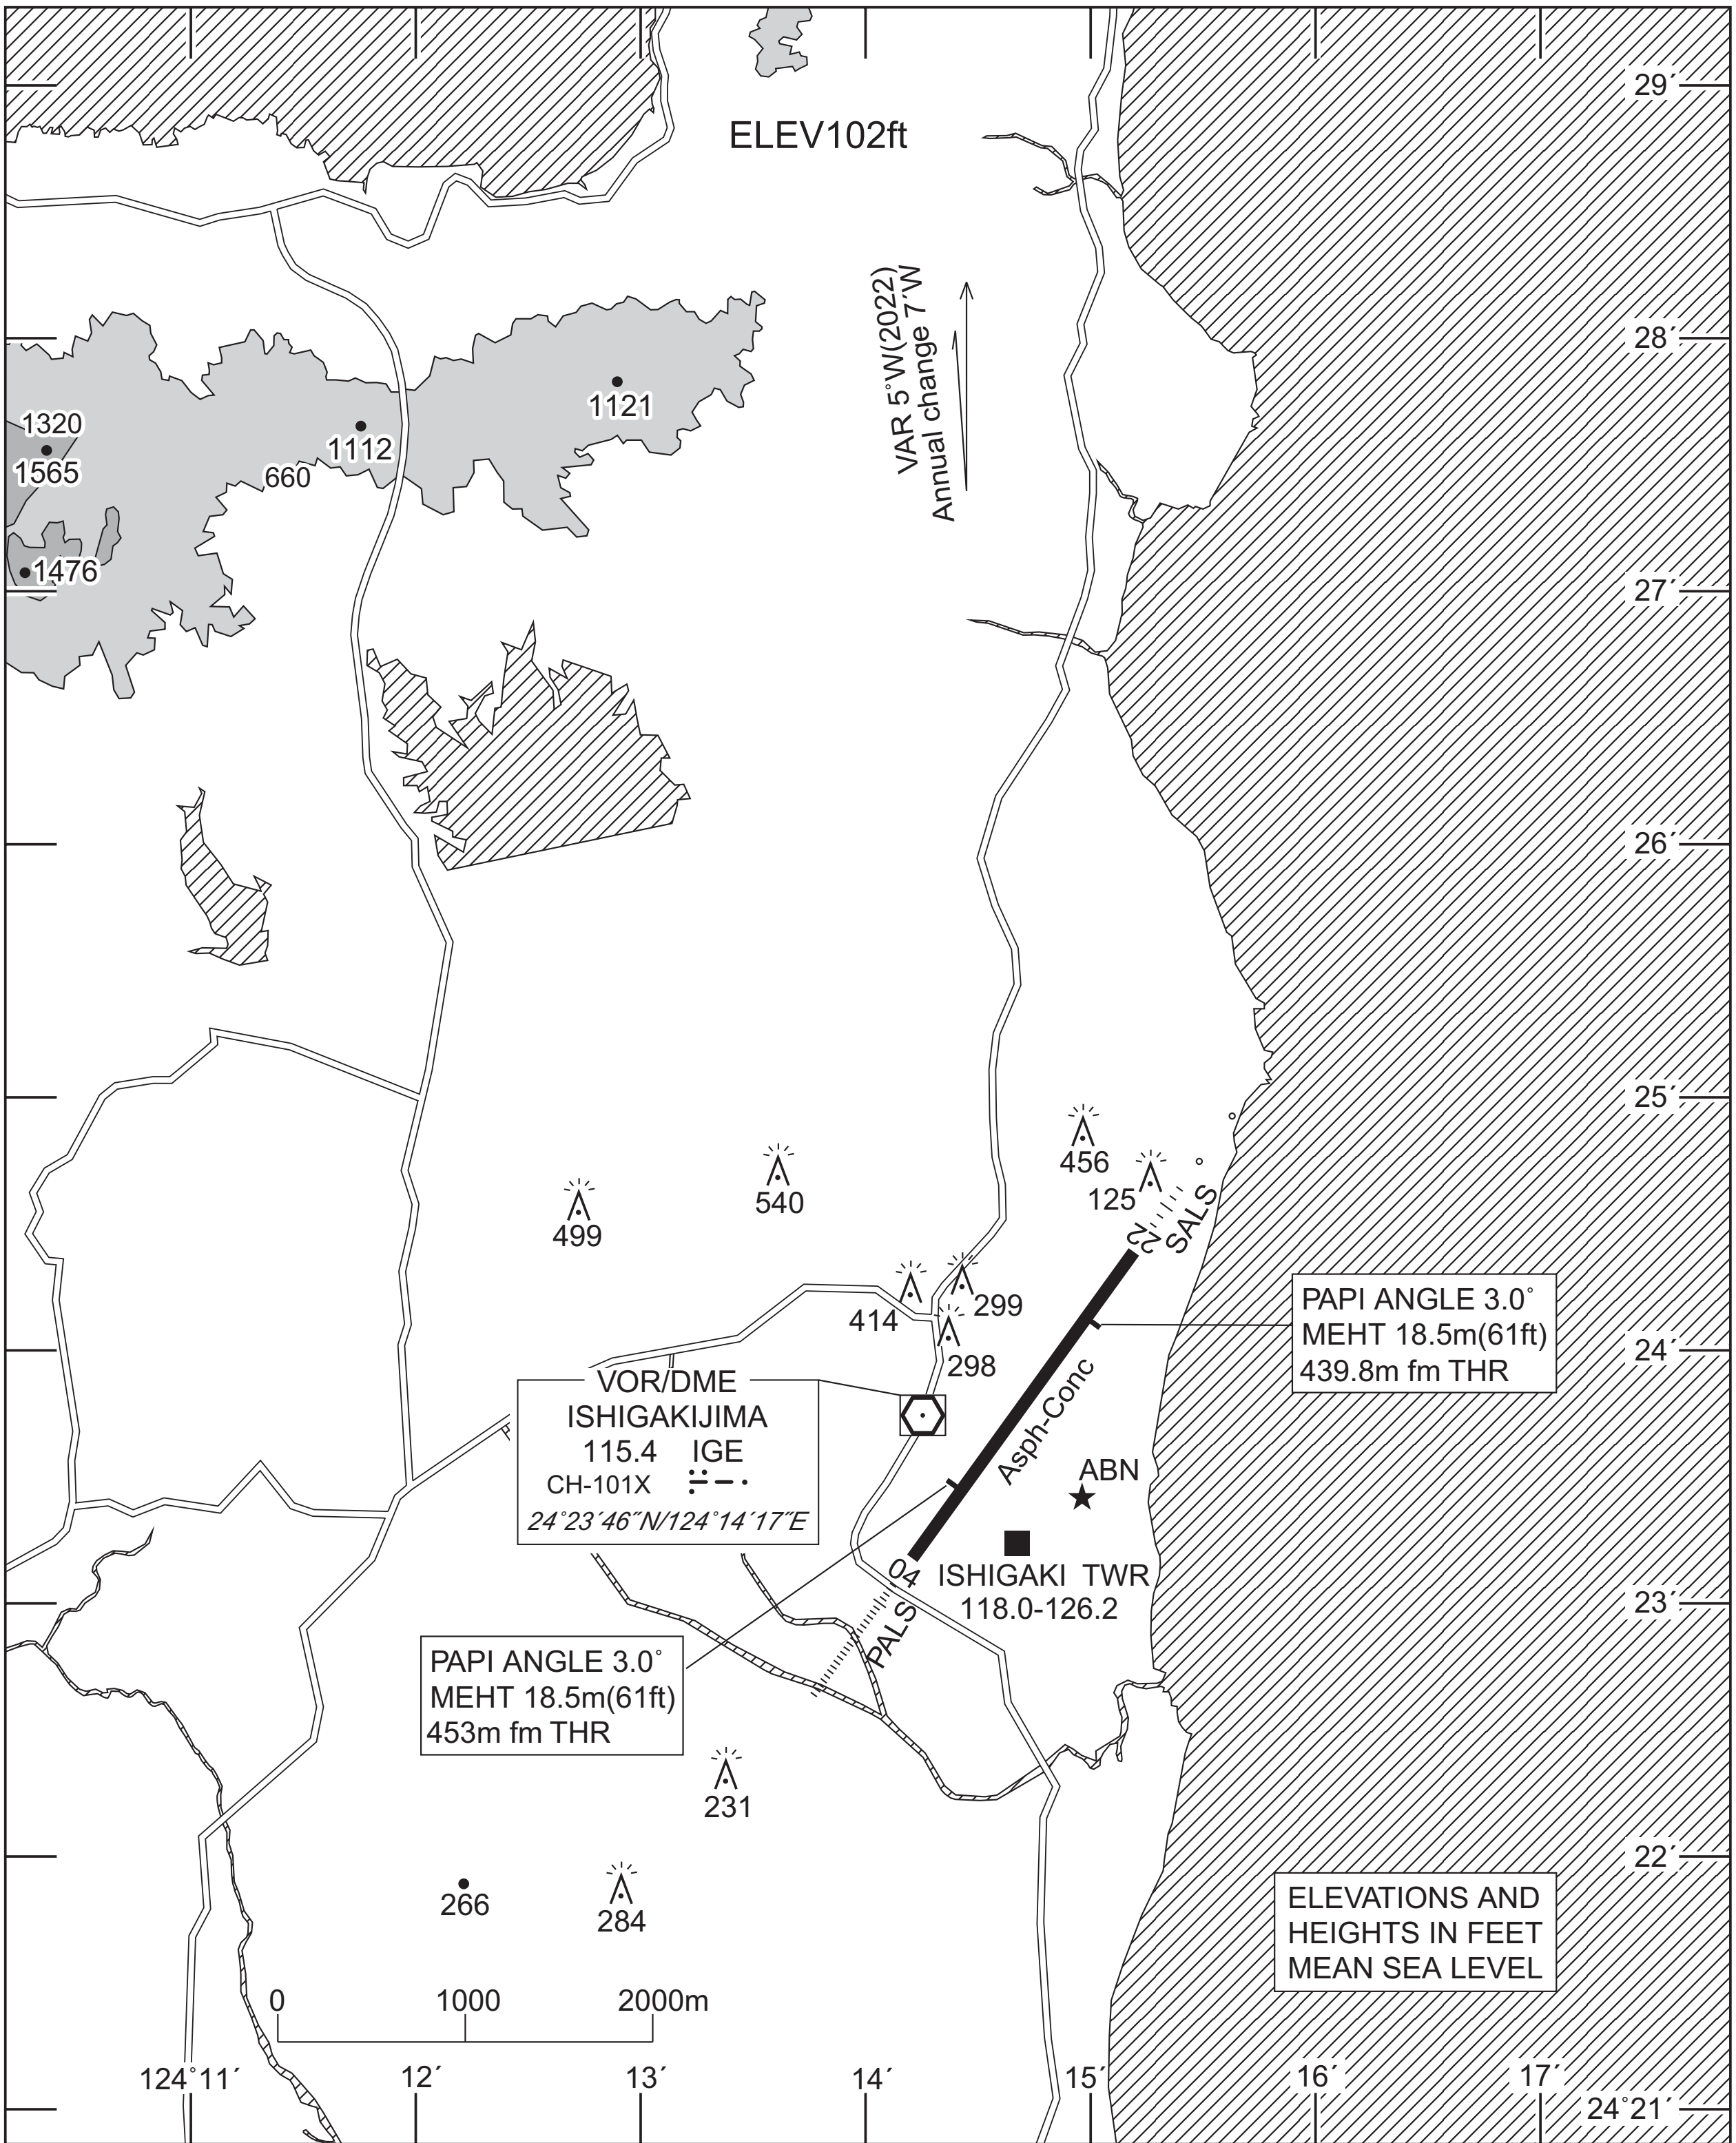

CHANGE : AD name.

ROIG / ISHIGAKI

Minimum Vectoring Altitude CHART

VAR 5˚W (2022)

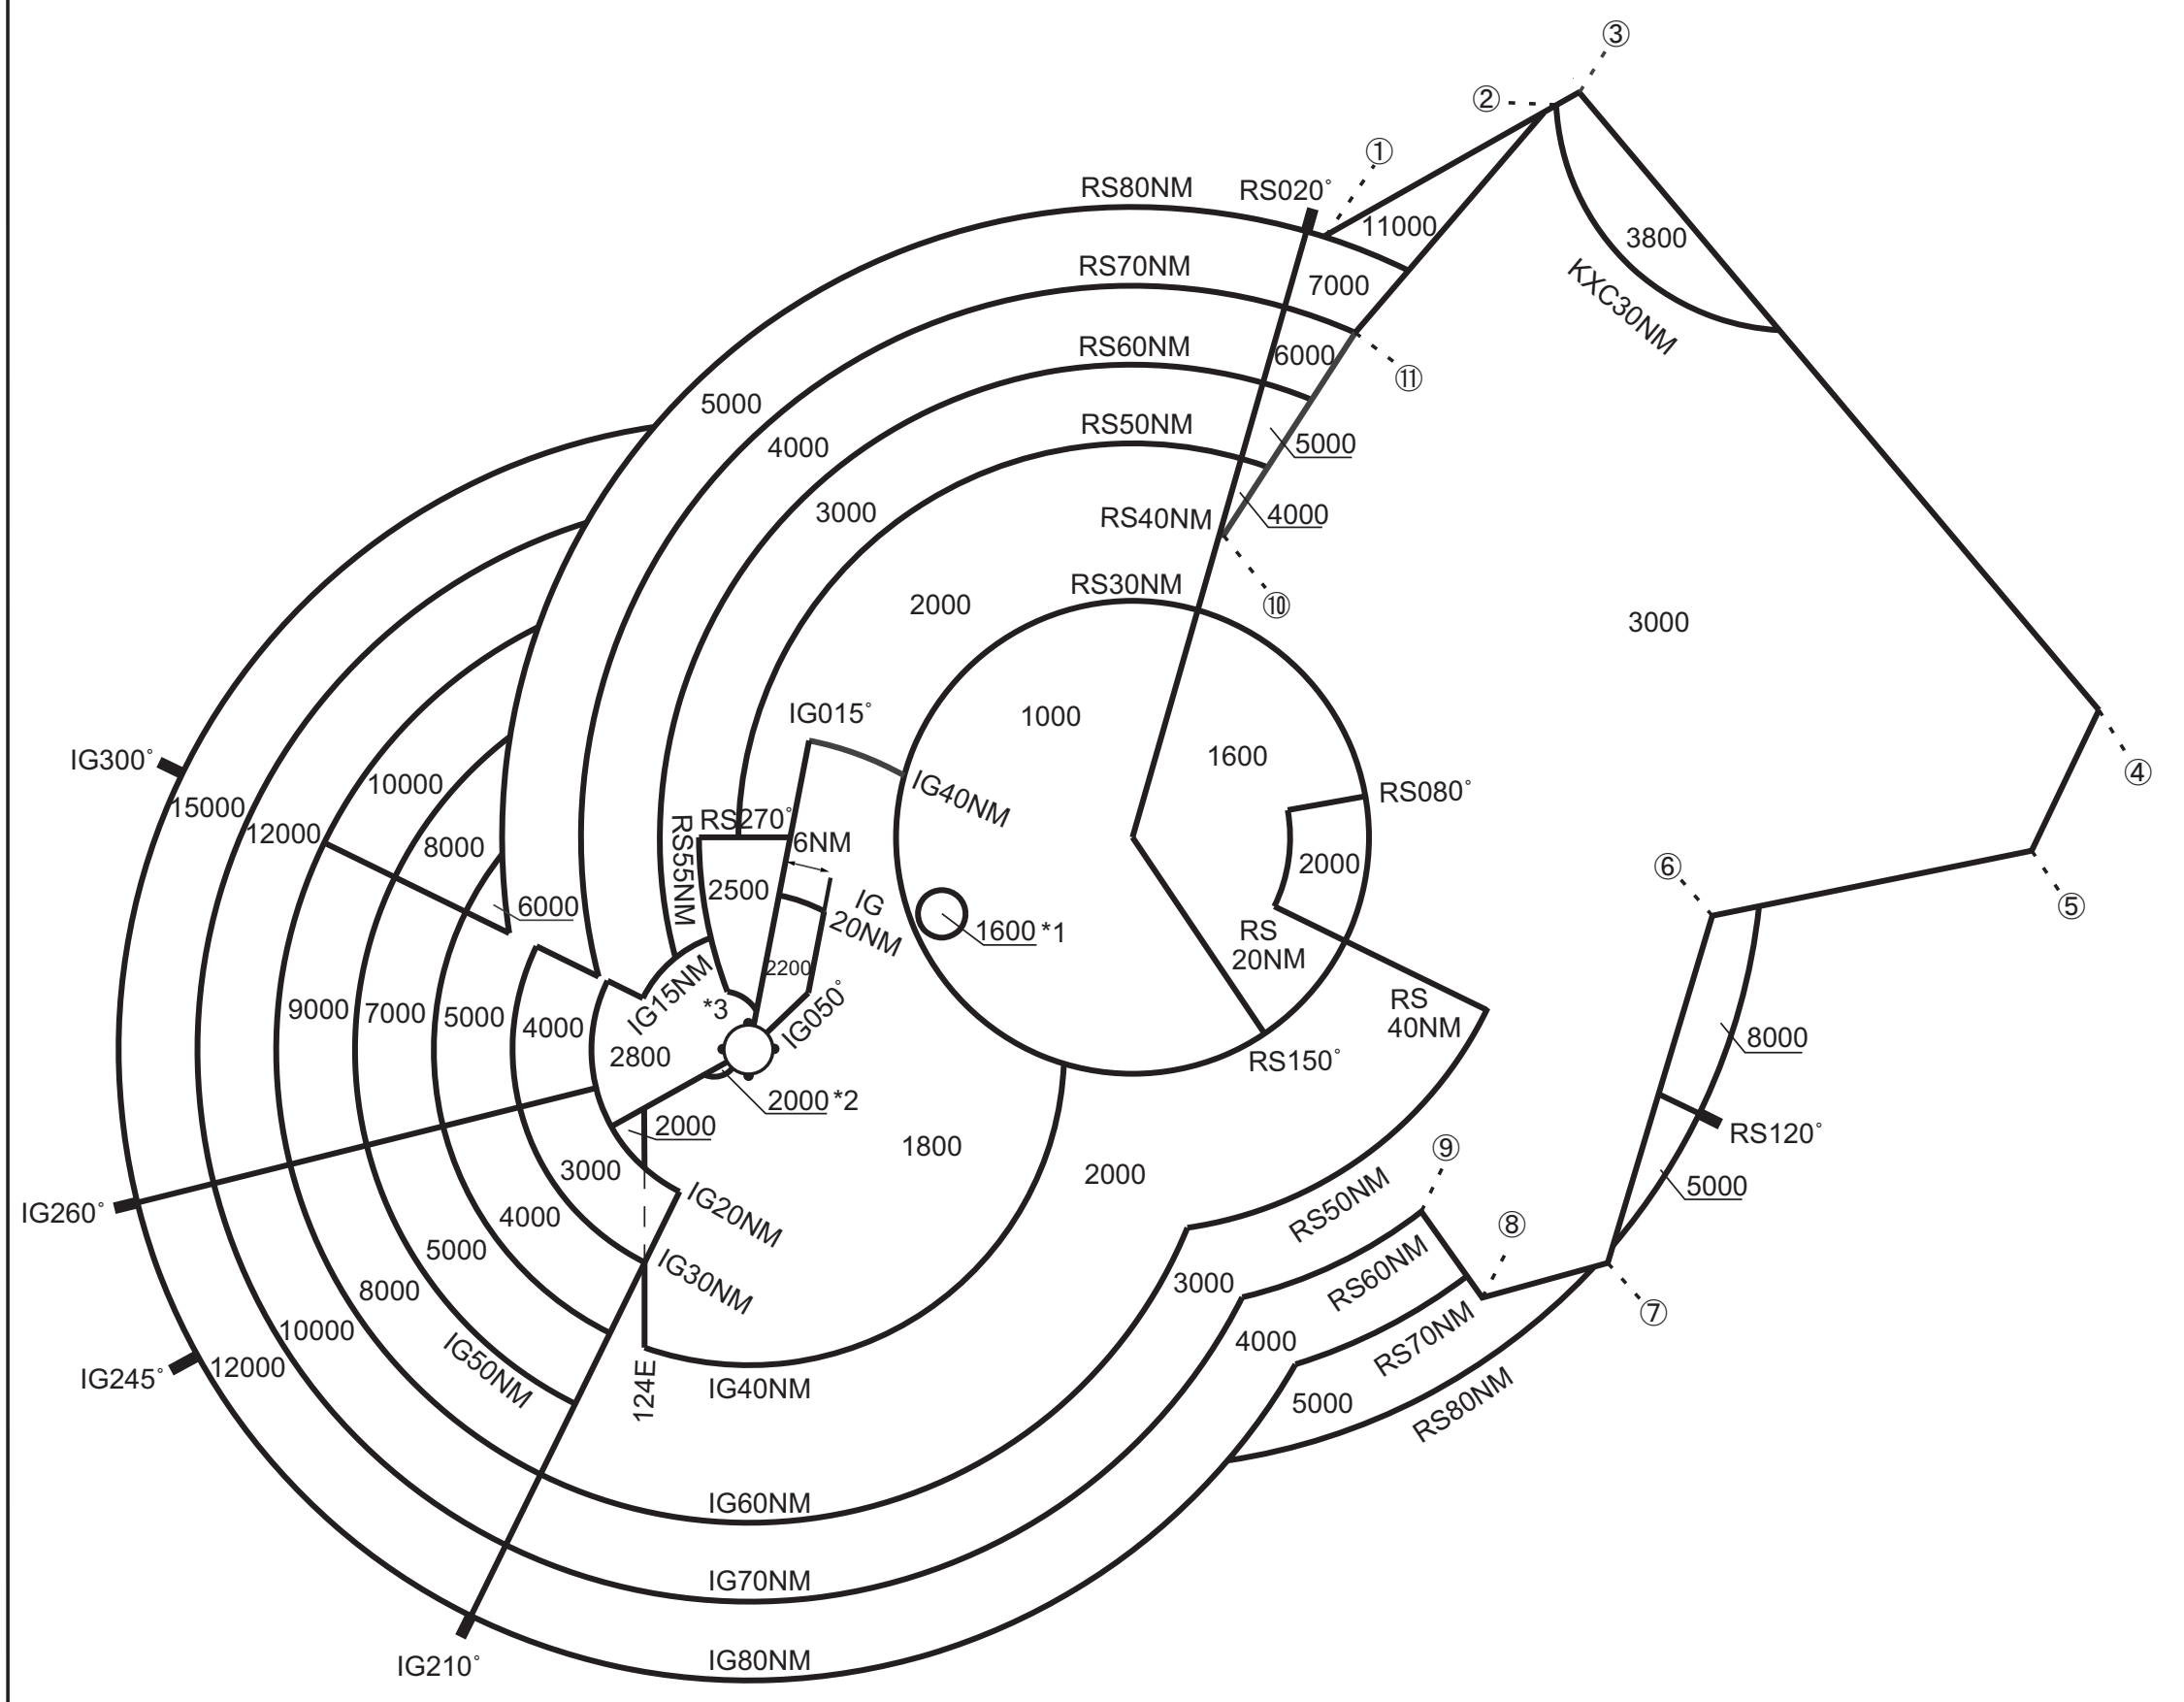

①260545N/1253603E
②262234N/1260956E
③262357N/1261243E
④250314N/1272349E
⑤244518N/1271337E
⑥243809N/1262857E
⑦235438N/1261324E
⑧235031N/1255540E
⑨240126N/1254742E
⑩252751N/1252151E
⑪255321N/1254054E

CENTER : *244938N/1250827E* (RORS RADAR SITE)
CENTER : *242310N/1241441E* (ROIG RADAR SITE)

*1 : *244015N/1244143E* RADIUS : 3NM
*2 : *242248N/1240952E* RADIUS : 3NM
*3 : *242538N/1241100E* RADIUS : 5NM

CHANGE : Update (East of RORS RADAR SITE).

INTENTIONALLY LEFT BLANK