



AERODROME CHART

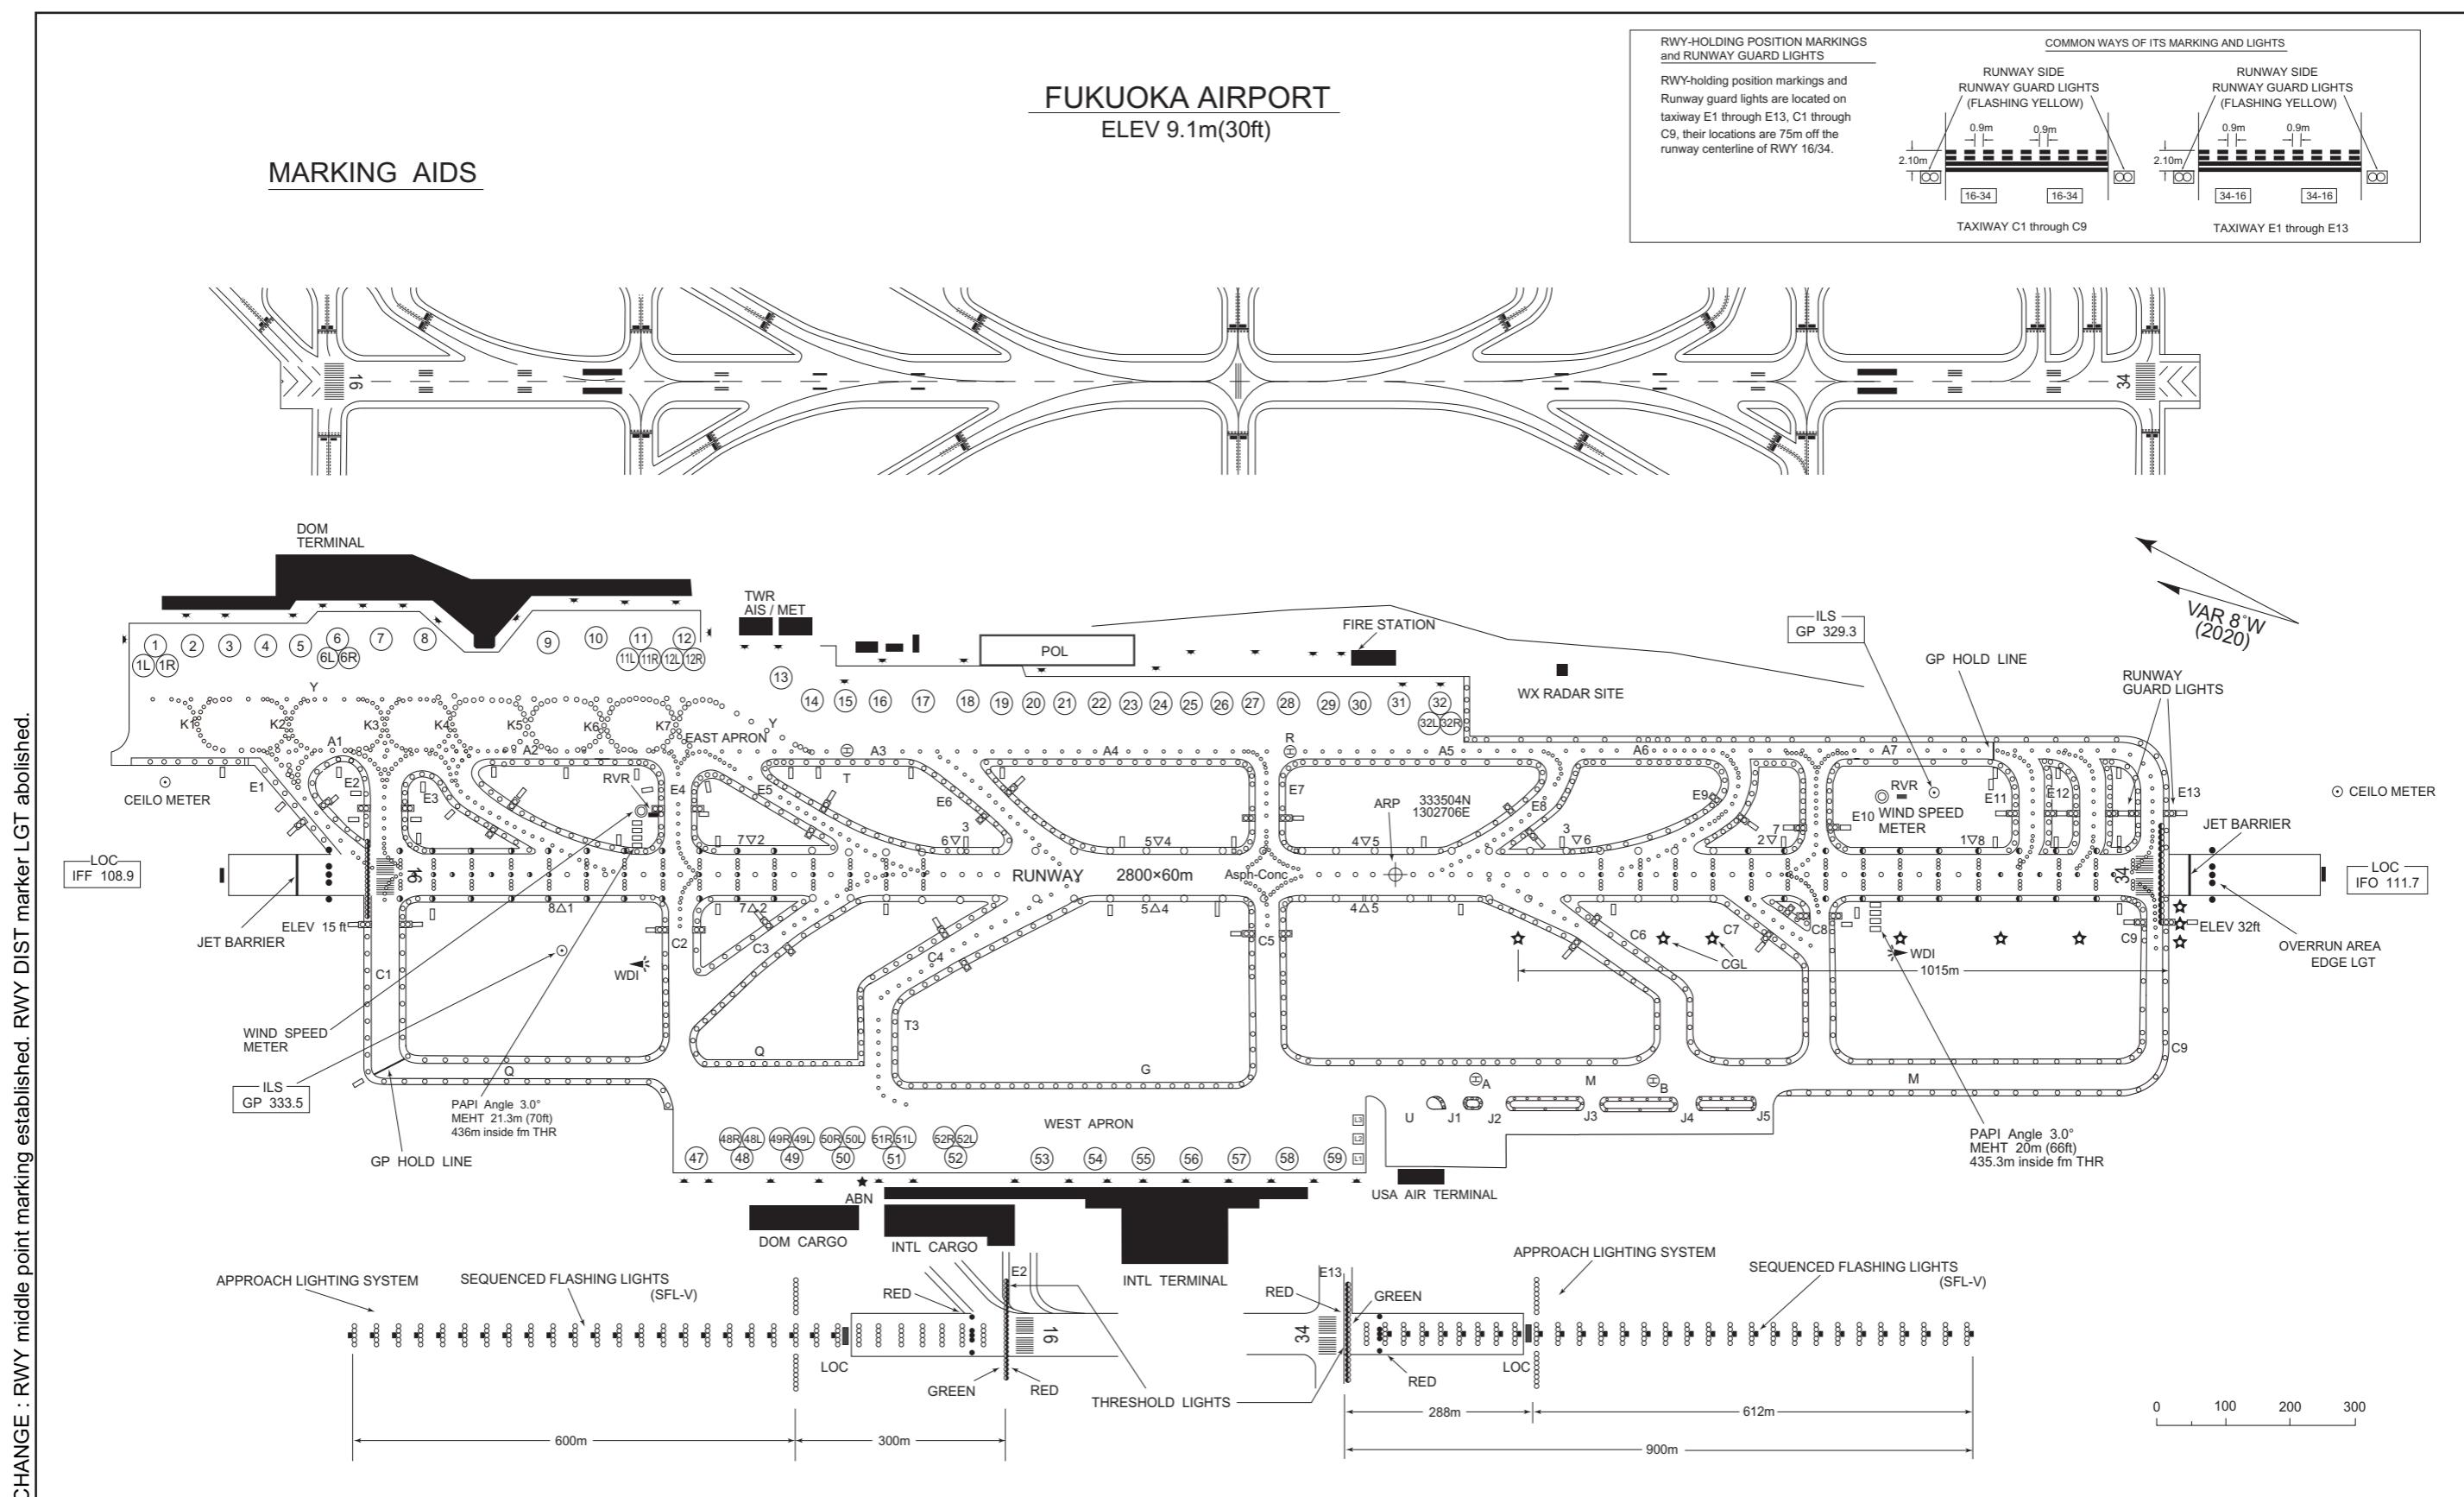

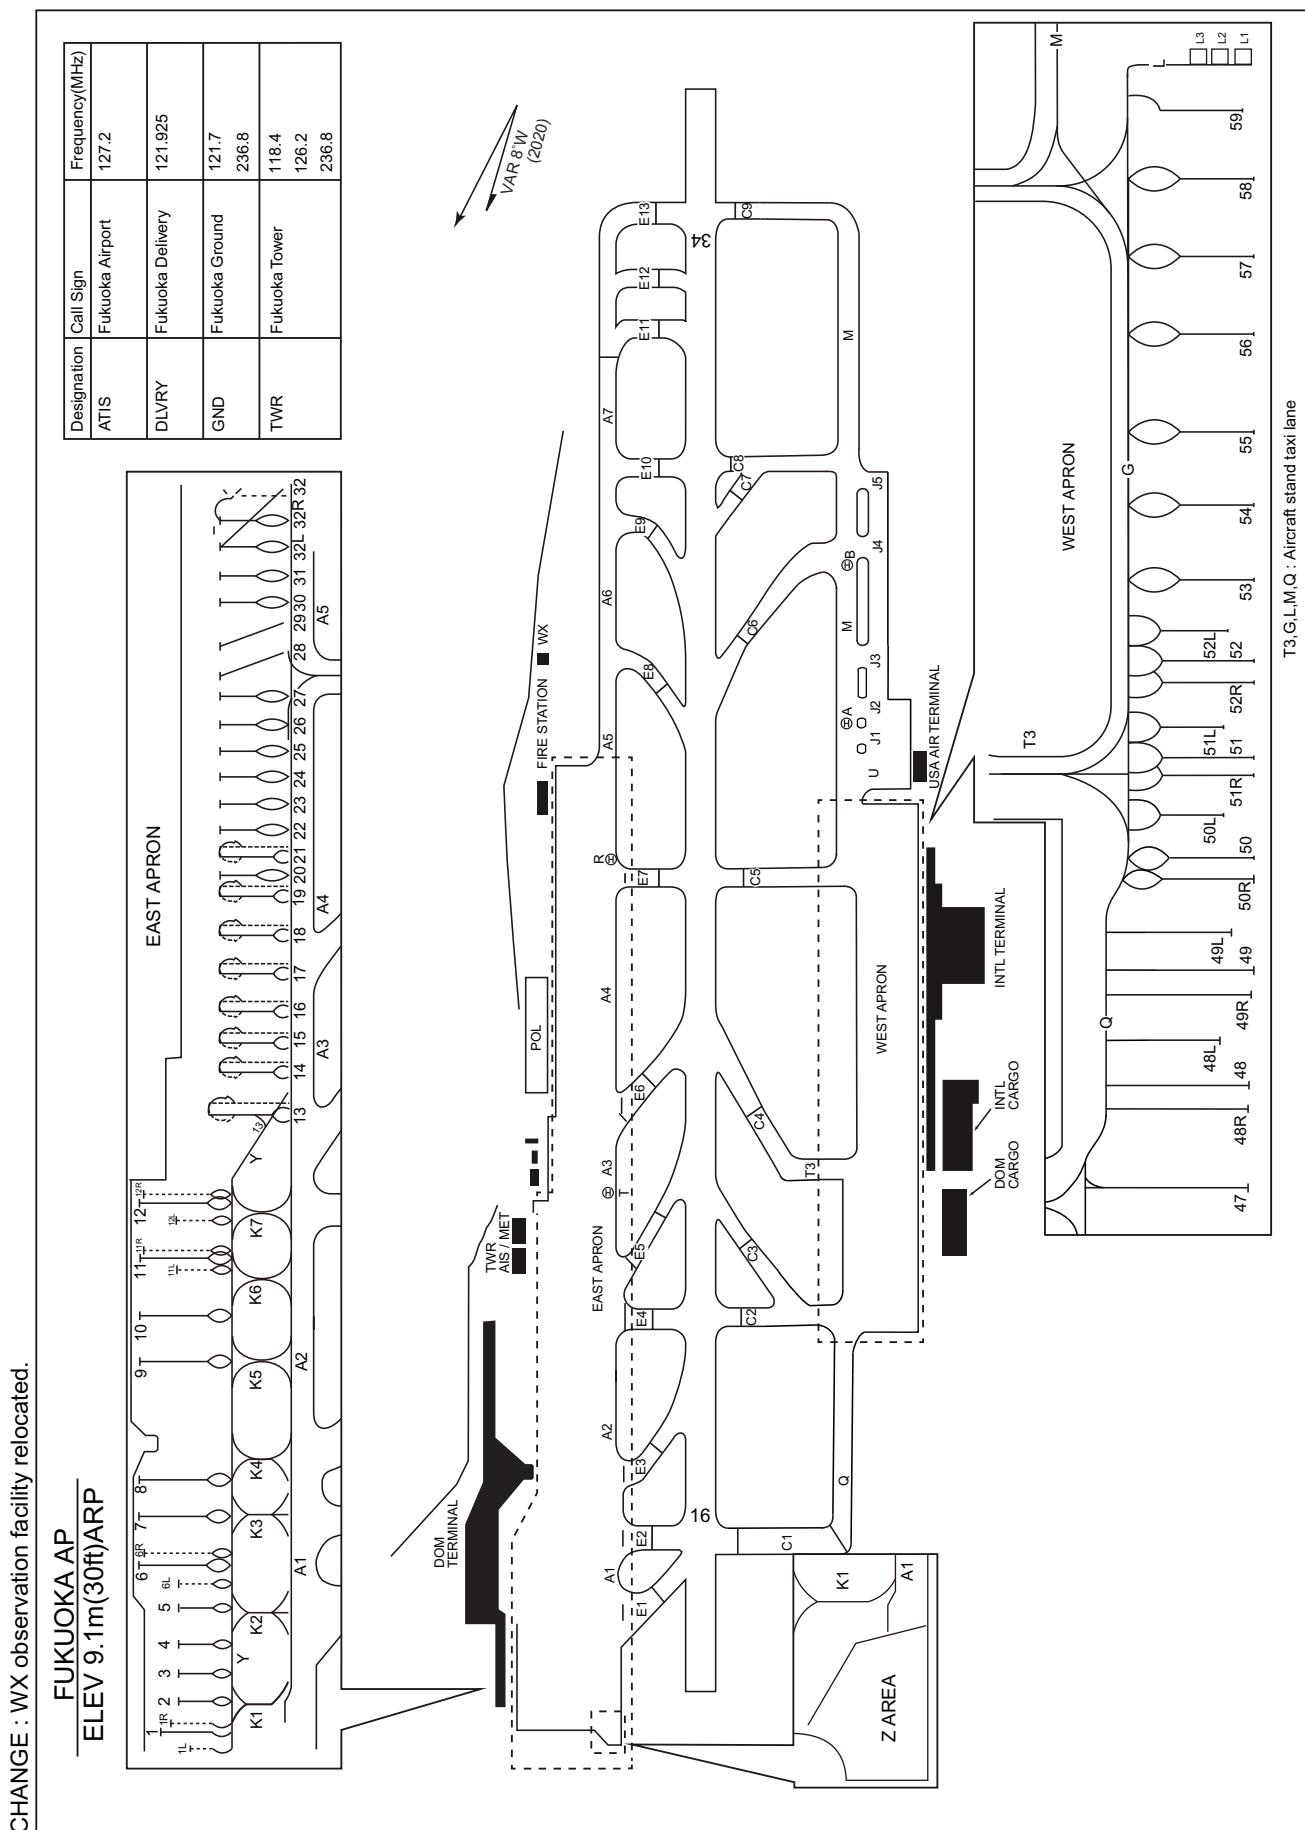

INTENTIONALLY LEFT BLANK

AERODROME OBSTACLE CHART-ICAO




TYPE A (OPERATING LIMITATIONS)

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

MAGNETIC VARIATION 8° W-MAR 2020

FUKUOKA AIRPORT
RWY : 16/34

| DECLARED DISTANCES | | |
|--------------------|------------------------------------|-------|
| RWY 16 | RWY | |
| 2800m | TAKE OFF RUN AVAILABLE | 2800m |
| 2800m | TAKE OFF DISTANCE AVAILABLE | 2800m |
| 2800m | ACCELERATE STOP DISTANCE AVAILABLE | 2800m |
| 2800m | LANDING DISTANCE AVAILABLE | 2800m |

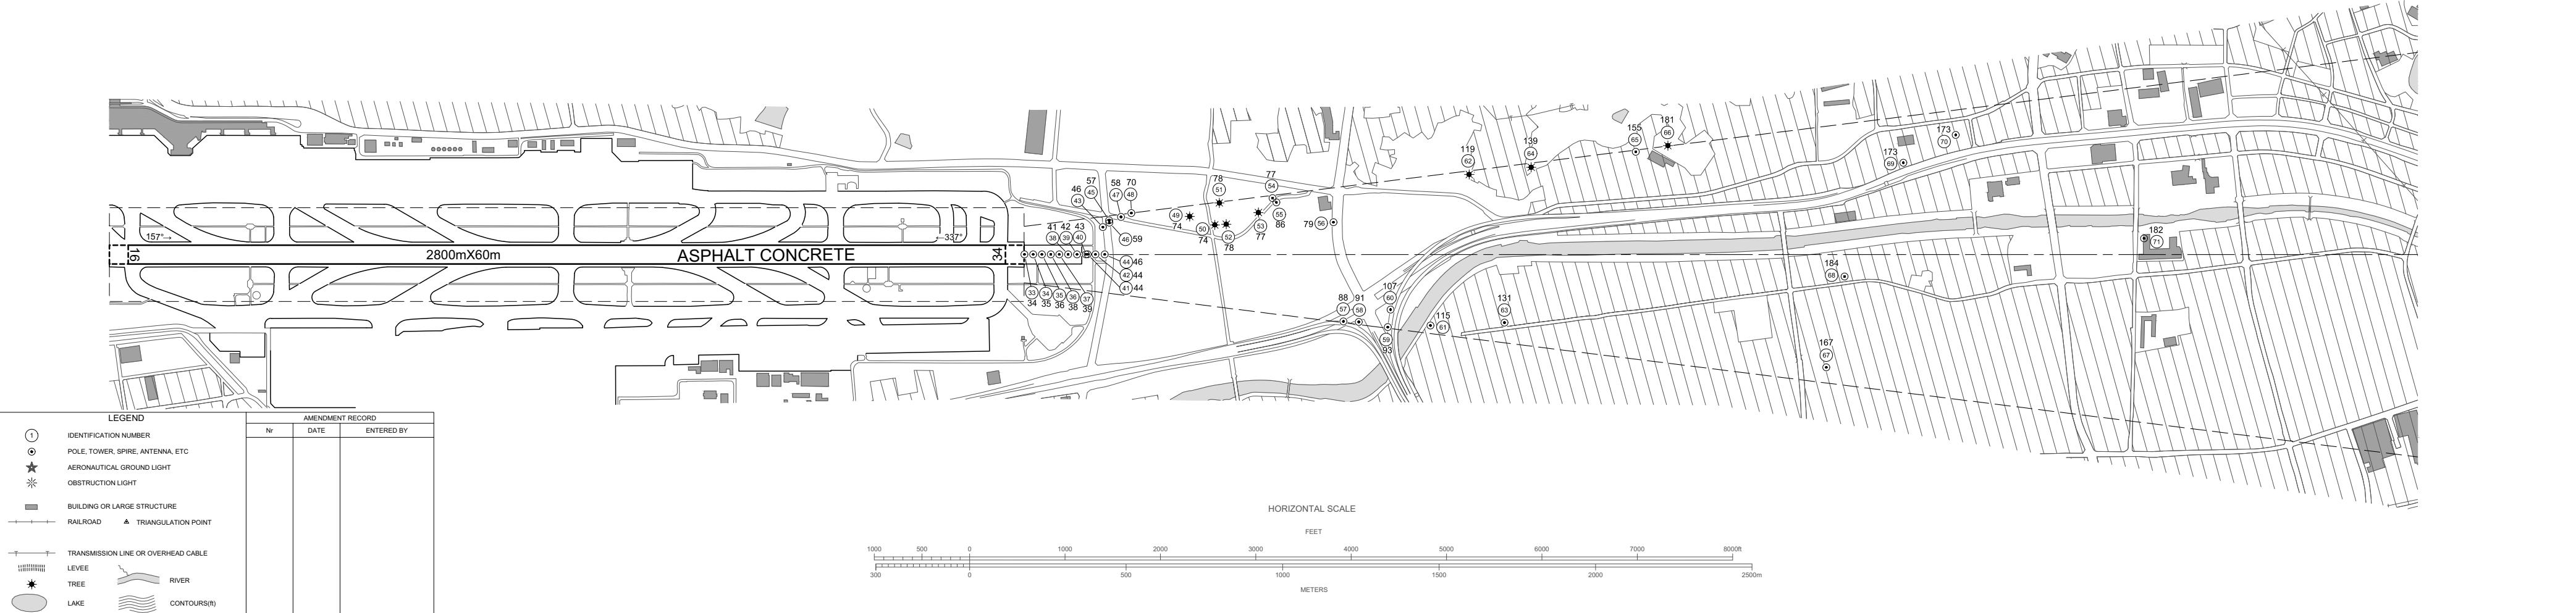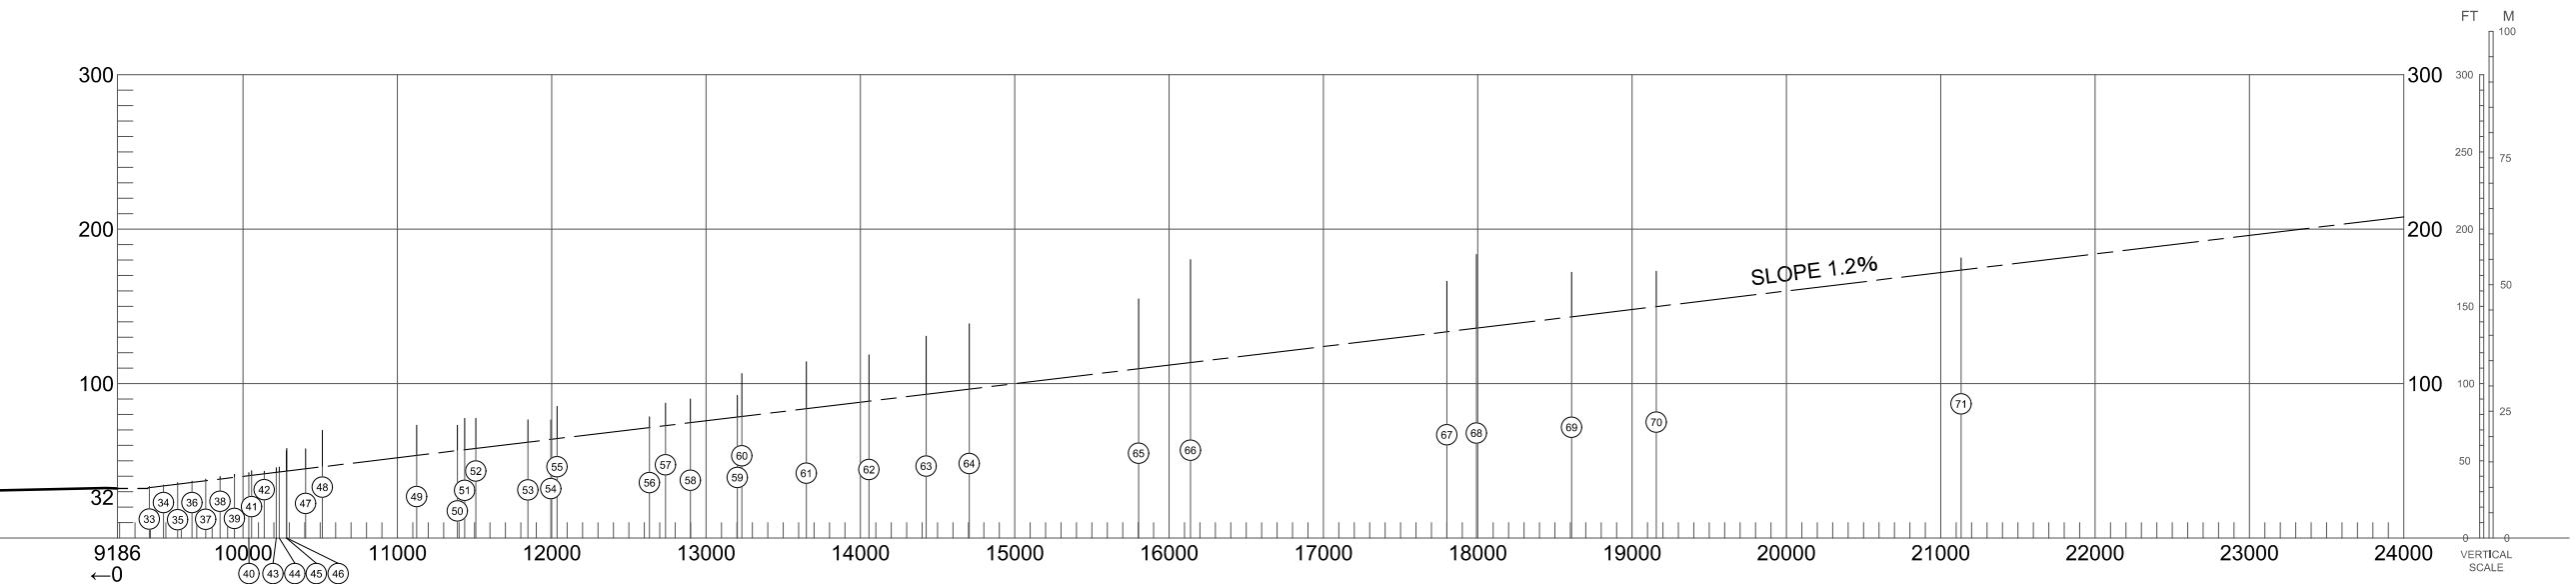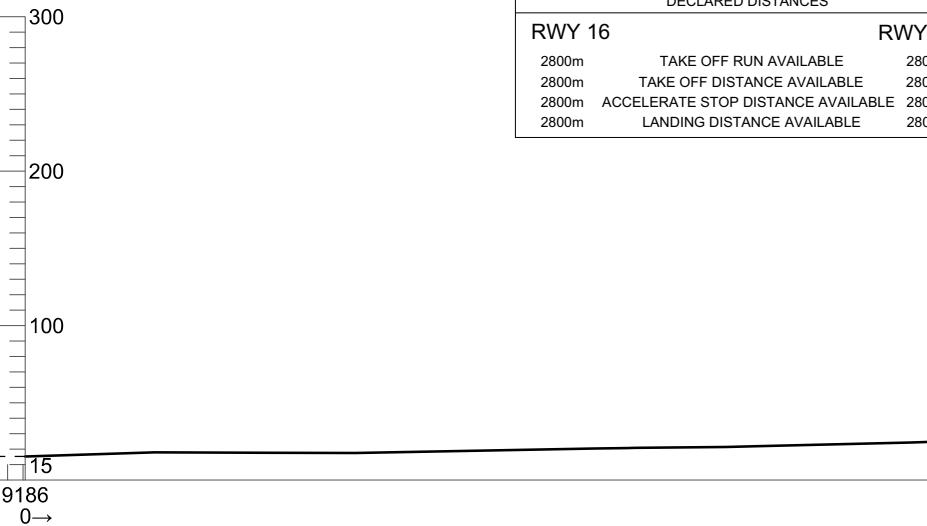


AERODROME OBSTACLE CHART-ICAO

TYPE A (OPERATING LIMITATIONS)


DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

MAGNETIC VARIATION 8°W-MAR 2020

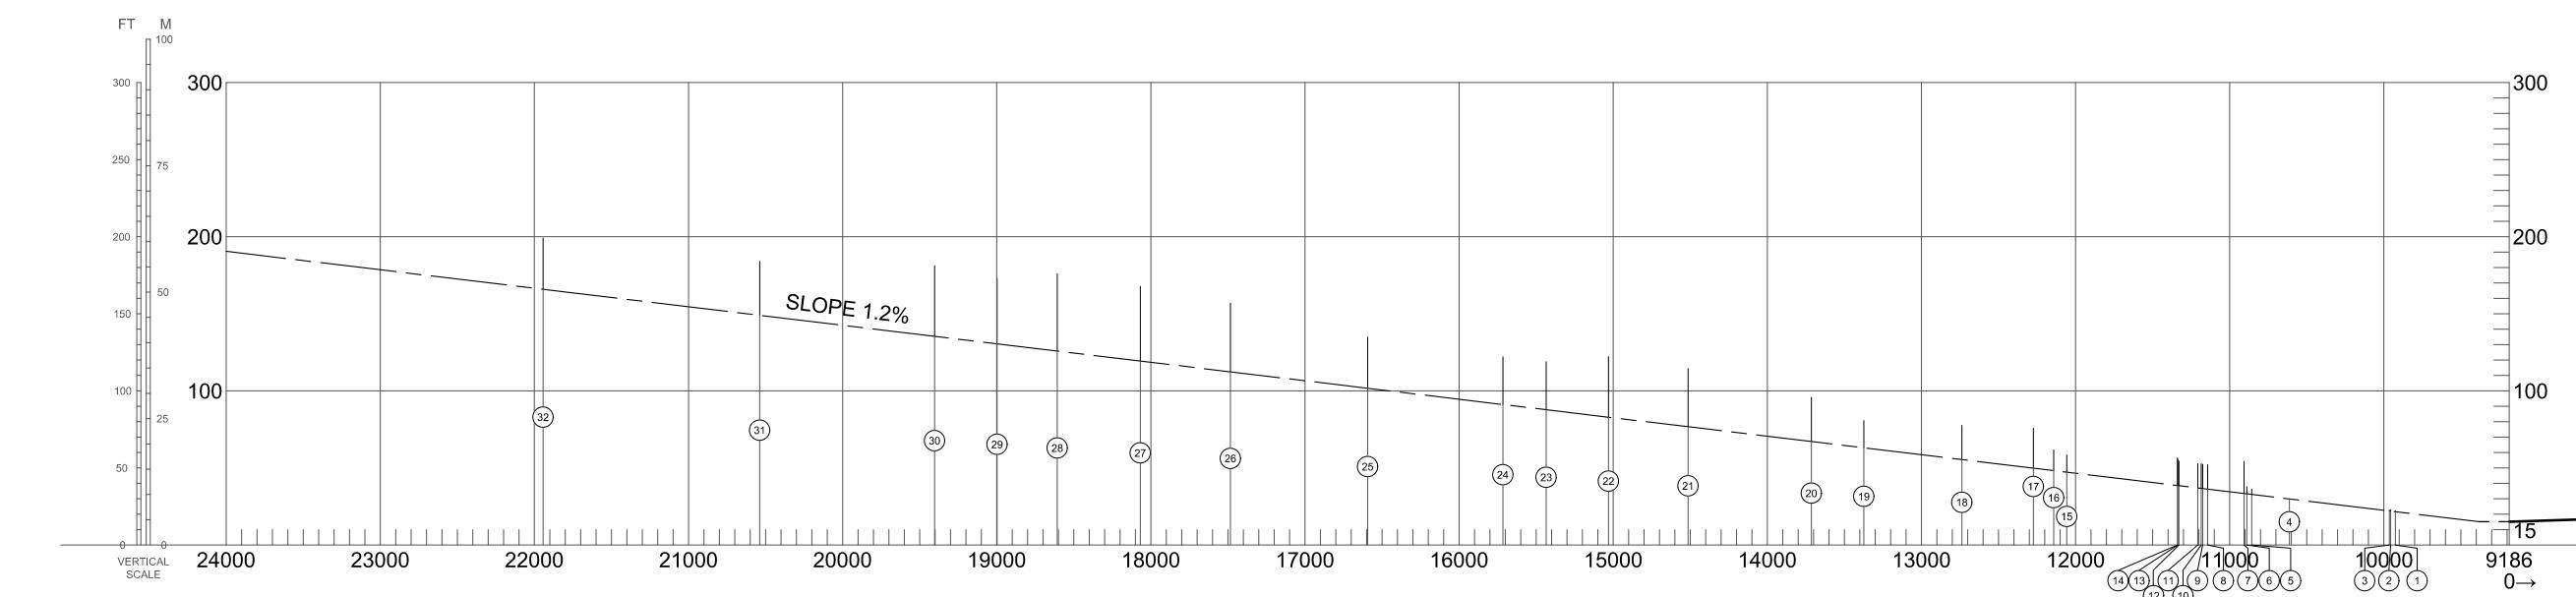

FUKUOKA AIRPORT
RWY : 16/34

| DECLARED DISTANCES | | |
|--------------------|------------------------------------|--------|
| RWY 16 | | RWY 34 |
| 2800m | TAKE OFF RUN AVAILABLE | 2800m |
| 2800m | TAKE OFF DISTANCE AVAILABLE | 2800m |
| 2800m | ACCELERATE STOP DISTANCE AVAILABLE | 2800m |
| 2800m | LANDING DISTANCE AVAILABLE | 2800m |

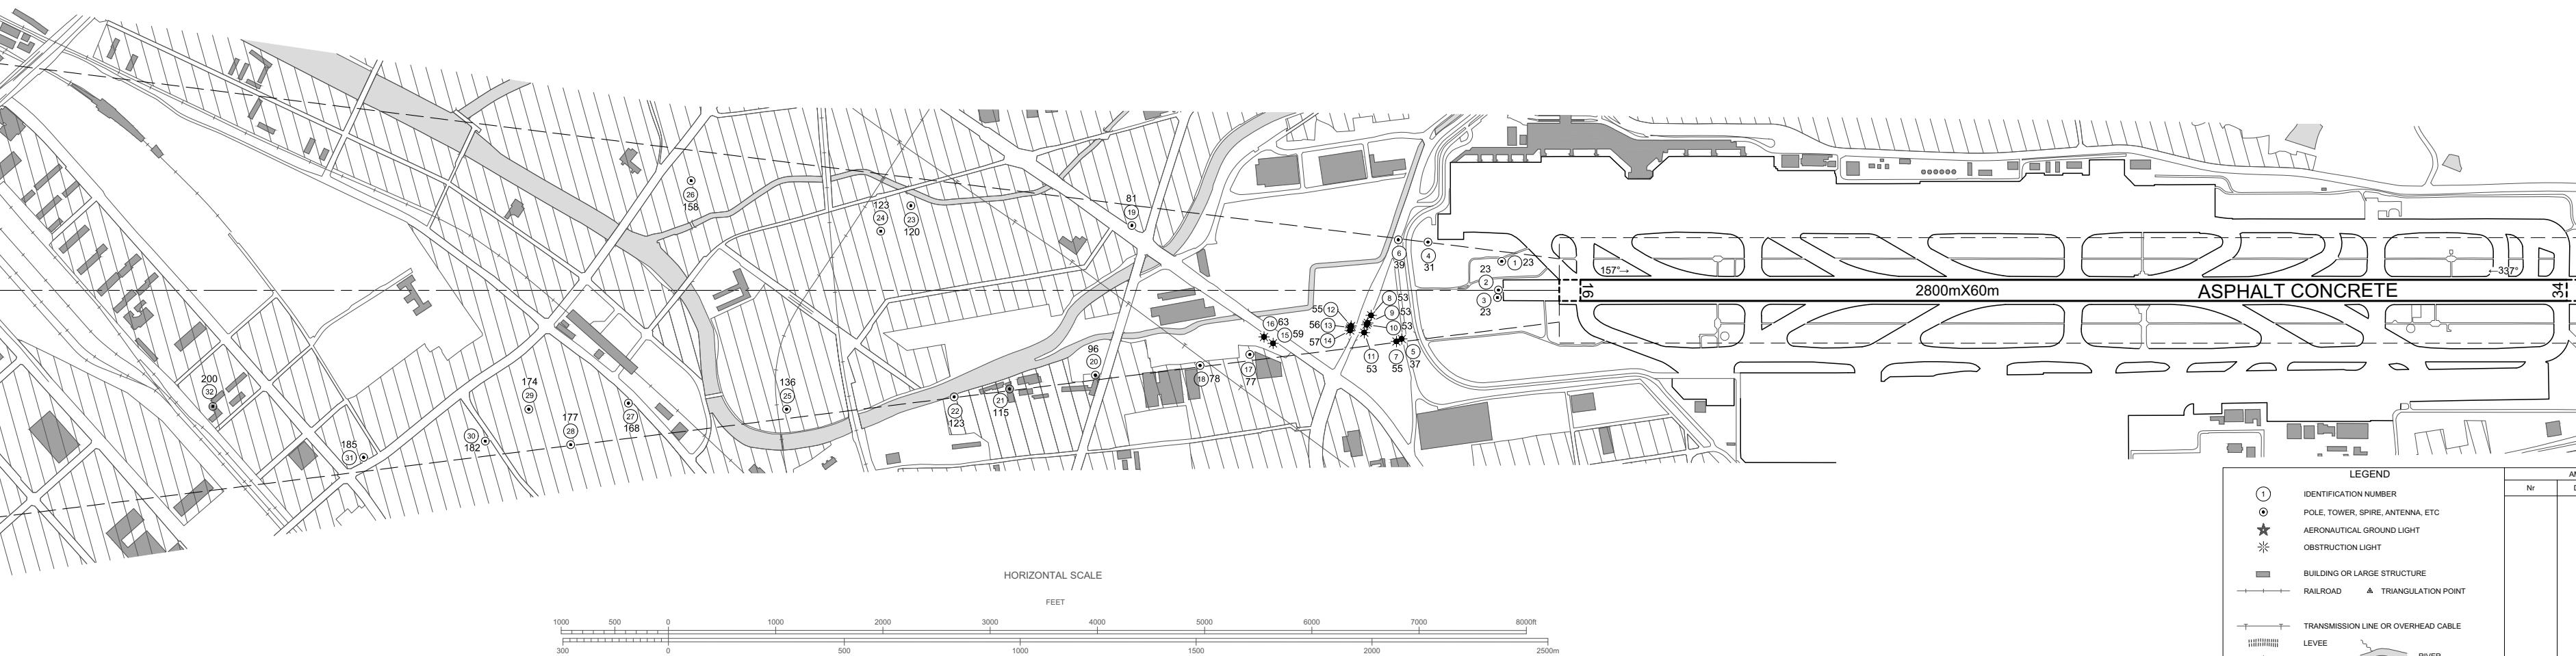

CHANGE:Update

STANDARD DEPARTURE CHART -INSTRUMENT

RJFF / FUKUOKA

SID

OGUNI EIGHT DEPARTURE

RWY 16 : Climb RWY HDG to 700FT, turn right, via DGC R160 to 30.0DME, turn left, via TFE R256 to OGUNI.

Cross DGC R160/28.0DME between FL150 and FL200.


RWY 34 : Climb RWY HDG to 3000FT, turn right HDG176° to intercept and proceed via DGC R146 to OGUNI.

Cross DGC R146/9.0DME at or below 10000FT, cross DGC R146/28.0DME at or below FL200, cross OGUNI at or above FL150.

Note RWY16 : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.

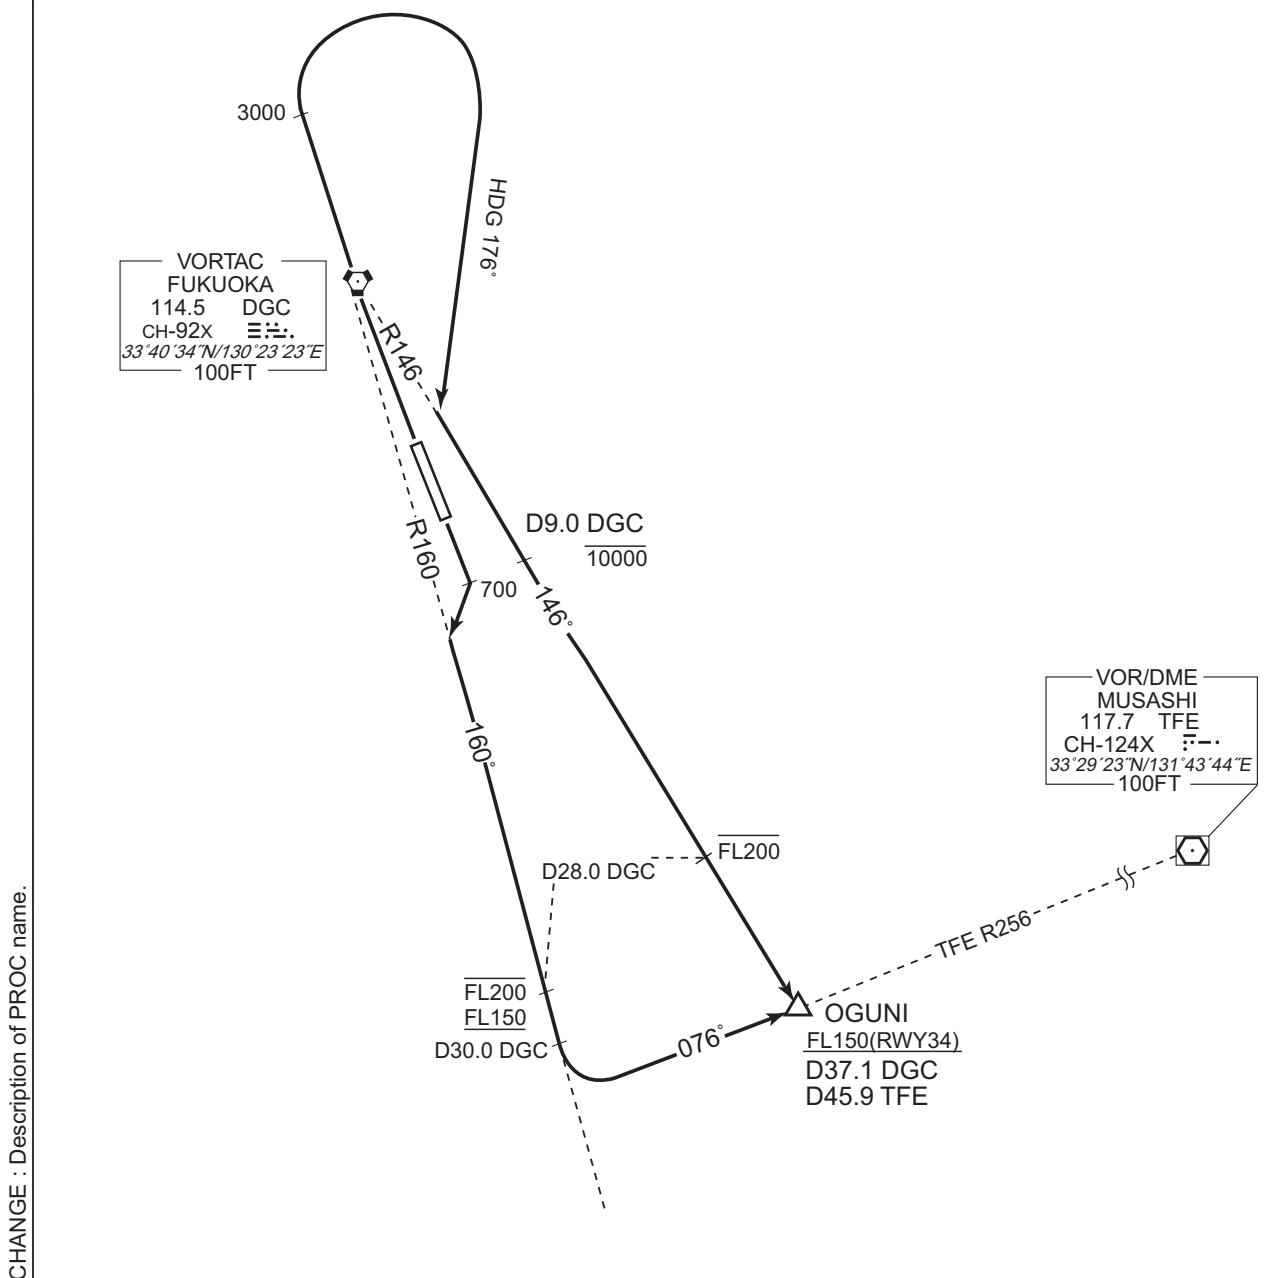

STANDARD DEPARTURE CHART -INSTRUMENT


RJFF / FUKUOKA

TRANSITION

MUSASHI TRANSITION

From over OGUNI, via TFE R256 to TFE VOR/DME.

Cross TFE R256/30.0DME at or above FL170.

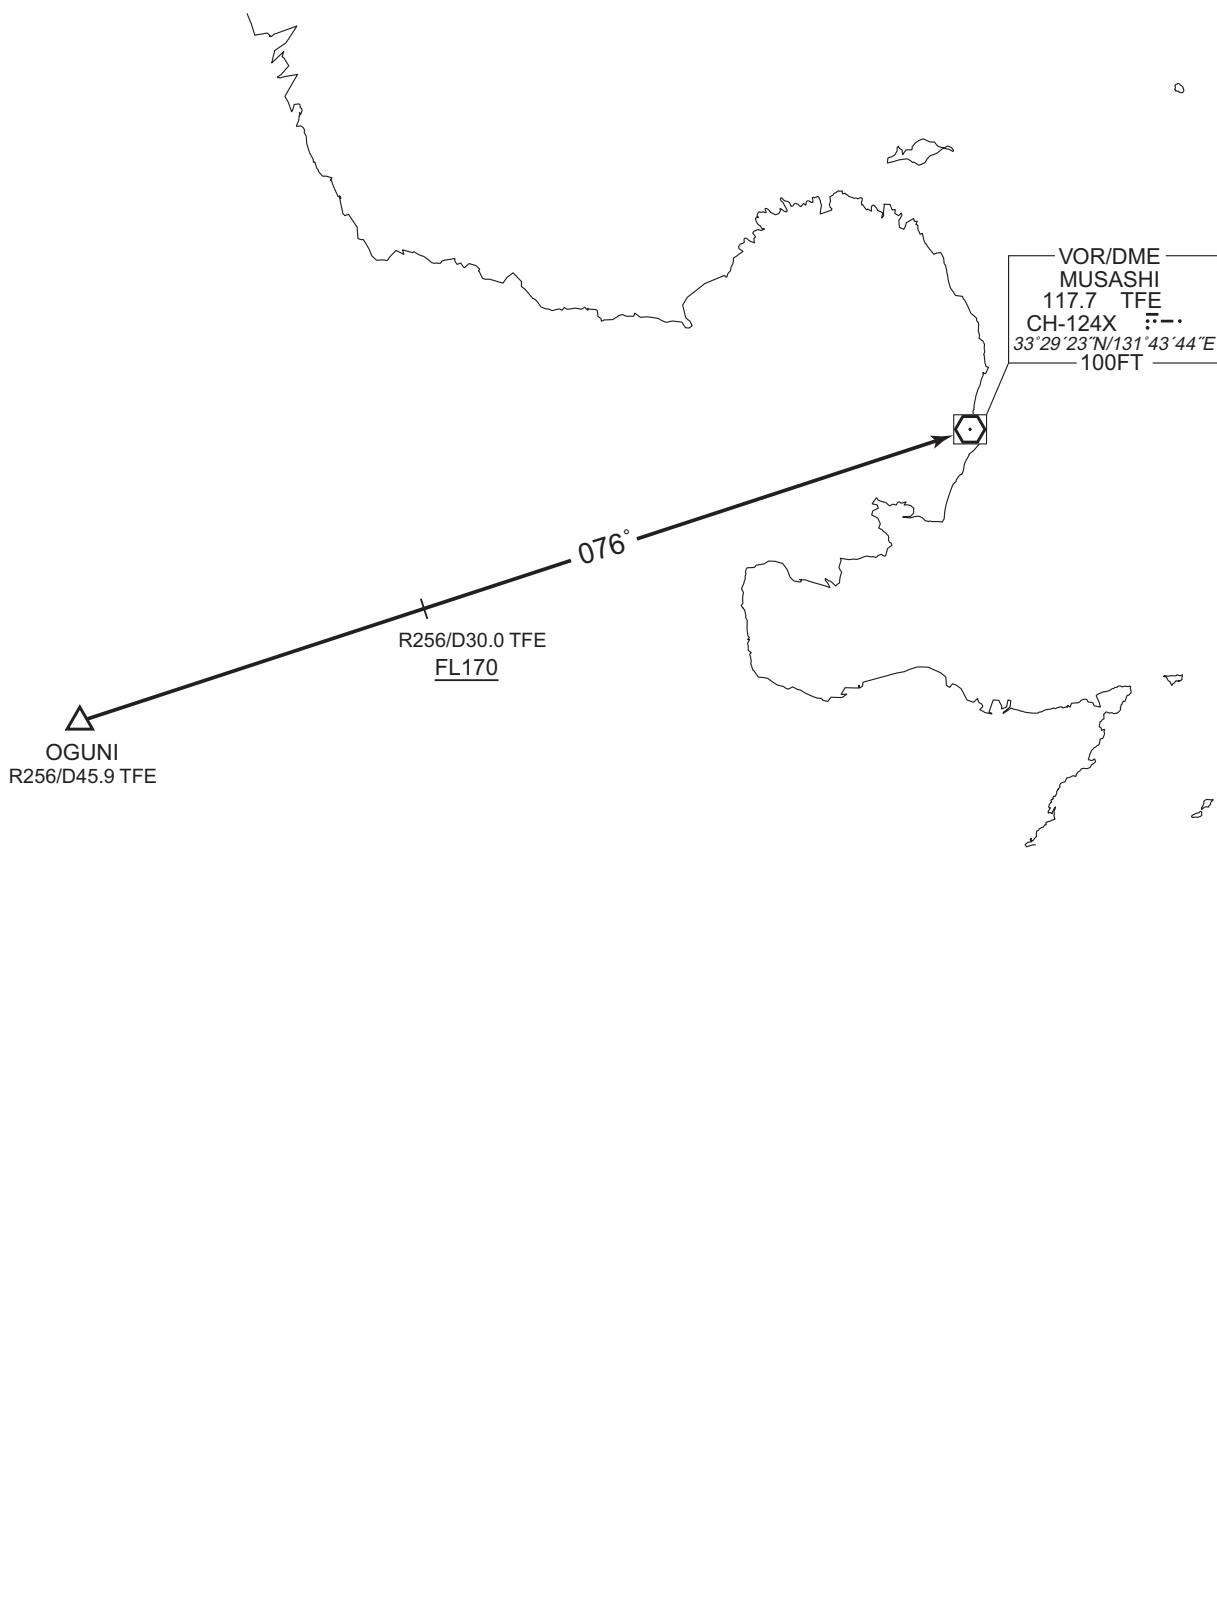

STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

SID

YAMEK NINE DEPARTURE

RWY 16 : Climb RWY HDG to 700FT, turn right, via DGC R160 to YAMEK.

Cross YAMEK at or above 5000FT.

RWY 34 : Climb RWY HDG to 3000FT, turn right HDG 176° to intercept and proceed via DGC R146 to DGC 17.6DME, turn right, via SGE R058 to YAMEK.


Cross DGC R146/9.0DME at or below 10000FT, cross YAMEK at or above 5000FT.

Note RWY16 : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.

CHANGE : Description of PROC name.

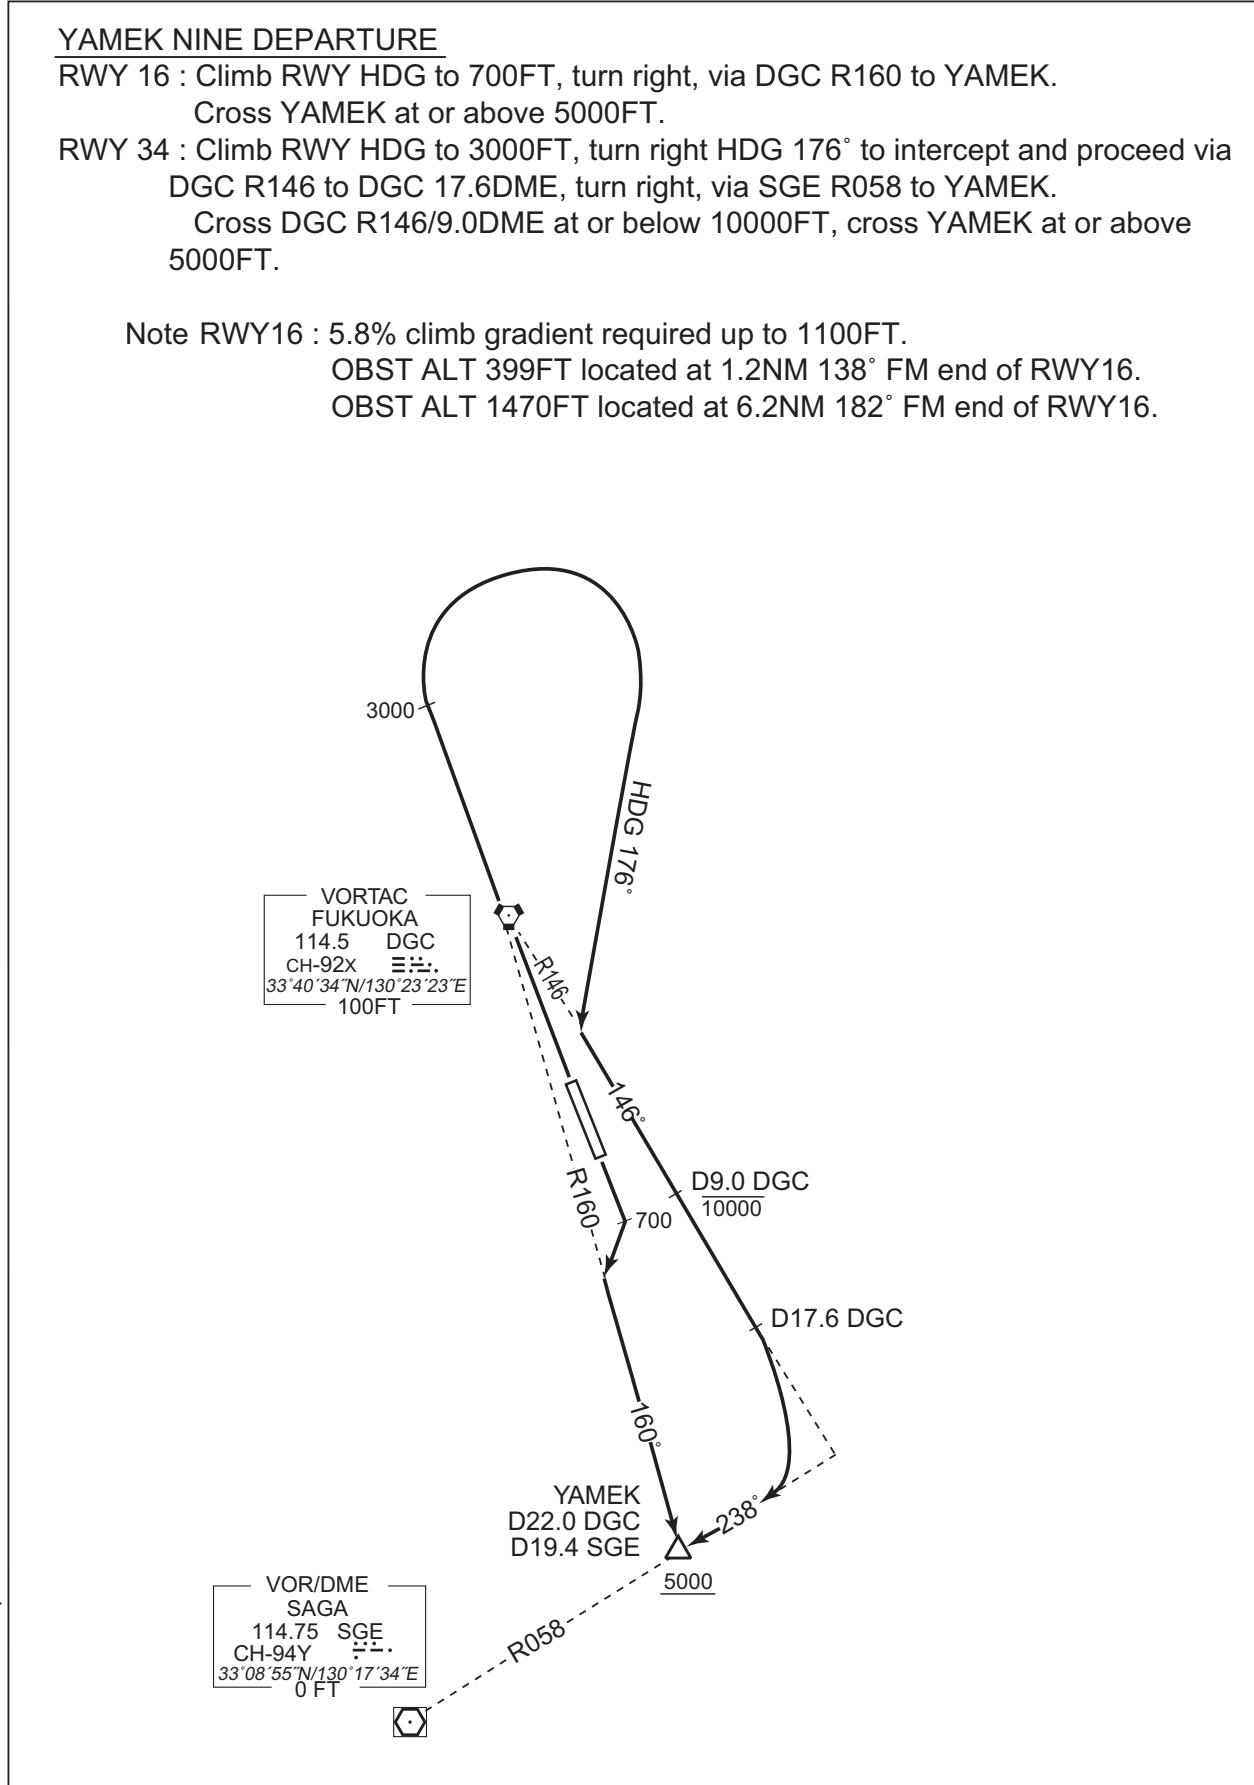

STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

SID


YAMGA SEVEN DEPARTURE

RWY 16 : Climb RWY HDG to 700FT, turn right, via DGC R160 to YAMGA.
 Cross DGC R160/28.0DME at or below FL200, cross YAMGA at or above 13000FT.
 RWY 34 : Climb RWY HDG to 3000FT, turn right HDG 176° to intercept and proceed via DGC R146 to YURRY, turn right, via KUE R351 to YAMGA.
 Cross DGC R146/9.0DME at or below 10000FT, cross KUE R351/28.0DME at or below FL200, cross YAMGA at or above 13000FT.

Note RWY16 : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.

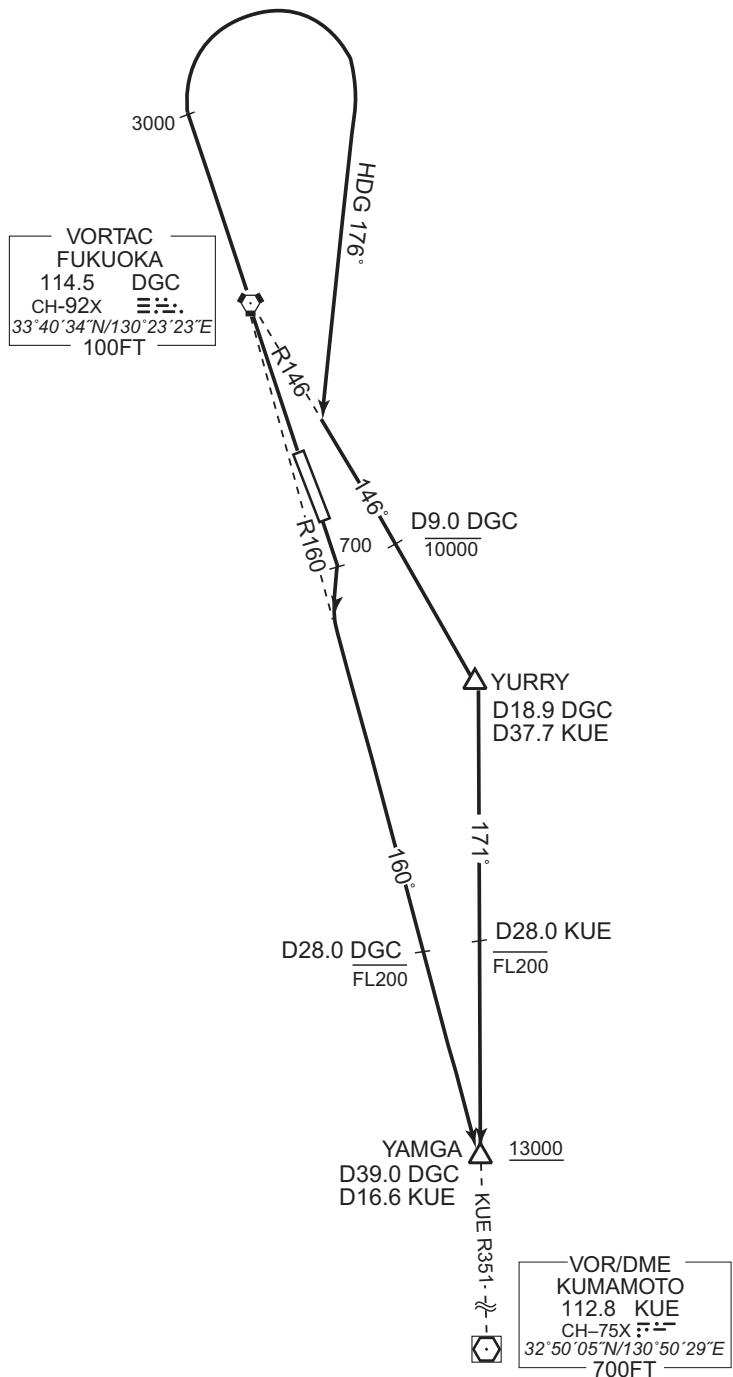

CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

SID

FUKUOKA FOUR DEPARTURE

RWY 16 : Climb RWY HDG to 700FT, turn right, via DGC R160 to YAMEK, turn right, via DGC R179 (MRA 7000FT) to DGC VORTAC.

Cross YAMEK at or above 5000FT.


RWY 34 : Climb direct to DGC VORTAC.

Note RWY16 : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.

CHANGE : Description of PROC name.

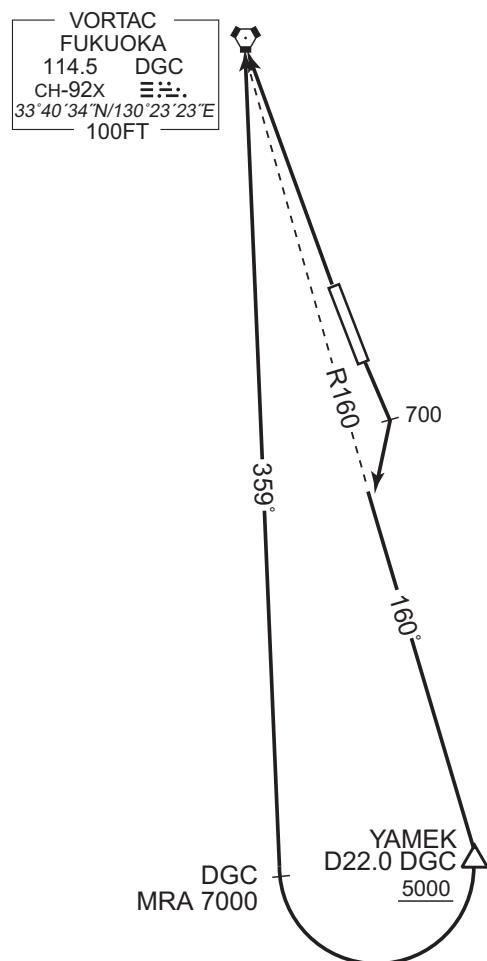

STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

TRANSITION

KAGOSHIMA TRANSITION

From over YAMGA, proceed via HKC R013 to HKC VORTAC via KEIKA, IPUDO and AJISE.
Cross KEIKA at or below FL180.

KUMAMOTO TRANSITION

From over YAMGA, proceed via KUE R351 to KUE VOR/DME via ABECK.
Cross ABECK at assigned altitude.

SAGA TRANSITION

From over YAMEK, proceed via SGE R058 to SGE VOR/DME.

MIZMA TRANSITION

From over YAMEK, proceed via SGE R058 to MIZMA.
Cross MIZMA at or above 8000FT.

IKI TRANSITION

From over YAMEK, turn right, proceed via IKE R128 to IKE VOR/DME .
Cross IKE R128/37.0DME at or above 6000FT.


CHANGE : Radial FM HKC.

STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

TRANSITION

CHANGE : Radial FM HKC. DIST FM HKC(YAMGA).

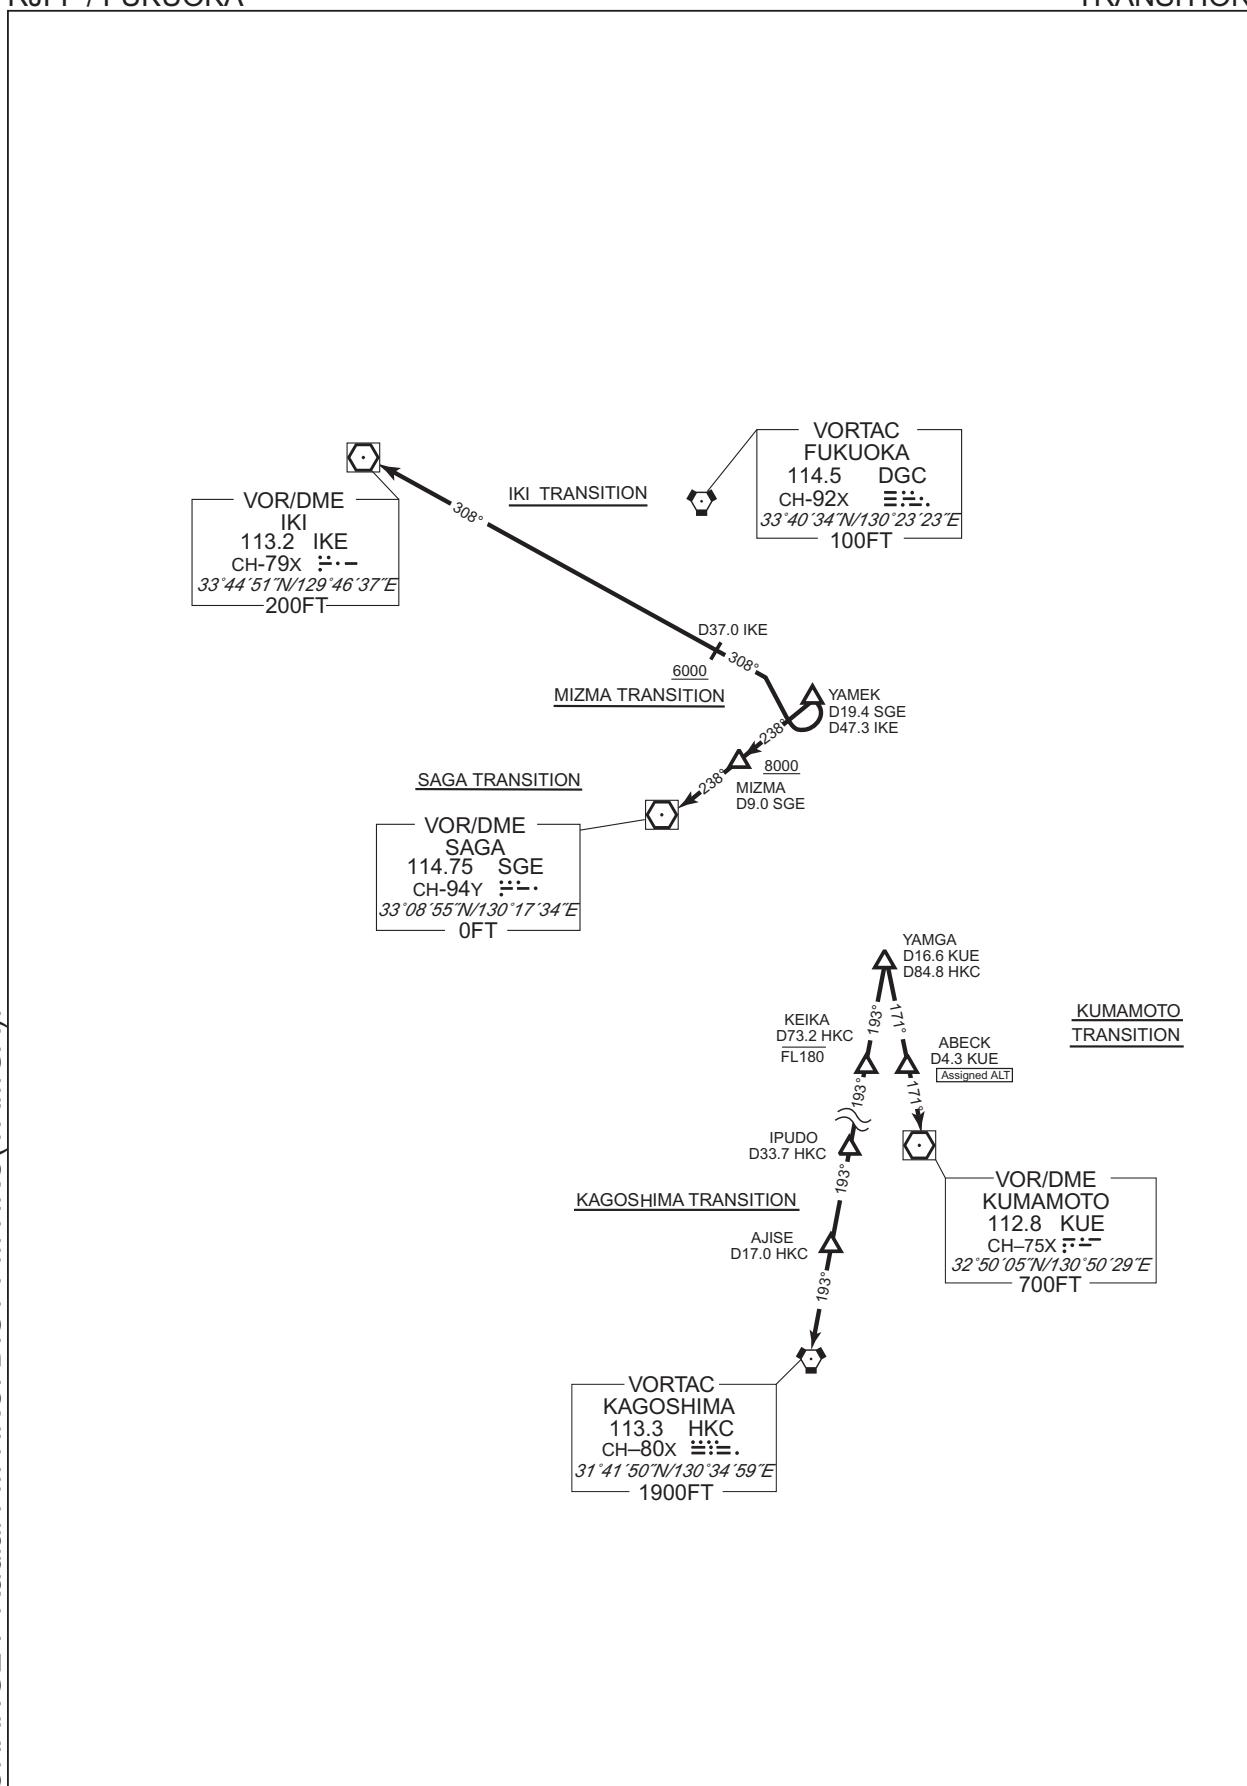


STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV SID

| YOKAT FIVE DEPARTURE | | RNAV 1 |
|---|--|--|
| Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required. | Critical DME | RWY16 : DGC "1.0NM FM DER~5.4NM FM DER" IKE "1.0NM FM DER~5.4NM FM DER" RWY34 : DGC "3.5NM to FF401~2.2NM to FF401" IKE "3.5NM to FF401~2.2NM to FF401" |
| | DME GAP | RWY16 : DER~1.0NM FM DER RWY34 : DER~0.9NM FM DER 2.2NM to FF401~FF403 |
| | Inappropriate Navaids See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 | |

VAR 8°W

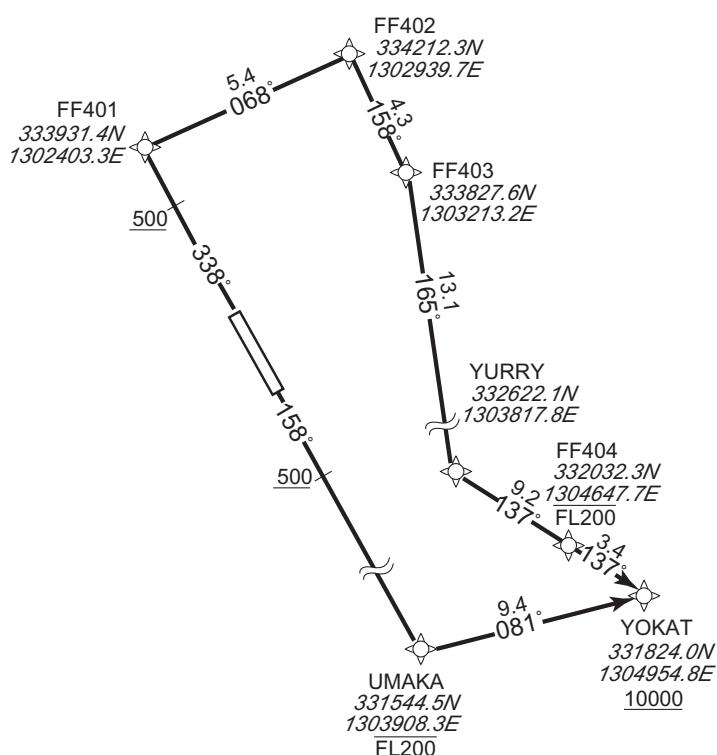

CHANGE : Description of VAR and PROC name.

RWY34 : Climb on HDG 338° at or above 500FT, direct to FF401, to FF402, to FF403, to YURRY, to FF404 at or below FL200, to YOKAT at or above 10000FT.

RWY16 : Climb on HDG 158° at or above 500FT, direct to UMAKA at or below FL200, to YOKAT at or above 10000FT.

Note RWY34 : 7.0% climb gradient required up to 2800FT.

RWY16 : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.

STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV SID

YOKAT FIVE DEPARTURE

RWY34

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 338 (330.3) | -7.7 | — | — | +500 | — | — | RNAV1 |
| 002 | DF | FF401 | — | — | -7.7 | — | — | — | — | — | RNAV1 |
| 003 | TF | FF402 | — | 068 (060.1) | -7.7 | 5.4 | — | — | — | — | RNAV1 |
| 004 | TF | FF403 | — | 158 (150.4) | -7.7 | 4.3 | — | — | — | — | RNAV1 |
| 005 | TF | YURRY | — | 165 (157.2) | -7.7 | 13.1 | — | — | — | — | RNAV1 |
| 006 | TF | FF404 | — | 137 (129.4) | -7.7 | 9.2 | — | -FL200 | — | — | RNAV1 |
| 007 | TF | YOKAT | — | 137 (129.4) | -7.7 | 3.4 | — | +10000 | — | — | RNAV1 |

RWY16

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 158 (150.3) | -7.7 | — | — | +500 | — | — | RNAV1 |
| 002 | DF | UMAKA | — | — | -7.7 | — | — | -FL200 | — | — | RNAV1 |
| 003 | TF | YOKAT | — | 081 (073.5) | -7.7 | 9.4 | — | +10000 | — | — | RNAV1 |


CHANGE : VAR. PROC renamed. PROC course.

STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV TRANSITION

| BRAID TRANSITION / MATSUYAMA TRANSITION / SALTY TRANSITION YANKS TRANSITION / SPIDE TRANSITION / SABAR TRANSITION | | RNAV 1 |
|--|-----------------------|--|
| Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required. | Critical DME | SABAR TRANSITION : SWE "YOKAT ~ RUISA" SGE "HOSEN ~ RUISA" |
| | DME GAP | — |
| | Inappropriate Navaids | See AD1.1.6.10.3. Inappropriate NAVIDs for RNAV1 |

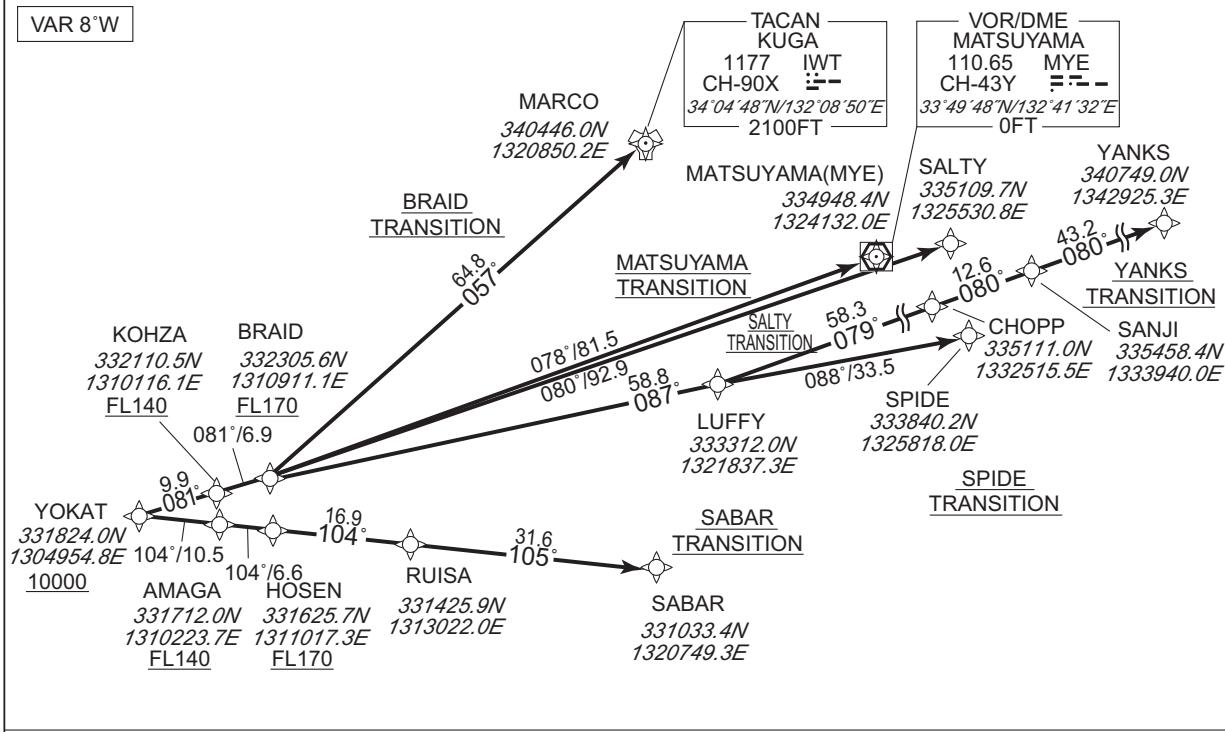

CHANGE : Description of VAR.

BRAID TRANSITION

From YOKAT at or above 10000FT, to KOHZA at or above FL140, to BRAID at or above FL170, to MARCO.

MATSUYAMA TRANSITION

From YOKAT at or above 10000FT, to KOHZA at or above FL140, to BRAID at or above FL170, to MYE.

SALTY TRANSITION

From YOKAT at or above 10000FT, to KOHZA at or above FL140, to BRAID at or above FL170, to SALTY.

YANKS TRANSITION

From YOKAT at or above 10000FT, to KOHZA at or above FL140, to BRAID at or above FL170, to LUFFY, to CHOPP, to SANJI, to YANKS.

SPIDE TRANSITION

From YOKAT at or above 10000FT, to KOHZA at or above FL140, to BRAID at or above FL170, to LUFFY, to SPIDE.

SABAR TRANSITION

From YOKAT at or above 10000FT, to AMAGA at or above FL140, to HOSEN at or above FL170, to RUISA, to SABAR.

STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV TRANSITION

| BRAID TRANSITION | | | | | | | | | | | | |
|------------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|--|
| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification | |
| 001 | IF | YOKAT | — | — | -7.7 | — | — | +10000 | — | — | RNAV1 | |
| 002 | TF | KOHZA | — | 081 (073.6) | -7.7 | 9.9 | — | +FL140 | — | — | RNAV1 | |
| 003 | TF | BRAID | — | 081 (073.8) | -7.7 | 6.9 | — | +FL170 | — | — | RNAV1 | |
| 004 | TF | MARCO | — | 057 (049.7) | -7.7 | 64.8 | — | — | — | — | RNAV1 | |

MATSUYAMA TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | YOKAT | — | — | -7.7 | — | — | +10000 | — | — | RNAV1 |
| 002 | TF | KOHZA | — | 081 (073.6) | -7.7 | 9.9 | — | +FL140 | — | — | RNAV1 |
| 003 | TF | BRAID | — | 081 (073.8) | -7.7 | 6.9 | — | +FL170 | — | — | RNAV1 |
| 004 | TF | MYE | — | 078 (070.4) | -7.7 | 81.5 | — | — | — | — | RNAV1 |

SALTY TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | YOKAT | — | — | -7.7 | — | — | +10000 | — | — | RNAV1 |
| 002 | TF | KOHZA | — | 081 (073.6) | -7.7 | 9.9 | — | +FL140 | — | — | RNAV1 |
| 003 | TF | BRAID | — | 081 (073.8) | -7.7 | 6.9 | — | +FL170 | — | — | RNAV1 |
| 004 | TF | SALTY | — | 080 (071.9) | -7.7 | 92.9 | — | — | — | — | RNAV1 |

CHANGE : VAR. Course FM BRAID to SALTY.

STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV TRANSITION

YANKS TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | YOKAT | — | — | -7.7 | — | — | +10000 | — | — | RNAV1 |
| 002 | TF | KOHZA | — | 081 (073.6) | -7.7 | 9.9 | — | +FL140 | — | — | RNAV1 |
| 003 | TF | BRAID | — | 081 (073.8) | -7.7 | 6.9 | — | +FL170 | — | — | RNAV1 |
| 004 | TF | LUFFY | — | 087 (079.8) | -7.7 | 58.8 | — | — | — | — | RNAV1 |
| 005 | TF | CHOPP | — | 079 (071.7) | -7.7 | 58.3 | — | — | — | — | RNAV1 |
| 006 | TF | SANJI | — | 080 (072.4) | -7.7 | 12.6 | — | — | — | — | RNAV1 |
| 007 | TF | YANKS | — | 080 (072.5) | -7.7 | 43.2 | — | — | — | — | RNAV1 |

SPIDE TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | YOKAT | — | — | -7.7 | — | — | +10000 | — | — | RNAV1 |
| 002 | TF | KOHZA | — | 081 (073.6) | -7.7 | 9.9 | — | +FL140 | — | — | RNAV1 |
| 003 | TF | BRAID | — | 081 (073.8) | -7.7 | 6.9 | — | +FL170 | — | — | RNAV1 |
| 004 | TF | LUFFY | — | 087 (079.8) | -7.7 | 58.8 | — | — | — | — | RNAV1 |
| 005 | TF | SPIDE | — | 088 (080.4) | -7.7 | 33.5 | — | — | — | — | RNAV1 |

SABAR TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | YOKAT | — | — | -7.7 | — | — | +10000 | — | — | RNAV1 |
| 002 | TF | AMAGA | — | 104 (096.5) | -7.7 | 10.5 | — | +FL140 | — | — | RNAV1 |
| 003 | TF | HOSEN | — | 104 (096.6) | -7.7 | 6.6 | — | +FL170 | — | — | RNAV1 |
| 004 | TF | RUISA | — | 104 (096.7) | -7.7 | 16.9 | — | — | — | — | RNAV1 |
| 005 | TF | SABAR | — | 105 (096.9) | -7.7 | 31.6 | — | — | — | — | RNAV1 |

CHANGE : VAR. CHOPP established. Course FM RUISA to SABAR.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID and TRANSITION

| KURUME FOUR DEPARTURE GABAI TRANSITION / BRUIN TRANSITION / GENKAI TRANSITION | | RNAV 1 |
|--|-----------------------|--|
| Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required. | Critical DME | RWY16 :DGC "1.0NM FM DER~5.4NM FM DER" IKE "1.0NM FM DER~5.4NM FM DER" RWY34 :DGC "3.5NM to FF401~2.2NM to FF401" IKE "3.5NM to FF401~2.2NM to FF401" BRUIN TRANSITION : DGC "2NM to OMUTA~OMUTA" |
| | DME GAP | RWY16 :DER~1.0NM FM DER RWY34 :DER~0.9NM FM DER 2.2NM to FF401~FF403 GABAI TRANSITION : 6.4NM to SGE~SGE |
| | Inappropriate Navaids | Inappropriate Navaids See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |
| <div style="border: 1px solid black; padding: 2px; display: inline-block;">VAR 8°W</div> | | |
| <p>KURUME FOUR DEPARTURE</p> <p>RWY34 : Climb on HDG 338° at or above 500FT, direct to FF401, to FF402, to FF403, to YURRY, to YAMEK.</p> <p>RWY16 : Climb on HDG 158° at or above 500FT, direct to YAMEK.</p> <p>Note RWY34 : 7.0% climb gradient required up to 2800FT.</p> <p>RWY16 : 5.8% climb gradient required up to 1100FT.</p> <p>OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.</p> <p>OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.</p> <p>BRUIN TRANSITION From YAMEK, to BRUIN, to OMUTA.</p> <p>GABAI TRANSITION From YAMEK, to SGE.</p> <p>GENKAI TRANSITION From YAMEK, to DAIZE to IKE.</p> | | |

CHANGE : Description of VAR.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID

KURUME FOUR DEPARTURE

RWY34

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 338 (330.3) | -7.7 | — | — | +500 | — | — | RNAV1 |
| 002 | DF | FF401 | — | — | -7.7 | — | — | — | — | — | RNAV1 |
| 003 | TF | FF402 | — | 068 (060.1) | -7.7 | 5.4 | — | — | — | — | RNAV1 |
| 004 | TF | FF403 | — | 158 (150.4) | -7.7 | 4.3 | — | — | — | — | RNAV1 |
| 005 | TF | YURRY | — | 165 (157.2) | -7.7 | 13.1 | — | — | — | — | RNAV1 |
| 006 | TF | YAMEK | — | 210 (202.7) | -7.7 | 5.7 | — | — | — | — | RNAV1 |

RWY16

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 158 (150.3) | -7.7 | — | — | +500 | — | — | RNAV1 |
| 002 | DF | YAMEK | — | — | -7.7 | — | — | — | — | — | RNAV1 |

CHANGE : VAR. SID renamed. PROC course.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV TRANSITION

BRUIN TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | YAMEK | — | — | -7.7 | — | — | — | — | — | RNAV1 |
| 002 | TF | BRUIN | — | 210 (202.4) | -7.7 | 16.2 | — | — | — | — | RNAV1 |
| 003 | TF | OMUTA | — | 210 (202.3) | -7.7 | 2.8 | — | — | — | — | RNAV1 |

GABAI TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | YAMEK | — | — | -7.7 | — | — | — | — | — | RNAV1 |
| 002 | TF | SGE | — | 239 (231.2) | -7.7 | 19.4 | — | — | — | — | RNAV1 |

GENKAI TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | YAMEK | — | — | -7.7 | — | — | — | — | — | RNAV1 |
| 002 | TF | DAIZE | — | 240 (232.7) | -7.7 | 8.5 | — | — | — | — | RNAV1 |
| 003 | TF | IKE | — | 318 (310.4) | -7.7 | 44.8 | — | — | — | — | RNAV1 |

CHANGE : VAR. PROC course.


STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA


RNAV SID and TRANSITION

| MORIO FOUR DEPARTURE SATSUMA TRANSITION / SAKURA TRANSITION | | RNAV 1 |
|--|-----------------------|--|
| Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. | Critical DME | RWY16 :DGC "1.0NM FM DER~5.4NM FM DER" IKE "1.0NM FM DER~5.4NM FM DER" RWY34 :DGC "3.5NM to FF401~2.2NM to FF401" IKE "3.5NM to FF401~2.2NM to FF401" |
| 2) RADAR service required. | DME GAP | RWY16 :DER~1.0NM FM DER RWY34 :DER~0.9NM FM DER 2.2NM to FF401~FF403 |
| | Inappropriate Navaids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

VAR 8°W

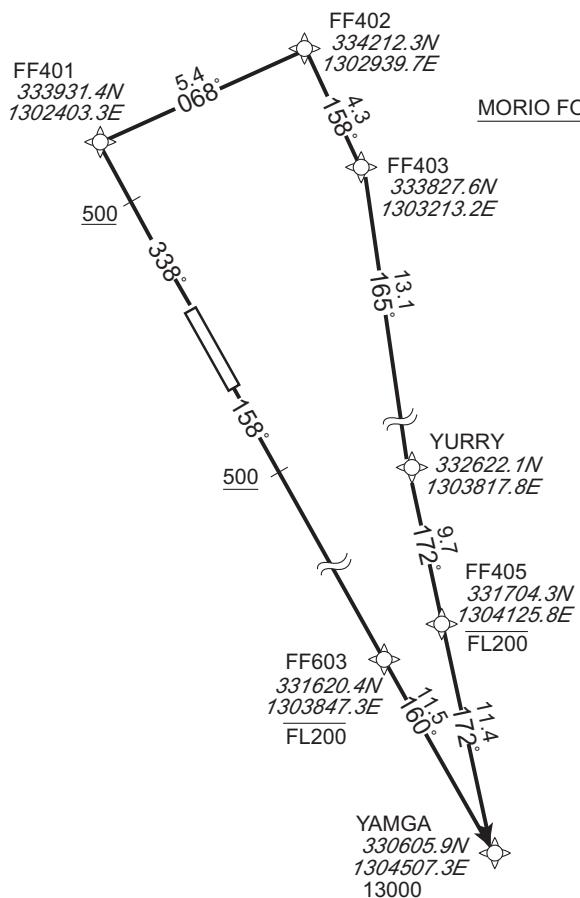

MORIO FOUR DEPARTURE

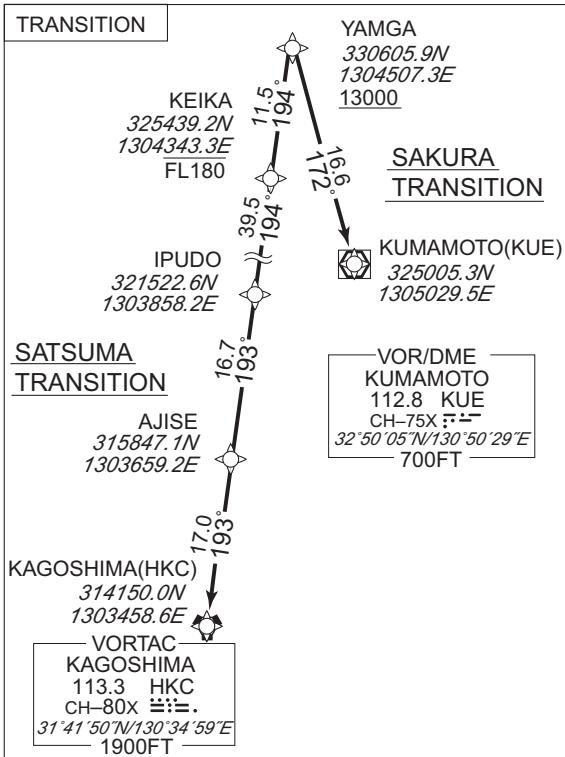

SATSUMA TRANSITION

VOR/DME
KUMAMOTO
112.8 KUE
CH-75X
32°50'05"N/130°50'29"E
700FT

VORTAC
KAGOSHIMA
113.3 HKC
CH-80X
31°41'50"N/130°34'59"E
1900FT

MORIO FOUR DEPARTURE

RWY34 : Climb on HDG 338° at or above 500FT, direct to FF401, to FF402, to FF403, to YURRY, to FF405 at or below FL200, to YAMGA at or above 13000FT.

RWY16 : Climb on HDG 158° at or above 500FT, direct to FF603 at or below FL200, to YAMGA at or above 13000FT.

Note RWY34 : 7.0% climb gradient required up to 2800FT.

RWY16 : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.

SAKURA TRANSITION

From YAMGA at or above 13000FT, to KUE.

SATSUMA TRANSITION

From YAMGA at or above 13000FT, to KEIKA at or below FL180, to IPUDO, to AJISE, to HKC.

CHANGE : Description of VAR.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID

MORIO FOUR DEPARTURE

RWY34

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 338 (330.3) | -7.7 | — | — | +500 | — | — | RNAV1 |
| 002 | DF | FF401 | — | — | -7.7 | — | — | — | — | — | RNAV1 |
| 003 | TF | FF402 | — | 068 (060.1) | -7.7 | 5.4 | — | — | — | — | RNAV1 |
| 004 | TF | FF403 | — | 158 (150.4) | -7.7 | 4.3 | — | — | — | — | RNAV1 |
| 005 | TF | YURRY | — | 165 (157.2) | -7.7 | 13.1 | — | — | — | — | RNAV1 |
| 006 | TF | FF405 | — | 172 (164.3) | -7.7 | 9.7 | — | -FL200 | — | — | RNAV1 |
| 007 | TF | YAMGA | — | 172 (164.3) | -7.7 | 11.4 | — | +13000 | — | — | RNAV1 |

RWY16

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 158 (150.3) | -7.7 | — | — | +500 | — | — | RNAV1 |
| 002 | DF | FF603 | — | — | -7.7 | — | — | -FL200 | — | — | RNAV1 |
| 003 | TF | YAMGA | — | 160 (152.6) | -7.7 | 11.5 | — | +13000 | — | — | RNAV1 |

CHANGE : VAR. PROC renamed. PROC course. ALT restriction at YAMGA.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV TRANSITION

SAKURA TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | YAMGA | — | — | -7.7 | — | — | +13000 | — | — | RNAV1 |
| 002 | TF | KUE | — | 172 (164.3) | -7.7 | 16.6 | — | — | — | — | RNAV1 |

SATSUMA TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | YAMGA | — | — | -7.7 | — | — | +13000 | — | — | RNAV1 |
| 002 | TF | KEIKA | — | 194 (185.9) | -7.7 | 11.5 | — | -FL180 | — | — | RNAV1 |
| 003 | TF | IPUDO | — | 194 (185.8) | -7.7 | 39.5 | — | — | — | — | RNAV1 |
| 004 | TF | AJISE | — | 193 (185.8) | -7.7 | 16.7 | — | — | — | — | RNAV1 |
| 005 | TF | HKC | — | 193 (185.8) | -7.7 | 17.0 | — | — | — | — | RNAV1 |

CHANGE : IPUDO established. ALT restriction at KEIKA.


STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID

| HAKATA FOUR DEPARTURE | | RNAV 1 |
|---|-----------------------|--|
| Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required. | Critical DME | RWY16 : DGC "1.0NM FM DER~5.4NM FM DER" IKE "1.0NM FM DER~5.4NM FM DER" RWY34 : DGC "4.6NM to DGC~3.0NM to DGC" IKE "4.6NM to DGC~3.0NM to DGC" |
| | DME GAP | RWY16 : DER~1.0NM FM DER RWY34 : DER~4.6NM to DGC 3.0NM to DGC~DGC |
| | Inappropriate Navaids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

VAR 8°W

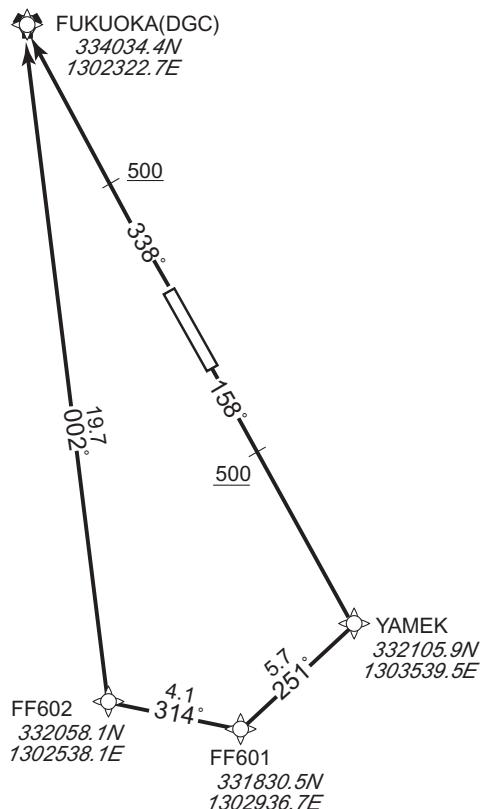

CHANGE : Description of VAR and PROC name.

RWY34 : Climb on HDG 338° at or above 500FT, direct to DGC.

RWY16 : Climb on HDG 158° at or above 500FT, direct to YAMEK, to FF601, to FF602 to DGC.

Note RWY16 : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID

HAKATA FOUR DEPARTURE

RWY34

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 338 (330.3) | -7.7 | — | — | +500 | — | — | RNAV1 |
| 002 | DF | DGC | — | — | -7.7 | — | — | — | — | — | RNAV1 |

RWY16

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 158 (150.3) | -7.7 | — | — | +500 | — | — | RNAV1 |
| 002 | DF | YAMEK | — | — | -7.7 | — | — | — | — | — | RNAV1 |
| 003 | TF | FF601 | — | 251 (242.9) | -7.7 | 5.7 | — | — | — | — | RNAV1 |
| 004 | TF | FF602 | — | 314 (306.5) | -7.7 | 4.1 | — | — | — | — | RNAV1 |
| 005 | TF | DGC | — | 002 (354.5) | -7.7 | 19.7 | — | — | — | — | RNAV1 |

CHANGE : VAR. PROC renamed. PROC course.

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

STAR

LAGER ARRIVAL

From over LAGER, via DGC R338 to MALTS.

Cross LAGER at or above 3000FT, cross MALTS at or above 2000FT.

EBISU ARRIVAL

From over EBISU, via IKE R074 to intercept and proceed via DGC R338 to MALTS via LAGER.


Cross LAGER at or above 3000FT, cross MALTS at or above 2000FT.

IKI ARRIVAL

From over IKE VOR/DME, via IKE R074 to intercept and proceed via DGC R338 to MALTS via LAGER.

Cross LAGER at or above 3000FT, cross MALTS at or above 2000FT.

CHANGE : PROC course(IKI ARRIVAL, EBISU ARRIVAL), HLDG course(IKI, EBISU).

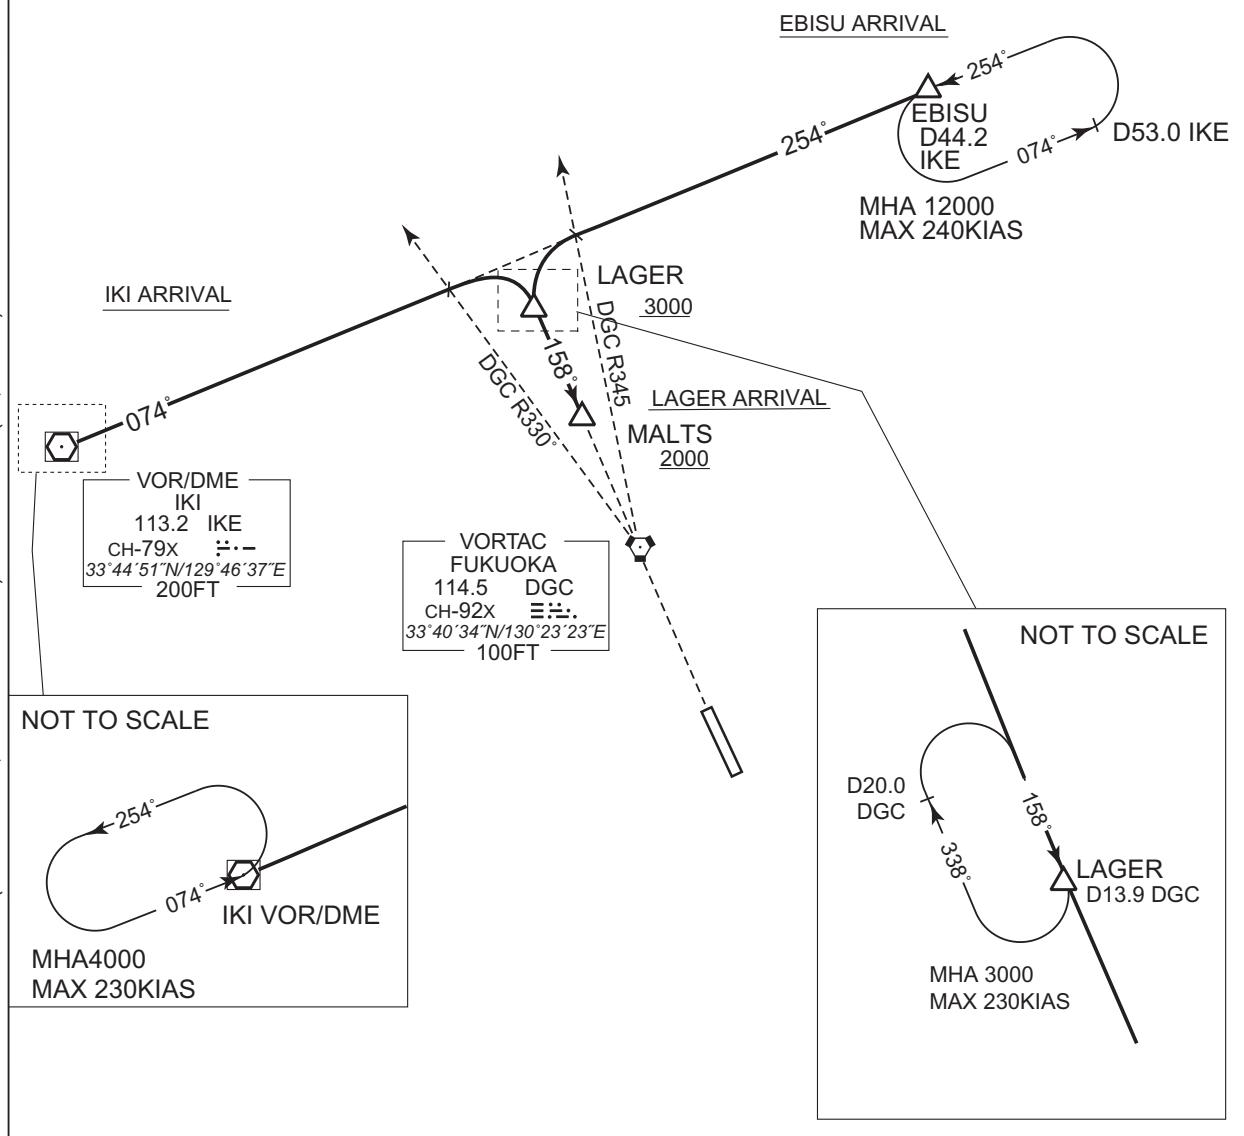

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

STAR

KAFRI EAST ARRIVAL

From over EBISU, proceed via IKE R074 to intercept and proceed via SGE R353 to KAFRI, via KUE R329 to intercept and proceed via SGE R064 to HAWKS.

Cross SGE R353/36.0DME between 7000FT and 10000FT, cross KUE R329/35.0DME at or above 6000FT, cross HAWKS at or above 4000FT.

KAFRI WEST ARRIVAL

From over IKE VOR/DME, proceed via IKE R074 to intercept and proceed via SGE R353 to KAFRI, via KUE R329, to intercept and proceed via SGE R064 to HAWKS.

Cross SGE R353/36.0DME between 7000FT and 10000FT, cross KUE R329/35.0DME at or above 6000FT, cross HAWKS at or above 4000FT.

KAFRI EAST ARRIVAL

KAFRI WEST ARRIVAL

MHA12000
MAX 240KIAS

MHA4000
MAX 230KIAS

VOR/DME
IKI
113.2 IKE
CH-79X 
33°44'51"N/129°46'37"E
200FT

MHA 6000
MAX 230KIAS

VOR/DME
SAGA
114.75 SGE
CH-94Y 
33°08'55"N/130°17'34"E
0FT

VOR/DME
KUMAMOTO
112.8 KUE
CH-75X 
32°50'05"N/130°50'29"E
700FT

CHANGE : PROC course. HDG course(IK), EB(SU). HDG pattern abolished(HAWKS).

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34

HAWKS EAST ARRIVAL / HAWKS WEST ARRIVAL / HAWKS NORTH ARRIVAL
HAWKS SOUTH ARRIVAL / ISKUP SOUTH ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

NOT TO SCALE

254°

074°

IKI (IKE)

1MIN(at or below FL140)
1.5MIN(above FL140)

018° 198°
LAGER
NOT TO SCALE

1MIN(at or below FL140)
1.5MIN(above FL140)

063°

243°

KIRIN

MHA 12000 NOT TO SCALE
MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL 140)

1MIN(at or below FL140)
1.5MIN(above FL140)

242°

062°

KEYAH

MHA 5000 NOT TO SCALE

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL 140)

EBISU
340220.1N
1303527.7E
12000

12.5°
254°
25.1°
199°
340179.9N
1304919.3E
12000
for HAWKS
EAST ARRIVAL

CHANGE : HLDG pattern established (ISKUP). HLDG course (KIRIN).

Map showing navigation points and arrival routes in the Fukuoka area:

- LAGER**: 335238.3N 1301504.7E, 6000ft, 24°
- HAWKS NORTH ARRIVAL**
- RONN**: 4831.1N 0659.0E
- V ARRIVAL**
- NOKOH**: 334149.5N 1301240.1E
- VORTAC FUKUOKA**: 114.5 DGC, CH-92X, 33°40'34"N/130°23'23"E, 100FT
- BEAMA**: 333346.7N 1301928.8E
- AMAOH**: 2809.0N 0959.9E
- SOFTO**: 332543.5N 1302616.3E
- HONOK**: 332006.3N 1301647.8E, 7000ft, 24°
- BANKU**: 331739.9N 1303302.5E, 5000ft, 4.3°, 068°, 45°, 248°
- HAWKS**: 331948.0N 1303730.0E, 4000ft
- OSTEP**: 330831.8N 1302632.1E, MAX 210KIAS

1MIN(at or below FL140)
1.5MIN(above FL140)

356°

176°

KAHOC

MHA 7000 NOT TO SCALE
MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34

HAWKS EAST ARRIVAL

From KIRIN at or above 12000FT, to ITODA between 10000FT and 8000FT, to KAHOC at or above 7000FT, to DAZAI at or above 5000FT, to HAWKS at or above 4000FT.

| | | |
|-----------------------|---|---|
| Critical DME | - | - |
| | - | - |
| | - | - |
| DME GAP | | - |
| Inappropriate Navaids | | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|-----------------|--------------|----------------|--------------------------|
| 001 | IF | KIRIN | - | - | -7.7 | - | - | +12000 | - | - | RNAV1 |
| 002 | TF | ITODA | - | 199 (191.0) | -7.7 | 25.1 | - | -10000 +8000 | - | - | RNAV1 |
| 003 | TF | KAHOC | - | 199 (191.0) | -7.7 | 14.2 | - | +7000 | - | - | RNAV1 |
| 004 | TF | DAZAI | - | 175 (167.3) | -7.7 | 6.9 | - | +5000 | - | - | RNAV1 |
| 005 | TF | HAWKS | - | 248 (240.3) | -7.7 | 4.5 | - | +4000 | - | - | RNAV1 |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | KIRIN | 243 (235.1) | -8.0 | 1.0(-14000) 1.5(+14001) | R | 12000 | - | -230(-14000) -240(+14001) | RNAV1 |
| Hold | KAHOC | 176 (167.3) | -7.7 | 1.0(-14000) 1.5(+14001) | R | 7000 | - | -230(-14000) -240(+14001) | RNAV1 |

HAWKS WEST ARRIVAL

From IKE, to ORONN, to NOKOH, to BEAMA, to SOFTO, to BANKU at or above 5000FT, to HAWKS at or above 4000FT.

| | | |
|-----------------------|------|---|
| Critical DME | DGC | IKE - 15.0NM to ORONN 6.0NM to ORONN - 5.0NM to NOKOH |
| | KUE | IKE - 15.0NM to ORONN |
| | IKUE | 6.0NM to ORONN - 5.0NM to NOKOH |
| | SGE | 9.0NM to BEAMA - 6.0NM to BEAMA |
| DME GAP | | 15.0NM to ORONN - 6.0NM to ORONN 5.0NM to NOKOH - 9.0NM to BEAMA |
| Inappropriate Navaids | | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | IKE | - | - | -7.7 | - | - | - | - | - | RNAV1 |
| 002 | TF | ORONN | - | 085 (077.7) | -7.7 | 17.3 | - | - | - | - | RNAV1 |
| 003 | TF | NOKOH | - | 152 (144.7) | -7.7 | 8.2 | - | - | - | - | RNAV1 |
| 004 | TF | BEAMA | - | 152 (144.8) | -7.7 | 9.9 | - | - | - | - | RNAV1 |
| 005 | TF | SOFTO | - | 153 (144.9) | -7.7 | 9.9 | - | - | - | - | RNAV1 |
| 006 | TF | BANKU | - | 153 (144.9) | -7.7 | 9.9 | - | +5000 | -210 | - | RNAV1 |
| 007 | TF | HAWKS | - | 068 (060.2) | -7.7 | 4.3 | - | +4000 | - | - | RNAV1 |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn | Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|------|-----------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | IKE | 074 (066.4) | -8.0 | 1.0(-14000) 1.5(+14001) | L | | 5000 | - | -230(-14000) -240(+14001) | RNAV1 |
| Hold | BANKU | 133 (125.0) | -7.7 | 1.0(-14000) 1.5(+14001) | R | | 5000 | - | -230(-14000) -240(+14001) | RNAV1 |

CHANGE : HLDG pattern (KIRIN).

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34

HAWKS NORTH ARRIVAL

From KIRIN, to EBISU at or above 12000FT, to LAGER at or above 6000FT, to NOKOH, to BEAMA, to SOFTO, to BANKU at or above 5000FT, to HAWKS at or above 4000FT.

| | | |
|-----------------------|-----|---|
| Critical DME | IKE | 4.0NM to LAGER - 3.0NM to NOKOH |
| | DGC | LAGER - 3.0NM to NOKOH |
| | SGE | 9.0NM to BEAMA - 6.0NM to BEAMA |
| DME GAP | | 3.0NM to NOKOH - 9.0NM to BEAMA |
| Inappropriate Navaids | | See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | KIRIN | — | — | -7.7 | — | — | — | — | — | RNAV1 |
| 002 | TF | EBISU | — | 254 (246.7) | -7.7 | 12.5 | — | +12000 | — | — | RNAV1 |
| 003 | TF | LAGER | — | 248 (240.3) | -7.7 | 19.5 | — | +6000 | — | — | RNAV1 |
| 004 | TF | NOKOH | — | 198 (190.5) | -7.7 | 11.0 | — | — | — | — | RNAV1 |
| 005 | TF | BEAMA | — | 152 (144.8) | -7.7 | 9.9 | — | — | — | — | RNAV1 |
| 006 | TF | SOFTO | — | 153 (144.9) | -7.7 | 9.9 | — | — | — | — | RNAV1 |
| 007 | TF | BANKU | — | 153 (144.9) | -7.7 | 9.9 | — | +5000 | -210 | — | RNAV1 |
| 008 | TF | HAWKS | — | 068 (060.2) | -7.7 | 4.3 | — | +4000 | — | — | RNAV1 |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | KIRIN | 243 (235.1) | -8.0 | 1.0(-14000) 1.5(+14001) | R | 12000 | — | -230(-14000) -240(+14001) | RNAV1 |
| Hold | EBISU | 255 (246.6) | -8.0 | 1.0(-14000) 1.5(+14001) | L | 12000 | — | -230(-14000) -240(+14001) | RNAV1 |
| Hold | LAGER | 198 (190.5) | -8.0 | 1.0(-14000) 1.5(+14001) | R | 6000 | — | -230(-14000) -240(+14001) | RNAV1 |
| Hold | BANKU | 133 (125.0) | -7.7 | 1.0(-14000) 1.5(+14001) | R | 5000 | — | -230(-14000) -240(+14001) | RNAV1 |

CHANGE : HLDG pattern (KIRIN).

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34

HAWKS SOUTH ARRIVAL

From OSTEP, to HONOK at or above 7000FT, to AMAOH, to KEYAH, to NOKOH, to BEAMA, to SOFTO, to BANKU at or above 5000FT, to HAWKS at or above 4000FT.

| | | |
|-----------------------|---|---|
| Critical DME | SGE | 4.0NM to NOKOH - NOKOH 9.0NM to BEAMA - 6.0NM to BEAMA |
| DME GAP | NOKOH - 9.0NM to BEAMA | |
| Inappropriate Navaids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 | |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | OSTEP | — | — | -7.7 | — | — | — | — | — | RNAV1 |
| 002 | TF | HONOK | — | 333 (324.9) | -7.7 | 14.2 | — | +7000 | — | — | RNAV1 |
| 003 | TF | AMAOH | — | 333 (324.8) | -7.7 | 9.9 | — | — | — | — | RNAV1 |
| 004 | TF | KEYAH | — | 332 (324.8) | -7.7 | 9.9 | — | — | — | — | RNAV1 |
| 005 | TF | NOKOH | — | 062 (054.5) | -7.7 | 9.7 | — | — | — | — | RNAV1 |
| 006 | TF | BEAMA | — | 152 (144.8) | -7.7 | 9.9 | — | — | — | — | RNAV1 |
| 007 | TF | SOFTO | — | 153 (144.9) | -7.7 | 9.9 | — | — | — | — | RNAV1 |
| 008 | TF | BANKU | — | 153 (144.9) | -7.7 | 9.9 | — | +5000 | -210 | — | RNAV1 |
| 009 | TF | HAWKS | — | 068 (060.2) | -7.7 | 4.3 | — | +4000 | — | — | RNAV1 |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | KEYAH | 062 (054.5) | -7.7 | 1.0(-14000) 1.5(+14001) | L | 5000 | — | -230(-14000) -240(+14001) | RNAV1 |
| Hold | BANKU | 133 (125.0) | -7.7 | 1.0(-14000) 1.5(+14001) | R | 5000 | — | -230(-14000) -240(+14001) | RNAV1 |

CHANGE : VAR. PROC course. HLDG course(BANKU).

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34

ISKUP SOUTH ARRIVAL

From ISKUP at or above 7000FT, to KEYAH, to NOKOH, to BEAMA, to SOFTO, to BANKU at or above 5000FT, to HAWKS at or above 4000FT.

| | | |
|-----------------------|-----|---|
| Critical DME | SGE | 4.0NM to NOKOH - NOKOH 9.0NM to BEAMA - 6.0NM to BEAMA |
| DME GAP | | NOKOH - 9.0NM to BEAMA |
| Inappropriate Navaids | | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | ISKUP | — | — | -7.7 | — | — | +7000 | — | — | RNAV1 |
| 002 | TF | KEYAH | — | 062 (054.3) | -7.7 | 12.7 | — | — | — | — | RNAV1 |
| 003 | TF | NOKOH | — | 062 (054.5) | -7.7 | 9.7 | — | — | — | — | RNAV1 |
| 004 | TF | BEAMA | — | 152 (144.8) | -7.7 | 9.9 | — | — | — | — | RNAV1 |
| 005 | TF | SOFTO | — | 153 (144.9) | -7.7 | 9.9 | — | — | — | — | RNAV1 |
| 006 | TF | BANKU | — | 153 (144.9) | -7.7 | 9.9 | — | +5000 | -210 | — | RNAV1 |
| 007 | TF | HAWKS | — | 068 (060.2) | -7.7 | 4.3 | — | +4000 | — | — | RNAV1 |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | ISKUP | 024 (016.5) | -8.0 | 1.0(-14000) 1.5(+14001) | R | 7000 | — | -230(-14000) -240(+14001) | RNAV1 |
| Hold | KEYAH | 062 (054.5) | -7.7 | 1.0(-14000) 1.5(+14001) | L | 5000 | — | -230(-14000) -240(+14001) | RNAV1 |
| Hold | BANKU | 133 (125.0) | -7.7 | 1.0(-14000) 1.5(+14001) | R | 5000 | — | -230(-14000) -240(+14001) | RNAV1 |

CHANGE : HLDG pattern established(ISKUP).

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY16

KIRIN ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.

2) RADAR service required.

VAR 8° W

1MIN(at or below FL140)
1.5MIN(above FL140)

063°

243°

NOT TO SCALE

KIRIN

MHA 12000

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)

NOT TO SCALE

MHA 12000
MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)

KIRIN

12000

FF667
FF666
210KIAS
FF668
6.4
259°
FF669
6.4
231°
OBKOS
9000
210KIAS
ENTIX
2000
ANBIM
9000
IDOLI
13.1
243°
16.3
113°
VORTAC
FUKUOKA
114.5 DGC
CH-92X
33°40'34"N 130°23'23"E
100FT

CHANGE : Course FM ANBIM to ENTIIX.

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY16

KIRIN ARRIVAL

From KIRIN at or above 12000FT, to IDOLI, to ANBIM at 9000FT, to FF666, to FF667, to FF668, to FF669, to OBKOS at 9000FT, to ENTIX at or above 2000FT.

| | |
|-----------------------|---|
| Critical DME | - |
| DME GAP | - |
| Inappropriate Navaids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | KIRIN | - | - | -8.0 | - | - | +12000 | - | - | RNAV1 |
| 002 | TF | IDOLI | - | 243 (235.0) | -8.0 | 13.7 | - | - | - | - | RNAV1 |
| 003 | TF | ANBIM | - | 282 (274.2) | -8.0 | 5.3 | - | 9000 | - | - | RNAV1 |
| 004 | TF | FF666 | - | 317 (308.8) | -8.0 | 6.2 | - | - | 210 | - | RNAV1 |
| 005 | TF | FF667 | - | 282 (274.1) | -8.0 | 6.4 | - | - | - | - | RNAV1 |
| 006 | TF | FF668 | - | 259 (251.4) | -8.0 | 6.4 | - | - | - | - | RNAV1 |
| 007 | TF | FF669 | - | 237 (228.8) | -8.0 | 6.4 | - | - | - | - | RNAV1 |
| 008 | TF | OBKOS | - | 214 (206.3) | -8.0 | 6.4 | - | 9000 | 210 | - | RNAV1 |
| 009 | TF | ENTIX | - | 113 (105.2) | -8.0 | 16.3 | - | +2000 | - | - | RNAV1 |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | KIRIN | 243 (235.1) | -8.0 | 1.0(-14000) 1.5(+14001) | R | 12000 | - | -230(-14000) -240(+14001) | RNAV1 |
| Hold | IDOLI | 282 (274.3) | -8.0 | 1.0(-14000) 1.5(+14001) | L | 8000 | - | -230(-14000) -240(+14001) | RNAV1 |

Waypoint Coordinates

| Waypoint Identifier | Coordinates |
|---------------------|------------------------|
| KIRIN | 340717.9N / 1304919.3E |
| IDOLI | 335926.2N / 1303546.7E |
| ANBIM | 335949.6N / 1302922.5E |
| FF666 | 340344.2N / 1302330.1E |
| FF667 | 340411.4N / 1301551.1E |
| FF668 | 340209.8N / 1300834.7E |
| FF669 | 335758.2N / 1300248.0E |
| OBKOS | 335215.0N / 1295923.7E |
| ENTIX | 334757.5N / 1301818.9E |

CHANGE : Course FM ANBIM to ENTIX.

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY16

OSTEP ARRIVAL / ISKUP ARRIVAL / ATSAG ARRIVAL / SARUP ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.

2) RADAR service required.

VAR 8° W

049°

223°

NOT TO SCALE

1MIN(at or below FL140)
1.5MIN(above FL140)

SARUJ ARRIVAL

AT-SAG ARRIVAL

ISKUP ARRIVAL

OSTEP ARRIVAL

ENTIX 2000

VORTAC FUKUOKA 114.5 DGC CH-92X 33°40'34"N/130°23'23"E 100FT

VOR/DME IKI 113.2 IKE CH-79X 33°44'51"N/129°46'37"E 200FT

VOR/DME SAGA 114.75 SGE CH-94Y 33°08'55"N/130°17'34"E 0FT

IKOLO 7000

SARUP

FF674 210KIAS

FF670 210KIAS

UGROT 8000

KEYAH

AMAOH

HONOK

OSTEP

Civil Aviation Bureau,Japan (EFF:21 MAR 2024)

22/2/24

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY16

OSTEP ARRIVAL

From OSTEP, to HONOK, to AMAOH, to KEYAH, to UGROT at 8000FT, to FF670, to FF671, to FF672, to FF673, to SAKOX at 8000FT, to ENTIX at or above 2000FT.

| | |
|-----------------------|---|
| Critical DME | - |
| DME GAP | - |
| Inappropriate Navaids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | OSTEP | - | - | -8.0 | - | - | - | - | - | RNAV1 |
| 002 | TF | HONOK | - | 333 (324.9) | -8.0 | 14.2 | - | - | - | - | RNAV1 |
| 003 | TF | AMAOH | - | 333 (324.8) | -8.0 | 9.9 | - | - | - | - | RNAV1 |
| 004 | TF | KEYAH | - | 333 (324.8) | -8.0 | 9.9 | - | - | - | - | RNAV1 |
| 005 | TF | UGROT | - | 343 (334.6) | -8.0 | 11.6 | - | 8000 | - | - | RNAV1 |
| 006 | TF | FF670 | - | 012 (003.8) | -8.0 | 6.0 | - | - | 210 | - | RNAV1 |
| 007 | TF | FF671 | - | 034 (026.3) | -8.0 | 7.0 | - | - | - | - | RNAV1 |
| 008 | TF | FF672 | - | 057 (048.8) | -8.0 | 7.0 | - | - | - | - | RNAV1 |
| 009 | TF | FF673 | - | 079 (071.4) | -8.0 | 6.9 | - | - | - | - | RNAV1 |
| 010 | TF | SAKOX | - | 102 (094.0) | -8.0 | 6.9 | - | 8000 | 210 | - | RNAV1 |
| 011 | TF | ENTIX | - | 203 (195.3) | -8.0 | 17.9 | - | +2000 | - | - | RNAV1 |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | HONOK | 333 (324.9) | -8.0 | 1.0(-14000) 1.5(+14001) | R | 7000 | - | -230(-14000) -240(+14001) | RNAV1 |
| Hold | KEYAH | 333 (324.8) | -8.0 | 1.0(-14000) 1.5(+14001) | R | 5000 | - | -230(-14000) -240(+14001) | RNAV1 |

CHANGE : Course FM KEYAH to ENTIX. Minimum ALT(KEYAH). Critical DME deleted.

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY16

ISKUP ARRIVAL

From ISKUP, to UGROT, at 8000FT, to FF670, to FF671, to FF672, to FF673, to SAKOX, at 8000FT, to ENTIX at or above 2000FT.

| | |
|-----------------------|---|
| Critical DME | - |
| DME GAP | - |
| Inappropriate Navaids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | ISKUP | - | - | -8.0 | - | - | - | - | - | RNAV1 |
| 002 | TF | UGROT | - | 024 (016.5) | -8.0 | 18.7 | - | 8000 | - | - | RNAV1 |
| 003 | TF | FF670 | - | 012 (003.8) | -8.0 | 6.0 | - | - | 210 | - | RNAV1 |
| 004 | TF | FF671 | - | 034 (026.3) | -8.0 | 7.0 | - | - | - | - | RNAV1 |
| 005 | TF | FF672 | - | 057 (048.8) | -8.0 | 7.0 | - | - | - | - | RNAV1 |
| 006 | TF | FF673 | - | 079 (071.4) | -8.0 | 6.9 | - | - | - | - | RNAV1 |
| 007 | TF | SAKOX | - | 102 (094.0) | -8.0 | 6.9 | - | 8000 | 210 | - | RNAV1 |
| 008 | TF | ENTIX | - | 203 (195.3) | -8.0 | 17.9 | - | +2000 | - | - | RNAV1 |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | ISKUP | 024 (016.5) | -8.0 | 1.0(-14000) 1.5(+14001) | R | 7000 | - | -230(-14000) -240(+14001) | RNAV1 |

CHANGE : Course FM ISKUP to ENTIX. HLDG course(ISKUP). Critical DME deleted.

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY16

ATSAG ARRIVAL

From ATSAG, to IKOLO, at 7000FT, to FF674, to FF675, to FF676, to FF677, to ELMIS at 7000FT, to ENTIX at or above 2000FT.

| | |
|-----------------------|---|
| Critical DME | - |
| DME GAP | - |
| Inappropriate Navaids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | ATSAG | - | - | -8.0 | - | - | - | - | - | RNAV1 |
| 002 | TF | IKOLO | - | 049 (040.9) | -8.0 | 12.7 | - | 7000 | - | - | RNAV1 |
| 003 | TF | FF674 | - | 049 (041.0) | -8.0 | 4.8 | - | - | 210 | - | RNAV1 |
| 004 | TF | FF675 | - | 034 (026.2) | -8.0 | 7.6 | - | - | - | - | RNAV1 |
| 005 | TF | FF676 | - | 057 (048.7) | -8.0 | 7.5 | - | - | - | - | RNAV1 |
| 006 | TF | FF677 | - | 079 (071.4) | -8.0 | 7.5 | - | - | - | - | RNAV1 |
| 007 | TF | ELMIS | - | 102 (094.0) | -8.0 | 7.5 | - | 7000 | 210 | - | RNAV1 |
| 008 | TF | ENTIX | - | 203 (195.3) | -8.0 | 19.4 | - | +2000 | - | - | RNAV1 |

CHANGE : Course FM ATSAG to ENTIX. HLDG pattern (ATSAG). Critical DME deleted.

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | ATSAG | 049 (040.9) | -8.0 | 1.0(-14000) 1.5(+14001) | R | 5000 | - | -230(-14000) -240(+14001) | RNAV1 |

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY16

SARUP ARRIVAL

From SARUP, to IKOLO at 7000FT, to FF674, to FF675, to FF676, to FF677, to ELMIS at 7000FT, to ENTIX at or above 2000FT.

| | |
|-----------------------|---|
| Critical DME | - |
| DME GAP | - |
| Inappropriate Navaids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | SARUP | - | - | -8.0 | - | - | - | - | - | RNAV1 |
| 002 | TF | IKOLO | - | 103 (095.0) | -8.0 | 7.9 | - | 7000 | - | - | RNAV1 |
| 003 | TF | FF674 | - | 049 (041.0) | -8.0 | 4.8 | - | - | 210 | - | RNAV1 |
| 004 | TF | FF675 | - | 034 (026.2) | -8.0 | 7.6 | - | - | - | - | RNAV1 |
| 005 | TF | FF676 | - | 057 (048.7) | -8.0 | 7.5 | - | - | - | - | RNAV1 |
| 006 | TF | FF677 | - | 079 (071.4) | -8.0 | 7.5 | - | - | - | - | RNAV1 |
| 007 | TF | ELMIS | - | 102 (094.0) | -8.0 | 7.5 | - | 7000 | 210 | - | RNAV1 |
| 008 | TF | ENTIX | - | 203 (195.3) | -8.0 | 19.4 | - | +2000 | - | - | RNAV1 |


| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | SARUP | 103 (094.9) | -8.0 | 1.0(-14000) 1.5(+14001) | L | 5000 | - | -230(-14000) -240(+14001) | RNAV1 |

Waypoint Coordinates

| Waypoint Identifier | Coordinates | Waypoint Identifier | Coordinates |
|---------------------|------------------------|---------------------|------------------------|
| OSTEP | 330831.8N / 1302632.1E | SAKOX | 340511.2N / 1302358.8E |
| HONOK | 332006.3N / 1301647.8E | ATSAG | 333953.2N / 1294210.5E |
| AMAOH | 332809.0N / 1300959.9E | SARUP | 335008.4N / 1294244.7E |
| KEYAH | 333611.4N / 1300310.7E | IKOLO | 334926.8N / 1295209.4E |
| ISKUP | 332847.3N / 1295046.6E | FF674 | 335302.0N / 1295555.0E |
| UGROT | 334642.0N / 1295710.6E | FF675 | 335948.3N / 1295956.5E |
| FF670 | 335238.5N / 1295739.4E | FF676 | 340446.3N / 1300647.0E |
| FF671 | 335853.2N / 1300122.2E | FF677 | 340710.3N / 1301523.8E |
| FF672 | 340328.1N / 1300740.9E | ELMIS | 340638.1N / 1302427.5E |
| FF673 | 340540.8N / 1301537.4E | ENTIX | 334757.5N / 1301818.9E |

CHANGE : Course FM SARUP to ENTIX. Minimum ALT(SARUP). Critical DME deleted.

INSTRUMENT APPROACH CHART

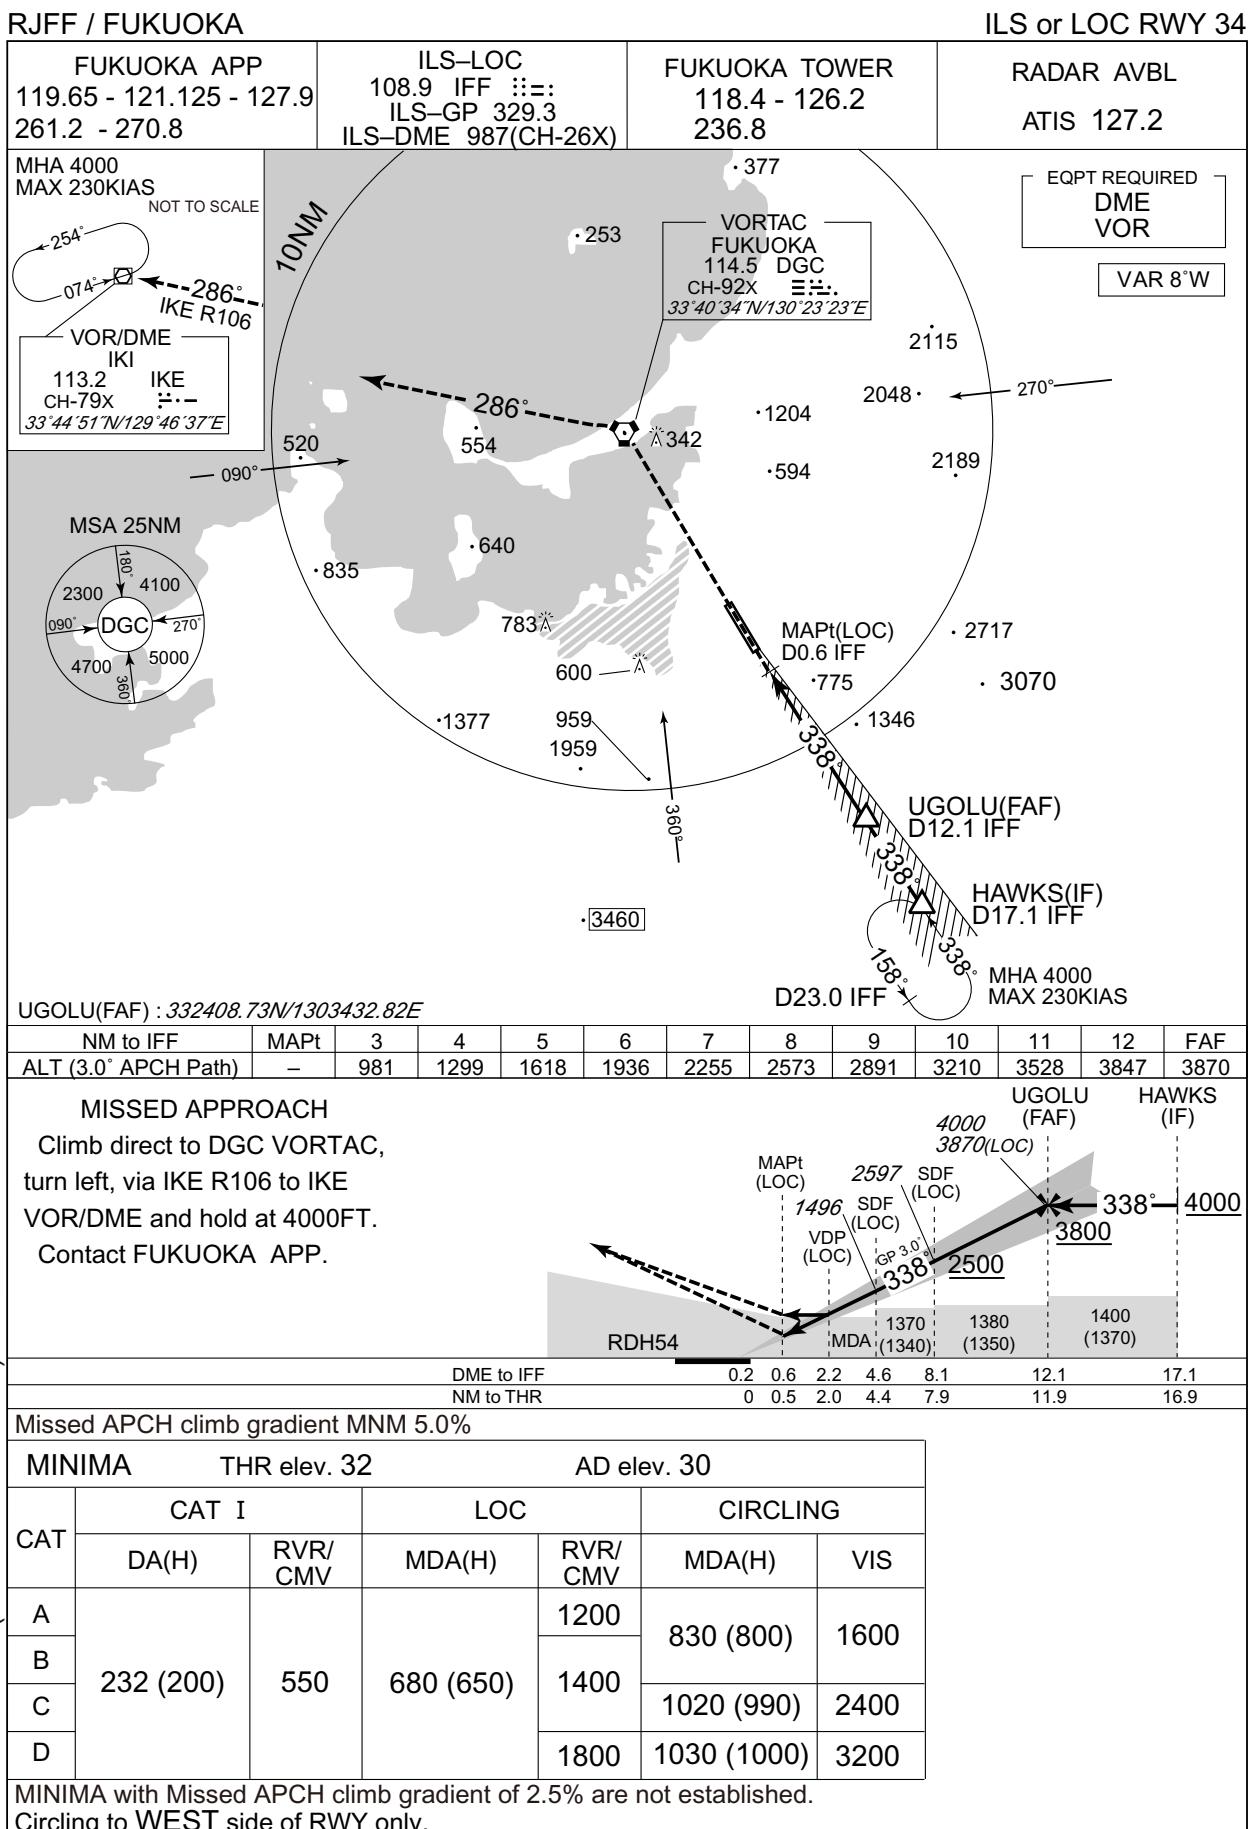

INSTRUMENT APPROACH CHART

RJFF / FUKUOKA

NOT TO SCALE

1MIN (at or below FL140)
1.5MIN (above FL140)

NOT TO SCALE

1MIN (at or below FL140)
1.5MIN (above FL140)

DAZAI (IAF) 5000

BANKU (IAF) 5000

HAWKS

HAWKS (IF)

IKI (IKE)

MHA 4000
MAX 230KIAS (at or below FL140)
MAX 240KIAS (above FL140)

MHA 4500
MAX 230KIAS (at or below FL140)
MAX 240KIAS (above FL140)

074° 25°

158° 338°

068° (060.2°)

4.3°

4.5° (240.3°)


248°

088° 080° 070° 060° 050° 040° 030° 020° 010° 000°

090°

MISSED APPROACH

Direct to ESLAS, to IKE
and hold at 4000FT.
Contact FUKUOKA APP.

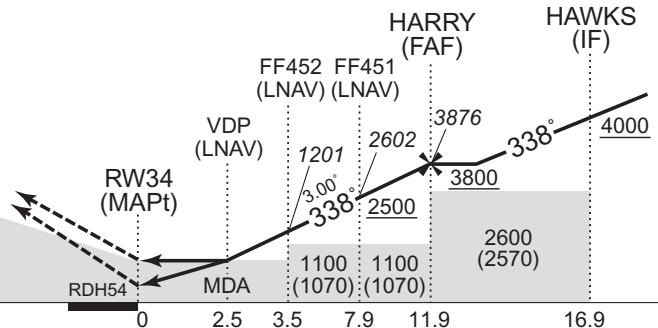

| Missed APCH climb gradient MNM 5.0% | | | | | | | | |
|-------------------------------------|-----------|--------------|-----------|-------------|-----------|---------|-------------|------|
| MINIMA | | THR elev. 32 | | AD elev. 30 | | | | |
| CAT | LPV | | LNAV/VNAV | | LNAV | | CIRCLING | |
| | DA(H) | RVR/CMV | DA(H) | RVR/CMV | MDA(H) | RVR/CMV | MDA(H) | VIS |
| A | 343 (311) | 900 | 820 (788) | 1200 | 820 (790) | 1200 | 830 (800) | 1600 |
| B | 353 (321) | 1000 | | 1400 | | 1400 | | |
| C | 363 (331) | | | 1800 | | 1800 | 1020 (990) | 2400 |
| D | 372 (340) | 1400 | | | | | 1030 (1000) | 3200 |

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to WEST side of RWY only.

INSTRUMENT APPROACH CHART

RJFF / FUKUOKA

RNP RWY34

FAS DATA BLOCK

| | | | |
|----------------------------------|---------------|----------------------------|---------------|
| Operation type | 0 | LTP/FTP ellipsoidal height | +00424 |
| SBAS service provider identifier | 2 | FPAP latitude | 333548.8630N |
| Airport identifier | RJFF | FPAP longitude | 1302635.4830E |
| Runway | 34 | Threshold crossing height | 00016.5 |
| Approach performance designator | 0 | TCH units selector | 1 |
| Route indicator | | Glide path angle | 03.00 |
| Reference path data selector | 0 | Course width at threshold | 105.00 |
| Reference path ID | M34A | Δ length offset | 0000 |
| LTP/FTP latitude | 333429.8705N | HAL | 40.0 |
| LTP/FTP longitude | 1302729.4540E | VAL | 50.0 |
| CRC remainder | 9DA9C0E7 | | |

Required additional data


| | |
|----------------------------|-----|
| LTP/FTP orthometric height | 9.8 |
|----------------------------|-----|

CHANGE : FAS DATA BLOCK and Required additional data established.

INSTRUMENT APPROACH CHART


RJFF / FUKUOKA

ILS or LOC RWY16

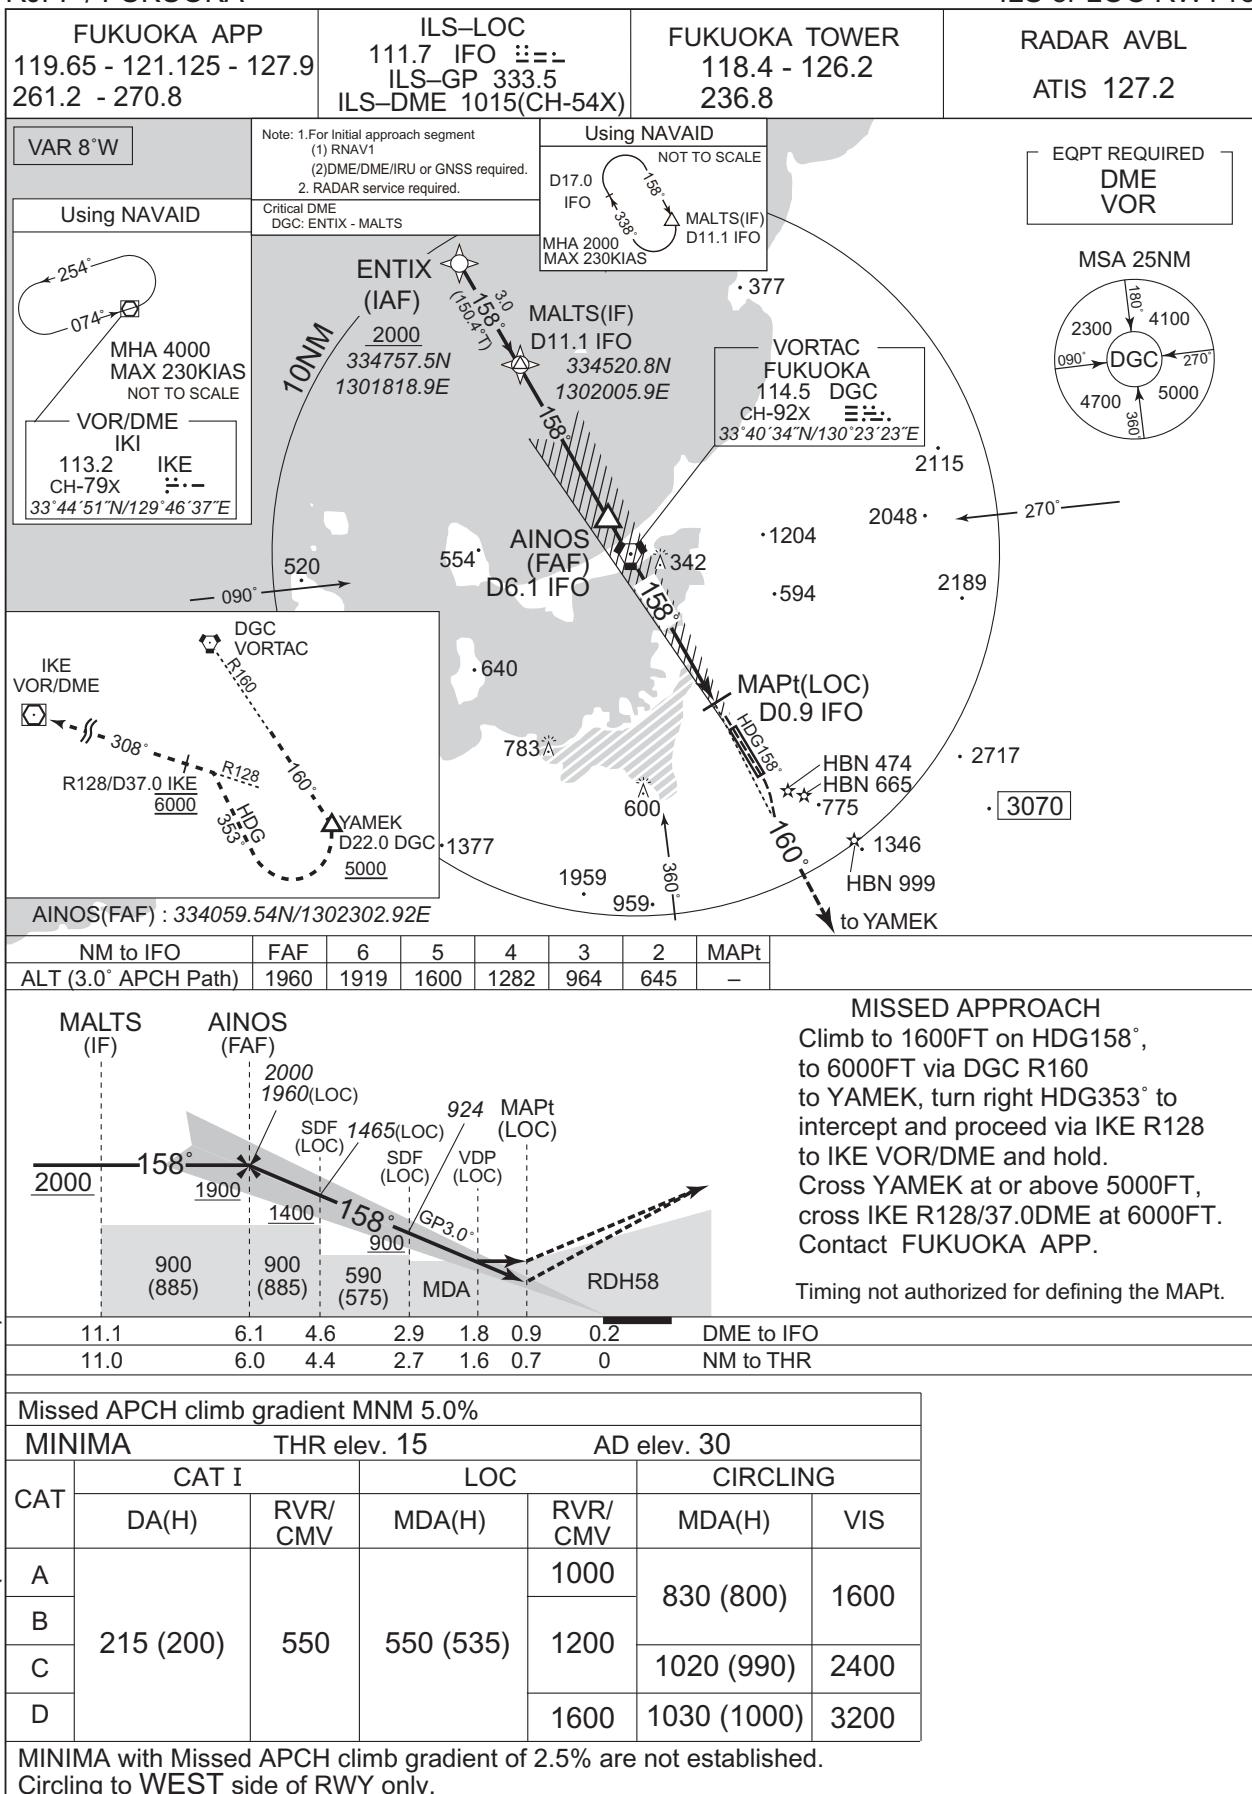

CHANGE : MSA(BTN 180° and 270°).

INSTRUMENT APPROACH CHART

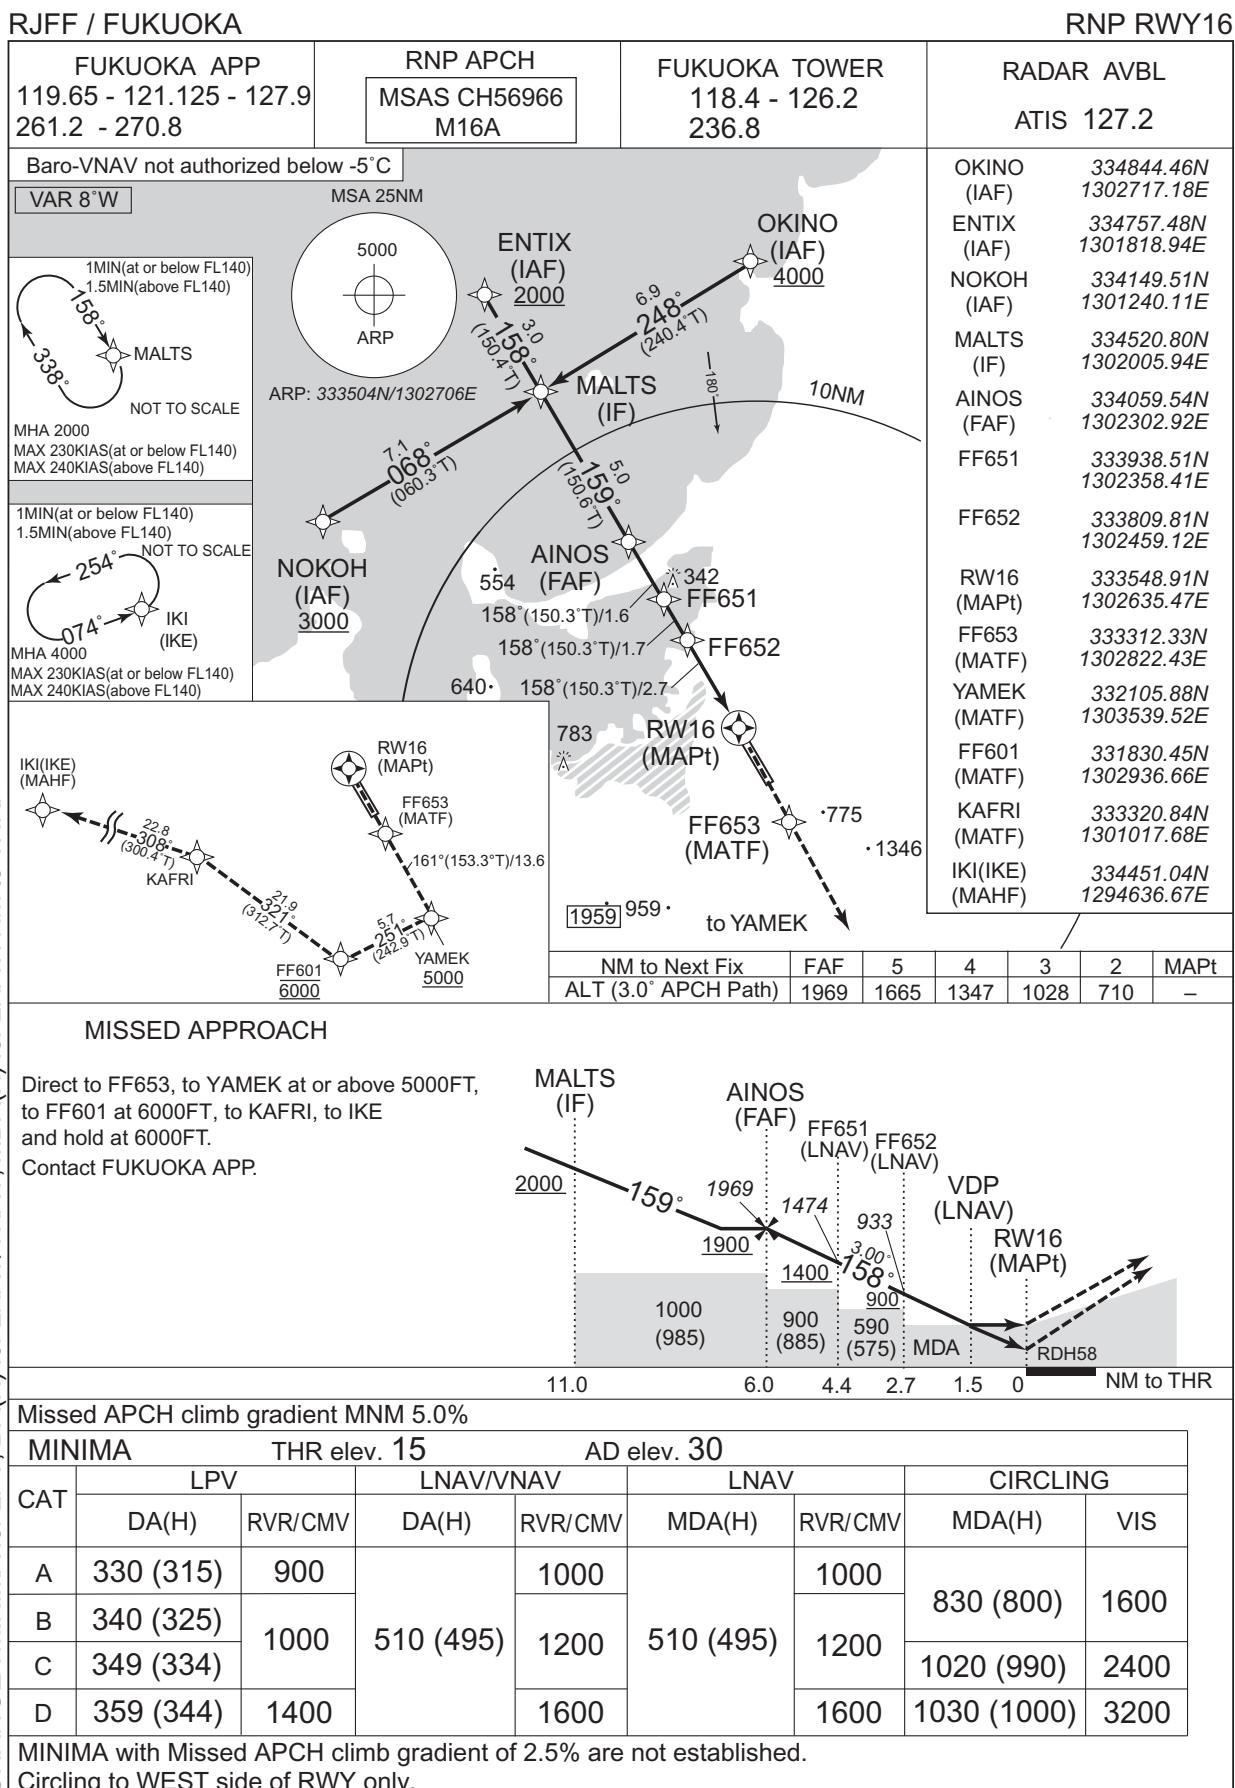

INSTRUMENT APPROACH CHART

RJFF / FUKUOKA

RNP RWY16

FAS DATA BLOCK


| | | | |
|----------------------------------|---------------|----------------------------|---------------|
| Operation type | 0 | LTP/FTP ellipsoidal height | +00371 |
| SBAS service provider identifier | 2 | FPAP latitude | 333429.8705N |
| Airport identifier | RJFF | FPAP longitude | 1302729.4540E |
| Runway | 16 | Threshold crossing height | 00017.7 |
| Approach performance designator | 0 | TCH units selector | 1 |
| Route indicator | | Glide path angle | 03.00 |
| Reference path data selector | 0 | Course width at threshold | 105.00 |
| Reference path ID | M16A | Δ length offset | 0000 |
| LTP/FTP latitude | 333548.8630N | HAL | 40.0 |
| LTP/FTP longitude | 1302635.4830E | VAL | 50.0 |
| CRC remainder | AA995500 | | |

Required additional data


| | |
|----------------------------|-----|
| LTP/FTP orthometric height | 4.5 |
|----------------------------|-----|

CHANGE : FAS DATA BLOCK and Required additional data established.

INSTRUMENT APPROACH CHART

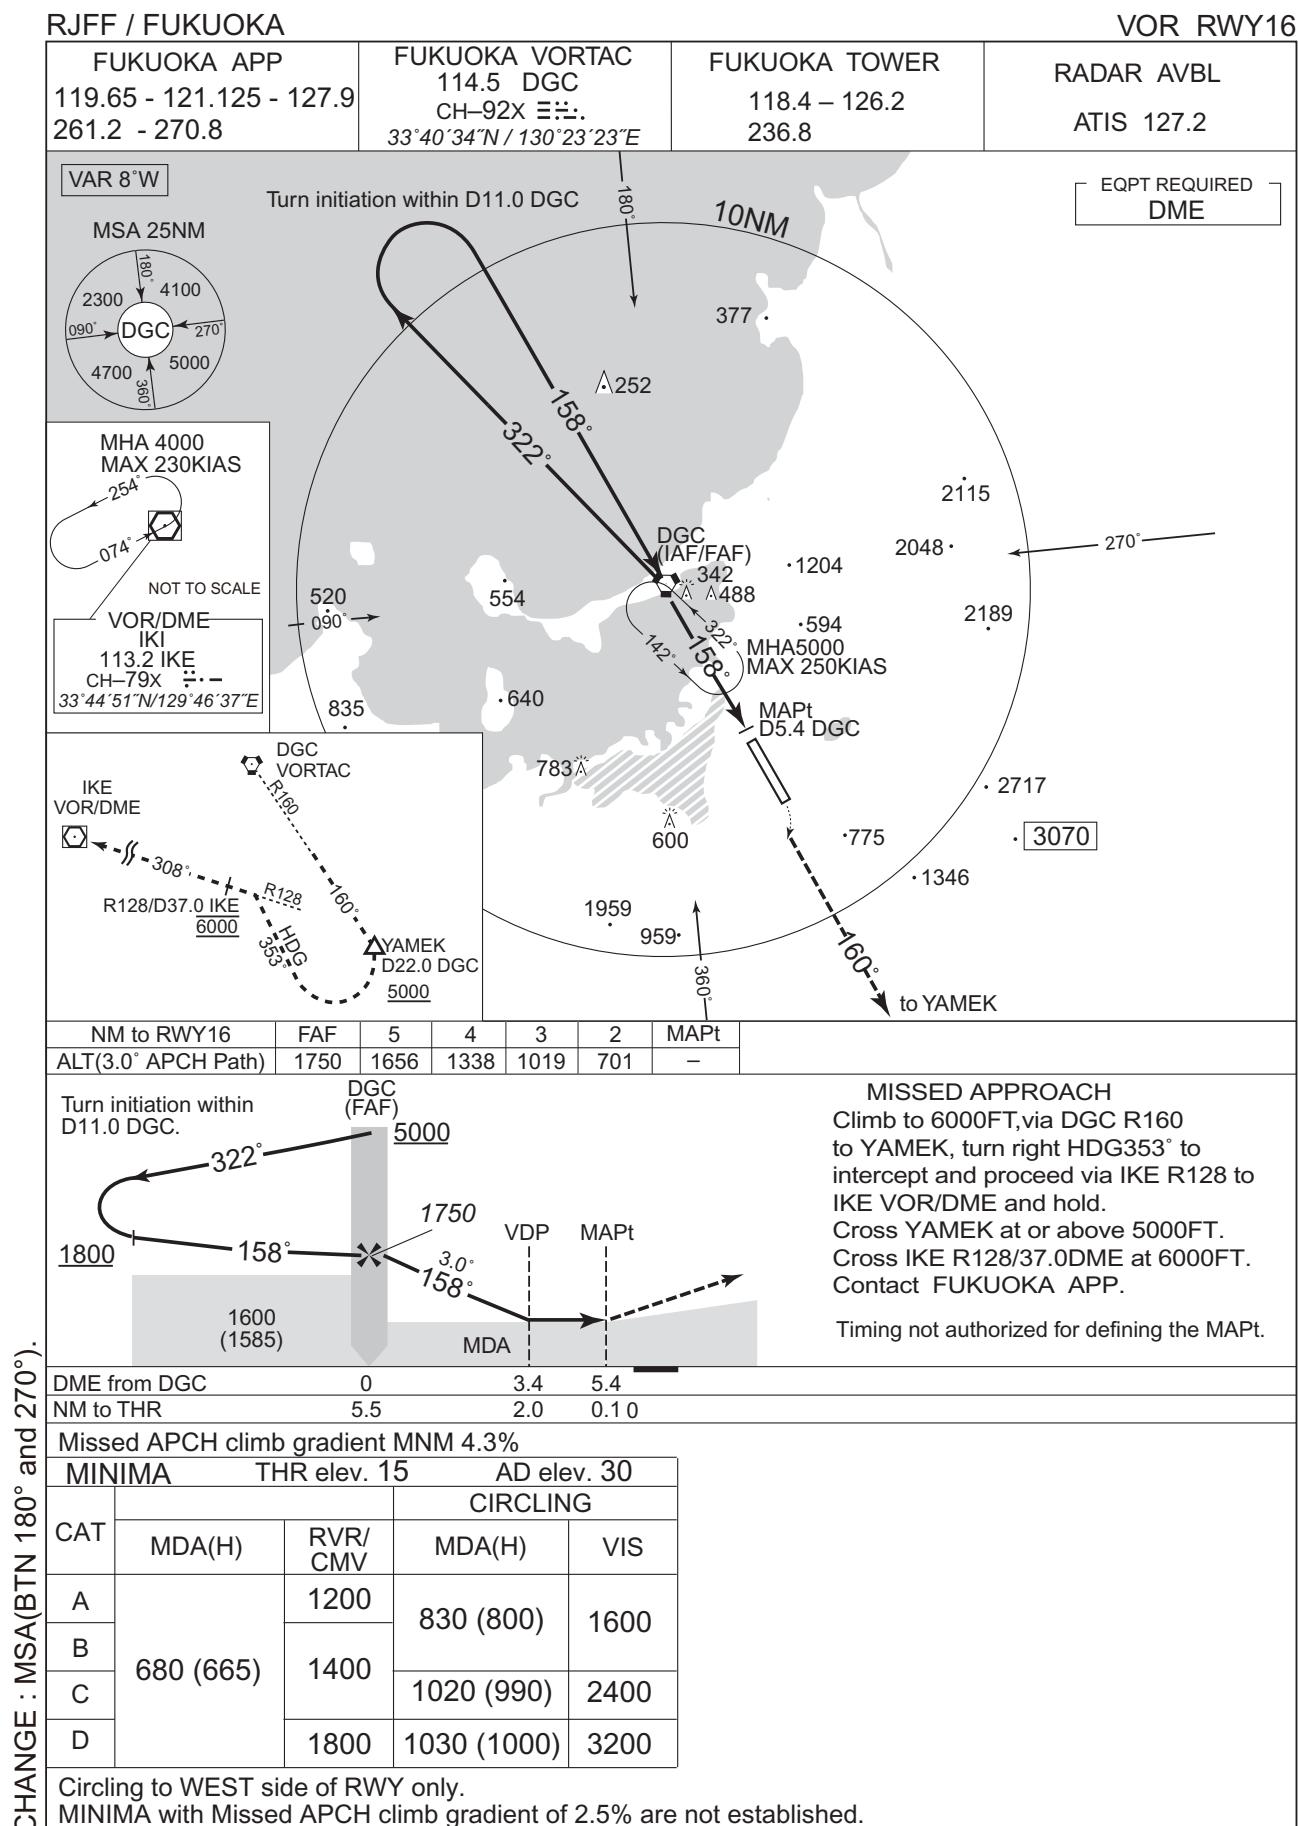


INSTRUMENT APPROACH CHART

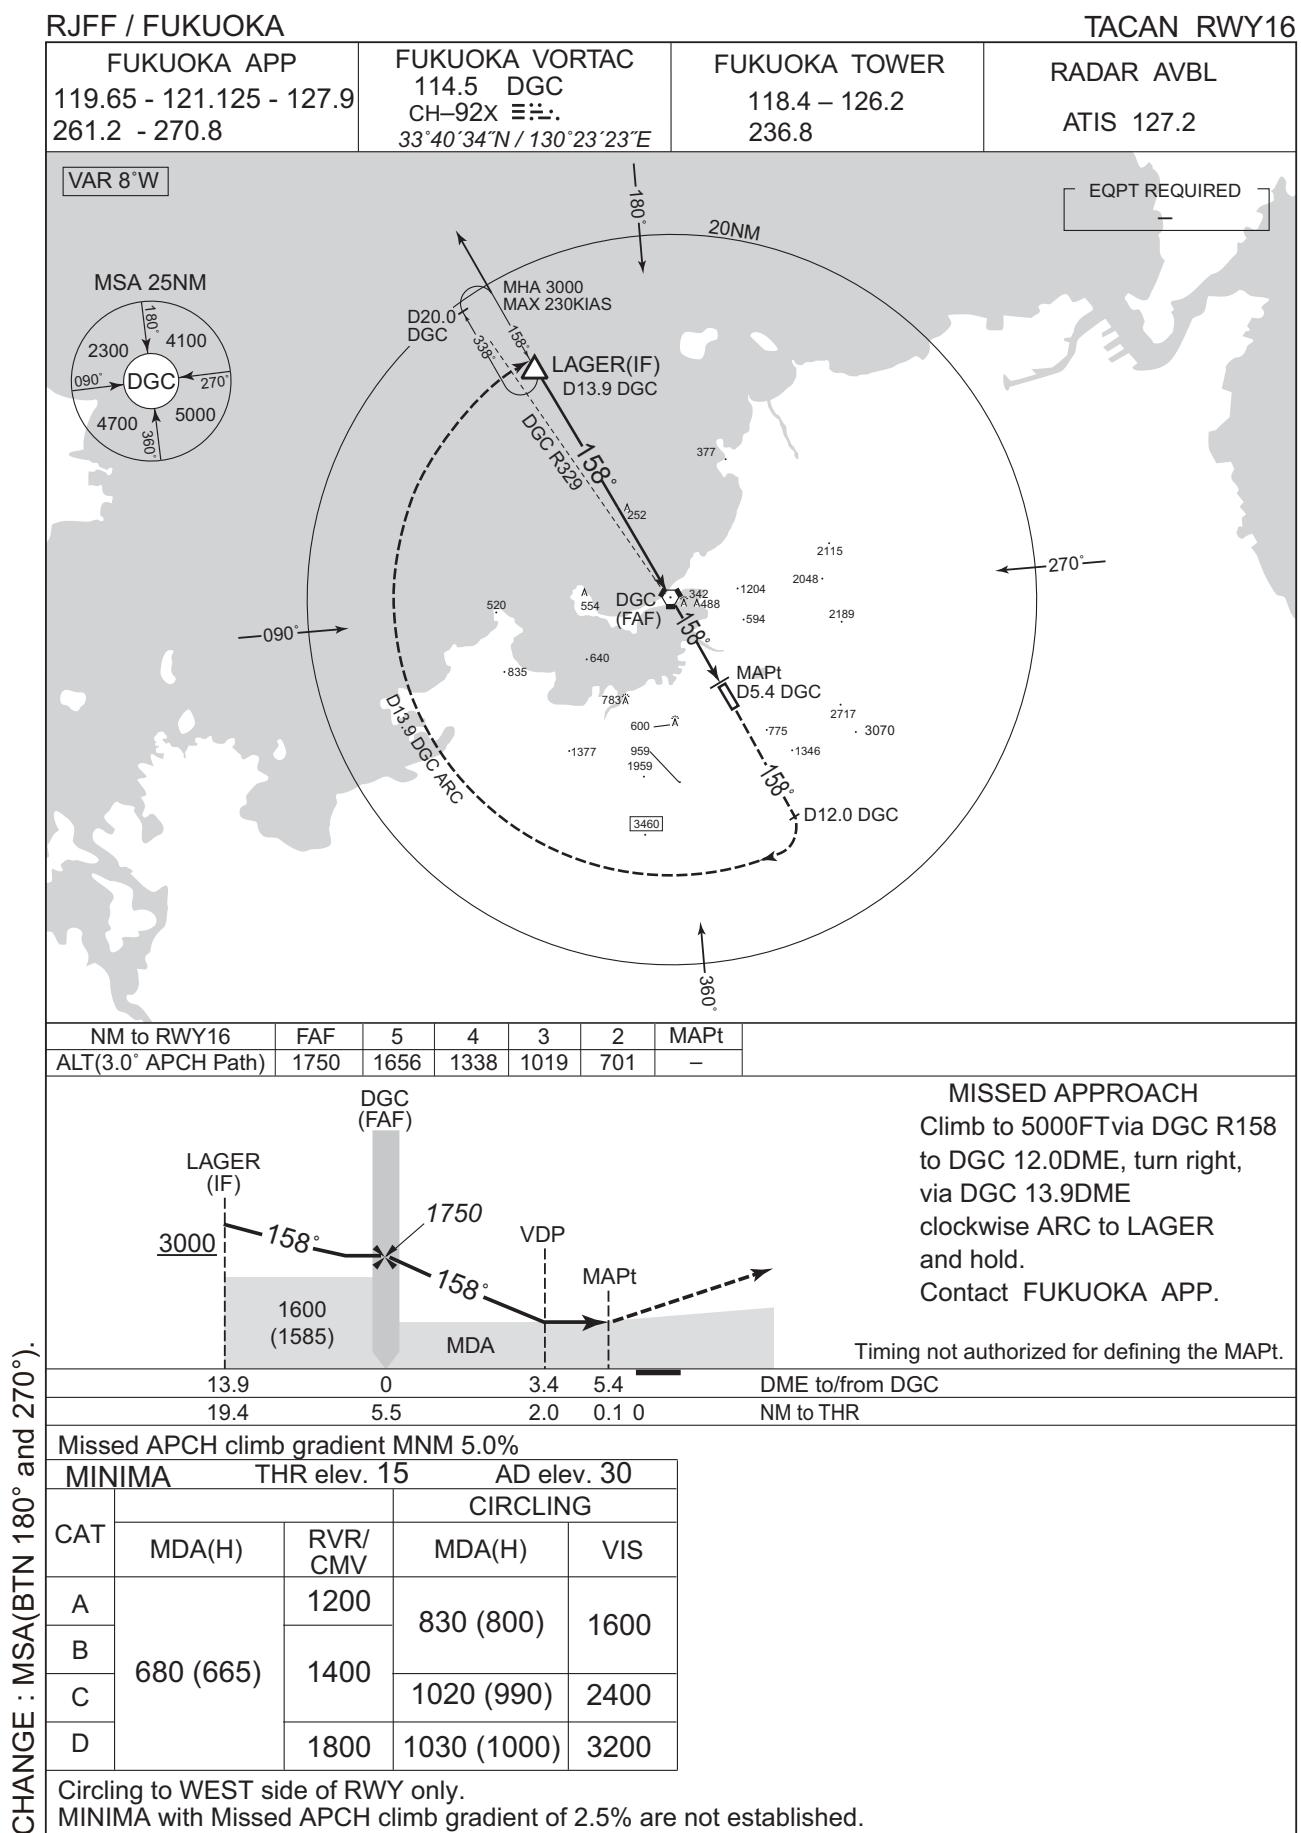

RJFF / FUKUOKA


Visual REP

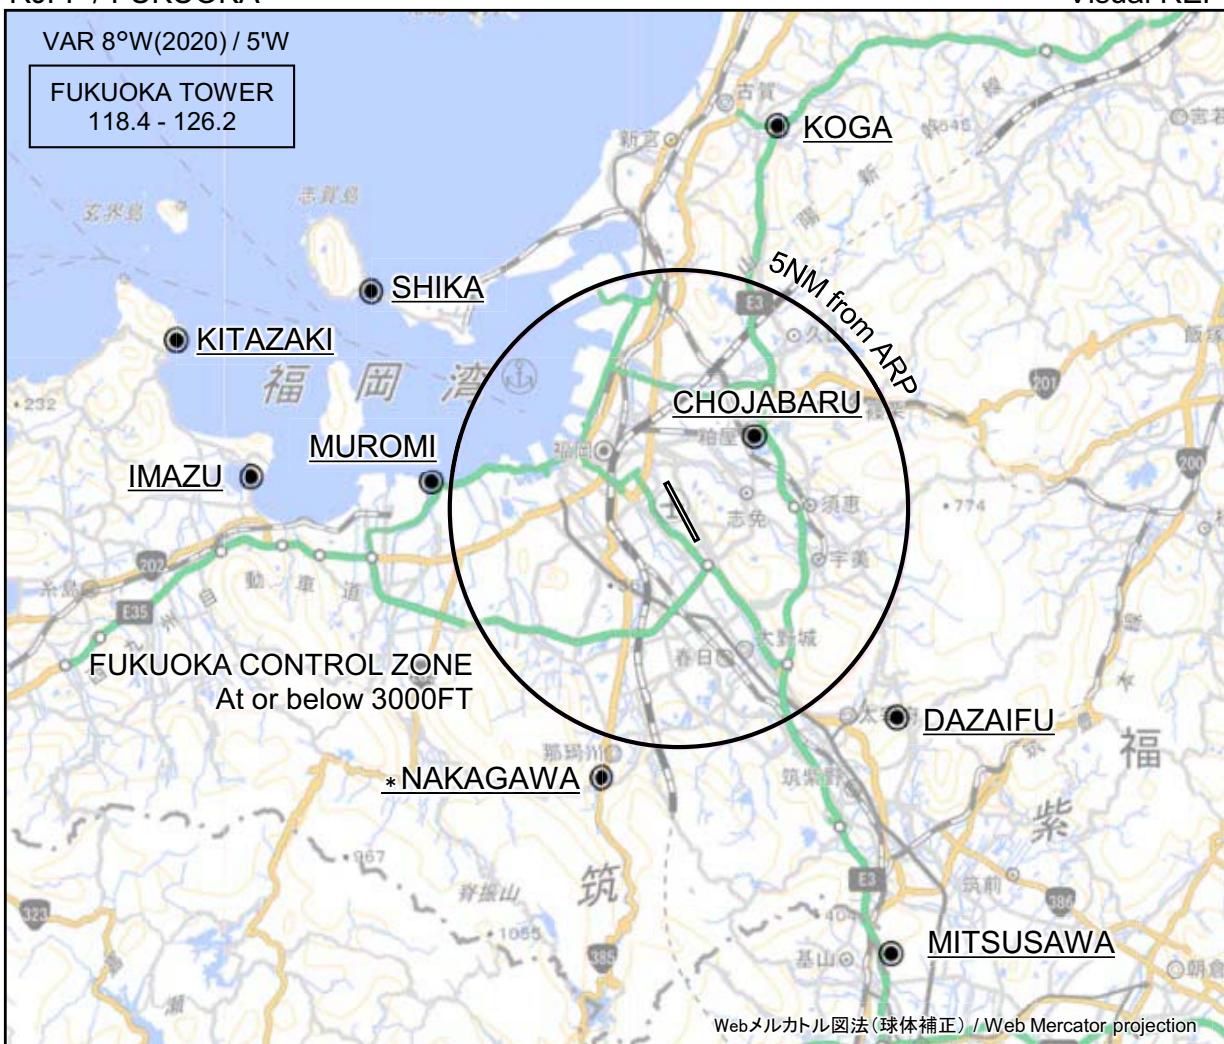

CHANGE : Map updated. BRG/DIST from ARP.


| Call sign | BRG / DIST from ARP | Remarks |
|-------------------|---------------------|-----------------------------|
| 古賀 Koga | 014°T / 8.4NM | 高速道路インターチェンジ Interchange |
| 長者原 Chojabaru | 046°T / 2.3NM | ドーム型建造物 Dome |
| 太宰府 Dazaifu | 133°T / 6.4NM | ゴルフ場 Golf Course |
| 三沢 Mitsusawa | 153°T / 10.4NM | ゴルフ場 Golf Course |
| * 那珂川 Nakagawa | 197°T / 5.8NM | 松尾橋 Bridge |
| 室見 Muromi | 277°T / 5.4NM | 室見川河口 River mouth |
| 今津 Imazu | 275°T / 9.4NM | 今津橋 Bridge |
| 志賀 Shika | 305°T / 8.2NM | 志賀島橋 Bridge |
| 北崎 Kitazaki | 289°T / 11.5NM | 漁港 Harbor |

* ヘリコプター用 Use For Helicopter

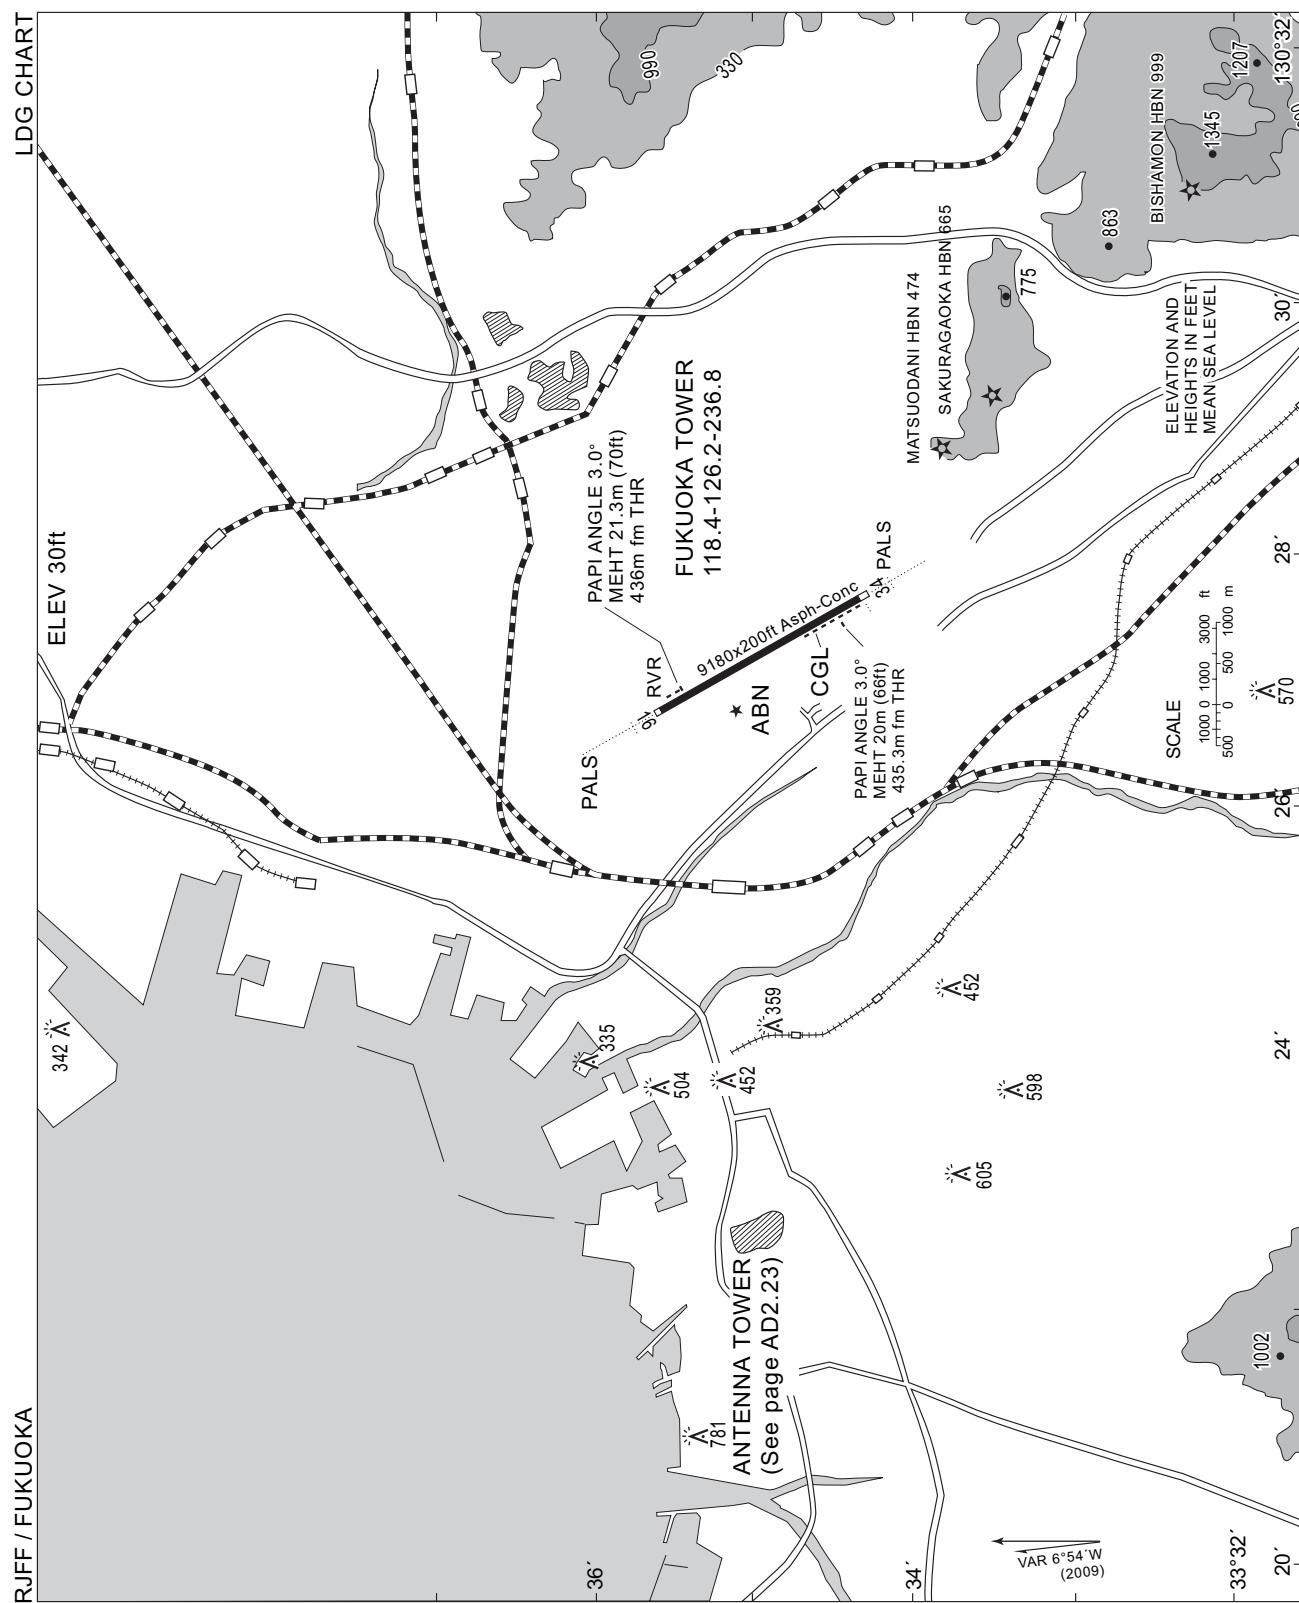

RJFF / FUKUOKA

Minimum Vectoring Altitude CHART

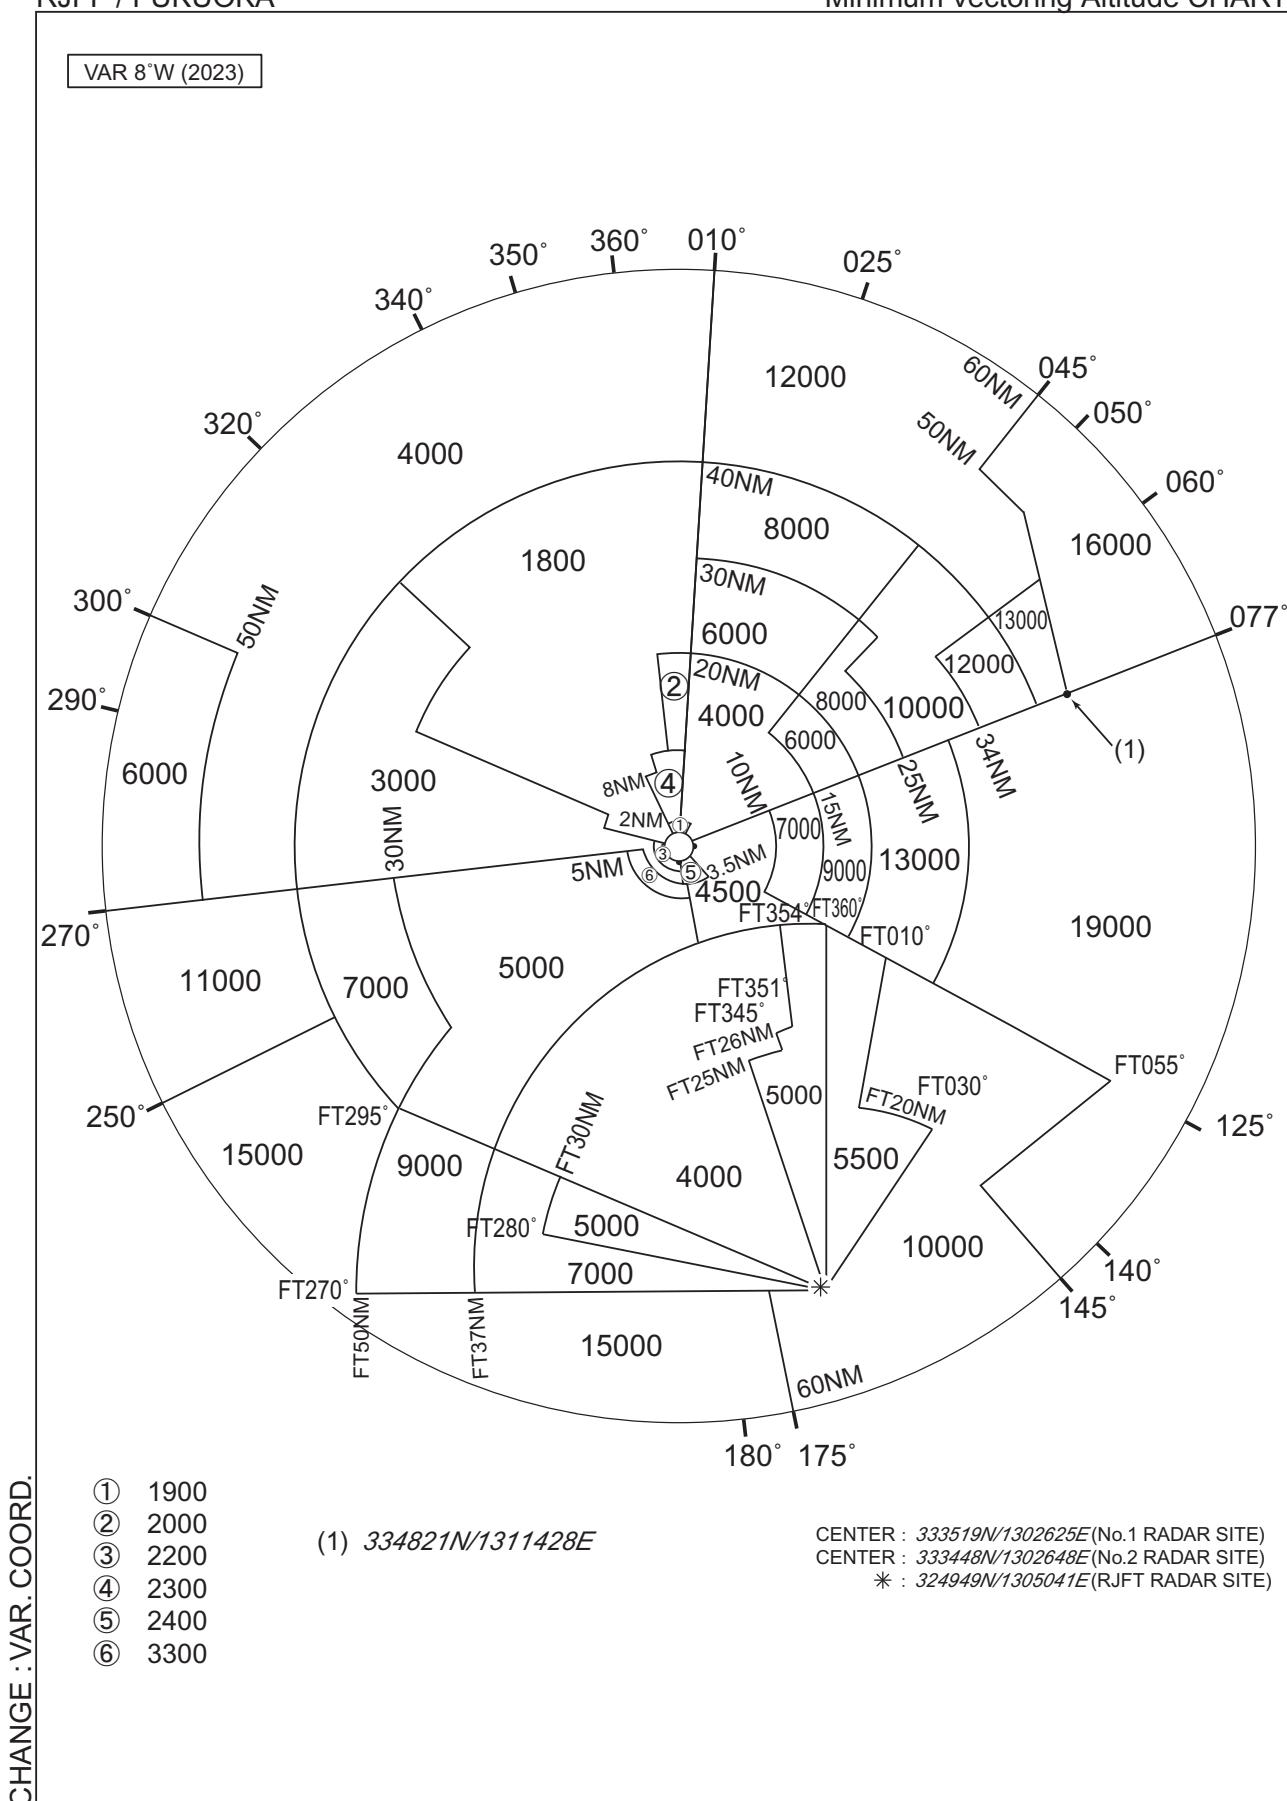

INTENTIONALLY LEFT BLANK