


RJTY / YOKOTA

AD CHART

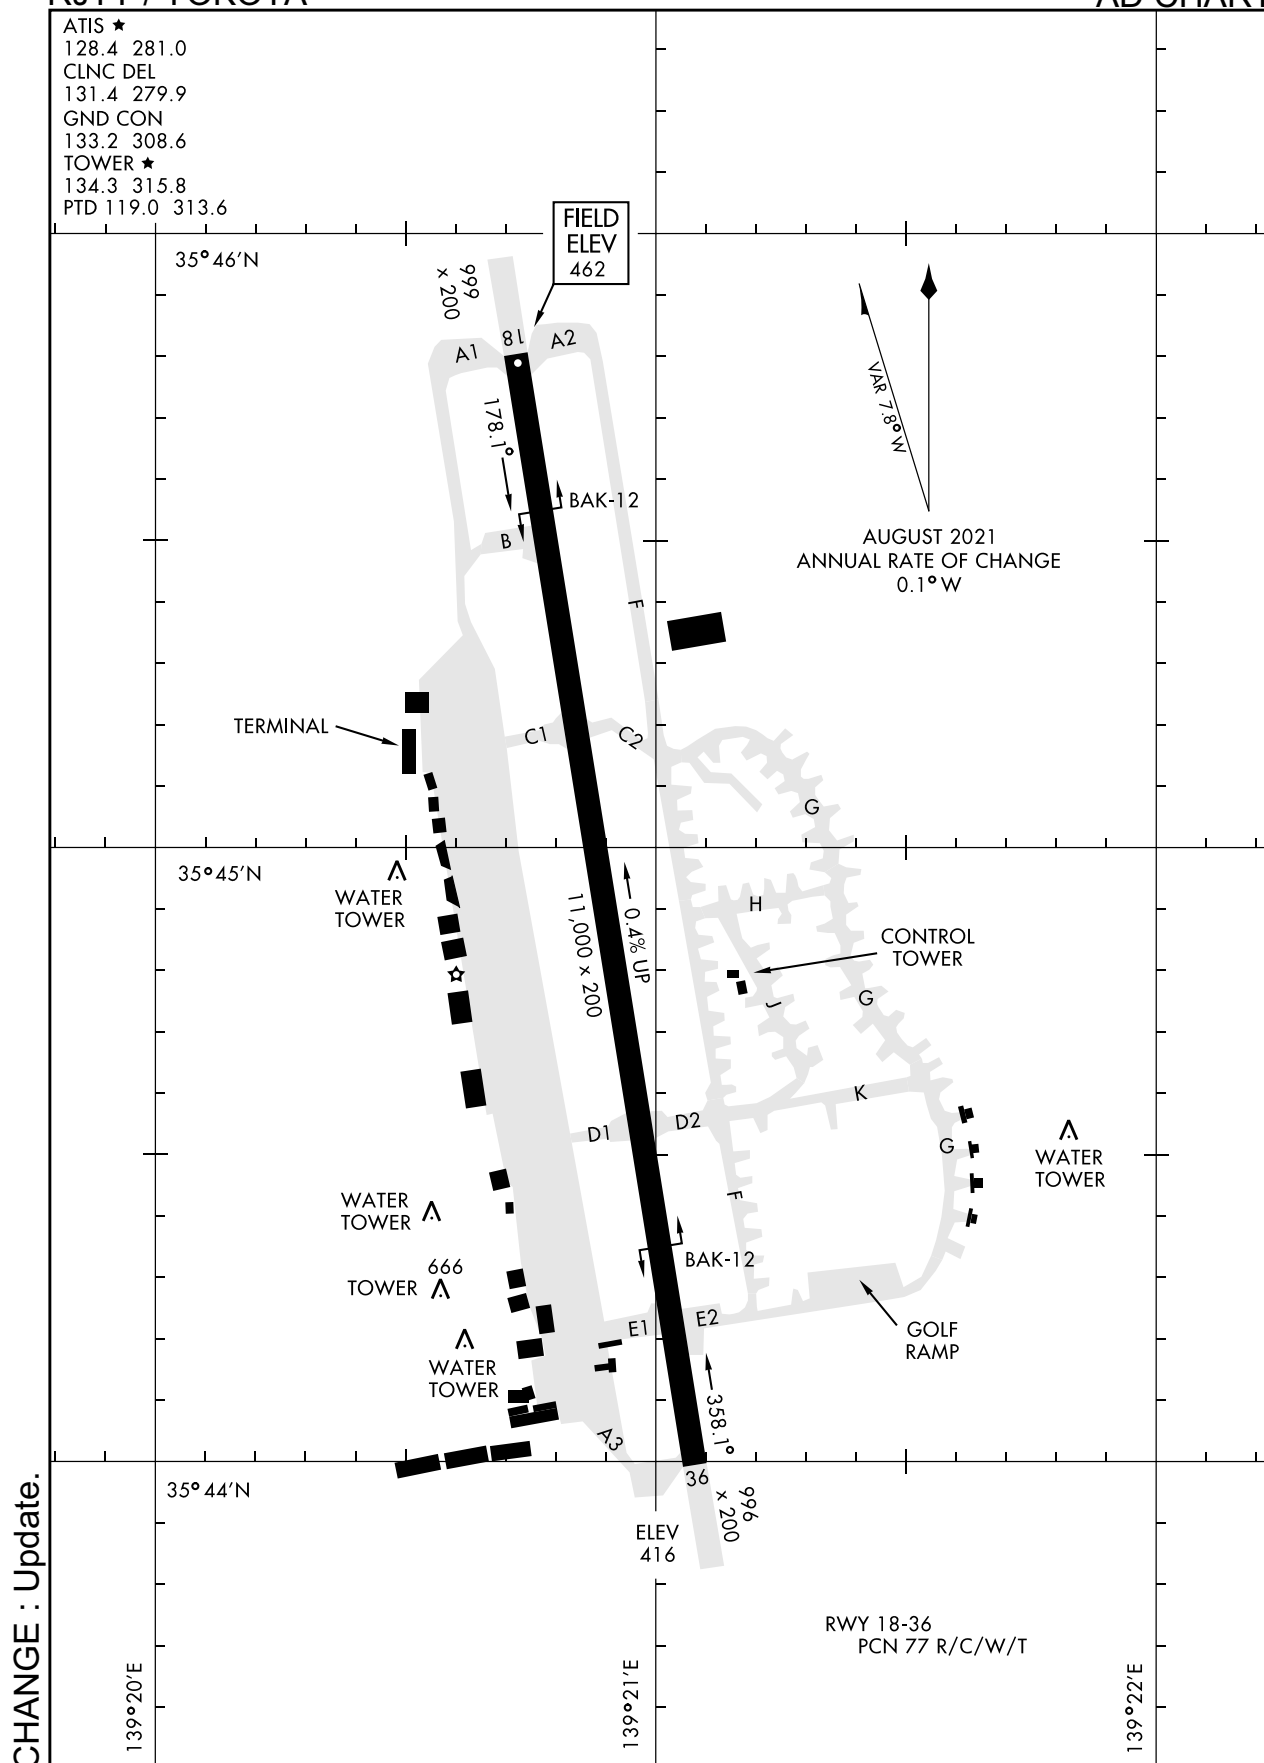


NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

BREEE FOUR DEPARTURE(OBSTACLE)

ATIS★128.4 281.0  
CLNC DEL  
131.4 279.9  
GND CON  
133.2 308.6  
TOWER★  
134.3 315.8  
DEP CON  
122.1 363.8

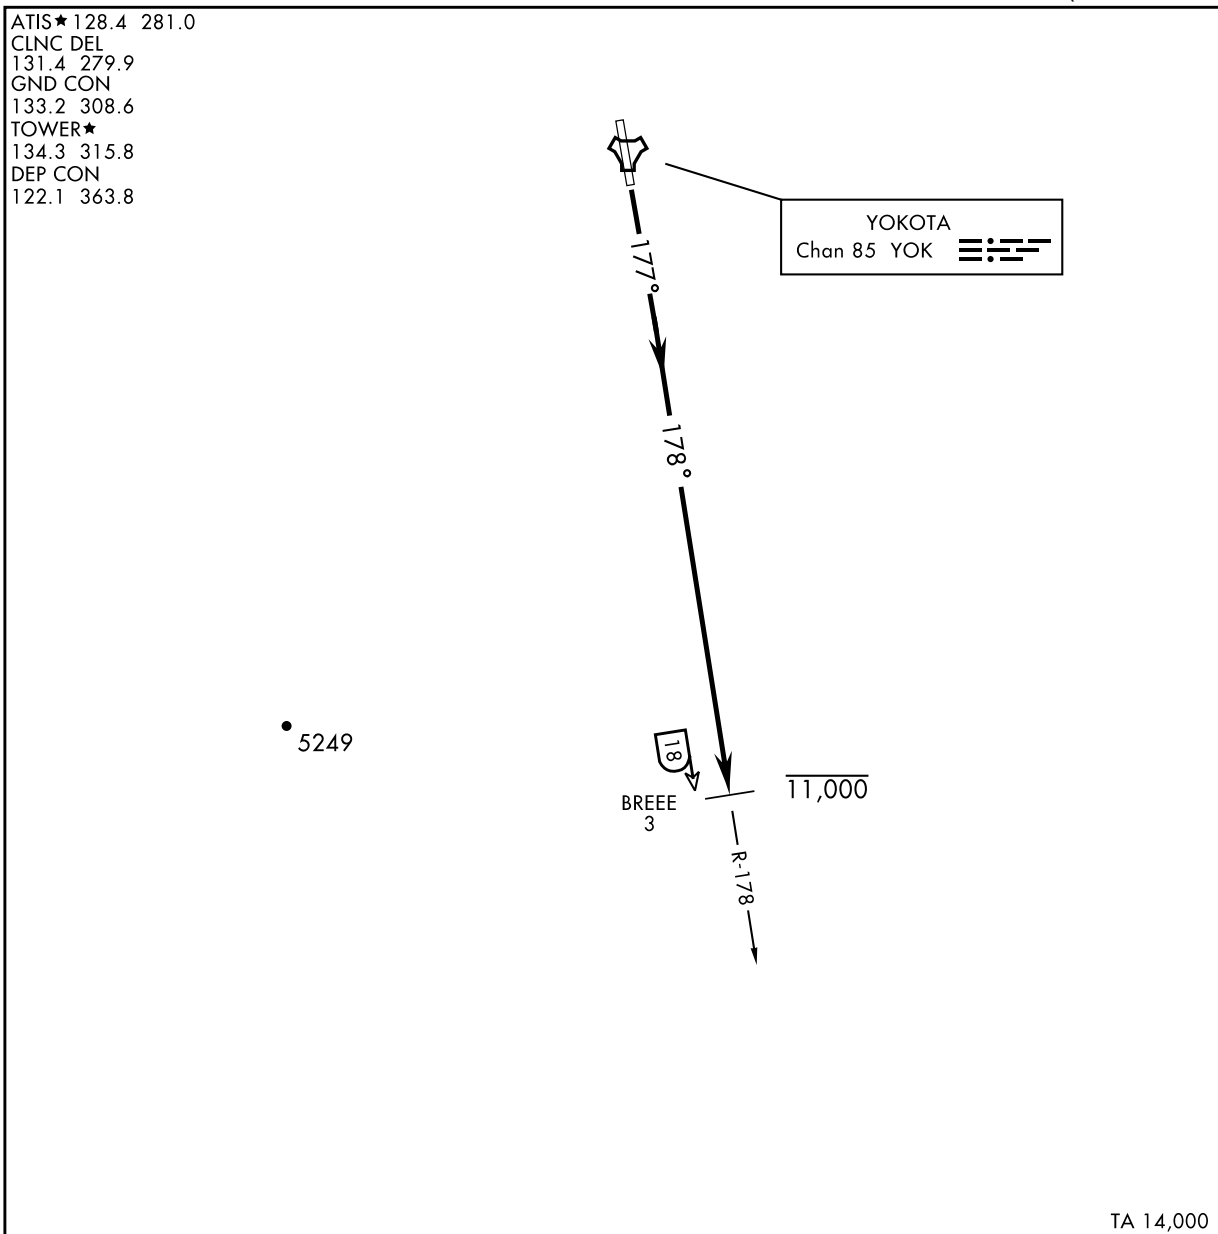

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 18: Climb to 4000, turn right to intercept YOK TACAN R-178 to BREEE.  
Cross BREEE at or below 11,000. Continue as assigned by ATC.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

## STANDARD DEPARTURE CHART - INSTRUMENT

RJTY /YOKOTA

TIMAP FOUR DEPARTURE(OBSTACLE)

ATIS★128.4 281.0  
 CLNC DEL  
 131.4 279.9  
 GND CON  
 133.2 308.6  
 TOWER★  
 134.3 315.8  
 DEP CON  
 122.1 363.8



TA 14,000



## DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 36: Climb to 4000, turn right to intercept YOK TACAN R-003 to TIMAP.  
 Cross TIMAP at or below 13,000. Continue as assigned by ATC.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

ATIS★128.4 281.0  
CLNC DEL  
131.4 279.9  
GND CON  
133.2 308.6  
TOWER★  
134.3 315.8  
DEP CON  
122.1 363.8

BUSYU ONE DEPARTURE

Rwy	Knots	60	120	180	240	300	360
* 18 (a)	V/V(fpm)	360	720	1080	1440	1800	2160
† 18 (b)	V/V(fpm)	465	930	1395	1860	2325	2790
* 36 (c)	V/V(fpm)	383	766	1149	1532	1915	2298
† 36 (b)	V/V(fpm)	476	952	1428	1904	2380	2856

\* Minimum      † ATC Climb Rate  
(a) to 8000  
(b) to 13,400  
(c) to 7900



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 18: Climbing right turn to intercept YOK TACAN R-283 to BUSYU.  
Cross BUSYU at or above 13,400. Maintain ATC assigned altitude.

TAKE-OFF RWY 36: Climbing left turn to intercept YOK TACAN R-283 to BUSYU.  
Cross BUSYU at or above 13,400. Maintain ATC assigned altitude.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

## STANDARD DEPARTURE CHART - INSTRUMENT


RJTY / YOKOTA

FISAB TWO DEPARTURE(RNAV)

ATIS★128.4 281.0  
 CLNC DEL  
 131.4 279.9  
 GND CON  
 133.2 308.6  
 TOWER★  
 134.3 315.8  
 DEP CON  
 122.1 363.8

## TAKE-OFF OBSTACLES:

- (1) RWY 36, building 3043' from DER, 1311' left of centerline, 53' AGL/527' MSL.  
 (2) RWY 36, building with antenna 2153' from DER, 1095' right of centerline, 76' AGL/532' MSL.  
 (3) RWY 36, misc natural 1583' from DER, 640' left of centerline, 53' AGL/522' MSL.

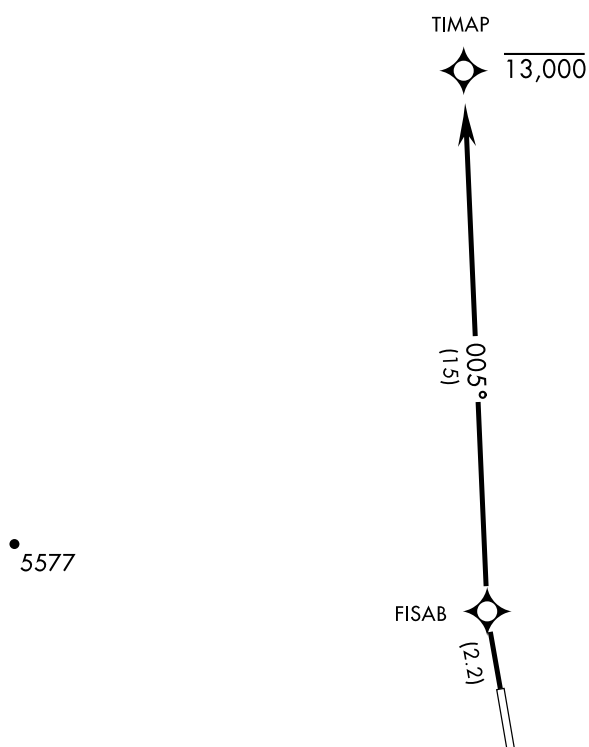

RNAV 1  
 DME/DME RNP-0.3 NA

**RADAR REQUIRED**  
 (for non-GPS Equipped Aircraft)

**GPS REQUIRED**

TA 14,000



## DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 36: Climb direct FISAB, then track 005° to TIMAP. Cross TIMAP at or below 13,000 or as assigned by ATC.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP


STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

GERGE TWO DEPARTURE(RNAV)

ATIS★128.4 281.0  
CLNC DEL  
131.4 279.9  
GND CON  
133.2 308.6  
TOWER★  
134.3 315.8  
DEP CON  
122.1 363.8

- TAKE-OFF OSBTACLES:
- (1) RWY 18, terrain within 15' from DER, 500' right of centerline, up to 417' MSL.
  - (2) RWY 18, building 3492' from DER, 1415' right of centerline, 90' AGL/512' MSL.
  - (3) RWY 18, building 6006' from DER, 1744' right of centerline, 145' AGL/529' MSL.
  - (4) RWY 18, pylon 4436' from DER 1410' right of centerline, 100' AGL/492' MSL.
  - (5) RWY 18, pylon 4870' from DER 1312' right of centerline, 100' AGL/502' MSL.
  - (6) RWY 18, MSL tree 2217' from DER 755' left of centerline, 90' AGL/494' MSL.

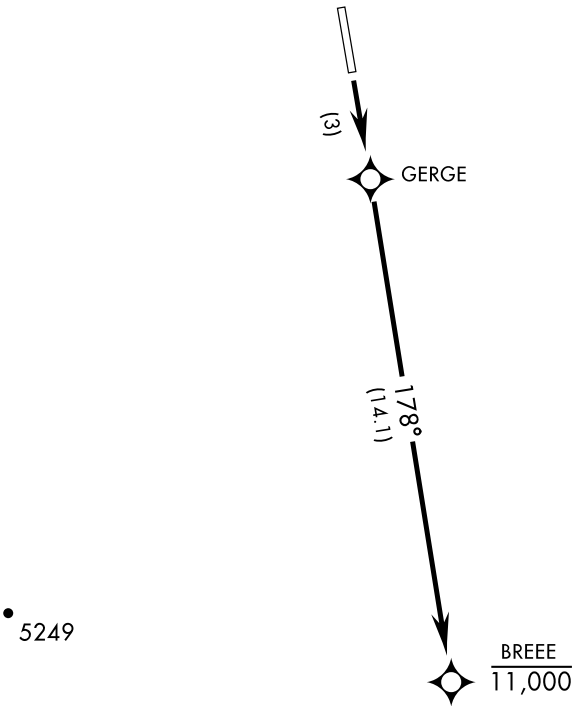

RNAV 1  
DME/DME RNP-0.3 NA

**RADAR REQUIRED**  
(for non-GPS Equipped Aircraft)

**GPS REQUIRED**

TA 14,000



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 18: Climb direct GERGE, then track 178° to BREEE. Cross BREEE at or below 11,000.


CHANGE : Update.

NOTE: REPRINTING DOD FLIP

**INTENTIONALLY LEFT BLANK**

## INSTRUMENT APPROACH CHART

## RJTY / YOKOTA

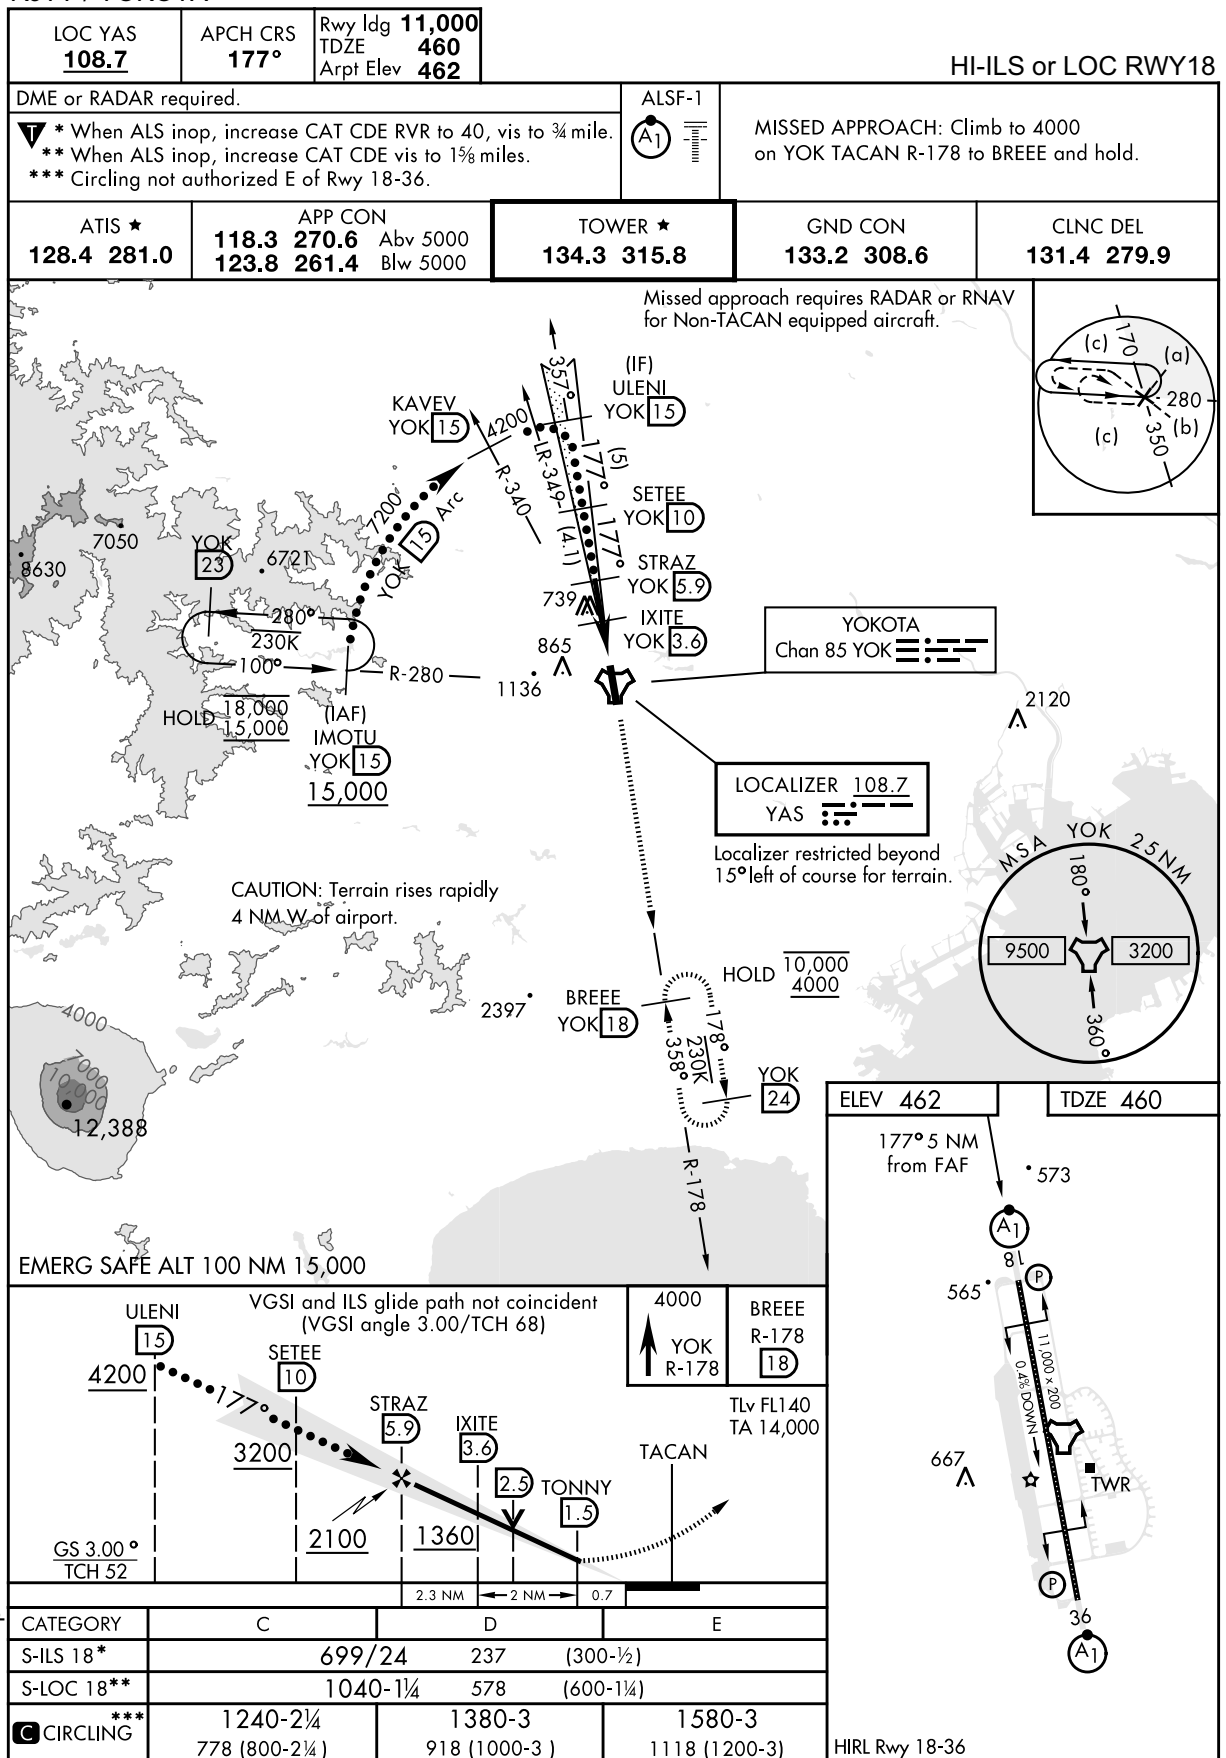



## INSTRUMENT APPROACH CHART

## RJTY / YOKOTA

LOC I-YAS <b>108.7</b>	APCH CRS <b>177°</b>	Rwy ldg <b>11,000</b> TDZE <b>460</b> Arpt Elev <b>462</b>
---------------------------	-------------------------	--

ILS or LOC/DME RWY18

▼ \* When ALS inop, increase CAT ABCDE RVR to 40, vis to ¾ mile.  
 \*\* When ALS inop increase CAT AB RVR to 55, vis to 1 mile,  
 CAT CDE vis to 1½ miles.  
 \*\*\* Circling not authorized E of Rwy 18-36.




† MISSED APPROACH: Climb to 4000 on  
YOK TACAN R-178 to BREEE and hold.

ATIS ★ <b>128.4 281.0</b>	APP CON <b>118.3 270.6</b> Abv 5000 <b>123.8 261.4</b> Blw 5000
------------------------------	---



TOWER ★  
**134.3 315.8**

GND CON  
**133.2 308.6**


CLNC DEL  
**131.4 279.9**

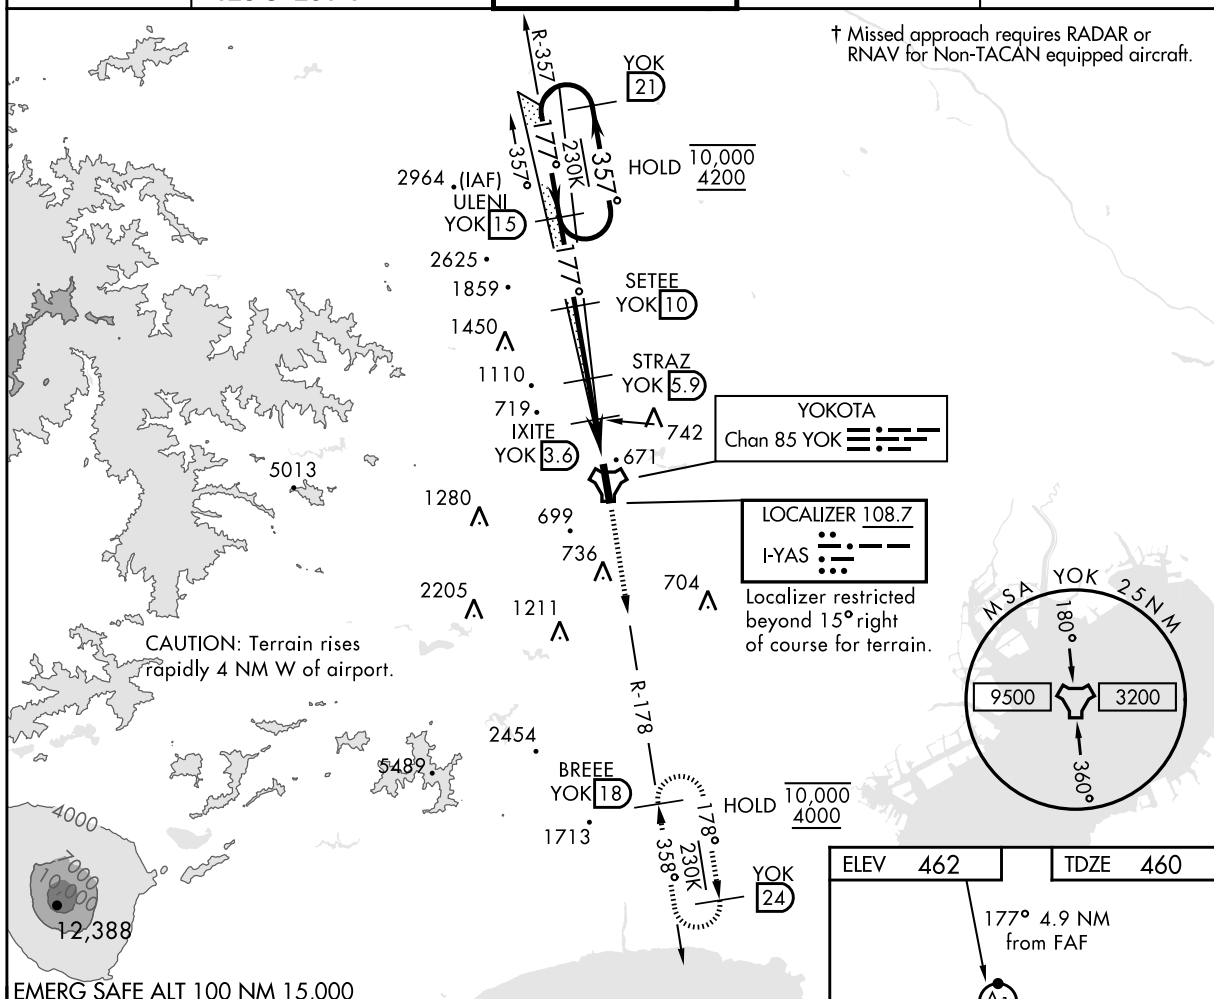

EMERG SAFE ALT 100 NM 15,000

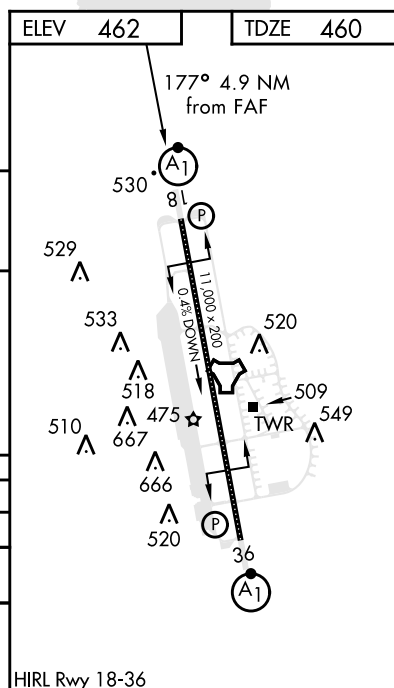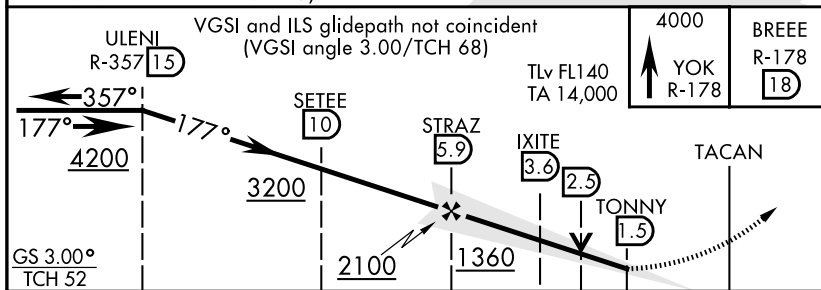

CHANGE : Update.


			←2.3 NM	←2.1 NM	0.6 NM	
CATEGORY	A	B	C	D	E	
S-ILS 18*	699/24		237	(300-½)		
S-LOC 18**	1040/24 578 (600-½)		1040-1¼ 578 (600-1¼)			
 ***	1040-1		1240-2¼	1380-3	1580-3	
	578 (600-1)		778 (800-2¼)	918 (1000-3)	1118 (1200-3)	

HIRL Rwy 18-36

NOTE: REPRINTING DOD FLIP


## INSTRUMENT APPROACH CHART

## RJTY / YOKOTA

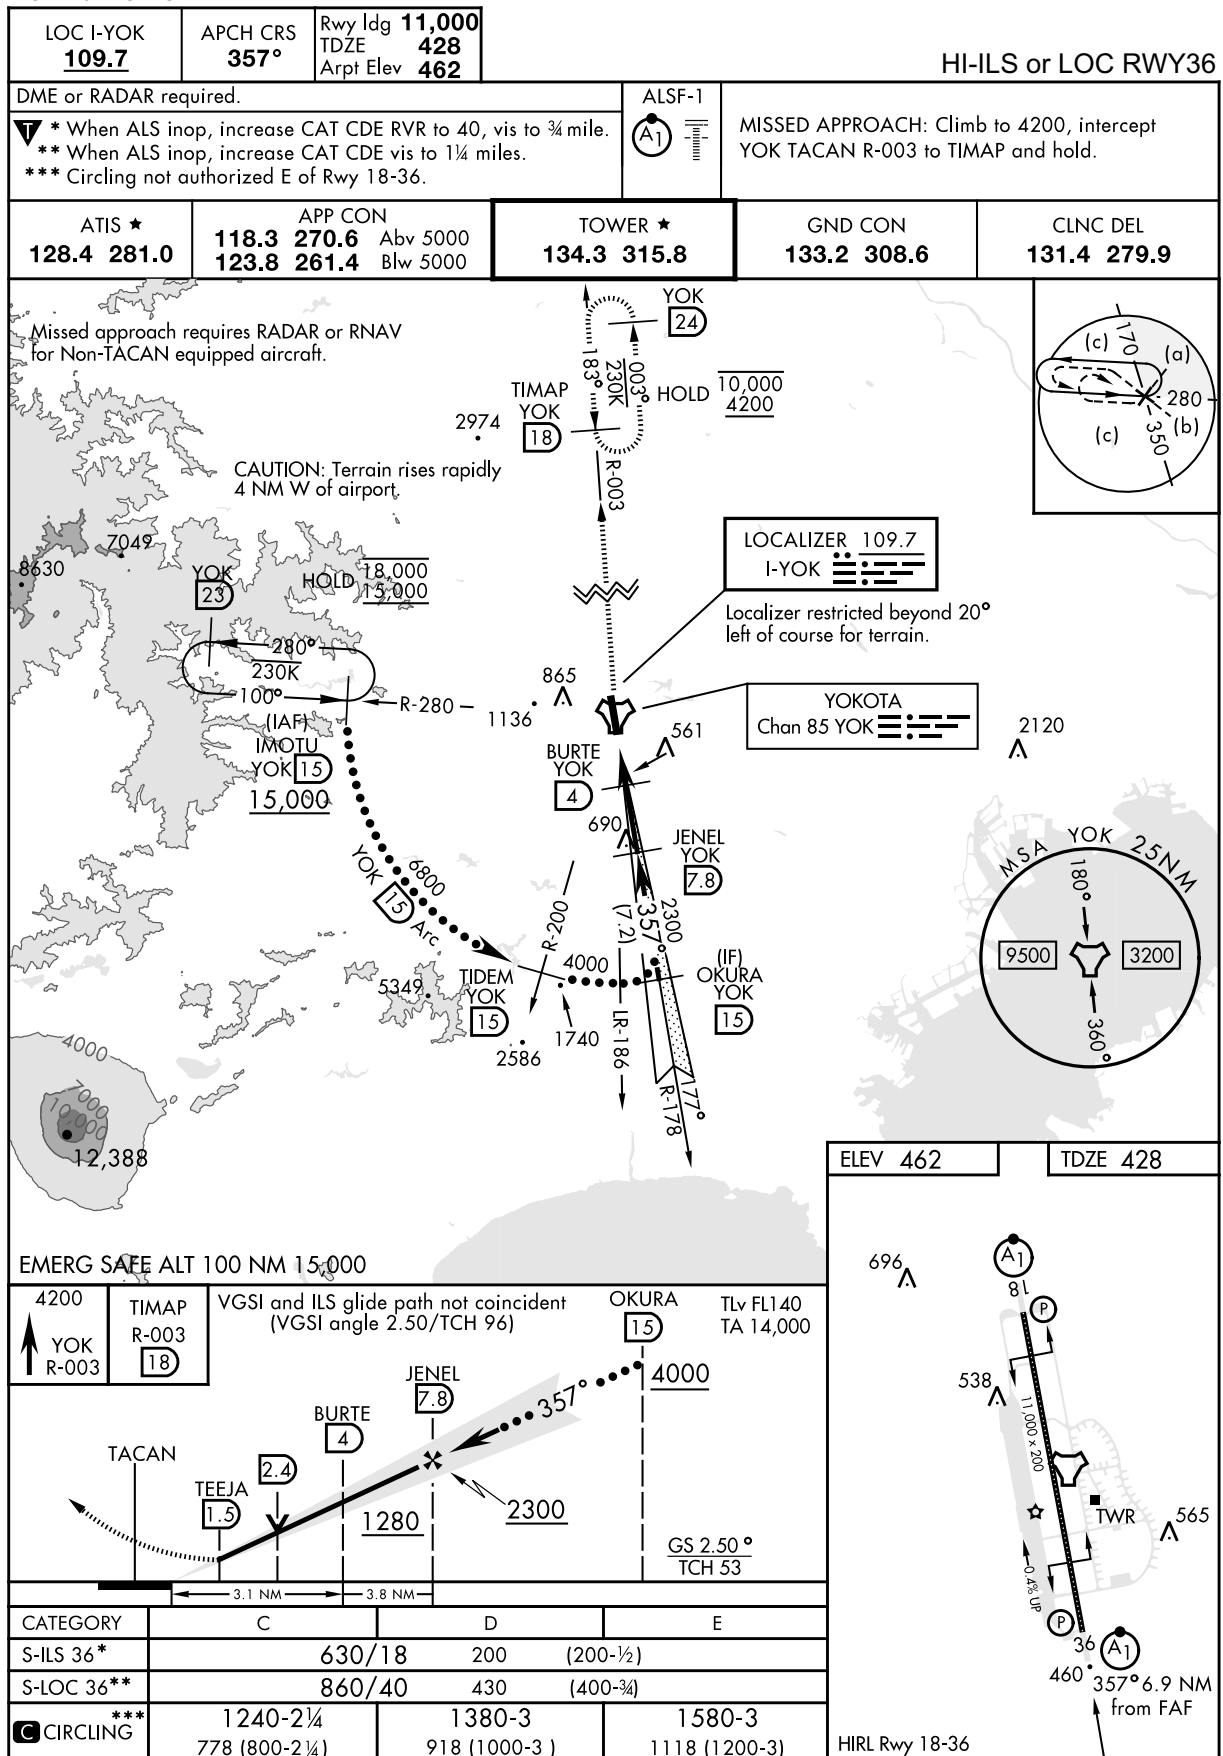

## INSTRUMENT APPROACH CHART

## RJTY / YOKOTA

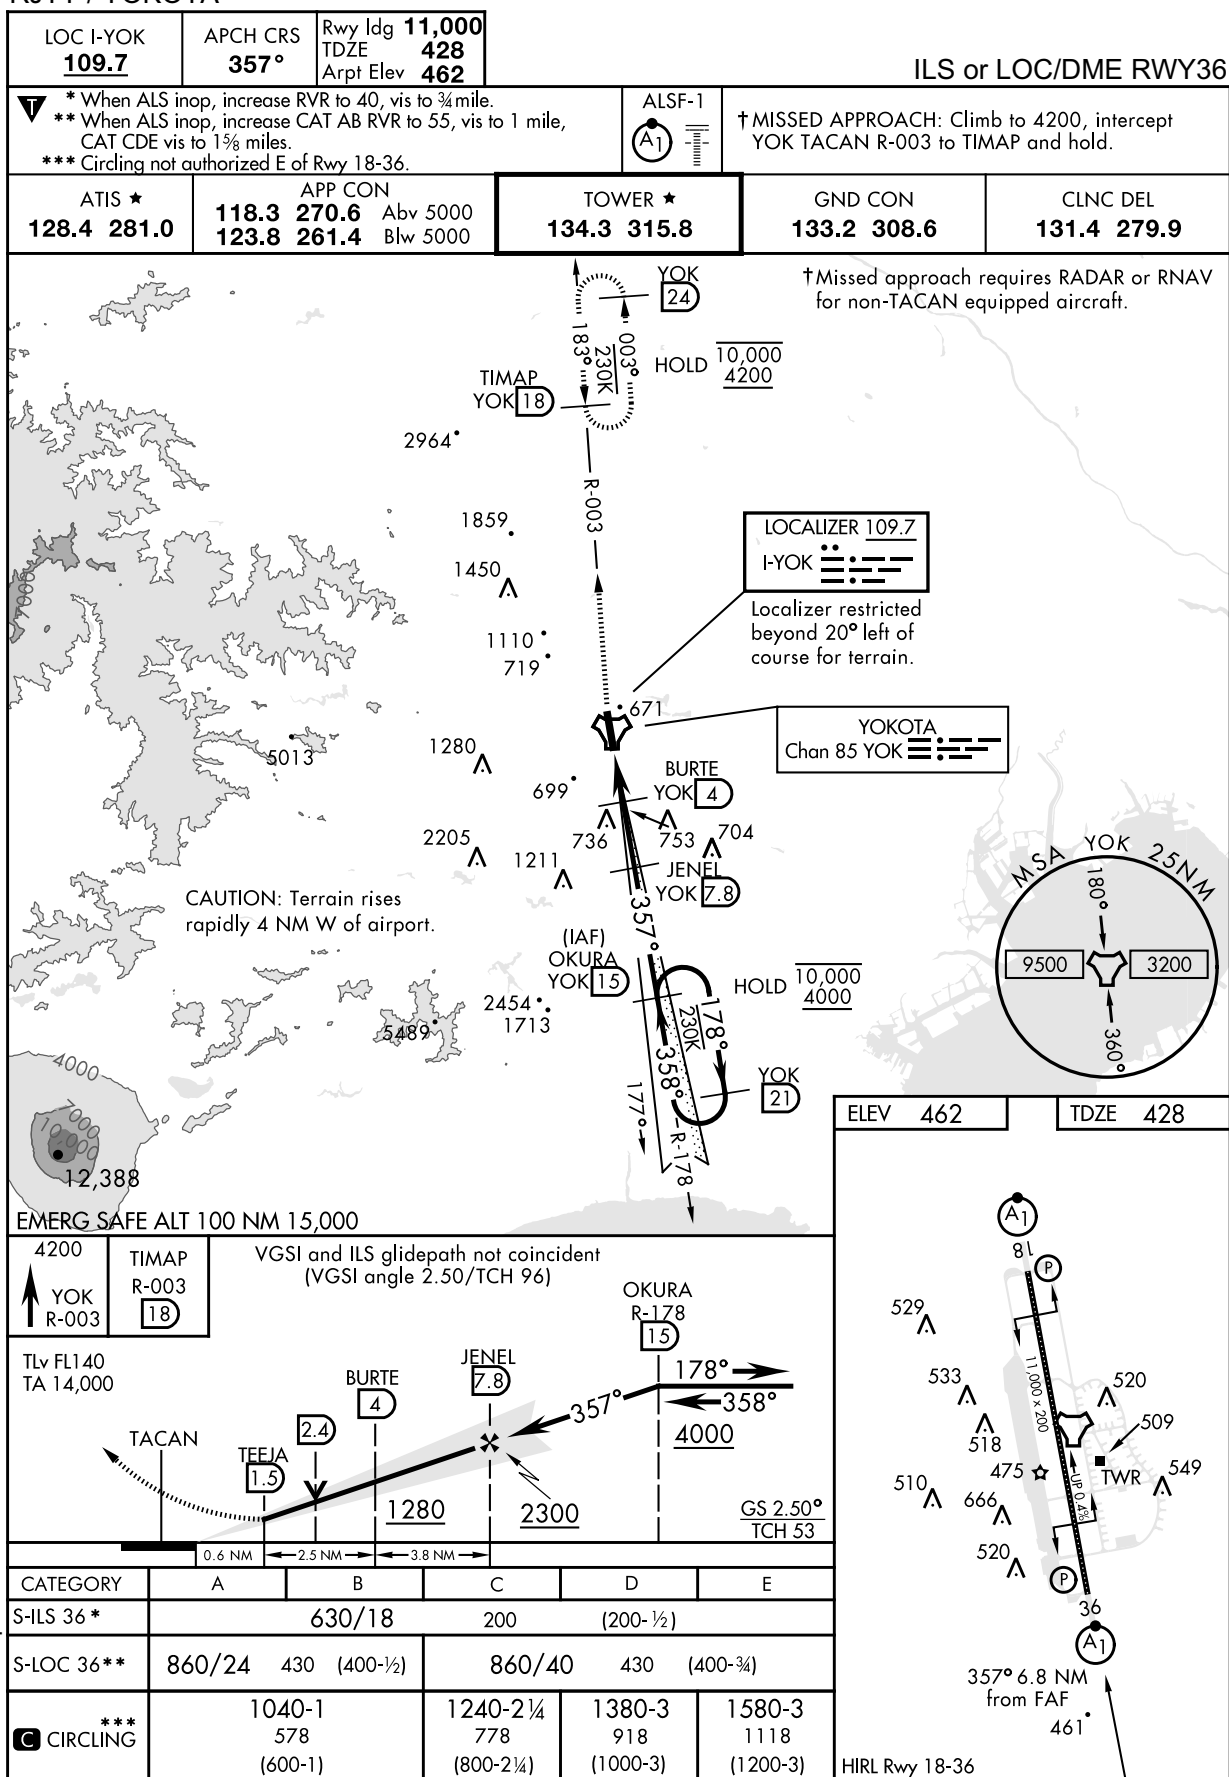

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RJTY / YOKOTA

APCH CRS	Rwy ldg	11,000
177°	TDZE	460
	Arpt Elev	462

RNAV(GPS) RWY18

<p>▼ *When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 3/8 miles.</p> <p>** Circling not authorized E of Rwy 18-36.</p>	<p>ALSF-1</p> <p>(A1)</p>	<p>MISSED APPROACH: Climb to 4000 direct MESTR WPT and hold.</p>
---	---------------------------	--

<p>ATIS ★</p> <p>128.4 281.0</p>	<p>APP CON</p> <p>118.3 270.6 Abv 5000</p> <p>123.8 261.4 Blw 5000</p>	<p>TOWER ★</p> <p>134.3 315.8</p>	<p>GND CON</p> <p>133.2 308.6</p>	<p>CLNC DEL</p> <p>131.4 279.9</p>
----------------------------------	--	-----------------------------------	-----------------------------------	------------------------------------



CHANGE : Update.

<p>TLv FL140</p> <p>TA 14,000</p>		<p>4000</p>	<p>MESTR</p>	<p>ELEV 462</p>	<p>TDZE 460</p>
<p>10,000</p> <p>4200</p> <p>357°</p> <p>177°</p> <p>177°</p> <p>3.09°</p> <p>TCH 68</p>		<p>BODAI</p>	<p>RISSA</p> <p>HANIV</p> <p>RW18</p> <p>1.4 NM to RW18</p> <p>2500</p> <p>1340</p> <p>3.5 NM</p> <p>2.5 NM</p>	<p>652</p> <p>529</p> <p>533</p> <p>518</p> <p>510</p> <p>666</p> <p>520</p> <p>510</p> <p>475</p> <p>520</p> <p>509</p> <p>549</p> <p>36</p> <p>81</p> <p>177° to RW18</p> <p>0.45° DOWN</p> <p>11,000 x 200</p> <p>TWR</p> <p>HIRL Rwy 18-36</p>	
CATEGORY	A	B	C	D	
LNAV MDA *	960/24	498 (500-1/2)	960/50	498 (500-1)	
CIRCLING **	1020-1	1040-1	1240-2 3/4	1380-3	
	558 (600 1)	578 (600 1)	778 (800 2 1/2)	918 (1000 3)	

NOTE: REPRINTING DOD FLIP

## INSTRUMENT APPROACH CHART


## RJTY / YOKOTA

APCH CRS	Rwy ldg	11,000
357°	TDZE	428
	Arpt Elev	462

## RNAV(GPS) RWY36

<p>▼ * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 3/8 miles.</p> <p>** Circling not authorized East of Rwy 18-36.</p>	<p>ALSF-1</p> <p>(A1)</p>	<p>MISSED APPROACH: Climb to 5300 direct BODAI WPT and hold, continue climb-in-hold to 5300.</p>
---	---------------------------	--

<p>ATIS★</p> <p>128.4 281.0</p>	<p>APP CON</p> <p>118.3 270.6 (ABV 5000 MSL)</p> <p>123.8 261.4 (BLW 5000 MSL)</p>	<p>TOWER★</p> <p>134.3 315.8</p>	<p>GND CON</p> <p>133.2 308.6</p>	<p>CLNC DEL</p> <p>131.4 279.9</p>
---------------------------------	--	----------------------------------	-----------------------------------	------------------------------------

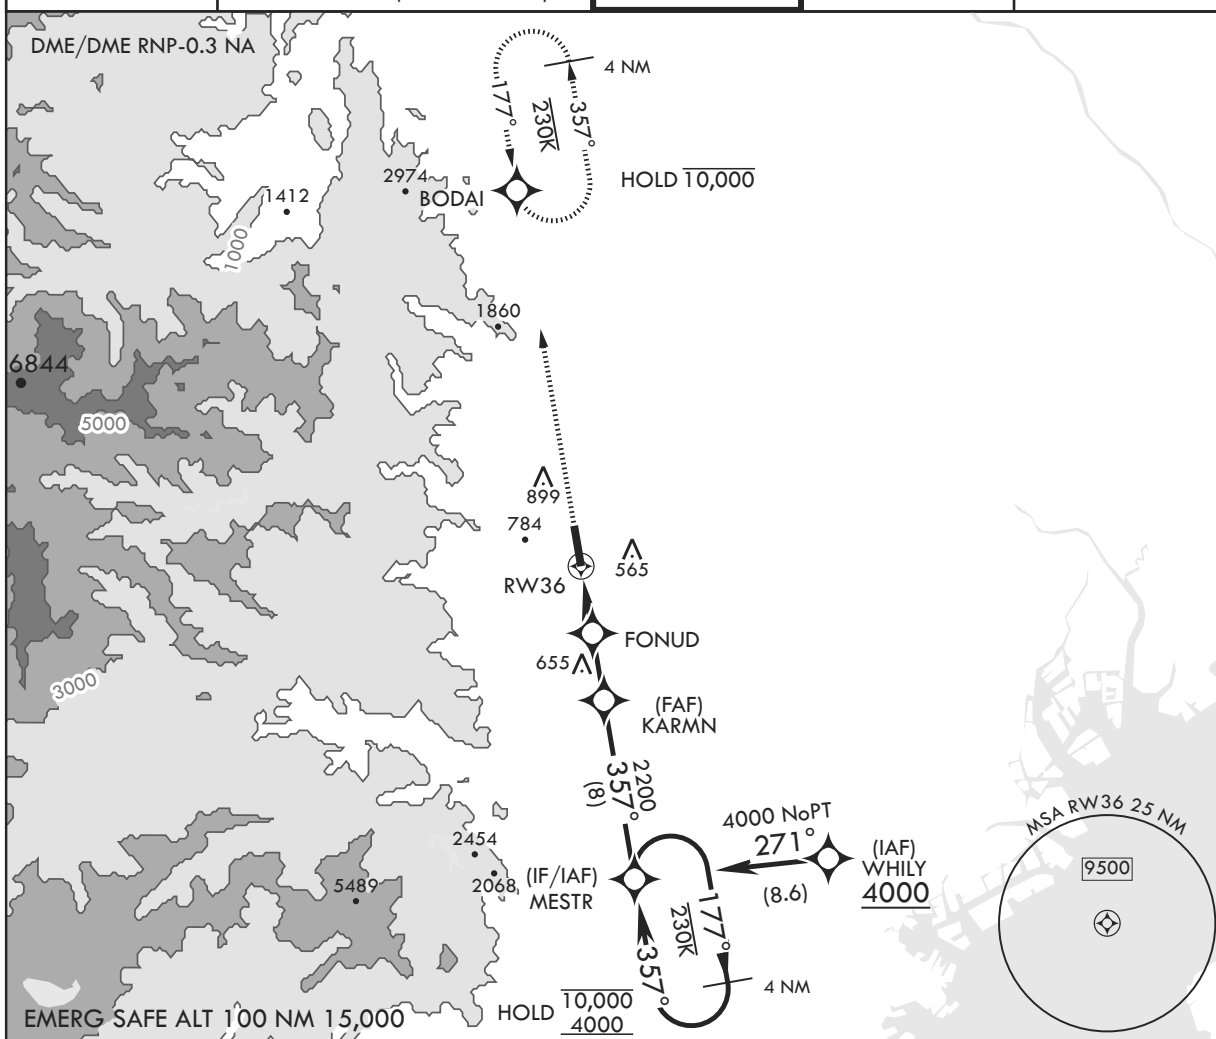

<p>5300 BODAI</p> <p>VGSI and ILS glide path not coincident (VGSI angle 2.50/TCH 96).</p> <p>TLv FL140</p> <p>TA 14,000</p>	<p>MESTR 177°</p> <p>KARMN 357°</p> <p>FONUD 1100</p> <p>RW36 1.6 NM to RW36</p> <p>3 NM</p> <p>3 NM</p> <p>≤ 2.68°</p> <p>TCH 75</p>	<p>ELEV 462</p> <p>TDZE 428</p> <p>81 (A1)</p> <p>529</p> <p>533</p> <p>518</p> <p>510</p> <p>666</p> <p>520</p> <p>36</p> <p>357° to RW36</p> <p>HIRL all Rws</p>
<p>CHANGE : Update.</p>	<p>CATEGORY</p> <p>A B C D</p> <p>LNAV MDA*</p> <p>940/24 510 (500-1/2) 940/55 510 (500-1)</p> <p>CIRCLING**</p> <p>1040-1 578 (600-1) 1240-2 1/4 778 (800-2 1/4) 1380-3 918 (1000-3)</p>	

NOTE: REPRINTING DOD FLIP