

AD CHART




INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART -INSTRUMENT

RORT / TARAMA

RNAV SID and TRANSITION

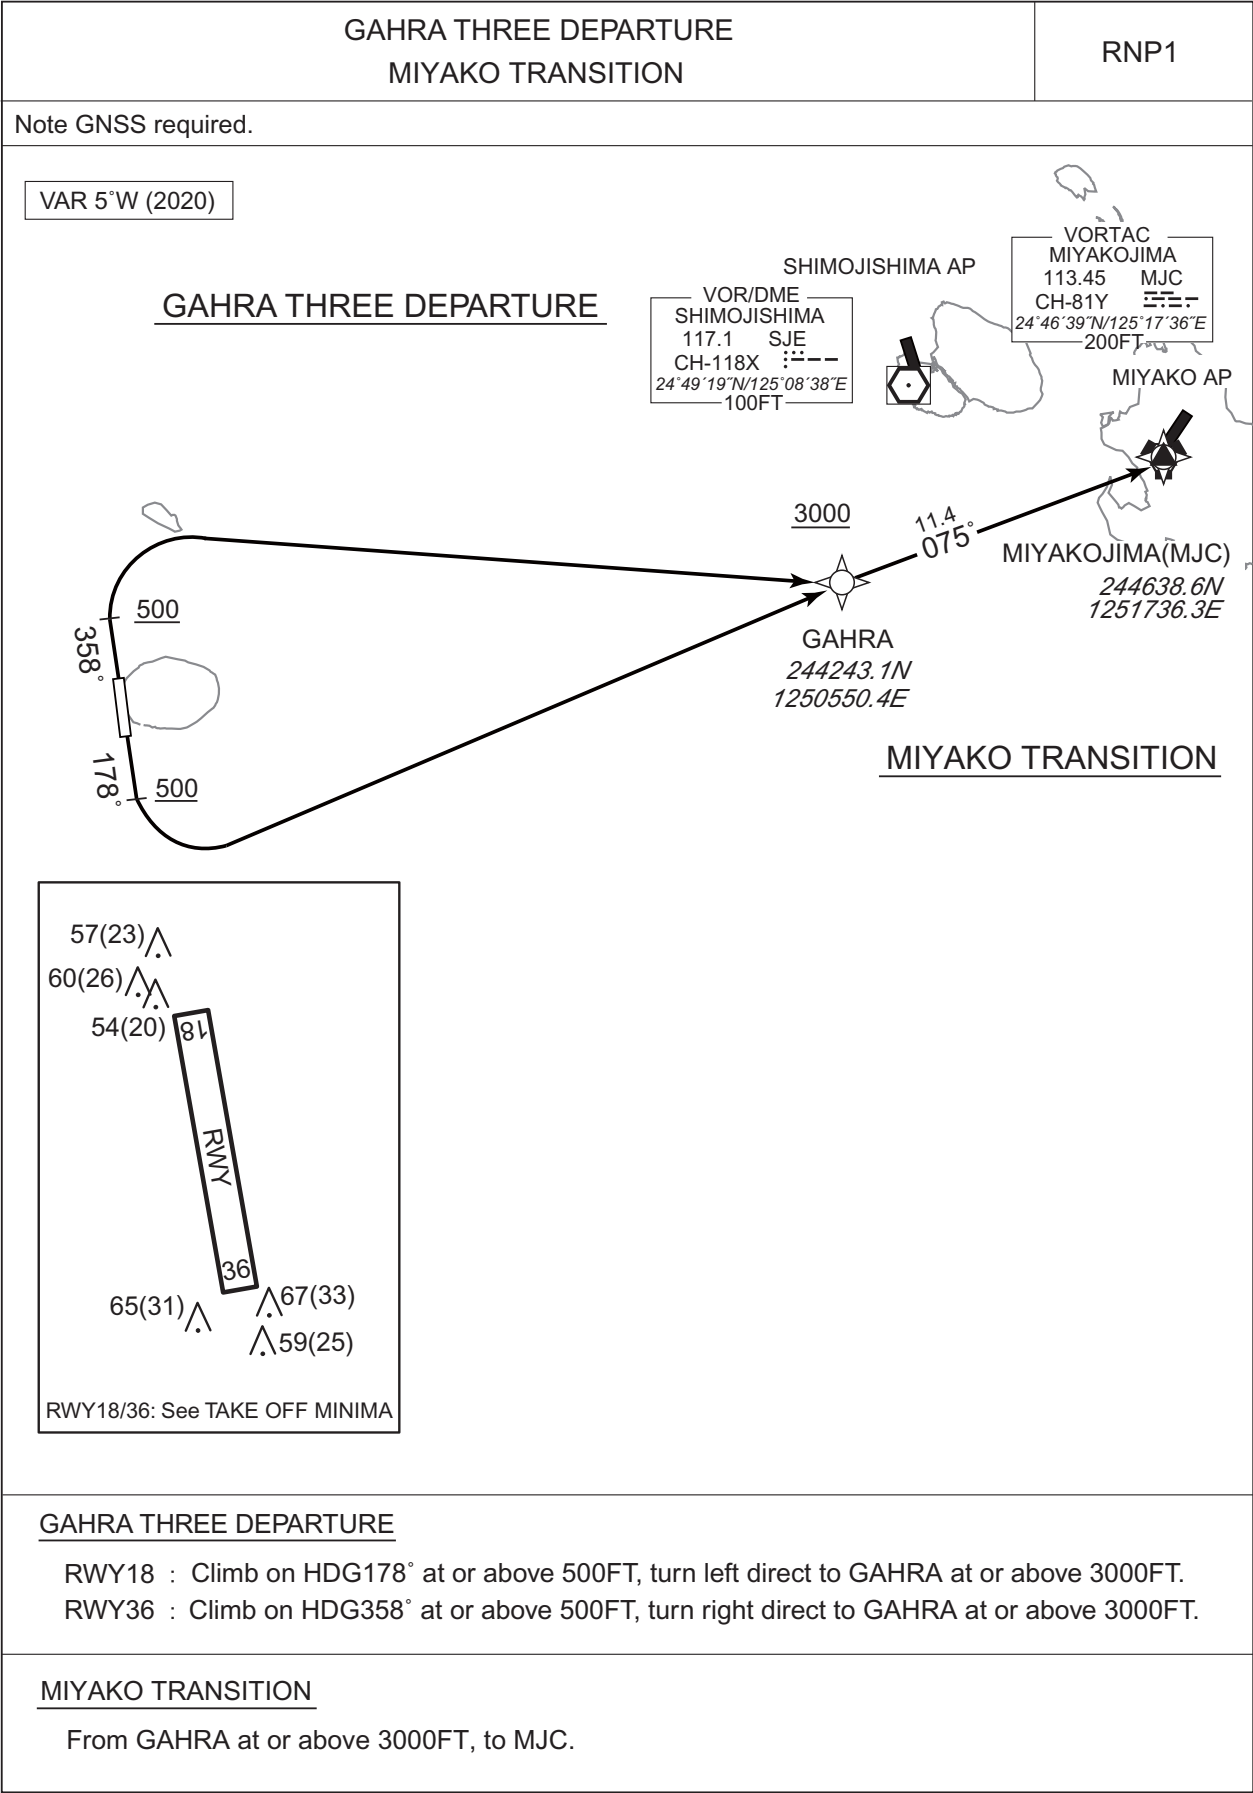

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART -INSTRUMENT

RORT/ TARAMA

RNAV SID and TRANSITION

GAHRA THREE DEPARTURE

RWY18

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	178 (172.8)	-4.9	-	-	+500	-	-	RNP1
002	DF	GAHRA	-	-	-4.9	-	L	+3000	-	-	RNP1

RWY36

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	358 (352.8)	-4.9	-	-	+500	-	-	RNP1
002	DF	GAHRA	-	-	-4.9	-	R	+3000	-	-	RNP1

MIYAKO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GAHRA	-	-	-4.9	-	-	+3000	-	-	RNP1
002	TF	MJC	-	075 (069.8)	-4.9	11.4	-	-	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

INSTRUMENT APPROACH CHART



RORT / TARAMA

SAKISHIMA APP

125.0 –121.2

RNP APCH

TARAMA RADIO

118.6

AFIS provided
by Naha Airport Office

RADAR AVBL

Baro-VNAV not authorized below 5°C

VAR 5°W (2020)

UMAKI 243721.70N
(IAF/MAHF) 1245115.01E

PANAP 243240.46N
1244551.44E

YUGAP (IF) 243210.30N
1244130.30E

RT650 (FAF) 243539.31N
1244101.38E

RW36 (MAPt) 243849.53N
1244035.04E

RT651 (MATF) 244148.68N
1244010.22E

RNAV HLDG

NOT TO SCALE

Using NAVAID

10NM

180°

270°

360°

RT651 (MATF)

381° 113° 54°

RW36 (MAPt)

358° (352.8 T)

RT650 (FAF)

358° (352.8 T)

YUGAP (IF) MAX 185KIAS

268° (262.8 T)

PANAP

231° (226.3 T)

UMAKI (IAF/MAHF)

MSA 25NM

2700

ARP

ARP: 243914N/1244031E

NM to Next Fix	MAPt	1	2	3	FAF
ALT(3.0° APCH Path)	—	404	722	1041	1100

MISSED APPROACH

Direct to RT651, turn right direct to UMAKI
and hold at 2000FT.
Contact SAKISHIMA APP.

VDP (LNAV)

RW36 (MAPt)

RDH50

MDA

RT650 (FAF)

YUGAP (IF)

PANAP

UMAKI (IAF)

358°

358°

268°

231°

1100

1200

2000

Missed APCH climb gradient MNM 5.0%

MINIMA	THR elev.36	AD elev.34				
CAT	LNAV/VNAV	LNAV	CIRCLING			
	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	340(304)	1500	340(306)	1500	680(646)	1600
B						
C	360(324)	1800	360(326)	1800		2400
D	—	—	—	—	—	—

MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE:PROC renamed. Requirement for RNP.





RORT / TARAMA

Minimum Vectoring Altitude CHART

VAR 5°W (2022)



- ① 260606N/1253511E
- ② 262504N/1261226E
- ③ 263831N/1264046E
- ④ 253118N/1273951E
- ⑤ 244518N/1271337E
- ⑥ 243809N/1262857E
- ⑦ 241018N/1261859E
- ⑧ 244643N/1255220E
- ⑨ 252751N/1252151E
- ⑩ 255321N/1254054E
- ⑪ 235438N/1261324E
- ⑫ 235414N/1261156E
- ⑬ 252316N/1272802E
- ⑭ 251400N/1272404E

CENTER : 244938N/1250827E (RORS RADAR SITE)
CENTER : 242310N/1241441E (ROIG RADAR SITE)

- *1 : 244015N/1244143E RADIUS : 3NM
- *2 : 242248N/1240952E RADIUS : 3NM
- *3 : 242538N/1241100E RADIUS : 5NM
- *4 : 242850N/1260600E RADIUS : 8NM

CHANGE : VAR.

INTENTIONALLY LEFT BLANK