

## AD 2 AERODROMES

## RJBE AD 2.1 AERODROME LOCATION INDICATOR AND NAME

## RJBE - KOBE

## RJBE AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

|   |                                                                                              |                                                                                                                                                                                                                                                                     |
|---|----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | ARP coordinates and site at AD                                                               | 343758N/1351326E<br>091°/1.25km from RWY 09 THR                                                                                                                                                                                                                     |
| 2 | Direction and distance from (city)                                                           | 8Km(4.3nm) S from Sannomiya Station                                                                                                                                                                                                                                 |
| 3 | Elevation/ Reference temperature                                                             | 18ft / 31°C (2009-2013)                                                                                                                                                                                                                                             |
| 4 | Geoid undulation at AD ELEV PSN                                                              | 121ft                                                                                                                                                                                                                                                               |
| 5 | MAG VAR/ Annual change                                                                       | 8°W (2022) / 5' W                                                                                                                                                                                                                                                   |
| 6 | AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses | Kansai Airports Kobe<br>1, Kobekuko, Chuo-ku, Kobe city, Hyogo pref., 650-0048 Japan<br>Tel: 078-306-4195 Fax: 078-306-4196<br>E-mail: ukb-ops@kobe.kansai-airports.co.jp<br>Web: <a href="http://www.kansai-airports.co.jp/">http://www.kansai-airports.co.jp/</a> |
| 7 | Types of traffic permitted(IFR/VFR)                                                          | IFR/VFR                                                                                                                                                                                                                                                             |
| 8 | Remarks                                                                                      | Kobe Airport Branch(CAB)<br>1, Kobekuko, Chuo-ku, Kobe city, Hyogo pref., 650-0048 Japan<br>Tel: 078-304-3800 Fax: 078-304-3806                                                                                                                                     |

## RJBE AD 2.3 OPERATIONAL HOURS

|    |                           |                                                                                                                               |
|----|---------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| 1  | AD Administration         | 2200-1400                                                                                                                     |
| 2  | Customs and immigration   | Customs: On request (078-333-3040)<br>Immigration: 2330-1030                                                                  |
| 3  | Health and sanitation     | Quarantine(human): On request (078-381-7315)<br>Quarantine(animal): On request (078-222-8990)<br>Quarantine(plant): 0000-1000 |
| 4  | AIS Briefing Office       | Nil                                                                                                                           |
| 5  | ATS Reporting Office(ARO) | Nil                                                                                                                           |
| 6  | MET Briefing Office       | H24 (KANSAI)                                                                                                                  |
| 7  | ATS                       | 2200-1400                                                                                                                     |
| 8  | Fuelling                  | 2200-1400                                                                                                                     |
| 9  | Handling                  | 2200-1400                                                                                                                     |
| 10 | Security                  | 2200-1400                                                                                                                     |
| 11 | De-icing                  | Nil                                                                                                                           |
| 12 | Remarks                   | Nil                                                                                                                           |

**RJBE AD 2.4 HANDLING SERVICES AND FACILITIES**

|   |                                         |                                              |
|---|-----------------------------------------|----------------------------------------------|
| 1 | Cargo-handling facilities               | Nil                                          |
| 2 | Fuel/ oil types                         | Fuel grades: Jet A1                          |
| 3 | Fuelling facilities/ capacity           | Fuel truck refueling / Ask AD Administration |
| 4 | De-icing facilities                     | Nil                                          |
| 5 | Hangar space for visiting aircraft      | Nil                                          |
| 6 | Repair facilities for visiting aircraft | Nil                                          |
| 7 | Remarks                                 | Nil                                          |

**RJBE AD 2.5 PASSENGER FACILITIES**

|   |                      |                                              |
|---|----------------------|----------------------------------------------|
| 1 | Hotels               | Hotels in Kobe city                          |
| 2 | Restaurants          | At Airport                                   |
| 3 | Transportation       | Railways, Buses and Taxi                     |
| 4 | Medical facilities   | Hospital in Kobe city 4km                    |
| 5 | Bank and Post Office | Bank in Kobe city / Post Office in Kobe city |
| 6 | Tourist Office       | Tourist office in Kobe city                  |
| 7 | Remarks              | Nil                                          |

**RJBE AD 2.6 RESCUE AND FIRE FIGHTING SERVICES**

|   |                                             |                                                                                                                                                                                                                               |
|---|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | AD category for fire fighting               | Fire protection:<br>Scale of protection ICAO required: CAT 9<br>Available: CAT 9                                                                                                                                              |
| 2 | Rescue equipment                            | Chemical fire fighting truck × 3<br>Water-supply truck<br>Emergency medical equipments conveyance truck                                                                                                                       |
| 3 | Capability for removal of disabled aircraft | INFO on EQPT AVBL in AP: Ask AD administration<br>MAX type of ACFT removed by EQPT: Ask AD administration for details<br>CTC details: Kansai Airports Kobe<br>TEL: 078-306-4195<br>E-mail: ukb-ops@kobe.kansai-airports.co.jp |
| 4 | Remarks                                     | Nil                                                                                                                                                                                                                           |

**RJBE AD 2.7 SEASONAL AVAILABILITY-CLEARING**

|   |                             |                                                                                                                                        |
|---|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Types of clearing equipment | Snow remove equipments:None                                                                                                            |
| 2 | Clearance priorities        | Nil                                                                                                                                    |
| 3 | Remarks                     | Seasonal availability: All seasons<br>Snow removal will be commenced, if the RWY and TWY are covered with a depth of 3cm snow or more. |

## RJBE AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

|   |                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Apron surface and strength          | Apron: Spot NR1 - 10<br>Surface: cement-concrete, Strength: PCR 1132/R/B/W/T<br>Apron: Spot NR11 - 15<br>Surface: cement-concrete, Strength: PCR 1026/R/B/W/T                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 2 | Taxiway width, surface and strength | TWY P1 - P3, P5<br>Width:30m, Surface: asphalt-concrete, Strength: PCR 1039/F/B/X/T<br>TWY P4<br>Width:30m, Surface: cement-concrete, Strength: PCR 1132/R/B/W/T<br>TWY T1, T6<br>Width:32m, Surface: asphalt-concrete, Strength: PCR 1039/F/B/X/T<br>TWY T2 - T5<br>Width:34m, Surface: asphalt-concrete, Strength: PCR 852/F/B/X/T<br>TWY W1<br>Width:9m, Surface: asphalt-concrete, Strength: PCR 190/F/B/X/T<br>TWY W2<br>Width:18m, Surface: asphalt-concrete, Strength: PCR 417/F/B/X/T<br>TWY W3<br>Width:23m, Surface: asphalt-concrete, Strength: PCR 513/F/B/X/T                                                                                                                                                                                                                                                                                                                   |
| 3 | ACL and elevation                   | Not available                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 4 | VOR checkpoints                     | Not available                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 5 | INS checkpoints                     | Spot NR<br>1 : 343811.41N 1351353.34E                      7 : 343810.19N 1351337.71E<br>2 : 343811.22N 1351351.00E                      7L : 343809.72N 1351337.60E<br>2R : 343810.72N 1351351.82E                      8 : 343810.10N 1351335.65E<br>2L : 343810.60N 1351350.24E                      9 : 343809.96N 1351333.89E<br>3 : 343810.92N 1351348.47E                      10 : 343808.89N 1351332.85E<br>4 : 343810.71N 1351345.73E                      11 : 343809.64N 1351329.78E<br>4R : 343810.26N 1351346.95E                      12 : 343809.48N 1351327.70E<br>4L : 343809.97N 1351345.38E                      13 : 343809.12N 1351325.37E<br>5 : 343810.50N 1351342.99E                      14 : 343808.39N 1351322.40E<br>6 : 343810.28N 1351340.26E                      15 : 343808.21N 1351320.05E<br>6R : 343810.42N 1351340.72E<br>6L : 343809.49N 1351339.22E |
| 6 | Remarks                             | Nil                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

## RJBE AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

|   |                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands | Aircraft stand identification sign: Spot NR 3 - 7, 11 - 13                                                                                                                                                                                                                                                                                                                                                                                         |
| 2 | RWY and TWY markings and LGT                                                                                   | RWY: RWY 09/27<br>(Marking) RWY designation, RWY CL, RWY THR, RWY middle point, Aiming point, TDZ, RWY side stripe<br>(LGT) RCLL, REDL, RTHL, RENL, RTZL(RWY09), WBAR(RWY09)<br><br>TWY: All<br>(Marking) TWY CL, TWY side stripe<br>(LGT) TWY edge LGT<br><br>TWY: T1 - T6, P1 - P5<br>(LGT) TWY CL LGT<br><br>TWY: T1 - T6<br>(Marking) RWY HLDG PSN<br>(LGT) RWY guard LGT, Taxiing guidance sign<br><br>TWY: P2<br>(LGT) Taxiing guidance sign |
| 3 | Stop bars                                                                                                      | Nil                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 4 | Remarks                                                                                                        | (Marking) Overrun, ACFT parking position, Apron TWY CL<br>(LGT) Apron flood LGT                                                                                                                                                                                                                                                                                                                                                                    |

## RJBE AD 2.10 AERODROME OBSTACLES

In Area2 See Obstacle data

The following obstacles in Obstacle data (Area2) shift locations.

| OBST ID                                                                                                                                                                          | Obstacle type | Coordinates | Elevation | Markings/ LGT | Remarks                                                                                                                                                                                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------|-----------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 28001789<br>28001790                                                                                                                                                             |               |             |           |               |                                                                                                                                                                                                                                     |
| 28001794<br>28001795<br>28001796<br>28001797<br>28001798<br>28001799<br>28001800<br>28001801<br>28001802<br>28001803<br>28001804<br>28001806<br>28006558<br>28006559<br>28006560 | Cranes        | See Remarks | 420ft     | Marking/LIM   | Above horizontal SFC<br>19 cranes exist in the area<br>bounded by straight lines<br>connecting following points:<br>a) 343906N/1351440E<br>b) 343927N/1351341E<br>c) 343943N/1351331E<br>d) 343950N/1351352E<br>e) 343940N/1351420E |

In Area3 To be developed

## RJBE AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

|    |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----|------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1  | Associated MET Office                                                  | KANSAI                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 2  | Hours of service<br>MET Office outside hours                           | H24 (KANSAI)                                                                                                                                                                                                                                                                                                                                                                                                               |
| 3  | Office responsible for TAF preparation<br>Periods of validity          | Nil                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 4  | Trend forecast<br>Interval of issuance                                 | Nil                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 5  | Briefing/ consultation provided                                        | Briefing is available upon inquiry at KANSAI                                                                                                                                                                                                                                                                                                                                                                               |
| 6  | Flight documentation<br>Language(s) used                               | C<br>En                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 7  | Charts and other information available<br>for briefing or consultation | S <sub>6</sub> , U <sub>85</sub> , U <sub>7</sub> , U <sub>5</sub> , U <sub>3</sub> , U <sub>25</sub> , U <sub>2</sub> /T <sub>r</sub> , P <sub>S</sub> , P <sub>5</sub> , P <sub>3</sub> , P <sub>25</sub> , P <sub>SW</sub> E, P <sub>SW</sub> F, P <sub>SW</sub> G, P <sub>SW</sub> I,<br>P <sub>SW</sub> M, P <sub>SW</sub> (domestic), E, C, W <sub>E</sub> , W <sub>F</sub> , W <sub>G</sub> , W <sub>I</sub> , W, N |
| 8  | Supplementary equipment<br>available for providing information         | Nil                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 9  | ATS units provided with information                                    | TWR, ATIS                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 10 | Additional information(limitation of<br>service, etc.)                 | Nil                                                                                                                                                                                                                                                                                                                                                                                                                        |

## RJBE AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

| Designations<br>RWY NR | TRUE BRG               | Dimensions of<br>RWY(M) | Strength(PCR) and<br>surface of RWY                | THR coordinates<br>THR geoid undulation | THR elevation and<br>highest elevation of TDZ<br>of precision APP RWY |
|------------------------|------------------------|-------------------------|----------------------------------------------------|-----------------------------------------|-----------------------------------------------------------------------|
| 1                      | 2                      | 3                       | 4                                                  | 5                                       | 6                                                                     |
| 09                     | 084.61°                | 2500 ×60                | PCR 1039/F/B/X/T<br>Asphalt Concrete               | 343753.91N<br>1351237.12E<br>121ft      | THR ELEV: 21.2ft<br>TDZ ELEV: 21.2ft                                  |
| 27                     | 264.61°                | 2500 ×60                | PCR 1039/F/B/X/T<br>Asphalt Concrete               | 343801.53N<br>1351414.84E<br>122ft      | THR ELEV: 20.8ft                                                      |
| Slope of RWY           | Strip<br>Dimensions(M) |                         | RESA (Overrun)<br>Dimensions(M)                    |                                         | Remarks                                                               |
| 7                      | 10                     |                         | 11                                                 |                                         | 14                                                                    |
| See AD2.24 AD Chart    | 2620×300               |                         | 200 × (MNM:180 MAX:300)*                           |                                         | RWY grooving:2500mX40m                                                |
| See AD2.24 AD Chart    | 2620×300               |                         | 40 × 300<br>*For detail, ask airport administrator |                                         | RWY grooving:2500mX40m                                                |

## RJBE AD 2.13 DECLARED DISTANCES

| RWY<br>Designator | TORA<br>(m) | TODA<br>(m) | ASDA<br>(m) | LDA<br>(m) | Remarks |
|-------------------|-------------|-------------|-------------|------------|---------|
| 1                 | 2           | 3           | 4           | 5          | 6       |
| 09                | 2500        | 2500        | 2500        | 2500       | Nil     |
| TWY:T2            | 1985        | 1985        | 1985        |            |         |
| 27                | 2500        | 2500        | 2500        | 2500       | Nil     |
| TWY:T5            | 1985        | 1985        | 1985        |            |         |

TORA, TODA and ASDA for TWY indicate distances BTN the point where TWY CL meets RWY CL and RWY THR.

## RJBE AD 2.14 APPROACH AND RUNWAY LIGHTING

| RWY<br>Designator                                                                                                    | APCH<br>LGT<br>type<br>LEN<br>INTST | RTHL<br>Color<br>WBAR | PAPI<br>(VASIS)<br>Angle<br>DIST FM THR<br>MEHT | RTZL<br>LEN | RCLL<br>LEN<br>Spacing<br>Color<br>INTST | REDL<br>LEN<br>Spacing<br>Color<br>INTST | RENL<br>Color<br>WBAR | STWL<br>LEN<br>Color |
|----------------------------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------|-------------------------------------------------|-------------|------------------------------------------|------------------------------------------|-----------------------|----------------------|
| 1                                                                                                                    | 2                                   | 3                     | 4                                               | 5           | 6                                        | 7                                        | 8                     | 9                    |
| 09                                                                                                                   | PALS<br>(CAT I)<br>900m<br>LIH      | Green<br>Green        | PAPI<br>3.0°/Left<br>431m<br>66ft               | 900m        | 2500m<br>30m<br>Coded color<br>LIH       | 2500m<br>60m<br>Coded color<br>LIH       | Red                   | Nil<br>(*2)          |
| 27                                                                                                                   | SALS<br>(*1)<br>420m<br>LIH         | Green<br>-            | PAPI<br>3.0°/Left<br>491m<br>74ft               | -           | 2500m<br>30m<br>Coded color<br>LIH       | 2500m<br>60m<br>Coded color<br>LIH       | Red                   | Nil<br>(*2)          |
| Remarks                                                                                                              |                                     |                       |                                                 |             |                                          |                                          |                       |                      |
| 10                                                                                                                   |                                     |                       |                                                 |             |                                          |                                          |                       |                      |
| SALS with APCH LGT BCN(600m and 900m FM RWY 27 THR)(*1)<br>Overrun area LGT(LEN:60m Color:Red)(*2)<br>CGL for RWY 27 |                                     |                       |                                                 |             |                                          |                                          |                       |                      |

**RJBE AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY**


|   |                                                          |                                                                                                     |
|---|----------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| 1 | ABN/IBN location, characteristics and hours of operation | ABN: 343819N/1351357E, White/Green EV4.3sec, HO                                                     |
| 2 | LDI location and LGT<br>Anemometer location and LGT      | LDI: Nil<br>Anemometer: 417m FM RWY09 THR, LGTD<br>414m FM RWY27 THR, LGTD                          |
| 3 | TWY edge and center line lighting                        | TWY edge and center line lights installed, see AD2.9                                                |
| 4 | Secondary power supply/<br>switch-over time              | Within 1 sec: REDL, RENL, RTHL, WBAR, RCLL and Overrun area edge LGT<br>Within 15 sec: Other Lights |
| 5 | Remarks                                                  | WDI LGT                                                                                             |

**RJBE AD 2.16 HELICOPTER LANDING AREA**

|   |                                                              |                                                                                                                                                                                                                               |
|---|--------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Coordinates TLOF or THR of FATO<br>Geoid undulation          | W-HELIPAD: 343802.10N/1351305.32E<br>C-HELIPAD: 343802.90N/1351315.52E<br>E-HELIPAD: 343805.95N/1351354.61E                                                                                                                   |
| 2 | TLOF and/or FATO elevation                                   | W-HELIPAD: 13ft<br>C-HELIPAD, E-HELIPAD: 12ft                                                                                                                                                                                 |
| 3 | TLOF and FATO area dimensions,<br>surface, strength, marking | TLOF and FATO area dimensions: 24m×20m<br>Surface:<br>W-HELIPAD, C-HELIPAD: Asphalt<br>E-HELIPAD: Concrete<br>Strength: 12ton<br>Marking: See AIP AD2.24 AD chart                                                             |
| 4 | True BRG of FATO                                             | 084.61°/264.61°                                                                                                                                                                                                               |
| 5 | Declared distance available                                  | Nil                                                                                                                                                                                                                           |
| 6 | APCH and FATO lighting                                       | Nil                                                                                                                                                                                                                           |
| 7 | Remarks                                                      | W-HELIPAD:<br>• MAX helicopter type: EC25<br>• daytime and VMC use only<br>C-HELIPAD:<br>• MAX helicopter type: EC25<br>• daytime and VMC use only<br>E-HELIPAD:<br>• MAX helicopter type: EC25<br>• daytime and VMC use only |

## RJBE AD 2.17 ATS AIRSPACE

| Designation and lateral limits |                                                                                                                                                                                                                                                                                        | Vertical limits<br>(ft) | Airspace classification | ATS unit call sign Language                                | Remarks            |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------|------------------------------------------------------------|--------------------|
| 1                              |                                                                                                                                                                                                                                                                                        | 2                       | 3                       | 4                                                          | 6                  |
| KOBE CTR                       | The airspace bounded by the lines connecting the following points:<br>(1)344120N/1351756E, (2)344035N/1350815E thence to point(1).<br>The line connecting point (1) to point (2) is the minor arc with a radius of 5NM KOBE ARP.                                                       | -----<br>2000           | D                       | KOBE TWR<br><br>En                                         |                    |
|                                | The airspace bounded by the lines connecting the following points:<br>(1)344120N/1351756E, (2)344035N/1350815E thence to point(1).<br>The line connecting point (2) to point (1) is the major arc with a radius of 5NM KOBE ARP.                                                       | -----<br>2500           |                         |                                                            |                    |
| KOBE PCA                       | 1. The airspace bounded by the lines connecting the following points:<br>(1)343931N/1350740E , (2)343918N/1350445E , (3)343508N/1350515E , (4)343523N/1350814E thence to point(1).<br>The line connecting point(4) to point(1) is the minor arc with a radius of 5NM KOBE ARP.         | 4000<br>-----<br>800    | C                       | KANSAI APP<br><br>KANSAI RADAR<br><br>KANSAI DEP<br><br>En | See attached chart |
|                                | 2. The airspace bounded by the lines connecting the following points:<br>(2)343918N/1350445E , (5)343901N/1350107E , (6)343449N/1350137E , (3)343508N/1350515E thence to point(2).                                                                                                     | 5000<br>-----<br>1200   |                         |                                                            |                    |
|                                | 3. The airspace bounded by the lines connecting the following points:<br>(5)343901N/1350107E , (7)343850N/1345842E , (8)343437N/1345912E , (6)343449N/1350137E thence to point(5).                                                                                                     | 5000<br>-----<br>1800   |                         |                                                            |                    |
|                                | 4. The airspace bounded by the lines connecting the following points.<br>(7)343850N/1345842E , (9)343835N/1345531E , (10)343420N/1345600E , (8)343437N/1345912E thence to point(7).<br>The line connecting point(9) to point(10) is the minor arc with a radius of 15NM KOBE VOR(KCE). | 5000<br>-----<br>2500   |                         |                                                            |                    |
| KANSAI TCA                     |                                                                                                                                                                                                                                                                                        | See RJBB AD2.17         |                         |                                                            |                    |

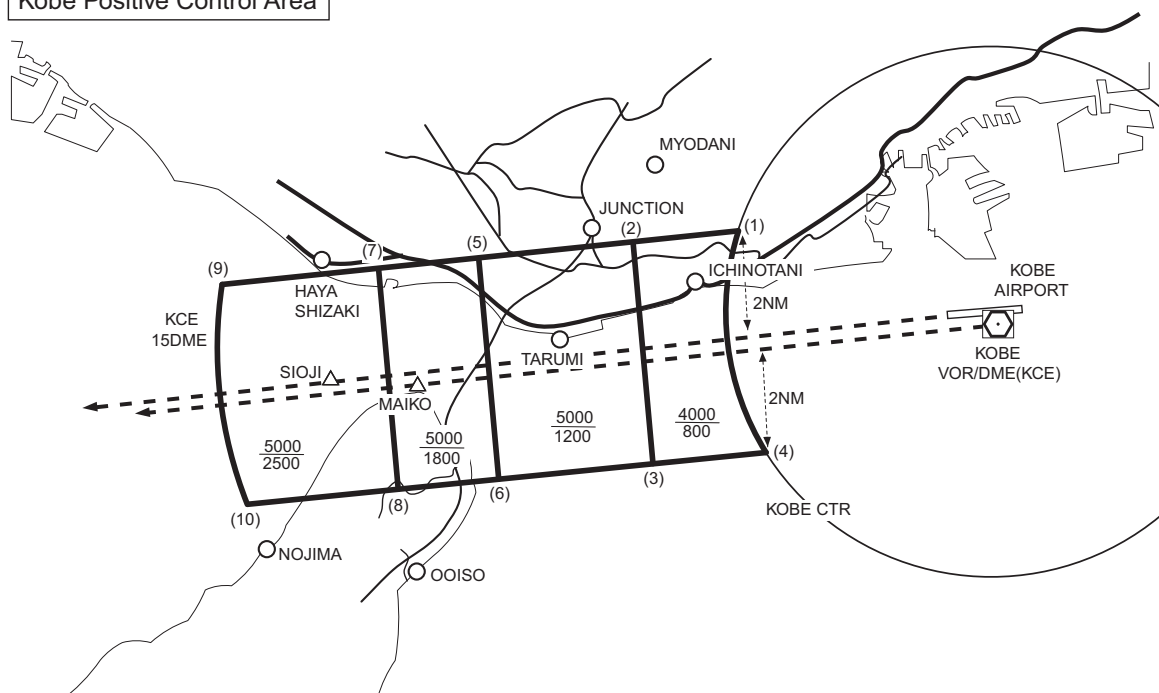神戸特別管制区  
Kobe Positive Control Area

## Point list

(1)343931N1350740E (5)343901N1350107E (9)343835N1345531E  
 (2)343918N1350445E (6)343449N1350137E (10)343420N1345600E  
 (3)343508N1350515E (7)343850N1345842E  
 (4)343523N1350814E (8)343437N1345912E

## RJBE AD 2.18 ATS COMMUNICATION FACILITIES


| Service designation | Call sign    | Frequency                                                                    | Hours of operation | Remarks                             |
|---------------------|--------------|------------------------------------------------------------------------------|--------------------|-------------------------------------|
| 1                   | 2            | 3                                                                            | 4                  | 5                                   |
| ASR                 | Kansai Radar | 121.15MHz<br>120.85MHz<br>125.5MHz<br>261.2MHz<br>121.5MHz(E)<br>243.0MHz(E) | 2200 - 1400        | APP service provided by KANSAI APP. |
| TCA                 | Kansai TCA   | 121.1MHz<br>125.3MHz<br>270.8MHz                                             | 2300 - 1030        |                                     |
| TWR                 | Kobe Tower   | 118.5MHz(1)<br>126.2MHz<br>121.5MHz(E)                                       | 2200 - 1400        | (1) Primary                         |
| GND                 | Kobe Ground  | 122.075MHz                                                                   | 2200 - 1400        |                                     |
| ATIS                | Kobe Airport | 128.075MHz                                                                   | 2200 - 1400        |                                     |



## RJBE AD 2.19 RADIO NAVIGATION AND LANDING AIDS

| Type of aid<br>(VOR declination) | ID  | Frequency           | Hours of<br>operation | Position of<br>transmitting<br>antenna<br>coordinates | Elevation of<br>DME<br>transmitting<br>antenna | Remarks                                                                                                                                                                                                                                     |
|----------------------------------|-----|---------------------|-----------------------|-------------------------------------------------------|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                                | 2   | 3                   | 4                     | 5                                                     | 6                                              | 7                                                                                                                                                                                                                                           |
| VOR<br>(8°W/2019)                | KCE | 111.25MHz           | H24                   | 343751.58N<br>1351342.45E                             |                                                | VOR Unusable:<br>360°-030° beyond 20nm BLW 6000ft.<br>320°-330° beyond 20nm BLW 3000ft.<br>350°-360° beyond 20nm BLW 5000ft.                                                                                                                |
| DME                              | KCE | 1136MHz<br>(CH-49Y) | H24                   | 343751.58N<br>1351342.45E                             | 43.6ft                                         | DME Unusable:<br>360°-010° beyond 20nm BLW 6000ft.<br>010°-020° beyond 15nm BLW 6000ft.<br>020°-030° beyond 20nm BLW 6000ft.<br>310°-330° beyond 15nm BLW 3000ft.<br>330°-350° beyond 20nm BLW 5000ft.<br>350°-360° beyond 15nm BLW 5000ft. |
| ILS-LOC 09<br>(CAT-I)            | IKO | 109.15MHz           | 2200-1400             | 343802.24N<br>1351423.96E                             |                                                | BRG(MAG) 092°<br>233m away FM RWY27 THR<br>OPR: CAB                                                                                                                                                                                         |
| ILS-GP 09                        | -   | 331.25MHz           | 2200-1400             | 343750.96N<br>1351251.37E                             |                                                | GP angle 3.0°<br>HGT of ILS Ref datum 59ft.<br>353m inside FM RWY09 THR<br>125m S of RCL                                                                                                                                                    |
| ILS-DME 09                       | IKO | 1115MHz<br>(CH-28Y) | 2200-1400             | 343750.48N<br>1351251.55E                             | 39ft                                           | 356m inside FM RWY09 THR<br>140m S of RCL                                                                                                                                                                                                   |
| MSAS                             |     | 1575.42MHz          | H24                   |                                                       |                                                | Transmitting antennas are satellite<br>based                                                                                                                                                                                                |

## ILS FOR RWY 09

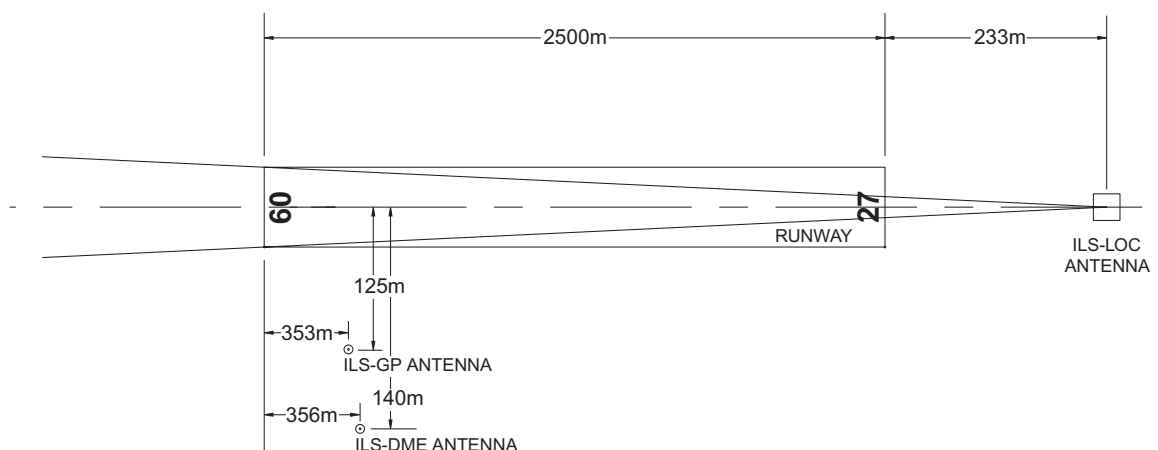

REMARKS: 1. LOC beam BRG(MAG) 092°  
2. HGT of ILS REF datum 18m (59ft)  
3. GP Angle 3.0°  
4. ELEV of ILS-DME 10.255m (34ft)


## RJBE AD 2.20 LOCAL TRAFFIC REGULATIONS

## 1. Airport regulations

|                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>1.1 定期便または緊急事態以外の航空機の取扱い</b></p> <p>当空港の使用について、航空機の運航者は、空港管理者の許可を得ること。</p> <p><b>1.2 補助動力装置 (APU) の使用制限</b></p> <p>航空機が固定電源設備付きのスポットを使用する場合は、管理者が特に認める場合を除き、次に掲げる時間を超えて補助動力装置の使用を控えるよう努めなければならない。</p> <p>(1) 出発予定時刻前の 30 分間</p> <p>(2) 到着後、固定電源設備または航空機用電源車が使用可能となるまでに必要とする最小限の時間</p> <p>(3) 航空機が点検整備のための補助動力を必要とする場合は最小限の時間</p> <p>注：スポット 3～6 は固定電源設備が設置されている。</p> | <p><b>1.1 Aircraft operations other than scheduled flights or in an emergency</b></p> <p>On use of this airport, aircraft operator is required to obtain the prior permission of the authority.</p> <p><b>1.2 Restrictions about the use of auxiliary power units (APU)</b></p> <p>When an aircraft is using an aircraft parking stand with fixed electric power facilities, efforts shall be made to avoid using the APU outside the time periods specified below except when specifically acknowledged by the authority as necessary.</p> <p>(1) 30 minutes prior to the estimated off-block time</p> <p>(2) The minimum time required for switching over to the fixed electric power facilities or an electric power vehicle for aircraft, after arrival at the parking stand</p> <p>(3) The minimum time required for aircraft maintenance purposes if needed</p> <p>Note: Stands 3-6 are equipped with fixed electric power unit.</p> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## 2. Taxiing to and from stands

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>2.1 ブッシュバック方式について</b></p> <p>1) ブッシュバックは、ブッシュバックガイドライン上へ実施すること。</p> <p>用語例：PUSH BACK WITHIN APRON APPROVED RWY09/27<br/>但し、次の航空機、スポットからのブッシュバックは P3 誘導路上へ実施すること。</p> <p>※B777 型機以上の大きさ（全幅 60m 以上の航空機）の機種<br/>※B777-300 型機以上の機種（全長 73m 以上の航空機）が駐機中の場合、PG ラインは使用不可とする。ただし、これら航空機の後方へのブッシュバック又は後方通過をしなければ可能とする。</p> <p>2) PG ラインを使用して、スポット 14 番から「FACE TO EAST」のロングブッシュバックは不可とする。</p> <p>※）ロングブッシュバック：航空機がスポットアウトする際に、後続機が当該スポットを使用できるよう十分な離隔を確保するブッシュバックをいう。</p> <p>3) PG ラインを使用して、スポット 15 番から「FACE TO EAST」のブッシュバックは不可とする。</p> <p><b>2.2 ブッシュバック後の地上走行</b></p> <p>ブッシュバックガイドラインからの地上走行開始直後は、プラストの影響を避けるため、ブッシュバック終了地点ですぐに P3 誘導路に機首を向けないこと。少なくともスポットアウトしようとするスポットの航空機導入線から出発すること。</p> | <p><b>2.1 Push back procedure</b></p> <p>1)Pushback should be made onto pushback guideline.<br/>Phraseology: PUSH BACK WITHIN APRON APPROVED RWY09/27<br/>However, the following aircrafts should be carried out onto the TWY P3.</p> <ul style="list-style-type: none"> <li>• B777 or larger (Aircraft with a wingspan is 60m or longer.)</li> <li>• In case of B777-300 or larger (Aircraft with a full length is 73m or longer.) is parked, pushback guideline is not available. But, If an aircraft in pushback doesn't pass behind B777-300 or larger, it is possible to be available.</li> </ul> <p>2)Long Pushback* facing east from SPOT 14 shall not be possible using the pushback guideline.<br/>*Long Pushback: It means pushback to keep a sufficient separation for successor aircraft.</p> <p>3)Long Pushback facing east from SPOT 15 shall not be possible using the pushback guideline.</p> <p><b>2.2 Taxing after pushback</b></p> <p>Immediately after the start of taxiing from the pushback guideline, do not turn the nose to TWY P3 right now in order to avoid a effect of blast. At least it should started to turn from lead line of the spot where you used.</p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

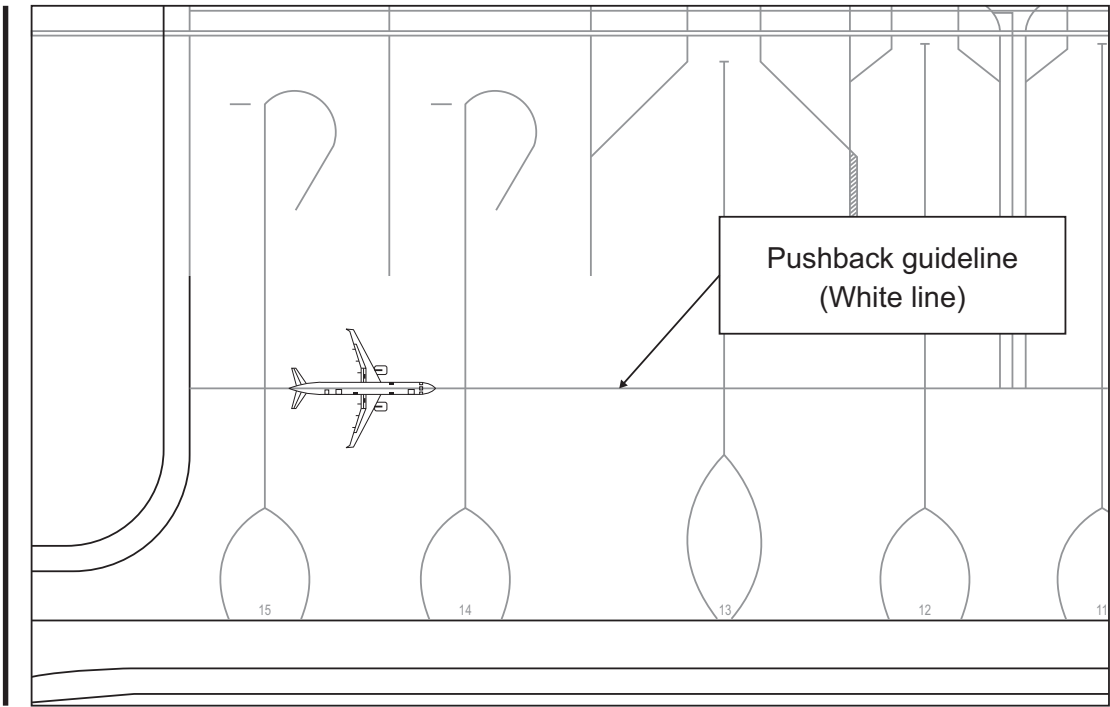

3. Parking area for small aircraft(General aviation)

Nil

4. Parking area for helicopters

Nil

5. Apron - taxiing during winter conditions

Nil

6. Taxiing - limitations

**6.1 誘導路交差点の翼端クリアランス**  
(AD1.1.6.8 参照)  
誘導路上の停止位置に待機中の航空機と後方の誘導路を  
走行する航空機の翼端クリアランスは以下のとおりであ  
る。

When B773 holding at the stop marking on TWY T2-T5

|                                                |            |                 |           |
|------------------------------------------------|------------|-----------------|-----------|
| Wing Span (WS) of aircraft<br>taxiing on P1-P5 | WS < 15.2m | 15.2m<=WS<32.2m | WS=>32.2m |
| Wing tip clearance                             | *A         | *B              | *C        |

**6.1 Wing tip clearance at the TWY intersection**  
(REF. AD1.1.6.8)  
Wing tip clearance at the TWY intersection between the  
aircraft holding at the stop marking on the TWY and the other  
aircraft taxiing behind it are as follows.

Legend:  
\*A : wing tip clearance >= 15m  
\*B : 6.5m <= wing tip clearance < 15m  
\*C : wing tip clearance < 6.5m

7. School and training flights - technical test flights - use of runways

Nil

## 8. Helicopter traffic - limitation

**TKOF and LDG for E-HELIPAD, C-HELIPAD and W-HELIPAD:**

Fly along the parallel taxiway. Do not fly over the buildings in airport island and fuelling facilities.

## 9. Removal of disabled aircraft from runways

## Terms of use:

As a rule, when submitting notification of airport use prior to flight operations, a "Consent Form for Airport Use" and an "aircraft operator's disabled aircraft removal operation plan" must be prepared and submitted to airport administrator. In addition, when preparing these documents in advance, coordinating with point of contact in 2.6.3 must be confirmed.

## 10. Remarks

Nil

**RJBE AD 2.21 NOISE ABATEMENT PROCEDURES**

1. For all jet aircraft, in order to reduce aircraft noise in the vicinity of airport, the following procedures shall be applied unless compliance of the procedures adversely affects the safety of aircraft operations.  
In case that the aircraft is unable to take these procedures, pilots should execute alternative procedures which are considered to be practically equivalent.

## (1) For take off

Nil

## (2) For landing to RWY09/27

## a) Delayed Flap Approach Procedure

Extend final landing flaps after leaving 1,500feet.

## b) Make gear down after leaving 2,500feet.

## (3) Reverse Thrust

Nil

## 2. Preferential Runways Procedures

Nil

## 3. Noise Preferential Routes

Nil

## 騒音軽減運航方式

1. すべてのジェット機に対して、空港周辺における航空機騒音軽減のため、運航の安全に支障のない範囲で、以下の方式が適用される。ただし、これらの方式によることができない航空機は実効的にこれらと同等と認められる代替方式を実施するものとする。

## (1) 離陸について

なし

## (2) 着陸について（滑走路 09/27）

## a) ディレイド・フラップ進入方式

1500 フィート通過後、最終着陸フラップ角とすること

## b) 2500 フィート通過後、脚下げを行うこと

## (3) リバース・スラストについて

なし

## 2. 優先滑走路方式

なし

## 3. 優先飛行経路

なし

## RJBE AD 2.22 FLIGHT PROCEDURES

| 1. TAKE OFF MINIMA                                 |     |             |                 |      |                                |      |                       |      |
|----------------------------------------------------|-----|-------------|-----------------|------|--------------------------------|------|-----------------------|------|
|                                                    | RWY | ACFT<br>CAT | REDL & RCLL     |      | REDL or RCLL<br>or RCL Marking |      | NIL<br>(DAYTIME ONLY) |      |
|                                                    |     |             | RVR             | VIS  | RVR                            | VIS  | RVR                   | VIS  |
| Multi-Engine<br>ACFT with<br>TKOF ALTN<br>AP FILED | 09  | A,B,C,D     | 400m            | 400m | 400m                           | 400m | -                     | 500m |
|                                                    | 27  |             | -               | 400m | -                              | 400m | -                     | 500m |
| OTHER                                              | 09  | A,B,C,D     | AVBL LDG MINIMA |      |                                |      |                       |      |
|                                                    | 27  |             |                 |      |                                |      |                       |      |

## 2. Lost Communication Procedures for Arrival Aircraft under radar navigational guidance.

If radio communications with Kansai Approach/Radar are lost for 1 minute, squawk Mode A/3 Code 7600 and ;

- (I) 1)Contact Kobe Tower  
2)If unable, proceed in accordance with Visual Flight Rules.  
3)If unable, proceed to SIOJI at the last assigned altitude or 3,000FT whichever is higher and execute Instrument Approach.  
(II) Procedures other than above will be issued when situation required.

## 3. Circling approach to Runway 27

An aircraft shall commence circling to RWY27 at or below 1,500ft, and maintain at or below 1,500ft during circling. If unable to comply with the restriction above, advise KOBE TOWER as soon as possible.

滑走路 27 への周回進入について

航空機は、RWY27 への周回を 1,500ft 以下で開始し、かつ周回中は 1,500ft 以下を維持しなければならない。  
もし、維持することが不可能な場合は、すみやかに神戸タワーに通報すること。

## 4. Missed approach

In case of missed approach, arriving aircraft may be instructed to maintain 1,500ft by KOBE TOWER due to traffic flying over the KOBE airport.

進入復行

進入復行した際、到着機は神戸空港上空を飛行する交通の関係で神戸タワーから 1,500ft を維持するよう指示される場合がある。

## RJBE AD 2.23 ADDITIONAL INFORMATION

1. Vessel (Max 200ft/MSL) will occasionally pass in the vicinity of the airport.

空港周辺を船舶（最高 200ft）が通過する場合がある。

---

**RJBE AD 2.24 CHARTS RELATED TO AN AERODROME**

|                                                          |
|----------------------------------------------------------|
| Aerodrome/Heliport Chart                                 |
| Standard Departure Chart - Instrument (KOBE)             |
| Standard Departure Chart - Instrument (TRANSITION)       |
| Standard Departure Chart - Instrument (RNAV TRANSITION1) |
| Standard Departure Chart - Instrument (RNAV TRANSITION2) |
| Standard Departure Chart - Instrument (MUKRI)            |
| Standard Arrival Chart - Instrument (OMBIP, KAGAWA)      |
| Standard Arrival Chart - Instrument (AVKUL, TRACY)       |
| Instrument Approach Chart (ILS Z or LOC Z RWY09)         |
| Instrument Approach Chart (ILS Y or LOC Y RWY09)         |
| Instrument Approach Chart (RNP RWY09)                    |
| Other chart (VISUAL REP)                                 |
| Other chart (LDG CHART)                                  |
| Other chart (MVA CHART)                                  |

### AD CHART

**LONGITUDINAL PROFILE OF RWY**

| Distance (m) | Distance (ft) | Elevation (m) | Elevation (ft) | Slope (%) |
|--------------|---------------|---------------|----------------|-----------|
| 0            | 0             | 6.45          | 21.2           | 0.17%     |
| 990          | 990           | 4.79          | 15.7           | 0.08%     |
| 1410         | 1410          | 4.44          | 14.6           | 0.04%     |
| 2027         | 2027          | 4.66          | 15.3           | 0.36%     |
| 2500         | 2500          | 6.35          | 20.8           |           |

**INTENTIONALLY LEFT BLANK**



STANDARD DEPARTURE CHART-INSTRUMENT


RJBE / KOBE

SID

KOBE SIX DEPARTURE

- RWY09: Turn right, climb via YOE R274 to intercept and proceed via KIE R333, via KCE R272 to MAIKO.
- RWY27: Climb via KCE R272 to MAIKO.

Note RWY09 : 5.0% climb gradient required up to 500FT.  
RWY27 : 5.0% climb gradient required up to 500FT.

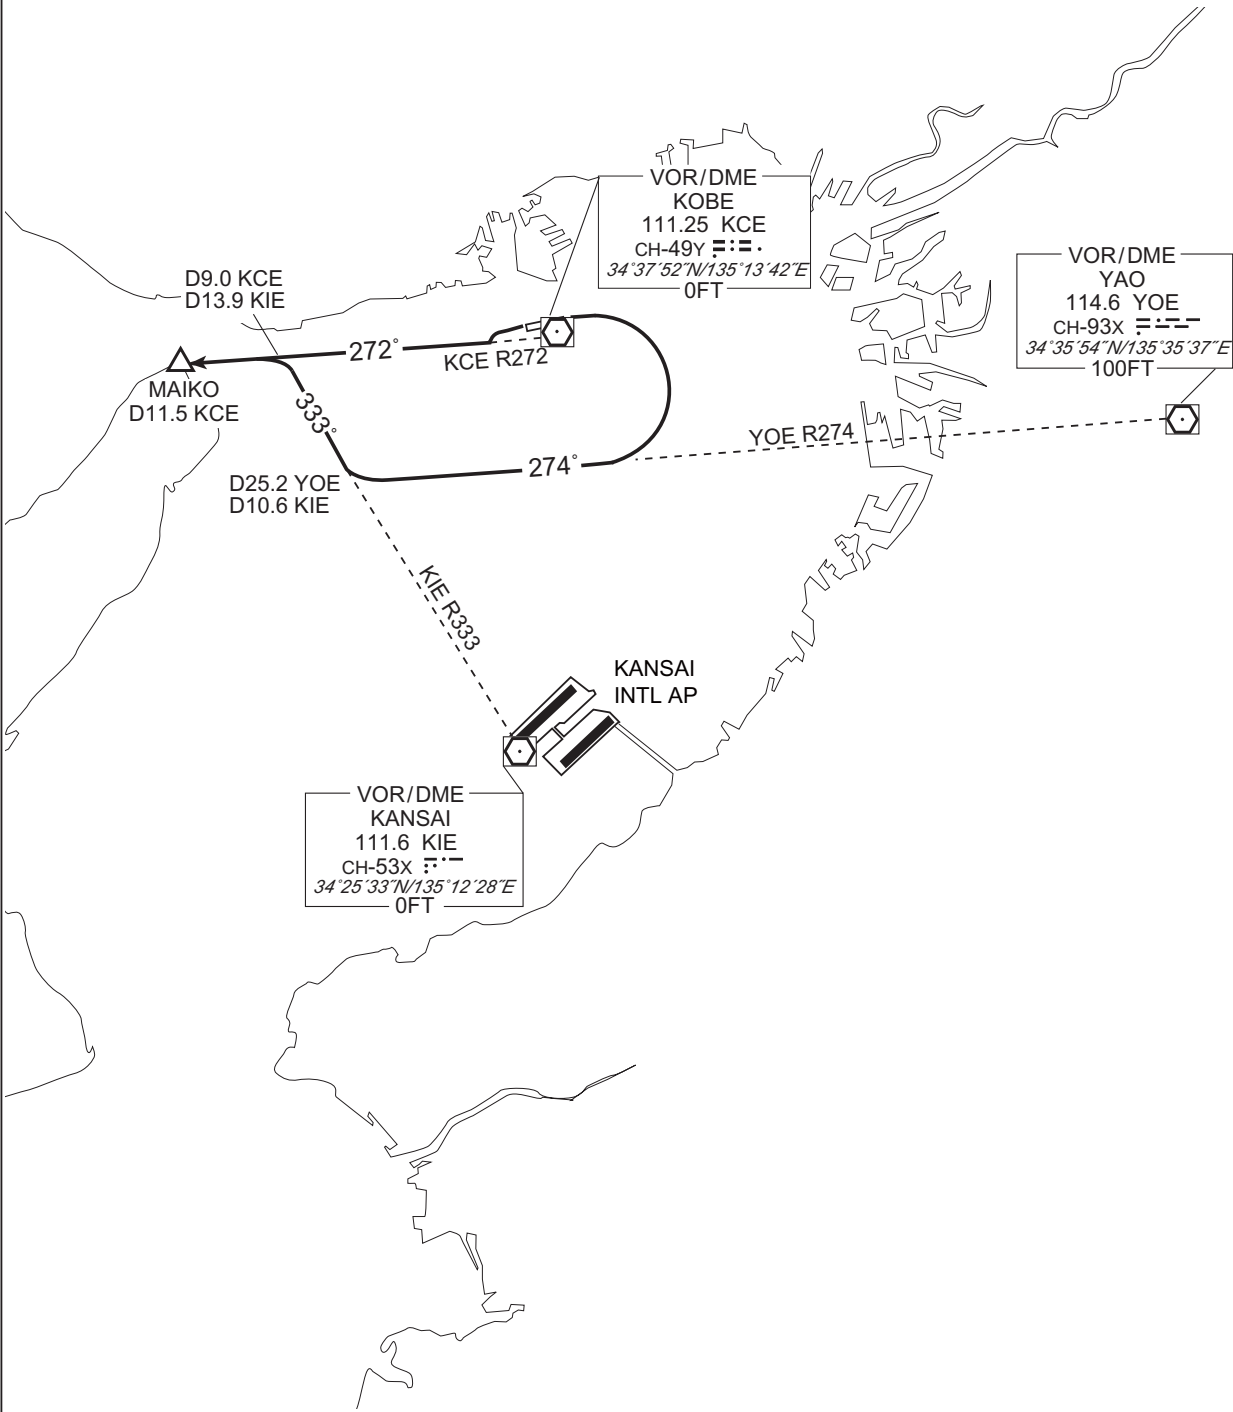

## RJBE / KOBE

CHANGE : YABUU TRANSITION, OMBIP TRANSITION established. TAMBA TRANSITION, AYAYA TRANSITION abolished. PROC course.

From over MAIKO, proceed via KCE R272 to KAWAT, via OYE R114 to OYE VOR/DME.

Cross KAWAT at or above 7000FT.

From over MAIKO, proceed via KCE R272 to KAWAT, via KCE 33.3DME clockwise ARC via OMBIP, to intercept and proceed via YME R215 to YME VOR/DME.


Cross KAWAT at or above 7000FT, cross KCE R330 at or above 8000FT.

From over MAIKO, proceed via KCE R272 to KAWAT, via KTE R058 to KTE VOR/DME.


Cross KAWAT at or above 7000FT.

From over MAIKO, proceed via KCE R272 to KAWAT,  
via KCE 33.3DME clockwise ARC to OMBIP.

Cross KAWAT at or above 7000FT.

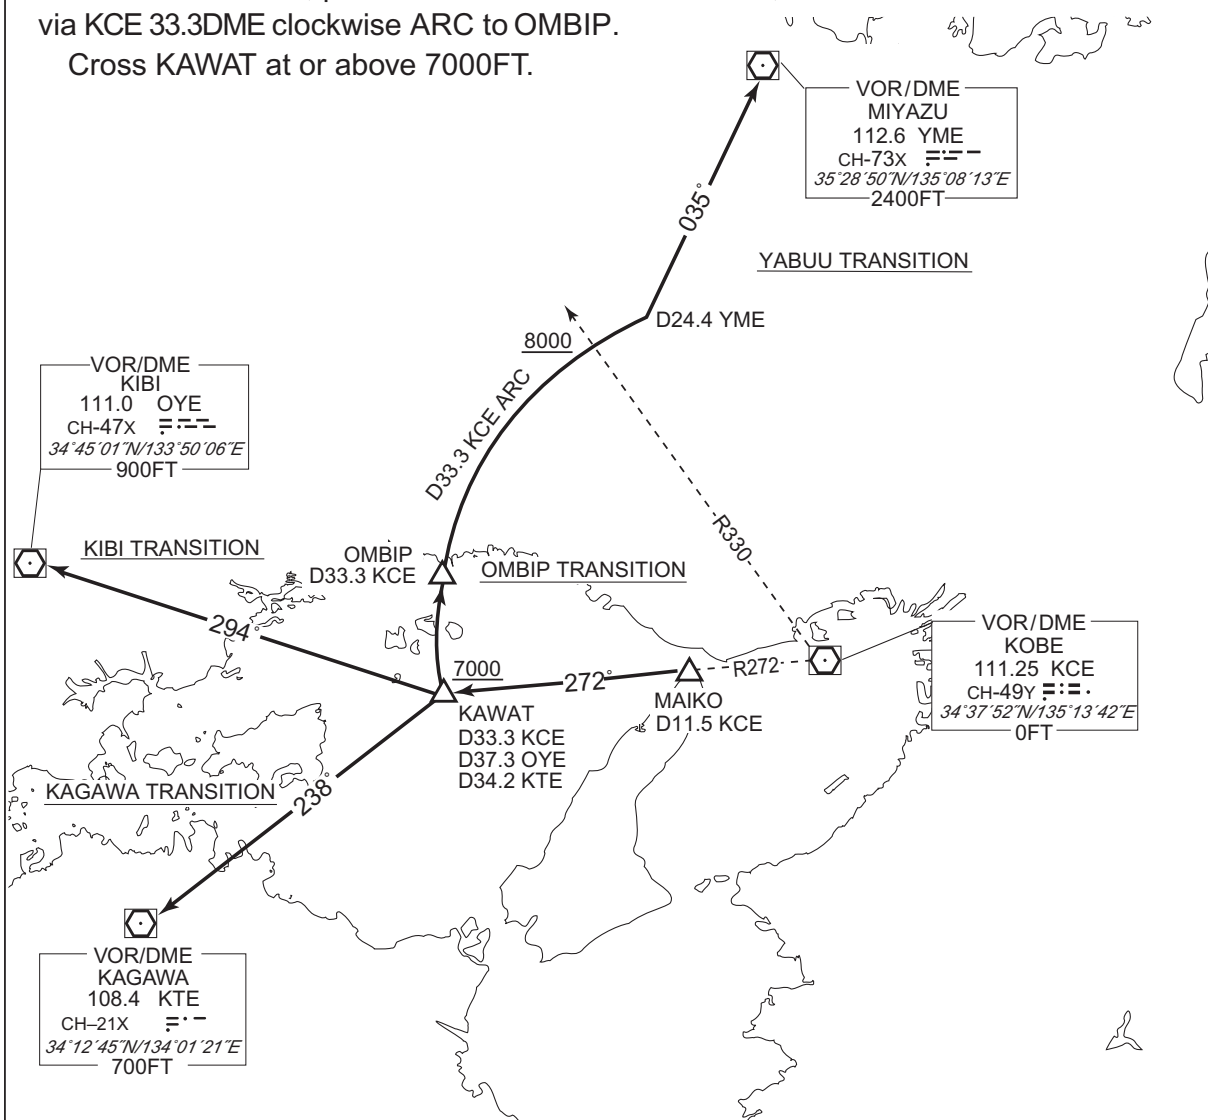

STANDARD DEPARTURE CHART-INSTRUMENT

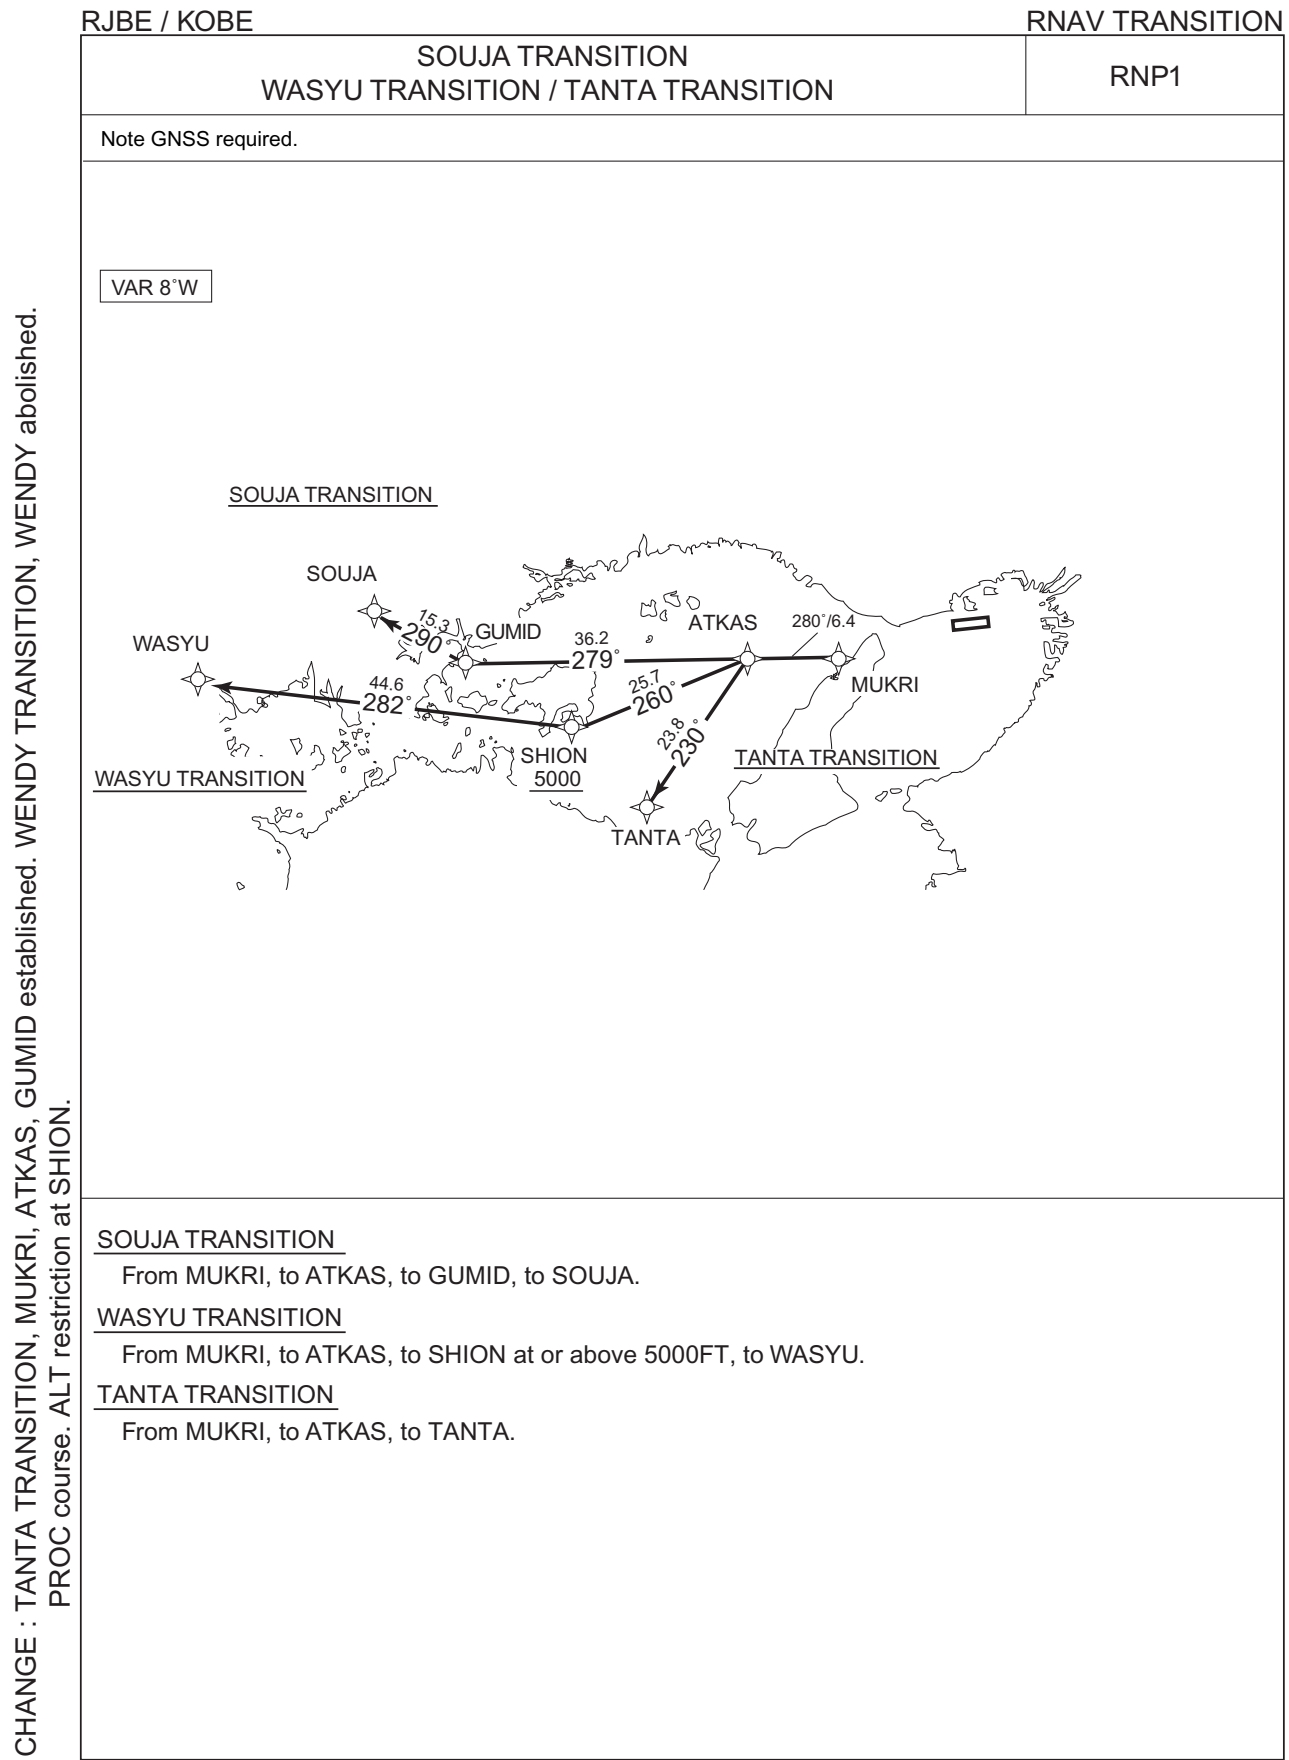

STANDARD DEPARTURE CHART-INSTRUMENT

RJBE / KOBE

RNAV TRANSITION

SOUJA TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course M°(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | MUKRI               | —        | —              | -8.2               | —             | —              | —             | —            | —              | RNP1                     |
| 002           | TF              | ATKAS               | —        | 280<br>(271.9) | -8.2               | 6.4           | —              | —             | —            | —              | RNP1                     |
| 003           | TF              | GUMID               | —        | 279<br>(270.9) | -8.2               | 36.2          | —              | —             | —            | —              | RNP1                     |
| 004           | TF              | SOUJA               | —        | 290<br>(282.2) | -8.2               | 15.3          | —              | —             | —            | —              | RNP1                     |

WASYU TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course M°(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | MUKRI               | —        | —              | -8.2               | —             | —              | —             | —            | —              | RNP1                     |
| 002           | TF              | ATKAS               | —        | 280<br>(271.9) | -8.2               | 6.4           | —              | —             | —            | —              | RNP1                     |
| 003           | TF              | SHION               | —        | 260<br>(251.4) | -8.2               | 25.7          | —              | +5000         | —            | —              | RNP1                     |
| 004           | TF              | WASYU               | —        | 282<br>(273.6) | -8.2               | 44.6          | —              | —             | —            | —              | RNP1                     |

TANTA TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course M°(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | MUKRI               | —        | —              | -8.2               | —             | —              | —             | —            | —              | RNP1                     |
| 002           | TF              | ATKAS               | —        | 280<br>(271.9) | -8.2               | 6.4           | —              | —             | —            | —              | RNP1                     |
| 003           | TF              | TANTA               | —        | 230<br>(221.4) | -8.2               | 23.8          | —              | —             | —            | —              | RNP1                     |


Waypoint Coordinates

| Waypoint Identifier | Coordinates            | Waypoint Identifier | Coordinates            |
|---------------------|------------------------|---------------------|------------------------|
| MUKRI               | 343345.5N / 1345419.2E | SHION               | 342542.1N / 1341657.4E |
| ATKAS               | 343358.2N / 1344630.9E | WASYU               | 342817.5N / 1332301.1E |
| GUMID               | 343425.8N / 1340234.0E | TANTA               | 341604.9N / 1342729.2E |
| SOUJA               | 343738.6N / 1334422.5E |                     |                        |

CHANGE : TANTA TRANSITION, MUKRI, ATKAS, GUMID established. WENDY TRANSITION, WENDY abolished. PROC course. VAR. ALT restriction at SHION. Navigation Specification. Waypoint Coordinates added.

STANDARD DEPARTURE CHART-INSTRUMENT

CHANGE : MUKRI, LANID, PORUS established. STEEL abolished. Note. PROC course.  
ALT restriction at LANID, PORUS. DIST FM MUKRI to TRIPY.

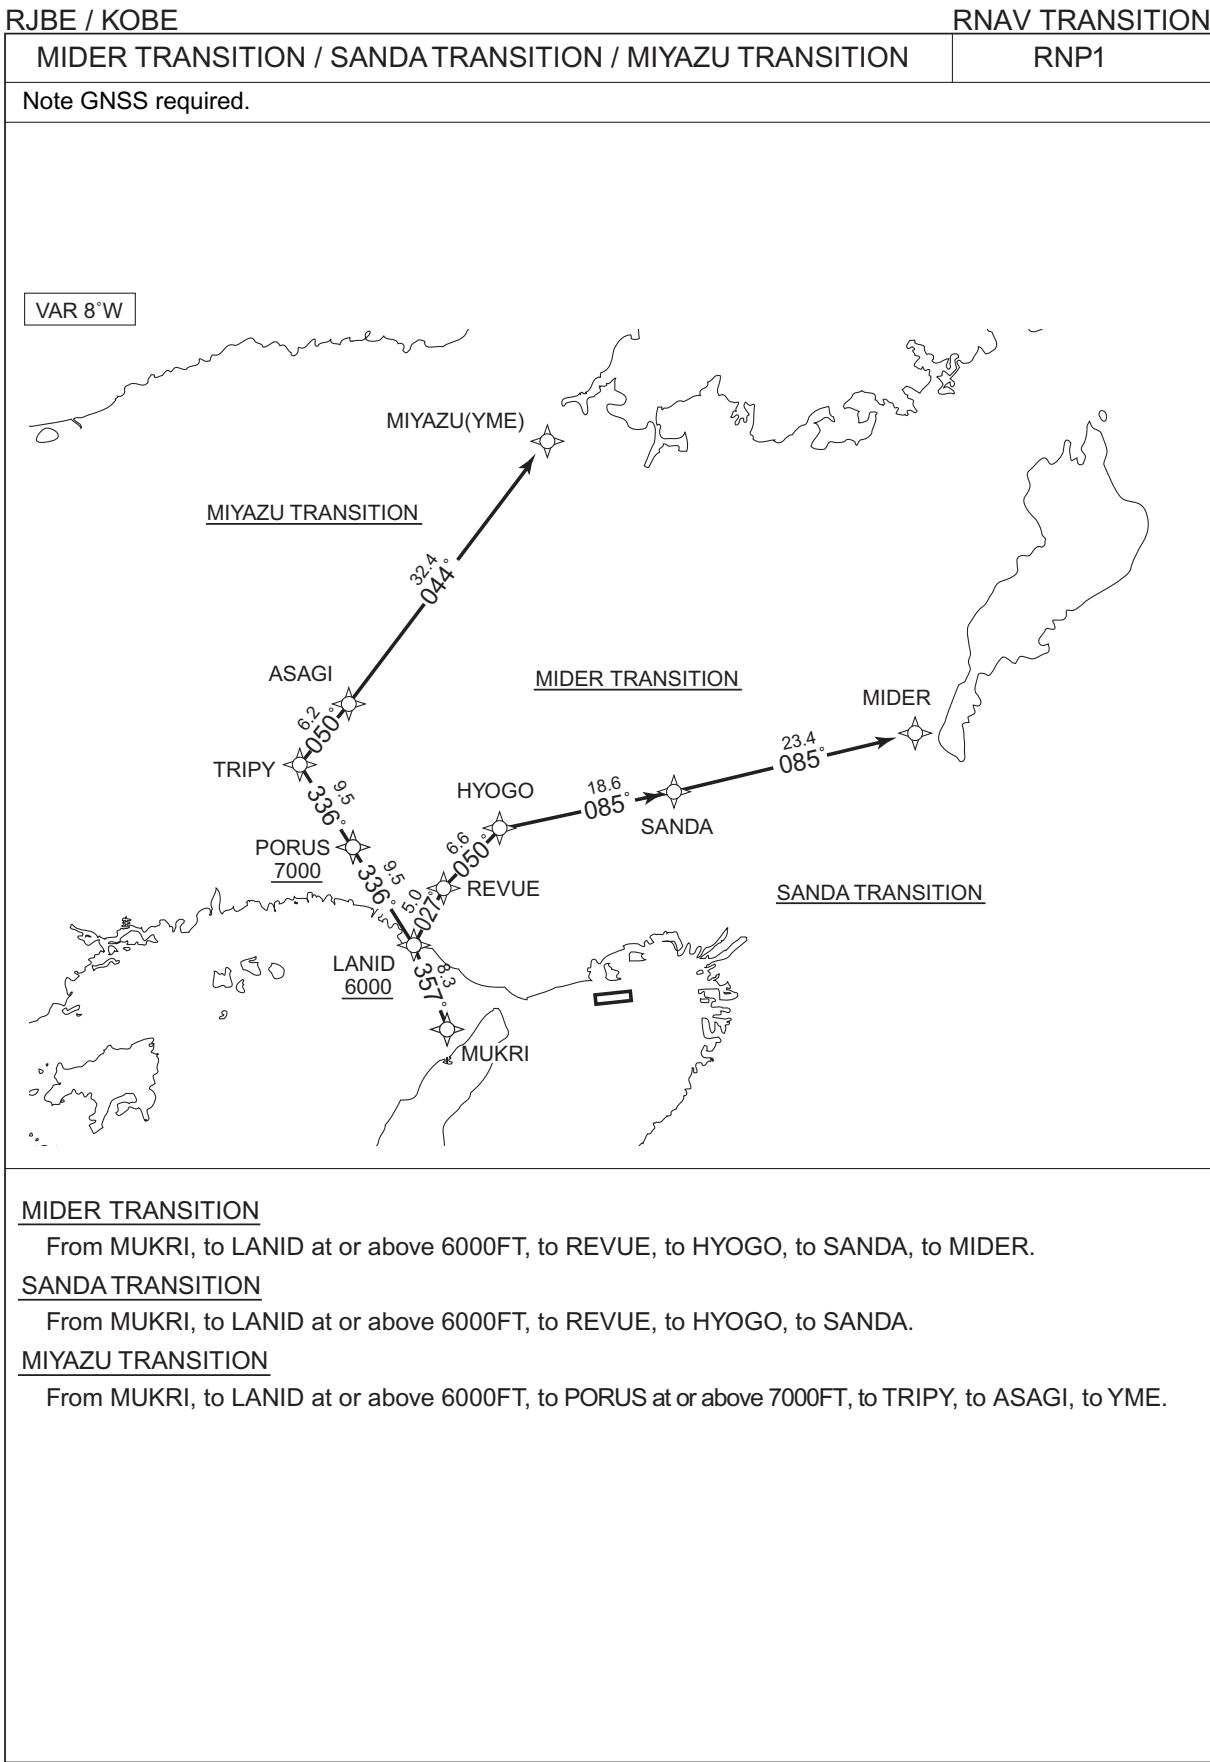

## STANDARD DEPARTURE CHART-INSTRUMENT

## RJBE / KOBE

## RNAV TRANSITION

MIDER TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | MUKRI               | —        | —              | -8.2               | —             | —              | —             | —            | —              | RNP1                     |
| 002           | TF              | LANID               | —        | 357<br>(349.2) | -8.2               | 8.3           | —              | +6000         | —            | —              | RNP1                     |
| 003           | TF              | REVUE               | —        | 027<br>(018.9) | -8.2               | 5.0           | —              | —             | —            | —              | RNP1                     |
| 004           | TF              | HYOGO               | —        | 050<br>(041.6) | -8.2               | 6.6           | —              | —             | —            | —              | RNP1                     |
| 005           | TF              | SANDA               | —        | 085<br>(076.4) | -8.2               | 18.6          | —              | —             | —            | —              | RNP1                     |
| 006           | TF              | MIDER               | —        | 085<br>(077.1) | -8.2               | 23.4          | —              | —             | —            | —              | RNP1                     |

SANDA TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | MUKRI               | —        | —              | -8.2               | —             | —              | —             | —            | —              | RNP1                     |
| 002           | TF              | LANID               | —        | 357<br>(349.2) | -8.2               | 8.3           | —              | +6000         | —            | —              | RNP1                     |
| 003           | TF              | REVUE               | —        | 027<br>(018.9) | -8.2               | 5.0           | —              | —             | —            | —              | RNP1                     |
| 004           | TF              | HYOGO               | —        | 050<br>(041.6) | -8.2               | 6.6           | —              | —             | —            | —              | RNP1                     |
| 005           | TF              | SANDA               | —        | 085<br>(076.4) | -8.2               | 18.6          | —              | —             | —            | —              | RNP1                     |

MIYAZU TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | MUKRI               | —        | —              | -8.2               | —             | —              | —             | —            | —              | RNP1                     |
| 002           | TF              | LANID               | —        | 357<br>(349.2) | -8.2               | 8.3           | —              | +6000         | —            | —              | RNP1                     |
| 003           | TF              | PORUS               | —        | 336<br>(327.9) | -8.2               | 9.5           | —              | +7000         | —            | —              | RNP1                     |
| 004           | TF              | TRIPY               | —        | 336<br>(327.8) | -8.2               | 9.5           | —              | —             | —            | —              | RNP1                     |
| 005           | TF              | ASAGI               | —        | 050<br>(041.6) | -8.2               | 6.2           | —              | —             | —            | —              | RNP1                     |
| 006           | TF              | YME                 | —        | 044<br>(035.7) | -8.2               | 32.4          | —              | —             | —            | —              | RNP1                     |

CHANGE : MUKRI, LANID, PORUS established. STEEL abolished. PROC course. VAR.  
DIST FM MUKRI to TRIPY. Navigation Specification.

STANDARD DEPARTURE CHART-INSTRUMENT

RJBE / KOBE

RNAV TRANSITION

Waypoint Coordinates

| Waypoint Identifier | Coordinates            | Waypoint Identifier | Coordinates            |
|---------------------|------------------------|---------------------|------------------------|
| MUKRI               | 343345.5N / 1345419.2E | MIDER               | 350101.4N / 1354933.6E |
| LANID               | 344152.2N / 1345226.6E | PORUS               | 344956.9N / 1344615.6E |
| REVUE               | 344636.4N / 1345425.3E | TRIPY               | 345801.2N / 1344003.4E |
| HYOGO               | 345130.6N / 1345944.0E | ASAGI               | 350237.2N / 1344502.4E |
| SANDA               | 345550.2N / 1352143.9E | YME                 | 352850.5N / 1350813.3E |

CHANGE : Waypoint Coordinates added.

STANDARD DEPARTURE CHART-INSTRUMENT


RJBE / KOBE

RNAV SID

MUKRI ONE DEPARTURE

RNP1

Note GNSS required.

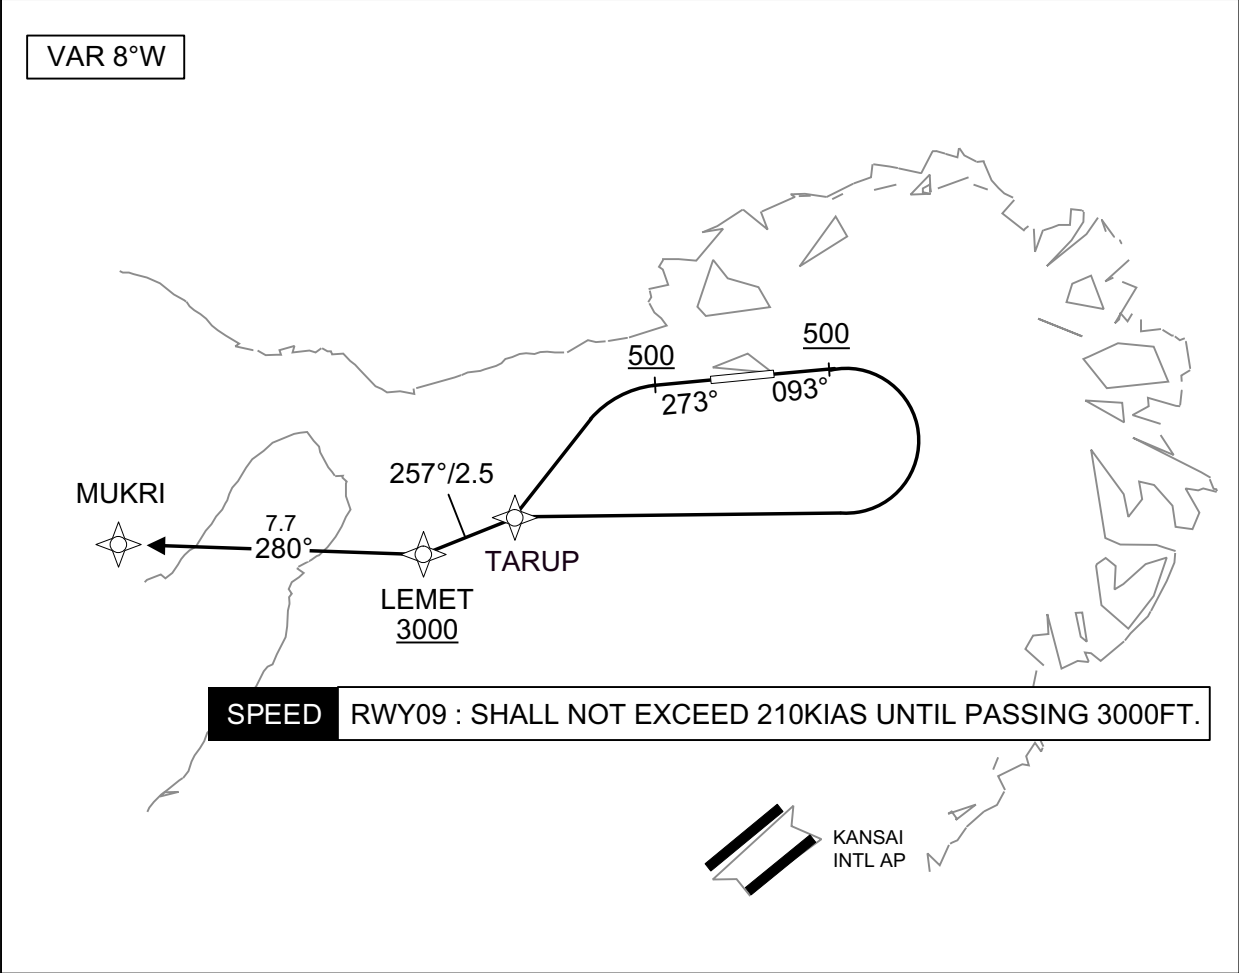

RWY09 : Climb on HDG093° at or above 500FT, turn right direct to TARUP, to LEMET at or above 3000FT, to MUKRI.

RWY27 : Climb on HDG273° at or above 500FT, turn left direct to TARUP, to LEMET at or above 3000FT, to MUKRI.

Note RWY09 : 5.0% climb gradient required up to 500FT.  
RWY27 : 5.0% climb gradient required up to 500FT.

CHANGE : New PROC.



STANDARD DEPARTURE CHART-INSTRUMENT

RJBE / KOBE

RNAV SID

MUKRI ONE DEPARTURE

RWY09

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 093 (084.6)   | -8.2               | —             | —              | +500          | —            | —              | RNP1                     |
| 002           | DF              | TARUP               | —        | —             | -8.2               | —             | R              | —             | —            | —              | RNP1                     |
| 003           | TF              | LEMET               | —        | 257 (248.5)   | -8.2               | 2.5           | —              | +3000         | —            | —              | RNP1                     |
| 004           | TF              | MUKRI               | —        | 280 (272.0)   | -8.2               | 7.7           | —              | —             | —            | —              | RNP1                     |

RWY27

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 273 (264.6)   | -8.2               | —             | —              | +500          | —            | —              | RNP1                     |
| 002           | DF              | TARUP               | —        | —             | -8.2               | —             | L              | —             | —            | —              | RNP1                     |
| 003           | TF              | LEMET               | —        | 257 (248.5)   | -8.2               | 2.5           | —              | +3000         | —            | —              | RNP1                     |
| 004           | TF              | MUKRI               | —        | 280 (272.0)   | -8.2               | 7.7           | —              | —             | —            | —              | RNP1                     |

Waypoint Coordinates

| Waypoint Identifier | Coordinates            | Waypoint Identifier | Coordinates            |
|---------------------|------------------------|---------------------|------------------------|
| TARUP               | 343423.6N / 1350626.5E | MUKRI               | 343345.5N / 1345419.2E |
| LEMET               | 343329.7N / 1350340.2E |                     |                        |

CHANGE : New PROC.

STANDARD ARRIVAL CHART-INSTRUMENT

RJBE / KOBE

STAR

OMBIP ARRIVAL

From over OMBIP, proceed via KCE 33.3DME counterclockwise ARC to intercept and proceed via KCE R283 to TRACY, via KIE R311 to intercept and proceed via KCE R273 to SIOJI.


Cross SIOJI at or above 3000FT.

KAGAWA ARRIVAL

From over KTE VOR/DME, proceed via KTE R054 to intercept and proceed via KCE R283 to TRACY, via KIE R311 to intercept and proceed via KCE R273 to SIOJI.

Cross KCE R283/30.5DME(KTE R054/40.3DME) at or above 4000FT,  
cross SIOJI at or above 3000FT.

CHANGE : New PROC.

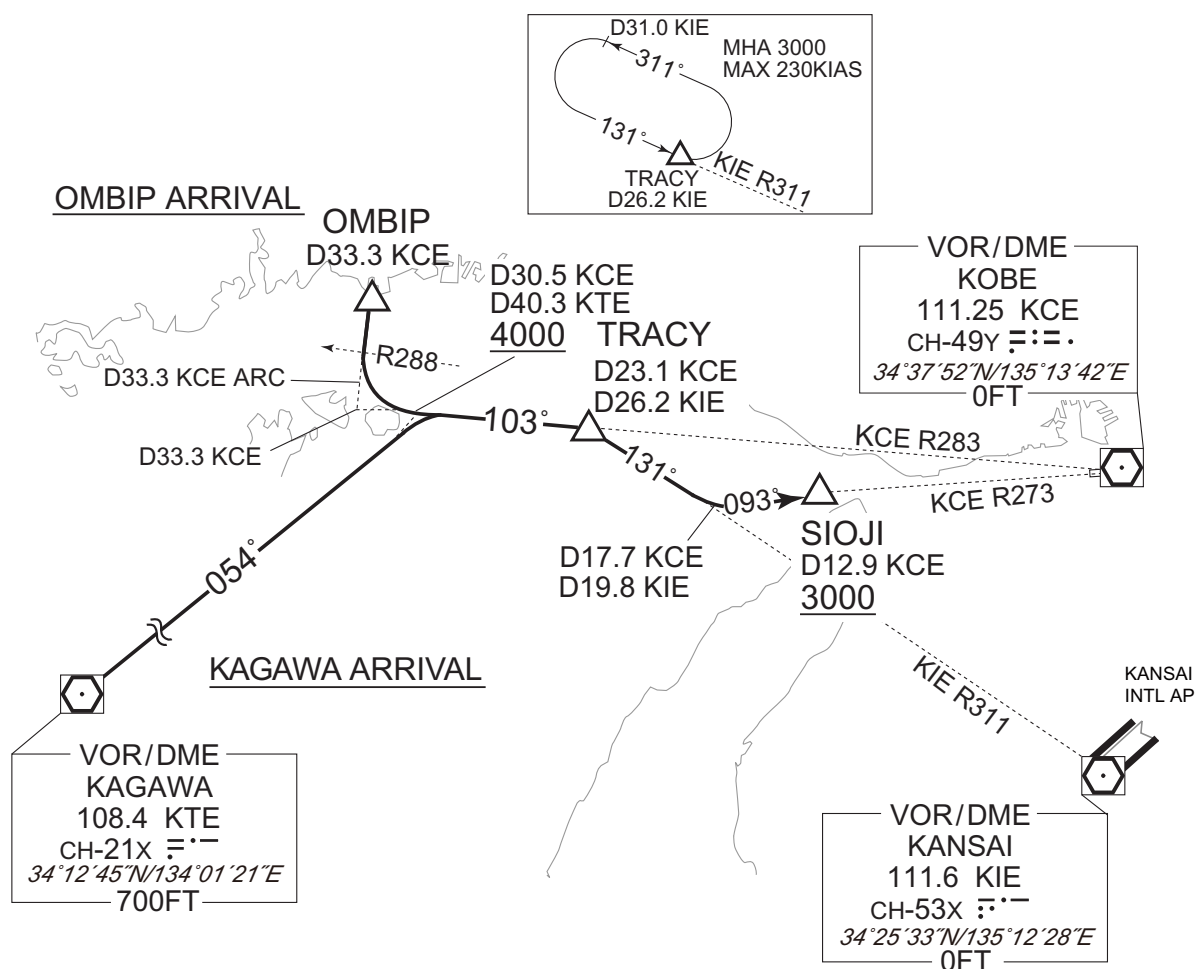

## STANDARD ARRIVAL CHART-INSTRUMENT

RJBE / KOBE


RNAV STAR RWY09

AVKUL ARRIVAL / TRACY ARRIVAL

RNP1

Note GNSS required.

VAR 8°W

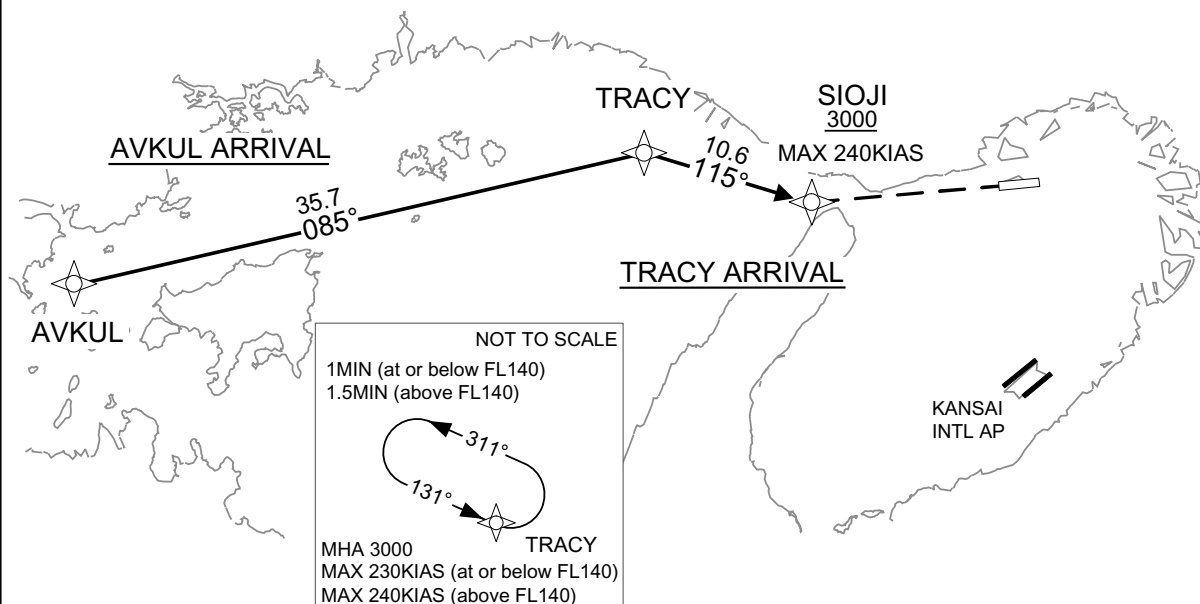AVKUL ARRIVAL

From AVKUL, to TRACY, to SIOJI at or above 3000FT.

TRACY ARRIVAL

From TRACY, to SIOJI at or above 3000FT.

CHANGE : New PROC.

STANDARD ARRIVAL CHART-INSTRUMENT

RJBE / KOBE

RNAV STAR RWY09

AVKUL ARRIVAL

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | AVKUL               | —        | —              | -8.2               | —             | —              | —             | —            | —              | RNP1                     |
| 002           | TF              | TRACY               | —        | 085<br>(076.5) | -8.2               | 35.7          | —              | —             | —            | —              | RNP1                     |
| 003           | TF              | SIOJI               | —        | 115<br>(106.7) | -8.2               | 10.6          | —              | +3000         | -240         | —              | RNP1                     |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN)        | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)                 | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | TRACY               | 131<br>(123.1)        | -8.2               | 1.0(-14000)<br>1.5(+14001) | L              | 3000                  | —                     | -230(-14000)<br>-240(+14001) | RNP1                     |

TRACY ARRIVAL

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | TRACY               | —        | —              | -8.2               | —             | —              | —             | —            | —              | RNP1                     |
| 002           | TF              | SIOJI               | —        | 115<br>(106.7) | -8.2               | 10.6          | —              | +3000         | -240         | —              | RNP1                     |


| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN)        | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)                 | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | TRACY               | 131<br>(123.1)        | -8.2               | 1.0(-14000)<br>1.5(+14001) | L              | 3000                  | —                     | -230(-14000)<br>-240(+14001) | RNP1                     |

Waypoint Coordinates


| Waypoint Identifier | Coordinates            | Waypoint Identifier | Coordinates            |
|---------------------|------------------------|---------------------|------------------------|
| AVKUL               | 343135.4N / 1340338.7E | SIOJI               | 343645.2N / 1345808.8E |
| TRACY               | 343949.3N / 1344547.8E |                     |                        |

CHANGE : New PROC.

## INSTRUMENT APPROACH CHART

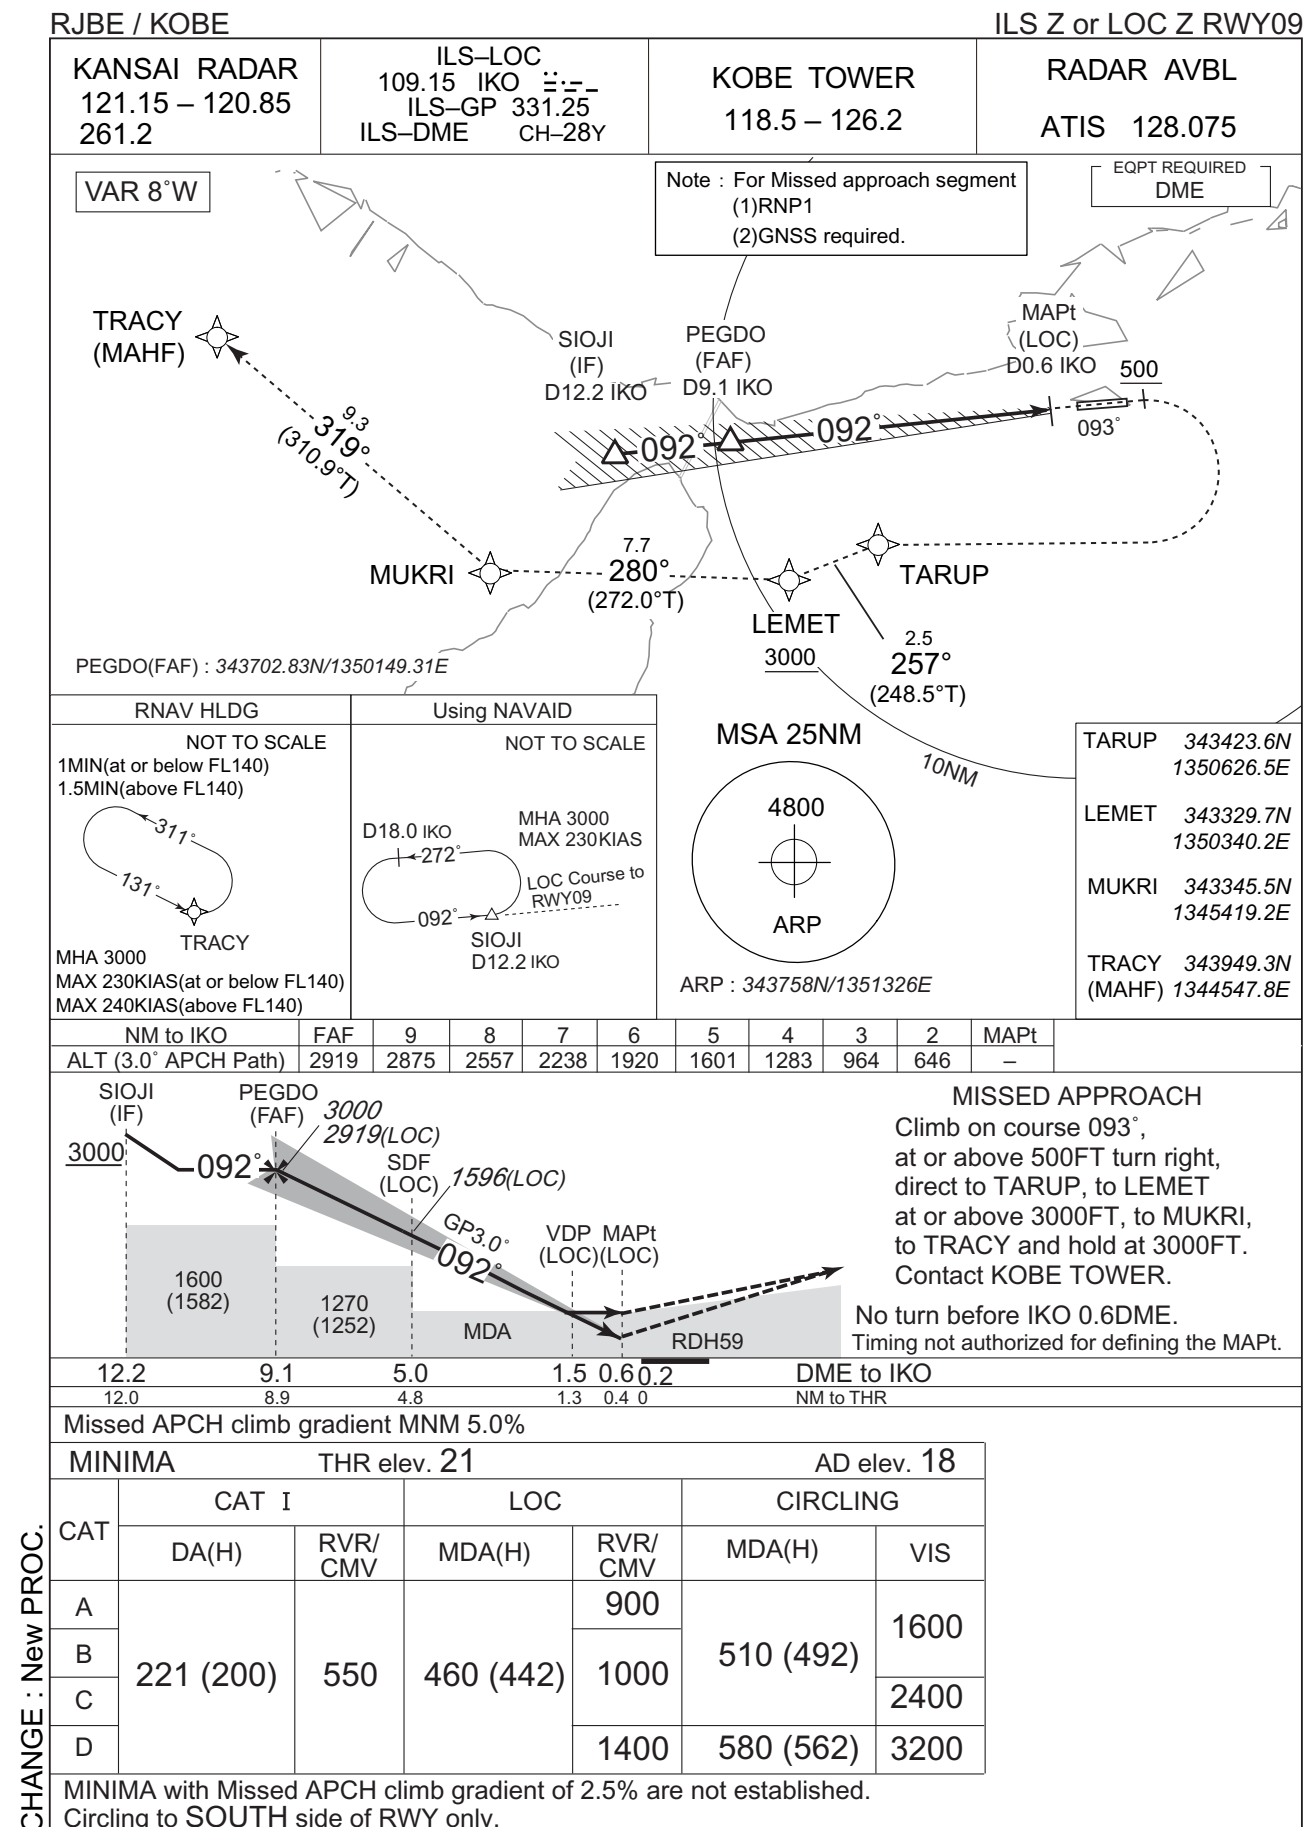

INSTRUMENT APPROACH CHART

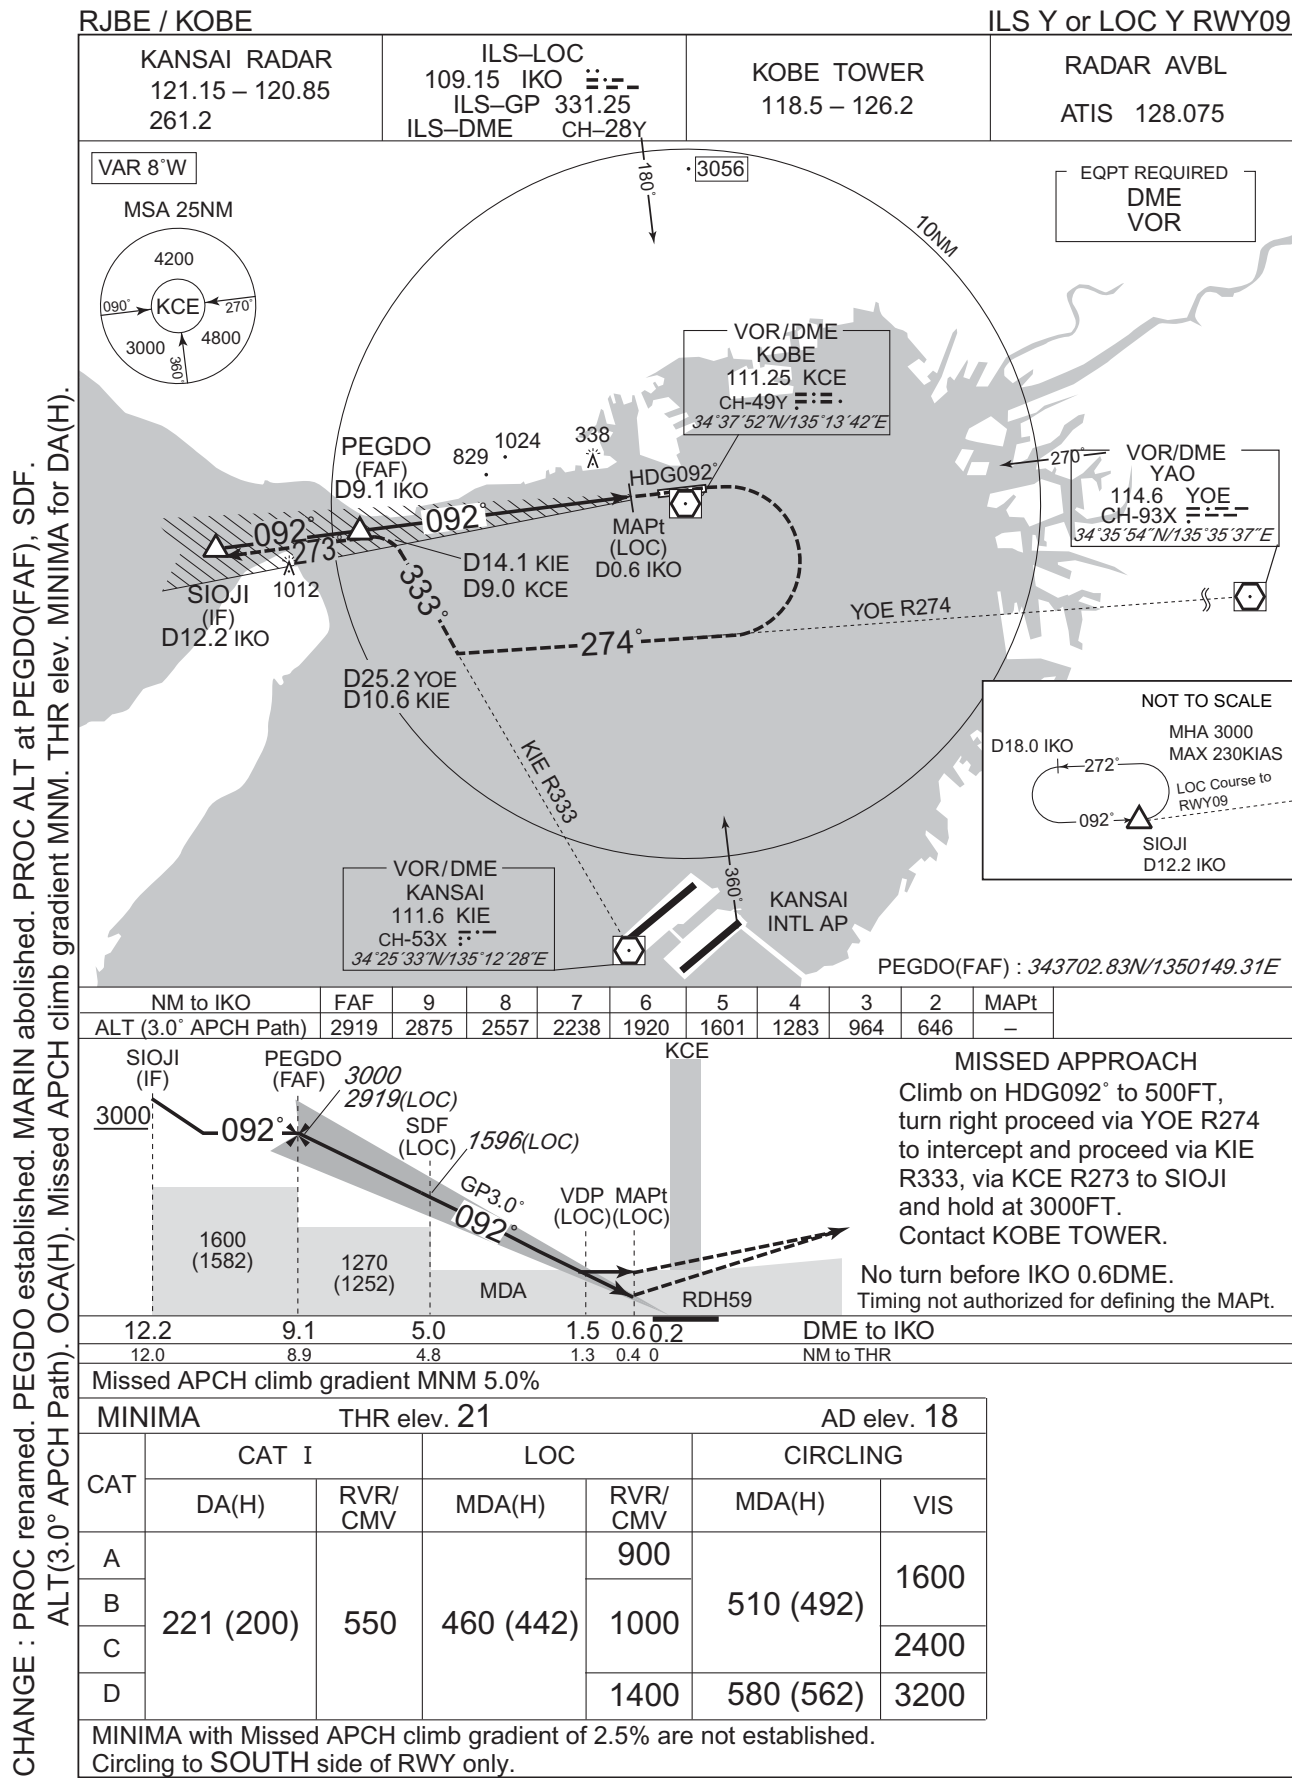


## RJBE / KOBE


RNP RWY09

VAR 8°W

Baro-VNAV not authorized below -5°C

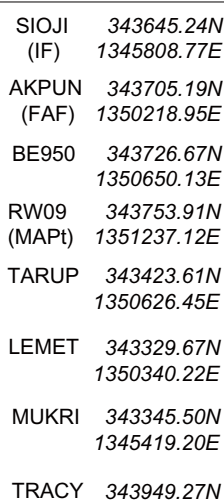

|                       |      |      |      |      |      |      |      |     |
|-----------------------|------|------|------|------|------|------|------|-----|
| REF (0.0 Air CH4 atm) | 2000 | 2020 | 2030 | 1997 | 1972 | 1997 | 1999 | 777 |
| SIO II                |      |      |      |      |      |      |      |     |

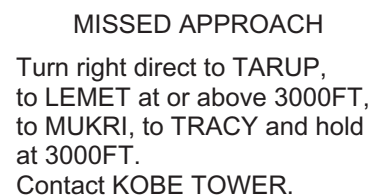

Missed APCH climb gradient MNM 5.0%

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling to **SOUTH** side of RWY only.

CHANGE : New PROC.

**INTENTIONALLY LEFT BLANK**



RJBE / KOBE


Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

| Call sign               | BRG / DIST from ARP | Remarks                                                |
|-------------------------|---------------------|--------------------------------------------------------|
| 一ノ谷<br>Ichinotani       | 276°T / 5.5NM       | JR須磨駅<br>JR Station                                    |
| 名谷<br>Myodani           | 294°T / 7.0NM       | 神戸市営西神・山手線名谷駅<br>Station                               |
| 長田<br>Nagata            | 291°T / 4.2NM       | JR新長田駅<br>JR Station                                   |
| 和田岬<br>Wadamisaki       | 304°T / 2.2NM       | 岬<br>Cape                                              |
| 布引<br>Nunobiki          | 342°T / 4.8NM       | 布引公園<br>Park                                           |
| 灘浜<br>Nadahama          | 359°T / 3.8NM       | ハーバーハイウェイ摩耶ランプ<br>Ramp                                 |
| ポートアイランド<br>Port Island | 012°T / 2.0NM       | ポートアイランド南埠頭<br>Southern Warf of Port Island            |
| 六甲アイランド<br>Rokko Island | 047°T / 4.4NM       | 六甲アイランド南東端<br>Southern Edge of Rokko Island            |
| 深江<br>Fukae             | 038°T / 6.0NM       | 阪神高速5号湾岸線 深江浜インターチェンジ<br>Interchange                   |
| イーストポイント<br>East Point  | 053°T / 7.2NM       | 西宮ヨットハーバー防波堤<br>Breakwater of Nishinomiya Yacht Harbor |

CHANGE : VAR.

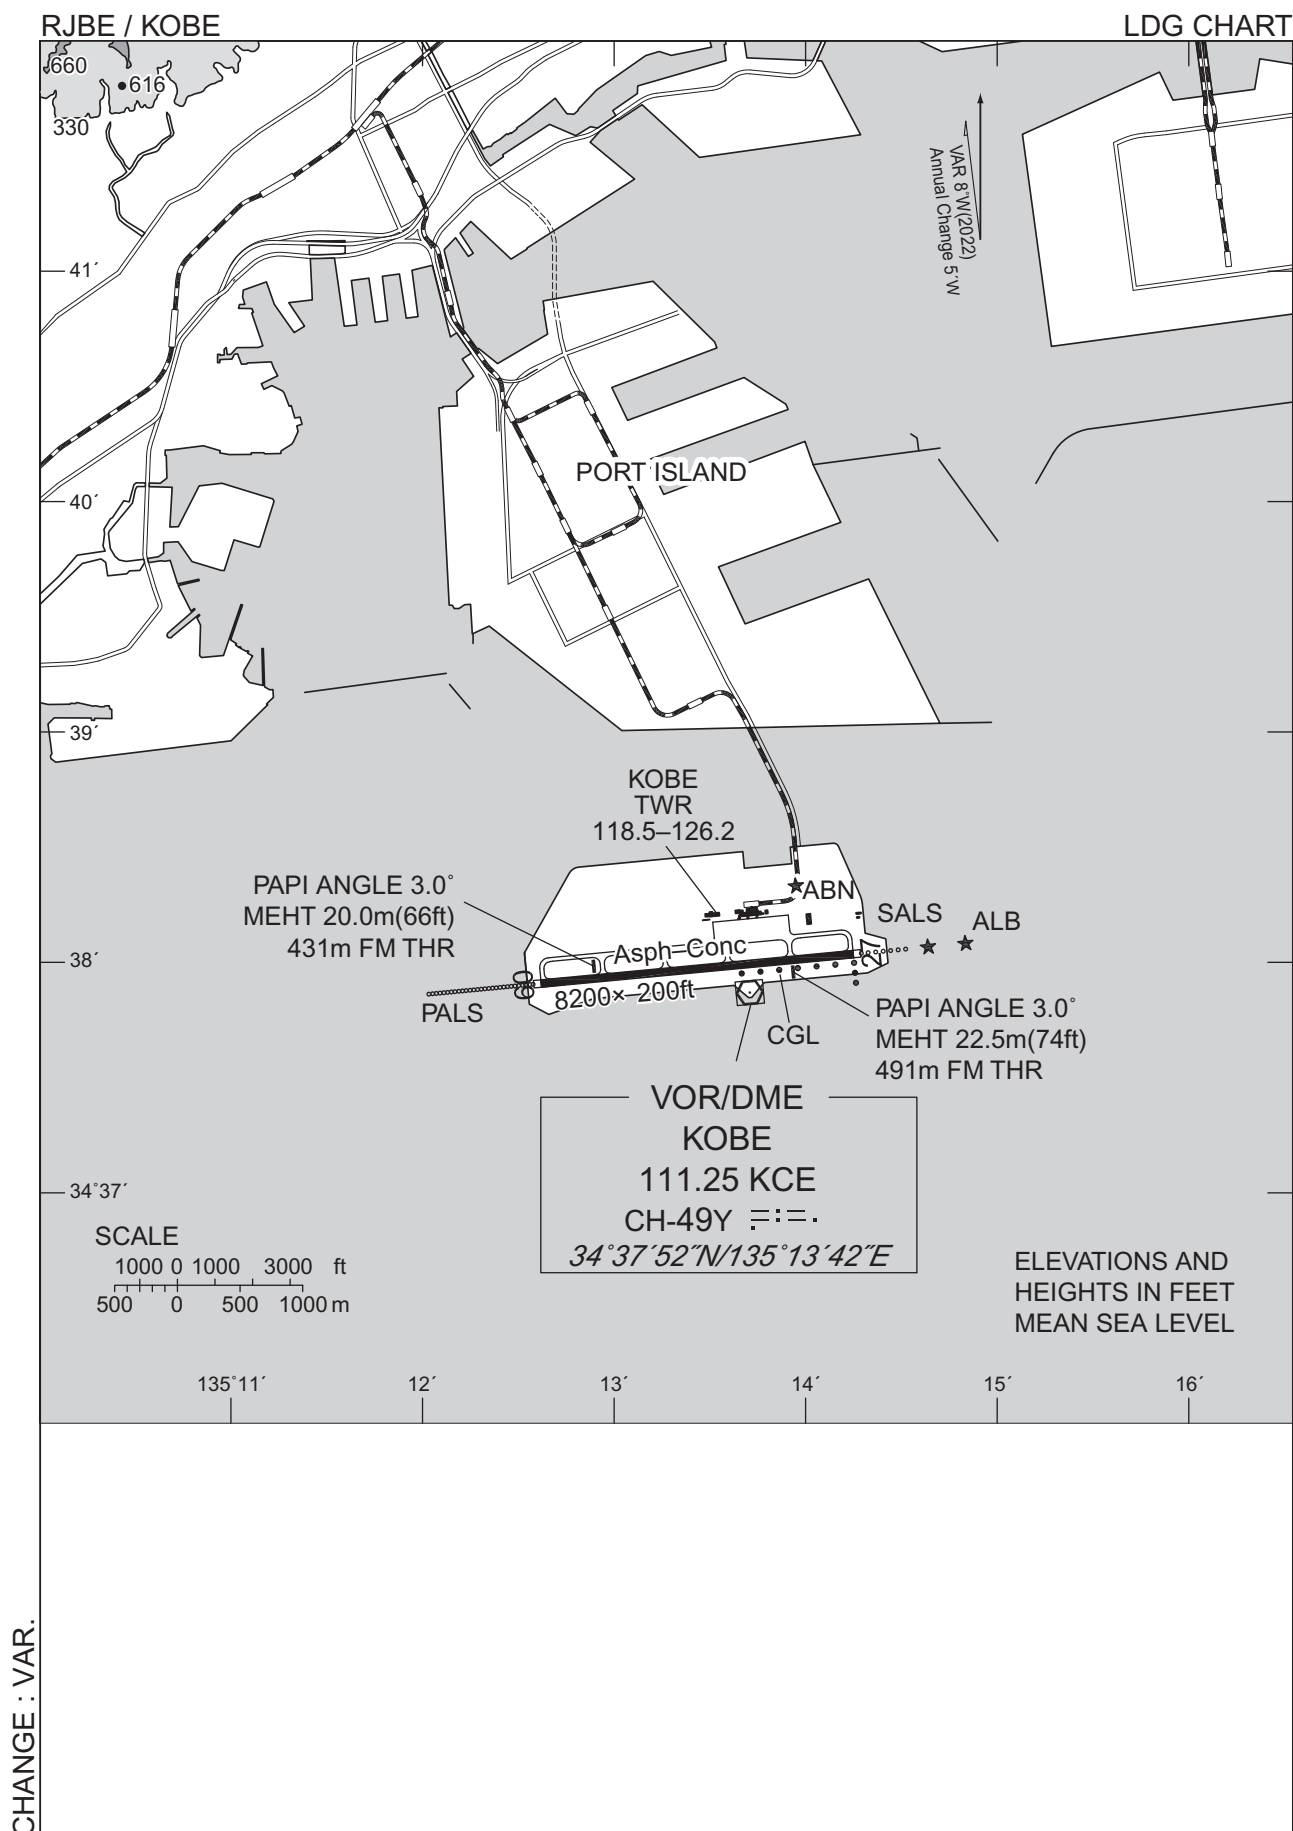

RJBE / KOBE

Minimum Vectoring Altitude CHART

