


CHANGE : Shape of TWY A11, B11 installed. VAR. RWY HLDG PSN markings and RWY guard LGT, stop bar LGT.




[illegible]

**INTENTIONALLY LEFT BLANK**


AERODROME OBSTACLE CHART-ICAO  
TYPE A (OPERATING LIMITATIONS)

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC  
MAGNETIC VARIATION 9°33' W-APR 2020

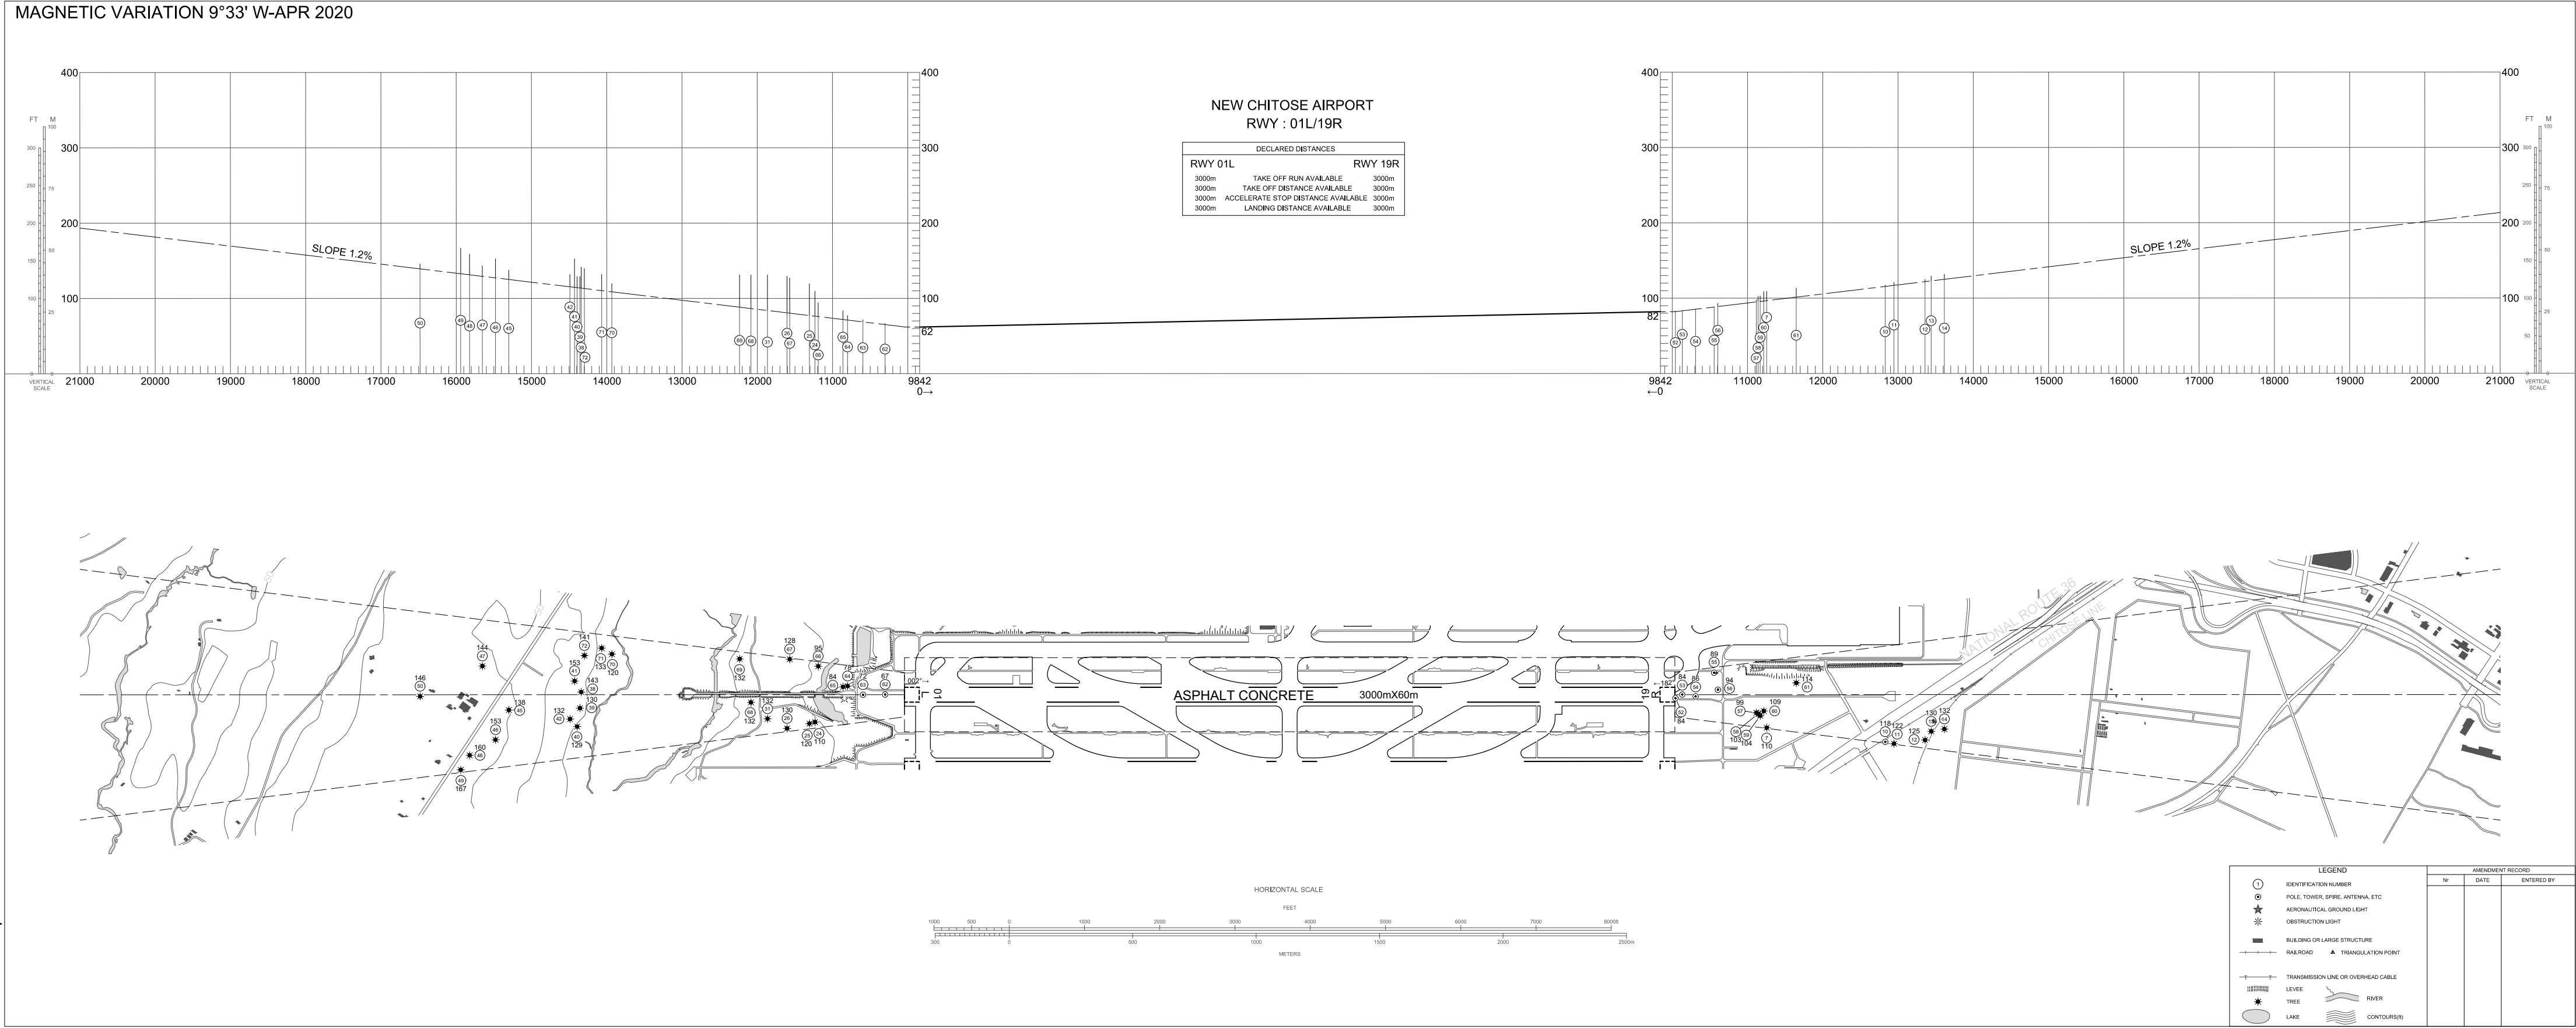


CHANGE:Update

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC  
MAGNETIC VARIATION 9°33' W-APR 2020






DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC



PRECISION APPROACH TERRAIN CHART

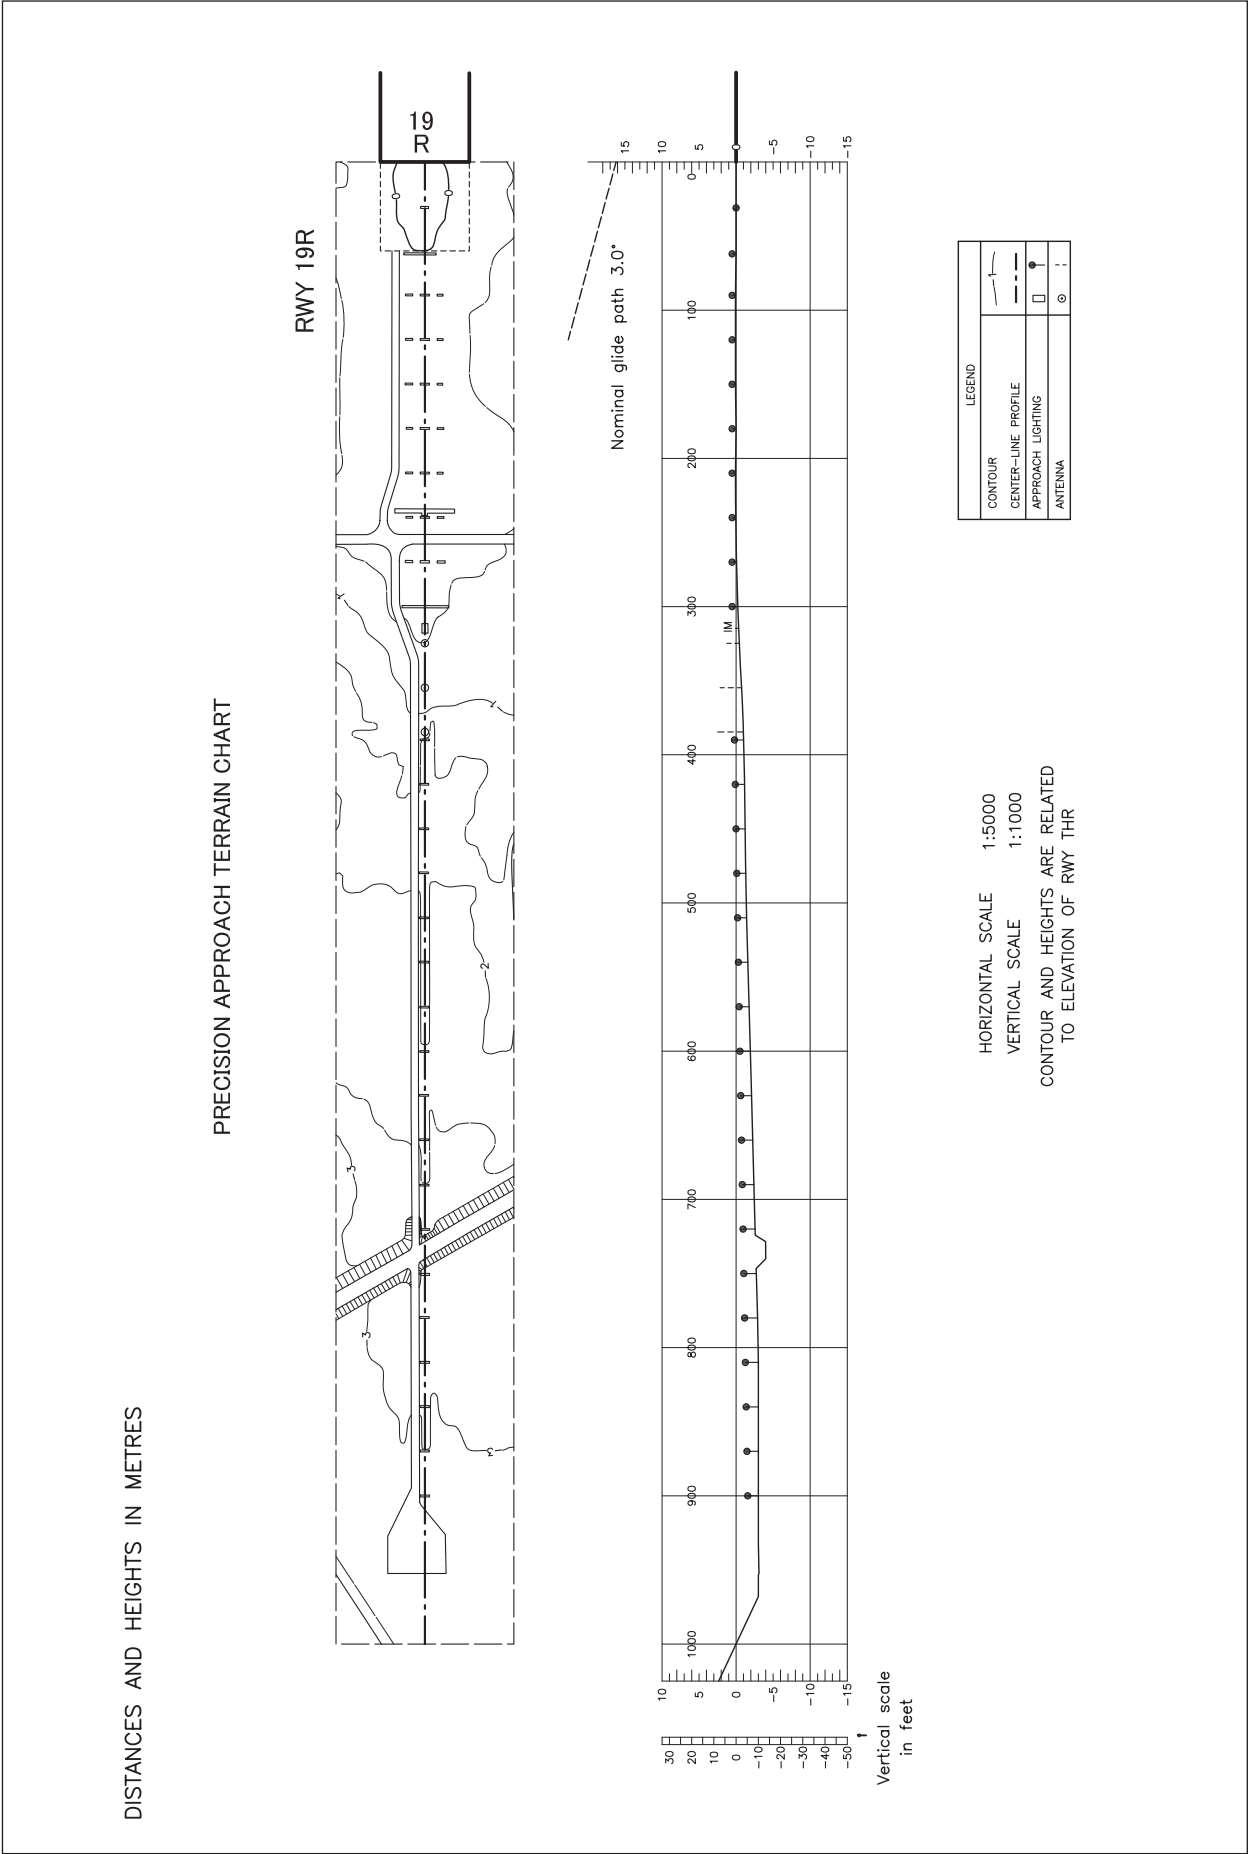


STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE

SID

CHITOSE FOUR DEPARTURE

RWY01L/01R: Climb RWY HDG until 1NM FM RWY end/CHE 6.3DME,  
turn right, direct to CHE VOR/DME within CHE  
10DME (5NM FM RWY end).  
Cross 4DME prior to CHE VOR/DME (MKE R330) at or  
above 3000FT.  
RWY19R/19L: Climb direct to CHE VOR/DME.

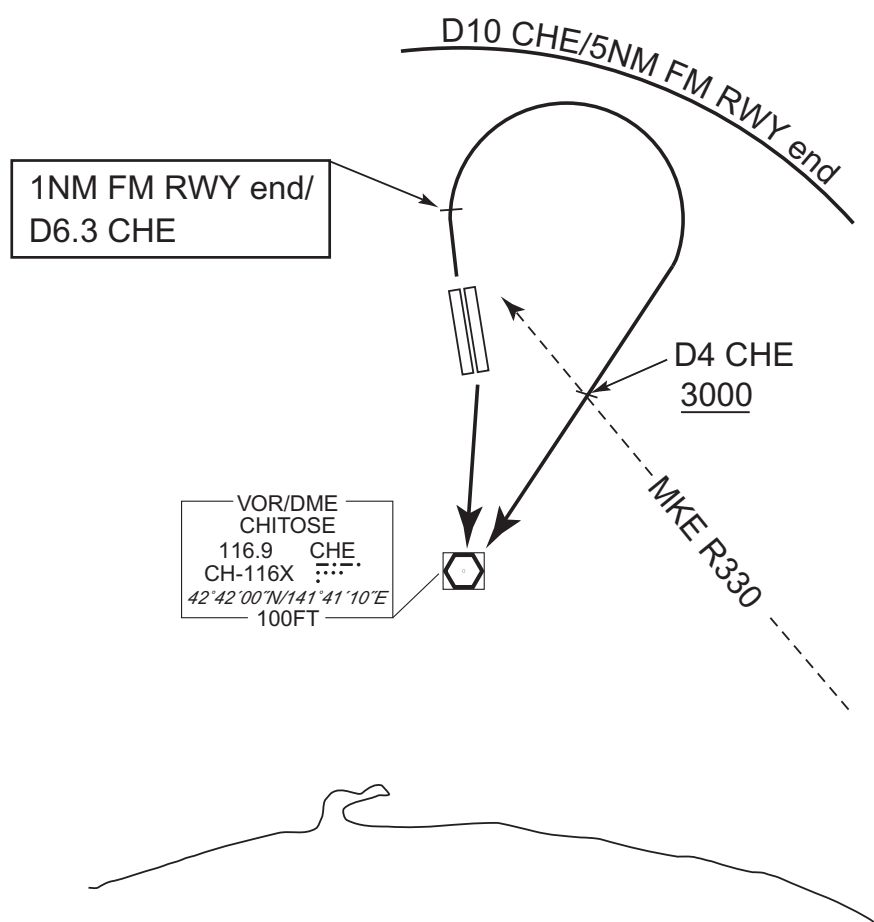

CHANGE : Description of PROC name.




STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE

SID

KURIS SEVEN DEPARTURE

RWY 01L/01R: Climb....  
RWY 19R/19L: Climb RWY HDG until 1.8NM FM RWY end/CHE  
2.0DME, turn left within 6NM,...  
...via CHE R011 to KURIS.

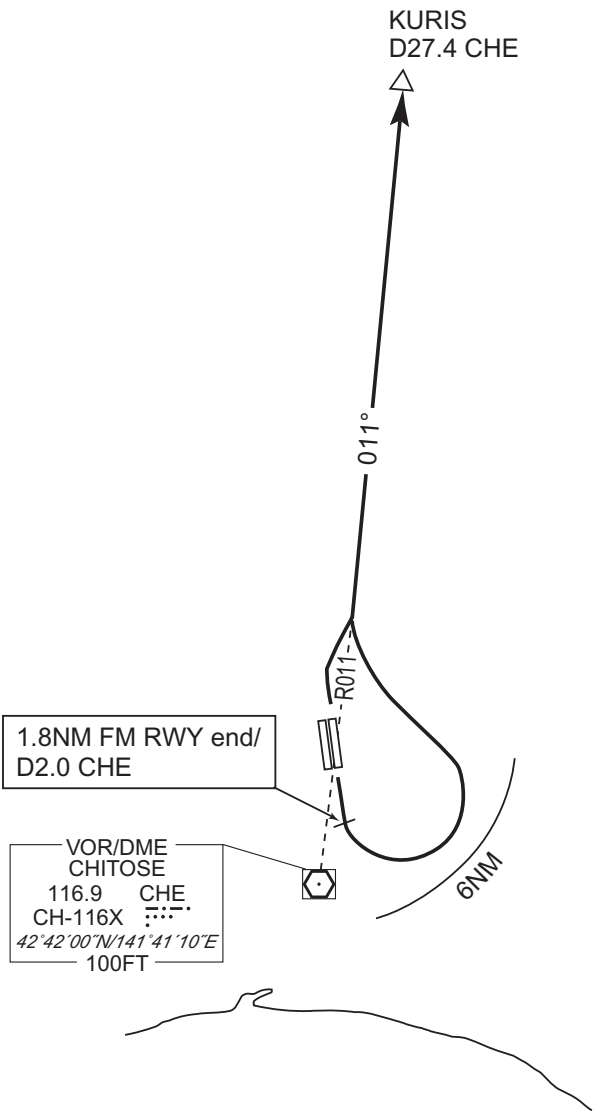

CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE


SID

TOKACHI TWO DEPARTURE

RWY 01L/01R: Climb RWY HDG until 1NM FM RWY end/CHE 6.3DME, turn right HDG 130° to intercept and proceed via...

RWY 19R/19L: Climb RWY HDG until 1.8NM FM RWY end/CHE 2.0DME, turn left, via...  
...CHE R088 to BOKSO or CHE R097 to RAKNO.  
Cross CHE R088/12DME or CHE R097/12DME at or below 5000FT.  
Cross CHE R088/22DME or CHE R097/22DME between 9000FT and 11000FT.

CHANGE : Description of PROC name.

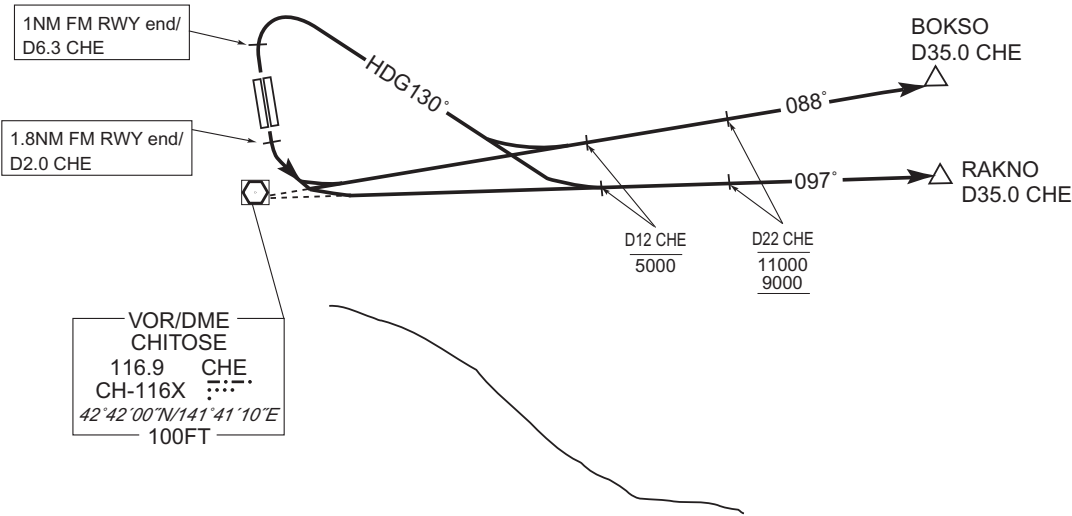

## STANDARD DEPARTURE CHART-INSTRUMENT


RJCC / NEW CHITOSE

SID

TEKKO ONE DEPARTURE

RWY01L/01R : Climb RWY HDG until 1NM FM RWY end/CHE 6.3DME,  
turn right, direct to CHE VOR/DME  
within CHE 10DME (5NM FM RWY end), cross 4DME prior to  
CHE VOR/DME (MKE R330) at or above 3000FT,...

RWY19R/19L : Climb direct to CHE VOR/DME,...  
...via CHE R256 to TEKKO.

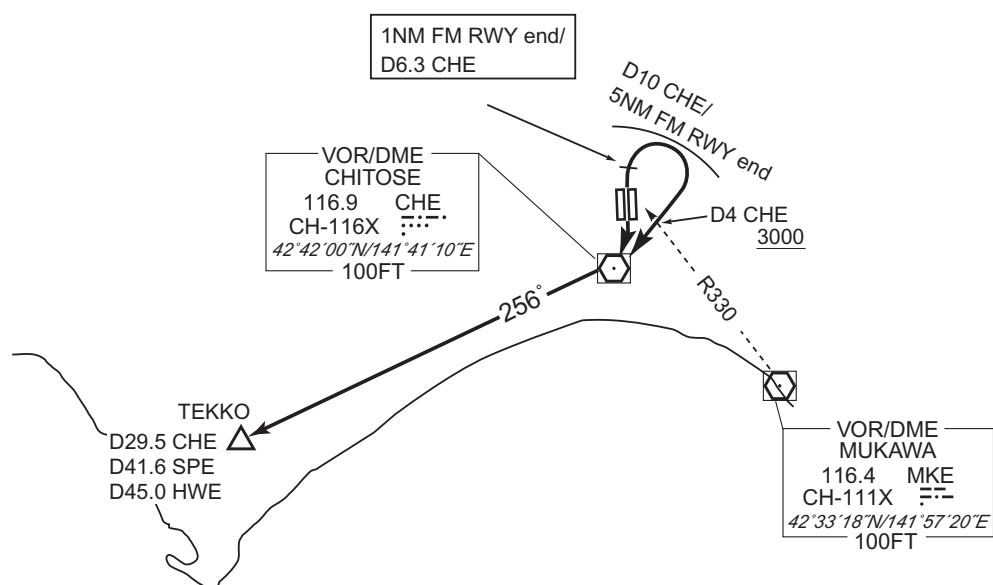

CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE

SID


MUKAWA EIGHT DEPARTURE

RWY01L/01R: Climb RWY HDG until 1NM FM RWY end/CHE 6.3DME, turn right within CHE 10DME(5NM from RWY end), via MKE R341 to MKE VOR/DME, via MKE R202 to TOBBY.

Cross MKE R341/12DME at or above 3000FT, cross MKE VOR/DME at or below 11000FT.

RWY19R/19L: Climb RWY HDG until 1.8NM FM RWY end/CHE 2.0DME, turn left, via MKE R320 to MKE VOR/DME, via MKE R202 to TOBBY.

Cross MKE R320/10DME at or above 3000FT, cross MKE VOR/DME at or below 11000FT.

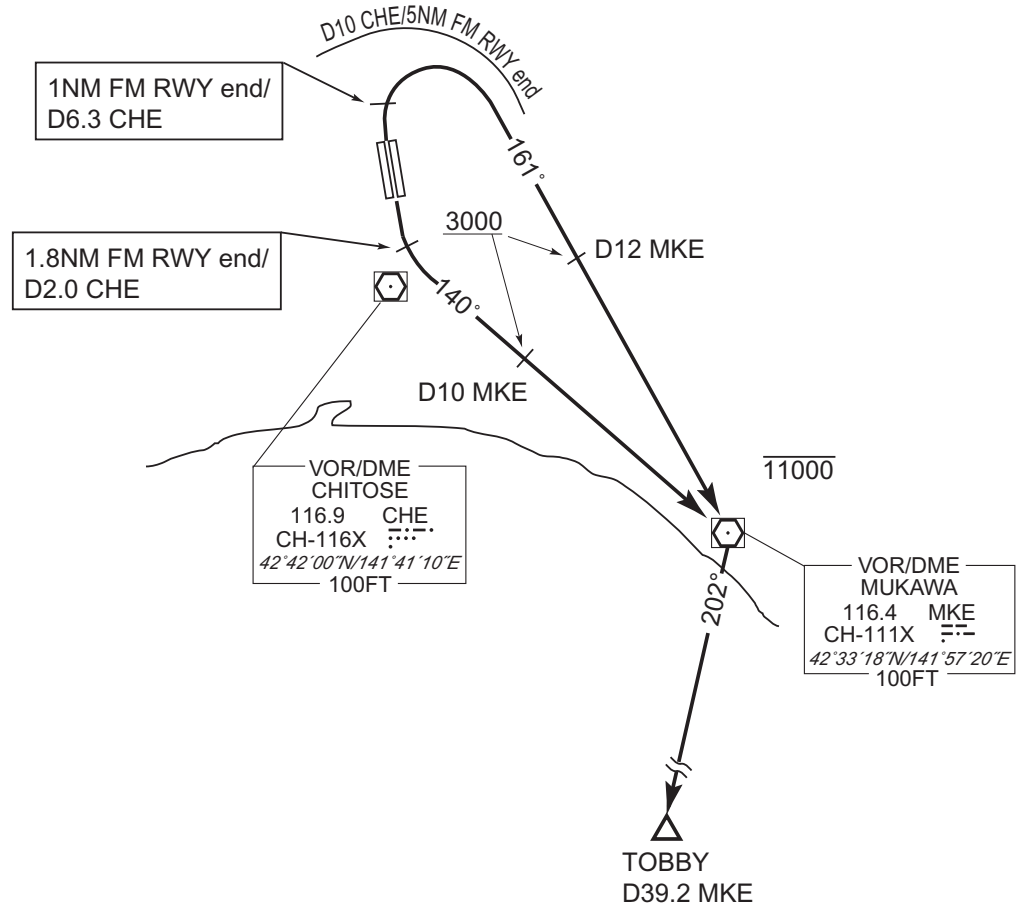

CHANGE : Description of PROC name.

## STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE

SID

TOBBY EIGHT DEPARTURE


RWY01L/01R : Climb RWY HDG until 1NM FM RWY end / CHE 6.3DME, turn right, direct to CHE VOR/DME within CHE 10DME (5NM FM RWY end), via CHE R185 to TOBBY.

Cross 4DME prior to CHE VOR/DME (MKE R330) at or above 3000FT, cross CHE R185/6DME at or above 6000FT, cross CHE R185/11DME at or above 7000FT.

RWY19R/19L : Climb direct to CHE VOR/DME, via CHE R185 to TOBBY.

Cross CHE R185/27DME at or below 11000FT.

Note : Aircraft unable to comply with the flight restriction, inform ATC for alternate procedure before departure.

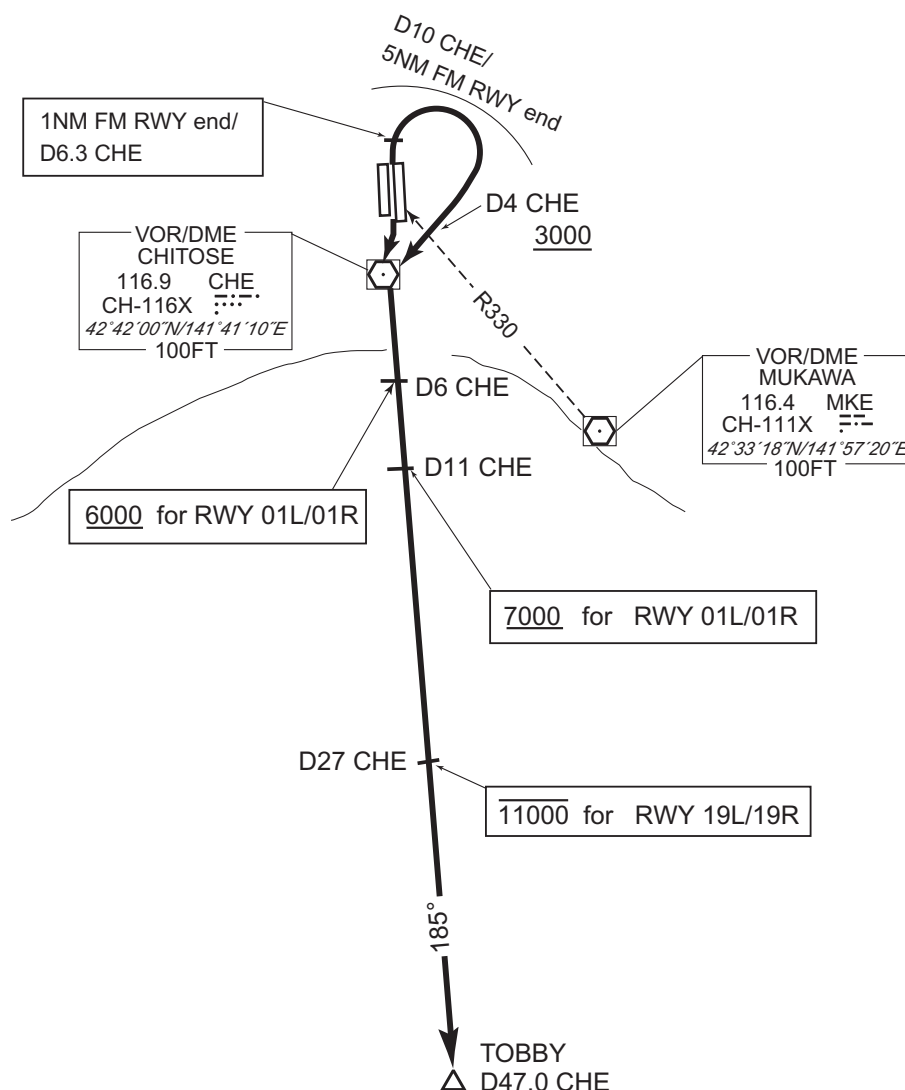

CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE


SID

HAKODATE SEVEN DEPARTURE

RWY01L/01R: Climb via RWY HDG until 1NM FM RWY end/CHE 6.3DME, turn right, direct to CHE VOR/DME within CHE 10DME (5NM FM RWY end), via CHE R224 to HWE VOR/DME. Cross 4DME prior to CHE VOR/DME (MKE R330) at or above 3000FT, cross CHE R224/8.0DME at or above 3600FT.

RWY19R/19L: Climb direct to CHE VOR/DME, via CHE R224 to HWE VOR/DME. Cross CHE R224/8.0DME at or above 3600FT.

CHANGE : Description of PROC name.

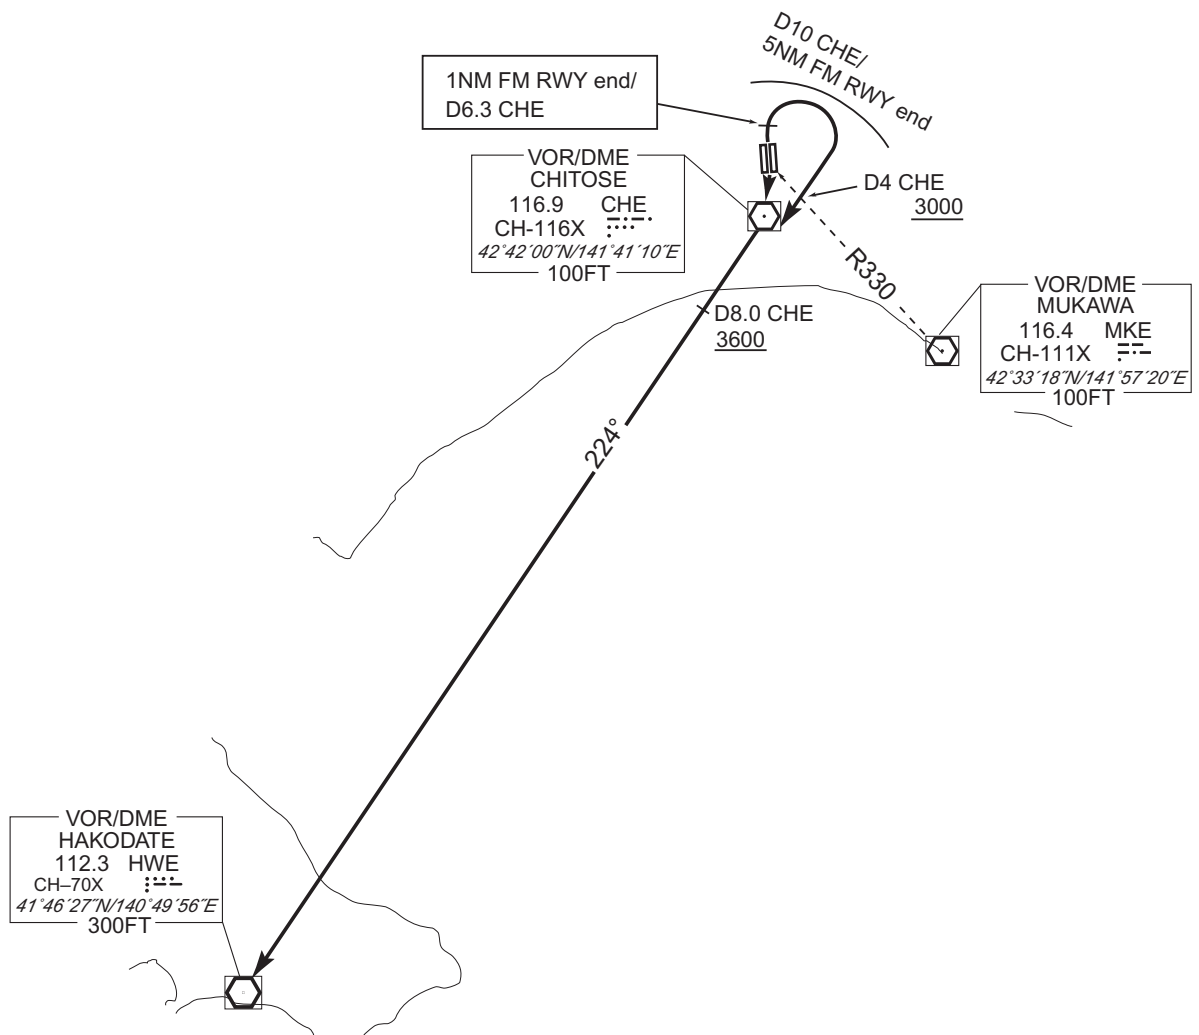

## STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE


SID

NAGANUMA FIVE DEPARTURE

RWY 01L/01R: Climb RWY HDG until 1NM FM RWY end/CHE 6.3DME, turn right to intercept and proceed via CHE R021 to CHE 15DME, turn left, via CHE R005 to CHE VOR/DME within CHE 19DME.

Cross CHE R021/15DME at or above 3000FT, cross CHE R005/10DME (MKE R335) at or above 6000FT, cross CHE VOR/DME at or above 9000FT.

RWY 19R/19L: Not established.

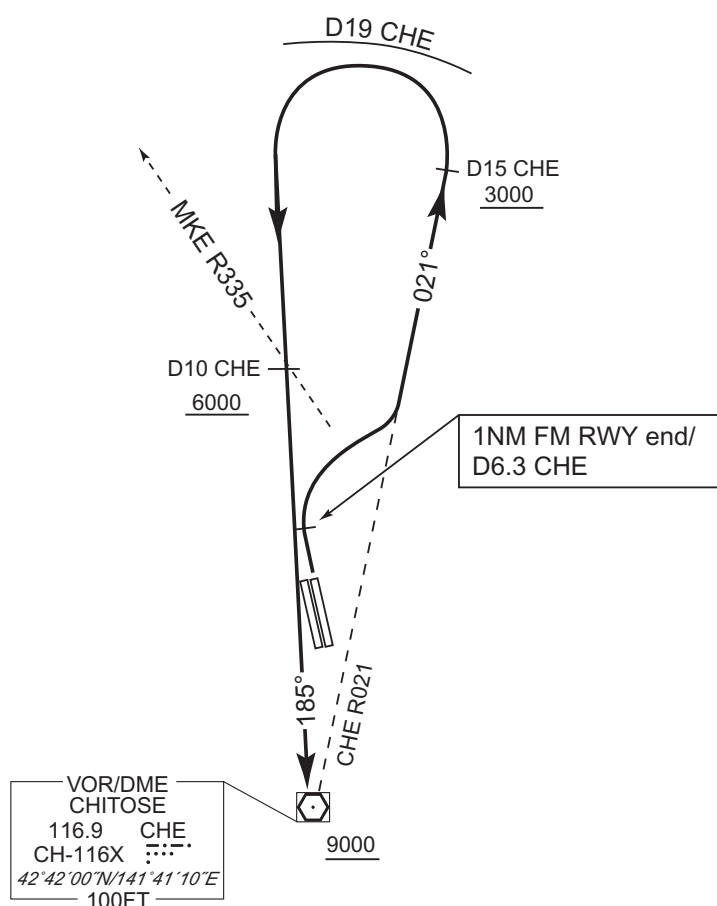

CHANGE : Description of PROC name.



STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE

SID


YUFUTSU FIVE DEPARTURE

RWY 01L/01R: Not established.

RWY 19R/19L: Climb direct to CHE VOR/DME until 1.5DME prior to CHE VOR/DME (until crossing MKE R320), turn left, via CHE R136 (MKE R315) to MKE VOR/DME or after MKE VOR/DME, via MKE R202 to TOBBY.

Cross CHE R136/5DME (MKE R315/10DME) at or above 3000FT, cross MKE R202/7DME at or below 8000FT.

CHANGE : Description of PROC name.

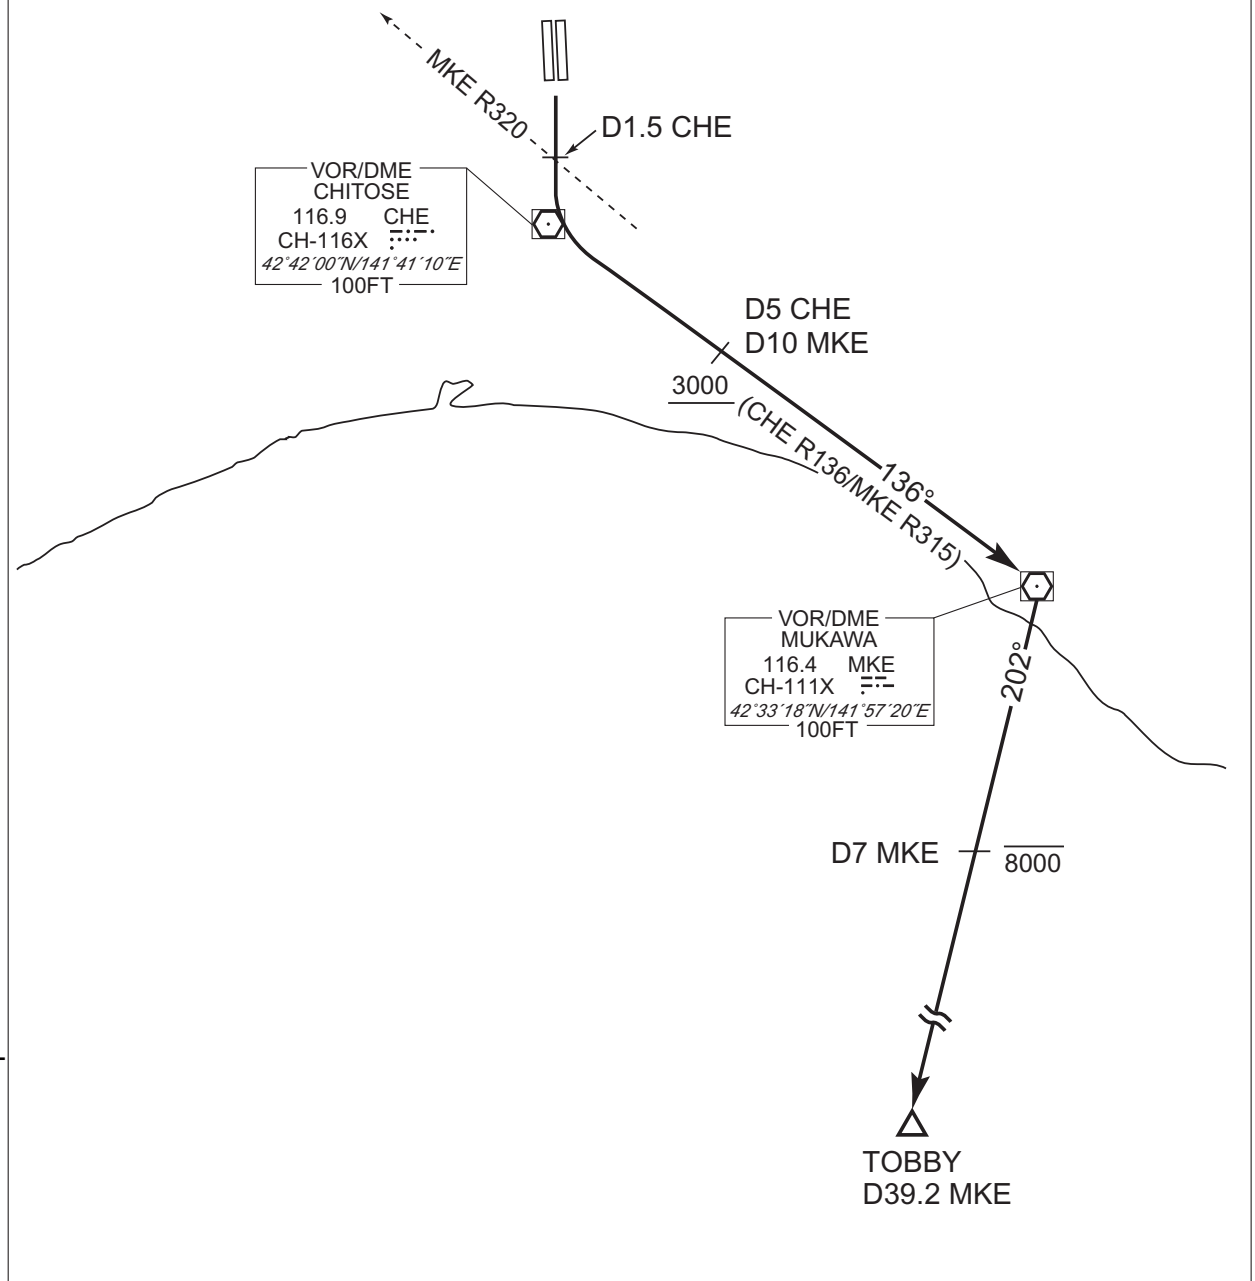


## STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE

SID

HOKUTO SEVEN DEPARTURE

- RWY 01L/01R: Climb RWY HDG until 1NM FM RWY end/CHE 6.3DME, turn right, via CHE R021, via MKE R352 to KURIS.  
Cross CHE R021/15DME at or above 3000FT, cross KURIS at or above 7000FT.
- RWY 19R/19L: Climb direct to CHE VOR/DME until 1.5DME prior to CHE VOR/DME (until crossing MKE R320), turn left, via CHE R136 (MKE R315) to CHE 5DME (MKE 10DME), turn left, via MKE R352 to KURIS.  
Cross CHE R136/5DME (MKE R315/10DME) at or above 3000FT, cross MKE R352/13DME at or above 5000FT, cross KURIS at or above 7000FT.

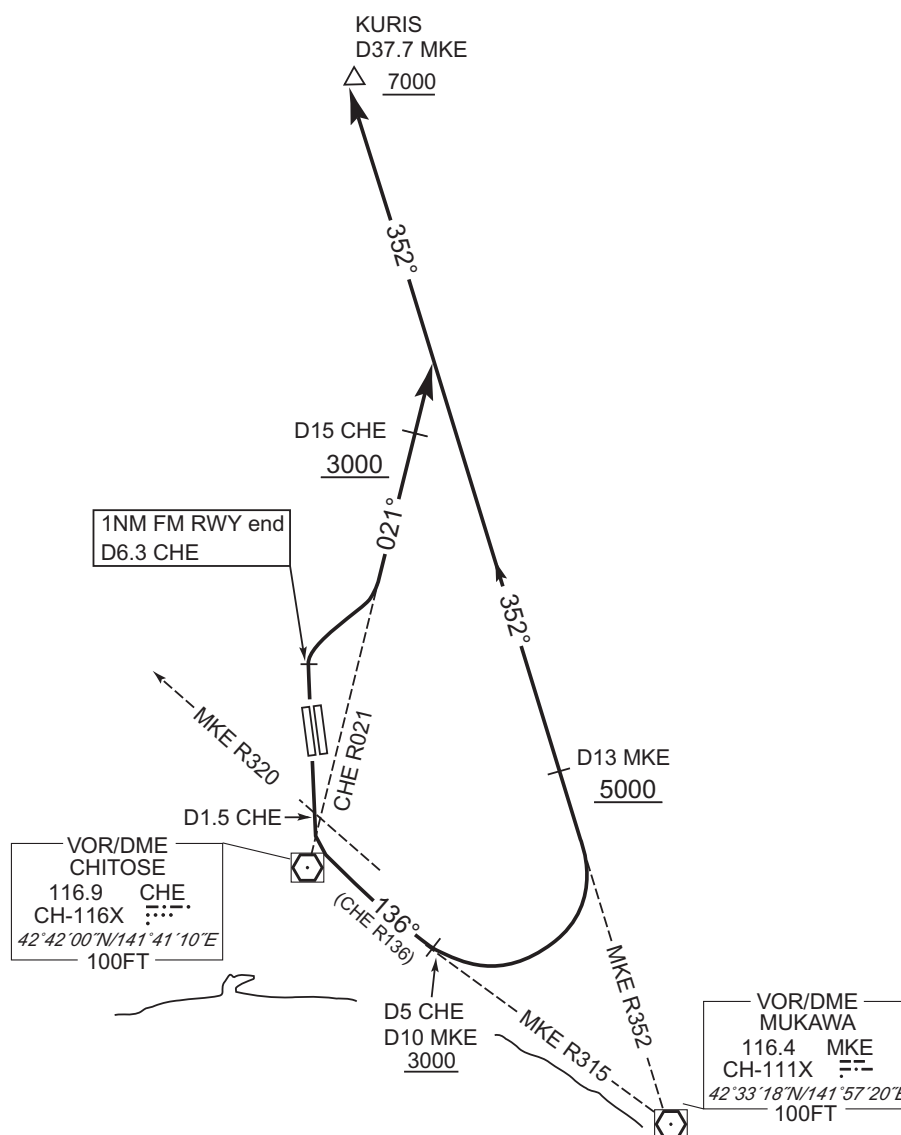

CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART-INSTRUMENT


RJCC / NEW CHITOSE

SID

SAVIT TWO DEPARTURE


RWY01L/01R: Climb via RWY HDG until 1NM FM RWY end/CHE 6.3DME, turn right, direct to CHE VOR/DME within CHE 10DME (5NM FM RWY end), via CHE R224 to SAVIT.  
Cross 4DME prior to CHE VOR/DME (MKE R330) at or above 3000FT, cross CHE R224/8.0DME at or above 3600FT.

RWY19R/19L: Climb direct to CHE VOR/DME, via CHE R224 to SAVIT.  
Cross CHE R224/8.0DME at or above 3600FT.

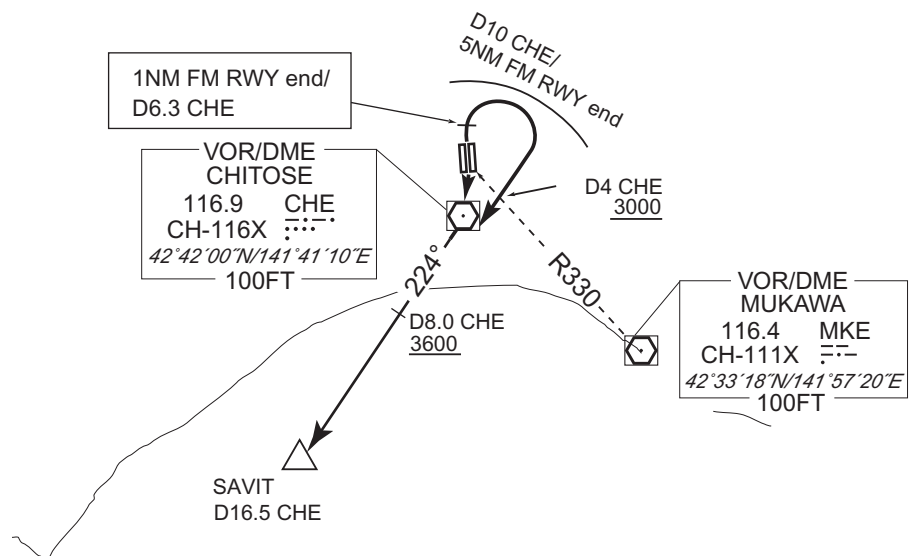

CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART -INSTRUMENT

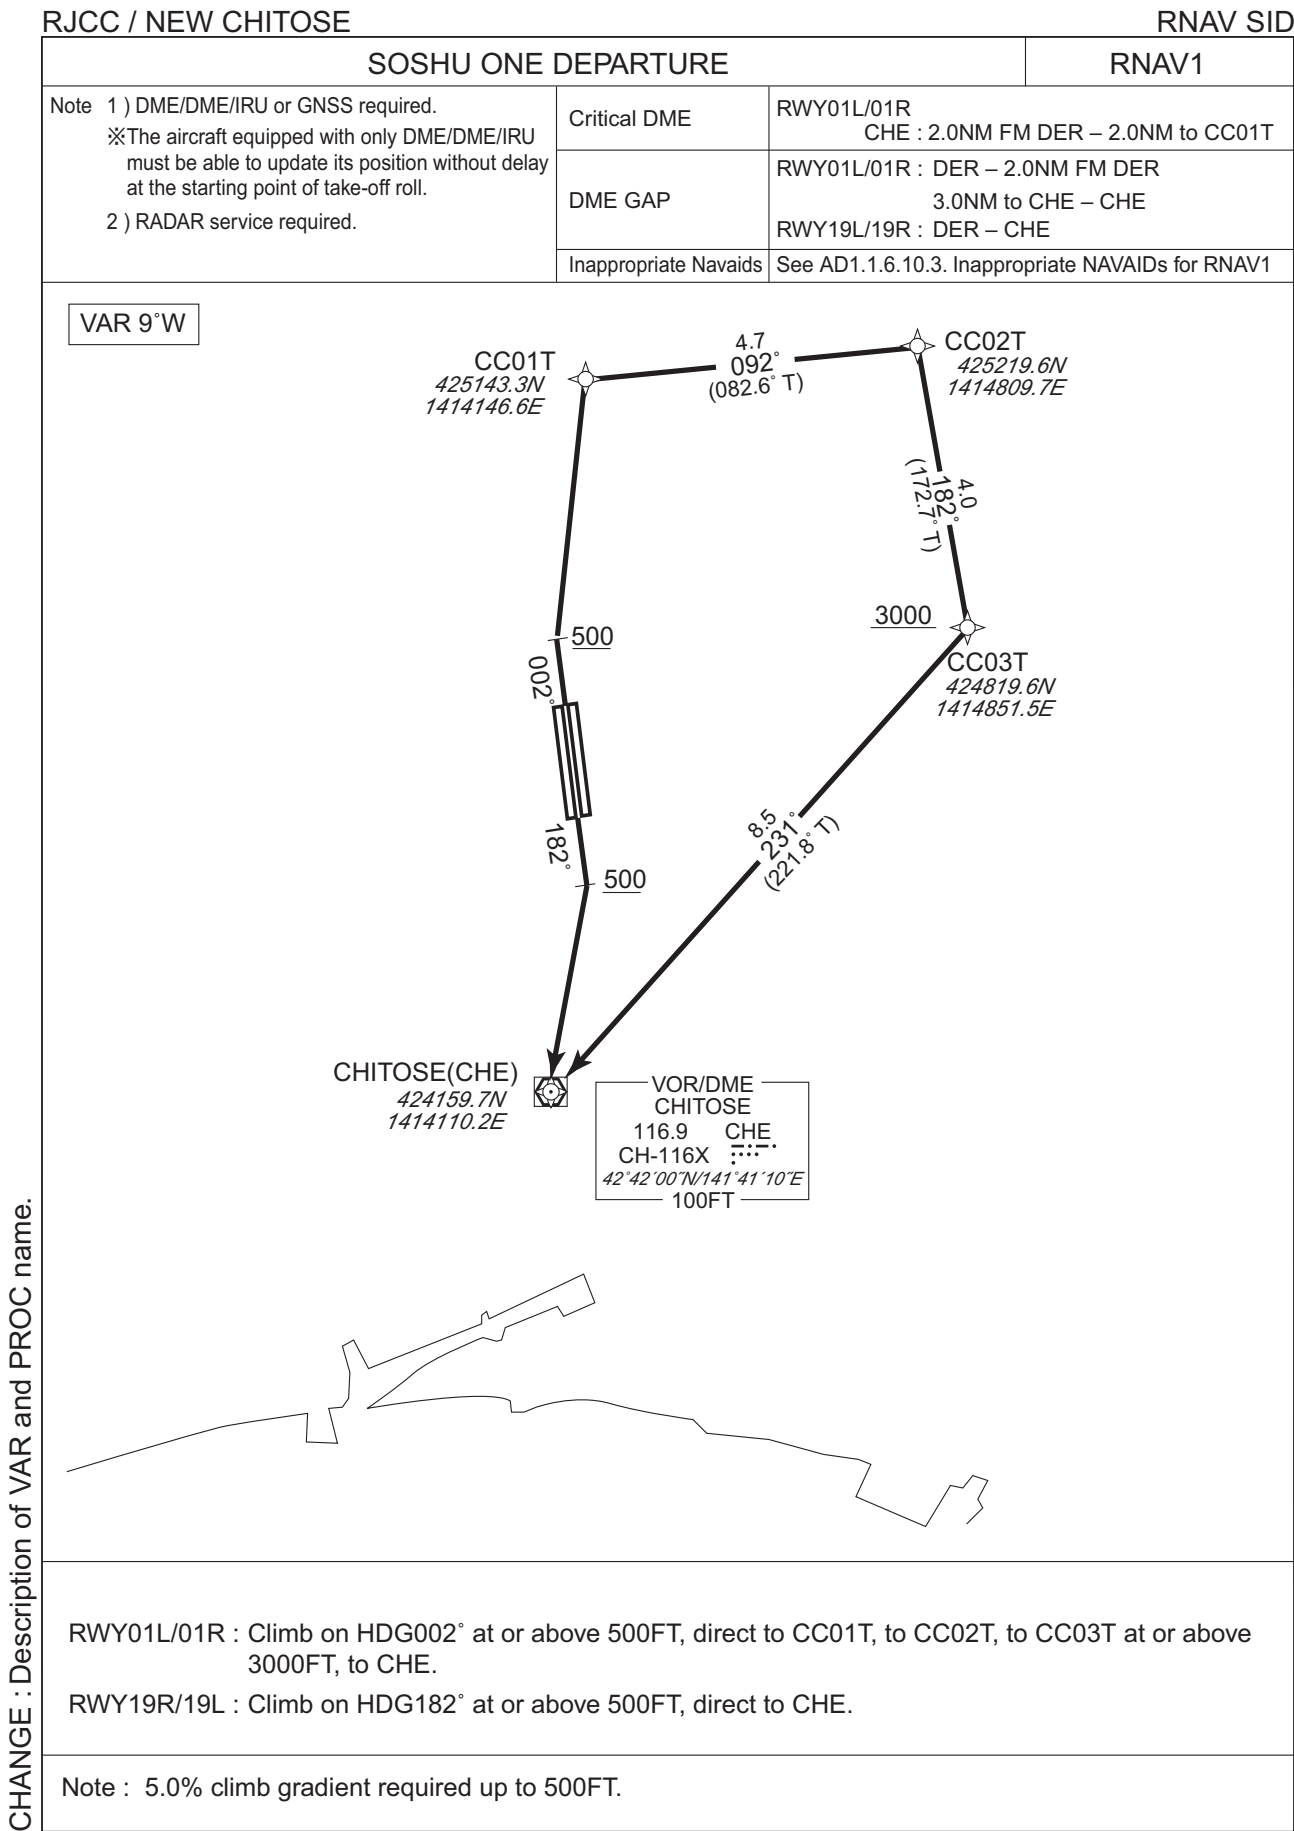

STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

SOSHU ONE DEPARTURE

RWY01L/01R

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course [M'(T°)] | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|-----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 002<br>(352.6)  | -9.1               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | CC01T               | —        | —               | -9.1               | —             | —              | —             | —            | —              | RNAV1                    |
| 003           | TF              | CC02T               | —        | 092<br>(082.6)  | -9.1               | 4.7           | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | CC03T               | —        | 182<br>(172.7)  | -9.1               | 4.0           | —              | +3000         | —            | —              | RNAV1                    |
| 005           | TF              | CHE                 | —        | 231<br>(221.8)  | -9.1               | 8.5           | —              | —             | —            | —              | RNAV1                    |

RWY19R/19L

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course [M'(T°)] | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|-----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 182<br>(172.6)  | -9.1               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | CHE                 | —        | —               | -9.1               | —             | —              | —             | —            | —              | RNAV1                    |

CHANGE : Waypoint identifier(CHE).


## STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

| REZOT TWO DEPARTURE                                                                                                                                                                                             |                                                                                                |              | RNAV1                                                                                                                                                                                                                                                                                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1 ) DME/DME/IRU or GNSS required.<br>※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.<br>2 ) RADAR service required. |                                                                                                | Critical DME | RWY01L/01R<br>CHE : 2.0NM FM DER – 2.0NM to CC01T<br>MKE : CHE – 18.0NM to REZOT<br>ZYT : CHE – 18.0NM to REZOT<br>RWY19L/19R<br>MKE : 3.0NM to CC06T – 16.0NM to REZOT<br>7.0NM to REZOT – REZOT<br>ZYT : 3.0NM to CC06T – 1.0NM to CC06T<br>7.0NM to REZOT – REZOT<br>RWY01L/01R, RWY19L/19R<br>SPE : 4.0NM to TEKKO – TEKKO |
| DME GAP                                                                                                                                                                                                         | RWY01L/01R :<br>DER – 2.0NM FM DER, 3.0NM to CHE – CHE<br>RWY19L/19R :<br>DER – 3.0NM to CC06T |              | Inappropriate Nav aids<br>See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1                                                                                                                                                                                                                                                    |

VAR 9°W

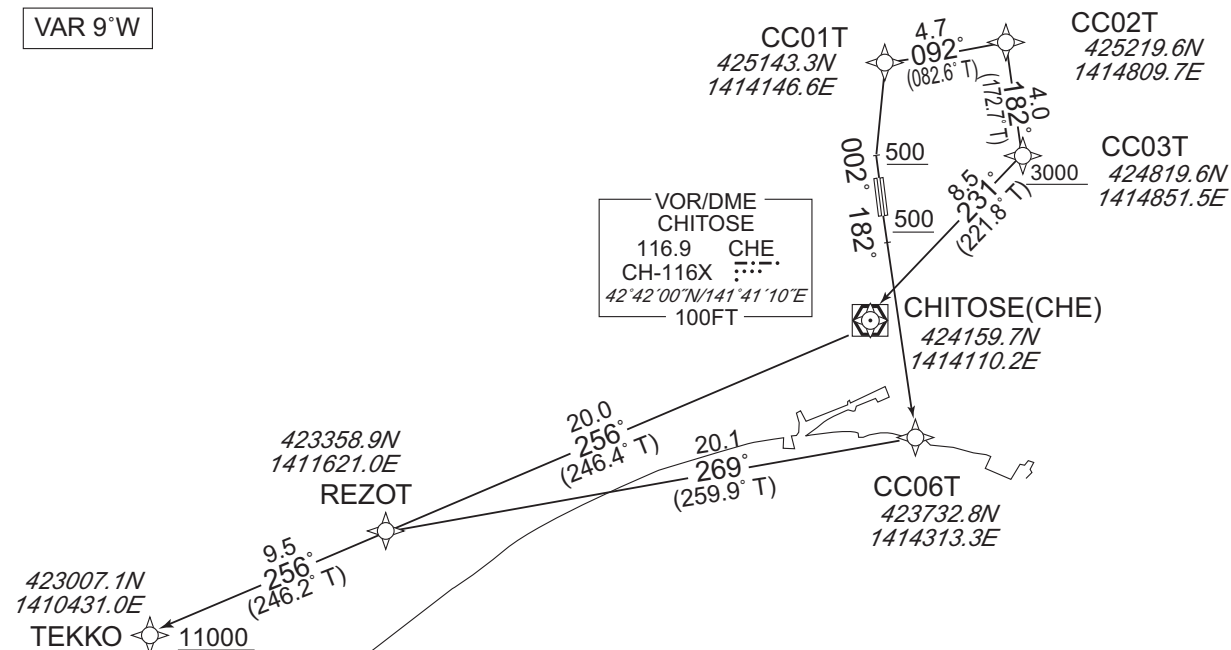

CHANGE : Description of VAR and PROC name.

RWY01L/01R : Climb on HDG002° at or above 500FT, direct to CC01T, to CC02T, to CC03T at or above 3000FT, to CHE, to REZOT, to TEKKO at or above 11000FT.

RWY19R/19L : Climb on HDG182° at or above 500FT, direct to CC06T, to REZOT, to TEKKO at or above 11000FT.

Note : 5.0% climb gradient required up to 500FT.

STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

REZOT TWO DEPARTURE

RWY01L/01R

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course [M°(T°)] | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|-----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 002<br>(352.6)  | -9.3               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | CC01T               | —        | —               | -9.3               | —             | —              | —             | —            | —              | RNAV1                    |
| 003           | TF              | CC02T               | —        | 092<br>(082.6)  | -9.3               | 4.7           | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | CC03T               | —        | 182<br>(172.7)  | -9.3               | 4.0           | —              | +3000         | —            | —              | RNAV1                    |
| 005           | TF              | CHE                 | —        | 231<br>(221.8)  | -9.3               | 8.5           | —              | —             | —            | —              | RNAV1                    |
| 006           | TF              | REZOT               | —        | 256<br>(246.4)  | -9.3               | 20.0          | —              | —             | —            | —              | RNAV1                    |
| 007           | TF              | TEKKO               | —        | 256<br>(246.2)  | -9.3               | 9.5           | —              | +11000        | —            | —              | RNAV1                    |

RWY19R/19L

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course [M°(T°)] | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|-----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 182<br>(172.6)  | -9.3               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | CC06T               | —        | —               | -9.3               | —             | —              | —             | —            | —              | RNAV1                    |
| 003           | TF              | REZOT               | —        | 269<br>(259.9)  | -9.3               | 20.1          | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | TEKKO               | —        | 256<br>(246.2)  | -9.3               | 9.5           | —              | +11000        | —            | —              | RNAV1                    |

CHANGE : Waypoint identifier(CHE).

## STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

## JUGGLAR ONE DEPARTURE

RNAV1

Note 1 ) DME/DME/IRU or GNSS required.

※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.

2 ) RADAR service required.

DME GAP

RWY01L/01R : DER – 2.0NM FM DER  
CC04T – 4.0NM to CC05T  
4.0NM to TOBBY – TOBBY  
RWY19L/19R : DER – 3.0NM to CC06T  
3.0NM to TOBBY – TOBBY

Critical DME

RWY01L/01R

CHE : 2.0NM FM DER – 2.0NM to CC01T

3.0NM to CC04T – CC04T

MKE : 4.0NM to CC05T – 23.0NM to TOBBY

12.0NM to TOBBY – 4.0NM to TOBBY

SPE : 18.0NM to TOBBY – 4.0NM to TOBBY

RWY19L/19R


MKE : 3.0NM to CC06T – 3.0NM to TOBBY

ZYT : 3.0NM to CC06T – 1.0NM to CC06T

SPE : 17.0NM to TOBBY – 3.0NM to TOBBY

Inappropriate  
NavAidsSee AD1.1.6.10.3. Inappropriate  
NAVAIDs for RNAV1

VAR 9°W

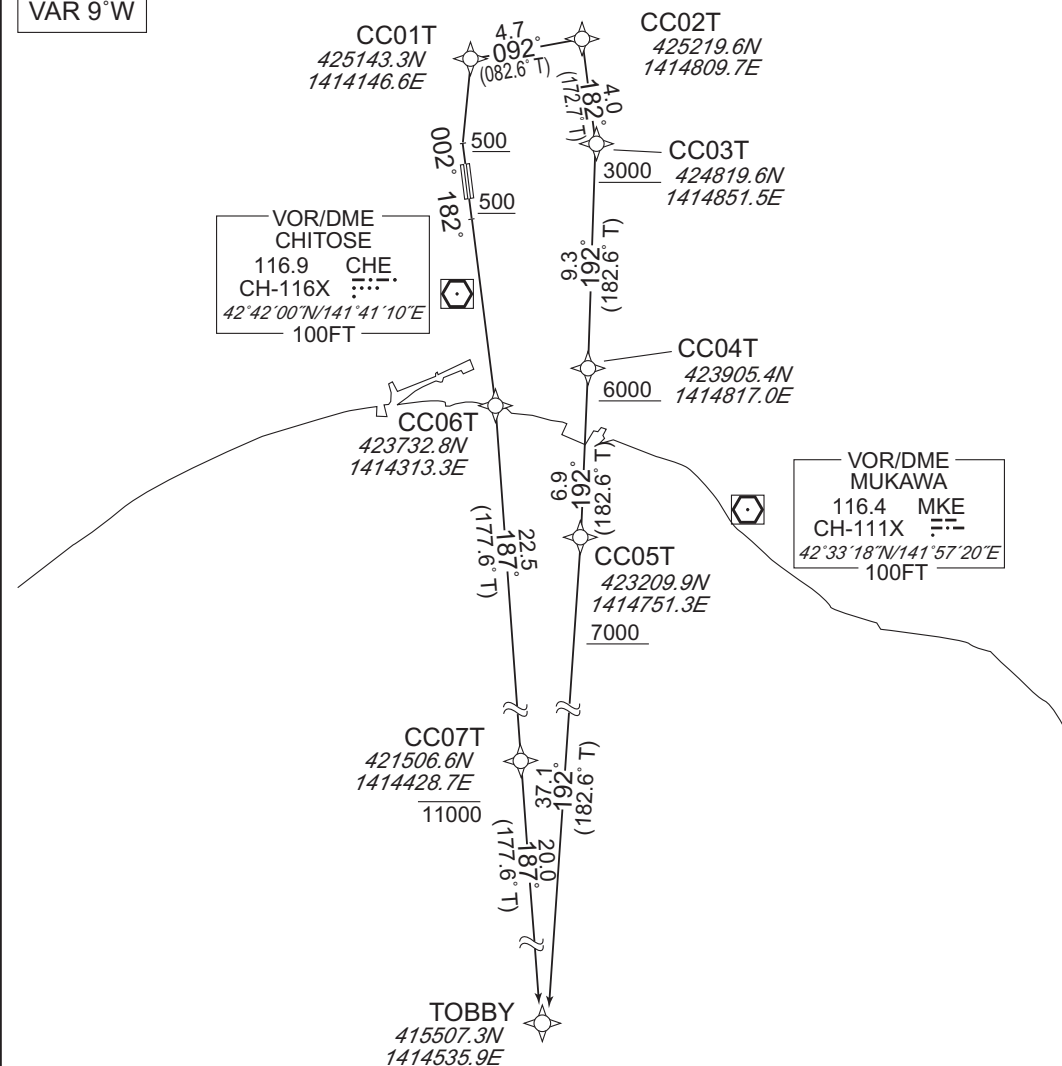

RWY01L/01R : Climb on HDG002° at or above 500FT, direct to CC01T, to CC02T, to CC03T at or above 3000FT, to CC04T at or above 6000FT, to CC05T at or above 7000FT, to TOBBY.

RWY19R/19L : Climb on HDG182° at or above 500FT, direct to CC06T, to CC07T at or below 11000FT, to TOBBY.

Note : 5.0% climb gradient required up to 500FT.

CHANGE : Description of VAR and PROC name.



## STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

JUGGLAR ONE DEPARTURE

## RWY01L/01R

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course [M°(T°)] | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|-----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 002<br>(352.6)  | -9.1               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | CC01T               | —        | —               | -9.1               | —             | —              | —             | —            | —              | RNAV1                    |
| 003           | TF              | CC02T               | —        | 092<br>(082.6)  | -9.1               | 4.7           | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | CC03T               | —        | 182<br>(172.7)  | -9.1               | 4.0           | —              | +3000         | —            | —              | RNAV1                    |
| 005           | TF              | CC04T               | —        | 192<br>(182.6)  | -9.1               | 9.3           | —              | +6000         | —            | —              | RNAV1                    |
| 006           | TF              | CC05T               | —        | 192<br>(182.6)  | -9.1               | 6.9           | —              | +7000         | —            | —              | RNAV1                    |
| 007           | TF              | TOBBY               | —        | 192<br>(182.6)  | -9.1               | 37.1          | —              | —             | —            | —              | RNAV1                    |

## RWY19R/19L

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course [M°(T°)] | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|-----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 182<br>(172.6)  | -9.1               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | CC06T               | —        | —               | -9.1               | —             | —              | —             | —            | —              | RNAV1                    |
| 003           | TF              | CC07T               | —        | 187<br>(177.6)  | -9.1               | 22.5          | —              | -11000        | —            | —              | RNAV1                    |
| 004           | TF              | TOBBY               | —        | 187<br>(177.6)  | -9.1               | 20.0          | —              | —             | —            | —              | RNAV1                    |


STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

| PATRUSH ONE DEPARTURE                                                                                                                                                                                           |                                                                      |              | RNAV 1                                                                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|--------------|---------------------------------------------------------------------------------------------------------------|
| Note 1 ) DME/DME/IRU or GNSS required.<br>※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.<br>2 ) RADAR service required. |                                                                      | Critical DME | RWY01L/01R<br>SPE : 7.0NM to KURIS – KURIS                                                                    |
| DME GAP                                                                                                                                                                                                         | RWY01L/01R : DER – 2.0NM FM DER<br>RWY19L/19R : DER – 1.0NM to CC02H |              | RWY19L/19R<br>SPE : 1.0NM to CC02H – CC02H<br>7.0NM to KURIS – KURIS<br>CHE : 1.0NM to CC02H – 4.0NM to CC03H |
| Inappropriate Nav aids                                                                                                                                                                                          | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1                    |              |                                                                                                               |

VAR 9°W

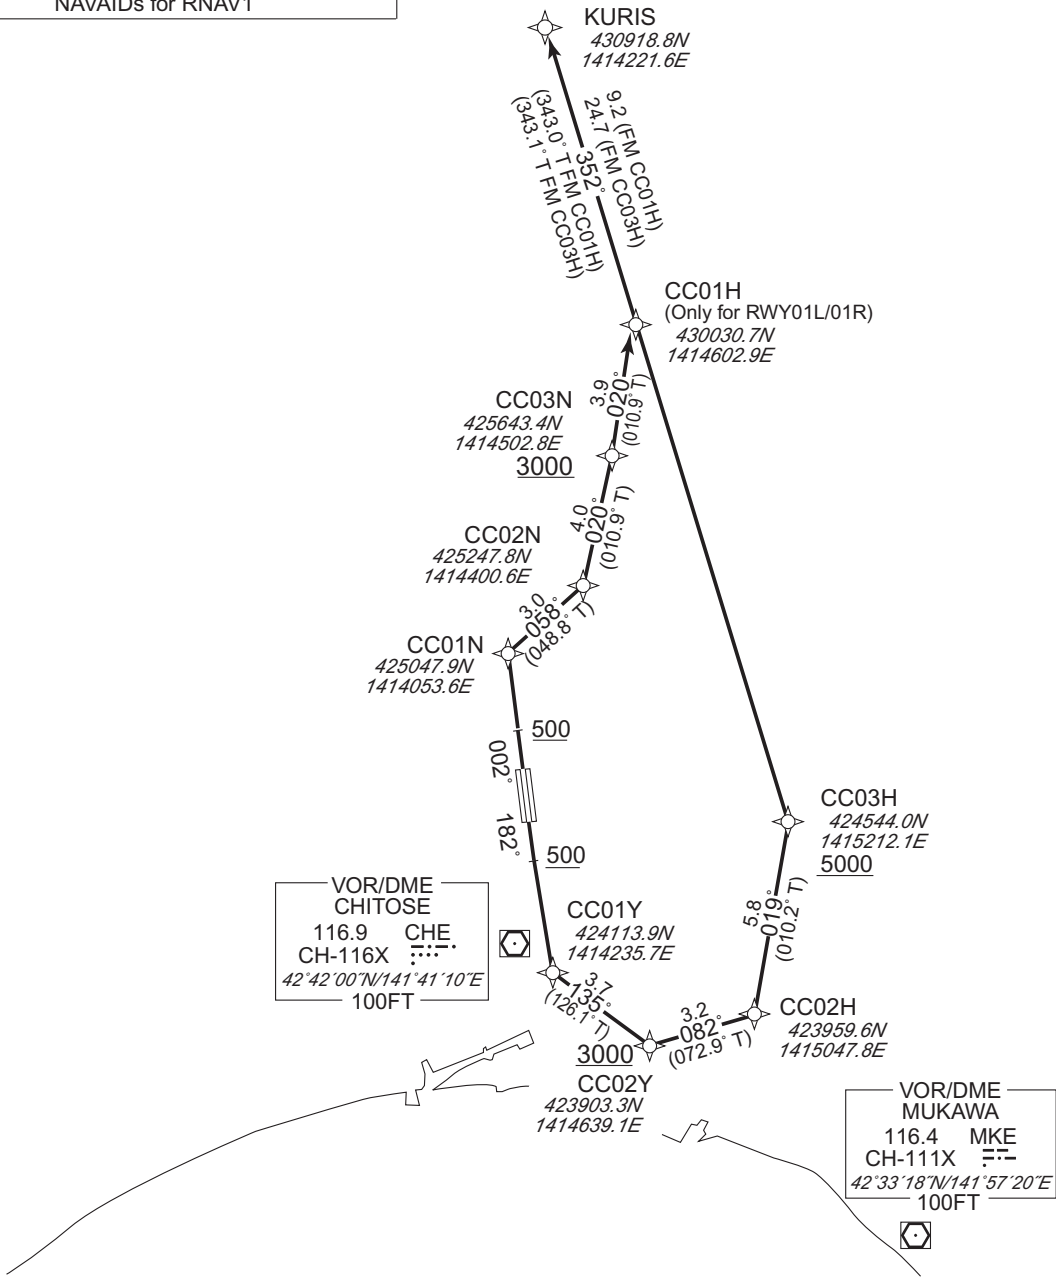

RWY01L/01R : Climb on HDG 002° at or above 500FT, direct to CC01N, to CC02N, to CC03N at or above 3000FT, to CC01H, to KURIS.  
RWY19R/19L : Climb on HDG 182° at or above 500FT, direct to CC01Y, to CC02Y at or above 3000FT, to CC02H, to CC03H at or above 5000FT, to KURIS.  
Note : 5.0% climb gradient required up to 500FT.

## STANDARD DEPARTURE CHART -INSTRUMENT

## RJCC / NEW CHITOSE

## RNAV SID

PATRUSH ONE DEPARTURE

## RWY01L/01R

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course [M°(T°)] | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|-----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 002<br>(352.6)  | -9.1               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | CC01N               | —        | —               | -9.1               | —             | —              | —             | —            | —              | RNAV1                    |
| 003           | TF              | CC02N               | —        | 058<br>(048.8)  | -9.1               | 3.0           | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | CC03N               | —        | 020<br>(010.9)  | -9.1               | 4.0           | —              | +3000         | —            | —              | RNAV1                    |
| 005           | TF              | CC01H               | —        | 020<br>(010.9)  | -9.1               | 3.9           | —              | —             | —            | —              | RNAV1                    |
| 006           | TF              | KURIS               | —        | 352<br>(343.0)  | -9.1               | 9.2           | —              | —             | —            | —              | RNAV1                    |

## RWY19R/19L

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course [M°(T°)] | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|-----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 182<br>(172.6)  | -9.1               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | CC01Y               | —        | —               | -9.1               | —             | —              | —             | —            | —              | RNAV1                    |
| 003           | TF              | CC02Y               | —        | 135<br>(126.1)  | -9.1               | 3.7           | —              | +3000         | —            | —              | RNAV1                    |
| 004           | TF              | CC02H               | —        | 082<br>(072.9)  | -9.1               | 3.2           | —              | —             | —            | —              | RNAV1                    |
| 005           | TF              | CC03H               | —        | 019<br>(010.2)  | -9.1               | 5.8           | —              | +5000         | —            | —              | RNAV1                    |
| 006           | TF              | KURIS               | —        | 352<br>(343.1)  | -9.1               | 24.7          | —              | —             | —            | —              | RNAV1                    |


## STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

| YOSAN ONE DEPARTURE                                                                                                                                                                                             |                                                   |              | RNAV1                                                                                                                                                                                                                                                                                                                                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1 ) DME/DME/IRU or GNSS required.<br>※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.<br>2 ) RADAR service required. |                                                   |              | RWY19L/19R<br>MKE : 3.0NM to CC06T – 6.0NM to YASKN<br>3.0NM to YASKN – 1.0NM to YASKN<br>YASKN – 3.0NM to YOSAN<br>5.0NM to TOBBY – 3.0NM to TOBBY<br>ZYT : 3.0NM to CC06T – 1.0NM to CC06T<br>YASKN – 5.0NM to MISTA<br>SPE : 5.0NM to TOBBY – 3.0NM to TOBBY<br>HWE : 19.0NM to TOBBY – 17.0NM to TOBBY<br>4.0NM to TOBBY – TOBBY |
| DME GAP                                                                                                                                                                                                         | RWY19L/19R : DER – 3.0NM to CC06T                 | Critical DME |                                                                                                                                                                                                                                                                                                                                      |
| Inappropriate NavAids                                                                                                                                                                                           | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |              |                                                                                                                                                                                                                                                                                                                                      |

VAR 9°W

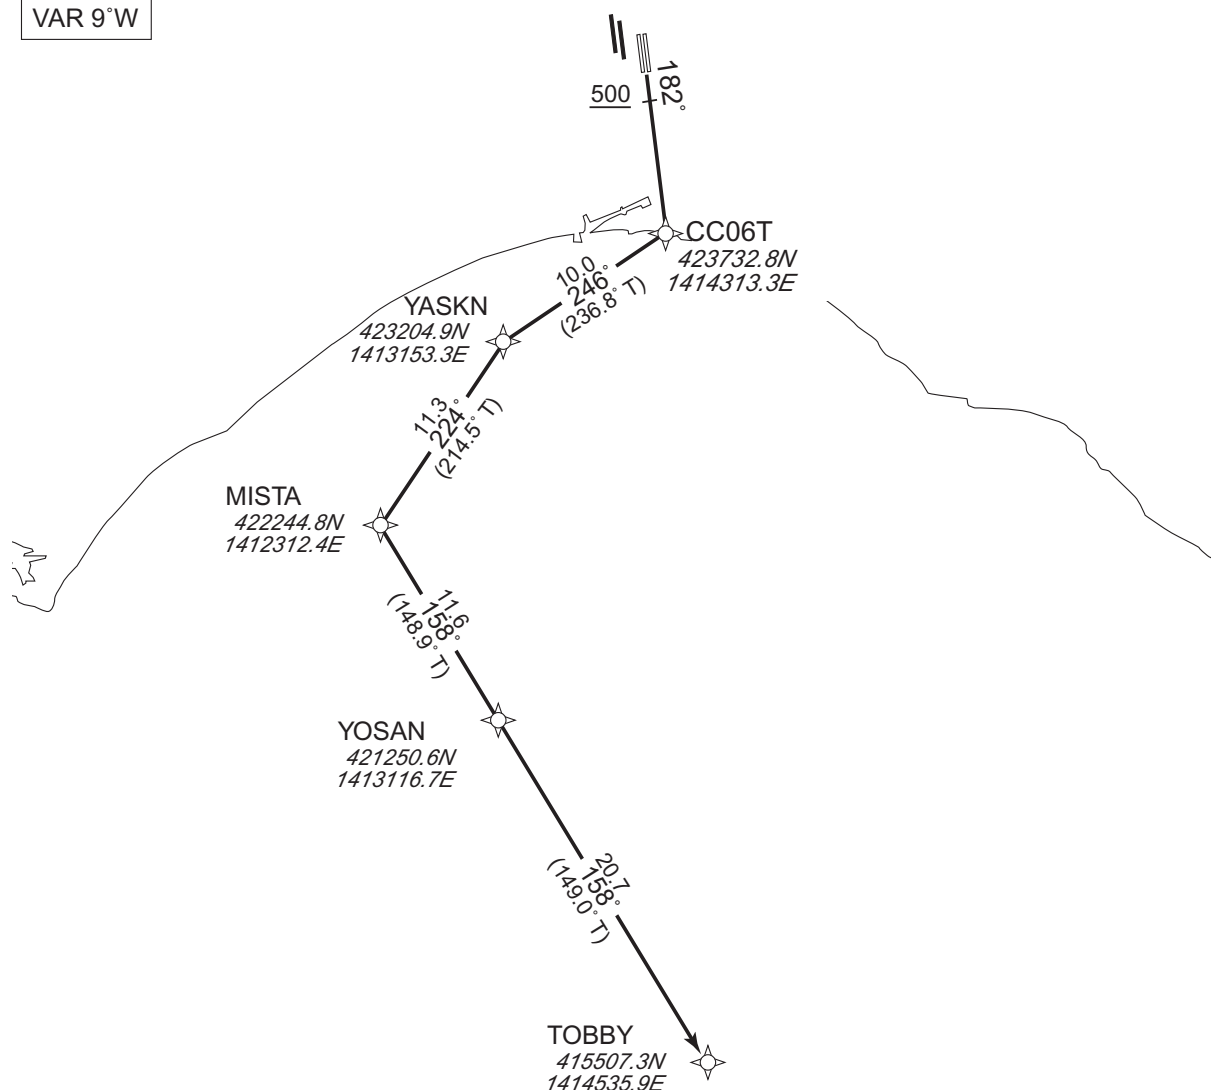

RWY19R/19L : Climb on HDG182° at or above 500FT, direct to CC06T, to YASKN, to MISTA, to YOSAN, to TOBBY.

Note : 5.0% climb gradient required up to 500FT.

CHANGE : Description of VAR and PROC name.

## STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

YOSAN ONE DEPARTURE

## RWY19R/19L

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course [M°(T°)] | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|-----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 182<br>(172.6)  | -9.3               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | CC06T               | —        | —               | -9.3               | —             | —              | —             | —            | —              | RNAV1                    |
| 003           | TF              | YASKN               | —        | 246<br>(236.8)  | -9.3               | 10.0          | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | MISTA               | —        | 224<br>(214.5)  | -9.3               | 11.3          | —              | —             | —            | —              | RNAV1                    |
| 005           | TF              | YOSAN               | —        | 158<br>(148.9)  | -9.3               | 11.6          | —              | —             | —            | —              | RNAV1                    |
| 006           | TF              | TOBBY               | —        | 158<br>(149.0)  | -9.3               | 20.7          | —              | —             | —            | —              | RNAV1                    |


## STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

| DALBI ONE DEPARTURE                                                                                                                                                                                            |                                                                                                                     |              | RNAV1                                                                                                                                                                                                                                                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1) DME/DME/IRU or GNSS required.<br>※ The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.<br>2) RADAR service required. |                                                                                                                     | Critical DME | RWY01L/01R<br>CHE : 2.0NM FM DER – 2.0NM to CC01T<br>19.0NM to KUGIE - 18.0NM to KUGIE<br>ZYT : 16.0NM to KUGIE - 13.0NM to KUGIE<br>MKE : 16.0NM to KUGIE - 12.0NM to KUGIE<br><br>RWY19L/19R<br>MKE : 6.0NM to NEJIE - 2.0NM to NEJIE<br>NEJIE - 26.8NM to POWAN |
| DME GAP                                                                                                                                                                                                        | RWY01L/01R :<br>DER – 2.0NM FM DER<br>18.0NM to KUGIE - 15.0NM to KUGIE<br><br>RWY19L/19R :<br>DER – 6.0NM to NEJIE |              |                                                                                                                                                                                                                                                                    |
| Inappropriate Nav aids                                                                                                                                                                                         | See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1                                                                   |              |                                                                                                                                                                                                                                                                    |

CHANGE : Description of VAR and PROC name.

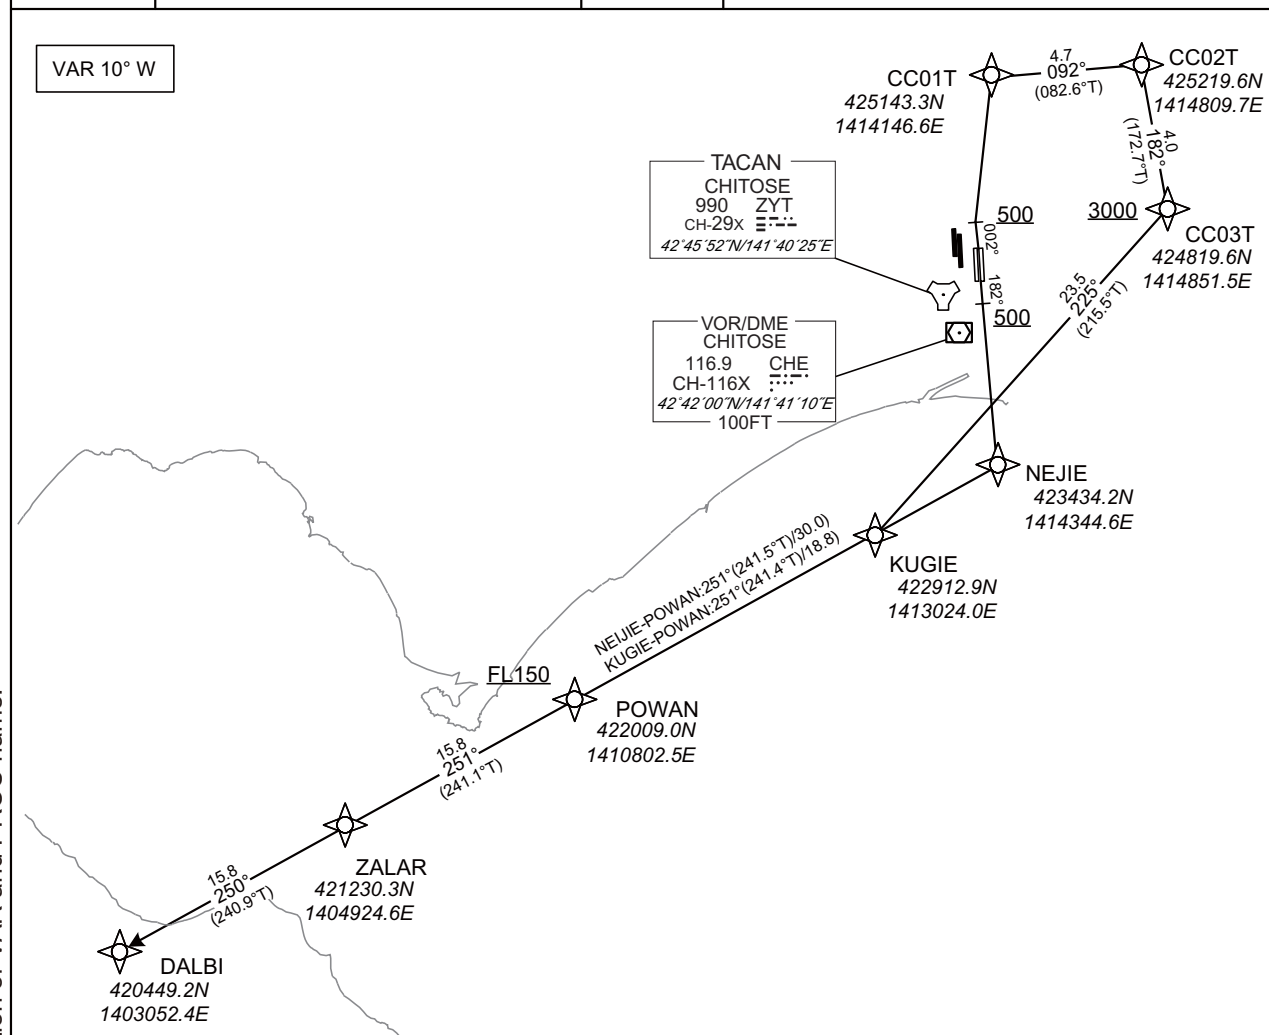

RWY01L/01R : Climb on HDG002° at or above 500FT, direct to CC01T, to CC02T, to CC03T at or above 3000FT, to KUGIE, to POWAN at or above FL150, to ZALAR, to DALBI.

RWY19R/19L : Climb on HDG182° at or above 500FT, direct to NEJIE, to POWAN at or above FL150, to ZALAR, to DALBI.

Note : 5.0% climb gradient required up to 500FT.

## STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

DALBI ONE DEPARTURE

## RWY01L/01R

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | -        | 002<br>(352.6) | -9.5               | -             | -              | +500          | -            | -              | RNAV1                    |
| 002           | DF              | CC01T               | -        | —              | -9.5               | -             | -              | -             | -            | -              | RNAV1                    |
| 003           | TF              | CC02T               | -        | 092<br>(082.6) | -9.5               | 4.7           | -              | -             | -            | -              | RNAV1                    |
| 004           | TF              | CC03T               | -        | 182<br>(172.7) | -9.5               | 4.0           | -              | +3000         | -            | -              | RNAV1                    |
| 005           | TF              | KUGIE               | -        | 225<br>(215.5) | -9.5               | 23.5          | -              | -             | -            | -              | RNAV1                    |
| 006           | TF              | POWAN               | -        | 251<br>(241.4) | -9.5               | 18.8          | -              | +FL150        | -            | -              | RNAV1                    |
| 007           | TF              | ZALAR               | -        | 251<br>(241.1) | -9.5               | 15.8          | -              | -             | -            | -              | RNAV1                    |
| 008           | TF              | DALBI               | -        | 250<br>(240.9) | -9.5               | 15.8          | -              | -             | -            | -              | RNAV1                    |

## RWY19R/19L


| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | -        | 182<br>(172.6) | -9.5               | -             | -              | +500          | -            | -              | RNAV1                    |
| 002           | DF              | NEJIE               | -        | —              | -9.5               | -             | -              | -             | -            | -              | RNAV1                    |
| 003           | TF              | POWAN               | -        | 251<br>(241.5) | -9.5               | 30.0          | -              | +FL150        | -            | -              | RNAV1                    |
| 004           | TF              | ZALAR               | -        | 251<br>(241.1) | -9.5               | 15.8          | -              | -             | -            | -              | RNAV1                    |
| 005           | TF              | DALBI               | -        | 250<br>(240.9) | -9.5               | 15.8          | -              | -             | -            | -              | RNAV1                    |

CHANGE : New PROC

## STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE

RNAV TRANSITION

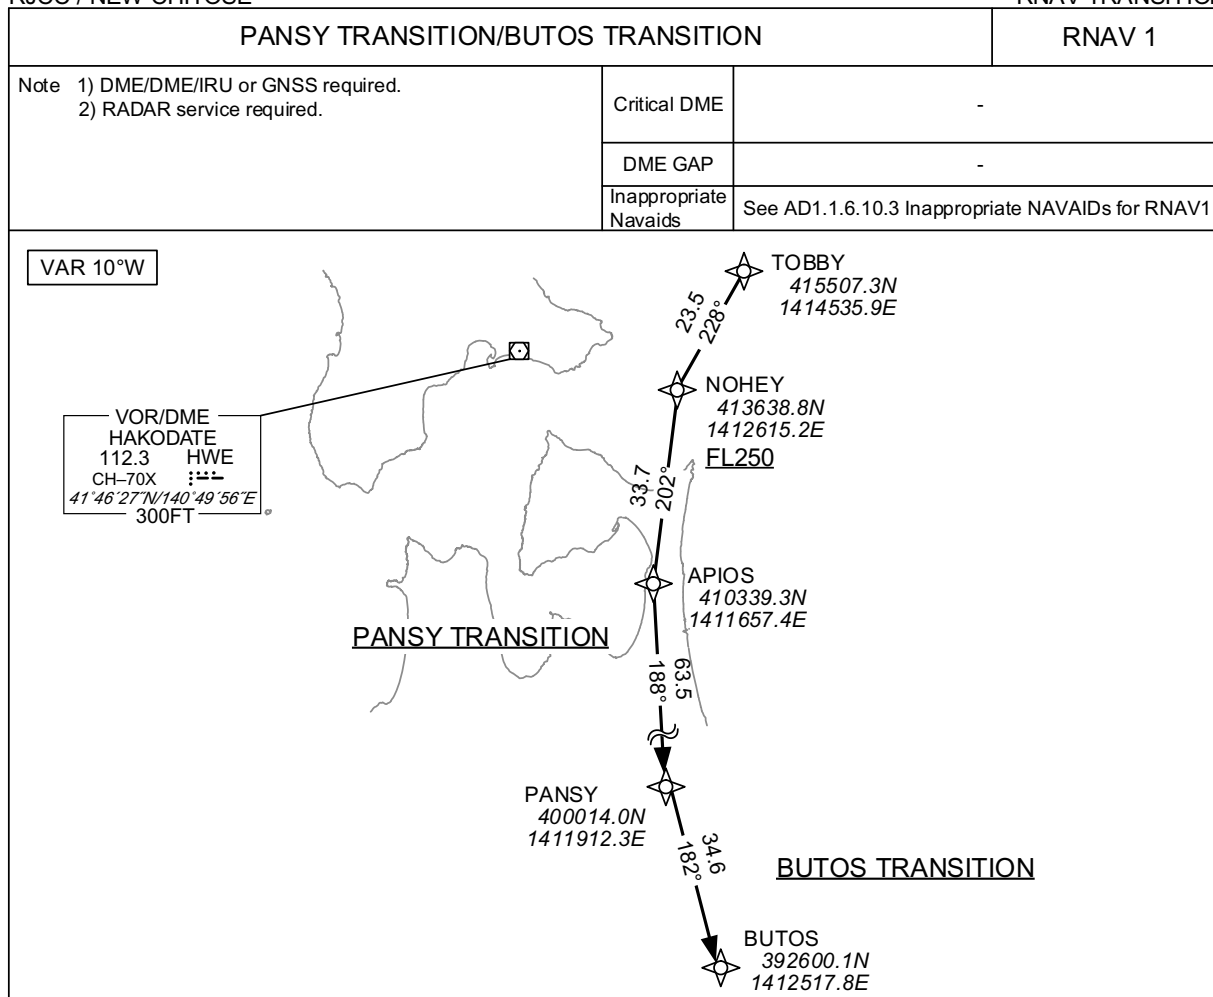**PANSY TRANSITION**

From TOBBY, to NOHEY at or above FL250, to APIOS, to PANSY.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | TOBBY               | —        | —              | -9.5               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | NOHEY               | —        | 228<br>(218.1) | -9.5               | 23.5          | —              | +FL250        | —            | —              | RNAV1                    |
| 003           | TF              | APIOS               | —        | 202<br>(192.0) | -9.5               | 33.7          | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | PANSY               | —        | 188<br>(178.4) | -9.5               | 63.5          | —              | —             | —            | —              | RNAV1                    |

**BUTOS TRANSITION**

From TOBBY, to NOHEY at or above FL250, to APIOS, to PANSY, to BUTOS.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | TOBBY               | —        | —              | -9.5               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | NOHEY               | —        | 228<br>(218.1) | -9.5               | 23.5          | —              | +FL250        | —            | —              | RNAV1                    |
| 003           | TF              | APIOS               | —        | 202<br>(192.0) | -9.5               | 33.7          | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | PANSY               | —        | 188<br>(178.4) | -9.5               | 63.5          | —              | —             | —            | —              | RNAV1                    |
| 005           | TF              | BUTOS               | —        | 182<br>(172.2) | -9.5               | 34.6          | —              | —             | —            | —              | RNAV1                    |

CHANGE : Description of VAR.




STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE

RNAV TRANSITION


| SHUYU TRANSITION                                                    |                       |                                                   | RNAV1 |
|---------------------------------------------------------------------|-----------------------|---------------------------------------------------|-------|
| Note 1) DME/DME/IRU or GNSS required.<br>2) RADAR service required. | Critical DME          | -                                                 |       |
|                                                                     | DME GAP               | -                                                 |       |
|                                                                     | Inappropriate Navaids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |       |

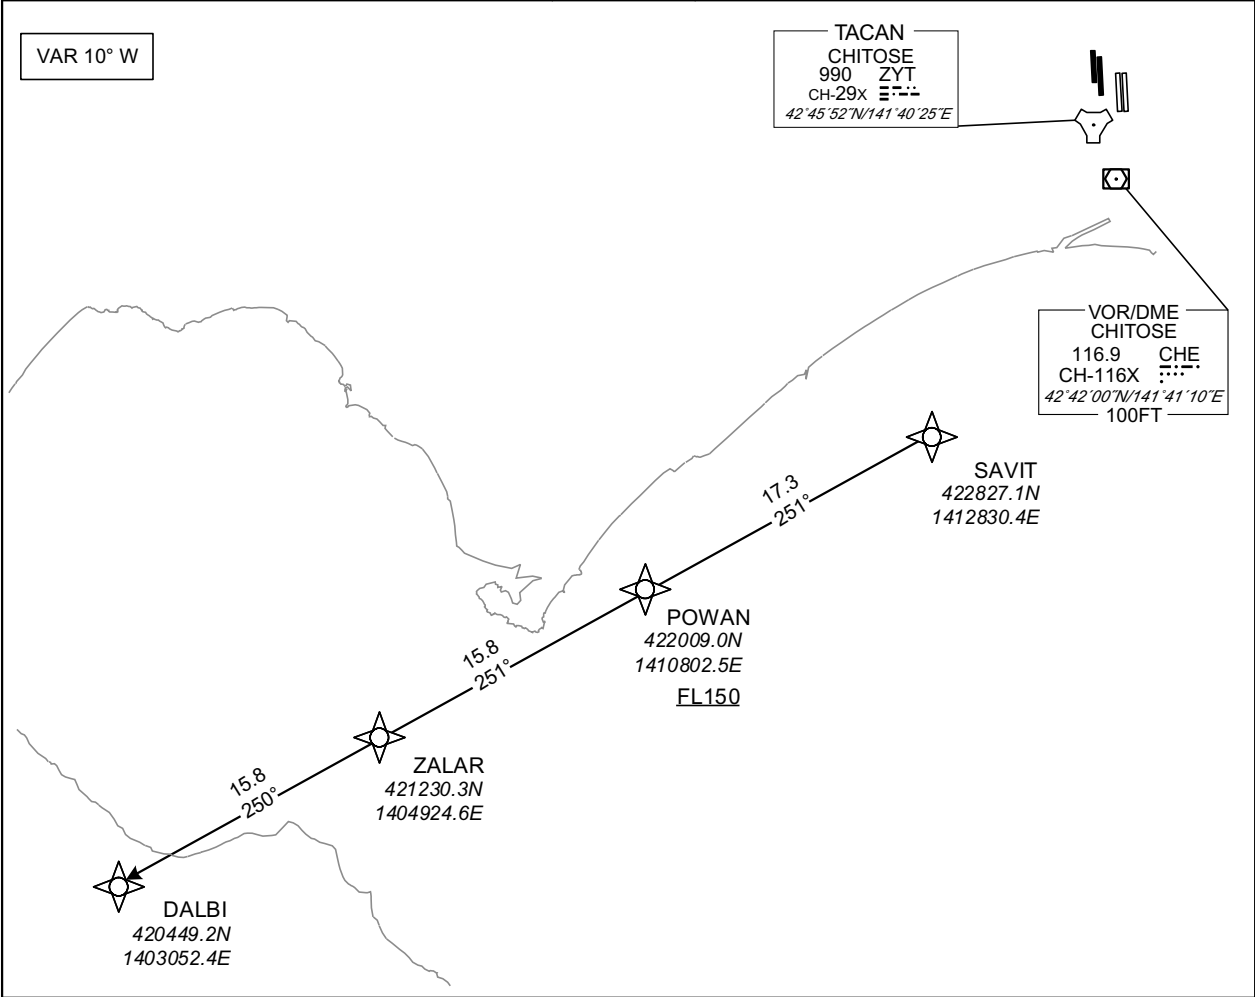

From SAVIT, to POWAN at or above FL150, to ZALAR, to DALBI.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | SAVIT               | -        | -             | -9.5               | -             | -              | -             | -            | -              | RNAV1                    |
| 002           | TF              | POWAN               | -        | 251 (241.3)   | -9.5               | 17.3          | -              | +FL150        | -            | -              | RNAV1                    |
| 003           | TF              | ZALAR               | -        | 251 (241.1)   | -9.5               | 15.8          | -              | -             | -            | -              | RNAV1                    |
| 004           | TF              | DALBI               | -        | 250 (240.9)   | -9.5               | 15.8          | -              | -             | -            | -              | RNAV1                    |

STANDARD DEPARTURE CHART-INSTRUMENT

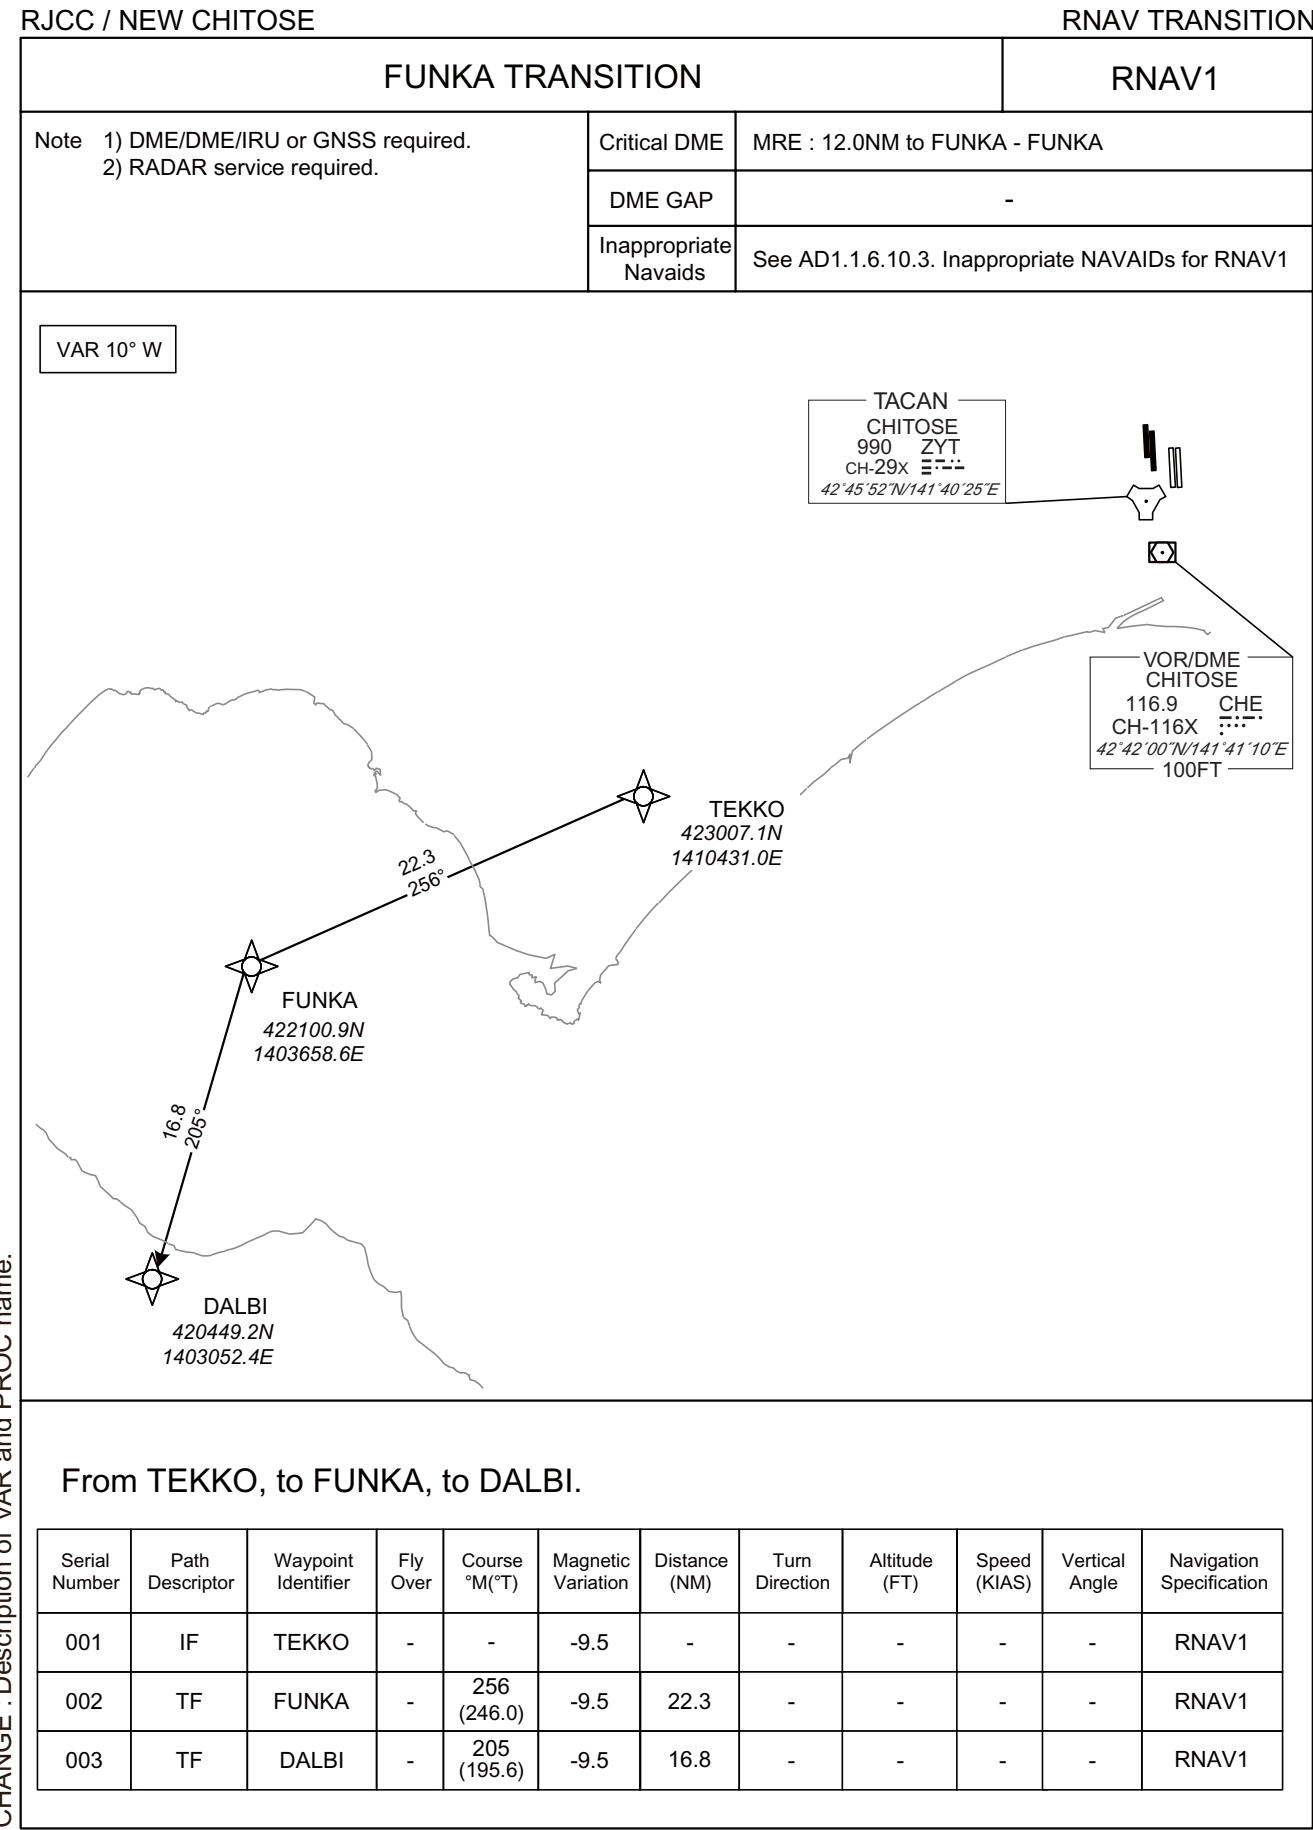

STANDARD ARRIVAL CHART-INSTRUMENT

RJCC / NEW CHITOSE

STAR

YUKII WEST ARRIVAL

From over NAVER, via CHE R201 to intercept and proceed via MKE R241...

for ILS Z or LOC Z RWY01L : ...to YUKII, via ICN-LOC to BAMBI.  
Cross BAMBI at 2000FT.

for ILS Y or LOC Y RWY01L : ...to YUKII, via ICN-LOC to BAMBI.  
Cross BAMBI at or above 3000FT.

for ILS Z or LOC Z RWY01R : ...to YOKOH, via ICH-LOC to YOTEI.  
Cross YOTEI at 2000FT.

for ILS Y or LOC Y RWY01R : ...to YOKOH, via ICH-LOC to YOTEI.  
Cross YOTEI at or above 3000FT.

YUKII EAST ARRIVAL


From over MKE VOR/DME, via MKE R180 to 8.0DME, turn right, via HDG 270° to intercept and proceed via ...

for ILS Z or LOC Z RWY01L : ...ICN-LOC to YUKII, via ICN-LOC to BAMBI.  
Cross BAMBI at 2000FT.

for ILS Y or LOC Y RWY01L : ...ICN-LOC to YUKII, via ICN-LOC to BAMBI.  
Cross BAMBI at or above 3000FT.

for ILS Z or LOC Z RWY01R : ...ICH-LOC to YOKOH, via ICH-LOC to YOTEI.  
Cross YOTEI at 2000FT.

for ILS Y or LOC Y RWY01R : ...ICH-LOC to YOKOH, via ICH-LOC to YOTEI.  
Cross YOTEI at or above 3000FT.

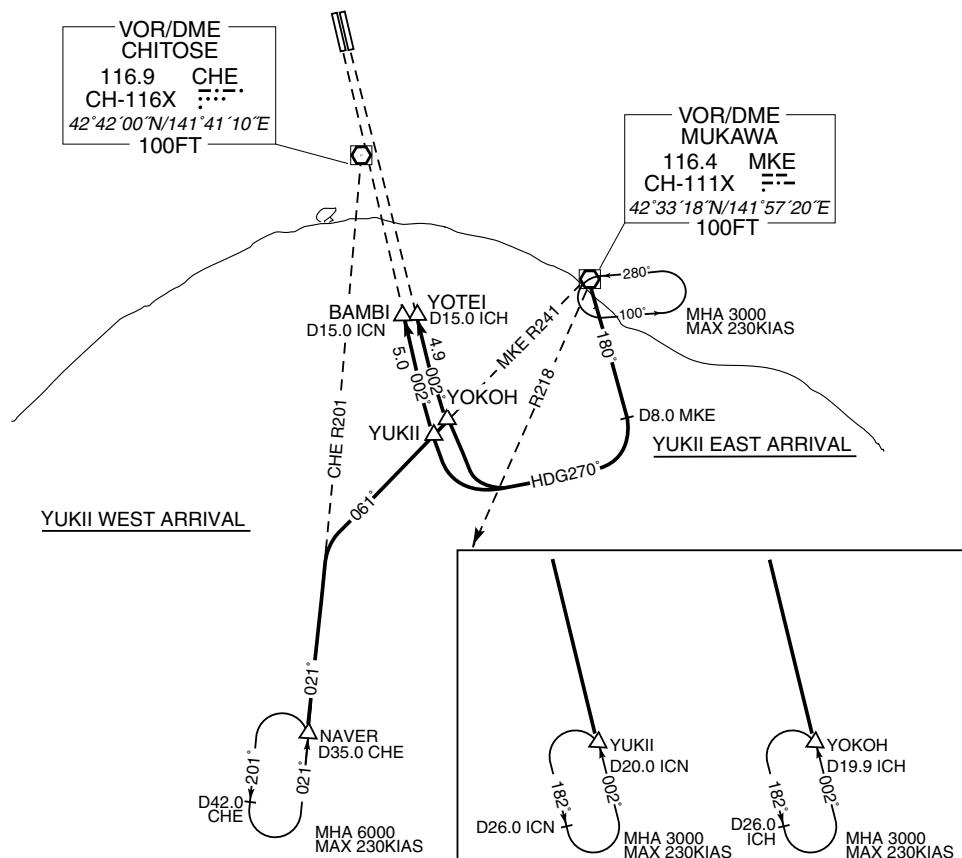

## STANDARD ARRIVAL CHART-INSTRUMENT

RJCC / NEW CHITOSE

STAR

CHITOSE NR.1 ARRIVAL

From over CHE VOR/DME, via CHE R045 to intercept and proceed via MKE R360, via MKE 31.1DME counterclockwise ARC...

for ILS or LOC RWY19R : ...to ISIYA.  
Cross MKE R360/25.0DME at or below 7000FT,  
cross MKE R360/30.0DME at or above 5000FT,  
cross ISIYA at or above 3000FT.

for VOR Z RWY19L : ...to SHINE, via CHE R011 to MAOIE.  
Cross MKE R360/25.0DME at or below 7000FT,  
cross MKE R360/30.0DME at or above 5000FT,  
cross SHINE at or above 3000FT.  
cross MAOIE at 2000FT.

YUBARI ARRIVAL

From over NAVER, via CHE R201 to intercept and proceed via MKE R241 to MKE VOR/DME, via MKE R360, via MKE 31.1DME counterclockwise ARC...

for ILS or LOC RWY19R : ...to ISIYA.  
Cross MKE R360/13.0DME at or above 12000FT,  
cross MKE R360/25.0DME at or below 7000FT,  
cross MKE R360/30.0DME at or above 5000FT,  
cross ISIYA at or above 3000FT.

for VOR Z RWY19L : ...to SHINE, via CHE R011 to MAOIE.  
Cross MKE R360/13.0DME at or above 12000FT,  
cross MKE R360/25.0DME at or below 7000FT,  
cross MKE R360/30.0DME at or above 5000FT,  
cross SHINE at or above 3000FT.  
cross MAOIE at 2000FT.

KURIS NR.1 ARRIVAL

for ILS or LOC RWY19R : From over KURIS, via SPE 17.7DME clockwise ARC to ISIYA.  
Cross ISIYA at or above 3000FT.


for VOR Z RWY19L : From over KURIS, via CHE R011 to MAOIE via SHINE.  
Cross SHINE at or above 3000FT, cross MAOIE at 2000FT.

STANDARD ARRIVAL CHART-INSTRUMENT

RJCC / NEW CHITOSE

STAR

CHANGE : Editorial(MKE R347, MKE R351).

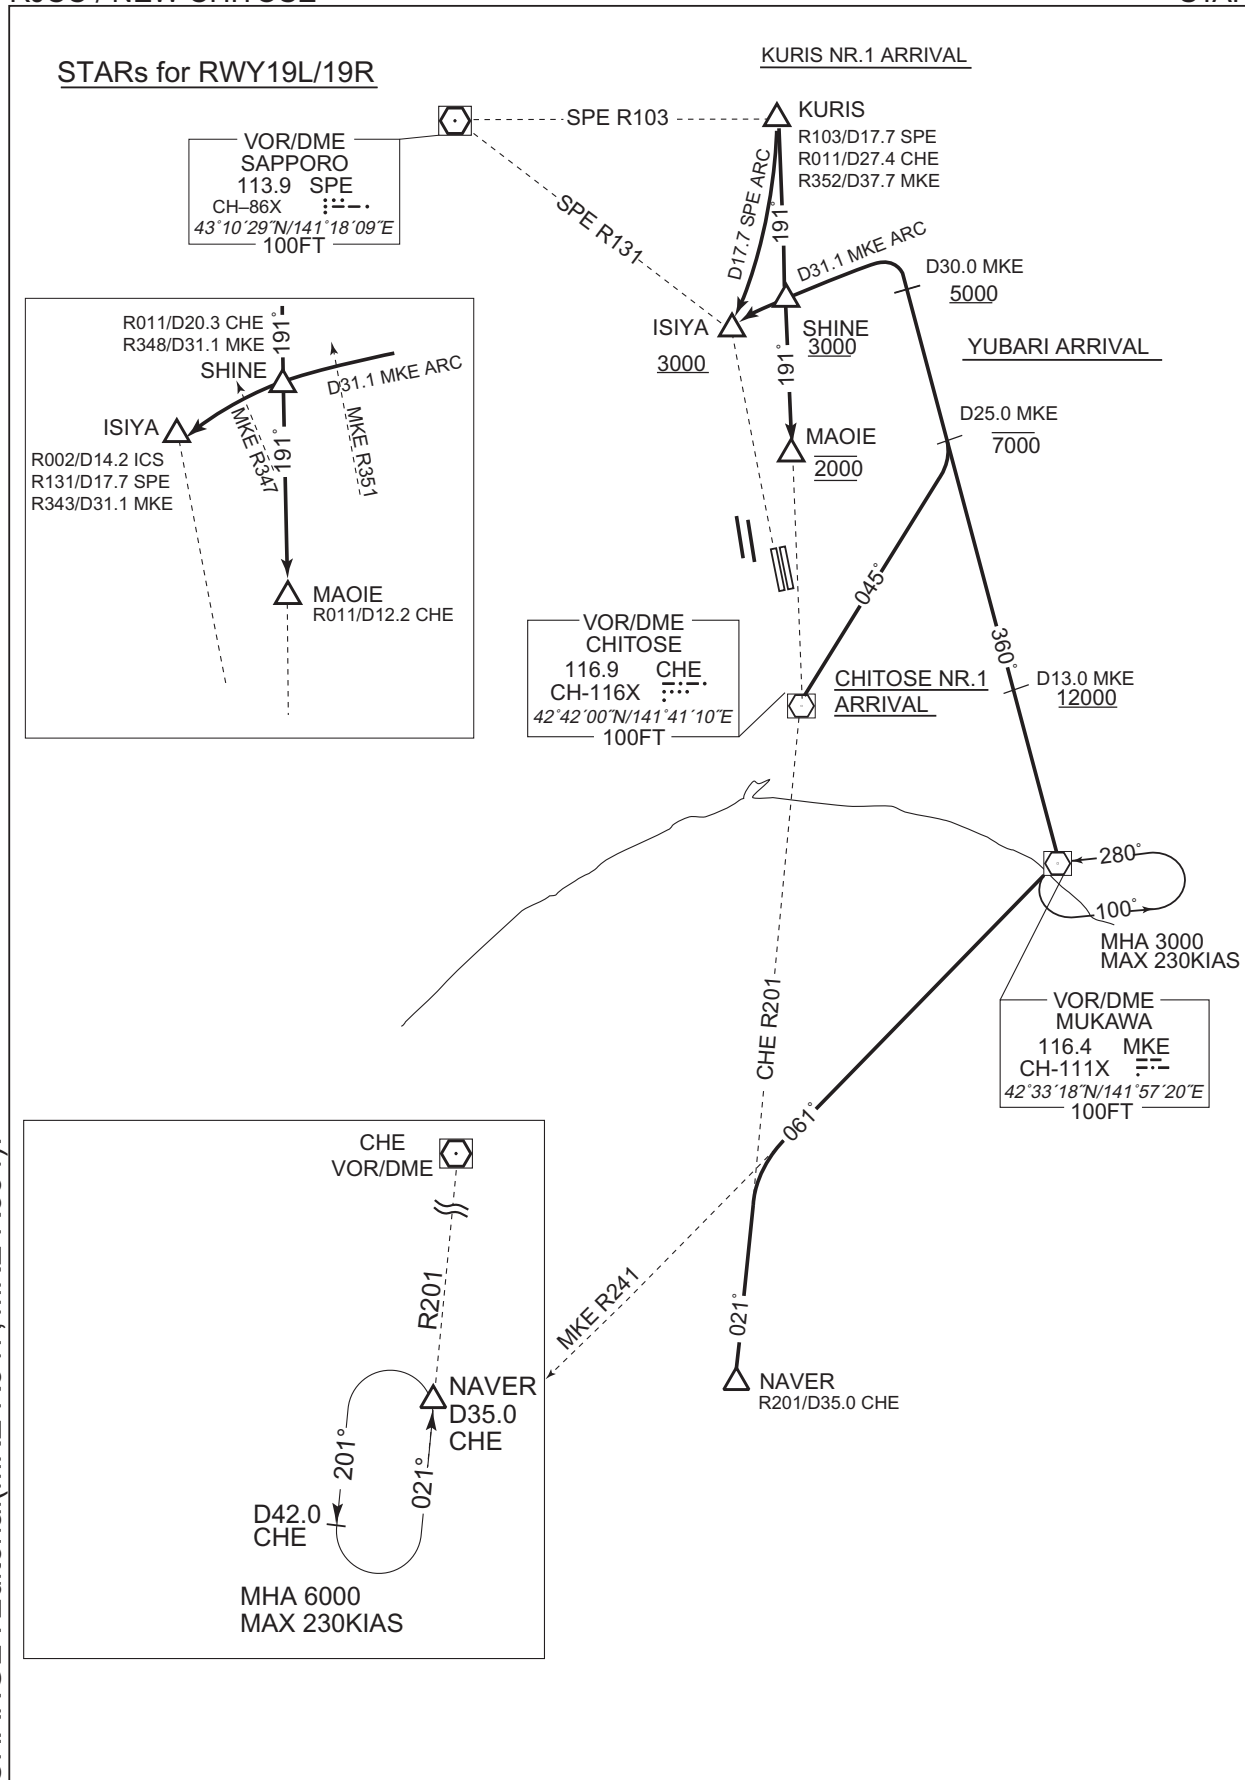

## STANDARD ARRIVAL CHART-INSTRUMENT

RJCC / NEW CHITOSE

STAR

CHITOSE NR.2 ARRIVAL

From over CHE VOR/DME, via CHE R045 to intercept and proceed via MKE R360, via MKE 31.2DME counterclockwise ARC to NAPRO.

Cross MKE R360/25.0DME at or below 7000FT,  
cross MKE R360/30.0DME at or above 5000FT,  
cross NAPRO at or above 3000FT.

NAPRO EAST ARRIVAL

From over NAVER, via CHE R201 to intercept and proceed via MKE R241 to MKE VOR/DME, via MKE R360, via MKE 31.2DME counterclockwise ARC to NAPRO.

Cross MKE R360/13.0DME at or above 12000FT,  
cross MKE R360/25.0DME at or below 7000FT,  
cross MKE R360/30.0DME at or above 5000FT,  
cross NAPRO at or above 3000FT.

KURIS NR.2 ARRIVAL

From over KURIS, via SPE 17.7DME clockwise ARC to NAPRO.  
Cross NAPRO at or above 3000FT.

## RJCC / NEW CHITOSE

STAR



## STANDARD ARRIVAL CHART-INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY01L


BAMBI SOUTH ARRIVAL  
BAMBI NORTH ARRIVAL

RNAV 1

Note 1 ) DME/DME/IRU or GNSS required.  
2 ) RADAR service required.

VAR 9° W

CHANGE : Description of VAR and HLDG pattern.

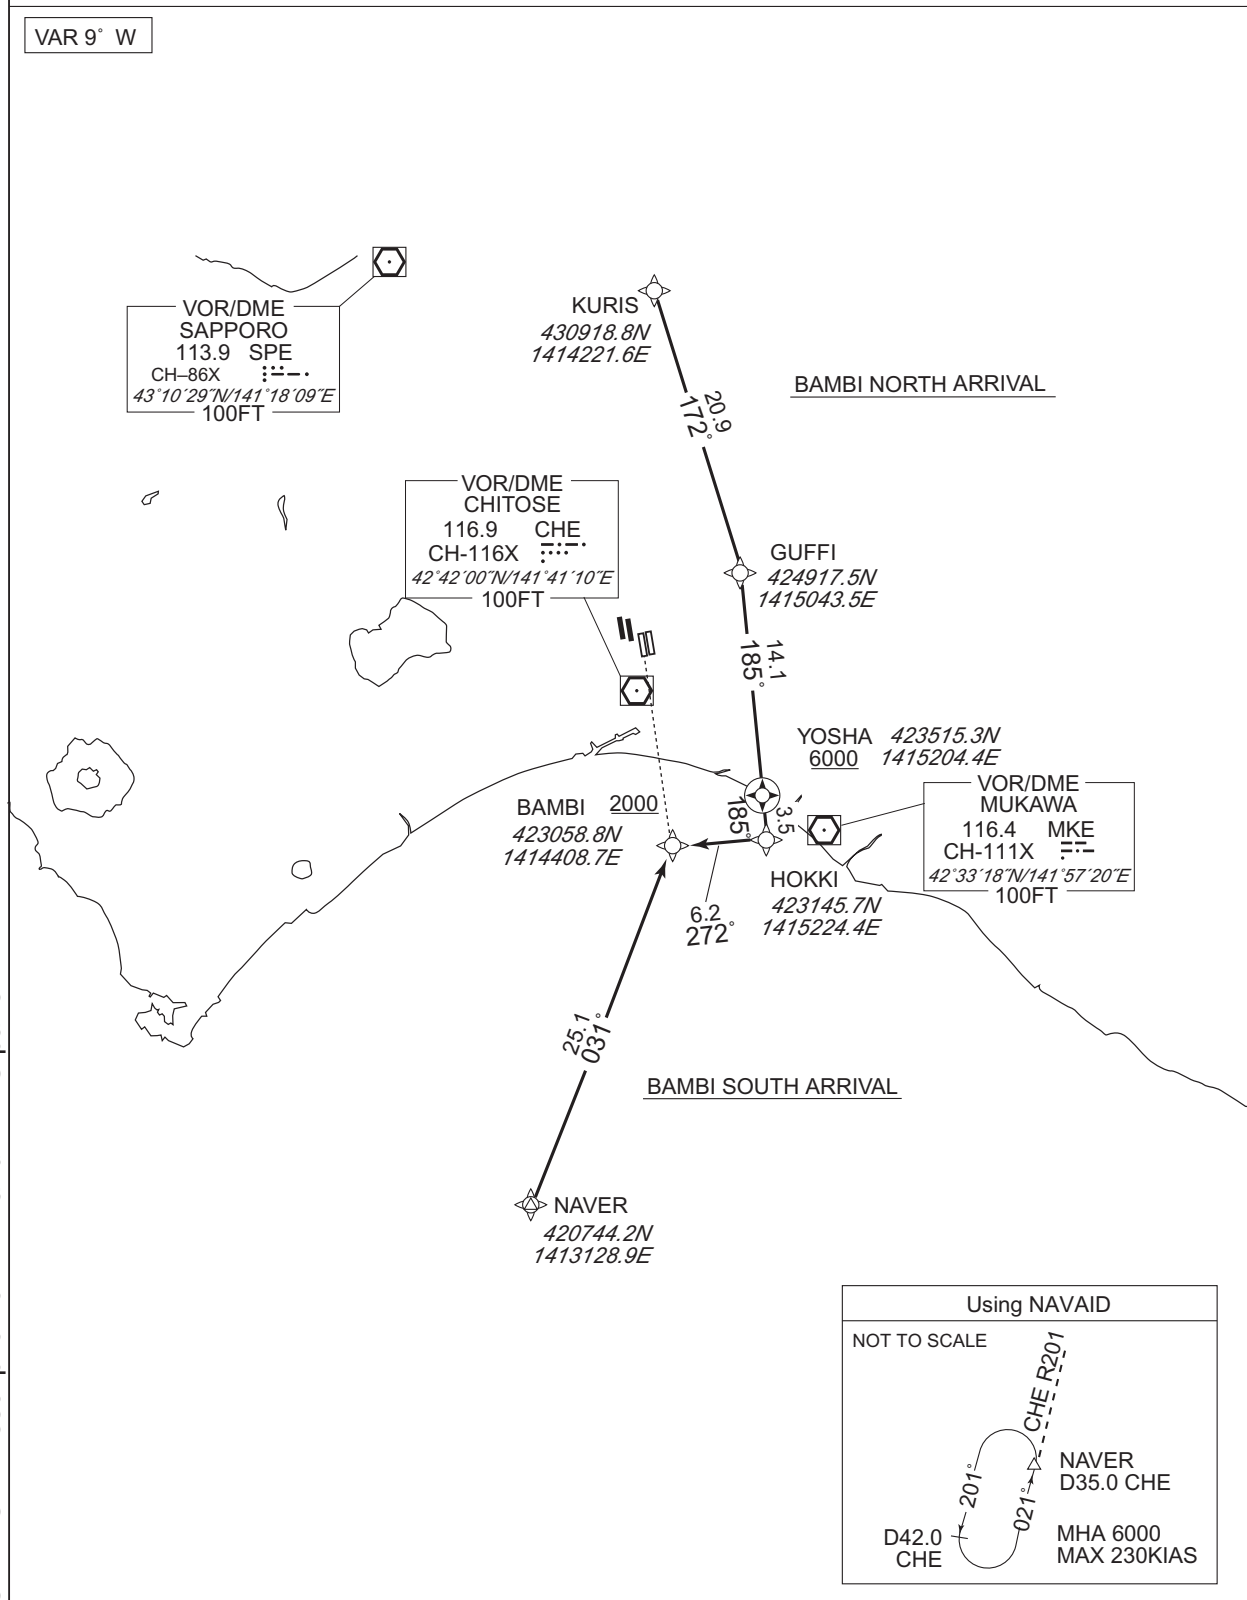



## STANDARD ARRIVAL CHART-INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY01L

BAMBI SOUTH ARRIVAL

From NAVER, to BAMBI at or above 2000FT.

|                        |                                                   |
|------------------------|---------------------------------------------------|
| Critical DME           | CHE, MKE : 19.0NM to BAMBI - BAMBI                |
| DME GAP                | NAVER - 19.0NM to BAMBI                           |
| Inappropriate Nav aids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | NAVER               | —        | —              | -9.3               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | BAMBI               | —        | 031<br>(022.0) | -9.3               | 25.1          | —              | +2000         | —            | —              | RNAV1                    |

BAMBI NORTH ARRIVAL

From KURIS, to GUFFI, to YOSHA at or above 6000FT, to HOKKI, to BAMBI at or above 2000FT.


|                        |                                                                                                                 |
|------------------------|-----------------------------------------------------------------------------------------------------------------|
| Critical DME           | SPE : KURIS - 10.0NM to GUFFI<br>CHE : 13.0NM to YOSHA - 3.0NM to YOSHA<br>HOKKI - BAMBI<br>MKE : HOKKI - BAMBI |
| DME GAP                | 3.0NM to YOSHA - HOKKI                                                                                          |
| Inappropriate Nav aids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1                                                               |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | KURIS               | —        | —              | -9.3               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | GUFFI               | —        | 172<br>(162.9) | -9.3               | 20.9          | —              | —             | —            | —              | RNAV1                    |
| 003           | TF              | YOSHA               | Y        | 185<br>(175.9) | -9.3               | 14.1          | —              | +6000         | —            | —              | RNAV1                    |
| 004           | TF              | HOKKI               | —        | 185<br>(175.9) | -9.3               | 3.5           | —              | —             | —            | —              | RNAV1                    |
| 005           | TF              | BAMBI               | —        | 272<br>(262.8) | -9.3               | 6.2           | —              | +2000         | —            | —              | RNAV1                    |

STANDARD ARRIVAL CHART-INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY01R

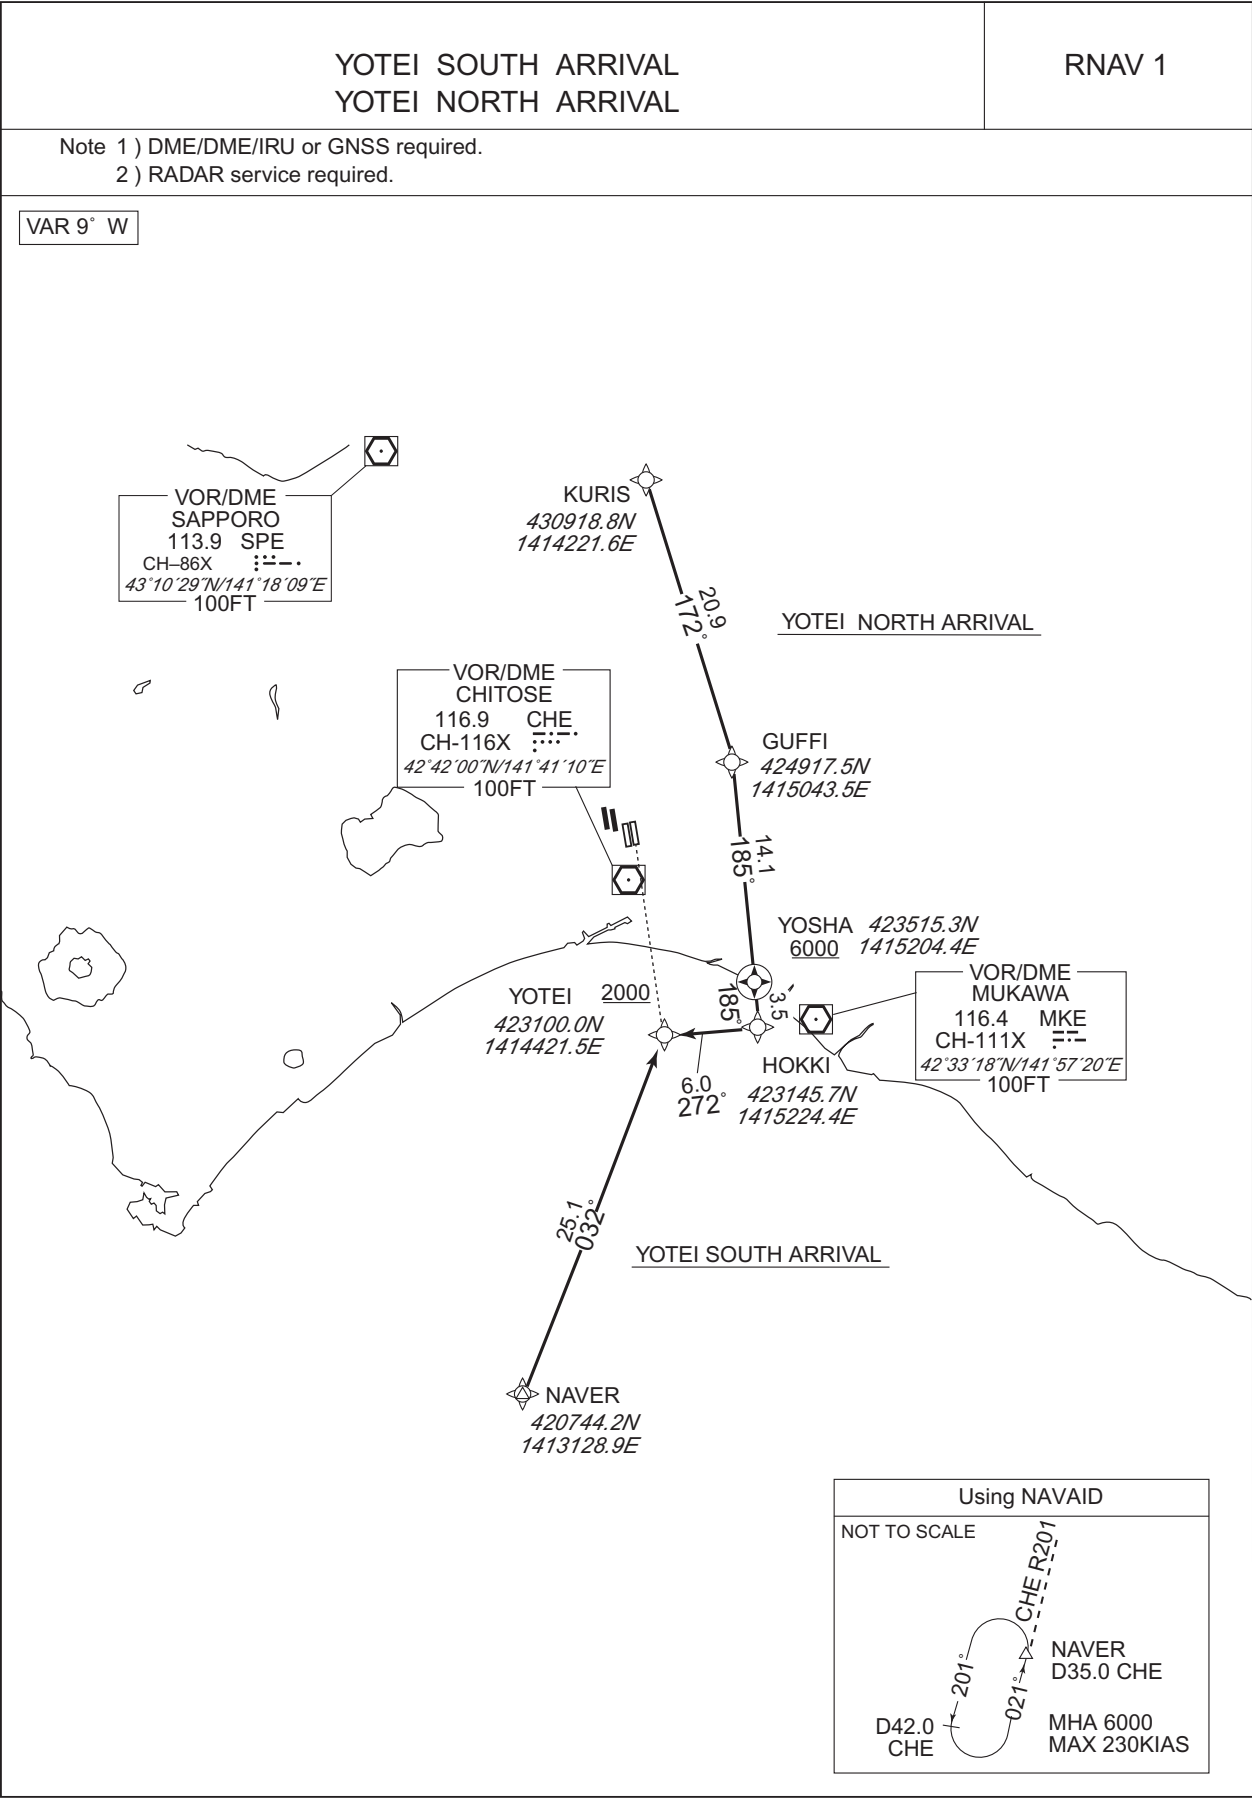

## STANDARD ARRIVAL CHART-INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY01R

YOTEI SOUTH ARRIVAL

From NAVER, to YOTEI at or above 2000FT.

|                        |                                                   |
|------------------------|---------------------------------------------------|
| Critical DME           | CHE, MKE : 19.0NM to YOTEI - YOTEI                |
| DME GAP                | NAVER - 19.0NM to YOTEI                           |
| Inappropriate Nav aids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | NAVER               | —        | —              | -9.3               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | YOTEI               | —        | 032<br>(022.3) | -9.3               | 25.1          | —              | +2000         | —            | —              | RNAV1                    |

YOTEI NORTH ARRIVAL

From KURIS, to GUFFI, to YOSHA at or above 6000FT, to HOKKI, to YOTEI at or above 2000FT.

|                        |                                                                                                                 |
|------------------------|-----------------------------------------------------------------------------------------------------------------|
| Critical DME           | SPE : KURIS - 10.0NM to GUFFI<br>CHE : 13.0NM to YOSHA - 3.0NM to YOSHA<br>HOKKI - YOTEI<br>MKE : HOKKI - YOTEI |
| DME GAP                | 3.0NM to YOSHA - HOKKI                                                                                          |
| Inappropriate Nav aids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1                                                               |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | KURIS               | —        | —              | -9.3               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | GUFFI               | —        | 172<br>(162.9) | -9.3               | 20.9          | —              | —             | —            | —              | RNAV1                    |
| 003           | TF              | YOSHA               | Y        | 185<br>(175.9) | -9.3               | 14.1          | —              | +6000         | —            | —              | RNAV1                    |
| 004           | TF              | HOKKI               | —        | 185<br>(175.9) | -9.3               | 3.5           | —              | —             | —            | —              | RNAV1                    |
| 005           | TF              | YOTEI               | —        | 272<br>(262.8) | -9.3               | 6.0           | —              | +2000         | —            | —              | RNAV1                    |

## STANDARD APPROACH CHART - INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY19L


YUNEE SOUTH ARRIVAL  
KAORY NORTH ARRIVAL

RNAV 1

Note 1 ) DME/DME/IRU or GNSS required.  
2 ) RADAR service required.

VAR 9° W

CHANGE : Description of VAR and HLDG pattern.

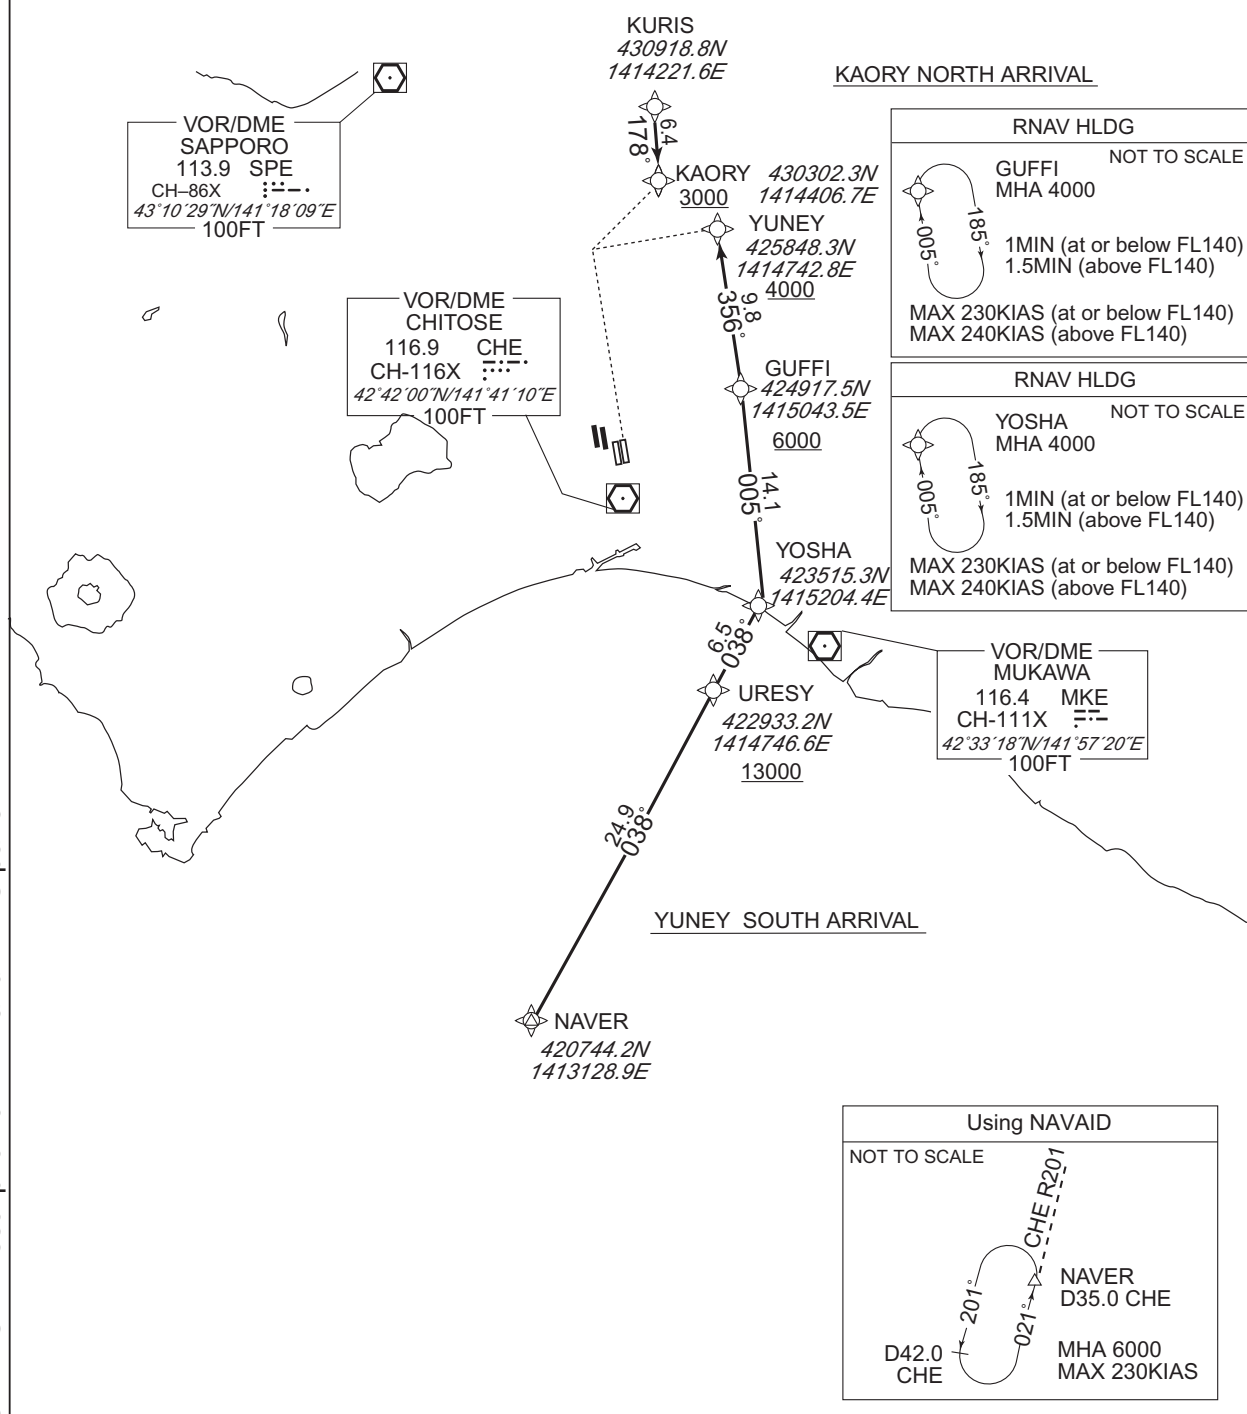

## STANDARD APPROACH CHART - INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY19L

## YUNEY SOUTH ARRIVAL

From NAVER, to URESY at or above 13000FT, to YOSHA, to GUFFI at or above 6000FT, to YUNEY at or above 4000FT.

|                        |                                                                                                                                        |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Critical DME           | CHE : 18.5NM to URESY - 15.5NM to URESY<br>10.0NM to GUFFI - GUFFI<br>MKE : 18.5NM to URESY - 3.0NM to YOSHA<br>1.0NM to YOSHA - YOSHA |
| DME GAP                | NAVER - 18.5NM to URESY<br>3.0NM to YOSHA - 1.0NM to YOSHA<br>YOSHA - 10.0NM to GUFFI                                                  |
| Inappropriate Nav aids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1                                                                                      |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | NAVER               | —        | —              | -9.3               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | URESY               | —        | 038<br>(028.8) | -9.3               | 24.9          | —              | +13000        | —            | —              | RNAV1                    |
| 003           | TF              | YOSHA               | —        | 038<br>(029.0) | -9.3               | 6.5           | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | GUFFI               | —        | 005<br>(356.0) | -9.3               | 14.1          | —              | +6000         | —            | —              | RNAV1                    |
| 005           | TF              | YUNEY               | —        | 356<br>(346.9) | -9.3               | 9.8           | —              | +4000         | —            | —              | RNAV1                    |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN)        | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)                 | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | GUFFI               | 005<br>(356.0)        | -9.3               | 1.0(-14000)<br>1.5(+14001) | R              | 4000                  | —                     | -230(-14000)<br>-240(+14001) | RNAV1                    |
| Hold | YOSHA               | 005<br>(356.0)        | -9.3               | 1.0(-14000)<br>1.5(+14001) | R              | 4000                  | —                     | -230(-14000)<br>-240(+14001) | RNAV1                    |

## STANDARD APPROACH CHART - INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY19L

KAORY NORTH ARRIVAL

From KURIS, to KAORY at or above 3000FT.


|                       |                                                   |
|-----------------------|---------------------------------------------------|
| Critical DME          | SPE : KURIS - KAORY                               |
| DME GAP               | —                                                 |
| Inappropriate Navaids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | KURIS               | —        | —              | -9.3               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | KAORY               | —        | 178<br>(168.4) | -9.3               | 6.4           | —              | +3000         | —            | —              | RNAV1                    |

STANDARD APPROACH CHART - INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY19L

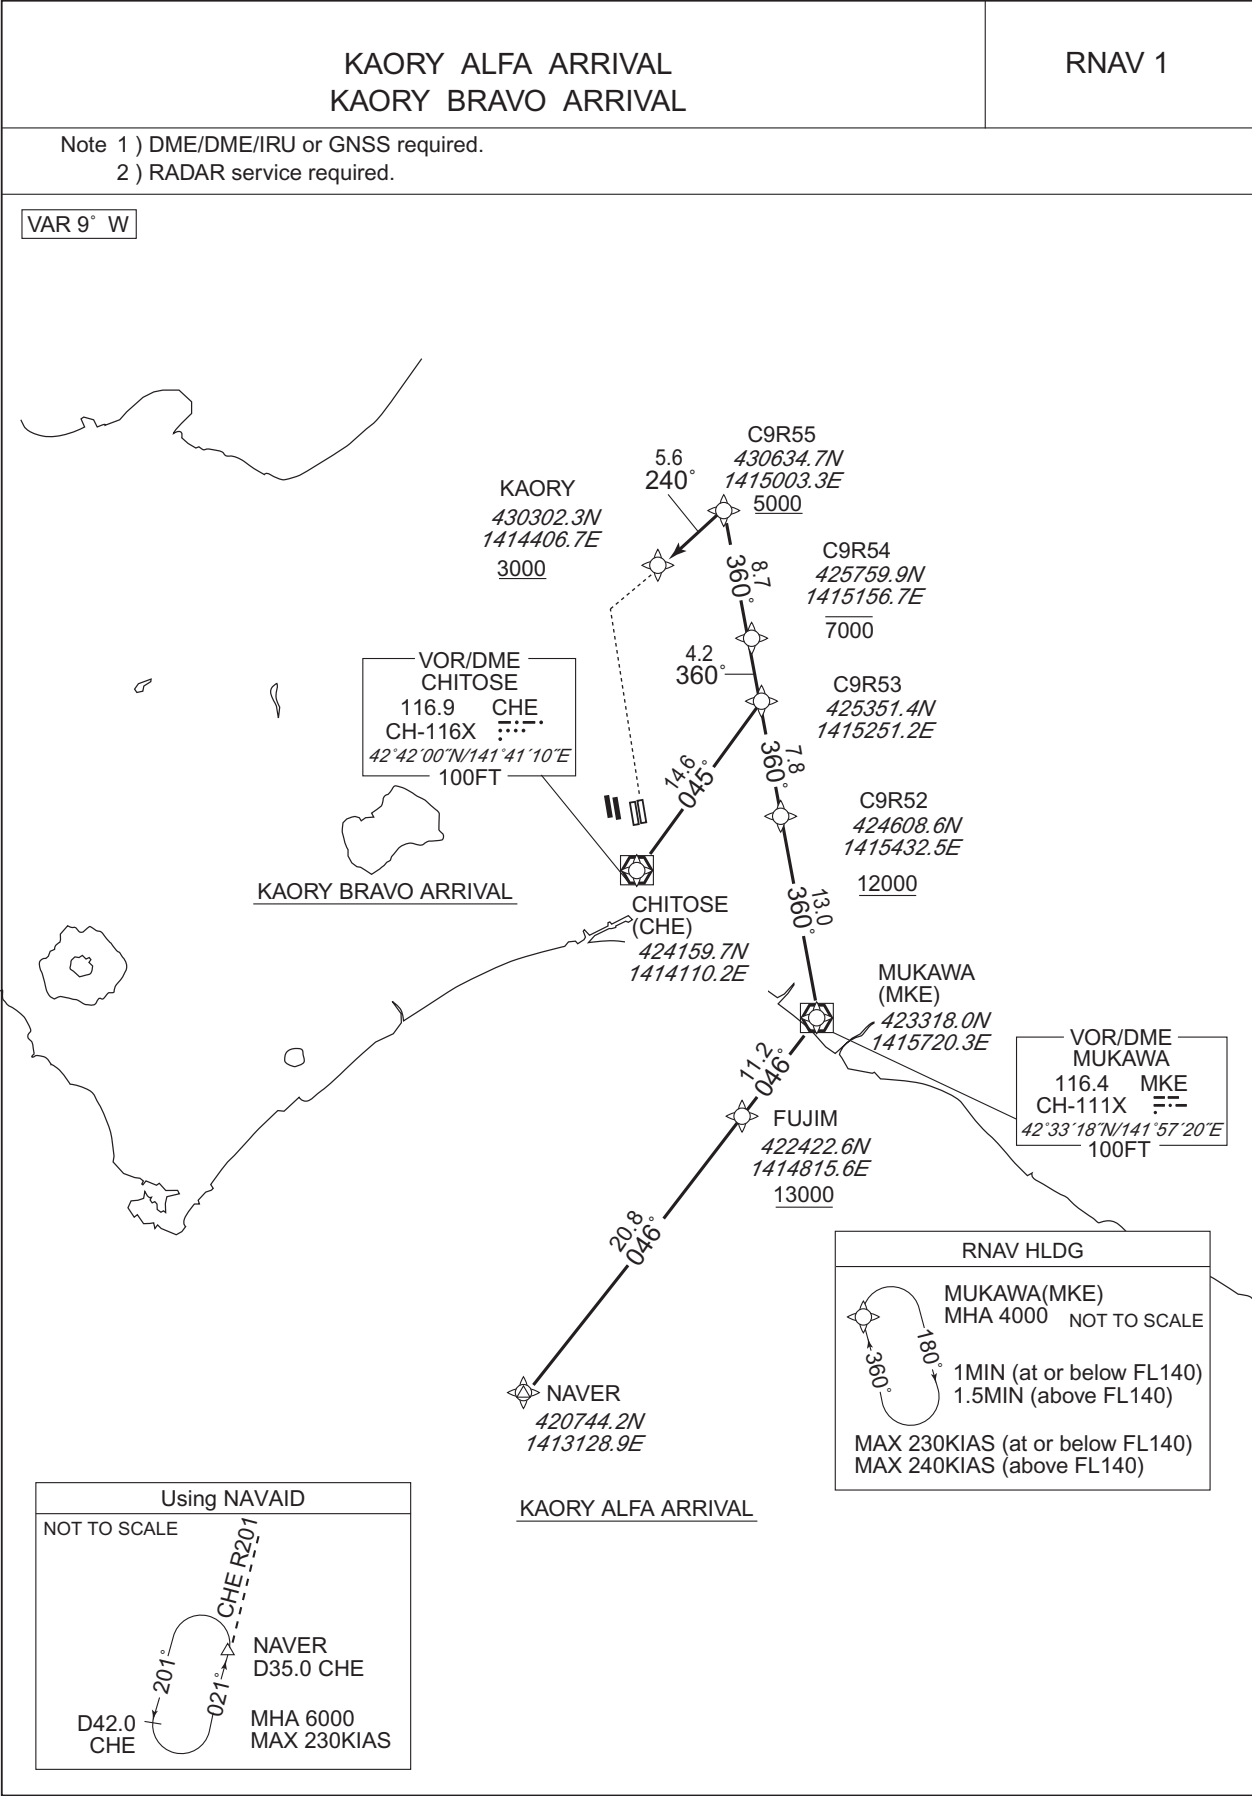

CHANGE : Description of VAR and HLDG pattern.

STANDARD APPROACH CHART - INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY19L

KAORY ALFA ARRIVAL

From NAVER, to FUJIM at or above 13000FT, to MKE, to C9R52 at or above 12000FT, to C9R53, to C9R54 at or below 7000FT, to C9R55 at or above 5000FT, to KAORY at or above 3000FT.

|                       |                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------|
| Critical DME          | SPE: C9R55 - KAORY<br>MKE: 10.0NM to MKE - 3.0NM to MKE<br>10.0NM to C9R52 - 8.0NM to C9R52 |
| DME GAP               | 3.0NM to MKE - 10.0NM to C9R52                                                              |
| Inappropriate Navaids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1                                           |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | NAVER               | —        | —              | -9.3               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | FUJIM               | —        | 046<br>(036.6) | -9.3               | 20.8          | —              | +13000        | —            | —              | RNAV1                    |
| 003           | TF              | MKE                 | —        | 046<br>(036.8) | -9.3               | 11.2          | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | C9R52               | —        | 360<br>(350.9) | -9.3               | 13.0          | —              | +12000        | —            | —              | RNAV1                    |
| 005           | TF              | C9R53               | —        | 360<br>(350.9) | -9.3               | 7.8           | —              | —             | —            | —              | RNAV1                    |
| 006           | TF              | C9R54               | —        | 360<br>(350.9) | -9.3               | 4.2           | —              | -7000         | —            | —              | RNAV1                    |
| 007           | TF              | C9R55               | —        | 360<br>(350.9) | -9.3               | 8.7           | —              | +5000         | —            | —              | RNAV1                    |
| 008           | TF              | KAORY               | —        | 240<br>(230.8) | -9.3               | 5.6           | —              | +3000         | —            | —              | RNAV1                    |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN)        | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)                 | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | MKE                 | 360<br>(350.9)        | -9.3               | 1.0(-14000)<br>1.5(+14001) | R              | 4000                  | —                     | -230(-14000)<br>-240(+14001) | RNAV1                    |

CHANGE : Waypoint identifier(MKE).



STANDARD APPROACH CHART - INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY19L

KAORY BRAVO ARRIVAL

From CHE, to C9R53, to C9R54 at or below 7000FT, to C9R55 at or above 5000FT, to KAORY at or above 3000FT.

|                       |                                                   |
|-----------------------|---------------------------------------------------|
| Critical DME          | SPE: C9R55 - KAORY                                |
| DME GAP               | CHE - 11.0NM to C9R53                             |
| Inappropriate Navaids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | CHE                 | —        | —              | -9.3               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | C9R53               | —        | 045<br>(035.8) | -9.3               | 14.6          | —              | —             | —            | —              | RNAV1                    |
| 003           | TF              | C9R54               | —        | 360<br>(350.9) | -9.3               | 4.2           | —              | -7000         | —            | —              | RNAV1                    |
| 004           | TF              | C9R55               | —        | 360<br>(350.9) | -9.3               | 8.7           | —              | +5000         | —            | —              | RNAV1                    |
| 005           | TF              | KAORY               | —        | 240<br>(230.8) | -9.3               | 5.6           | —              | +3000         | —            | —              | RNAV1                    |

## STANDARD APPROACH CHART - INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY19L

NAVER ARRIVAL

RNAV 1

Note 1 ) DME/DME/IRU or GNSS required.  
2 ) RADAR service required.

VAR 9° W

VOR/DME  
SAPPORO  
113.9 SPE  
CH-86X  
43°10'29"N/141°18'09"E  
100FT

VOR/DME  
CHITOSE  
116.9 CHE  
CH-116X  
42°42'00"N/141°41'10"E  
100FT

KAORY  
430302.3N  
1414406.7E  
3000

YOHCK  
430010.8N  
1414716.6E  
330.7

GUFFI  
424917.5N  
1415043.5E  
6000

YOSHA  
423515.3N  
1415204.4E  
14.1

URESY  
422933.2N  
1414746.6E  
13000

NAVER  
420744.2N  
1413128.9E  
24.9  
038°

RNAV HLDG  
NOT TO SCALE  
GUFFI  
MHA 4000  
185°  
005°  
1MIN (at or below FL140)  
1.5MIN (above FL140)  
MAX 230KIAS (at or below FL140)  
MAX 240KIAS (above FL140)

RNAV HLDG  
NOT TO SCALE  
YOSHA  
MHA 4000  
185°  
005°  
1MIN (at or below FL140)  
1.5MIN (above FL140)  
MAX 230KIAS (at or below FL140)  
MAX 240KIAS (above FL140)

VOR/DME  
MUKAWA  
116.4 MKE  
CH-111X  
42°33'18"N/141°57'20"E  
100FT

Using NAVAID  
NOT TO SCALE  
D42.0 CHE  
201°  
021°  
CHE R201  
NAVER  
D35.0 CHE  
MHA 6000  
MAX 230KIAS

CHANGE : Description of VAR and HLDG pattern.

## STANDARD APPROACH CHART - INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY19L

NAVER ARRIVAL

From NAVER, to URESY at or above 13000FT, to YOSHA, to GUFFI at or above 6000FT, to YOHCK, to KAORY at or above 3000FT.

|                        |                                                                                                                                                               |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Critical DME           | CHE : 18.5NM to URESY - 15.5NM to URESY<br>10.0NM to GUFFI - GUFFI<br>MKE : 18.5NM to URESY - 3.0NM to YOSHA<br>1.0NM to YOSHA - YOSHA<br>SPE : YOHCK - KAORY |
| DME GAP                | NAVER - 18.5NM to URESY<br>3.0NM to YOSHA - 1.0NM to YOSHA<br>YOSHA - 10.0NM to GUFFI                                                                         |
| Inappropriate Nav aids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1                                                                                                             |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | NAVER               | —        | —              | -9.3               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | URESY               | —        | 038<br>(028.8) | -9.3               | 24.9          | —              | +13000        | —            | —              | RNAV1                    |
| 003           | TF              | YOSHA               | —        | 038<br>(029.0) | -9.3               | 6.5           | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | GUFFI               | —        | 005<br>(356.0) | -9.3               | 14.1          | —              | +6000         | —            | —              | RNAV1                    |
| 005           | TF              | YOHCK               | —        | 356<br>(346.9) | -9.3               | 11.2          | —              | —             | —            | —              | RNAV1                    |
| 006           | TF              | KAORY               | —        | 330<br>(320.9) | -9.3               | 3.7           | —              | +3000         | —            | —              | RNAV1                    |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN)        | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)                 | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | GUFFI               | 005<br>(356.0)        | -9.3               | 1.0(-14000)<br>1.5(+14001) | R              | 4000                  | —                     | -230(-14000)<br>-240(+14001) | RNAV1                    |
| Hold | YOSHA               | 005<br>(356.0)        | -9.3               | 1.0(-14000)<br>1.5(+14001) | R              | 4000                  | —                     | -230(-14000)<br>-240(+14001) | RNAV1                    |

STANDARD APPROACH CHART - INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY19L


YUNEY EAST ARRIVAL

RNAV 1

Note 1 ) DME/DME/IRU or GNSS required.  
2 ) RADAR service required.

VAR 10° W

CHANGE : Description of VAR and HLDG pattern.

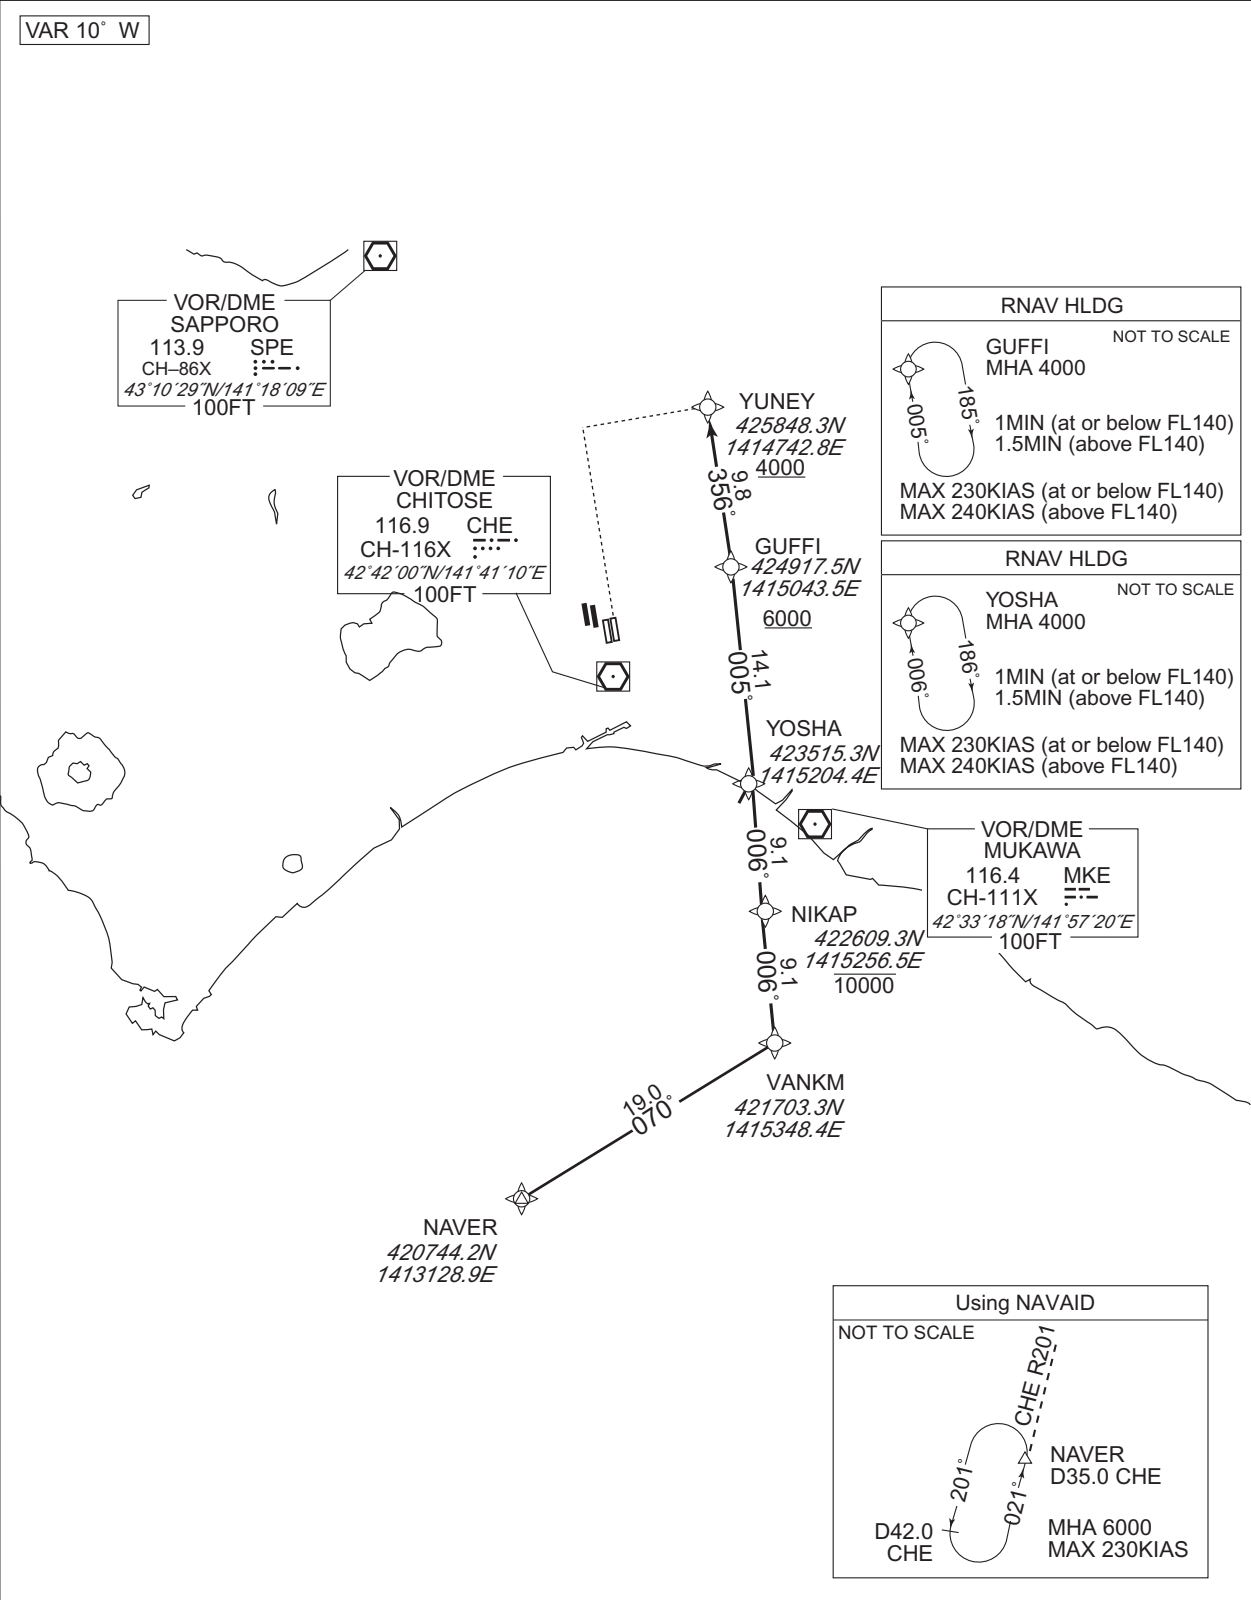

## STANDARD APPROACH CHART - INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY19L

YUNEY EAST ARRIVAL

From NAVER, to VANKM, to NIKAP at or below 10000FT, to YOSHA, to GUFFI at or above 6000FT, to YUNEY at or above 4000FT.

|                        |                                                               |
|------------------------|---------------------------------------------------------------|
| Critical DME           | CHE : 10.0NM to GUFFI - GUFFI<br>MKE : 7.0NM to VANKM - YOSHA |
| DME GAP                | YOSHA - 10.0NM to GUFFI                                       |
| Inappropriate Nav aids | See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1             |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | NAVER               | —        | —              | -9.5               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | VANKM               | —        | 070<br>(060.5) | -9.5               | 19.0          | —              | —             | —            | —              | RNAV1                    |
| 003           | TF              | NIKAP               | —        | 006<br>(356.0) | -9.5               | 9.1           | —              | -10000        | —            | —              | RNAV1                    |
| 004           | TF              | YOSHA               | —        | 006<br>(356.0) | -9.5               | 9.1           | —              | —             | —            | —              | RNAV1                    |
| 005           | TF              | GUFFI               | —        | 005<br>(356.0) | -9.5               | 14.1          | —              | +6000         | —            | —              | RNAV1                    |
| 006           | TF              | YUNEY               | —        | 356<br>(347.0) | -9.5               | 9.8           | —              | +4000         | —            | —              | RNAV1                    |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN)        | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)                 | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | GUFFI               | 005<br>(356.0)        | -9.5               | 1.0(-14000)<br>1.5(+14001) | R              | 4000                  | —                     | -230(-14000)<br>-240(+14001) | RNAV1                    |
| Hold | YOSHA               | 006<br>(356.0)        | -9.5               | 1.0(-14000)<br>1.5(+14001) | R              | 4000                  | —                     | -230(-14000)<br>-240(+14001) | RNAV1                    |

CHANGE : Critical DME

## STANDARD ARRIVAL CHART-INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY19R

NAGANUMA SOUTH ARRIVAL  
NAGANUMA NORTH ARRIVAL

RNAV 1

Note 1 ) DME/DME/IRU or GNSS required.  
2 ) RADAR service required.

VAR 9° W

VOR/DME  
SAPPORO  
113.9 SPE  
CH-86X  
43°10'29"N/141°18'09"E  
100FT

NAGANUMA NORTH ARRIVAL

KURIS  
430918.8N  
1414221.6E

KAORY  
430302.3N  
1414406.7E

NACKS  
430000.7N  
1413902.5E

YOHCK  
430010.8N  
1414716.6E

VOR/DME  
CHITOSE  
116.9 CHE  
CH-116X  
42°42'00"N/141°41'10"E  
100FT

GUFFI  
424917.5N  
1415043.5E  
6000

YOSHA  
423515.3N  
1415204.4E

URESY  
422933.2N  
1414746.6E  
13000

NAVER  
420744.2N  
1413128.9E

NAGANUMA SOUTH ARRIVAL

## RNAV HLDG

NOT TO SCALE

GUFFI  
MHA 4000



1MIN (at or below FL140)  
1.5MIN (above FL140)

MAX 230KIAS (at or below FL140)  
MAX 240KIAS (above FL140)

## RNAV HLDG

NOT TO SCALE

YOSHA  
MHA 4000



1MIN (at or below FL140)  
1.5MIN (above FL140)


MAX 230KIAS (at or below FL140)  
MAX 240KIAS (above FL140)

## VOR/DME

MUKAWA  
116.4 MKE  
CH-111X  
42°33'18"N/141°57'20"E  
100FT

## Using NAVAID

NOT TO SCALE



NAVER  
D35.0 CHE

MHA 6000  
MAX 230KIAS

CHANGE : Description of VAR and HLDG pattern.

## STANDARD ARRIVAL CHART-INSTRUMENT

## RJCC / NEW CHITOSE

## RNAV STAR RWY19R

NAGANUMA SOUTH ARRIVAL

From NAVER, to URESY at or above 13000FT, to YOSHA, to GUFFI at or above 6000FT, to YOHCK, to KAORY, to NACKS at or above 3000FT.

|                        |                                                                                                                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Critical DME           | CHE : 18.5NM to URESY - 15.5NM to URESY<br>10.0NM to GUFFI - GUFFI<br>1.0NM to NACKS - NACKS<br>MKE : 18.5NM to URESY - 3.0NM to YOSHA<br>1.0NM to YOSHA - YOSHA<br>SPE : YOHCK - NACKS |
| DME GAP                | NAVER - 18.5NM to URESY<br>3.0NM to YOSHA - 1.0NM to YOSHA<br>YOSHA - 10.0NM to GUFFI                                                                                                   |
| Inappropriate Nav aids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1                                                                                                                                       |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(T)   | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | NAVER               | —        | —              | -9.3               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | URESY               | —        | 038<br>(028.8) | -9.3               | 24.9          | —              | +13000        | —            | —              | RNAV1                    |
| 003           | TF              | YOSHA               | —        | 038<br>(029.0) | -9.3               | 6.5           | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | GUFFI               | —        | 005<br>(356.0) | -9.3               | 14.1          | —              | +6000         | —            | —              | RNAV1                    |
| 005           | TF              | YOHCK               | —        | 356<br>(346.9) | -9.3               | 11.2          | —              | —             | —            | —              | RNAV1                    |
| 006           | TF              | KAORY               | —        | 330<br>(320.9) | -9.3               | 3.7           | —              | —             | —            | —              | RNAV1                    |
| 007           | TF              | NACKS               | —        | 240<br>(230.9) | -9.3               | 4.8           | —              | +3000         | —            | —              | RNAV1                    |

| Path | Waypoint Identifier | Inbound Course °M(T) | Magnetic Variation | Outbound Time (MIN)        | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)                 | Navigation Specification |
|------|---------------------|----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | GUFFI               | 005<br>(356.0)       | -9.3               | 1.0(-14000)<br>1.5(+14001) | R              | 4000                  | —                     | -230(-14000)<br>-240(+14001) | RNAV1                    |
| Hold | YOSHA               | 005<br>(356.0)       | -9.3               | 1.0(-14000)<br>1.5(+14001) | R              | 4000                  | —                     | -230(-14000)<br>-240(+14001) | RNAV1                    |

NAGANUMA NORTH ARRIVAL

From KURIS, to NACKS at or above 3000FT.

|                        |                                                     |
|------------------------|-----------------------------------------------------|
| Critical DME           | CHE : 1.0NM to NACKS - NACKS<br>SPE : KURIS - NACKS |
| DME GAP                | —                                                   |
| Inappropriate Nav aids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1   |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(T)   | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | KURIS               | —        | —              | -9.3               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | NACKS               | —        | 204<br>(194.7) | -9.3               | 9.6           | —              | +3000         | —            | —              | RNAV1                    |

## STANDARD ARRIVAL CHART-INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY19R


NACKS ALFA ARRIVAL  
NACKS BRAVO ARRIVAL

RNAV 1

Note 1 ) DME/DME/IRU or GNSS required.  
2 ) RADAR service required.

VAR 9° W

CHANGE : Description of VAR and HLDG pattern.

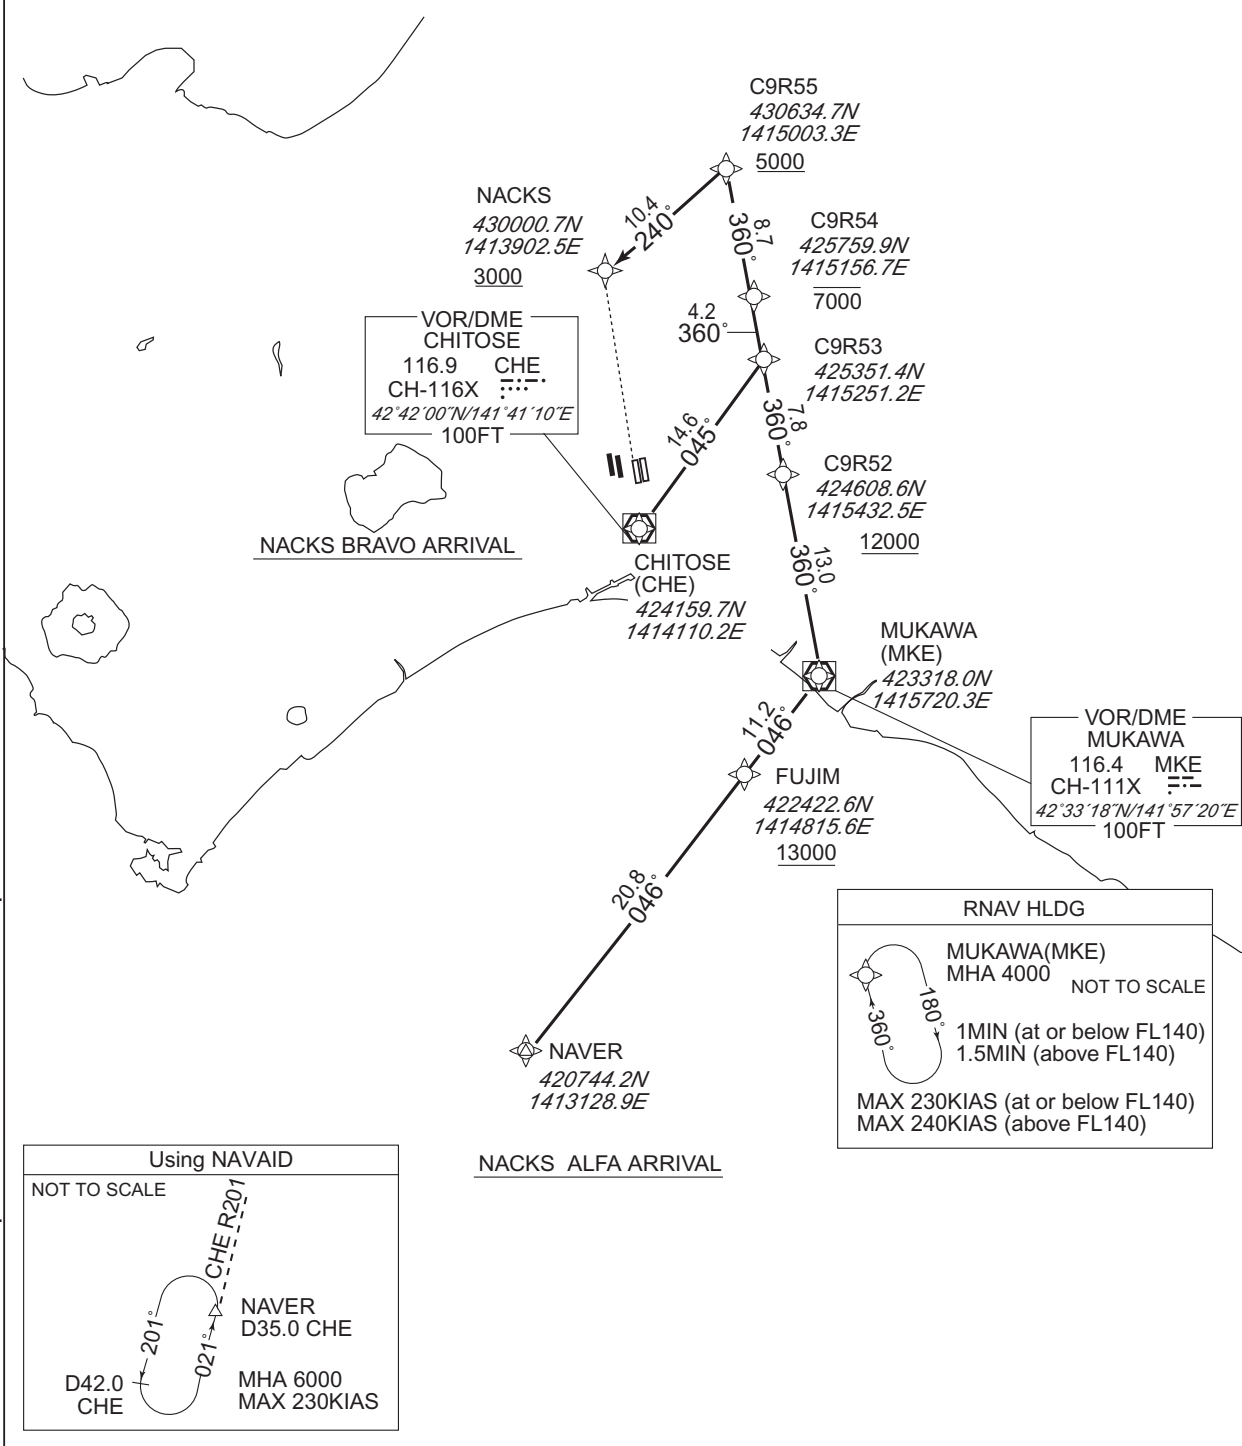



## STANDARD ARRIVAL CHART-INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY19R

## NACKS ALFA ARRIVAL

From NAVER, to FUJIM at or above 13000FT, to MKE, to C9R52 at or above 12000FT, to C9R53, to C9R54 at or below 7000FT, to C9R55 at or above 5000FT, to NACKS at or above 3000FT.

|                        |                                                                                               |
|------------------------|-----------------------------------------------------------------------------------------------|
| Critical DME           | SPE : C9R55 - NACKS<br>MKE : 10.0NM to MKE - 3.0NM to MKE<br>10.0NM to C9R52 - 8.0NM to C9R52 |
| DME GAP                | 3.0NM to MKE - 10.0NM to C9R52                                                                |
| Inappropriate Nav aids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1                                             |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | NAVER               | —        | —              | -9.3               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | FUJIM               | —        | 046<br>(036.6) | -9.3               | 20.8          | —              | +13000        | —            | —              | RNAV1                    |
| 003           | TF              | MKE                 | —        | 046<br>(036.8) | -9.3               | 11.2          | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | C9R52               | —        | 360<br>(350.9) | -9.3               | 13.0          | —              | +12000        | —            | —              | RNAV1                    |
| 005           | TF              | C9R53               | —        | 360<br>(350.9) | -9.3               | 7.8           | —              | —             | —            | —              | RNAV1                    |
| 006           | TF              | C9R54               | —        | 360<br>(350.9) | -9.3               | 4.2           | —              | -7000         | —            | —              | RNAV1                    |
| 007           | TF              | C9R55               | —        | 360<br>(350.9) | -9.3               | 8.7           | —              | +5000         | —            | —              | RNAV1                    |
| 008           | TF              | NACKS               | —        | 240<br>(230.8) | -9.3               | 10.4          | —              | +3000         | —            | —              | RNAV1                    |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN)        | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)                 | Navigation Specification |
|------|---------------------|-----------------------|--------------------|----------------------------|----------------|-----------------------|-----------------------|------------------------------|--------------------------|
| Hold | MKE                 | 360<br>(350.9)        | -9.3               | 1.0(-14000)<br>1.5(+14001) | R              | 4000                  | —                     | -230(-14000)<br>-240(+14001) | RNAV1                    |

CHANGE : Waypoint identifier(MKE).

## STANDARD ARRIVAL CHART-INSTRUMENT

RJCC / NEW CHITOSE

RNAV STAR RWY19R


NACKS BRAVO ARRIVAL

From CHE, to C9R53, to C9R54 at or below 7000FT, to C9R55 at or above 5000FT, to NACKS at or above 3000FT.

|                        |                                                   |
|------------------------|---------------------------------------------------|
| Critical DME           | SPE : C9R55 - NACKS                               |
| DME GAP                | CHE - 11.0NM to C9R53                             |
| Inappropriate Nav aids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | CHE                 | —        | —              | -9.3               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | C9R53               | —        | 045<br>(035.8) | -9.3               | 14.6          | —              | —             | —            | —              | RNAV1                    |
| 003           | TF              | C9R54               | —        | 360<br>(350.9) | -9.3               | 4.2           | —              | -7000         | —            | —              | RNAV1                    |
| 004           | TF              | C9R55               | —        | 360<br>(350.9) | -9.3               | 8.7           | —              | +5000         | —            | —              | RNAV1                    |
| 005           | TF              | NACKS               | —        | 240<br>(230.8) | -9.3               | 10.4          | —              | +3000         | —            | —              | RNAV1                    |


INSTRUMENT APPROACH CHART

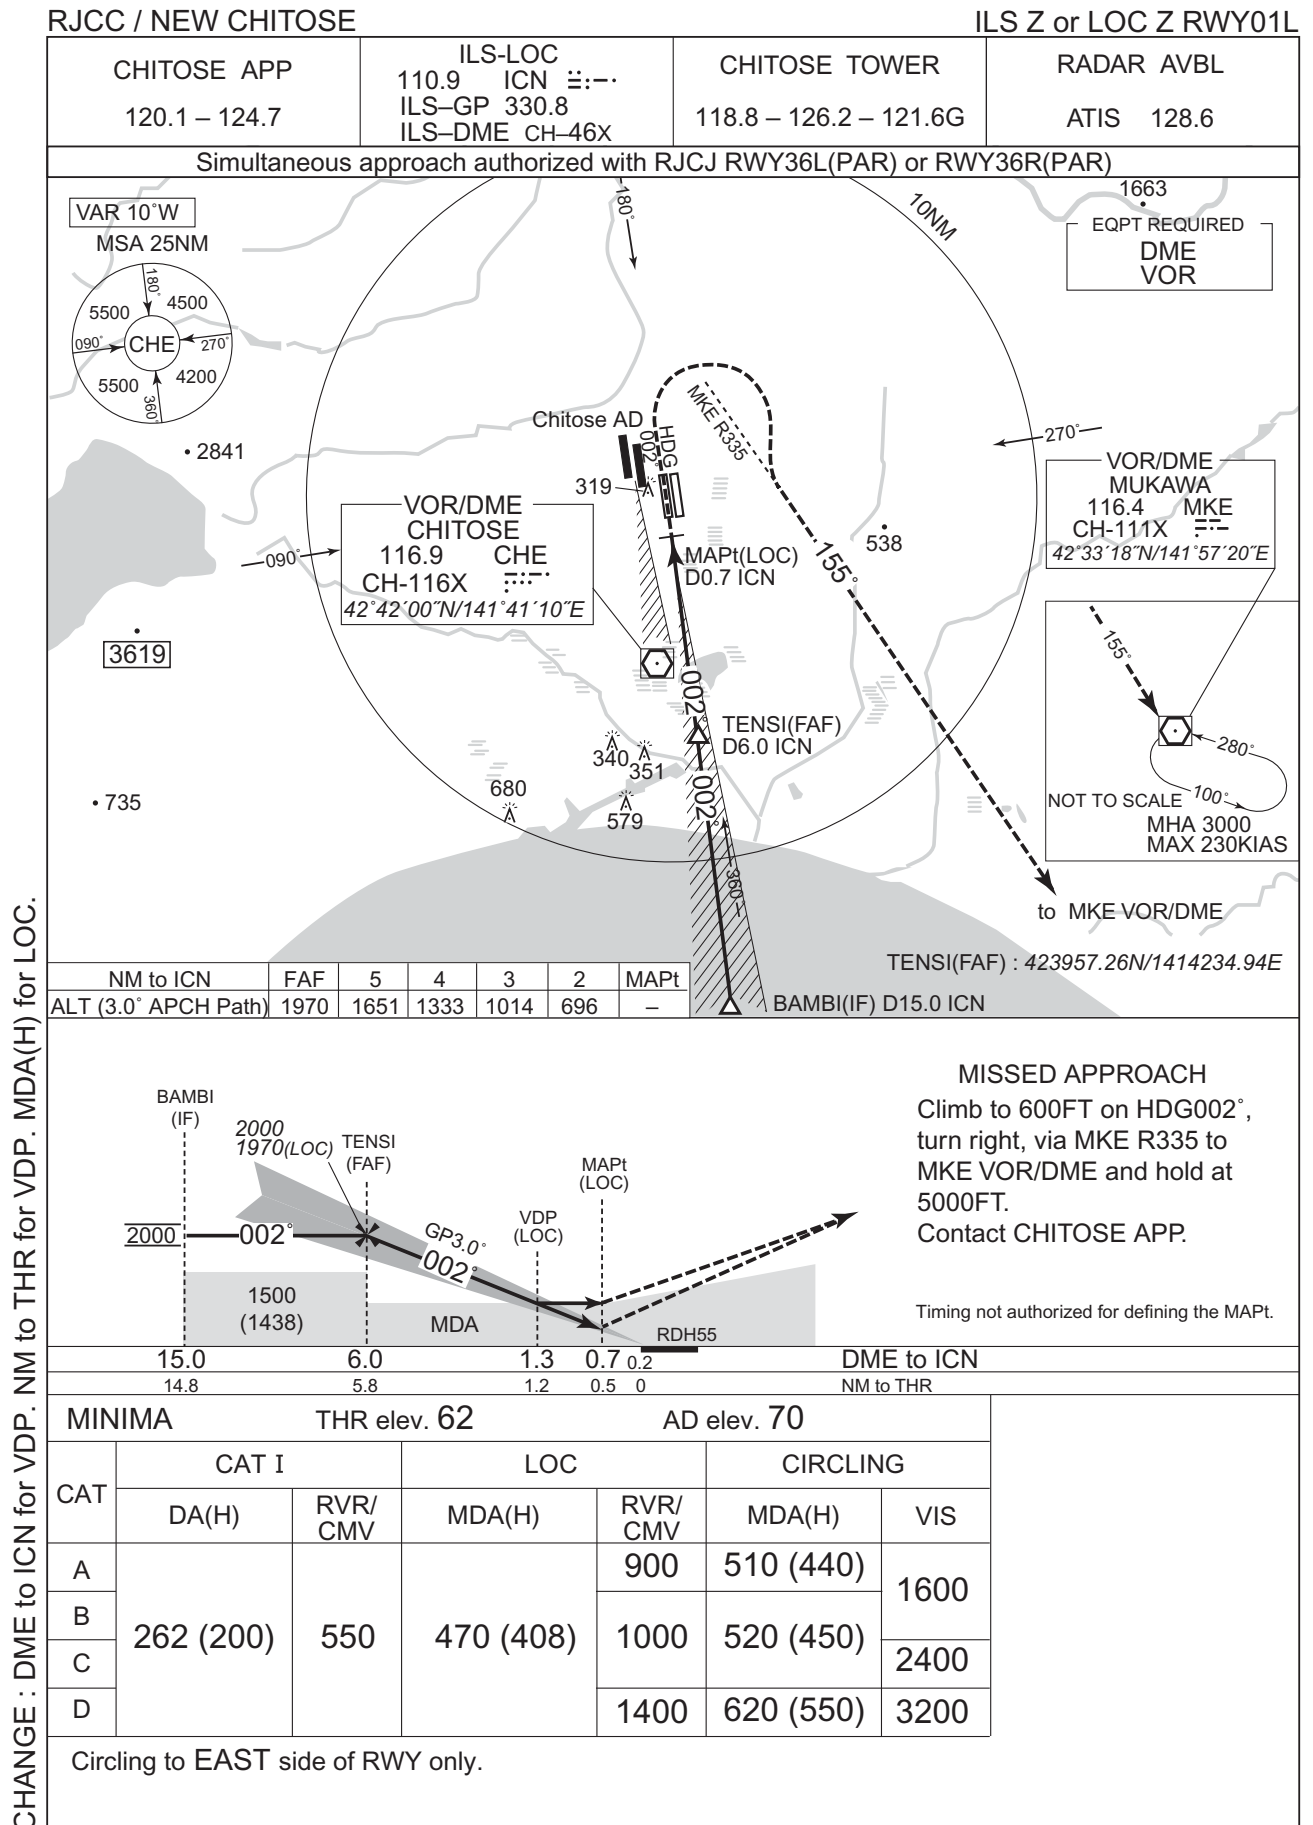


## INSTRUMENT APPROACH CHART

RJCC / NEW CHITOSE

ILS Y or LOC Y RWY01L

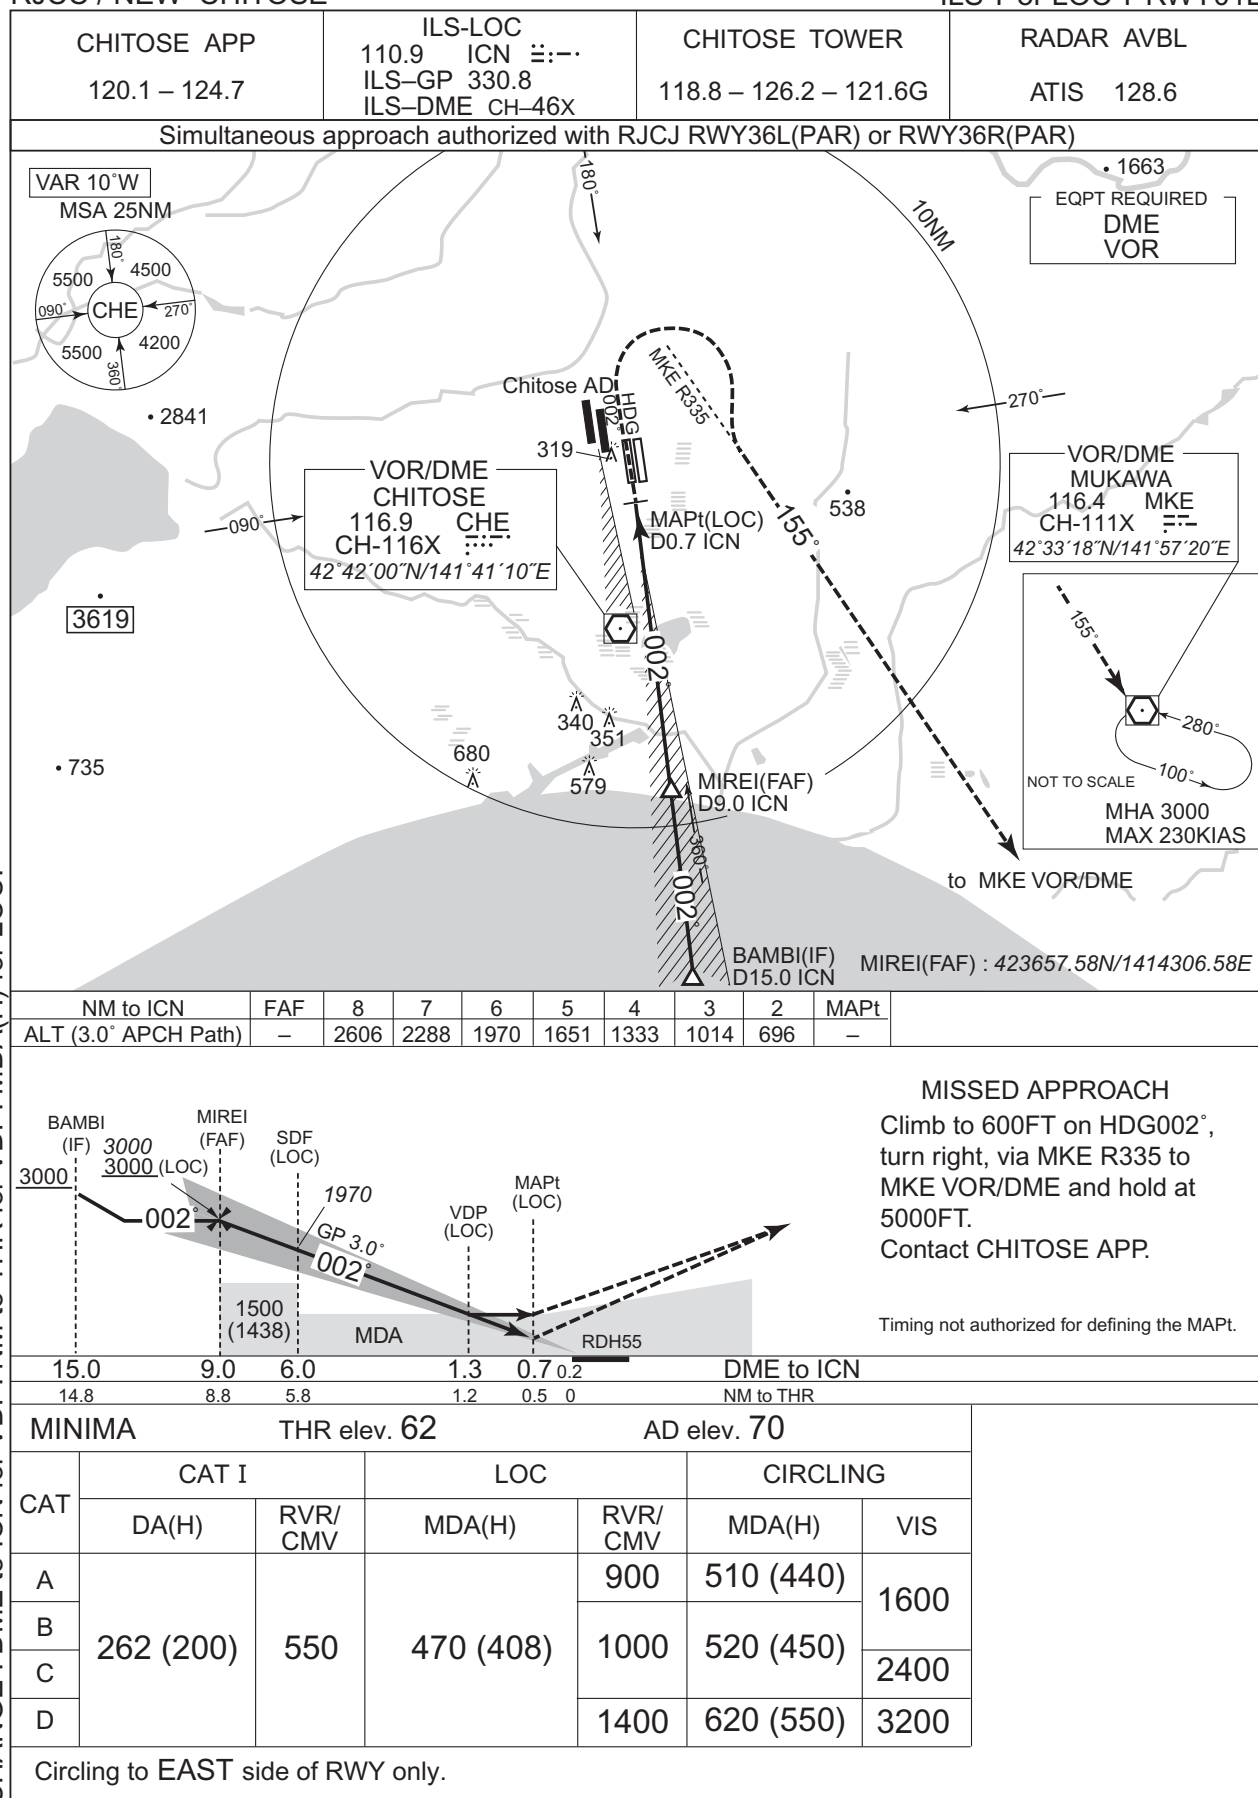

INSTRUMENT APPROACH CHART

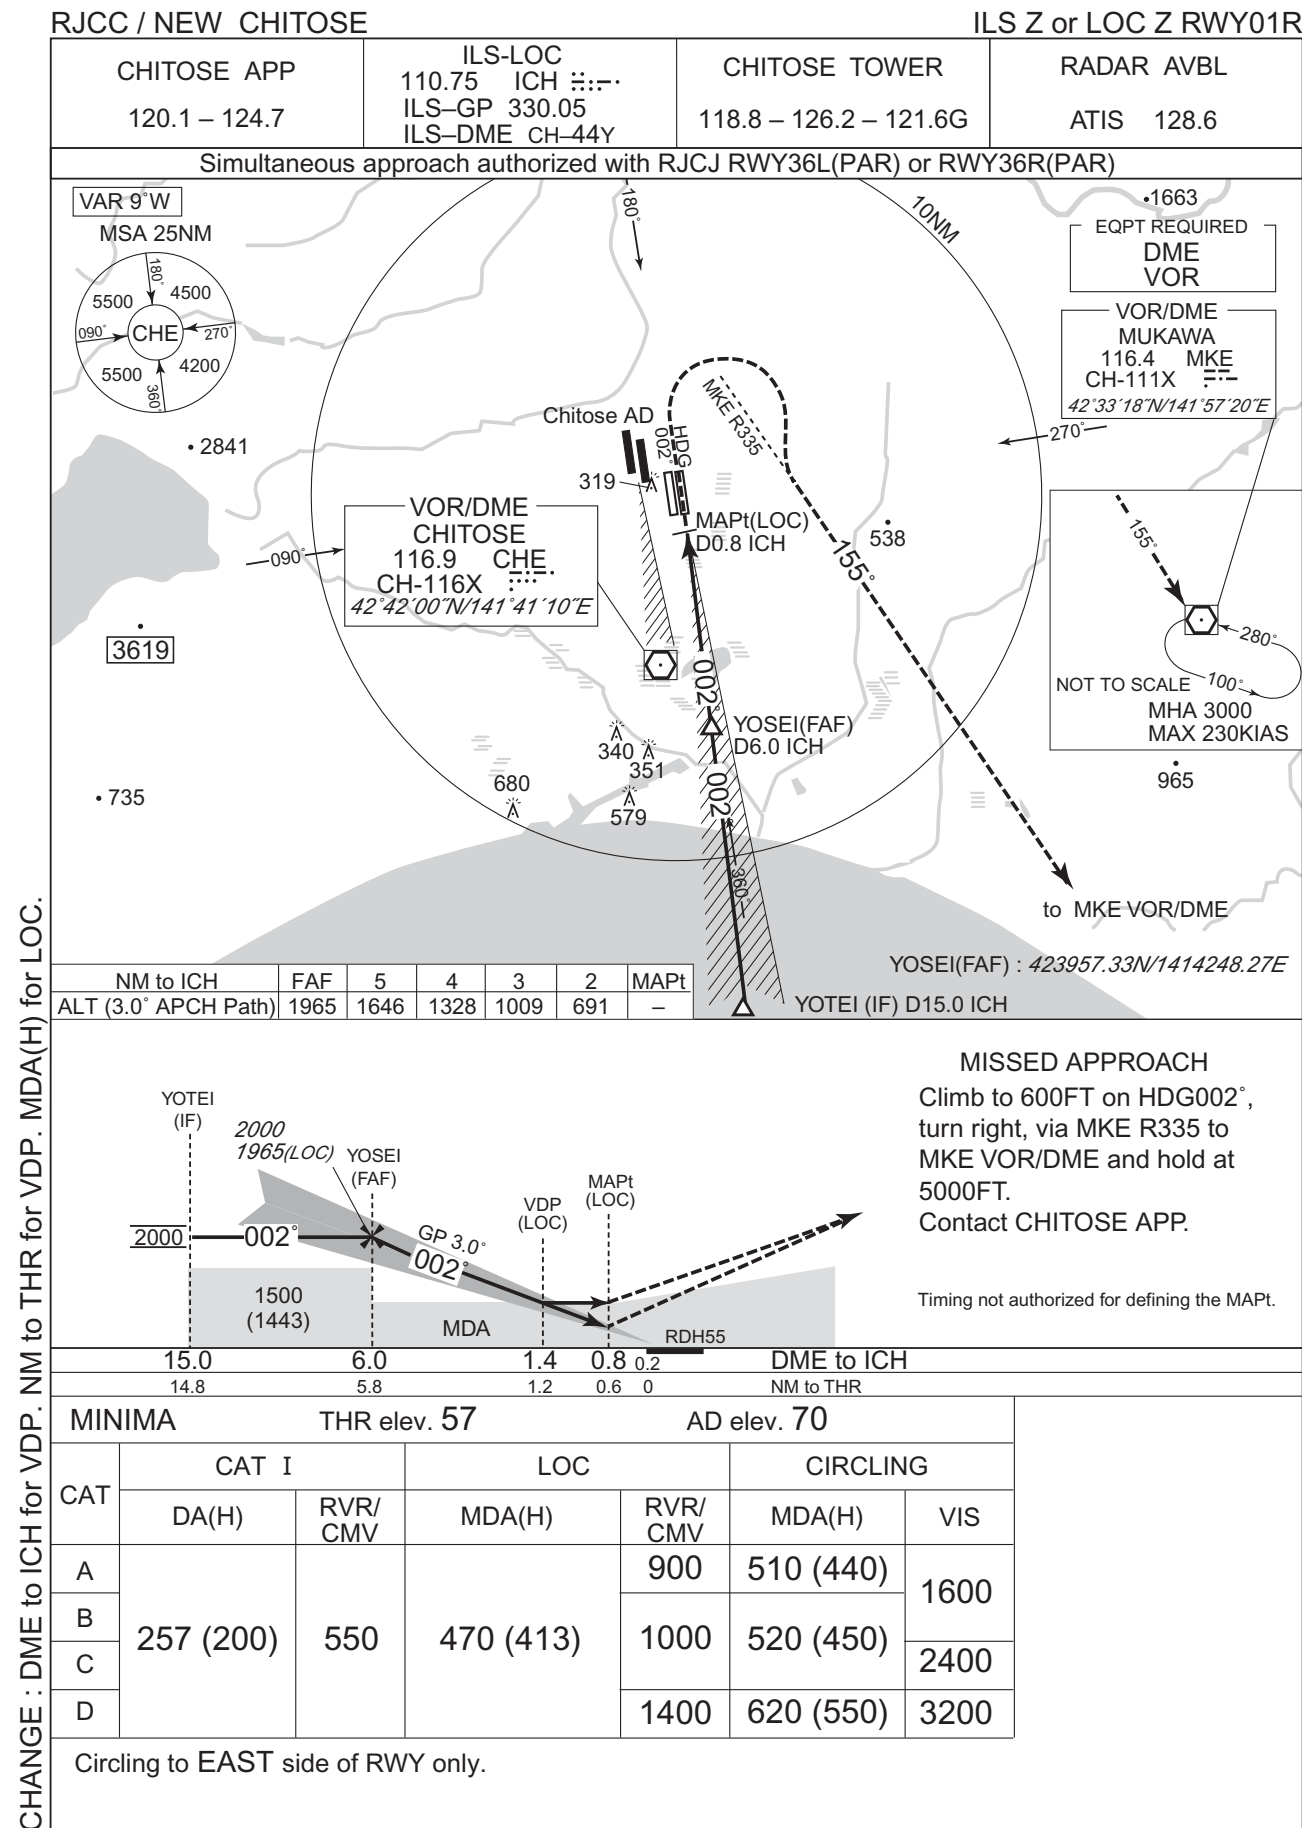


## INSTRUMENT APPROACH CHART

RJCC / NEW CHITOSE


ILS Y or LOC Y RWY01R

|                              |                                                               |                                         |                          |
|------------------------------|---------------------------------------------------------------|-----------------------------------------|--------------------------|
| CHITOSE APP<br>120.1 – 124.7 | ILS-LOC<br>110.75 ICH :::-<br>ILS-GP 330.05<br>ILS-DME CH-44Y | CHITOSE TOWER<br>118.8 – 126.2 – 121.6G | RADAR AVBL<br>ATIS 128.6 |
|------------------------------|---------------------------------------------------------------|-----------------------------------------|--------------------------|

Simultaneous approach authorized with RJCJ RWY36L(PAR) or RWY36R(PAR)

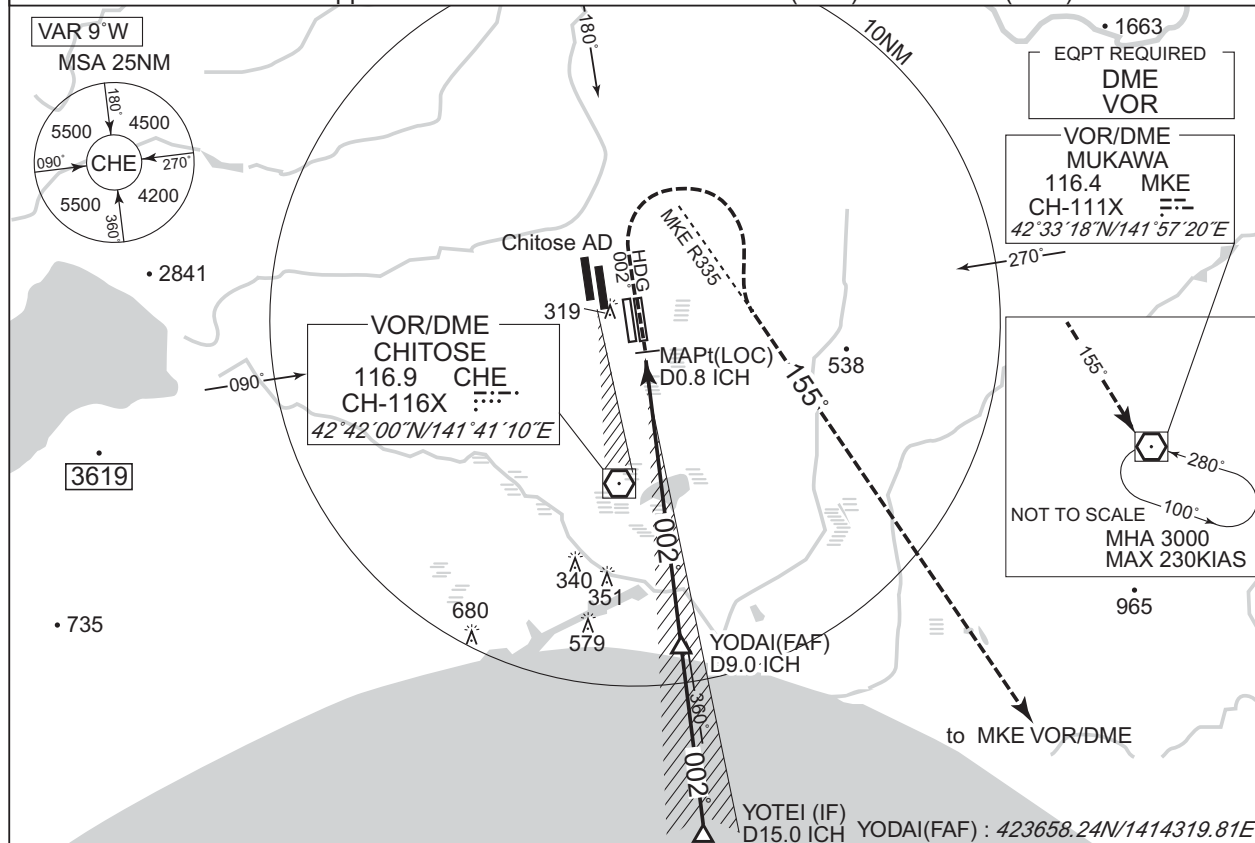

| NM to ICH            | FAF | 8    | 7    | 6    | 5    | 4    | 3    | 2   | MAPt |
|----------------------|-----|------|------|------|------|------|------|-----|------|
| ALT (3.0° APCH Path) | —   | 2601 | 2283 | 1964 | 1646 | 1328 | 1009 | 691 | —    |

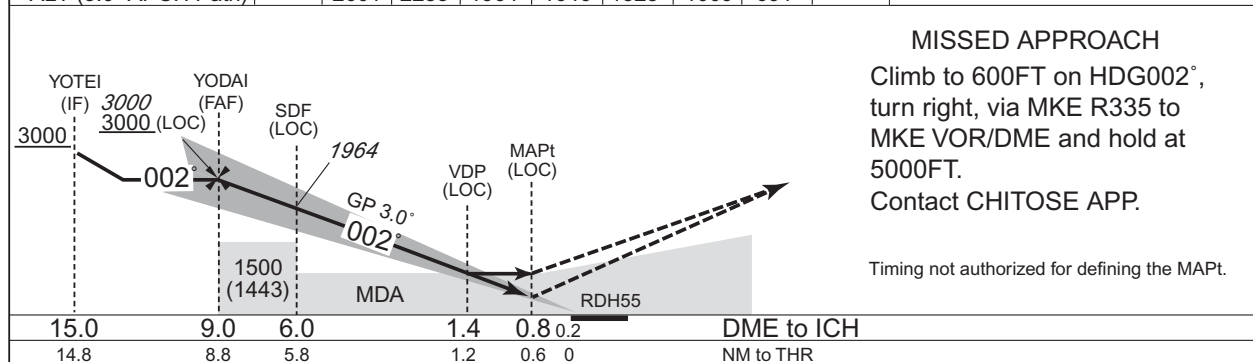

| MINIMA |           |         | THR elev. 57 |         | AD elev. 70 |      |
|--------|-----------|---------|--------------|---------|-------------|------|
| CAT    | CAT I     |         | LOC          |         | CIRCLING    |      |
|        | DA(H)     | RVR/CMV | MDA(H)       | RVR/CMV | MDA(H)      | VIS  |
| A      | 257 (200) | 550     | 470 (413)    | 900     | 510 (440)   | 1600 |
| B      |           |         |              | 1000    | 520 (450)   |      |
| C      |           |         |              | 1400    | 620 (550)   | 2400 |
| D      |           |         |              |         |             | 3200 |


Circling to EAST side of RWY only.

CHANGE : DME to ICH for VDP. NM to THR for VDP. MDA(H) for LOC.

INSTRUMENT APPROACH CHART

RJCC / NEW CHITOSE

ILS Z or LOC Z RWY19L

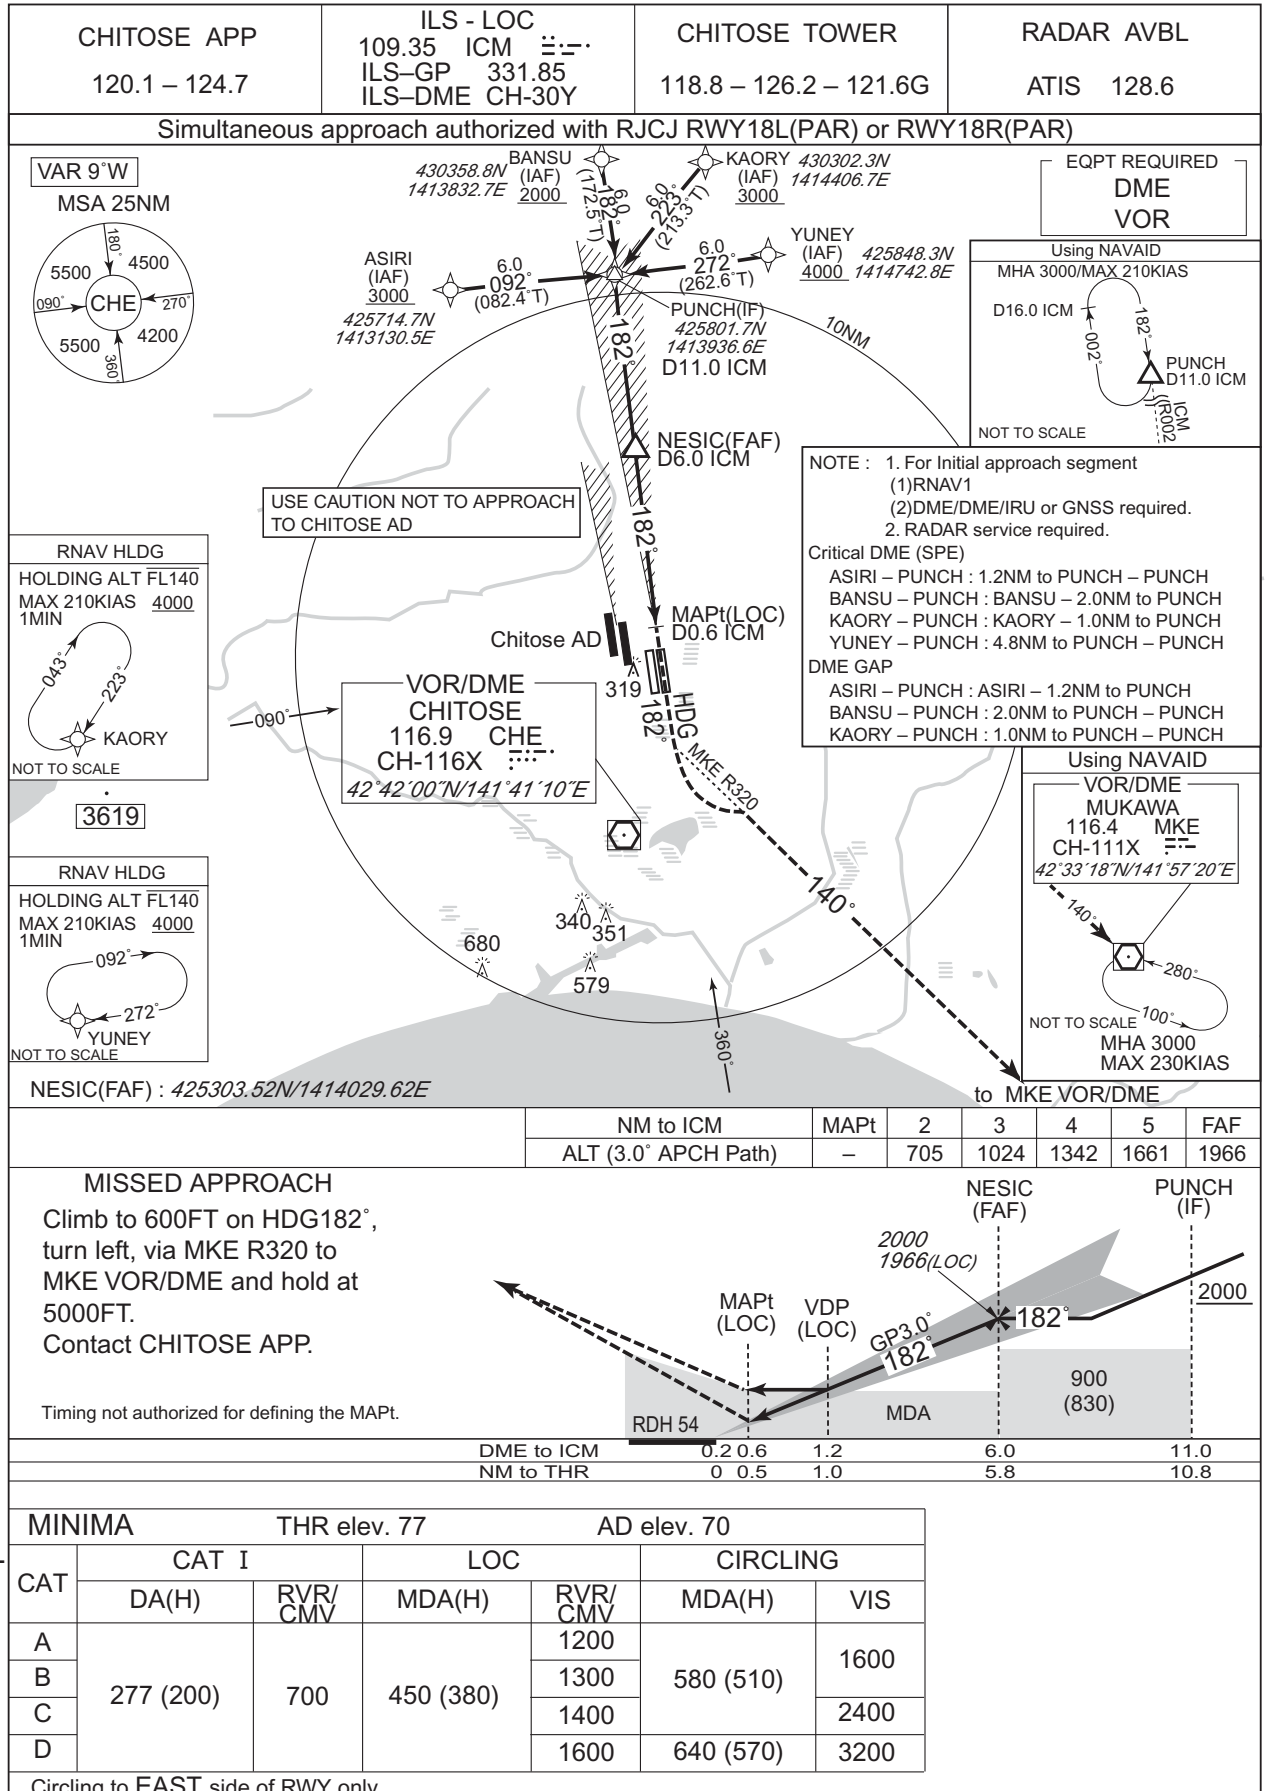


CHANGE : Description of VAR.



## INSTRUMENT APPROACH CHART

RJCC / NEW CHITOSE


ILS Y or LOC Y RWY19L

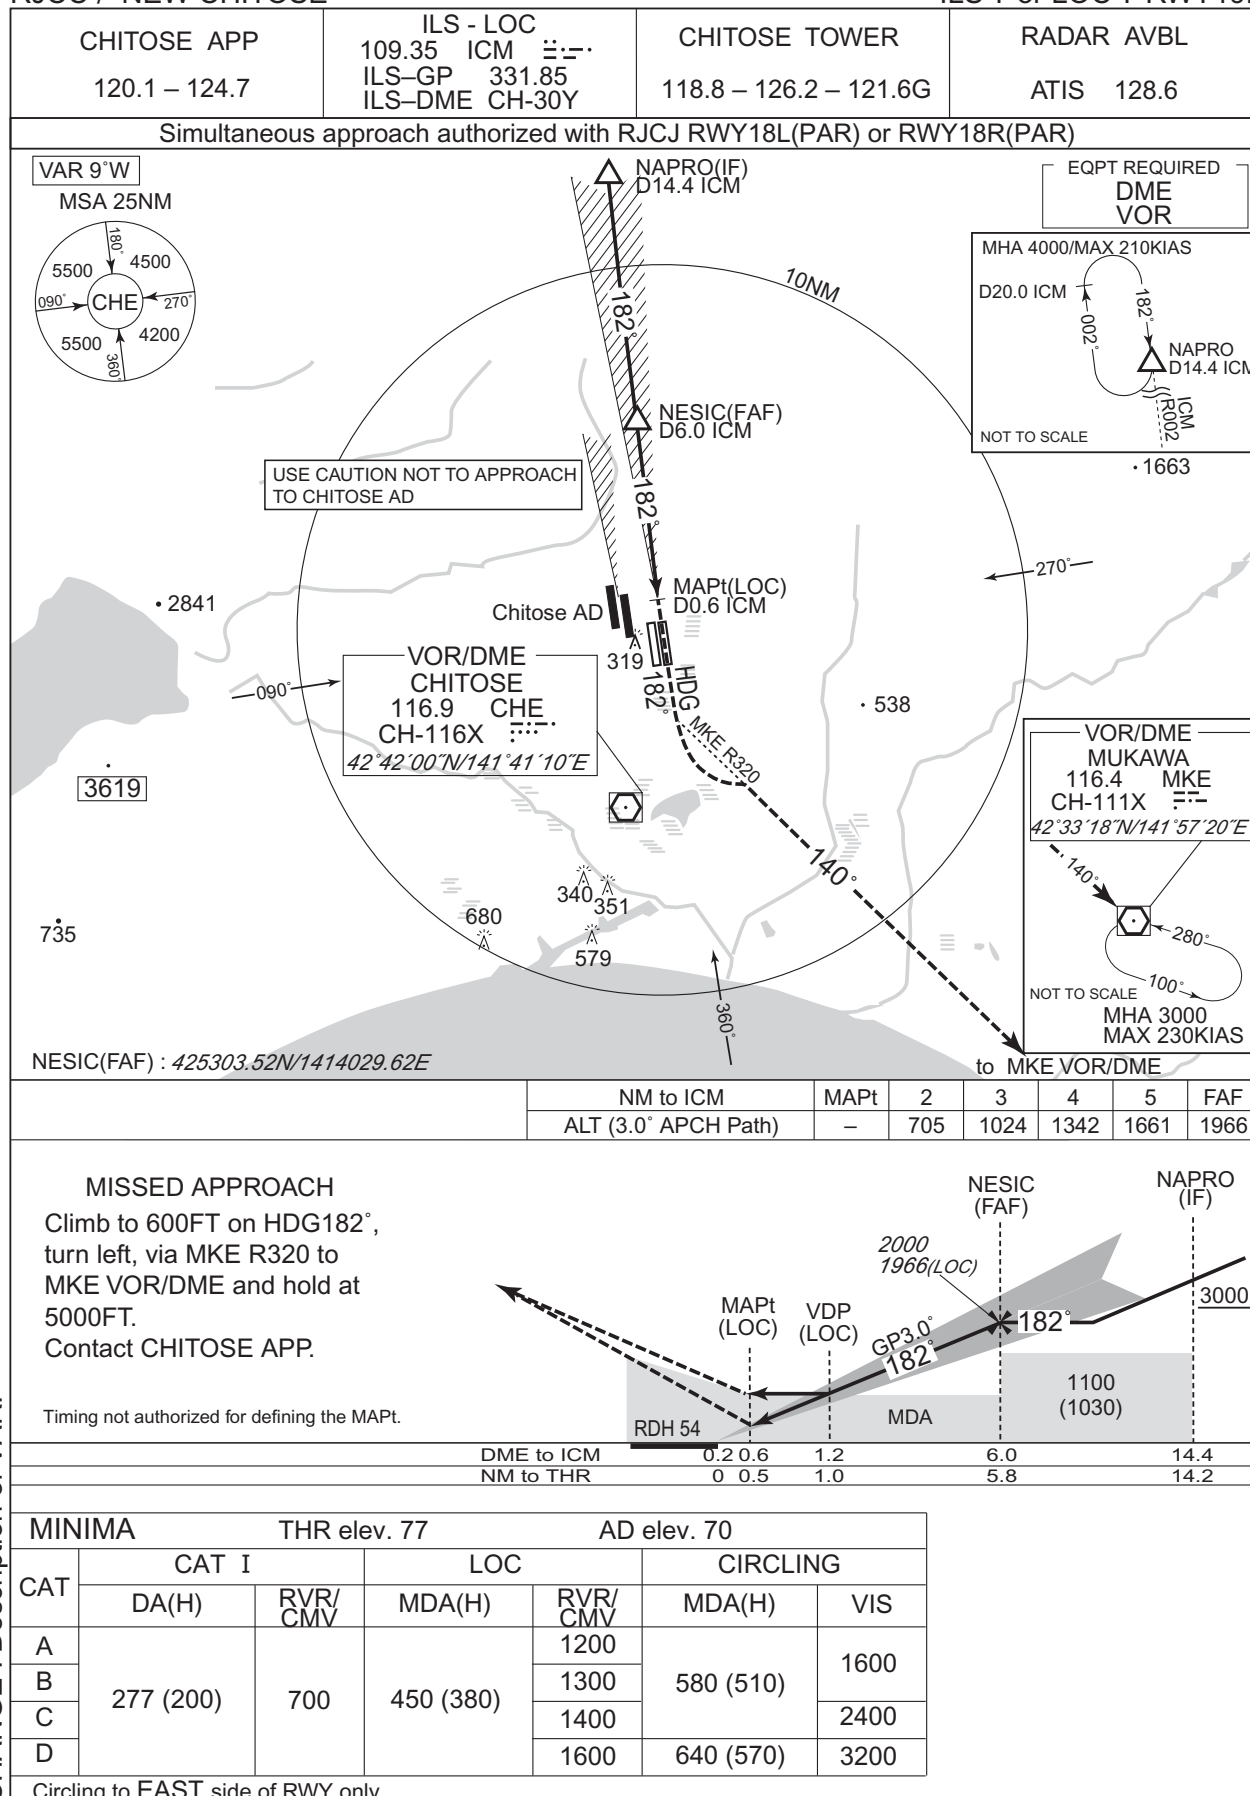

CHANGE : Description of VAR.



INSTRUMENT APPROACH CHART

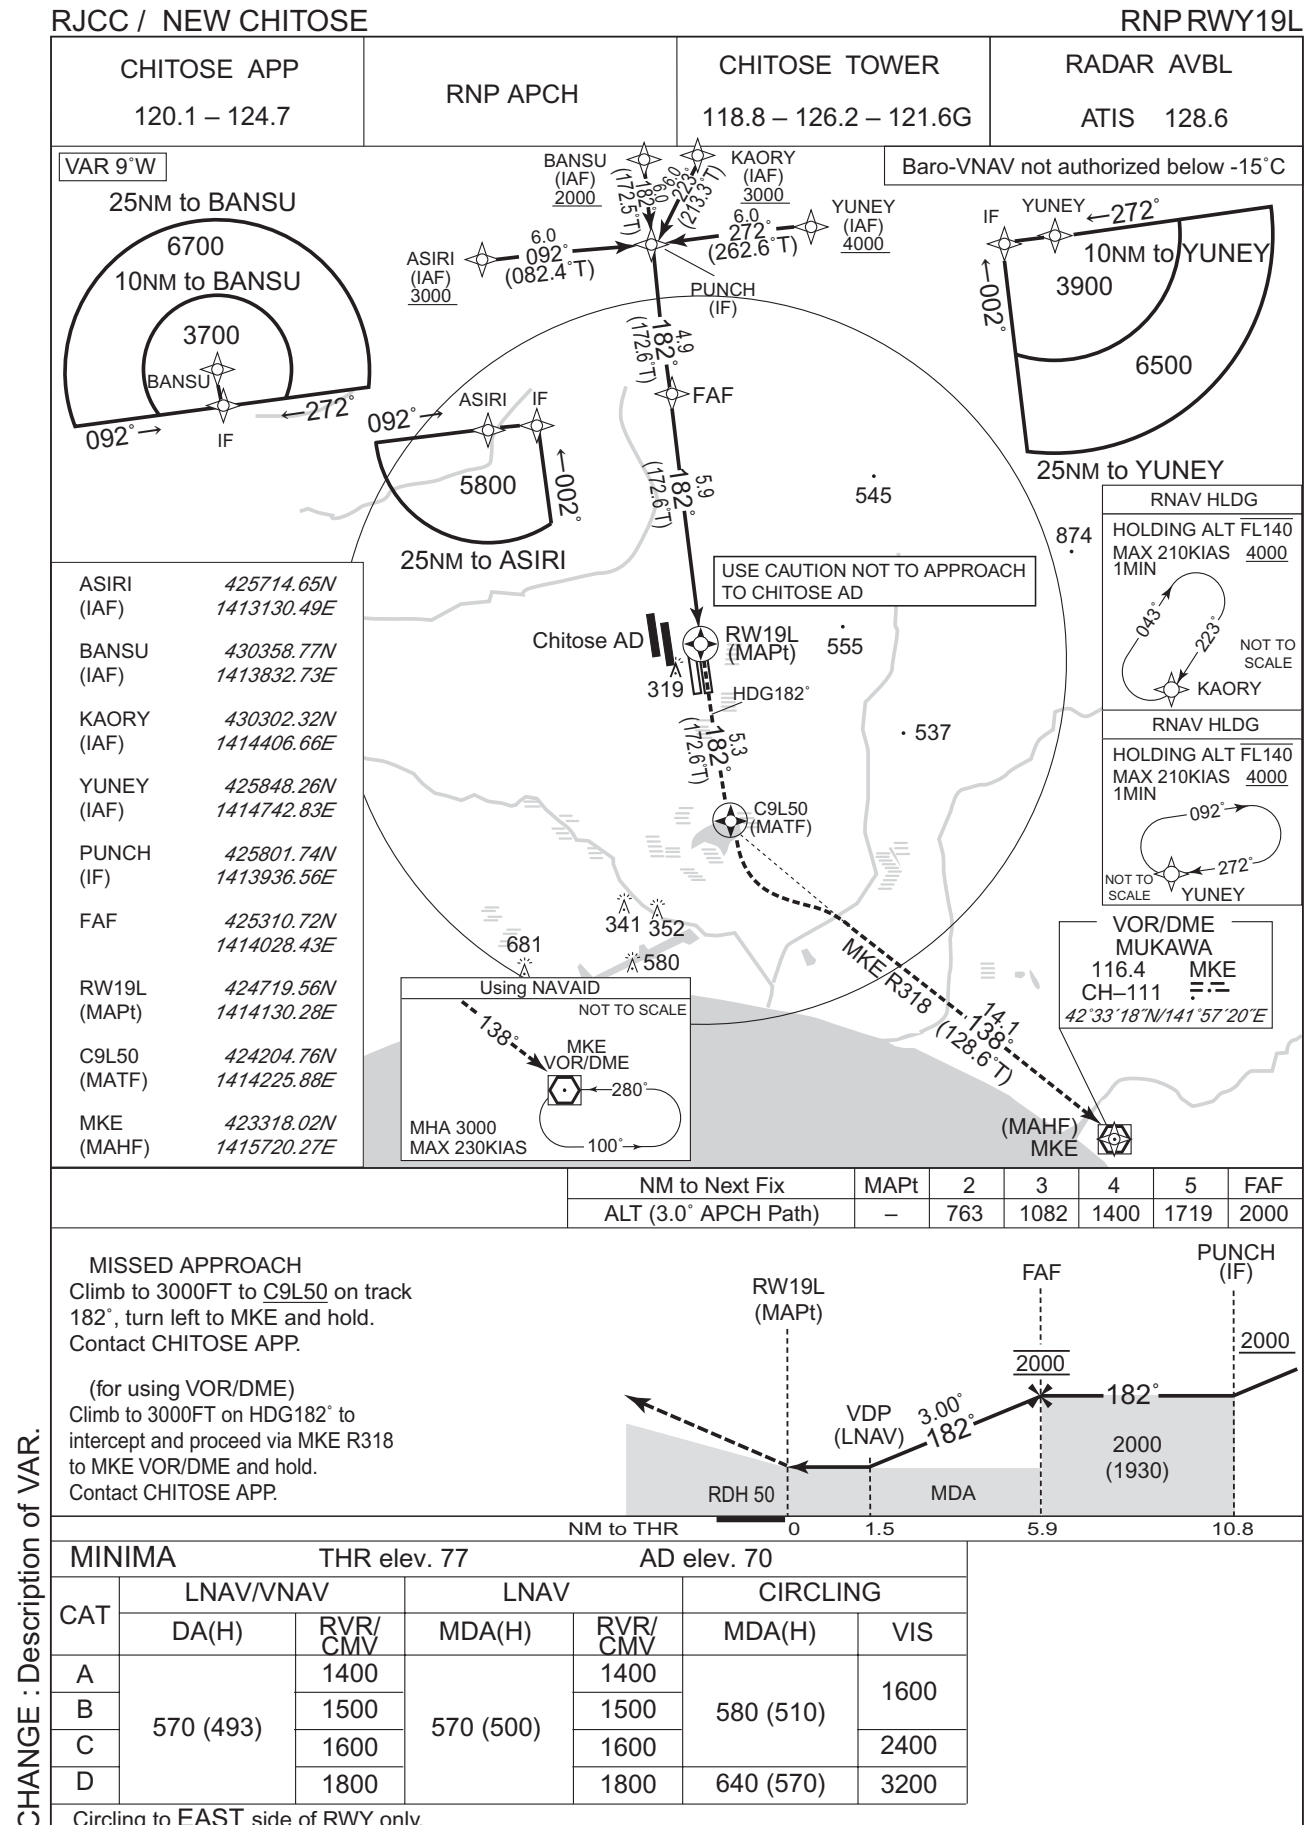


CHANGE : Description of VAR.

INSTRUMENT APPROACH CHART

RJCC / NEW CHITOSE

VOR Z RWY19L

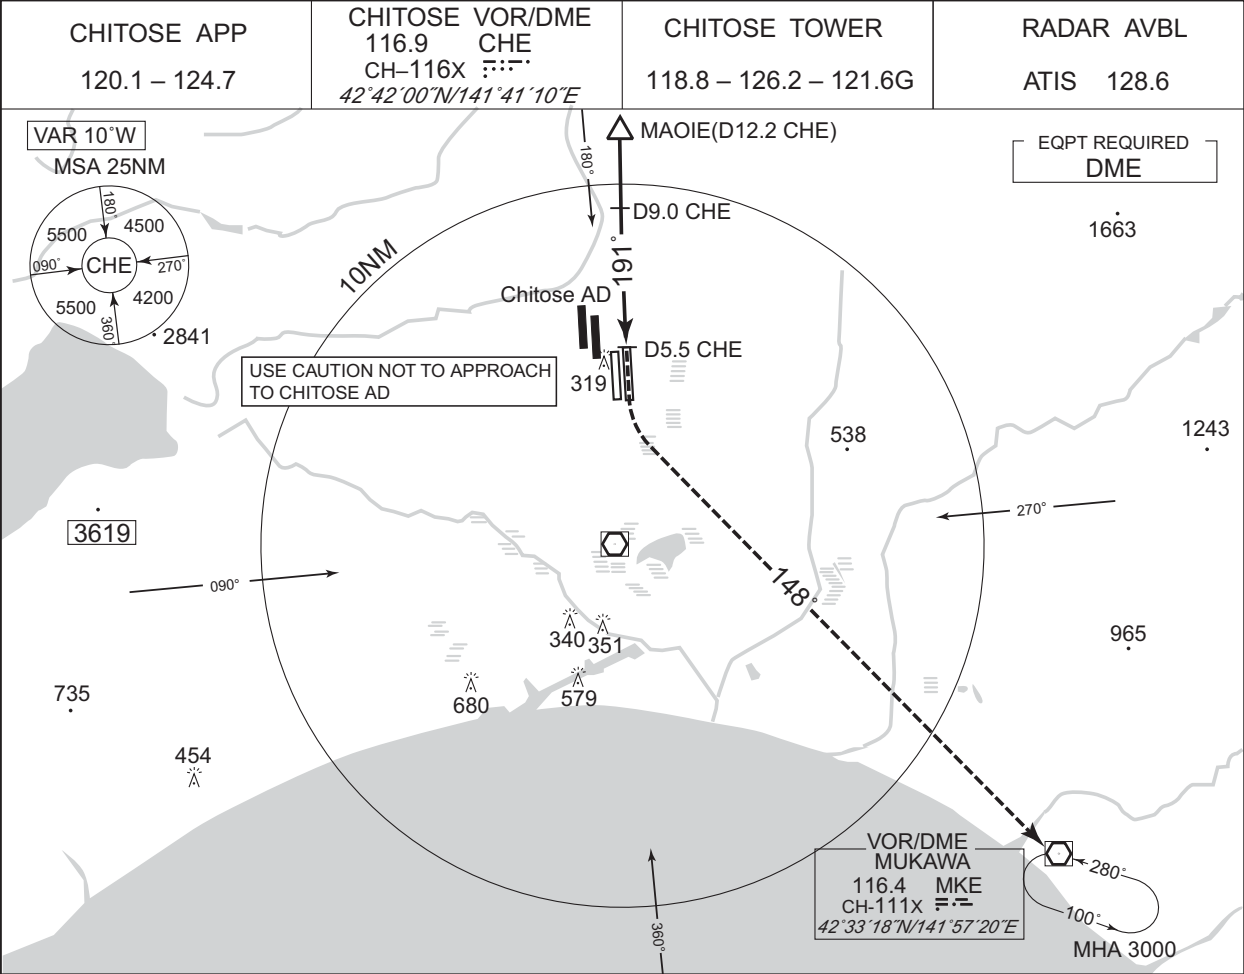

MISSED APPROACH  
Turn left, climb via MKE  
R328 to 5000FT, proceed to  
MKE VOR/DME and hold.  
Contact CHITOSE APP.

| MINIMA |           | THR elev. 77 | AD elev. 70 |      |
|--------|-----------|--------------|-------------|------|
| CAT    | CIRCLING  |              | MDA(H)      | VIS  |
|        | MDA(H)    | RVR/CMV      |             |      |
| A      | 620 (550) | 1400         | 620 (550)   | 1600 |
| B      |           | 1500         |             | 2400 |
| C      |           | 1600         |             |      |
| D      |           | 1800         | 640 (570)   | 3200 |



Circling to EAST side of RWY only.

CHANGE : Description of VAR.

INSTRUMENT APPROACH CHART

RJCC / NEW CHITOSE

VOR Y RWY19L

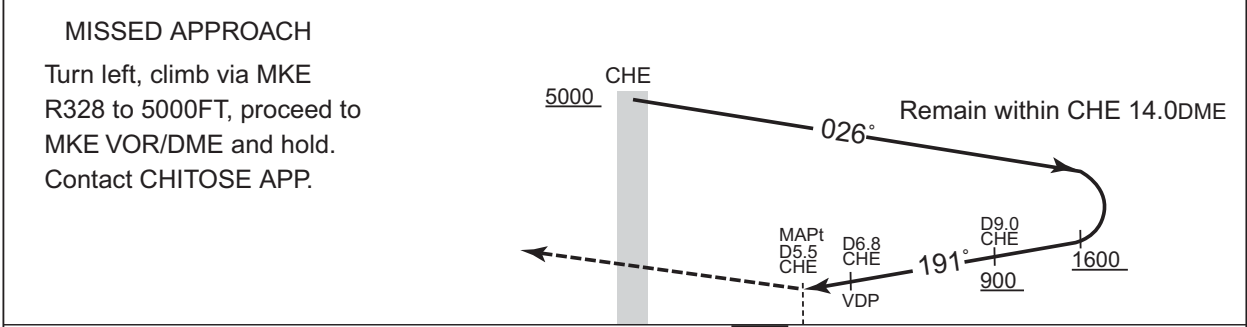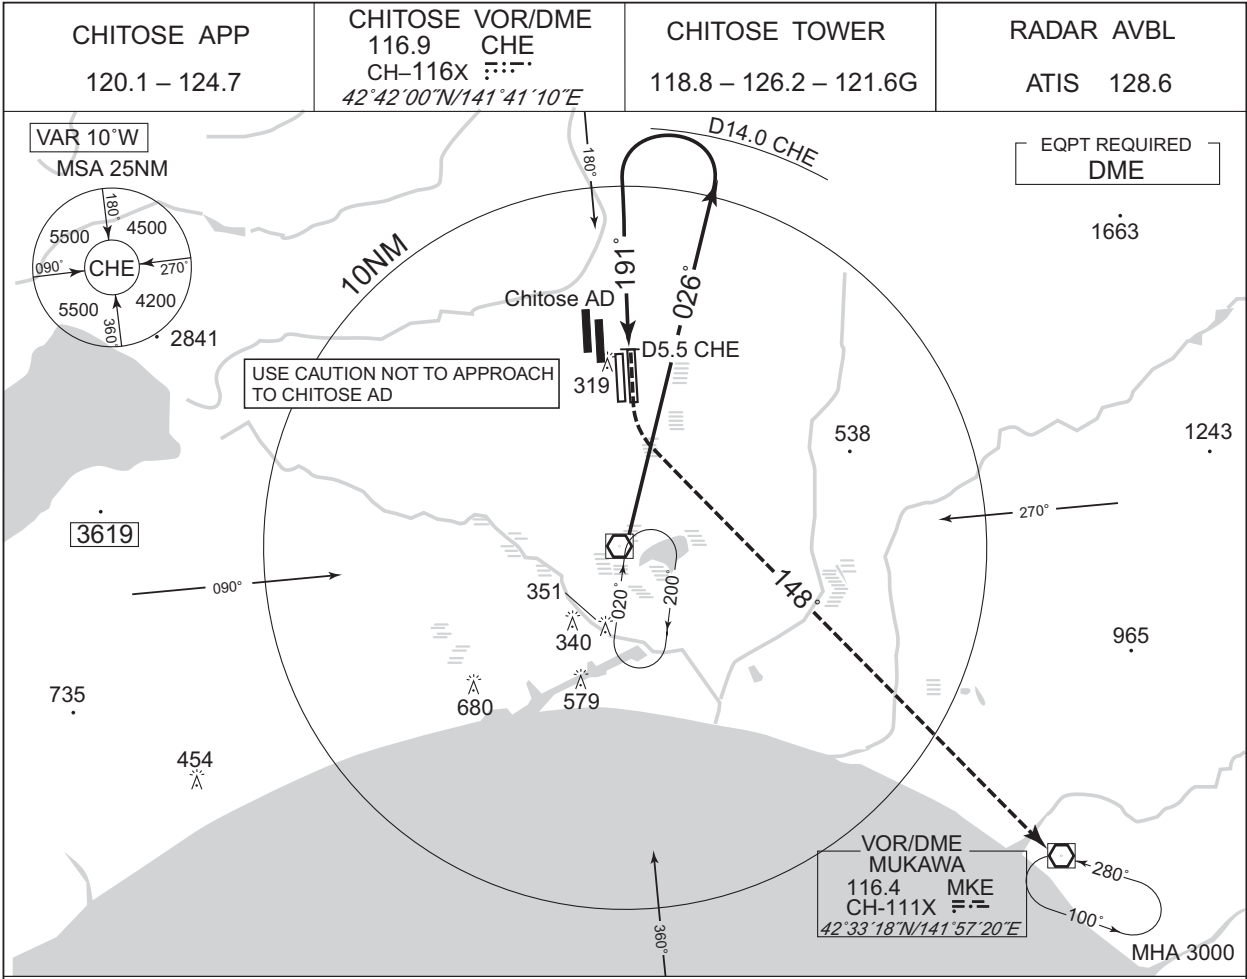


| MINIMA |           | THR elev. 77 | AD elev. 70 |      |
|--------|-----------|--------------|-------------|------|
| CAT    | CIRCLING  |              |             |      |
|        | MDA(H)    | RVR/CMV      | MDA(H)      | VIS  |
| A      | 620 (550) | 1400         | 620 (550)   | 1600 |
| B      |           | 1500         |             | 2400 |
| C      |           | 1600         |             | 3200 |
| D      |           | 1800         |             |      |

Circling to EAST side of RWY only.

## INSTRUMENT APPROACH CHART

RJCC / NEW CHITOSE

ILS Z or LOC Z RWY19R (CAT II &amp; III)

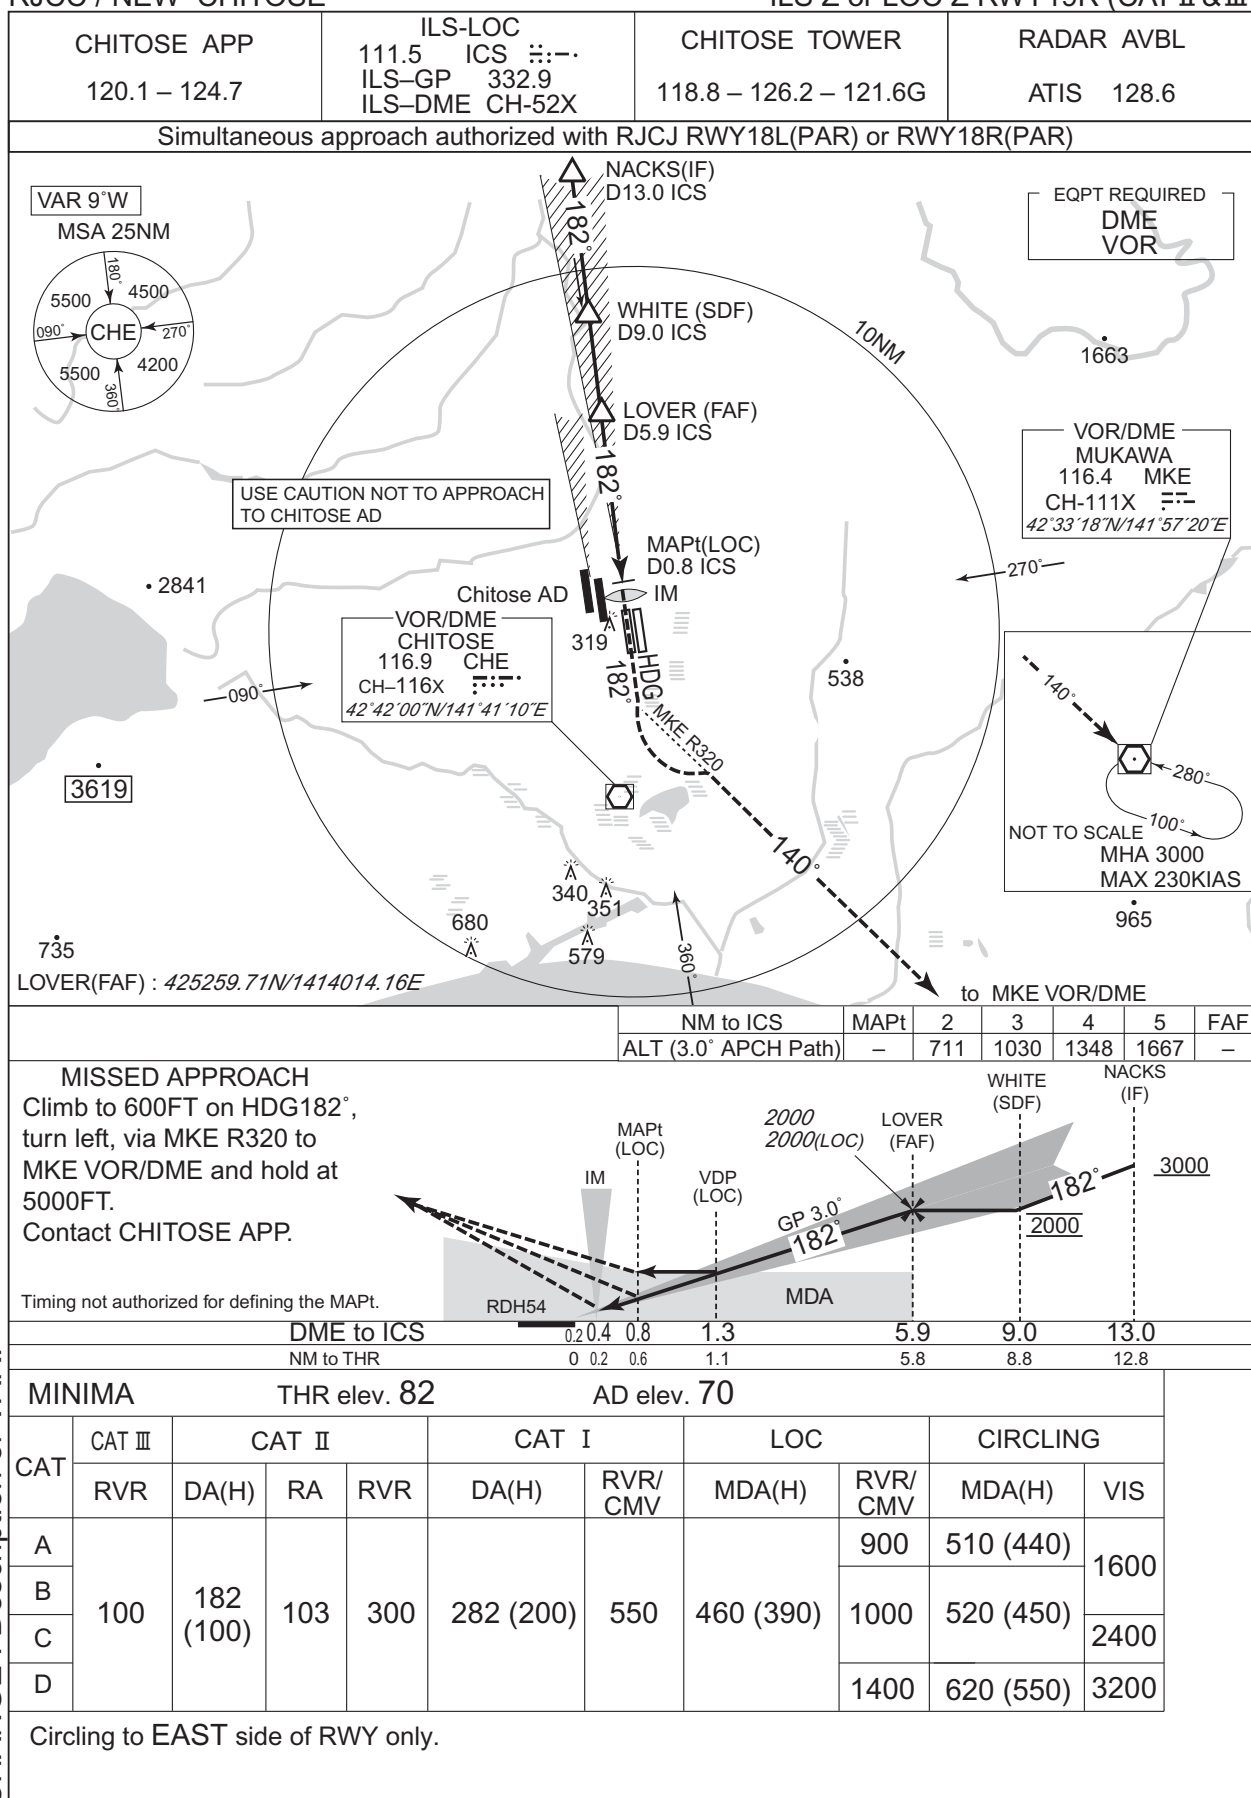


CHANGE : Description of VAR.



## INSTRUMENT APPROACH CHART

RJCC / NEW CHITOSE

ILS X or LOC X RWY19R (CAT II &amp; III)

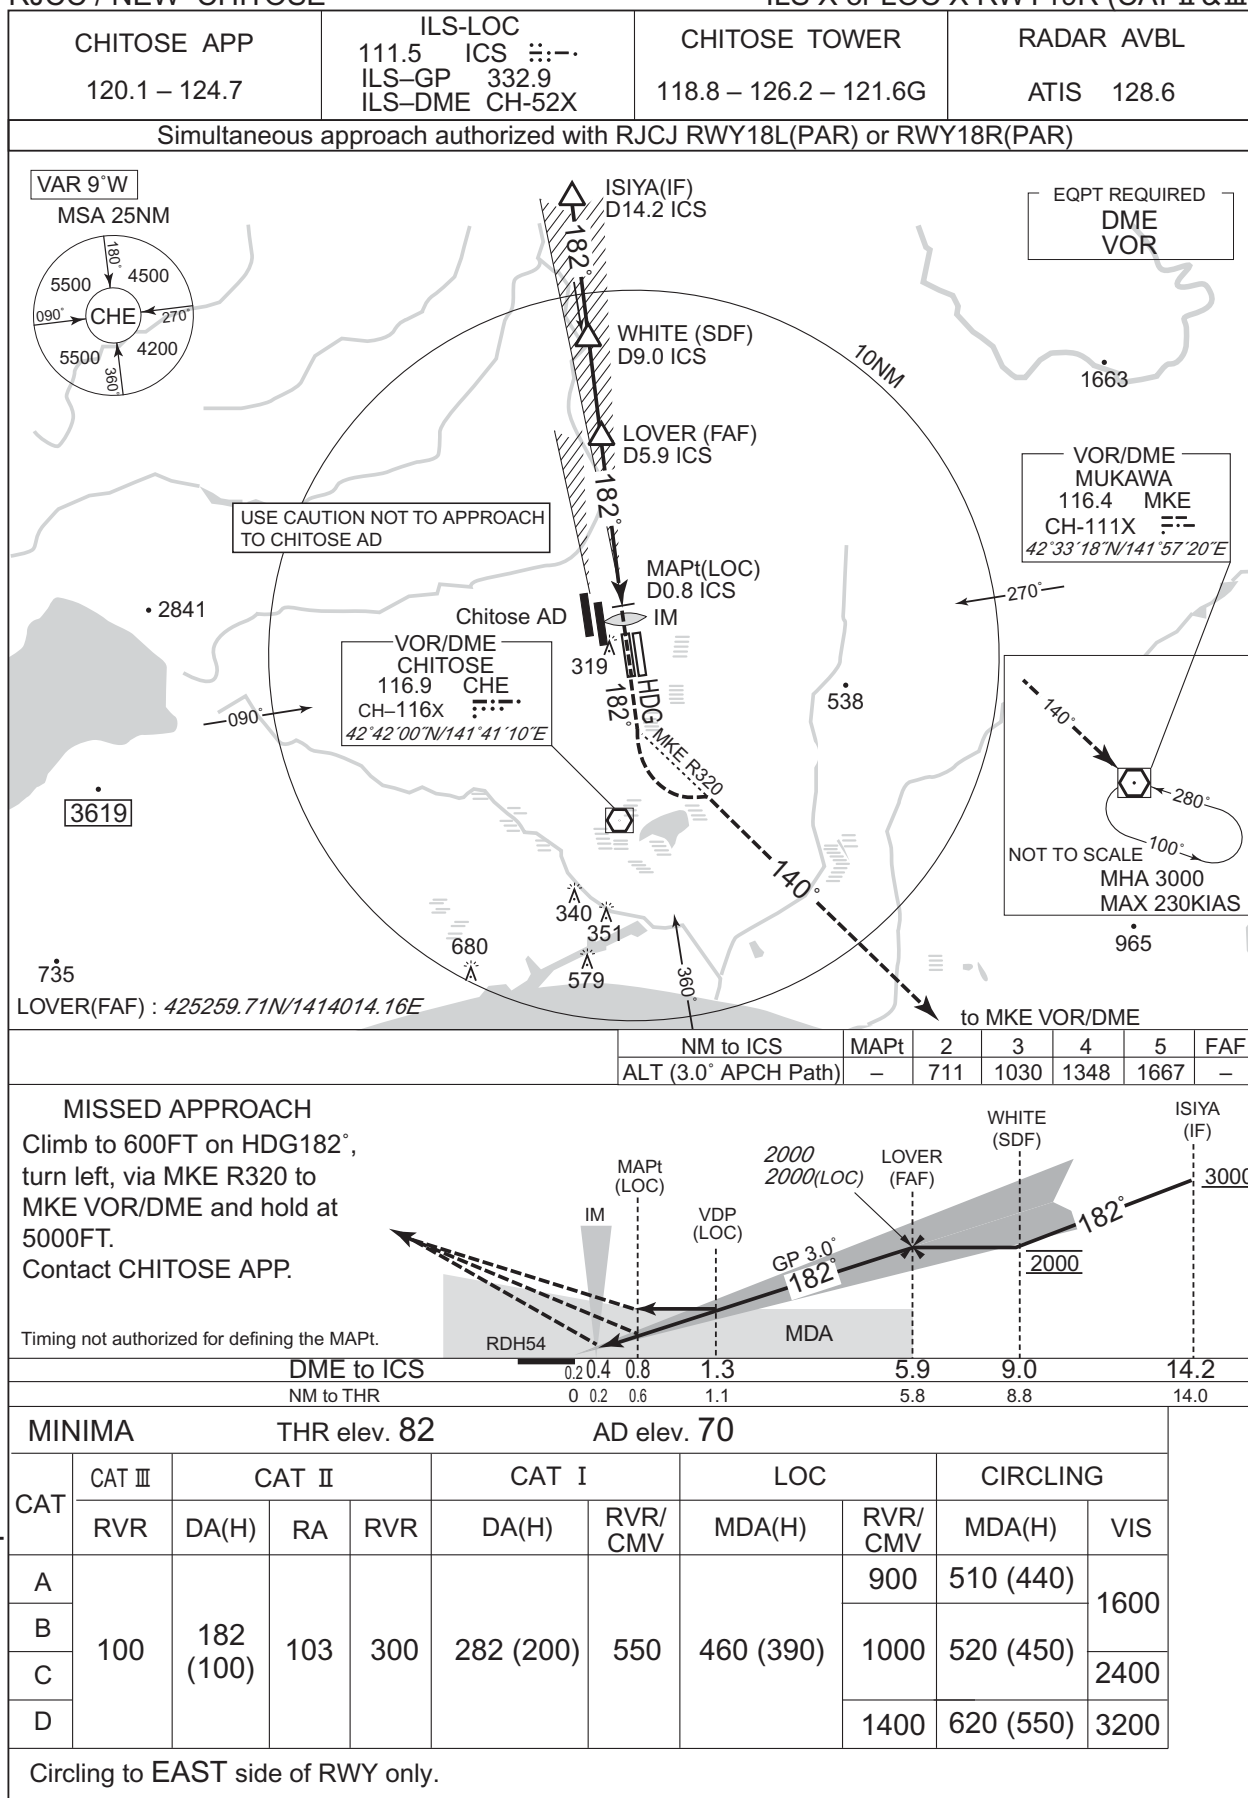

CHANGE : Description of VAR.


INSTRUMENT APPROACH CHART

RJCC / NEW CHITOSE


ILS W or LOC W RWY19R (CAT II & III)

|                              |                                                             |                                         |                          |
|------------------------------|-------------------------------------------------------------|-----------------------------------------|--------------------------|
| CHITOSE APP<br>120.1 – 124.7 | ILS-LOC<br>111.5 ICS ::--<br>ILS-GP 332.9<br>ILS-DME CH-52X | CHITOSE TOWER<br>118.8 – 126.2 – 121.6G | RADAR AVBL<br>ATIS 128.6 |
|------------------------------|-------------------------------------------------------------|-----------------------------------------|--------------------------|

Simultaneous approach authorized with RJCJ RWY18L(PAR) or RWY18R(PAR)

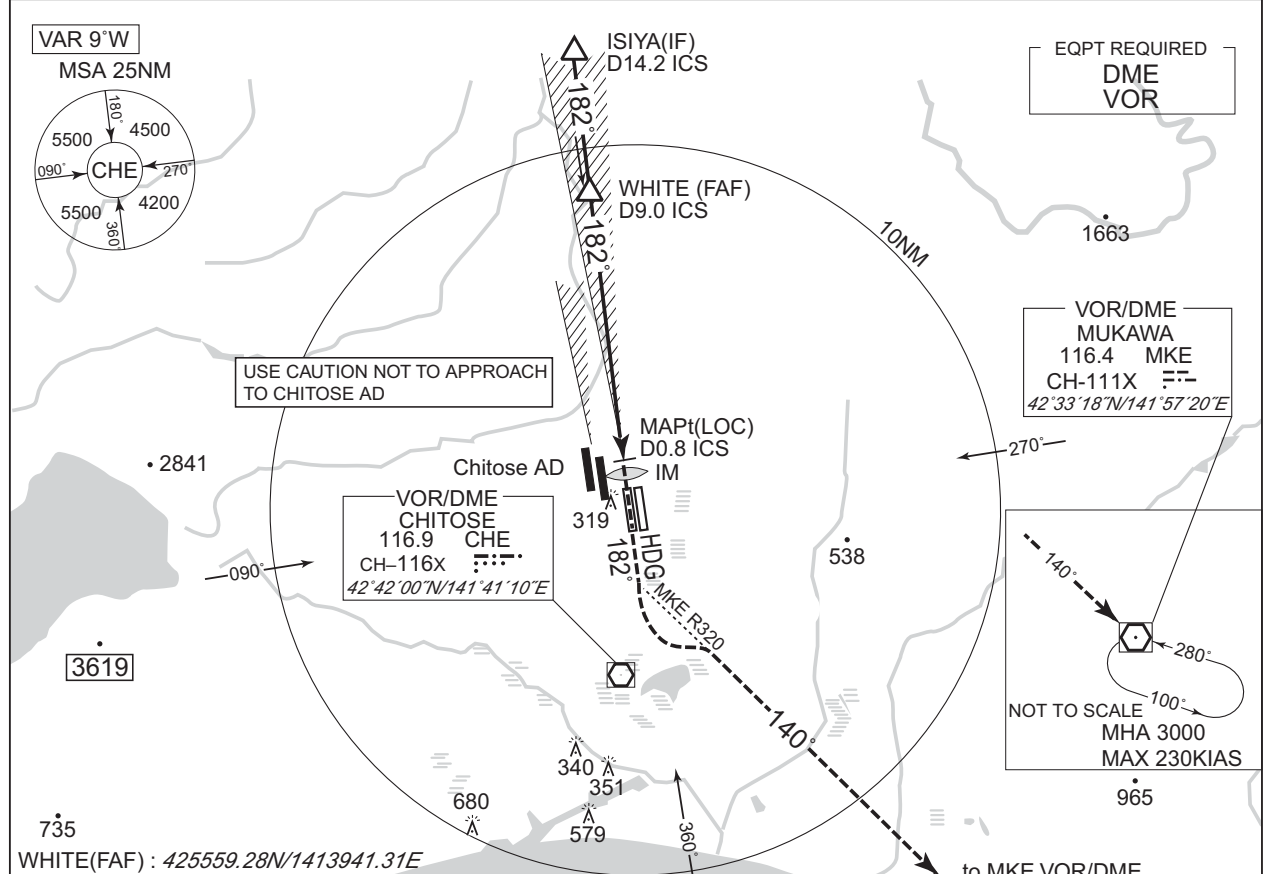

|  |                      |      |     |      |      |      |     |
|--|----------------------|------|-----|------|------|------|-----|
|  | NM to ICS            | MAPt | 2   | 3    | 4    | 5    | FAF |
|  | ALT (3.0° APCH Path) | —    | 711 | 1030 | 1348 | 1667 | —   |

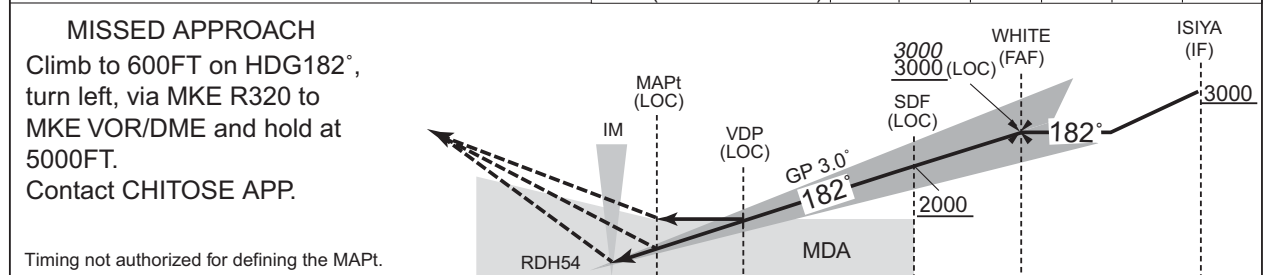

|  |            |     |     |     |     |     |     |      |
|--|------------|-----|-----|-----|-----|-----|-----|------|
|  | DME to ICS | 0.2 | 0.4 | 0.8 | 1.3 | 5.9 | 9.0 | 14.2 |
|  | NM to THR  | 0   | 0.2 | 0.6 | 1.1 | 5.8 | 8.8 | 14.0 |


| MINIMA |         | THR elev. 82 |     |     | AD elev. 70 |         |           |         |           |          |
|--------|---------|--------------|-----|-----|-------------|---------|-----------|---------|-----------|----------|
| CAT    | CAT III | CAT II       |     |     | CAT I       |         |           | LOC     |           | CIRCLING |
|        | RVR     | DA(H)        | RA  | RVR | DA(H)       | RVR/CMV | MDA(H)    | RVR/CMV | MDA(H)    | VIS      |
| A      | 100     | 182<br>(100) | 103 | 300 | 282 (200)   | 550     | 460 (390) | 1000    | 520 (450) | 1600     |
| B      |         |              |     |     |             |         |           |         |           |          |
| C      |         |              |     |     |             |         |           |         |           |          |
| D      |         |              |     |     |             |         |           |         |           |          |

Circling to EAST side of RWY only.

CHANGE : Description of VAR.





INSTRUMENT APPROACH CHART

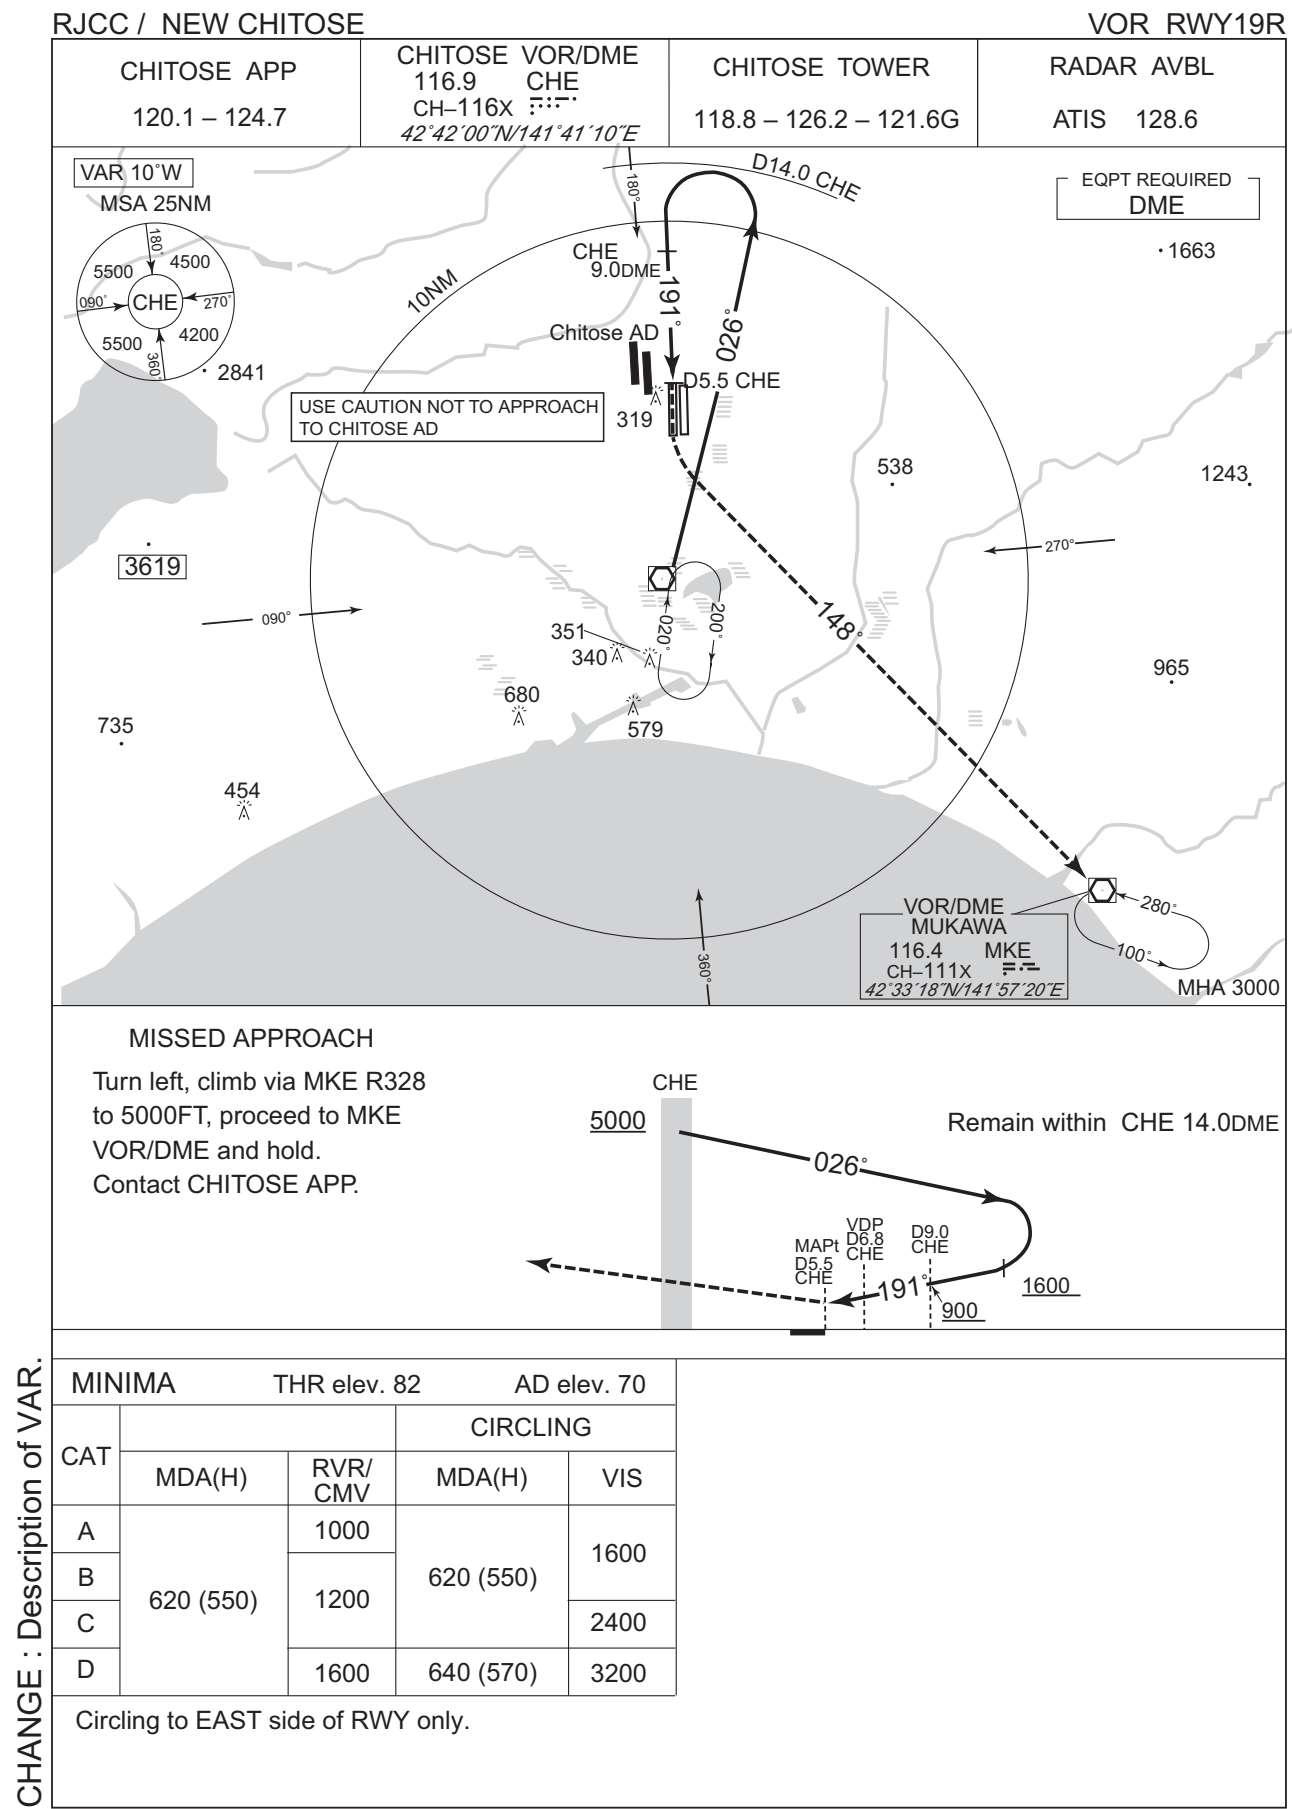



INSTRUMENT APPROACH CHART

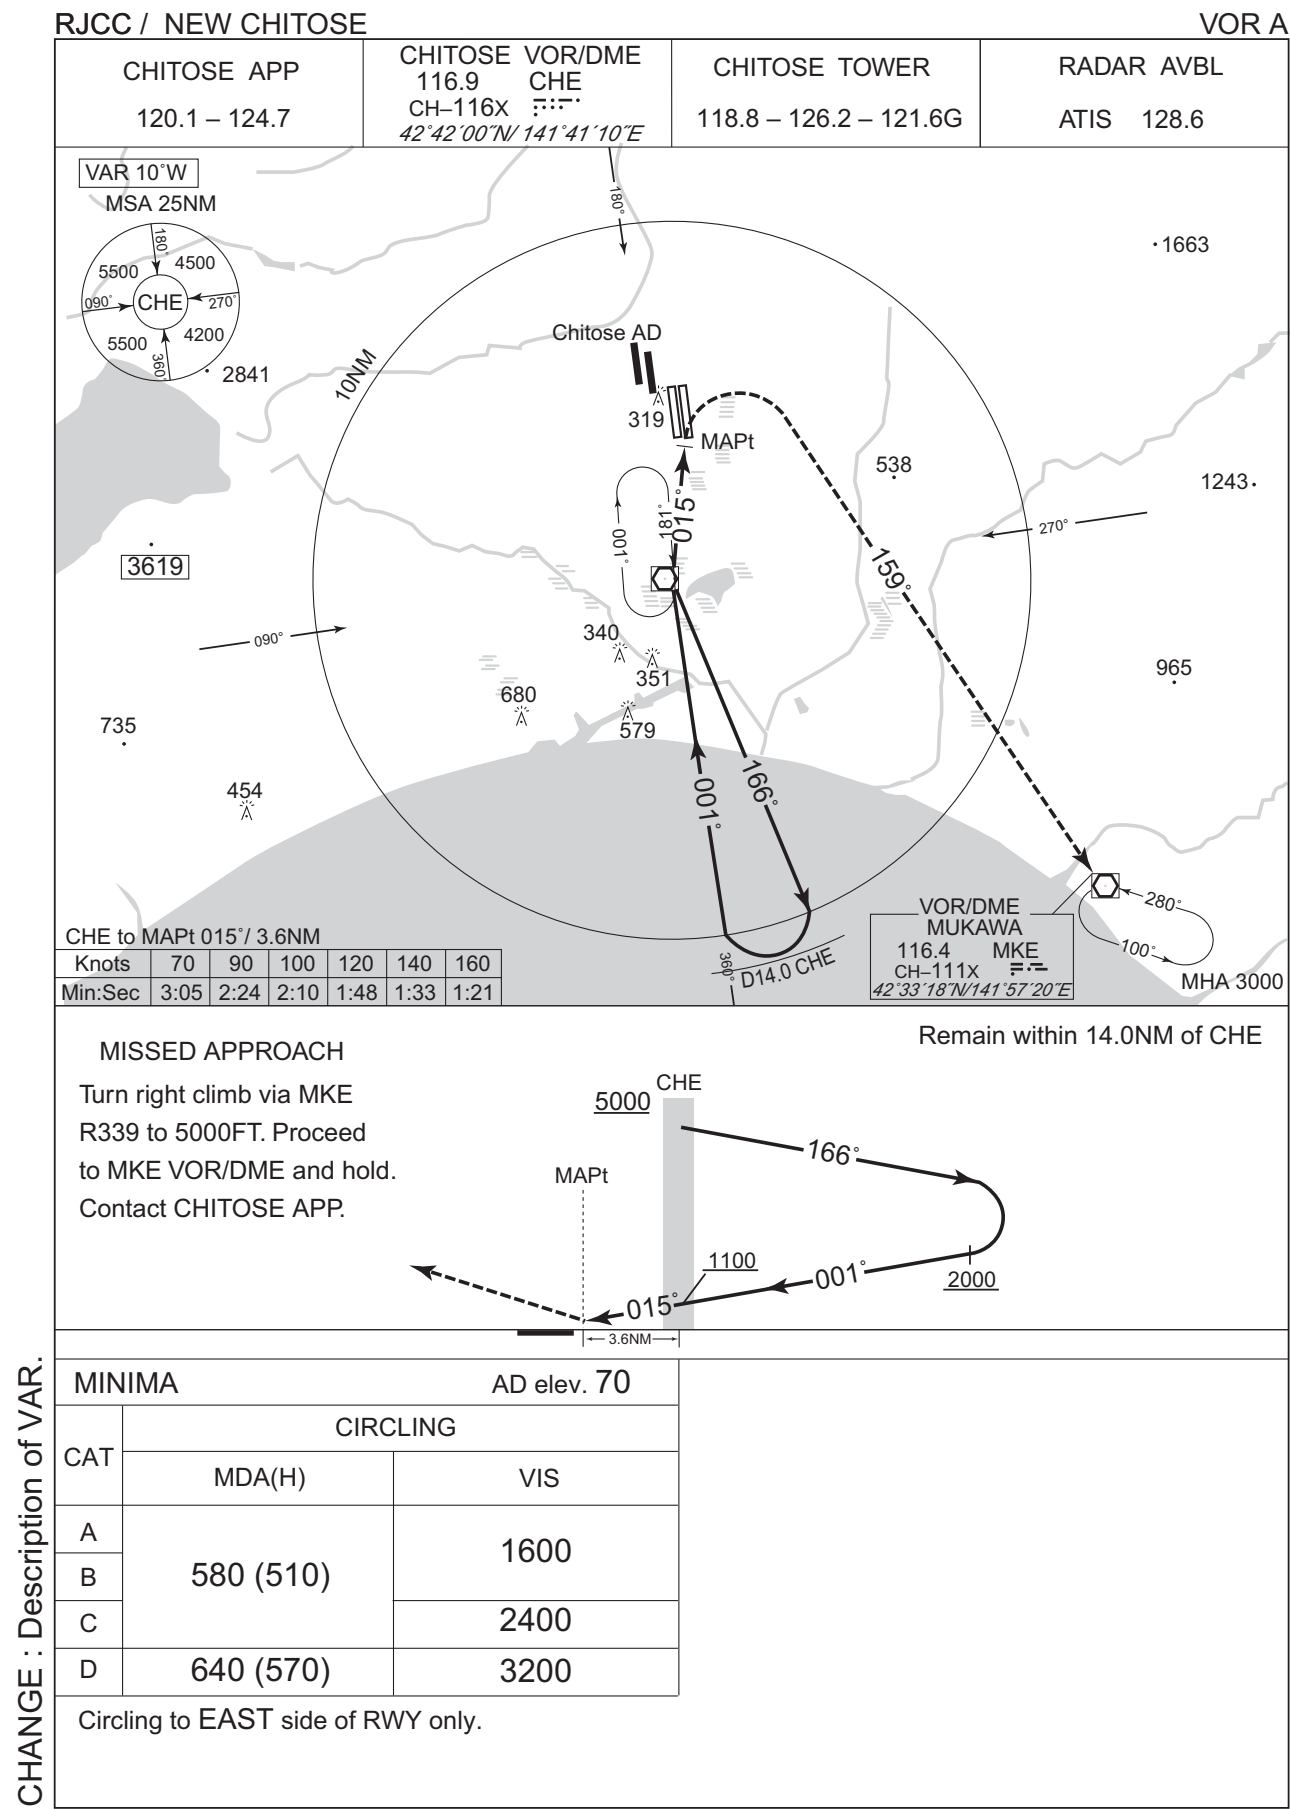


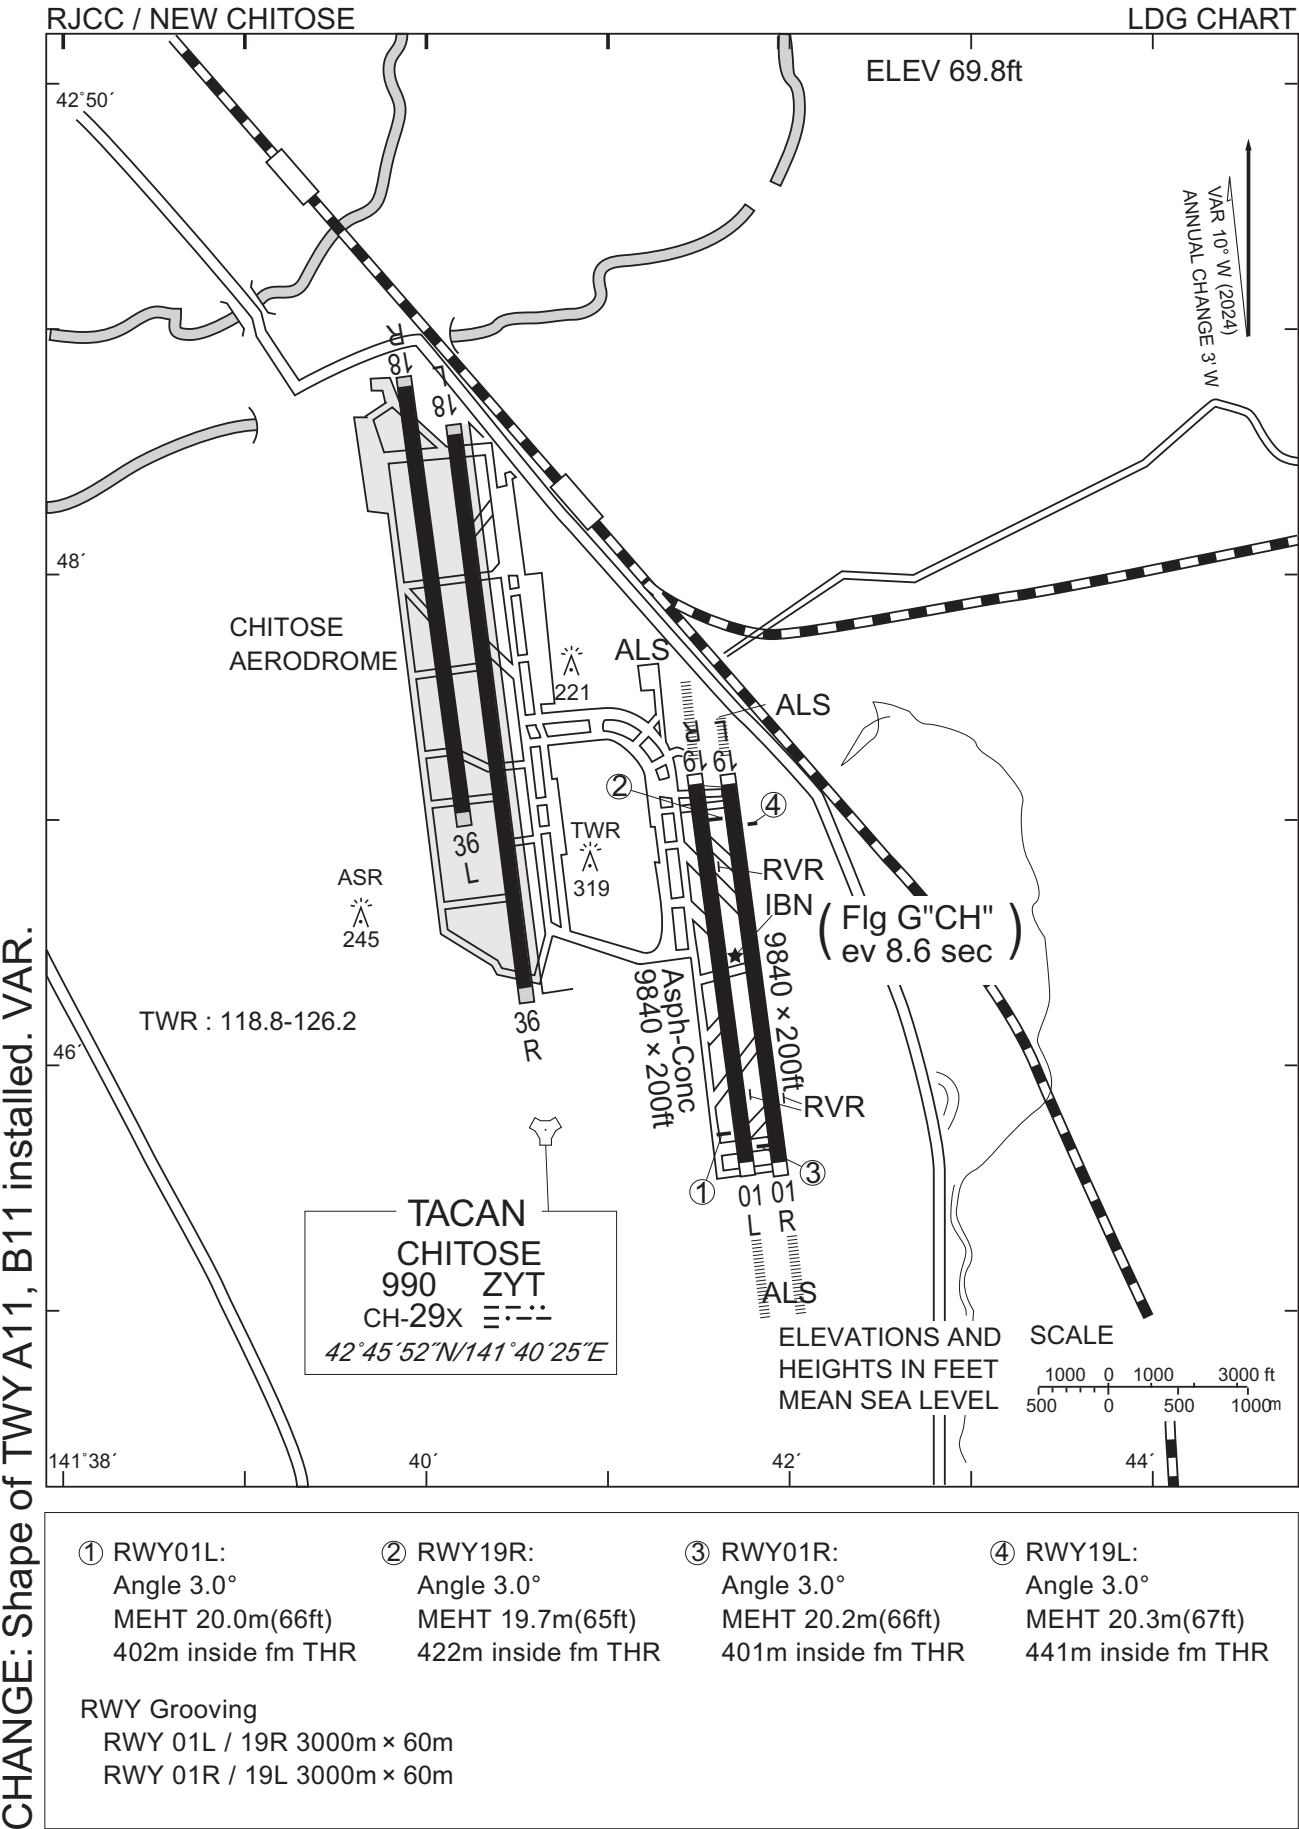

RJCC / NEW CHITOSE

Minimum Vectoring Altitude CHART

VAR 10°W (2024)

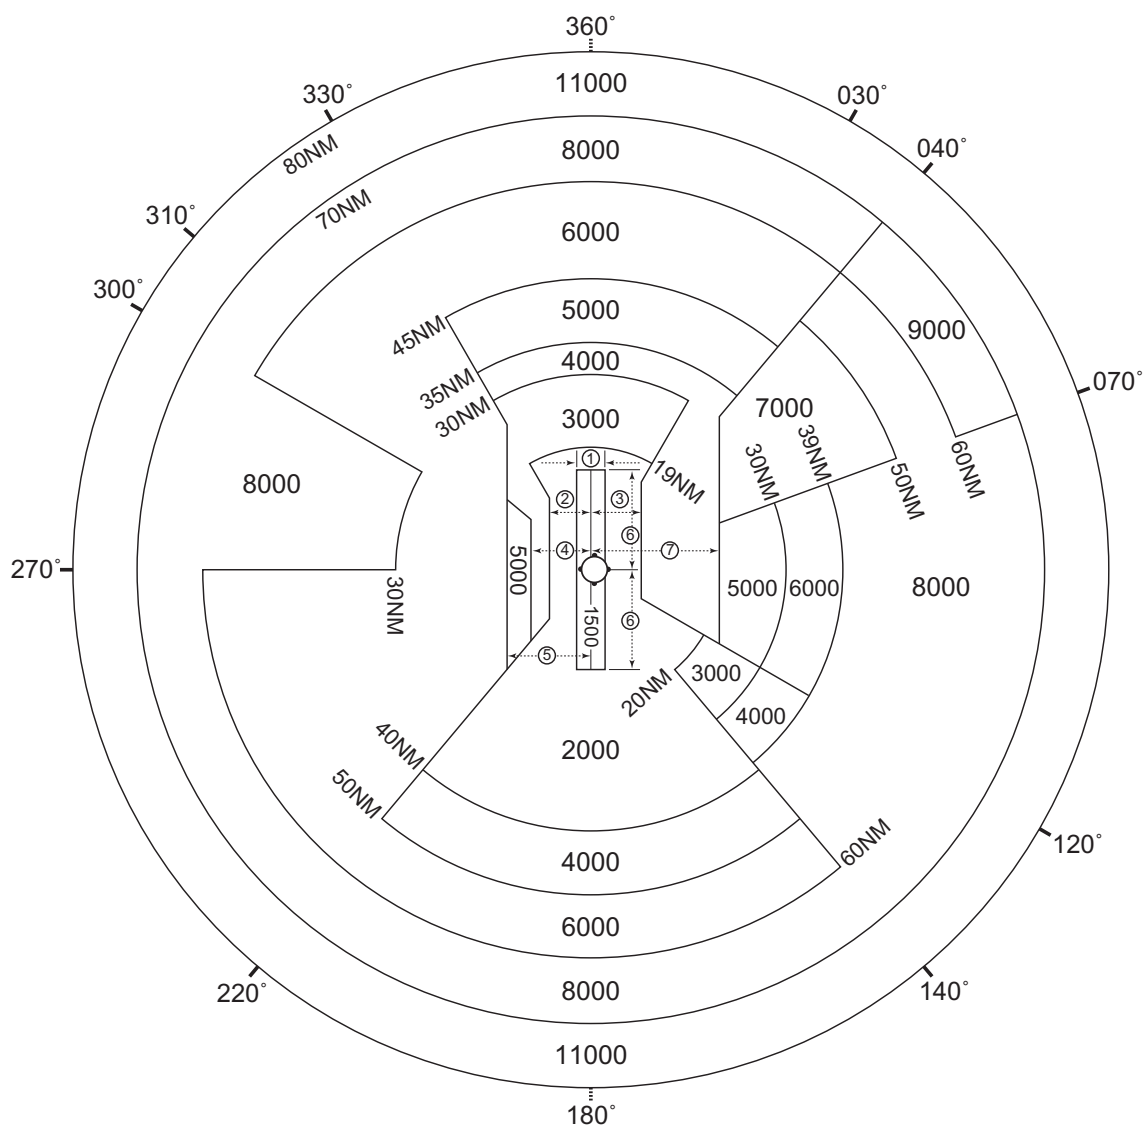

CHANGE: VAR.