

## AD 2 AERODROMES

## RJDU AD 2.1 AERODROME LOCATION INDICATOR AND NAME

## RJDU - OMURA

## RJDU AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

|   |                                                                                              |                                  |
|---|----------------------------------------------------------------------------------------------|----------------------------------|
| 1 | ARP coordinates and site at AD                                                               | 325541N/1295603E                 |
| 2 | Direction and distance from (city)                                                           | 305°/3.3km from JR Omura station |
| 3 | Elevation/ Reference temperature                                                             | 19ft / -                         |
| 4 | Geoid undulation at AD ELEV PSN                                                              | Nil                              |
| 5 | MAG VAR/ Annual change                                                                       | 7°W(2011) / -                    |
| 6 | AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses | JSDF-M                           |
| 7 | Types of traffic permitted(IFR/VFR)                                                          | IFR/VFR                          |
| 8 | Remarks                                                                                      | Nil                              |

## RJDU AD 2.3 OPERATIONAL HOURS

|    |                           |                                                                                         |
|----|---------------------------|-----------------------------------------------------------------------------------------|
| 1  | AD Administration         | H24                                                                                     |
| 2  | Customs and immigration   | Nil                                                                                     |
| 3  | Health and sanitation     | Nil                                                                                     |
| 4  | AIS Briefing Office       | H24                                                                                     |
| 5  | ATS Reporting Office(ARO) | Nil                                                                                     |
| 6  | MET Briefing Office       | H24                                                                                     |
| 7  | ATS                       | 2200-1300<br>Remarks: 2200-2245 and 1215-1300, AFIS provided by Fukuoka Airport Office. |
| 8  | Fuelling                  | Nil                                                                                     |
| 9  | Handling                  | Nil                                                                                     |
| 10 | Security                  | Nil                                                                                     |
| 11 | De-icing                  | Nil                                                                                     |
| 12 | Remarks                   | Nil                                                                                     |

**RJDU AD 2.4 HANDLING SERVICES AND FACILITIES**

|   |                                         |                       |
|---|-----------------------------------------|-----------------------|
| 1 | Cargo-handling facilities               | Nil                   |
| 2 | Fuel/ oil types                         | JP-5                  |
| 3 | Fuelling facilities/ capacity           | Fuel truck refuelling |
| 4 | De-icing facilities                     | Nil                   |
| 5 | Hangar space for visiting aircraft      | Nil                   |
| 6 | Repair facilities for visiting aircraft | Nil                   |
| 7 | Remarks                                 | Nil                   |

**RJDU AD 2.5 PASSENGER FACILITIES**

|   |                      |     |
|---|----------------------|-----|
| 1 | Hotels               | Nil |
| 2 | Restaurants          | Nil |
| 3 | Transportation       | Nil |
| 4 | Medical facilities   | Nil |
| 5 | Bank and Post Office | Nil |
| 6 | Tourist Office       | Nil |
| 7 | Remarks              | Nil |

**RJDU AD 2.6 RESCUE AND FIRE FIGHTING SERVICES**

|   |                                             |     |
|---|---------------------------------------------|-----|
| 1 | AD category for fire fighting               | Nil |
| 2 | Rescue equipment                            | Nil |
| 3 | Capability for removal of disabled aircraft | Nil |
| 4 | Remarks                                     | Nil |

**RJDU AD 2.7 SEASONAL AVAILABILITY-CLEARING**

|   |                             |     |
|---|-----------------------------|-----|
| 1 | Types of clearing equipment | Nil |
| 2 | Clearance priorities        | Nil |
| 3 | Remarks                     | Nil |

**RJDU AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA**

|   |                                     |     |
|---|-------------------------------------|-----|
| 1 | Apron surface and strength          | Nil |
| 2 | Taxiway width, surface and strength | Nil |
| 3 | ACL and elevation                   | Nil |
| 4 | VOR checkpoints                     | Nil |
| 5 | INS checkpoints                     | Nil |
| 6 | Remarks                             | Nil |

**RJDU AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS**

|   |                                                                                                                |                                                                                                                                                                                               |
|---|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands | Nil                                                                                                                                                                                           |
| 2 | RWY and TWY markings and LGT                                                                                   | RWY : RWY18/36<br>(Marking) : RWY designation, RWY CL, RWY THR, Aiming point, TDZ<br>(LGT) : REDL, RTHL, RENL, RWY DIST marker LGT<br><br>TWY :<br>(Marking) : TWY CL<br>(LGT) : TWY edge LGT |
| 3 | Stop bars                                                                                                      | Nil                                                                                                                                                                                           |
| 4 | Remarks                                                                                                        | Nil                                                                                                                                                                                           |

**RJDU AD 2.10 AERODROME OBSTACLES**

| RWY/Area affected | Obstacle type | Coordinates      | Elevation | Markings/ LGT | Remarks                                              |
|-------------------|---------------|------------------|-----------|---------------|------------------------------------------------------|
| RWY36             | Island        | 325408N/1295629E | 256ft     | Nil           | See AD2.14<br>The Unusable area<br>of PAPI for RWY36 |

**RJDU AD 2.11 METEOROLOGICAL INFORMATION PROVIDED**

|    |                                                                        |                     |
|----|------------------------------------------------------------------------|---------------------|
| 1  | Associated MET Office                                                  | OMURA               |
| 2  | Hours of service<br>MET Office outside hours                           | H24                 |
| 3  | Office responsible for TAF preparation<br>Periods of validity          | Nil                 |
| 4  | Trend forecast<br>Interval of issuance                                 | Nil                 |
| 5  | Briefing/ consultation provided                                        | P, Ja               |
| 6  | Flight documentation Language(s) used                                  | Nil                 |
| 7  | Charts and other information<br>available for briefing or consultation | S, U, P, E, C, W, N |
| 8  | Supplementary equipment<br>available for providing information         | Nil                 |
| 9  | ATS units provided with information                                    | Nil                 |
| 10 | Additional information<br>(limitation of service, etc.)                | Nil                 |

## RJDU AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

| Designations<br>RWY NR                                                                                                                                                                                                                                                                                                                                                                           | TRUE BRG | Dimensions of<br>RWY(M) | Strength(PCN) and<br>surface of RWY                                            | THR coordinates<br>THR geoid undulation | THR elevation and<br>highest elevation of TDZ<br>of precision APP RWY |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------------------------|--------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------------------------------------------|
| 1                                                                                                                                                                                                                                                                                                                                                                                                | 2        | 3                       | 4                                                                              | 5                                       | 6                                                                     |
| 18                                                                                                                                                                                                                                                                                                                                                                                               | 175.35   | 1200 x 30               | SW15000kg<br>(33000lbs)<br>DW17000kg<br>(37400lbs)<br>DTW24000kg<br>(52800lbs) | 325600.47N<br>1295601.33E               | THR ELEV : 18.6ft                                                     |
| 36                                                                                                                                                                                                                                                                                                                                                                                               | 355.35   | 1200 x 30               | SW15000kg<br>(33000lbs)<br>DW17000kg<br>(37400lbs)<br>DTW24000kg<br>(52800lbs) | 325521.65N<br>1295605.09E               | THR ELEV : 8.5ft                                                      |
| Slope of RWY                                                                                                                                                                                                                                                                                                                                                                                     |          | Strip<br>Dimensions(M)  | Remarks                                                                        |                                         |                                                                       |
| 7                                                                                                                                                                                                                                                                                                                                                                                                |          | 10                      | 12                                                                             |                                         |                                                                       |
| See below chart                                                                                                                                                                                                                                                                                                                                                                                  |          | 1320 x 90<br>1320 x 90  | Nil                                                                            |                                         |                                                                       |
| Slope of RWY                                                                                                                                                                                                                                                                                                                                                                                     |          |                         |                                                                                |                                         |                                                                       |
| <div><div><div>RWY18</div><div>18.6FT</div><div>1.30%</div><div>10.0FT</div><div>0.26%</div><div>11.8FT</div><div>0.23%</div><div>13.3FT</div><div>0.11%</div><div>14.0FT</div><div>0.41%</div><div>16.7FT</div><div>1.25%</div><div>8.5FT</div><div>RWY36</div></div><div><div>0m</div><div>200m</div><div>400m</div><div>600m</div><div>800m</div><div>1000m</div><div>1200m</div></div></div> |          |                         |                                                                                |                                         |                                                                       |

## RJDU AD 2.13 DECLARED DISTANCES

| RWY Designator | TORA<br>(m) | TODA<br>(m) | ASDA<br>(m) | LDA<br>(m) | Remarks |
|----------------|-------------|-------------|-------------|------------|---------|
| 1              | 2           | 3           | 4           | 5          | 6       |
|                |             |             |             |            |         |


## RJDU AD 2.14 APPROACH AND RUNWAY LIGHTING

| RWY<br>Designator                                                                | APCH<br>LGT<br>type<br>LEN<br>INTST | RTHL<br>Color<br>WBAR | PAPI<br>(VASIS)<br>Angle<br>DIST FM THR<br>MEHT | RTZL<br>LEN | RCLL<br>LEN<br>Spacing<br>Color<br>INTST | REDL<br>LEN<br>Spacing<br>Color<br>INTST             | RENL<br>Color<br>WBAR | STWL<br>LEN<br>Color |
|----------------------------------------------------------------------------------|-------------------------------------|-----------------------|-------------------------------------------------|-------------|------------------------------------------|------------------------------------------------------|-----------------------|----------------------|
| 1                                                                                | 2                                   | 3                     | 4                                               | 5           | 6                                        | 7                                                    | 8                     | 9                    |
| 18                                                                               |                                     | Green<br>-            | PAPI<br>3.0°/LEFT<br>289m<br>44.6ft             |             |                                          | 1200m<br>60m<br>Coded color<br>(White/Yellow)<br>LIH | Red                   | Nil                  |
| 36                                                                               |                                     | Green<br>-            | PAPI<br>3.0°/LEFT<br>263m<br>44.6ft             |             |                                          | 1200m<br>60m<br>Coded color<br>(White/Yellow)<br>LIH | Red                   | Nil                  |
| Remarks                                                                          |                                     |                       |                                                 |             |                                          |                                                      |                       |                      |
| 10                                                                               |                                     |                       |                                                 |             |                                          |                                                      |                       |                      |
| Overrun area edge LGT(LEN : 60m Color : Red)<br>RWY THR ID LGT for RWY 18/36 THR |                                     |                       |                                                 |             |                                          |                                                      |                       |                      |

## Unusable area of PAPI

滑走路36末端側進入角指示灯の使用制限は下図の通り。

The unusable area of PAPI for runway 36 is shown in the charts below.

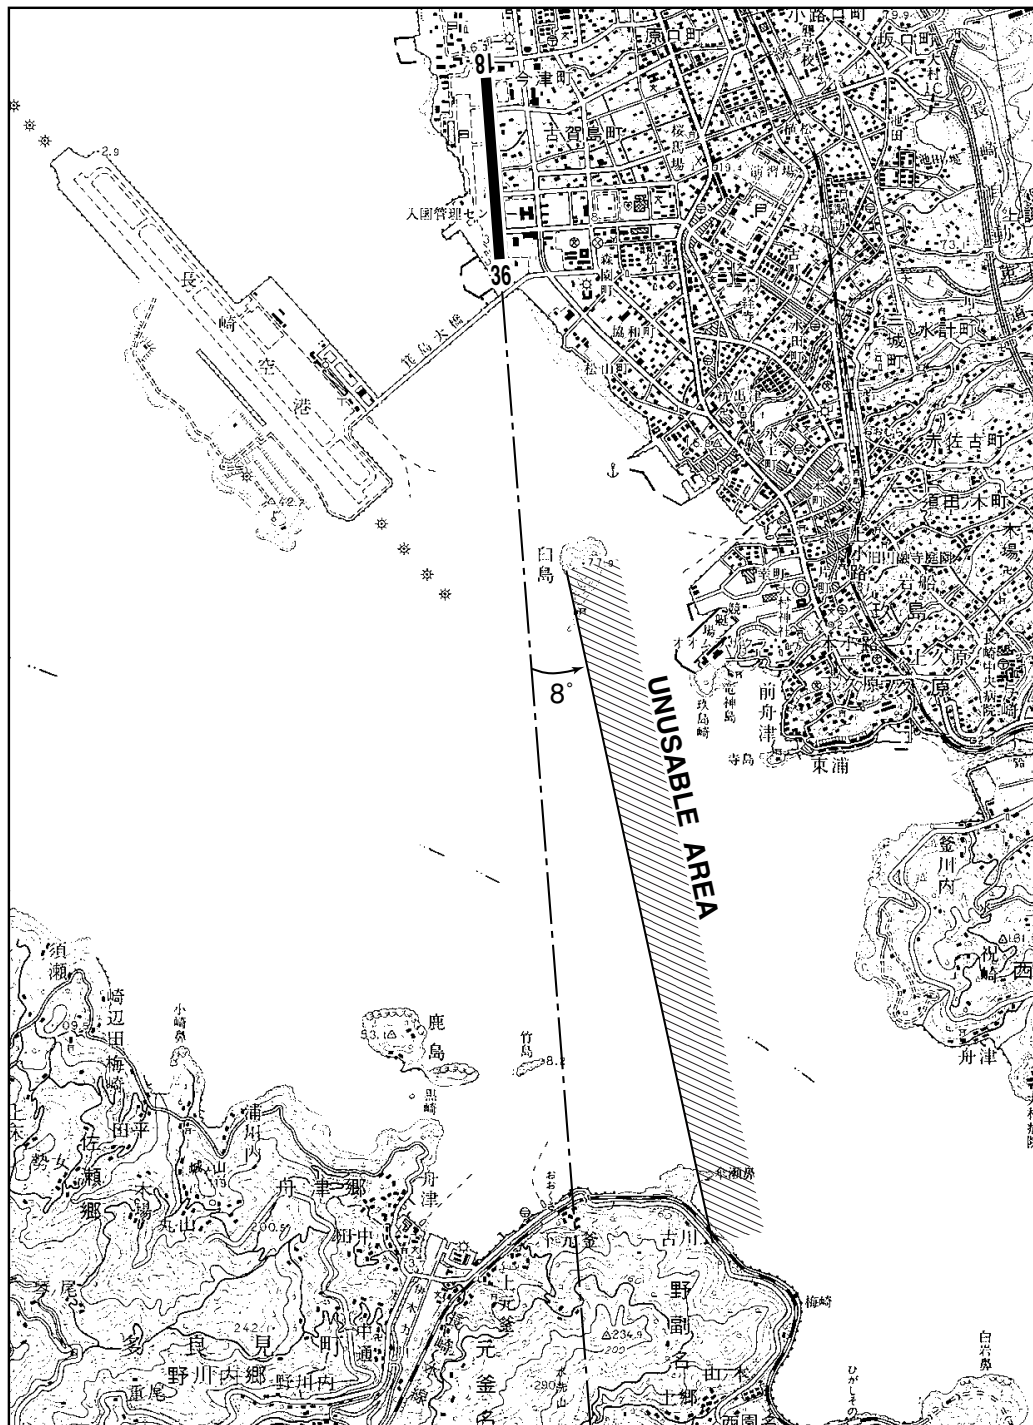

**RJDU AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY**

|   |                                                          |                                                     |
|---|----------------------------------------------------------|-----------------------------------------------------|
| 1 | ABN/IBN location, characteristics and hours of operation | ABN : 325544N/1295558E, White EV2sec, HO            |
| 2 | LDI location and LGT<br>Anemometer location and LGT      | LDI : Nil<br>Anemometer : 200m from RWY18 THR, LGTD |
| 3 | TWY edge and centerline lighting                         | TWY edge LGT : Blue<br>TWY CL LGT : Nil             |
| 4 | Secondary power supply/ switch-over time                 | Within 15 sec                                       |
| 5 | Remarks                                                  | WDI LGT, OBST LGT                                   |

**RJDU AD 2.16 HELICOPTER LANDING AREA**

|     |
|-----|
| Nil |
|-----|

**RJDU AD 2.17 ATS AIRSPACE**

| Designation and lateral limits |                         | Vertical limits (ft) | Airspace classification | ATS unit call sign Language                       | Remarks                   |
|--------------------------------|-------------------------|----------------------|-------------------------|---------------------------------------------------|---------------------------|
| 1                              |                         | 2                    | 3                       | 4                                                 | 6                         |
| NAGASAKI CTR                   | See RJFU AD2.17         |                      | D                       | NAGASAKI TOWER<br>NAGASAKI RADIO(1)<br>En         | (1)2200-2245<br>1215-1300 |
| FUKUOKA ACA                    | See RJFF attached chart |                      | E                       | FUKUOKA APP<br>FUKUOKA DEP<br>FUKUOKA RADAR<br>En |                           |
| FUKUOKA TCA                    | See RJFF attached chart |                      | E                       | FUKUOKA TCA<br>En                                 |                           |

## RJDU AD 2.18 ATS COMMUNICATION FACILITIES

| Service designation | Call sign                         | Frequency                                                                           | Hours of operation                                                                        | Remarks                                       |
|---------------------|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-----------------------------------------------|
| 1                   | 2                                 | 3                                                                                   | 4                                                                                         | 5                                             |
| APP                 | Fukuoka Approach                  | 119.175MHz(1)<br>121.0MHz<br>121.025MHz<br>261.2MHz<br>121.5MHz(E)<br>243.0MHz(E)   | 2200 - 1300                                                                               | (1)Primary                                    |
| ASR                 | Fukuoka Radar                     | 119.175MHz(1)<br>121.0MHz<br>121.025MHz<br>261.2MHz<br>121.5MHz(E)<br>243.0MHz(E)   | 2200 - 1300                                                                               |                                               |
| DEP                 | Fukuoka Departure                 | 119.175MHz(1)<br>121.0MHz<br>121.025MHz<br>261.2MHz<br>121.5MHz(E)<br>243.0MHz(E)   | 2200 - 1300                                                                               |                                               |
| TCA                 | Fukuoka TCA                       | 121.175MHz<br>245.3MHz                                                              | 2300 - 1030                                                                               |                                               |
| TWR                 | Nagasaki Tower                    | 118.5MHz(1)<br>126.2MHz<br>122.7MHz<br>236.8MHz<br>121.5MHz(E)<br>243.0MHz(E)       | 2245 - 1215(*)                                                                            |                                               |
| GND                 | Nagasaki Ground<br>Omura Seadrome | 121.6MHz<br>228.2MHz(2)<br>138.3MHz(2)<br>123.1MHz(3)<br>121.5MHz(E)<br>243.0MHz(E) | 2245 - 1215(*)<br>2300 - 0745<br>EXC<br>FRI 0746-SUN 2259<br>and HOL<br>Other time 1HR PN | (2)For taxi instruction<br>(3)For rescue only |
| AFIS                | Nagasaki Radio                    | 118.5MHz                                                                            | 2200 - 2245<br>1215-1300(*)                                                               | Operated by Fukuoka Airport<br>Office         |

\*Depending on air traffic situation, ATC service will be provided from 2230 to 2245 and from 1215 to 1230.



## RJDU AD 2.19 RADIO NAVIGATION AND LANDING AIDS

| Type of aid       | ID  | Frequency             | Hours of operation | Position of transmitting antenna coordinates | Elevation of DME transmitting antenna | Remarks                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------|-----|-----------------------|--------------------|----------------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                 | 2   | 3                     | 4                  | 5                                            | 6                                     | 7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| VOR<br>(7°W/2020) | OLE | 116.6MHz              | H24                | 325418.89N/<br>1295504.73E                   |                                       | VOR unusable :<br>040°-070° beyond 25nm BLW 6000ft<br>070°-090° beyond 20nm BLW 6000ft                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| DME               | OLE | 1200 MHz<br>(CH-113X) | H24                | 325418.89N/<br>1295504.73E                   | 154ft                                 | DME unusable :<br>030°-070° beyond 20nm BLW 6000ft<br>070°-090° beyond 15nm BLW 6000ft<br>160°-170° beyond 30nm BLW 5000ft<br>170°-200° beyond 20nm BLW 4000ft<br>200°-210° beyond 10nm BLW 4000ft<br>210°-240° beyond 20nm BLW 4000ft<br>260°-300° beyond 20nm BLW 4000ft                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| TACAN             | JBT | 1048MHz<br>(CH-87Y)   | H24                | 325533N/<br>1295556E                         | 80ft                                  | TACAN Unusable:<br>R350 - 010 beyond 26nm BLW 5000ft<br>R010 - 020 beyond 31nm BLW 6000ft<br>R020 - 030 beyond 25nm BLW 6000ft<br>R030 - 040 beyond 21nm BLW 6000ft<br>R040 - 090 beyond 14nm BLW 6000ft<br>R090 - 100 beyond 21nm BLW 6000ft<br>R100 - 110 beyond 30nm BLW 7000ft<br>R120 - 130 beyond 30nm BLW 7000ft<br>R140 - 150 beyond 29nm BLW 5000ft<br>R150 - 160 beyond 37nm BLW 5000ft<br>R160 - 170 beyond 29nm BLW 5000ft<br>R170 - 180 beyond 26nm BLW 5000ft<br>R180 - 200 beyond 20nm BLW 4000ft<br>R200 - 220 beyond 12nm BLW 4000ft<br>R220 - 230 beyond 20nm BLW 4000ft<br>R230 - 240 beyond 27nm BLW 4000ft<br>R240 - 250 beyond 36nm BLW 4000ft<br>R250 - 260 beyond 28nm BLW 4000ft<br>R260 - 270 beyond 22nm BLW 4000ft<br>R270 - 280 beyond 19nm BLW 4000ft<br>R280 - 290 beyond 25nm BLW 4000ft<br>R290 - 300 beyond 36nm BLW 4000ft<br>R310 - 320 beyond 37nm BLW 4000ft<br>R330 - 350 beyond 36nm BLW 5000ft |

## RJDU AD 2.20 LOCAL TRAFFIC REGULATIONS

## 1. Airport regulations

Prior notification should be required with Nagasaki Airport Office for the purpose of getting the permission when crossing Nagasaki CTR from 2200UTC to 2245UTC or from 1215UTC to 1300UTC.

For further information(0000UTC-0800UTC MON-FRI EXC HOL)

Air Traffic Controller Office, Nagasaki Airport Office

TEL: 0957-53-6870

7 時 00 分から 7 時 45 分または 21 時 15 分から 22 時 00 分までの間、長崎管制圏を通過する場合は、当該通過の許可を得るためにあらかじめ長崎空港事務所へ調整すること。

問い合わせ先

長崎空港事務所管制官事務室（月曜日から金曜日までのうち、9 時 00 分から 17 時 00 分までの間。ただし休日を除く。）

TEL: 0957-53-6870

## 2. Taxiing to and from stands

Nil

## 3. Parking area for small aircraft(General aviation)

Nil

## 4. Parking area for helicopters

Nil

## 5. Apron - taxiing during winter conditions

Nil

## 6. Taxiing - limitations

Nil

## 7. School and training flights - technical test flights - use of runways

Nil

## 8. Helicopter traffic - limitation

Nil

## 9. Removal of disabled aircraft from runways

Nil

**RJDU AD 2.21 NOISE ABATEMENT PROCEDURES**

Nil

**RJDU AD 2.22 FLIGHT PROCEDURES****1. TAKE OFF MINIMA**

|                                                    | RWY | ACFT<br>CAT | REDL & RCLL     |          | REDL or RCLL<br>or RCL Marking |            | NIL<br>(DAYTIME ONLY) |            |
|----------------------------------------------------|-----|-------------|-----------------|----------|--------------------------------|------------|-----------------------|------------|
|                                                    |     |             | CEIL-RVR        | CEIL-VIS | CEIL-RVR                       | CEIL-VIS   | CEIL-RVR              | CEIL-VIS   |
| Multi-Engine<br>ACFT with<br>TKOF ALTN<br>AP FILED | 18  | A,B,C       | -               | -        | -                              | 200'-1600m | -                     | 200'-1600m |
|                                                    | 36  |             | -               | -        | -                              | 200'-1600m | -                     | 200'-1600m |
| OTHER                                              | 18  | A,B,C       | AVBL LDG MINIMA |          |                                |            |                       |            |
|                                                    | 36  |             |                 |          |                                |            |                       |            |

**2. Lost communication procedures for Arrival Aircraft under radar navigational guidance.**

If radio communications with FUKUOKA Approach/Radar are lost for 30 seconds, squawk Mode A/3 Code 7600 and :

- (I)
1. Contact NAGASAKI Tower / NAGASAKI Radio
  2. If unable, proceed in accordance with Visual Flight Rules.
  3. If unable, proceed to NAGASAKI VOR/DME at last assigned altitude or 4,000 feet whichever is higher, and execute instrument approach.
- (II) Procedures other than above will be issued when situation required.

**RJDU AD 2.23 ADDITIONAL INFORMATION**

Nil

---

**RJDU AD 2.24 CHARTS RELATED TO AN AERODROME**

Aerodrome/Heliport Chart

Standard Departure Chart - Instrument (NORTH)

Standard Departure Chart - Instrument (WEST)

Standard Departure Chart - Instrument (SOUTH)

Standard Departure Chart - Instrument (REVERSAL)

Standard Departure Chart - Instrument (TRANSITION)

Standard Arrival Chart - Instrument (IVSAT)

Instrument Approach Chart (TACAN RWY18)

Instrument Approach Chart (LOC C)

Instrument Approach Chart (VOR D)

Instrument Approach Chart (VOR E)


Other Chart (Visual REP)

**INTENTIONALLY LEFT BLANK**

RJDU / OMURA

AD CHART

CHANGE: TWY A-3 deleted.

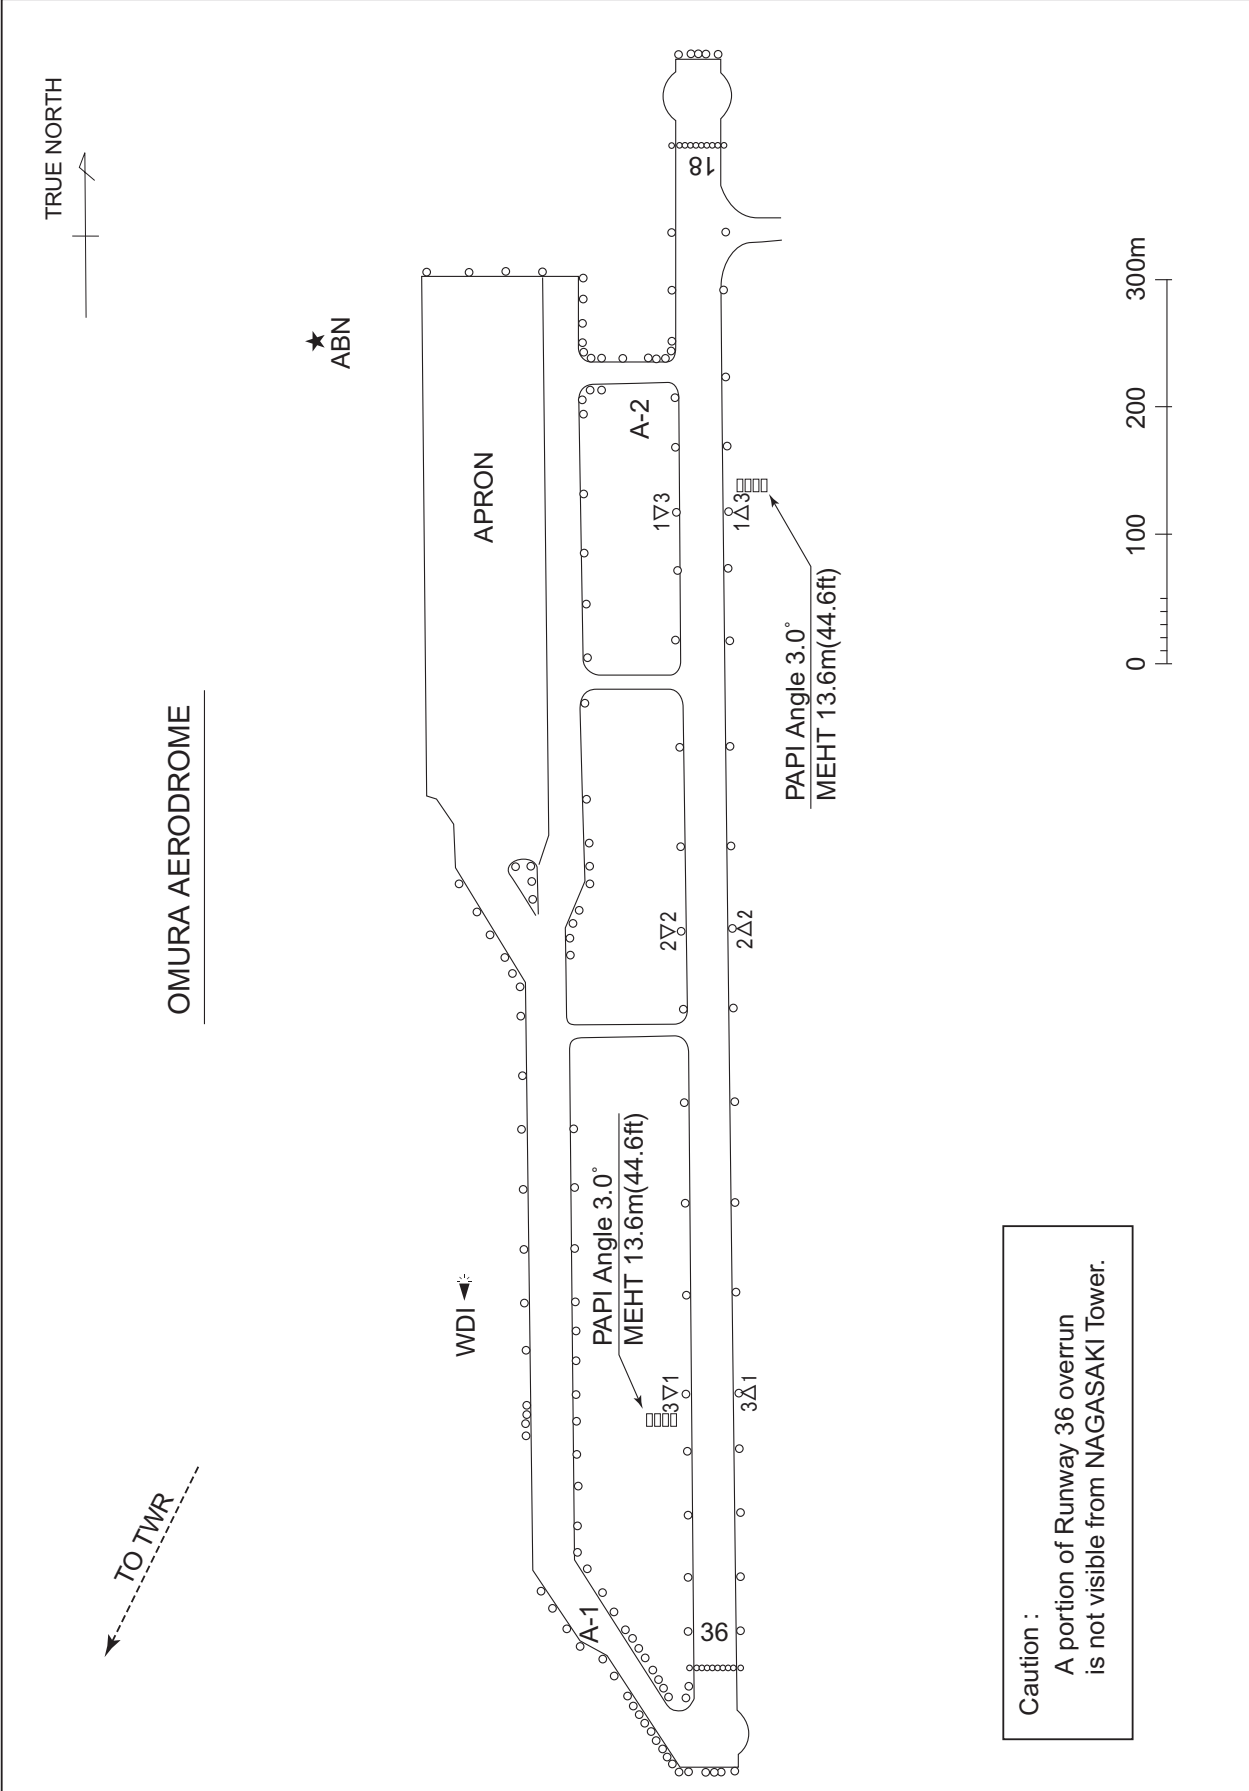

STANDARD DEPARTURE CHART-INSTRUMENT

RJDU / OMURA

SID

OMURA NORTH THREE DEPARTURE

RWY 18: Climb RWY HDG to 700FT, turn right HDG016° to intercept and proceed via OLE R331 to PEARL...

RWY 36: Climb RWY HDG to 500FT, turn left HDG286° to intercept and proceed via OLE R331 to PEARL...


... Cross PEARL at or above 6000FT(\*).

\* For FUKUOKA TRANSITION : Cross PEARL at or above 8000FT.

NOTE RWY 18: 7.0% climb gradient required up to 2000FT.

OBST ALT 1575FT located at 4.7NM 214° FM end of RWY18.

RWY 36: 5.0% climb gradient required up to 500FT.

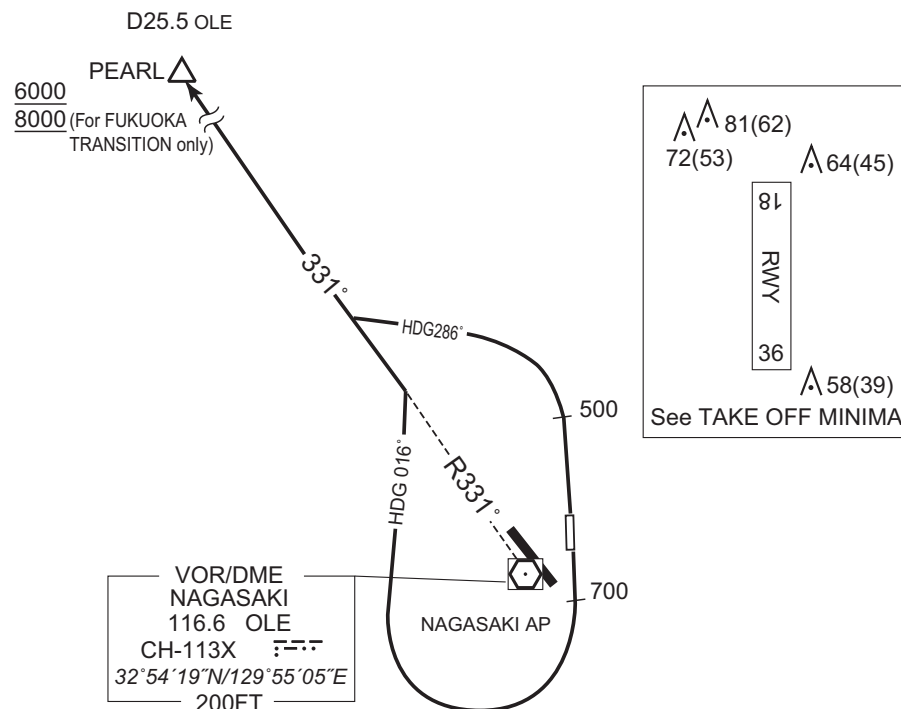

CHANGE : OBST.

## STANDARD DEPARTURE CHART-INSTRUMENT

RJDU / OMURA

SID

OMURA WEST TWO DEPARTURE

RWY 18: Climb RWY HDG to 700FT, turn right, via OLE R247...


RWY 36: Climb RWY HDG to 1500FT, turn left HDG202° to intercept  
and proceed via OLE R247...

... to SUMOU.

Cross SUMOU at or above 4000FT.

Note RWY 18: 7.0% climb gradient required up to 2000FT.  
OBST ALT 1575FT located at 4.7NM 214° FM end of RWY18.

RWY 36: 5.0% climb gradient required up to 1500FT.  
OBST ALT 1739FT located at 8.4NM 360° FM end of RWY36.

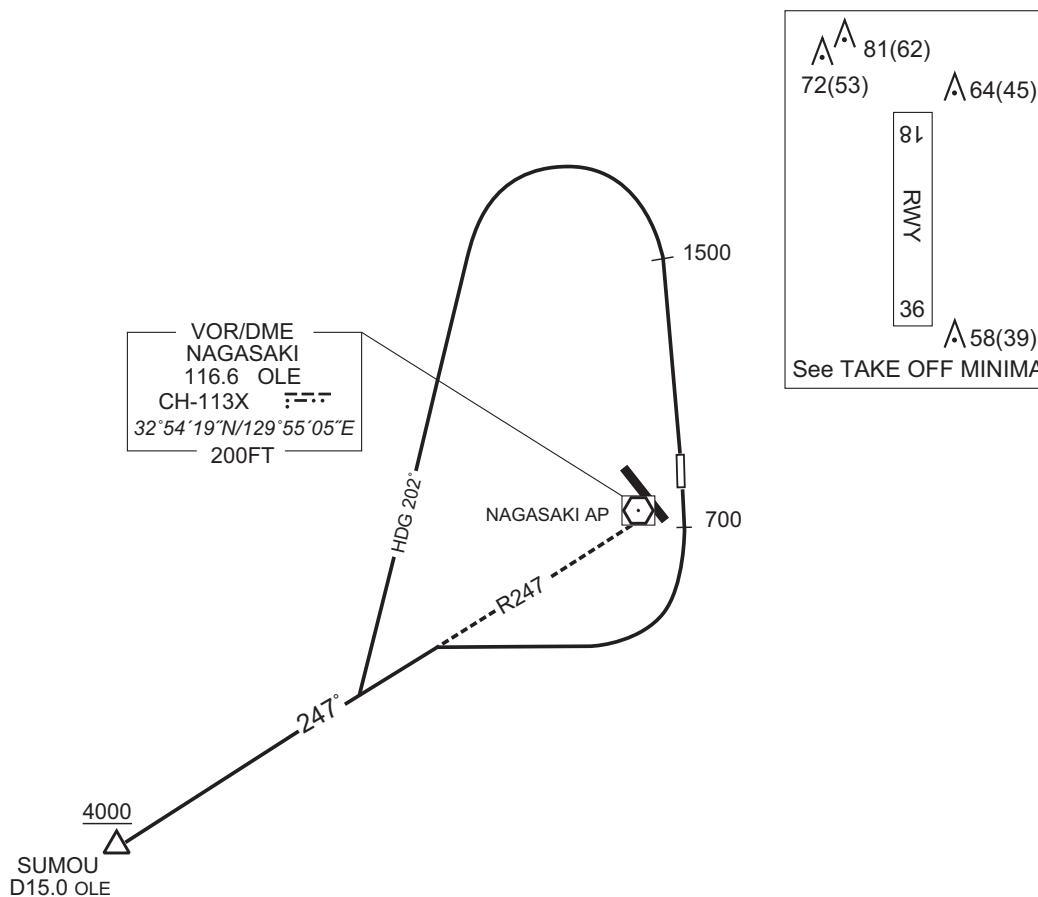

CHANGE : OBST.

STANDARD DEPARTURE CHART-INSTRUMENT

RJDU / OMURA


SID

OMURA SOUTH THREE DEPARTURE

RWY 18: Climb RWY HDG to 700FT, turn left, via OLE R144 to 9.0DME, turn right to intercept and proceed via OLE R147 to KAZSA. Cross OLE R144/5.0DME at or above 1500FT.

RWY 36: Climb RWY HDG to 1500FT, turn left to OLE VOR/DME, via OLE R144 to 9.0DME, turn right to intercept and proceed via OLE R147 to KAZSA.

Note RWY 18: 5.0% climb gradient required up to 1500FT.  
OBST ALT 329FT located at 1.2NM 171° FM end of RWY18.  
OBST ALT 1018FT located at 4.4NM 185° FM end of RWY18.  
RWY 36: 5.0% climb gradient required up to 1500FT.  
OBST ALT 1739FT located at 8.4NM 360° FM end of RWY36.

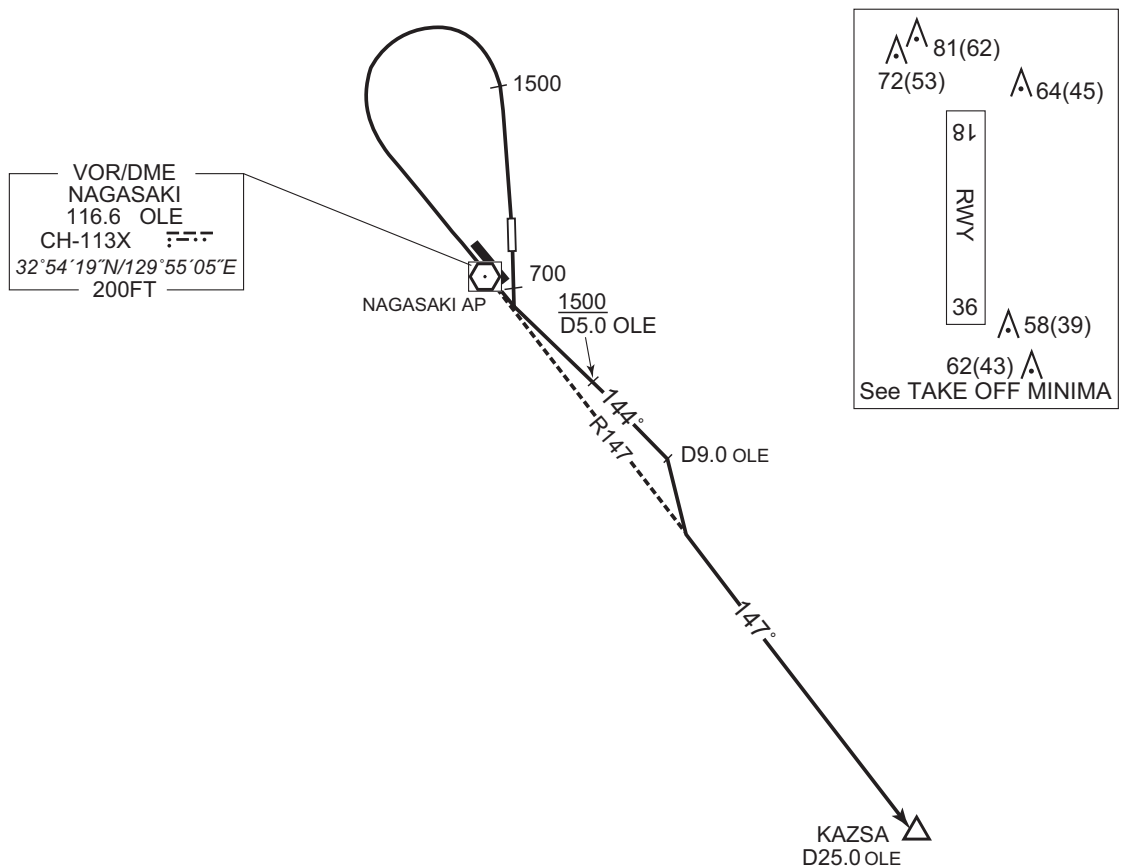

CHANGE : PROC renamed. OBST.



## STANDARD DEPARTURE CHART-INSTRUMENT

RJDU / OMURA


SID

OMURA REVERSAL THREE DEPARTURE

RWY 18: Climb RWY HDG to 700FT, turn left, via OLE R144 to 6.0 DME,  
turn right, direct to OLE VOR/DME.  
Cross OLE VOR/DME at or above 5000FT.

RWY 36: Climb RWY HDG to 500FT, turn left HDG286° to intercept  
and proceed via OLE R331 to 8.0DME  
turn left, direct to OLE VOR/DME.  
Cross OLE VOR/DME at or above 5000FT.

Note RWY 18: 5.0% climb gradient required up to 1500FT.  
OBST ALT 329FT located at 1.2NM 171° FM end of RWY18.  
OBST ALT 1018FT located at 4.4NM 185° FM end of RWY18.  
RWY 36: 5.0% climb gradient required up to 1500FT.  
OBST ALT 2067FT located at 9.7NM 269° FM end of RWY36.

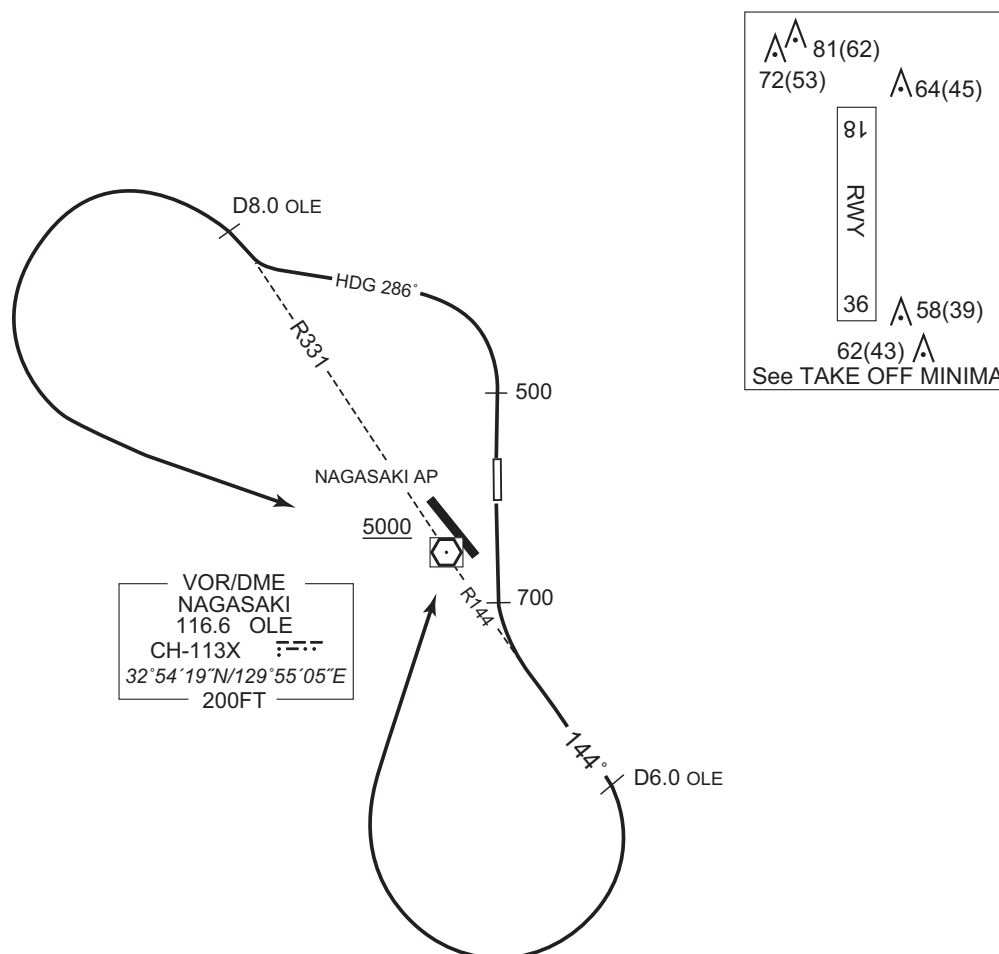


CHANGE : PROC renamed. OBST.

## RJDU / OMURA

## TRANSITION

From over PEARL, via DGC R244 to DGC VORTAC.  
Note : Not applicable for aircraft equipped with TACAN only.

From over PEARL, via IKE R203 to IKE VOR/DME.

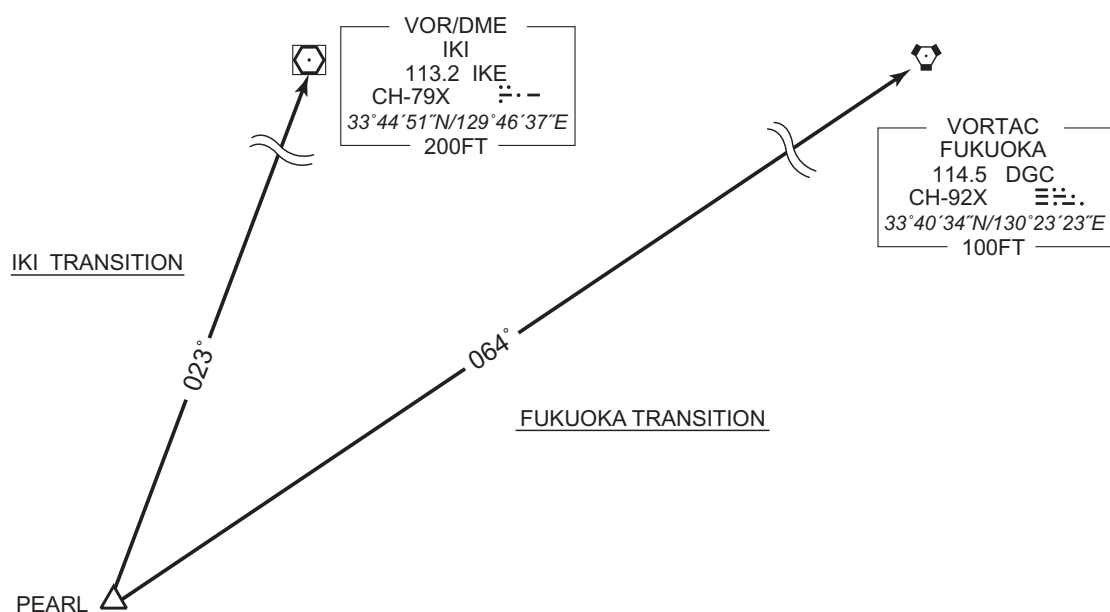

CHANGE : Course FM PEARL to IKE.

## STANDARD DEPARTURE CHART - INSTRUMENT

RJDU / OMURA

TRANSITION

FUKUE TRANSITION

From over SUMOU, turn right HDG308° to intercept and proceed via OLE R263 to FUE VOR/DME.


Maintain 12000FT or below until intercepting OLE R263.

OMURA TRANSITION

From over SUMOU, turn right to intercept and proceed via OLE R279 to OLE VOR/DME.

Maintain 12000FT or below until intercepting OLE R279.

Cross OLE R279/13.0DME at or above 9000FT.

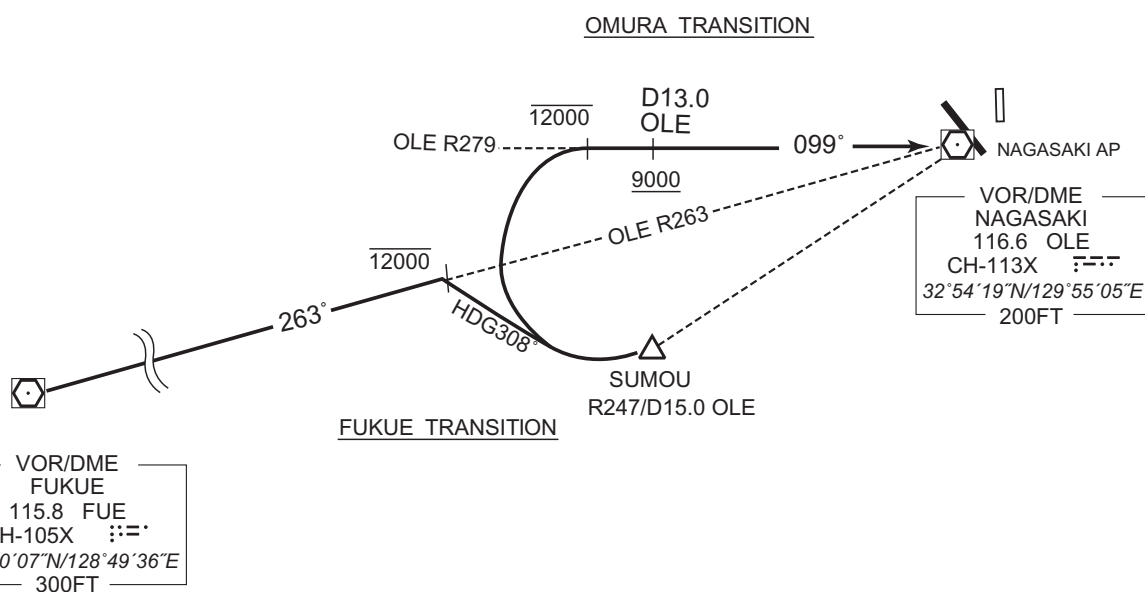

CHANGE : PROC course(FUKUE TRANSITION, OMURA TRANSITION). Radial/DIST FM OLE added(SUMOU).

STANDARD DEPARTURE CHART - INSTRUMENT

RJDU / OMURA

TRANSITION


SASIK TRANSITION

From over KAZSA, via OLE R147 to SASIK.

KAGOSHIMA TRANSITION

From over KAZSA, via HKC R349 to HKC VORTAC.

CHANGE : Radial FM HKC. DIST FM HKC added(KAZSA).

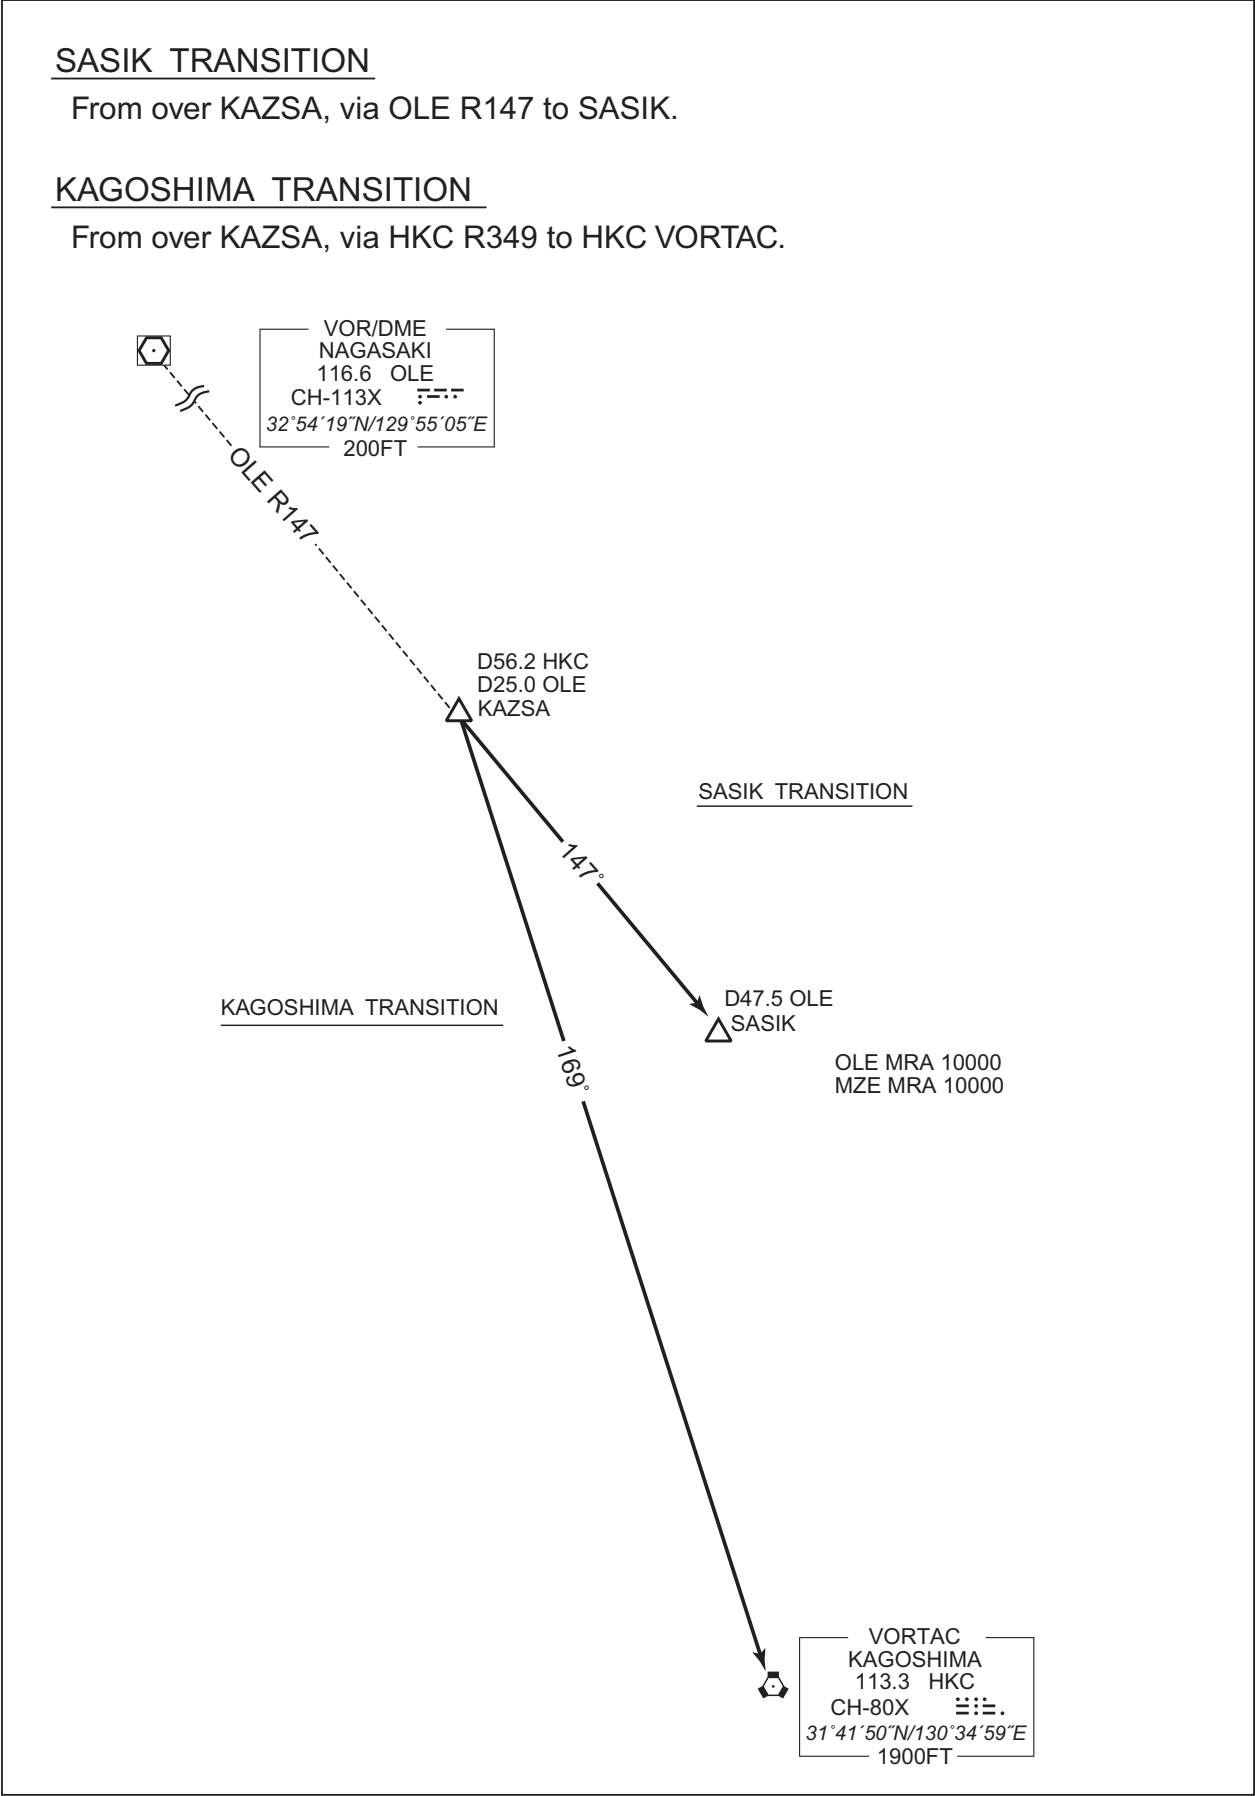


STANDARD ARRIVAL CHART-INSTRUMENT

RJDU / OMURA

STAR

IVSAT ARRIVAL

From over JBT, via JBT R291 to IVSAT.  
Cross IVSAT at or above 4000FT.

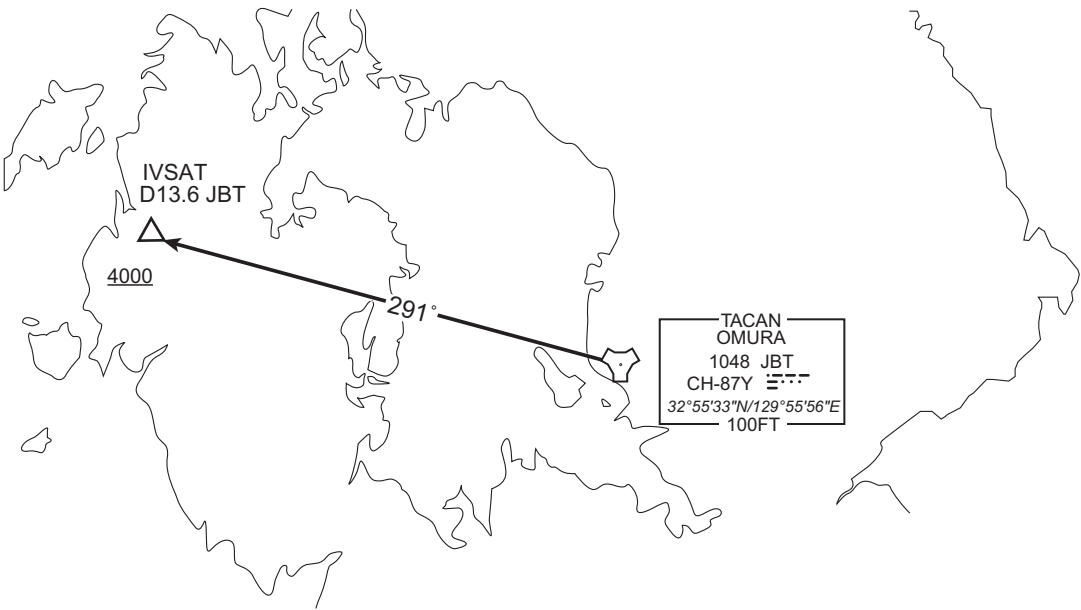


CHANGE : New PROC.

**INTENTIONALLY LEFT BLANK**

## INSTRUMENT APPROACH CHART

RJDU / OMURA

TACAN RWY18

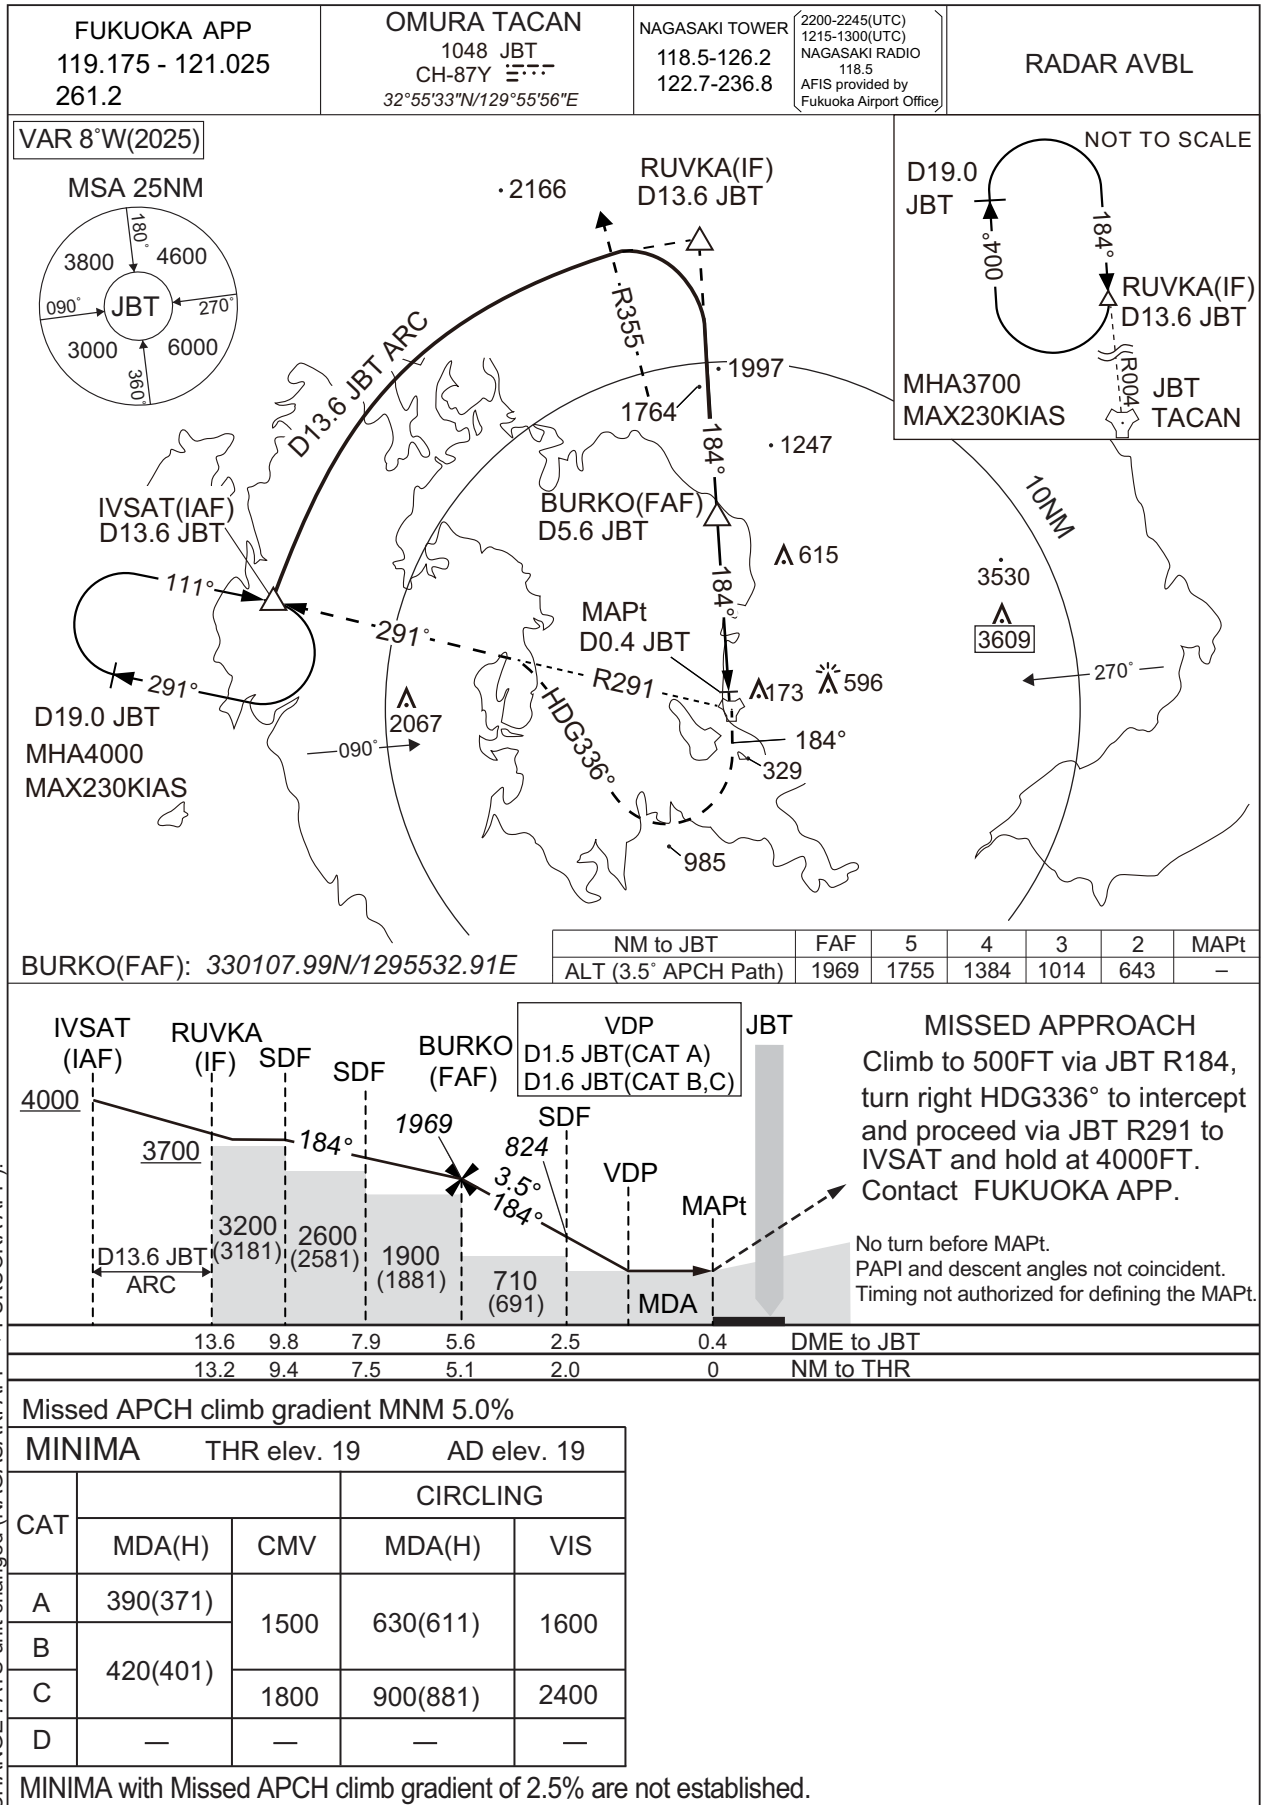

## INSTRUMENT APPROACH CHART

RJDU / OMURA

LOC C

FUKUOKA APP  
119.175 - 121.025  
261.2

ILS-LOC  
110.9 IOL  
ILS-DME CH-46X

NAGASAKI TOWER  
118.5 - 126.2  
122.7 - 236.8  
(2200 - 2245(UTC)  
1215 - 1300(UTC)  
NAGASAKI RADIO  
118.5  
AFIS provided by  
Fukuoka Airport Office)

RADAR AVBL


VAR 8°W  
EQPT REQUIRED  
DME  
VOR

MHA 4000  
MAX 230KIAS  
NOT TO SCALE  
OLE  
VOR/DME



**MISSED APPROACH**  
Climb on HDG325° to 2500FT,  
turn left, direct to OLE VOR/DME  
and hold at 4000FT.  
Contact FUKUOKA APP.

No turn before MAPt.  
Timing not authorized for defining the MAPt.

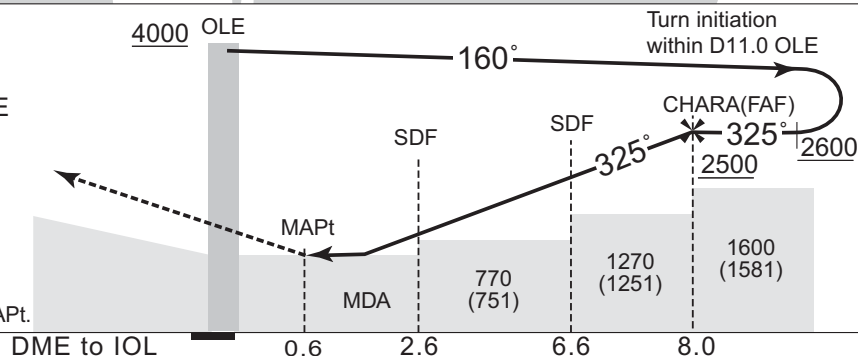

| MINIMA |           | AD elev. 19 |  |
|--------|-----------|-------------|--|
| CAT    | CIRCLING  |             |  |
|        | MDA(H)    | VIS         |  |
| A      | 630 (611) | 3200        |  |
| B      |           |             |  |
| C      | 900 (881) |             |  |
| D      | —         | —           |  |

CHANGE : ATS unit changed (NAGASAKI APP → FUKUOKA APP).




## RJDU / OMURA

VOR D




Climb via OLE R312 to  
OLE 6.0DME, turn right,  
direct to OLE VOR/DME  
and hold at 4000FT.  
Contact FUKUOKA APP.

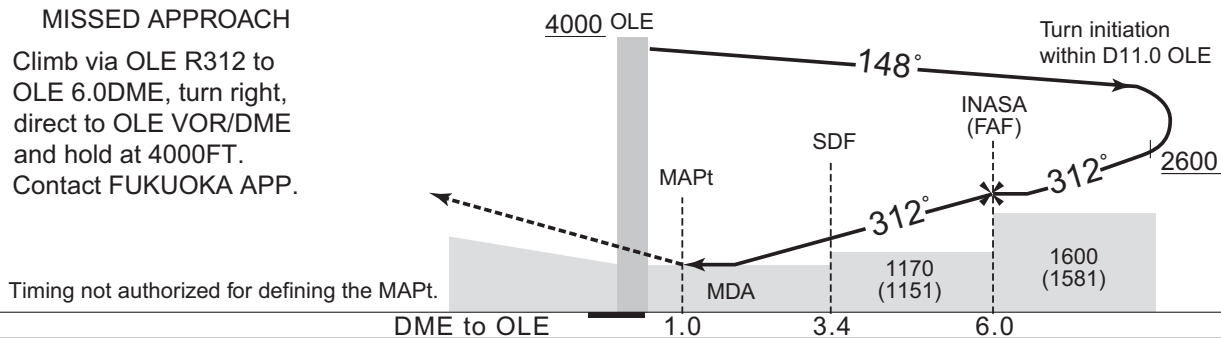


|                    |           |      |
|--------------------|-----------|------|
| MINIMA AD elev. 19 |           |      |
| CAT                | CIRCLING  |      |
|                    | MDA(H)    | VIS  |
| A                  | 870 (851) | 3200 |
| B                  |           |      |
| C                  | 900 (881) |      |
| D                  | —         | —    |

INSTRUMENT APPROACH CHART

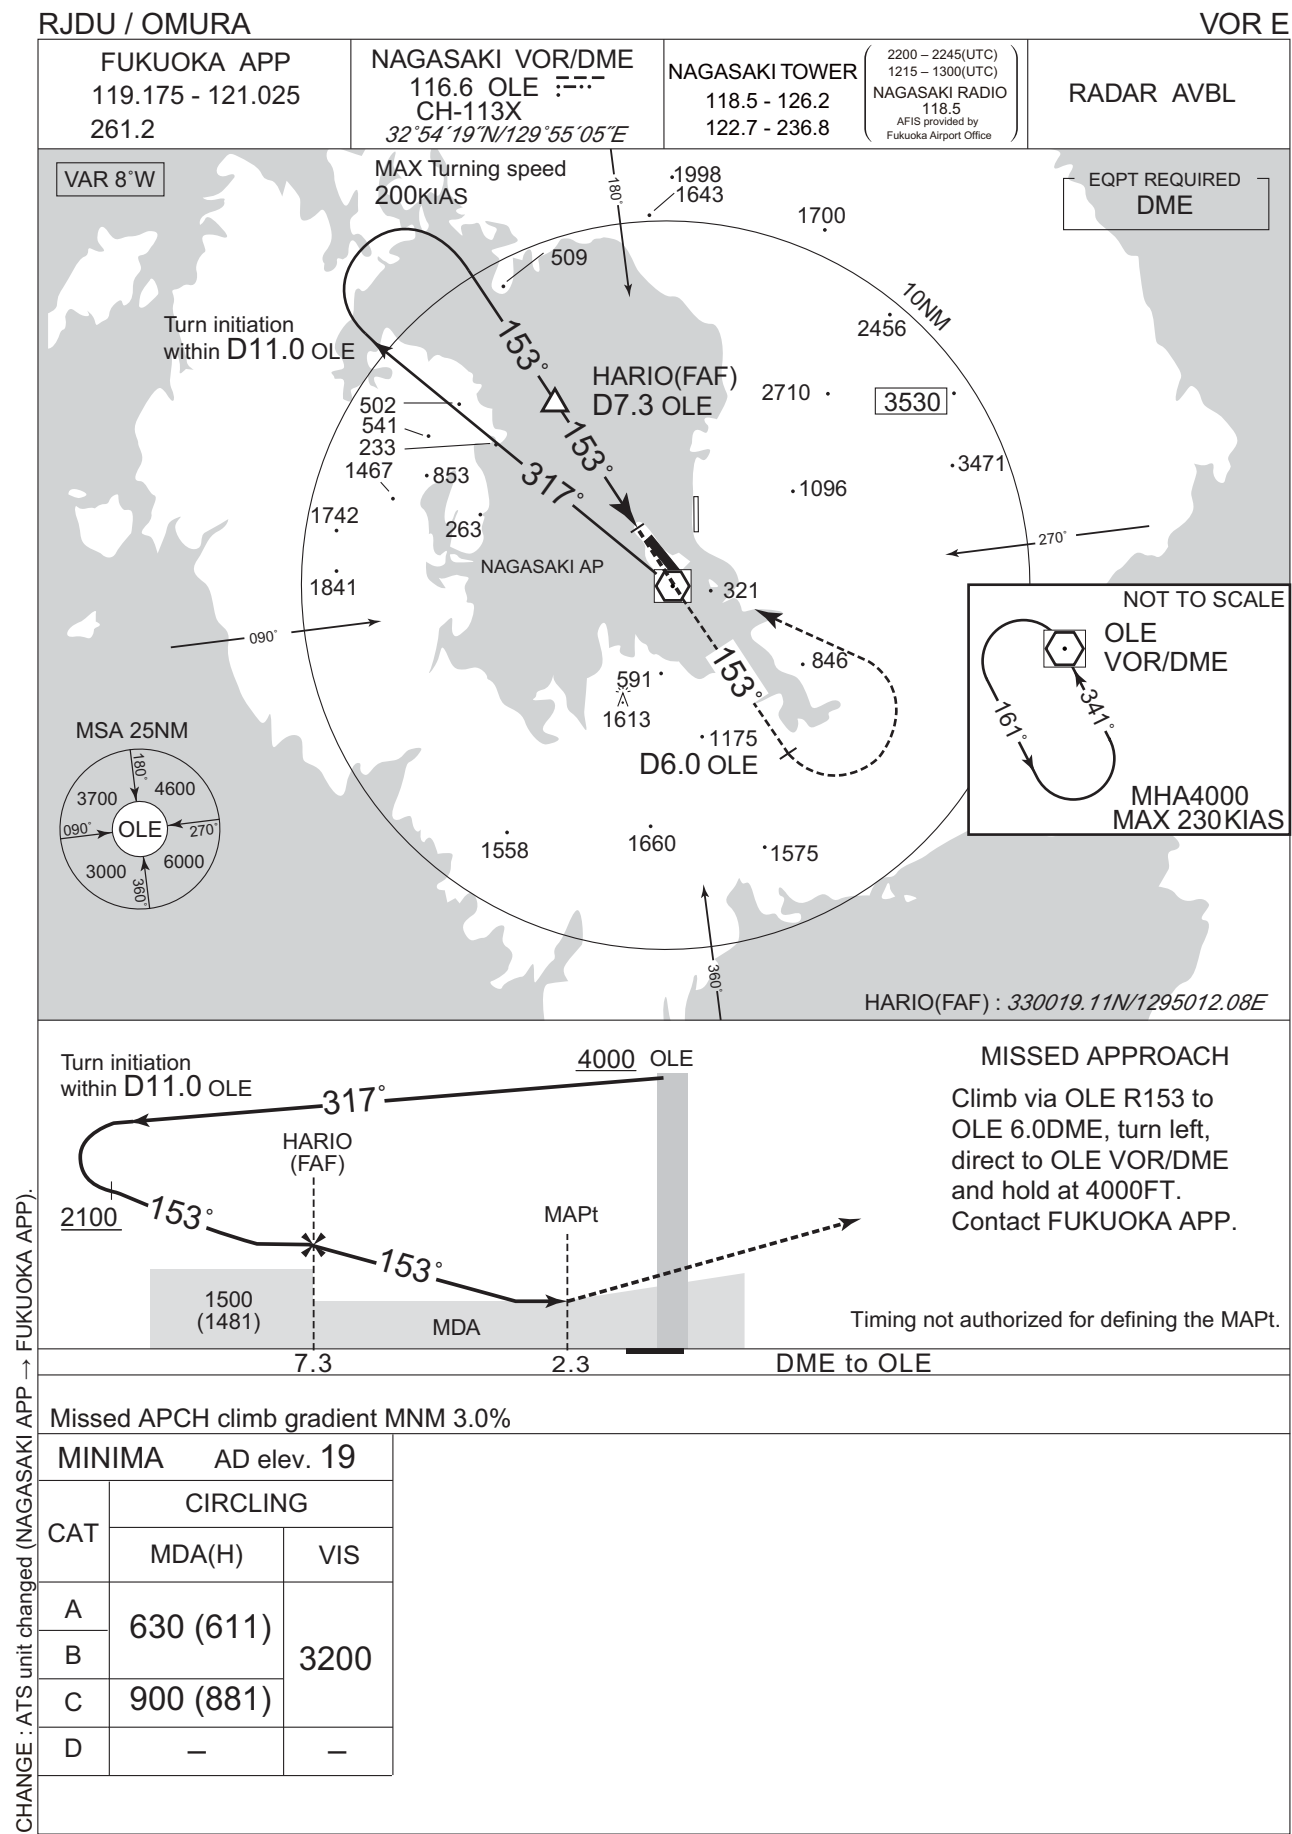

RJDU / OMURA

Visual REP

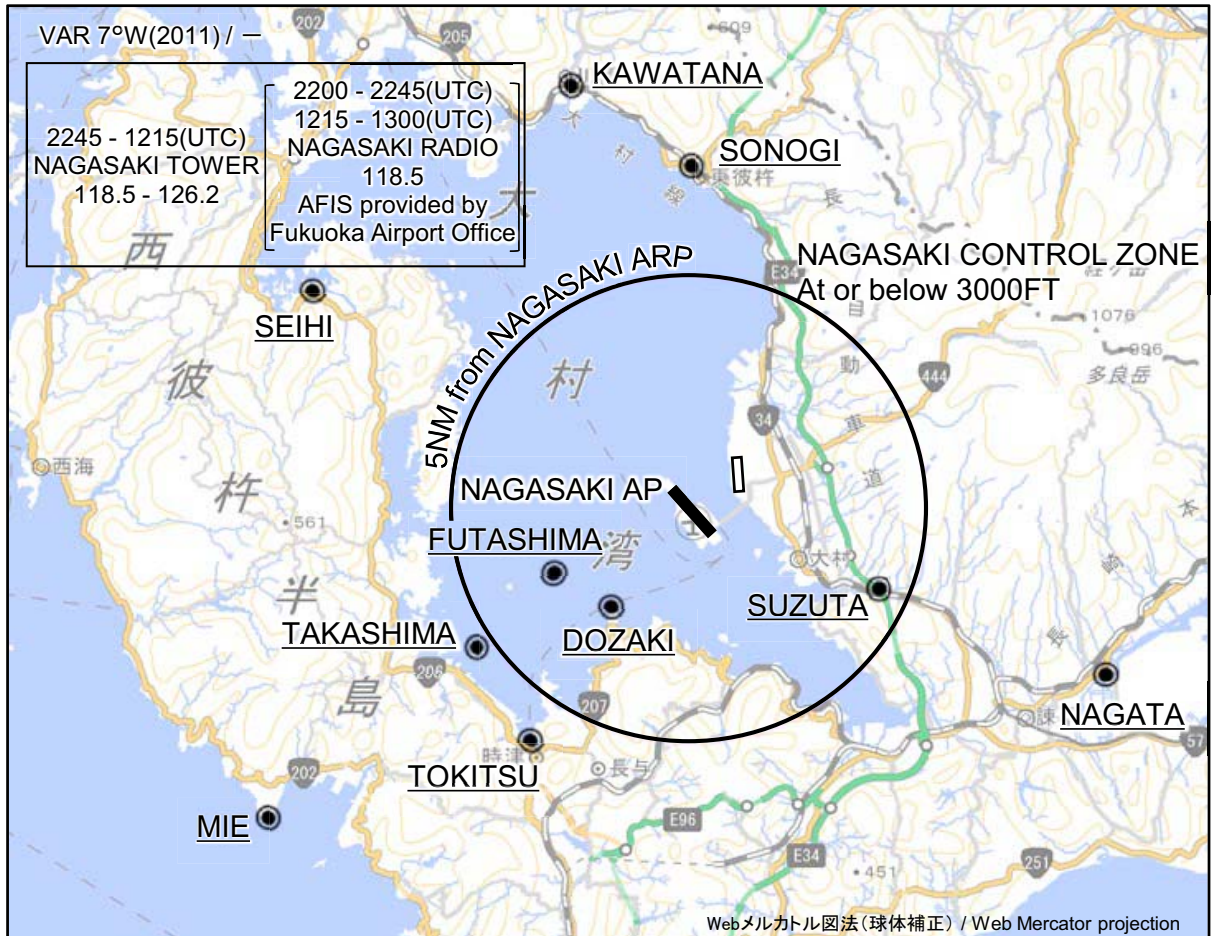

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

| Call sign       | BRG / DIST from<br>NAGASAKI ARP | Remarks                          |
|-----------------|---------------------------------|----------------------------------|
| 川棚<br>Kawatana  | 345°T / 9.4NM                   | JR駅<br>JR Station                |
| 彼杵<br>Sonogi    | 360°T / 7.4NM                   | JR駅<br>JR Station                |
| 鈴田<br>Suzuta    | 113°T / 4.3NM                   | 長崎自動車道と国道34号線の交点<br>Intersection |
| 長田<br>Nagata    | 112°T / 9.4NM                   | 不知火橋<br>Bridge                   |
| 西彼<br>Seihi     | 301°T / 9.2NM                   | オランダ村<br>Windmill                |
| 二島<br>Futashima | 244°T / 3.1NM                   | 二島<br>Island                     |
| 堂崎<br>Dozaki    | 217°T / 2.7NM                   | 堂崎鼻<br>A point of land           |
| 鷹島<br>Takashima | 237°T / 5.4NM                   | 鷹島<br>Island                     |
| 時津<br>Tokitsu   | 213°T / 6.0NM                   | 時津港<br>Harbor                    |
| 三重<br>Mie       | 233°T / 11.1NM                  | 三重崎<br>A point of land           |

CHANGE : Map updated. BRG/DIST from NAGASAKI ARP.