


RJNW / NOTO

AD CHART

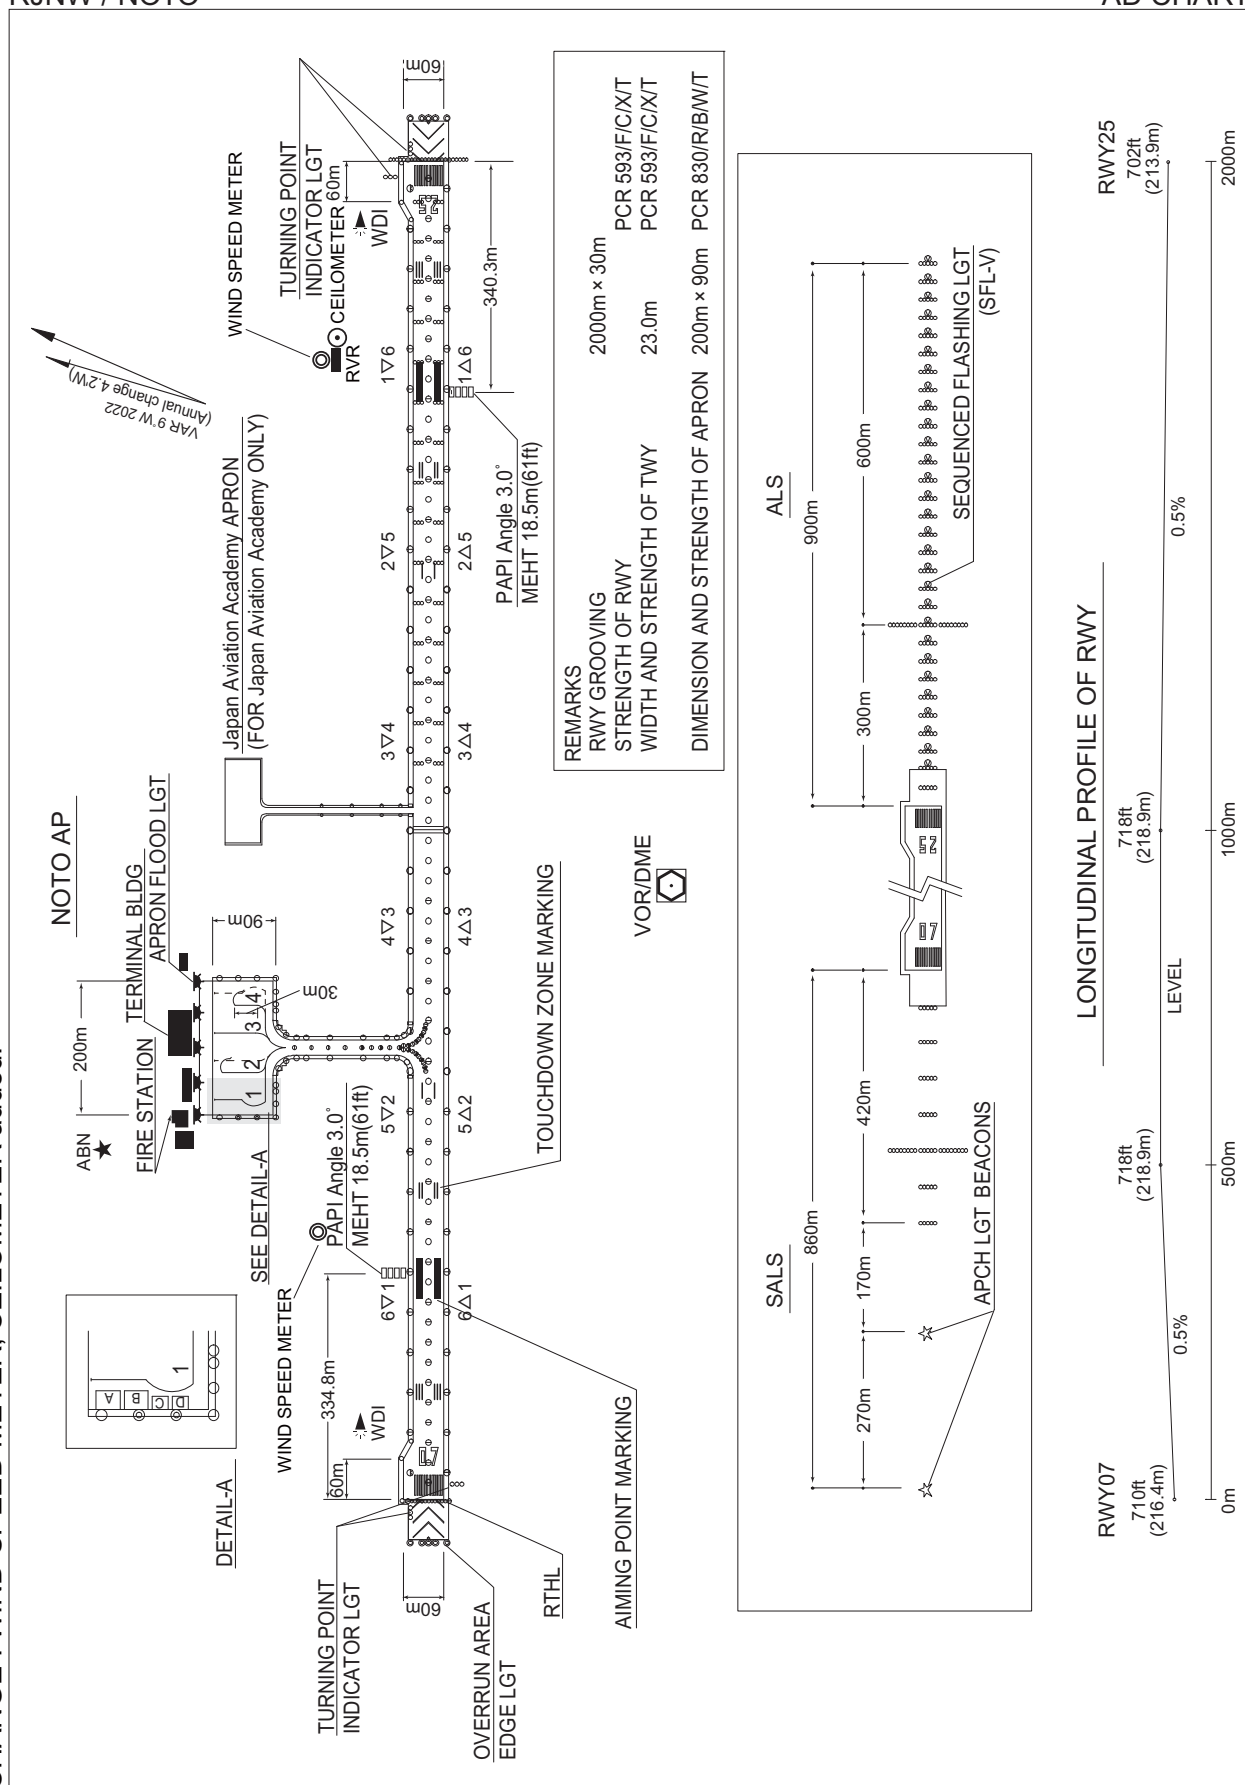

STANDARD DEPARTURE CHART -INSTRUMENT

RJNW / NOTO

SID

HISUI FOUR DEPARTURE


RWY07 : Climb RWY HDG to 1300FT, turn right...

RWY25 : Climb RWY HDG to 1200FT, turn left HDG 032° ...
...to intercept and proceed via NTE R077 to HISUI.

Note RWY07 : 5.0% climb gradient required up to 1300FT.

OBST ALT 772FT located at 0.3NM 046° FM end of RWY07.

CHANGE : PROC renamed. Note added. OBST figure deleted.

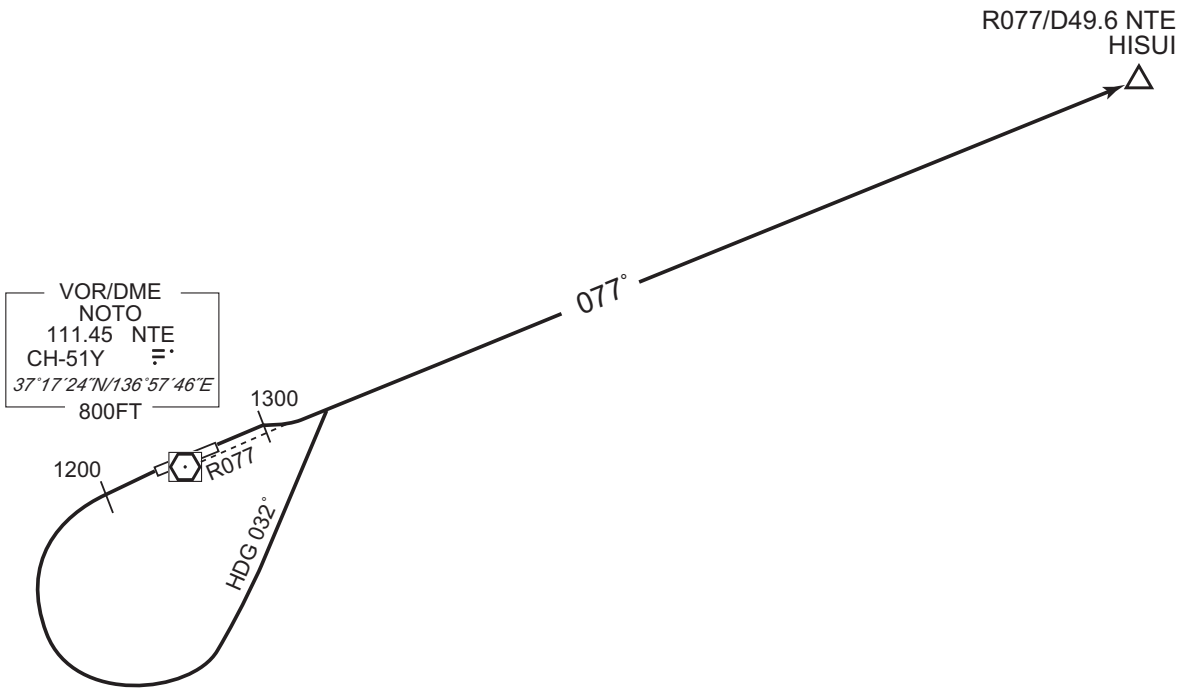

STANDARD DEPARTURE CHART -INSTRUMENT

RJNW / NOTO

SID

URUSI TWO DEPARTURE

RWY07 : Climb RWY HDG to 1300FT, turn right HDG217°...


RWY25 : Climb RWY HDG to 1200FT, turn left HDG127°...

...to intercept and proceed via NTE R172 to URUSI.

Cross URUSI at or above 8000FT.

Note RWY07 : 5.0% climb gradient required up to 1300FT.

OBST ALT 772FT located at 0.3NM 046° FM end of RWY07.

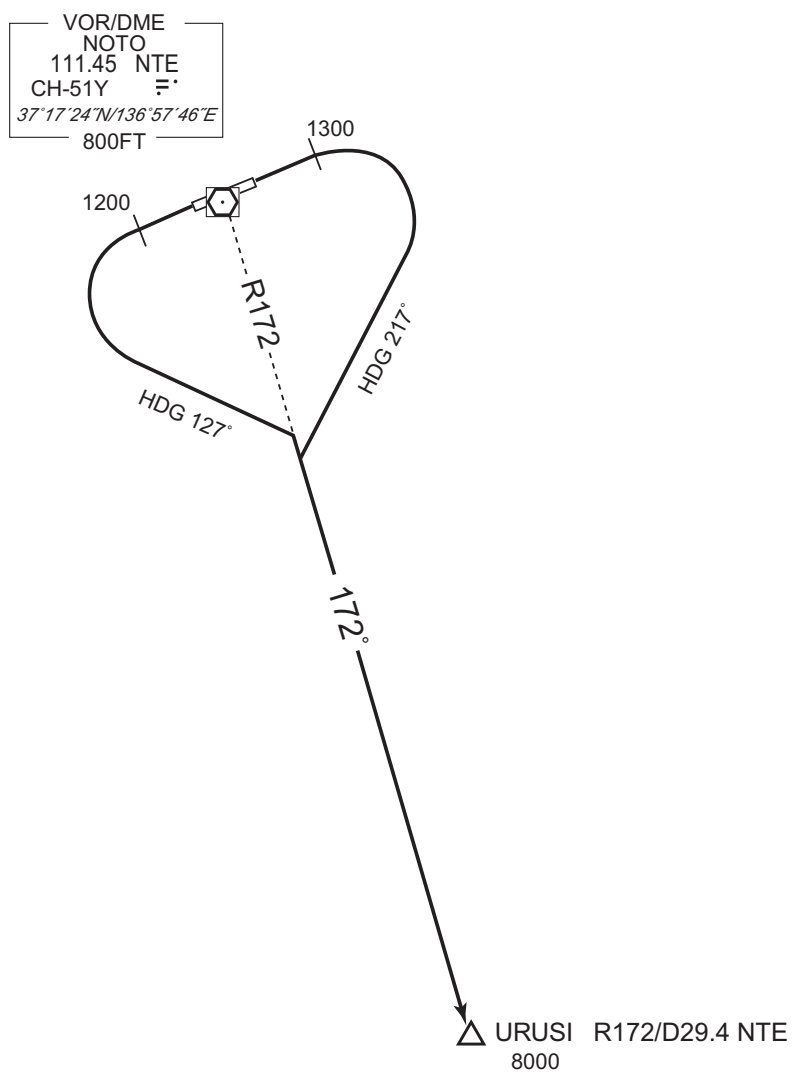

CHANGE : PROC renamed. Note added. OBST figure deleted.


STANDARD DEPARTURE CHART -INSTRUMENT

RJNW / NOTO

HOUSU ONE DEPARTURE

RNAV SID
RNP1

Note GNSS required.

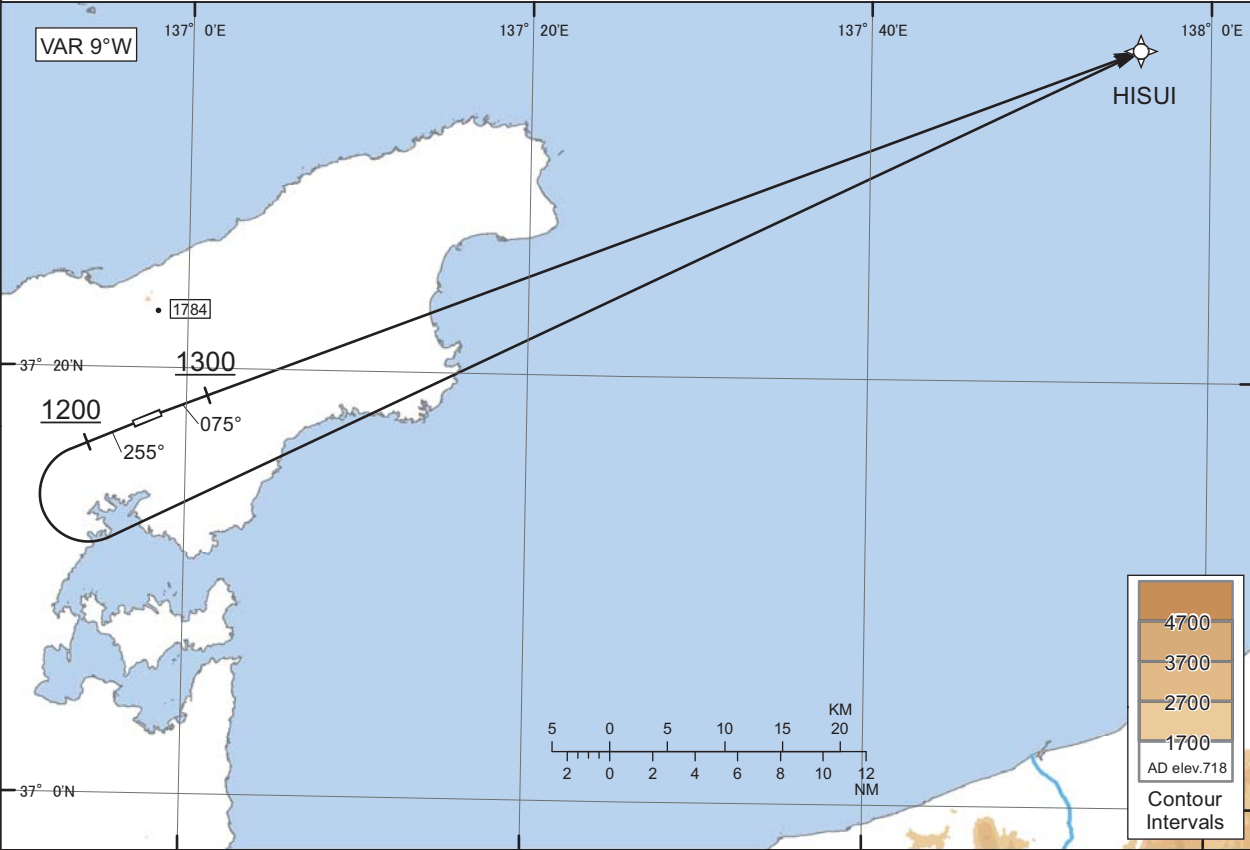

RWY07 : Climb on HDG075° at or above 1300FT, direct to HISUI.
RWY25 : Climb on HDG255° at or above 1200FT, turn left direct to HISUI.

Note RWY07 : 5.0% climb gradient required up to 1300FT.
OBST ALT 772FT located at 0.3NM 046° FM end of RWY07.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	075 (066.7)	-8.8	-	-	+1300	-	-	RNP1
002	DF	HISUI	-	-	-8.8	-	-	-	-	-	RNP1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	255 (246.7)	-8.8	-	-	+1200	-	-	RNP1
002	DF	HISUI	-	-	-8.8	-	L	-	-	-	RNP1

Waypoint Coordinates


Waypoint Identifier	Coordinates
HISUI	373534.5N / 1375553.1E

CHANGE : New PROC.

STANDARD DEPARTURE CHART -INSTRUMENT

RJNW / NOTO

RNAV SID

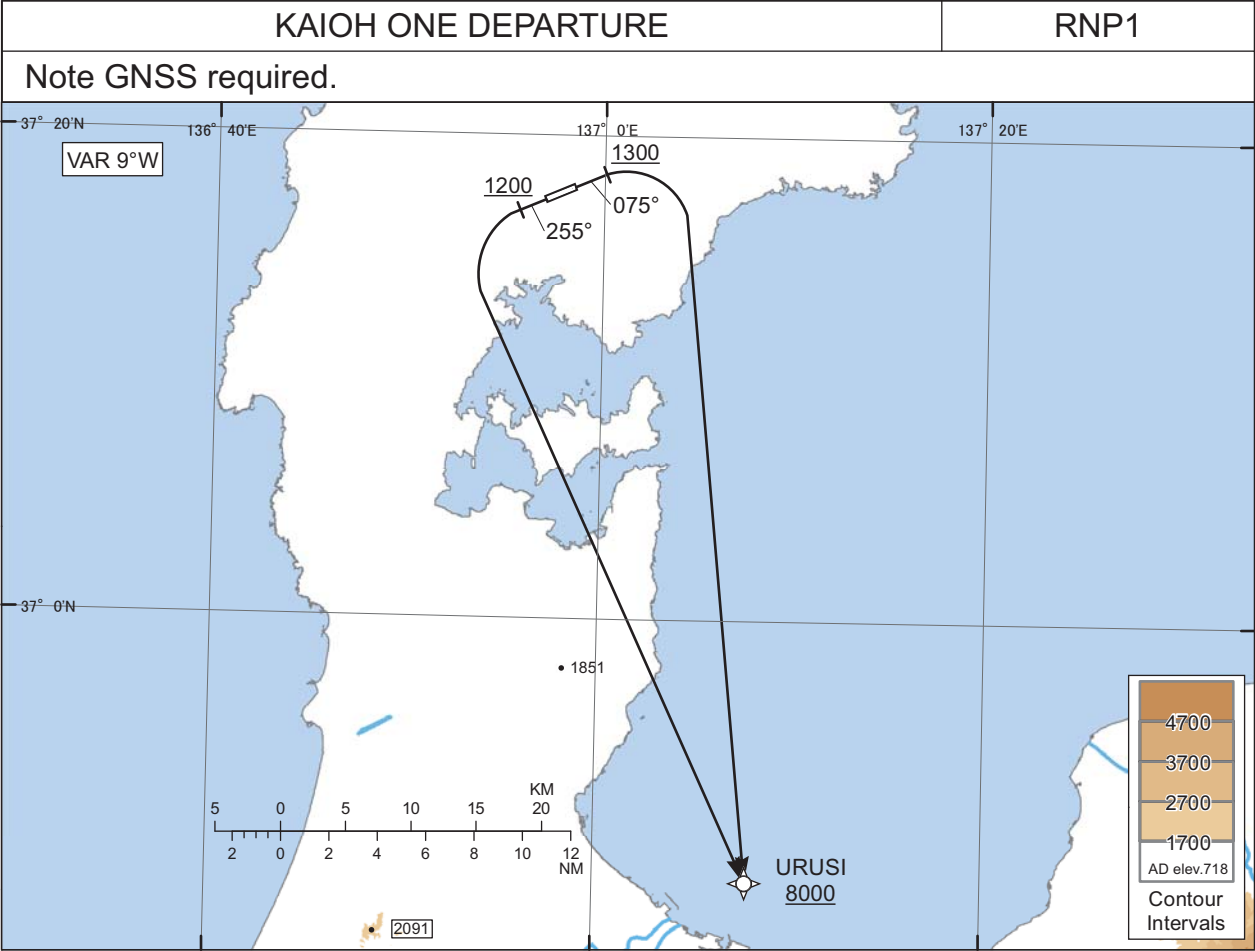

RWY07 : Climb on HDG075° at or above 1300FT, turn right direct to URUSI at or above 8000FT.
RWY25 : Climb on HDG255° at or above 1200FT, turn left direct to URUSI at or above 8000FT.

Note RWY07 : 5.0% climb gradient required up to 1300FT.
OBST ALT 772FT located at 0.3NM 046° FM end of RWY07.

RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	075 (066.7)	-8.8	-	-	+1300	-	-	RNP1
002	DF	URUSI	-	-	-8.8	-	R	+8000	-	-	RNP1

RWY25


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	255 (246.7)	-8.8	-	-	+1200	-	-	RNP1
002	DF	URUSI	-	-	-8.8	-	L	+8000	-	-	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates
URUSI	364909.2N / 1370753.5E

CHANGE : New PROC.


STANDARD ARRIVAL CHART -INSTRUMENT

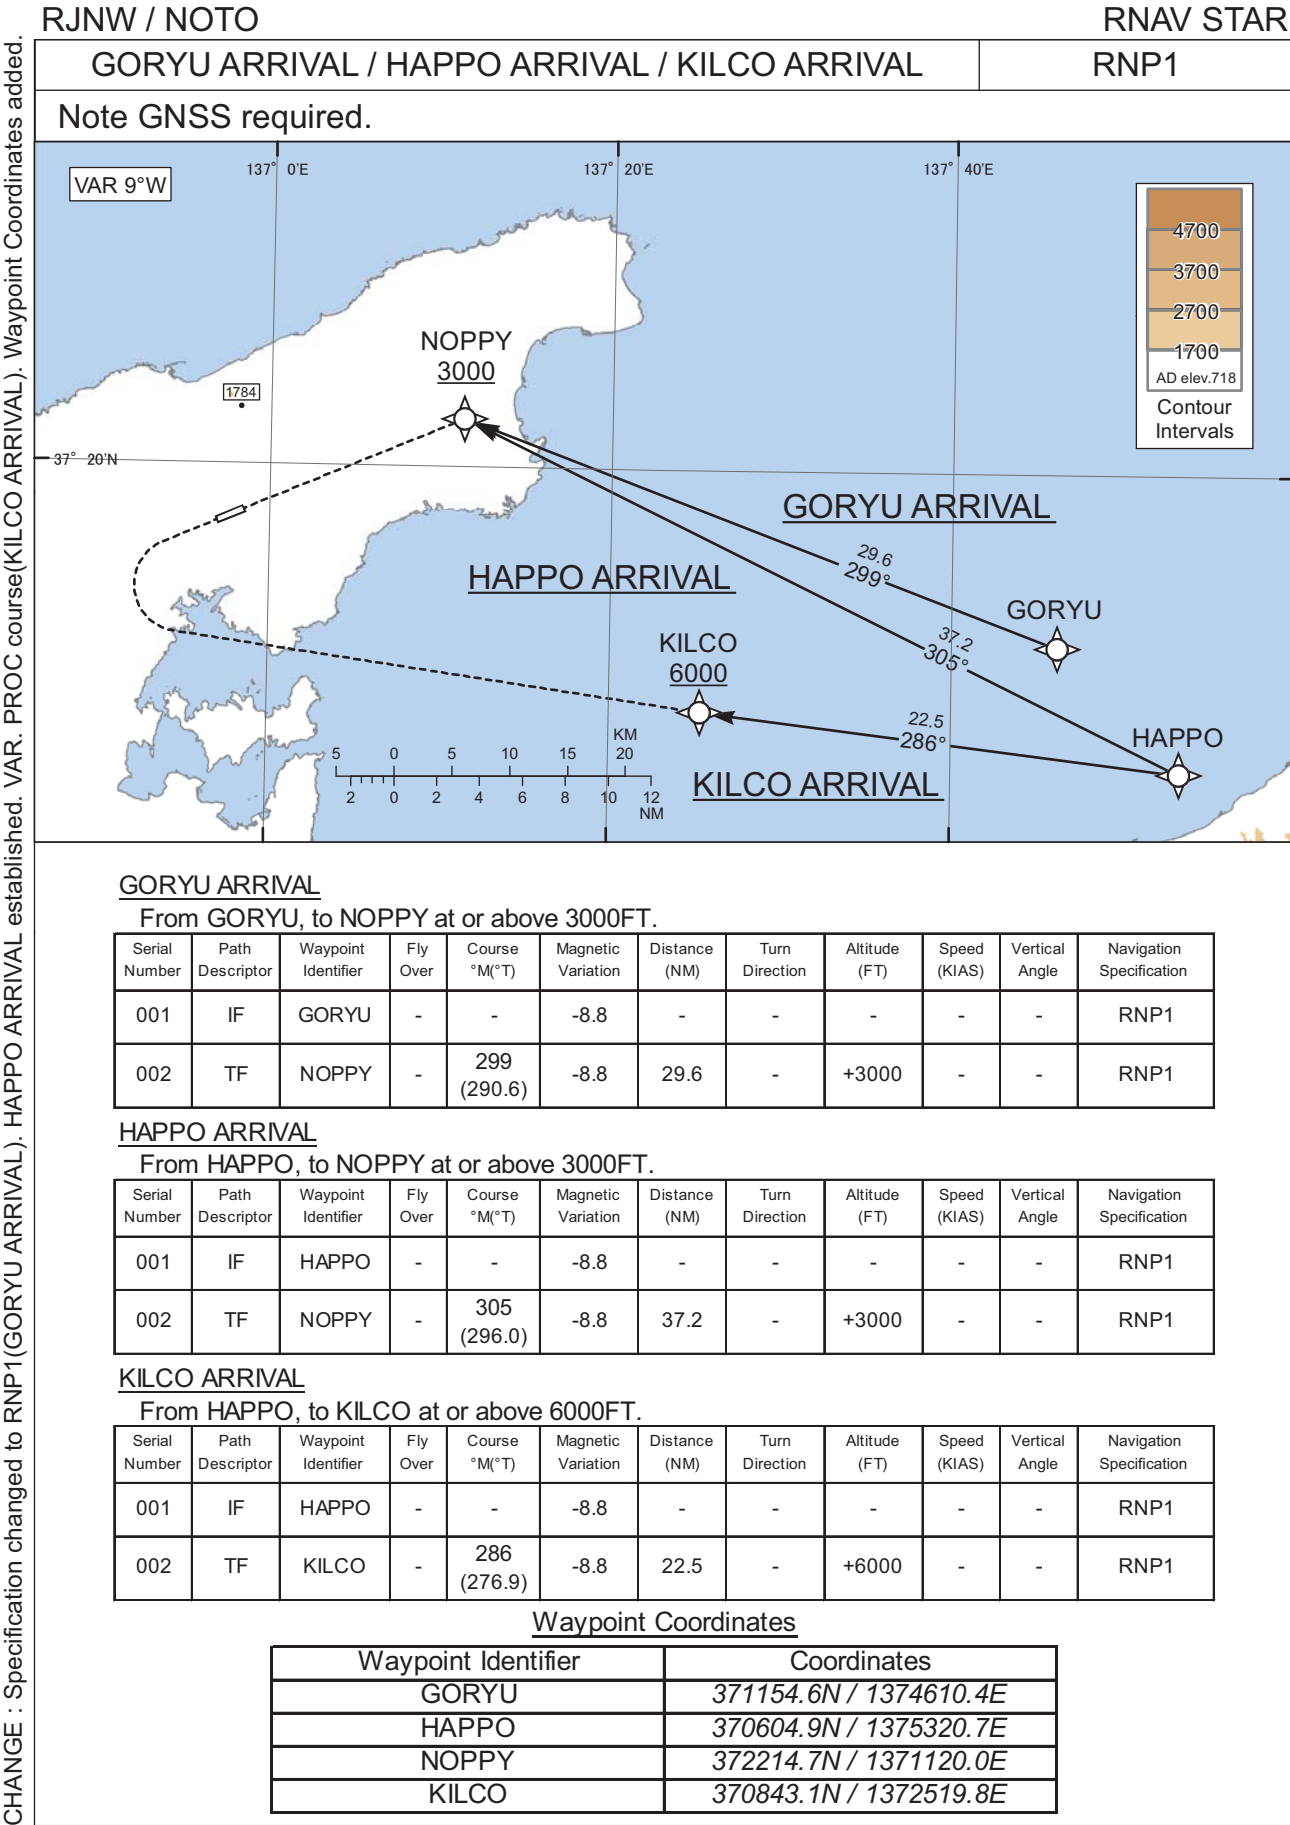


INSTRUMENT APPROACH CHART

RJNW / NOTO


ILS Z or LOC Z RWY25

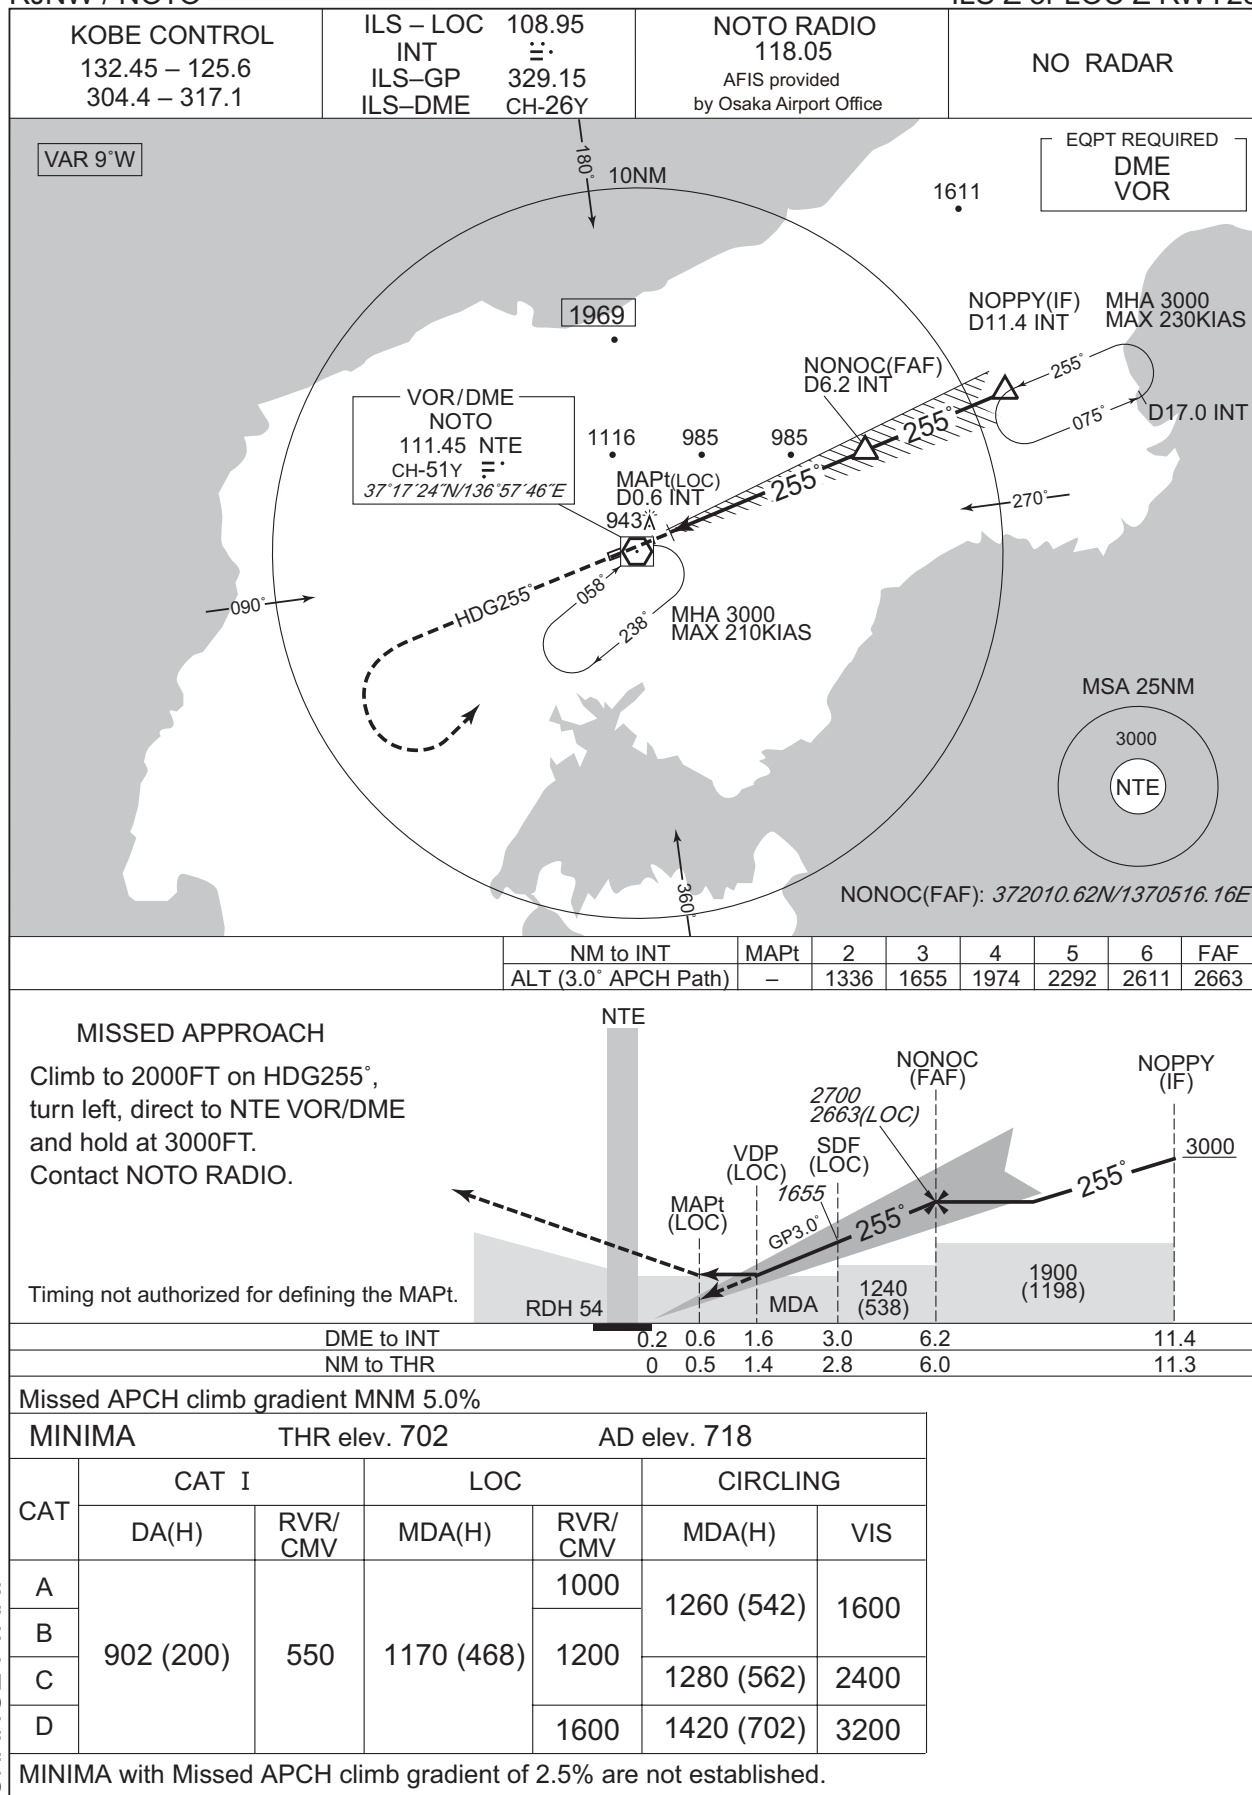


INSTRUMENT APPROACH CHART

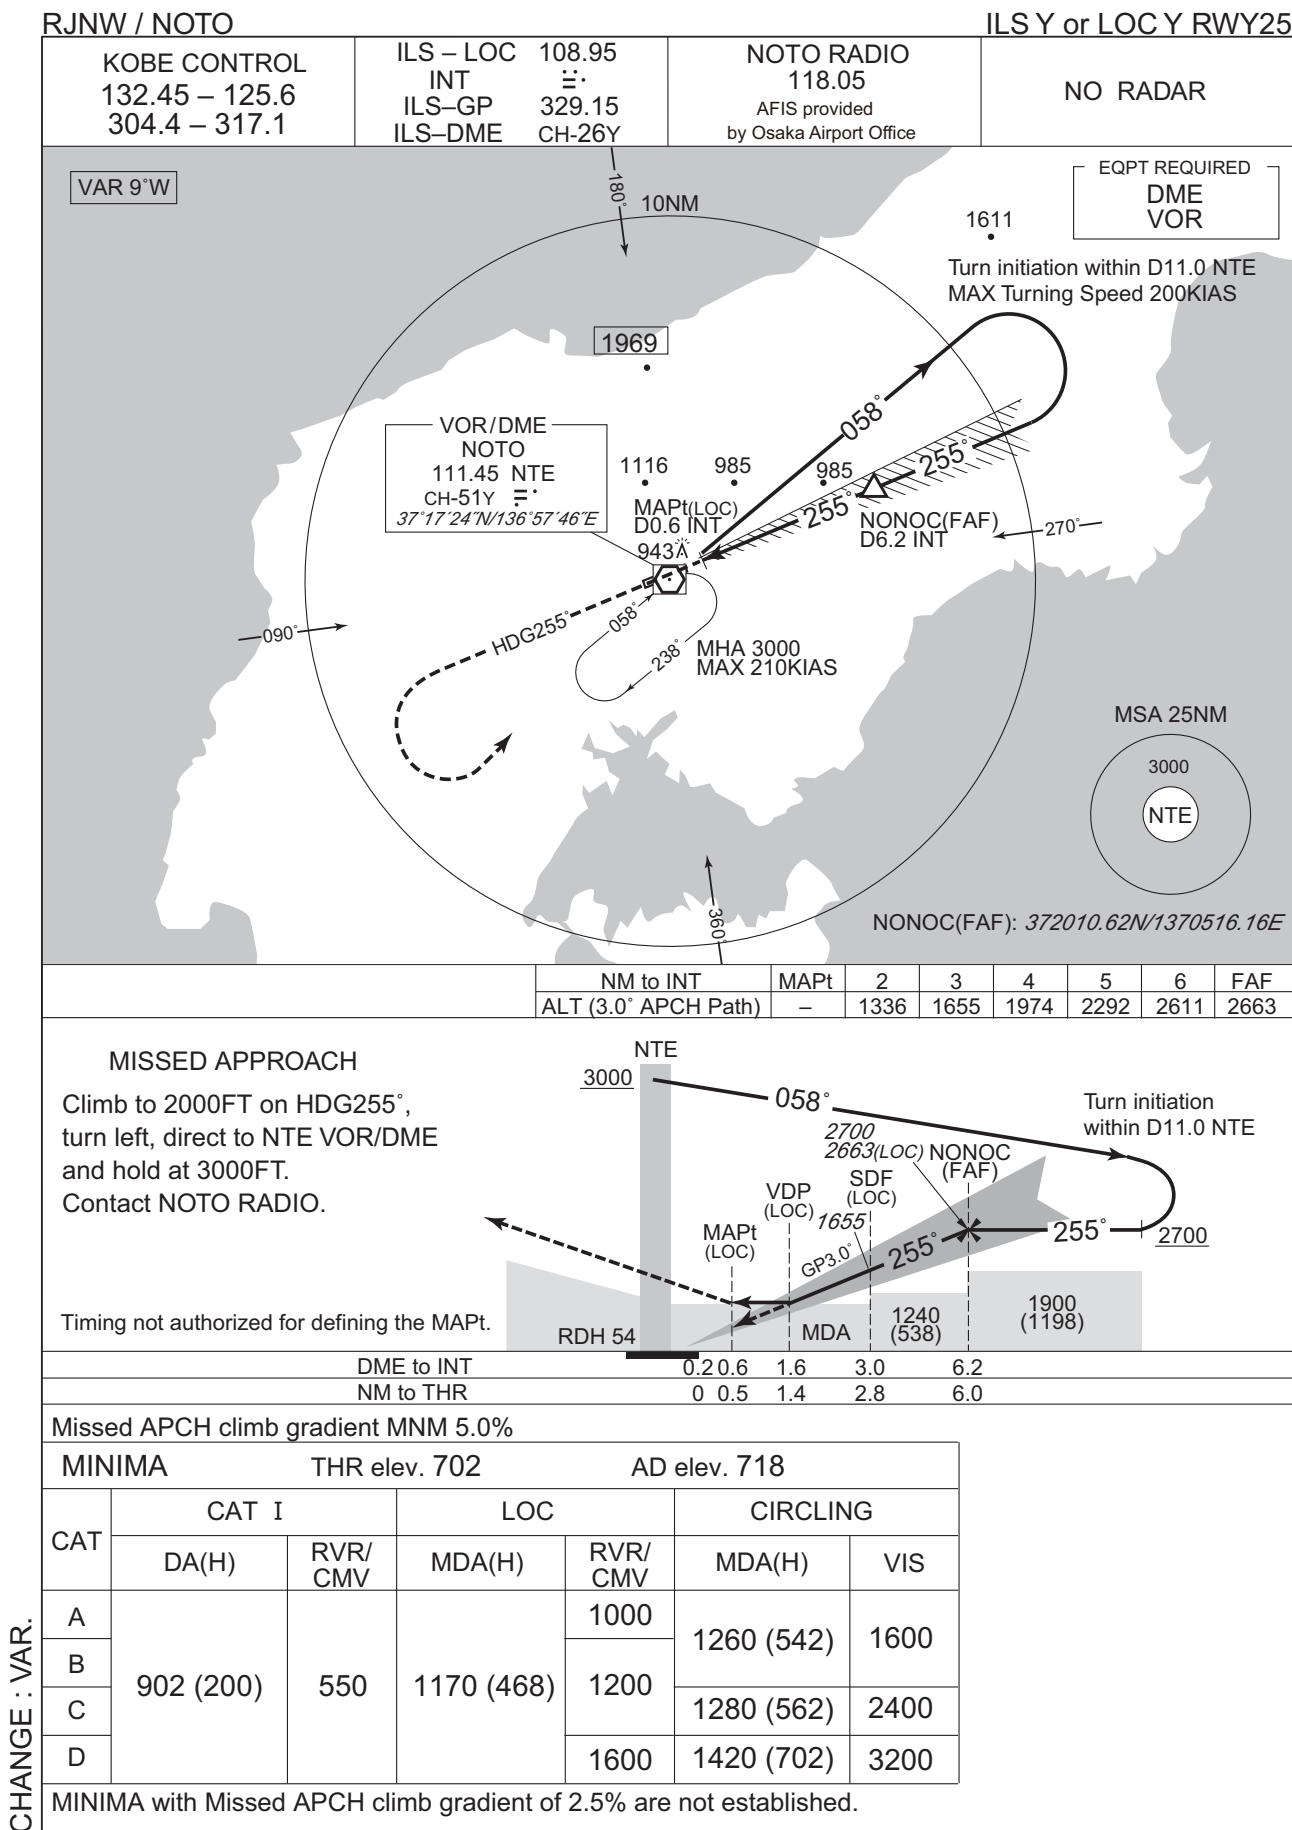


INSTRUMENT APPROACH CHART

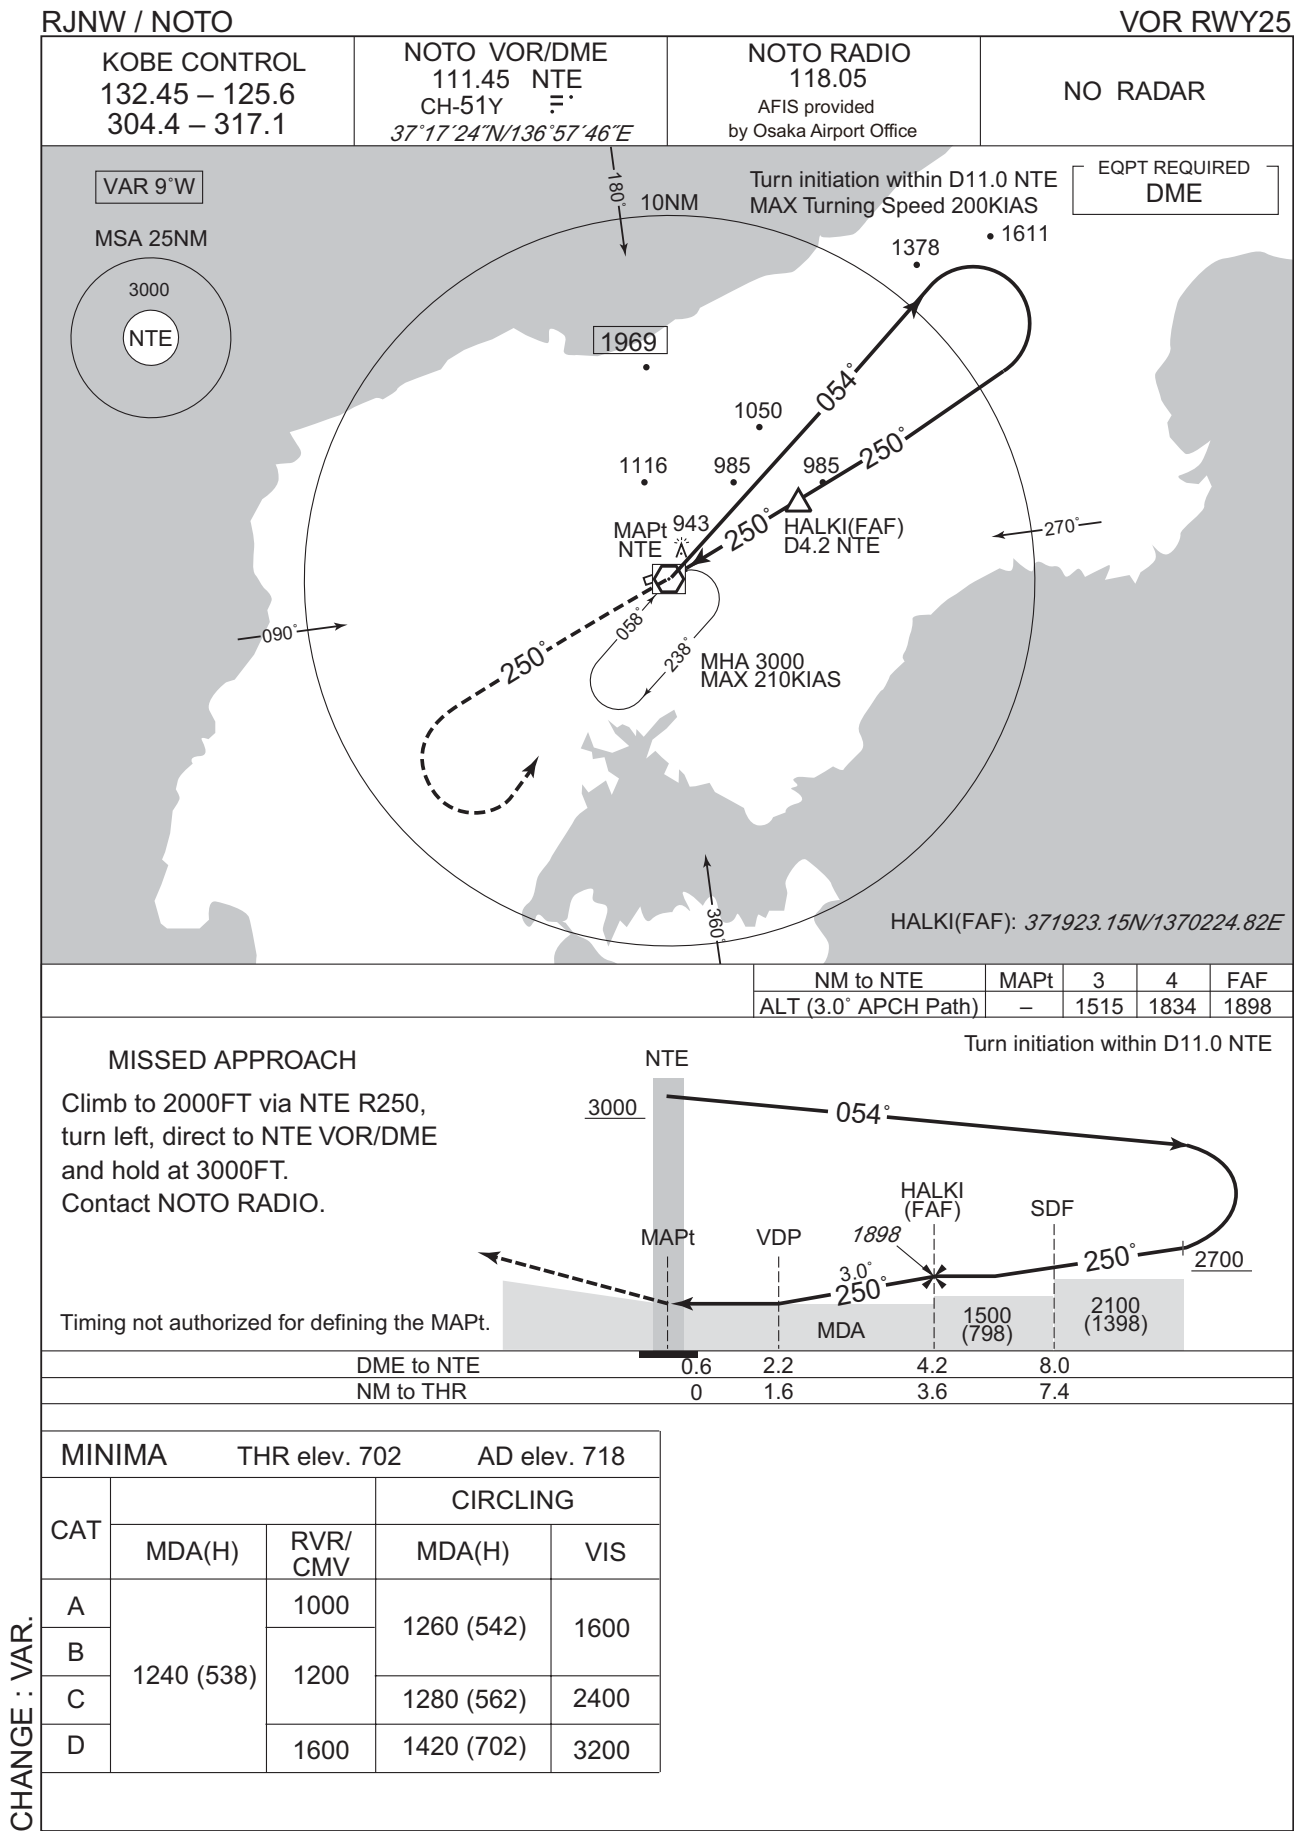


INSTRUMENT APPROACH CHART

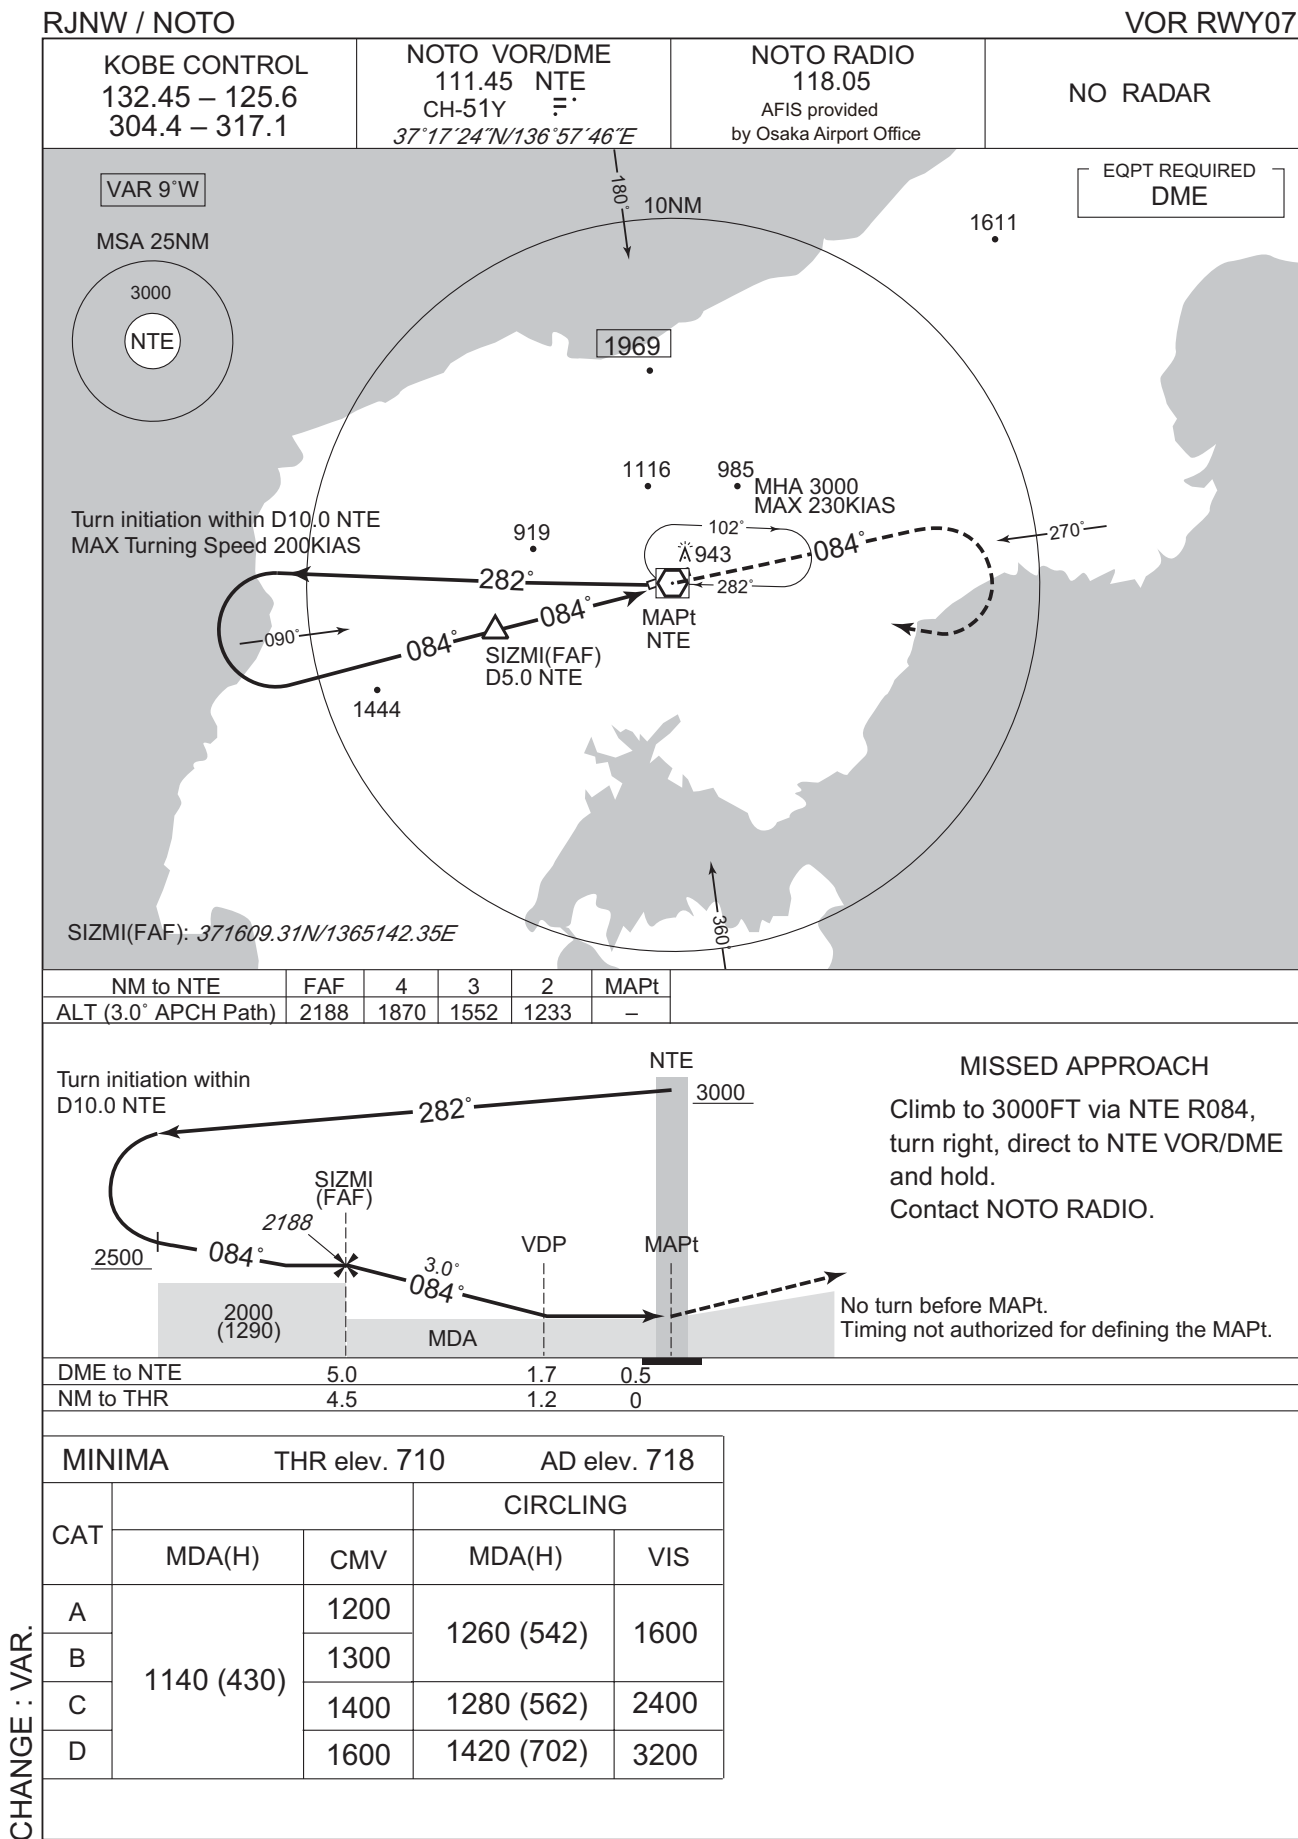

INSTRUMENT APPROACH CHART

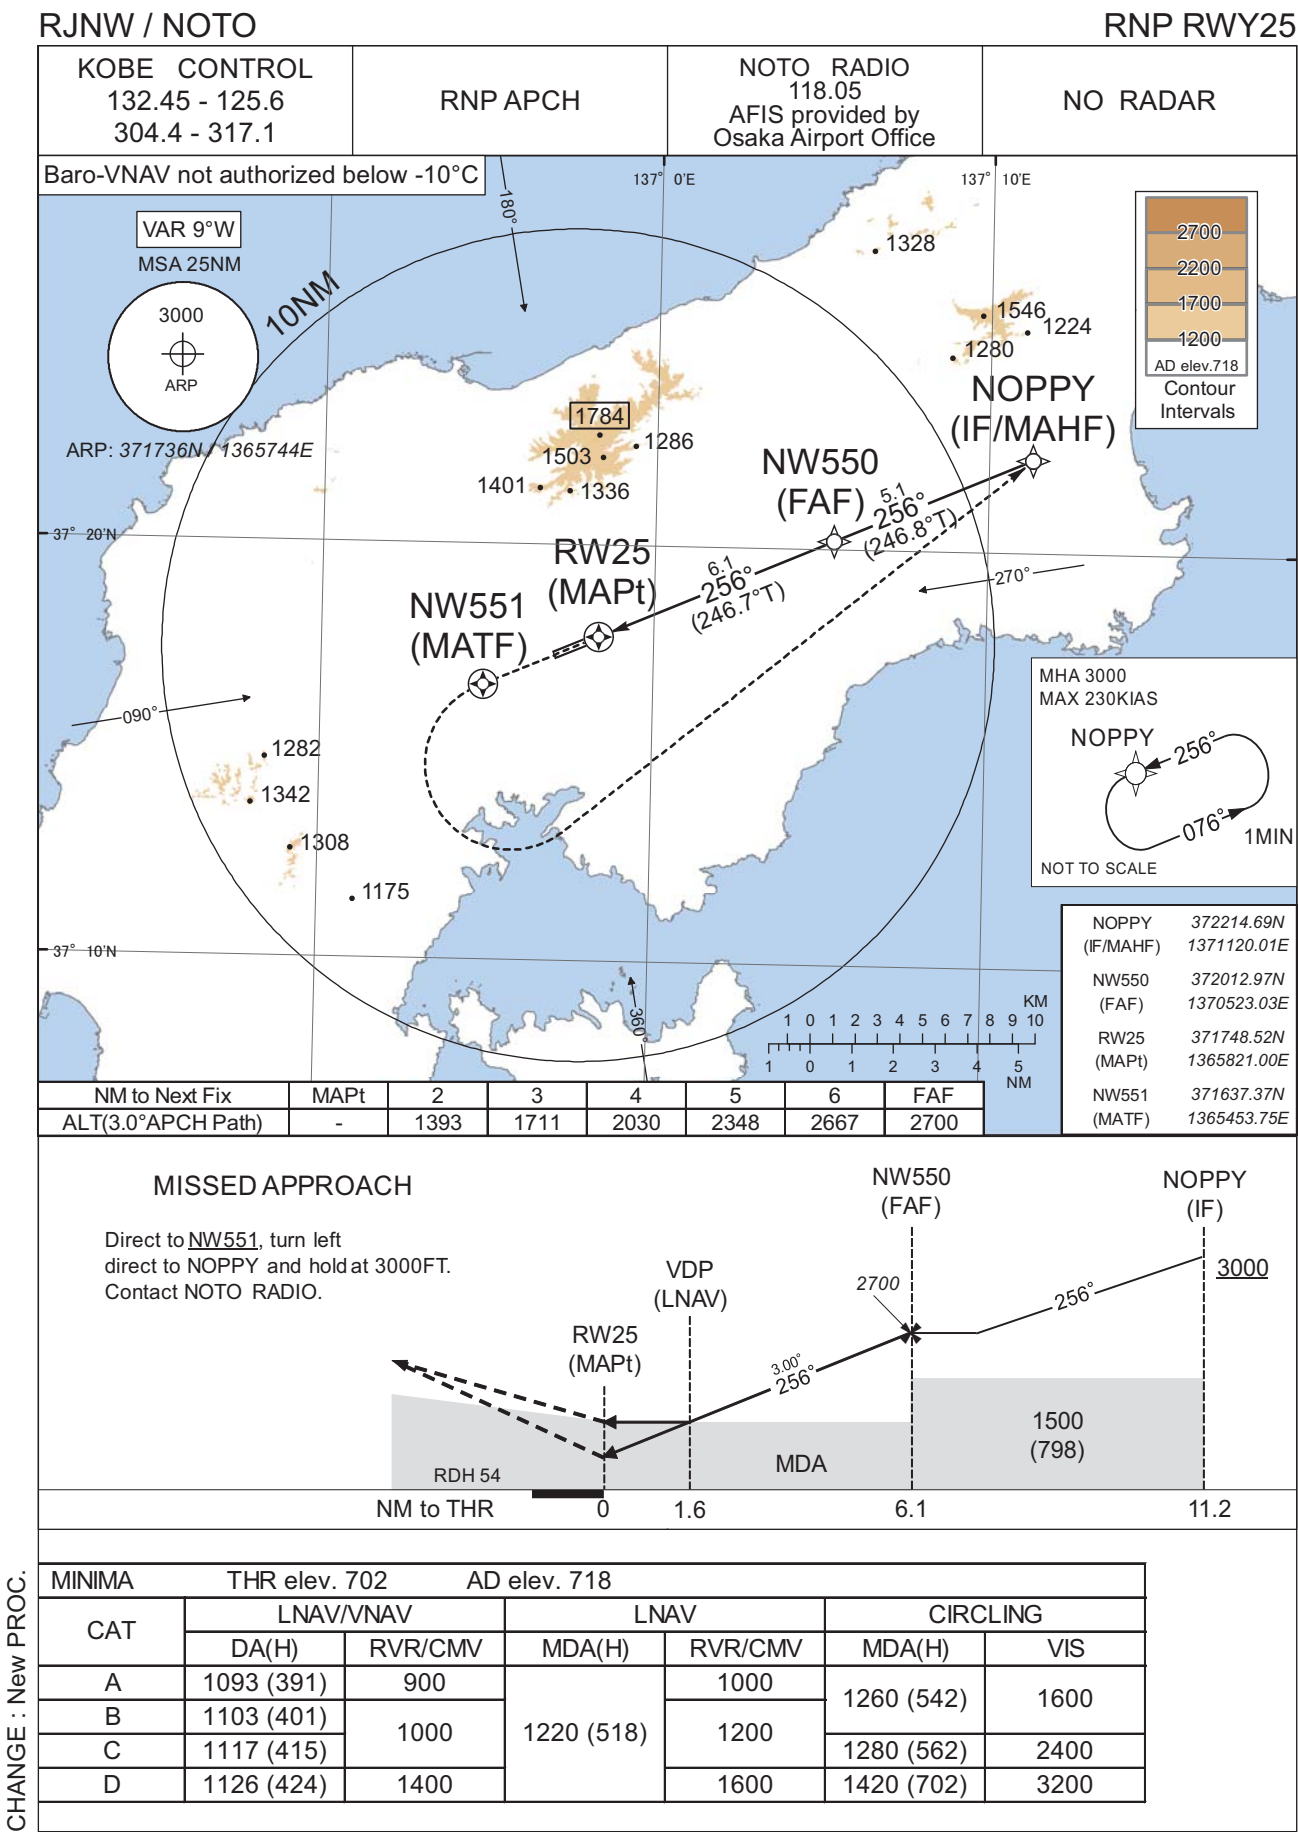

INSTRUMENT APPROACH CHART

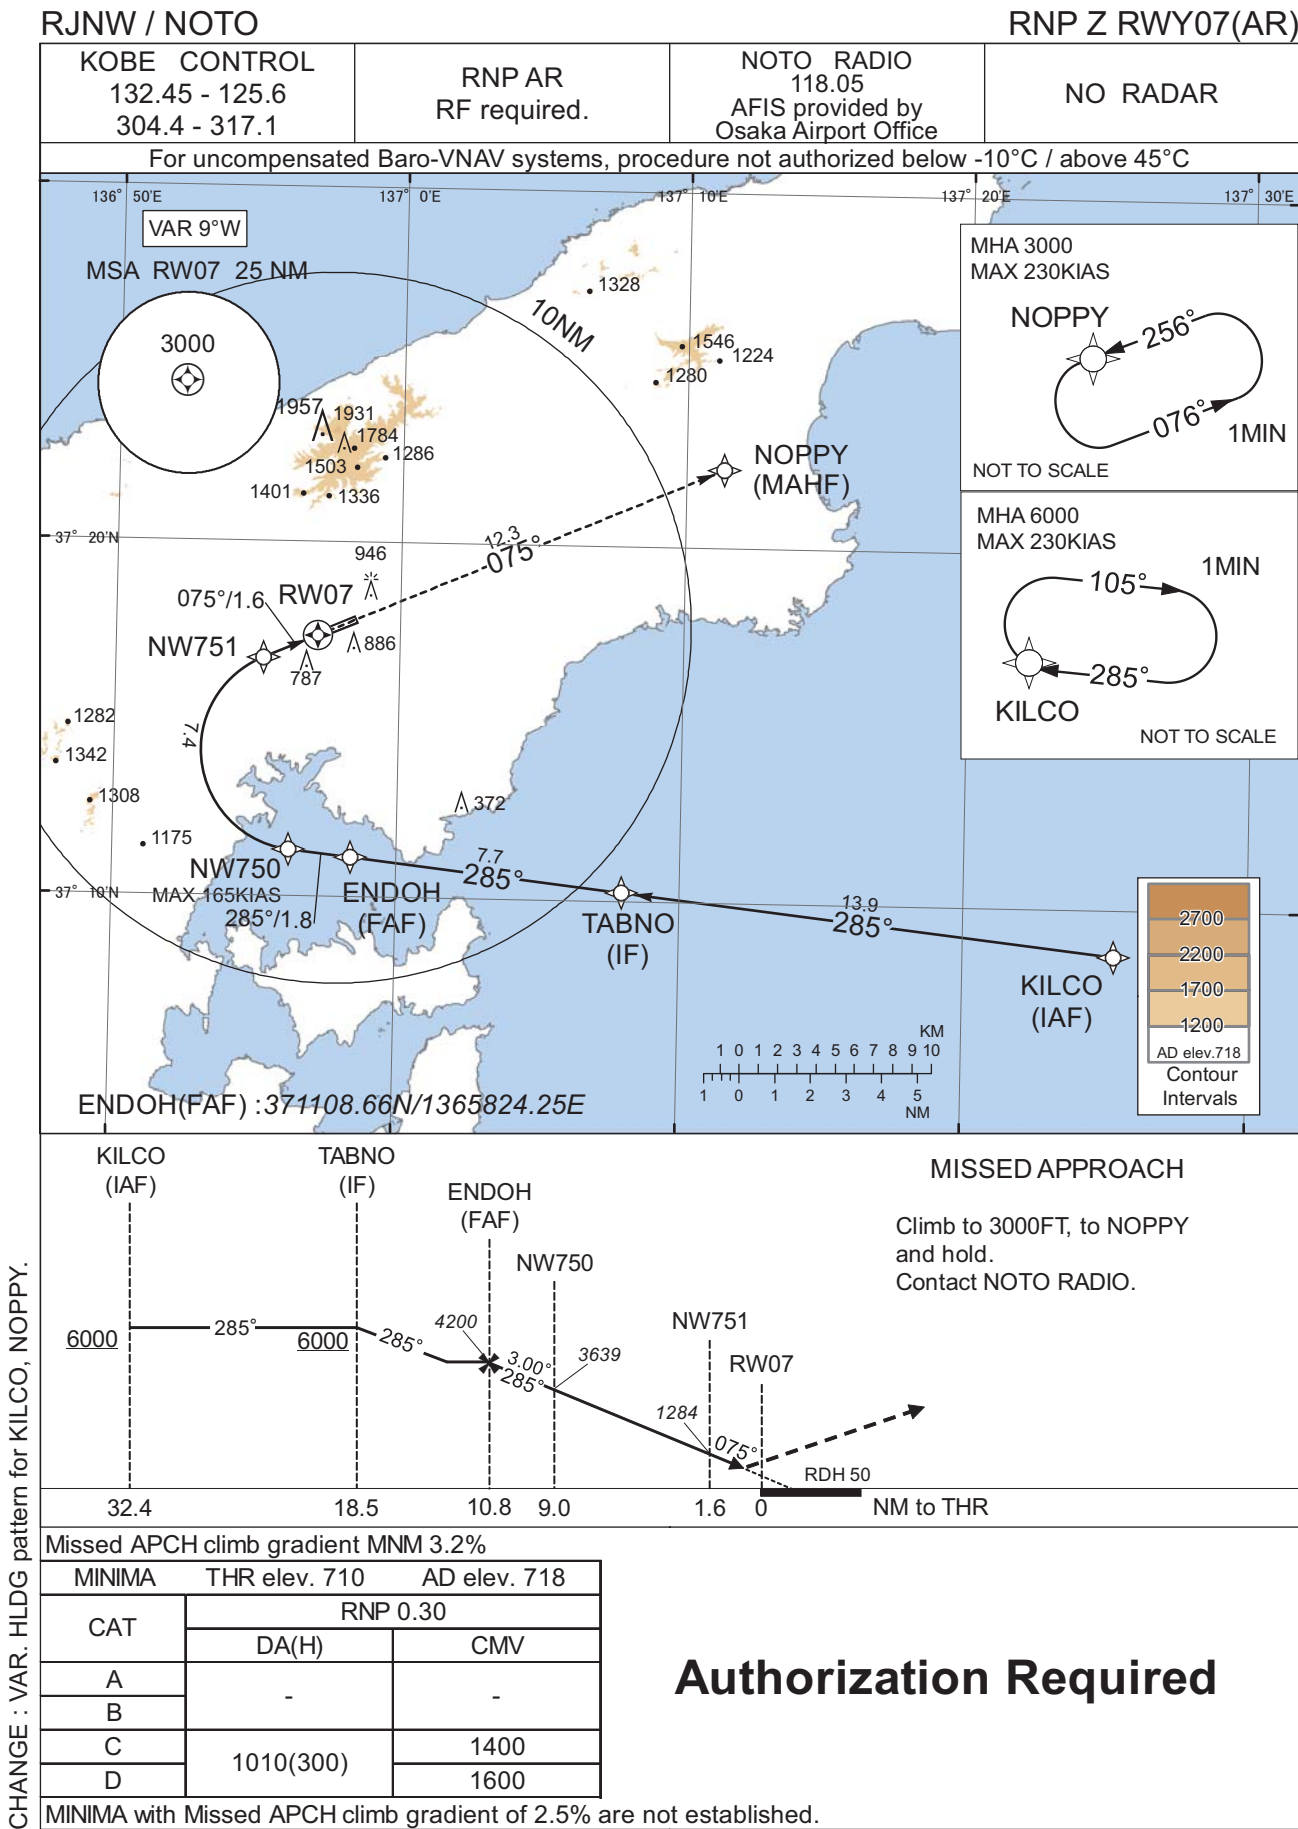

INSTRUMENT APPROACH CHART

RJNW / NOTO

RNP Z RWY07(AR)


Coding Table											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	KILCO	-	-	-8.8	-	-	+6000	-	-	-
002	TF	TABNO	-	285 (276.6)	-8.8	13.9	-	+6000	-	-	1.0
003	TF	ENDOH	-	285 (276.4)	-8.8	7.7	-	4200	-	-	1.0
004	TF	NW750	-	285 (276.3)	-8.8	1.8	-	3639	-165	-3.00	0.3
005	RF Center: NWRF1 r=2.82NM	NW751	-	-	-8.8	7.4	R	1284	-	-3.00	0.3
006	TF	RW07	Y	075 (066.6)	-8.8	1.6	-	760	-	-3.00/50	0.3
007	TF	NOPPY	-	075 (066.7)	-8.8	12.3	-	3000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	KILCO	285 (276.7)	-8.8	1.0 (-14000)	R	6000	FL140	-230 (-14000)	1.0
Hold	NOPPY	256 (246.9)	-8.8	1.0 (-14000)	L	3000	FL140	-230 (-14000)	1.0

Waypoint Coordinates			
Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
KILCO	370843.05N / 1372519.77E	NWRF1	371408.38N / 1365636.03E
TABNO	371017.61N / 1370758.59E		
ENDOH	371108.66N / 1365824.25E		
NW750	371120.22N / 1365612.92E		
NW751	371643.80N / 1365512.45E		
RW07	371722.92N / 1365706.38E		
NOPPY	372214.69N / 1371120.01E		

CHANGE : VAR. HLDG pattern for KILCO, NOPPY.

INSTRUMENT APPROACH CHART

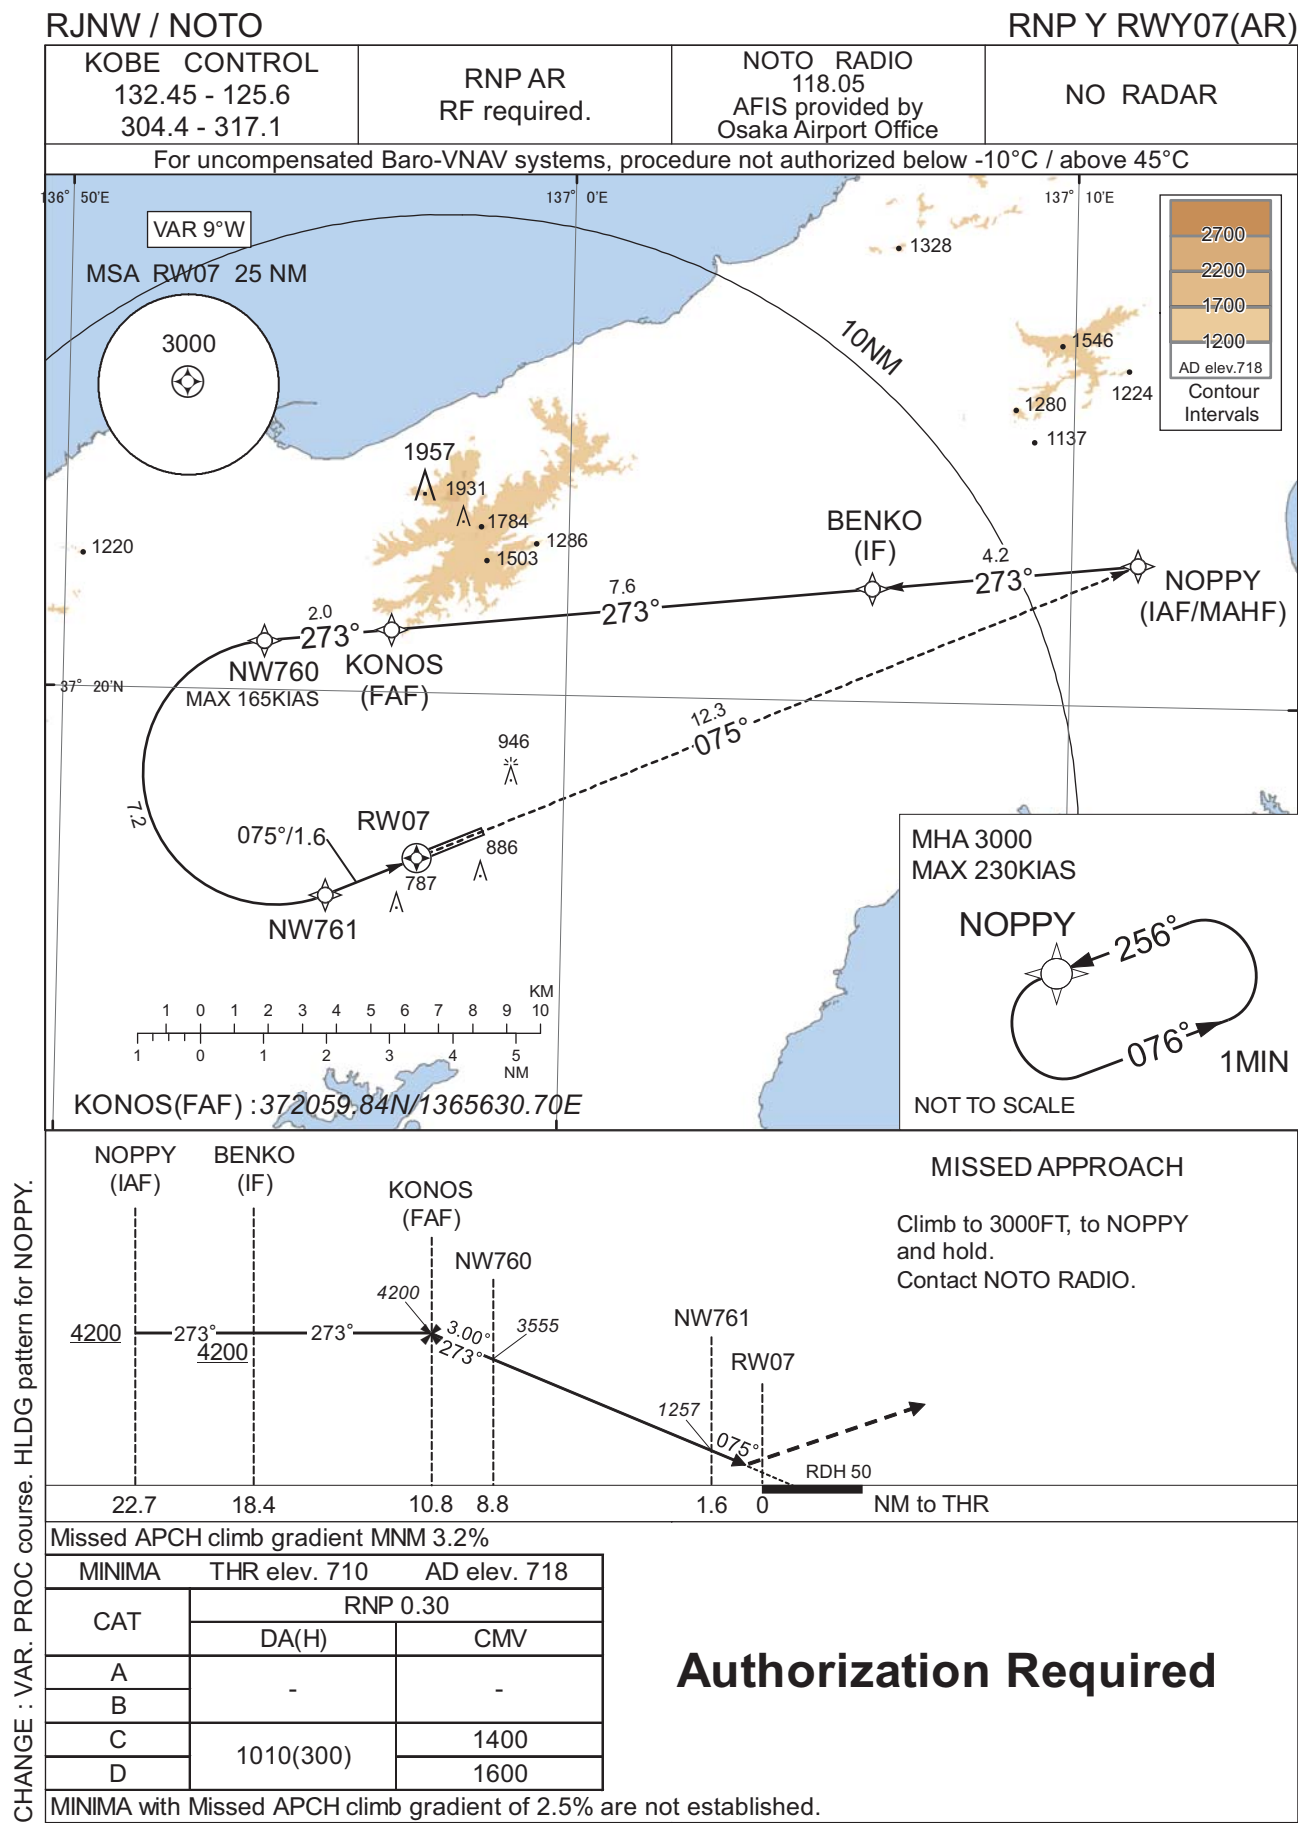

INSTRUMENT APPROACH CHART

RJNW / NOTO

RNP Y RWY07(AR)

Coding Table											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	NOPPY	-	-	-8.8	-	-	+4200	-	-	-
002	TF	BENKO	-	273 (264.0)	-8.8	4.2	-	+4200	-	-	1.0
003	TF	KONOS	-	273 (264.0)	-8.8	7.6	-	4200	-	-	1.0
004	TF	NW760	-	273 (263.9)	-8.8	2.0	-	3555	-165	-3.00	0.3
005	RF Center: NWRF2 r=2.10NM	NW761	-	-	-8.8	7.2	L	1257	-	-3.00	0.3
006	TF	RW07	Y	075 (066.6)	-8.8	1.6	-	760	-	-3.00/50	0.3
007	TF	NOPPY	-	075 (066.7)	-8.8	12.3	-	3000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	NOPPY	256 (246.9)	-8.8	1.0 (-14000)	L	3000	FL140	-230 (-14000)	1.0

Waypoint Coordinates



Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
NOPPY	372214.69N / 1371120.01E	NWRF2	371841.62N / 1365416.12E
BENKO	372148.26N / 1370603.41E		
KONOS	372059.84N / 1365630.70E		
NW760	372046.91N / 1365359.30E		
NW761	371645.85N / 1365518.43E		
RW07	371722.92N / 1365706.38E		
NOPPY	372214.69N / 1371120.01E		

CHANGE : VAR. PROC course. HLDG pattern for NOPPY.

INSTRUMENT APPROACH CHART

RJNW / NOTO

RNP X RWY07

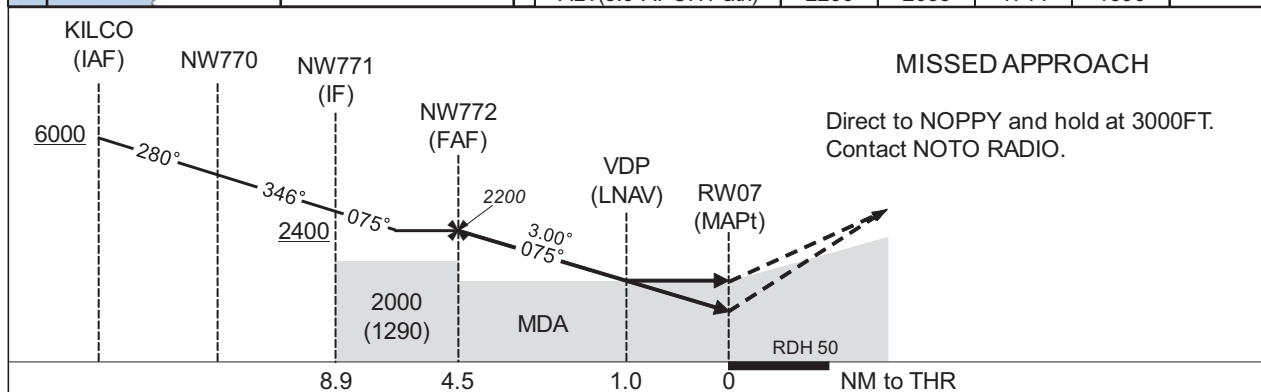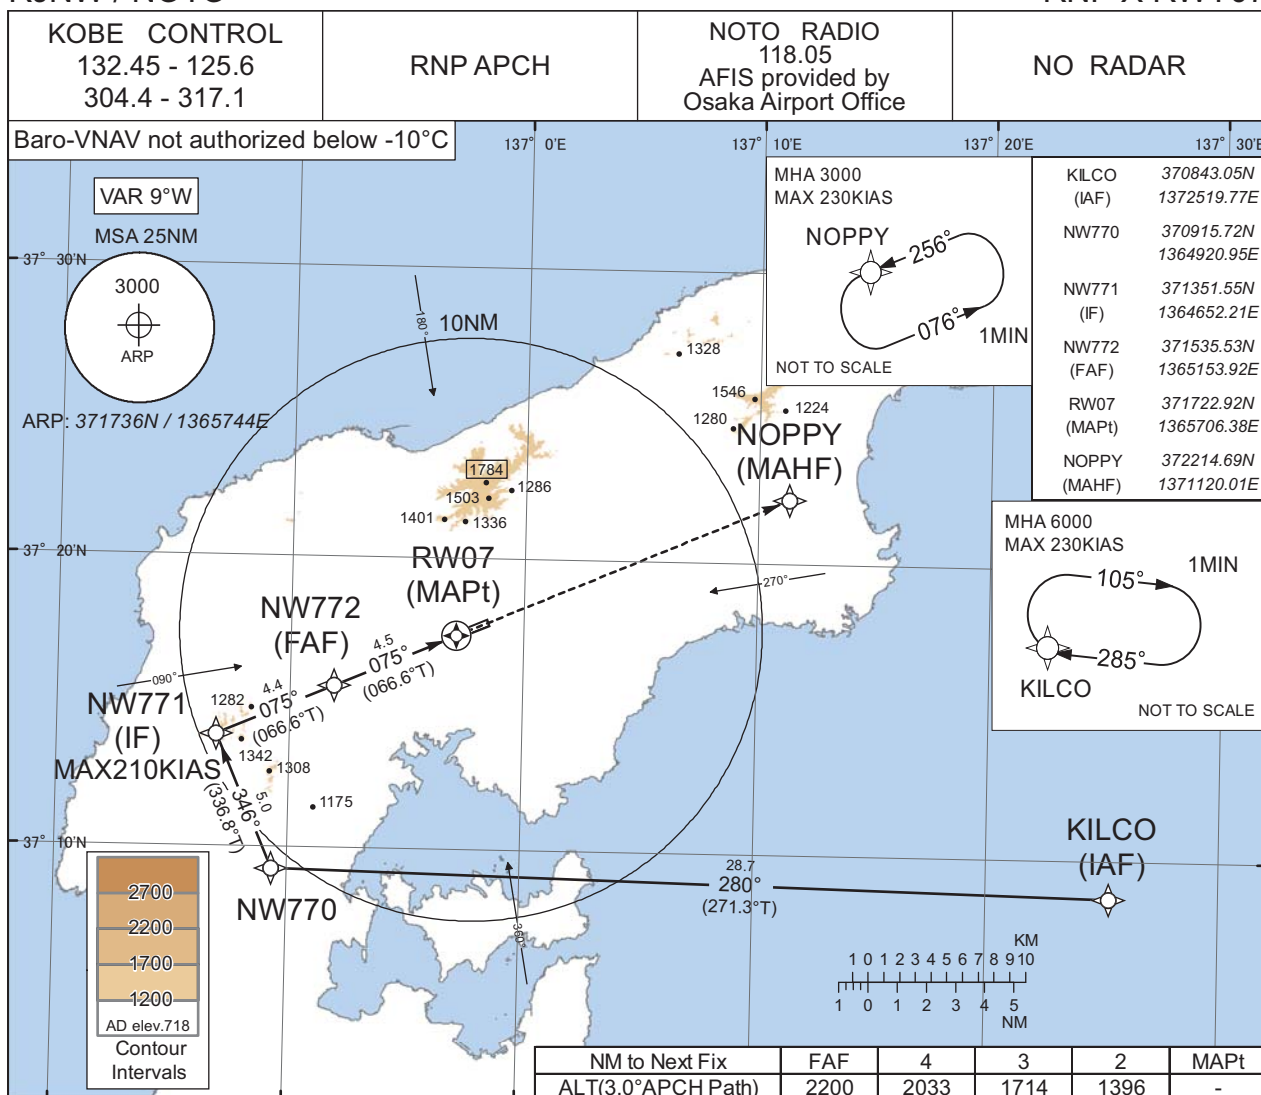

Missed APCH climb gradient MNM 3.0%

MINIMA		THR elev. 710	AD elev. 718
CAT	LNAV/VNAV		LNAV
	DA(H)	CMV	MDA(H)
A	962 (252)	1000	1060 (350)
B		1100	1200
C	972 (262)	1200	1300
D	1001 (291)	1400	1400

MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : New PROC.

RJNW / NOTO

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
見附島 Mitsukejima	066°T / 14.9NM	島 Island
宇出津 Ushitsu	085°T / 9.1NM	港 Harbor
観音崎 Kannonzaki	158°T / 12.0NM	岬 Cape
ツインブリッジ TwinBridge	197°T / 9.8NM	橋 Bridge
穴水 Anamizu	210°T / 4.6NM	港 Harbor
海士崎 Amazaki	238°T / 16.5NM	岬 Cape
猿山 Saruyama	278°T / 11.7NM	岬 Cape
輪島 Wajima	335°T / 7.0NM	港 Harbor

RJNW / NOTO

Minimum Vectoring Altitude CHART

