

MATSUYAMA AP

VAR 8° W 2024
(Annual change 5' W)

18 17 16 15 14 13 12 11 10

GUIDANCE LINE OF SPARE SPOT FOR MAINTENANCE
OR NIGHT STAY (PPR ON USE)

396m

468m

TWR

ABN

190m

85m

WIND SPEED METER

WIND DIRECTION INDICATOR LGT

P-1 P-2 P-3 P-4 P-5 P-6 P-7 P-8

T-1 T-2 T-3 T-4 T-5 T-6 T-7 T-8

CELLOMETER

RWY GUARD LGT

RWY THR ID LGT

RWY ID LGT

ARP 334938N 1324759E

PAPI Angle 3.0°
MEHT 20m (66 ft)

RVR

415m

461.3m

OVERRUN LGT


WIND DIRECTION INDICATOR LGT

PAPI Angle 3.0°
MEHT 22.5m (74 ft)

CGL

REMARKS :

The diagram illustrates a 'SIMPLE APCH LIGHTING SYSTEM'. It shows a runway layout with a 420m approach section, a 165m transition section, and a 351m final approach section. The runway is 32m wide. The approach section is marked with a series of lights, including a 165m transition section and a 351m final approach section. Two 'APCH LGT BEACONS' are shown at the end of the final approach section, with arrows pointing to the runway. The diagram also shows a 420m approach section with a 165m transition section and a 351m final approach section.

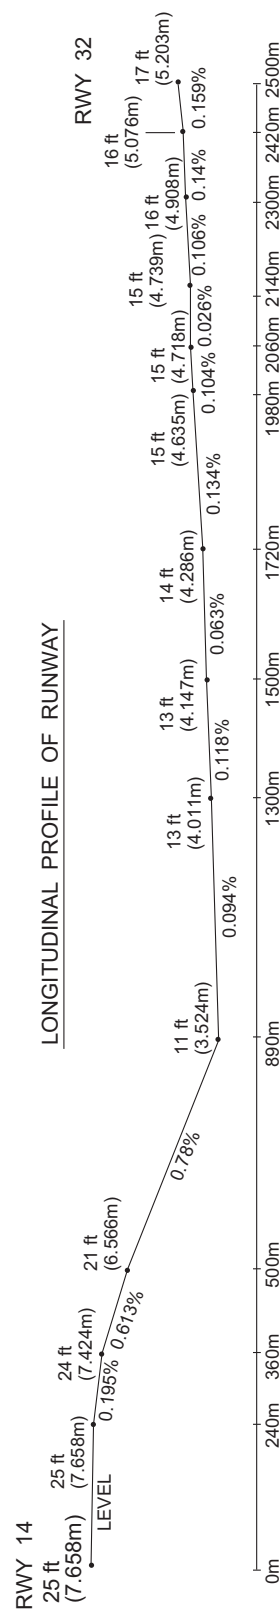

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART -INSTRUMENT

RJOM / MATSUYAMA

SID

MATSUYAMA REVERSAL FIVE DEPARTURE


RWY32 : Climb RWY HDG to 500FT, turn left HDG 270° to 3500FT, turn left...

RWY14 : Climb RWY HDG to 1300FT, turn right HDG 270° to 3500FT, turn right...
...direct to MYE VOR/DME.

Cross MYE VOR/DME at or above 6500FT.

Note RWY14 : 7.0% climb gradient required up to 3200FT.

OBST ALT 2822FT located at 7.6NM 173° FM end of RWY14.
No turn before DER.

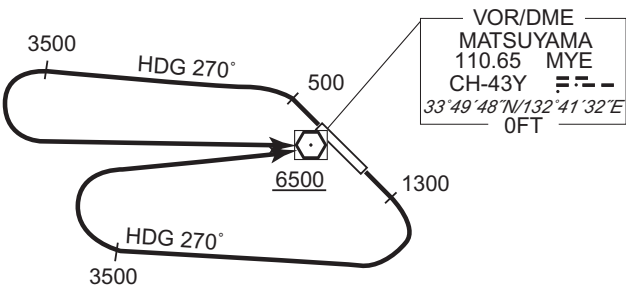


CHANGE : OBST.

STANDARD DEPARTURE CHART -INSTRUMENT

RJOM / MATSUYAMA

RNAV SID

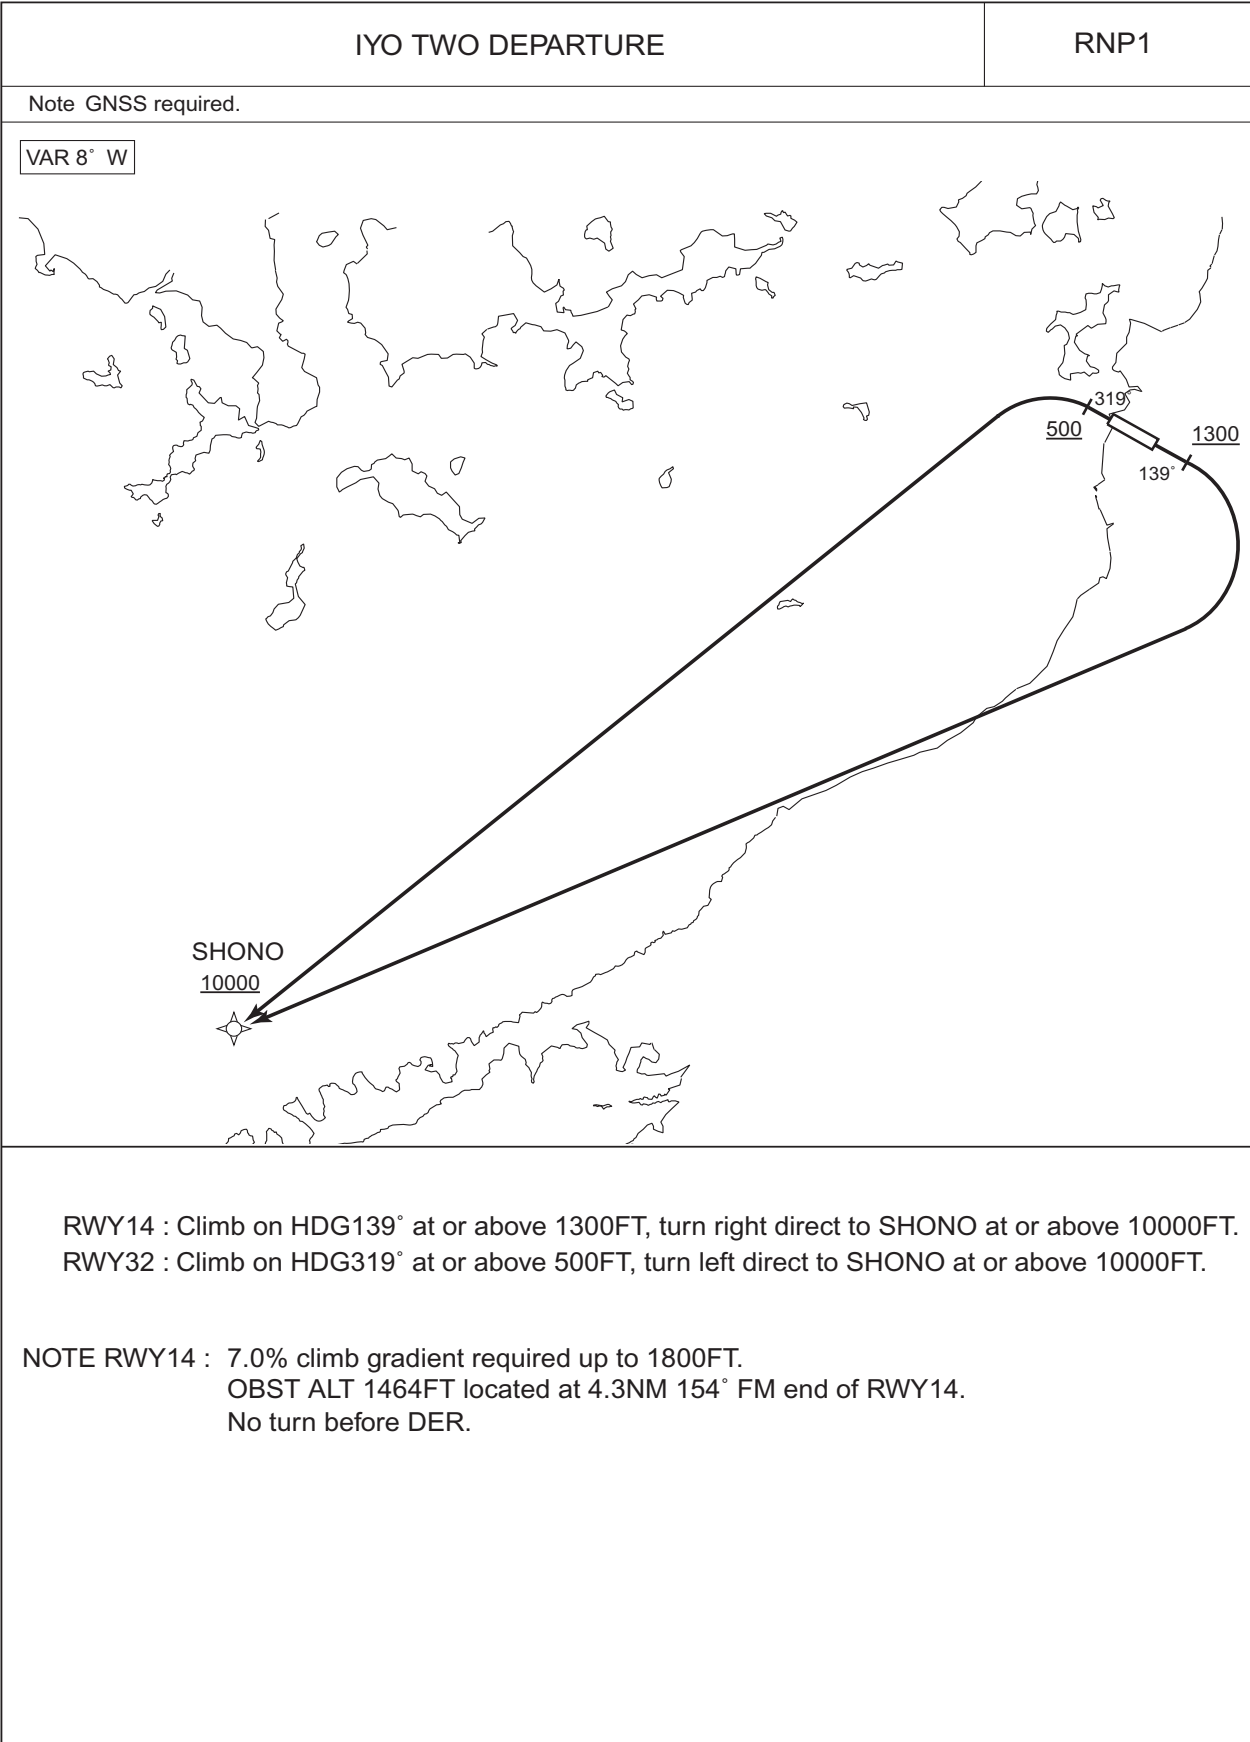

CHANGE : PROC renamed. PROC course. VAR.

STANDARD DEPARTURE CHART -INSTRUMENT

RJOM / MATSUYAMA

RNAV SID

IYO TWO DEPARTURE

RWY14

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	139 (130.7)	-8.1	-	-	+1300	-	-	RNP1
002	DF	SHONO	-	-	-8.1	-	R	+10000	-	-	RNP1

RWY32

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	319 (310.7)	-8.1	-	-	+500	-	-	RNP1
002	DF	SHONO	-	-	-8.1	-	L	+10000	-	-	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates
SHONO	332744.0N / 1320647.1E


CHANGE : PROC renamed. PROC course. VAR. Waypoint Coordinates added.

RJOM / MATSUYAMA

SAKAR TWO DEPARTURE
URDET TRANSITION / JINBE TRANSITION
ROSIE TRANSITION / KOCHI TRANSITION

RNP1

VAR 8° W

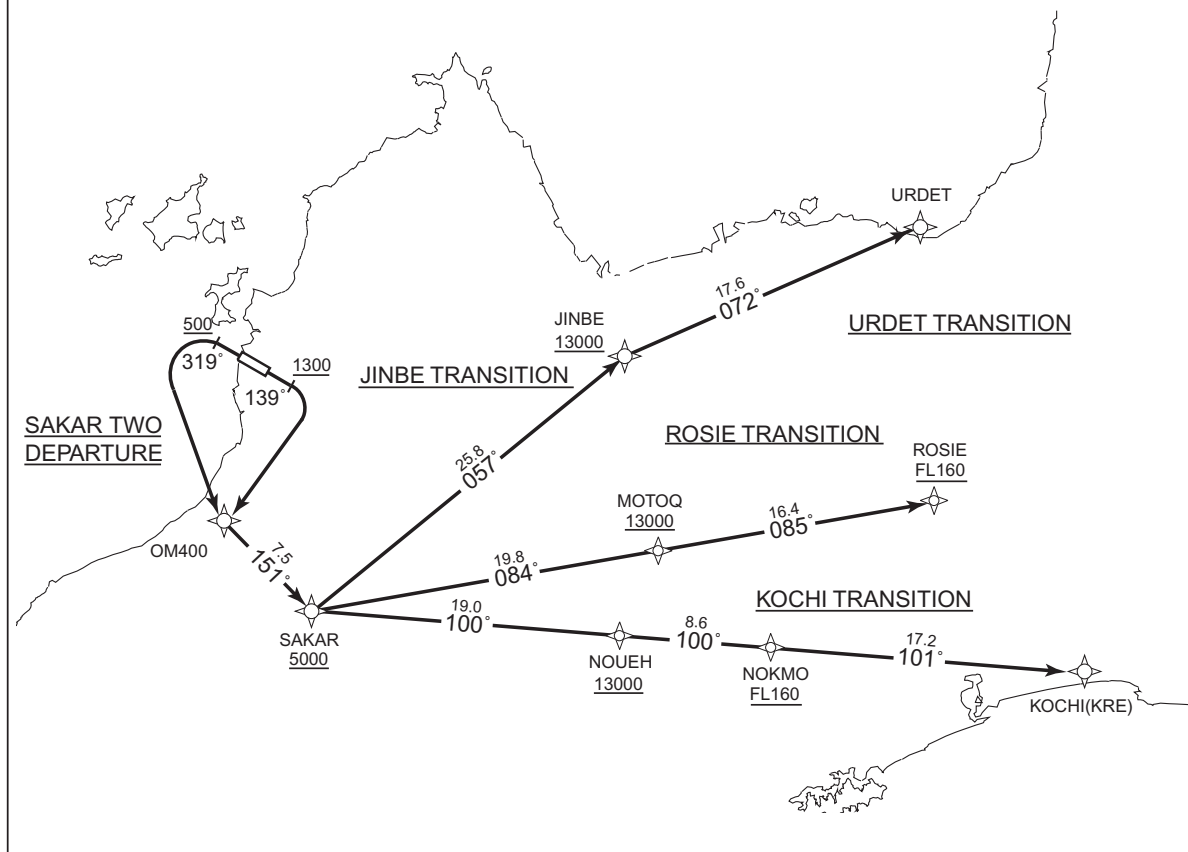

NOTE RWY14 : 7.0% climb gradient required up to 3200FT.
OBST ALT 2822FT located at 7.6NM 173° FM end of RWY14.
No turn before DER.

RWY32 : 5.3% climb gradient required up to 3600FT.
OBST ALT 3084FT located at 10.5NM 178° FM end of RWY32.

From SAKAR at or above 5000FT, to JINBE at or above 13000FT, to URDET.

From SAKAR at or above 5000FT, to JINBE at or above 13000FT.

From SAKAR at or above 5000FT, to MOTOQ at or above 13000FT, to ROSIE at or above FL160.

From SAKAR at or above 5000FT, to NOUEH at or above 13000FT, to NOKMO at or above FL160, to KRE.

CHANGE : PROC renamed(SAKAR TWO DEPARTURE). URDET TRANSITION, URDET established.
RANDY TRANSITION, RANDY abolished. VAR: PROC course.

STANDARD DEPARTURE CHART -INSTRUMENT

RJOM / MATSUYAMA

RNAV SID and TRANSITION

SAKAR TWO DEPARTURE

RWY14

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	139 (130.7)	-8.1	-	-	+1300	-	-	RNP1
002	DF	OM400	-	-	-8.1	-	R	-	-	-	RNP1
003	TF	SAKAR	-	151 (142.7)	-8.1	7.5	-	+5000	-	-	RNP1

RWY32

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	319 (310.7)	-8.1	-	-	+500	-	-	RNP1
002	DF	OM400	-	-	-8.1	-	L	-	-	-	RNP1
003	TF	SAKAR	-	151 (142.7)	-8.1	7.5	-	+5000	-	-	RNP1

URDET TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SAKAR	-	-	-8.1	-	-	+5000	-	-	RNP1
002	TF	JINBE	-	057 (048.8)	-8.1	25.8	-	+13000	-	-	RNP1
003	TF	URDET	-	072 (064.0)	-8.1	17.6	-	-	-	-	RNP1

JINBE TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SAKAR	-	-	-8.1	-	-	+5000	-	-	RNP1
002	TF	JINBE	-	057 (048.8)	-8.1	25.8	-	+13000	-	-	RNP1

CHANGE : PROC renamed(SAKAR TWO DEP, URDET TRANSITION). URDET established. RANDY abolished. PROC course. VAR.

STANDARD DEPARTURE CHART -INSTRUMENT

RJOM / MATSUYAMA RNAV SID and TRANSITION

ROSIE TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SAKAR	-	-	-8.1	-	-	+5000	-	-	RNP1
002	TF	MOTOQ	-	084 (076.4)	-8.1	19.8	-	+13000	-	-	RNP1
003	TF	ROSIE	-	085 (076.6)	-8.1	16.4	-	+FL160	-	-	RNP1

KOCHI TRANSITION


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SAKAR	-	-	-8.1	-	-	+5000	-	-	RNP1
002	TF	NOUEH	-	100 (092.2)	-8.1	19.0	-	+13000	-	-	RNP1
003	TF	NOKMO	-	100 (092.4)	-8.1	8.6	-	+FL160	-	-	RNP1
004	TF	KRE	-	101 (092.5)	-8.1	17.2	-	-	-	-	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
OM400	334023.4N / 1324141.5E	ROSIE	334248.4N / 1332926.3E
SAKAR	333425.3N / 1324708.8E	NOUEH	333339.4N / 1330955.5E
JINBE	335120.9N / 1331027.5E	NOKMO	333317.2N / 1332014.0E
URDET	335902.5N / 1332930.9E	KRE	333230.4N / 1334048.6E
MOTOQ	333902.8N / 1331018.4E		

CHANGE : PROC course. VAR. Waypoint Coordinates added.

STANDARD DEPARTURE CHART -INSTRUMENT

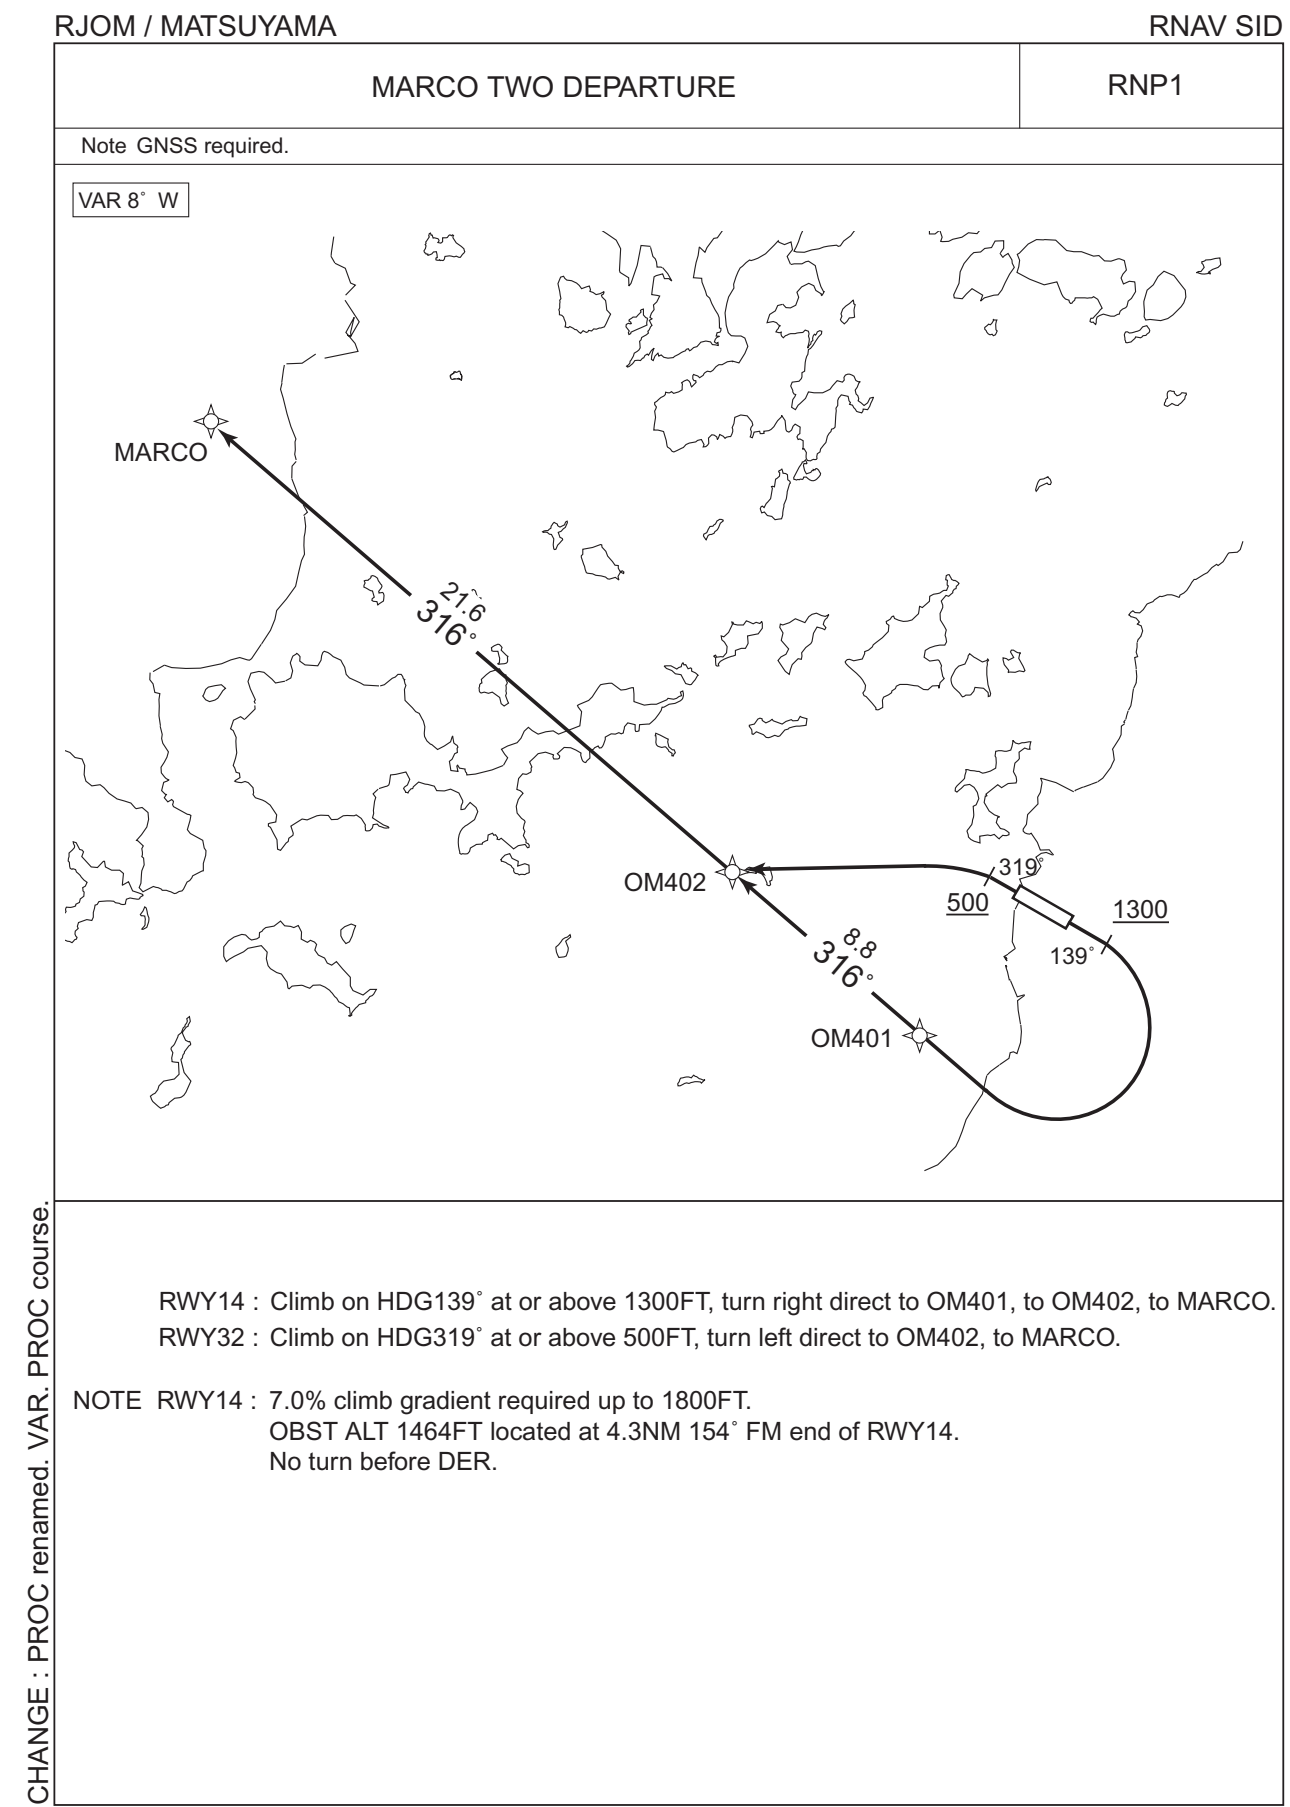

STANDARD DEPARTURE CHART -INSTRUMENT

RJOM / MATSUYAMA

RNAV SID

MARCO TWO DEPARTURE

RWY14

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	139 (130.7)	-8.1	-	-	+1300	-	-	RNP1
002	DF	OM401	-	-	-8.1	-	R	-	-	-	RNP1
003	TF	OM402	-	316 (308.1)	-8.1	8.8	-	-	-	-	RNP1
004	TF	MARCO	-	316 (308.1)	-8.1	21.6	-	-	-	-	RNP1

RWY32

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	319 (310.7)	-8.1	-	-	+500	-	-	RNP1
002	DF	OM402	-	-	-8.1	-	L	-	-	-	RNP1
003	TF	MARCO	-	316 (308.1)	-8.1	21.6	-	-	-	-	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates
OM401	334603.4N / 1323745.6E
OM402	335129.5N / 1322924.1E
MARCO	340446.0N / 1320850.2E

CHANGE : PROC course. VAR. Waypoint Coordinates added.

STANDARD ARRIVAL CHART - INSTRUMENT


RJOM / MATSUYAMA

STAR

MASKU ARRIVAL

From over MASKU, via MYE R319 to ROBIN.


Cross MASKU at or above 5000FT, cross MYE R319/20.0DME at or above 4000FT, cross ROBIN at or above 2600FT.

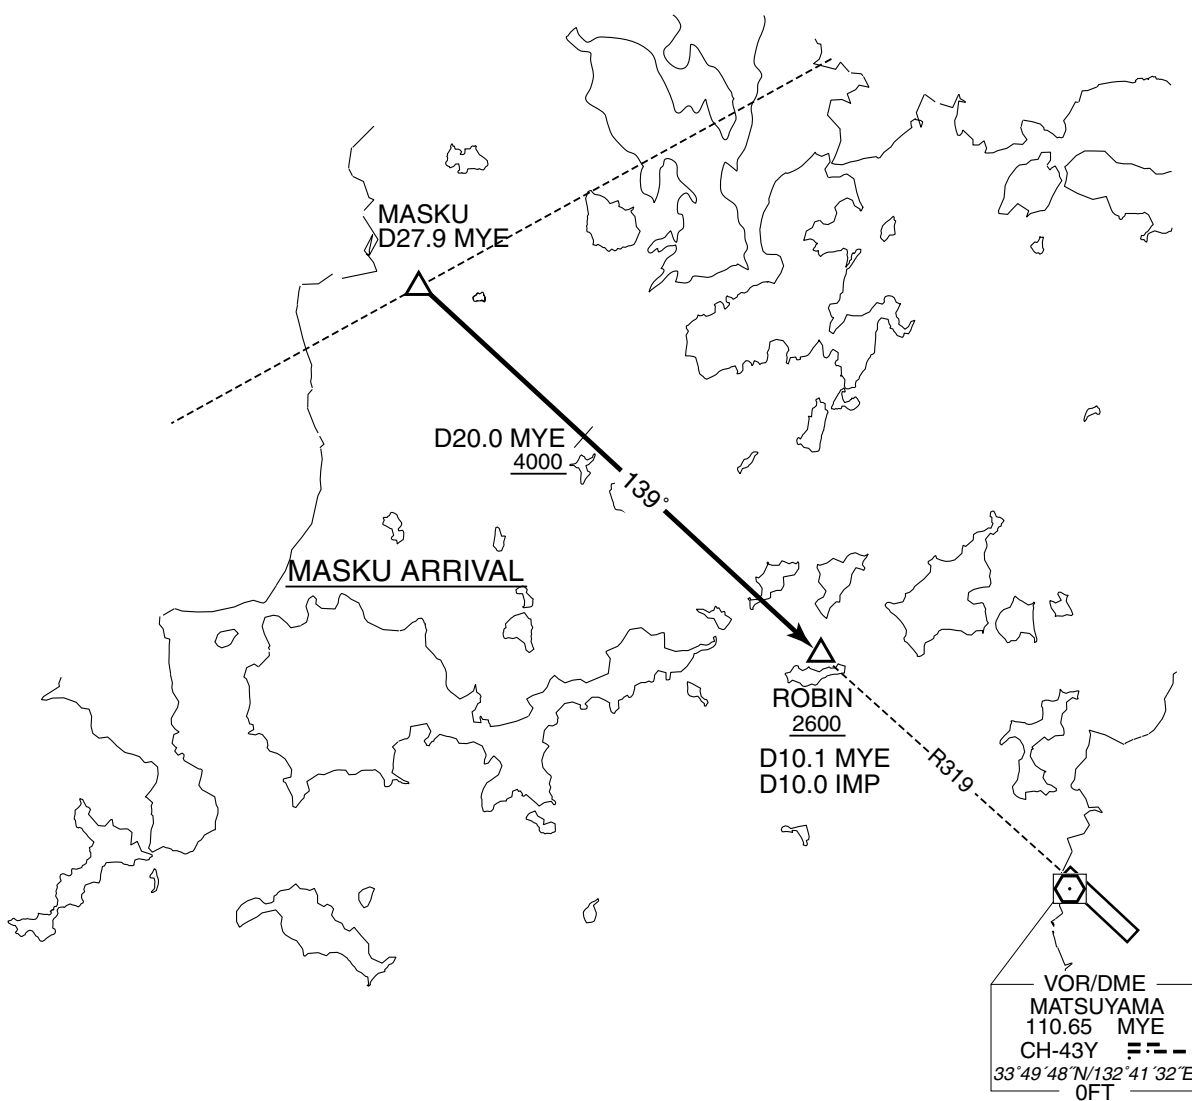

STANDARD ARRIVAL CHART -INSTRUMENT

RJOM / MATSUYAMA

RNAV STAR RWY14

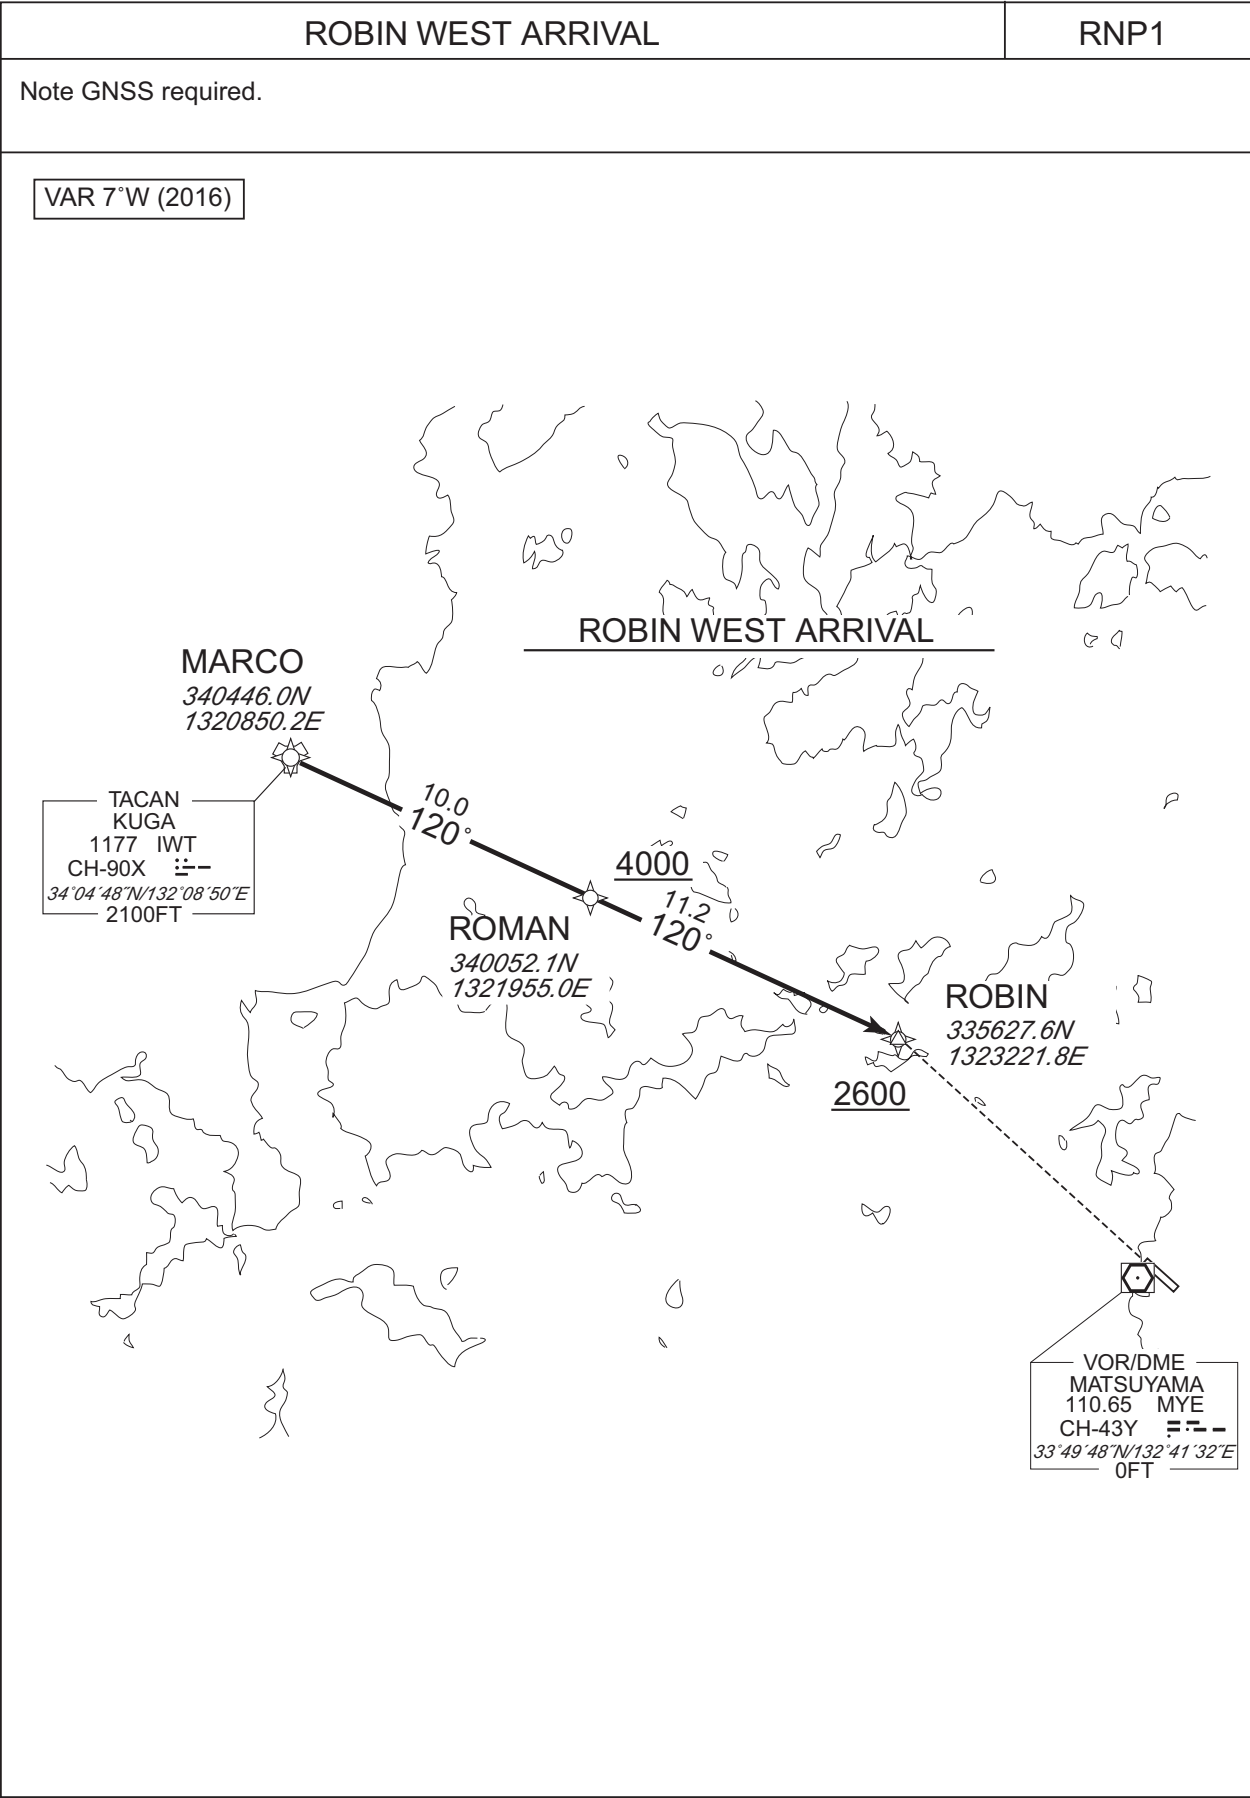

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD ARRIVAL CHART -INSTRUMENT

RJOM / MATSUYAMA

RNAV STAR RWY14

ROBIN WEST ARRIVAL
From MARCO, to ROMAN at or above 4000FT, to ROBIN at or above 2600FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MARCO	-	-	-7.4	-	-	-	-	-	RNP1
002	TF	ROMAN	-	120 (113.0)	-7.4	10.0	-	+4000	-	-	RNP1
003	TF	ROBIN	-	120 (113.1)	-7.4	11.2	-	+2600	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD ARRIVAL CHART -INSTRUMENT

RJOM / MATSUYAMA

RNAV STAR RWY14/32


ROBIN EAST ARRIVAL
MADON ARRIVAL
KIKMA ARRIVAL

RNP1

Note GNSS required.

VAR 7°W (2016)

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

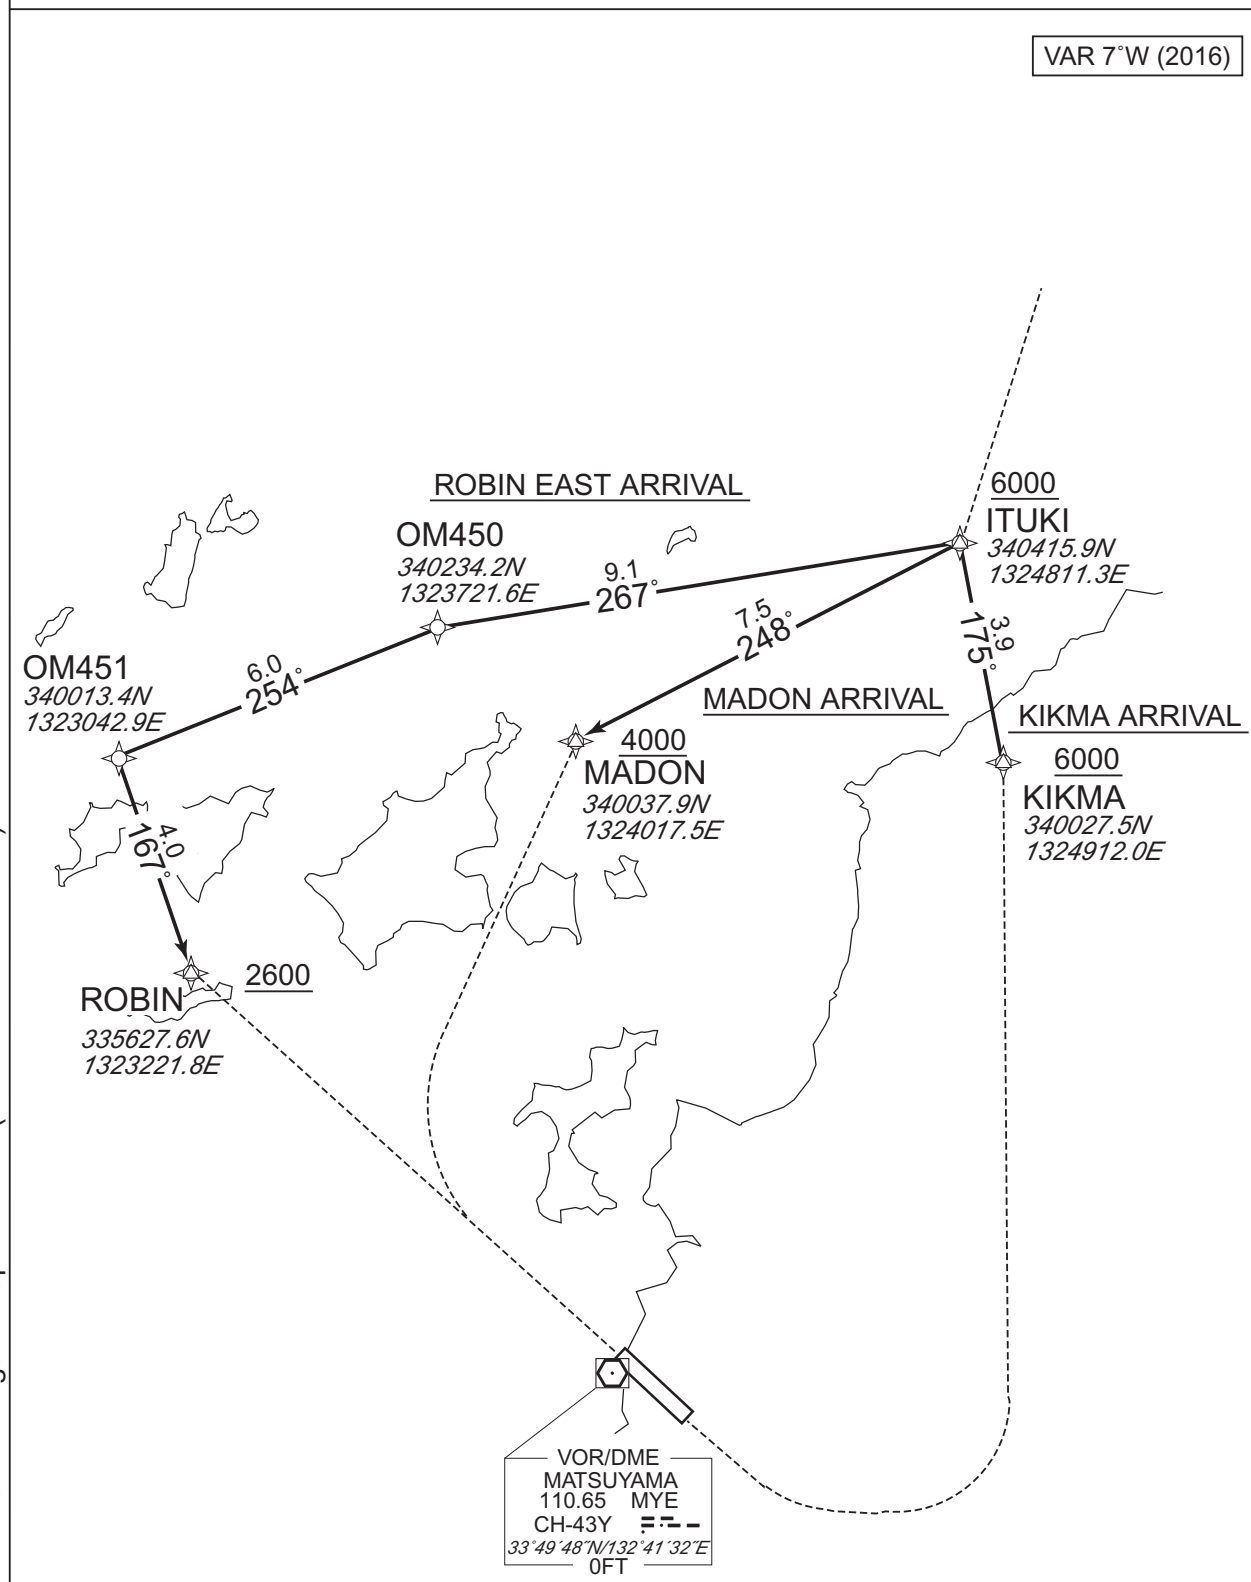

STANDARD ARRIVAL CHART -INSTRUMENT

RJOM / MATSUYAMA

RNAV STAR RWY14/32

ROBIN EAST ARRIVAL
From ITUKI at or above 6000FT, to OM450, to OM451, to ROBIN at or above 2600FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ITUKI	-	-	-7.4	-	-	+6000	-	-	RNP1
002	TF	OM450	-	267 (259.4)	-7.4	9.1	-	-	-	-	RNP1
003	TF	OM451	-	254 (247.0)	-7.4	6.0	-	-	-	-	RNP1
004	TF	ROBIN	-	167 (160.0)	-7.4	4.0	-	+2600	-	-	RNP1

MADON ARRIVAL
From ITUKI at or above 6000FT, to MADON at or above 4000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ITUKI	-	-	-7.4	-	-	+6000	-	-	RNP1
002	TF	MADON	-	248 (241.0)	-7.4	7.5	-	+4000	-	-	RNP1

KIKMA ARRIVAL
From ITUKI at or above 6000FT, to KIKMA at or above 6000FT.


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ITUKI	-	-	-7.4	-	-	+6000	-	-	RNP1
002	TF	KIKMA	-	175 (167.6)	-7.4	3.9	-	+6000	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

INSTRUMENT APPROACH CHART

RJOM / MATSUYAMA


ILS Z or LOC Z RWY14

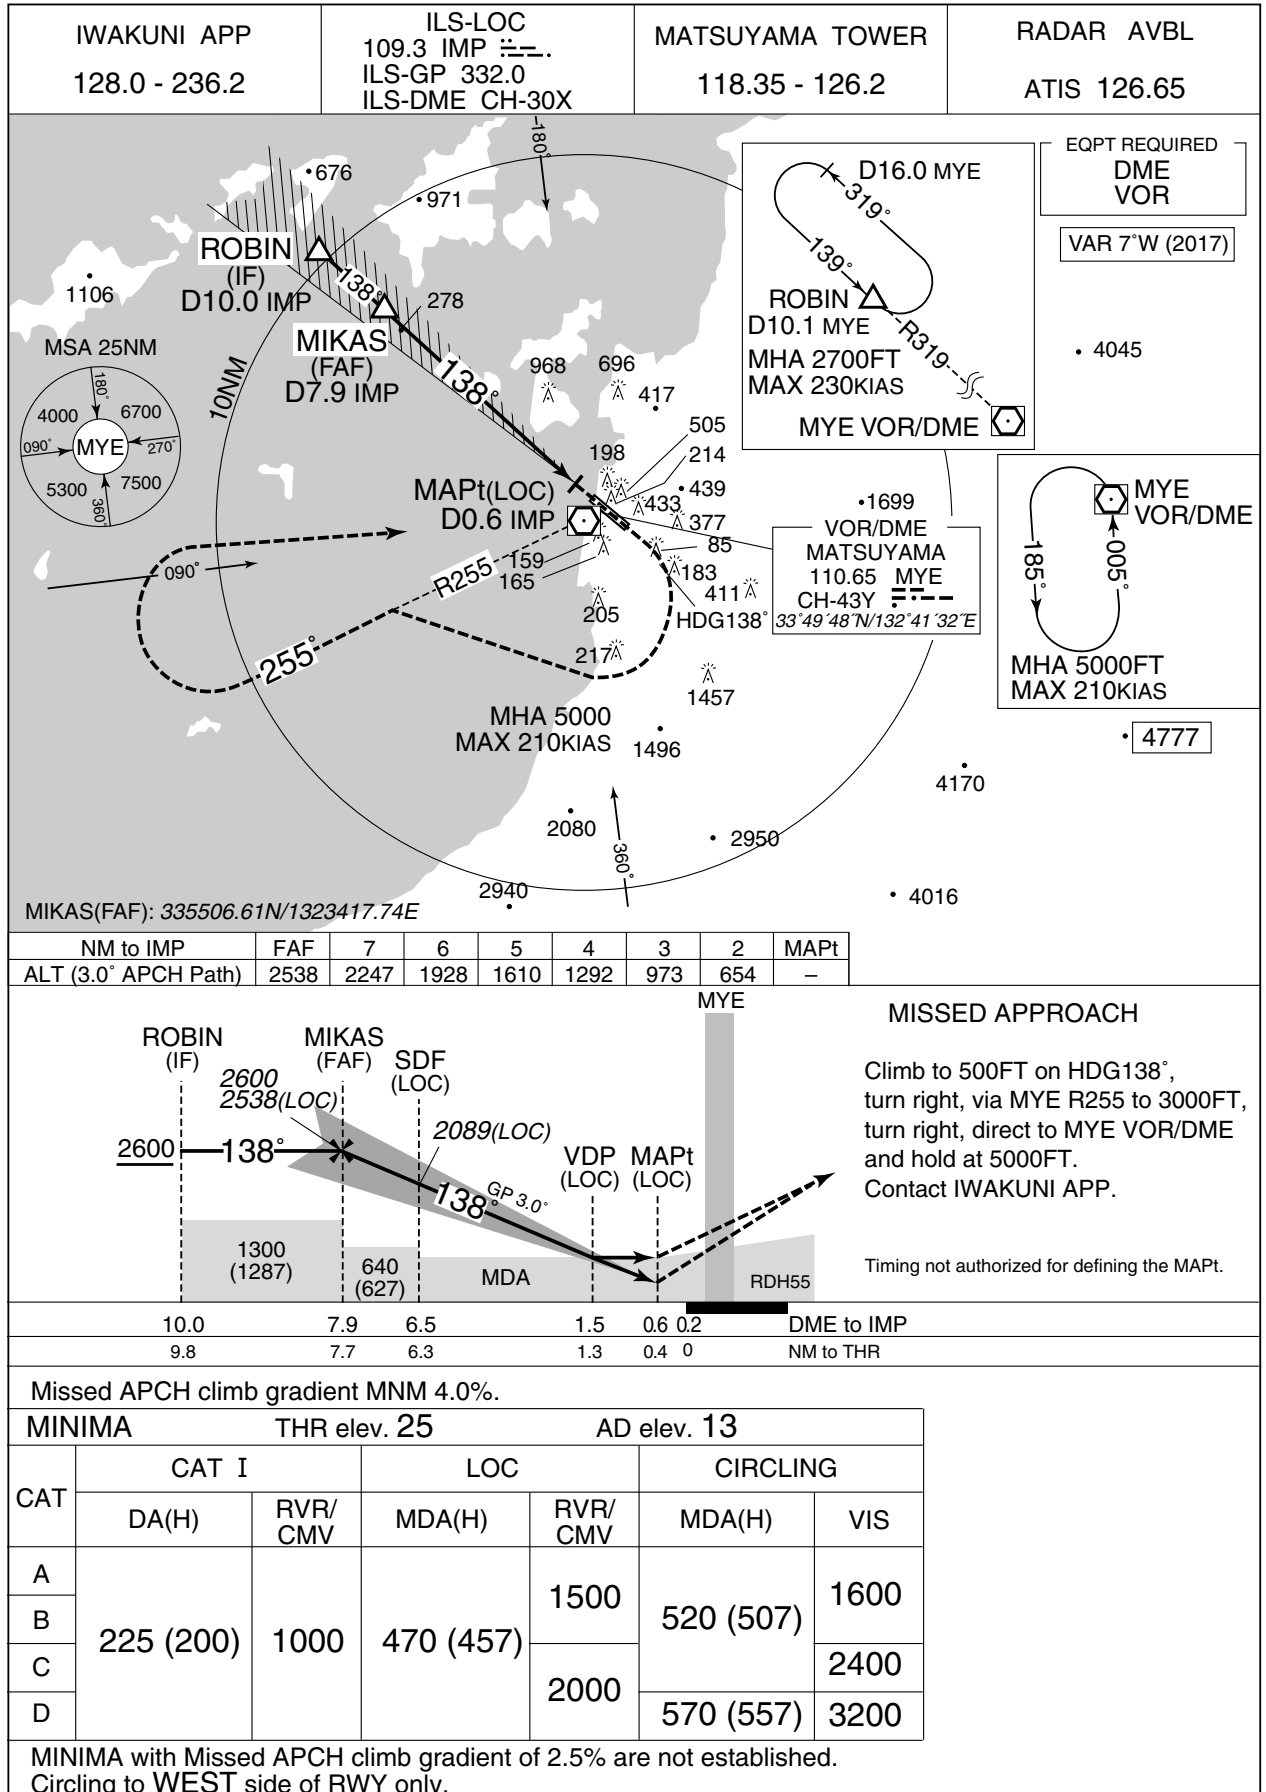

INSTRUMENT APPROACH CHART

RJOM / MATSUYAMA


ILS Y or LOC Y RWY14

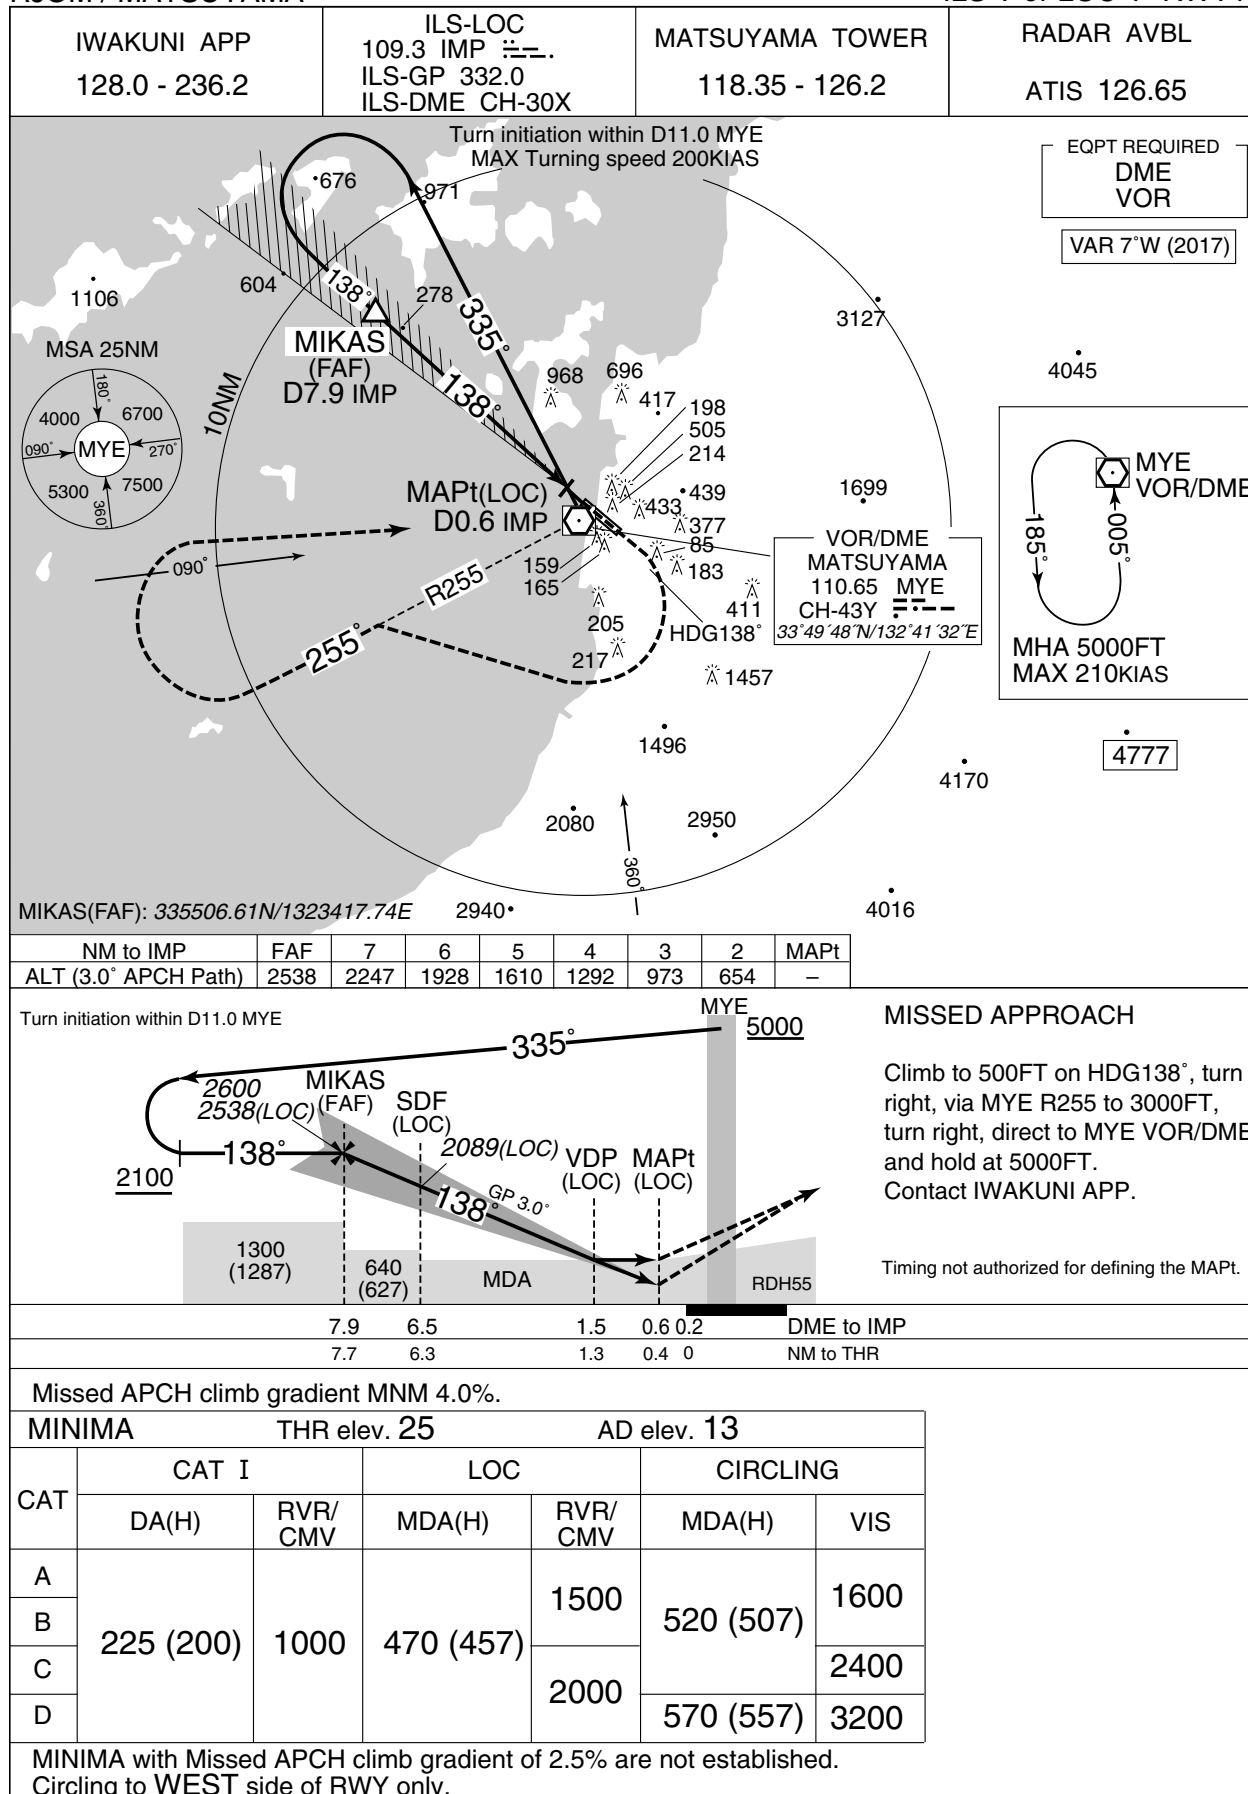

INSTRUMENT APPROACH CHART

RJOM / MATSUYAMA


VOR RWY14

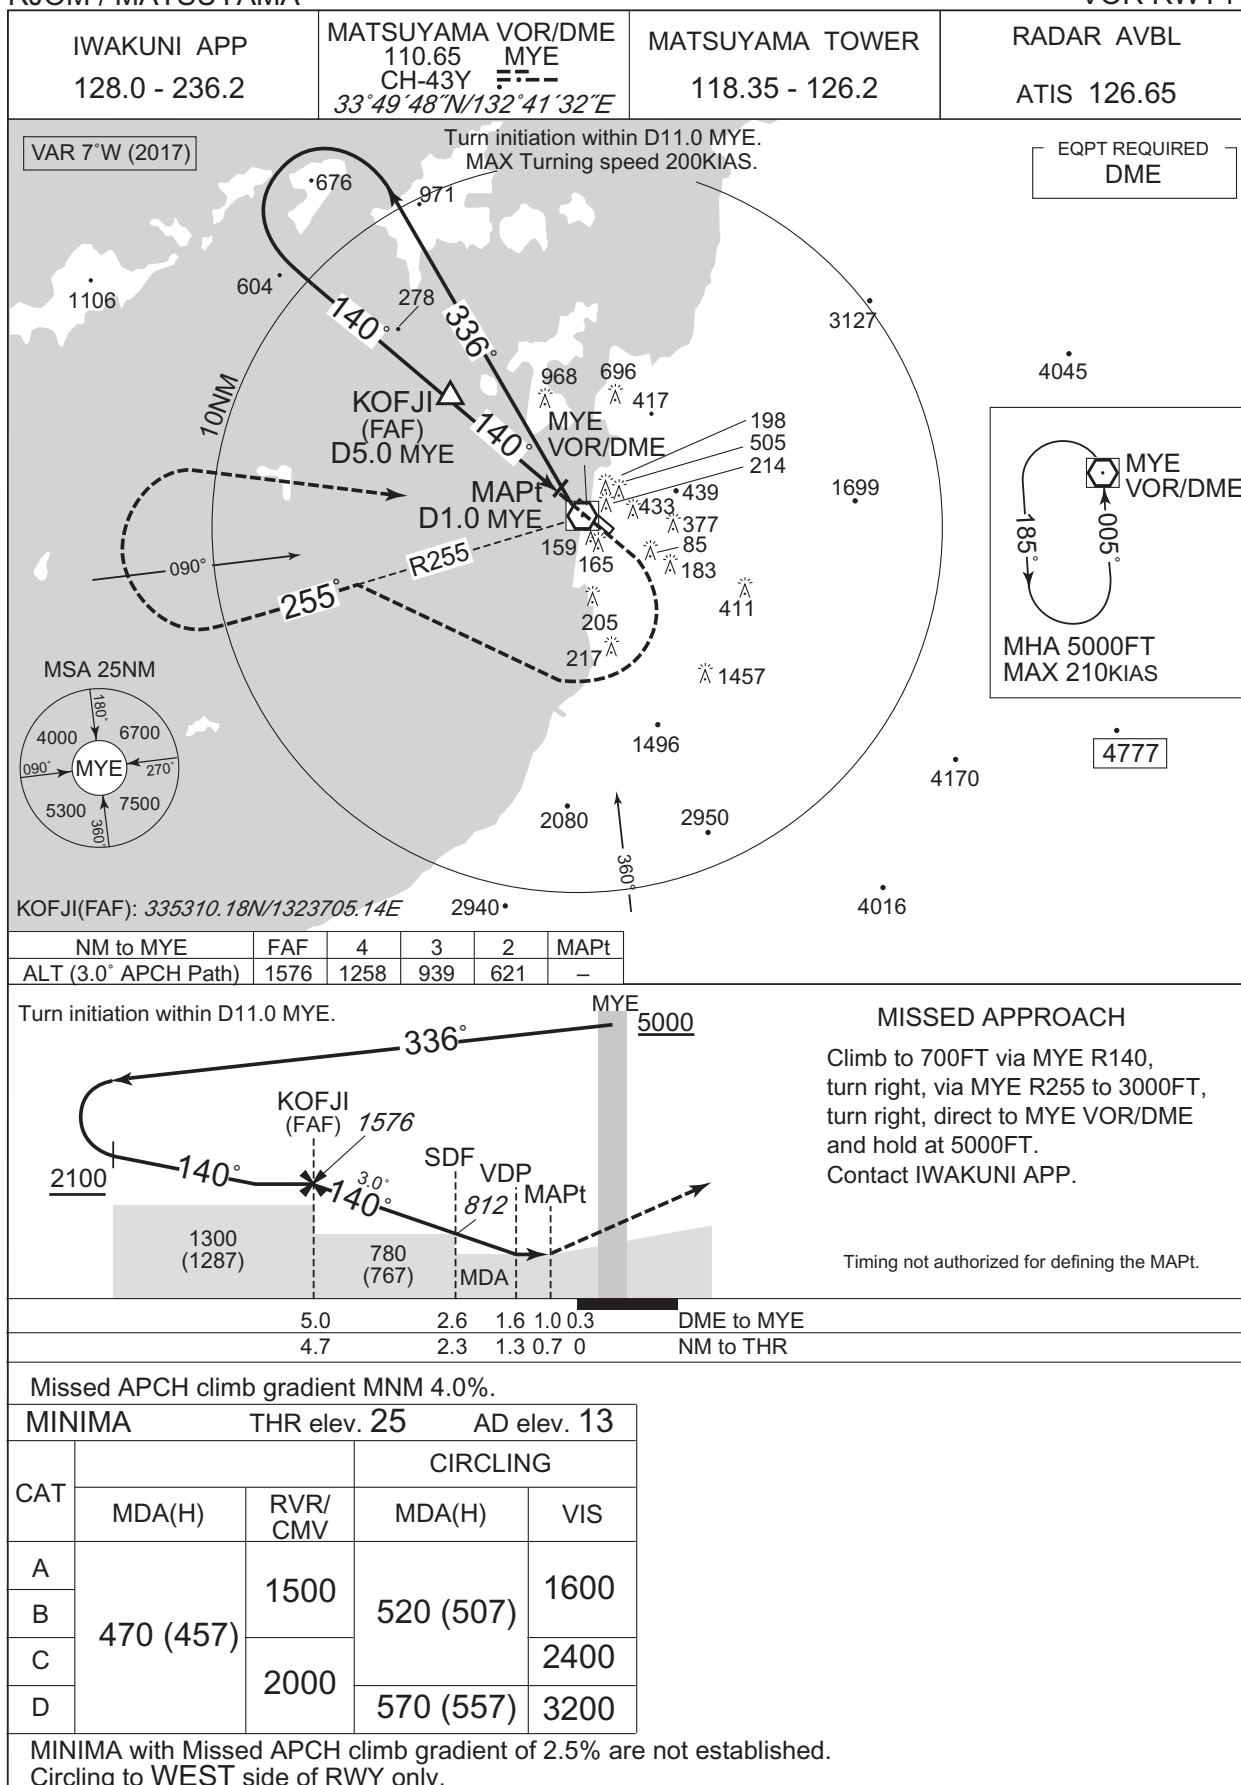


INSTRUMENT APPROACH CHART

RJOM / MATSUYAMA

RNP RWY14(AR)

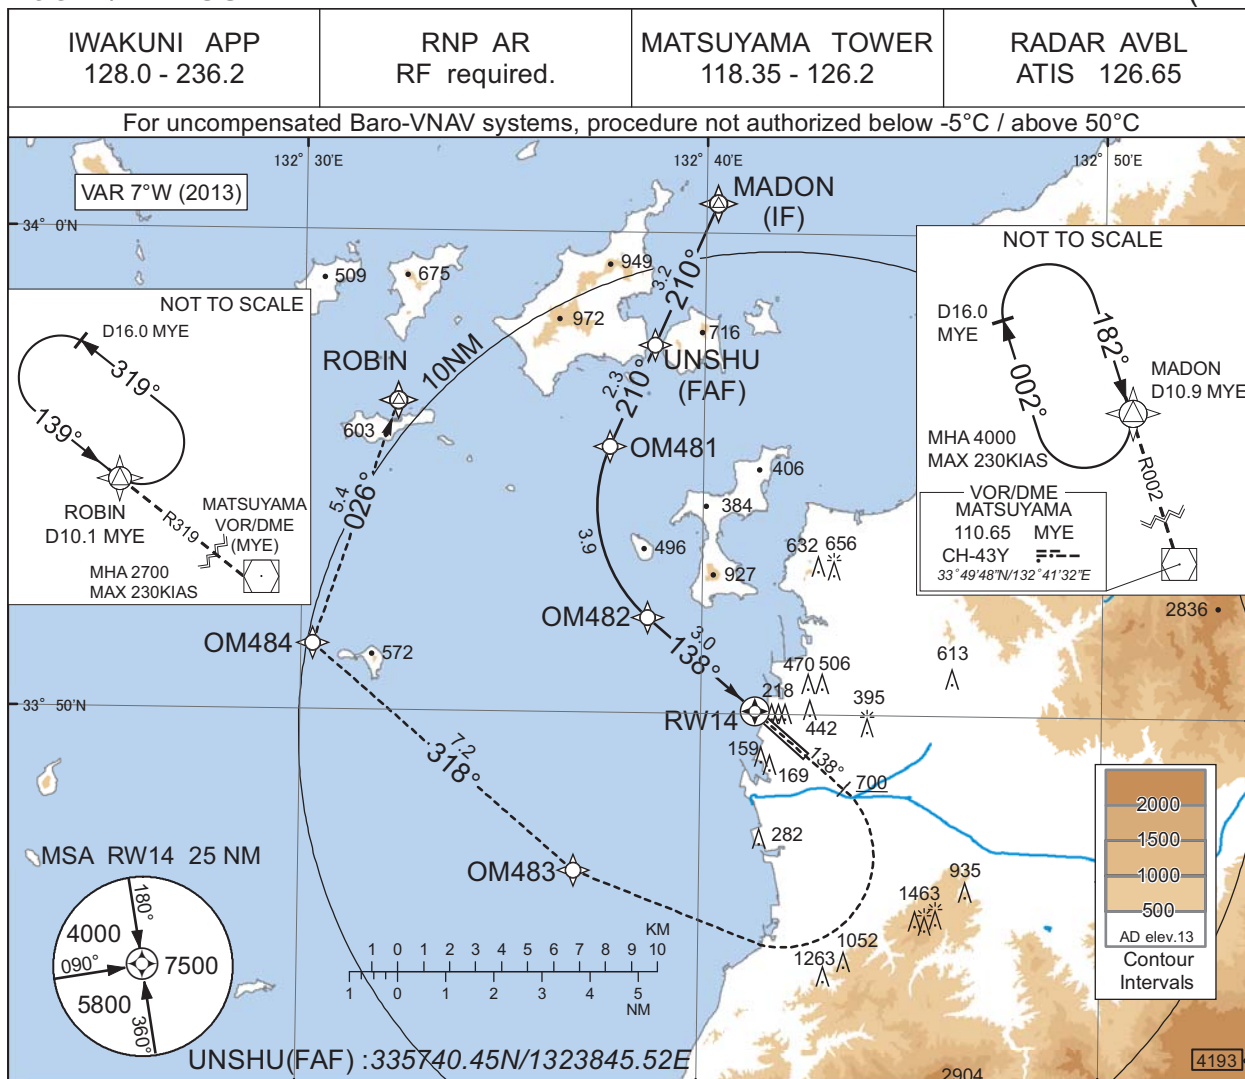

CHANGE : PROC renamed. Requirement for RNP.

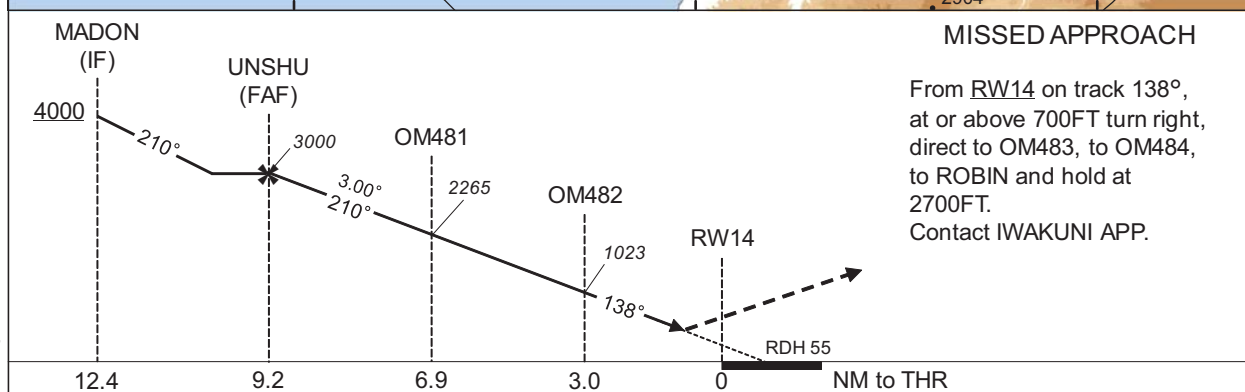

Missed APCH climb gradient MNM 5.0%

MINIMA	THR elev. 25	AD elev. 13
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B	-	-
C	505(480)	2000
D		

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Authorization Required

INSTRUMENT APPROACH CHART

RJOM / MATSUYAMA

RNP RWY14(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	MADON	-	-	-7.1	-	-	+4000	-	-	-
002	TF	UNSHU	-	210 (203.3)	-7.1	3.2	-	3000	-	-	1.0
003	TF	OM481	-	210 (203.2)	-7.1	2.3	-	2265	-	-3.00	0.3
004	RF Center: OMRF4 r=3.06NM	OM482	-	-	-7.1	3.9	L	1023	-	-3.00	0.3
005	TF	RW14	Y	138 (130.5)	-7.1	3.0	-	80	-	-3.00/55	0.3
006	FA	-	-	138 (130.5)	-7.1	-	-	+700	-	-	1.0
007	DF	OM483	-	-	-7.1	-	R	-	-	-	1.0
008	TF	OM484	-	318 (310.5)	-7.1	7.2	-	-	-	-	1.0
009	TF	ROBIN	-	026 (018.6)	-7.1	5.4	-	2700	-	-	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
MADON	340037.92N / 1324017.47E	OMRF4	335420.16N / 1324102.43E
UNSHU	335740.45N / 1323845.52E		
OM481	335533.13N / 1323739.63E		
OM482	335159.96N / 1323839.26E		
RW14	335004.50N / 1324121.73E		
OM483	334643.12N / 1323652.81E		
OM484	335123.09N / 1323018.19E		
ROBIN	335627.62N / 1323221.80E		

CHANGE : PROC renamed.


INSTRUMENT APPROACH CHART

RJOM / MATSUYAMA

RNP RWY32(AR)


IWAKUNI APP 128.0 - 236.2	RNP AR RF required.	MATSUYAMA TOWER 118.35 - 126.2	RADAR AVBL ATIS 126.65
------------------------------	------------------------	-----------------------------------	---------------------------

For uncompensated Baro-VNAV systems, procedure not authorized below -5°C / above 50°C

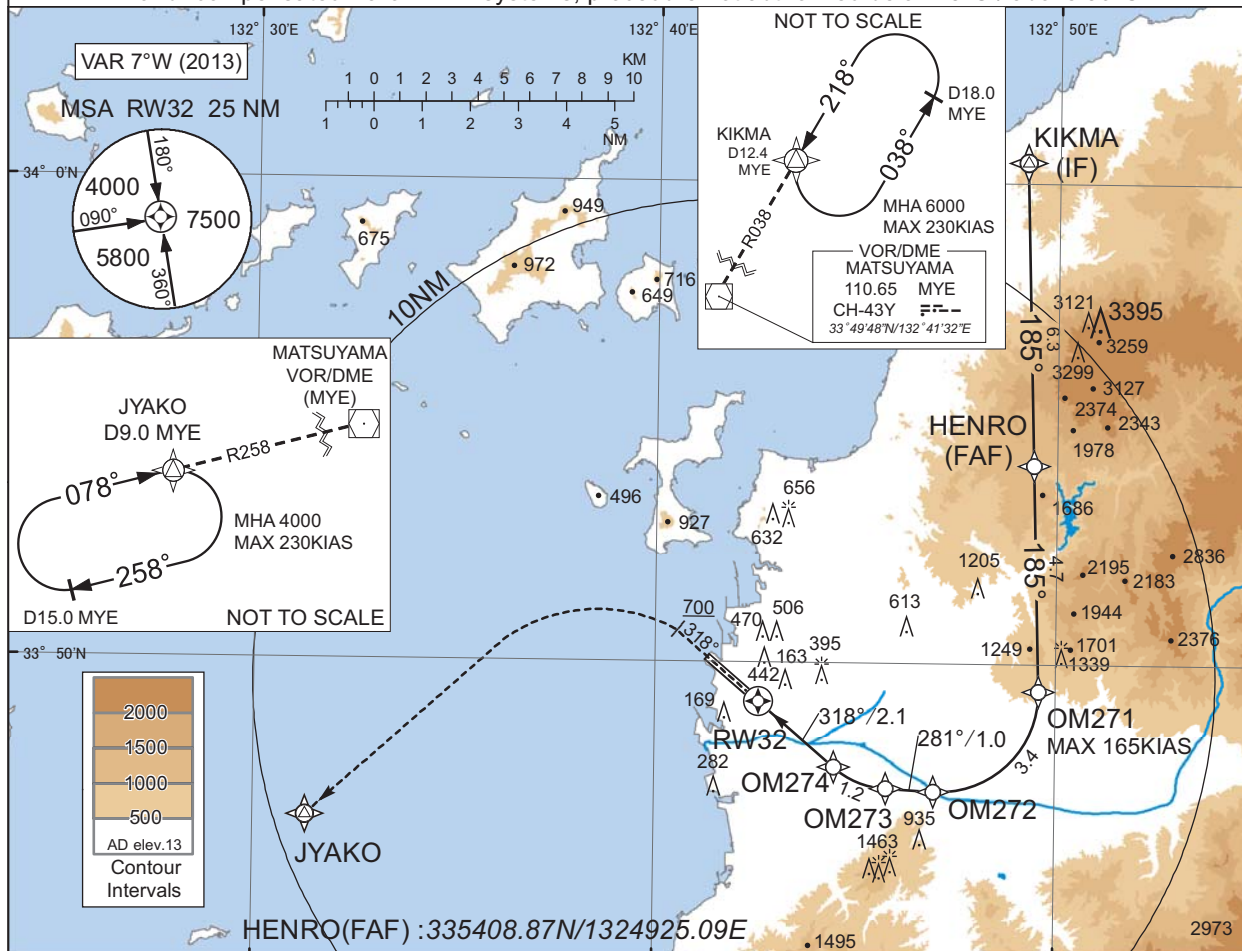

MISSED APPROACH

From RW32 on track 318°, at or above 700FT turn left, direct to JYAKO and hold at 4000FT.
Contact IWAKUNI APP.

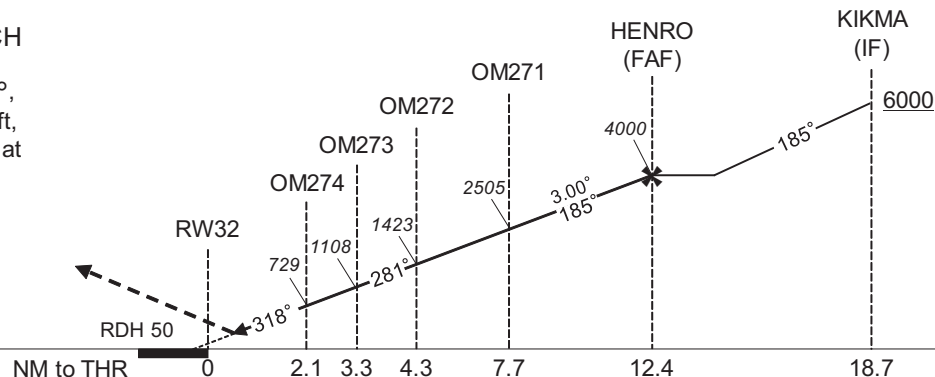

Missed APCH climb gradient MNM 5.0%

MINIMA	THR elev. 17	AD elev. 13
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B	-	-
C	484(467)	1600
D		1800

Authorization Required

MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : PROC renamed. Requirement for RNP.

INSTRUMENT APPROACH CHART

RJOM / MATSUYAMA

RNP RWY32(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	KIKMA	-	-	-7.1	-	-	+6000	-	-	-
002	TF	HENRO	-	185 (178.4)	-7.1	6.3	-	4000	-	-	1.0
003	TF	OM271	-	185 (178.4)	-7.1	4.7	-	2505	-165	-3.00	0.3
004	RF Center: OMRF1 r=2.04NM	OM272	-	-	-7.1	3.4	R	1423	-	-3.00	0.3
005	TF	OM273	-	281 (273.5)	-7.1	1.0	-	1108	-	-3.00	0.3
006	RF Center: OMRF2 r=1.85NM	OM274	-	-	-7.1	1.2	R	729	-	-3.00	0.3
007	TF	RW32	Y	318 (310.7)	-7.1	2.1	-	67	-	-3.00/50	0.3
008	FA	-	-	318 (310.7)	-7.1	-	-	+700	-	-	1.0
009	DF	JYAKO	-	-	-7.1	-	L	4000	-	-	1.0


Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
KIKMA	340027.49N / 1324911.96E	OMRF1	334923.23N / 1324707.68E
HENRO	335408.87N / 1324925.09E	OMRF2	334915.02N / 1324555.54E
OM271	334926.79N / 1324934.83E		
OM272	334720.59N / 1324658.72E		
OM273	334724.21N / 1324547.47E		
OM274	334750.46N / 1324429.38E		
RW32	334911.75N / 1324235.61E		
JYAKO	334643.83N / 1323118.89E		

CHANGE : PROC renamed.

RJOM / MATSUYAMA

Visual REP

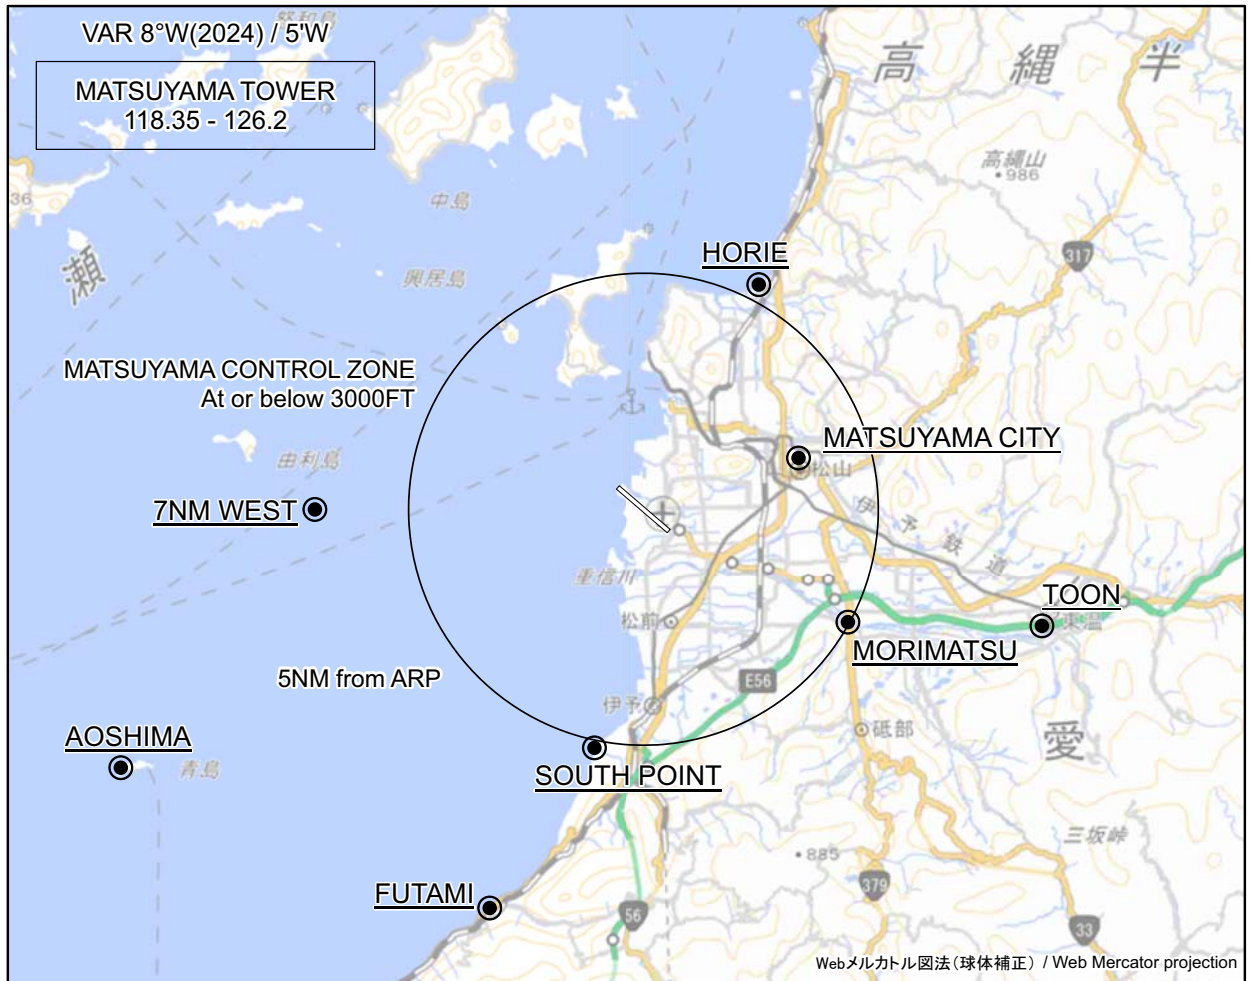

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
堀江 Horie	027°T / 5.4NM	堀江港 Horie harbor
松山シティー Matsuyama City	072°T / 3.4NM	松山城 Matsuyama castle
7NM WEST	270°T / 7.0NM	海上 Over the sea
森松 Morimatsu	119°T / 5.0NM	重信大橋 Shigenobu-ohashi Bridge
東温 Toon	106°T / 8.8NM	東温スマートインターチェンジ Toon smart interchange
サウスポイント South Point	192°T / 5.1NM	森川河口 Mouth of Mori river
青島 Aoshima	243°T / 12.3NM	青島 Aoshima island
双海 Futami	201°T / 9.1NM	ふたみシーサイド公園 Futami seaside park

CHANGE : Visual REP established(Toon).

注：有視界飛行方式により松山空港に着陸しようとする航空機又は松山航空交通管制圏を通過しようとする航空機は、南方向から進入する場合は双海ポイント付近で、南西～西方向から進入する場合は青島ポイント又は7NM WEST付近で、松山タワーと通信設定すること。

NOTE : When VFR flight is going to enter the control zone for landing or passing through, the pilot should contact with the control tower before passing following points;
FUTAMI in case of coming from south/
AOSHIMA or 7NM WEST in case of coming from southwest to west.

INTENTIONALLY LEFT BLANK