


RJOR / TOTTORI

AD CHART

CHANGE : CEILOMETER, WIND SPEED METER added. Description of RVR.

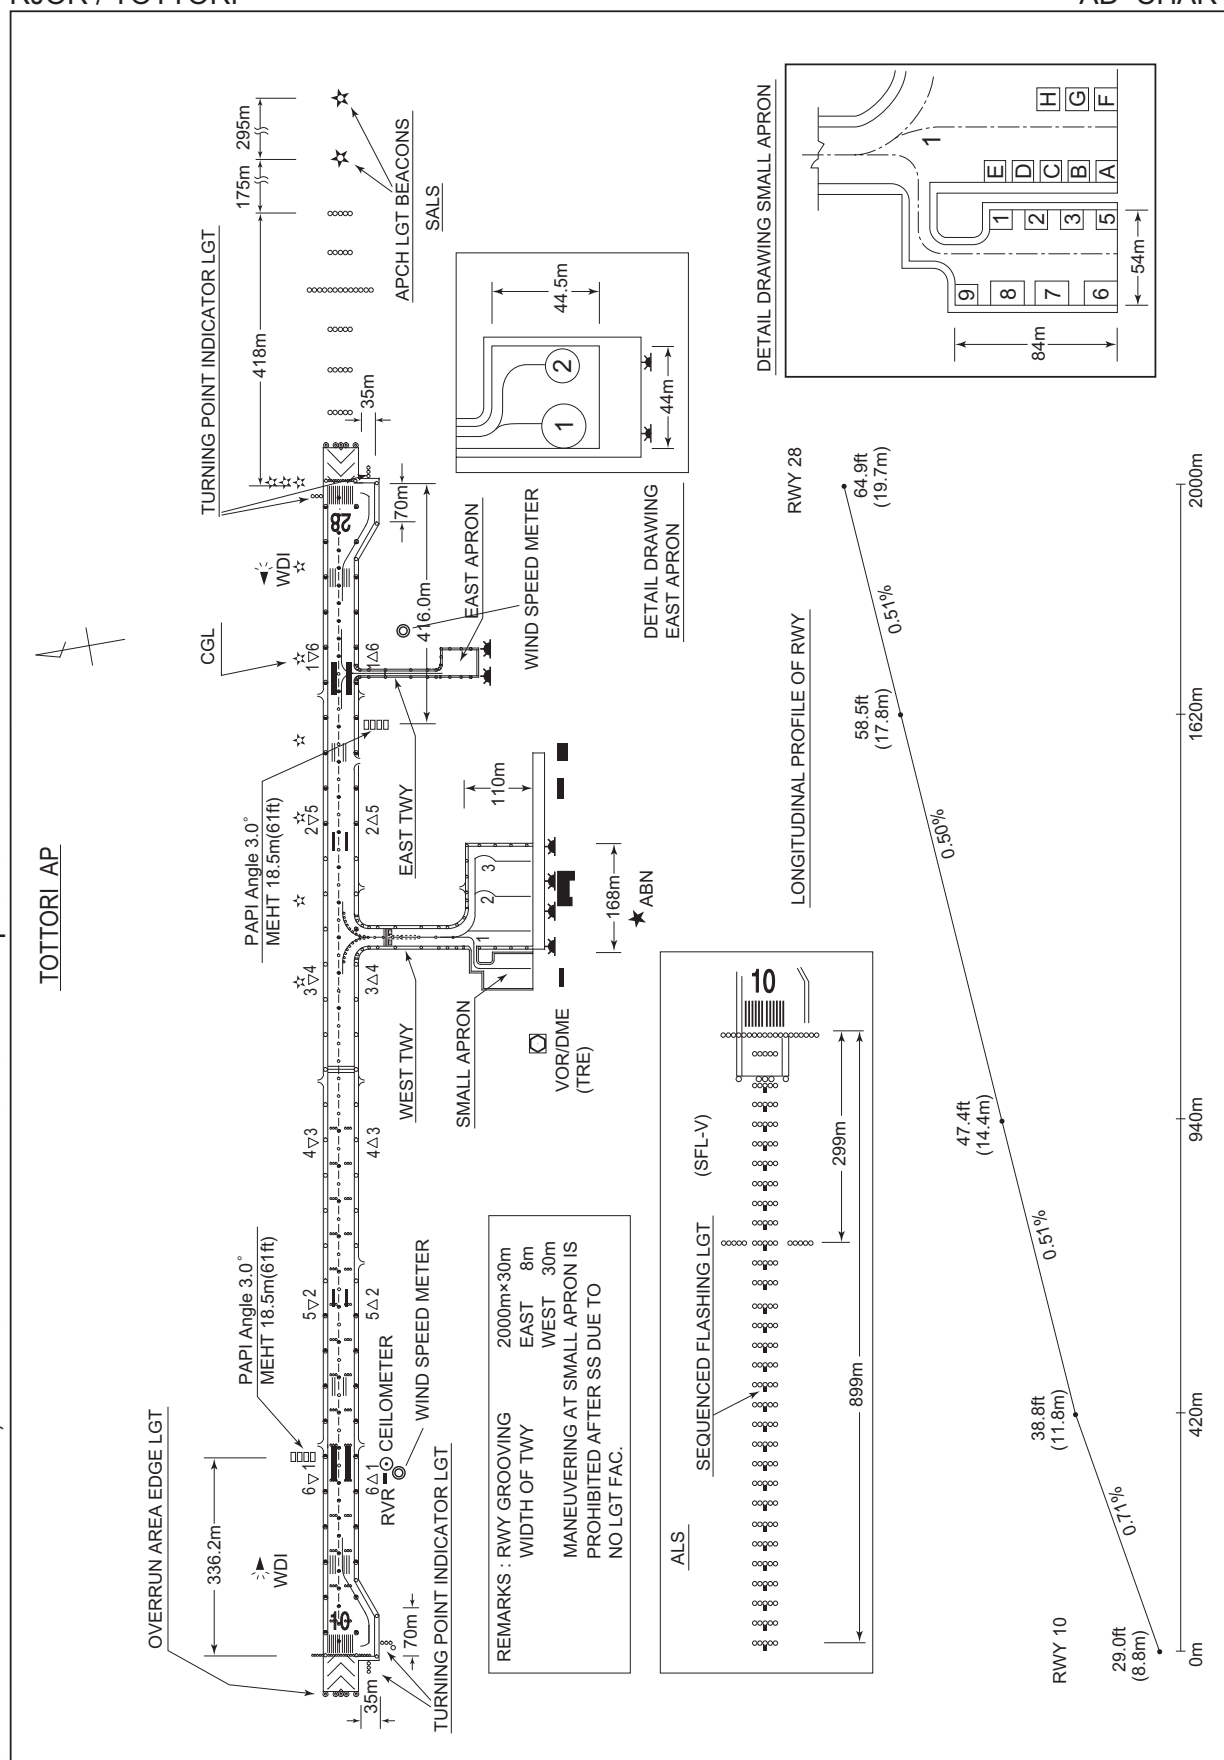

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART - INSTRUMENT

RJOR / TOTTORI

SID

AYABE THREE DEPARTURE

RWY 10 : Climb RWY HDG to 500FT, turn left HDG345°...

RWY 28 : Climb RWY HDG to 500FT, turn right HDG075°...

...to intercept and proceed via TRE R030 to 13.0DME, turn right, via YME R300 to YME VOR/DME.

Note RWY10 : 5.5% climb gradient required up to 1300FT.

OBST ALT 1247FT located at 3.73NM 105° FM end of RWY10.

RWY28 : 4.0% climb gradient required up to 700FT.

OBST ALT 374FT located at 2.62NM 271° FM end of RWY28.

TOTTORI REVERSAL THREE DEPARTURE

RWY 10 : Climb RWY HDG to 500FT, turn left HDG345°...

RWY 28 : Climb RWY HDG to 500FT, turn right HDG075°...

...to intercept and proceed via TRE R030 to 13.0DME, turn left, direct to TRE VOR/DME.


Note RWY10 : 5.5% climb gradient required up to 1300FT.

OBST ALT 1247FT located at 3.73NM 105° FM end of RWY10.


RWY28 : 4.0% climb gradient required up to 700FT.

OBST ALT 374FT located at 2.62NM 271° FM end of RWY28.

TOTTORI REVERSAL THREE DEPARTURE

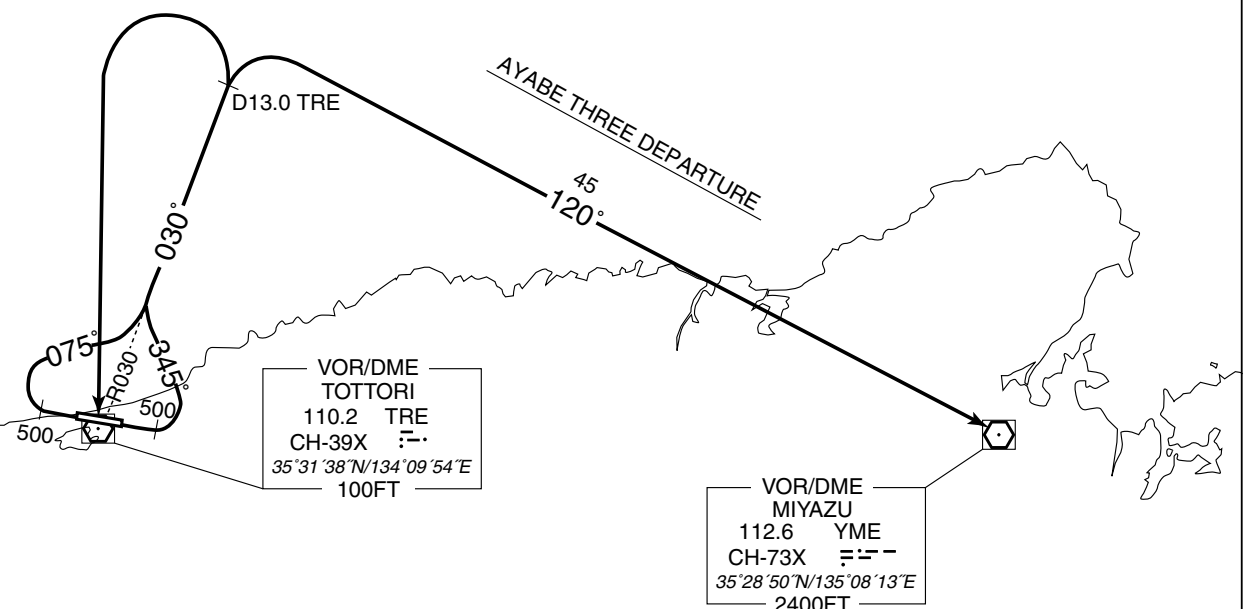

STANDARD DEPARTURE CHART -INSTRUMENT

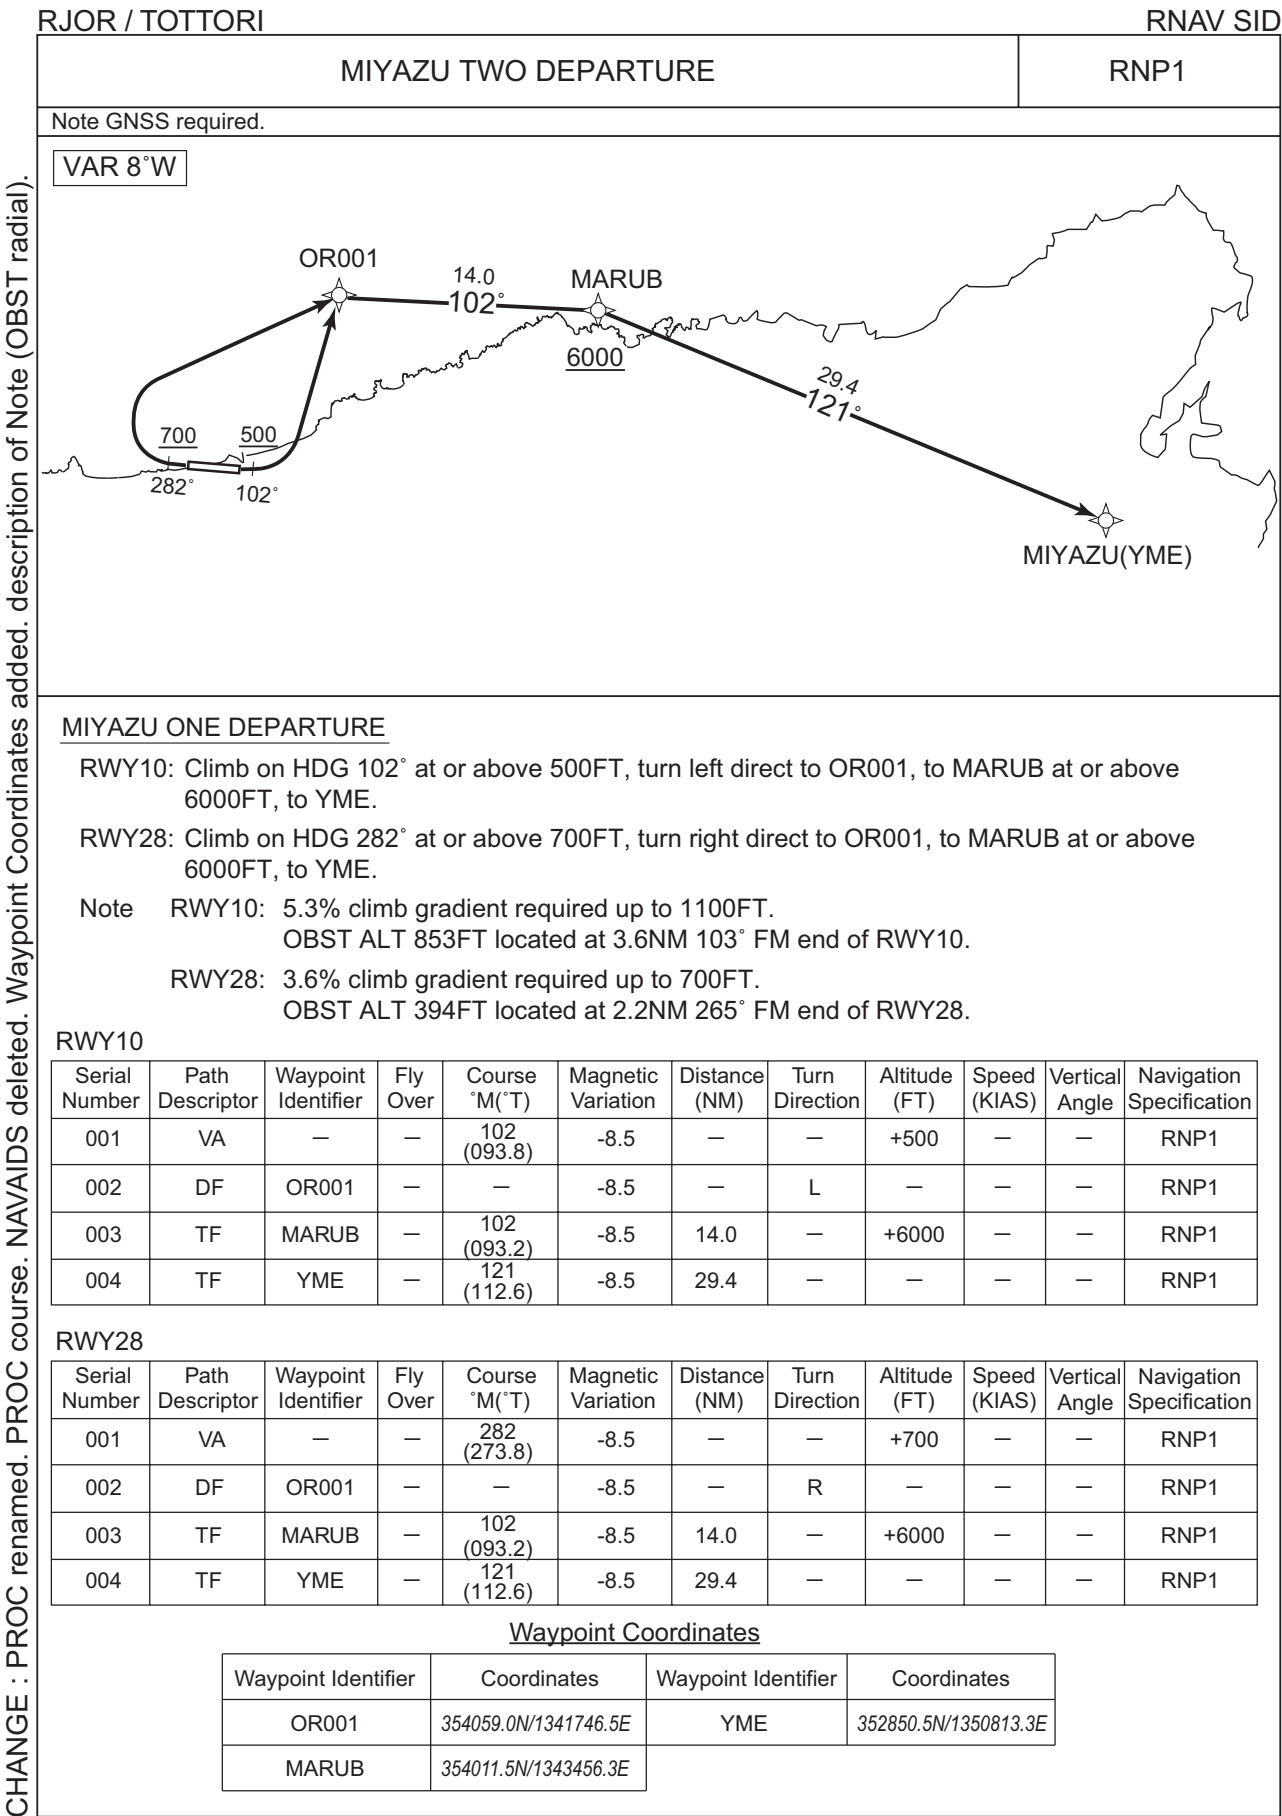

MIYAZU ONE DEPARTURE

RWY10: Climb on HDG 102° at or above 500FT, turn left direct to OR001, to MARUB at or above 6000FT, to YME.

RWY28: Climb on HDG 282° at or above 700FT, turn right direct to OR001, to MARUB at or above 6000FT, to YME.

Note RWY10: 5.3% climb gradient required up to 1100FT.
OBST ALT 853FT located at 3.6NM 103° FM end of RWY10.

RWY28: 3.6% climb gradient required up to 700FT.
OBST ALT 394FT located at 2.2NM 265° FM end of RWY28.

RWY10

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	102 (093.8)	-8.5	—	—	+500	—	—	RNP1
002	DF	OR001	—	—	-8.5	—	L	—	—	—	RNP1
003	TF	MARUB	—	102 (093.2)	-8.5	14.0	—	+6000	—	—	RNP1
004	TF	YME	—	121 (112.6)	-8.5	29.4	—	—	—	—	RNP1

RWY28

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	282 (273.8)	-8.5	—	—	+700	—	—	RNP1
002	DF	OR001	—	—	-8.5	—	R	—	—	—	RNP1
003	TF	MARUB	—	102 (093.2)	-8.5	14.0	—	+6000	—	—	RNP1
004	TF	YME	—	121 (112.6)	-8.5	29.4	—	—	—	—	RNP1

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
OR001	354059.0N/1341746.5E	YME	352850.5N/1350813.3E
MARUB	354011.5N/1343456.3E		

CHANGE : PROC renamed. PROC course. NAVAIDS deleted. Waypoint Coordinates added. description of Note (OBST radial).

INSTRUMENT APPROACH CHART

RJOR / TOTTORI

ILS Z or LOC RWY10

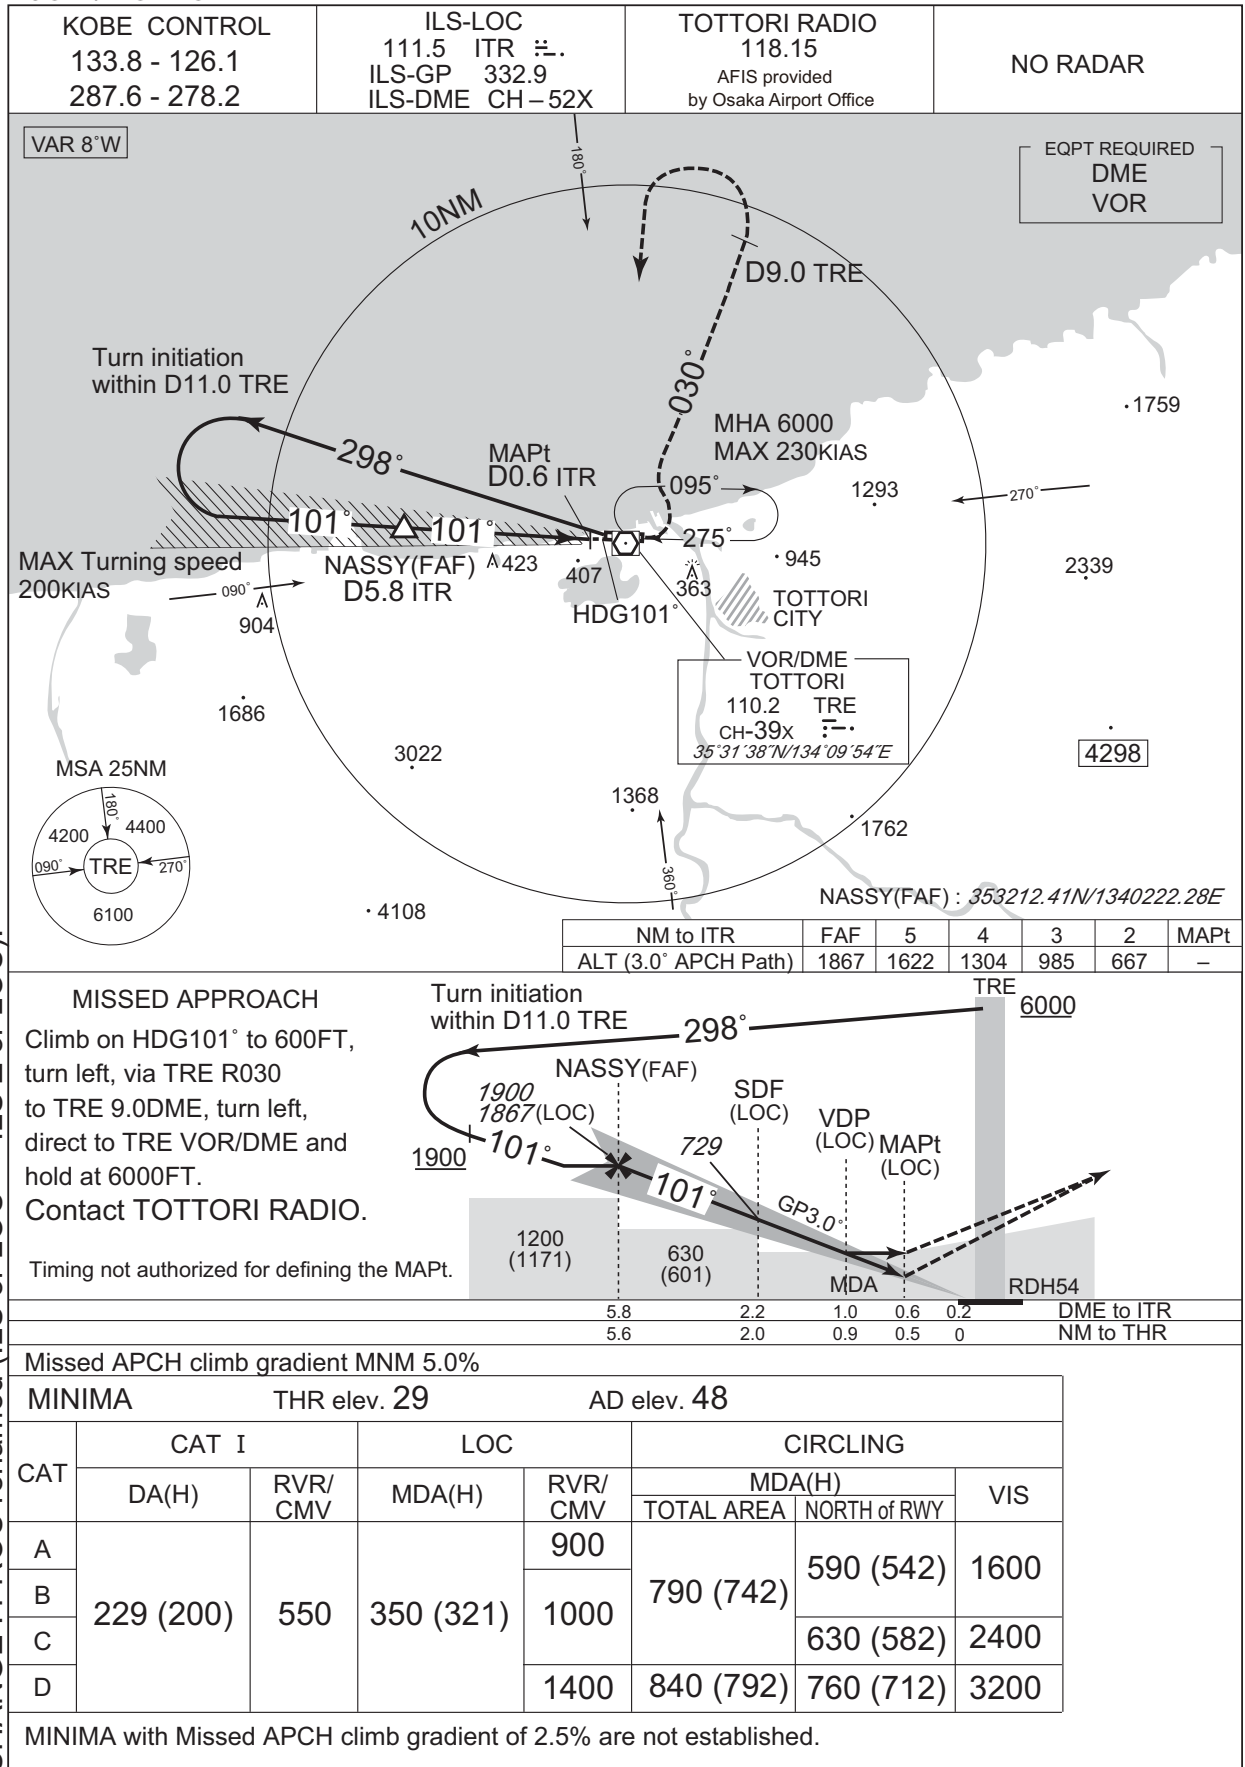

INSTRUMENT APPROACH CHART

RJOR / TOTTORI

ILS Y RWY10

KOBE CONTROL
133.8 – 126.1
287.6 – 278.2


ILS - LOC ITR 111.5
ILS - GP 332.9
ILS - DME CH - 52X

TOTTORI RADIO 118.5
AFIS provided
by Osaka Airport Office

NO RADAR

VAR8°W

MSA 25NM




ARP : 353148N/1340954E

RNAV HLDG

MHA 6000
MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)

NOT TO SCALE


1MIN(at or below FL140)
1.5MIN(above FL140)



EQPT REQUIRED

DME


RNP1
RF required.

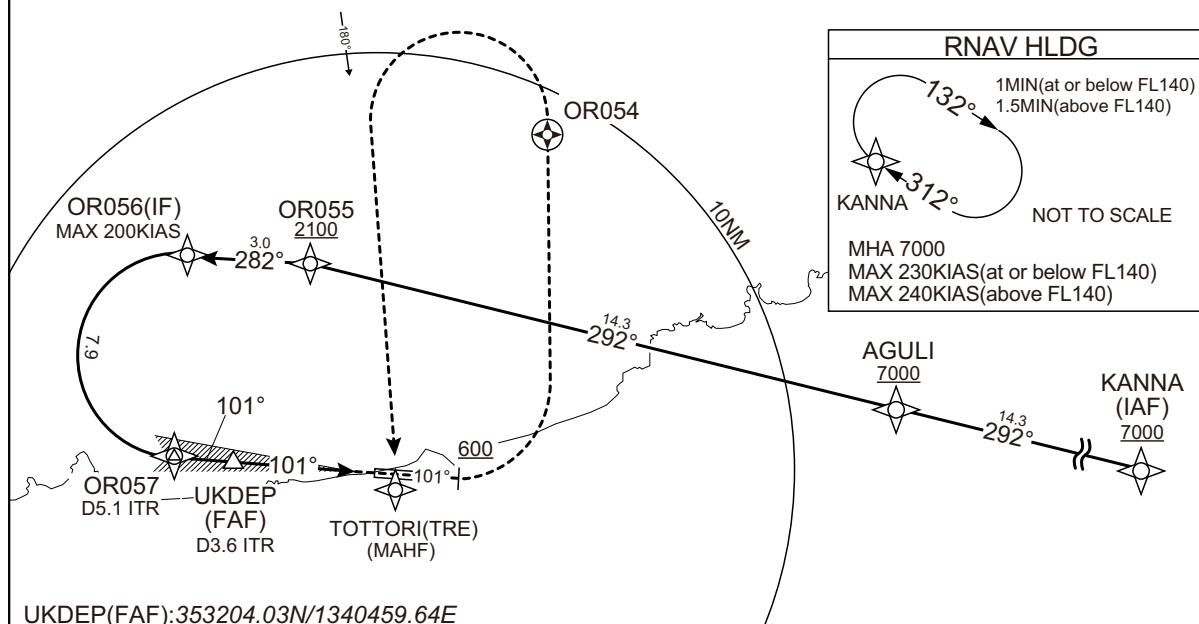

UKDEP(FAF):353204.03N/1340459.64E

MISSED APPROACH

Climb on course 101°,
at or above 600FT turn left,
direct to OR054,
turn left direct to TRE
and hold at 6000FT.
Contact TOTTORI RADIO.

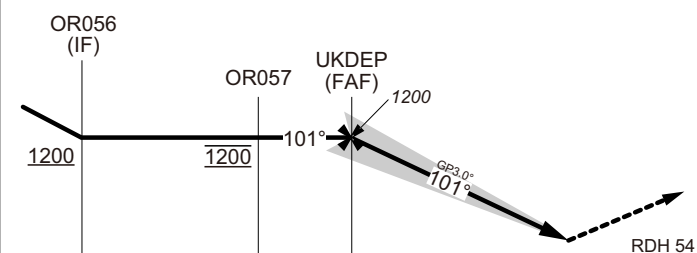

5.1 3.6 0.2 NM to ITR
5.0 3.5 0 NM to THR

Missed APCH climb gradient MNM 5.0%

MINIMA THR elev. 29 AD elev. 48

CAT	CAT I		CIRCLING		VIS
	DA(H)	RVR/CMV	MDA(H) TOTAL AREA NORTH of RWY		
A	229 (200)	550	790 (742)	590 (542)	1600
B				630 (582)	2400
C			840 (792)	760 (712)	3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : New PROC.

INSTRUMENT APPROACH CHART

RJOR / TOTTORI

ILS Y RWY10

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KANNA	—	—	-8.5	—	—	+7000	—	—	RNP1
002	TF	AGULI	—	292 (283.9)	-8.5	14.3	—	+7000	—	—	RNP1
003	TF	OR055	—	292 (283.7)	-8.5	14.3	—	+2100	—	—	RNP1
004	TF	OR056	—	282 (273.8)	-8.5	3.0	—	+1200	-200	—	RNP1
005	RF Center: ORRF6 r=2.50NM	OR057	—	—	-8.5	7.9	L	1200	—	—	RNP1
001	CA	—	—	101 (093.8)	-8.5	—	—	+600	—	—	RNP1
002	DF	OR054	Y	—	-8.5	—	L	—	—	—	RNP1
003	DF	TRE	—	—	-8.5	—	L	6000	—	—	RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	KANNA	312 (303.4)	-8.5	1.0(-14000) 1.5(+14001)	R	7000	—	-230(-14000) -240(+14001)	RNP1
Hold	TRE	329 (321.0)	-8.5	1.0(-14000) 1.5(+14001)	L	6000	—	-230(-14000) -240(+14001)	RNP1

Waypoint Coordinates


Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
KANNA	353011.27N / 1344121.95E	ORRF6	353439.86N / 1340321.51E
AGULI	353335.27N / 1342421.62E		
OR055	353658.03N / 1340713.85E		
OR056	353709.81N / 1340333.47E		
OR057	353209.90N / 1340309.56E		
OR054	354013.71N / 1341418.65E		
TRE	353138.28N / 1340953.59E		

CHANGE : New PROC.

INSTRUMENT APPROACH CHART

RJOR / TOTTORI



VOR RWY10

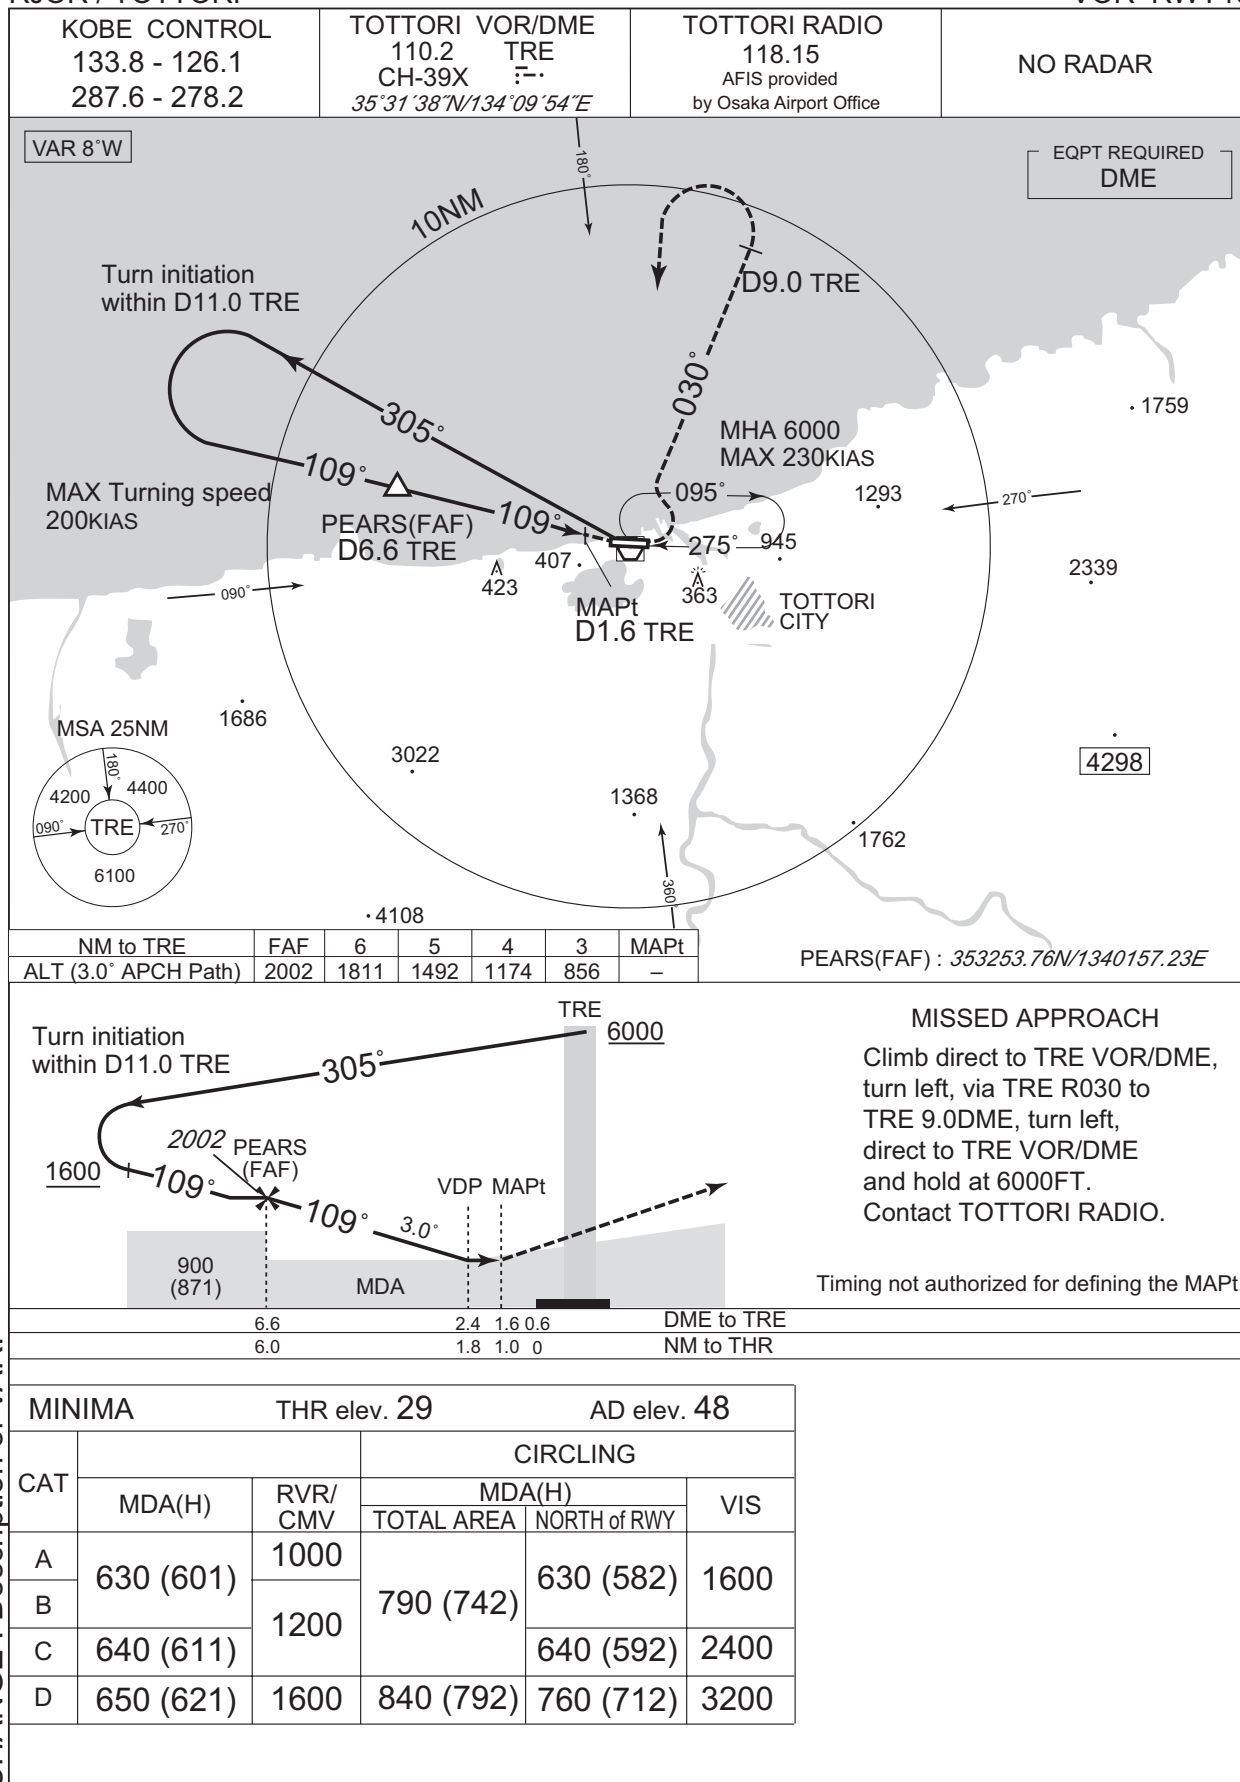

INSTRUMENT APPROACH CHART

RJOR / TOTTORI

RNP Z RWY10(AR)

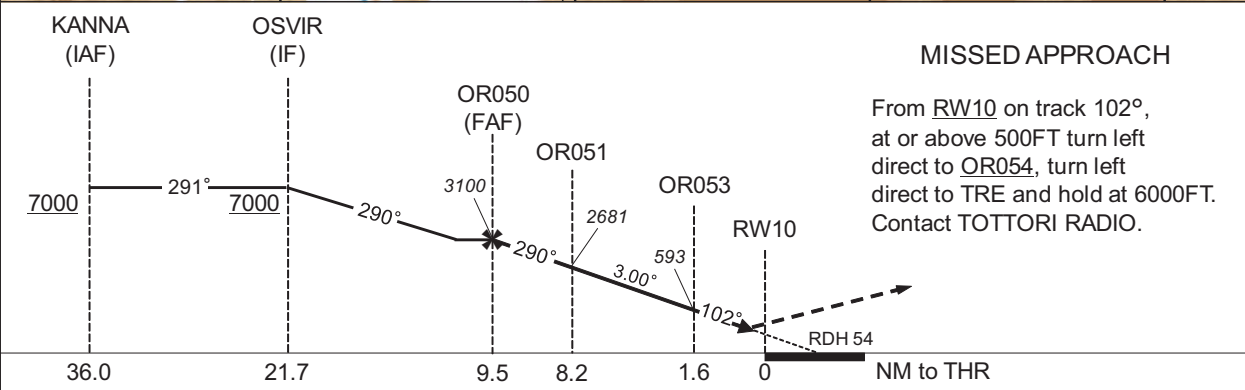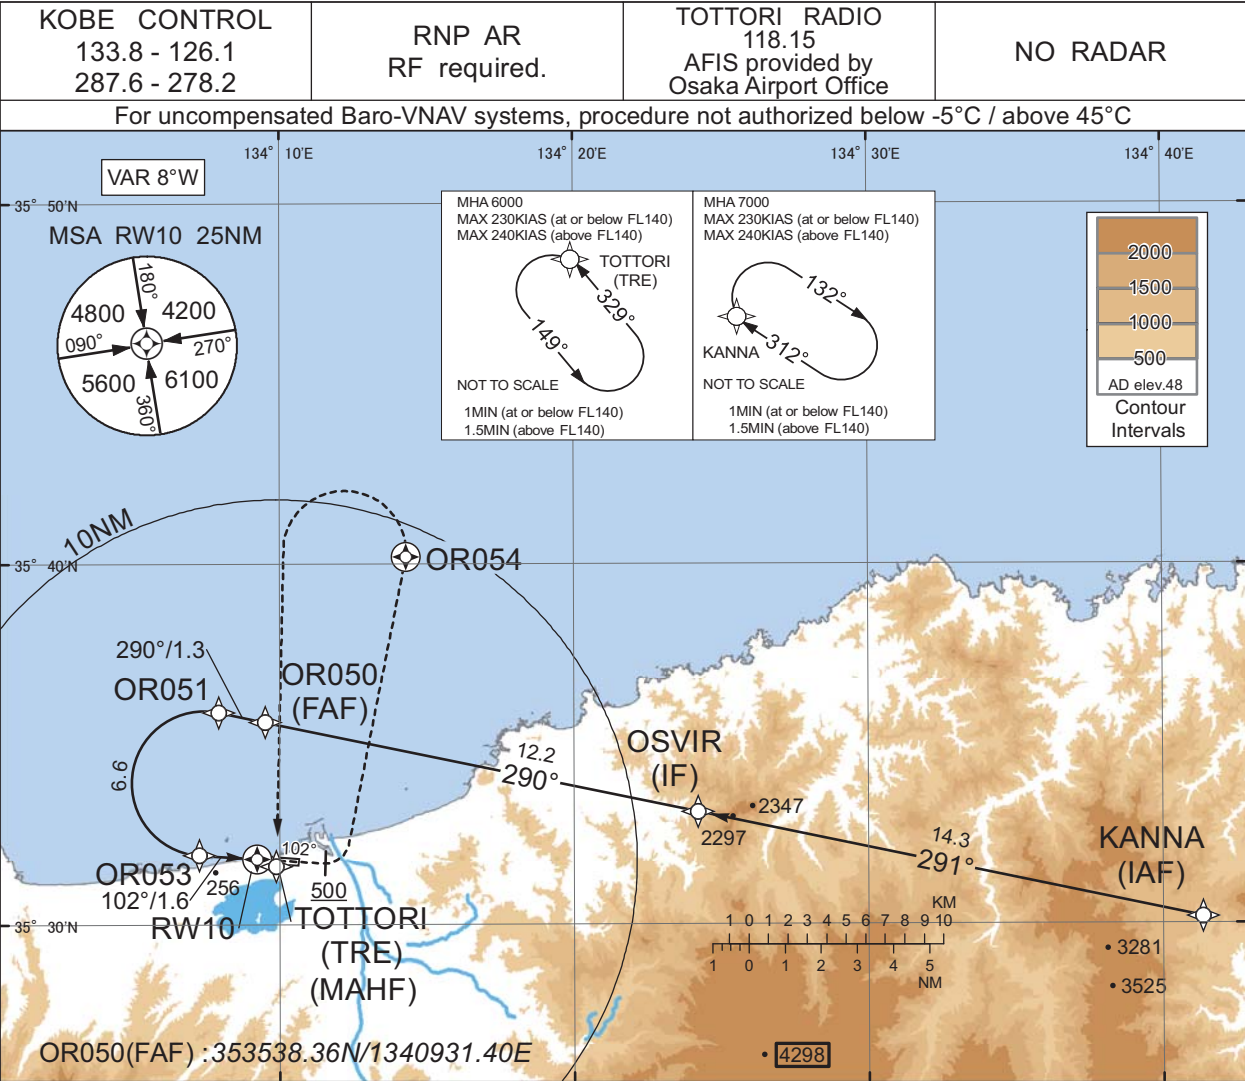

CHANGE : New PROC.

Missed APCH climb gradient MNM 5.0%

CAT	THR elev. 29		AD elev. 48	
	DA(H)	RVR/CMV	DA(H)	RVR/CMV
A	-	-	-	-
B	-	-	-	-
C	279(250)	800	424(395)	1000
D		1200	434(405)	1400

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Authorization Required

INSTRUMENT APPROACH CHART

RJOR / TOTTORI

RNP Z RWY10(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	KANNA	-	-	-8.5	-	-	+7000	-	-	-
002	TF	OSVIR	-	291 (282.0)	-8.5	14.3	-	+7000	-	-	1.0
003	TF	OR050	-	290 (281.9)	-8.5	12.2	-	3100	-	-	1.0
004	TF	OR051	-	290 (281.7)	-8.5	1.3	-	2681	-	-3.00	0.10 0.30
005	RF Center: ORRF4 r=2.00NM	OR053	-	-	-8.5	6.6	L	593	-	-3.00	0.10 0.30
006	TF	RW10	Y	102 (093.8)	-8.5	1.6	-	83	-	-3.00/54	0.10 0.30
007	FA	-	-	102 (093.8)	-8.5	-	-	+500	-	-	1.0
008	DF	OR054	Y	-	-8.5	-	L	-	-	-	1.0
009	DF	TRE	-	-	-8.5	-	L	6000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	KANNA	312 (303.4)	-8.5	1.0 (-14000) 1.5 (+14001)	R	7000	-	-230(-14000) -240(+14001)	1.0
Hold	TRE	329 (321.0)	-8.5	1.0 (-14000) 1.5 (+14001)	L	6000	-	-230(-14000) -240(+14001)	1.0


Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
KANNA	353011.27N / 1344121.95E	ORRF4	353356.61N / 1340726.83E
OSVIR	353308.46N / 1342413.64E		
OR050	353538.36N / 1340931.40E		
OR051	353554.35N / 1340756.57E		
OR053	353156.66N / 1340716.98E		
RW10	353150.32N / 1340914.57E		
OR054	354013.71N / 1341418.65E		
TRE	353138.28N / 1340953.59E		

CHANGE : New PROC.

INSTRUMENT APPROACH CHART

RJOR / TOTTORI RNP Y RWY10(AR)

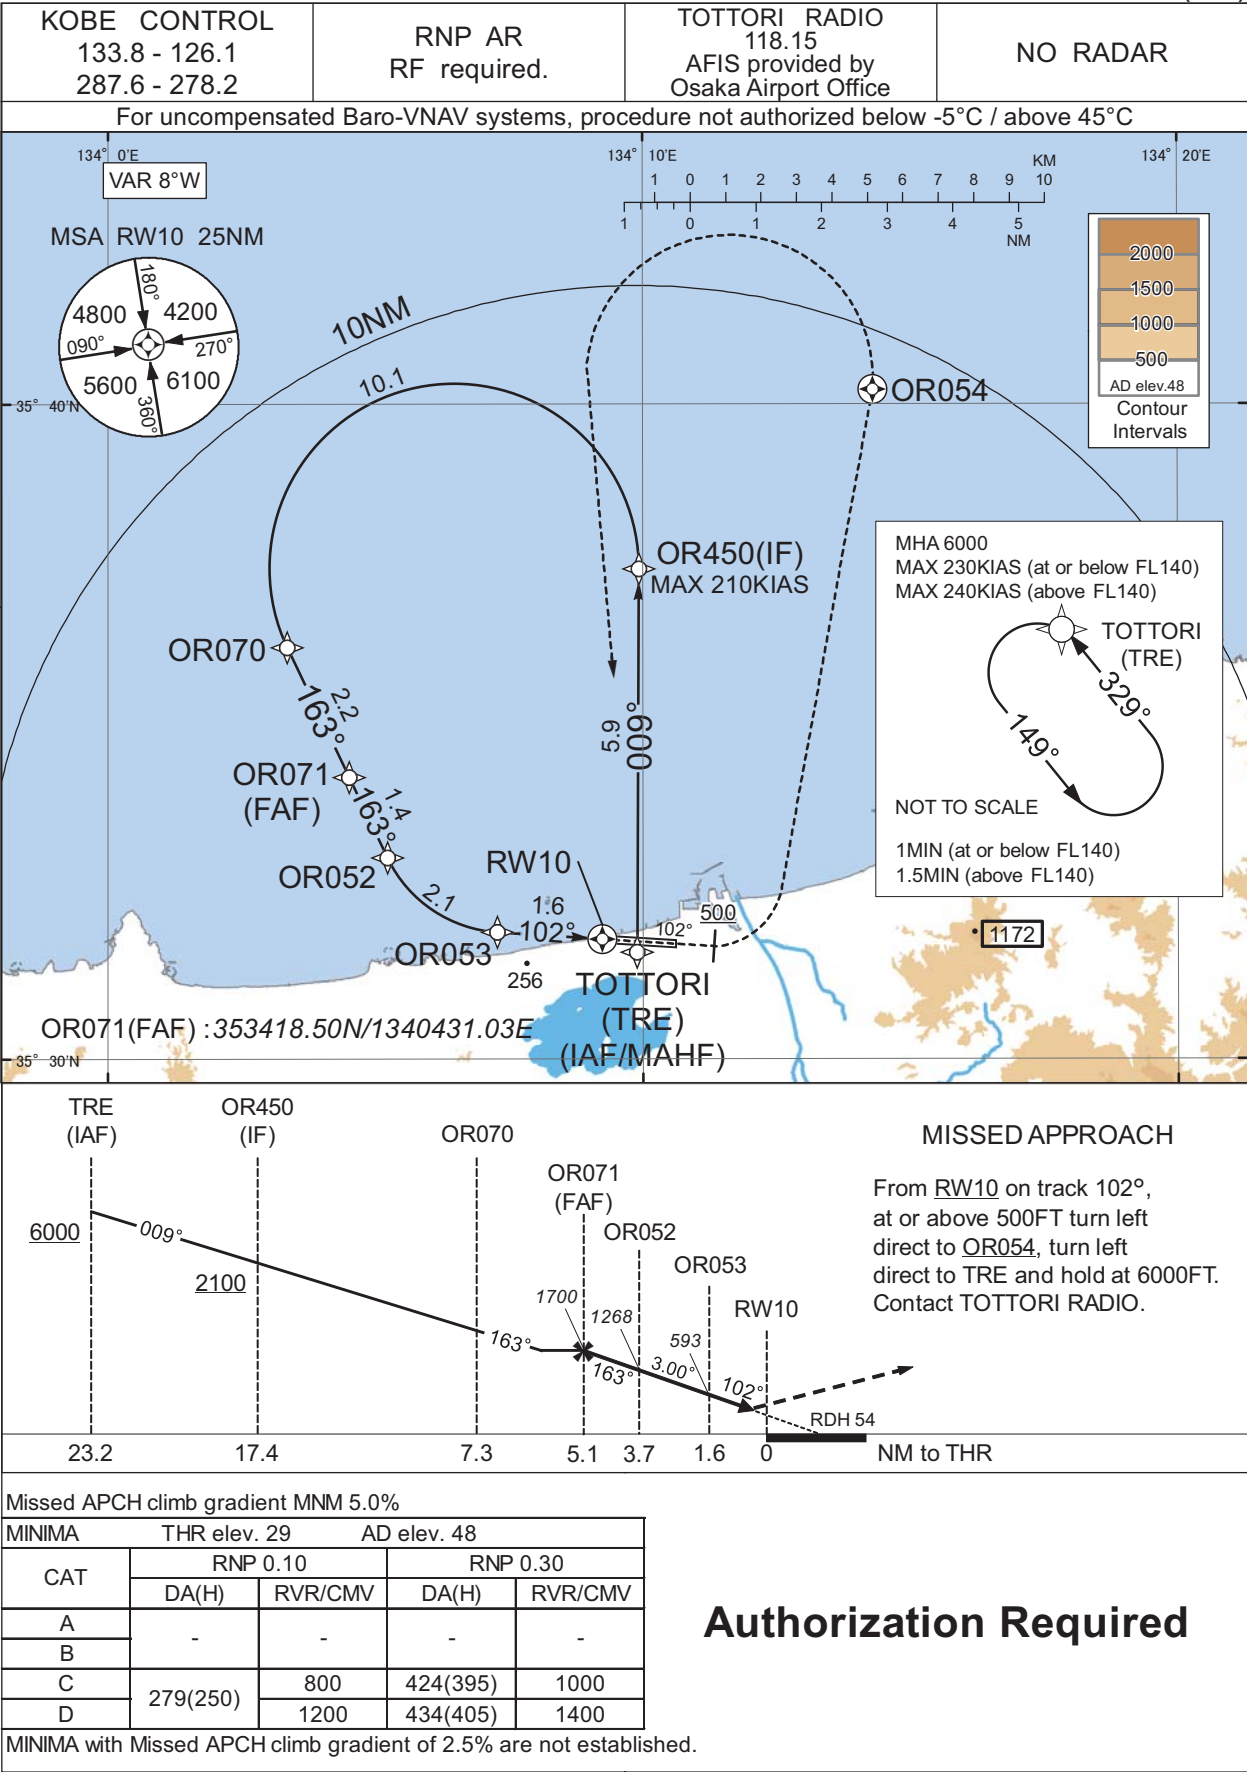

INSTRUMENT APPROACH CHART

RJOR / TOTTORI

RNP Y RWY10(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	TRE	-	-	-8.5	-	-	+6000	-	-	-
002	TF	OR450	-	009 (000.3)	-8.5	5.9	-	+2100	-210	-	1.0
003	RF Center: ORRF5 r=2.81NM	OR070	-	-	-8.5	10.1	L	-	-	-	1.0
004	TF	OR071	-	163 (154.6)	-8.5	2.2	-	1700	-	-	1.0
005	TF	OR052	-	163 (154.6)	-8.5	1.4	-	1268	-	-3.00	0.10 0.30
006	RF Center: ORRF4 r=2.00NM	OR053	-	-	-8.5	2.1	L	593	-	-3.00	0.10 0.30
007	TF	RW10	Y	102 (093.8)	-8.5	1.6	-	83	-	-3.00/54	0.10 0.30
008	FA	-	-	102 (093.8)	-8.5	-	-	+500	-	-	1.0
009	DF	OR054	Y	-	-8.5	-	L	-	-	-	1.0
010	DF	TRE	-	-	-8.5	-	L	6000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	TRE	329 (321.0)	-8.5	1.0 (-14000) 1.5 (+14001)	L	6000	-	-230(-14000) -240(+14001)	1.0

Waypoint Coordinates


Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
TRE	353138.28N / 1340953.59E	ORRF5	353730.33N / 1340628.72E
OR450	353729.37N / 1340956.14E	ORRF4	353356.61N / 1340726.83E
OR070	353617.39N / 1340321.54E		
OR071	353418.50N / 1340431.03E		
OR052	353304.86N / 1340514.03E		
OR053	353156.66N / 1340716.98E		
RW10	353150.32N / 1340914.57E		
OR054	354013.71N / 1341418.65E		

CHANGE : New PROC.

INSTRUMENT APPROACH CHART

RJOR / TOTTORI


RNP X RWY10

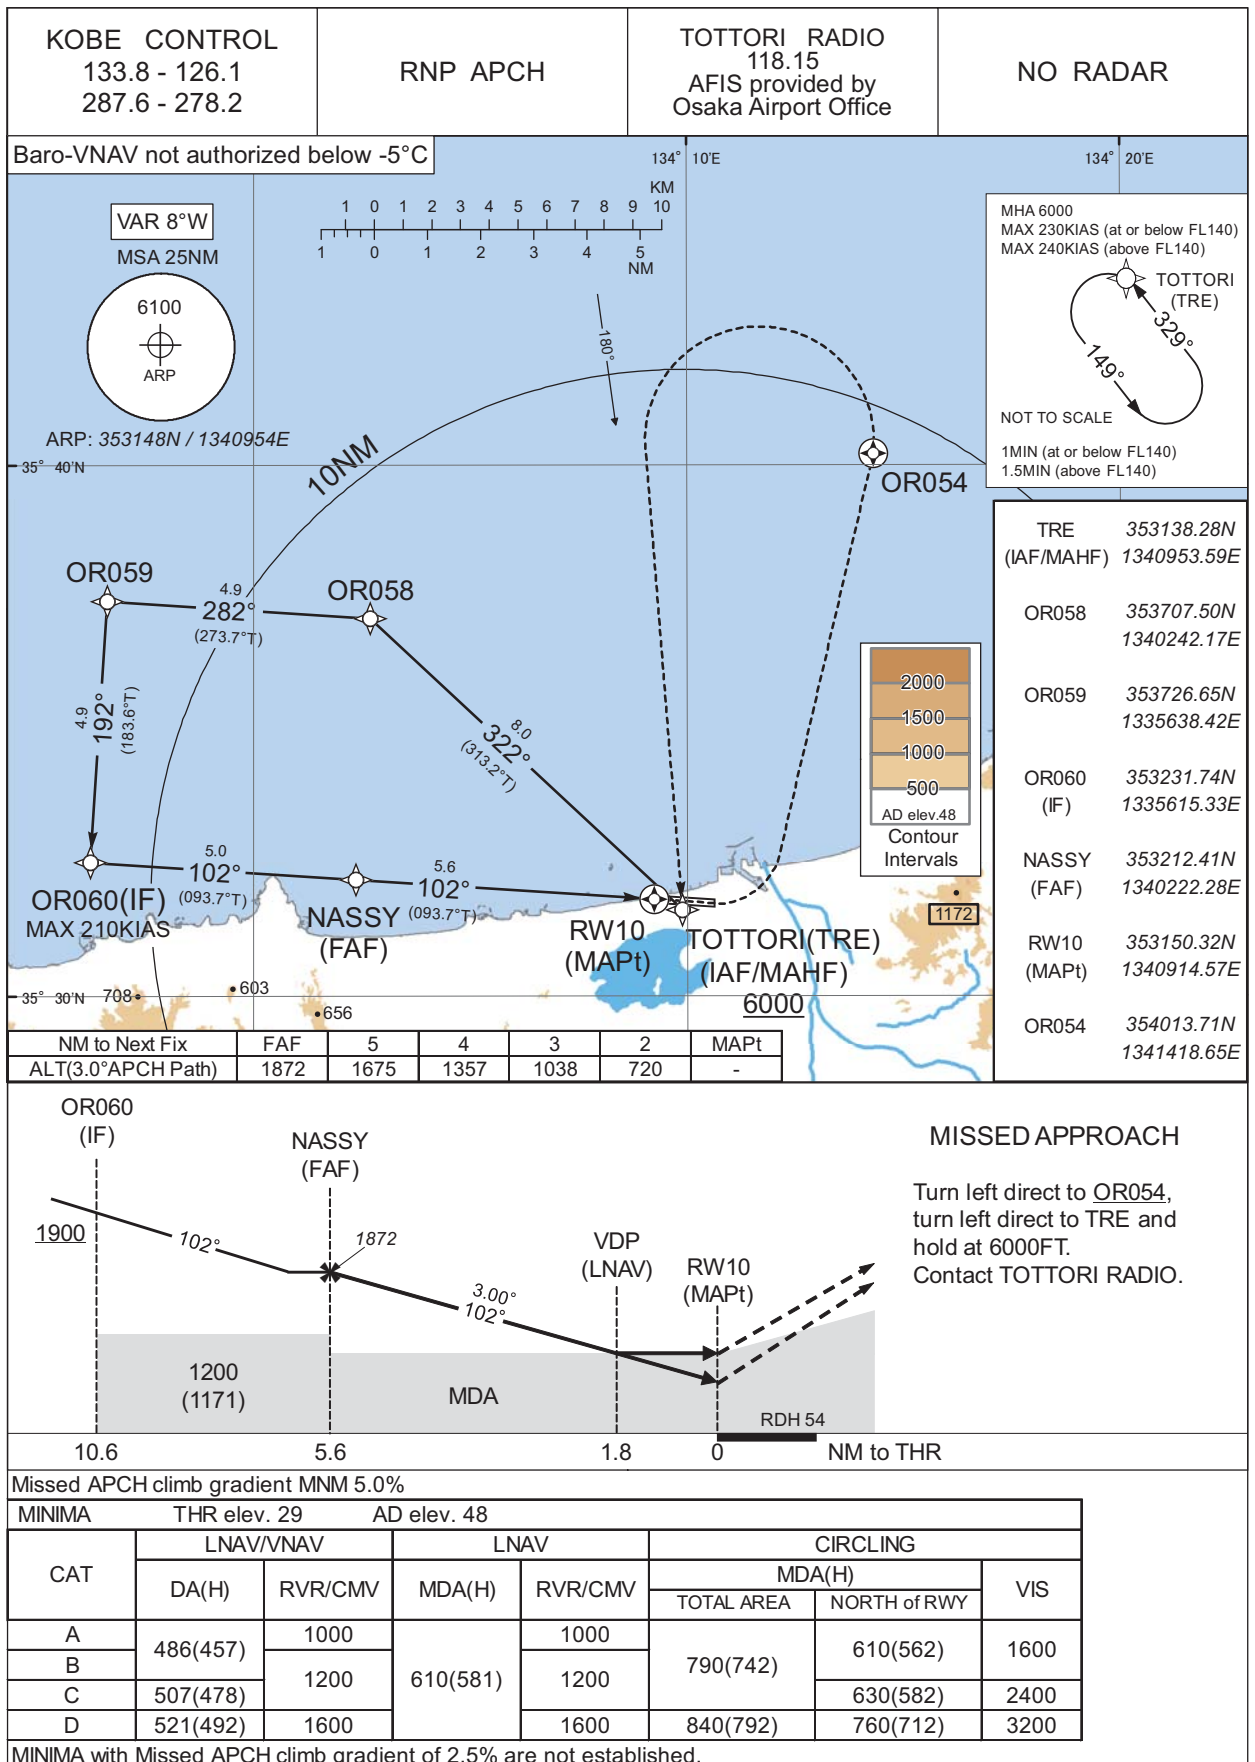

INSTRUMENT APPROACH CHART

RJOR / TOTTORI

RNP Z RWY28(AR)

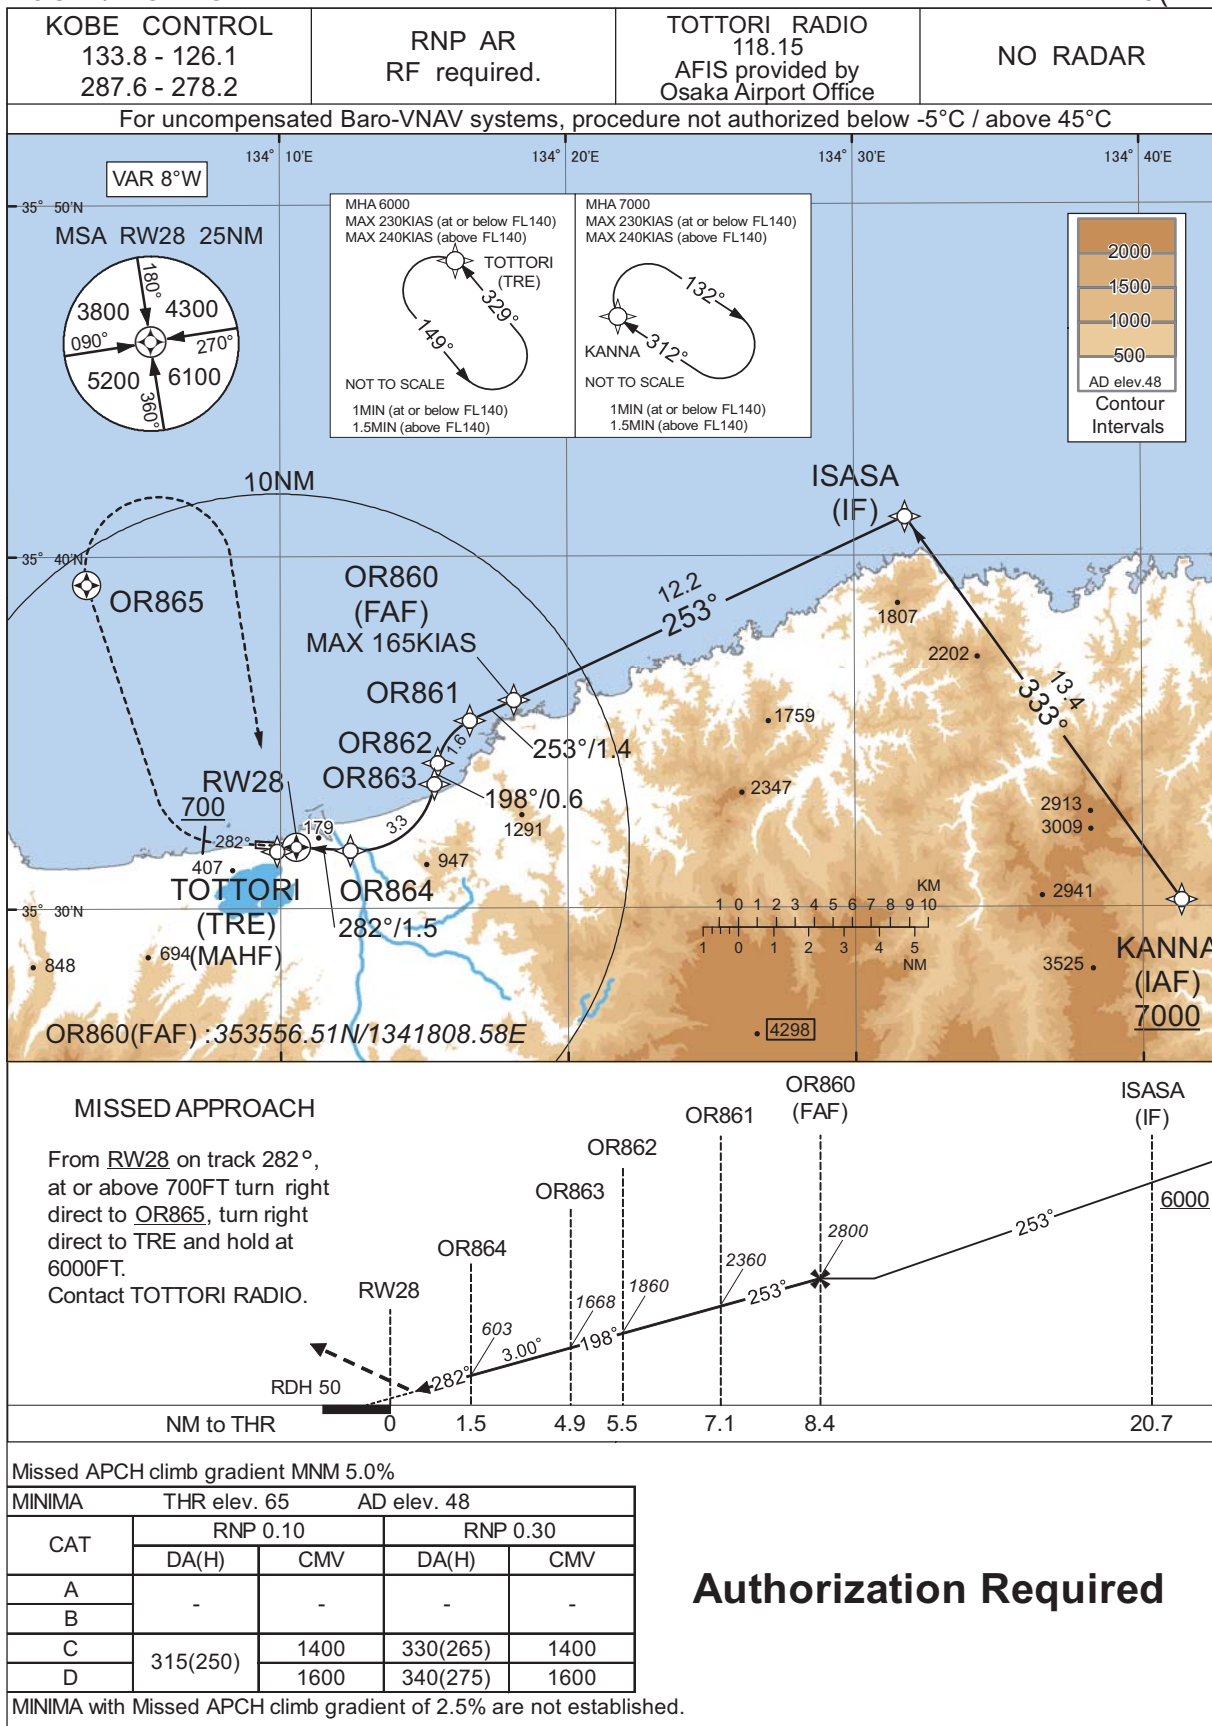

CHANGE : PROC renamed. OR860, OR861, OR862, OR863, OR864, OR865 established. TOTTORI(TRE) added. OR850, OR851, OR852, OR583, OR854 abolished. HLDG pattern. Missed APCH PROC. MINIMA. MSA(NW area).

INSTRUMENT APPROACH CHART

RJOR / TOTTORI

RNP Z RWY28(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	KANNA	-	-	-8.5	-	-	+7000	-	-	-
002	TF	ISASA	-	333 (324.6)	-8.5	13.4	-	+6000	-	-	1.0
003	TF	OR860	-	253 (245.0)	-8.5	12.2	-	2800	-165	-	1.0
004	TF	OR861	-	253 (244.9)	-8.5	1.4	-	2360	-	-3.00	0.10 0.30
005	RF Center: ORRF2 r=1.61NM	OR862	-	-	-8.5	1.6	L	1860	-	-3.00	0.10 0.30
006	TF	OR863	-	198 (189.2)	-8.5	0.6	-	1668	-	-3.00	0.10 0.30
007	RF Center: ORRF1 r=2.25NM	OR864	-	-	-8.5	3.3	R	603	-	-3.00	0.10 0.30
008	TF	RW28	Y	282 (273.8)	-8.5	1.5	-	115	-	-3.00/50	0.10 0.30
009	FA	-	-	282 (273.8)	-8.5	-	-	+700	-	-	1.0
010	DF	OR865	Y	-	-8.5	-	R	-	-	-	1.0
011	DF	TRE	-	-	-8.5	-	R	6000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	KANNA	312 (303.4)	-8.5	1.0 (-14000) 1.5 (+14001)	R	7000	-	-230(-14000) -240(+14001)	1.0
Hold	TRE	329 (321.0)	-8.5	1.0 (-14000) 1.5 (+14001)	L	6000	-	-230(-14000) -240(+14001)	1.0

Waypoint Coordinates


Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
KANNA	353011.27N / 1344121.95E	ORRF2	353353.44N / 1341726.73E
ISASA	354107.52N / 1343147.31E	ORRF1	353354.77N / 1341238.96E
OR860	353556.51N / 1341808.58E		
OR861	353521.38N / 1341636.47E		
OR862	353409.01N / 1341529.49E		
OR863	353333.13N / 1341522.36E		
OR864	353139.90N / 1341226.53E		
RW28	353146.03N / 1341033.79E		
OR865	353913.26N / 1340315.89E		
TRE	353138.28N / 1340953.59E		

CHANGE : PROC renamed. OR860, OR861, OR862, OR863, OR864, OR865 established. OR850, OR851, OR852, OR853, OR854 abolished. HLDG pattern added.

INSTRUMENT APPROACH CHART

RJOR / TOTTORI

RNP Y RWY28(AR)

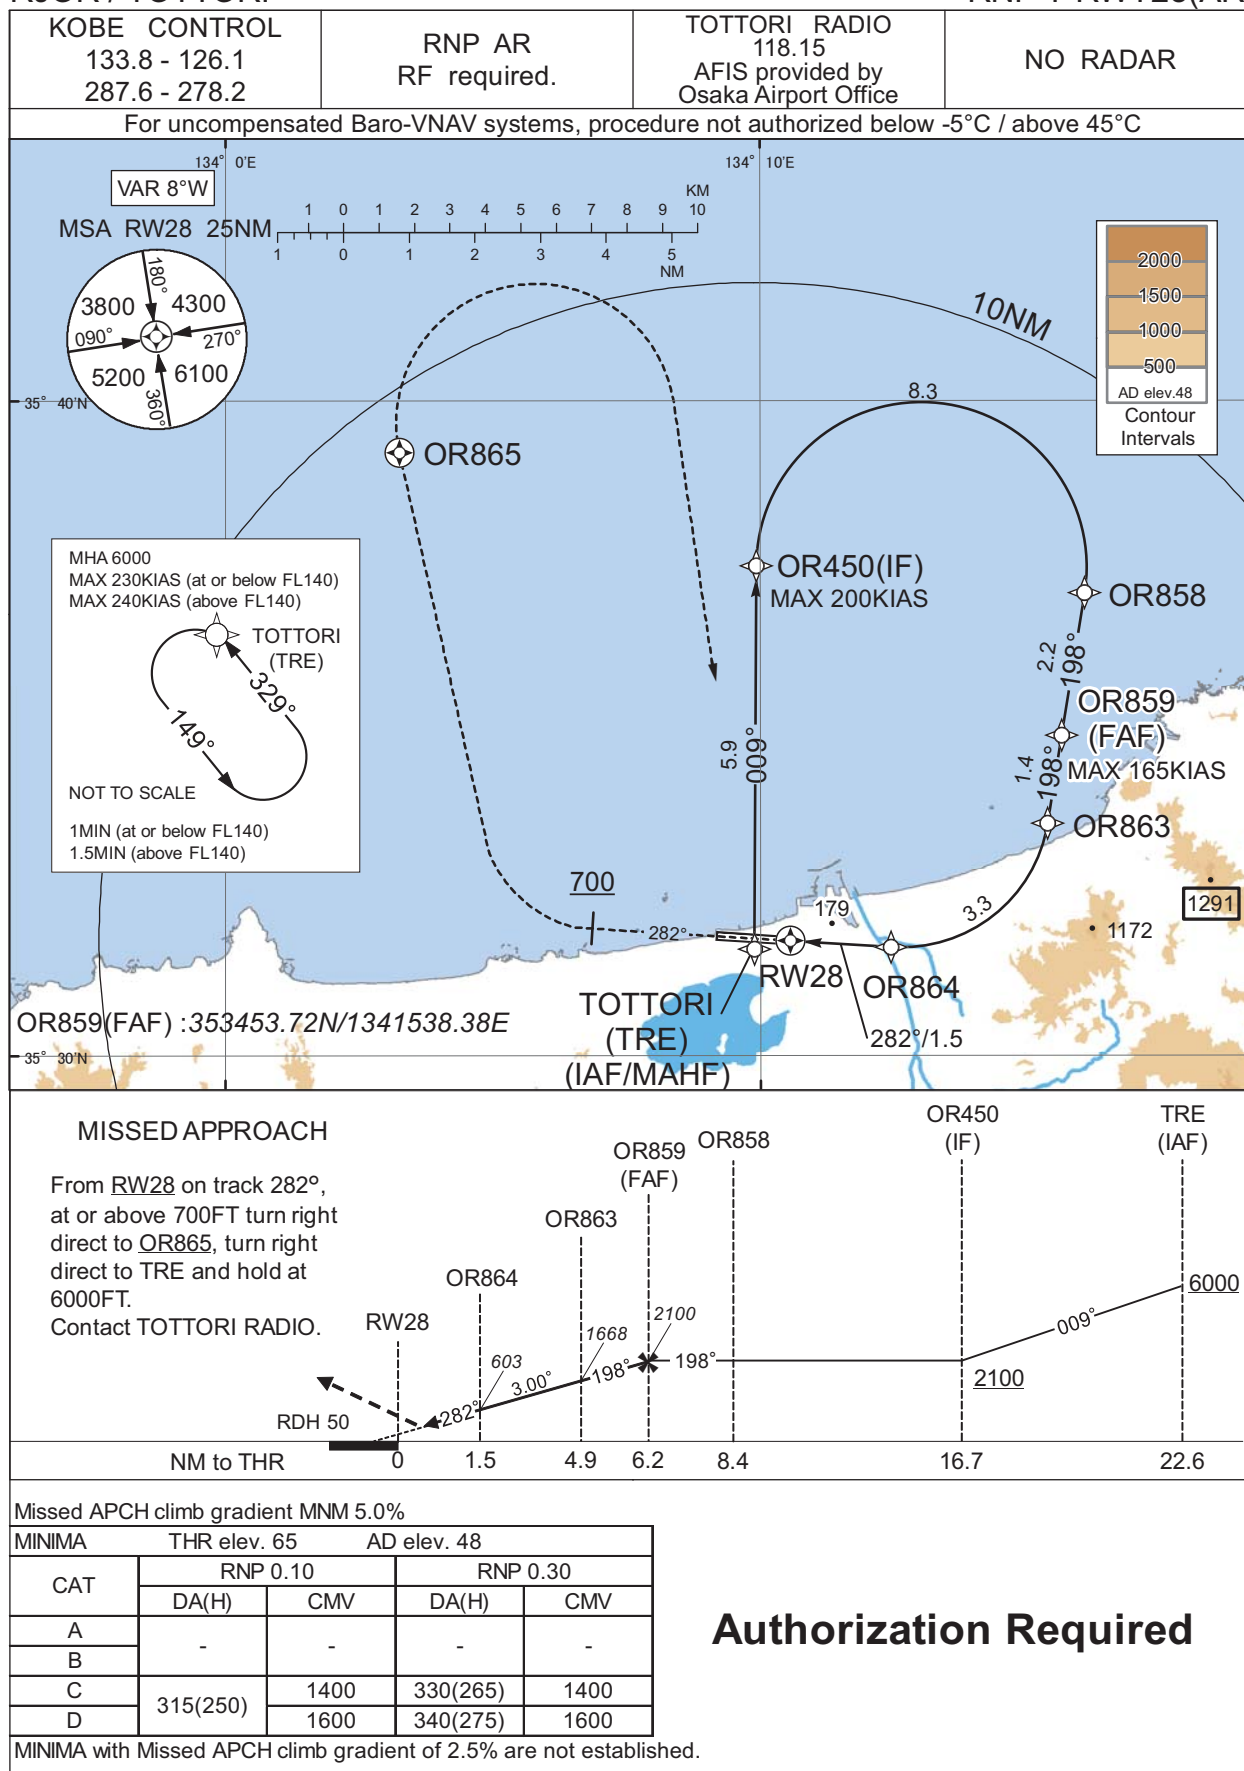**Authorization Required**

INSTRUMENT APPROACH CHART

RJOR / TOTTORI

RNP Y RWY28(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	TRE	-	-	-8.5	-	-	+6000	-	-	-
002	TF	OR450	-	009 (000.3)	-8.5	5.9	-	+2100	-200	-	1.0
003	RF Center: ORRF3 r=2.51NM	OR858	-	-	-8.5	8.3	R	-	-	-	1.0
004	TF	OR859	-	198 (189.2)	-8.5	2.2	-	2100	-165	-	1.0
005	TF	OR863	-	198 (189.2)	-8.5	1.4	-	1668	-	-3.00	0.10 0.30
006	RF Center: ORRF1 r=2.25NM	OR864	-	-	-8.5	3.3	R	603	-	-3.00	0.10 0.30
007	TF	RW28	Y	282 (273.8)	-8.5	1.5	-	115	-	-3.00/50	0.10 0.30
008	FA	-	-	282 (273.8)	-8.5	-	-	+700	-	-	1.0
009	DF	OR865	Y	-	-8.5	-	R	-	-	-	1.0
010	DF	TRE	-	-	-8.5	-	R	6000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	TRE	329 (321.0)	-8.5	1.0 (-14000) 1.5 (+14001)	L	6000	-	-230(-14000) -240(+14001)	1.0


Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
TRE	353138.28N / 1340953.59E	ORRF3	353728.44N / 1341301.43E
OR450	353729.37N / 1340956.14E	ORRF1	353354.77N / 1341238.96E
OR858	353704.21N / 1341604.33E		
OR859	353453.72N / 1341538.38E		
OR863	353333.13N / 1341522.36E		
OR864	353139.90N / 1341226.53E		
RW28	353146.03N / 1341033.79E		
OR865	353913.26N / 1340315.89E		

CHANGE : New PROC.

RJOR / TOTTORI


Visual REP

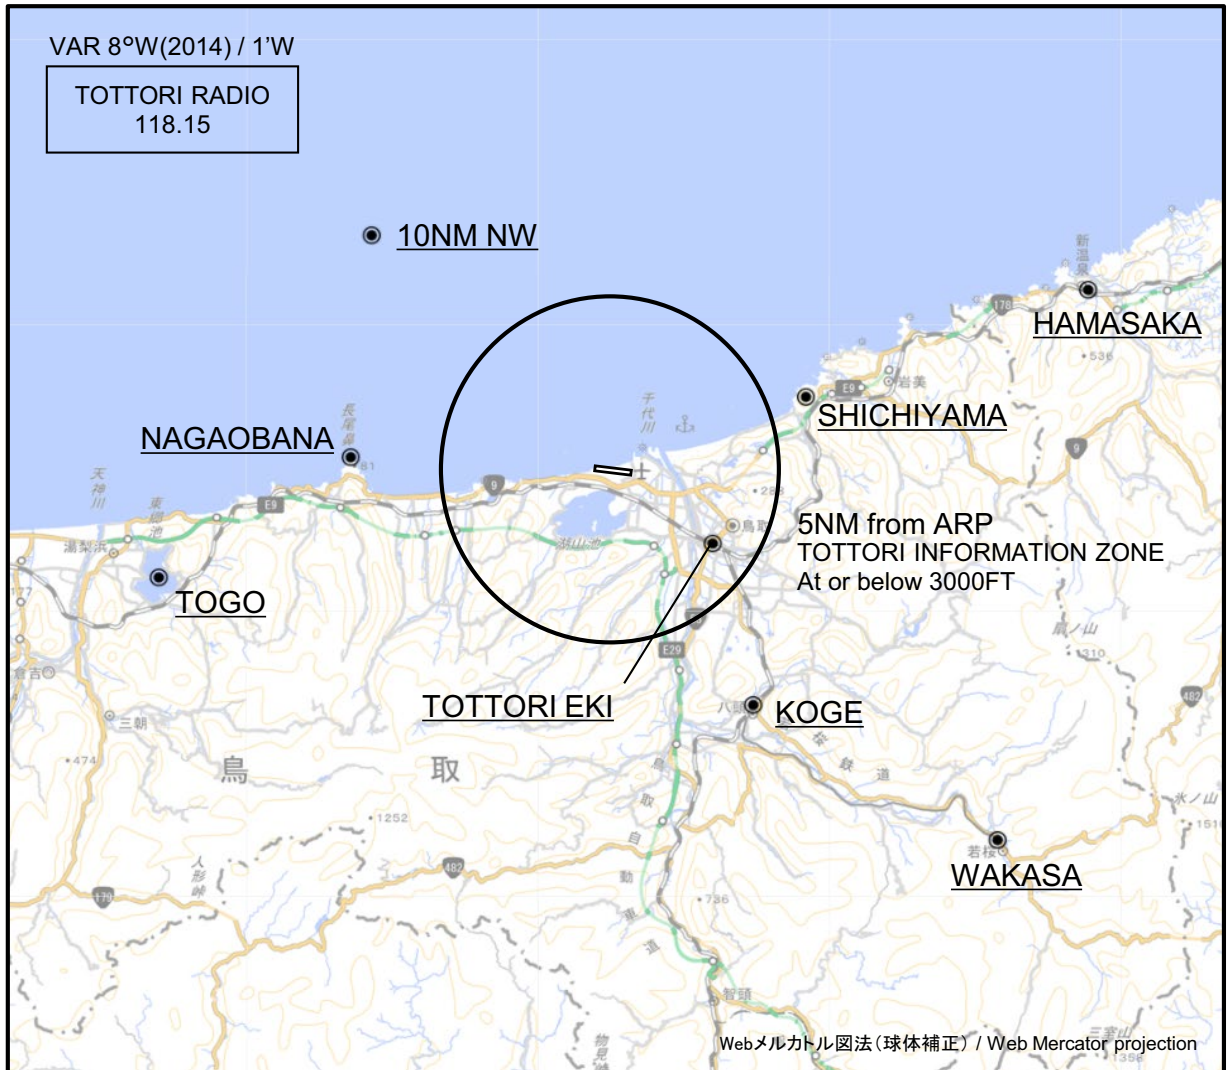

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).


CHANGE : Secondary FREQ abolished.

Call sign	BRG / DIST from ARP	Remarks
10NM NW	315°T / 10.0NM	海上 Over the sea
浜坂 Hamasaka	069°T / 15.1NM	駅 Station
駟馳山 Shichiyama	069°T / 6.2NM	山 Mountain
長尾鼻 Nagaobana	273°T / 7.7NM	岬 Cape
鳥取駅 Tottori eki	126°T / 3.7NM	駅 Station
東郷 Togo	257°T / 13.7NM	池 Pond
郡家 Koge	149°T / 8.2NM	駅 Station
若桜 Wakasa	134°T / 15.9NM	駅 Station

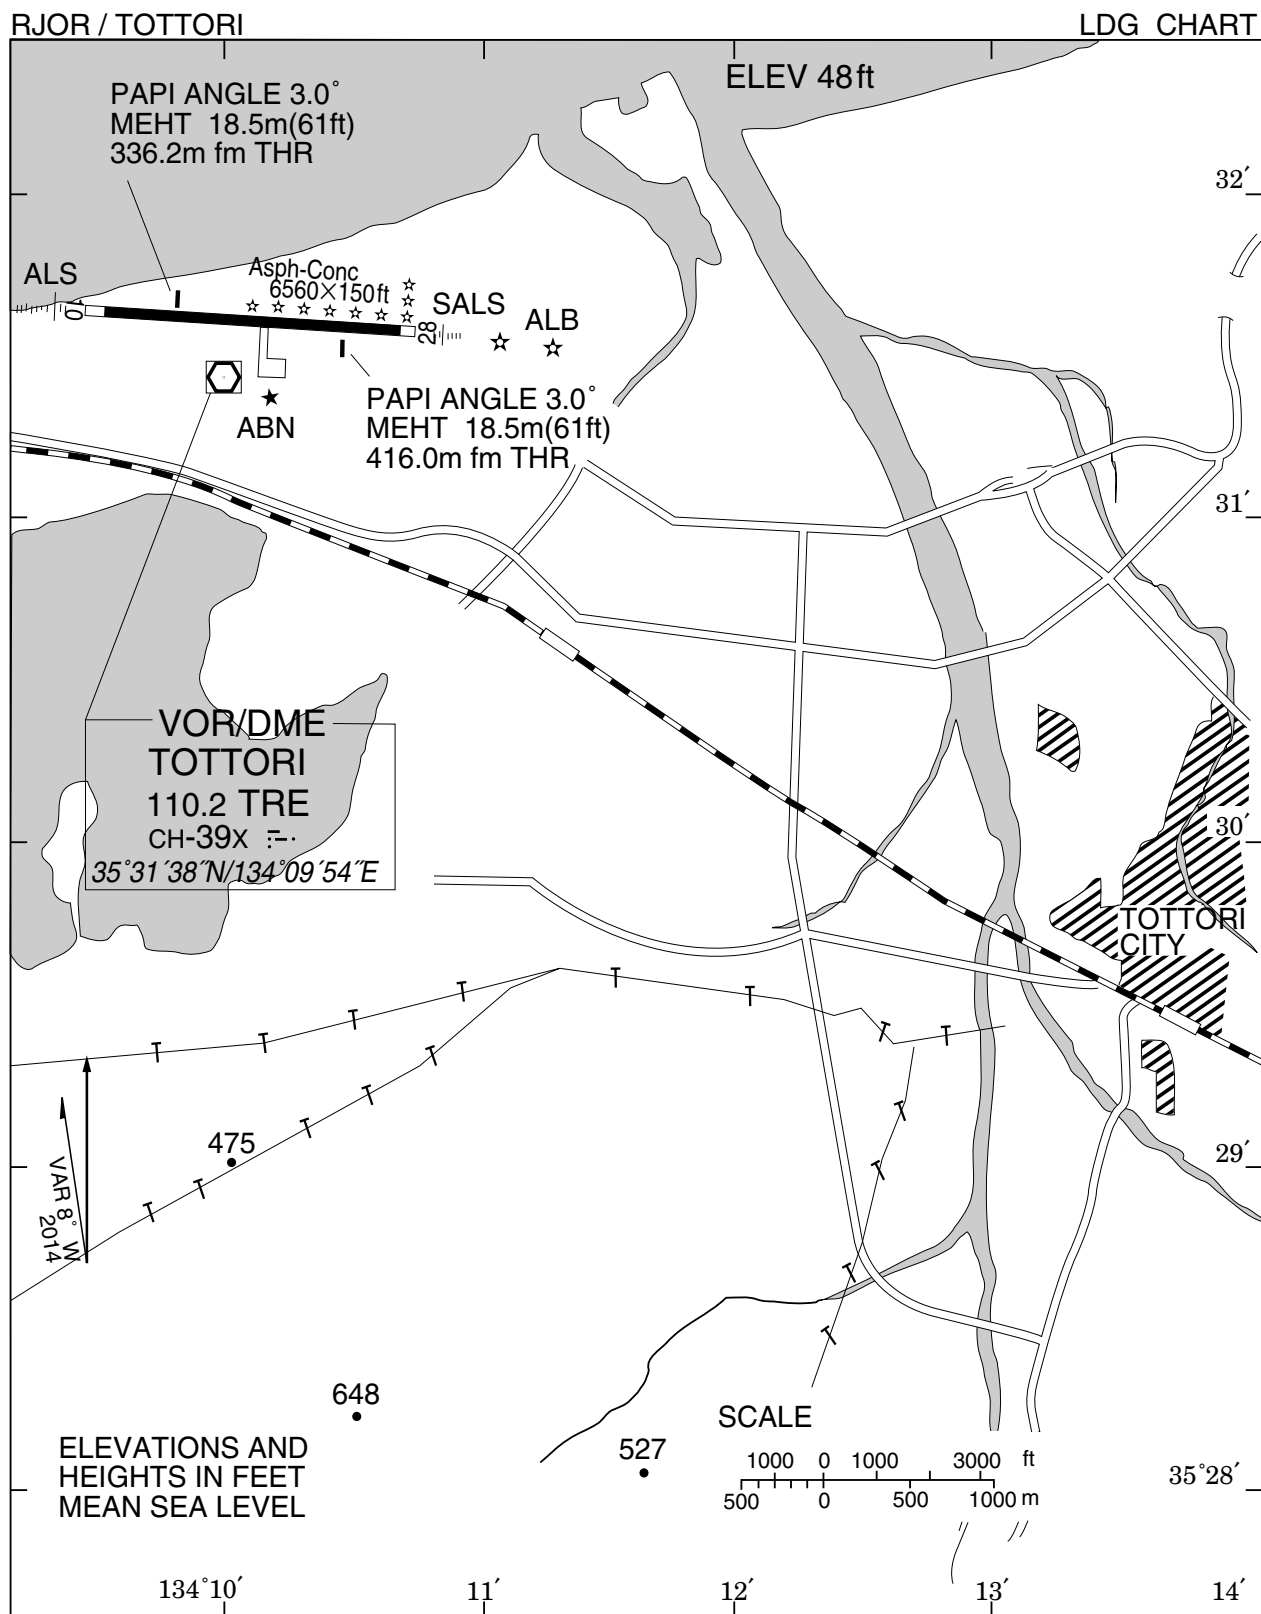

RJOR / TOTTORI

Minimum Vectoring Altitude CHART

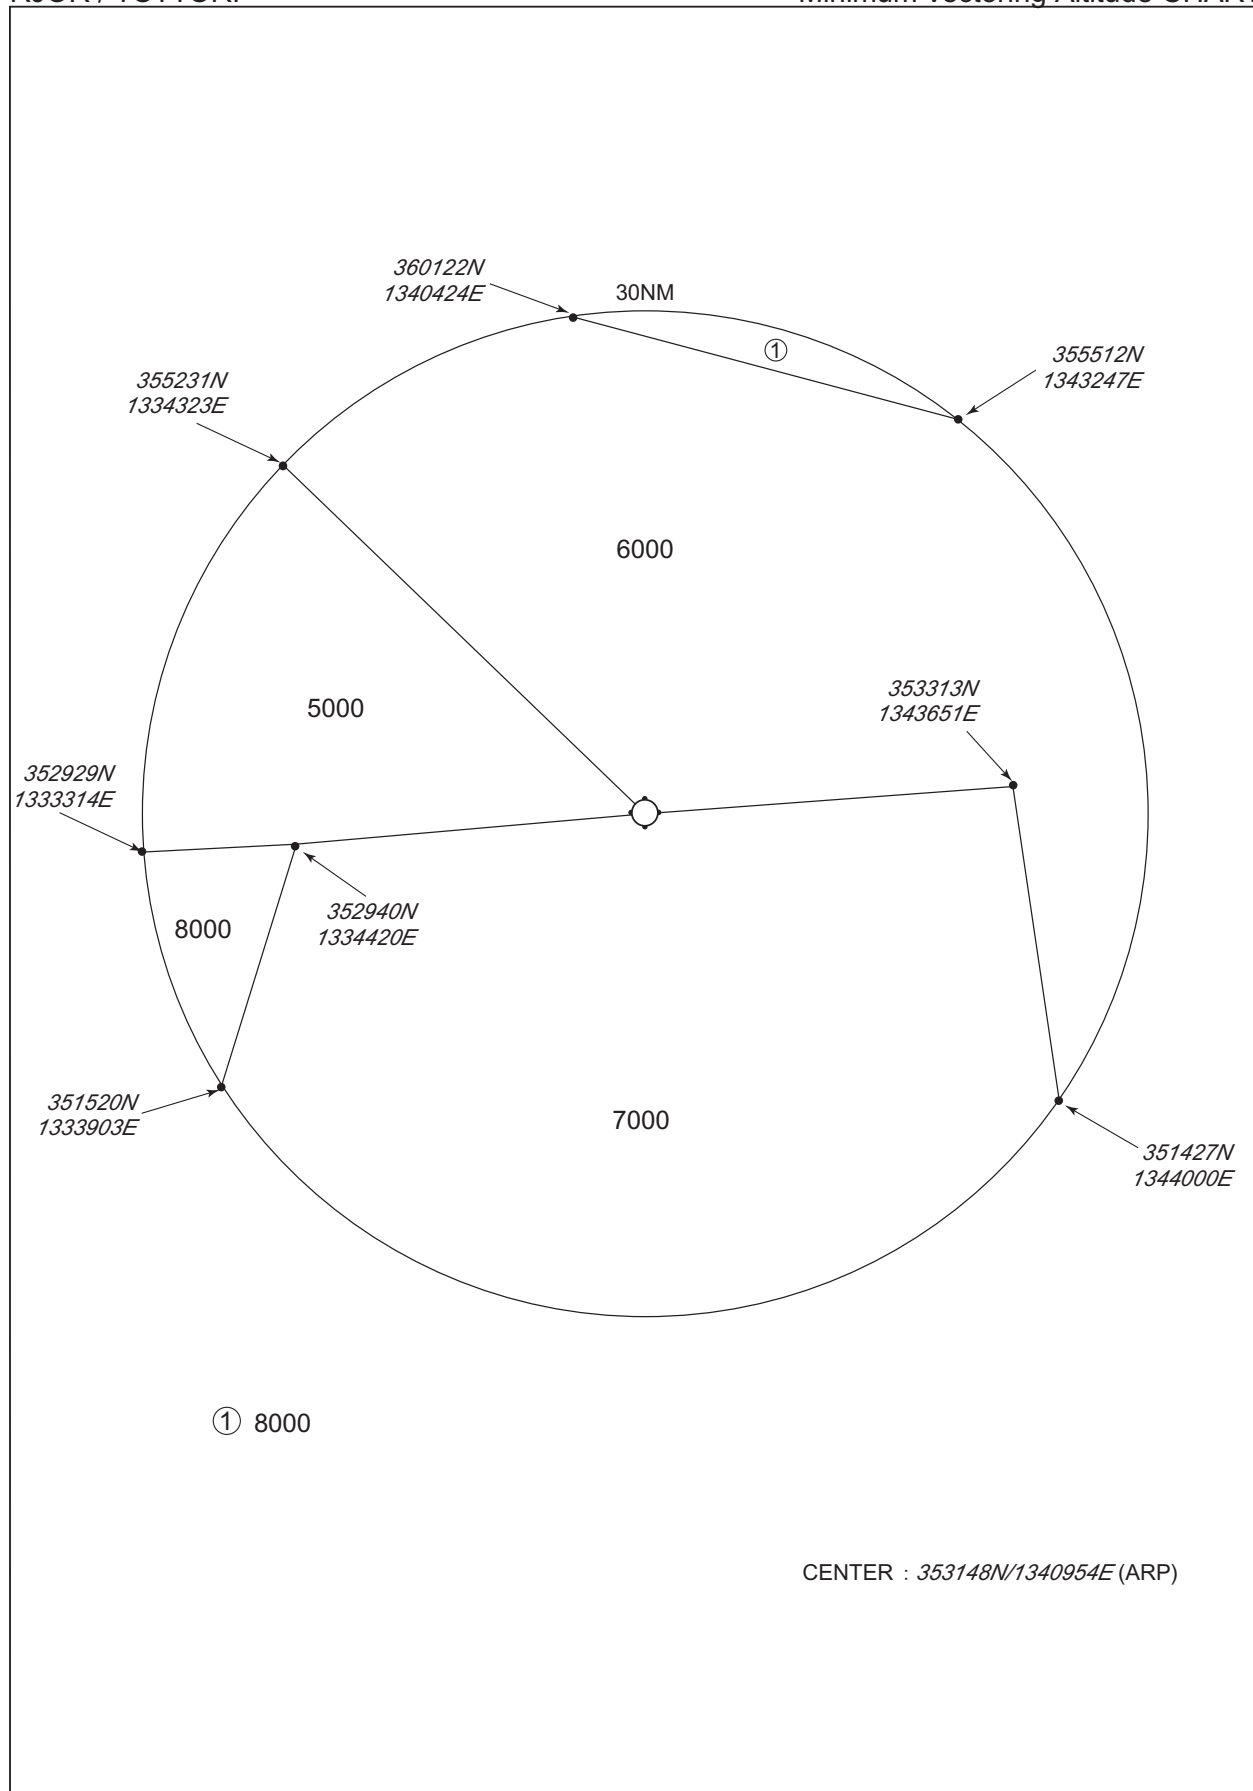

INTENTIONALLY LEFT BLANK