

REMARKS : WIDTH OF TWY (EXC G2) 18m
WIDTH OF TWY G2 13.5m

YAO AIRPORT

SOUTH APRON

VOR/DME

ABN APRON FLOOD LIGHTS

TWR

P1 CEILOMETER

NORTH APRON

G1

B3

B2

P2

A4

A3

A2

A1

B1

ARP

G2

OVERRUN AREA EDGE LIGHTS

RUNWAY THRESHOLD IDENTIFICATION LIGHTS

WIND SPEED METER

PAPI Angle 4.0°
MEHT 11.2m(37ft)

WIND SPEED METER

PAPI Angle 4.5°
MEHT 17.5m(57ft)

NOTE :
1.G1, G2 TWY are unable to use for civil ACFT
2.RWY 13/31,TWY B2 & B3 unusable between SS &
SR due to no LGT system.

LONGITUDINAL PROFILE OF RUNWAY

Stationing	Elevation (ft/m)	Grade (%)
RWY 09 36ft (11m)	36ft (11m)	0.1%
270m	35ft (10.8m)	0.1%
400m	35ft (10.7m)	0.2%
620m	37ft (11.4m)	0.1%
955m	39ft (11.9m)	0.1%
1050m	37ft (11.4m)	0.1%
1490m	38ft (11.7m)	0.1%
RWY 13 34ft (10.5m)	34ft (10.5m)	-

TRUE NORTH

Example for MANDATORY INSTRUCTION MARKING

RWY SIDE

27-09

TWY SIDE

Installed on TWY A1 THRU A4, B1 THRU B3, G2.

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART - INSTRUMENT

RJOY / YAO


SID

IZUMI THREE DEPARTURE

RWY 27/31 : Turn left,...
RWY 09/13 : Complete right turn within 3.0NM (YOE 3.5DME)...
...climb via YOE R229 to IZUMI.
Cross IZUMI at or above 5000FT.

Note : When take off RWY27/31/(13)/[09], following climb gradient should be maintained until 800FT(1000FT)[1400FT].

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

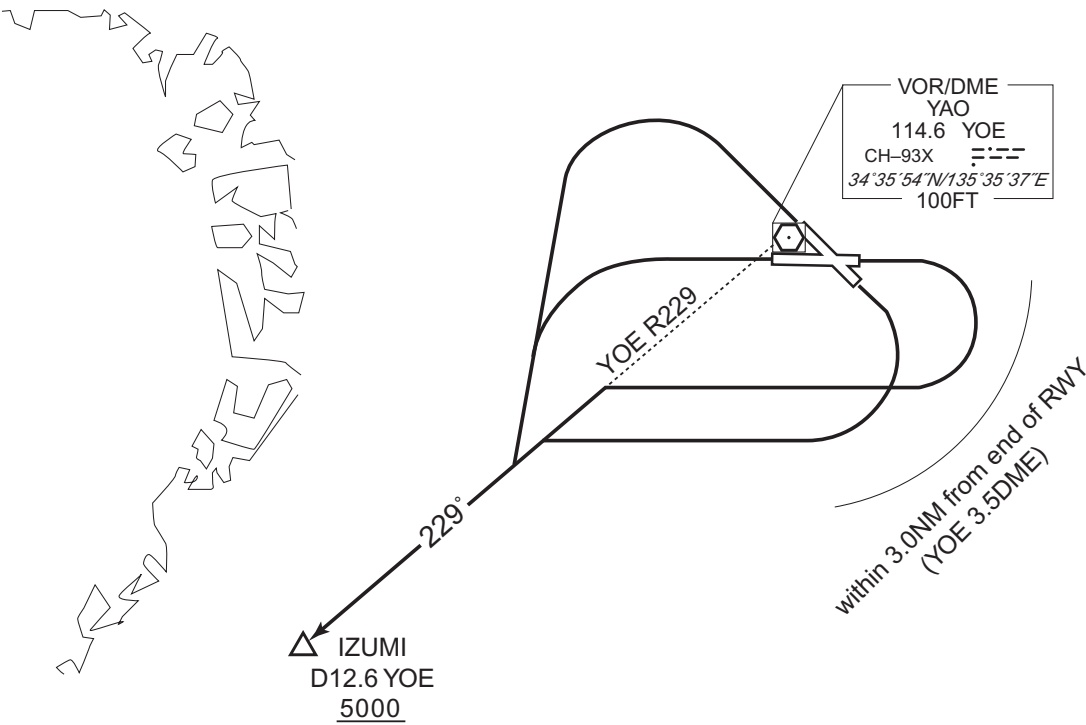

STANDARD DEPARTURE CHART- INSTRUMENT

RJOY / YAO

SID and TRANSITION

ASUKA SEVEN DEPARTURE

RWY 27 : Turn right,...
 RWY 09/13 : Complete right turn within 3.0NM (YOE 3.5DME)...
 RWY 31 : Turn left,...
 ... climb via YOE R281 to YOE 7.1DME (ITE R176), turn right to
 intercept and proceed via KCE R086 to ASUKA.

Cross ASUKA at or above 9000FT. (for NAGOYA TRANSITION)


Note : When take off RWY 31(13/27) [09], following climb gradient should be
 maintained until 500FT (1100FT) [1400FT].

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050


NAGOYA TRANSITION

From over ASUKA, proceed via KCC R243 to KCC VORTAC.

CHANGE : PROC renamed. Radial FM KCE.

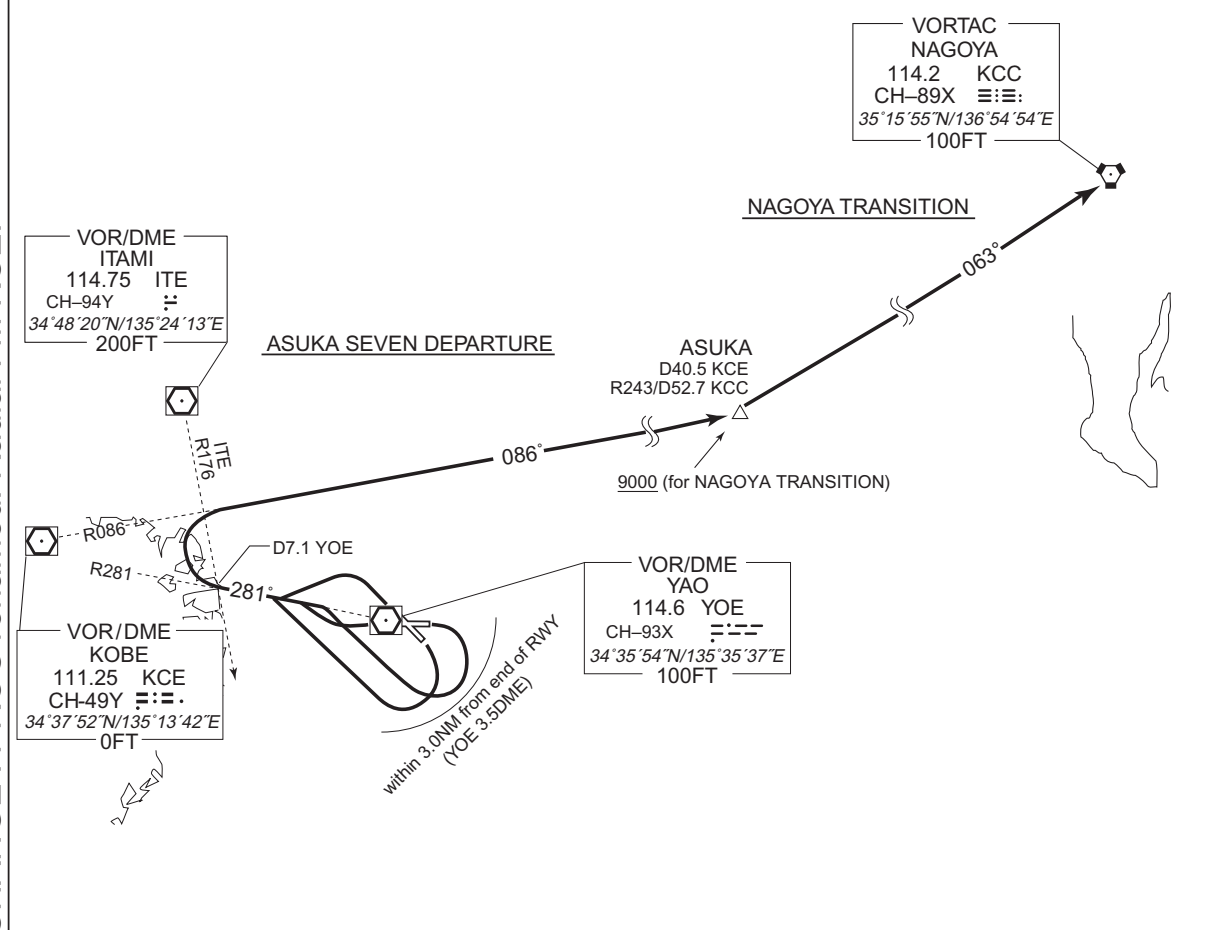

INSTRUMENT APPROACH CHART

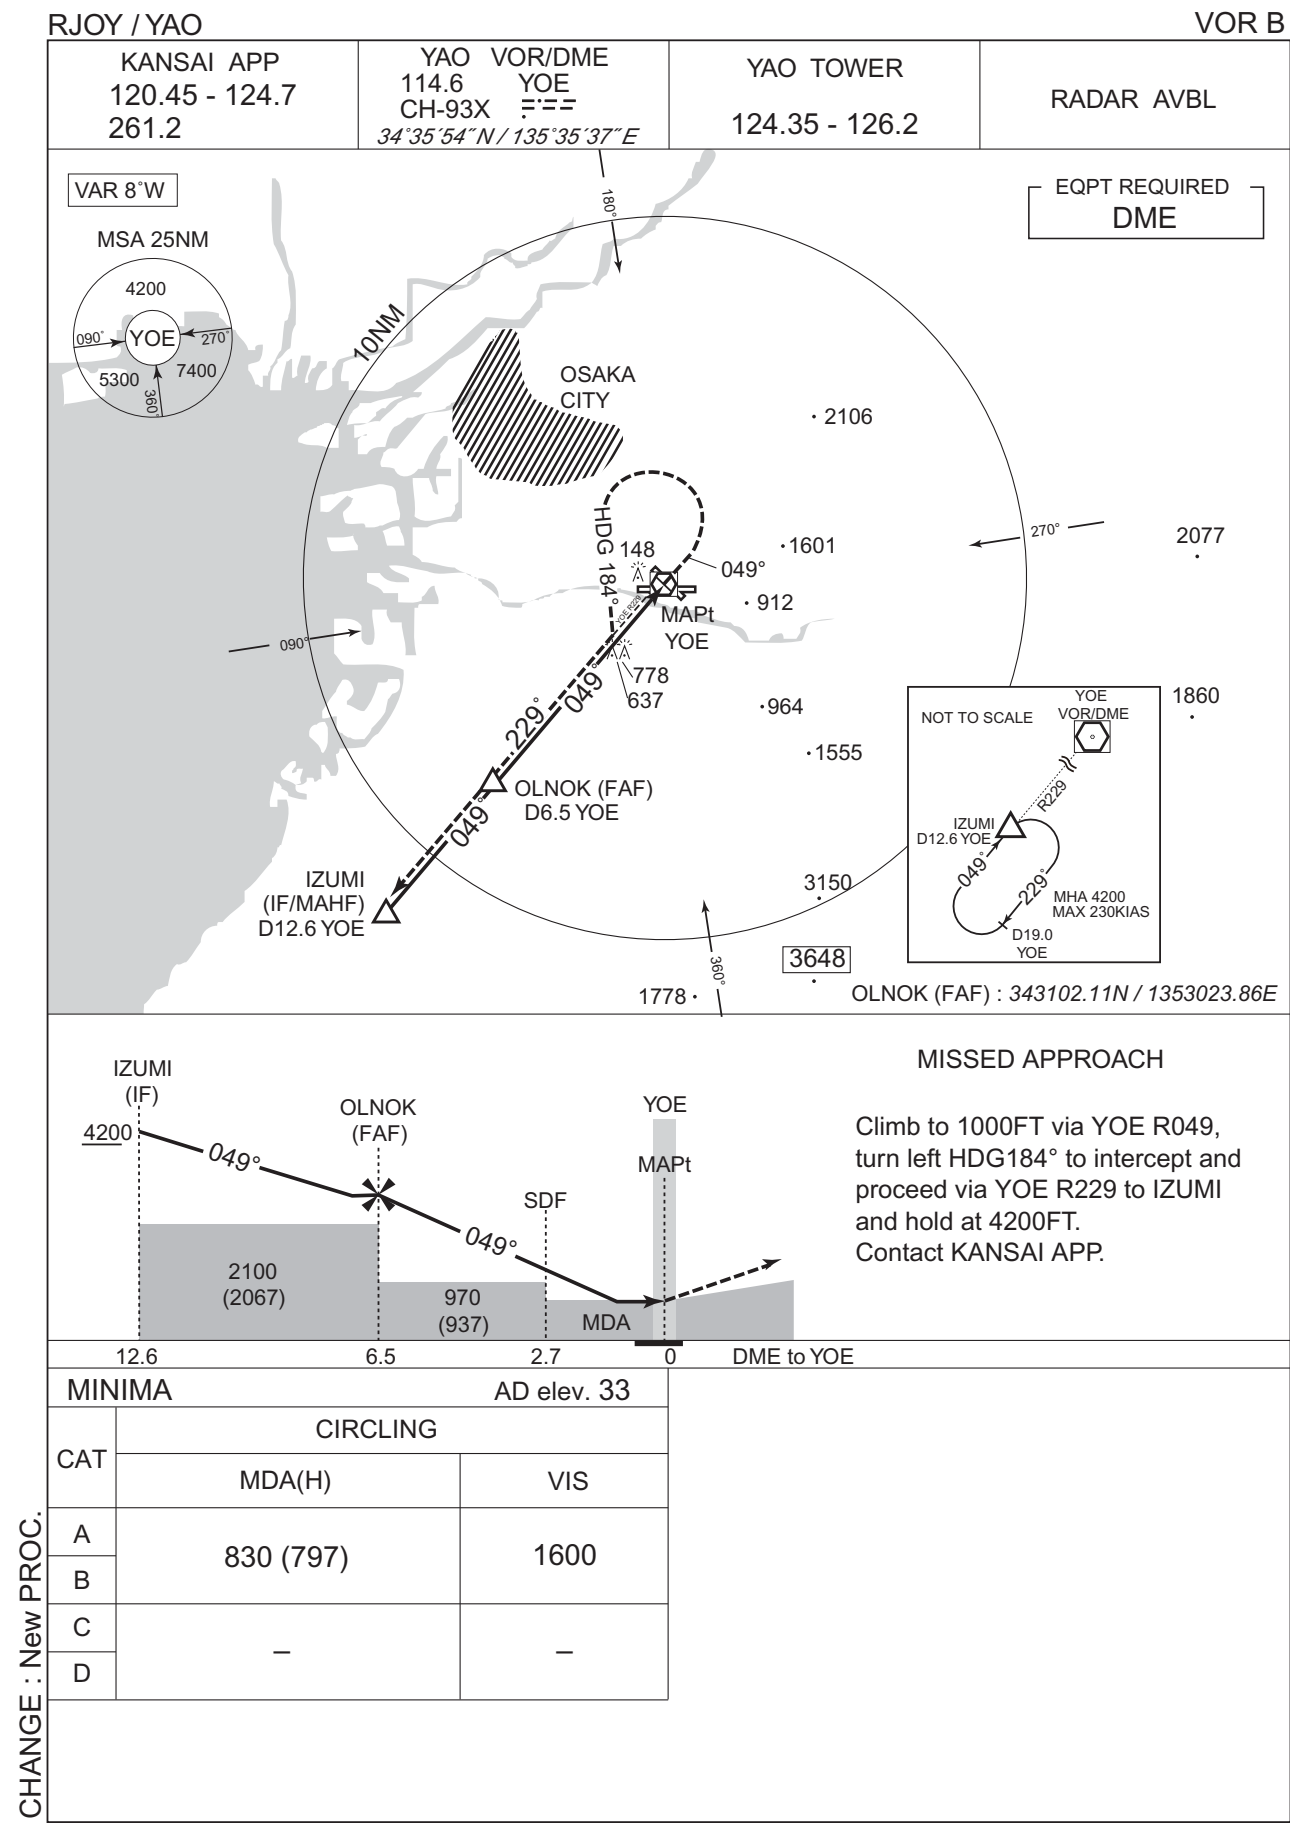


CHANGE : New PROC.

INTENTIONALLY LEFT BLANK

RJOY / YAO

Visual REP

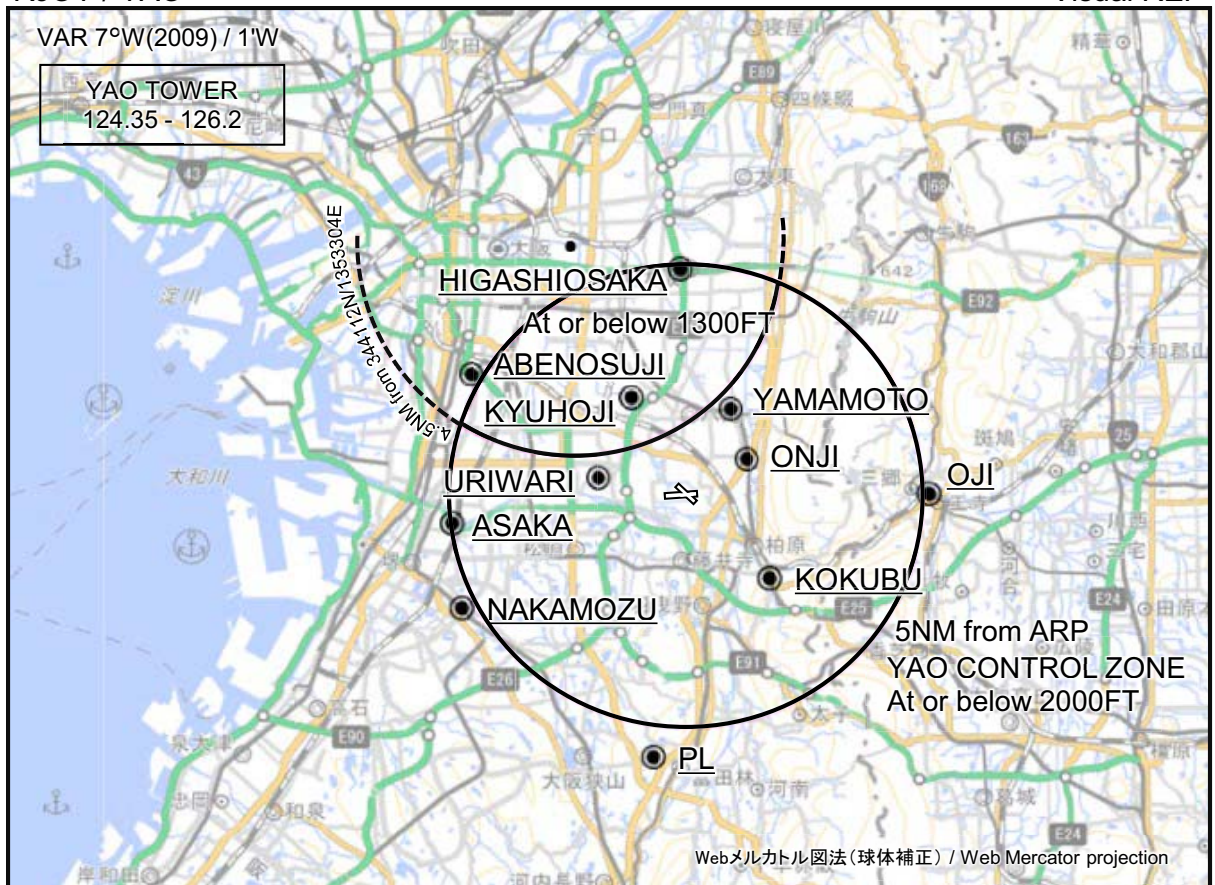


※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP.

Call sign	BRG / DIST from ARP	Remarks
東大阪 Higashiosaka	358°T / 4.9NM	東大阪ジャンクション Junction
阿倍野筋 Abenosuji	300°T / 5.3NM	阿倍野霊園 Cemetery Park
浅香 Asaka	263°T / 5.0NM	大和川曲り角 Curve of the Yamato River
中百舌鳥 Nakamozu	243°T / 5.3NM	南海中百舌鳥駅 Station
ピーエル PL	187°T / 5.7NM	PL教団の塔 Monument
王寺 Oji	089°T / 5.1NM	JR王寺駅 Station
国分 Kokubu	136°T / 2.5NM	近鉄国分駅 Station
瓜破 Uriwari	281°T / 2.0NM	瓜破霊園 Cemetery Park
久宝寺 Kyuhoji	331°T / 2.4NM	久宝寺緑地 Wooded Area
山本 Yamamoto	026°T / 2.1NM	近鉄山本駅 Station
恩智 Onji	058°T / 1.5NM	近鉄恩智駅 Station

RJOY / YAO


LDG CHART

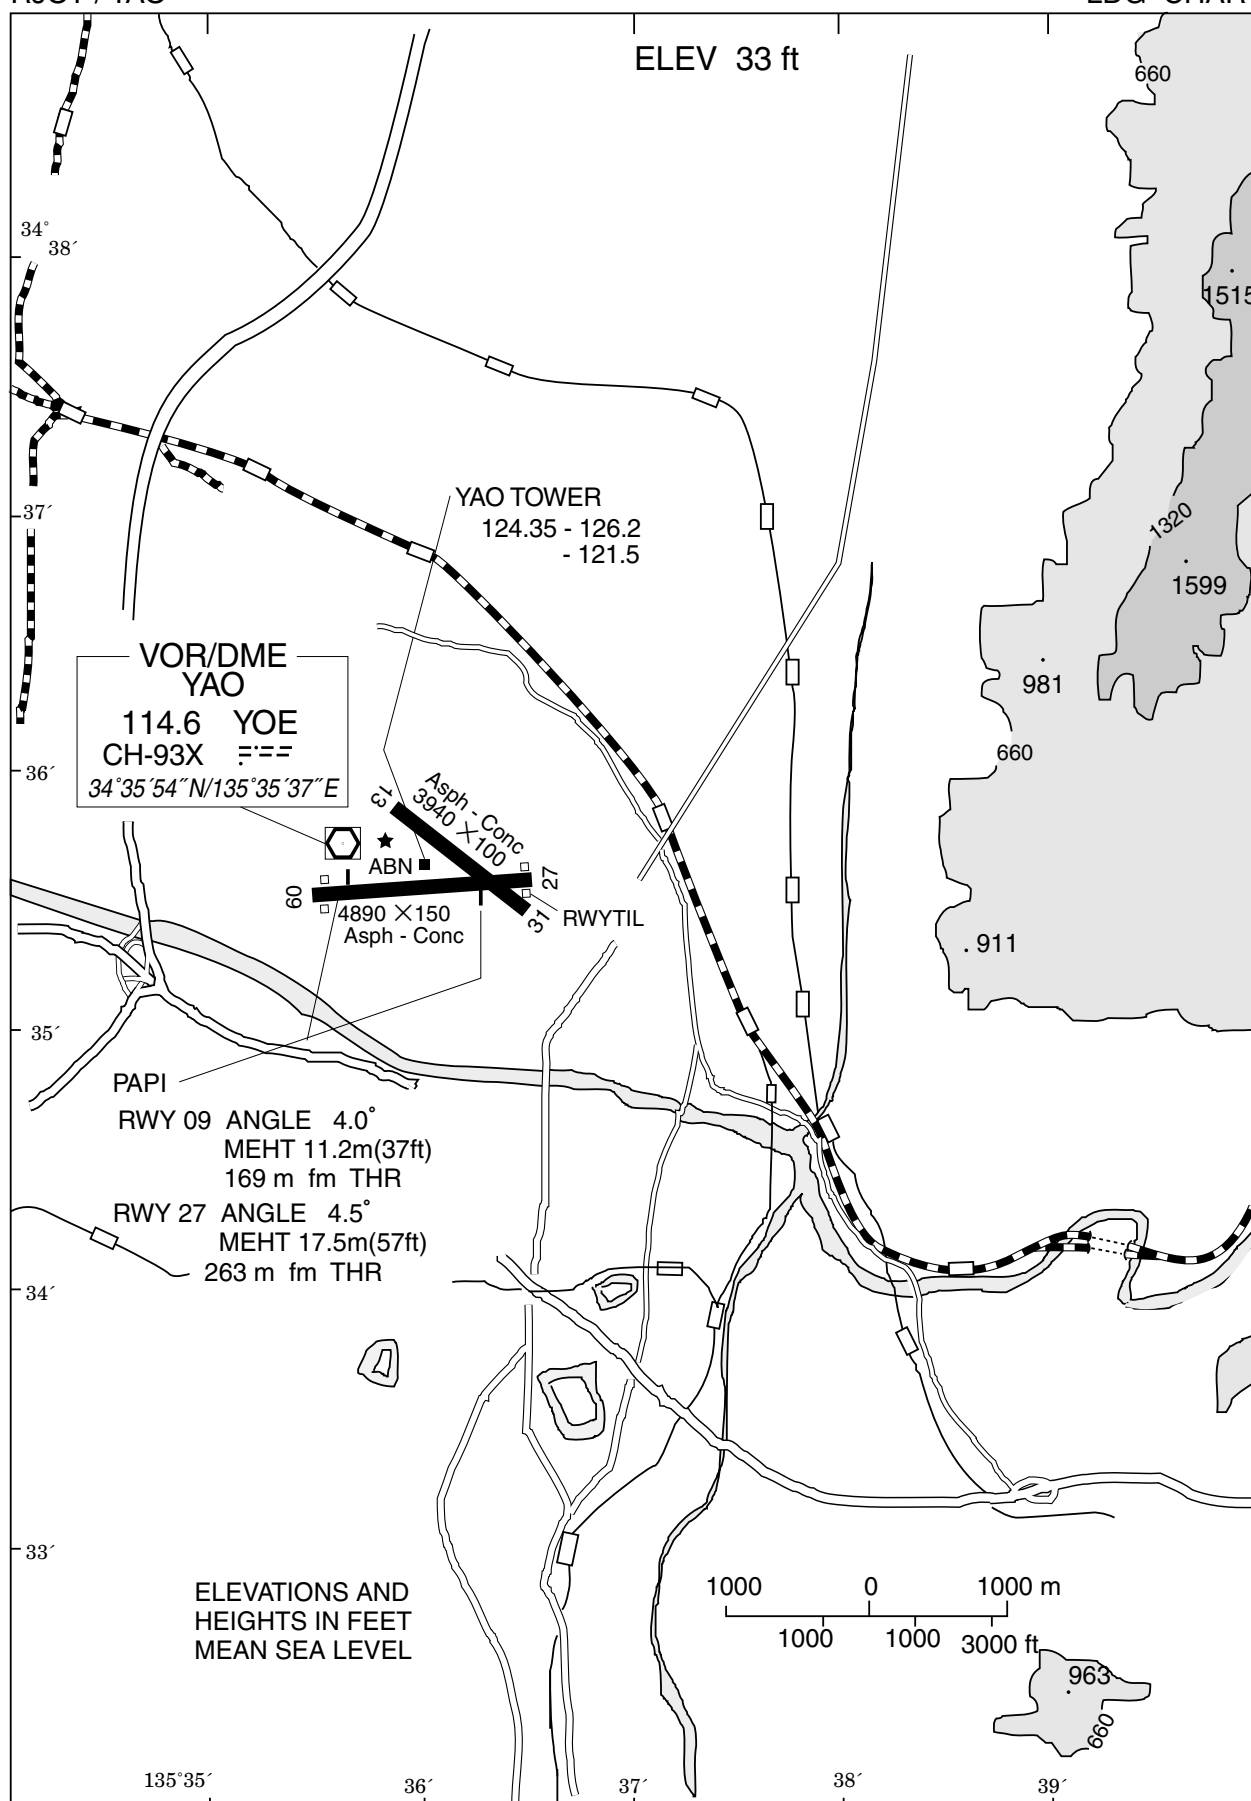

RJOY / YAO

Minimum Vectoring Altitude CHART

VAR 8°W (2023)

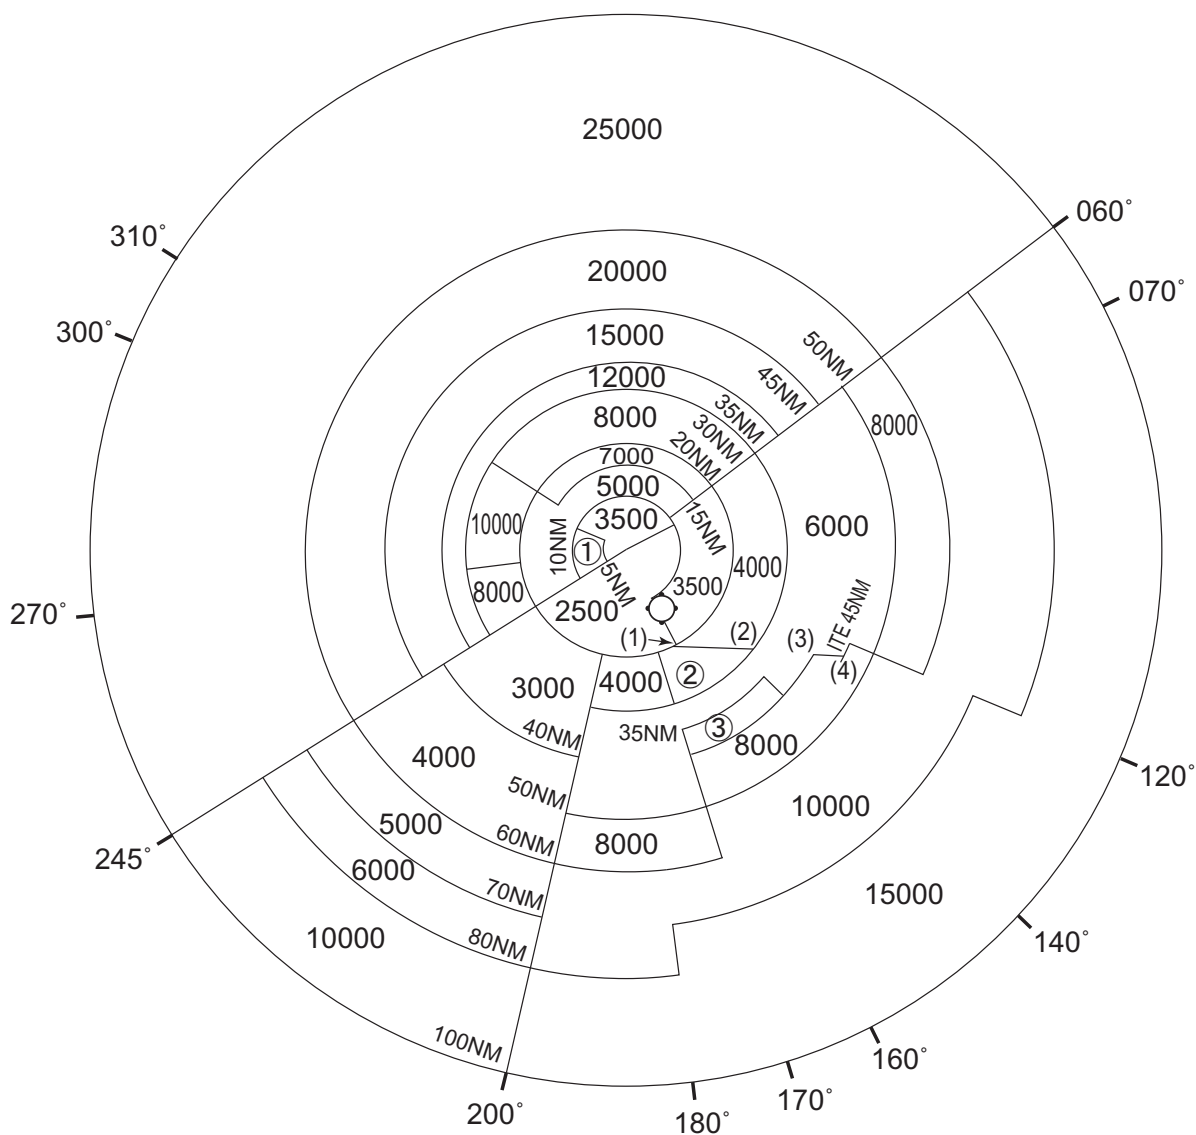

- | | |
|--------|----------------------|
| ① 4100 | (1) 342930N/1353527E |
| ② 5000 | (2) 342925N/1355432E |
| ③ 7000 | (3) 342918N/1360849E |
| | (4) 342924N/1361335E |

CENTER : 344752N/1352550E (RJOJ No.1 RADAR SITE)
CENTER : 344659N/1352600E (RJOJ No.2 RADAR SITE)

CHANGE : Update(BTN 245° and 300°). VAR.