

AD 2 AERODROMES

RJTT AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RJTT - TOKYO International

RJTT AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	353312N/1394652E 301° /2.3km from RWY 34R THR
2	Direction and distance from (city)	14km (7.6nm) S of Tokyo Station (Japan Railway)
3	Elevation/ Reference temperature	21ft / 31°C (2004-2008)
4	Geoid undulation at AD ELEV PSN	117.6FT
5	MAG VAR/ Annual change	8°W (2021) /4.2°W
6	AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses	Civil Aviation Bureau, Ministry of Land, Infrastructure, Transport and Tourism. Tokyo International Airport, 3-1. 3-chome, Haneda-Kuko, Ota-ku, Tokyo, 144-0041 Japan. Tel : 03-5757-3000, Fax : 03-5756-1511 Tel(AD) : 03-5756-1531,1532, Tel(AIS) : 050-3198-2863, Fax : 03-5756-1528 AFS : RJTTYFYX
7	Types of traffic permitted (IFR/ VFR)	IFR/VFR
8	Remarks	Nil

RJTT AD 2.3 OPERATIONAL HOURS

1	AD Administration	H24
2	Customs and immigration	H24
3	Health and sanitation	H24
4	AIS Briefing Office	H24
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	H24
7	ATS	H24
8	Fuelling	H24
9	Handling	H24
10	Security	H24
11	De-icing	Nil
12	Remarks	Nil

RJTT AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	All the modern institutions that deal with the weight thing to Boeing747-8F type freighter.
2	Fuel/ oil types	Fuel Grades : JET A-1 Oil grades : Turbine grades
3	Fuelling facilities / capacity	Hydrant refueling,fuel truck/Not limitation
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

RJTT AD 2.5 PASSENGER FACILITIES

1	Hotels	At Airport
2	Restaurants	At Airport
3	Transportation	Monorail, Railways, Busses and Taxis
4	Medical facilities	First aid treatment, ambulance
5	Bank and Post Office	At Airport
6	Tourist Office	At Airport
7	Remarks	Nil

RJTT AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT 10
2	Rescue equipment	Chemical fire fighting truck x 6, Water-supply truck, Lighting power supply truck, Emergency medical equipments conveyance truck
3	Capability for removal of disabled aircraft	To be issued later
4	Remarks	Nil

RJTT AD 2.7 SEASONAL AVAILABILITY-CLEARING

1	Types of clearing equipment	Snow remove equipments: 1) 6 snow sweepers 2) 8 snow plows 3) 2 rotaries 4) 2 motor graders 5) 5 loaders
2	Clearance priorities	1) RWY16R/34L and 16L/34R, Taxiways attached to the RWY 2) RWY04/22 and 05/23, Taxiways attached to the RWY
3	Remarks	Seasonal availability : All seasons. Snow removal will be commenced, if the RWY and TWY are covered with a depth of 3cm snow or more.

RJTT AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	Apron surface and strength	Terminal 1, Terminal 2 Surface : Concrete Strength : PCR 1132/R/B/W/T Terminal 3 Surface : Concrete Strength : PCR 1183/R/B/W/T N Area Surface : Concrete Strength : PCR 1132/R/B/W/T
2	Taxiway width, surface and strength	Surface : Asphalt-concrete, concrete Strength : PCR 975/F/C/X/T, PCR 925/R/B/W/T Width : 34m(111FT) : A6, A9, A11, B2, B5, B7, C8, C9, E3(between C and E), E4, E5, E8(between C and E), E9(between C and E), E12(between C and E), G(between C and E), H(between A and W), H(between C and E), J(between A and W), J(between C and E), K(between A and W), L4, L6, L9, L11, M2(between C and E), W6 THRU W10, W11(between A and W), W13 32m(105FT) : A1, A2, A4, B1, C1, E1, E2, E10(between C and E), G(between A and W), K(between C and E), L3, R(between G and H), R(between K and J), W1 30m(98FT) : A, A3, A5, A7, A8 THRU A10, A12 THRU A16, B, B3, B4, B6, B8 THRU B14, C, C2 THRU C7, C10 THRU C14, D, D1 THRU D7, E3(between E and R), E, E8(between E and R), E9(between E and R), E10(from spot NR55 to spot NR53), E12(between E and R), G(between E and W), H(between E and W), H1, H2, R1, J(between E and W), J1, J2, K(between E and W), L, L5, L10, L12 THRU L16, M, M1, M2(between E and R), N(between spot NR981 and N7), N1, N7, P, P3 THRU P11, Q, Q1, Q2, R(between A and G), R(between E8 and E9), R(between E10 and J), R(between K and C), R(between A and S), S, S1 THRU S3, T, T1 THRU T9, T11, T12, T14, U2, U4, V, W, W11(between W and R1), Y1 15m(49FT) : N6(between spot NR961 and N2) 23m(75FT) : Other
3	ACL and elevation	Not available
4	VOR checkpoints	Not available

5	INS checkpoints	Spot NR	
		1 : 353244.87N/1394715.45E	68 : 353258.54N/1394734.99E
		2 : 353243.91N/1394713.19E	69 : 353255.82N/1394737.27E
		3 : 353242.77N/1394710.79E	70 : 353254.33N/1394735.67E
		4 : 353241.67N/1394708.47E	71 : 353253.92N/1394733.45E
		5R : 353240.61N/1394706.99E	72 : 353252.85N/1394731.08E
		5 : 353240.85N/1394707.04E	73 : 353251.67N/1394728.59E
		5L : 353240.41N/1394705.84E	81 : 353313.04N/1394725.84E
		6 : 353241.75N/1394705.46E	82 : 353311.01N/1394727.27E
		7 : 353243.30N/1394705.33E	83 : 353306.60N/1394730.41E
		8 : 353245.27N/1394705.86E	84 : 353304.57N/1394731.84E
		9 : 353248.11N/1394704.81E	
		10 : 353250.36N/1394703.25E	101 : 353235.61N/1394632.63E
		11 : 353252.33N/1394700.22E	102 : 353234.38N/1394630.02E
		12 : 353252.76N/1394658.54E	103 : 353233.14N/1394627.41E
		13 : 353254.41N/1394657.37E	104 : 353231.90N/1394624.80E
		14 : 353255.85N/1394657.64E	105F : 353230.68N/1394622.23E
		15 : 353258.98N/1394657.09E	105P : 353230.91N/1394620.33E
		16 : 353301.21N/1394655.50E	106 : 353233.11N/1394618.77E
		17 : 353303.24N/1394652.77E	106R : 353233.52N/1394618.36E
		18 : 353303.50N/1394650.89E	106L : 353233.25N/1394620.00E
		19 : 353304.80N/1394648.96E	107 : 353236.04N/1394617.83E
		20 : 353306.09N/1394648.17E	107R : 353236.45N/1394617.42E
		21 : 353306.70N/1394649.16E	107L : 353236.11N/1394619.13E
		22 : 353307.44N/1394651.14E	108 : 353238.48N/1394616.10E
		23 : 353308.19N/1394653.09E	108R : 353238.89N/1394615.69E
			108L : 353238.58N/1394617.37E
		31 : 353313.19N/1394648.39E	109 : 353240.52N/1394614.66E
		32 : 353314.60N/1394647.42E	110 : 353242.55N/1394613.21E
		33 : 353316.57N/1394646.03E	111 : 353244.59N/1394611.77E
		34 : 353318.53N/1394644.64E	112 : 353246.90N/1394610.12E
		35 : 353320.50N/1394643.24E	113 : 353248.94N/1394608.68E
		36 : 353322.46N/1394641.85E	114 : 353250.97N/1394607.23E
		37 : 353324.18N/1394639.92E	
		38 : 353326.39N/1394639.06E	121 : 353240.65N/1394626.06E
		39 : 353328.36N/1394637.66E	122 : 353242.75N/1394624.57E
		40 : 353330.32N/1394636.27E	123 : 353247.53N/1394621.33E
		41 : 353332.28N/1394634.87E	124 : 353249.20N/1394620.14E
		47 : 353331.04N/1394702.17E	131 : 353241.47N/1394627.80E
		48 : 353329.08N/1394703.57E	132 : 353243.58N/1394626.30E
		49 : 353327.11N/1394704.96E	133 : 353248.25N/1394622.84E
		50 : 353324.93N/1394707.34E	134 : 353249.91N/1394621.66E
		50R : 353325.40N/1394706.93E	
		50L : 353324.93N/1394708.28E	140 : 353254.40N/1394614.86E
		51 : 353322.67N/1394708.95E	141 : 353255.60N/1394617.04E
		51R : 353323.13N/1394708.54E	142 : 353300.16N/1394613.74E
		51L : 353322.65N/1394709.89E	143 : 353258.90N/1394611.08E
		52 : 353321.01N/1394710.46E	144 : 353257.70N/1394608.54E
		53 : 353319.08N/1394714.89E	145 : 353256.46N/1394605.92E
		54 : 353320.22N/1394717.28E	146 : 353255.26N/1394603.39E
		55 : 353321.20N/1394719.34E	147 : 353253.79N/1394600.30E
		56 : 353318.42N/1394721.31E	148 : 353252.61N/1394557.81E
		57 : 353317.26N/1394719.15E	149 : 353251.43N/1394555.32E
		58 : 353314.90N/1394715.68E	
		59 : 353311.22N/1394717.32E	151 : 353306.65N/1394610.75E
		60 : 353309.26N/1394718.72E	152 : 353305.54N/1394608.40E
		61 : 353307.29N/1394720.11E	153 : 353304.42N/1394606.05E
		62 : 353305.33N/1394721.51E	154 : 353303.31N/1394603.69E
		63 : 353303.36N/1394722.90E	155 : 353302.19N/1394601.34E
		64 : 353301.40N/1394724.30E	
		65 : 353259.43N/1394725.69E	201 : 353204.82N/1394732.11E
		66 : 353256.29N/1394729.18E	202 : 353206.22N/1394731.32E
		67R : 353257.40N/1394732.54E	203 : 353208.26N/1394730.08E
		67 : 353257.49N/1394732.99E	204 : 353210.22N/1394728.69E
		67L : 353258.73N/1394733.01E	205 : 353212.18N/1394727.29E
			206 : 353214.15N/1394725.90E
			207 : 353216.11N/1394724.51E
			208 : 353218.08N/1394723.11E
			209 : 353220.04N/1394721.72E
			210 : 353222.10N/1394720.51E


5	INS checkpoints	Spot NR	
		211 : 353223.98N/1394718.93E	709 : 353224.95N/1394758.47E
		212 : 353226.39N/1394717.22E	710 : 353223.03N/1394759.83E
		213 : 353228.44N/1394716.01E	711 : 353220.90N/1394801.11E
		214 : 353230.32N/1394714.43E	712 : 353218.93N/1394802.74E
		301 : 353346.49N/1394639.93E	801 : 353243.57N/1394744.54E
		302 : 353347.63N/1394642.33E	802 : 353241.85N/1394746.45E
		303 : 353348.77N/1394644.73E	803 : 353239.66N/1394747.37E
		304 : 353349.54N/1394647.40E	804 : 353238.00N/1394749.39E
		305 : 353350.96N/1394649.27E	805 : 353235.73N/1394750.16E
		311 : 353345.88N/1394639.02E	806 : 353233.68N/1394751.61E
		312 : 353346.52N/1394641.55E	807 : 353232.03N/1394753.62E
		313 : 353347.66N/1394643.96E	808 : 353225.94N/1394757.33E
		314 : 353349.22N/1394646.06E	809 : 353223.75N/1394758.66E
		315 : 353349.85N/1394648.59E	810 : 353221.85N/1394800.23E
			811 : 353219.87N/1394801.65E
		331 : 353359.72N/1394651.90E	
		332 : 353355.35N/1394656.39E	901 : 353308.45N/1394528.21E
		333 : 353353.78N/1394658.18E	902 : 353310.37N/1394529.86E
		341 : 353400.48N/1394651.39E	903 : 353312.29N/1394531.51E
		342 : 353359.07N/1394653.13E	904 : 353314.22N/1394533.16E
		343 : 353354.96N/1394657.15E	905 : 353316.15N/1394534.81E
		344 : 353353.92N/1394659.52E	906 : 353318.08N/1394536.46E
			907 : 353320.00N/1394538.11E
		351 : 353354.90N/1394614.70E	908 : 353321.93N/1394539.77E
		352 : 353356.83N/1394616.35E	909 : 353323.10N/1394541.72E
		353 : 353358.76N/1394618.00E	
		354 : 353400.68N/1394619.66E	941 : 353327.61N/1394534.26E
		355 : 353403.34N/1394622.14E	942 : 353329.54N/1394532.62E
			943 : 353331.48N/1394530.99E
		361 : 353355.47N/1394614.66E	944 : 353333.41N/1394529.35E
		362 : 353357.59N/1394616.49E	945 : 353335.52N/1394527.92E
		363 : 353359.52N/1394618.15E	
		364 : 353359.81N/1394616.36E	951 : 353333.71N/1394541.04E
		365 : 353402.73N/1394620.54E	952 : 353335.65N/1394539.40E
		366 : 353403.13N/1394624.24E	953 : 353337.58N/1394537.76E
			954 : 353339.52N/1394536.13E
		401R : 353336.59N/1394658.56E	955 : 353339.98N/1394532.87E
		401 : 353335.21N/1394659.00E	956 : 353341.19N/1394531.83E
		402 : 353333.22N/1394700.44E	957 : 353342.53N/1394530.74E
			961 : 353343.77N/1394524.31E
			962 : 353344.36N/1394525.56E
		501 : 353345.29N/1394702.69E	963 : 353344.95N/1394526.80E
		502 : 353343.54N/1394704.16E	964 : 353345.54N/1394528.05E
		503 : 353341.52N/1394705.44E	965 : 353346.13N/1394529.29E
		504 : 353339.55N/1394706.83E	966 : 353346.72N/1394530.54E
		505 : 353334.60N/1394710.28E	967 : 353347.31N/1394531.79E
		506 : 353332.80N/1394711.63E	968 : 353347.90N/1394533.03E
		507 : 353330.89N/1394713.13E	969 : 353348.59N/1394534.48E
		508 : 353328.92N/1394714.53E	
		509 : 353326.96N/1394715.92E	981 : 353302.38N/1394519.18E
			982 : 353306.41N/1394518.19E
		601 : 353238.52N/1394736.98E	983 : 353308.63N/1394518.73E
		602 : 353236.85N/1394738.16E	984 : 353310.56N/1394520.38E
		603 : 353235.18N/1394739.35E	985 : 353312.21N/1394522.64E
		604 : 353233.10N/1394740.97E	
		605 : 353231.06N/1394742.41E	
		701 : 353244.66N/1394744.06E	VN : 353341.08N/1394654.86E
		702 : 353242.69N/1394745.45E	VS : 353338.04N/1394656.82E
		703 : 353240.73N/1394746.85E	
		704 : 353238.69N/1394748.09E	
		705 : 353236.95N/1394749.96E	
		706 : 353234.93N/1394751.24E	
		707 : 353232.78N/1394752.46E	
		708 : 353227.03N/1394756.76E	
6	Remarks	Nil	

RJTT AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS





1	Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands	ACFT stand ID sign : NR1 THRU NR4, NR5, NR6 THRU NR23, NR47 THRU NR49, NR50, NR51, NR52 THRU NR66, NR67, NR68 THRU NR73, NR105P, NR106, NR107, NR108, NR109 THRU NR114, NR140 THRU NR149 ACFT stand taxi lane : E8(BTN E and R), E9(BTN E and R), R(from E8 to E9), N6(from spot NR964 to spot NR969) Visual docking guidance system : See below figure
2	RWY and TWY markings and LGT	RWY: RWY 16L/34R, 16R/34L, 04/22, 05/23 (Marking) RWY designation, RWY CL, RWY THR, Aiming point, TDZ, RWY side stripe, RWY middle point, Displaced THR(RWY 16L/34R, 16R) (LGT) RCLL, REDL, RTHL, RENL, RTZL(RWY16L/34R, 16R/34L, 22, 23), WBAR(RWY16L/34R, 16R/34L, 22, 23) TWY: C10, D3 and D5 (LGT) Rapid exit taxiway indicator lights TWY: ALL TWY (Marking) TWY CL, RWY HLDG PSN, TWY side stripe (LGT) TWY edge LGT(except F), TWY CL LGT(except B12, D(between D7 and E), F, N1, N2, N6, N, Y(between SPOT 312 and J2)), Taxiing guidance sign(except B12) TWY CL LGT on C4, C6, C7, C10, C11, B4, B6, T4, T6, A2, A5, A10, A12, L5 and L12 The intensity of the TWY CL LGT is more increased than that of other TWY CL LGT. TWY: C1 THRU C14 (LGT) Stop bar LGT, RWY guard LGT(90m off the runway center line) TWY: A1 THRU A16, C1, C2, C3, C5, C12, C13, C14, D1 THRU D5, L3 THRU L16 (LGT) RWY guard LGT(75m off the runway center line) TWY: A, E, M, R (Marking) Intermediate Holding Position (LGT) Intermediate Holding Position (see attached chart) TWY: A1, A3, A4, A6, A9, A11, A13, A14, A15, A16, B1, B2, B5, B7, B9, B10, B11, L3, L4, L6, L9, L11, L14, L15, L16, T1, T2, T5, T7, T9, T11 (LGT)Variable Message Signs (RWY status LGT) (see attached chart) SFC painted direction sign (See Figure "Type of Surface Painted Markings")
3	Stop bars	Stop Bar Lights Operations 1) Stop Bar Lights are installed at each RWY holding position associated with RWY16L/34R 2) Stop Bar Lights will be operated when the visibility or the lowest RVR of the RWY16L/34R is at or less than 600m. 3) Stop Bar Lights on TWY C1, C2, C13 and C14 are controlled individually by ATC 4) Stop Bar Lights on TWY C3 THRU C12 are not controlled individually by ATC. 5) During the period Stop Bar Lights operated, TWY C3 THRU C12 are not available for departure aircraft.
4	Remarks	(Marking) Overrun area, ACFT PRKG PSN, Apron TWY CL (LGT) Apron flood LGT Runway Guard Lights Operations: Either Runway Guard Lights of 75m off runway center line or Runway Guard Lights of 90m off runway center line turn on in the daytime regardless of visibility condition of TWY C1, C2, C3, C5, C12, C13, C14

Diagram illustrating the markings and layout for RWY 16L/34R. The diagram shows the runway layout, including the runway edge, centerline, and various markings. Callouts identify the following markings:

- RWY HLDG
- PSN marking
- Mandatory instruction marking
- Enhanced TWY CI marking



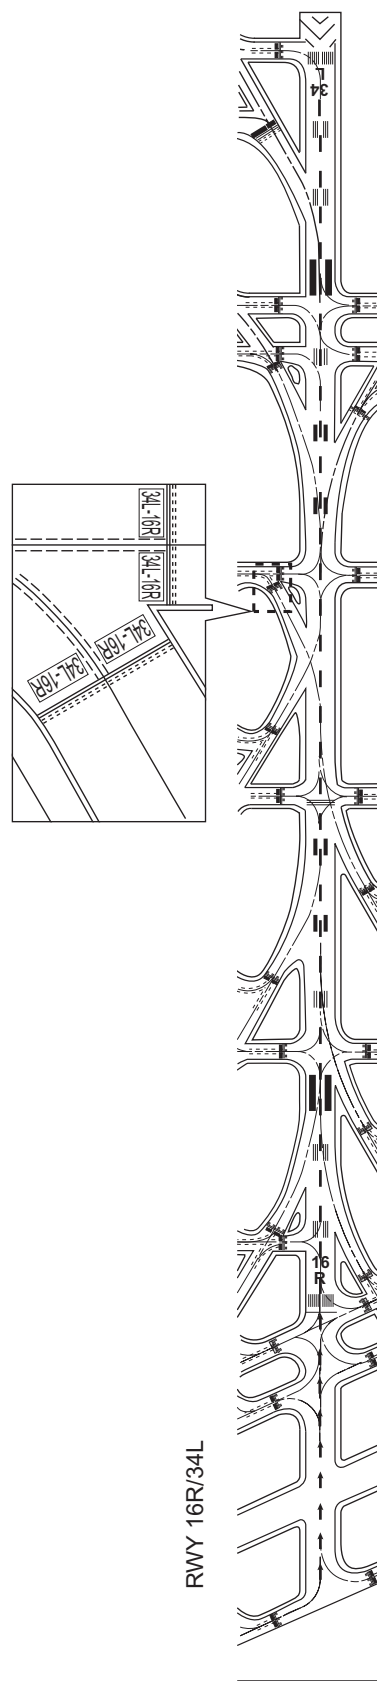


MARKING AIDS

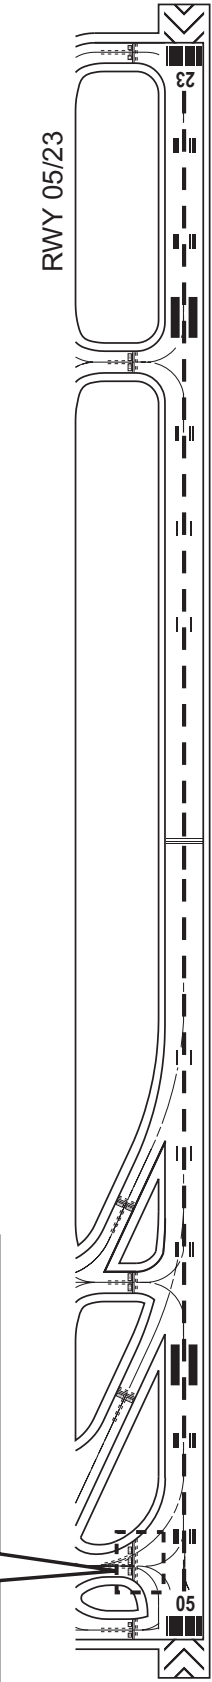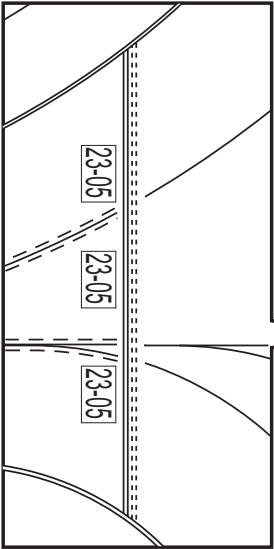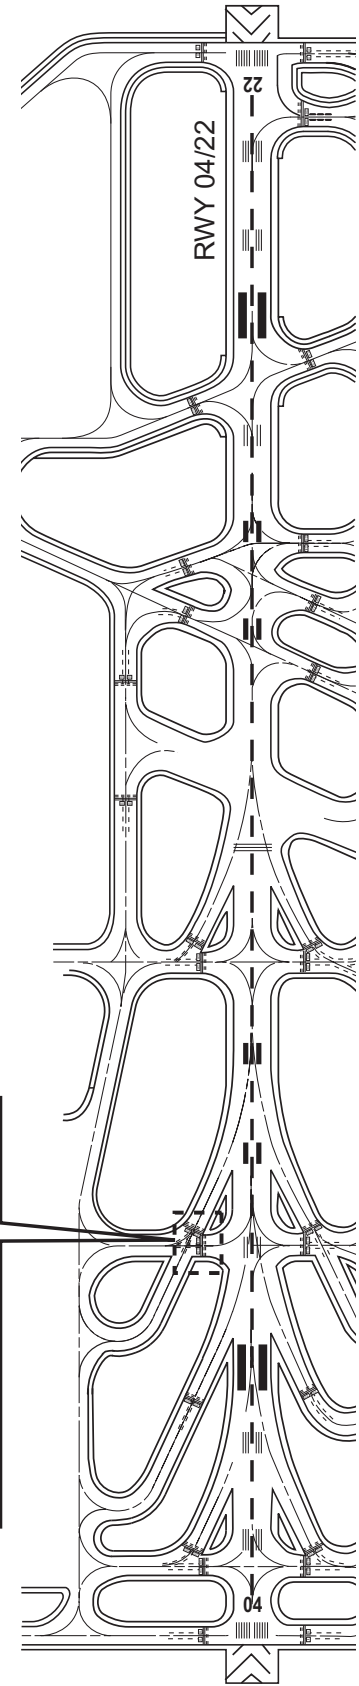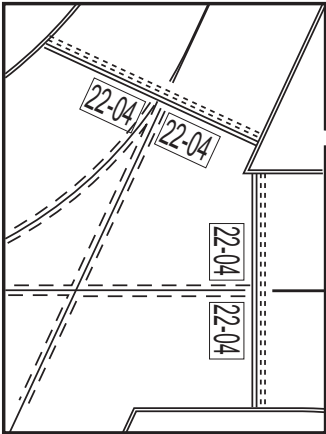


Intermediate Holding Position Marking and Intermediate Holding Position Lights

1. The Intermediate Holding Position Marking indicates the position where aircraft is to hold to prevent collision with other aircraft on the taxiway. The Intermediate Holding Position Lights are collocated with the Intermediate Holding Position Marking and synchronized with the taxiway center line lights. The Intermediate Holding Position Lights consist of 5 yellow lights and the Intermediate Holding Position Marking is a single broken line as illustrated in the figure below;

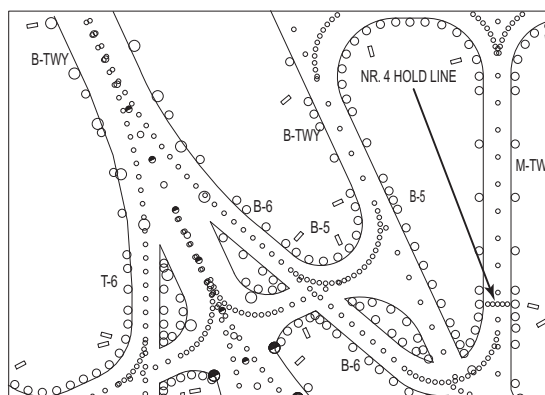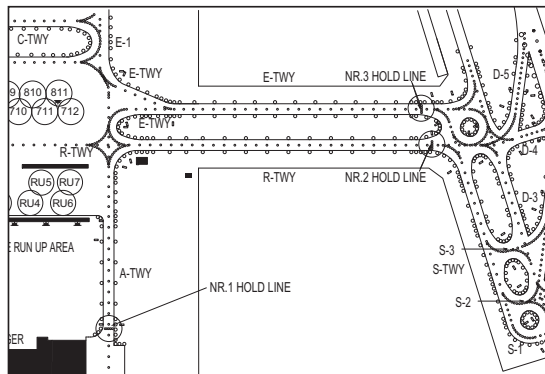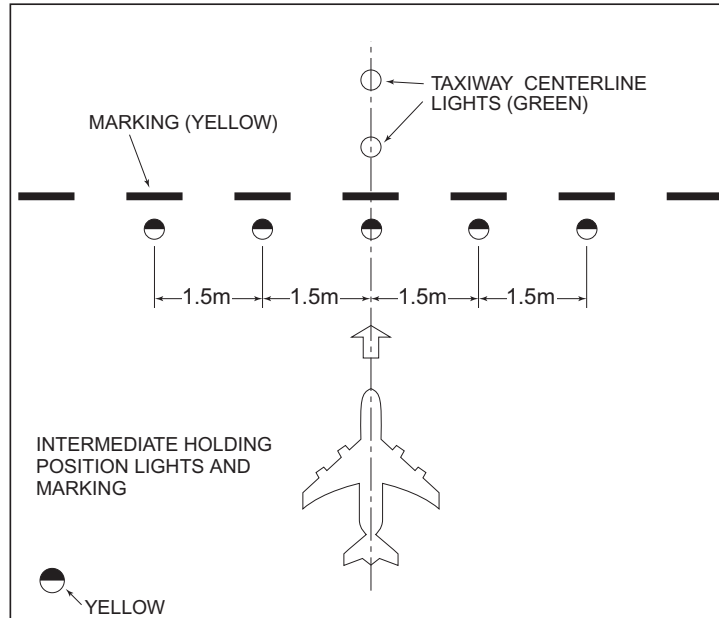

2. Operational procedure
See AD 2.20.6.4.

Variable Message Signs (VMS)

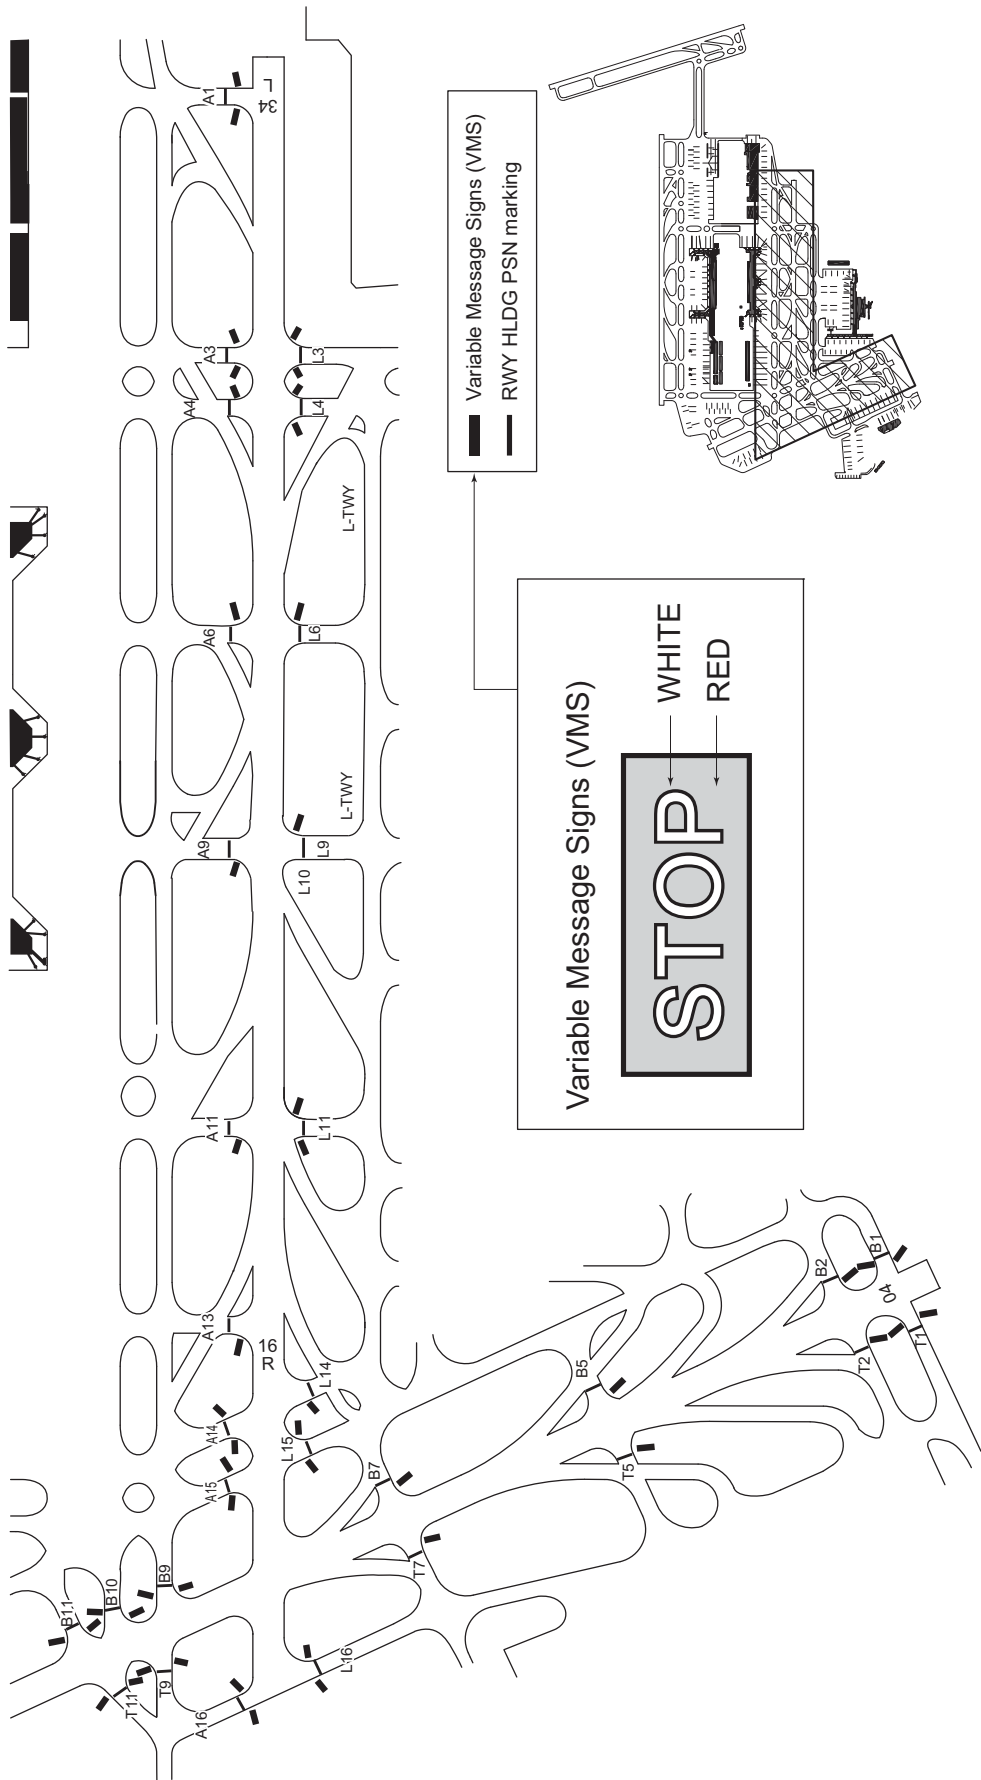

NOTE : The TWY names and RWY HLDG PSN markings in this ATTACHMENT are depicted only for the TWYs where VMS are installed.

1.Type of Surface Painted Markings

•Surface Painted Direction Sign

This type of making at a taxiway intersection indicates the designation and direction of the taxiway leading out of an intersection. Black inscriptions with an arrow with a yellow background.

•Surface Painted Location Sign

This type of making indicates the designation of the taxiway on which the aircraft is located. Yellow inscriptions with a black background and yellow frame.

2.On each of the taxiways A, A14, A15, A16, B, B6, B7, B9, B10, F, H, J, K, L, L13, L15, L16, M, N, N2, N5, T, T7, T9, T11, U2, U4, W, surface painted markings are provided (refer attached drawing).

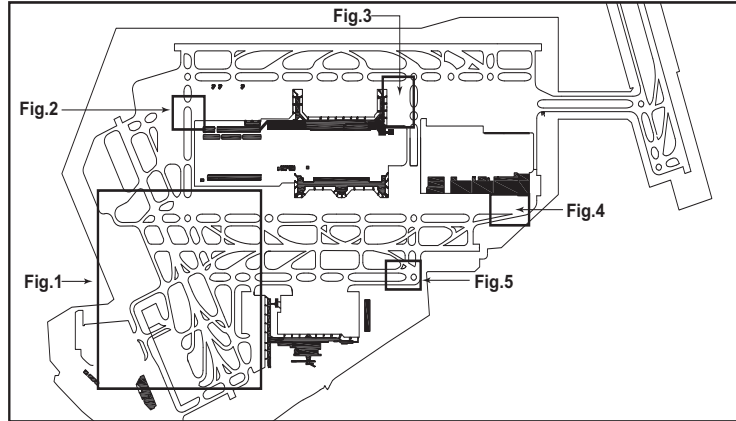


Fig.1

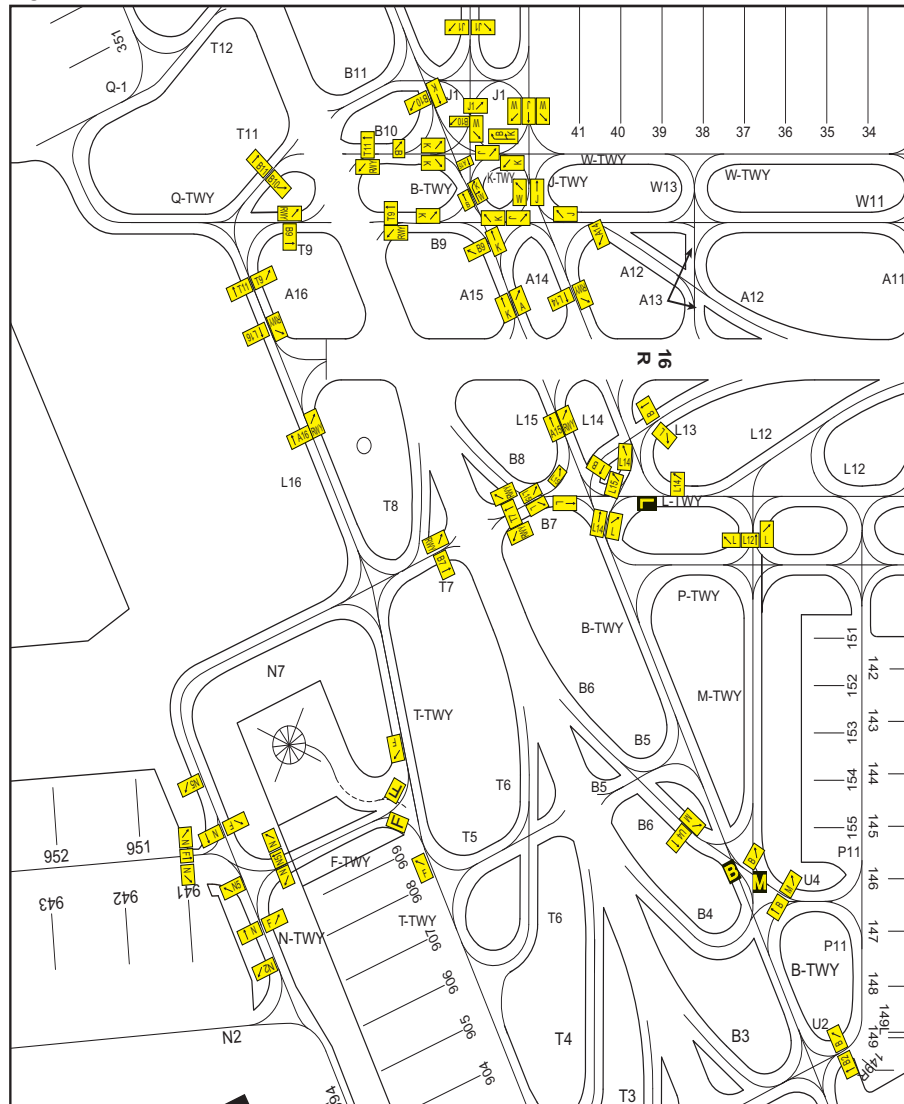


Fig.2




Fig.3

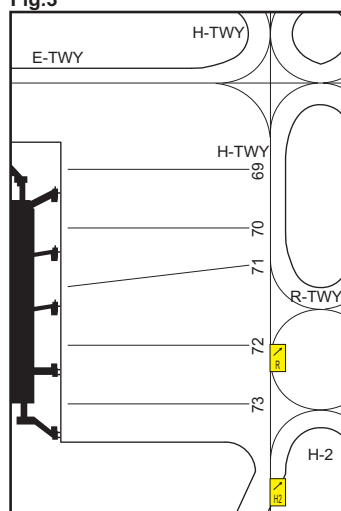


Fig.4





Fig.5



VISUAL DOCKING GUIDANCE SYSTEM

I. SAFEDOCK

1. General

- (1) Aircraft parking stands NR1 THRU NR4, NR5, NR6 THRU NR23, NR47 THRU NR49, NR50, NR51, NR52 THRU NR66, NR67, NR68 THRU NR73, NR105P, NR106, NR107, NR108, NR109 THRU NR114, NR140 THRU NR149 are equipped with a SAFEDOCK visual docking guidance system.

The pilots of an arriving aircraft assigned to park at one of these parking stands can use this system to be guided and stop the aircraft at the correct parking position.

- (2) This system is operational only in the automatic mode and in an event of a system failure, the aircraft shall be manually guided by a marshaller to the stopping position.
- (3) The SAFEDOCK visual docking system consists of a display screen for pilots and a laser scanner.
The system detects and analyses the aircraft type of an approaching aircraft, tracks it through the laser scanner, and displays these results on the display screen.
- (4) The display screen indicates the following information:
 - a) type of the approaching aircraft
 - b) deviation from the lead-in center line, and
 - c) distance to the stopping position.

The above information is provided equally to the pilots on both left seat and right seat.

2. Aircraft Type Indication

- (1) A message about the aircraft type from Spot Control System shall be confirmed and put into the system by ground operator.

The system then carries out internal calibration and starts laser scanning simultaneously.

The system shows the aircraft type on the display screen and then will begin to indicate yellow lead-in arrows scrolling upwards prompting the aircraft to proceed.(Fig.1)




Fig.1





Fig.2

- (2) When the laser scanner detects the approaching aircraft, the display screen will indicate the aircraft type, a "T" bar, and a lead-in upward arrow in yellow.(Fig.2)
- (3) At least until the approaching aircraft arrives at a point 12 meters before the stopping position, the system will identify the aircraft type and will compare with the previously input aircraft type. If these data match, the system will continue its operation. If they do not match, the display screen will repeatedly indicate "STOP", "ID" and "FAIL" in sequence and will indicate 2 illuminated red squares simultaneously.


NOTE:At this moment, the pilots must stop the aircraft immediately.

When the operator re-input the correct aircraft type into the system and the system finds it correct, it resumes normal operations indicating the correct aircraft type on its display screen


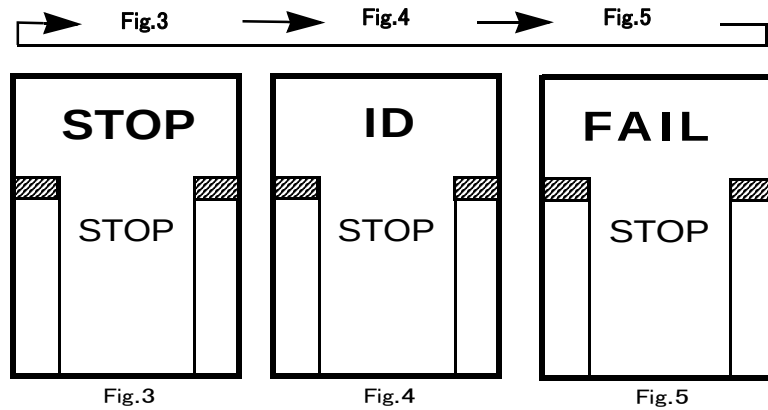


3. Taxiing and Lateral Center line Guidance

- (1) While taxiing the aircraft using the system, the pilots should maneuver the aircraft at a low speed to the stopping position. In an event when "SLOW" is indicated on the display screen, the pilots should further decelerate the taxiing speed to avoid overshooting.(Fig.6)



- (2) Deviation of an upward yellow arrow from the center line of "T" indicates the deviation of the approaching aircraft relative to the center line of the parking stand either to right or left. Further, an additional flashing red arrow on the either side indicates the required direction for the aircraft to turn.(Fig.7, Fig.8)



4. Stop Guidance

- (1) When the approaching aircraft is within 30 meters from the stopping position, display of digital countdown will start. As the aircraft approaches the stopping position, digital countdown is for every 1.0 meter (from 30.0 to 2.0 meters to the stop position) or for every 0.2 meters (from 2.0 to 0.0 meters to the stop position).

- (2) When the approaching aircraft is within 16 meters from the stopping position, the shaft of the illuminated "T" will start to reduce in its length from the bottom to indicate the approaching rate of the aircraft, indicating the remaining distance to the stopping position successively.(Fig.9, Fig.10)

As the aircraft approaches the stopping position, the shaft of the illuminated "T" retract one row for every 0.5 meters.




Fig.9




Fig.10

- (3) When the aircraft reaches the stopping position, a message "STOP" will be displayed on the screen together with two red squares, one each at the either side of the screen at the positions previously used for indication of a direction to turn. (Fig.11)




Fig.11

- (4) When the aircraft is stopped at the correct stopping position, a message "OK" will be displayed on the screen in several seconds.(Fig.12)




Fig.12




Fig.13

- (5) When the operator applies chocks, and switches on "CHOCK ON" switch, the display screen will display "CHOCK ON".(Fig.13)

- (6) If the aircraft stops at a position beyond the correct stopping position, a message "TOO FAR" will be displayed on the screen.(Fig 14).




Fig.14




Fig.15

5. Cautions and Safety

- (1) When the system displays an incorrect aircraft type, or when such a message as "STOP", "ID", "FAIL", or "WAIT" appears on the display screen, the pilots should stop the aircraft immediately. (Fig.3, Fig.4, Fig.5, Fig.11, Fig.15)
- (2) Bad weather condition, during heavy fog, rain or snow, the visibility for the docking system can be reduced. When the system is activated and in capture mode, the display screen will deactivate the floating arrows and indicate "Aircraft type" and "SLOW".
This message will be superseded by the "T" bar, as soon as the system detects the approaching aircraft.
The pilot must not proceed beyond the bridge, unless the "SLOW" text has been superseded by the "T" bar.

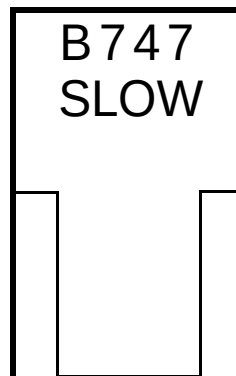


Fig.16

- (3) System breakdown, in case of a severe system failure, the display screen will go black, except for 2 red squares indicator. A manual backup procedure must be used for docking guidance.(Fig.17)




Fig.17


RJTT AD 2.10 AERODROME OBSTACLES

- In Area2 See Obstacle data
- In Area3 To be developed


RJTT AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	TOKYO
2	Hours of service MET Office outside hours	H24
3	Office responsible for TAF preparation Periods of validity	TOKYO 30 Hours
4	Trend forecast Interval of issuance	TREND 30min
5	Briefing/ consultation provided	P, Ja, En
6	Flight documentation Language(s) used	C En
7	Charts and other information available for briefing or consultation	S ₆ , U ₈₅ , U ₇ , U ₅ , U ₃ , U ₂₅ , U ₂ /T _r , P _S , P ₅ , P ₃ , P ₂₅ , P _{SWE} , P _{SWF} , P _{SWG} , P _{SWI} , P _{SWM} , P _{SW} (domestic), E, C, W _E , W _F , W _G , W _I , W, N
8	Supplementary equipment available for providing information	Doppler Radar and Lidars for Airport Weather(see attached chart)
9	ATS units provided with information	TWR, APP, ATIS
10	Additional information(limitation of service, etc.)	Nil


Airspace for the advisory service concerning low level wind shear (RWY16L/34R)

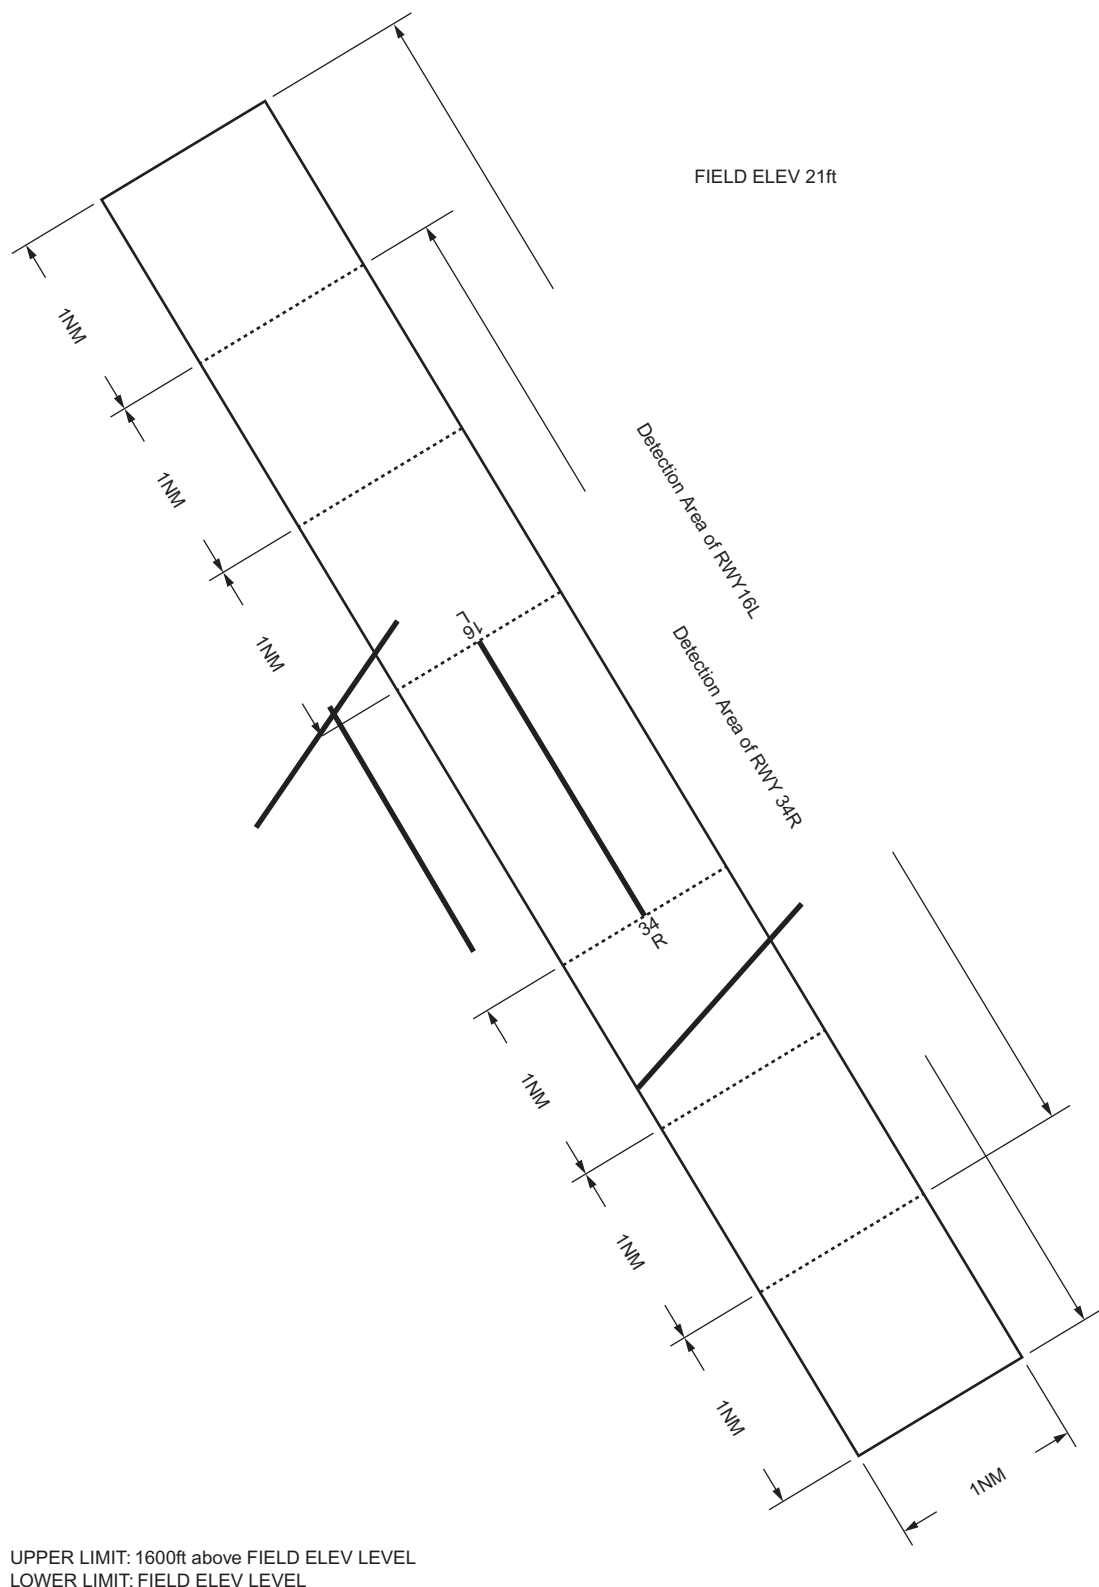

Airspace for the advisory service concerning low level wind shear (RWY16R/34L)

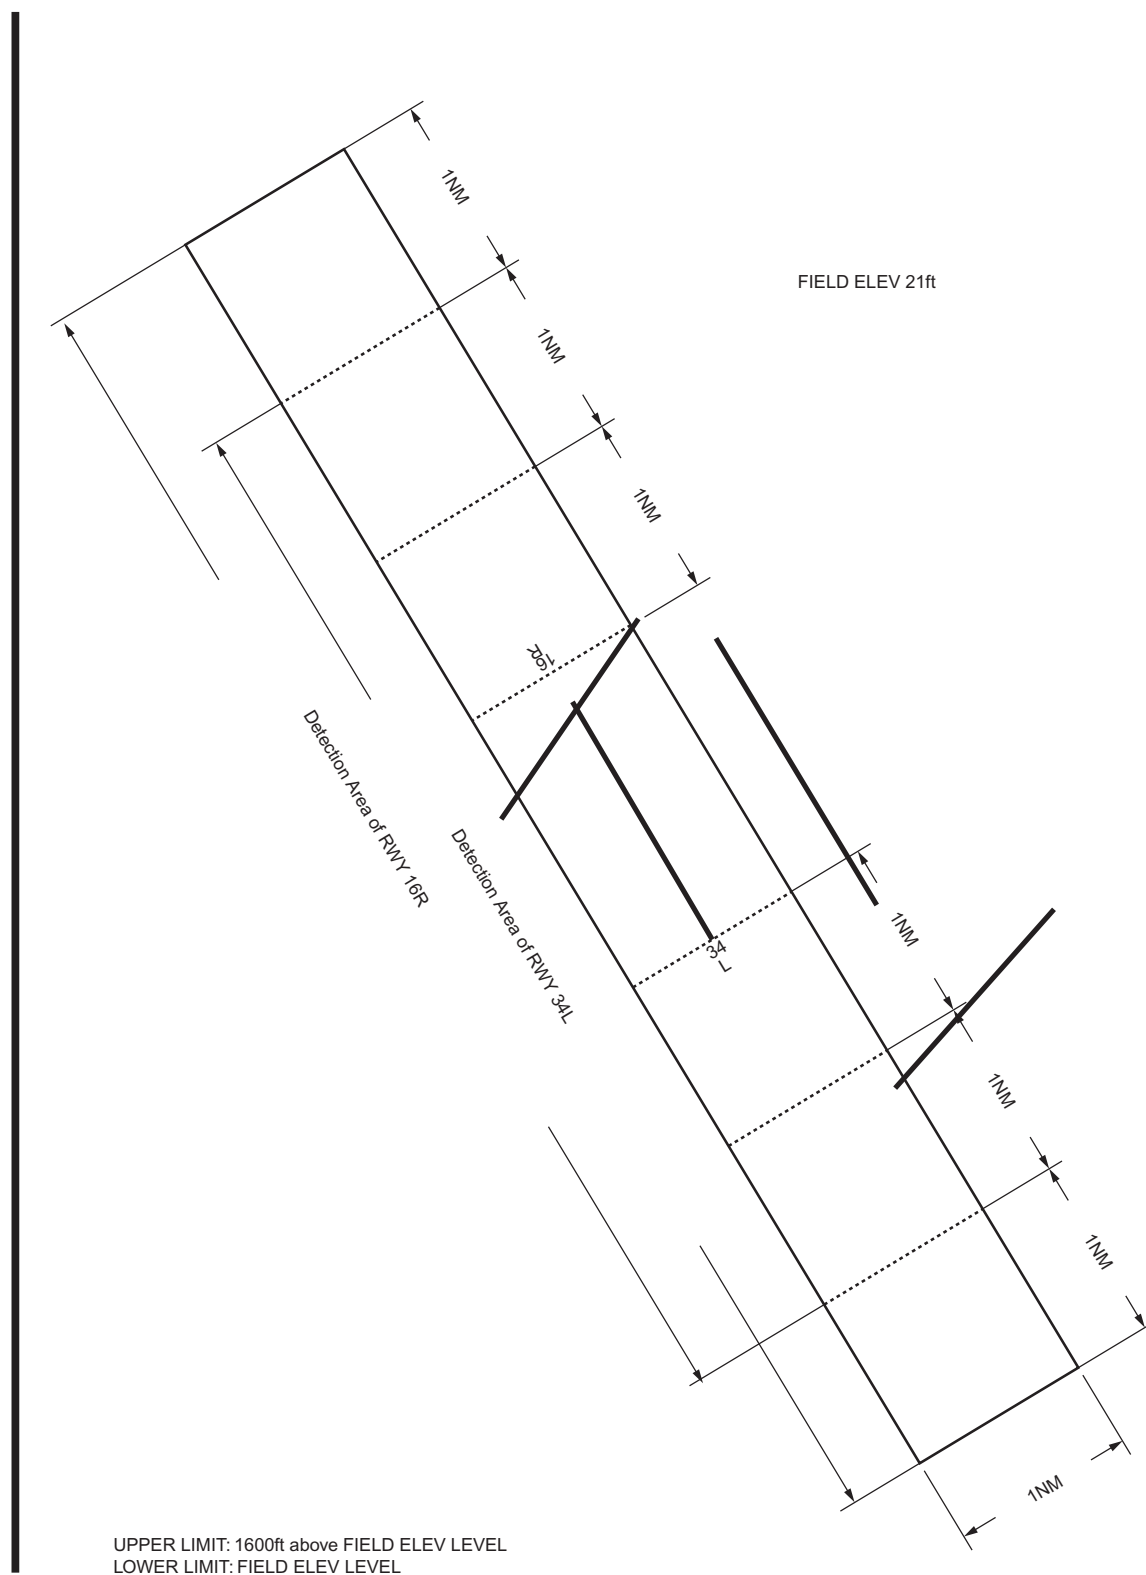


Airspace for the advisory service concerning low level wind shear (RWY04/22)

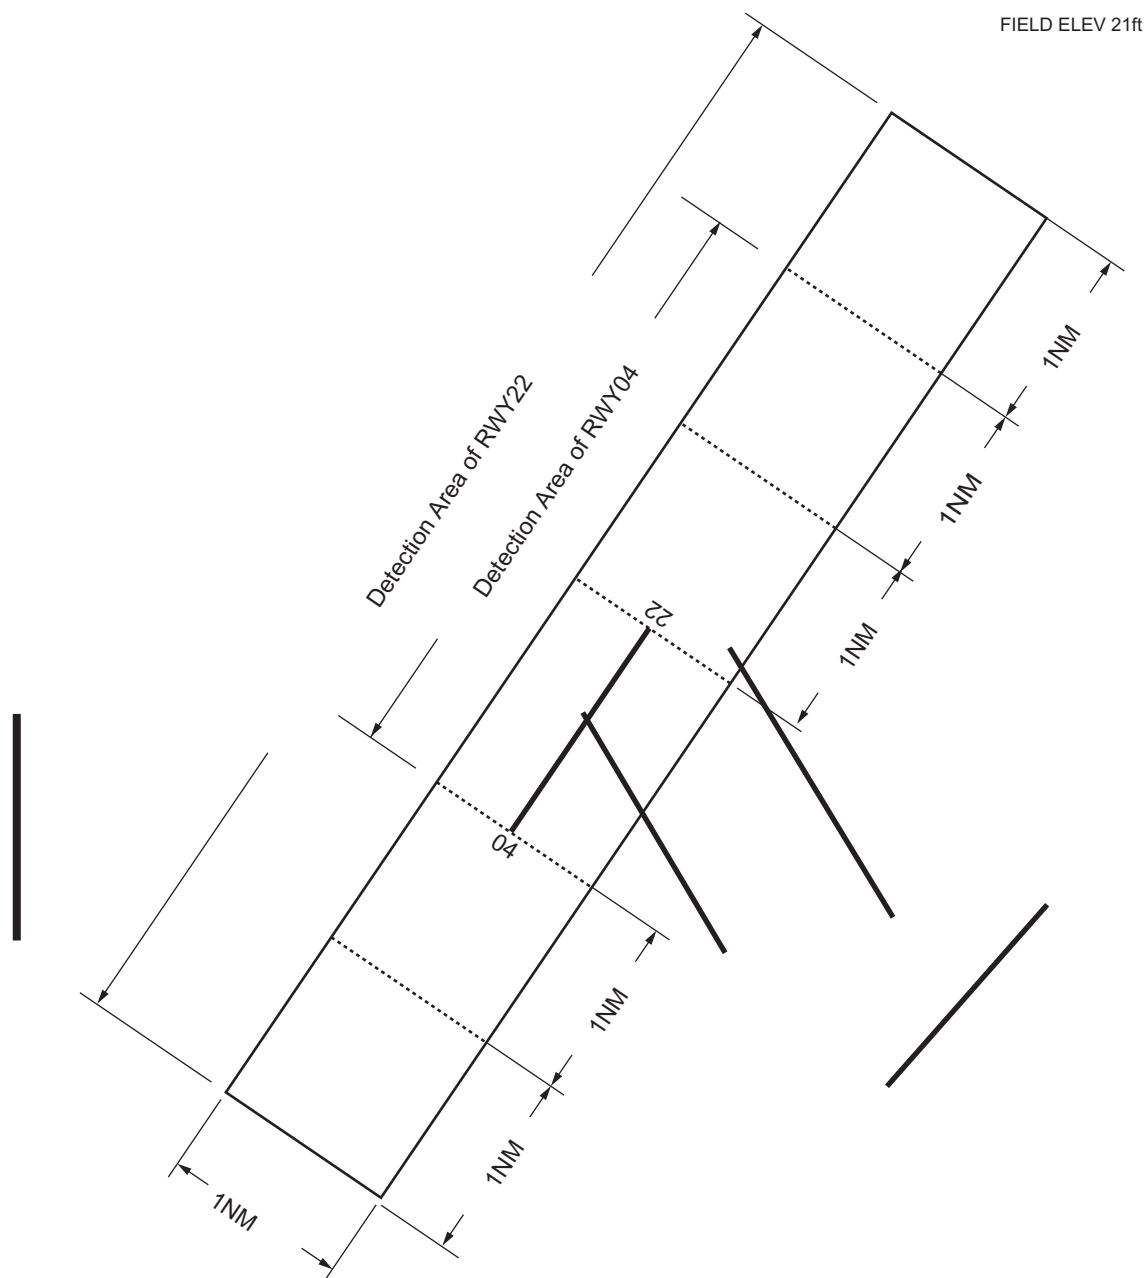

UPPER LIMIT: 1600ft above FIELD ELEV LEVEL
LOWER LIMIT: FIELD ELEV LEVEL

Airspace for the advisory service concerning low level wind shear (RWY05/23)

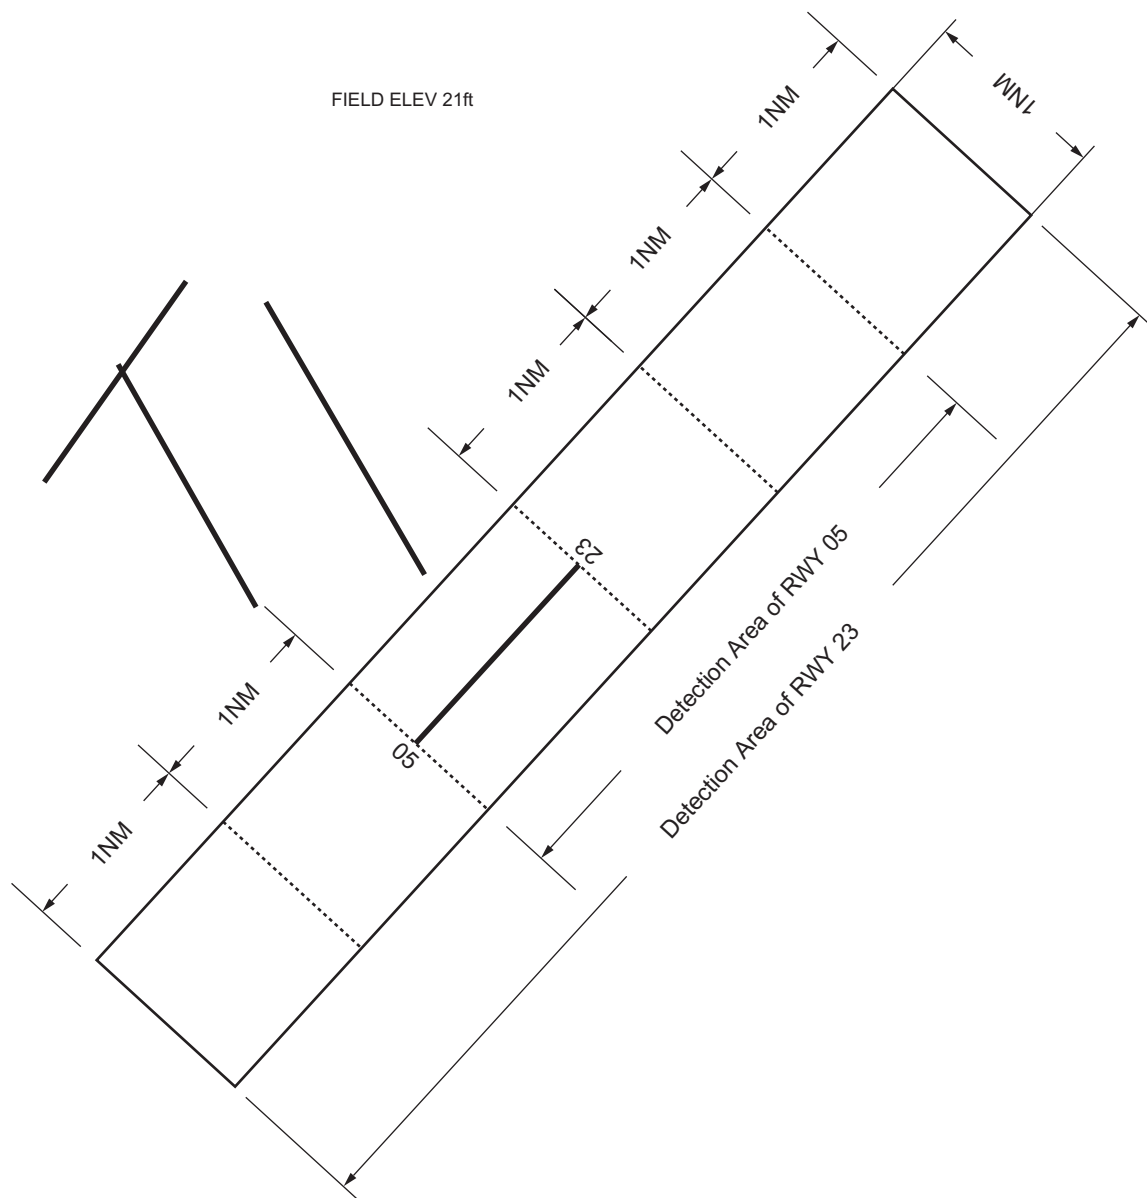


UPPER LIMIT: 1600ft above FIELD ELEV LEVEL
LOWER LIMIT: FIELD ELEV LEVEL

RJTT AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCR) and surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
16L	149.88°	3360×60	PCR 1000/F/C/X/T Asphalt Concrete	353357.23N 1394711.59E 117.7FT (Displaced THR) 353346.27N 1394719.34E 117.8FT	THR ELEV : 21.8FT (Displaced THR) THR ELEV : 19.2FT TDZ ELEV : 19.2FT
34R	329.88°	3360×60	PCR 1000/F/C/X/T Asphalt Concrete	353222.90N 1394818.49E 117.1FT (Displaced THR) 353233.02N 1394811.34E 117.2FT	THR ELEV : 27.8FT (Displaced THR) THR ELEV : 19.7FT TDZ ELEV : 21.0FT
16R	149.88°	3000×60	PCR 873F/B/X/T Asphalt Concrete	353335.95N 1394608.64E 117.9FT (Displaced THR) 353322.47N 1394618.19E 117.9FT	THR ELEV : 20.5FT (Displaced THR) THR ELEV : 16.4FT TDZ ELEV : 16.4FT
34L	329.88°	3000×60	PCR 873/F/B/X/T Asphalt Concrete	353211.76N 1394708.41E 117.3FT	THR ELEV : 18.2FT TDZ ELEV :18.4FT
04	035.01°	2500×60	PCR 1098/F/C/X/T Asphalt Concrete	353256.47N 1394540.60E 117.8FT	THR ELEV : 19.0FT TDZ ELEV :19.3FT
22	215.01°	2500×60	PCR 1098/F/C/X/T Asphalt Concrete	353402.88N 1394637.61E 117.9FT	THR ELEV : 35.0FT TDZ ELEV :35.0FT
05	042.56°	2500×60	PCR 1337/F/C/X/T* Asphalt Concrete	353126.41N 1394812.47E 116.9FT	THR ELEV : 45.5FT TDZ ELEV :45.5FT
23	222.56°	2500×60	PCR 1337/F/C/X/T* Asphalt Concrete	353226.15N 1394919.61E 116.9FT	THR ELEV : 54.7FT TDZ ELEV :54.7FT

Slope of RWY	Strip Dimensions(M)	RESA(Overrun) Dimensions(M)	Arresting System	Remarks
7	10	11	12	14
See below figure	3480×300	150×300		RWY grooving: RWY 16L/34R 3360mx40m RWY 16R/34L 3000mx40m RWY 04/22 2500mx40m RWY 05/23 2500mx40m *REF AD2.23.7
	3480×300	240×300		
	3120×300	40x(MNM:255 MAX:300)**	EMAS(84.5mx62.8m) *See RJTT AD2.23.8	CAUTION : THR of RWY 16L is displaced by 390m inward. In case of landing, the usable length of RWY 16L is 2,970m. In case of take-off, the usable length of RWY 16L is 3,360m. THR of RWY 34R is displaced by 360m inward. In case of landing, the usable length of RWY 34R is 3,000m. In case of take-off, the usable length of RWY 34R is 3,360m. THR of RWY 16R is displaced by 480m inward. In case of landing, the usable length of RWY 16R is 2,520m. In case of take-off, the usable length of RWY 16R is 3,000m. Usable length of RWY 34L is 3,000m for both landing and take-off.
	3120×300	240×300		
	2620×300	186x(MNM:210 MAX:300)**		
	2620×300	240×300		
	2620×300	240×300		
	2620×300	240×300 **For detail, ask airport administrator		

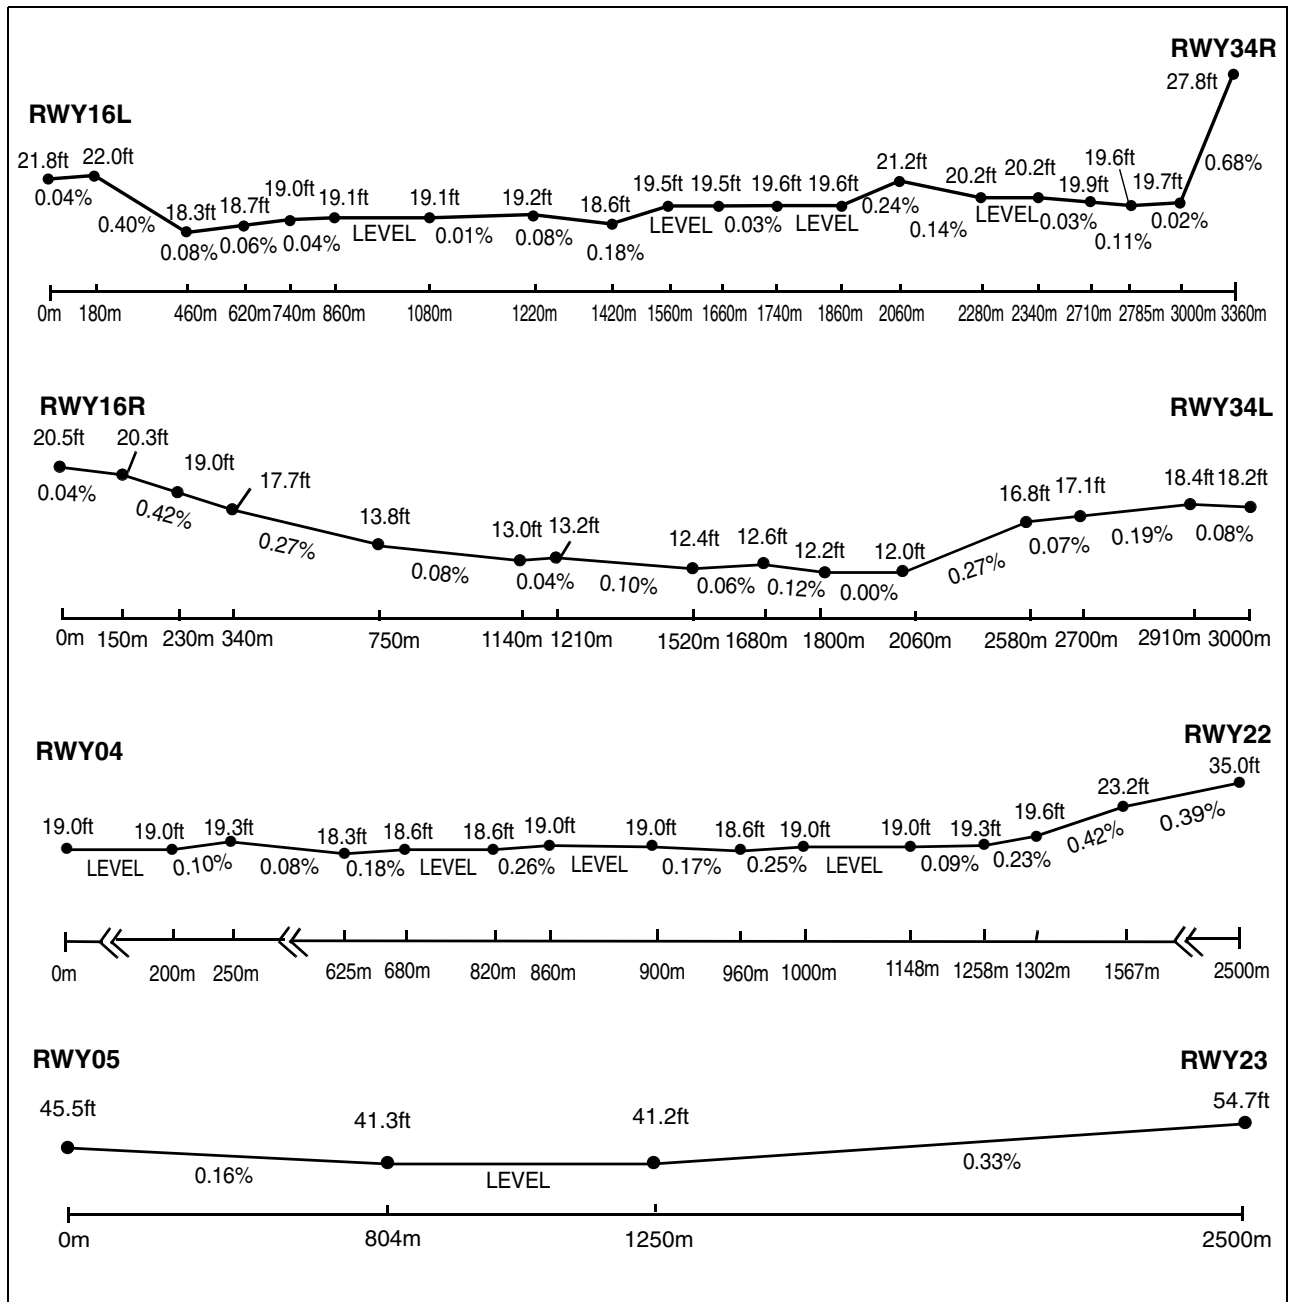

RJTT AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6
16L	3360	3360	3360	2970	Nil
34R	3360	3360	3360	3000	Nil
16R	3000	3000	3000	2520	Nil
34L	3000	3000	3000	3000	Nil
04	2500	2500	2500	2500	Nil
22	2500	2500	2500	2500	Nil
05	2500	2500	2500	-	Not usable for LDG
23	2500	2500	2500	2500	Nil

RJTT AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	RTHL Color WBAR	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color
1	2	3	4	5	6	7	8	9
16L	PALS 900M LIH	Green Green	PAPI 3.0°/LEFT 412M 65FT PAPI ^{(*)3} 3.25°/LEFT 378M 65FT	900M	3360M 15M Coded color (White/Red) LIH	3360M 30M Coded color (White/Yellow/Red) LIH	Red	Nil (*1)
34R	PALS (CAT III) 900M LIH	Green Green	PAPI 3.0°/RIGHT 416M 66FT	900M	3360M 15M Coded color (White/Red) LIH	3360M 30M Coded color (White/Yellow/Red) LIH	Red	Nil (*1)
16R	PALS 900M LIH	Green Green	PAPI 3.0°/LEFT 434M 65FT PAPI ^{(*)3} 3.25°/LEFT 397M 65FT	900M	3000M 30M Coded color (White/Red) LIH	3000M 60M Coded color (White/Yellow/Red) LIH	Red	Nil (*1)
34L	PALS (CAT I) 900M LIH	Green Green	PAPI 3.0°/LEFT 449M 66FT	900M	3000M 30M Coded color (White/Red) LIH	3000M 60M Coded color (White/Yellow) LIH	Red	Nil (*1)
04	-	Green -	PAPI ^{(*)2} 3.0°/LEFT 369M 61FT	-	2500M 30M Coded color (White/Red) LIH	2500M 60M Coded color (White/Yellow) LIH	Red	Nil (*1)
22	PALS (CAT I) 900M LIH	Green Green	PAPI 3.0°/LEFT 438M 63FT	900M	2500M 30M Coded color (White/Red) LIH	2500M 60M Coded color (White/Yellow) LIH	Red	Nil (*1)
05	-	Green -	-	-	2500M 30M Coded color (White/Red) LIH	2500M 30M Coded color (White/Yellow) LIH	Red	Nil (*1)
23	PALS (CAT I) 870M LIH	Green Green	PAPI 3.0°/LEFT 452M 66FT	900M	2500M 30M Coded color (White/Red) LIH	2500M 30M Coded color (White/Yellow) LIH	Red	Nil (*1)
Remarks								
10								
Overrun area edge LGT(LEN:60M(RWY16L,34R,34L,04,22, 05, 23) 77M(RWY16R), Color:Red) ^{(*)1} CGL for RWY 16L APCH guidance LGT for RWY16L,16R RWY THR ID LGT for RWY04, RWY22 and RWY16L THR(Color:White) Rapid exit taxiway indicator lights prior to exit to TWY C10, D3 and D5(Color:Yellow) Usable area of PAPI for RWY04 is within 2.4NM FM RWY04 THR ^{(*)2} 3.25° PAPI(The angle is 3.25°) turn on and 3.0° PAPI(The angle is 3.0°) turn off only when RNP RWY16R and RNP RWY16L are in operation. See AIP RJTT AD2.20.1.8 ^{(*)3}								

RJTT AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	ABN: 353238N/1394557E, White/Green EV4.3sec, HO
2	LDI location and LGT Anemometer location and LGT	LDI:Nil Anemometer: RWY16L: 358m from RWY16L THR, LGTD RWY34R: 710m from RWY34R THR, LGTD RWY16R: 226m from RWY16R THR, LGTD RWY34L: 270m from RWY34L THR, LGTD RWY04: 273m from RWY04 THR, LGTD RWY22: 400m from RWY22 THR, LGTD RWY05: 381m from RWY05 THR, LGTD RWY23: 319m from RWY23 THR, LGTD
3	TWY edge and center line lighting	TWY edge and center line lights installed, see AD2.9
4	Secondary power supply / switch-over time	Within 1 sec: PALS(RWY34R), PAPI(RWY16L/34R), RCLL(RWY16L/34R), RTZL(RWY34R), RENL(RWY16L/34R), RTHL(RWY16L/34R), WBAR(RWY16L/34R), Overrun area edge LGT(RWY16L/34R), Stop Bar LGT Within 15 sec : PALS(RWY16L/16R/34L/22/23), CGL(RWY16L), PAPI(RWY16R/34L/04/22/23), REDL(RWY16L/34R/16R/34L/04/22/05/23), RCLL(RWY16R/34L/04/22/05/23), RTZL(RWY16L/16R/34L/22/23), RENL(RWY16R/34L/04/22/05/23), RTHL(RWY16R/34L/04/22/05/23), WBAR(RWY16R/34L/22/23), RWY THR ID LGT(RWY16L/04/22), Overrun area edge LGT(RWY16R/34L/04/22/05/23), RWY guard LGT, ABN, TWY edge LGT, TWY CL LGT, Intermediate Holding Position Light, Rapid exit taxiway indicator lights, Taxiing guidance sign, WDI LGT, Variable Message Signs
5	Remarks	WDI LGT

RJTT AD 2.16 HELICOPTER LANDING AREA

Nil

RJTT AD 2.17 ATS AIRSPACE

Designation and lateral limits		Vertical limits (ft)	Airspace classification	ATS unit call sign Language	Remarks
1		2	3	4	6
TOKYO CTR	Area defined as follows. Area within a radius of 5nm of TOKYO INTERNATIONAL ARP (35°33'N/139°47'E).	3 000 or below (900)	D	TOKYO TOWER En	
TOKYO PCA	SEE RJTT ATTACHED CHART		C		
TOKYO ACA	SEE RJTT ATTACHED CHART		E		
TOKYO TCA	SEE RJTT ATTACHED CHART		E		


東京特別管制区


Tokyo Positive Control Area

NAME	LATERAL LIMITS	UPPER LIMIT (AMSL) ----- LOWER LIMIT (AMSL) M(ft)	UNIT PROVIDING SERVICE	REMARKS
1	2	3	4	5
Tokyo	下図に示される区域 The area shown below (1) 東京第一特別管制区 Tokyo NR1 Positive control Area (2) 東京第二特別管制区 Tokyo NR2 Positive control Area		Primary Tokyo TCA 124.75MHz (2300-1200) 119.7MHz Secondary Tokyo Tower 118.1MHz 124.35MHz	当該空域を飛行しようとする航空機は東京 TCA 又はタワーに連絡し、コールサイン、現在位置、高度及び意図を通報し指示を受けなければならない。なお、東京第一特別管制区にあっては 24 時間、東京第二特別管制区にあっては 0600UTC から 1000UTC の間とする。 Pilot requiring transit of Tokyo NR1/NR2 Positive Control Area must call Tokyo TCA or Tower prior to the point of entry to provide aircraft identification, position, altitude and intention. This rule is enforced 24 hours a day for Tokyo NR1 Positive Control Area and between 0600UTC and 1000UTC for Tokyo NR2 Positive Control Area.

東京特別管制区

Tokyo Positive Control Area

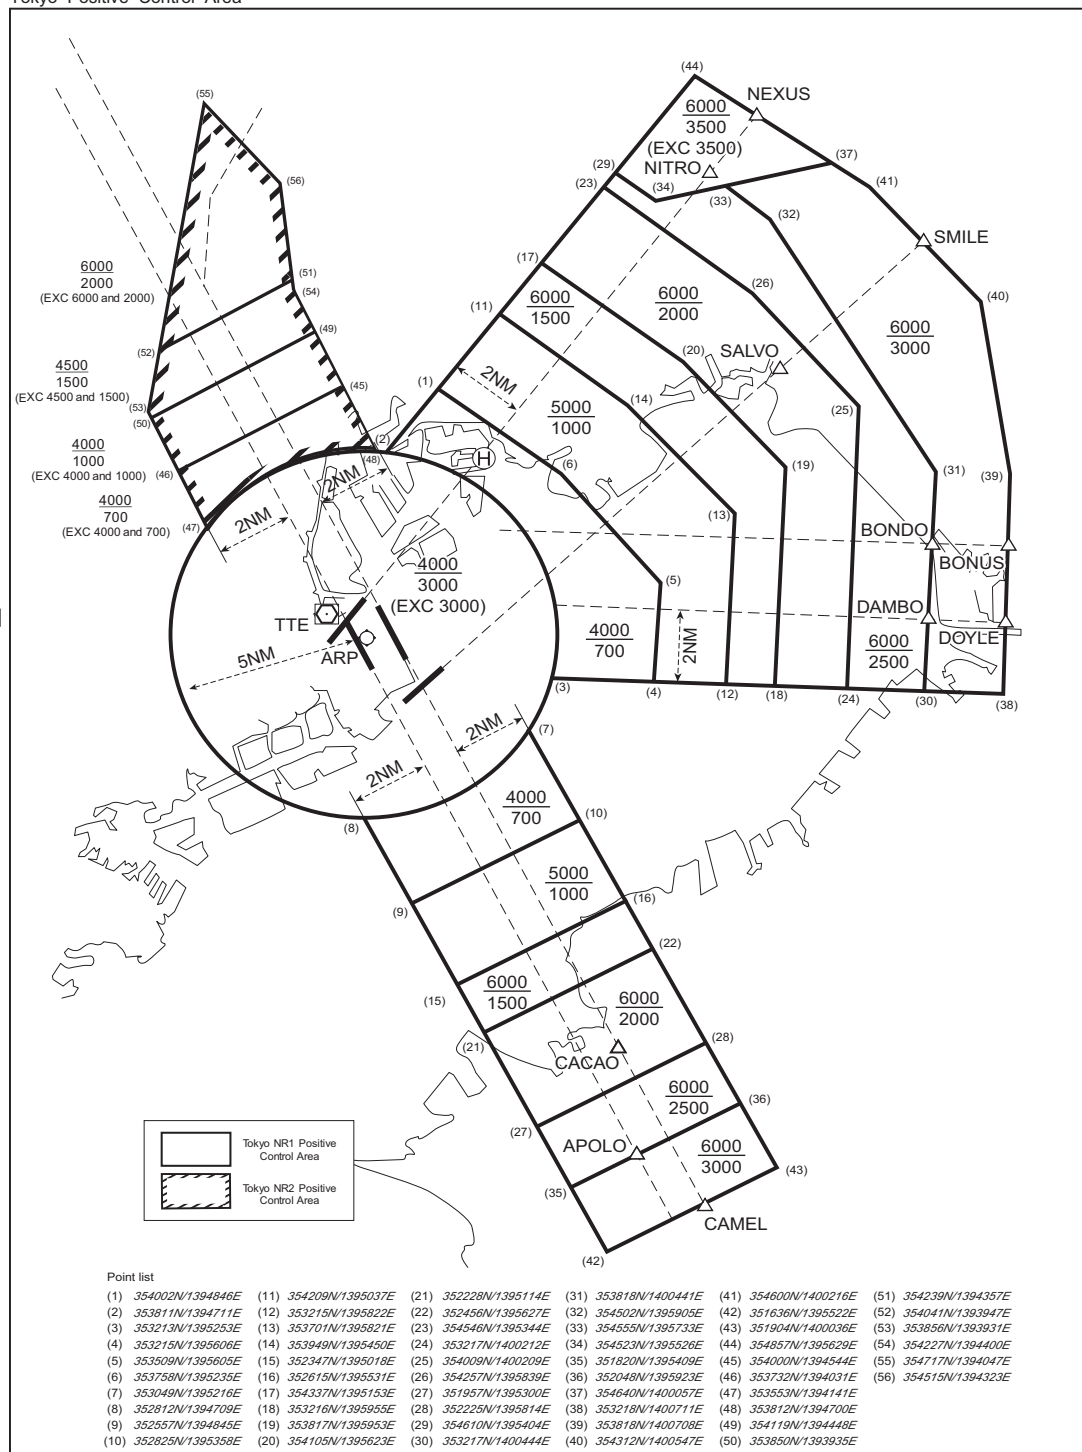


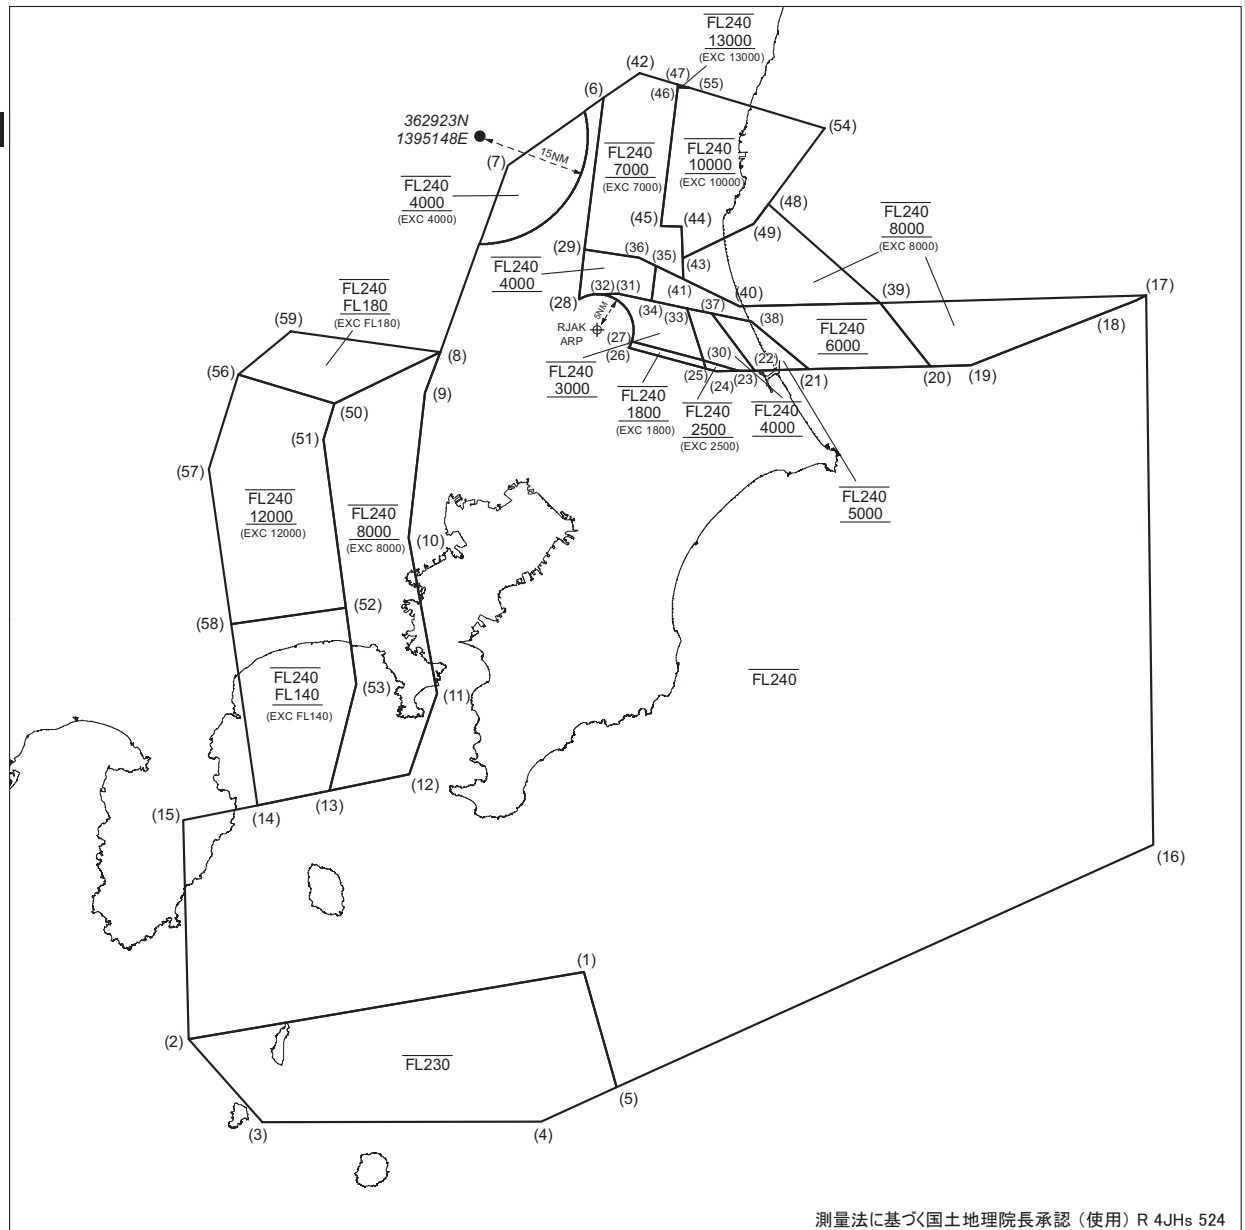東京進入管制区
Tokyo Approach Control Area

測量法に基づく国土地理院長承認（使用）R 4JHs 524

Point list

(1) 343224N/1400724E	(18) 360419N/1414409E	(35) 361053N/1402147E	(52) 352343N/1392749E
(2) 342337N/1390033E	(19) 355600N/1411534E	(36) 361204N/1401853E	(53) 351301N/1392926E
(3) 341153N/1391255E	(20) 355600N/1410841E	(37) 360407N/1403112E	(54) 362938N/1405126E
(4) 341141N/1395954E	(21) 355600N/1404746E	(38) 360250N/1403803E	(55) 363540N/1402812E
(5) 341614N/1401235E	(22) 355600N/1403828E	(39) 360503N/1410017E	(56) 355626N/1390939E
(6) 363429N/1401317E	(23) 355600N/1403535E	(40) 360500N/1403600E	(57) 354316N/1390433E
(7) 362515N/1395633E	(24) 355600N/1403154E	(41) 360858N/1402626E	(58) 352134N/1390812E
(8) 355918N/1394424E	(25) 355626N/1403002E	(42) 363752N/1401937E	(59) 360223N/1391842E
(9) 355339N/1394146E	(26) 355930N/1401651E	(43) 361152N/1402623E	
(10) 353325N/1393840E	(27) 360023N/1401723E	(44) 361619N/1402619E	
(11) 351136N/1394310E	(28) 360623N/1400824E	(45) 361628N/1402245E	
(12) 350019N/1393818E	(29) 361321N/1400930E	(46) 363547N/1402606E	
(13) 345811N/1392443E	(30) 355732N/1402939E	(47) 363611N/1402610E	
(14) 345614N/1391225E	(31) 360705N/1401514E	(48) 361913N/1404125E	
(15) 345412N/1385949E	(32) 360705N/1401134E	(49) 361630N/1403849E	
(16) 344816N/1414417E	(33) 360453N/1402703E	(50) 355218N/1392608E	
(17) 360500N/1414604E	(34) 360602N/1402056E	(51) 354715N/1392411E	

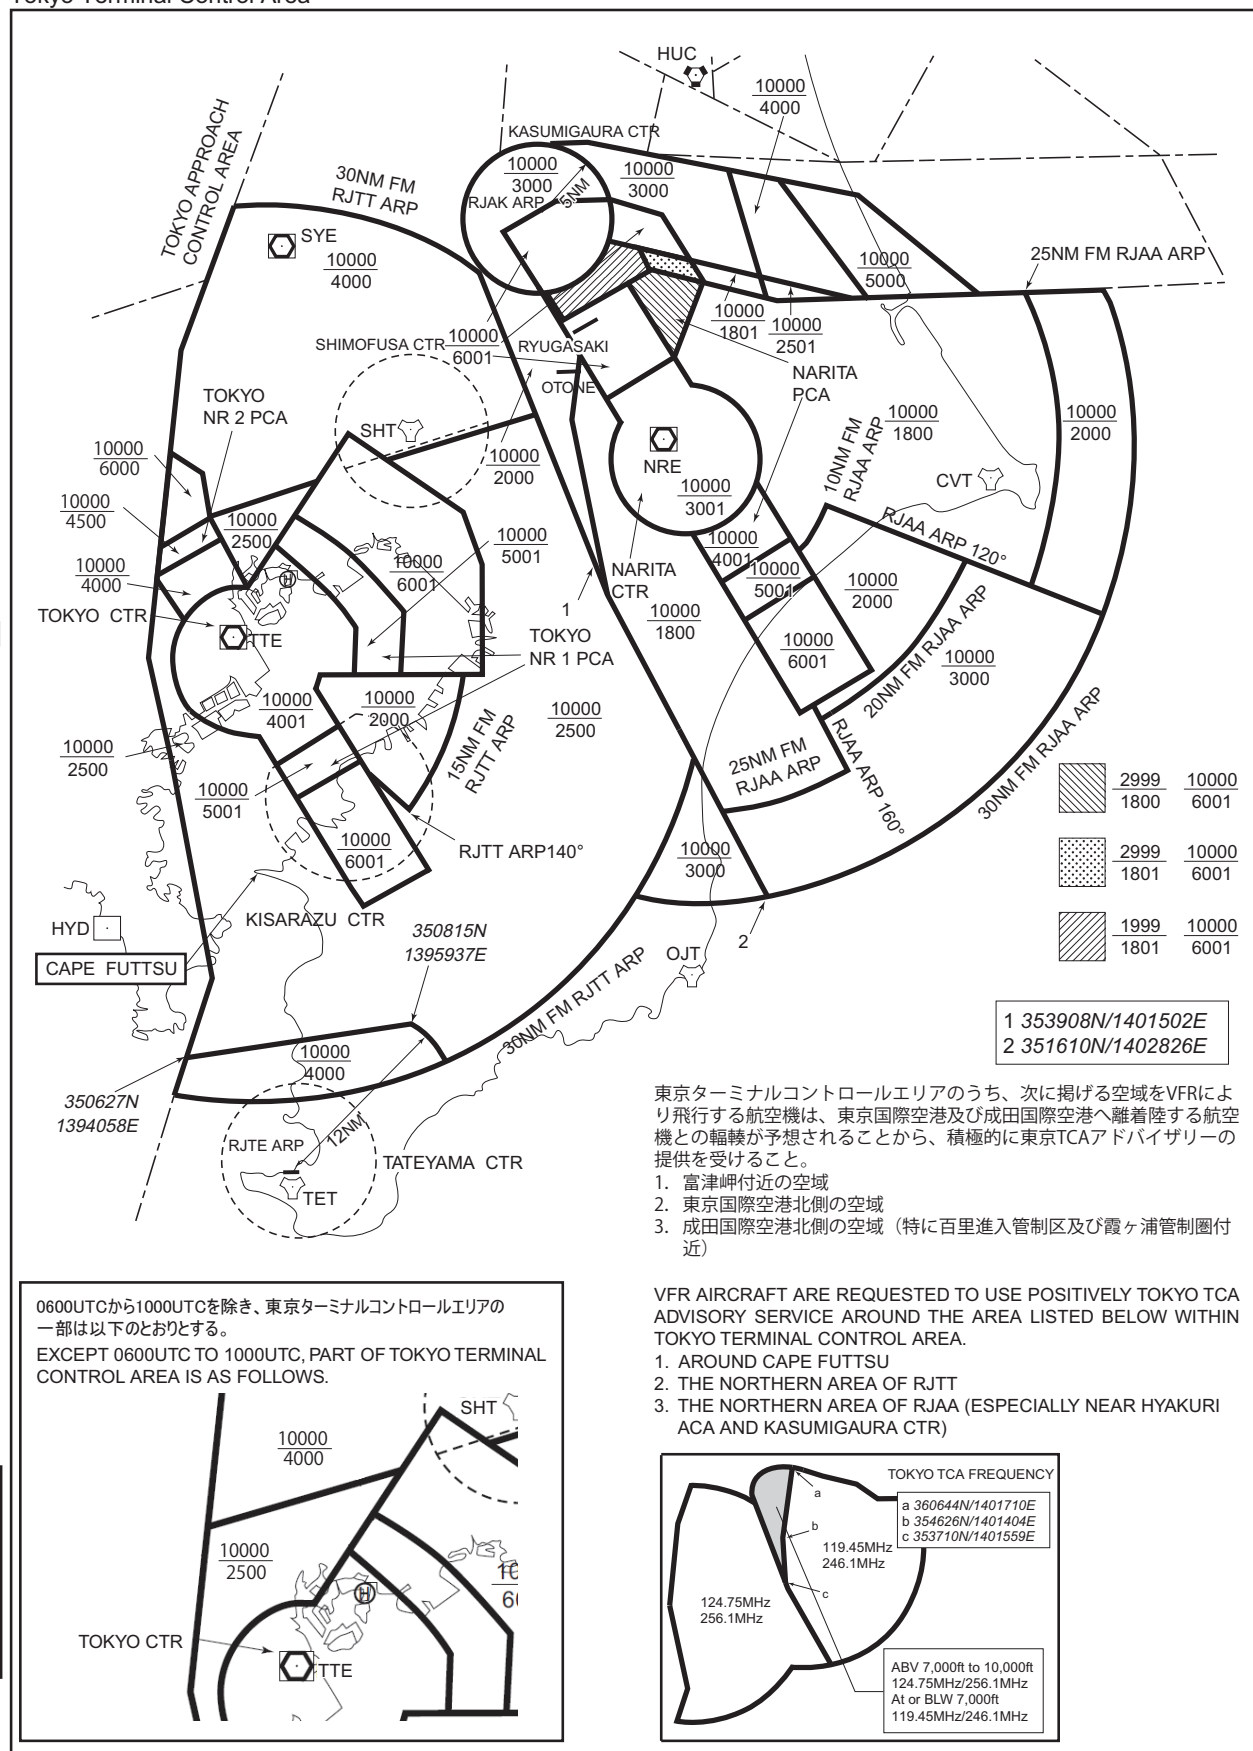東京ターミナルコントロールエリア
Tokyo Terminal Control Area


RJTT AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Frequency		Hours of operation	Remarks
1	2	3		4	5
APP	Tokyo Approach	119.1MHz(1) 119.4MHz 119.65MHz 119.7MHz 125.4MHz 232.2MHz 261.2MHz 121.5MHz(E) 243.0MHz(E)	121.275MHz 124.4MHz 125.2MHz 125.8MHz 127.7MHz 225.65MHz	H24	(1)Primary
ASR	Tokyo Radar	124.0MHz 126.5MHz 236.8MHz 261.2MHz 295.9MHz 121.5MHz(E) 243.0MHz(E) 120.2MHz	119.025MHz 120.9MHz 123.6MHz 125.1MHz 283.4MHz	H24	
DEP	Tokyo Departure	126.0MHz(1) 120.8MHz 127.5MHz 127.6MHz 121.5MHz(E) 243.0MHz(E) 124.2MHz 119.6MHz 120.6MHz 125.525MHz		H24	
TCA	Tokyo TCA	124.75MHz(1) 119.7MHz 256.1MHz 119.45MHz 246.1MHz		2300 - 1200 2300 - 1030	
TWR	Tokyo Tower	118.1MHz(1) 118.575MHz 118.725MHz 124.35MHz 118.8MHz 126.2MHz 236.8MHz 121.5MHz(E) 243.0MHz(E)		H24	
GND	Tokyo Ground	118.225MHz 121.625MHz 121.7MHz 121.975MHz 122.075MHz		H24	See RJTT AD2.20.1.2 (14) "GROUND CONTROL Frequency"
DLVRY	Tokyo Delivery	121.825MHz(1) 121.875MHz		H24	
ATIS	Tokyo INTL Airport	128.8MHz		H24	

RJTT AD 2.19 RADIO NAVIGATION AND LANDING AIDS


Type of aid	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
VOR	TTE	117.4MHz	H24	353336.15N/ 1394553.79E		VOR unusable : 1) 360° -010° beyond 35nm BLW 3000ft. 2) 010° -020° beyond 25nm BLW 3000ft. 3) 165° -170° beyond 10nm. 4) 260° -280° beyond 10nm BLW 8000ft. 5) 330° -340° beyond 35nm BLW 3000ft. 6) 340° -350° beyond 30nm BLW 3000ft. 7) 350° -360° beyond 25nm BLW 3000ft.
DME	TTE	1208MHz (CH-121X)	H24	353336.15N/ 1394553.79E	101ft	DME unusable : 1) 360° -010° beyond 30nm BLW 3000ft. 2) 010° -020° beyond 25nm BLW 3000ft. 3) 120° -130° beyond 20nm BLW 3000ft. 4) 160° -170° beyond 30nm BLW 4000ft. 5) 180° -190° beyond 25nm BLW 4000ft. 6) 330° -350° beyond 30nm BLW 3000ft. 7) 350° -360° beyond 25nm BLW 3000ft.
ILS-LOC 16L	IOC	111.95MHz	H24	353217.43N/ 1394822.37E		LOC: 195m(640ft) away FM RWY34R THR, BRG(MAG) 157.41°.
ILS-GP 16L	-	330.95MHz	H24	353335.57N/ 1394721.45E		GP: 312m(1024ft) inside FM RWY16L Displaced THR, 120m(394ft) SW of RCL. HGT of ILS Ref datum 16.3m(53ft). GP angle 3.0°.
ILS-DME 16L	IOC	1143MHz (CH-56Y)	H24	353335.08N/ 1394721.61E	34ft	DME: 320m(1050ft) inside FM RWY16L Displaced THR, 131.5m(431ft) SW of RCL.
ILS-LOC 34R	ITC	108.9MHz	H24	353403.81N/ 1394706.89E		LOC: (ITC) 235m(771ft) away FM RWY16L THR, BRG (MAG) 337°.
ILS-GP 34R	-	329.3MHz	H24	353243.92N/ 1394809.36E		GP: 316m(1037ft) inside FM RWY34R Displaced THR, 126m(413ft) NE of RCL. HGT of ILS Ref datum 16.5m(54ft). GP angle 3.0°.
ILS-DME 34R	ITC	987MHz (CH-26X)	H24	353244.02N/ 1394809.72E	35ft	DME: 314m(1030ft) inside FM RWY34R Displaced THR, 135m(443ft) NE of RCL.
IM 34R	-	75MHz	H24	353220.45N/ 1394820.26E		IM: 446m(1463ft) away FM RWY34R Dis- placed THR.
ILS-LOC 16R	ITA	111.55MHz	H24	353206.29N/ 1394712.30E		LOC: 195m(640ft) away FM RWY34L THR, BRG(MAG) 157.41°.
ILS-GP 16R	-	332.75MHz	H24	353315.14N/ 1394628.93E		GP: 326m(1070ft) inside FM RWY16R Displaced THR, 120m(394ft) NE of RCL. HGT of ILS Ref datum 16.3m(53ft). GP angle 3.0°.
ILS-DME 16R	ITA	1139MHz (CH-52Y)	H24	353315.97N/ 1394629.22E	31ft	DME: 334m(1096ft) inside FM RWY16L Displaced THR, 125m(410ft) NE of RCL.

Type of aid	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
ILS-LOC 34L	IHA	111.7MHz	H24	353343.81N/ 1394603.06E		LOC: (IHA) 280m(919ft) away FM RWY 16R THR, BRG(MAG)337°.
ILS-GP 34L	-	333.5MHz	H24	353223.19N/ 1394705.78E		GP: 338m(1109ft) inside FM RWY34L THR, 120m(394ft) NE of RCL. HGT of ILS Ref datum 16.5m (54ft). GP angle 3.0°.
ILS-DME 34L	IHA	1015MHz (CH-54X)	H24	353223.33N/ 1394706.14E	43ft	DME: 338m(1109ft) inside FM RWY34L THR, 130m (427ft) NE of RCL. DME Unusable: beyond 15° E side of LOC course.
ILS-LOC 22	IAD	108.1MHz	H24	353248.36N/ 1394533.62E		LOC: (IAD)305m (1001ft) away FM RWY04 THR, BRG(MAG) 222°.
ILS-GP 22	-	334.7MHz	H24	353351.52N/ 1394633.91E		GP: 339m(1112ft) inside FM RWY22 THR, 125m (410ft) S of RCL. HGT of ILS Ref datum 16.5m(54ft). GP angle 3.0°.
ILS-DME 22	IAD	979MHz (CH-18X)	H24	353351.23N/ 1394633.96E	44ft	DME: 346.4m(1137ft) inside FM RWY22 THR, 130.9m(429ft) S of RCL.
LDA-LOC 22	IKL	110.1MHz	H24	353613.77N/ 1394908.33E		LOC: (IKL) 5481m(17983ft) outside FM RWY22, 788m(2585ft) S of RCL, BRG(MAG) 277°.
LDA-DME 22	IKL	999MHz (CH-38X)	H24	353612.96N/ 1394908.33E	122ft	DME: 5460m(17914ft) outside FM RWY22, 803m(2635ft) S of RCL.
ILS-LOC 23	ITD	110.5MHz	H24	353149.16N/ 1394832.63E		LOC: (ITD) 860m(2822ft) inside FM RWY05 THR, 100m(328ft) NW of RCL. LOC off-set angle 2.0°, BRG(MAG)232°.
ILS-GP 23	-	329.6MHz	H24	353220.75N/ 1394907.08E		GP: 336m(1102ft) inside FM RWY23 THR, 120m(394ft) NW of RCL. HGT of ILS Ref datum 16.9m (55ft). GP angle 3.0°.
ILS-DME 23	ITD	1003MHz (CH-42X)	H24	353220.54N/ 1394906.05E	61ft	DME: 350m(1148ft) inside FM RWY23 THR, 127m (417ft) NW of RCL.
LDA-LOC 23	ITL	108.5MHz	H24	353410.37N/ 1394656.13E		LOC: (ITL) 79m(259ft) inside FM RWY23, 4834m(15860ft) N of RCL, BRG(MAG) 277°.
LDA-DME 23	ITL	983MHz (CH-22X)	H24	353411.11N/ 1394656.12E	34ft	DME: 62m(203ft) inside FM RWY23, 4849m(15910ft) N of RCL.
MSAS		1575.42MHz	H24			Transmitting antennas are satellite based.
GBAS	RJTT	114.3MHz	1400-2100	① 353335.94N/ 1394551.74E ② 353229.45N/ 1394824.40E		Service volume radius from GBAS reference point : 23NM

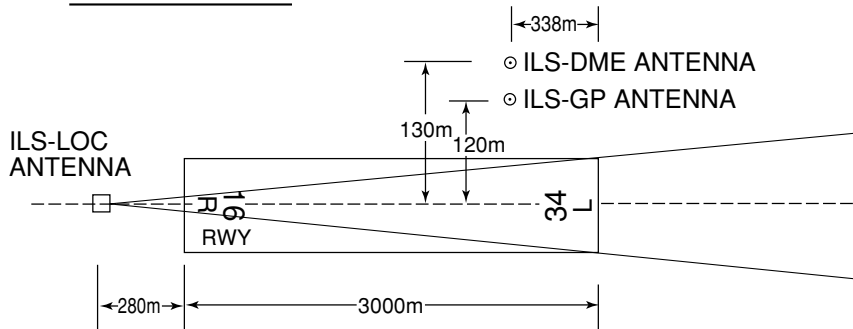
ILS for RWY 34L

REMARKS :	1. LOC beam BRG (MAG)	337°
	2. HGT of ILS REF datum	16.5m(54ft)
	3. GP Angle	3.0°
	4. ELEV of ILS-DME	13.0m(43ft)

ILS for RWY 22

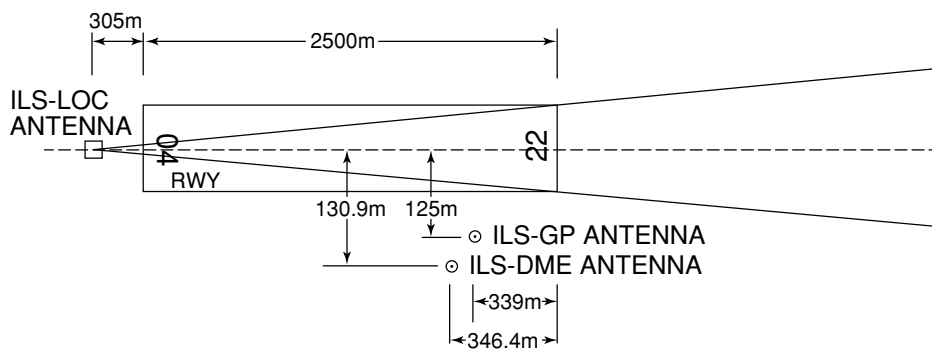


REMARKS : 1.LOC beam BRG(MAG)	222°
2.HGT of ILS REF datum	16.5m(54ft)
3.GP Angle	3.0°
4.ELEV of ILS-DME	13.5m(44ft)

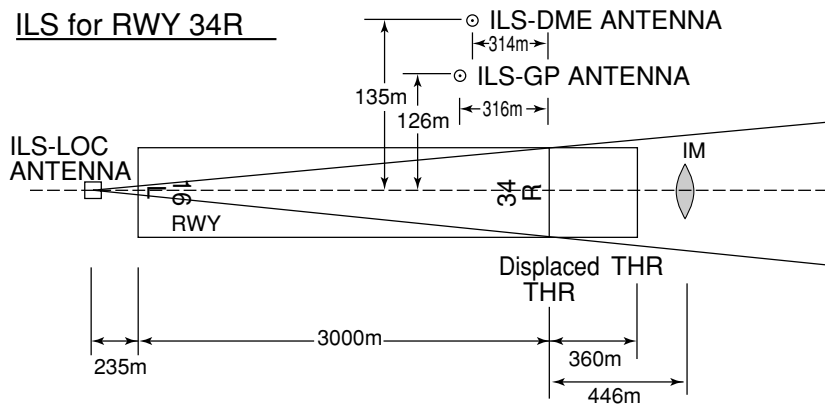
ILS for RWY 34R

REMARKS :	1.LOC BEAM BRG(MAG)	337°
	2.HGT of ILS REF datum	16.5m(54ft)
	3.GP Angle	3.0°
	4.ELEV of ILS-DME	10.6m(35ft)


LDA for RWY 22

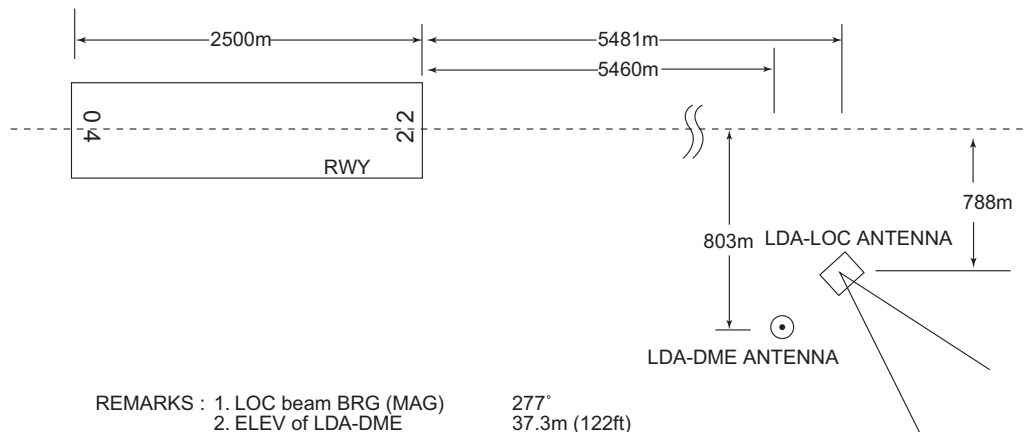


ILS for RWY 23

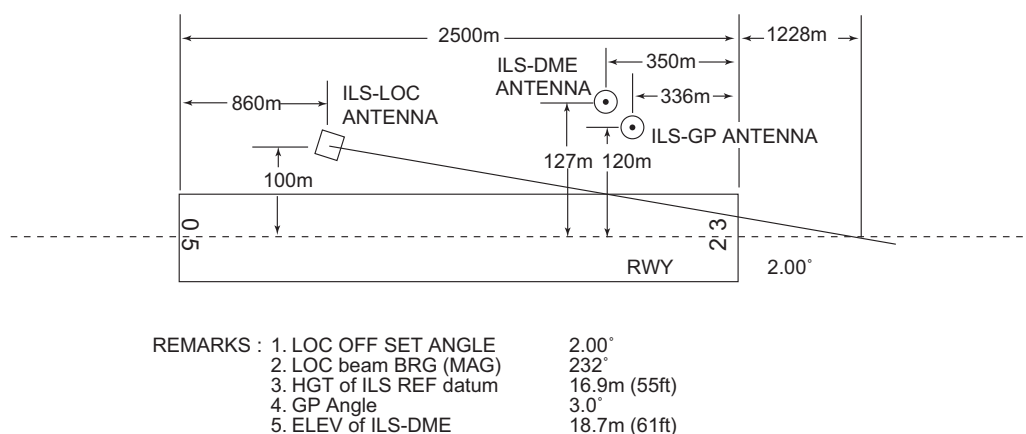


LDA for RWY 23

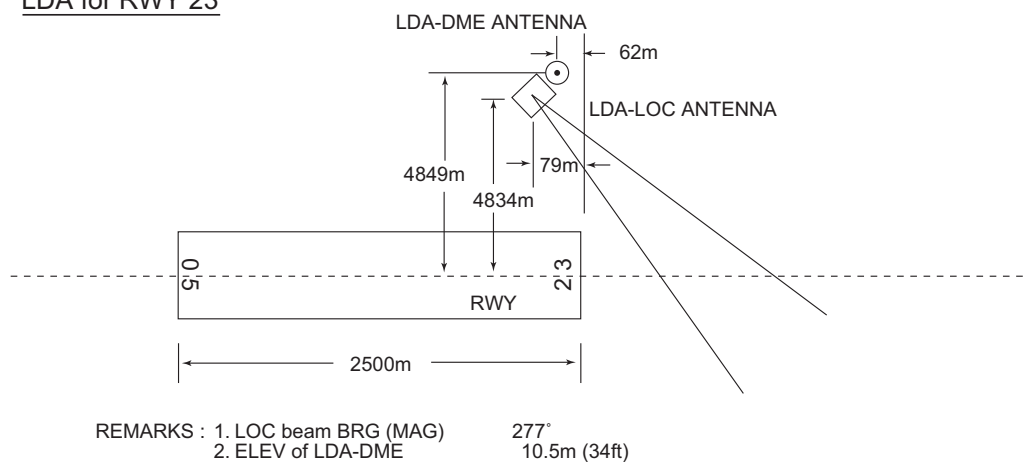

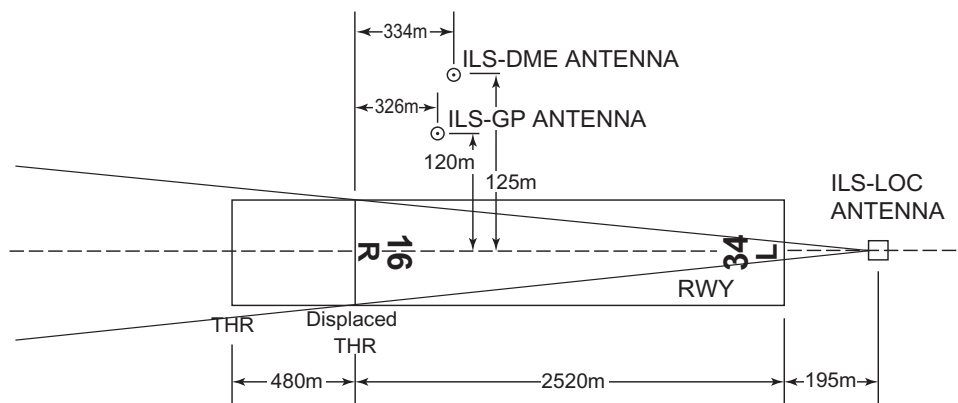ILS for RWY 16R

REMARKS : 1. LOC beam BRG (MAG) 157.41°
 2. HGT of ILS REF datum 16.3m(53ft)
 3. GP Angle 3.0°
 4. ELEV of ILS-DME 9.4m(31ft)

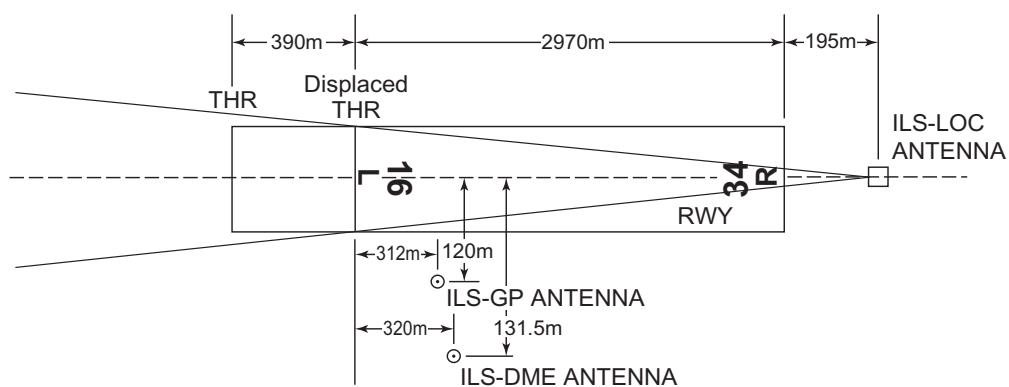ILS for RWY 16L

REMARKS : 1. LOC beam BRG (MAG) 157.41°
 2. HGT of ILS REF datum 16.3m(53ft)
 3. GP Angle 3.0°
 4. ELEV of ILS-DME 10.1m(34ft)

RJTT AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

1.1 Procedural Speed and Speedy Turn Off Procedure

In order to reduce runway occupancy time with the smooth traffic flow based on safety, arriving aircraft should operate as follows.

(1)Procedural Speed (for IFR)

(a)Unless otherwise instructed by ATC, arriving aircraft should cross each points at the speed listed below.

Approach	Point	Procedural Speed
ILS Z RWY34L LOC Z RWY34L	IHA 10.0DME	180 kt (IAS)
	IHA 5.0DME	160 kt (IAS)
ILS X RWY34L	KAIHO	180 kt (IAS)
	ALLIE	160 kt (IAS)
ILS Z RWY34R LOC Z RWY34R	ITC 10.0DME	180 kt (IAS)
	ITC 5.0DME	160 kt (IAS)
ILS RWY22 LOC RWY22	IAD 10.0DME	180 kt (IAS)
	IAD 5.0DME	160 kt (IAS)
LDA Z RWY22 LDA X RWY22 LDA W RWY22	IKL 8.0DME	180 kt (IAS)
	IKL 3.0DME	160 kt (IAS)
ILS Z RWY23 LOC Z RWY23	ITD 10.0DME	180 kt (IAS)
	ITD 5.0DME	160 kt (IAS)
LDA Z RWY23 LDA X RWY23 LDA W RWY23	ITL 12.0DME	180 kt (IAS)
	ITL 7.0DME	160 kt (IAS)
ILS RWY16R	ITA 10.0DME	180 kt (IAS)
	ITA 5.0DME	160 kt (IAS)
RNP RWY16R	10.2NM from THR	170 kt (IAS)
ILS RWY16L	IOC 10.0DME	180 kt (IAS)
	IOC 5.0DME	160 kt (IAS)
RNP RWY16L	9.2NM from THR	170 kt (IAS)

(b)

1)When speed adjustment is made after approach clearance issued, ATC will instruct to comply with Procedural Speed by the phrase as below instead of "RESUME PUBLISHED SPEED (ref. ENR1.6.1.8.7)".

(e.g.) COMPLY WITH PROCEDURAL SPEED.

2)Pilots should advise ATC when unable to comply with Procedural Speed due to an operational or a performance reason.

(e.g.) UNABLE TO COMPLY WITH PROCEDURAL SPEED ([number]KNOTS).

3)Pilots will be informed by ATC when there is no need to comply with Procedural Speed.

(e.g.) PROCEDURAL SPEED ([number]KNOTS) IS NOT REQUIRED.

(e.g.) MAINTAIN PROCEDURAL SPEED OR GREATER.

(2) Speedy Turn Off Procedure

(a) The exit taxiways, as a rule, from which arriving aircraft should plan to vacate the runway are listed below.

(b) Pilot should vacate the runway for which the nearest side of the arriving spot.

RWY	EXIT TAXIWAY	DISTANCE FROM THRESHOLD (m/ft)	REMARKS
34L	A10	1,500/4,920	for Terminal 1 and Terminal 2*
	A12	2,000/6,560	
	L10	1,320/4,330	for Terminal 3 and "N" Area*
	L12	1,800/5,900	
	L13	2,080/6,820	
16R	A5	1,530/5,020	for Terminal 1 and Terminal 2*
	A2	2,040/6,690	
	L5	1,500/4,920	for Terminal 3 and "N" Area*
34R	C9	1,290/4,230	
	C10	1,670/5,470	
	C11	2,120/6,950	
16L	C7	1,390/4,570	
	C6	1,710/5,640	
	C4	2,000/6,560	
22	B8	1,050/3,440	Except for "N" Area*
	B6	1,530/5,010	
	B4	1,800/5,900	
	B3	2,030/6,660	
	T8	1,050/3,440	for "N" Area*
	T6	1,530/5,010	
	T4	1,800/5,900	
	T3	2,030/6,660	
23	D5	1,500/4,920	
	D3	1,800/5,900	

*Except for Instructed by ATC when the Aircraft is on the air or on the ground

(c) Pilots should plan which exit taxiway to be used to vacate the runway in approach/landing briefing. Upon landing, pilots should vacate the runway without delay and pass the runway holding position marking on the exit taxiway. It is better, in terms of runway occupancy time, to aim for an exit which can be made, rather than to aim for an earlier one, just to miss it and then to roll slowly to the next.

Note ; The intensity of the taxiway center line lights listed below will be more increased than that of other taxiways to improve the recognition of these exit taxiways.

RWY	TAXIWAY
16L	C4, C6, C7
34R	C10, C11
22	B4
	B6
	T4
	T6
16R	A2, A5, L5
34L	A10, A12
	L12

1.2 Procedures other than 1.1 above and information

- (1) Aircraft operations other than scheduled or in emergency
On use of this airport, aircraft operator is required to obtain the prior permission of the airport administrator.
- (2) A380-800 is prohibited from operating between 2100UTC and 1400UTC.
- (3) When operating A380-800 between 1400UTC and 2100UTC, the aircraft weight restriction is imposed.
(see RJTT AD2.23.7)
- (4) A380-800 and B747-8 shall equip digital avionics that provide steering commands to maintain an established track during the go-around manoeuvre and they shall be utilized when landing to runway.
- (5) Aircraft without approvals of RNAV1 and RNAV5 is prohibited from operating.
- (6) RNP RWY16R/RWY16L are set for the purpose of noise reduction, and applied between 0600UTC and 1000UTC in southerly wind condition with good weather.
All landing aircraft are required to be ready to conduct RNP RWY16R/RWY16L during that period.
In case of aircraft which is not possible to conduct RNP RWY16R/RWY16L for inevitable reasons, it will be assigned another runway or type of approach with reasonable delay which depends on traffic flow at the time.
So, the pilot should notify at initial contact with Tokyo Approach.
- (7) Preflight call to control tower
IFR departing aircraft should notify TOKYO DELIVERY of their readiness five minutes prior to starting engines with following items for facilitating ATC service.
 - a. call sign
 - b. spot number
 - c. proposed flight level/altitude and route (only when changed from original Flight Plan)
- (8) Pilot should ensure that they are able to follow the clearance to the take-off position or the take-off clearance without delay to reduce runway occupancy time. Cockpit check should be completed prior to line-up and checks requiring completion on the runway should be kept to a minimum. If unable to do so, notify to Tokyo Tower.
- (9) Pilot should ensure that they are able to follow the instruction for runway crossing without delay. Upon runway crossing, pilot should vacate the runway as soon as possible and pass through the runway holding position marking on the exit taxiway.
- (10) Departure aircraft is required to take off with runway length 2500m except following (a) and (b).
 - (a) Between 2100UTC and 1400UTC : Departure aircraft(*) for North America, Europe and Turkey.
 - (b) Between 1400UTC and 2100 UTC : Departure specified and allowed in advance(see RJTT AD2.21 NOISE ABATEMENT PROCEDURES 2.Noise Preferential Runways)
 (Note)*Between 0600UTC and 1000UTC, non-scheduled flight is required to take off with runway length 2500m,even though bound for North America, Europe and Turkey.
- (11) Predetermined Runway depend on the flight direction
During 2100UTC and 1400UTC, the aircraft will be assigned departure runway depending on the flight direction.

The Airway or Fix filed in Flight Plan (Reference AIC)	Departure Runway		
	North wind operation	South wind operation 1 (RWY22/23 approaches in progress)	South wind operation 2 (RWY16L/R approaches in progress between 0600UTC and 1000UTC)
ROVER, Y884, Y885	RWY34R	RWY16L	RWY16R ^(*1)
Y18(*2)	RWY34R	RWY16L	RWY16R
	RWY05	RWY16R	RWY22
Y20(*2)	RWY34R	RWY16L	RWY16R
	RWY05	RWY16R	RWY22
Y28, Y56, XAC	RWY05	RWY16R	RWY22

(Note1) *1 Scheduled flight only for North America, Europe and Turkey will be assigned RWY16L.

(Note2) *2 Departure runway will be assigned when Flight schedule is fixed.

(Note3) ATC may assign other runway that listed above, if required.

(12) SID depending on the time of take-off

Aircraft filing AGRIS/AKAGI/INUBO/BEKLA/TIARA in flight plan will be assigned SID depending on the time of take-off.

SID designator	Period
TIARA/BEKLA/ROVER [number] A Departure	From 2100UTC to 1400UTC, excluding the period listed below.
TIARA/BEKLA/ROVER [number] B Departure	From 2200UTC to 0230UTC
TIARA/BEKLA/ROVER [number] C Departure	About 3hours from 0600UTC to 1000UTC

(13) Runway is predetermined by flight direction.


Aircraft which uses RWY05 for take off shall comply with the aircraft weight restriction. Even though aircraft weight exceeds the restriction, the other runway shall not be used.(see RJTT AD2.23.7)

(14) Prior notice of spot number before landing

All arriving aircraft should notify control tower of the parking spot number at initial contact.

(15) GROUND CONTROL Frequency

See attached chart

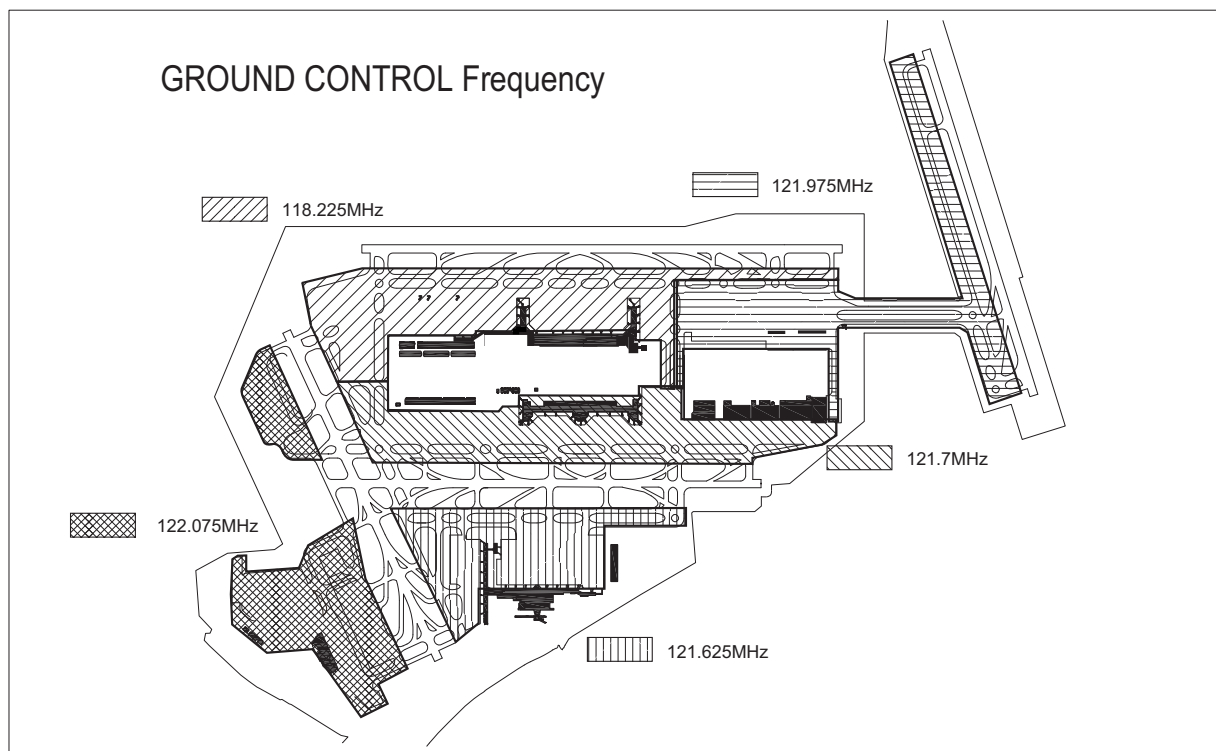

1.3 Intersection departure

- (1) When RWY 34R/16L, 05, 16R, 04/22 is in use, departing aircraft may be instructed intersection departure from C2, C3, C13, D2, A15/L15, A14/L14, B2/T2 or B13 without pilot's consent. Aircraft unable to depart from C2, C3, C13, D2, A15/L15, A14/L14, B2/T2 or B13 intersection shall advise "TOKYO GROUND/TOWER" accordingly.
- (2) Separation for departure as in AD1.1.6.3.2.2(2) will not be applied to aircraft departing from TWY C13, D2, B2/T2, B13, TWY C3 behind departing aircraft from C2 or A14/L14 behind departing aircraft from A15/L15. Aircraft requiring separation in AD1.1.6.3.2.2(2) shall advise "TOKYO GROUND/TOWER" accordingly.
- (3) The remaining runway length for intersection departures are as follows.

RWY	TWY	Remaining RWY length *
34R	C2	2,920m(9,590ft)
	C3	2,820m (9,250ft)
	C5	2,420m (7,930ft)
	C6	2,100m (6,880ft)
	C7	1,780m (5,830ft)
16L	C8	1,330m (4,360ft)
	C13	3,180m (10,440ft)
	C12	2,800m (9,190ft)
	C11	2,480m (8,160ft)
	C10	2,030m (6,680ft)
34L	C9	1,650m (5,430ft)
	A2	2,520m (8,260ft)
	A3/L3	2,420m (7,960ft)
	A4/L4	2,320m (7,630ft)
	A5	2,010m (6,590ft)
	L5	1,980m (6,490ft)
	A6/L6	1,890m (6,200ft)
	A7	1,570m (5,150ft)
	A9/L9	1,470m (4,820ft)
16R	RWY 04/22	2,770m (9,080ft)
	A15	2,600m (8,550ft)
	L15	2,550m (8,370ft)
	A14	2,490m (8,190ft)
	L14	2,440m (8,010ft)
	A13	2,310m (7,570ft)
	A12	2,000m (6,560ft)
	L13	2,080m (6,850ft)
	L12	1,800m (5,910ft)
	A11/L11	1,930m (6,350ft)
	A10	1,500m (4,920ft)
04	B2/T2	2,310m (7,570ft)
	B3/T3	2,030m (6,670ft)
	B4/T4	1,800m (5,900ft)
	B5/T5	1,810m (5,950ft)
	B6/T6	1,530m (5,030ft)
22	B13	2,320m (7,620ft)
	B12	1,930m (6,340ft)
	T12	1,880m (6,170ft)
	B11	1,660m (5,460ft)
	T11	1,630m (5,370ft)
	B10	1,580m (5,190ft)
	B9	1,470m (4,830ft)
	T9	1,520m (5,010ft)
05	D2	2,320m (7,620ft)
	D3	1,800m (5,900ft)
	D4	1,880m (6,170ft)
	D5	1,500m (4,920ft)

*Rounded down to the nearest 10m(10ft) from the measurement between the point where TWY CL meets RWY CL and RWY THR.

- 1.4 Pilot should hold at RWY-holding position markings beside RWY guard lights are turned on at the TWY C1, C2, C3, C5, C12, C13 and C14.
Remarks; RWY-holding position markings and RWY guard lights are located at 75m and 90m off the runway center line on those TWY.(see RJTT AD2.24-ADC-1)
- 1.5 機材制限
B747-100/100SR, -200/200SR, -300/300SR 及び -SP (いわゆる、「クラシックジャンボ」) については、緊急機または国の航空機を除き運航は許可されない。
- 1.5 Aircraft type restrictions
B747-100/100SR, -200/200SR, -300/300SR and -SP (so-called "B747 Classics") are not allowed to operate all day except in emergency or state aircraft.
- 1.6 補助動力装置 (APU) の使用制限
航空機が対象スポットを使用する場合は、管理者が特に認める場合を除き、次に掲げる時間を超えて補助動力装置を使用してはならない。
(1) 出発予定時刻前の 15 分間
(2) 到着後、地上からの動力設備が使用可能となるまでに必要とする最小限度の時間
(3) 航空機が点検整備のため補助動力装置を必要とする場合は最小限度の時間
注) 対象スポットは、1 ~ 5R、5、6 ~ 23、50R、50L、51R、51L、53 ~ 73、105P、106 ~ 114、142 ~ 149 とする。
- 1.6 Restrictions about the use of auxiliary power units (APU)
When an aircraft is using following aircraft parking stand, APU shall not be used outside the time periods specified below except when specifically acknowledged by the authority as necessary.
(1) Less than 15 minutes prior to the estimated time of departure.
(2) The minimum time required for switching over to the fixed power facilities, after arrival at the parking stand.
(3) For the minimum time required for aircraft maintenance purposes if needed.
NOTE) Aircraft parking stand: Spot NR1-5R, 5, 6-23, 50R, 50L, 51R, 51L, 53-73, 105P, 106-114, 142-149.
- 1.7 PDA (parts departing aircraft) reporting to Airport Administration
In order to secure the safety of aircraft operations and to rectify the issue of falling objects from aircraft operating in the vicinity of Tokyo International Airport, aircraft operators are required to notify Airport Administration (Tel 03-5756-1531) of any "Parts Departing Aircraft" from flights operating to/from Tokyo International Airport, without delay. This information shall be shared by relevant parties in order to prevent recurrence of such.
- 1.8 RWY16R/RWY16L における PAPI の運用
- (1) RNP RWY16R 及び RNP RWY16L 運用時のみ設定角 3.25° の PAPI (以下「3.25° PAPI」という。) が点灯し、設定角 3.0° の PAPI (以下「3.0° PAPI」という。) が消灯する。(図 1)
- (2) 3.25° PAPI のオンコースは、3.0° から 3.5° となる。(図 2)
- (3) 3.0° PAPI と 3.25° PAPI の同時点灯は行わない。
- (4) PAPI の切替えは、原則として、航空機が滑走路進入端から 5NM の地点に到達するまでに行われる。
- (5) 点灯している PAPI の角度に疑義がある場合は管制機関に確認すること。
(例) Pilot: Confirm PAPI angle.
ATC: PAPI angle 3.0/3.25.
- (6) 進入方式の変更に伴い PAPI が切り替わる場合は必要に応じ管制機関から通報される。
(例) PAPI angle change to 3.0.
- (7) 障害等により 3.25° PAPI が不点灯となっている場合、その代替措置として 3.0° PAPI が点灯される。その場合には必要に応じ管制機関から通報される。
(例) 3.25° PAPI unserviceable (due to trouble).
(例) Alternate PAPI angle 3.0 available.
- 注 RNP RWY16R/RWY16L 運用時以外において、3.0° PAPI が障害等により不点灯になった場合であっても、3.25° PAPI は点灯されない。
- 1.8 Operation of PAPI on RWY16R/RWY16L
- (1) PAPI (The angle is 3.25°) (The PAPI is called "3.25° PAPI" hereafter.) is turned on and PAPI (The angle is 3.0°) (The PAPI is called "3.0° PAPI" hereafter.) turned off only when RNP RWY16R and RNP RWY16L are in operation. (Fig.1)
- (2) The setting angles for a 3.25° PAPI on-course sector is between 3.0° and 3.5°. (Fig.2)
- (3) 3.0° PAPI and 3.25° PAPI are not turned on simultaneously.
- (4) A changeover between 3.0° PAPI and 3.25° PAPI will be accomplished before the aircraft reaches 5NM from runway threshold.
- (5) When pilot is uncertain of an angle of the PAPI in operation, that pilot should contact ATC for confirmation.
(e.g.) Pilot: CONFIRM PAPI ANGLE.
ATC: PAPI ANGLE 3.0/3.25.
- (6) When ATC intend to carry out a changeover between 3.0° PAPI and 3.25° PAPI in response to a change in approach procedure, ATC will inform pilots as necessary.
(e.g.) PAPI ANGLE CHANGE TO 3.0.
- (7) When the outages of 3.25° PAPI occur due to the system failure, 3.0° PAPI will be turned on as an alternative guidance.
ATC will inform pilots about PAPI conditions as necessary.
(e.g.) 3.25° PAPI UNSERVICEABLE (DUE TO TROUBLE).
(e.g.) ALTERNATE PAPI ANGLE 3.0 AVAILABLE.
- Note: When approach procedures except RNP RWY16R/RWY16L are in operation, 3.25° PAPI will not be turned on as an alternative guidance even if 3.0° PAPI becomes unserviceable due to system failure.

Fig.1


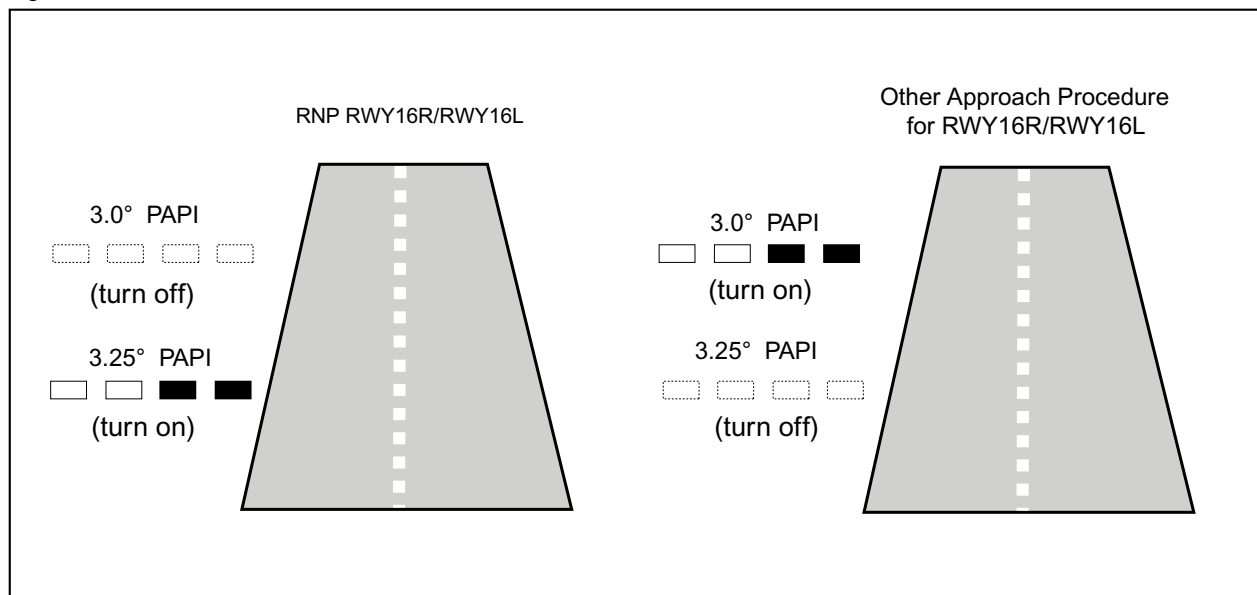


Fig.2

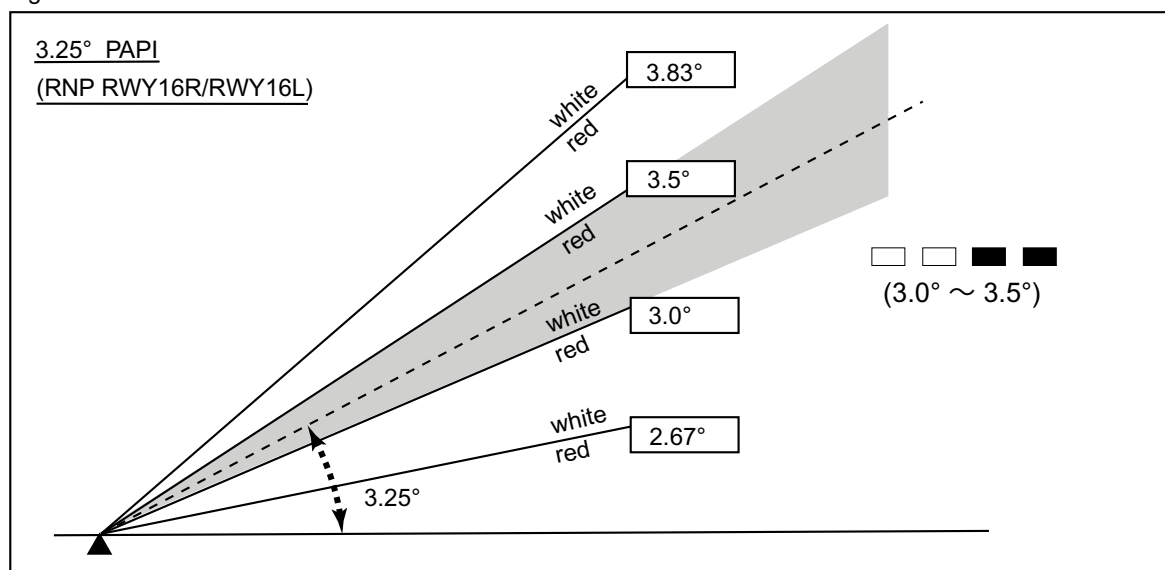

2. Taxiing to and from stands

2.1 TSAT Operation

1. 定義

用語の定義は次のとおりとする。

1-1 TSAT (Target Start Up Approval Time)

航空機が移動開始の許可を受領する目標時刻

1-2 TOBT (Target Off-Block Time)

航空機が管制機関からの許可があれば直ちに移動開始できる状況となる目標時刻

1-3 TSAT 運用

滑走路処理能力及び出発機の地上走行時間の最適化を目的とし、TSAT を用いて移動開始時刻を指定する運用

2. 対象航空機

飛行計画上のEOBTが2120UTCから1359UTCまでの全てのIFR出発機。ただし、以下の航空機を除く。

- (1) 航空交通流制御により、EOBTから60分以降のEDCTが指定された航空機。当該EDCT指定後に、EDCTが変更又は取り消された場合も含む。
- (2) 航空交通流制御により、出発の停止を指示された航空機。

3. 運用方式

3-1 TOBT の通報

3-1-1 運航者は、EOBTから5分以上の遅延が見込まれる場合は管制機関にTOBTを通報する。なお、TOBTの通報がない場合は、飛行計画上のEOBTが通報されたTOBTとして取り扱われる。

3-1-2 航空機は、通報したTOBTから5分以内に移動開始ができるよう準備し、移動開始ができない場合、その都度、運航者はTOBTを通報すること。

3-1-3 TOBTによる遅延通報は、AIP ENR 1.11.2.2に記載の遅延通報の代替にはならない。

3-2 TSAT の通知

3-2-1 TSATは、管制承認発出時に、音声通信又はデータリンクにより通知される。

〔例〕

音声通信の場合 「TSAT 0930」

データリンクの場合 「TSAT 0930」

3-2-2 Visual Docking Guidance System (VDGS)が設置されている場合は、3-2-1項に加えて、原則としてTSATの20分前からVDGS表示により通知される。

〔表示例〕

1行目に“TSAT”表示、2行目にTSAT、3行目にTSATから現在時刻のカウントダウン(分)が表示される(Figure 1)。カウントダウンが0分を過ぎた場合には、30分間DLA表示となる(Figure 2)。

3-2-2-1 TSATに変更がある場合には、VDGS表示により通知される。

〔表示例〕

TSATが変更された場合には、3行目が3分間CHG表示となり、その後カウントダウン表示となる(Figure 3)。

1. Definition

Words are defined as follows;

1-1 TSAT(Target Start Up Approval Time)

A target time at which an aircraft can expect to receive the off-block (including pushback and self-taxi-out) approval

1-2 TOBT(Target Off-Block Time)

A target time at which an aircraft is ready for off-block immediately upon reception of clearance from ATC

1-3 TSAT Operation

The operation designates the off-block time using TSAT, which aims to improve the capacity of runway and optimize taxi times on the ground

2. Subject Aircraft

All IFR departures whose EOBT stated in flight plan between 2120UTC and 1359UTC except for a following aircraft.

- (1) An aircraft whose EDCT is 60 minutes or more after EOBT due to flow control, including when this EDCT is changed or cancelled.
- (2) An aircraft that is assigned to hold on the ground due to flow control.

3. Operation procedures

3-1 TOBT

3-1-1 When the flight is expected delay more than 5 minutes, the Aircraft Operator(AO)/Ground Handler(GH) must provide suitable TOBT to ATC facility. In case there is no input of TOBT, the EOBT stated in flight plan is processed as TOBT.

3-1-2 An aircraft should be ready within TOBT + 5 minutes. If the aircraft is not ready within TOBT + 5 minutes, the AO/ GH should update predictable TOBT accordingly.

3-1-3 Delay message described in AIP ENR 1.11.2.2 may not be substituted by TOBT.

3-2 Issue of TSAT

3-2-1 TSAT is issued by voice communication or data link at Clearance Delivery.

〔Example〕

Voice “TSAT 0930”

Data link “TSAT 0930”

3-2-2 TSAT is displayed on Visual Docking Guidance System (VDGS) 20 minutes prior to the TSAT.

〔Example〕

First row: “TSAT”, Second row: TSAT (in time), Third row: Countdown to TSAT in minutes (Figure 1)

After countdown of “0”, it is displayed as “DLA” for 30 minutes. (Figure 2)

3-2-2-1 When TSAT is revised, it is informed by the message on VDGS.

〔Example〕

When TSAT on the second row is changed, the third row becomes “CHG” for 3 minutes and starts countdown. (Figure 3)

3-2-2-2 TSAT が失効する場合には、VDGS 表示により通知される (Figure 4)。

3-2-2-2 When TSAT is voided, it is displayed on VDGS. (Figure 4)

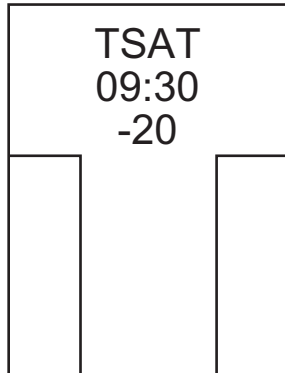


Figure 1

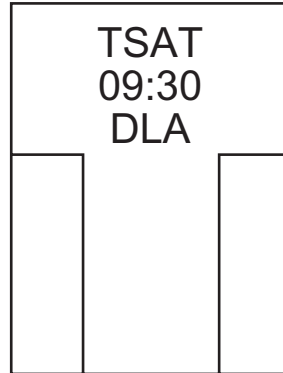


Figure 2

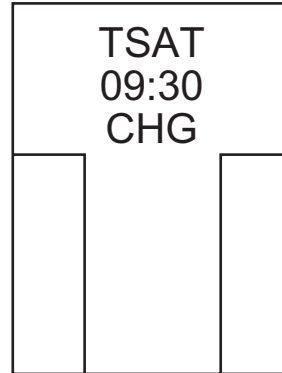


Figure 3

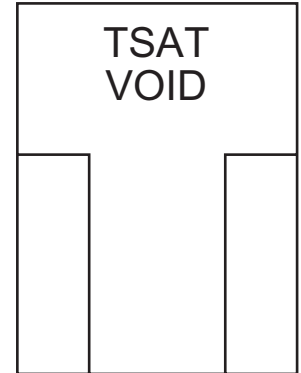


Figure 4

3-2-3 VDGSが設置されていない場合又はVDGSが使用できないことが周知されている場合には、3-2-1 項に加えて次のとおり TSAT が通知される。

3-2-3 If VDGS is not installed or unserviceable in a parking stand, TSAT is issued as Paragraph 3-2-1 and follows.

3-2-3-1 管制承認発出後に運航者が TOBT 変更入力を実施した場合は、入力を実施した運航者が航空機へ新しい TSAT を通知する。

3-2-3-1 When the AO/GH modifies the TOBT after ATC clearance has been issued, the AO/GH is responsible for notifying the new TSAT to the pilot.

3-2-3-2 管制承認発出後に EDCT が指定または変更された場合は、管制機関から航空機へ新しい TSAT が通知される。

3-2-3-2 When EDCT is assigned or changed after ATC clearance has been issued, ATC informs a new TSAT to the pilot.

3-3 TSAT の取消し

3-3 Cancellation

TSAT が取り消される場合には、管制機関から音声通信又はデータリンクにより、航空機へその旨通知される。

ATC notifies the pilot by voice communication or data link when TSAT is cancelled.

[例]

音声通信の場合 「TSAT CANCELLED.」

データリンクの場合 「TSAT CNL」

[Example]

Voice: "TSAT CANCELLED"

Data link "TSAT CNL"

3-4 移動開始

3-4 Pushback / Taxi Request

3-4-1 航空機は、TSAT に移動開始を要求すること。ただし、TSAT よりも早く移動開始準備が完了した場合には、TSAT の3分前から移動開始を要求することができる。

3-4-1 Pilots should ensure the aircraft is ready for Pushback/Taxi at TSAT. Regardless of above, pilots are able to request Pushback/Taxi from 3 minutes earlier than TSAT when the aircraft is ready earlier than TSAT.

3-4-2 VDGS が設置されている場合は、TSAT は VDGS に表示されているものを有効な TSAT として取り扱うこと。

3-4-2 The pilot should recognize the TSAT displayed in VDGS as the valid TSAT.

3-4-3 VDGS が設置されていない場合又は VDGS が使用できないことが周知されている場合には、管制機関または運航者より通知された TSAT のうち直近に通知されたものを有効な TSAT として取り扱うこと。

3-4-3 If the VDGS is not installed or unserviceable, pilots should recognize the last TSAT notified by ATC or the AO/GH as the valid TSAT.

3-4-4 TSAT に移動開始できない場合には、移動開始準備完了次第、速やかに移動開始を要求すること。

3-4-4 If the flight cannot achieve TSAT, pilots should request Pushback/Taxi as soon as the aircraft being ready.

3-4-5 航空機は、管制機関より TSAT の取り消しを通報された場合は、VDGS における TSAT の表示内容及び運航者から通知された TSAT に基づき、任意の時機に移動開始を要求することができる。

3-4-5 Pilots are able to request Pushback/Taxi when the aircraft being ready to start-up if ATC inform the TSAT has been cancelled regardless of displayed on VDGS or notified by the AO/GH.

3-4-6 TSAT よりも前の時刻であっても必要に応じ、管制機関から航空機に対し移動開始を指示することがある。

3-4-6 ATC may give an instruction of Pushback/Taxi if the aircraft is ready even before the TSAT depending on capacity of ground traffic.

4. TSAT 運用の中断

4. Suspension of TSAT Operation

TSAT 運用が中断される場合には、ノータム RJTT により周知される。

In case of suspension of TSAT Operation, it is announced by NOTAM RJTT.

2.2 スポット 33 ～ 41 からのスポットアウト手順

プッシュバック後に、プッシュバックレーンから誘導路 W へ自走を行う場合は、使用スポット導入線とプッシュバックレーンの交点付近から、隣接スポット導入線と誘導路 W の誘導路中心線との交点付近を会合点として実施すること。ただし、管制官からプッシュバックレーンの走行を指示された場合^{*1*2}は、プッシュバックレーンを走行した後、地上走行補助線を経由して誘導路 W へ自走すること。

プッシュバック後にプッシュバックレーンから誘導路 J 又は誘導路 J1 へ自走を行う場合は、プッシュバックレーンを走行した後、地上走行補助線を経由して誘導路 J 又は誘導路 J1 へ自走すること。

^{*1} 例: "TAXI VIA PUSHBACK-LANE TO W TWY"

^{*2} 例: "TAXI VIA PUSHBACK-LANE TO J TWY"


2.2 Spot OUT procedure from spot 33-41

After pushing back, ACFT taxiing from the Pushback-lane to TWY W, shall proceed to TWY W from the intersection of the Pushback-lane and the guide lane for the used spot, so as to intercept TWY W center line near the point crossing the guide lane for the next spot. However, when instructed to taxi via the Pushback-lane by ATC^{*1*2}, ACFT shall taxi on the Pushback-lane and then proceed via the auxiliary taxiing line to TWY W.

After pushing back, ACFT taxiing from the Pushback-lane to TWY J or TWY J1, shall taxi on the Pushback-lane and then proceed via the auxiliary taxiing line to TWY J or TWY J1.

^{*1} example: "TAXI VIA PUSHBACK-LANE TO W TWY"


^{*2} example: "TAXI VIA PUSHBACK-LANE TO J TWY"

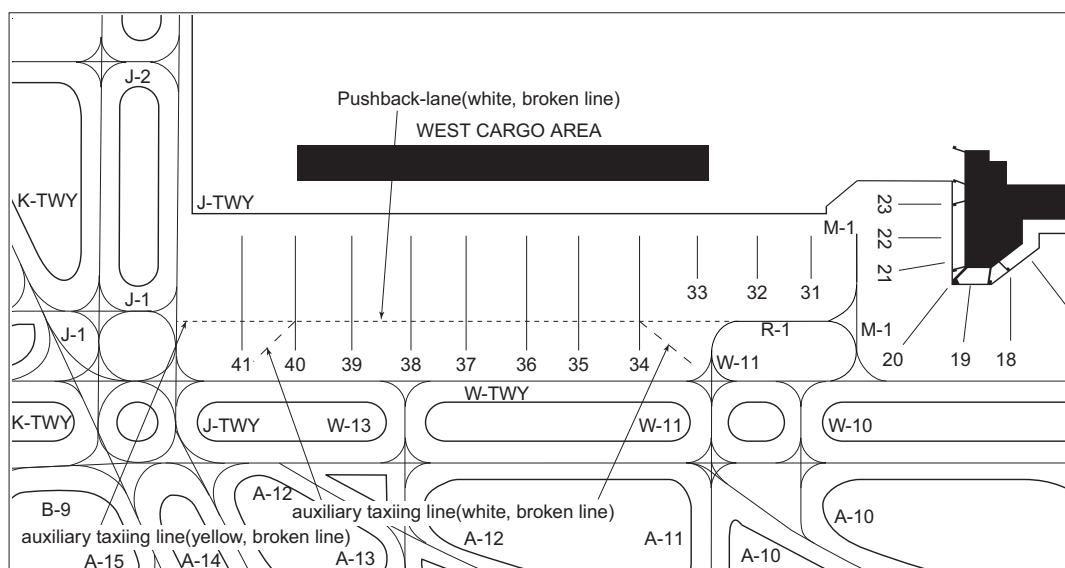

2.3 Standard taxiing route(See attached chart RJTT AD2.20)

The standard taxiing routes for departure and arrival may be instructed by ATC, using route ID in the table below.

	Direction	Route ID	Routing Via
Departure	To RWY05	ROUTE 5	TWY A-R-S
Arrival	From RWY23		TWY S-R-A

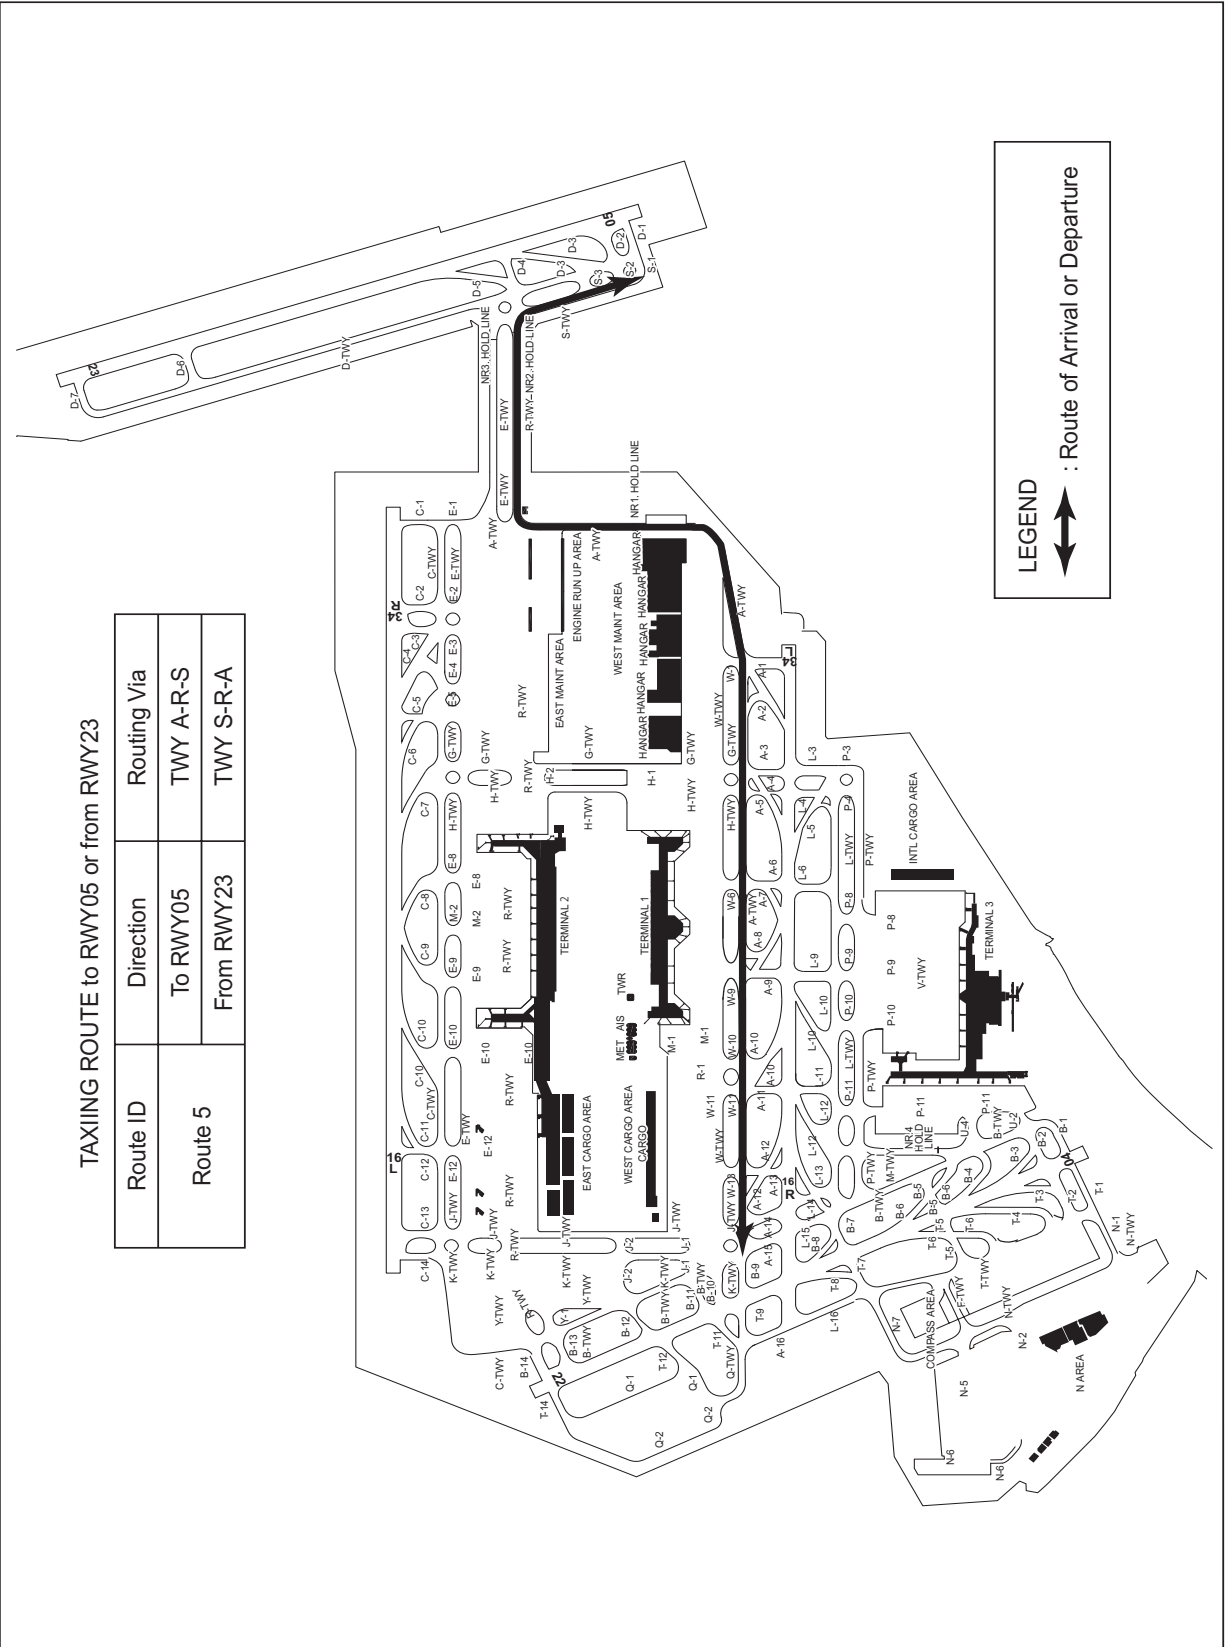

3. Parking area for small aircraft(General aviation)

Nil

4. Parking area for helicopters

Nil

5. Apron - taxiing during winter conditions

Nil

6. Taxiing - limitations

6.1 Restricted taxiways

(a)The aircraft of which wing span (WS) listed below table shall not pass following TWY or ACFT stand taxilane.

Restricted TWY or ACFT stand taxilane	WS	REMARKS
A(BTN A1 and A3), A(BTN A1 and W)	WS >= 74m	
A2, A5(BTN RWY16R/34L and A4), A5(BTN A3 and A4), A7, A8, A10, A13(BTN A and A12), A13(BTN RWY16R/34L and A12), B8, B9, B10, B11, J1(BTN B and K), J1(BTN K and J), C(BTN K and R), C4, C8, C9, C10, C13, E(BTN J and K), E3(BTN E and R), E4, E8(BTN C and E), E9(BTN C and E), E10(BTN C and E), E12, L10, M2(BTN C and E), Y(BTN C and R), R(BTN A and G), R(BTN E12 and J), T8, T9, T11, A16, W10, W11(BTN A and W), W(BTN K and B), E(BTN H and J), W13, W(BTN K and J), W(BTN J and M1)	WS >= 69m	
E10(BTN E and spot NR53), R(BTN E10 and E12), R1, J2(BTN K and Y), F, N(BTN spot NR981 and N5), N1, P11(BTN P and U2), U2, U4, W6, W9, W(BTN H and M1), W11(BTN W and R1), M1(BTN R1 and W)	WS >= 65m	
E8(BTN E and R)*, E9(BTN E and R)*, R(from E8 to E9)*, M2(BTN E and R)	WS >= 61m	*The restrictions are excepted for B77W. REF AD2.20. 6.1(e)
Q	WS >= 52m	*REF AD2.23. 7
M1(from spot NR21 to NR23), N6(from spot NR961 to NR969)*	WS >= 36m	*Except towed aircraft of which WS below 48m
N2	WS >= 33m	
N6(BTN spot NR961 and N2)	WS > 28.5m	

(b) In order to keep clearance between other aircraft or obstacle, the aircraft of which wing span (WS) listed below table shall reduce taxi speed and shall strictly follow the taxiway center line as following TWY.

Restricted TWY	WS
A(from RU6 to RU7)	78m $\leq$ WS < 80m
A(from W to Hangar)	76m $\leq$ WS < 80m
E(from spot NR801 to NR807), E(from spot NR808 to NR811)	72m $\leq$ WS < 80m
W(from spot NR201 to NR214), P8(BTN P and V), P9(BTN P and V), P10(BTN P and V) and V	71m $\leq$ WS < 80m
C(BTN K and R), E3(BTN E and R), E12(BTN E and R), E(BTN H and J), Y(BTN C and R), R(BTN A and G), R(BTN E10 and J), W(BTN J and M1)	63m $\leq$ WS < 69m
W(from spot NR5 to NR20), E10(from spot NR55 to spot NR53), R(BTN E10 and E12), J2(BTN K and Y), P11(BTN P and U2) and F	55m $\leq$ WS < 65m
M2(BTN E and R)	55m $\leq$ WS < 61m

(c) All aircraft shall taxi with minimum power when taxiing on apron taxiways in order to avoid blast damage to vehicles running along apron taxiways.

(d) In order to keep clearance between aircrafts and the fence etc, (31.5m from taxiway center line, 1.1m/AGL) which is installed on the bridge of E, P and R taxiway, all aircrafts shall reduce taxiing speed and follow the taxiway center line strictly.(see below chart)

E, P 及び R 誘導路橋梁部に設置されるフェンス等 (誘導路中心線から 31.5m, 地上高 1.1m) と機体との間のクリアランスを確保するために、すべての航空機は速度を減じて且つ誘導路中心線を走行することを厳守すること。(下図参照)

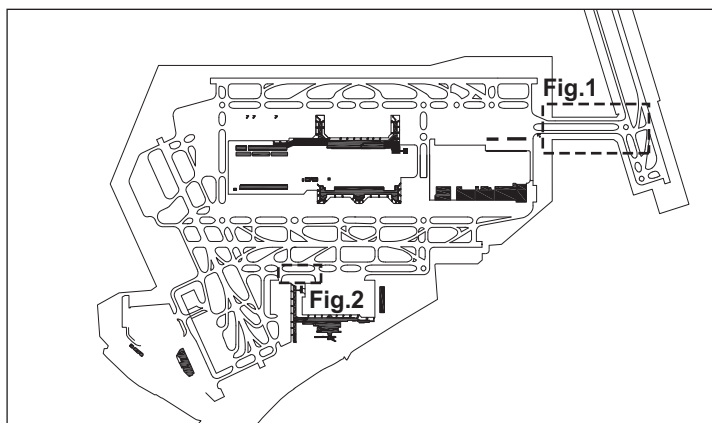


Fig.1




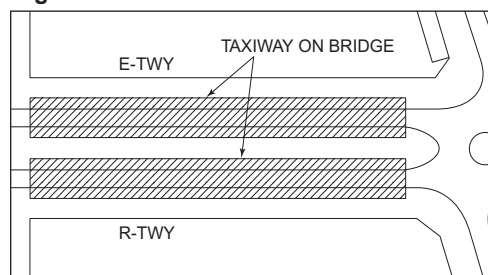



Fig.2

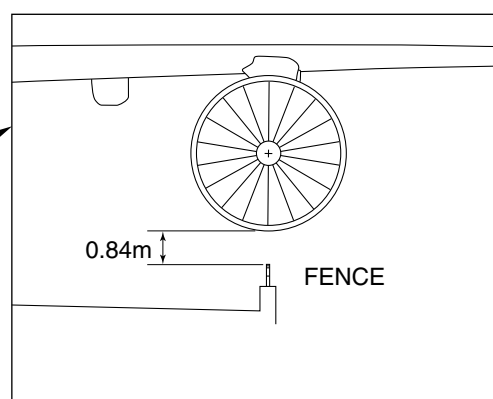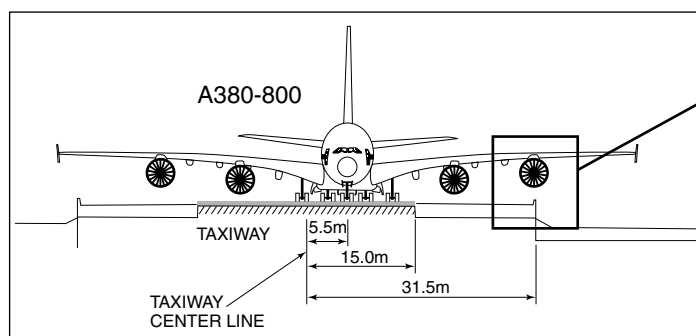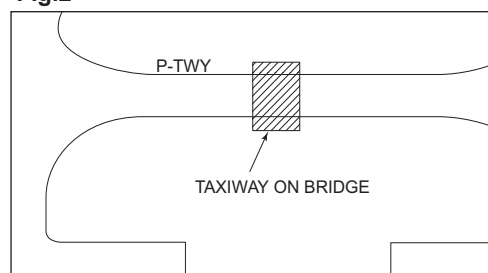

(e) Taxiway required to pay special attention are shown on attached chart.
(See RJTT AD2.20.6.1(a) and (b))


1) A340-500 における注意して走行すべき誘導路

1) TWY required to pay special attention for A340-500

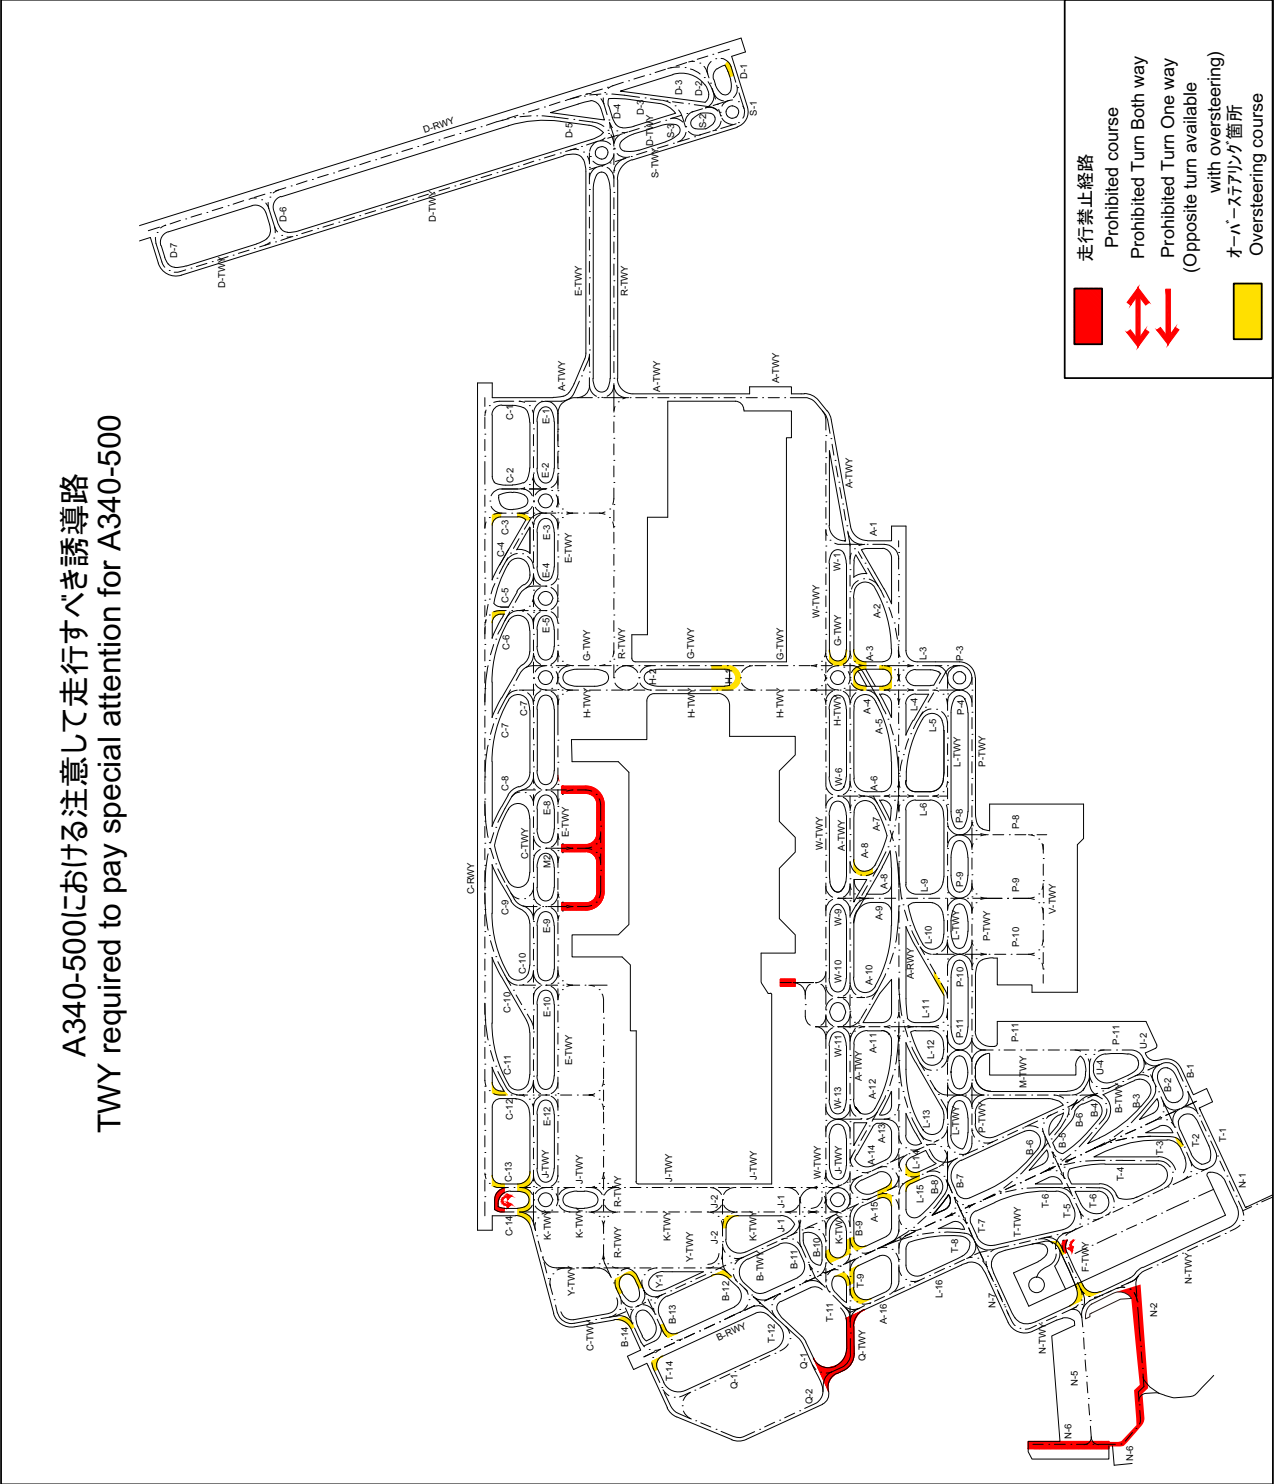


2) A340-600 における注意して走行すべき誘導路


2) TWY required to pay special attention for A340-600

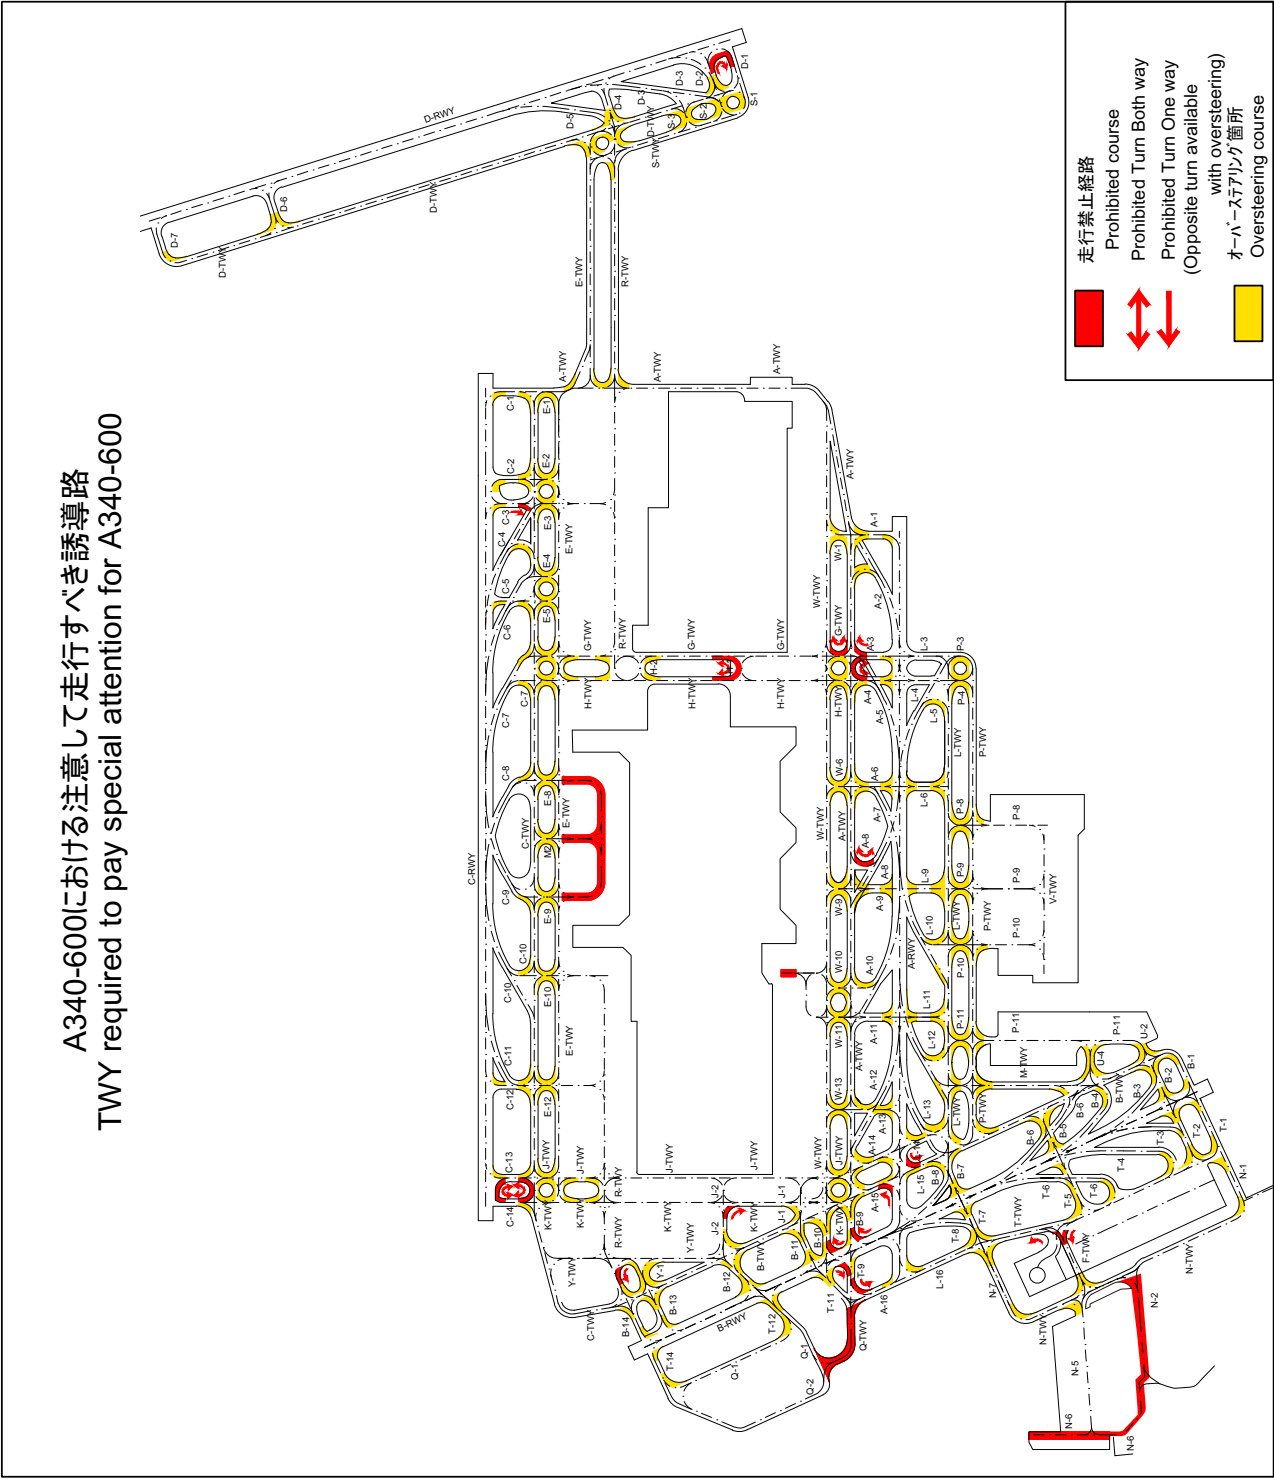

3) TWY required to pay special attention for A350-900

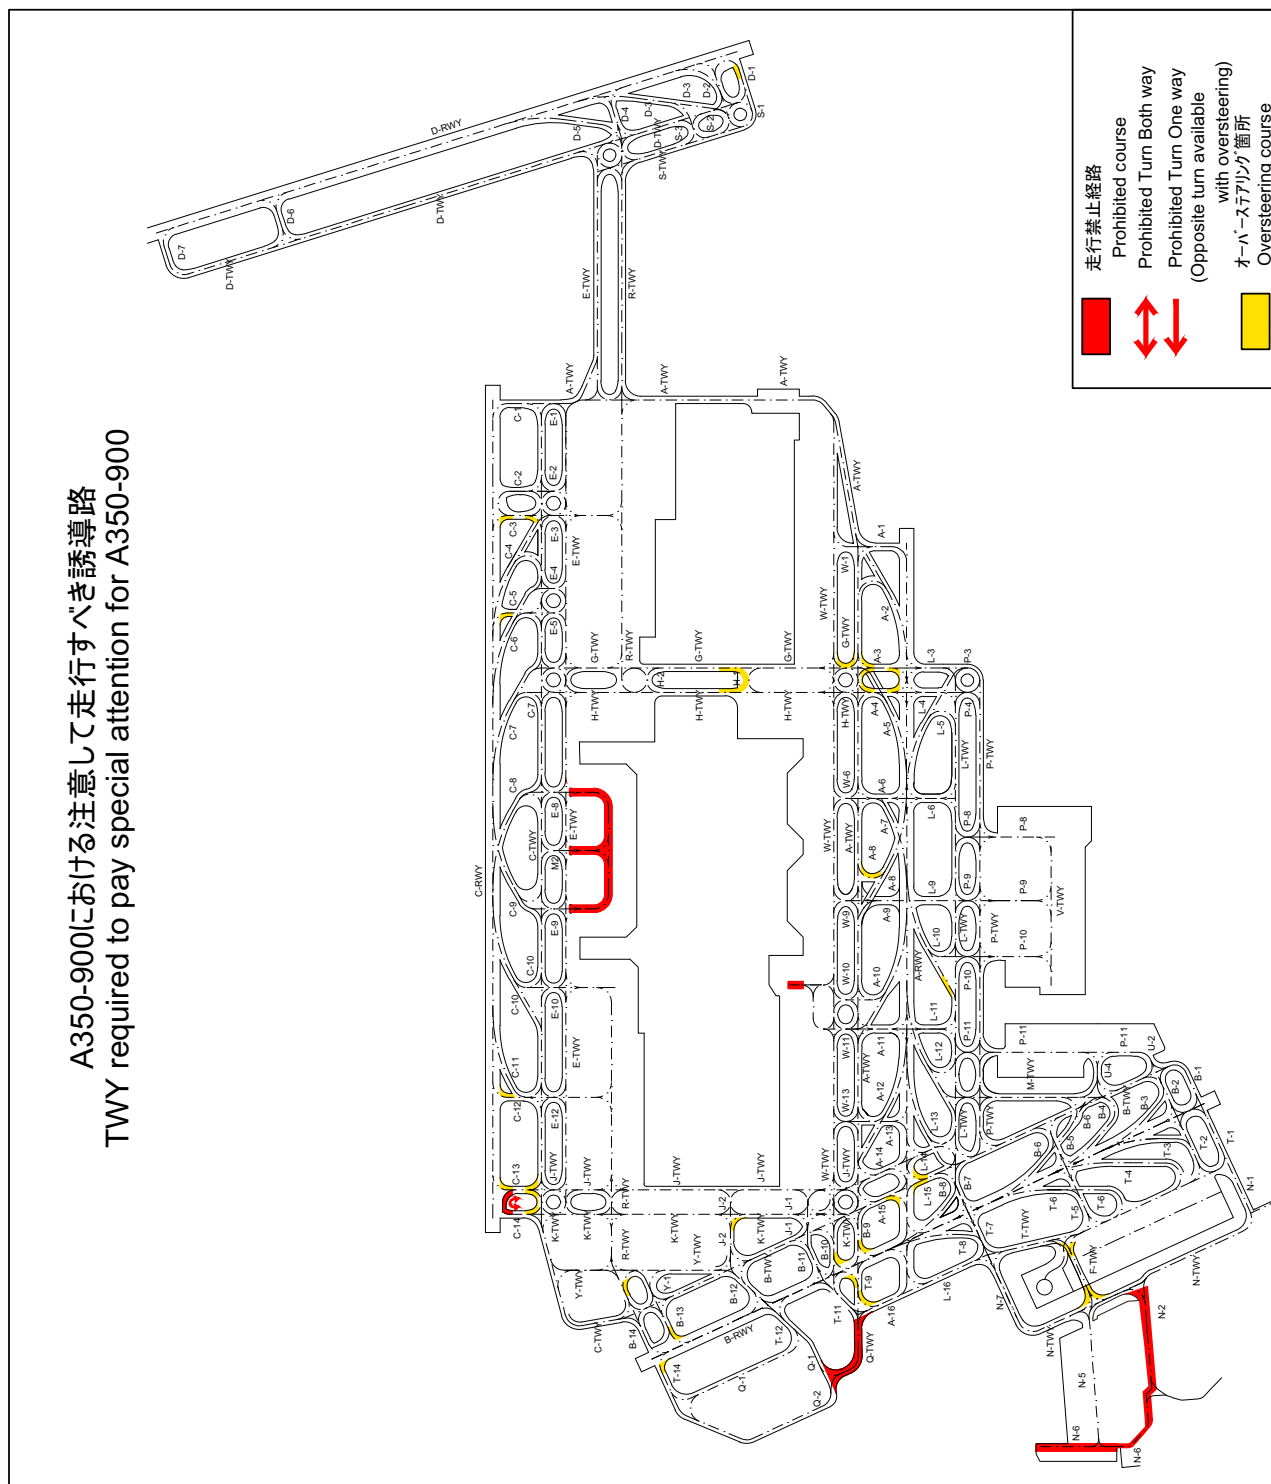

- 4) A350-1000 における注意して走行すべき誘導路
- 4) TWY required to pay special attention for A350-1000

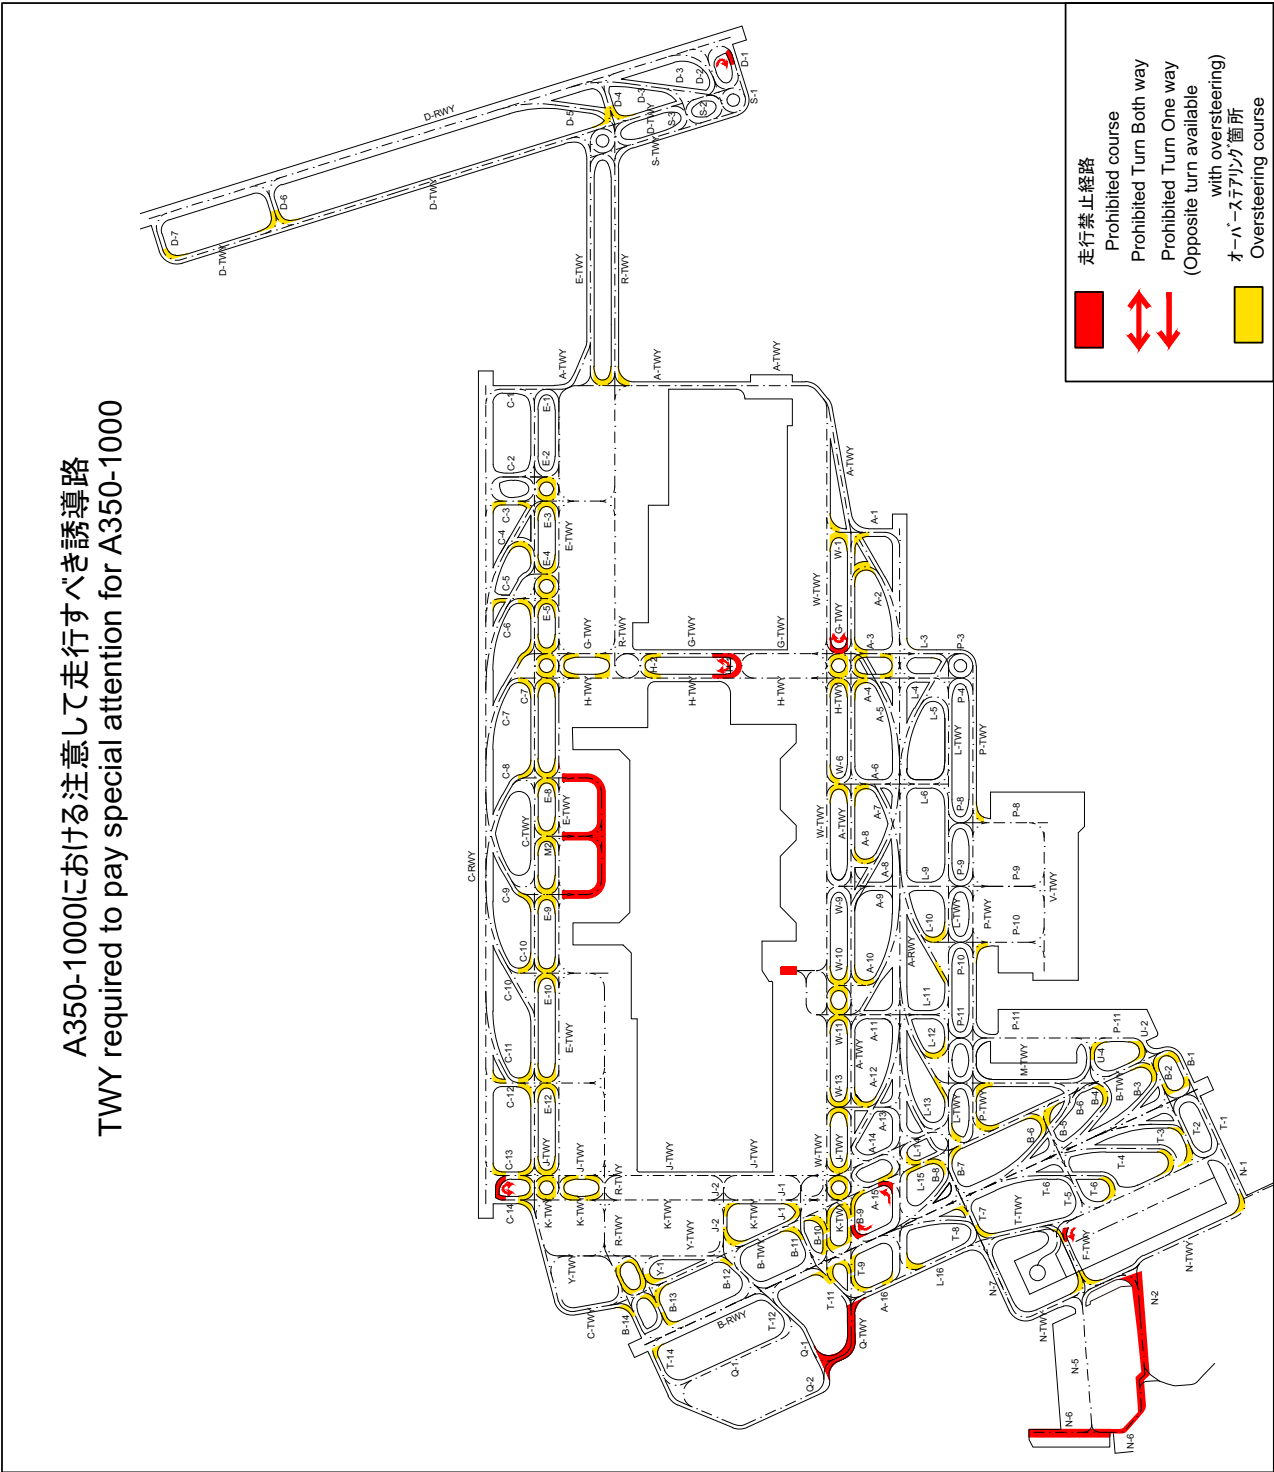


5) TWY required to pay special attention for A380-800



6) B747-8 における注意して走行すべき誘導路

6) TWY required to pay special attention for B747-8

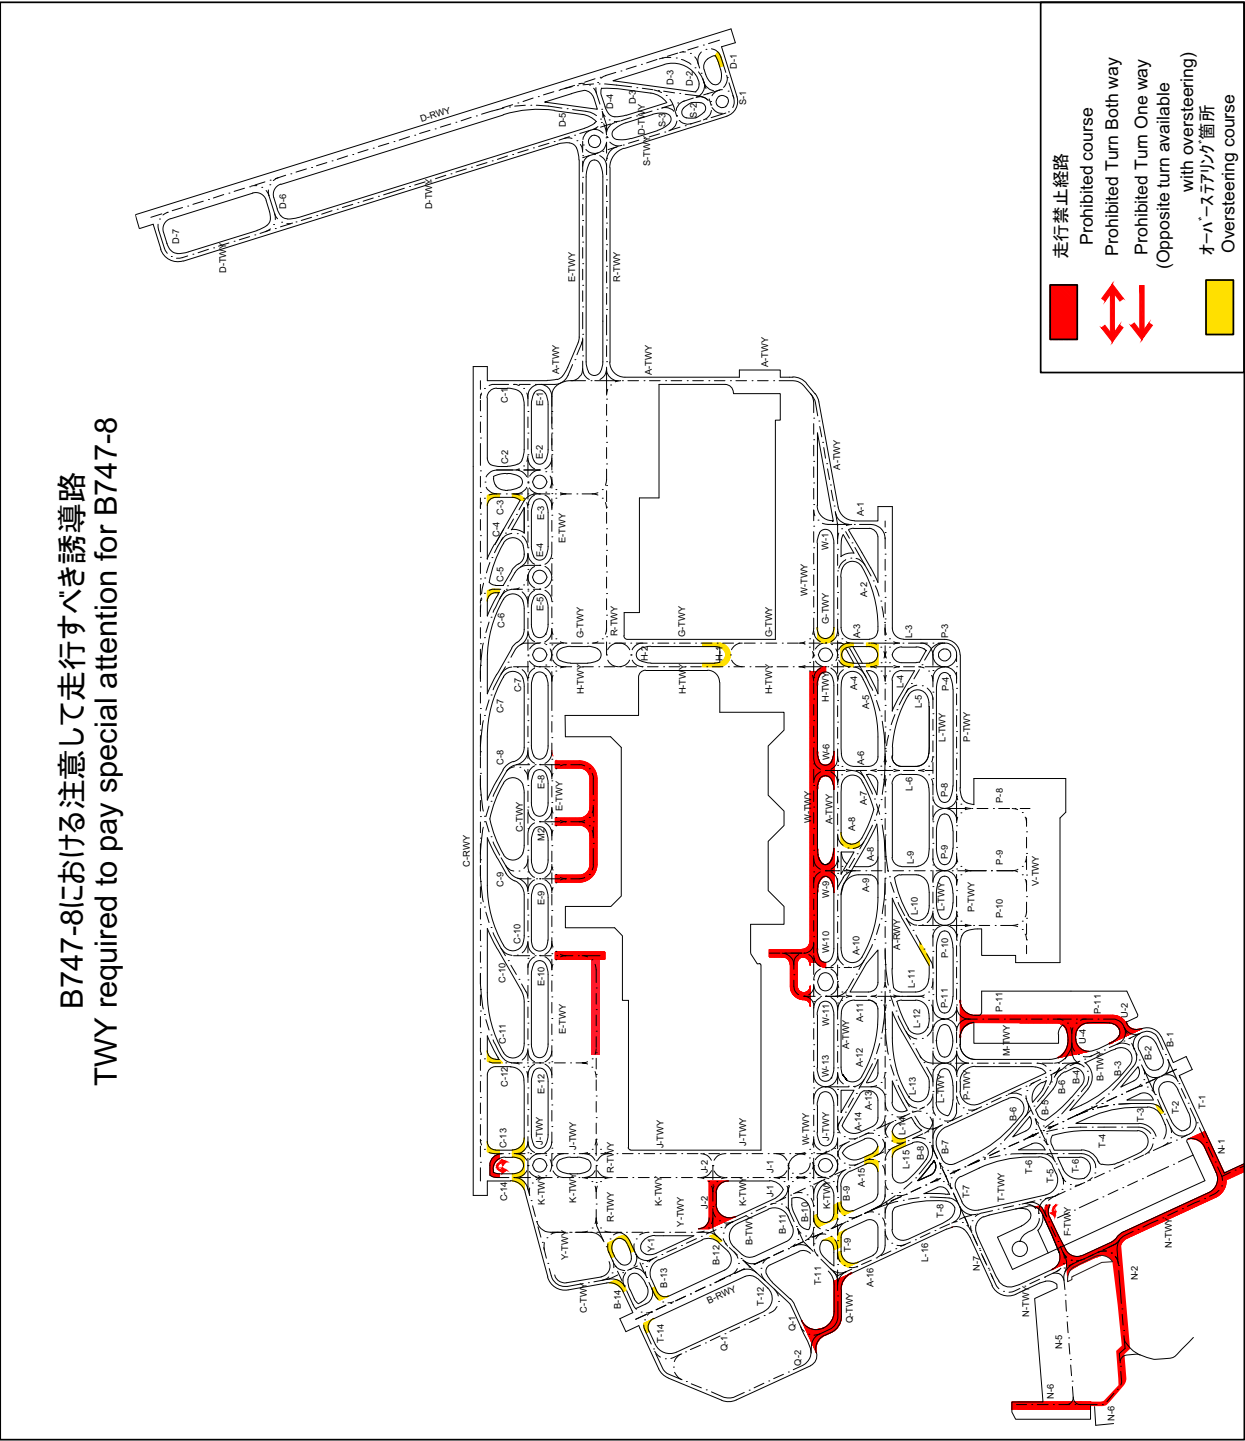


- 7) TWY required to pay special attention for B767-400ER



8) B777-300 における注意して走行すべき誘導路

8) TWY required to pay special attention for B777-300

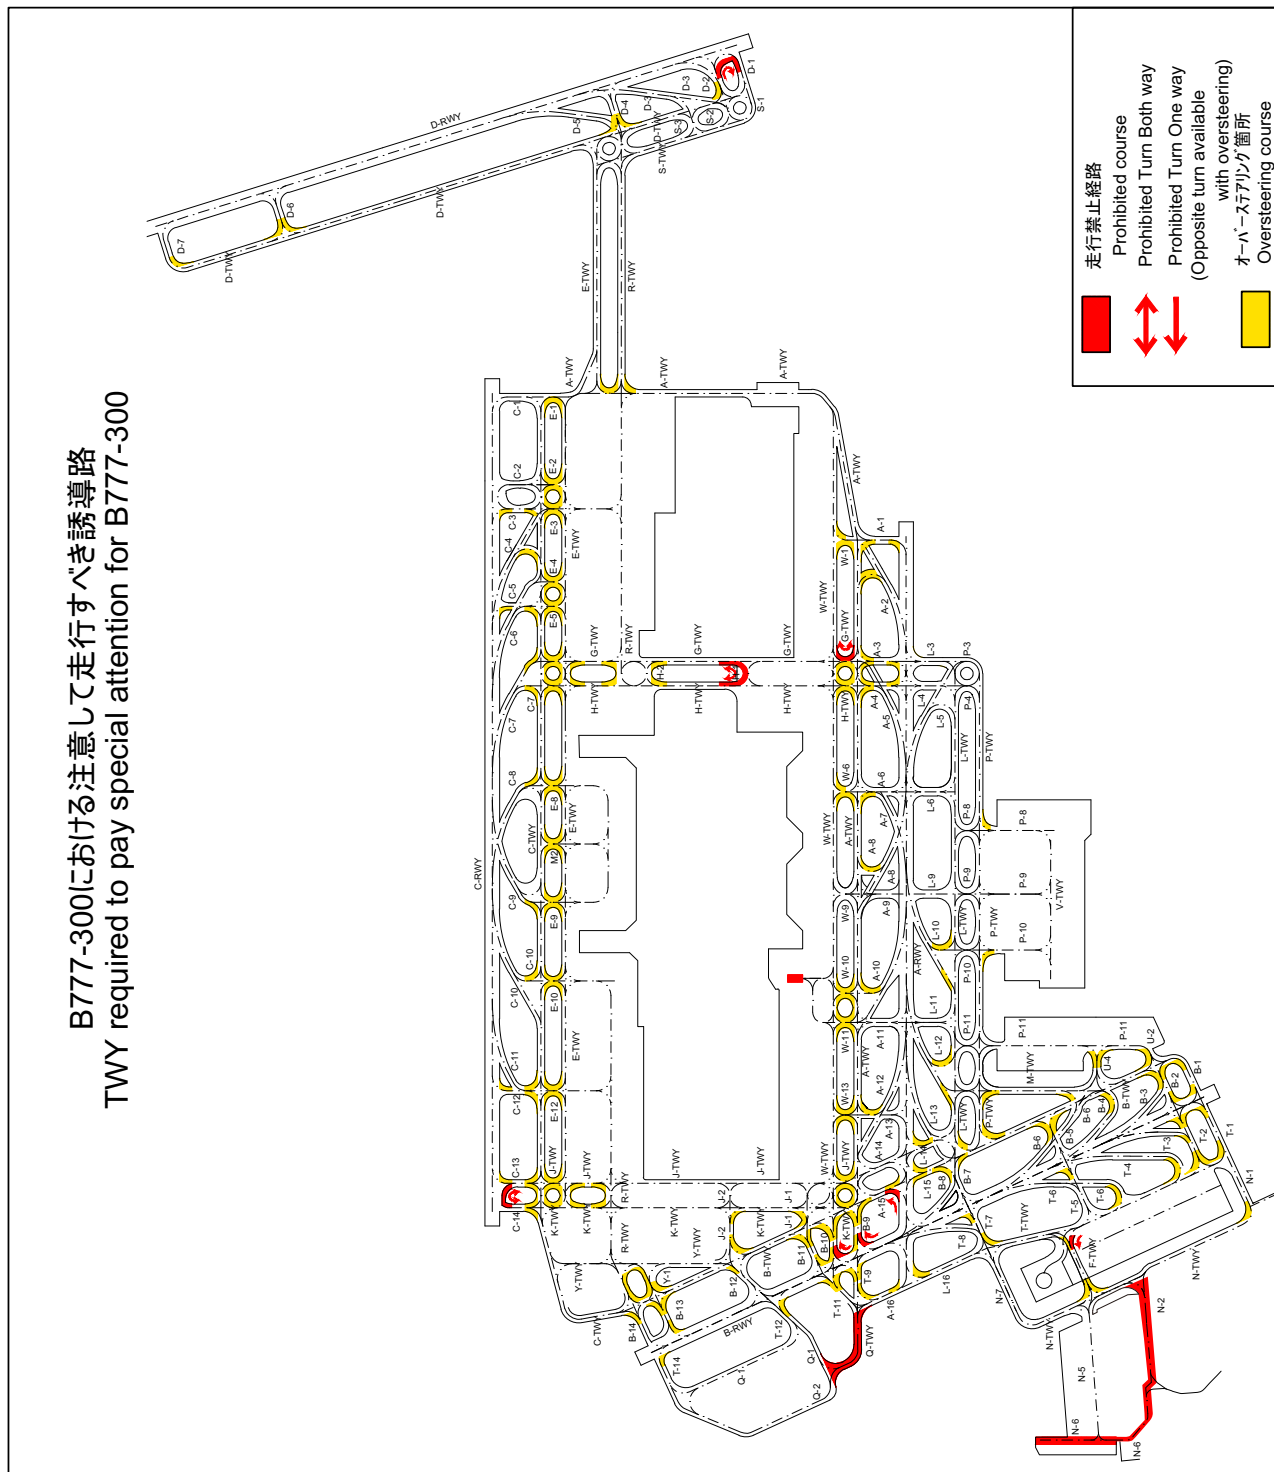


- 9) TWY required to pay special attention for B777-300ER



10) B787-8 における注意して走行すべき誘導路

10) TWY required to pay special attention for B787-8

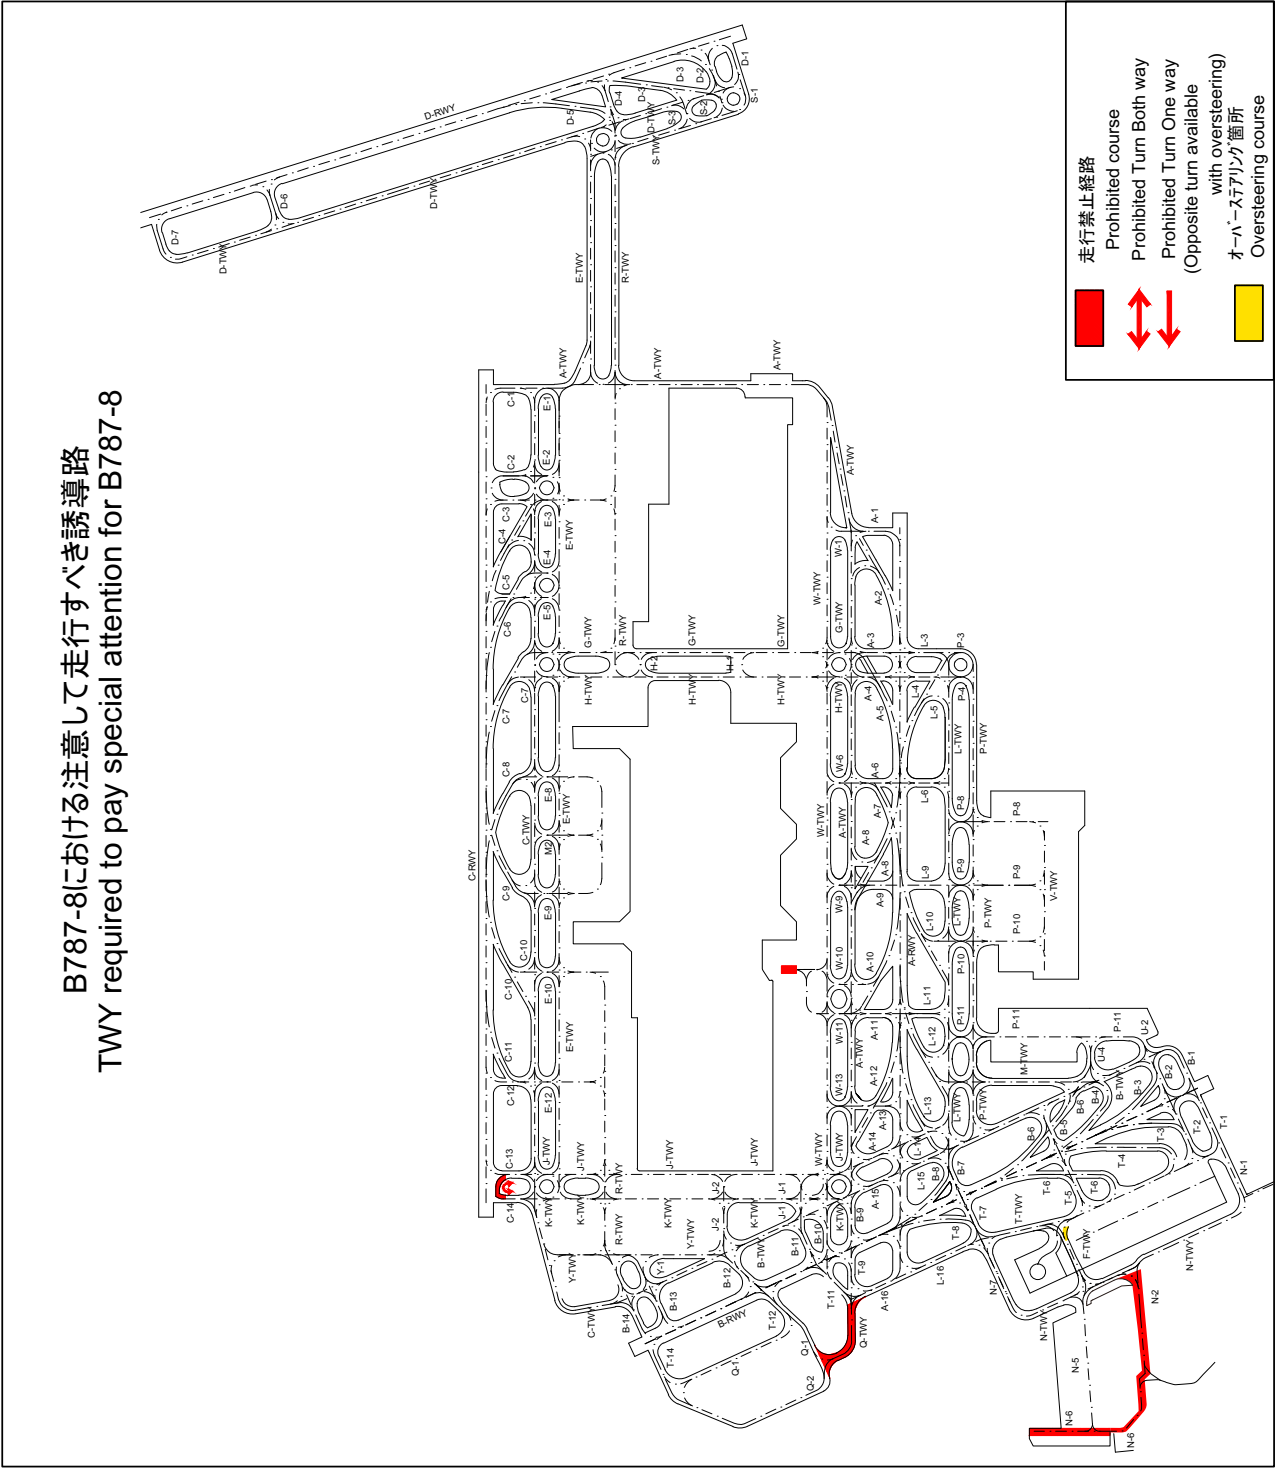

11) TWY required to pay special attention for B787-9

Prohibited course

Prohibited Turn Both way


Prohibited Turn One way (Opposite turn available with oversteering)

Oversteering course

12) B787-10 における注意して走行すべき誘導路

12) TWY required to pay special attention for B787-10

B787-10における注意して走行すべき誘導路
TWY required to pay special attention for B787-10

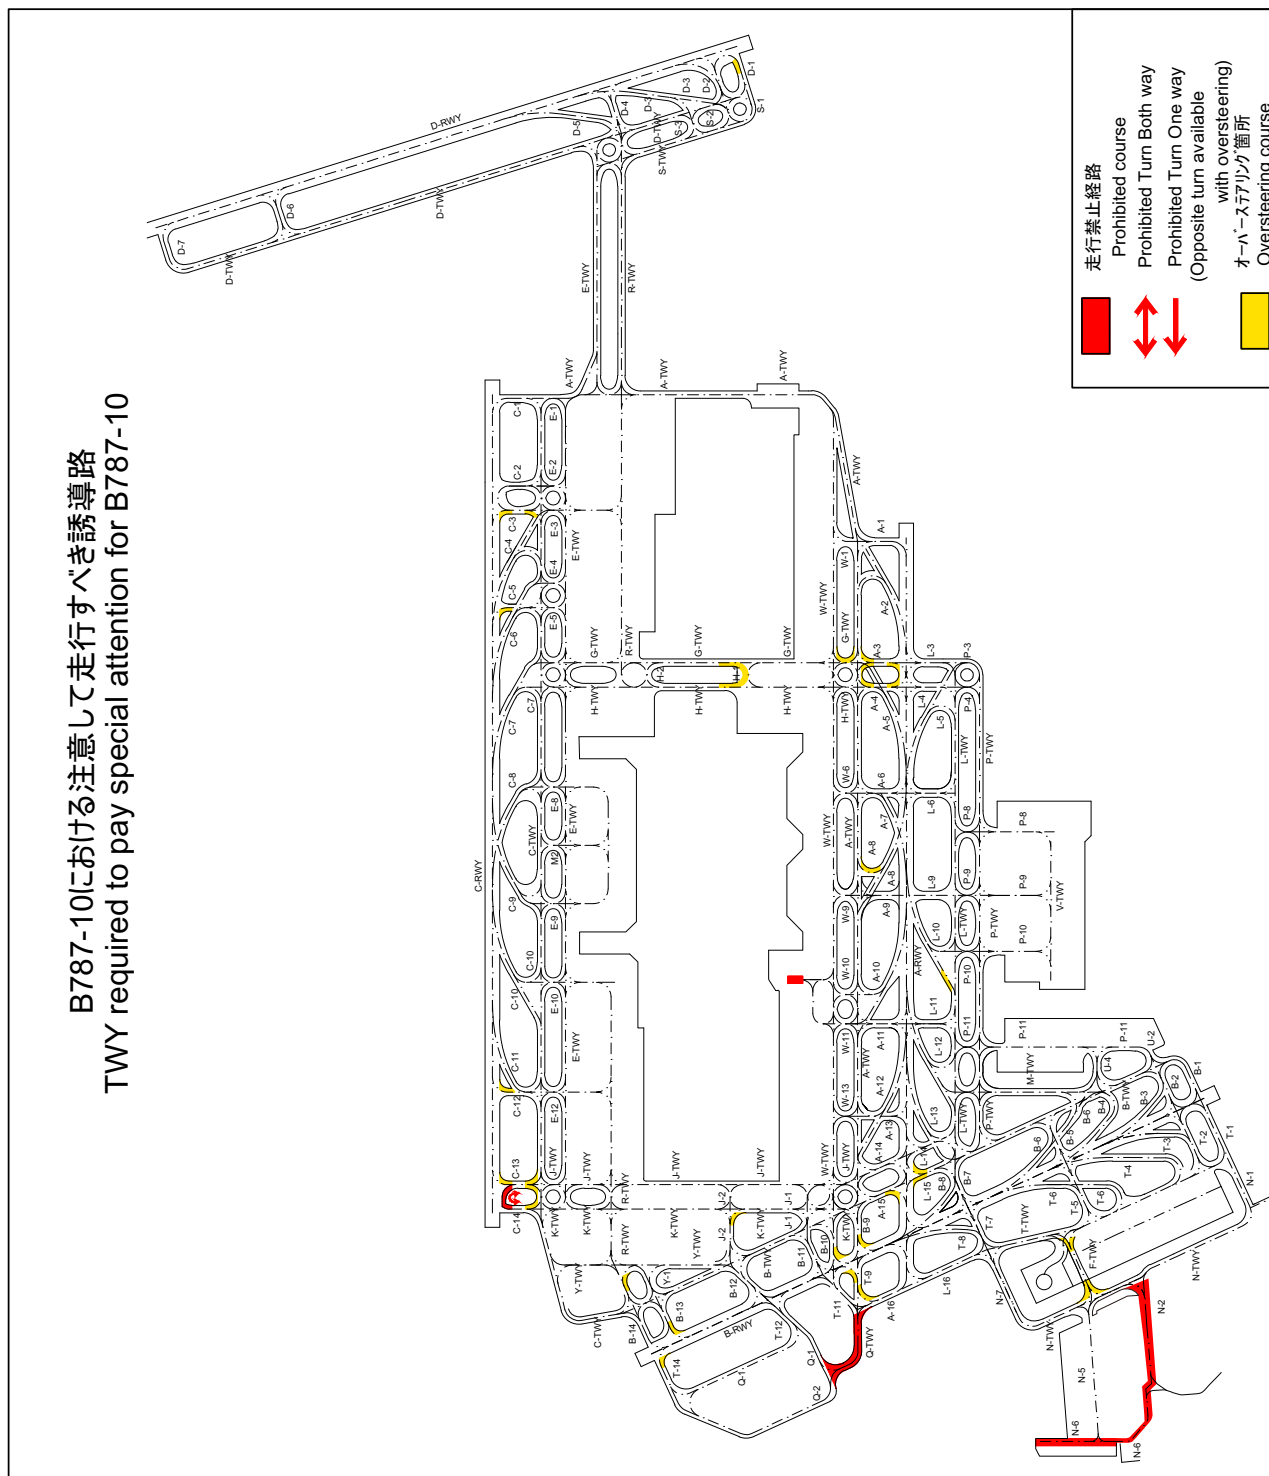

6.2 All aircraft shall hold at "GP HOLD LINE" on TWY A1, A12, A13, C12, B13, B14 until receiving further taxi clearance in order to protect ILS glide slope signal. (See RJTT AD2.24-APDC-1)

6.3 Wing tip clearance at the TWY intersection (REF. AD1.1.6.8)

Wing tip clearance at the TWY intersection between the ACFT holding at the stop marking on the TWY and the other ACFT taxiing behind it are as follows.

1) When B748 holding at the stop marking on TWY C1, C2, C3, C5, C12, C13, or C14

wing span (WS) of ACFT taxiing on TWY C ^{*1}	WS =< 28.8m	28.8m < WS =< 45.8m	WS > 45.8m
wing tip clearance	A	B	×
wing span (WS) of ACFT taxiing on TWY C ^{*2}		WS =< 15.8m	WS > 15.8m
wing tip clearance		B	×
*1 When B748 holding at the stop markings located at 75m off the RWY center line.			
*2 When B748 holding at the stop markings located at 90m off the RWY center line.			

2) When B748 holding at the stop marking on TWY T9

wing span (WS) of ACFT taxiing on TWY A16	WS ≤ 5.8m	WS > 5.8m
wing tip clearance	*B	*×

3) When B748 holding at the stop marking on TWY T7

wing span (WS) of ACFT taxiing on TWY T	WS ≤ 25.8m	WS > 25.8m
wing tip clearance	B	×

4) When B748 holding at the stop marking on TWY A14, A15, B9, B10, L14 or L15

wing span (WS) of ACFT taxiing on TWY B, L or TWY A	WS ≤ 21.3m	21.3m < WS ≤ 38.3m	WS > 38.3m
wing tip clearance	A	B	×

5) When B748 holding at the stop marking on TWY A3, A4, A6, A9, A11, A13, B2, B5, B7, B11, B13, B14, D1, D2, D4, D6, L3, L4, L6, L9 or L11

wing span (WS) of ACFT taxiing on TWY A, B, D or TWY L	WS ≤ 28.8m	28.8m < WS ≤ 45.8m	WS > 45.8m
wing tip clearance	A	B	×

6) When B748 holding at the stop marking on TWY B12

wing span (WS) of ACFT taxiing on TWY B	WS ≤ 17.9m	17.9m < WS ≤ 34.9m	WS > 34.9m
wing tip clearance	A	B	×

7) When B748 holding at the GP HOLD LINE on TWY A1

wing span (WS) of ACFT taxiing on TWY W	WS ≤ 24.6m	WS > 24.6m
wing tip clearance	B	×

Legend

A: wing tip clearance ≥ 15m
 B: 6.5m ≤ wing tip clearance < 15m
 ×: wing tip clearance < 6.5m
 *B: 10.5m ≤ wing tip clearance < 15m
 *×: wing tip clearance < 10.5m

6.4 A 誘導路又は M 誘導路を西に向けて走行する航空機及び、R(A と S の間) 誘導路又は E 誘導路を南に向けて走行する航空機は、管制機関に指示された場合に限り、中間待機位置標識または中間待機位置灯で停止し待機する。(RJTT AD2.9.2 及び AD2.24 を参照)

6.4 The aircraft taxiing to the west on TWY A or TWY M and taxiing to the south on TWY R(between A and S) or TWY E shall hold at Intermediate Holding Position Marking or Intermediate Holding Position Lights only when instructed by ATC.
(see RJTT AD2.9.2 and AD2.24)

6.5 (a) Spot NR104、NR105P、NR105F 及び NR106 へのスポットインの方法(添付図参照)

(1) Spot NR104 及び spot NR106
各スポットの航空機導入線に沿ってスポットインすること。

(2) Spot NR105P

Spot NR105P の航空機導入線に沿ってスポットインする。ただし、NR103 に航空機が駐機している場合は、航空機ブラストの影響を避けるため、コード D 以上の航空機(翼幅が 36m 以上)は航空機導入線上の停止位置で停止し、エンジンカットした後、トーイングによりスポットインする。

(3) Spot NR105F

Spot NR106 の航空機導入線に沿って走行し、spot NR106 の航空機導入線上の停止位置で停止し、エンジンカットした後、spot NR105F にトーイングによりスポットインする。

6.5 (a) Procedures of taxiing to spot NR104, NR105P, NR105F and NR106(see attached chart)

(1) Spot NR104 and NR106

The aircraft should strictly follow the taxiing guide line.


(2) Spot NR105P

The aircraft should strictly follow the taxiing guide line of the spot NR105P.

When there is an aircraft at the spot NR103 in order to avoid the blast damage, the aircraft with wing-span 36m or longer should shut down their engines at the stop line installed on the taxiing guide line and then should be pulled into the spot NR105P by the aircraft tug.

(3) Spot NR105F

The aircraft should strictly follow the taxiing guide line of spot NR106, and should shut down engines at the stop line installed on the taxiing guide line, and then should be pulled into the spot NR105F by the aircraft tug.

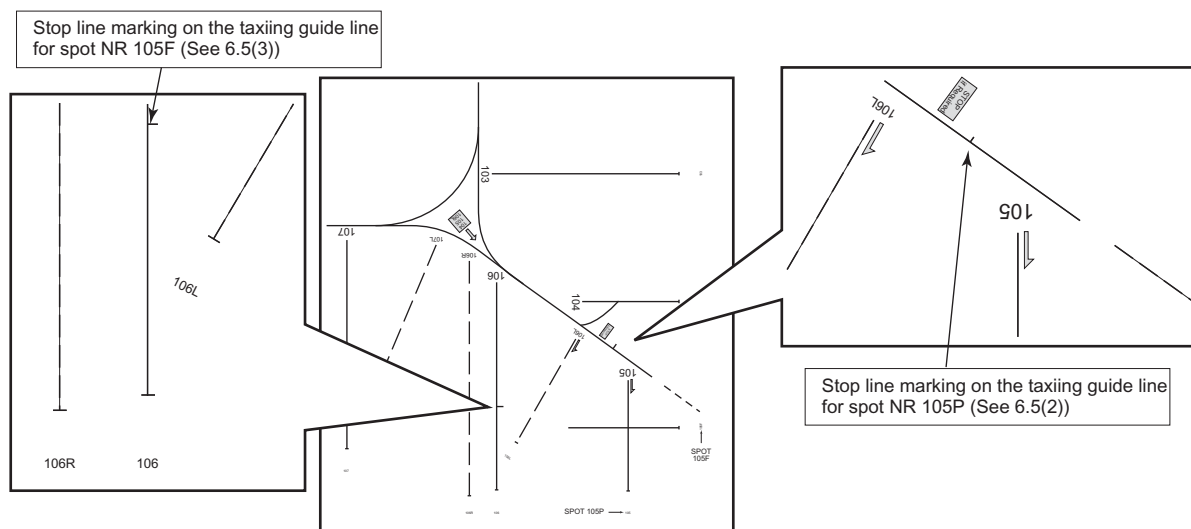


(b) Spot NR5R のスポットインの方法(添付図参照)

W 誘導路を経由してスポット NR5R に入る航空機は、十分に減速して航空機導入線に沿ってスポットインすること。

(b) Procedure of taxiing to spot NR5R(see attached chart)

The aircraft should reduce taxi speed and should strictly follow the taxiing guide line of the spot NR5R via W-TWY.

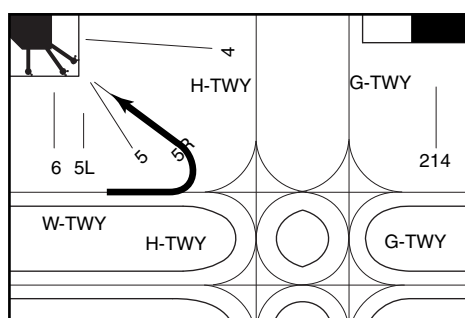

7. School and training flights - technical test flights - use of runways

Nil

8. Helicopter traffic - limitation

Nil

9. Removal of disabled aircraft from runways


Nil

10. Hot spots

A “HOT SPOT” is a location on an aerodrome movement area with a history or potential risk of collision or runway incursion, and where heightened attention by pilots/drivers is necessary.


HS1

Intersection of taxiways of B7, L and L13
Pilots sometimes confuse L with L13, while taxiing from B7 to L.
Do not enter L13.

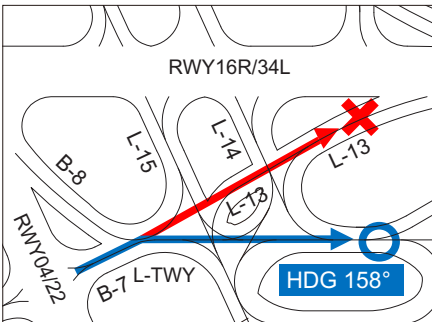


HS2

Intersection of taxiways of U4, B and B6
Pilots sometimes confuse B with B6, while taxiing from U4 to B.
Do not enter B6.

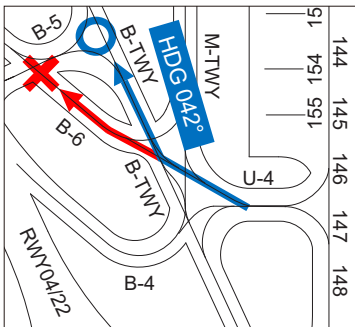


HS3

Runway crossing area of taxiways A16 and L16
Runway holding position markings are installed. ATC authorization shall be required for crossing the runway.

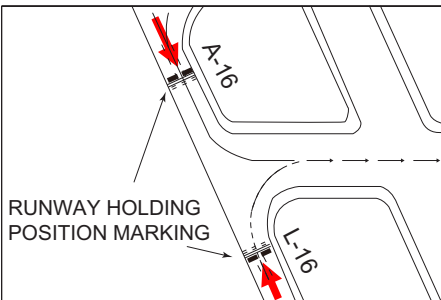

HS4

Intersection of taxiways L and L5
Pilots sometimes confuse L4 with L5 while taxiing from L to L4.
Do not enter L5.

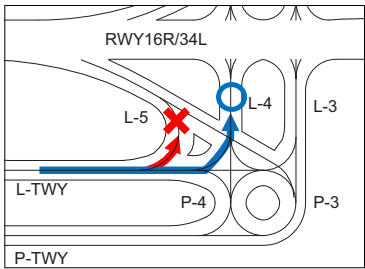

RJTT AD 2.21 NOISE ABATEMENT PROCEDURES

1. 騒音制限
東京国際空港においては、以下の騒音軽減運航方式が適用される。
- ・ 優先滑走路方式
 - ・ 優先飛行経路及び騒音軽減運航方式
 - ・ 騒音軽減進入方式 (NAAP)

1. Noise restrictions
Following noise abatement procedures on Tokyo INTL Airport are in force.
- Noise Preferential Runways
 - Preferential Routes and Aircraft Operating Procedures for Noise Abatement
 - Noise Abatement Approach Procedure(NAAP)

2. 優先滑走路方式
使用される滑走路は以下の通り。(滑走路閉鎖時又は緊急事態発生時を除く。

2. Noise Preferential Runways
Runways described below are used except when those runways are not available or urgent situation exists.

(離陸)

(For Take off)

From 2100UTC to 1400UTC	1. 滑走路 05 及び 34R (北風運用時) 又は滑走路 16L 及び 16R (南風運用時) を優先的に使用する。ただし、0600UTC から 1000UTC の南風運用時は除く。(*1) 2. 滑走路 04 は、概ね 20 ノット以上の北東強風時又は滑走路 05 もしくは 34R の閉鎖時に使用する。	1. RWY05 and 34R(north wind operation applied) or, RWY16L and 16R(south wind operation applied) are preferentially used. Except during south wind operation from 0600UTC to 1000UTC.(*1) 2. RWY04 is used when northeast wind is about 20 knots or more, or, when RWY05 or RWY34R is closed.
-------------------------	---	--

From 1400UTC to 2100UTC	- 滑走路 05（北風運用時）又は 16L（南風運用時）を優先的に使用する。 - 滑走路 05 及び 16L が使用できない場合は滑走路 16R を使用する。 - 滑走路 34R は、北風運用時、以下の a. 又は b. のいずれかの場合であって、加えて 16L 及び 16R のいずれの滑走路からも安全な離陸が不可能となった場合に限り使用できるものとする。なお、滑走路 34R は、滑走路 05 の使用を前提に計画したものが、本条項に該当した場合に、使用するものであるから、滑走路 05/23 の航空機荷重制限 (RJTT AD2.23.7) を満たすとともに、滑走路 34R の南端から滑走路長 2500m での離陸を行うこと。ただし、機材性能及び路線距離等を考慮して、滑走路 34R の使用があらかじめ認められた便（以下「指定便」という。）はこの限りではない。この場合、滑走路 34R の南端から滑走路長 3000m での離陸を行うこと。 - 滑走路 05 が閉鎖中である場合 - 出発時において滑走路 05 では背風又は横風制限を超過する場合であって、安全な離陸が可能な場合 * 滑走路 05 からの離陸機又は滑走路 34R への着陸機と、上記 3.b. による滑走路 34R からの離陸機が競合する場合、前者が優先される。 * 滑走路 05/23 の航空機荷重制限 (AIP RJTT AD2.23.7) の超過は、上記 3.b. による滑走路 34R の使用理由とはならない。 * 上記 3.b. による滑走路 34R からの離陸について、やむを得ないと考えられる範囲を超えた運用がなされた場合、当該号については適用休止又は削除等の措置を執る場合がある。 * 指定便以外により滑走路 34R からの離陸を行った運航者は、以下の事項を東京空港事務所環境・地域振興課あてに FAX 又は E メールにより報告するものとする。 - 当該離陸の日時 - 航空機呼出符号及び航空機型式 - 当該離陸時のウエイト・アンド・バランスのデータ - 当該離陸を行った理由（滑走路 05 の閉鎖／背風／横風） - 風向、風速 - 滑走路の状態（wet/dry 等） - その他の関連情報 当該離陸が上記 3.b. によるものである場合は、併せて以下の情報を報告すること。 - 出発時における風速の背風又は横風成分のうち、制限を超過しているものの当該制限値及び実際値 東京空港事務所環境・地域振興課 FAX : 03-5756-1511(+81-3-5756-1511) E メール : hnd-kantika1596@mlit.go.jp - 滑走路 04 は滑走路 05、滑走路 16L/16R 及び滑走路 34R が使用できない場合に使用する。	- RWY05(north wind operation applied) or RWY16L(south wind operation applied) is preferentially used. - When RWY05 and RWY16L are not available, RWY16R is used. - RWY34R is available only when north wind operation applied, under following a. or b.circumstance, and RWY16L/R does not suit for safe take-off. However, in each case, all aircraft should take off with 2,500m RWY length from RWY34R threshold and keep its weight, main gear load and wheel load, on departure, at or below the limitations for RWY05/23(see RJTT AD2.23.7). (Because RWY34R is used as a substitute for RWY05.) However this does not apply to flights that is specified and allowed in advance in consideration of the performance and route distance, etc. "Specified flights". In this case, all specified aircraft should take off with 3,000m RWY length from RWY34R threshold. - RWY05 is closed. - The wind condition on departure exceeds crosswind or tailwind take-off limitations of RWY05. *Aircraft departing from RWY05 or landing to RWY34R have priority over the aircraft which departs from RWY34R due to 3.b. above. *No aircraft shall depart from RWY34R only because of being over the aircraft weight restriction of RWY05/23 (RJTT AD2.23.7). *As for 3.b. above, when take off from RWY34R beyond reasonable level is made, suspending/deleting the item(3.b.) , or other appropriate measures will be implemented. *Except specified flight, the operator of the aircraft which has made take-off from RWY34R, shall report following information to Environment and Regional Development Division Tokyo international airport office. - date and time of the take-off - call-sign and type of the aircraft - weight and balance data of the aircraft on the departure - reason for using RWY34R (RWY05 closed/tailwind limitation/crosswind limitation) - wind direction and wind velocity - runway conditions (wet/dry, etc.) - other informations concerning if the take-off is made due to 3.b. above, following item h) shall be added, - limitation and actual value of crosswind and/or tailwind on the departure which conflicts take-off limit Environment and Regional Development Division Tokyo International Airport Office FAX: 03-5756-1511(+81-3-5756-1511) e-mail: hnd-kantika1596@mlit.go.jp - RWY04 is used when RWY05, RWY16L/R and RWY34R are not available.
--	---	---

(着陸)

(For Landing)

From 2100UTC to 1400UTC	1. 滑走路 34L 及び 34R (北風運用時)、又は、滑走路 22 及び 23 (南風運用時) を優先的に使用する。ただし、0600UTC から 1000UTC の南風運用時は除く。(*1) 2. 2100UTC から 0600UTC まで、及び 1000UTC から 1400UTC までは、滑走路 16L は、概ね 20 ノット以上の南東強風時、又は、滑走路 22 が使用できない場合 (滑走路 23 が使用できない場合であって、滑走路 22 では対応が不可能な場合を含む。) に使用する。	1. RWY34L and 34R (north wind operation applied) or, RWY22 and 23 (south wind operation applied) are preferentially used. Except during south wind operation from 0600UTC to 1000UTC.(*1) 2. From 2100UTC to 0600UTC and from 1000UTC to 1400UTC, RWY16L is used when southeast wind is about 20knots or more, or, when RWY22 is not available (including the case that RWY23 is not available and RWY22 is unsuitable.).
From 1400UTC to 2100UTC	1. 滑走路 34R (北風運用時) 又は滑走路 23 (南風運用時) を優先的に使用する 2. 北風運用時において滑走路 34R が使用できない場合、滑走路 34L を使用する。 3. 南風運用時において滑走路 23 が使用できない場合は、滑走路 16L、滑走路 22 の優先順位により滑走路を使用する。	1. RWY34R(north wind operation applied) or RWY23(south wind operation applied) is preferentially used. 2. When north wind operation is applied, and RWY34R is not available, RWY34L is used. 3. When south wind operation is applied, and RWY23 is not available, RWY16L and RWY22 is used in this order.

3. 優先飛行経路及び騒音軽減運航方式

航空機が緊急状態又は避けたい事態にある場合及び NOTAM に別段の定めがある場合を除き、次の運航方式がすべての航空機に適用される。ただし、航空機の安全な運航を確保するために必要な操縦者の職務権限と責任の遂行を妨げるものではない。

3. Preferential Routes and Aircraft Operating Procedures for Noise Abatement

Except in the event an aircraft is in an emergency, an unavoidable situation or unless otherwise specified by NOTAMs, the following procedures shall be adhered to by all aircraft. However, none of the procedures herein is intended, in any manner, to abrogate the responsibility of the pilot in command to assure the safe operations of the aircraft.

(離陸)

(For Take off)

From 2100UTC to 1400UTC	RWY 34R	(右旋回離陸) 空港の北部、北西部及び北東部にある居住地域における航空機騒音を軽減するため、航空機は次の方式に従わなければならない。 1. 航空機は各航空会社のフライトマニュアルに規定されているバンク角及び速度により、できるだけ早く旋回を開始しなければならない。 2. 2200UTC から 0230UTC 及び 0600UTC から 1000UTC において、TIARA/BEKLA/ROVER [number] B/C Departure が承認された場合、急上昇方式もしくは NADP2 が適用される。	(For right turn departure) In order to minimize public annoyance for aircraft noise in the residential areas located north, northwest and northeast of the airport, the aircraft should comply with following procedures. 1. Aircraft should commence turns as soon as practicable with bank angles and speeds as prescribed in each operator's flight manuals. 2. From 2200UTC to 0230UTC and From 0600UTC to 1000UTC, when TIARA/BEKLA/ROVER [number] B/C Departure is cleared, Steepest Climb Procedure or NADP2 shall be applied.
	RWY 34L	(左旋回離陸) 空港の北部、北西部及び西部にある居住地域における航空機騒音を軽減するため、航空機は次の方式に従わなければならない。 1. 航空機は各航空会社のフライトマニュアルに規定されているバンク角及び速度により、できるだけ早く旋回を開始しなければならない。 2. インターセクションからの離陸は認められない。	(For left turn departure) In order to minimize public annoyance for aircraft noise in the residential areas located north, northwest and west of the airport, the aircraft should comply with following procedures. 1. Aircraft should commence turns as soon as practicable with bank angles and speeds as prescribed in each operator's flight manuals. 2. Intersection departure is not permitted.
	RWY 05	なし	Nil
	RWY 16L	なし	Nil
	RWY 16R	なし	Nil

From 2100UTC to 1400UTC	RWY 04	(右旋回離陸) 空港の北部、北西部及び北東部にある居住地域における航空機騒音を軽減するため、各航空会社のフライトマニュアルに規定されているバンク角及び速度により、できるだけ早く旋回を開始するものとする。		(For right turn departure) In order to minimize public annoyance for aircraft noise in the residential areas located north, northwest and northeast of the airport, the aircraft should commence turns as soon as practicable with bank angles and speeds as prescribed in each operator's flight manuals.	
	RWY 22	空港の西部にある居住地域における航空機騒音を軽減するため、航空機は次の方式に従わなければならない。 1. 航空機は各航空会社のフライトマニュアルに規定されているバンク角及び速度により、できるだけ早く旋回を開始しなければならない。 2. 急上昇方式が適用される。 3. 原則として主発動機が4発以上の航空機は運航が認められない。ただし、捜索救難及びVIP機を除く。 4. 以下の機種においては、可能な限り最大離陸推力を使用する。 B777, A330, MD11 5. B777, A330は、原則としてB14/T14からの離陸とする。 6. 使用する機材は、耐空証明における離陸測定点における離陸中の騒音値が89未満であること。(定期便を除く。)		In order to minimize public annoyance for aircraft noise in the residential areas located west of the airport, the aircraft should comply with following procedures. 1. Aircraft should commence turns as soon as practicable with bank angles and speeds as prescribed in each operator's flight manual. 2. Steepest Climb Procedure shall be applied. 3. In principle, aircraft with 4 or more main engines are not allowed to operate. Excluding search and rescue and VIP aircraft. 4. In the following models, using the maximum takeoff thrust as much as possible. B777, A330, MD11 5. In principle, B777, A330 should use intersection B14/T14 for takeoff. 6. The noise level (EPNdB) during takeoff at flyover reference noise measurement point in the airworthiness certification shall be less than 89. (Excluding Scheduled flights.)	
From 1400UTC to 2100UTC	RWY 05	「OPPAR DEPARTURE」 (代替方式無し)	空港の北部及び北東部にある居住地域における航空機騒音を軽減するため、各航空会社のフライトマニュアルに規定されているバンク角及び速度により、できるだけ早く旋回を開始するものとする。	[OPPAR DEPARTURE] (Not alternate procedures)	In order to minimize public annoyance for aircraft noise in the residential areas located north and northeast of the airport, the aircraft should commence turns as soon as practicable with bank angles and speeds as prescribed in each operator's flight manuals.
	RWY 16L		なし		Nil
	RWY 16R		なし		Nil
	RWY 34R		空港の北部、北西部及び北東部にある居住地域における航空機騒音を軽減するため、各航空会社のフライトマニュアルに規定されているバンク角及び速度により、できるだけ早く旋回を開始するものとする。		In order to minimize public annoyance for aircraft noise in the residential areas located north, northwest and northeast of the airport, the aircraft should commence turns as soon as practicable with bank angles and speeds as prescribed in each operator's flight manuals.
	RWY 04		空港の北部、北西部及び北東部にある居住地域における航空機騒音を軽減するため、各航空会社のフライトマニュアルに規定されているバンク角及び速度により、できるだけ早く旋回を開始するものとする。		In order to minimize public annoyance for aircraft noise in the residential areas located north, northwest and northeast of the airport, the aircraft should commence turns as soon as practicable with bank angles and speeds as prescribed in each operator's flight manuals.

(着陸)

1. 住居地域における航空機騒音を軽減するため、脚下げは運航上可能な限り遅く操作するものとする。特に、滑走路 22ILS 進入を使用する場合は IAD から 6.3 海里の地点まで住居が密集していることに留意すること。
2. 1300UTC から 2200UTC まではディレイド・フラップ進入方式によるものとする。

(For Landing)

1. In order to reduce aircraft noise in the residential area, gear-down should be delayed as far as operationally practicable. Especially, when using RWY22 ILS approach, pay attention that residences are dense until 6.3NM from IAD.
2. Between the hours of 1300UTC and 2200UTC, aircraft should perform Delayed Flap Approach Procedure.

From 2100UTC to 1400UTC	RWY 34R	「HIGHWAY VISUAL RWY34R」が優先的に使用される。 「ILS Z or LOC Z RWY34R」は「HIGHWAY VISUAL RWY34R」が使用できない場合に限り使用される。	[HIGHWAY VISUAL RWY34R] is primarily applied. [ILS Z or LOC Z RWY34R] is applied only when [HIGHWAY VISUAL RWY34R] is not applicable.
	RWY 34L	「ILS X or LOC X RWY34L」が優先的に使用される。 「ILS Z or LOC Z RWY34L」は「ILS X or LOC X RWY34L」が使用できない場合に限り使用される。	[ILS X or LOC X RWY34L] is primarily applied. [ILS Z or LOC Z RWY34L] is applied only when [ILS X or LOC X RWY34L] is not applicable.
From 2100UTC to 1400UTC	RWY 22	「LDA W RWY22」が優先的に使用される。 (4. 騒音軽減進入方式を参照) 「LDA W RWY22」が使用できないときには、 「LDA Z(X) RWY22」、「ILS RWY22」、 「LOC RWY22」の順に使用される。	[LDA W RWY22] is primarily applied. (See 4.Noise Abatement Approach Procedure) When [LDA W RWY22] is not available, [LDA Z(X) RWY22], [ILS RWY22] and [LOC RWY22] is used in this order.
	RWY 23	「LDA W RWY23」が優先的に使用される。 (4. 騒音軽減進入方式を参照) 「LDA W RWY23」が使用できないときには、 「LDA Z(X) RWY23」、「ILS Z RWY23」、 「LOC Z RWY23」の順に使用される。	[LDA W RWY23] is primarily applied. (See 4.Noise Abatement Approach Procedure) When [LDA W RWY23] is not available, [LDA Z(X) RWY23], [ILS Z RWY23] and [LOC Z RWY23] is used in this order.
	RWY 16L	2100UTC から 0600UTC まで、及び 1000UTC から 1400UTC までは、空港の北部にある住居地域における航空機騒音を軽減するため、航空機は最終進入への旋回の間、付図に示すコースに沿って又はその内側を飛行しなければならない。 0600UTC から 1000UTC まで、「RNP RWY16L」が優先的に使用される。(*2) 「ILS RWY16L」は「RNP RWY16L」が使用できない場合に限り使用される。	From 2100UTC to 0600UTC and From 1000UTC to 1400UTC, in order to minimize public annoyance for aircraft noise in the residential areas located north of the airport, aircraft should fly along or inside of the course shown in attached chart during the circling to final. From 0600UTC to 1000UTC, [RNP RWY16L] is primarily applied.(*2) [ILS RWY16L] is applied only when [RNP RWY16L] is not applicable.
	RWY 16R	0600UTC から 1000UTC まで、「RNP RWY16R」が優先的に使用される。(*2) 「ILS RWY16R」は「RNP RWY16R」が使用できない場合に限り使用される。	From 0600UTC to 1000UTC, [RNP RWY16R] is primarily applied.(*2) [ILS RWY16R] is applied only when [RNP RWY16R] is not applicable.
From 1400UTC to 2100UTC	RWY 34R	「ILS Y or LOC Y RWY34R」 or 「GLS RWY34R」 (via OSHIMA NIGHT ARRIVAL, AKSEL NIGHT ARRIVAL, AROSA NIGHT ARRIVAL or MESSE NIGHT ARRIVAL) 「GLS RWY34R」はパイロットの要求に基づき使用される。	[ILS Y or LOC Y RWY34R] or [GLS RWY34R] (via OSHIMA NIGHT ARRIVAL, AKSEL NIGHT ARRIVAL, AROSA NIGHT ARRIVAL or MESSE NIGHT ARRIVAL) [GLS RWY34R] is applied upon request from a pilot.
	RWY 34L	「ILS Y or LOC Y RWY34L」 or 「GLS RWY34L」 (via OSHIMA NIGHT ARRIVAL, AKSEL NIGHT ARRIVAL, AROSA NIGHT ARRIVAL or MESSE NIGHT ARRIVAL) 「GLS RWY34L」はパイロットの要求に基づき使用される。 リバーススラスト 空港周辺の航空機騒音を軽減するため、滑走路 34L 着陸後のリバーススラスト使用についてはアイドルパワーまでとする。	[ILS Y or LOC Y RWY34L] or [GLS RWY34L] (via OSHIMA NIGHT ARRIVAL, AKSEL NIGHT ARRIVAL, AROSA NIGHT ARRIVAL or MESSE NIGHT ARRIVAL) [GLS RWY34L] is applied upon request from a pilot. Reverse Thrust In order to reduce aircraft noise in the vicinity of the airport, pilots are requested to limit the use of reverse thrust to idle power after landing at RWY34L.
	RWY 22	「LDA Y RWY22」 (via OSHIMA NIGHT ARRIVAL, AKSEL NIGHT ARRIVAL, AROSA NIGHT ARRIVAL or MESSE NIGHT ARRIVAL) リバーススラスト 空港周辺の航空機騒音を軽減するため、滑走路 22 着陸後のリバーススラスト使用についてはアイドルパワーまでとする。	[LDA Y RWY22] (via OSHIMA NIGHT ARRIVAL, AKSEL NIGHT ARRIVAL, AROSA NIGHT ARRIVAL or MESSE NIGHT ARRIVAL) Reverse Thrust In order to reduce aircraft noise in the vicinity of the airport, pilots are requested to limit the use of reverse thrust to idle power after landing at RWY22.

From 1400UTC to 2100UTC	RWY 23	「LDA Y RWY23」(via OSHIMA NIGHT ARRIVAL, AKSEL NIGHT ARRIVAL, AROSA NIGHT ARRIVAL or MESSE NIGHT ARRIVAL) が優先的に使用される。 「ILS Y or LOC Y RWY23」(via OSHIMA NIGHT ARRIVAL, AKSEL NIGHT ARRIVAL, AROSA NIGHT ARRIVAL or MESSE NIGHT ARRIVAL) は「LDA Y RWY23」が使用できない場合に限り使用される。	[LDA Y RWY23] (via OSHIMA NIGHT ARRIVAL, AKSEL NIGHT ARRIVAL, AROSA NIGHT ARRIVAL or MESSE NIGHT ARRIVAL) is primarily applied. [ILS Y or LOC Y RWY23] (via OSHIMA NIGHT ARRIVAL, AKSEL NIGHT ARRIVAL, AROSA NIGHT ARRIVAL or MESSE NIGHT ARRIVAL) is applied only when [LDA Y RWY23] is not applicable.
	RWY 16L	「VOR A」(via OSHIMA V ARRIVAL, AKSEL V ARRIVAL, AROSA V ARRIVAL or MESSE V ARRIVAL) 空港の北部にある居住地域における航空機騒音を軽減するため、航空機は最終進入への旋回の間、付図に示すコースに沿って又はその内側を飛行しなければならない。	[VOR A] (via OSHIMA V ARRIVAL, AKSEL V ARRIVAL, AROSA V ARRIVAL or MESSE V ARRIVAL) In order to minimize public annoyance for aircraft noise in the residential areas located north of the airport, aircraft should fly along or inside of the course shown in attached chart during the circling to final.

(※1) 0600UTC から 1000UTC のうちの 3 時間程度にあつては、南風運用時において以下の滑走路が使用される。
(離陸) RWY16R, RWY16L, RWY22
(着陸) RWY16R, RWY16L

(※2) 0600UTC から 1000UTC のうちの 3 時間程度であつて、上記(※1)の滑走路が使用される場合に適用される。

(※1) For about 3 hours from 0600UTC to 1000UTC, the following runway is used during the south wind operation.
(For Take off) RWY16R, RWY16L, RWY22
(For Landing) RWY16R, RWY16L


(※2) Applicable when the runway (※1) is used in about 3 hours from 0600UTC to 1000UTC.

4. 騒音軽減進入方式 (NAAP)

- (1) 適用時間帯
2100UTC から 1400UTC の間
- (2) 対象航空機
BACON 経由滑走路 22 及び DATUM 経由滑走路 23 に着陸する航空機
(レーダー誘導により LDA22 又は LDA23 ローカライザーコースへ会合するものを除く。)
- (3) 対象経路
LDA W RWY22 及び LDA W RWY23
- (4) 実施条件
台風等の悪天候、レーダー施設の障害等の重大な事象がないこと。
- (5) NAAP の承認
管制機関は LDA W RWY22 又は LDA W RWY23 による進入を許可することにより、NAAP を承認する。
- (6) 継続的な降下 (LDA W RWY22 のみ)
NAAP 実施中は、不必要な TCAS-RA の発生を避けるとともに、騒音軽減のため、航空機は BACON と BEAST の間を 1500FT /min を超えない降下率で継続的に降下しなければならない。
- (7) NAAP が実施できない場合
悪天候などの理由により NAAP が実施できない場合には、航空機は東京アプローチとの通信設定時に、その理由とともに LDA Z RWY22 又は LDA Z RWY23 若しくはその他の進入方式を要求しなければならない。
- (8) NAAP の中止
交通状況等により、管制機関は承認した NAAP を中止することがある。その場合、代替指示が発出される。
- (9) その他
交通状況もしくは気象状態等によって、管制機関は進入方式上の速度と異なる速度を指示することがある。

4. Noise Abatement Approach Procedure(NAAP)

- 1) Applicable time
Between 2100UTC and 1400UTC
- 2) Aircrafts NAAP is applied
All aircraft which land to RWY22 via BACON/RWY23 via DATUM of Tokyo INTL Airport. (except aircraft intercepting LDA22/LDA23 LOC course by RADAR vector)
- 3) Routes used for NAAP
LDA W RWY22 and LDA W RWY23
- 4) Conditions
No significant condition such as Typhoon, Severe WX conditions, or Malfunction of radar system etc. is observed.
- 5) Clearance for NAAP
ATC clears NAAP by assigning approach procedure of "LDA W RWY22" or "LDA W RWY23".
- 6) Continuous descent(only LDA W RWY22)
To avoid nuisance TCAS-RA and reduce noise, while conducting NAAP, pilot should make descent continuously with 1500FT/min or less descending rate between BACON and BEAST.
- 7) In case NAAP is not available
If NAAP is not available because of WX conditions etc, pilot should request LDA Z RWY22/LDA Z RWY23 or other approach with the reason at initial contact with Tokyo Approach.
- 8) Cancellation of NAAP
ATC may cancel NAAP due to traffic conditions even after NAAP is cleared. In this case, alternate instructions will be issued.
- 9) Remarks
Due to traffic or WX conditions, ATC may assign IAS differing from on attached.

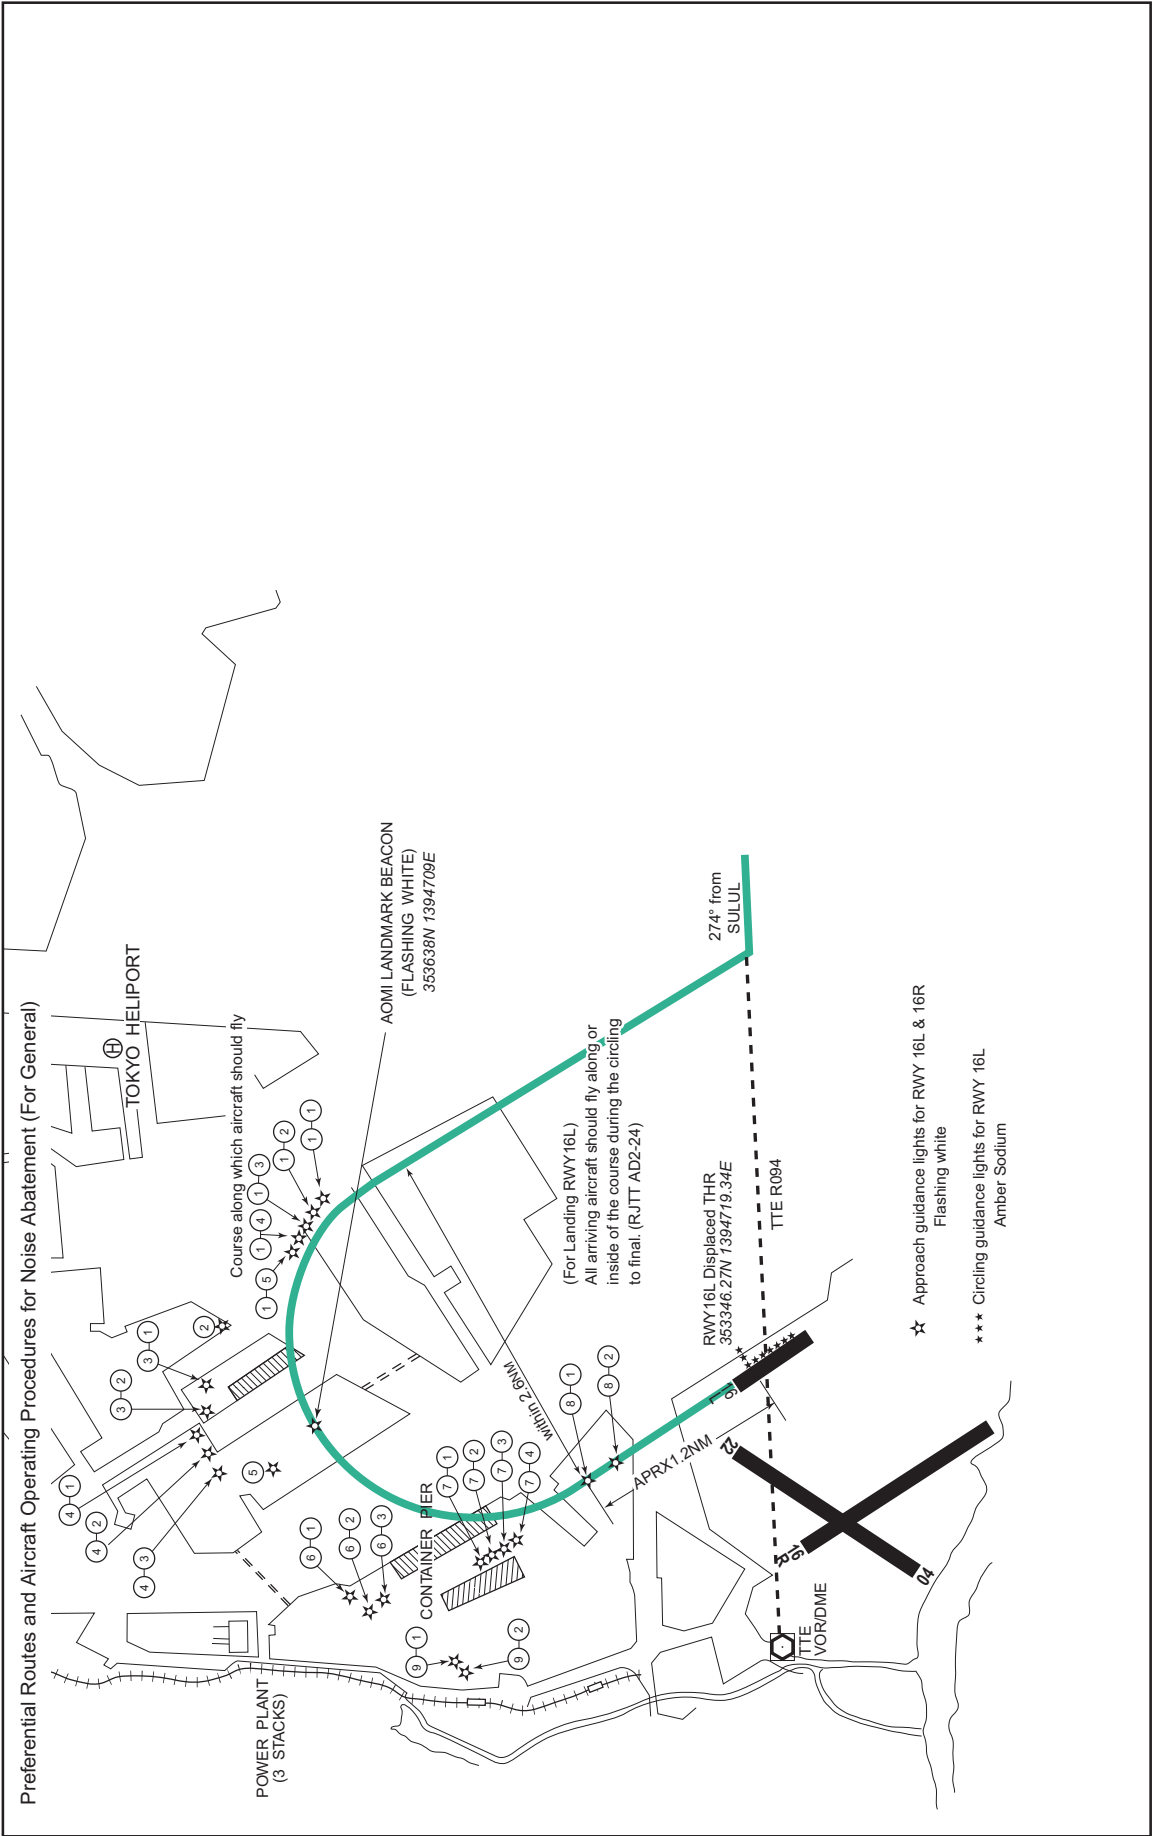

RJTT AD 2.22 FLIGHT PROCEDURES

1. TAKE OFF MINIMA

	RWY	ACFT CAT	REDL & RCLL		REDL or RCLL or RCL Marking		NIL (DAYTIME ONLY)	
			RVR	VIS	RVR	VIS	RVR	VIS
Multi-Engine ACFT with TKOF ALTN AP FILED	04	A,B,C,D	-	400m	-	400m	-	500m
	22	A,B,C,D	400m	400m	400m	400m		
	05	A,B,C,D	400m	400m	400m	400m		
	16R	A,B,C,D	400m	400m	400m	400m		
	34L	A,B,C,D	400m	400m	400m	400m		
	16L	A,B,C	400m *200m **150m	400m *200m	400m *250m	400m *250m		
		D	400m *250m **200m	400m *250m	400m *300m	400m *300m		
	34R	A,B,C	400m *200m **150m	400m *200m	400m *250m	400m *250m		
		D	400m *250m **200m	400m *250m	400m *300m	400m *300m		
	OTHER	04 22 05 16R 34L 16L 34R	A,B,C,D	AVBL LDG MINIMA				

*APPLICABLE WHEN LVP/LVPD IN FORCE

**APPLICABLE WHEN LVP/LVPD IN FORCE and MULTIPLE RVRs AVAILABLE

2. Trajectorized Airport Traffic Data Processing System (TAPS)

東京アプローチの指示のもとに、当該進入管制区を飛行する航空機は、モード A/3 の二次レーダー個別コード及びモード C による応答を指示される。

二次レーダー個別コードを搭載していない航空機が当該コードによる応答を指示された場合は、管制官に対し、その旨通報すること。

Aircraft flying under control of Tokyo approach control in the approach control area will be instructed to reply with discrete code on Mode A/3 and Mode C.

If an aircraft with non-discrete code capability be instructed to reply with the discrete code, it shall report a controller accordingly.

3. Lost communication procedures for arrival aircraft under radar navigational guidance

If radio communications with Tokyo Approach/Radar are lost for 1 minute, squawk Mode A/3 Code 7600 and;

- (I) 1) Contact TOKYO Tower.
2) If unable, proceed in accordance with visual flight rules.
3) If unable,
a) When RWY34L or RWY34R in use, proceed to SAPTI at last assigned altitude or 4,000feet whichever is higher, and execute instrument approach for RWY34R.
b) When RWY22, RWY23, RWY16L or RWY16R in use, proceed to SMILE at last assigned altitude or 4,000feet whichever is higher, and execute instrument approach for RWY23.
- (II) Procedures other than above will be issued when situation required.

4. Flight restrictions

Unless otherwise authorized by ATC.


Aircraft other than the arriving at and/or departing from Tokyo International Airport are required not to fly over the Kawasaki Petrochemical Complex area, and even in case of flying over the area, not to fly below an altitude of 3,000feet.
(See AD2.24 OTHER CHART ATTACHMENT 1)

5. Special VFR flight route for helicopter (See below chart)

SPECIAL VFR FLIGHT ROUTE FOR HELICOPTER

Special VFR flight route for helicopter in
the TOKYO Control ZONE

Daishibashi - (along the Tama River) - Marukobashi

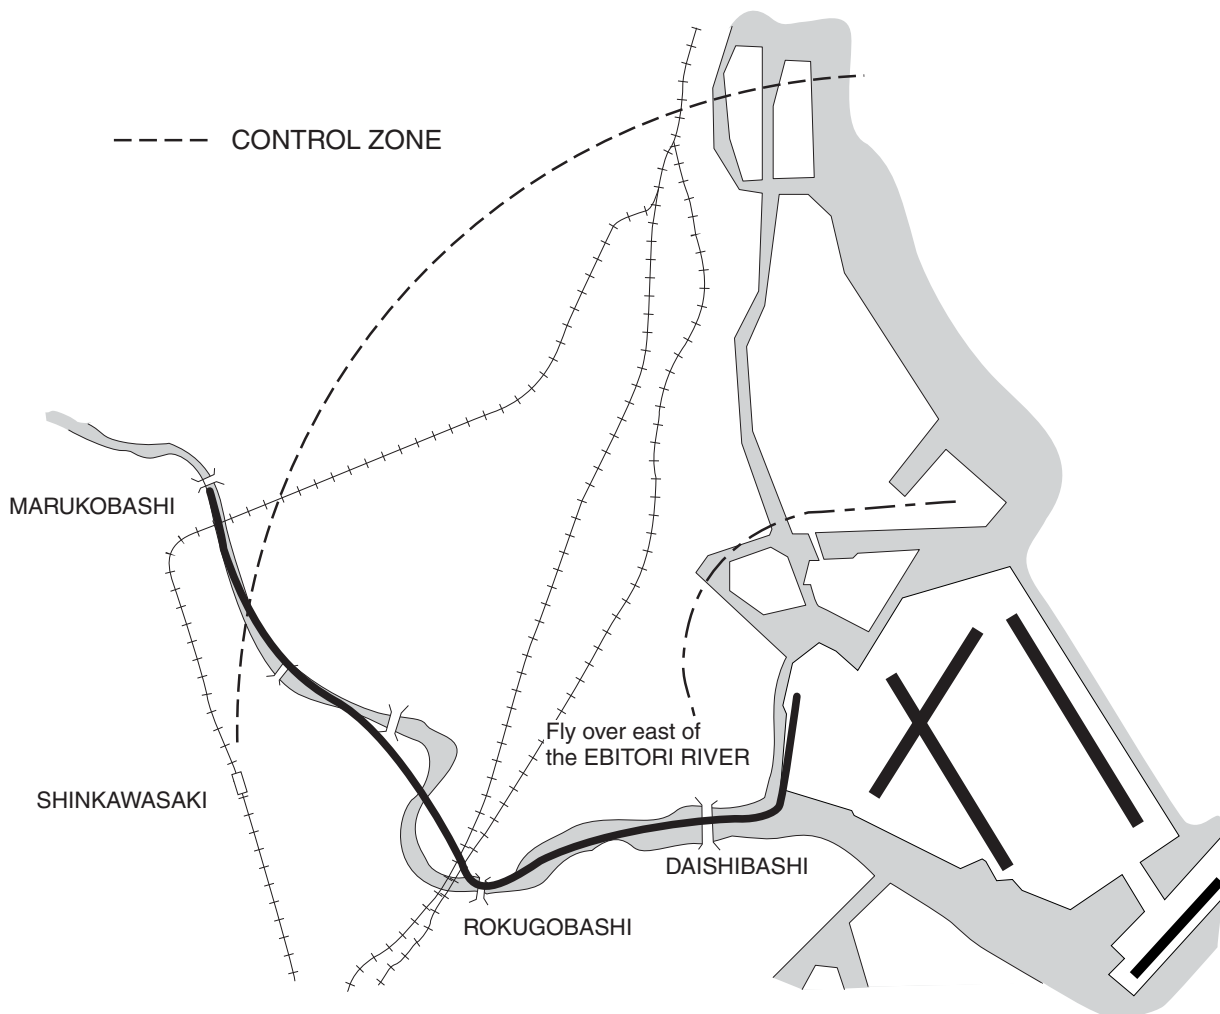

6. SIMULTANEOUS INDEPENDENT LDA APPROACHES (SILA)

1) Applicable instrument approach procedures for SILA

LDA W RWY22(with VPT), LDA W RWY23(with VPT), LDA Z RWY22(with VPT), LDA Z RWY23(with VPT), LDA X RWY22(with VPT) and LDA X RWY23(with VPT)

Note: "VPT" stands for Visual maneuver with Prescribed Track that meets the criteria of ICAO PANS-OPS (Doc.8168).

A specific track for visual maneuvering after the MAPt is prescribed in these procedures.

2) Conditions

SILA, where radar separation minima between aircrafts on adjacent localizer courses and VPTs are not prescribed, will be conducted when the following conditions are met. However, SILA shall not be applied under certain adverse weather conditions which might affect safe operations (e.g. windshear on the final approach course, etc.).

A. No Transgression Zone (NTZ) 610m wide is established equidistant between localizer courses and is depicted on the radar display.

B. LOC, radar, and appropriate frequencies are operating normally.

Note: Visual aids associated with the runway used for the prescribed track (i.e. ALS, PAPI) are shown on the chart with their main characteristics (i.e. slope of the PAPI).

3) Information of SILA

Aircraft shall be advised that SILA are in force. This information may be provided through the ATIS broadcasts.

"Simultaneous LDA approaches to RWY22 and RWY23 are in progress."

4) Radar monitoring

Radar monitoring is provided for each simultaneous LDA approach to ensure aircraft do not deviate from the localizer course as follows;

A. Aircraft shall be provided a minimum of 1,000ft vertical separation or a minimum of 3NM radar separation until intercepting localizer course.

The assigned altitude shall be maintained until final approach fix (FAF).

B. Radar monitoring is continued even after instructed to contact Tower frequency and instructions prescribed in C are provided on the frequency when necessary.

C. Aircraft observed to overshoot the turn-on or continue on a track which will penetrate the NTZ will be instructed to return to the correct localizer course. If a deviating aircraft fails to respond to such instructions or is observed penetrating the NTZ, the aircraft on the adjacent localizer course shall be instructed to avoid the deviating aircraft.

D. Radar monitoring will automatically be terminated when the aircraft has passed the coverage of NTZ (RWY22: IKL 2.7DME / RWY23: MAPt).

Note: ATC will not inform pilots when radar monitoring is terminated.

5) Go around procedure

When going around, pilot should report ATC as soon as practicable, and proceed in accordance with the go around procedure described on the chart until receiving ATC instructions.

6) Response to "TRAFFIC ALERT"

All breakouts in response to ATC's instructions shall be accomplished quickly. These instructions will be issued on TOWER FREQUENCY when situation required.

7. SIMULTANEOUS INDEPENDENT RNP APPROACHES (SIRA)

1) Applicable instrument approach procedures for SIRA

RNP RWY16L, RNP RWY16R

2) Conditions

SIRA, where radar separation minima between aircrafts on adjacent approach courses are not prescribed, will be conducted when the following conditions are met. However, SIRA shall not be applied under certain adverse weather conditions which might affect safe operations (e.g. windshear on the final approach course, etc.).

- A. No Transgression Zone (NTZ) 610m wide is established equidistant between 16R final approach course and 16L final approach course is depicted on the radar display.
- B. Wide Area Multilateration (WAM), radar and appropriate frequencies are operating normally.
- C. Mode S transponder is activating normally. In case of Mode S transponder which has failed or be not equipped, the pilot should inform the ATC facility.

3) Information of SIRA

Aircraft shall be advised that SIRA are in force. This information may be provided through the ATIS broadcasts.

"Simultaneous RNP approaches to RWY16L and RWY16R are in progress."

4) Radar monitoring

Radar monitoring is provided for each simultaneous RNP approach to ensure aircraft do not deviate from the approach course as follows;

- A. Aircraft shall be provided a minimum of 1,000ft vertical separation or a minimum of 3NM radar separation until the following point;
: Intersection of an extension line of the north short side of NTZ with RWY 16L/R RNP approach courses.
- B. Radar monitoring is continued even after instructed to contact Tower frequency and instructions prescribed in C are provided on the frequency when necessary.
- C. Aircraft observed to deviate from the approach course or continue on a track which will penetrate the NTZ will be advised by ATC. If a deviating aircraft is observed penetrating the NTZ, the aircraft on the adjacent approach course shall be instructed to avoid the deviating aircraft.
- D. Radar monitoring will automatically be terminated when visual separation is applied by ATC.

Note: ATC will not inform pilots when radar monitoring is terminated.

5) Response to "TRAFFIC ALERT"

All breakouts in response to ATC's instructions shall be accomplished quickly. These instructions will be issued on TOWER FREQUENCY when situation required.

8. Category II / III Operations at Tokyo International Airport

1) Facilities

The following facilities are available:

Runway 34R
(1) ILS Runway 34R-CAT III (2) Lighting system Runway 34R-CAT III (3) RVR by forward-scatter meters (the touchdown zone, the mid-point and stop-end of the runway)

2) Conditions

A. The following systems must be operative:

For ILS Z RWY34R approach (CAT II) For ILS Y RWY34R approach (CAT II)	For ILS Z RWY34R approach (CAT III) For ILS Y RWY34R approach (CAT III)
(1) ILS comprising; • ILS-LOC 34R with standby transmitter • ILS-GP 34R with standby transmitter (When any standby transmitters unserviceable, downgrade ILS-CAT I.) • IM 34R (When IM unserviceable, RA could be used as an alternate method.) • ILS-DME 34R	(1) ILS comprising; • ILS-LOC 34R with standby transmitter (including far field monitor) • ILS-GP 34R with standby transmitter (When any standby transmitters or far field monitor unserviceable, downgrade ILS-CAT I.) • ILS-DME 34R
(2) Lighting systems comprising; • PALS 34R (including side row barrettes) • High INTST REDL • High INTST RTHL • RCLL and RTZL	(2) Lighting systems comprising; • PALS 34R (including side row barrettes) • High INTST REDL • High INTST RTHL • RCLL and RTZL
(3) Secondary power supply	(3) Secondary power supply
(4) RVR by forward-scatter meters at the touchdown zone and either (the mid-point or stop-end of the runway).	(4) RVR by forward-scatter meters at the touchdown zone, mid-point and stop-end of the runway.

B. The following information must be currently available:

- 1) Surface wind speed and direction
- 2) RVR

C. ITEM A and/or B are not met, the relevant information will be notified to the pilots as soon as practicable.

3) Operating Minimum

Approach minima stated AD2.24 (Instrument Approach Chart) are observed.

4) LVP

LVP will be available when the following conditions are met:

- 1) Ceiling is at or less than 200ft and/or RVR is at or less than 600m.
- 2) Facilities listed 1) above are operational.
- 3) ILS Critical Area is protected.

In order to protect Critical Area for the succeeding arrival aircraft, an arrival aircraft may be given the following instruction by ATC:

“REPORT OUT OF ILS CRITICAL AREA”

The exit taxiway center line lights are fixed alternate green and yellow inside the ILS Critical Area. If an aircraft is given the above instruction, she is expected to advise the ATC when the taxiway center line lights change from alternate green and yellow to steady green.

5) Approval for CAT II / III Operations

Operators must obtain operational approval from the State of Registry or the State of Operator, as appropriate, to conduct CAT II / III Operations. (See GEN1.5)

9. LVTO at Tokyo International Airport

1) Facilities

The following facilities are available:

RWY 16L	RWY 34R
• Lighting system RWY 16L for LVTO • RVR by forward-scatter meters (the touchdown zone, the mid-point and stop-end of the runway)	• Lighting system RWY 34R for LVTO • RVR by forward-scatter meters (the touchdown zone, the mid-point and stop-end of the runway)

2) Conditions

A. The following systems must be operative:

For LVTO
(1) Lighting system comprising; • High INTST REDL • High INTST RENL • RCLL
(2) Secondary power supply

B. The following information must be currently available:

- a) Surface wind speed and direction
- b) RVR or VIS

C. ITEM A and/or B are not met, the relevant information will be notified to the pilots as soon as practicable.

3) Operating Minima

Take-off minima stated in AD2.22 (TAKE-OFF MINIMA) are observed.

4) LVP/LVPD

LVP/LVPD will be available when the following conditions are met:

- a) RVR is at or less than 600m.
- b) Facilities listed 1) above are operational.

RJTT AD 2.23 ADDITIONAL INFORMATION

1. TV tower
TV tower 1,148 feet MSL located 6NM NNW of TOKYO VOR/DME (TTE)
2. Vehicle traffic line
White line markings on apron area.
3. Schedule maintenance on the runway
All RWY are subject to closing for maintenance purpose as follows. See NOTAM RJTT for further detailed information.

FACILITY	PLANNING PERIOD	REMARKS
RWY 16R/34L	MON, WED, SAT, SUN 1430-2100	AVBL CROSS RWY 16R/34L VIA TWY OTHER THAN CLSD TWY
RWY 04/22	MON, TUE, THU, FRI, SUN 1430-2100	AVBL CROSS RWY 04/22 VIA TWY OTHER THAN CLSD TWY
RWY 16L/34R	TUE, THU, FRI 1530-2130	
RWY 05/23	WED, SAT 1430-2100	

4. Bird-patrollers will patrol on perimeter and/or maintenance road around RWYs and occasionally use shotgun and shell crackers to get rid of birds harmful to air safety. Bird-patrollers may enter LDG strips not nearer than 50M FM RWY edges and 20M FM TWY edges to pick up birds being shot down HJ.
5. Positions not visible from control tower.
 - a) Aircraft stand
From NR201 to NR205.
 - b) Taxiway
A part of TWY A(from spot NR201 to spot RU6) and a part of TWY W(from spot NR201 to NR203).

6. 空港付近の船舶の航行

- 6.1 RWY04/22 及び RWY05/23 の北東側に船舶高基準面と許容高が設定される。
- 6.2 航空機の運航に影響がある高さの船舶が、RWY22 または RWY23 の進入表面下を航行することがあり、これらの船舶は空港当局により監視されている。必要に応じて以下の対応が取られる。
(添付図参照)

東京西航路

- 1) 当該進入表面下に設定された東京西航路を航行する船舶の情報は、RJTT NOTAM または ATC により提供される。
- 2) 船舶が A 点と B 点または C 点と D 点の間を通過する間、下記の制限がかかる。
 - a) RWY04 及び RWY05 からの離陸は許可されない。
 - b) RWY22 及び RWY23 への到着機に対して空中待機または復行が指示されることがある。

側傍海域

船舶が、東京西航路と進入灯の間の進入表面下を通過する場合には、船舶の高さ及び位置により、以下の制限がかかる。

- a) RWY04 及び RWY05 からの離陸は許可されない。
- b) RWY22 及び RWY23 への到着機に対して復行が指示されることがある。

6. Passage of vessel in the vicinity of the airport

- 6.1 Base level of Vessel height and Admissible height is set at Northeast side of RWY 04/22 or RWY 05/23.
- 6.2 The Vessel with height which affects aircraft operations may pass across beneath the approach surface of RWY22 or RWY23, and those vessels are monitored by Airport authority. The following action will be taken when necessary.
(see attached chart)

Tokyo West Passage Route

- (1) The information of the vessel passing along the Tokyo West Passage Route, which is laid down beneath the approach surfaces, will be provided by NOTAM RJTT or ATC.
- (2) While the vessel is between point A and B or between point C and D, following restrictions are taken;
 - a) Take-off clearance is not issued for RWY04 or RWY05.
 - b) Holding or Go-around instruction may be issued for arrival aircraft for RWY22 or RWY23.

Adjacent sea area

When a vessel passes across beneath approach surface between approach lights and Tokyo West Passage Route, depending on height and position of the vessel, following restrictions are taken;

- a) Take-off clearance is not issued for RWY04 or RWY05.
- b) Go-around instruction may be issued for RWY22 or RWY23.

(断面図)

- 航空機の運航に影響がある高さの船舶：
側傍海域にあっては、N.H.H.W.L + 24.0m以上の船舶

東京西航路にあっては、N.H.H.W.L + 56.3m以上の船舶

- N.H.H.W.L：満潮時でこれより高くならないと想定される潮位

(profile view)


- The Vessel height which affects aircraft operations adjacent sea area :

Vessel height is at or above N.H.H.W.L + 24.0m

Tokyo West Passage Route :

Vessel height is at or above N.H.H.W.L + 56.3m

- N.H.H.W.L: Nearly Highest High Water Level

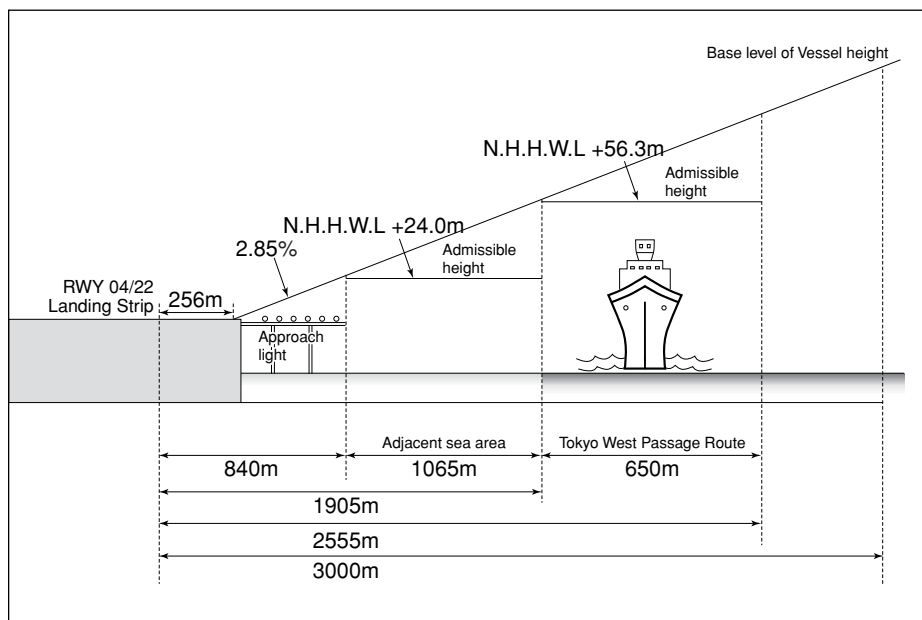

(断面図)

- 航空機の運航に影響がある高さの船舶：
側傍海域にあっては、N.H.H.W.L + 28.4m以上の船舶

東京西航路にあっては、N.H.H.W.L + 53.7m以上の船舶

- N.H.H.W.L：満潮時でこれより高くならないと想定される潮位

(profile view)


- The Vessel height which affects aircraft operations adjacent sea area:

Vessel height is at or above N.H.H.W.L + 28.4m


Tokyo West Passage Route :

Vessel height is at or above N.H.H.W.L + 53.7m

- N.H.H.W.L: Nearly Highest High Water Level

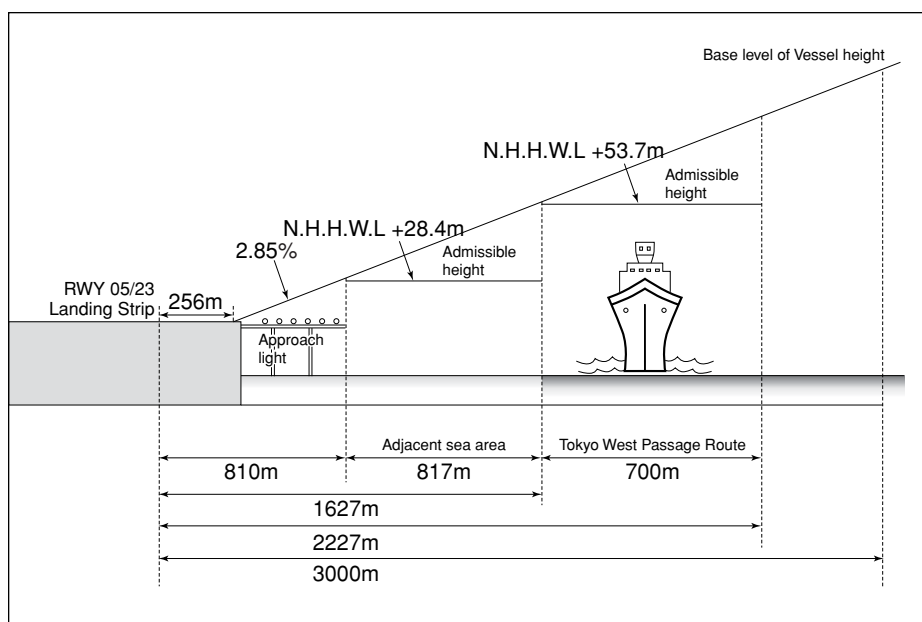

Tokyo West passage Route and Adjacent sea area

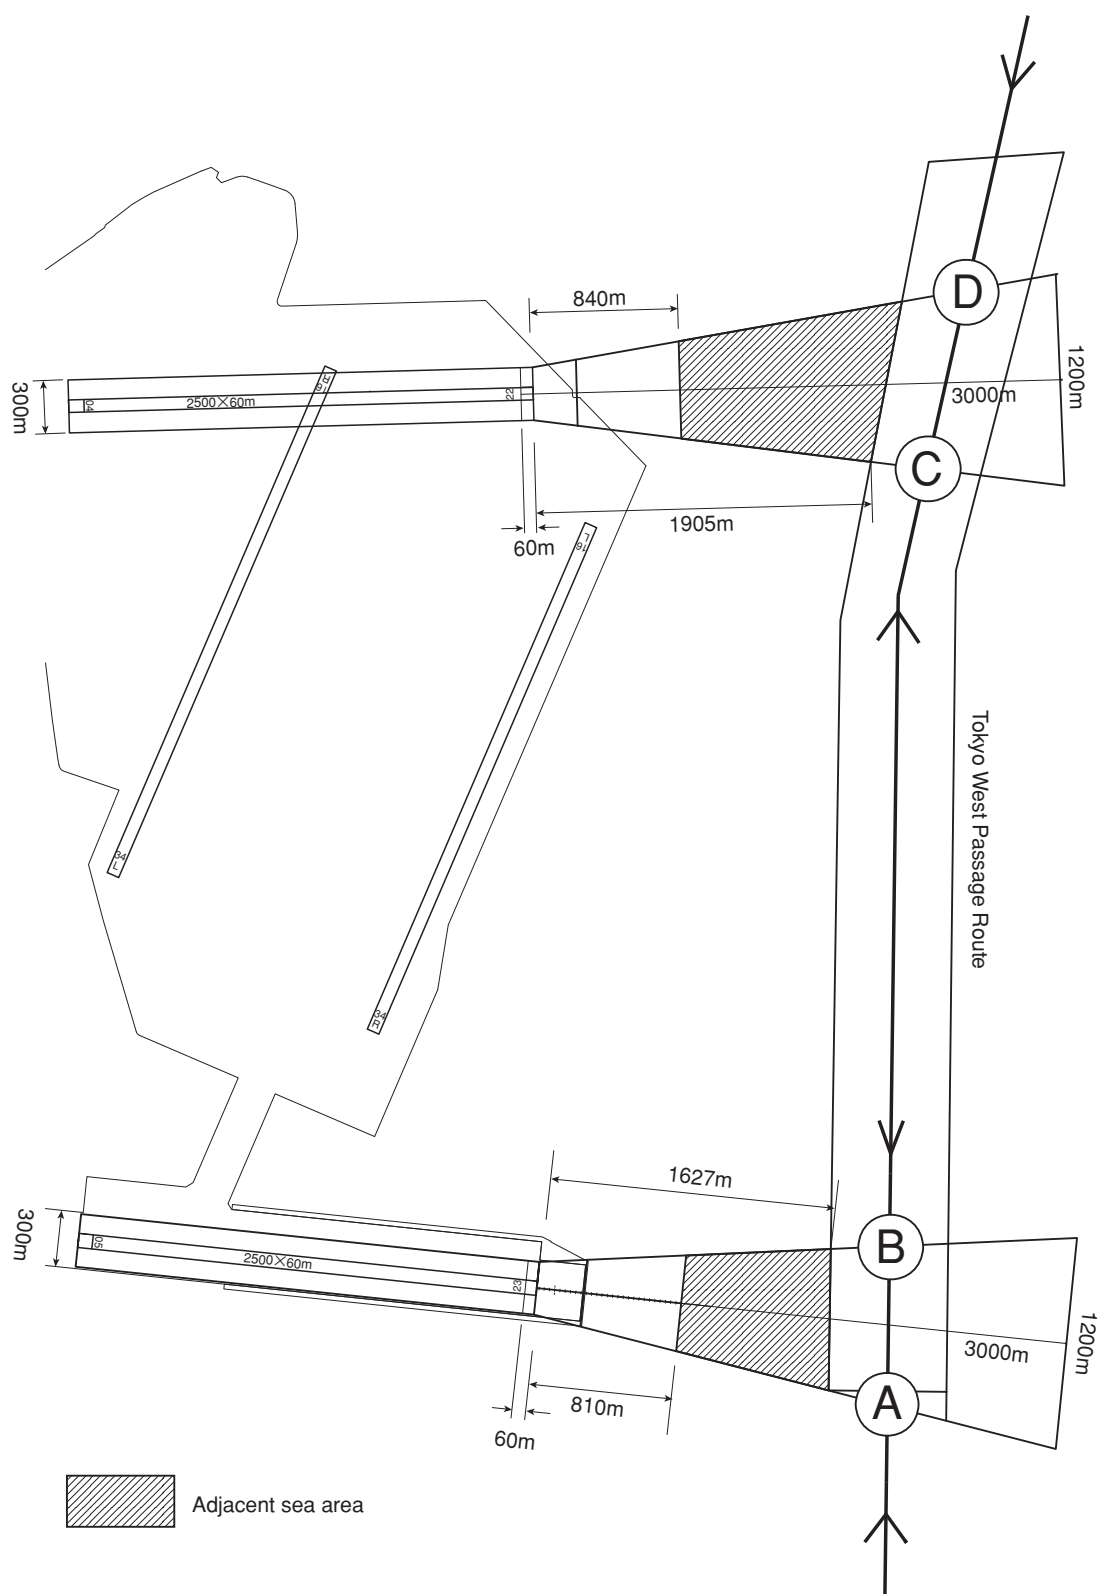

7. 航空機重量制限

滑走路 05/23 を使用する航空機においては、航空機重量、主脚荷重及び輪荷重の全てが下表の値を超えてはならない。

航空機重量		主脚荷重		輪荷重	
(lb)	(kg)	(lb/脚)	(kg/脚)	(lb/輪)	(kg/輪)
881,800	400,000	307,500	139,500	57,700	26,200

注) RJTT AD2.20.1.2 LOCAL TRAFFIC REGULATIONS (3), (12) 及び AD2.21.2 Noise Preferential Runways を参照

誘導路 Q を使用する航空機においては、コード D までの航空機（翼幅が 52m 未満）の使用に限ることとし、航空機重量、主脚荷重及び輪荷重の全てが下表の値を超えてはならない。

航空機重量		主脚荷重		輪荷重	
(lb)	(kg)	(lb/脚)	(kg/脚)	(lb/輪)	(kg/輪)
570,900	259,000	215,300	97,700	49,100	22,300

7. Aircraft weight restriction

When using RWY 05/23, all of the values of aircraft (aircraft weight, main gear load AND wheel load) shall not exceed the values listed in the table below.

Aircraft weight		Main gear load		Wheel load	
(lb)	(kg)	(lb/gear)	(kg/gear)	(lb/wheel)	(kg/wheel)
881,800	400,000	307,500	139,500	57,700	26,200

There are other restrictions for using runway(see RJTT AD2.20.1.2 LOCAL TRAFFIC REGULATIONS (3), (12) and RJTT AD2.21.2 Noise Preferential Runways.).

When passing TWY Q, the wing span of aircraft shall be less than 52m and all of the values of aircraft (aircraft weight, main gear load AND wheel load) shall not exceed the values listed in the table below.

Aircraft weight		Main gear load		Wheel load	
(lb)	(kg)	(lb/gear)	(kg/gear)	(lb/wheel)	(kg/wheel)
570,900	259,000	215,300	97,700	49,100	22,300

8. EMAS (Engineered Materials Arresting Systems)

EMAS, which has high energy-absorbing performance, is located in the overrun area and RESA of the runway. EMAS will exert deceleration force on the landing gear to reduce the damage in case of overrun of an airplane. EMAS is installed with overrun area marking. These systems do not affect the normal landing and takeoff of airplanes.

9. 双方向に設置されている ILS の輻射について

1) ILS 16L / 34R

LVP 適用時を除き、RWY16L および 34R ILS は同時に輻射する。
(RJTT AD2.22 8.Category II /III Operations at Tokyo International Airport を参照)

2) ILS 16R / 34L

RWY16R 運用時を除き、RWY16R および 34L ILS は同時に輻射する。

9. Two separate ILS radiate at opposite ends of a single runway

1) ILS 16L / 34R

RWY16L and 34R ILS radiate simultaneously except when LVP are applied.
(See RJTT AD2.22 8.Category II /III Operations at Tokyo International Airport)

2) ILS 16R / 34L

RWY16R and 34L ILS radiate simultaneously except when operating RWY16R.

RJTT AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome Chart-1
 Aerodrome Chart-2
 Aircraft Parking/Docking Chart
 Aerodrome Obstacle Chart-ICAO type A (RWY16R/34L)
 Aerodrome Obstacle Chart-ICAO type A (RWY22)
 Aerodrome Obstacle Chart-ICAO type A (RWY04)
 Aerodrome Obstacle Chart-ICAO type A (RWY34R)
 Aerodrome Obstacle Chart-ICAO type A (RWY16L)
 Aerodrome Obstacle Chart-ICAO type A (RWY05/23)
 Aerodrome Obstacle Chart-ICAO type B
 Precision Approach Terrain Chart (RWY34R)
 Standard Departure Chart - Instrument (SEKIYADO)

 Standard Departure Chart - Instrument (VISIP)
 Standard Departure Chart - Instrument (OPPAR)
 Standard Departure Chart - Instrument (ISOGO)
 Standard Departure Chart - Instrument (VAMOS-RNAV)
 Standard Departure Chart - Instrument (LAXAS-RNAV)
 Standard Departure Chart - Instrument (NINOX-RNAV)
 Standard Departure Chart - Instrument (TIARA-A/B/C-RNAV)
 Standard Departure Chart - Instrument (BEKLA-A/B/C-RNAV)
 Standard Departure Chart - Instrument (ROVER-A/B/C-RNAV)
 Standard Departure Chart - Instrument (RUTAS-RNAV)
 Standard Departure Chart - Instrument (GUSRO-RNAV)

 Standard Arrival Chart - Instrument (SULPU-1S/1D, OLRAT-1A/1B)
 Standard Arrival Chart - Instrument (OSHIMA-1A/1K/2C-RNAV)
 Standard Arrival Chart - Instrument (AKSEL-1A/1K/2C-RNAV)
 Standard Arrival Chart - Instrument (AROSA-1A/1K/2C-RNAV)
 Standard Arrival Chart - Instrument (GODIN -2A/2K/1C-RNAV)
 Standard Arrival Chart - Instrument (POLIX-2A/2K/1C-RNAV)
 Standard Arrival Chart - Instrument (OSHIMA, AKSEL, AROSA-2H-RNAV)
 Standard Arrival Chart - Instrument (GODIN, POLIX-1H-RNAV)
 Standard Arrival Chart - Instrument (OSHIMA-1N/2N-RNAV)
 Standard Arrival Chart - Instrument (OSHIMA-1B/2B-RNAV)
 Standard Arrival Chart - Instrument (AKSEL-1N/2N-RNAV)
 Standard Arrival Chart - Instrument (AKSEL-1B/2B-RNAV)
 Standard Arrival Chart - Instrument (AROSA-1N/2N-RNAV)
 Standard Arrival Chart - Instrument (AROSA-1B/2B-RNAV)
 Standard Arrival Chart - Instrument (GODIN-1S/1D-RNAV)
 Standard Arrival Chart - Instrument (POLIX-1S/1D-RNAV)
 Standard Arrival Chart - Instrument (OSHIMA-L/R-RNAV)
 Standard Arrival Chart - Instrument (AKSEL-L/R-RNAV)
 Standard Arrival Chart - Instrument (AROSA-L/R-RNAV)
 Standard Arrival Chart - Instrument (GODIN-L/R-RNAV)
 Standard Arrival Chart - Instrument (POLIX-L/R-RNAV)
 Standard Arrival Chart - Instrument (OSHIMA, AKSEL, AROSA, MESSE-NIGHT-RNAV)
 Standard Arrival Chart - Instrument (OSHIMA, AKSEL, AROSA, MESSE-V-RNAV)
 Instrument Approach Chart (ILS Z RWY34L)
 Instrument Approach Chart (LOC Z RWY34L)
 Instrument Approach Chart (ILS Y RWY34L)
 Instrument Approach Chart (LOC Y RWY34L)
 Instrument Approach Chart (ILS X RWY34L)
 Instrument Approach Chart (LOC X RWY34L)
 Instrument Approach Chart (VOR RWY34L)
 Instrument Approach Chart (GLS RWY34L)
 Instrument Approach Chart (ILS Z RWY34R(CAT II & III))
 Instrument Approach Chart (LOC Z RWY34R)
 Instrument Approach Chart (ILS Y RWY34R(CAT II & III))
 Instrument Approach Chart (LOC Y RWY34R)
 Instrument Approach Chart (GLS RWY34R)
 Instrument Approach Chart (ILS RWY22)
 Instrument Approach Chart (LOC RWY22)
 Instrument Approach Chart (LDA Z RWY22)
 Instrument Approach Chart (LDA Y RWY22)
 Instrument Approach Chart (LDA X RWY22)
 Instrument Approach Chart (LDA W RWY22)
 Instrument Approach Chart (ILS Z RWY23)
 Instrument Approach Chart (LOC Z RWY23)
 Instrument Approach Chart (ILS Y or LOC Y RWY23)
 Instrument Approach Chart (LDA Z RWY23)

Instrument Approach Chart (LDA Y RWY23)
Instrument Approach Chart (LDA X RWY23)
Instrument Approach Chart (LDA W RWY23)
Instrument Approach Chart (RNP RWY23 (AR))
Instrument Approach Chart (ILS or LOC RWY16R)
Instrument Approach Chart (RNP RWY16R)
Instrument Approach Chart (ILS or LOC RWY16L)
Instrument Approach Chart (RNP RWY16L)
Instrument Approach Chart (VOR A)
Other Chart (HIGHWAY VISUAL RWY34R)
Other Chart (HOLDING PATTERN)
Other Chart (HOLDING PATTERN-RNAV)
Other Chart (Visual REP)
Other Chart (MVA CHART)
Other Chart (LDG CHART)
Other Chart (Kawasaki Petrochemical Complex(ATTACHMENT-1))



AERODROME CHART

CHANGE : Facility renamed (EAST FIRE STATION → SOUTH FIRE STATION).

TOKYO INTERNATIONAL AIRPORT
ELEV 6.4m(21ft)

HS

HS: HOT SPOT / See RJTT AD2.20

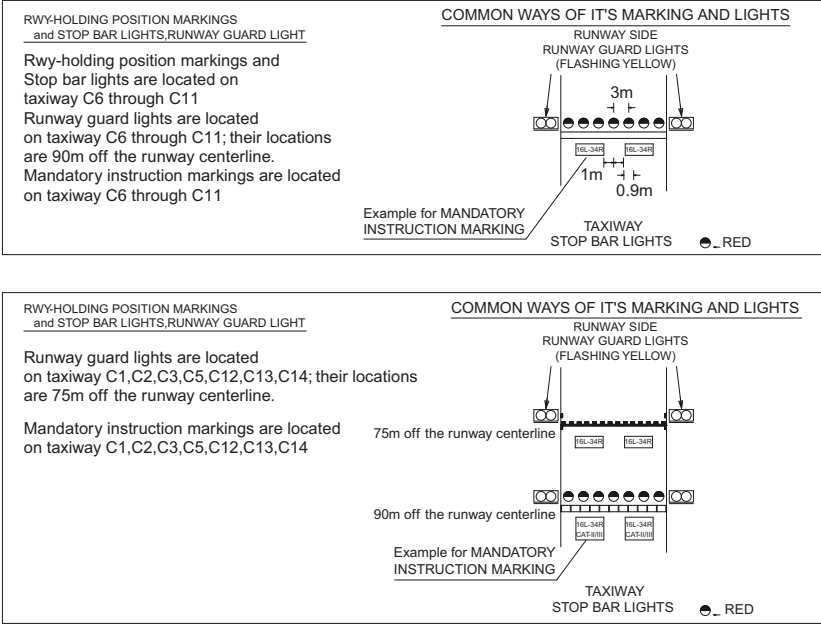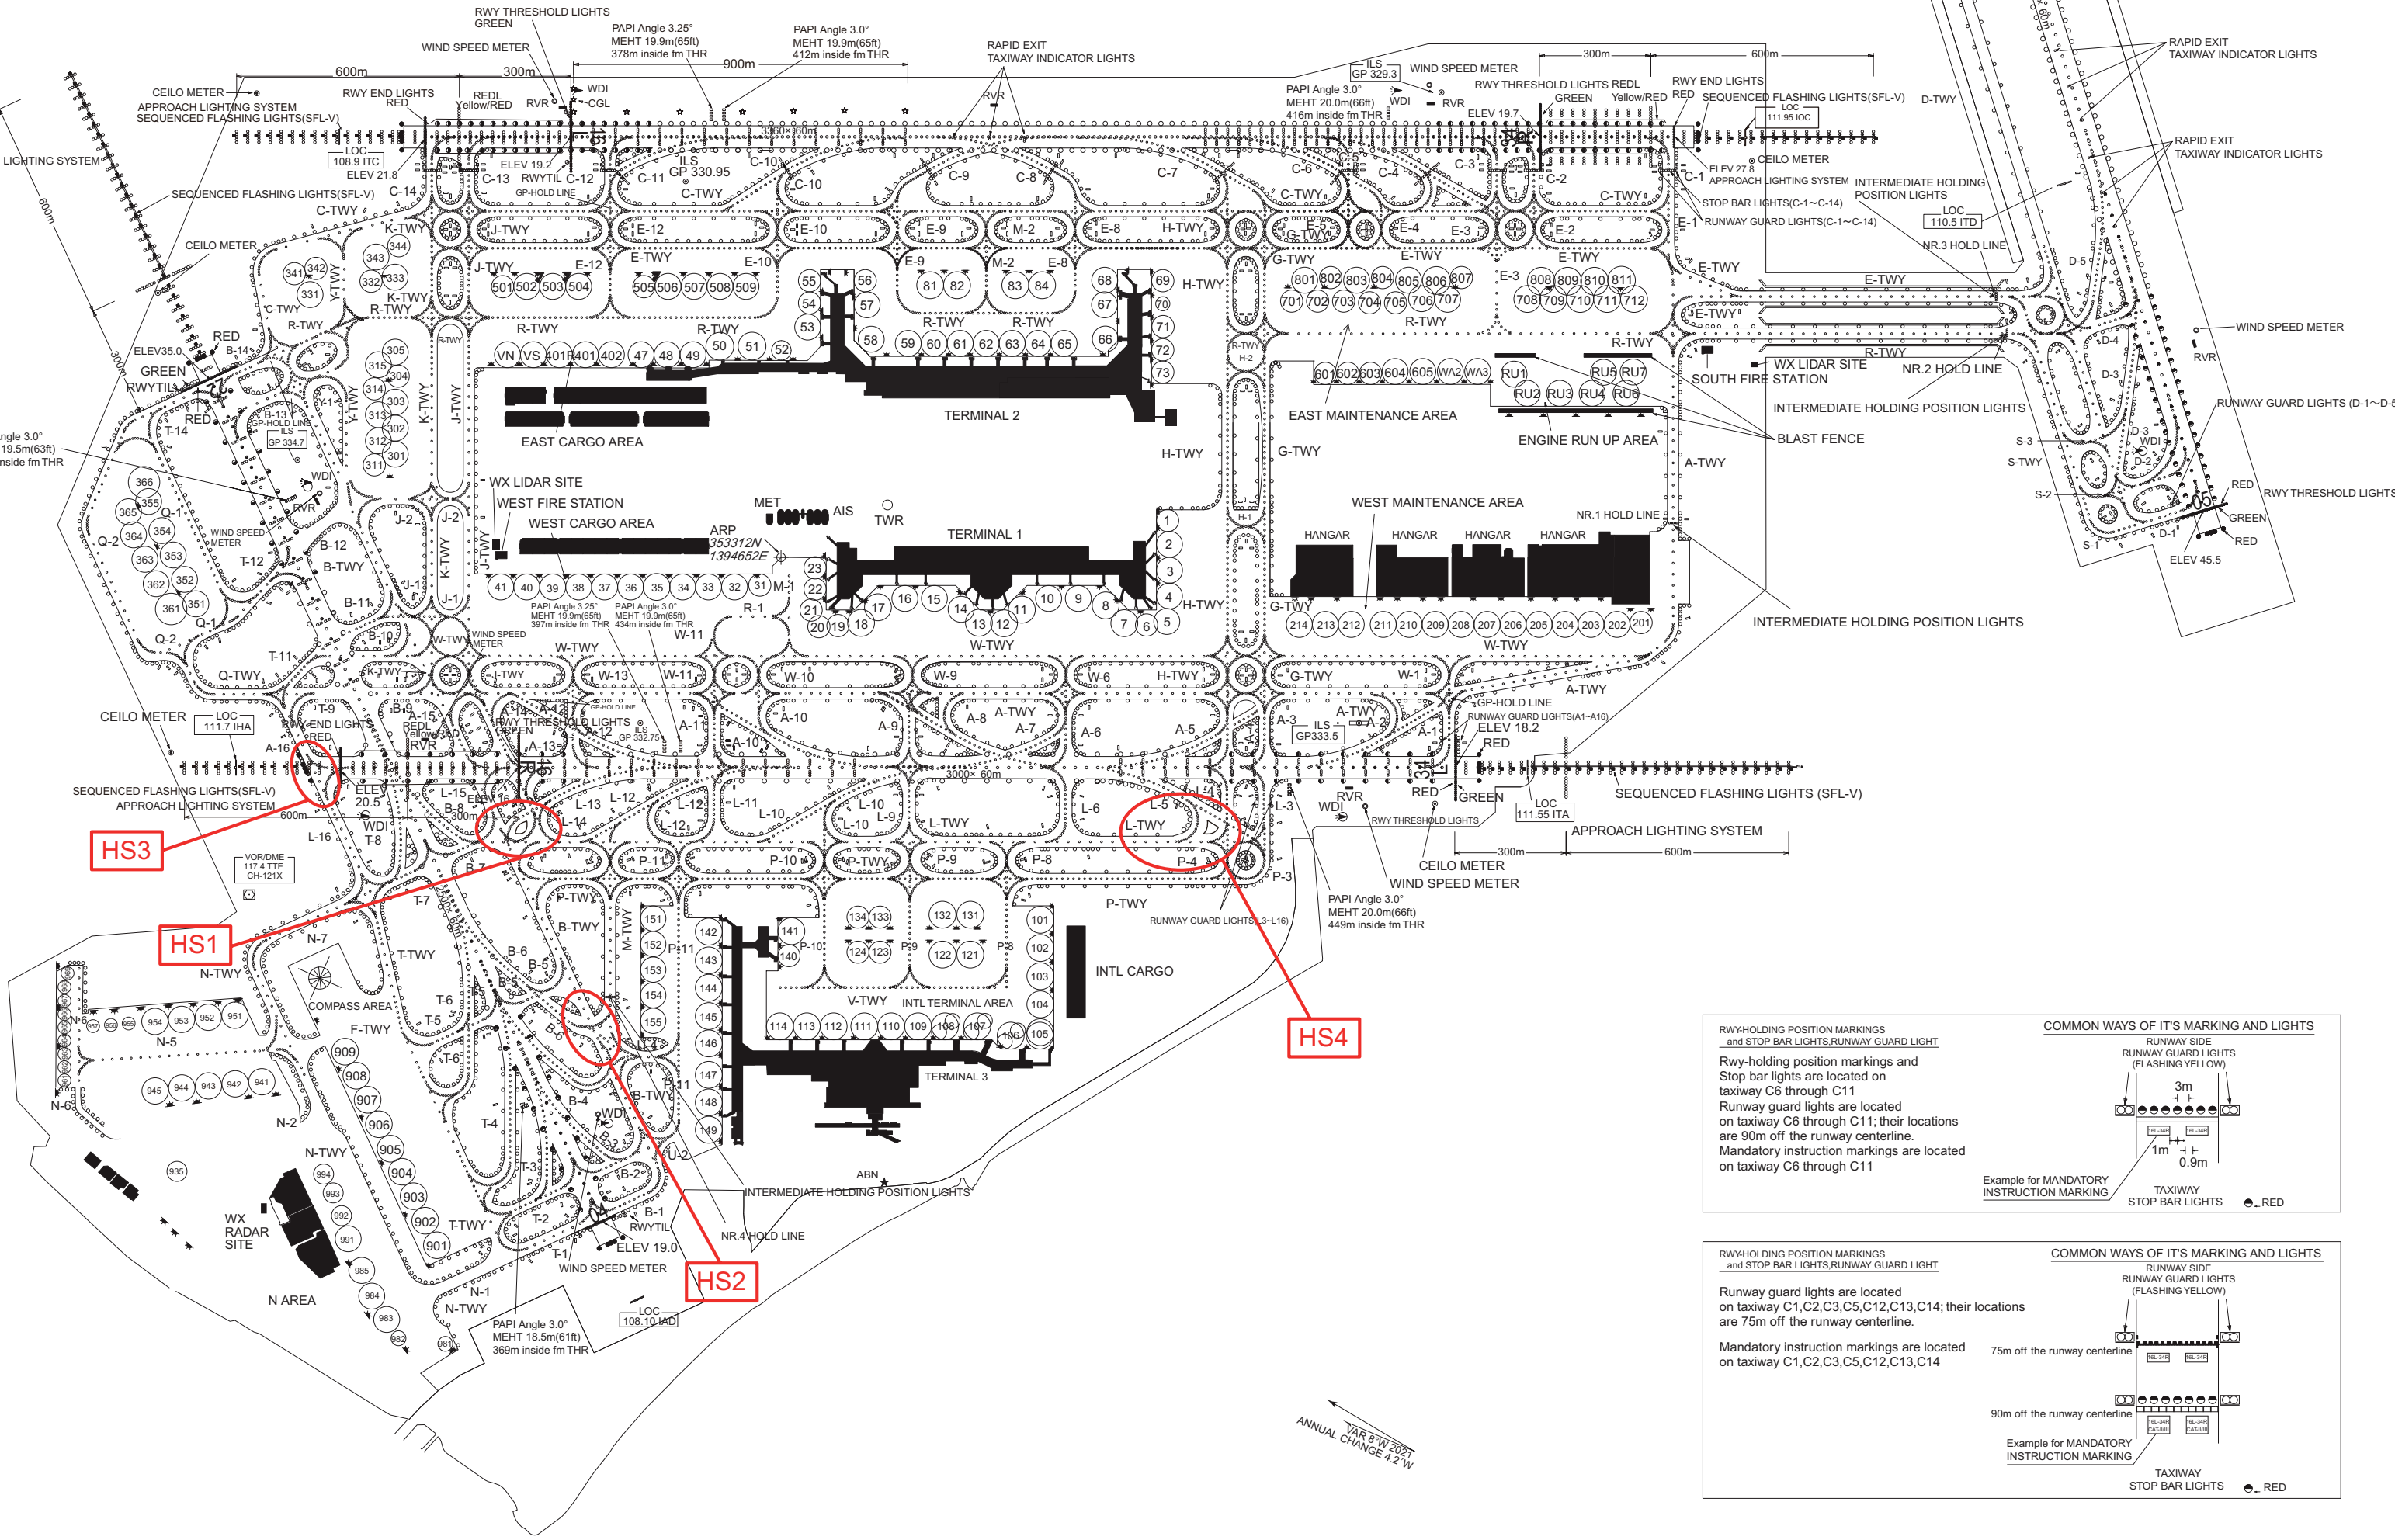


RJTT / TOKYO INTL

AD CHART


CHANGE : Facility renamed (EAST FIRE STATION → SOUTH FIRE STATION).

TOKYO INTL AP
ELEV 6.4m(21ft)

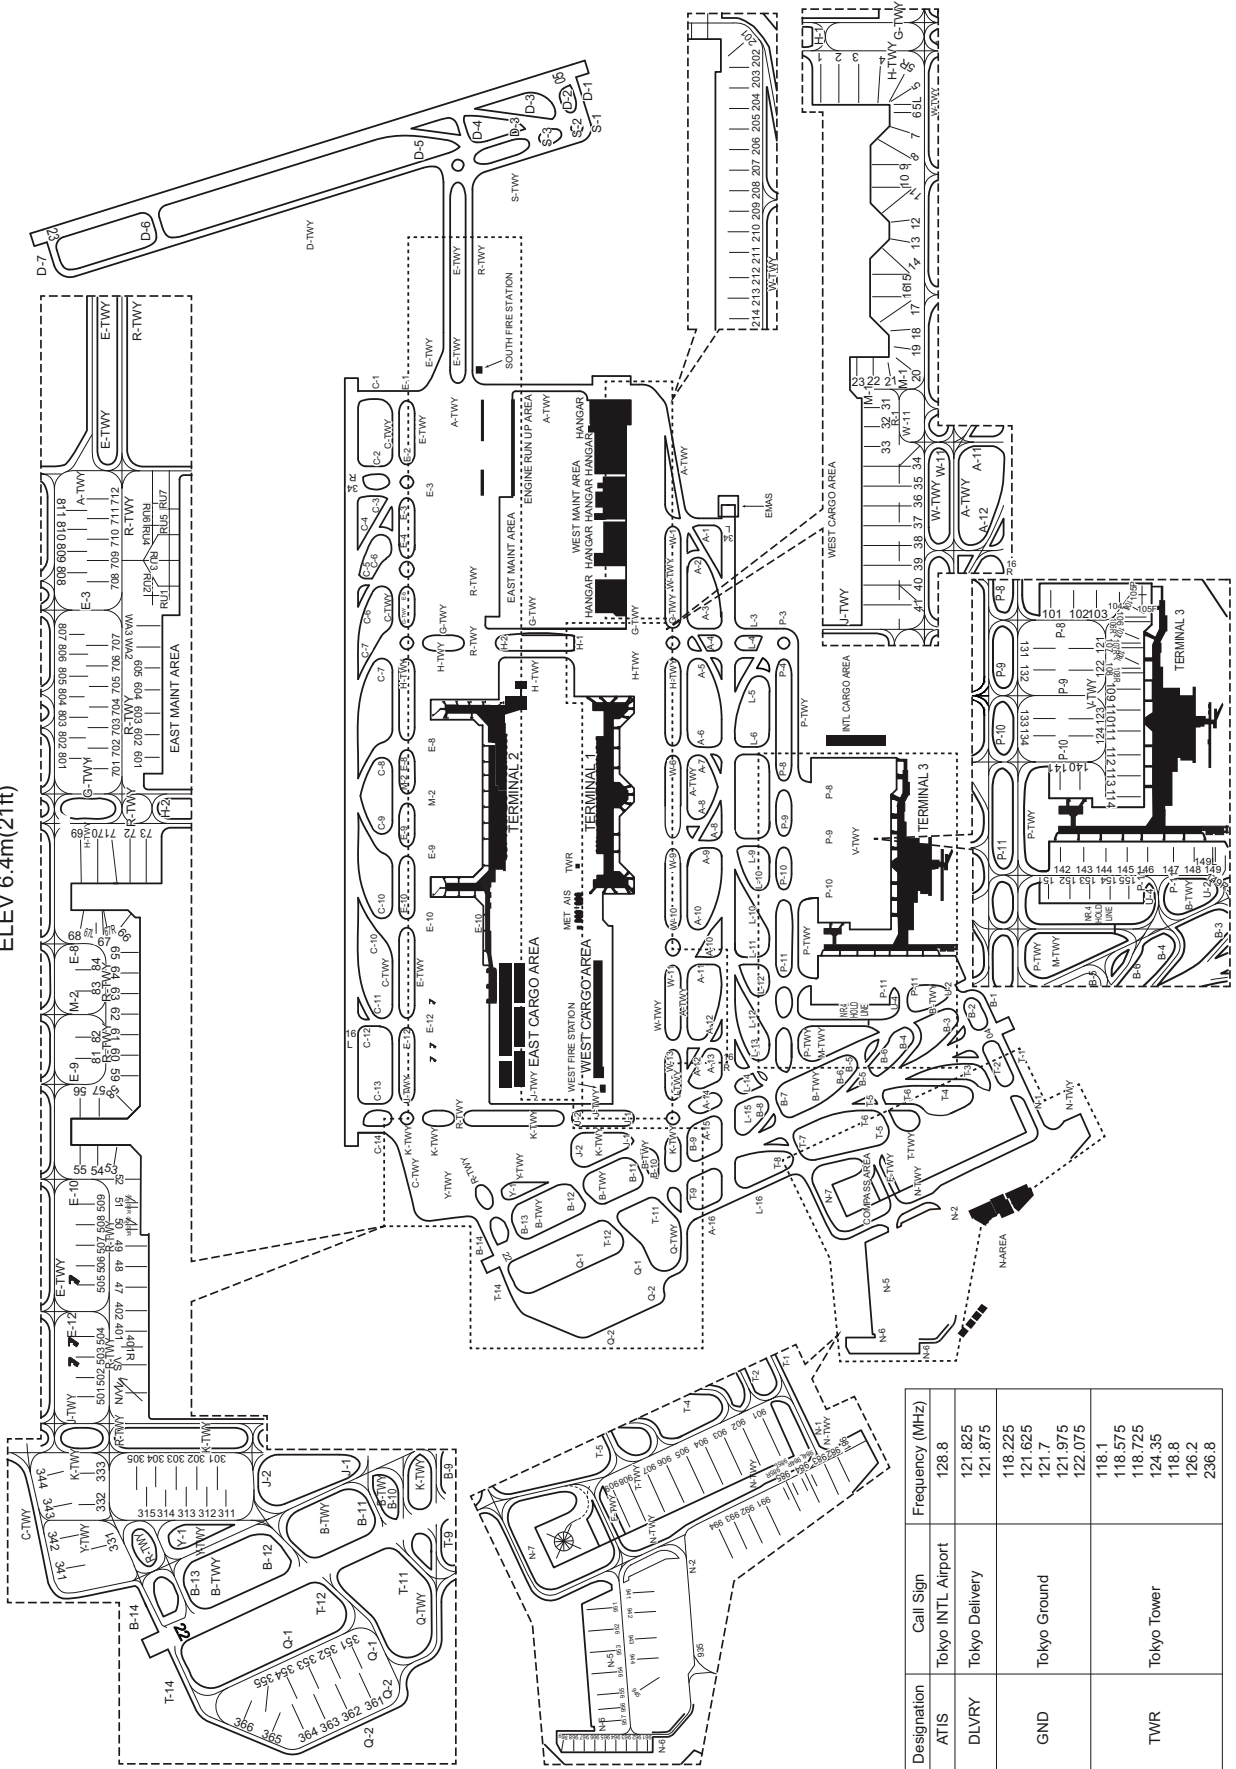

INTENTIONALLY LEFT BLANK

TAXIING GUIDE LINE AND PARKING AREAS

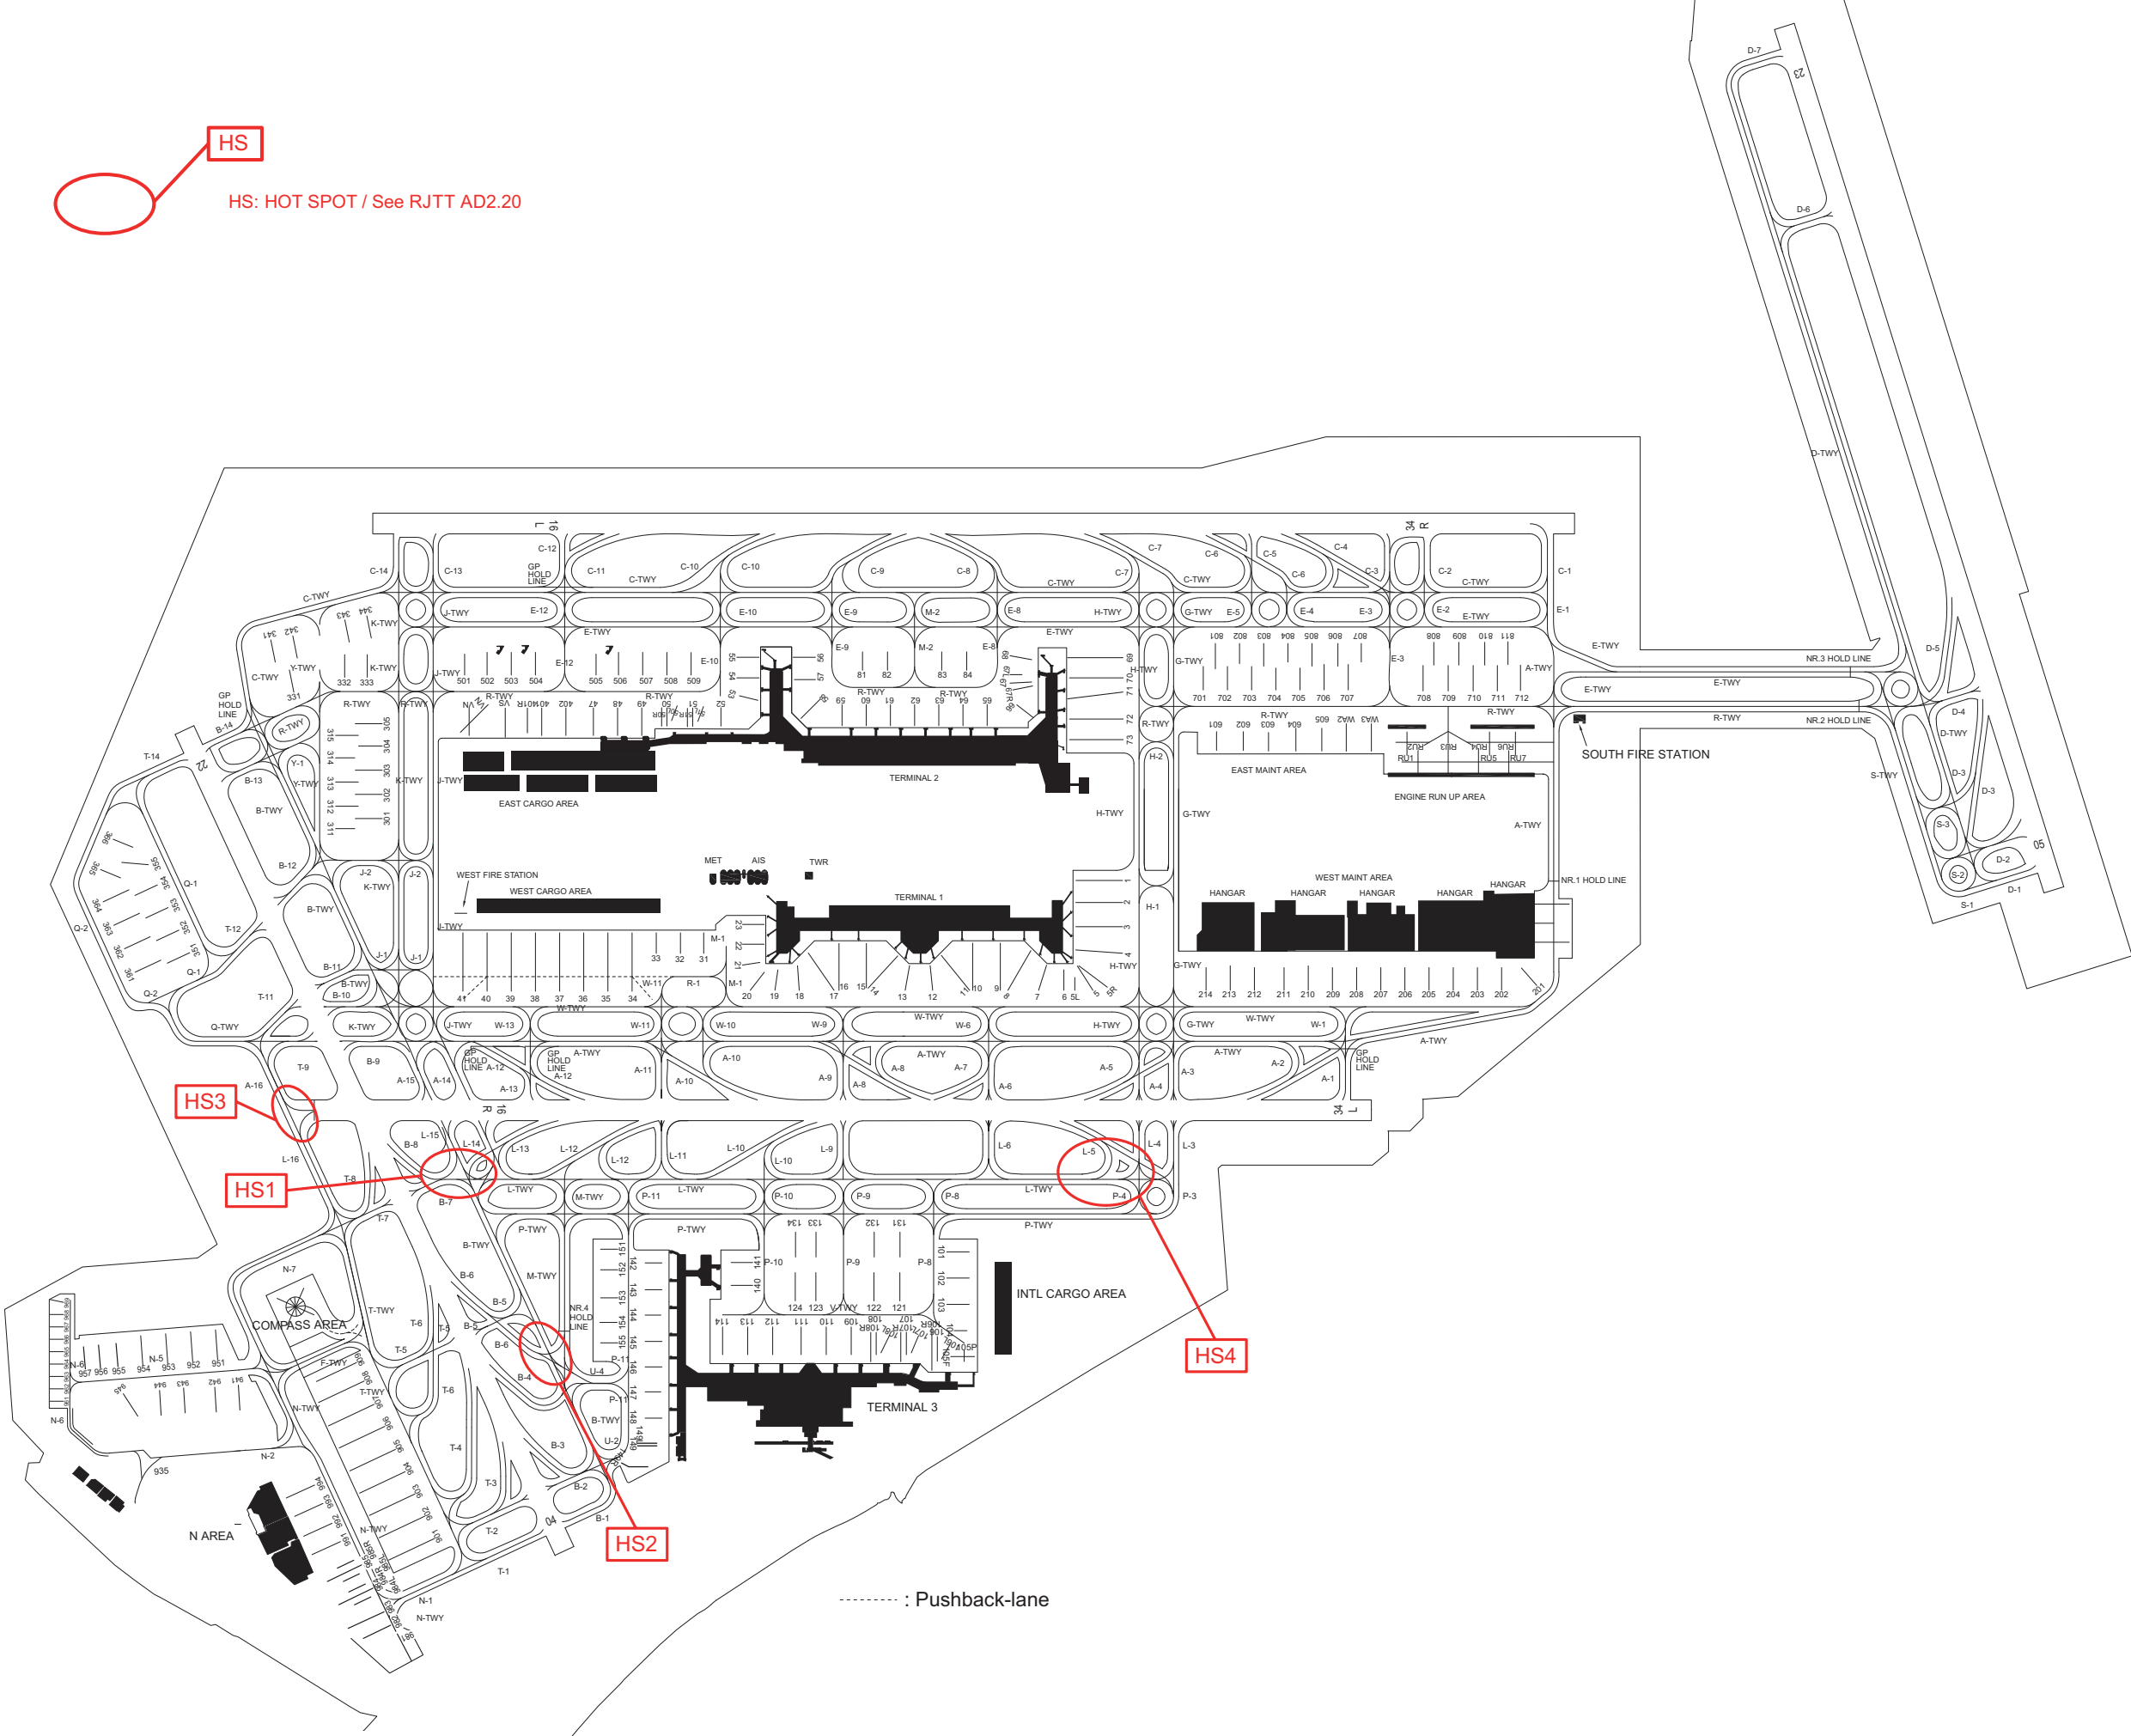


CHANGE : Facility renamed (EAST FIRE STATION → SOUTH FIRE STATION).


DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8°W - JUL 2022

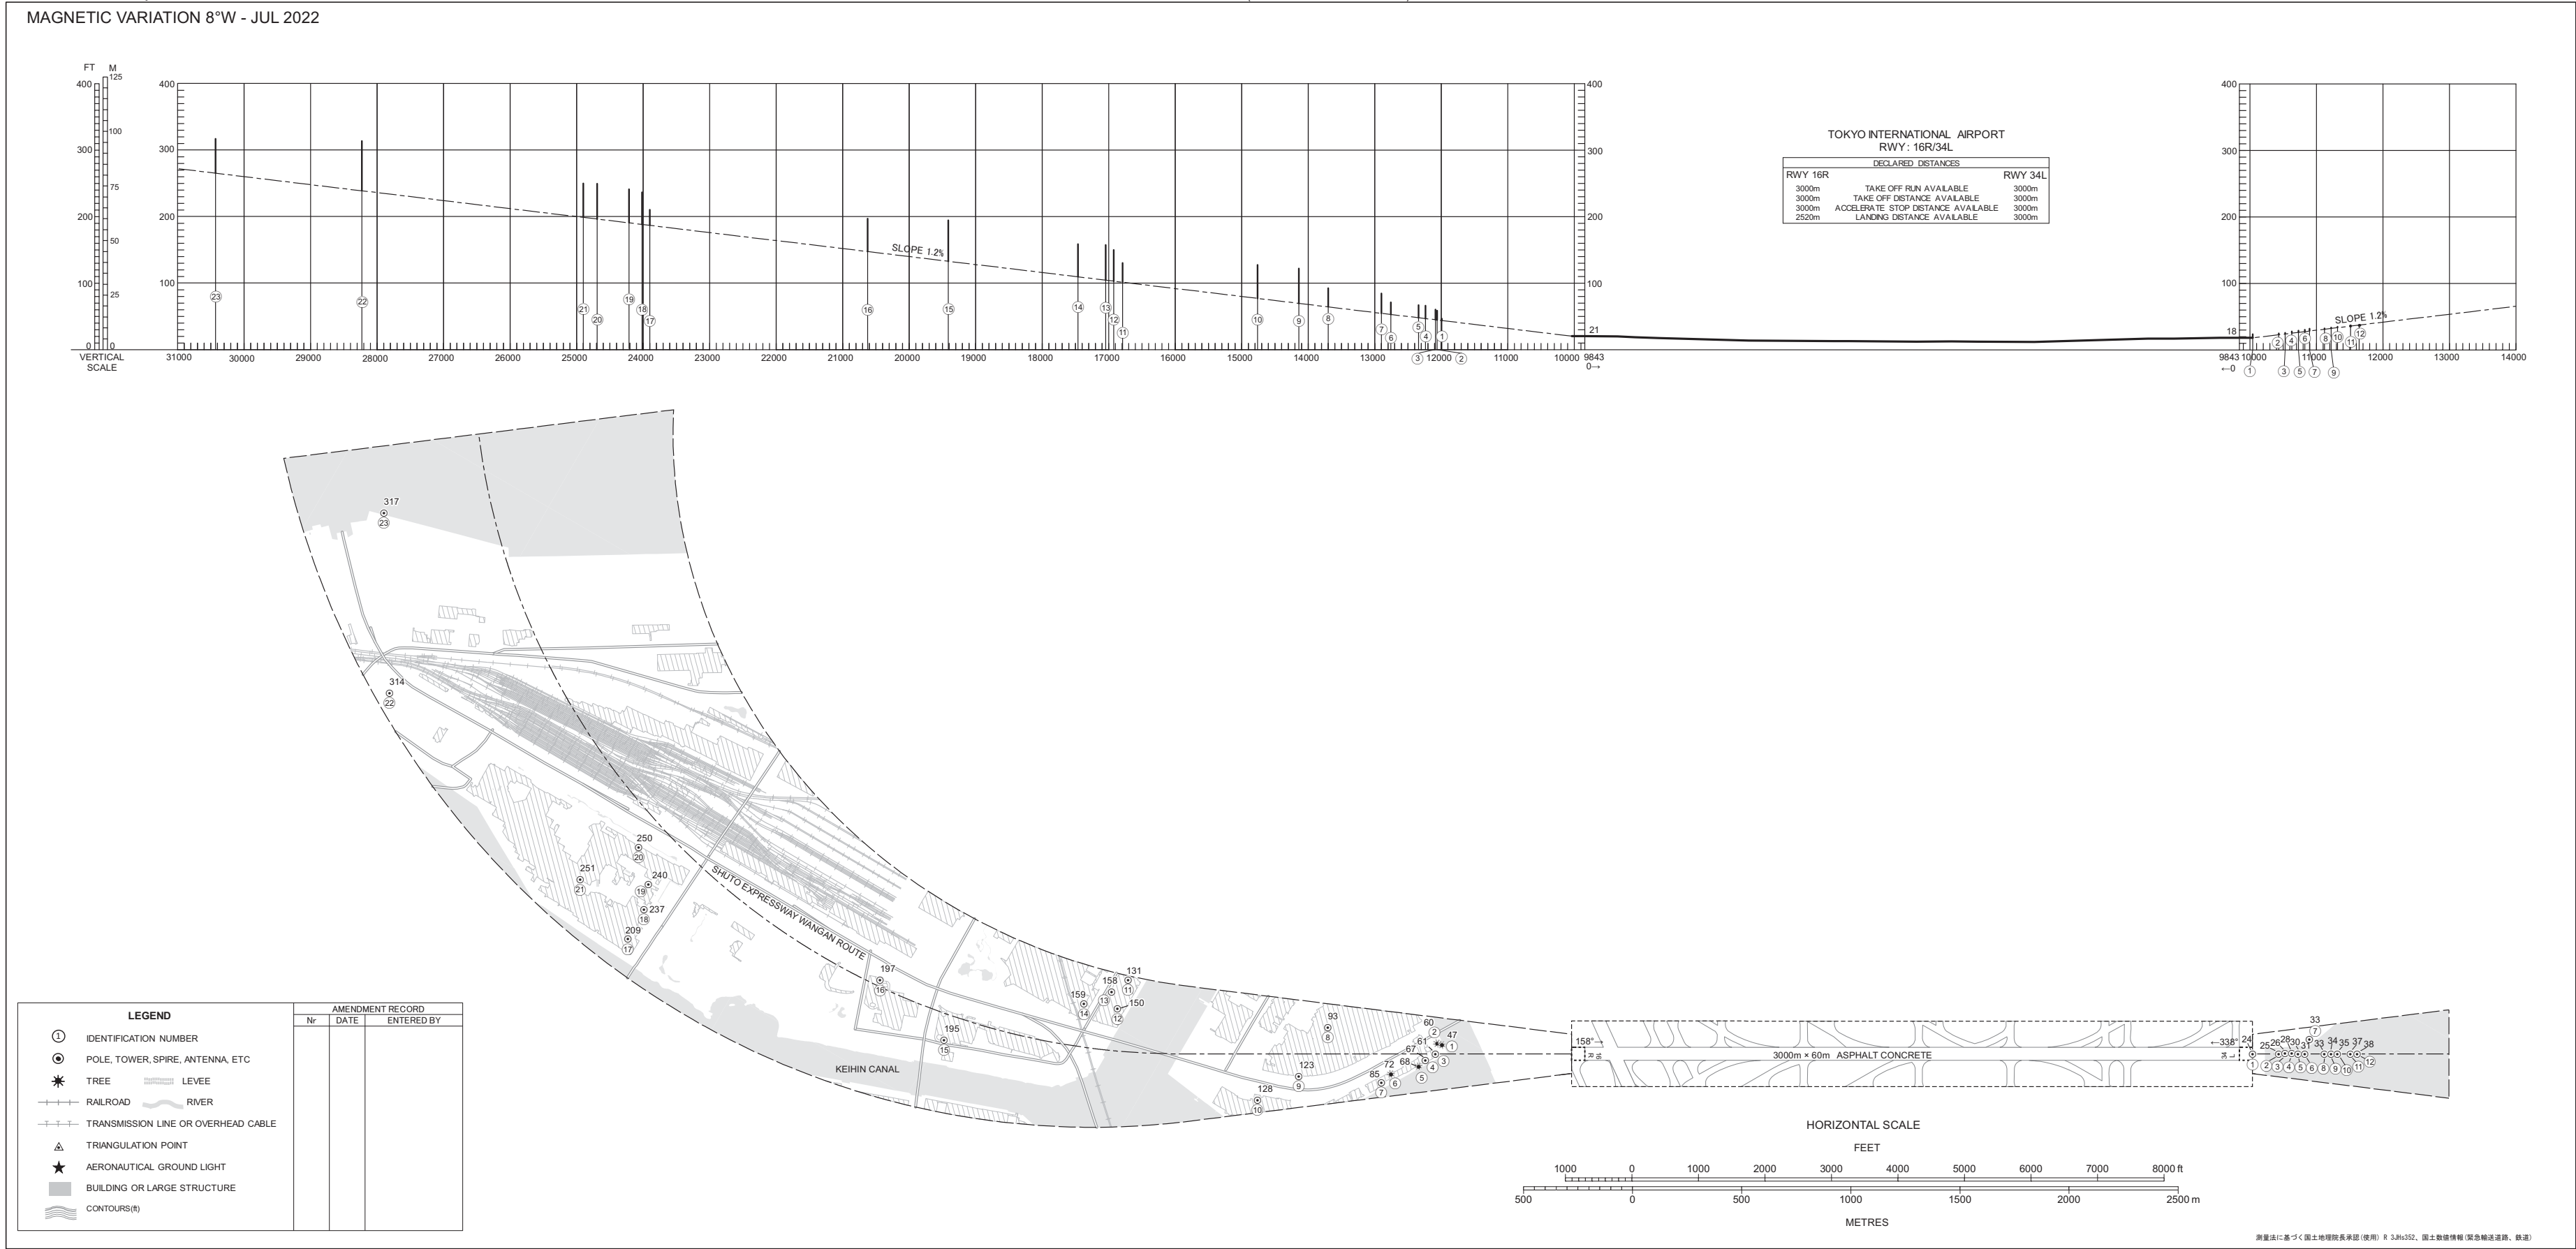



CHANGE : Update.

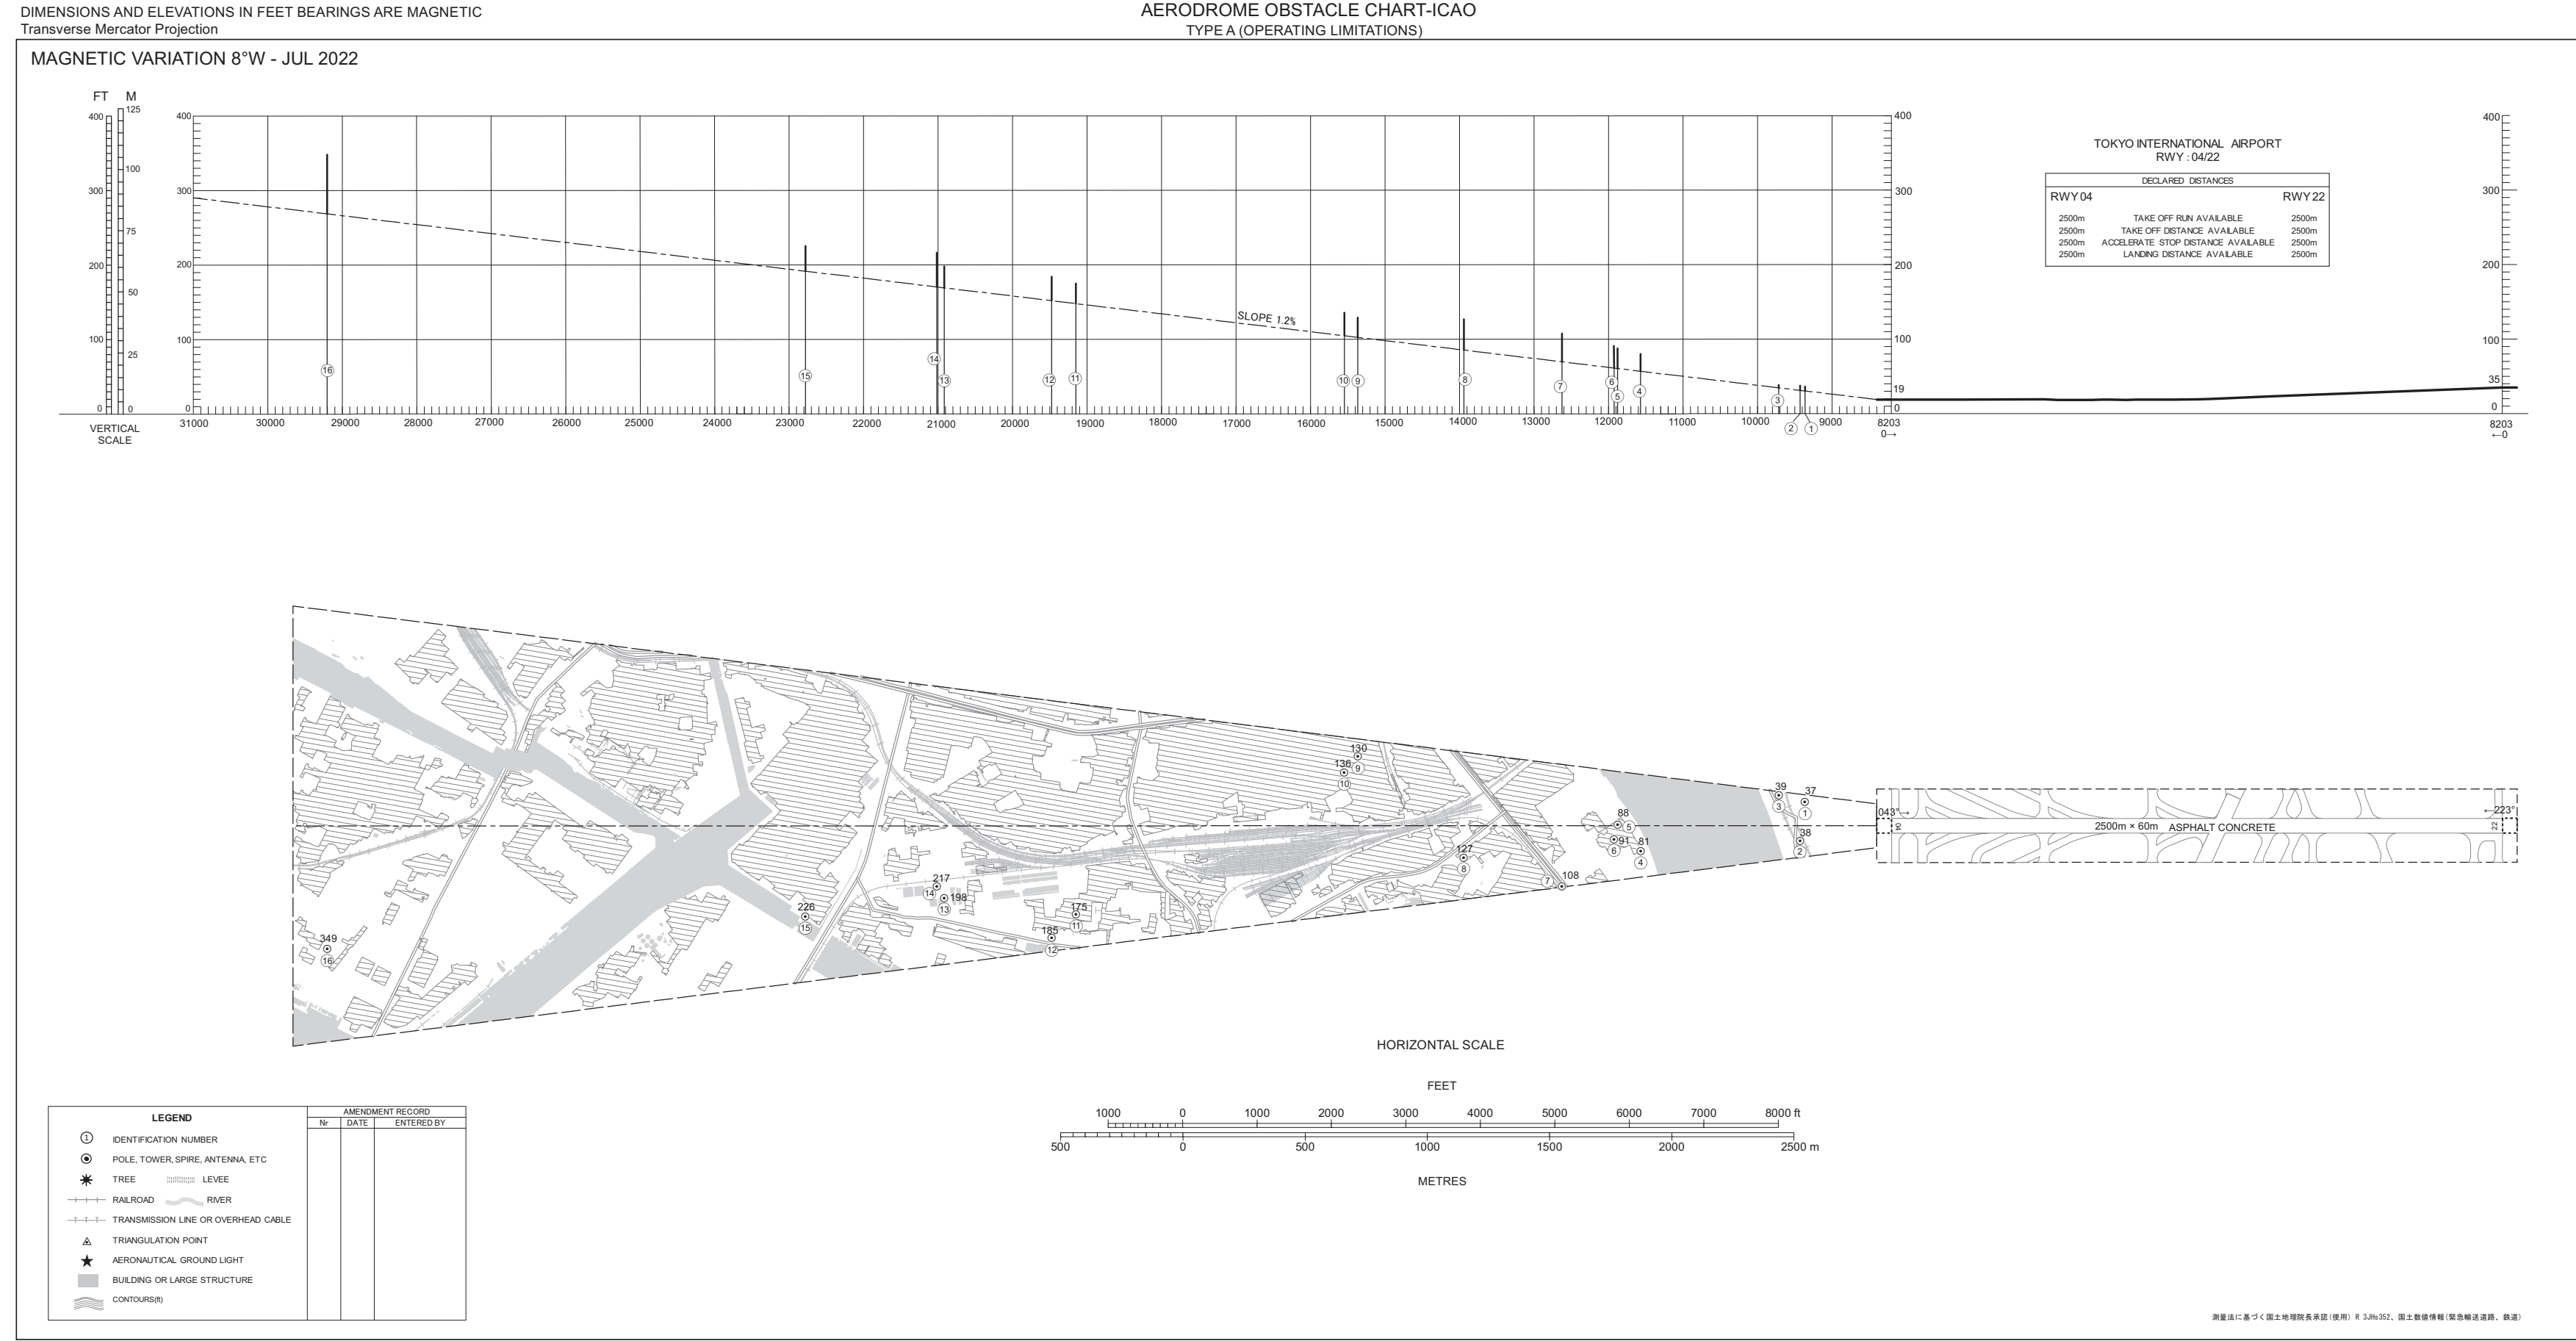


DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8°W - JUL 2022

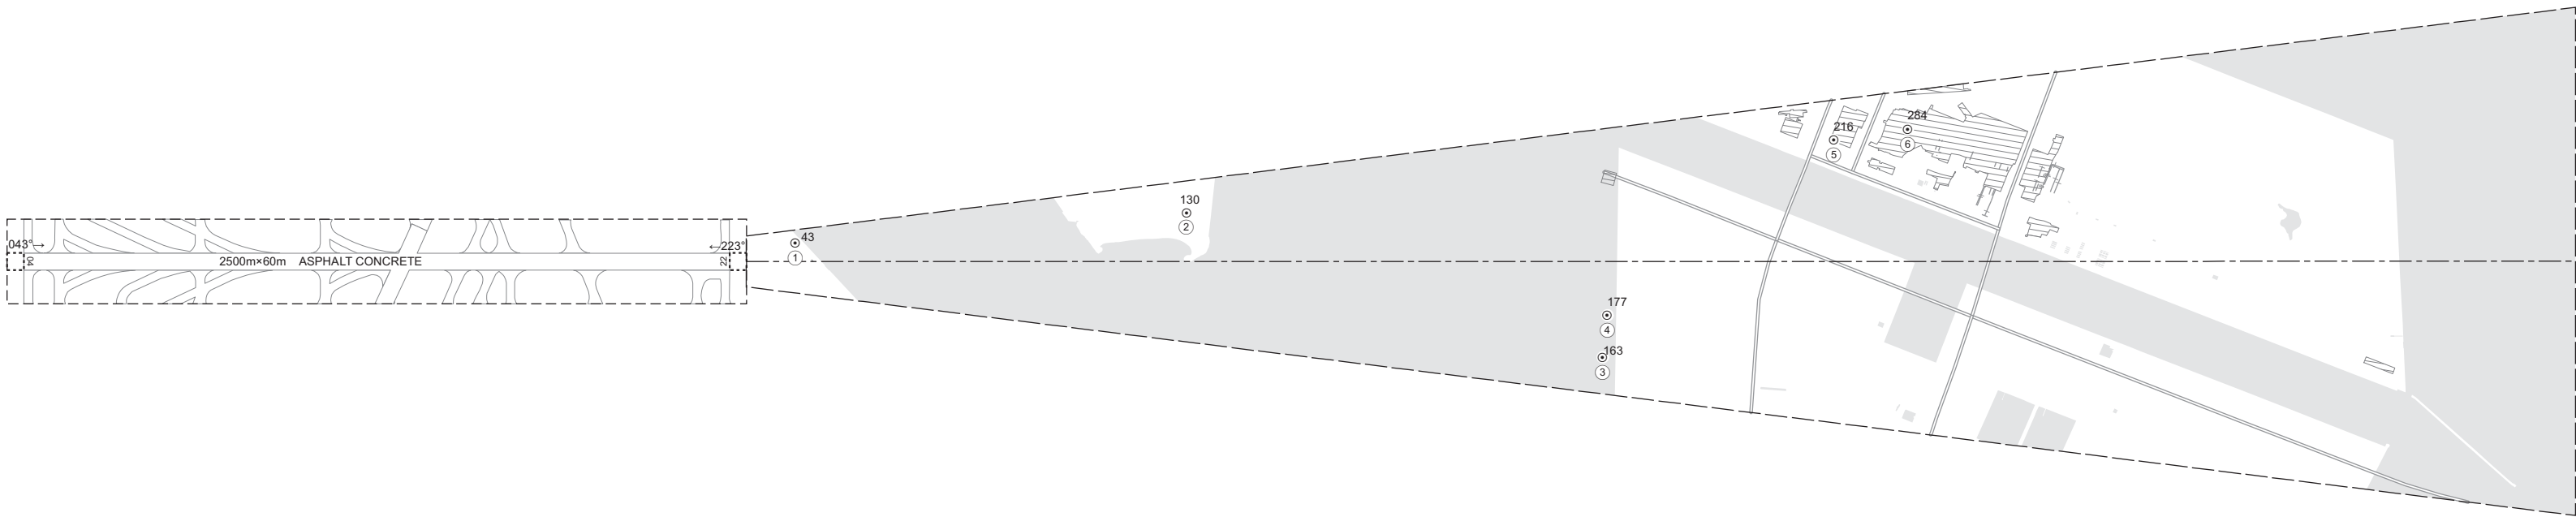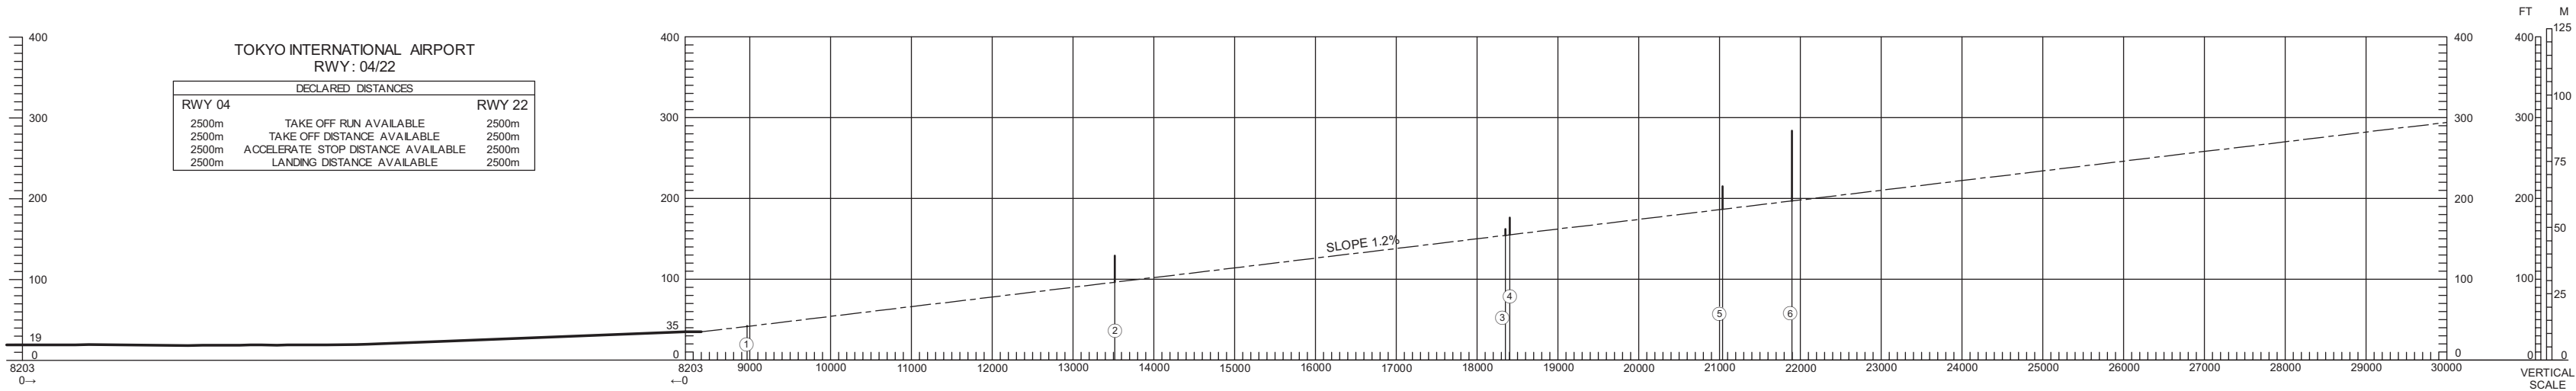

LEGEND	AMENDMENT RECORD		
	Nr	DATE	ENTERED BY
① IDENTIFICATION NUMBER			
⊙ POLE, TOWER, SPIRE, ANTENNA, ETC			
✱ TREE			
⚓ RAILROAD			
—+—+— TRANSMISSION LINE OR OVERHEAD CABLE			
△ TRIANGULATION POINT			
★ AERONAUTICAL GROUND LIGHT			
■ BUILDING OR LARGE STRUCTURE			
〰 CONTOURS(11)			

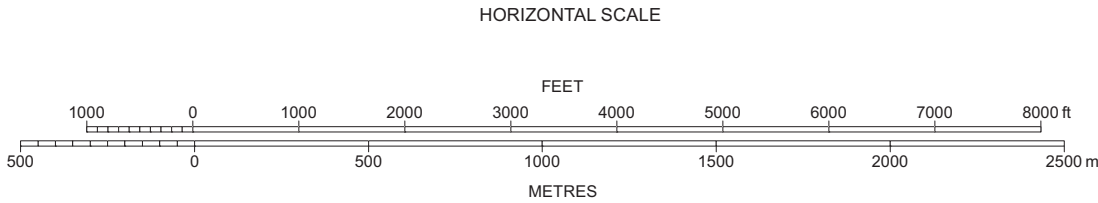


測量法に基づく国土地理院長承認(使用) R 3.8/a 352、国土数値情報(緊急輸送道路)

CHANGE : Update.

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)


MAGNETIC VARIATION 8°W - JUL 2022

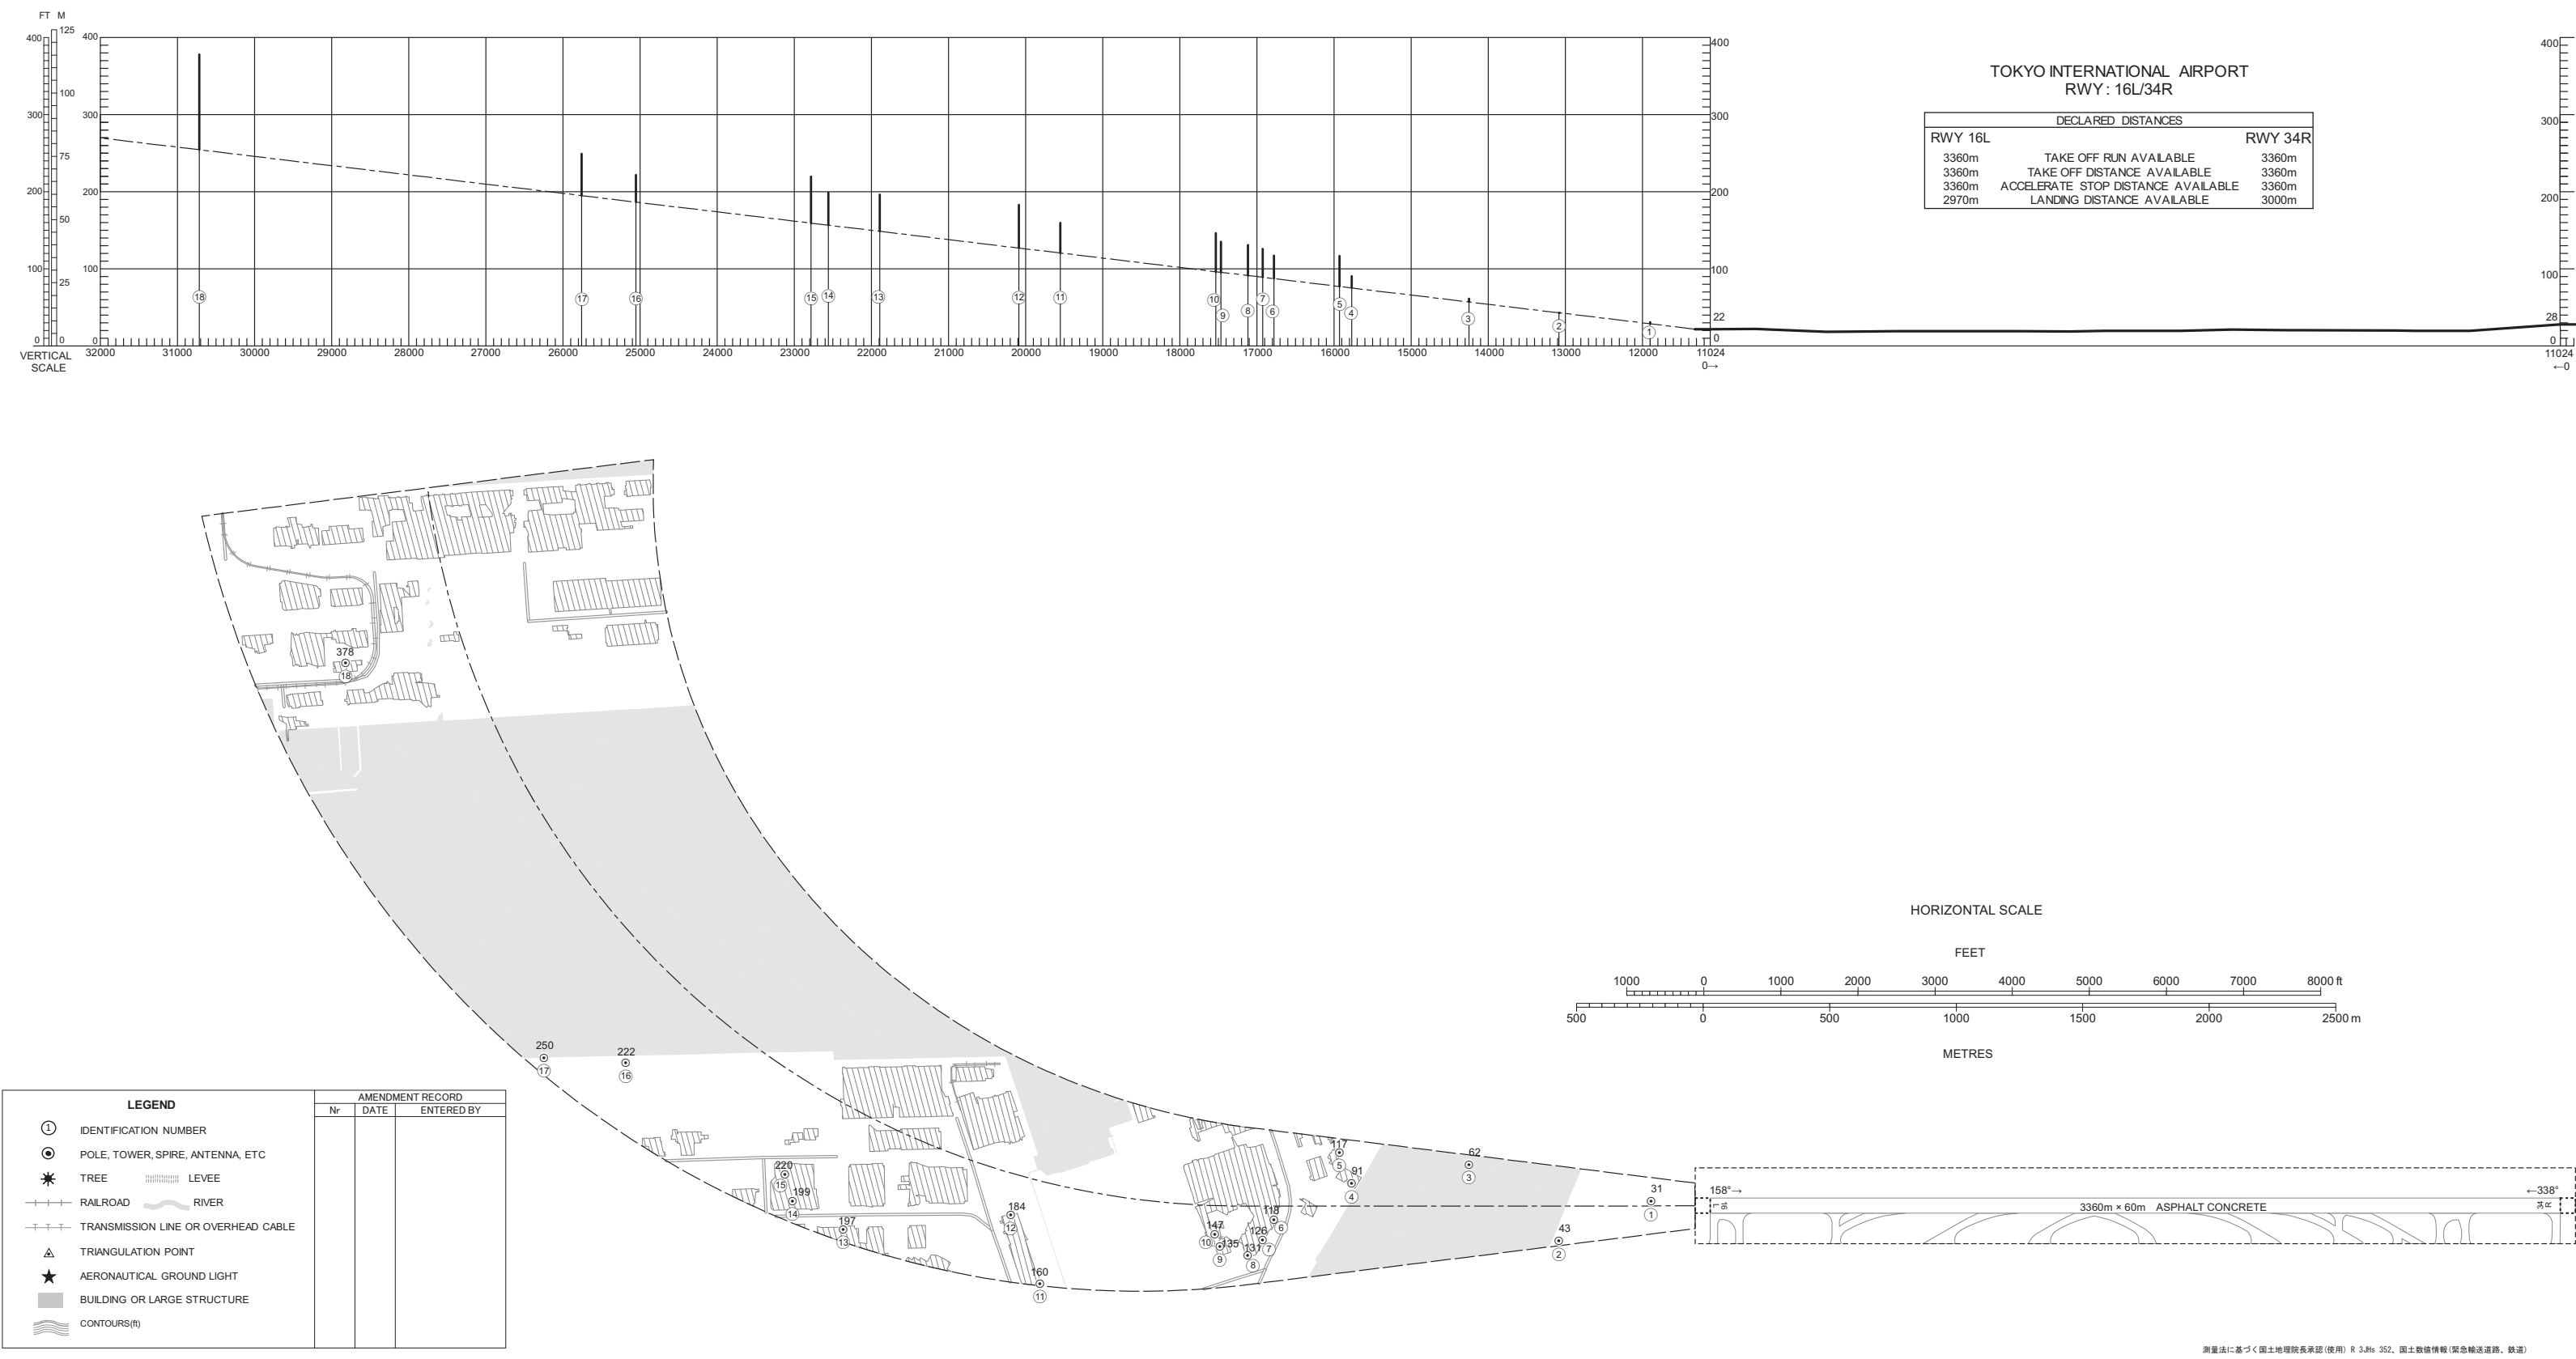

CHANGE : Update.

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

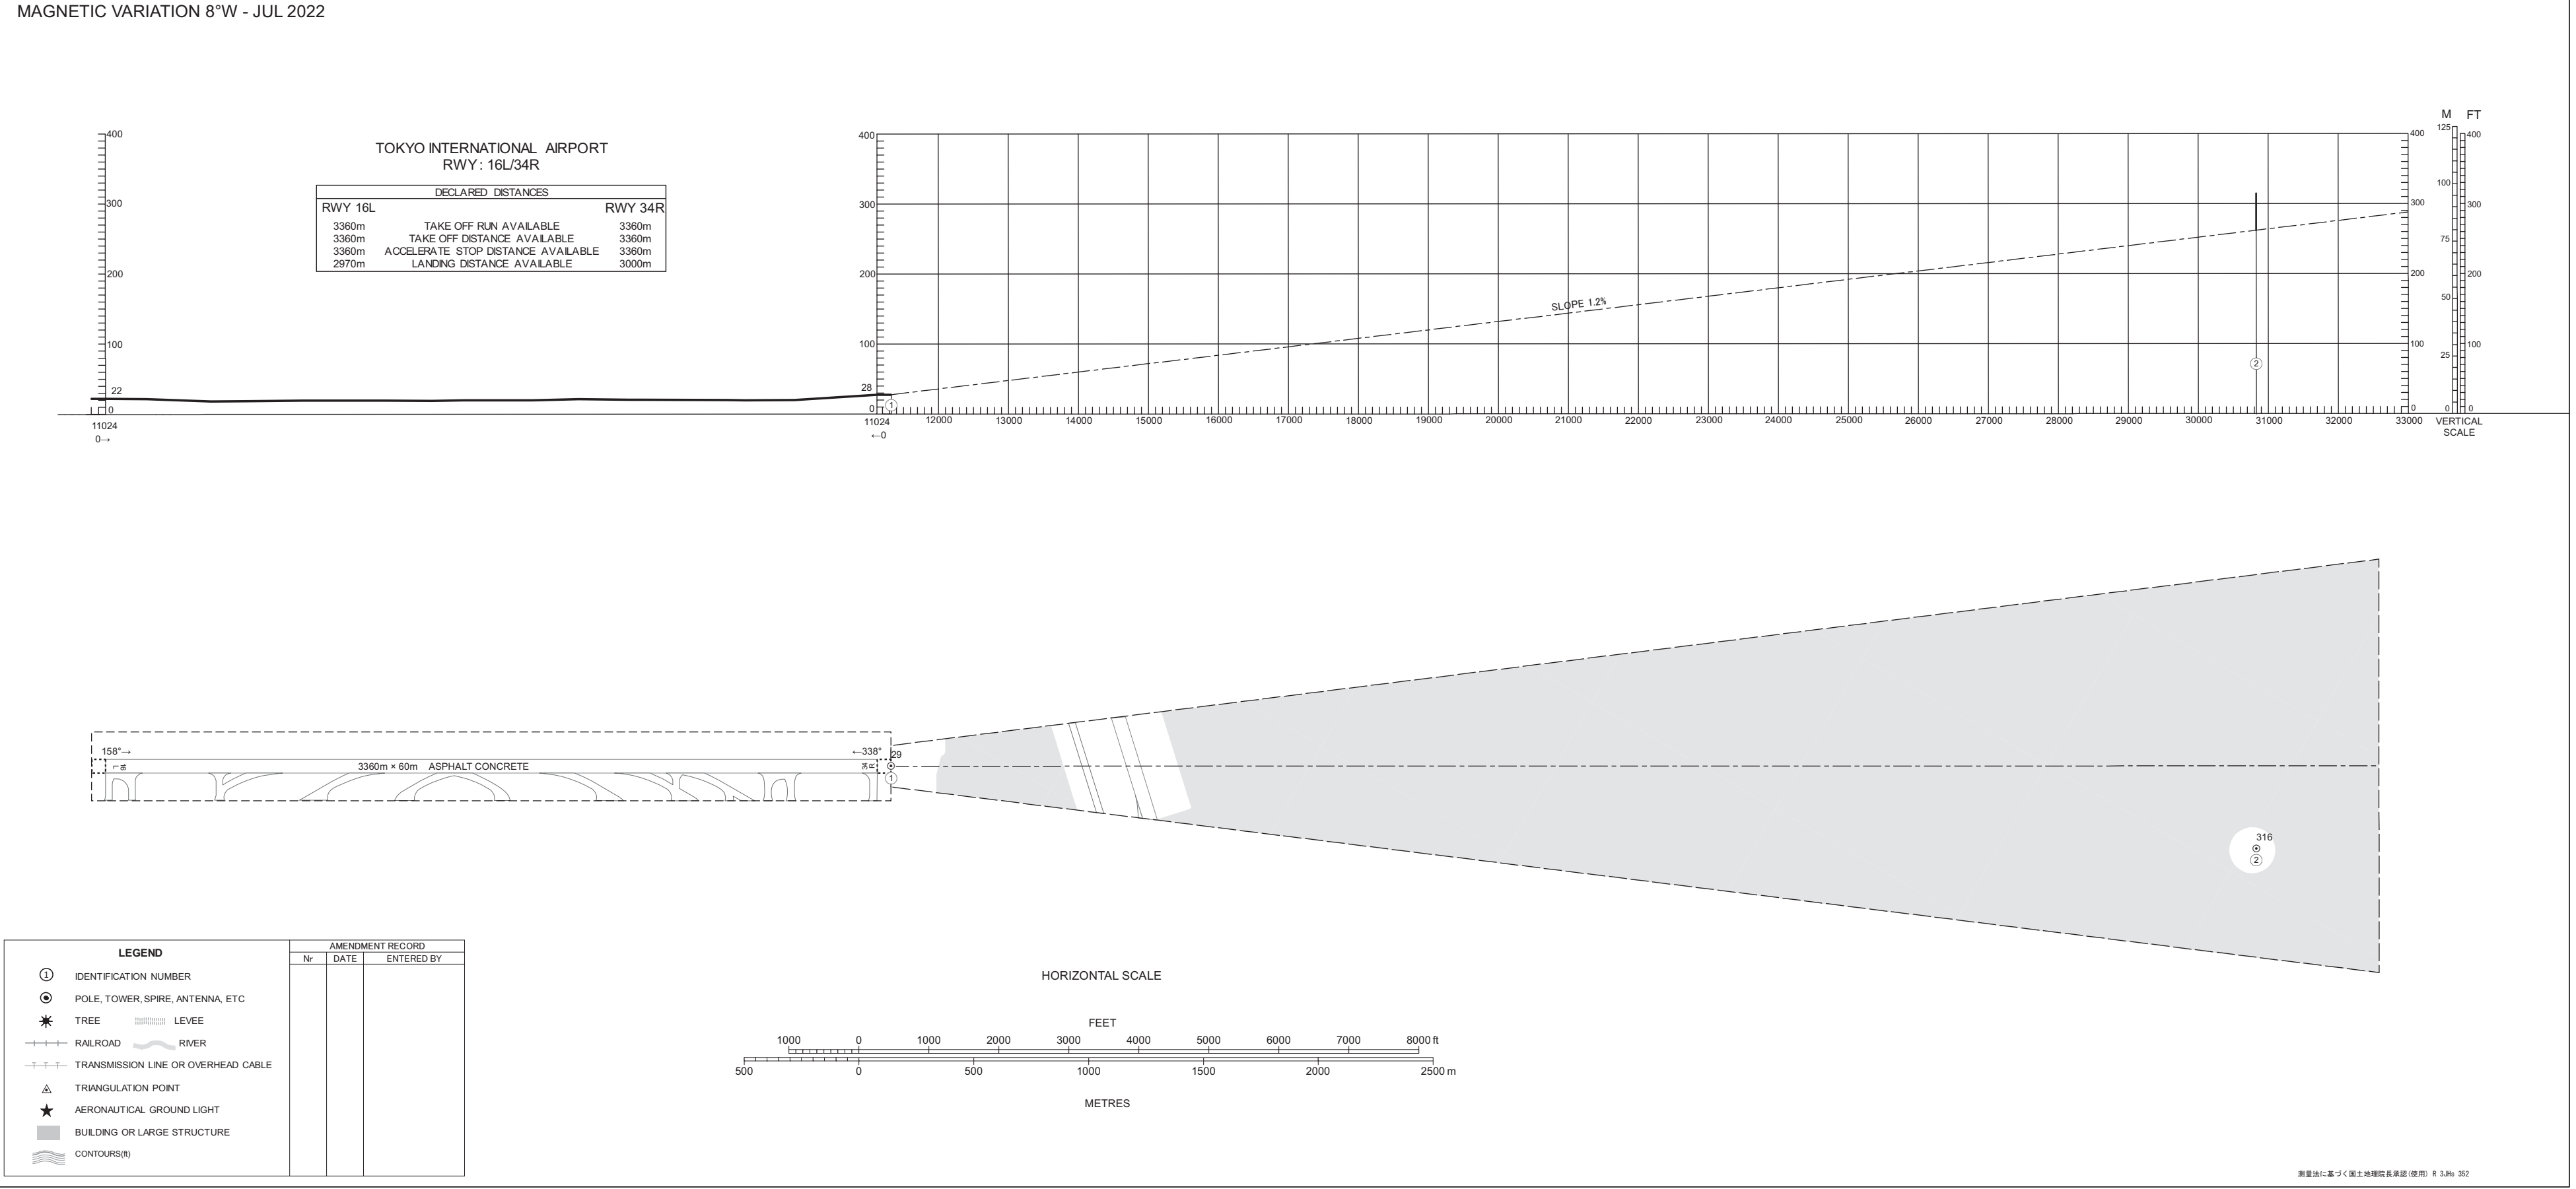

CHANGE : Update.

AERODROME OBSTACLE CHART-ICAO

TOKYO INTERNATIONAL AIRPORT
RWY: 05/23

DECLARED DISTANCES		
RWY 05		RWY 23
2500m	TAKE OFF RUN AVAILABLE	2500m
2500m	TAKE OFF DISTANCE AVAILABLE	2500m
2500m	ACCELERATE STOP DISTANCE AVAILABLE	2500m
-	LANDING DISTANCE AVAILABLE	2500m



		AMENDMENT RECORD		
		Nr	DATE	ENTERED BY
LEGEND  IDENTIFICATION NUMBER  POLE, TOWER, SPIRE, ANTENNA, ETC  TREE  LEVEE  RAILROAD  RIVER  TRANSMISSION LINE OR OVERHEAD CABLE  TRIANGULATION POINT  AERONAUTICAL GROUND LIGHT  BUILDING OR LARGE STRUCTURE  CONTOURS(ft)				

測量法に基づく国土地理院長承認(使用) R 3JHs 352、国土数値情報(緊急輸送道路)


DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO
TYPE B



CHANGE : Obstruction added.

PRECISION APPROACH TERRAIN CHART

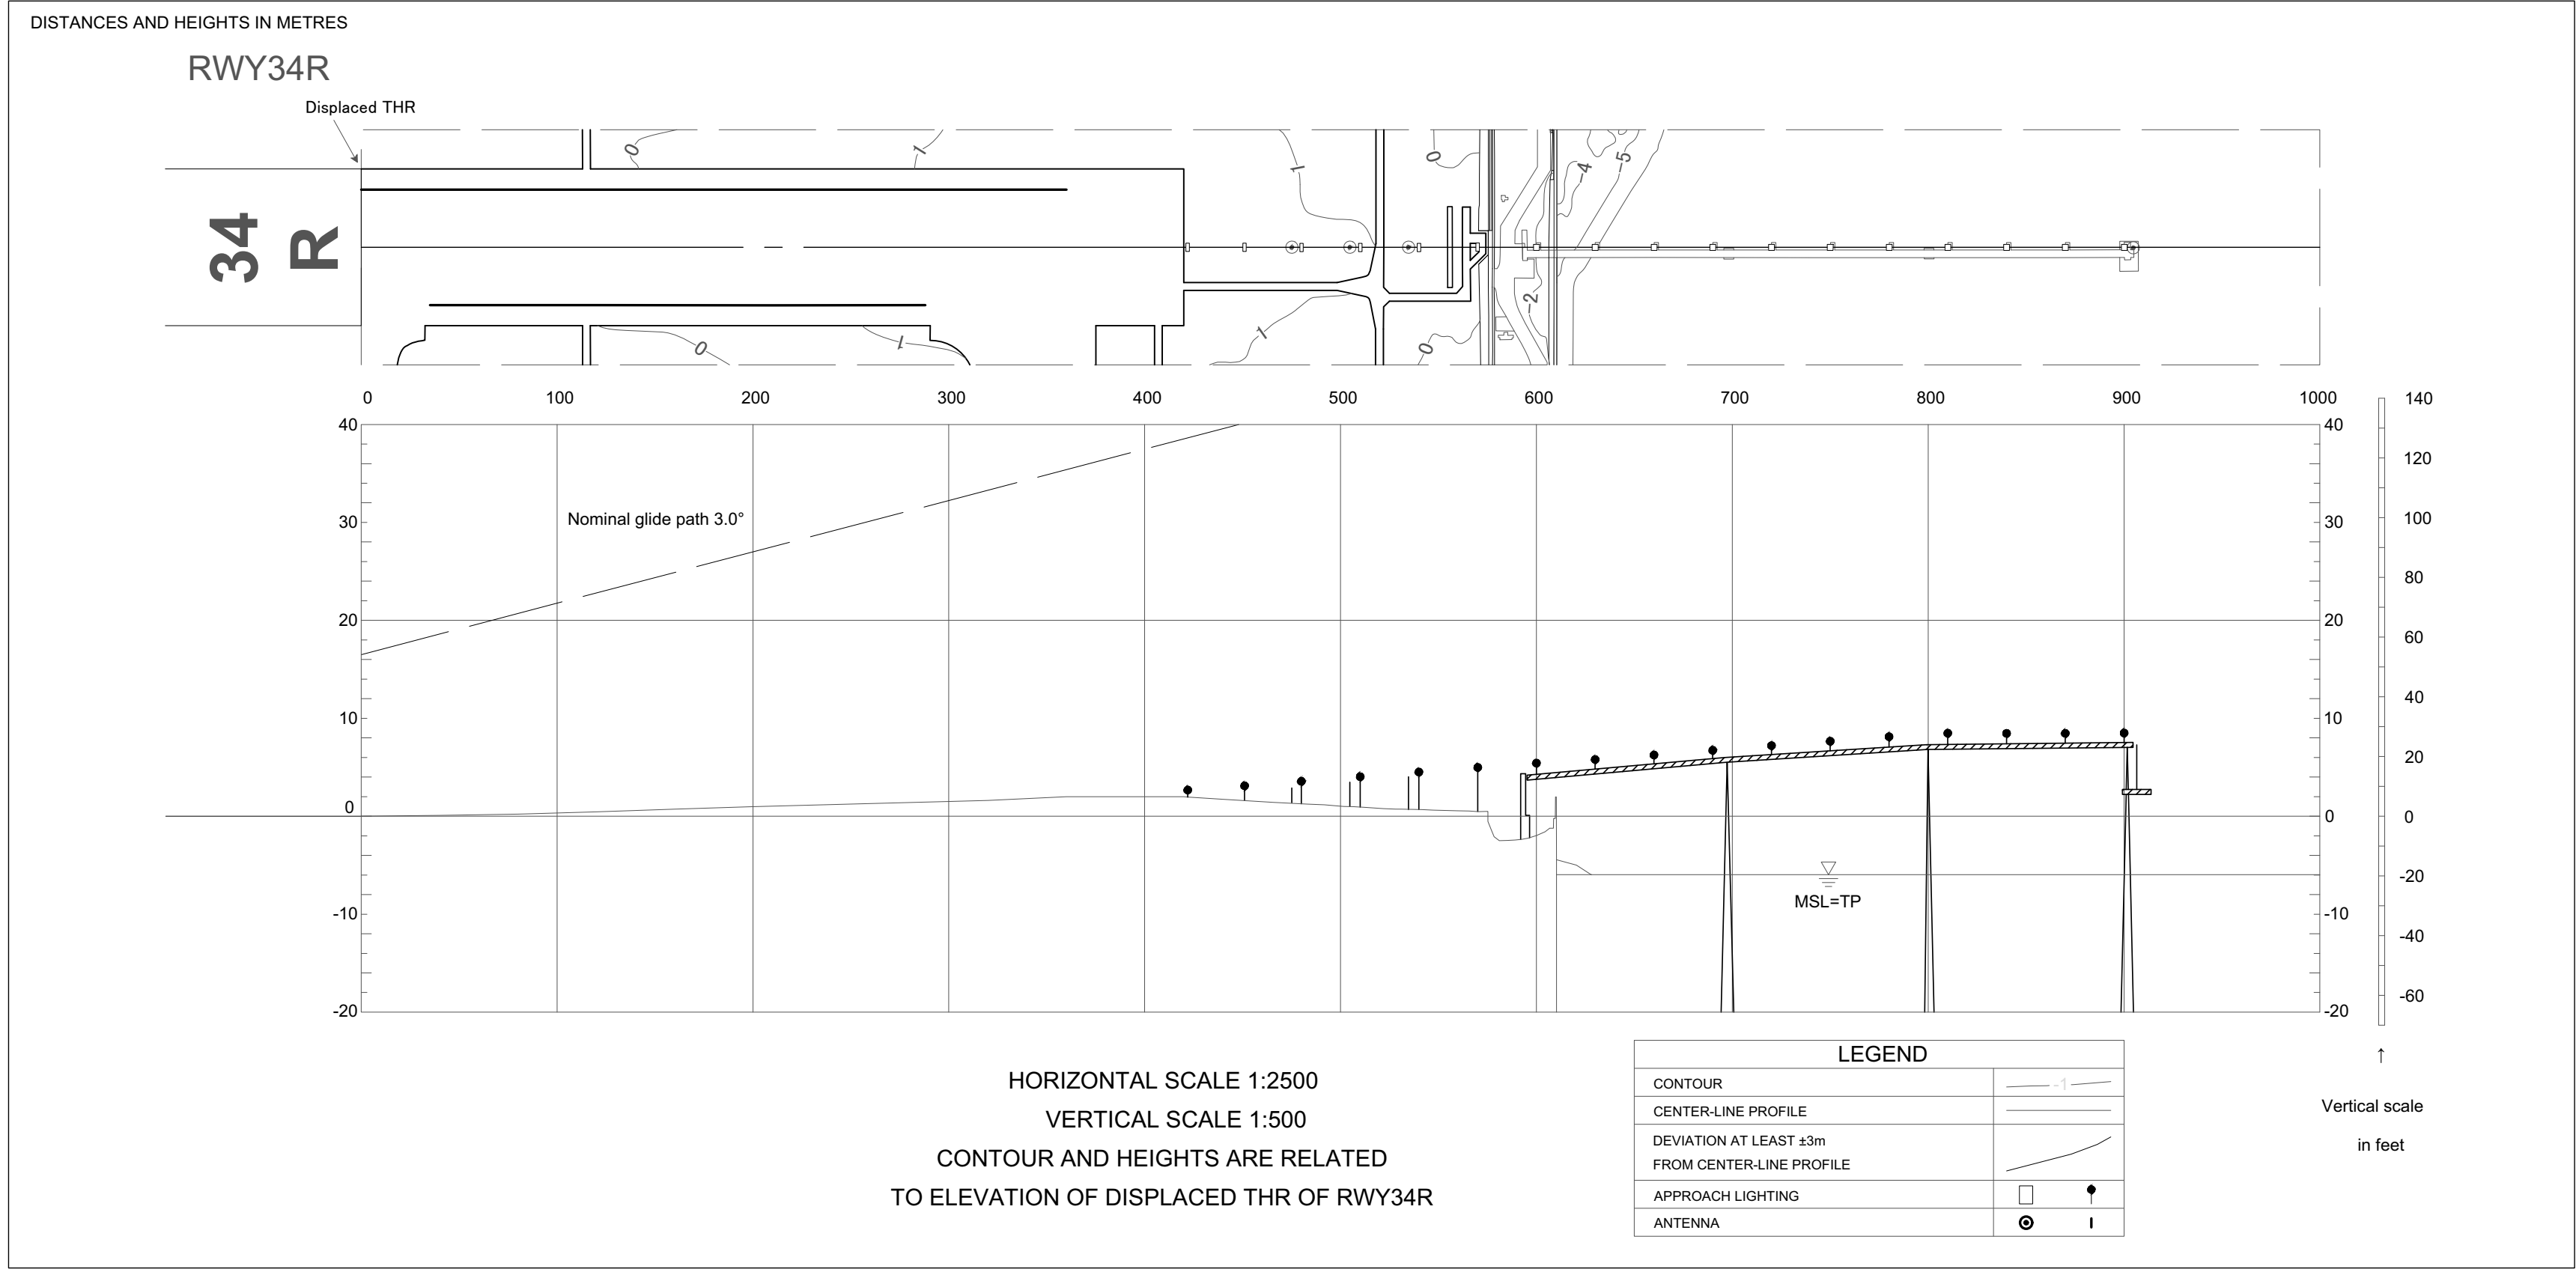

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

SID

SEKIYADO FOUR DEPARTURE

RWY04/34R/34L: Climb RWY HDG to 700FT, turn right HDG100° to TTE 9.0DME, turn left HDG017° to intercept and proceed via SYE R167 to SYE VOR/DME.

Cross SYE VOR/DME between 12000FT and FL150.

RWY16R/16L: Climb RWY HDG to intercept and proceed via TTE 11.8DME counterclockwise ARC to TTE R065, turn right HDG017° to intercept and proceed via SYE R167 to SYE VOR/DME.

Cross TTE R117 at or above 6000FT, cross SYE VOR/DME between 12000FT and FL150.


RWY05 : Climb on HDG059° to TTE 10.0DME, turn left HDG017° to intercept and proceed via SYE R167 to SYE VOR/DME.

Cross SYE VOR/DME between 12000FT and FL150.

Note RWY34R/34L/04: 5.0% climb gradient required up to 700FT.

RWY05: 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed. VOR/DME relocated (HME→TTE).

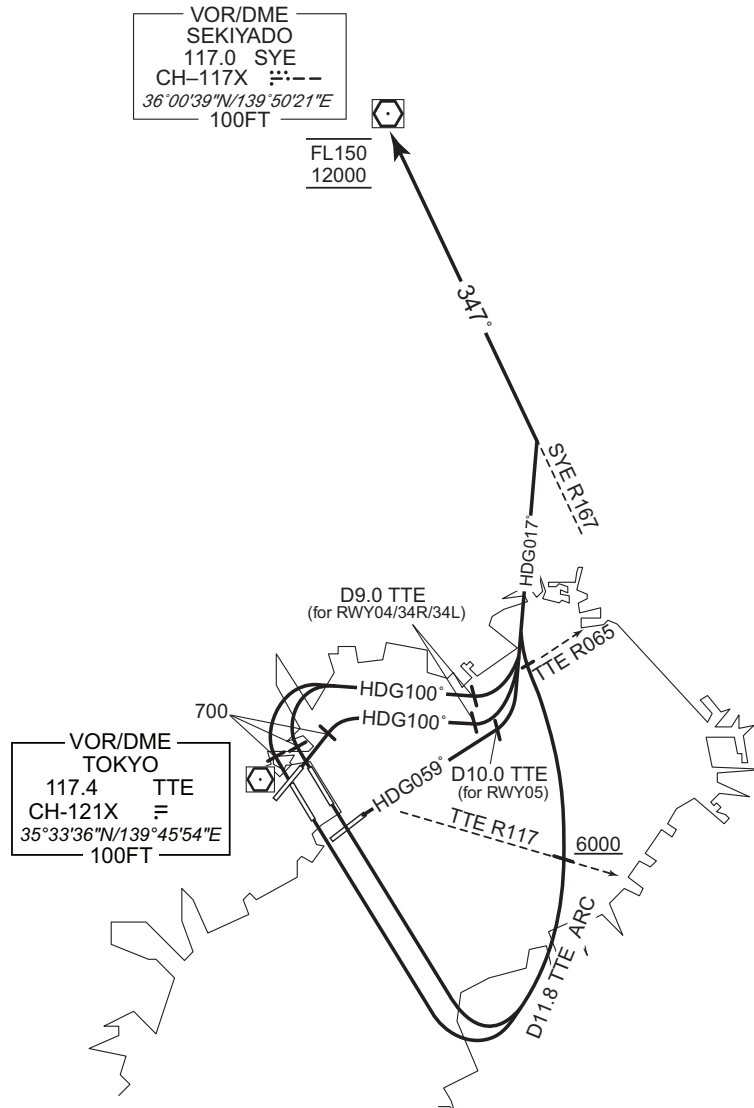

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

SID

VISIP ONE DEPARTURE

RWY04/34R/34L: Climb RWY HDG to 700FT, turn right HDG100° to TTE 9.0DME, turn right HDG223° to intercept and proceed via TTE R178 to VISIP.

Cross TTE R120 at or above 5000FT, cross VISIP at or above 9000FT.

RWY16R/16L: Climb RWY HDG to TTE 7.0DME, turn right HDG208° to intercept and proceed via TTE R178 to VISIP.


Cross VISIP at or above 9000FT.

RWY05: Climb RWY HDG to 1000FT, turn right HDG100° to TTE 9.0DME, turn right HDG223° to intercept and proceed via TTE R178 to VISIP.

Cross TTE R120 at or above 5000FT, cross VISIP at or above 9000FT.

Note RWY04/34R/34L: 5.0% climb gradient required up to 700FT.

RWY05: 5.0% climb gradient required up to 1000FT.

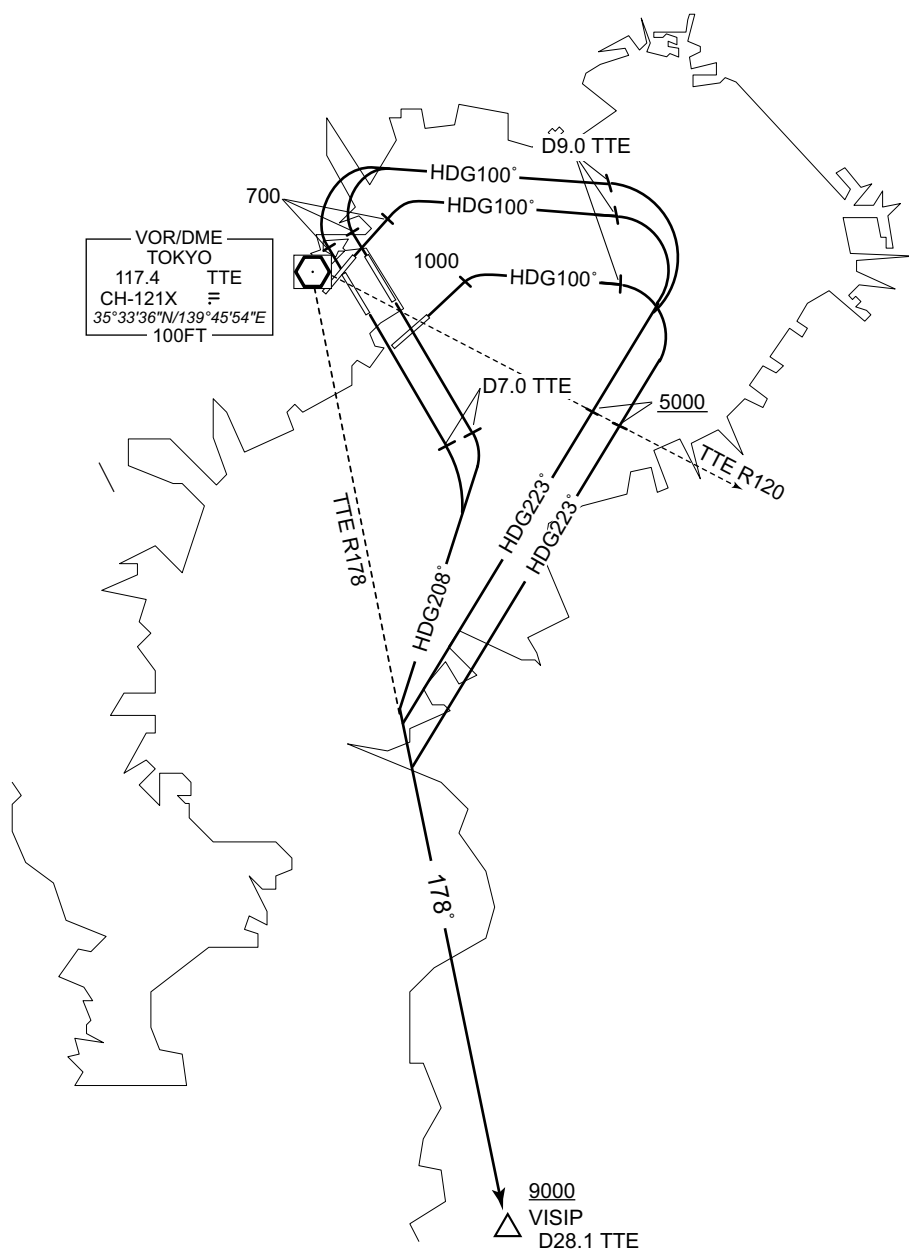

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

SID

OPPAR FOUR DEPARTURE

RWY04/34R/34L: Climb RWY HDG to 700FT, turn right within 4NM, climb via HDG110° to TTE 7.0DME, turn right, via TTE 8.0DME clockwise ARC to intercept and proceed via TTE R195 to OPPAR.

Cross TTE 7.0DME at or above 3000FT, cross TTE R120 at or above 5000FT, cross OPPAR at or above 9000FT.

RWY16R/16L: Climb RWY HDG to 500FT, turn left climb via TTE R141 to 8.0DME, turn left HDG240° within TTE 12.0DME to intercept and proceed via TTE R195 to OPPAR.

Cross OPPAR at or above 9000FT.


RWY05: Climb RWY HDG to TTE 5.0DME, turn right, via TTE 8.0DME clockwise ARC to intercept and proceed via TTE R195 to OPPAR.

Cross TTE R120 at or above 5000FT, cross OPPAR at or above 9000FT.

Note Aircraft taking off from RWY16R/16L are required to complete left turns south of TTE R080.

RWY34R/34L/04: 5.0% climb gradient required up to 700FT.

CHANGE : PROC renamed. PROC course. VOR/DME relocated (HME→TTE).

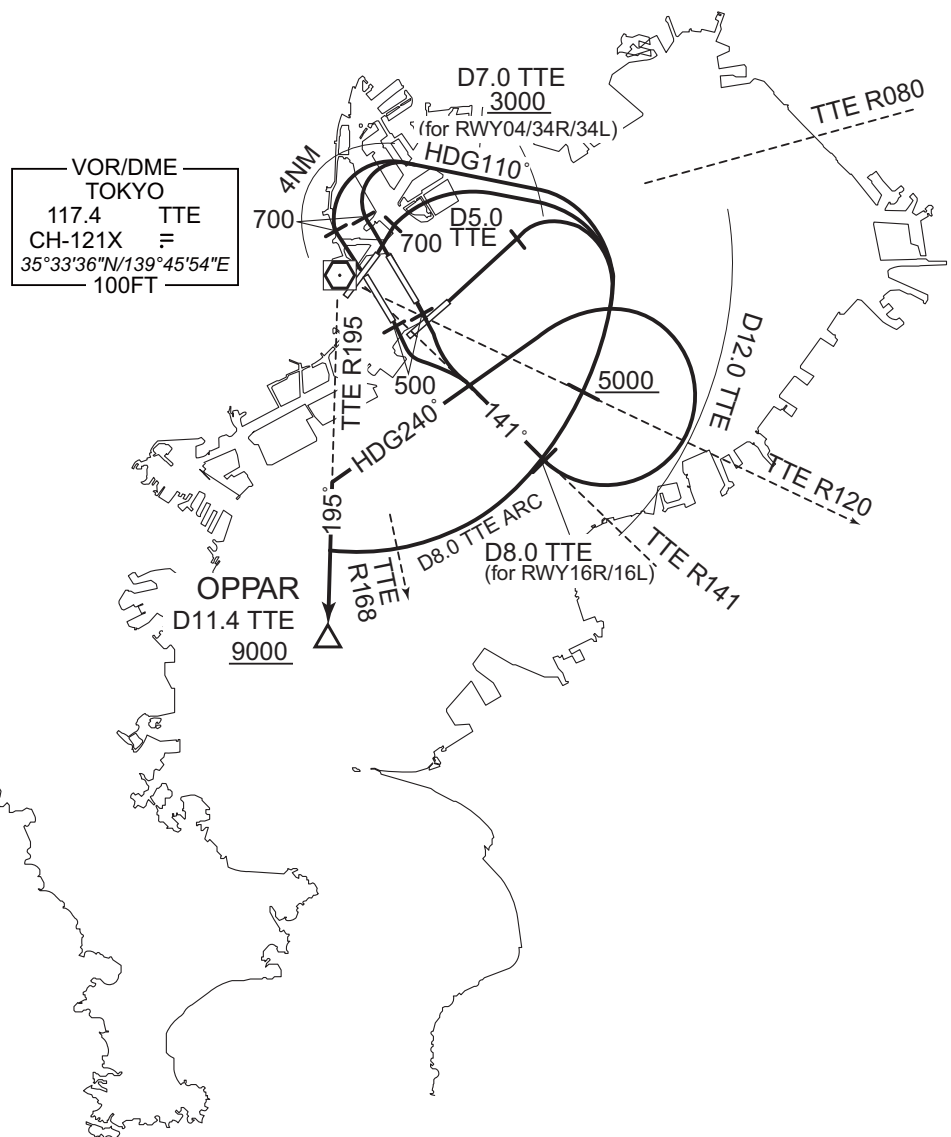


STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV TRANSITION

JYOGA TRANSITION UTIBO TRANSITION		RNAV1
Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	Critical DME	—
	DME GAP	—
	Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

VAR 8° W

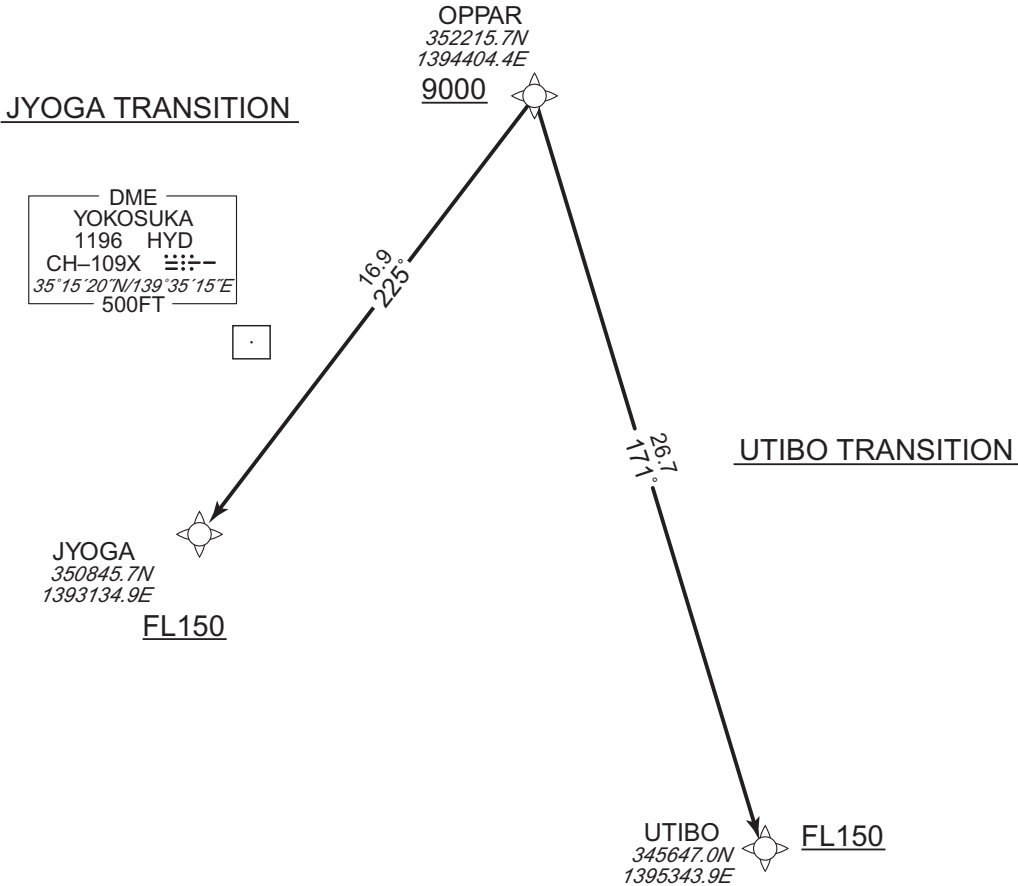

CHANGE : PROC course. VAR.

JYOGA TRANSITION
From OPPAR at or above 9000FT, to JYOGA at or above FL150.

UTIBO TRANSITION
From OPPAR at or above 9000FT, to UTIBO at or above FL150.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTLRNAV TRANSITION

JYOGA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OPPAR	—	—	-7.9	—	—	+9000	—	—	RNAV1
002	TF	JYOGA	—	225 (217.1)	-7.9	16.9	—	+FL150	—	—	RNAV1

UTIBO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OPPAR	—	—	-7.9	—	—	+9000	—	—	RNAV1
002	TF	UTIBO	—	171 (162.7)	-7.9	26.7	—	+FL150	—	—	RNAV1

CHANGE : PROC course. VAR.

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

SID

ISOGO THREE DEPARTURE (FOR PROP ONLY)


RWY04/34R/34L: Climb RWY HDG to 700FT or above, turn left within 4NM, climb via TTE R178 to VISIP.

RWY16R/16L: Climb RWY HDG to TTE 7.0DME, turn right HDG208° to intercept and proceed via TTE R178 to VISIP.

RWY05: Climb RWY HDG to 1000FT, turn right HDG100° to TTE 9.0DME, turn right HDG223° to intercept and proceed via TTE R178 to VISIP.
Cross TTE R120 at or above 5000FT.

Note RWY34R/34L/04: 5.0% climb gradient required up to 700FT.
RWY05: 5.0% climb gradient required up to 1000FT.

CHANGE : PROC renamed. PROC course. VISIP established. VADAR abolished. VOR/DME relocated (HME→TTE).

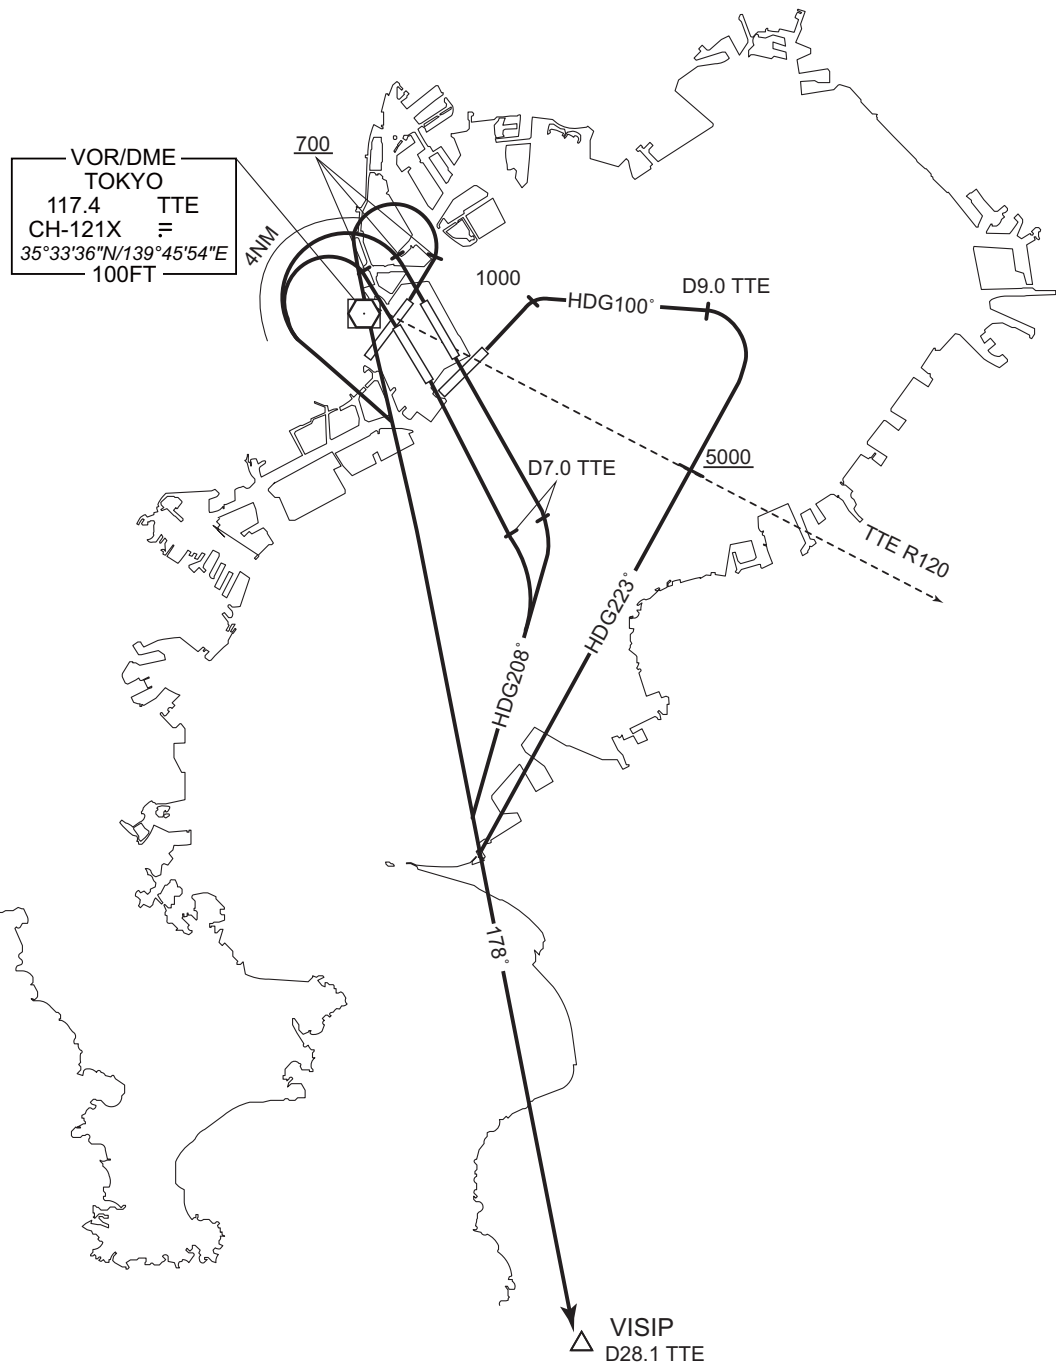

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

TRANSITION


OSHIMA TRANSITION

From over VISIP, via TTE R178 to intercept and proceed via XAC R058 to XAC VORTAC.

CHIKURA TRANSITION

From over VISIP, via TTE R178 to UTIBO.

CHANGE : VISIP established. VADAR abolished. VOR/DME relocated (HME→TTE).

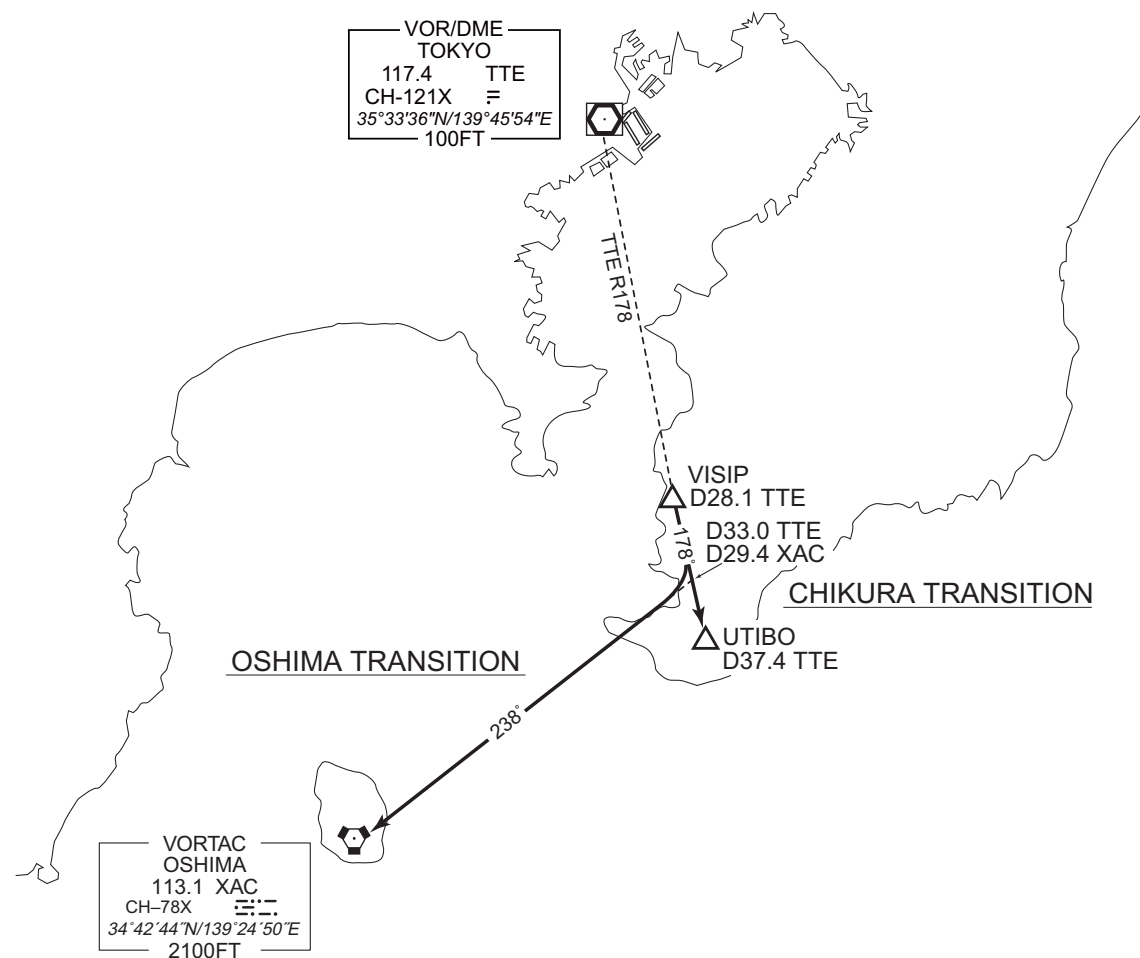

RJTTH/TOKYO INTL

RNAV SID

VAR8°W

VOR/DME
TOKYO
117.4 TTE
CH-121X
35°33'36"N/139°45'54"E
100FT

700
338°
338°
043°
050°
500
158°
500
223°
600
158°
500
HOBBS
5.8
188°
BASSA
8.9
188°
VAMOS
9000
207°/14.5
209°/15.4
17.3
217°
T6R11
T6L21
LOCUP
5000
5.2
199°
TT501
TT502

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAMOS FOUR DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,
to VAMOS at or above 9000FT.

RWY16L : Climb on HDG 158° at or above 500FT, direct to T6L21,
to VAMOS at or above 9000FT.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to
TT502, to LOCUP at or above 5000FT, to VAMOS at or above
9000FT.

RWY04: Climb on HDG 043° at or above 700FT, turn right direct to TT502,
to LOCUP at or above 5000FT, to VAMOS at or above 9000FT.

RWY05: Climb on HDG 050° at or above 500FT, direct to TT501, turn right
direct to TT502, to LOCUP at or above 5000FT, to VAMOS at or
above 9000FT.

RWY22: Climb on HDG 223° at or above 600FT, turn left direct to HOBBS,
to BASSA, to VAMOS at or above 9000FT.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

RWY22 : 5.0% climb gradient required up to 600FT.

CHANGE : PROC renamed.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAMOS FOUR DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6R11	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	VAMOS	—	207 (199.5)	-7.9	14.5	—	+9000	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6L21	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	VAMOS	—	209 (200.7)	-7.9	15.4	—	+9000	—	—	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.9	—	—	+700	—	—	RNAV1
002	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
004	TF	VAMOS	—	217 (209.5)	-7.9	17.3	—	+9000	—	—	RNAV1

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	043 (034.9)	-7.9	—	—	+700	—	—	RNAV1
002	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
004	TF	VAMOS	—	217 (209.5)	-7.9	17.3	—	+9000	—	—	RNAV1

CHANGE : PROC renamed. Course FM T6L21 to VAMOS. VAR.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.9	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.9	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
005	TF	VAMOS	—	217 (209.5)	-7.9	17.3	—	+9000	—	—	RNAV1

RWY22


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	223 (214.9)	-7.9	—	—	+600	—	—	RNAV1
002	DF	HOBBS	—	—	-7.9	—	L	—	—	—	RNAV1
003	TF	BASSA	—	188 (179.9)	-7.9	5.8	—	—	—	—	RNAV1
004	TF	VAMOS	—	188 (179.9)	-7.9	8.9	—	+9000	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
BASSA	352108.8N / 1394542.2E	T6R11	352552.5N / 1395137.2E
HOBBS	352653.9N / 1394541.3E	TT501	353328.7N / 1395029.9E
LOCUP	352718.8N / 1395608.5E	TT502	353224.4N / 1395720.7E
T6L21	352639.1N / 1395222.0E	VAMOS	351215.5N / 1394543.6E

CHANGE : PROC course. VAR.

STANDARD DEPARTURE CHART-INSTRUMENT

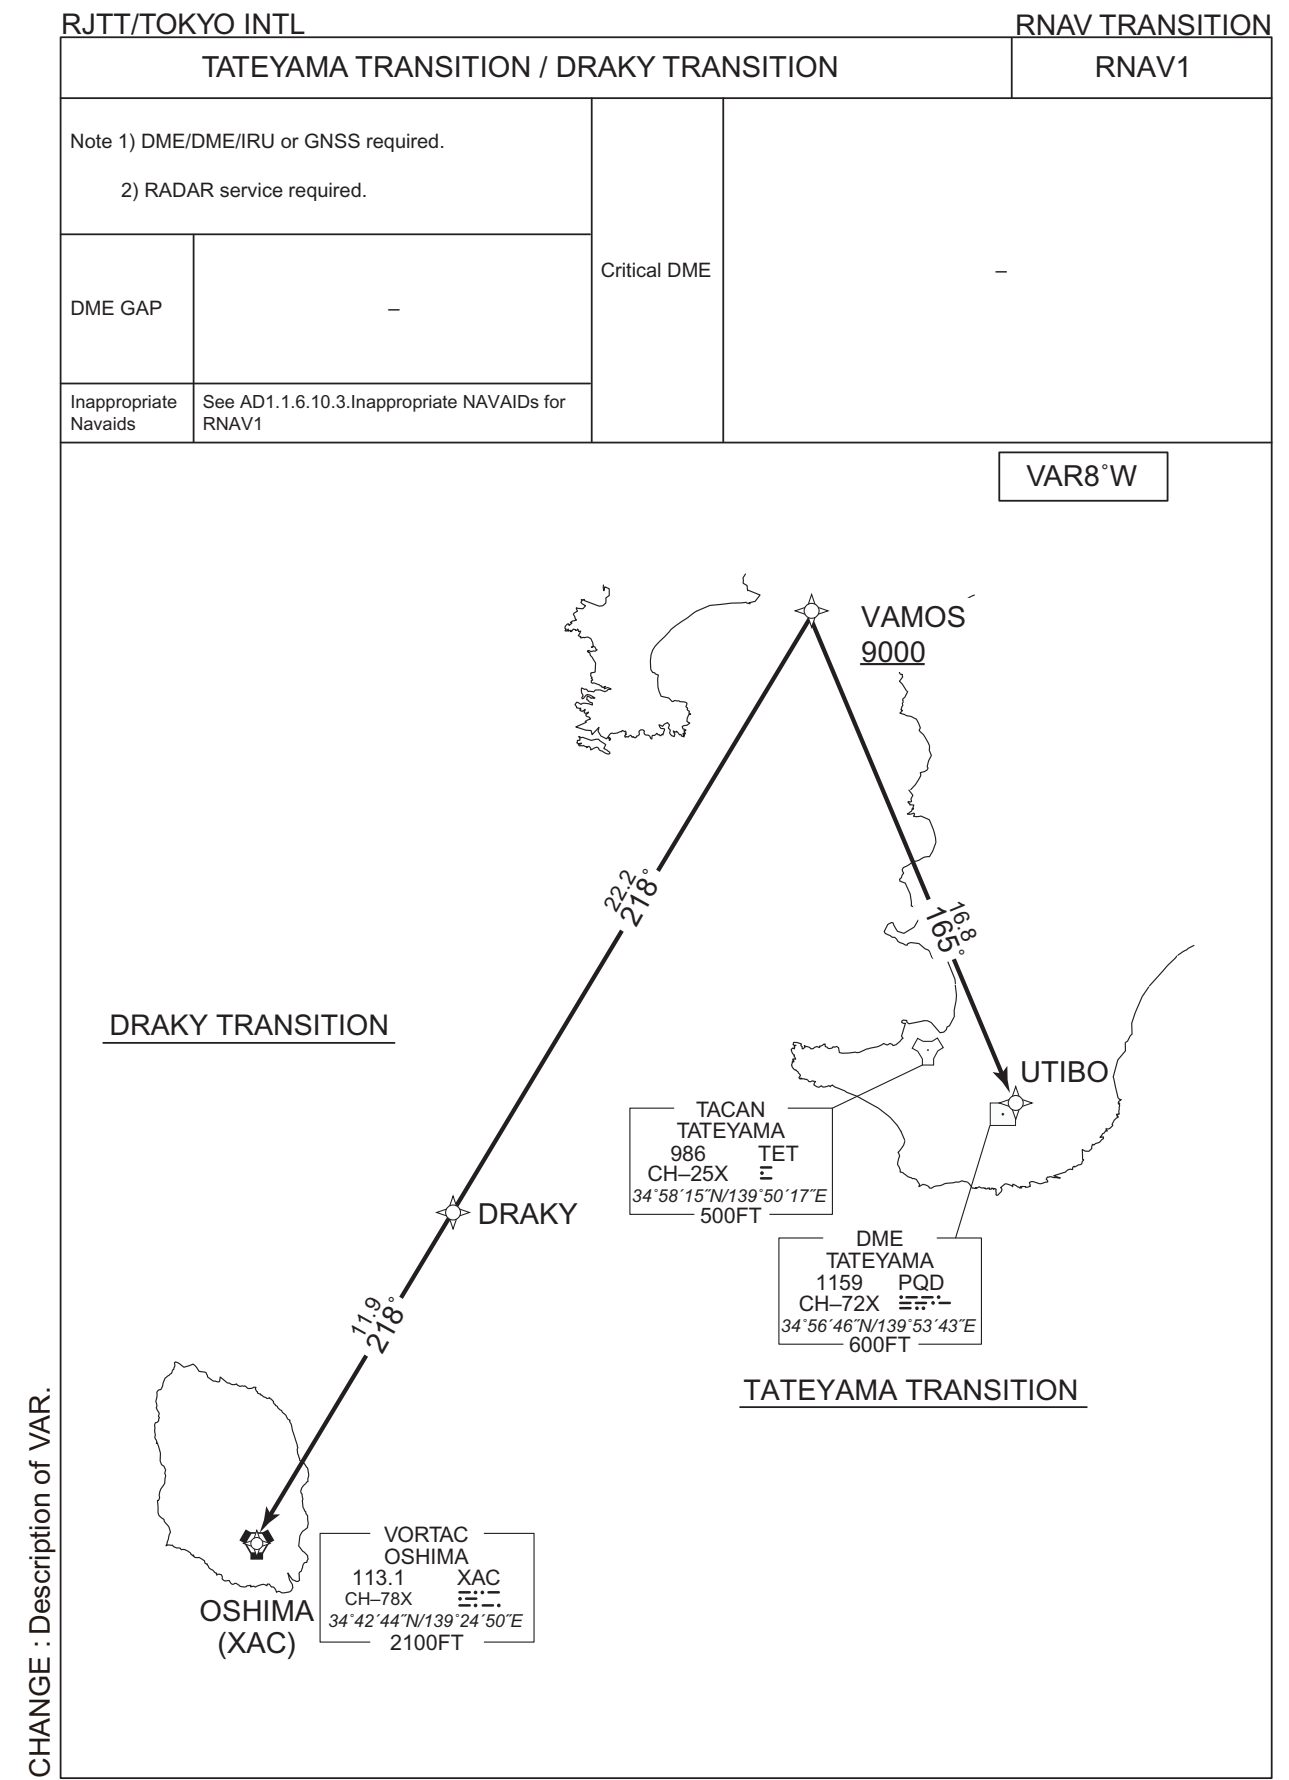

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV TRANSITION

TATEYAMA TRANSITION

From VAMOS at or above 9000FT, to UTIBO.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	VAMOS	—	—	-7.9	—	—	+9000	—	—	RNAV1
002	TF	UTIBO	—	165 (157.0)	-7.9	16.8	—	—	—	—	RNAV1

DRAKY TRANSITION

From VAMOS at or above 9000FT, to DRAKY, to XAC.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	VAMOS	—	—	-7.9	—	—	+9000	—	—	RNAV1
002	TF	DRAKY	—	218 (210.2)	-7.9	22.2	—	—	—	—	RNAV1
003	TF	XAC	—	218 (210.1)	-7.9	11.9	—	—	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
DRAKY	345301.7N / 1393205.5E	VAMOS	351215.5N / 1394543.6E
UTIBO	345647.0N / 1395343.9E	XAC	344244.1N / 1392450.5E

CHANGE : VAR.

STANDARD DEPARTURE CHART-INSTRUMENT


RJTT/TOKYO INTL

RNAV SID

LAXAS FOUR DEPARTURE			RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		Critical DME	RWY16R : TTE 1.2NM FM DER - 5.0NM to T6R11 RWY34R : TET 2.5NM FM DER - 10.0NM to TT502 RWY34L : TET 2.9NM FM DER - 7.3NM to TT502 RWY22 : HYD 5.0NM to HOBBS - 4.0NM to HOBBS TET 5.0NM to HOBBS - 4.0NM to HOBBS
DME GAP	RWY16R:DER - 1.2NM FM DER RWY16L:DER - 1.0NM FM DER RWY34R:DER - 0.2NM FM DER RWY34L:DER - 0.4NM FM DER RWY04:DER - 1.0NM FM DER RWY22:DER - 1.0NM FM DER		
Inappropriate Nav aids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1		

VAR8°W

CHANGE : DME GAP, Critical DME, VOR/DME relocated (HME→TTE).

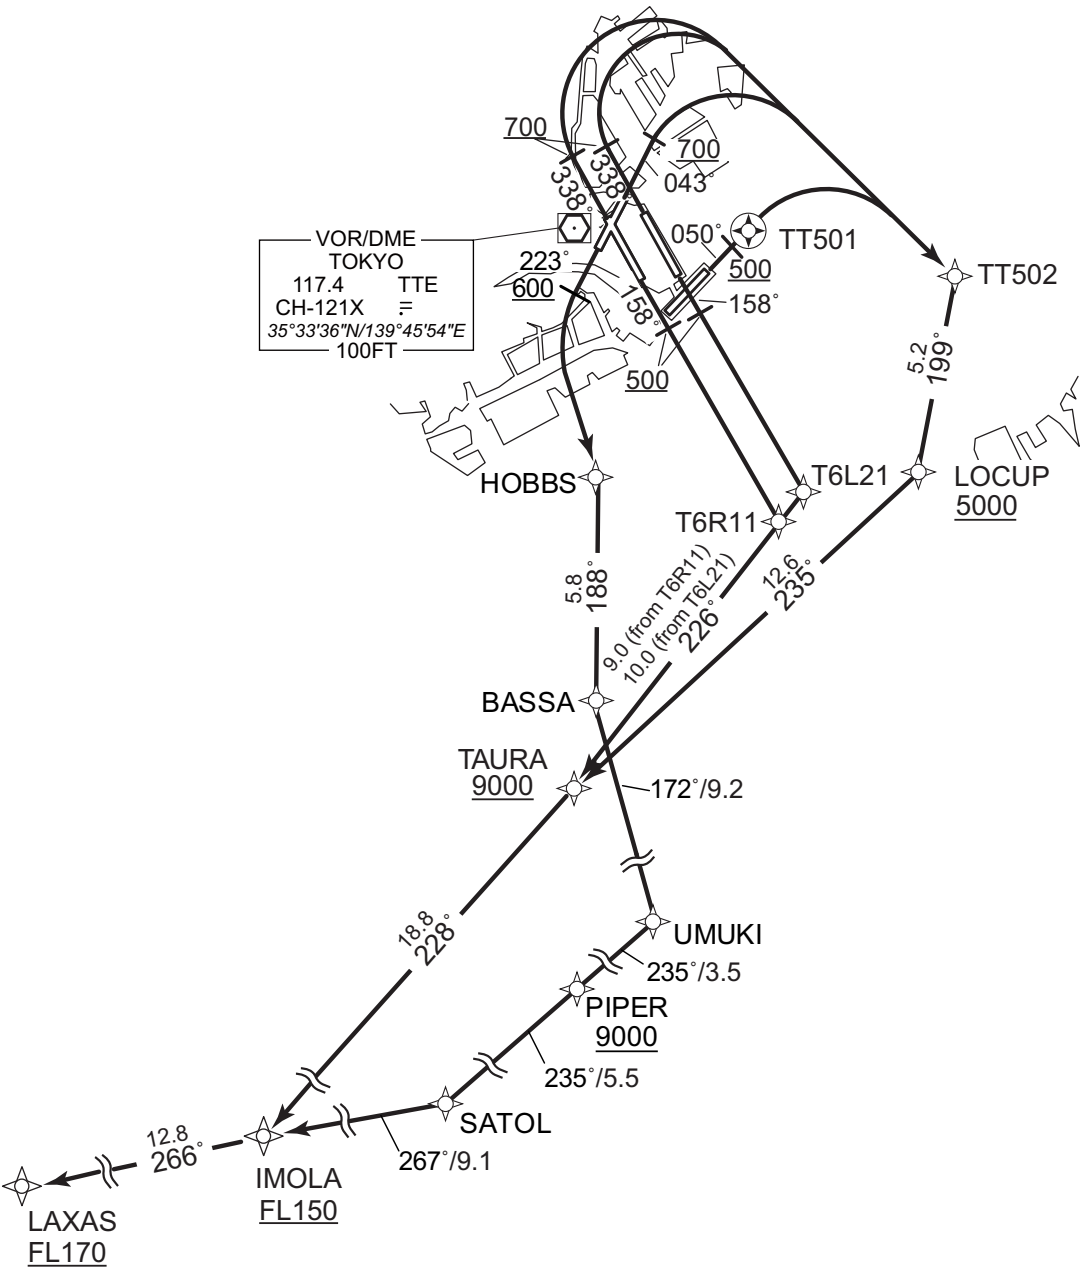

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

LAXAS FOUR DEPARTURE

- RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,
to TAURA at or above 9000FT, to IMOLA at or above FL150,
to LAXAS at or above FL170.
- RWY16L : Climb on HDG 158° at or above 500FT, direct to T6L21,
to TAURA at or above 9000FT, to IMOLA at or above FL150,
to LAXAS at or above FL170.
- RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to
TT502, to LOCUP at or above 5000FT, to TAURA at or above
9000FT, to IMOLA at or above FL150, to LAXAS at or above
FL170.
- RWY04 : Climb on HDG 043° at or above 700FT, turn right direct to TT502,
to LOCUP at or above 5000FT, to TAURA at or above 9000FT,
to IMOLA at or above FL150, to LAXAS at or above FL170.
- RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right
direct to TT502, to LOCUP at or above 5000FT, to TAURA at or
above 9000FT, to IMOLA at or above FL150, to LAXAS at or above
FL170.
- RWY22 : Climb on HDG 223° at or above 600FT, turn left direct to HOBBS,
to BASSA, to UMUKI, to PIPER at or above 9000FT, to SATOL,
to IMOLA at or above FL150, to LAXAS at or above FL170.
- Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.
RWY05 : 5.0% climb gradient required up to 500FT.
RWY22 : 5.0% climb gradient required up to 600FT.

CHANGE : PROC renamed.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

LAXAS FOUR DEPARTURE											
RWY16R											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6R11	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	TAURA	—	226 (218.1)	-7.9	9.0	—	+9000	—	—	RNAV1
004	TF	IMOLA	—	228 (220.5)	-7.9	18.8	—	+FL150	—	—	RNAV1
005	TF	LAXAS	—	266 (258.6)	-7.9	12.8	—	+FL170	—	—	RNAV1
RWY16L											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6L21	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	TAURA	—	226 (218.1)	-7.9	10.0	—	+9000	—	—	RNAV1
004	TF	IMOLA	—	228 (220.5)	-7.9	18.8	—	+FL150	—	—	RNAV1
005	TF	LAXAS	—	266 (258.6)	-7.9	12.8	—	+FL170	—	—	RNAV1
RWY34L/RWY34R											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.9	—	—	+700	—	—	RNAV1
002	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
004	TF	TAURA	—	235 (227.3)	-7.9	12.6	—	+9000	—	—	RNAV1
005	TF	IMOLA	—	228 (220.5)	-7.9	18.8	—	+FL150	—	—	RNAV1
006	TF	LAXAS	—	266 (258.6)	-7.9	12.8	—	+FL170	—	—	RNAV1

CHANGE : PROC renamed. VAR.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	043 (034.9)	-7.9	—	—	+700	—	—	RNAV1
002	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
004	TF	TAURA	—	235 (227.3)	-7.9	12.6	—	+9000	—	—	RNAV1
005	TF	IMOLA	—	228 (220.5)	-7.9	18.8	—	+FL150	—	—	RNAV1
006	TF	LAXAS	—	266 (258.6)	-7.9	12.8	—	+FL170	—	—	RNAV1

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.9	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.9	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
005	TF	TAURA	—	235 (227.3)	-7.9	12.6	—	+9000	—	—	RNAV1
006	TF	IMOLA	—	228 (220.5)	-7.9	18.8	—	+FL150	—	—	RNAV1
007	TF	LAXAS	—	266 (258.6)	-7.9	12.8	—	+FL170	—	—	RNAV1

CHANGE : VAR.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	223 (214.9)	-7.9	—	—	+600	—	—	RNAV1
002	DF	HOBBS	—	—	-7.9	—	L	—	—	—	RNAV1
003	TF	BASSA	—	188 (179.9)	-7.9	5.8	—	—	—	—	RNAV1
004	TF	UMUKI	—	172 (163.9)	-7.9	9.2	—	—	—	—	RNAV1
005	TF	PIPER	—	235 (227.4)	-7.9	3.5	—	+9000	—	—	RNAV1
006	TF	SATOL	—	235 (227.4)	-7.9	5.5	—	—	—	—	RNAV1
007	TF	IMOLA	—	267 (258.7)	-7.9	9.1	—	+FL150	—	—	RNAV1
008	TF	LAXAS	—	266 (258.6)	-7.9	12.8	—	+FL170	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
BASSA	352108.8N / 1394542.2E	T6L21	352639.1N / 1395222.0E
HOBBS	352653.9N / 1394541.3E	T6R11	352552.5N / 1395137.2E
IMOLA	350426.0N / 1392951.0E	TAURA	351846.1N / 1394447.3E
LAXAS	350153.1N / 1391432.8E	TT501	353328.7N / 1395029.9E
LOCUP	352718.8N / 1395608.5E	TT502	353224.4N / 1395720.7E
PIPER	350958.3N / 1394542.0E	UMUKI	351219.1N / 1394849.2E
SATOL	350613.3N / 1394043.4E		

CHANGE : PROC course. VAR.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

NINOX FOUR DEPARTURE

RNAV1

Note 1) DME/DME/IRU or GNSS required.

※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling.

2) RADAR service required.

DME GAP

RWY16R : DER - 1.2NM FM DER
 RWY16L : DER - 1.0NM FM DER
 RWY34R : DER - 0.2NM FM DER
 RWY34L : DER - 0.4NM FM DER
 RWY04 : DER - 1.0NM FM DER
 RWY22 : DER - 1.0NM FM DER

Critical DME


RWY16R : TTE 1.2NM FM DER - 6.9NM to T6R12
 RWY34R : TET 2.5NM FM DER - 10.0NM to TT502
 RWY34L : TET 2.9NM FM DER - 7.3NM to TT502
 RWY22 : HYD 5.0NM to HOBBS - 4.0NM to HOBBS
 TET 5.0NM to HOBBS - 4.0NM to HOBBS

Inappropriate
NavAids

See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1

VAR8°W

CHANGE : DME GAP, Critical DME, VOR/DME relocated (HME→TTE).

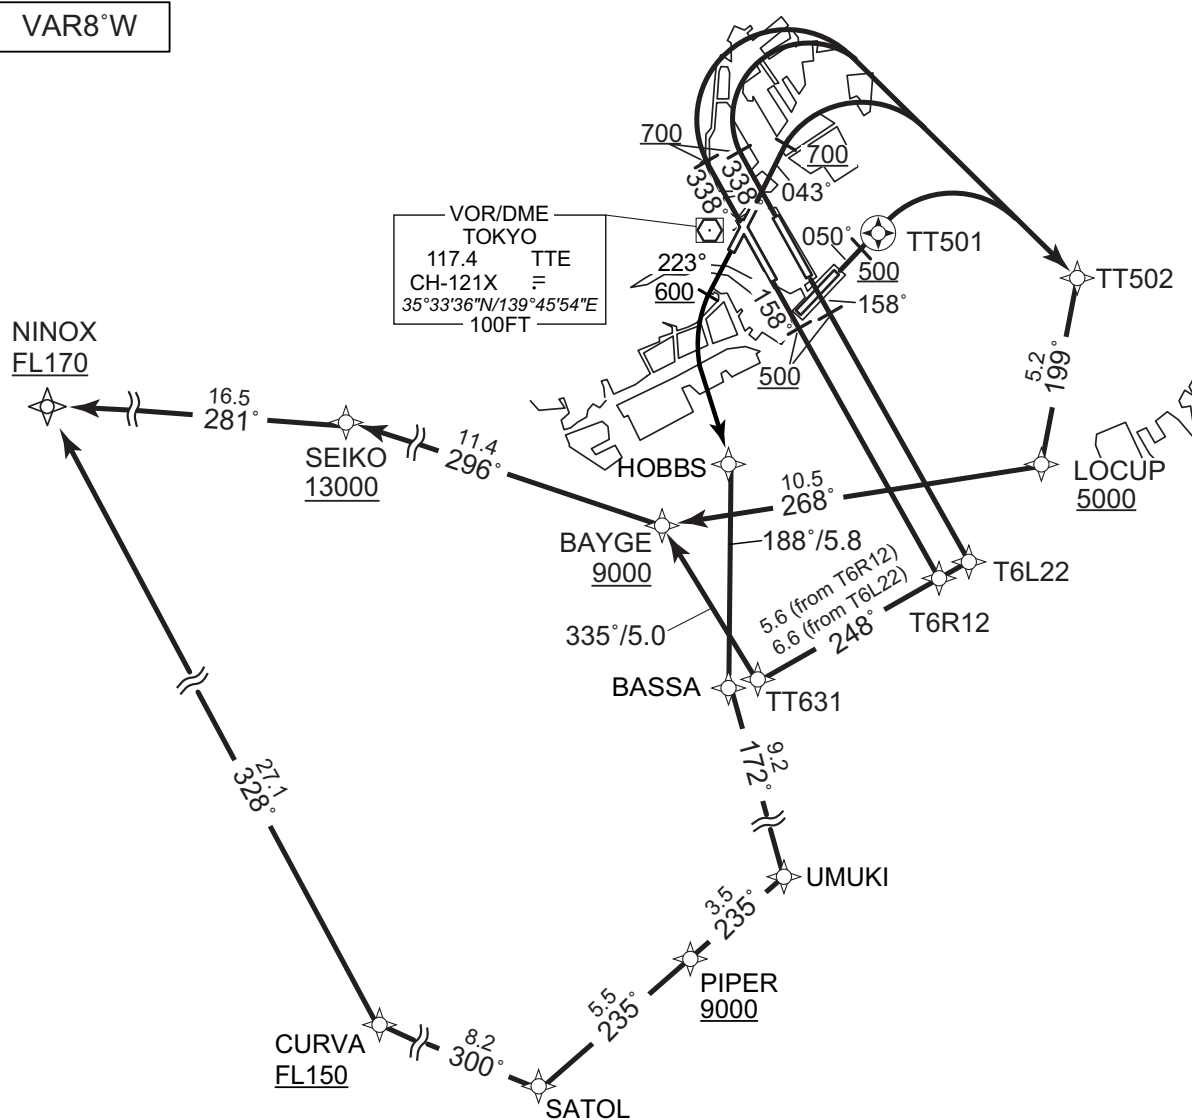

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

NINOX FOUR DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R12, to TT631, to BAYGE at or above 9000FT, to SEIKO at or above 13000FT, to NINOX at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, direct to T6L22, to TT631, to BAYGE at or above 9000FT, to SEIKO at or above 13000FT, to NINOX at or above FL170.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to TT502, to LOCUP at or above 5000FT, to BAYGE at or above 9000FT, to SEIKO at or above 13000FT, to NINOX at or above FL170.

RWY04 : Climb on HDG 043° at or above 700FT, turn right direct to TT502, to LOCUP at or above 5000FT, to BAYGE at or above 9000FT, to SEIKO at or above 13000FT, to NINOX at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to BAYGE at or above 9000FT, to SEIKO at or above 13000FT, to NINOX at or above FL170.

RWY22 : Climb on HDG 223° at or above 600FT, turn left direct to HOBBS, to BASSA, to UMUKI, to PIPER at or above 9000FT, to SATOL, to CURVA at or above FL150, to NINOX at or above FL170.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.
RWY05 : 5.0% climb gradient required up to 500FT.
RWY22 : 5.0% climb gradient required up to 600FT.

CHANGE : PROC renamed.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

NINOX FOUR DEPARTURE

RWY16R											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6R12	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	TT631	—	248 (239.8)	-7.9	5.6	—	—	—	—	RNAV1
004	TF	BAYGE	—	335 (327.0)	-7.9	5.0	—	+9000	—	—	RNAV1
005	TF	SEIKO	—	296 (287.8)	-7.9	11.4	—	+13000	—	—	RNAV1
006	TF	NINOX	—	281 (272.9)	-7.9	16.5	—	+FL170	—	—	RNAV1

RWY16L											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6L22	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	TT631	—	248 (239.8)	-7.9	6.6	—	—	—	—	RNAV1
004	TF	BAYGE	—	335 (327.0)	-7.9	5.0	—	+9000	—	—	RNAV1
005	TF	SEIKO	—	296 (287.8)	-7.9	11.4	—	+13000	—	—	RNAV1
006	TF	NINOX	—	281 (272.9)	-7.9	16.5	—	+FL170	—	—	RNAV1

RWY34L/RWY34R											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.9	—	—	+700	—	—	RNAV1
002	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
004	TF	BAYGE	—	268 (260.6)	-7.9	10.5	—	+9000	—	—	RNAV1
005	TF	SEIKO	—	296 (287.8)	-7.9	11.4	—	+13000	—	—	RNAV1
006	TF	NINOX	—	281 (272.9)	-7.9	16.5	—	+FL170	—	—	RNAV1

CHANGE : PROC renamed. PROC course. VAR.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	043 (034.9)	-7.9	—	—	+700	—	—	RNAV1
002	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
004	TF	BAYGE	—	268 (260.6)	-7.9	10.5	—	+9000	—	—	RNAV1
005	TF	SEIKO	—	296 (287.8)	-7.9	11.4	—	+13000	—	—	RNAV1
006	TF	NINOX	—	281 (272.9)	-7.9	16.5	—	+FL170	—	—	RNAV1
RWY05											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.9	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.9	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
005	TF	BAYGE	—	268 (260.6)	-7.9	10.5	—	+9000	—	—	RNAV1
006	TF	SEIKO	—	296 (287.8)	-7.9	11.4	—	+13000	—	—	RNAV1
007	TF	NINOX	—	281 (272.9)	-7.9	16.5	—	+FL170	—	—	RNAV1

CHANGE : PROC course. VAR.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY22


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	223 (214.9)	-7.9	—	—	+600	—	—	RNAV1
002	DF	HOBBS	—	—	-7.9	—	L	—	—	—	RNAV1
003	TF	BASSA	—	188 (179.9)	-7.9	5.8	—	—	—	—	RNAV1
004	TF	UMUKI	—	172 (163.9)	-7.9	9.2	—	—	—	—	RNAV1
005	TF	PIPER	—	235 (227.4)	-7.9	3.5	—	+9000	—	—	RNAV1
006	TF	SATOL	—	235 (227.4)	-7.9	5.5	—	—	—	—	RNAV1
007	TF	CURVA	—	300 (292.2)	-7.9	8.2	—	+FL150	—	—	RNAV1
008	TF	NINOX	—	328 (319.6)	-7.9	27.1	—	+FL170	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
BASSA	352108.8N / 1394542.2E	SEIKO	352904.5N / 1393005.0E
BAYGE	352535.4N / 1394327.4E	T6L22	352441.2N / 1395345.4E
CURVA	350919.0N / 1393124.4E	T6R12	352413.6N / 1395247.1E
HOBBS	352653.9N / 1394541.3E	TT501	353328.7N / 1395029.9E
LOCUP	352718.8N / 1395608.5E	TT502	353224.4N / 1395720.7E
NINOX	352953.4N / 1390953.1E	TT631	352123.4N / 1394648.6E
PIPER	350958.3N / 1394542.0E	UMUKI	351219.1N / 1394849.2E
SATOL	350613.3N / 1394043.4E		

CHANGE : PROC course. VAR.

STANDARD DEPARTURE CHART-INSTRUMENT

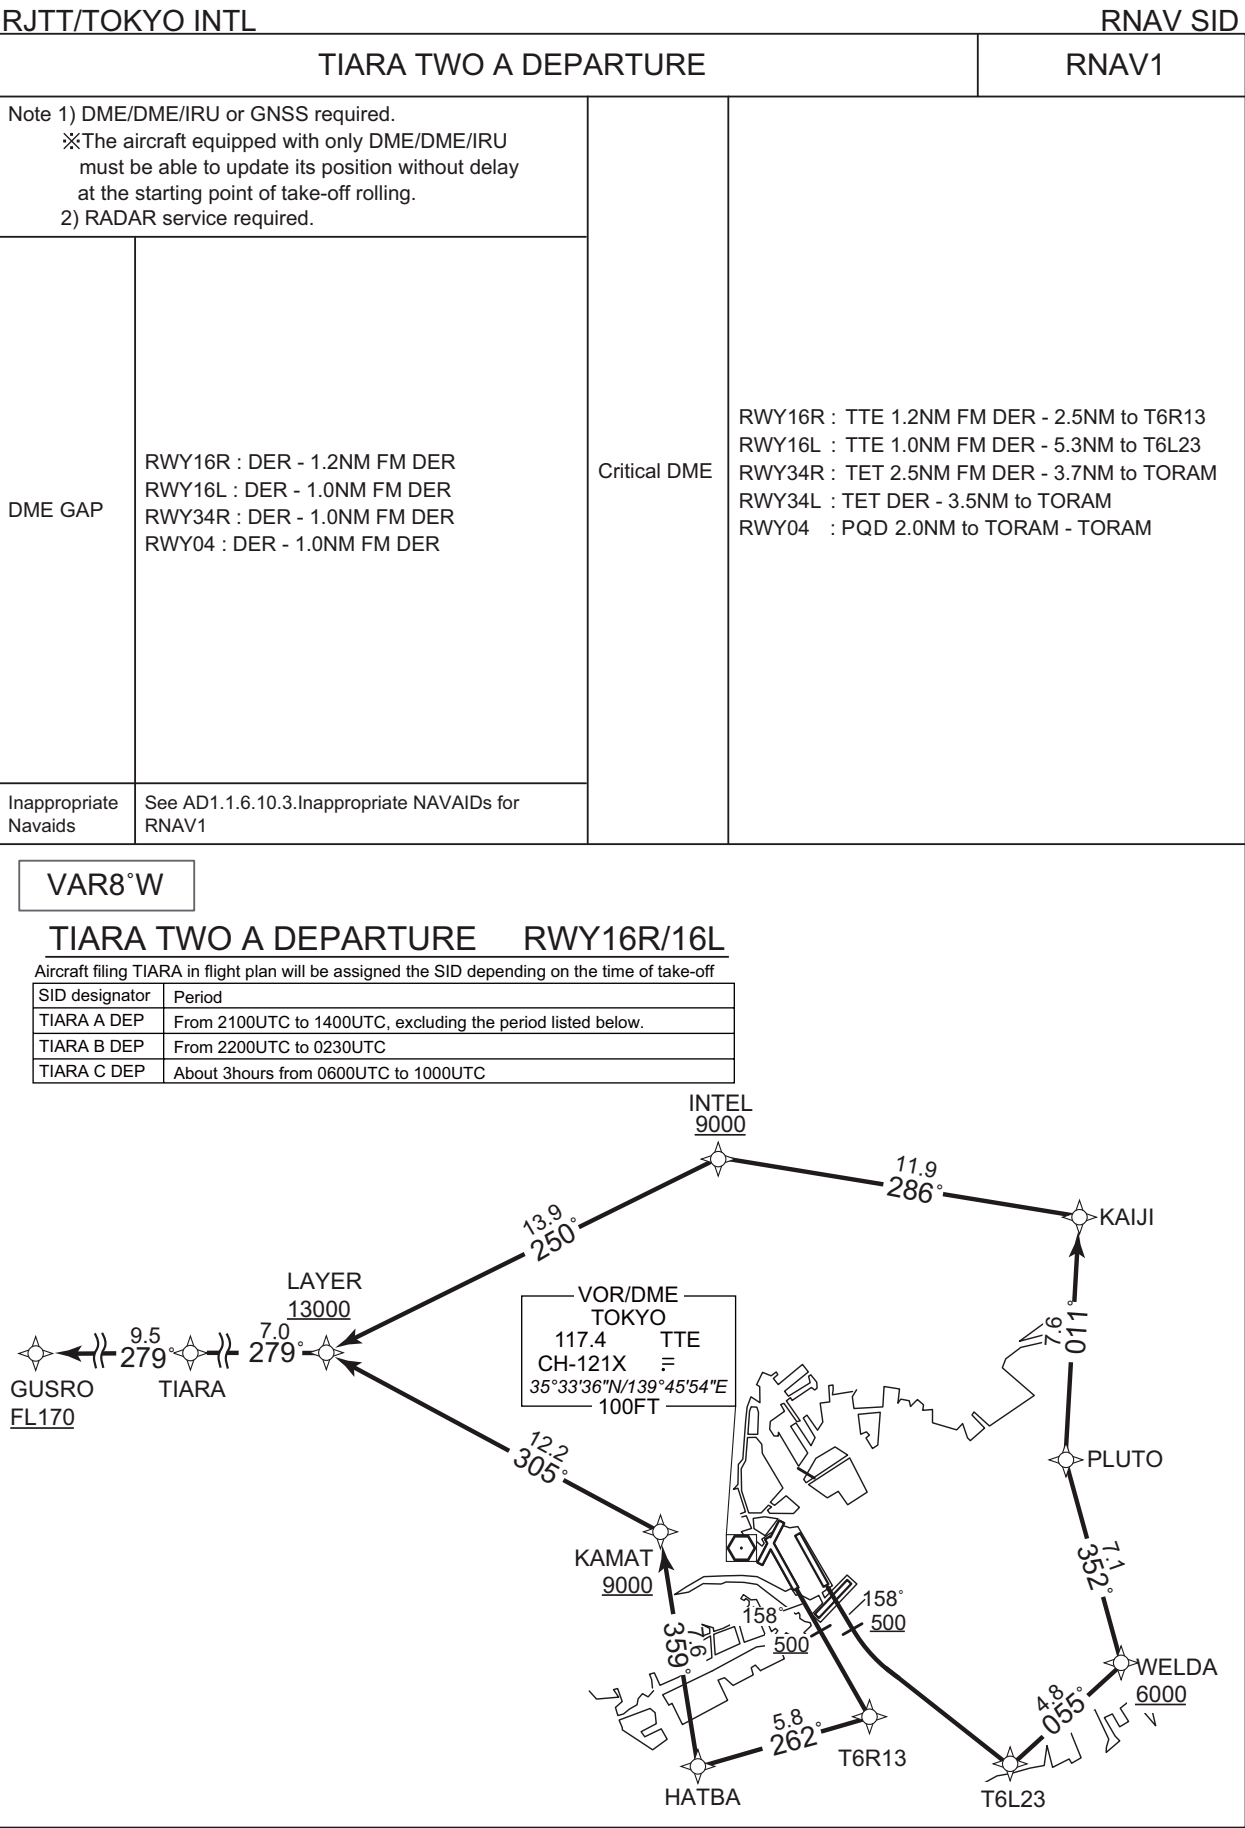

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL


RNAV SID

VAR8°W

TIARA TWO A DEPARTURE RWY 34L/34R/04/05

Aircraft filing TIARA in flight plan will be assigned the SID depending on the time of take-off

SID designator	Period
TIARA A DEP	From 2100UTC to 1400UTC, excluding the period listed below.
TIARA B DEP	From 2200UTC to 0230UTC
TIARA C DEP	About 3hours from 0600UTC to 1000UTC

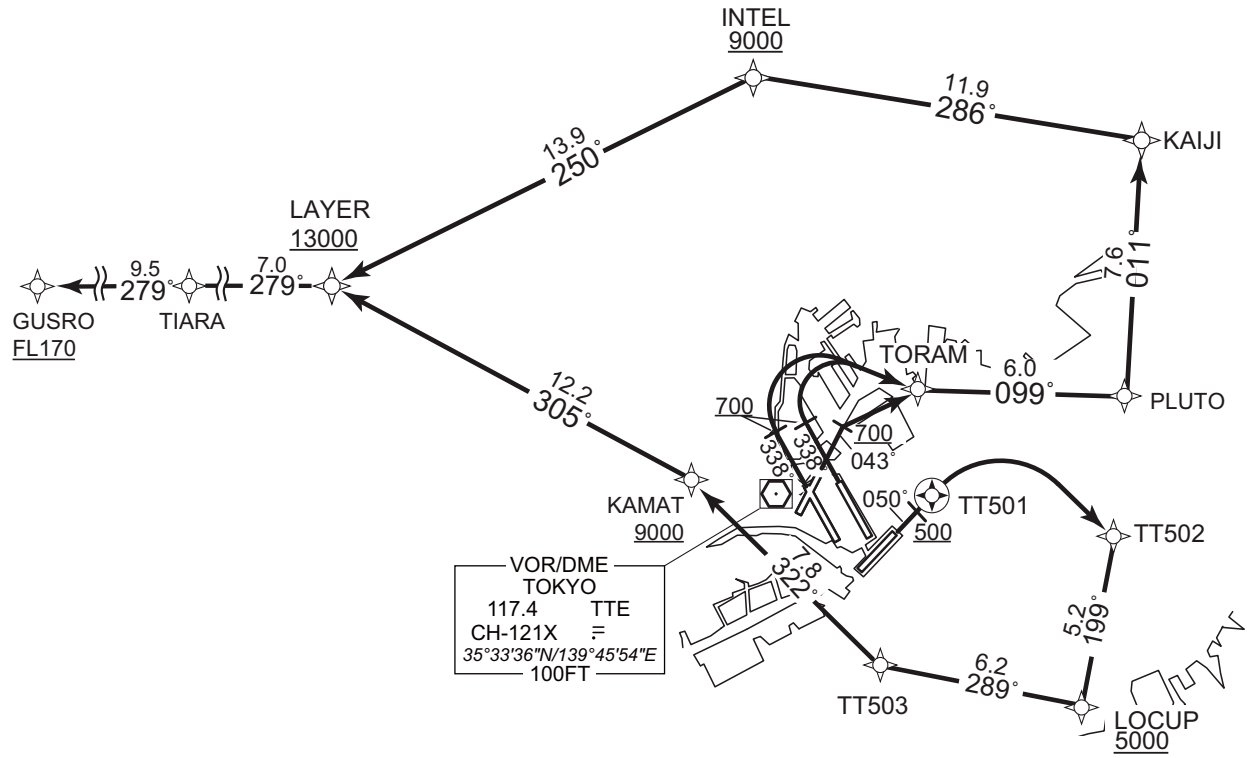

CHANGE : VOR/DME relocated (HME→TTE).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

TIARA TWO A DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R13,
to HATBA, to KAMAT at or above 9000FT, to LAYER at or above
13000FT, to TIARA, to GUSRO at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23,
to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or
above 9000FT, to LAYER at or above 13000FT, to TIARA,
to GUSRO at or above FL170.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to
TORAM, to PLUTO, to KAIJI, to INTEL at or above 9000FT,
to LAYER at or above 13000FT, to TIARA, to GUSRO at or above FL170.

RWY04 : Climb on HDG 043° at or above 700FT, direct to TORAM, to PLUTO,
to KAIJI, to INTEL at or above 9000FT, to LAYER at or above
13000FT, to TIARA, to GUSRO at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right
direct to TT502, to LOCUP at or above 5000FT, to TT503, to
KAMAT at or above 9000FT, to LAYER at or above 13000FT, to TIARA,
to GUSRO at or above FL170.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.
RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

TIARA TWO A DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6R13	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	HATBA	—	262 (253.8)	-7.9	5.8	—	—	—	—	RNAV1
004	TF	KAMAT	—	359 (351.1)	-7.9	7.6	—	+9000	—	—	RNAV1
005	TF	LAYER	—	305 (297.1)	-7.9	12.2	—	+13000	—	—	RNAV1
006	TF	TIARA	—	279 (271.2)	-7.9	7.0	—	—	—	—	RNAV1
007	TF	GUSRO	—	279 (271.1)	-7.9	9.5	—	+FL170	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6L23	—	—	-7.9	—	L	—	—	—	RNAV1
003	TF	WELDA	—	055 (047.3)	-7.9	4.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.9	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
006	TF	INTEL	—	286 (278.4)	-7.9	11.9	—	+9000	—	—	RNAV1
007	TF	LAYER	—	250 (242.4)	-7.9	13.9	—	+13000	—	—	RNAV1
008	TF	TIARA	—	279 (271.2)	-7.9	7.0	—	—	—	—	RNAV1
009	TF	GUSRO	—	279 (271.1)	-7.9	9.5	—	+FL170	—	—	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.9	—	—	+700	—	—	RNAV1
002	DF	TORAM	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	PLUTO	—	099 (090.7)	-7.9	6.0	—	—	—	—	RNAV1
004	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
005	TF	INTEL	—	286 (278.4)	-7.9	11.9	—	+9000	—	—	RNAV1
006	TF	LAYER	—	250 (242.4)	-7.9	13.9	—	+13000	—	—	RNAV1
007	TF	TIARA	—	279 (271.2)	-7.9	7.0	—	—	—	—	RNAV1
008	TF	GUSRO	—	279 (271.1)	-7.9	9.5	—	+FL170	—	—	RNAV1

CHANGE : PROC renamed. PROC course. VAR.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	043 (034.9)	-7.9	—	—	+700	—	—	RNAV1
002	DF	TORAM	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	PLUTO	—	099 (090.7)	-7.9	6.0	—	—	—	—	RNAV1
004	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
005	TF	INTEL	—	286 (278.4)	-7.9	11.9	—	+9000	—	—	RNAV1
006	TF	LAYER	—	250 (242.4)	-7.9	13.9	—	+13000	—	—	RNAV1
007	TF	TIARA	—	279 (271.2)	-7.9	7.0	—	—	—	—	RNAV1
008	TF	GUSRO	—	279 (271.1)	-7.9	9.5	—	+FL170	—	—	RNAV1
RWY05											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.9	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.9	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
005	TF	TT503	—	289 (280.8)	-7.9	6.2	—	—	—	—	RNAV1
006	TF	KAMAT	—	322 (314.2)	-7.9	7.8	—	+9000	—	—	RNAV1
007	TF	LAYER	—	305 (297.1)	-7.9	12.2	—	+13000	—	—	RNAV1
008	TF	TIARA	—	279 (271.2)	-7.9	7.0	—	—	—	—	RNAV1
009	TF	GUSRO	—	279 (271.1)	-7.9	9.5	—	+FL170	—	—	RNAV1
Waypoint Coordinates											
CHANGE : PROC course. VAR.											
Waypoint Identifier		Coordinates		Waypoint Identifier		Coordinates					
GUSRO		353944.8N / 1390813.1E		T6L23		352627.6N / 1395539.1E					
HATBA		352623.4N / 1394315.9E		T6R13		352800.8N / 1395006.4E					
INTEL		354553.0N / 1394340.2E		TIARA		353934.0N / 1391954.2E					
KAIJI		354409.6N / 1395806.6E		TORAM		353636.8N / 1395011.0E					
KAMAT		353353.6N / 1394148.9E		TT501		353328.7N / 1395029.9E					
LAYER		353925.4N / 1392829.5E		TT502		353224.4N / 1395720.7E					
LOCUP		352718.8N / 1395608.5E		TT503		352828.0N / 1394840.4E					
PLUTO		353632.1N / 1395736.8E		WELDA		352941.4N / 1395956.7E					

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

TIARA THREE B DEPARTURE

RNAV1


Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		Critical DME	RWY16R : TTE 1.2NM FM DER - 2.5 NM to T6R13 RWY16L : TTE 1.0NM FM DER - 5.3NM to T6L23 RWY34R : TET 2.5NM FM DER - 4.8NM to ARAKA
DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 0.6NM FM DER		
Inappropriate Navaids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1		

VAR8°W

TIARA THREE B DEPARTURE RWY16R/16L

Aircraft filing TIARA in flight plan will be assigned the SID depending on the time of take-off

SID designator	Period
TIARA A DEP	From 2100UTC to 1400UTC, excluding the period listed below.
TIARA B DEP	From 2200UTC to 0230UTC
TIARA C DEP	About 3hours from 0600UTC to 1000UTC

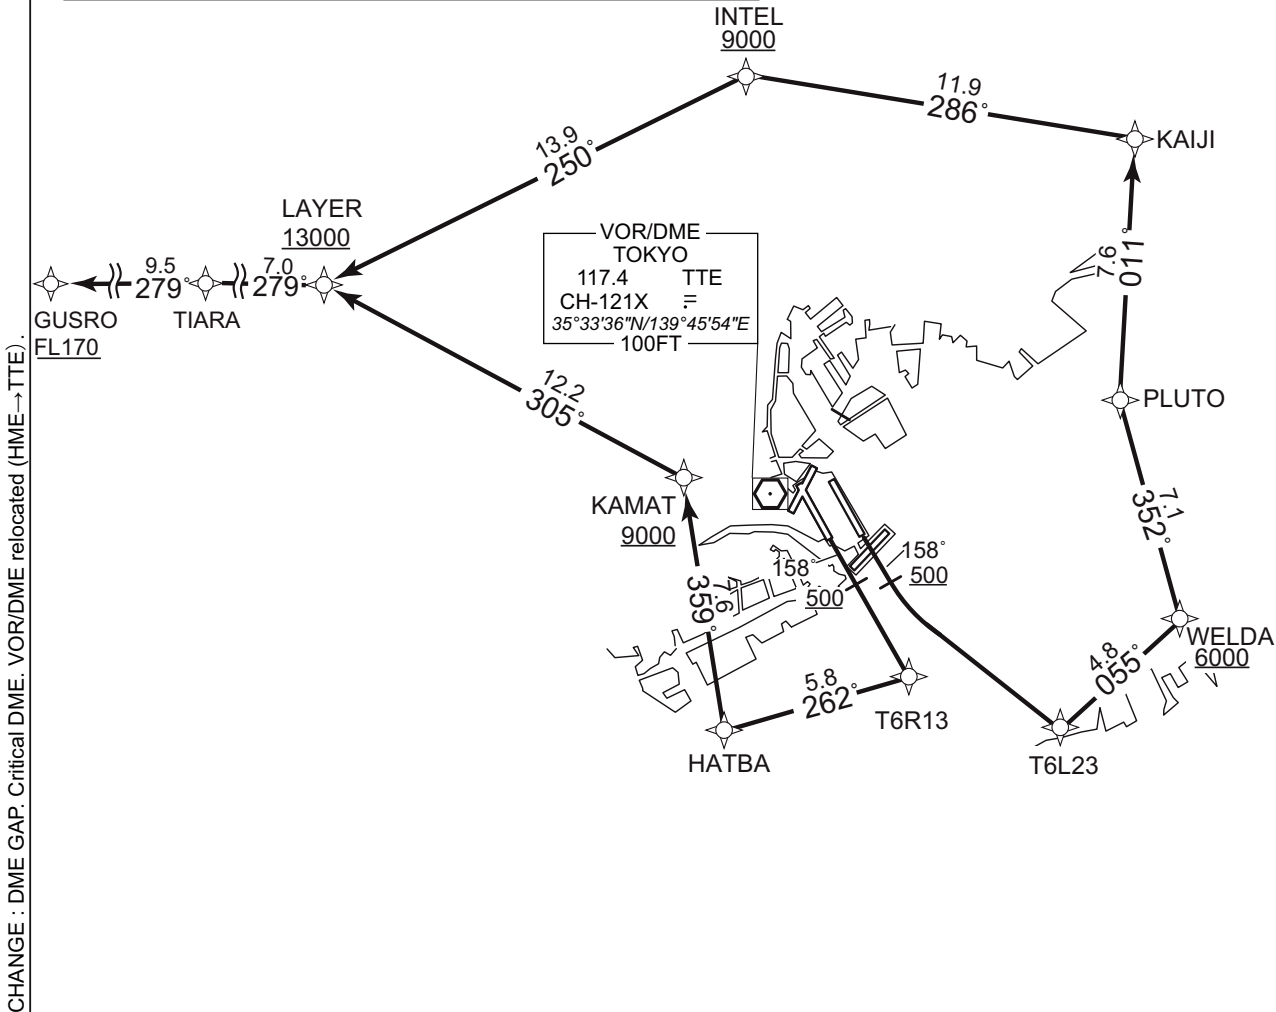

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL


RNAV SID

VAR8°W

TIARA THREE B DEPARTURE RWY 34R/05

Aircraft filing TIARA in flight plan will be assigned the SID depending on the time of take-off

SID designator	Period
TIARA A DEP	From 2100UTC to 1400UTC, excluding the period listed below.
TIARA B DEP	From 2200UTC to 0230UTC
TIARA C DEP	About 3hours from 0600UTC to 1000UTC

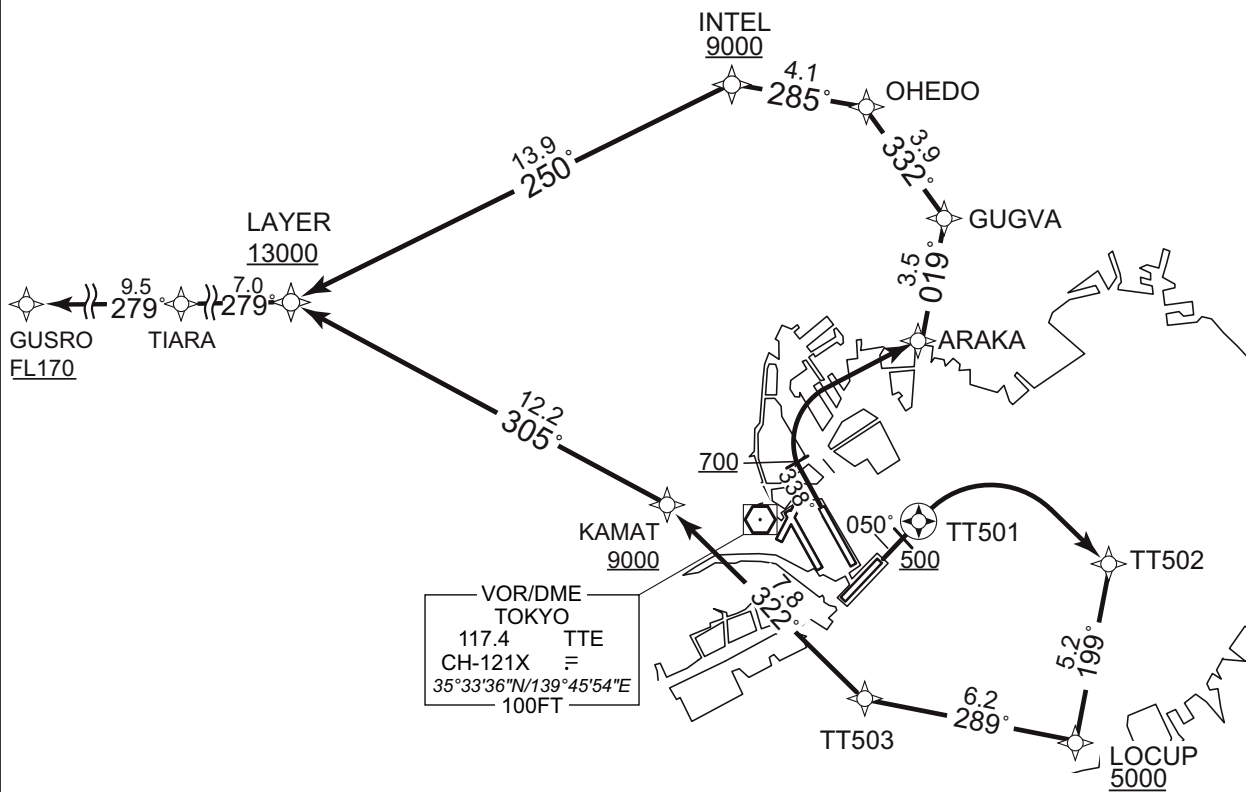

CHANGE : VOR/DME relocated (HME→TTE).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

TIARA THREE B DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R13,
to HATBA, to KAMAT at or above 9000FT, to LAYER at or above
13000FT, to TIARA, to GUSRO at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23,
to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or
above 9000FT, to LAYER at or above 13000FT, to TIARA,
to GUSRO at or above FL170.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA,
to GUGVA, to OHEDO, to INTEL at or above 9000FT, to LAYER
at or above 13000FT, to TIARA, to GUSRO at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right
direct to TT502, to LOCUP at or above 5000FT, to TT503, to
KAMAT at or above 9000FT, to LAYER at or above 13000FT, to TIARA,
to GUSRO at or above FL170.

Note RWY34R : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed. GUGVA established. EDOJO abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

TIARA THREE B DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6R13	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	HATBA	—	262 (253.8)	-7.9	5.8	—	—	—	—	RNAV1
004	TF	KAMAT	—	359 (351.1)	-7.9	7.6	—	+9000	—	—	RNAV1
005	TF	LAYER	—	305 (297.1)	-7.9	12.2	—	+13000	—	—	RNAV1
006	TF	TIARA	—	279 (271.2)	-7.9	7.0	—	—	—	—	RNAV1
007	TF	GUSRO	—	279 (271.1)	-7.9	9.5	—	+FL170	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6L23	—	—	-7.9	—	L	—	—	—	RNAV1
003	TF	WELDA	—	055 (047.3)	-7.9	4.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.9	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
006	TF	INTEL	—	286 (278.4)	-7.9	11.9	—	+9000	—	—	RNAV1
007	TF	LAYER	—	250 (242.4)	-7.9	13.9	—	+13000	—	—	RNAV1
008	TF	TIARA	—	279 (271.2)	-7.9	7.0	—	—	—	—	RNAV1
009	TF	GUSRO	—	279 (271.1)	-7.9	9.5	—	+FL170	—	—	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.9	—	—	+700	—	—	RNAV1
002	DF	ARAKA	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	GUGVA	—	019 (010.8)	-7.9	3.5	—	—	—	—	RNAV1
004	TF	OHEDO	—	332 (323.7)	-7.9	3.9	—	—	—	—	RNAV1
005	TF	INTEL	—	285 (277.0)	-7.9	4.1	—	+9000	—	—	RNAV1
006	TF	LAYER	—	250 (242.4)	-7.9	13.9	—	+13000	—	—	RNAV1
007	TF	TIARA	—	279 (271.2)	-7.9	7.0	—	—	—	—	RNAV1
008	TF	GUSRO	—	279 (271.1)	-7.9	9.5	—	+FL170	—	—	RNAV1

CHANGE : PROC renamed. GUGVA established. EDOJO abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.9	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.9	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
005	TF	TT503	—	289 (280.8)	-7.9	6.2	—	—	—	—	RNAV1
006	TF	KAMAT	—	322 (314.2)	-7.9	7.8	—	+9000	—	—	RNAV1
007	TF	LAYER	—	305 (297.1)	-7.9	12.2	—	+13000	—	—	RNAV1
008	TF	TIARA	—	279 (271.2)	-7.9	7.0	—	—	—	—	RNAV1
009	TF	GUSRO	—	279 (271.1)	-7.9	9.5	—	+FL170	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	OHEDO	354523.4N / 1394838.6E
GUGVA	354214.0N / 1395129.9E	PLUTO	353632.1N / 1395736.8E
GUSRO	353944.8N / 1390813.1E	T6L23	352627.6N / 1395539.1E
HATBA	352623.4N / 1394315.9E	T6R13	352800.8N / 1395006.4E
INTEL	354553.0N / 1394340.2E	TIARA	353934.0N / 1391954.2E
KAIJI	354409.6N / 1395806.6E	TT501	353328.7N / 1395029.9E
KAMAT	353353.6N / 1394148.9E	TT502	353224.4N / 1395720.7E
LAYER	353925.4N / 1392829.5E	TT503	352828.0N / 1394840.4E
LOCUP	352718.8N / 1395608.5E	WELDA	352941.4N / 1395956.7E

CHANGE : GUGVA established. EDOJO abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

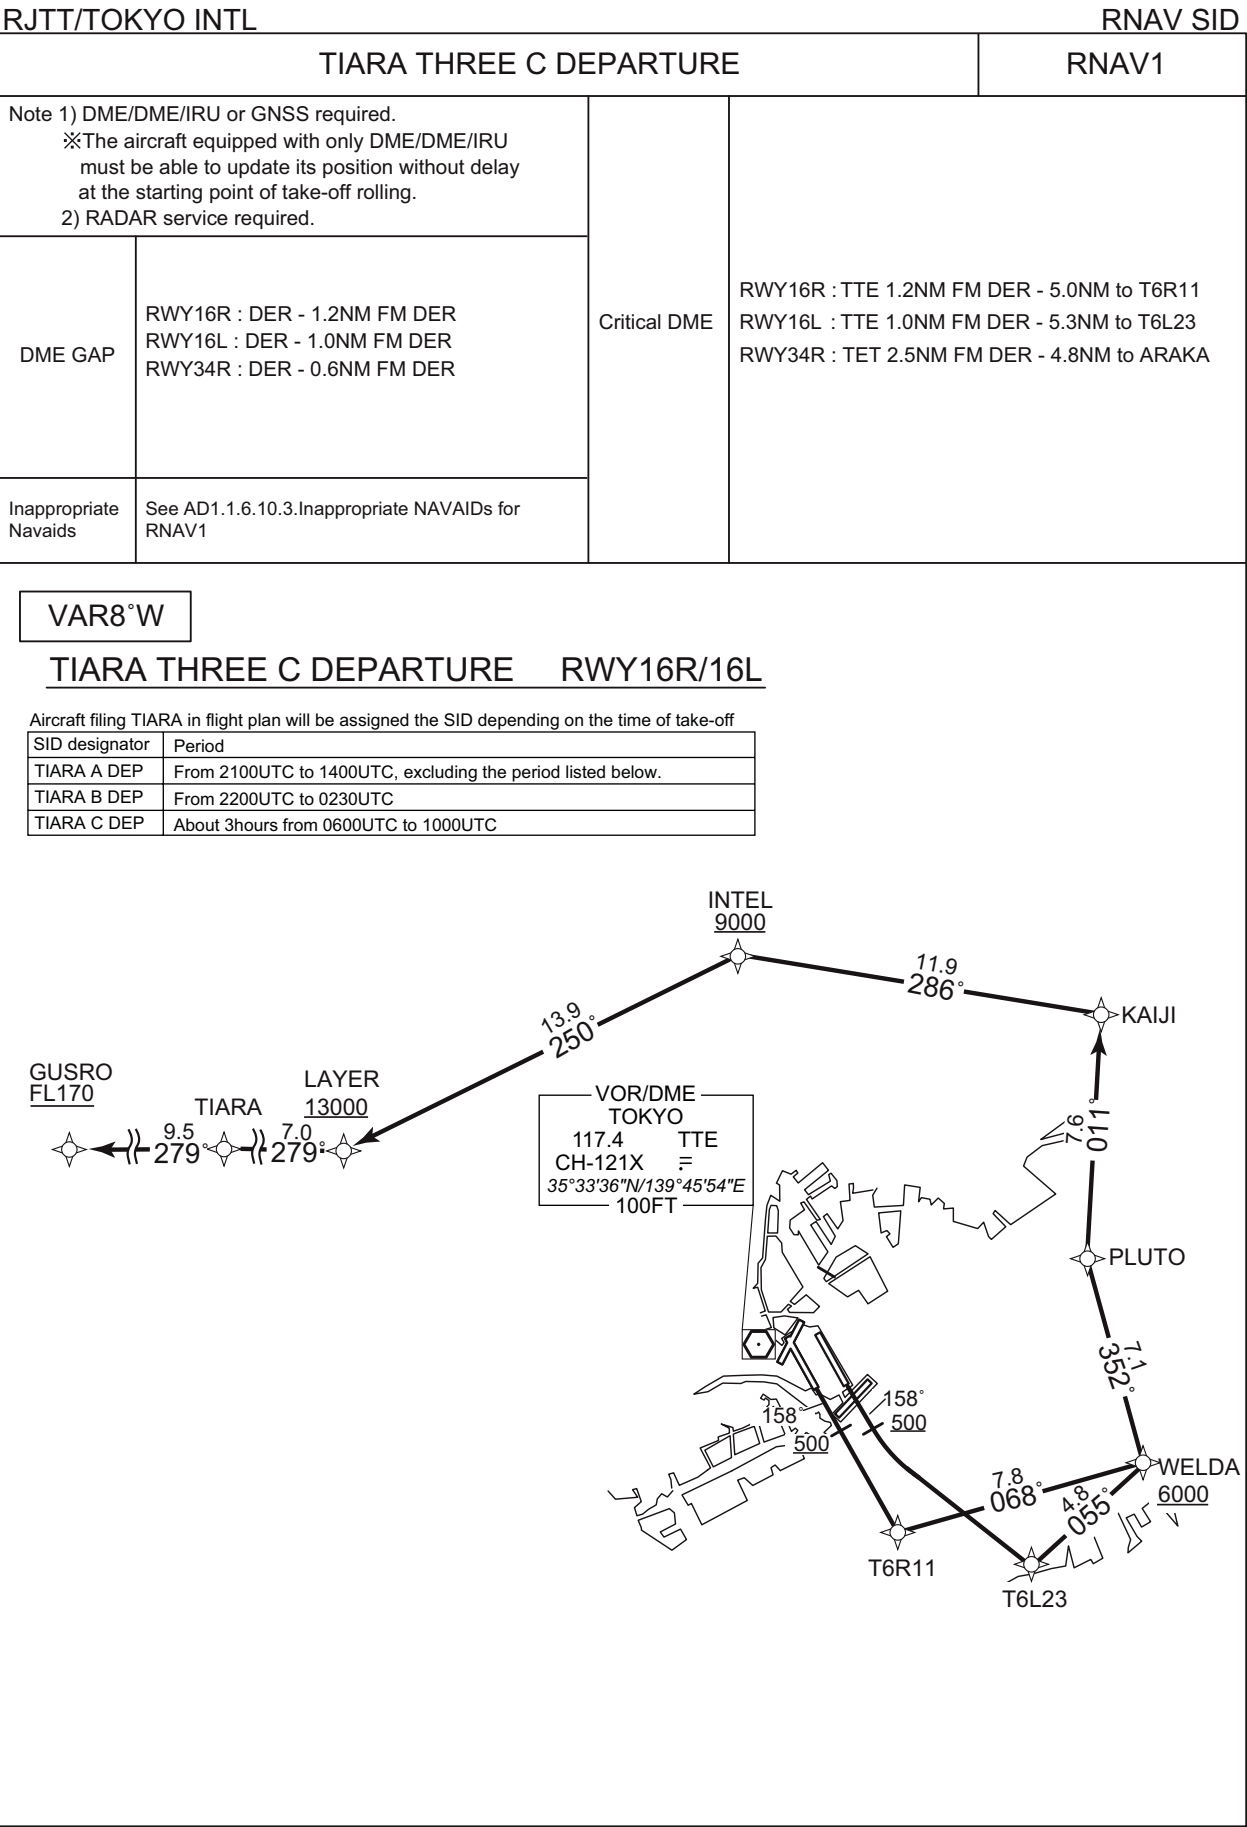

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL


RNAV SID

VAR8°W

TIARA THREE C DEPARTURE RWY 34R/05

Aircraft filing TIARA in flight plan will be assigned the SID depending on the time of take-off

SID designator	Period
TIARA A DEP	From 2100UTC to 1400UTC, excluding the period listed below.
TIARA B DEP	From 2200UTC to 0230UTC
TIARA C DEP	About 3hours from 0600UTC to 1000UTC

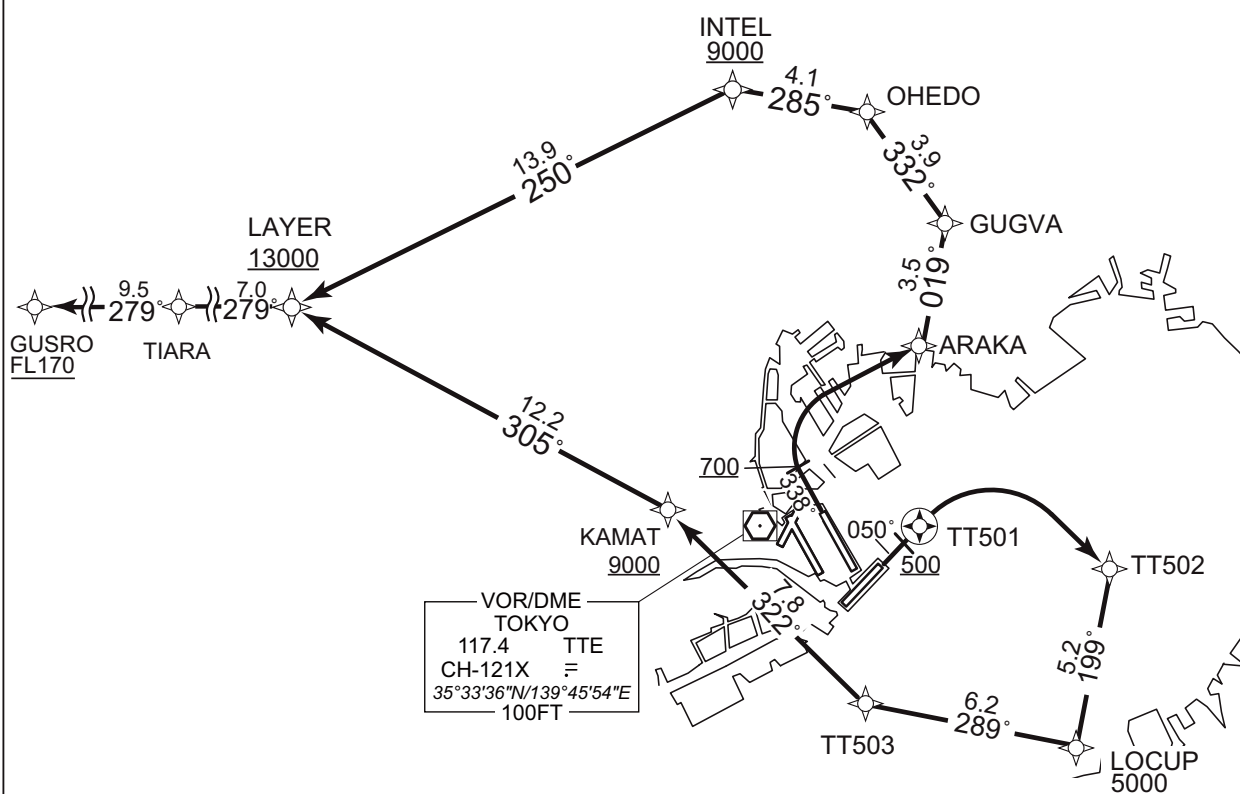

CHANGE : VOR/DME relocated (HME→TTE).

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

TIARA THREE C DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,
to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL
at or above 9000FT, to LAYER at or above 13000FT, to TIARA,
to GUSRO at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23,
to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or
above 9000FT, to LAYER at or above 13000FT, to TIARA,
to GUSRO at or above FL170.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA,
to GUGVA, to OHEDO, to INTEL at or above 9000FT, to LAYER
at or above 13000FT, to TIARA, to GUSRO at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right
direct to TT502, to LOCUP at or above 5000FT, to TT503, to
KAMAT at or above 9000FT, to LAYER at or above 13000FT, to TIARA,
to GUSRO at or above FL170.

Note RWY34R : 5.0% climb gradient required up to 700FT.
RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed. GUGVA established. EDOJO abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

TIARA THREE C DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6R11	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	WELDA	—	068 (060.6)	-7.9	7.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.9	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
006	TF	INTEL	—	286 (278.4)	-7.9	11.9	—	+9000	—	—	RNAV1
007	TF	LAYER	—	250 (242.4)	-7.9	13.9	—	+13000	—	—	RNAV1
008	TF	TIARA	—	279 (271.2)	-7.9	7.0	—	—	—	—	RNAV1
009	TF	GUSRO	—	279 (271.1)	-7.9	9.5	—	+FL170	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6L23	—	—	-7.9	—	L	—	—	—	RNAV1
003	TF	WELDA	—	055 (047.3)	-7.9	4.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.9	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
006	TF	INTEL	—	286 (278.4)	-7.9	11.9	—	+9000	—	—	RNAV1
007	TF	LAYER	—	250 (242.4)	-7.9	13.9	—	+13000	—	—	RNAV1
008	TF	TIARA	—	279 (271.2)	-7.9	7.0	—	—	—	—	RNAV1
009	TF	GUSRO	—	279 (271.1)	-7.9	9.5	—	+FL170	—	—	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.9	—	—	+700	—	—	RNAV1
002	DF	ARAKA	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	GUGVA	—	019 (010.8)	-7.9	3.5	—	—	—	—	RNAV1
004	TF	OHEDO	—	332 (323.7)	-7.9	3.9	—	—	—	—	RNAV1
005	TF	INTEL	—	285 (277.0)	-7.9	4.1	—	+9000	—	—	RNAV1
006	TF	LAYER	—	250 (242.4)	-7.9	13.9	—	+13000	—	—	RNAV1
007	TF	TIARA	—	279 (271.2)	-7.9	7.0	—	—	—	—	RNAV1
008	TF	GUSRO	—	279 (271.1)	-7.9	9.5	—	+FL170	—	—	RNAV1

CHANGE : PROC renamed. GUGVA established. EDOJO abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL RNAV SID

RWY05


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.9	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.9	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
005	TF	TT503	—	289 (280.8)	-7.9	6.2	—	—	—	—	RNAV1
006	TF	KAMAT	—	322 (314.2)	-7.9	7.8	—	+9000	—	—	RNAV1
007	TF	LAYER	—	305 (297.1)	-7.9	12.2	—	+13000	—	—	RNAV1
008	TF	TIARA	—	279 (271.2)	-7.9	7.0	—	—	—	—	RNAV1
009	TF	GUSRO	—	279 (271.1)	-7.9	9.5	—	+FL170	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	PLUTO	353632.1N / 1395736.8E
GUGVA	354214.0N / 1395129.9E	T6L23	352627.6N / 1395539.1E
GUSRO	353944.8N / 1390813.1E	T6R11	352552.5N / 1395137.2E
INTEL	354553.0N / 1394340.2E	TIARA	353934.0N / 1391954.2E
KAIJI	354409.6N / 1395806.6E	TT501	353328.7N / 1395029.9E
KAMAT	353353.6N / 1394148.9E	TT502	353224.4N / 1395720.7E
LAYER	353925.4N / 1392829.5E	TT503	352828.0N / 1394840.4E
LOCUP	352718.8N / 1395608.5E	WELDA	352941.4N / 1395956.7E
OHEDO	354523.4N / 1394838.6E		

CHANGE : GUGVA established. EDOJO abolished.


STANDARD DEPARTURE CHART-INSTRUMENT

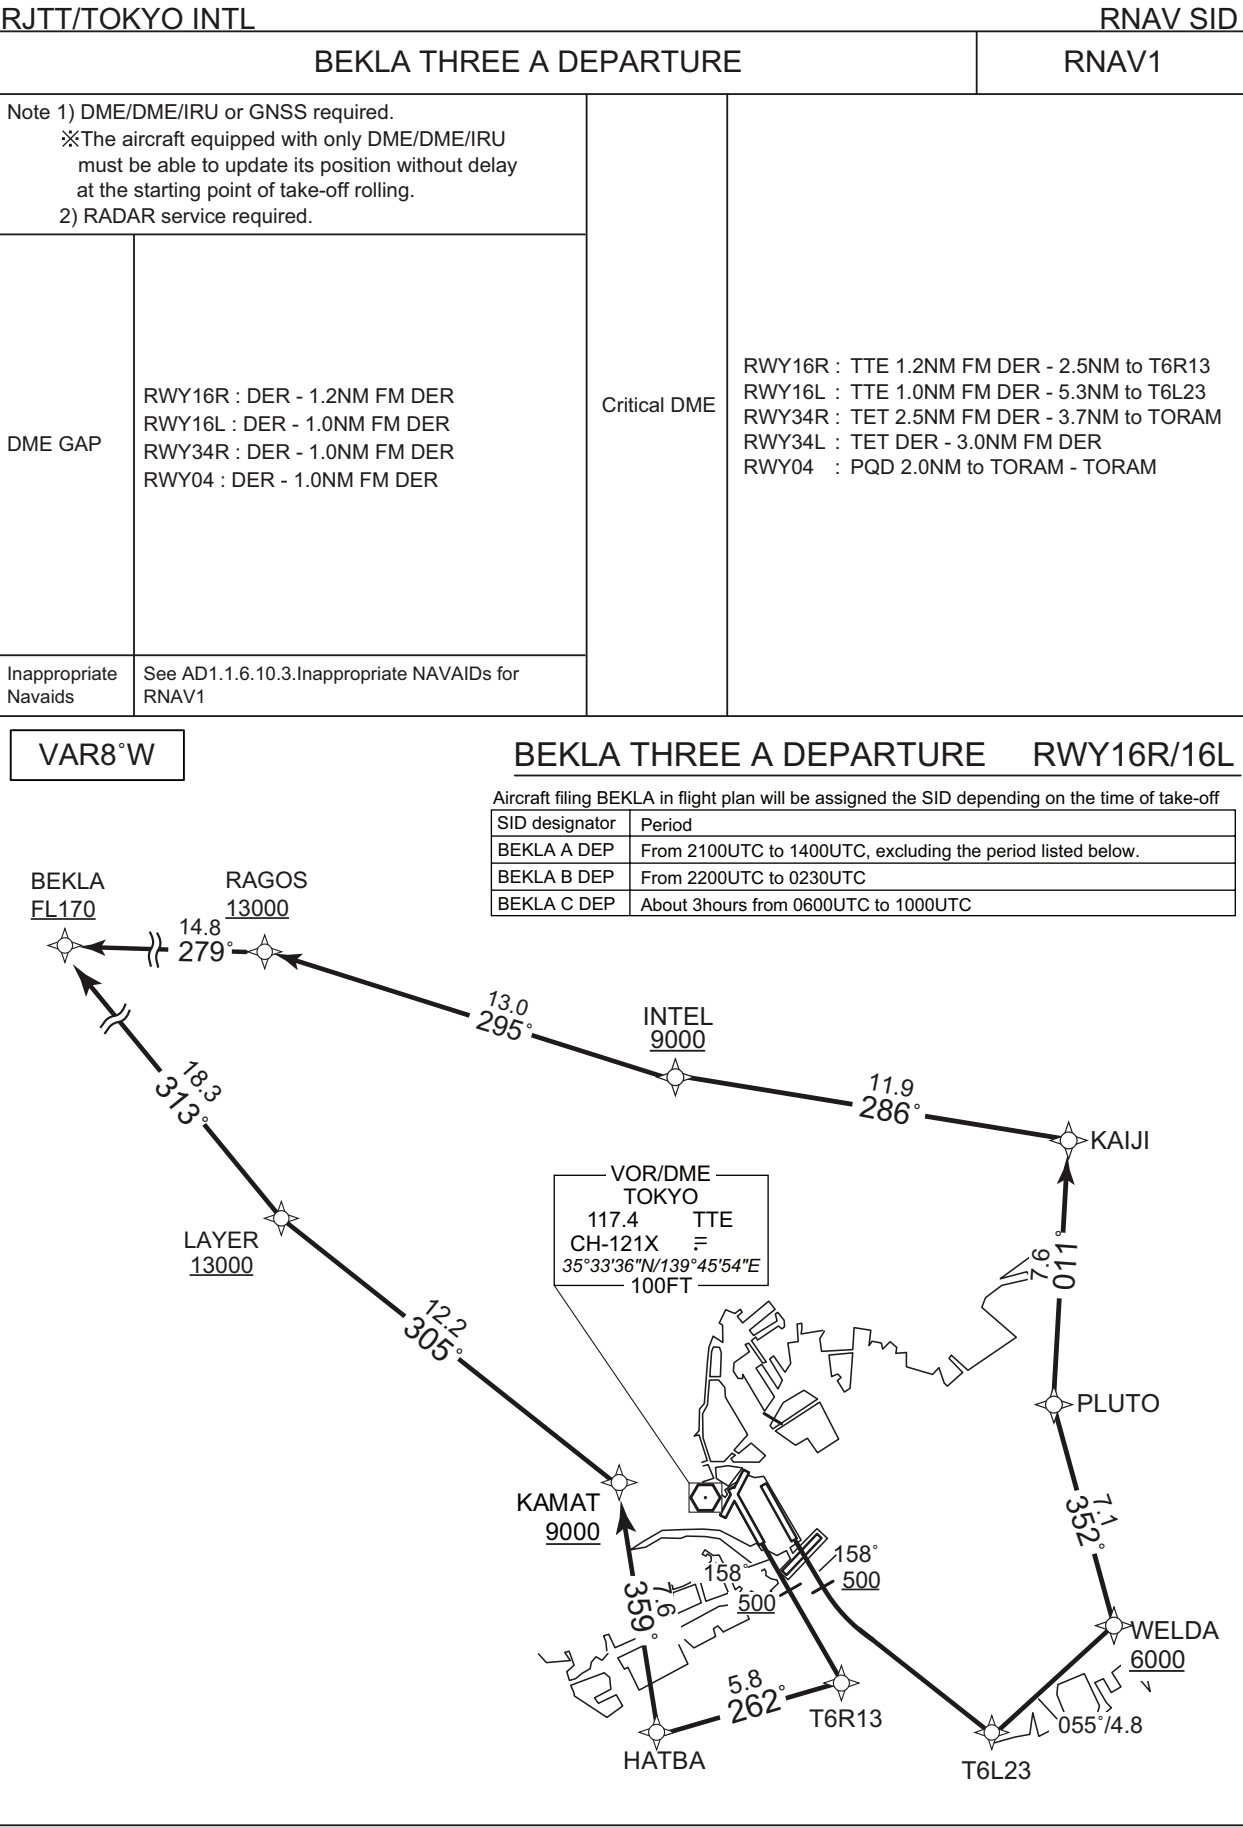

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

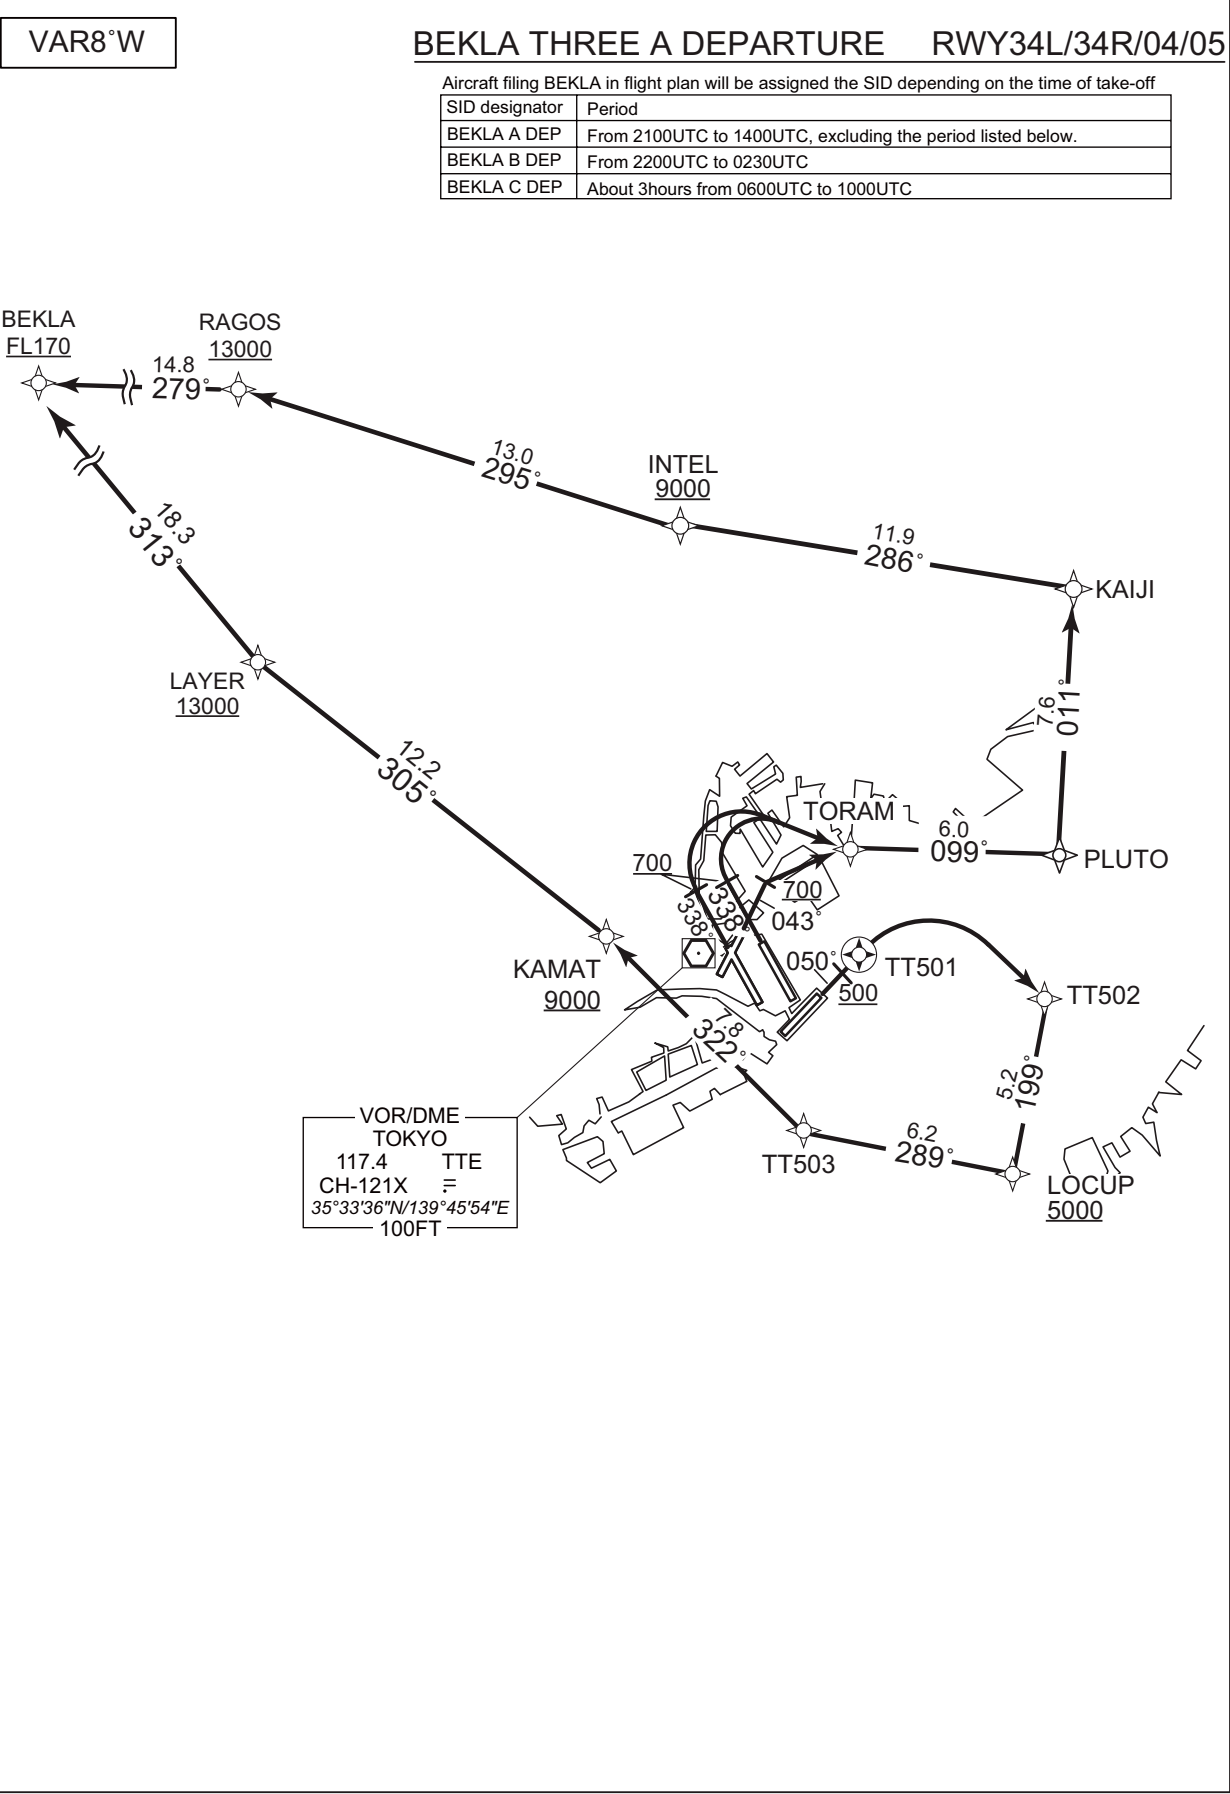

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA THREE A DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R13, to HATBA, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to BEKLA at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to TORAM, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY04 : Climb on HDG 043° at or above 700FT, direct to TORAM, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to TT503, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to BEKLA at or above FL170.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA THREE A DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6R13	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	HATBA	—	262 (253.8)	-7.9	5.8	—	—	—	—	RNAV1
004	TF	KAMAT	—	359 (351.1)	-7.9	7.6	—	+9000	—	—	RNAV1
005	TF	LAYER	—	305 (297.1)	-7.9	12.2	—	+13000	—	—	RNAV1
006	TF	BEKLA	—	313 (305.4)	-7.9	18.3	—	+FL170	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6L23	—	—	-7.9	—	L	—	—	—	RNAV1
003	TF	WELDA	—	055 (047.3)	-7.9	4.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.9	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
006	TF	INTEL	—	286 (278.4)	-7.9	11.9	—	+9000	—	—	RNAV1
007	TF	RAGOS	—	295 (287.2)	-7.9	13.0	—	+13000	—	—	RNAV1
008	TF	BEKLA	—	279 (271.2)	-7.9	14.8	—	+FL170	—	—	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.9	—	—	+700	—	—	RNAV1
002	DF	TORAM	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	PLUTO	—	099 (090.7)	-7.9	6.0	—	—	—	—	RNAV1
004	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
005	TF	INTEL	—	286 (278.4)	-7.9	11.9	—	+9000	—	—	RNAV1
006	TF	RAGOS	—	295 (287.2)	-7.9	13.0	—	+13000	—	—	RNAV1
007	TF	BEKLA	—	279 (271.2)	-7.9	14.8	—	+FL170	—	—	RNAV1

CHANGE : PROC renamed. PROC course: VAR.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	043 (034.9)	-7.9	—	—	+700	—	—	RNAV1
002	DF	TORAM	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	PLUTO	—	099 (090.7)	-7.9	6.0	—	—	—	—	RNAV1
004	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
005	TF	INTEL	—	286 (278.4)	-7.9	11.9	—	+9000	—	—	RNAV1
006	TF	RAGOS	—	295 (287.2)	-7.9	13.0	—	+13000	—	—	RNAV1
007	TF	BEKLA	—	279 (271.2)	-7.9	14.8	—	+FL170	—	—	RNAV1

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.9	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.9	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
005	TF	TT503	—	289 (280.8)	-7.9	6.2	—	—	—	—	RNAV1
006	TF	KAMAT	—	322 (314.2)	-7.9	7.8	—	+9000	—	—	RNAV1
007	TF	LAYER	—	305 (297.1)	-7.9	12.2	—	+13000	—	—	RNAV1
008	TF	BEKLA	—	313 (305.4)	-7.9	18.3	—	+FL170	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
BEKLA	354958.7N / 1391009.5E	RAGOS	354942.2N / 1392821.2E
HATBA	352623.4N / 1394315.9E	T6L23	352627.6N / 1395539.1E
INTEL	354553.0N / 1394340.2E	T6R13	352800.8N / 1395006.4E
KAIJI	354409.6N / 1395806.6E	TORAM	353636.8N / 1395011.0E
KAMAT	353353.6N / 1394148.9E	TT501	353328.7N / 1395029.9E
LAYER	353925.4N / 1392829.5E	TT502	353224.4N / 1395720.7E
LOCUP	352718.8N / 1395608.5E	TT503	352828.0N / 1394840.4E
PLUTO	353632.1N / 1395736.8E	WELDA	352941.4N / 1395956.7E

CHANGE : PROC course: VAR.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA FOUR B DEPARTURE			RNAV SID
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		Critical DME	RWY16R : TTE 1.2NM FM DER - 2.5NM to T6R13 RWY16L : TTE 1.0NM FM DER - 5.3NM to T6L23 RWY34R : TET 2.5NM FM DER - 4.8NM to ARAKA
DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 0.6NM FM DER		
Inappropriate Nav aids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1		


VAR8°W

BEKLA FOUR B DEPARTURE RWY16R/16L

Aircraft filing BEKLA in flight plan will be assigned the SID depending on the time of take-off

SID designator	Period
BEKLA A DEP	From 2100UTC to 1400UTC, excluding the period listed below.
BEKLA B DEP	From 2200UTC to 0230UTC
BEKLA C DEP	About 3hours from 0600UTC to 1000UTC

CHANGE : DME GAP, Critical DME, VOR/DME relocated (HME→TTE).

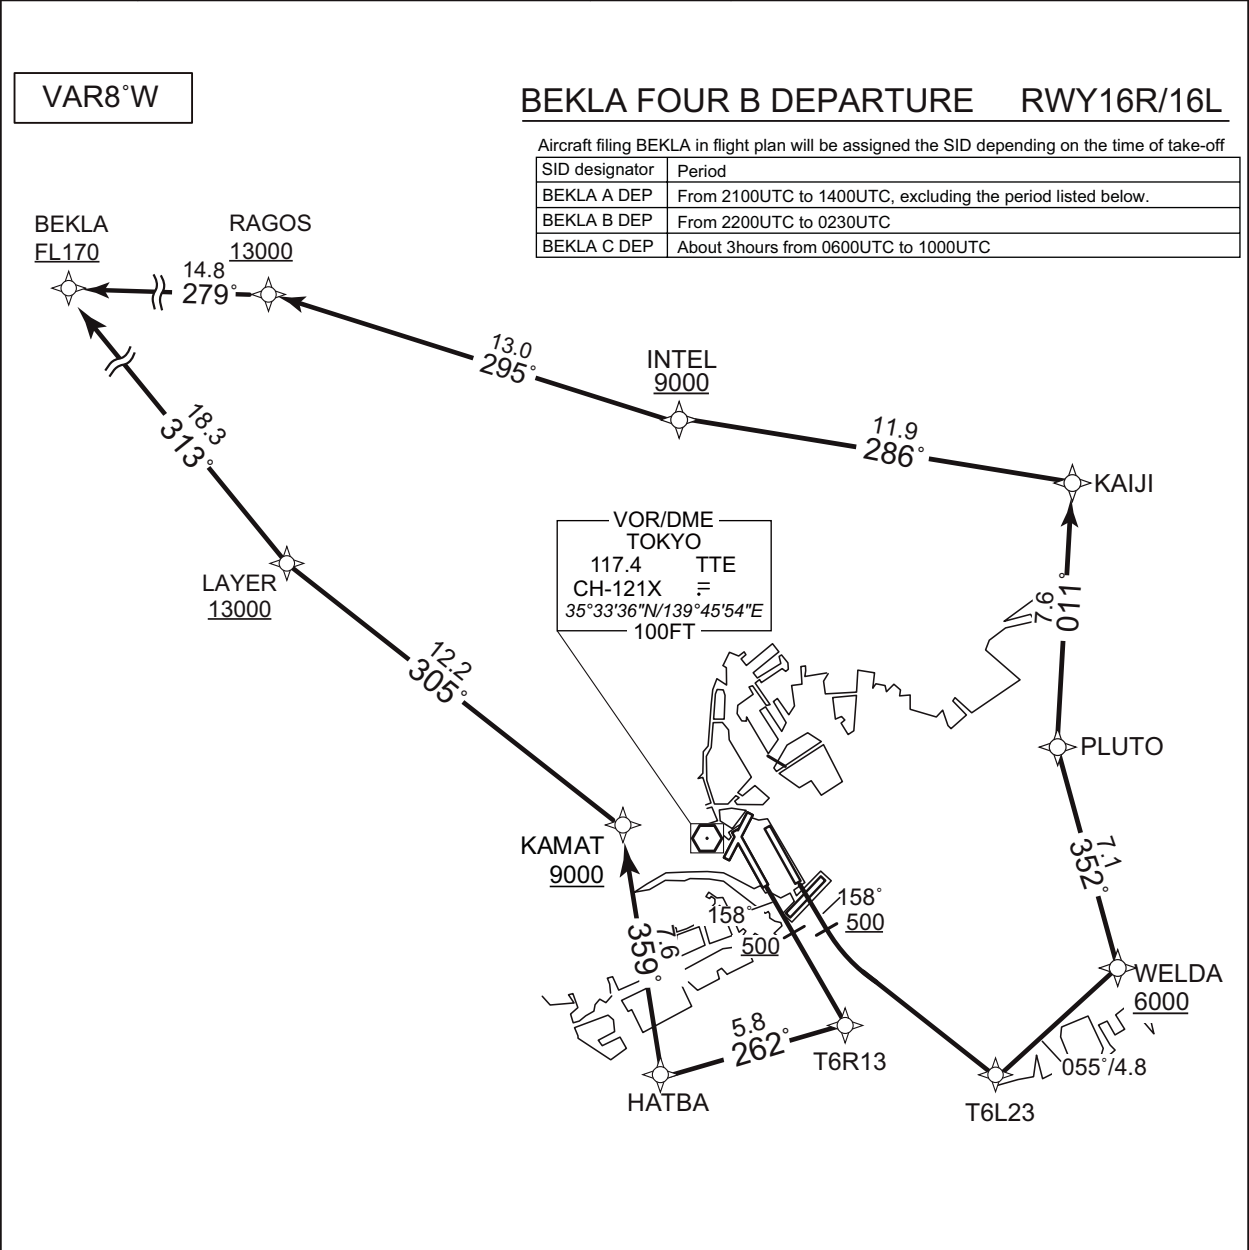

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL


RNAV SID

VAR8°W

BEKLA FOUR B DEPARTURE RWY34R/05

Aircraft filing BEKLA in flight plan will be assigned the SID depending on the time of take-off

SID designator	Period
BEKLA A DEP	From 2100UTC to 1400UTC, excluding the period listed below.
BEKLA B DEP	From 2200UTC to 0230UTC
BEKLA C DEP	About 3hours from 0600UTC to 1000UTC

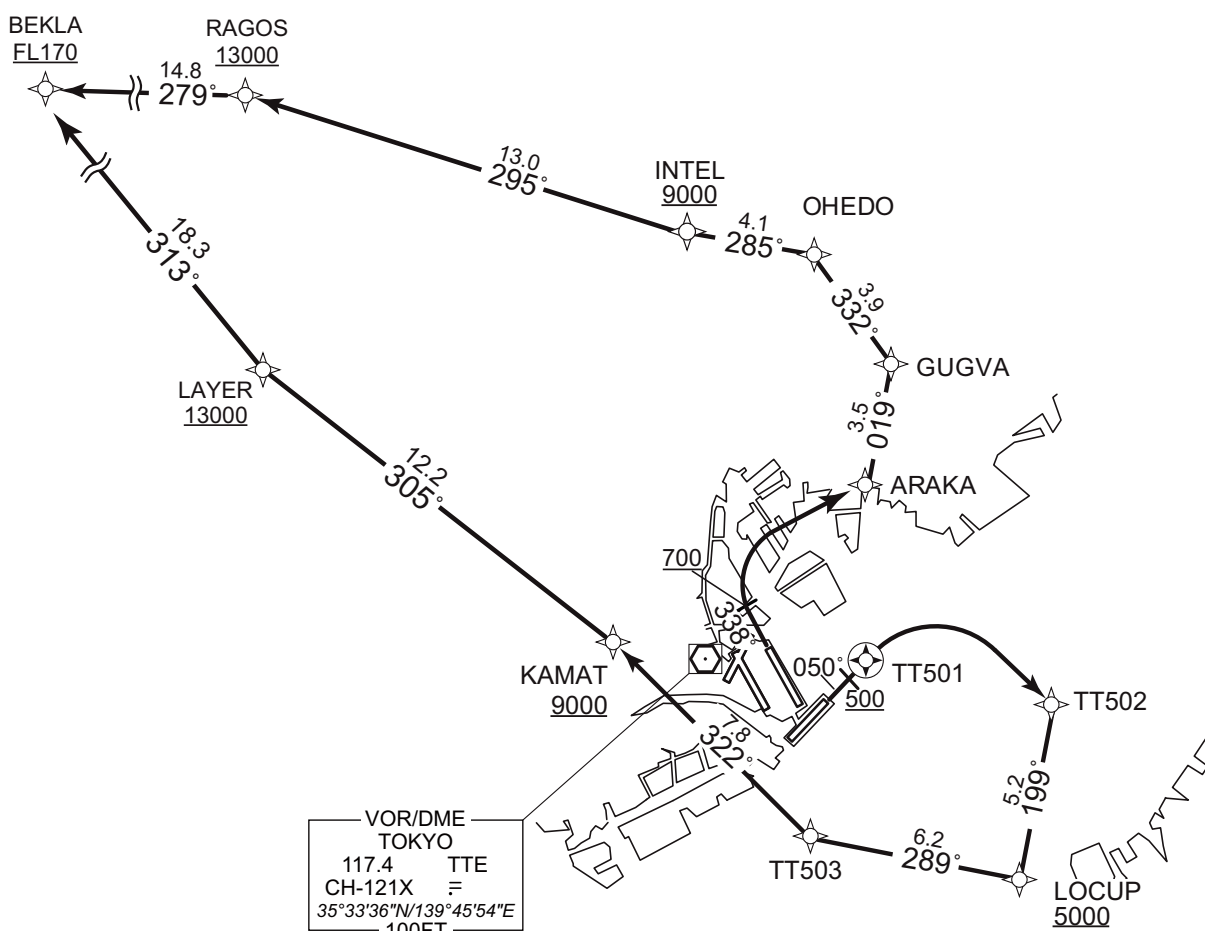

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA FOUR B DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R13, to HATBA, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to BEKLA at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23, to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA, to GUGVA, to OHEDO, to INTEL at or above 9000FT, to RAGOS at or above 13000FT, to BEKLA at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right direct to TT502, to LOCUP at or above 5000FT, to TT503, to KAMAT at or above 9000FT, to LAYER at or above 13000FT, to BEKLA at or above FL170.

Note RWY34R : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed. GUGVA established. EDOJO abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA FOUR B DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6R13	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	HATBA	—	262 (253.8)	-7.9	5.8	—	—	—	—	RNAV1
004	TF	KAMAT	—	359 (351.1)	-7.9	7.6	—	+9000	—	—	RNAV1
005	TF	LAYER	—	305 (297.1)	-7.9	12.2	—	+13000	—	—	RNAV1
006	TF	BEKLA	—	313 (305.4)	-7.9	18.3	—	+FL170	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6L23	—	—	-7.9	—	L	—	—	—	RNAV1
003	TF	WELDA	—	055 (047.3)	-7.9	4.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.9	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
006	TF	INTEL	—	286 (278.4)	-7.9	11.9	—	+9000	—	—	RNAV1
007	TF	RAGOS	—	295 (287.2)	-7.9	13.0	—	+13000	—	—	RNAV1
008	TF	BEKLA	—	279 (271.2)	-7.9	14.8	—	+FL170	—	—	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.9	—	—	+700	—	—	RNAV1
002	DF	ARAKA	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	GUGVA	—	019 (010.8)	-7.9	3.5	—	—	—	—	RNAV1
004	TF	OHEDO	—	332 (323.7)	-7.9	3.9	—	—	—	—	RNAV1
005	TF	INTEL	—	285 (277.0)	-7.9	4.1	—	+9000	—	—	RNAV1
006	TF	RAGOS	—	295 (287.2)	-7.9	13.0	—	+13000	—	—	RNAV1
007	TF	BEKLA	—	279 (271.2)	-7.9	14.8	—	+FL170	—	—	RNAV1

CHANGE : PROC renamed. GUGVA established. EDOJO abolished.

STANDARD DEPARTURE CHART-INSTRUMENT


RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.9	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.9	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
005	TF	TT503	—	289 (280.8)	-7.9	6.2	—	—	—	—	RNAV1
006	TF	KAMAT	—	322 (314.2)	-7.9	7.8	—	+9000	—	—	RNAV1
007	TF	LAYER	—	305 (297.1)	-7.9	12.2	—	+13000	—	—	RNAV1
008	TF	BEKLA	—	313 (305.4)	-7.9	18.3	—	+FL170	—	—	RNAV1

STANDARD DEPARTURE CHART-INSTRUMENT

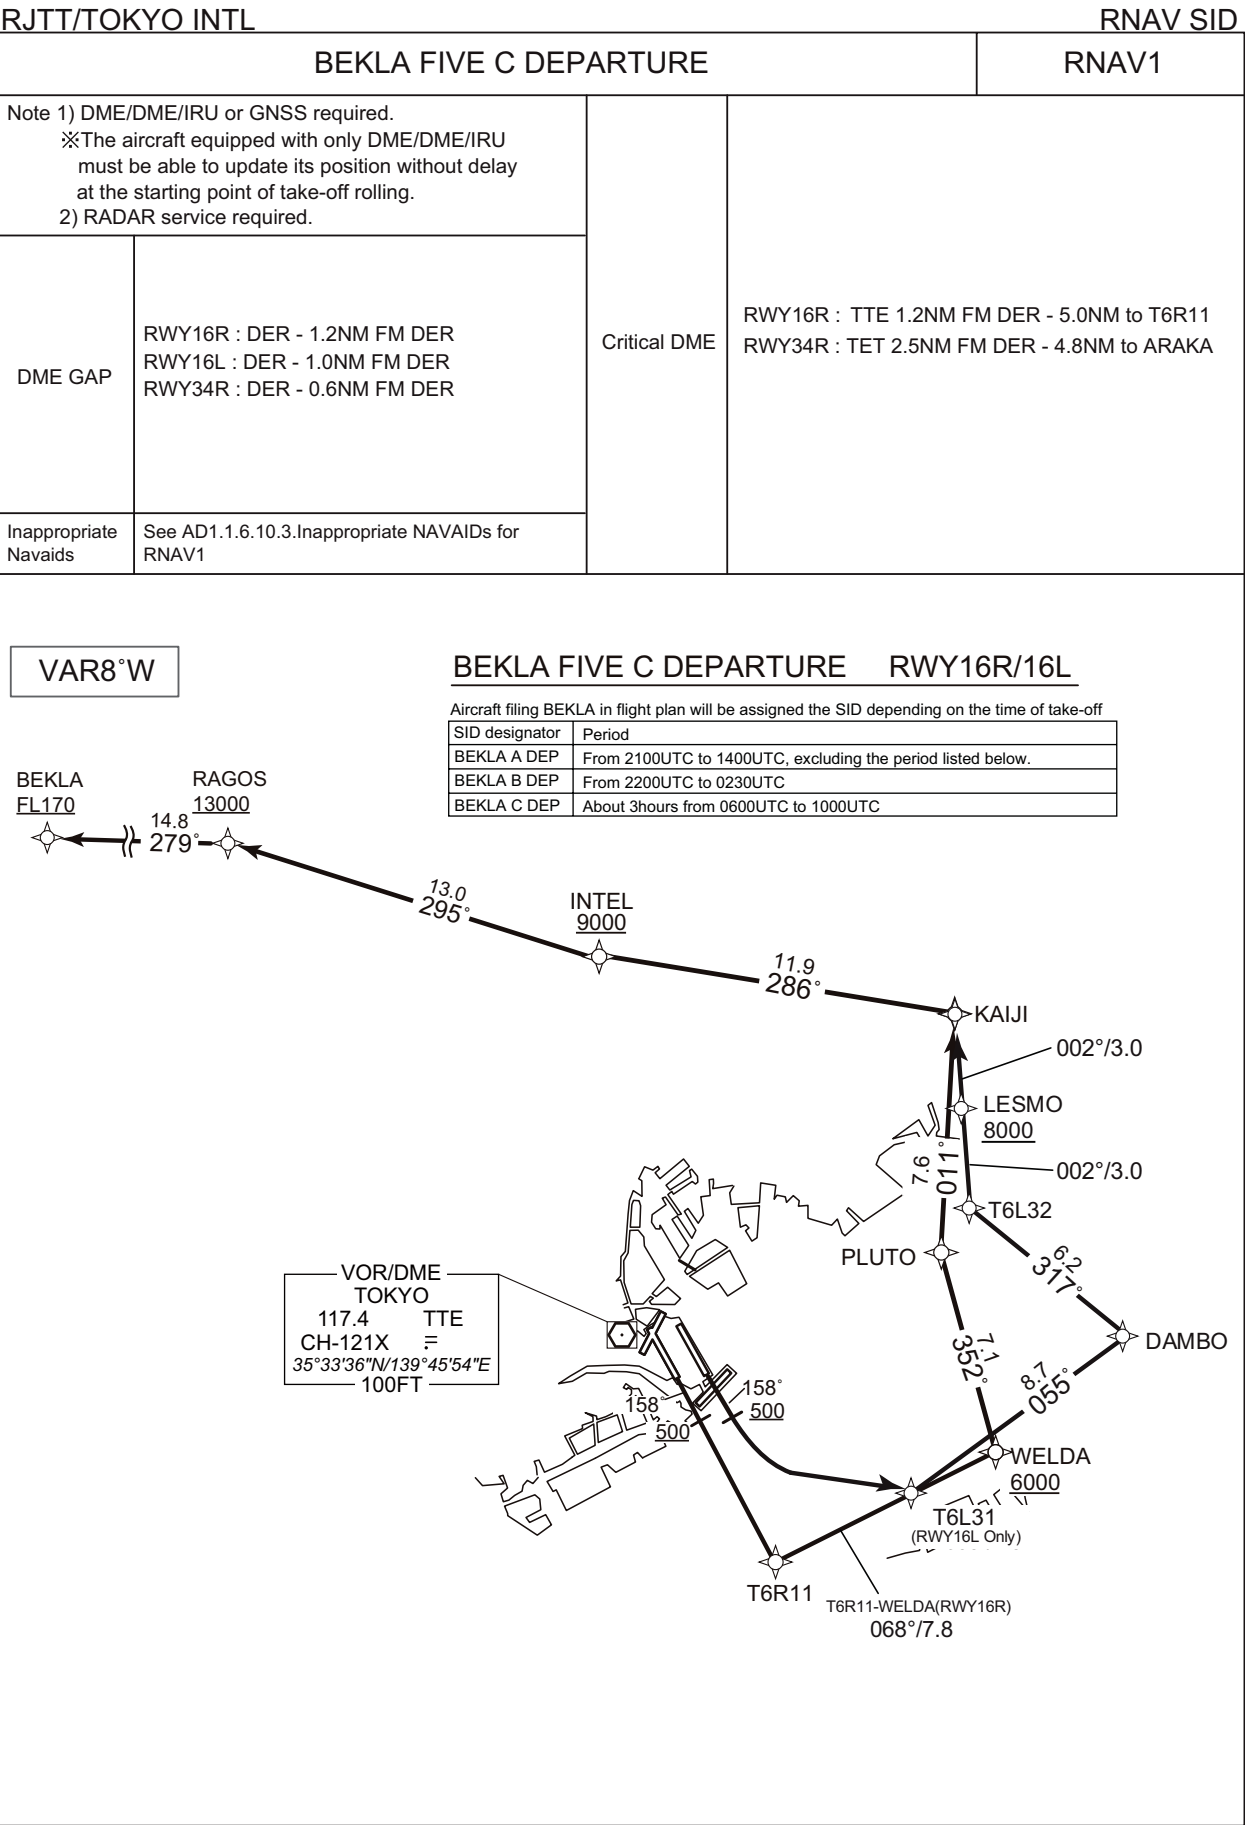

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL


RNAV SID

VAR8°W

BEKLA FIVE C DEPARTURE RWY34R/05

Aircraft filing BEKLA in flight plan will be assigned the SID depending on the time of take-off

SID designator	Period
BEKLA A DEP	From 2100UTC to 1400UTC, excluding the period listed below.
BEKLA B DEP	From 2200UTC to 0230UTC
BEKLA C DEP	About 3hours from 0600UTC to 1000UTC

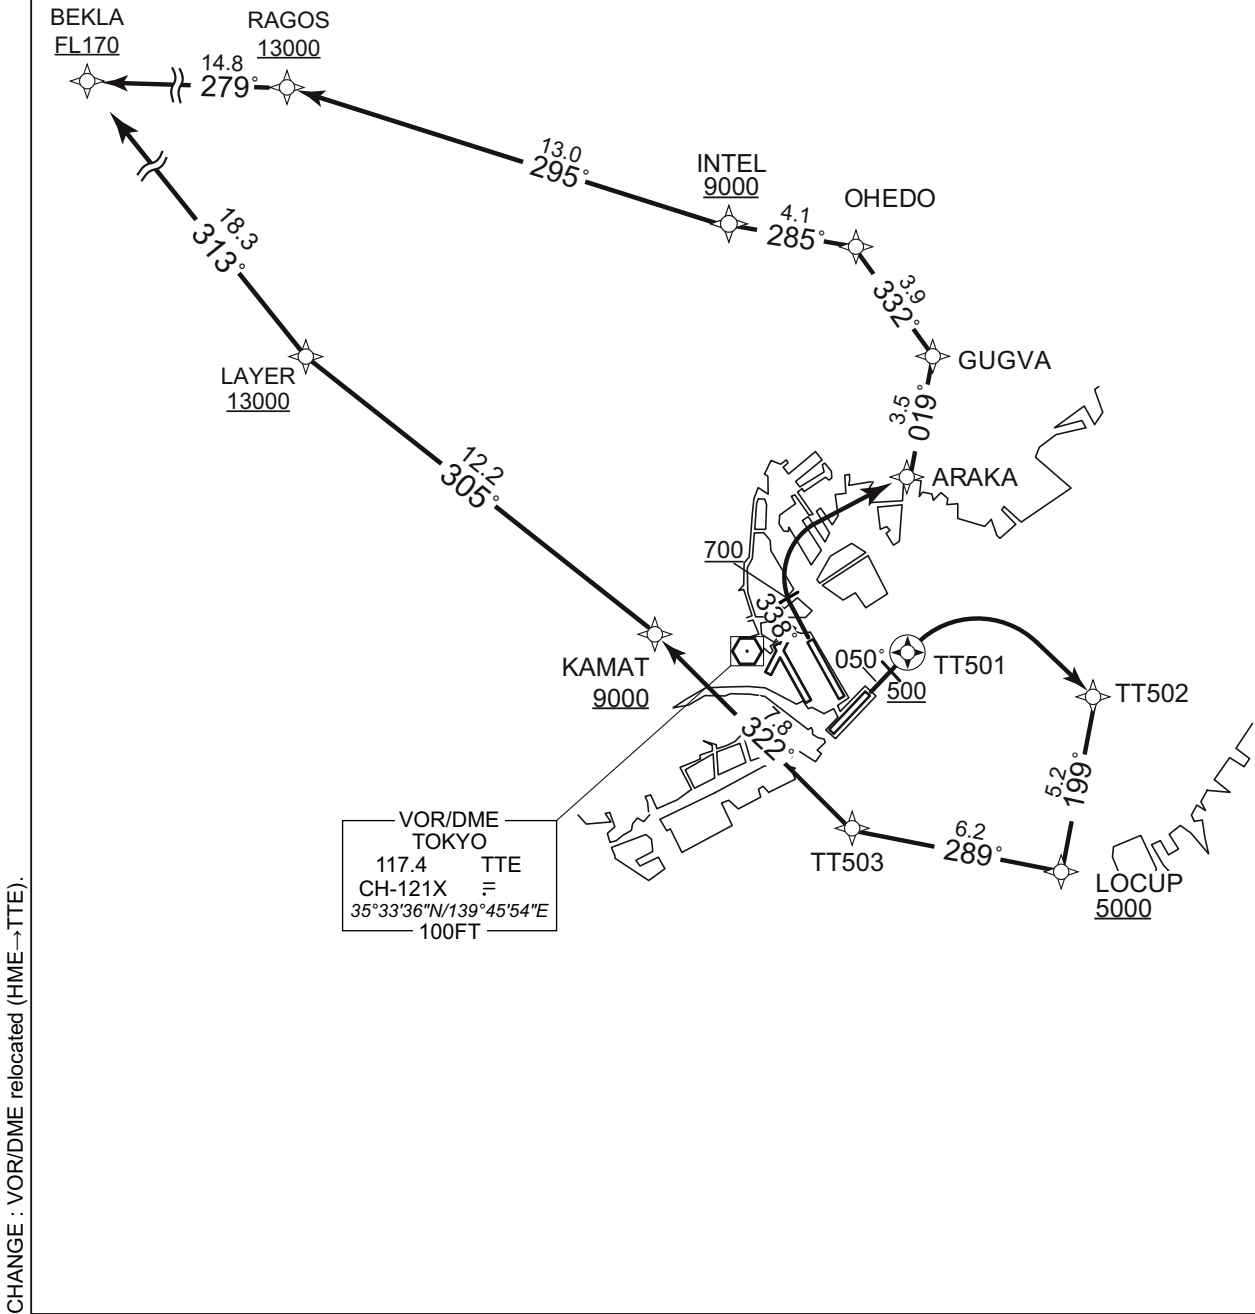

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA FIVE C DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,
to WELDA at or above 6000FT, to PLUTO, to KAIJI, to INTEL
at or above 9000FT, to RAGOS at or above 13000FT,
to BEKLA at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L31,
to DAMBO, to T6L32, to LESMO at or above 8000FT, to KAIJI,
to INTEL at or above 9000FT, to RAGOS at or above 13000FT,
to BEKLA at or above FL170.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA,
to GUGVA, to OHEDO, to INTEL at or above 9000FT, to RAGOS
at or above 13000FT, to BEKLA at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right
direct to TT502, to LOCUP at or above 5000FT, to TT503, to
KAMAT at or above 9000FT, to LAYER at or above 13000FT, to
BEKLA at or above FL170.

Note RWY34R : 5.0% climb gradient required up to 700FT.
RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed. GUGVA established. EDOJO abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

BEKLA FIVE C DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6R11	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	WELDA	—	068 (060.6)	-7.9	7.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.9	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
006	TF	INTEL	—	286 (278.4)	-7.9	11.9	—	+9000	—	—	RNAV1
007	TF	RAGOS	—	295 (287.2)	-7.9	13.0	—	+13000	—	—	RNAV1
008	TF	BEKLA	—	279 (271.2)	-7.9	14.8	—	+FL170	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6L31	—	—	-7.9	—	L	—	—	—	RNAV1
003	TF	DAMBO	—	055 (047.5)	-7.9	8.7	—	—	—	—	RNAV1
004	TF	T6L32	—	317 (309.4)	-7.9	6.2	—	—	—	—	RNAV1
005	TF	LESMO	—	002 (354.1)	-7.9	3.0	—	+8000	—	—	RNAV1
006	TF	KAIJI	—	002 (354.1)	-7.9	3.0	—	—	—	—	RNAV1
007	TF	INTEL	—	286 (278.4)	-7.9	11.9	—	+9000	—	—	RNAV1
008	TF	RAGOS	—	295 (287.2)	-7.9	13.0	—	+13000	—	—	RNAV1
009	TF	BEKLA	—	279 (271.2)	-7.9	14.8	—	+FL170	—	—	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.9	—	—	+700	—	—	RNAV1
002	DF	ARAKA	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	GUGVA	—	019 (010.8)	-7.9	3.5	—	—	—	—	RNAV1
004	TF	OHEDO	—	332 (323.7)	-7.9	3.9	—	—	—	—	RNAV1
005	TF	INTEL	—	285 (277.0)	-7.9	4.1	—	+9000	—	—	RNAV1
006	TF	RAGOS	—	295 (287.2)	-7.9	13.0	—	+13000	—	—	RNAV1
007	TF	BEKLA	—	279 (271.2)	-7.9	14.8	—	+FL170	—	—	RNAV1

CHANGE : PROC renamed. GUGVA established. EDOJO abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.9	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.9	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
005	TF	TT503	—	289 (280.8)	-7.9	6.2	—	—	—	—	RNAV1
006	TF	KAMAT	—	322 (314.2)	-7.9	7.8	—	+9000	—	—	RNAV1
007	TF	LAYER	—	305 (297.1)	-7.9	12.2	—	+13000	—	—	RNAV1
008	TF	BEKLA	—	313 (305.4)	-7.9	18.3	—	+FL170	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	OHEDO	354523.4N / 1394838.6E
BEKLA	354958.7N / 1391009.5E	PLUTO	353632.1N / 1395736.8E
DAMBO	353416.5N / 1400443.4E	RAGOS	354942.2N / 1392821.2E
GUGVA	354214.0N / 1395129.9E	T6L31	352822.8N / 1395648.0E
INTEL	354553.0N / 1394340.2E	T6L32	353810.9N / 1395852.2E
KAIJI	354409.6N / 1395806.6E	T6R11	352552.5N / 1395137.2E
KAMAT	353353.6N / 1394148.9E	TT501	353328.7N / 1395029.9E
LAYER	353925.4N / 1392829.5E	TT502	353224.4N / 1395720.7E
LESMO	354110.3N / 1395829.4E	TT503	352828.0N / 1394840.4E
LOCUP	352718.8N / 1395608.5E	WELDA	352941.4N / 1395956.7E

CHANGE : GUGVA established. EDOJO abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER THREE A DEPARTURE			RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		Critical DME	RWY16R : TTE 1.2NM FM DER - 5.0NM to T6R11 RWY16L : TTE 1.0NM FM DER - 5.3NM to T6L23 RWY34R : TET 2.5NM FM DER - 3.7NM to TORAM RWY34L : TET DER - 3.0NM FM DER RWY04 : PQD 2.0NM to TORAM - TORAM
DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 1.0NM FM DER RWY04 : DER - 1.0NM FM DER		
Inappropriate Nav aids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1		


VAR8°W

ROVER THREE A DEPARTURE

Aircraft filing AGRIS, AKAGI or INUBO in flight plan will be assigned the SID depending on the time of take-off

SID designator	Period
ROVER A DEP	From 2100UTC to 1400UTC, excluding the period listed below.
ROVER B DEP	From 2200UTC to 0230UTC
ROVER C DEP	About 3hours from 0600UTC to 1000UTC

CHANGE : DME GAP, Critical DME, VOR/DME relocated (HME→TTE).

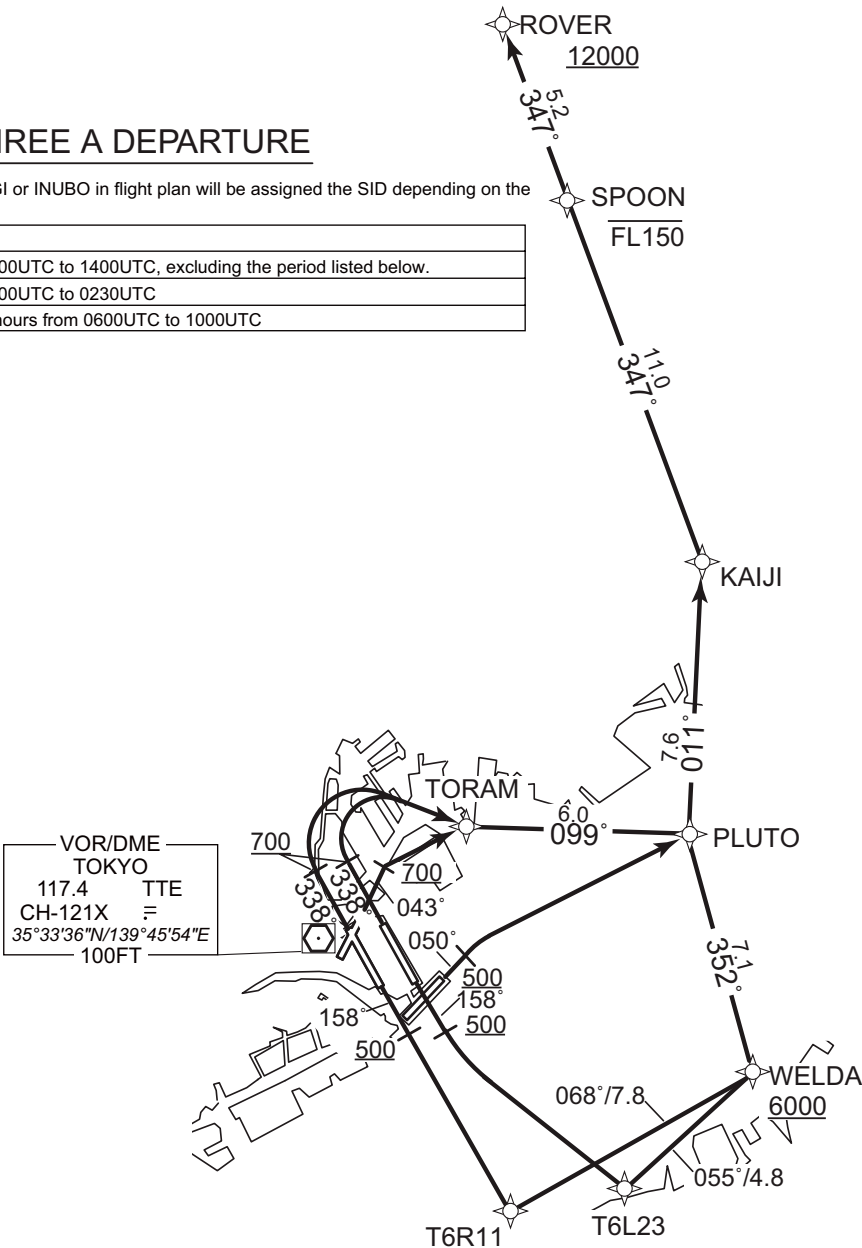

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER THREE A DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,
to WELDA at or above 6000FT, to PLUTO, to KAIJI,
to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23,
to WELDA at or above 6000FT, to PLUTO, to KAIJI,
to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to
TORAM, to PLUTO, to KAIJI, to SPOON at or below FL150,
to ROVER at or above 12000FT.

RWY04 : Climb on HDG 043° at or above 700FT, direct to TORAM, to PLUTO,
to KAIJI, to SPOON at or below FL150, to ROVER at or above
12000FT.

RWY05 : Climb on HDG 050° at or above 500FT, turn right direct to PLUTO,
to KAIJI, to SPOON at or below FL150, to ROVER at or above
12000FT.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER THREE A DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6R11	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	WELDA	—	068 (060.6)	-7.9	7.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.9	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
006	TF	SPOON	—	347 (339.2)	-7.9	11.0	—	-FL150	—	—	RNAV1
007	TF	ROVER	—	347 (339.1)	-7.9	5.2	—	+12000	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6L23	—	—	-7.9	—	L	—	—	—	RNAV1
003	TF	WELDA	—	055 (047.3)	-7.9	4.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.9	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
006	TF	SPOON	—	347 (339.2)	-7.9	11.0	—	-FL150	—	—	RNAV1
007	TF	ROVER	—	347 (339.1)	-7.9	5.2	—	+12000	—	—	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.9	—	—	+700	—	—	RNAV1
002	DF	TORAM	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	PLUTO	—	099 (090.7)	-7.9	6.0	—	—	—	—	RNAV1
004	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
005	TF	SPOON	—	347 (339.2)	-7.9	11.0	—	-FL150	—	—	RNAV1
006	TF	ROVER	—	347 (339.1)	-7.9	5.2	—	+12000	—	—	RNAV1

CHANGE : PROC renamed. Course FM TORAM to PLUTO. VAR.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	043 (034.9)	-7.9	—	—	+700	—	—	RNAV1
002	DF	TORAM	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	PLUTO	—	099 (090.7)	-7.9	6.0	—	—	—	—	RNAV1
004	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
005	TF	SPOON	—	347 (339.2)	-7.9	11.0	—	-FL150	—	—	RNAV1
006	TF	ROVER	—	347 (339.1)	-7.9	5.2	—	+12000	—	—	RNAV1

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.9	—	—	+500	—	—	RNAV1
002	DF	PLUTO	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
004	TF	SPOON	—	347 (339.2)	-7.9	11.0	—	-FL150	—	—	RNAV1
005	TF	ROVER	—	347 (339.1)	-7.9	5.2	—	+12000	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
KAIJI	354409.6N / 1395806.6E	T6L23	352627.6N / 1395539.1E
PLUTO	353632.1N / 1395736.8E	T6R11	352552.5N / 1395137.2E
ROVER	355918.3N / 1395059.3E	TORAM	353636.8N / 1395011.0E
SPOON	355428.3N / 1395316.0E	WELDA	352941.4N / 1395956.7E

CHANGE : Course FM TORAM to PLUTO. VAR.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER FOUR B DEPARTURE			RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		Critical DME	RWY16R : TTE 1.2NM FM DER - 5.0NM to T6R11 RWY16L : TTE 1.0NM FM DER - 5.3NM to T6L23 RWY34R : TET2.5NM FM DER - 4.8NM to ARAKA
DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 0.6NM FM DER		
Inappropriate Nav aids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1		

VAR8°W


ROVER FOUR B DEPARTURE

Aircraft filing AGRIS, AKAGI or INUBO in flight plan will be assigned the SID depending on the time of take-off

SID designator	Period
ROVER A DEP	From 2100UTC to 1400UTC, excluding the period listed below.
ROVER B DEP	From 2200UTC to 0230UTC
ROVER C DEP	About 3hours from 0600UTC to 1000UTC

CHANGE : DME GAP, Critical DME, VOR/DME relocated (HME→TTE).

VOR/DME
TOKYO
117.4 TTE
CH-121X
35°33'36"N/139°45'54"E
100FT

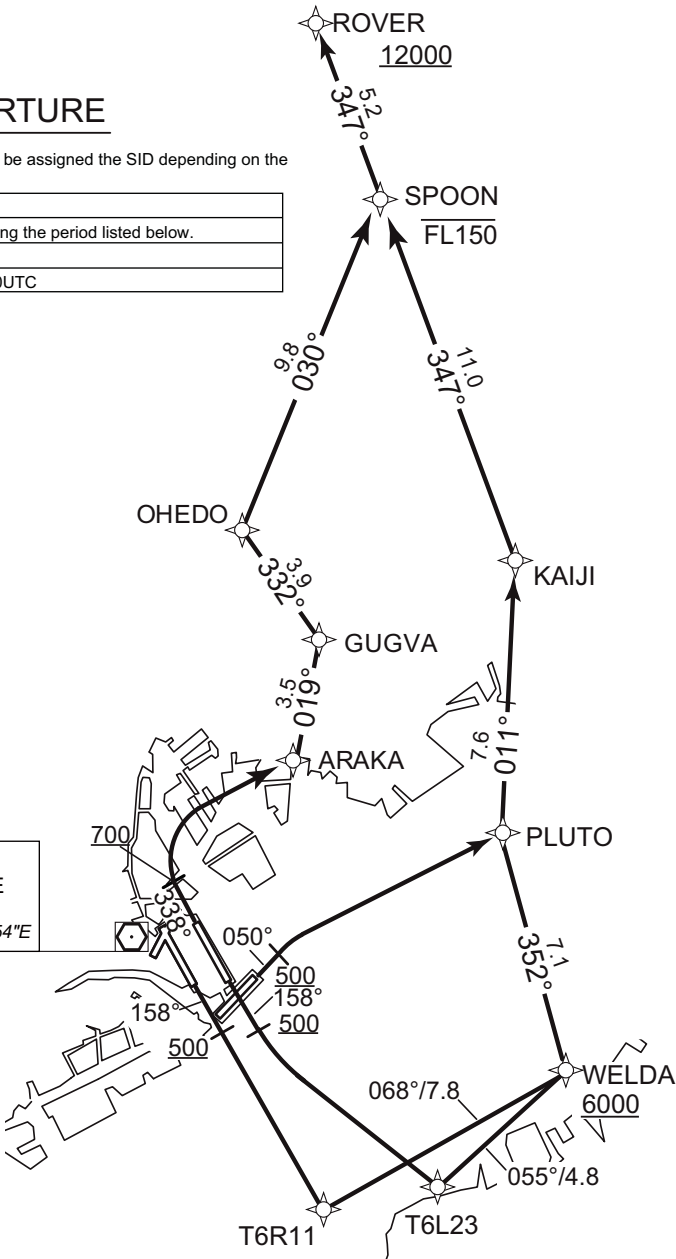

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER FOUR B DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,
to WELDA at or above 6000FT, to PLUTO, to KAIJI,
to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L23,
to WELDA at or above 6000FT, to PLUTO, to KAIJI,
to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA,
to GUGVA, to OHEDO, to SPOON at or below FL150, to ROVER
at or above 12000FT.

RWY05 : Climb on HDG 050° at or above 500FT, turn right direct to PLUTO,
to KAIJI, to SPOON at or below FL150, to ROVER at or above
12000FT.

Note RWY34R : 5.0% climb gradient required up to 700FT.
RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed. GUGVA established. EDOJO abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER FOUR B DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6R11	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	WELDA	—	068 (060.6)	-7.9	7.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.9	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
006	TF	SPOON	—	347 (339.2)	-7.9	11.0	—	-FL150	—	—	RNAV1
007	TF	ROVER	—	347 (339.1)	-7.9	5.2	—	+12000	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6L23	—	—	-7.9	—	L	—	—	—	RNAV1
003	TF	WELDA	—	055 (047.3)	-7.9	4.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.9	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
006	TF	SPOON	—	347 (339.2)	-7.9	11.0	—	-FL150	—	—	RNAV1
007	TF	ROVER	—	347 (339.1)	-7.9	5.2	—	+12000	—	—	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.9	—	—	+700	—	—	RNAV1
002	DF	ARAKA	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	GUGVA	—	019 (010.8)	-7.9	3.5	—	—	—	—	RNAV1
004	TF	OHEDO	—	332 (323.7)	-7.9	3.9	—	—	—	—	RNAV1
005	TF	SPOON	—	030 (022.4)	-7.9	9.8	—	-FL150	—	—	RNAV1
006	TF	ROVER	—	347 (339.1)	-7.9	5.2	—	+12000	—	—	RNAV1

CHANGE : PROC renamed. GUGVA established. EDOJO abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.9	—	—	+500	—	—	RNAV1
002	DF	PLUTO	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
004	TF	SPOON	—	347 (339.2)	-7.9	11.0	—	-FL150	—	—	RNAV1
005	TF	ROVER	—	347 (339.1)	-7.9	5.2	—	+12000	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	ROVER	355918.3N / 1395059.3E
GUGVA	354214.0N / 1395129.9E	SPOON	355428.3N / 1395316.0E
KAIJI	354409.6N / 1395806.6E	T6L23	352627.6N / 1395539.1E
OHEDO	354523.4N / 1394838.6E	T6R11	352552.5N / 1395137.2E
PLUTO	353632.1N / 1395736.8E	WELDA	352941.4N / 1395956.7E

CHANGE : GUGVA established. EDOJO abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER FOUR C DEPARTURE			RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		Critical DME	RWY16R : TTE 1.2NM FM DER - 5.0NM to T6R11 RWY34R : TET 2.5NM FM DER - 4.8NM to ARAKA
DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 0.6NM FM DER		
Inappropriate Nav aids	See AD1.1.6.10.3.Inappropriate NAVAIDS for RNAV1		


VAR8°W

ROVER FOUR C DEPARTURE

Aircraft filing AGRIS, AKAGI or INUBO in flight plan will be assigned the SID depending on the time of take-off

SID designator	Period
ROVER A DEP	From 2100UTC to 1400UTC, excluding the period listed below.
ROVER B DEP	From 2200UTC to 0230UTC
ROVER C DEP	About 3hours from 0600UTC to 1000UTC

CHANGE : DME GAP. Critical DME. VOR/DME relocated (HME→TTE).

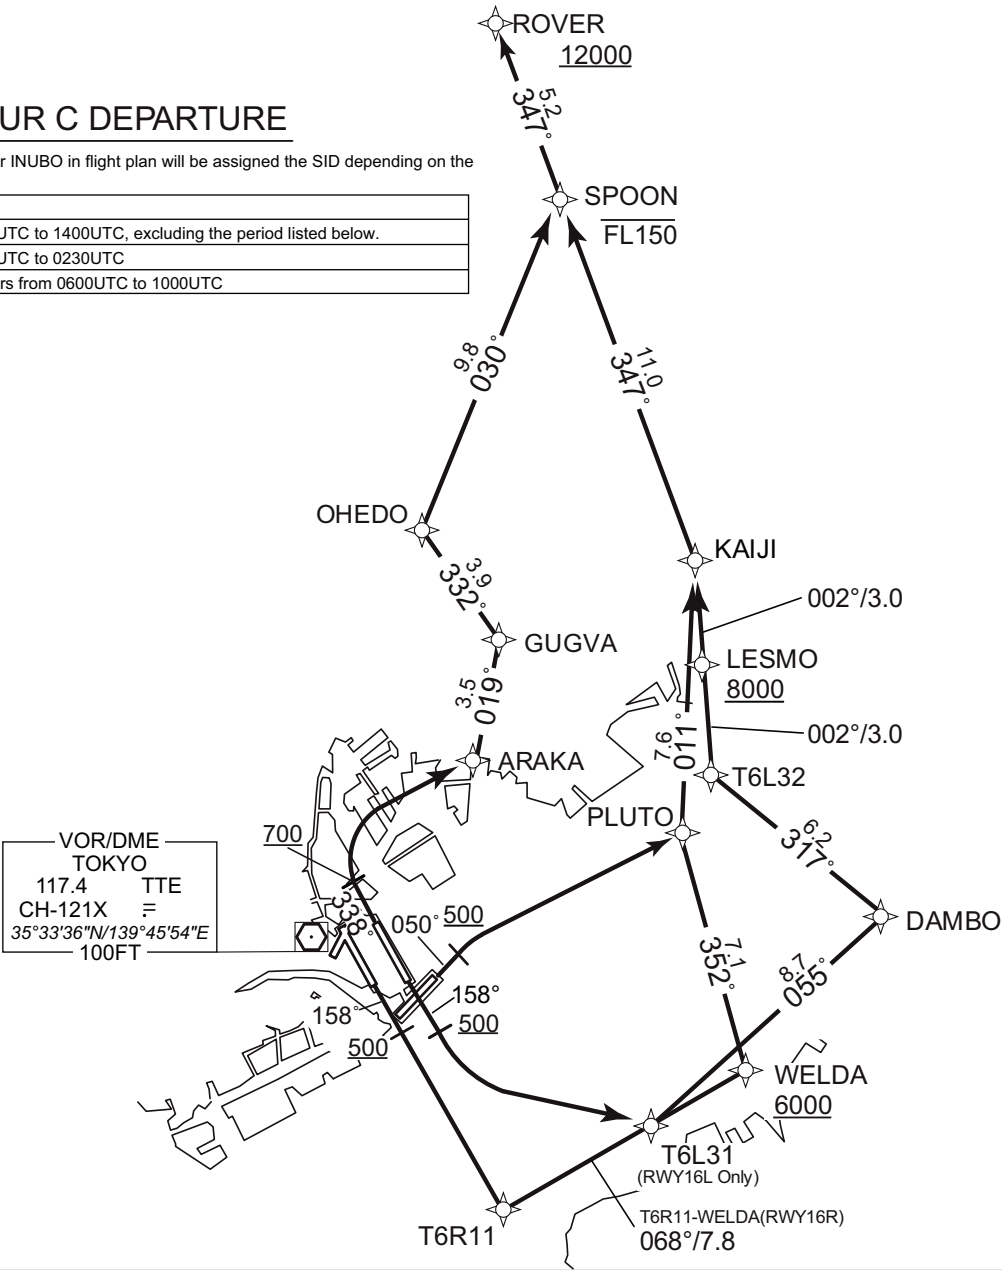

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER FOUR C DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,
to WELDA at or above 6000FT, to PLUTO, to KAIJI,
to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY16L : Climb on HDG 158° at or above 500FT, turn left direct to T6L31,
to DAMBO, to T6L32, to LESMO at or above 8000FT, to KAIJI,
to SPOON at or below FL150, to ROVER at or above 12000FT.

RWY34R : Climb on HDG 338° at or above 700FT, turn right direct to ARAKA,
to GUGVA, to OHEDO, to SPOON at or below FL150, to ROVER
at or above 12000FT.

RWY05 : Climb on HDG 050° at or above 500FT, turn right direct to PLUTO,
to KAIJI, to SPOON at or below FL150, to ROVER at or above
12000FT.

Note RWY34R : 5.0% climb gradient required up to 700FT.
RWY05 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed. GUGVA established. EDOJO abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

ROVER FOUR C DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6R11	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	WELDA	—	068 (060.6)	-7.9	7.8	—	+6000	—	—	RNAV1
004	TF	PLUTO	—	352 (344.5)	-7.9	7.1	—	—	—	—	RNAV1
005	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
006	TF	SPOON	—	347 (339.2)	-7.9	11.0	—	-FL150	—	—	RNAV1
007	TF	ROVER	—	347 (339.1)	-7.9	5.2	—	+12000	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6L31	—	—	-7.9	—	L	—	—	—	RNAV1
003	TF	DAMBO	—	055 (047.5)	-7.9	8.7	—	—	—	—	RNAV1
004	TF	T6L32	—	317 (309.4)	-7.9	6.2	—	—	—	—	RNAV1
005	TF	LESMO	—	002 (354.1)	-7.9	3.0	—	+8000	—	—	RNAV1
006	TF	KAIJI	—	002 (354.1)	-7.9	3.0	—	—	—	—	RNAV1
007	TF	SPOON	—	347 (339.2)	-7.9	11.0	—	-FL150	—	—	RNAV1
008	TF	ROVER	—	347 (339.1)	-7.9	5.2	—	+12000	—	—	RNAV1

RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.9	—	—	+700	—	—	RNAV1
002	DF	ARAKA	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	GUGVA	—	019 (010.8)	-7.9	3.5	—	—	—	—	RNAV1
004	TF	OHEDO	—	332 (323.7)	-7.9	3.9	—	—	—	—	RNAV1
005	TF	SPOON	—	030 (022.4)	-7.9	9.8	—	-FL150	—	—	RNAV1
006	TF	ROVER	—	347 (339.1)	-7.9	5.2	—	+12000	—	—	RNAV1

CHANGE : PROC renamed. GUGVA established. EDOJO abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.9	—	—	+500	—	—	RNAV1
002	DF	PLUTO	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	KAIJI	—	011 (003.0)	-7.9	7.6	—	—	—	—	RNAV1
004	TF	SPOON	—	347 (339.2)	-7.9	11.0	—	-FL150	—	—	RNAV1
005	TF	ROVER	—	347 (339.1)	-7.9	5.2	—	+12000	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARAKA	353848.8N / 1395041.9E	ROVER	355918.3N / 1395059.3E
DAMBO	353416.5N / 1400443.4E	SPOON	355428.3N / 1395316.0E
GUGVA	354214.0N / 1395129.9E	T6L31	352822.8N / 1395648.0E
KAIJI	354409.6N / 1395806.6E	T6L32	353810.9N / 1395852.2E
LESMO	354110.3N / 1395829.4E	T6R11	352552.5N / 1395137.2E
OHEDO	354523.4N / 1394838.6E	WELDA	352941.4N / 1395956.7E
PLUTO	353632.1N / 1395736.8E		

CHANGE : GUGVA established. EDOJO abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

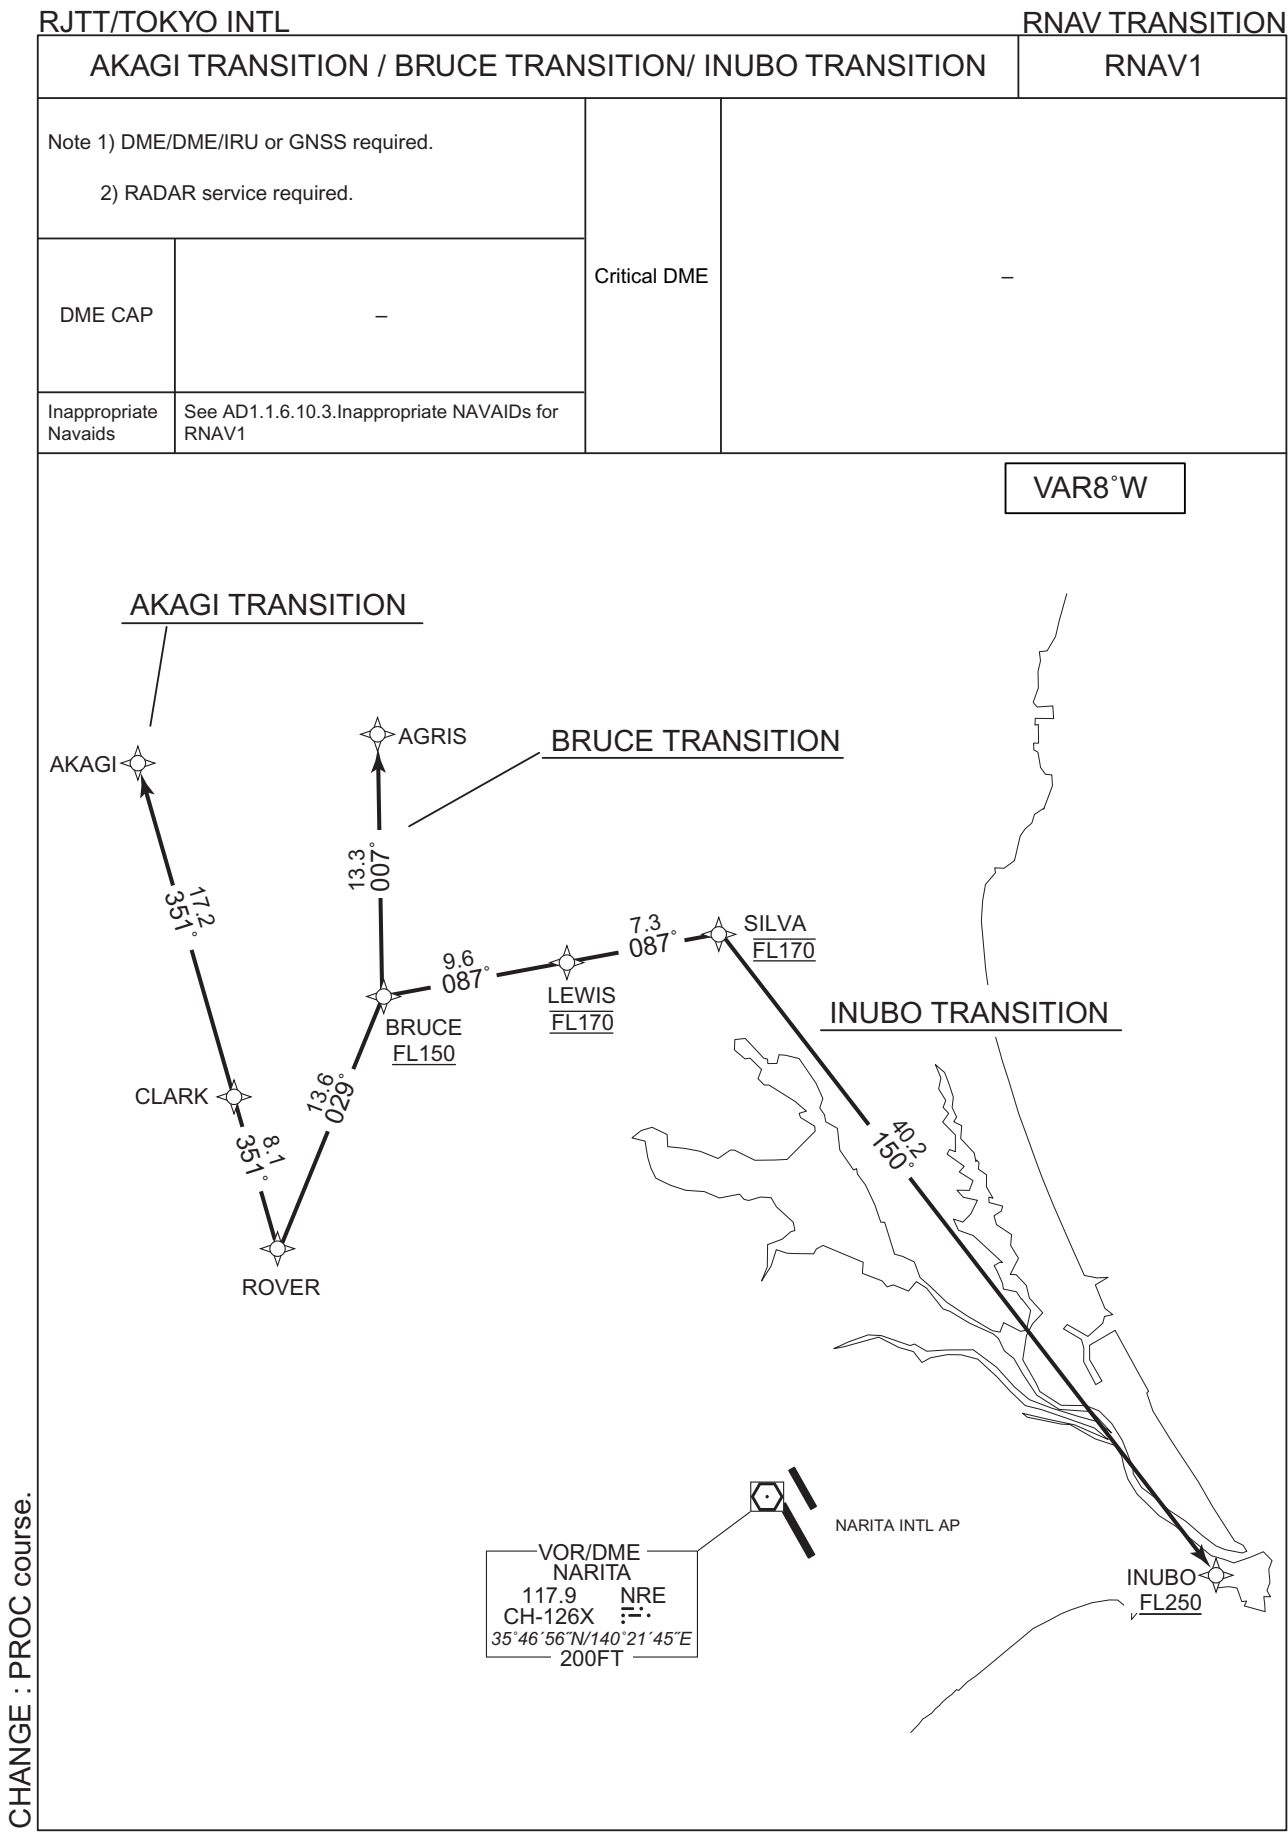

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV TRANSITION

AKAGI TRANSITION

From ROVER, to CLARK, to AKAGI.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ROVER	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	CLARK	—	351 (342.7)	-7.9	8.1	—	—	—	—	RNAV1
003	TF	AKAGI	—	351 (343.4)	-7.9	17.2	—	—	—	—	RNAV1

BRUCE TRANSITION

From ROVER, to BRUCE at or above FL150, to AGRIS.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ROVER	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	BRUCE	—	029 (020.7)	-7.9	13.6	—	+FL150	—	—	RNAV1
003	TF	AGRIS	—	007 (358.7)	-7.9	13.3	—	—	—	—	RNAV1

INUBO TRANSITION

From ROVER, to BRUCE at or above FL150, to LEWIS at FL170, to SILVA at FL170, to INUBO at or above FL250.


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ROVER	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	BRUCE	—	029 (020.7)	-7.9	13.6	—	+FL150	—	—	RNAV1
003	TF	LEWIS	—	087 (078.6)	-7.9	9.6	—	FL170	—	—	RNAV1
004	TF	SILVA	—	087 (078.8)	-7.9	7.3	—	FL170	—	—	RNAV1
005	TF	INUBO	—	150 (141.9)	-7.9	40.2	—	+FL250	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AGRIS	362514.7N / 1395633.1E	INUBO	354335.3N / 1404757.9E
AKAGI	362328.3N / 1394156.3E	LEWIS	361353.2N / 1400834.7E
BRUCE	361200.4N / 1395655.9E	ROVER	355918.3N / 1395059.3E
CLARK	360702.0N / 1394800.5E	SILVA	361518.0N / 1401726.0E

CHANGE : PROC course. VAR.

STANDARD DEPARTURE CHART-INSTRUMENT

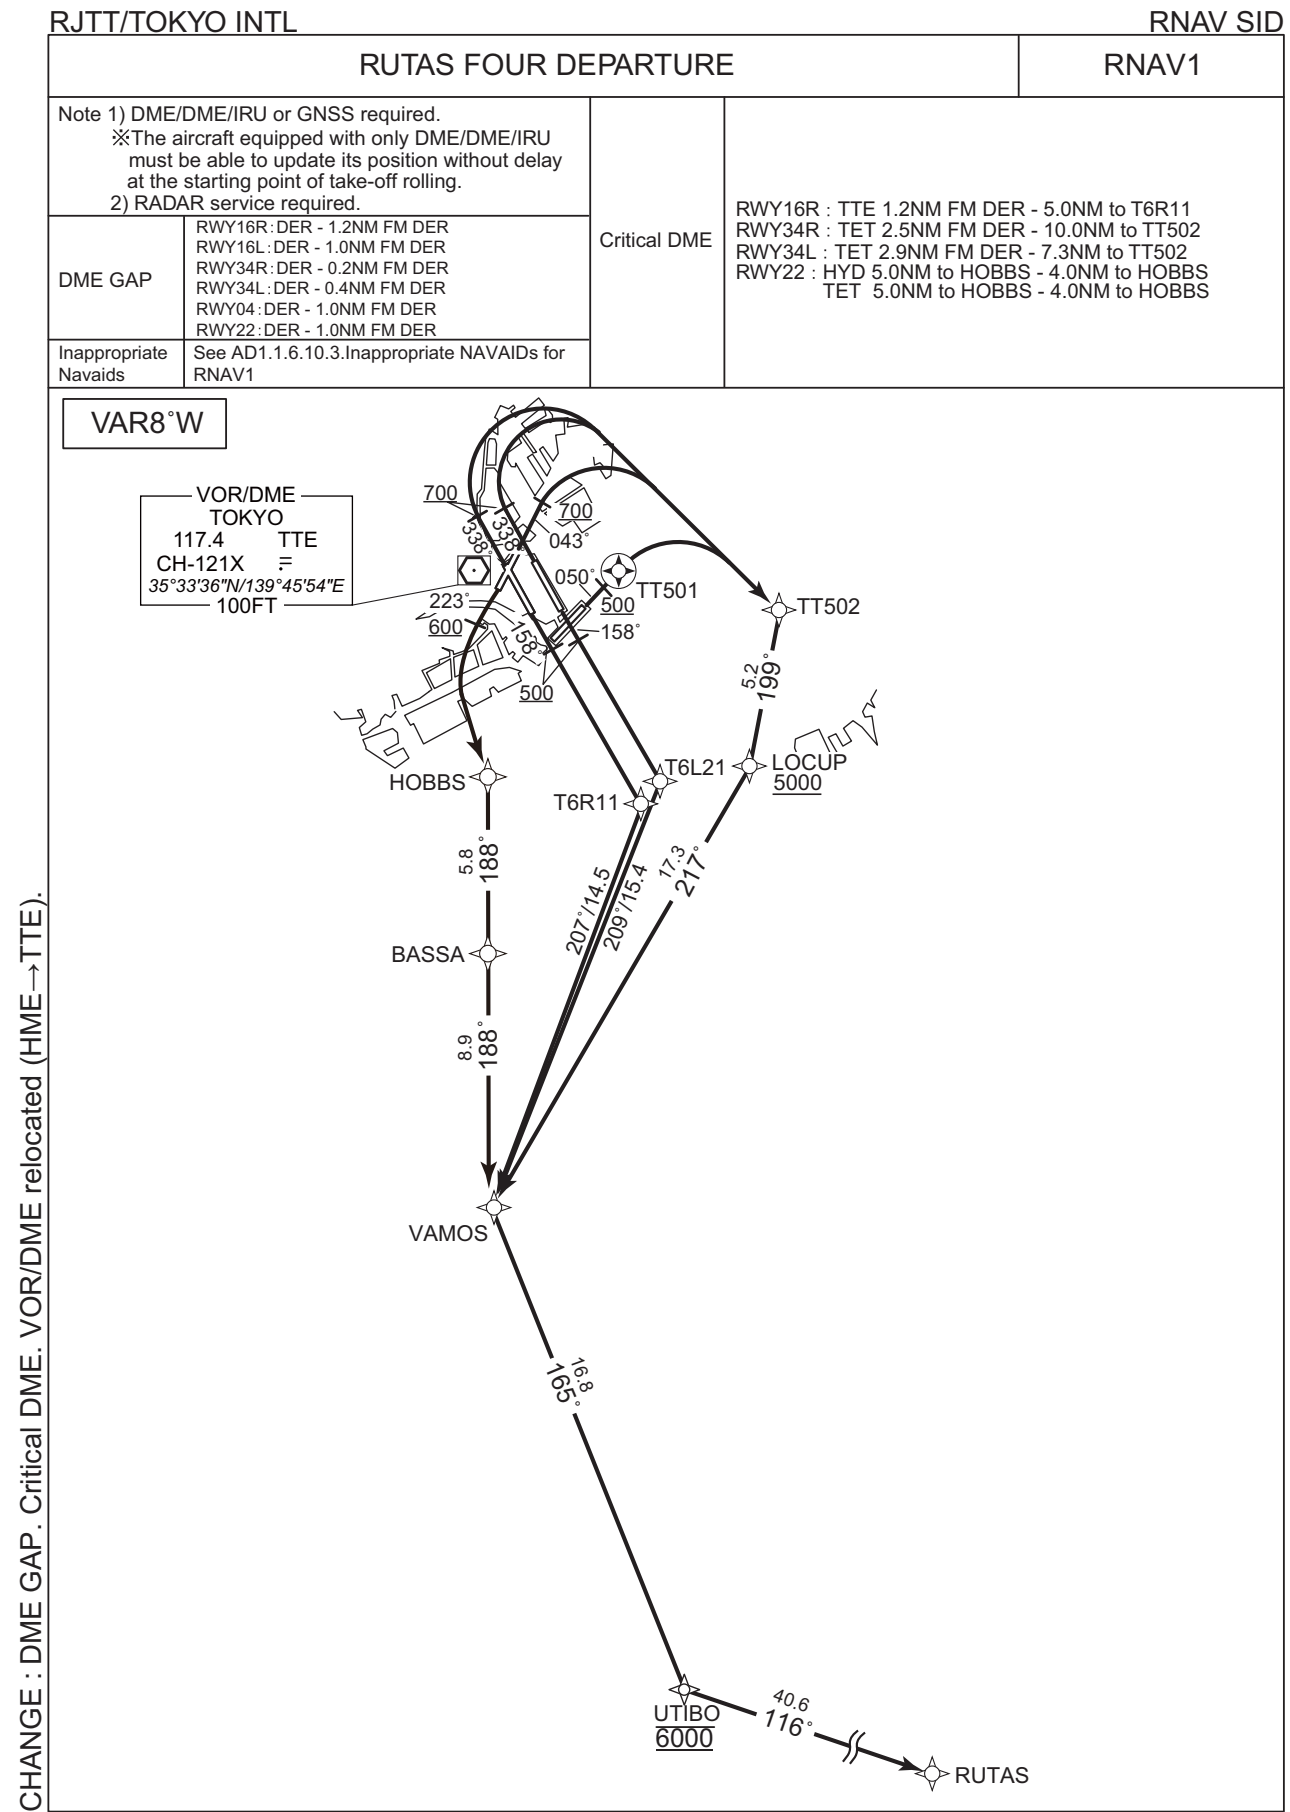

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RUTAS FOUR DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,
to VAMOS, to UTIBO at 6000FT, to RUTAS.

RWY16L : Climb on HDG 158° at or above 500FT, direct to T6L21,
to VAMOS, to UTIBO at 6000FT, to RUTAS.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to
TT502, to LOCUP at or above 5000FT, to VAMOS,
to UTIBO at 6000FT, to RUTAS.

RWY04: Climb on HDG 043° at or above 700FT, turn right direct to TT502,
to LOCUP at or above 5000FT, to VAMOS, to UTIBO at 6000FT,
to RUTAS.

RWY05: Climb on HDG 050° at or above 500FT, direct to TT501, turn right
direct to TT502, to LOCUP at or above 5000FT, to VAMOS, to
UTIBO at 6000FT, to RUTAS.

RWY22 : Climb on HDG 223° at or above 600FT, turn left direct to HOBBS,
to BASSA, to VAMOS, to UTIBO at 6000FT, to RUTAS.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

RWY22 : 5.0% climb gradient required up to 600FT.

CHANGE : PROC renamed. PROC course and Note FM RWY22 established.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RUTAS FOUR DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6R11	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	VAMOS	—	207 (199.5)	-7.9	14.5	—	—	—	—	RNAV1
004	TF	UTIBO	—	165 (157.0)	-7.9	16.8	—	6000	—	—	RNAV1
005	TF	RUTAS	—	116 (108.4)	-7.9	40.6	—	—	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6L21	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	VAMOS	—	209 (200.7)	-7.9	15.4	—	—	—	—	RNAV1
004	TF	UTIBO	—	165 (157.0)	-7.9	16.8	—	6000	—	—	RNAV1
005	TF	RUTAS	—	116 (108.4)	-7.9	40.6	—	—	—	—	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.9	—	—	+700	—	—	RNAV1
002	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
004	TF	VAMOS	—	217 (209.5)	-7.9	17.3	—	—	—	—	RNAV1
005	TF	UTIBO	—	165 (157.0)	-7.9	16.8	—	6000	—	—	RNAV1
006	TF	RUTAS	—	116 (108.4)	-7.9	40.6	—	—	—	—	RNAV1

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	043 (034.9)	-7.9	—	—	+700	—	—	RNAV1
002	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
004	TF	VAMOS	—	217 (209.5)	-7.9	17.3	—	—	—	—	RNAV1
005	TF	UTIBO	—	165 (157.0)	-7.9	16.8	—	6000	—	—	RNAV1
006	TF	RUTAS	—	116 (108.4)	-7.9	40.6	—	—	—	—	RNAV1

CHANGE : PROC renamed.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.9	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.9	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
005	TF	VAMOS	—	217 (209.5)	-7.9	17.3	—	—	—	—	RNAV1
006	TF	UTIBO	—	165 (157.0)	-7.9	16.8	—	6000	—	—	RNAV1
007	TF	RUTAS	—	116 (108.4)	-7.9	40.6	—	—	—	—	RNAV1

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	223 (214.9)	-7.9	—	—	+600	—	—	RNAV1
002	DF	HOBBS	—	—	-7.9	—	L	—	—	—	RNAV1
003	TF	BASSA	—	188 (179.9)	-7.9	5.8	—	—	—	—	RNAV1
004	TF	VAMOS	—	188 (179.9)	-7.9	8.9	—	—	—	—	RNAV1
005	TF	UTIBO	—	165 (157.0)	-7.9	16.8	—	6000	—	—	RNAV1
006	TF	RUTAS	—	116 (108.4)	-7.9	40.6	—	—	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
BASSA	352108.8N / 1394542.2E	T6R11	352552.5N / 1395137.2E
HOBBS	352653.9N / 1394541.3E	TT501	353328.7N / 1395029.9E
LOCUP	352718.8N / 1395608.5E	TT502	353224.4N / 1395720.7E
RUTAS	344349.3N / 1404034.2E	UTIBO	345647.0N / 1395343.9E
T6L21	352639.1N / 1395222.0E	VAMOS	351215.5N / 1394543.6E

CHANGE : RWY22 established. BASSA, HOBBS added.

STANDARD DEPARTURE CHART-INSTRUMENT


RJTT/TOKYO INTL

RNAV SID

GUSRO ONE DEPARTURE		RNAV1	
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		RWY16R : TTE 1.2NM FM DER – 2.5NM to T6R13 RWY34R : TET 2.5NM FM DER - 10.0NM to TT502 RWY34L : TET 2.9NM FM DER - 7.3NM to TT502 RWY22 : HYD 5.0NM to HOBBS - 4.0NM to HOBBS TET 5.0NM to HOBBS - 4.0NM to HOBBS	
DME GAP	RWY16R : DER - 1.2NM FM DER RWY16L : DER - 1.0NM FM DER RWY34R : DER - 0.2NM FM DER RWY34L : DER - 0.4NM FM DER RWY04 : DER - 1.0NM FM DER RWY22 : DER - 1.0NM FM DER		
Inappropriate Navais	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1		

VAR8°W

GUSRO ONE DEPARTURE RWY16R/16L

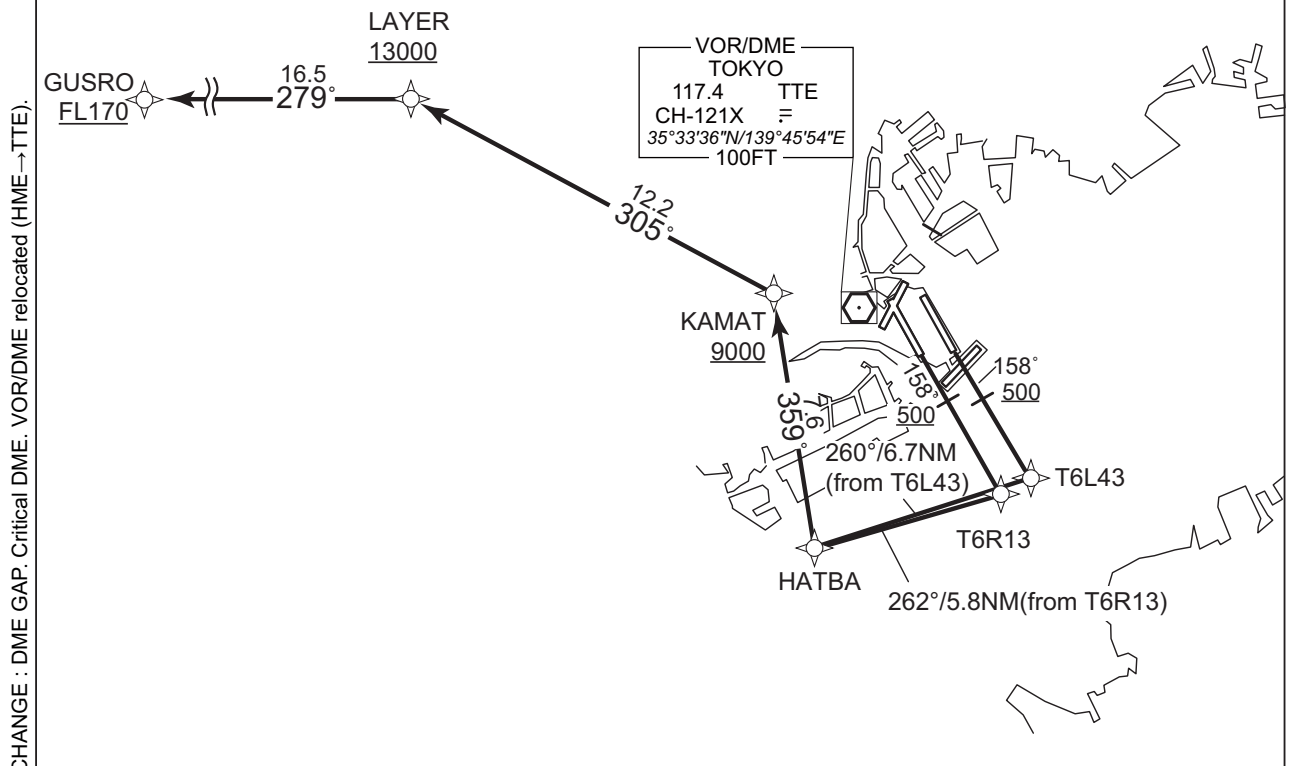


STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

VAR8°W

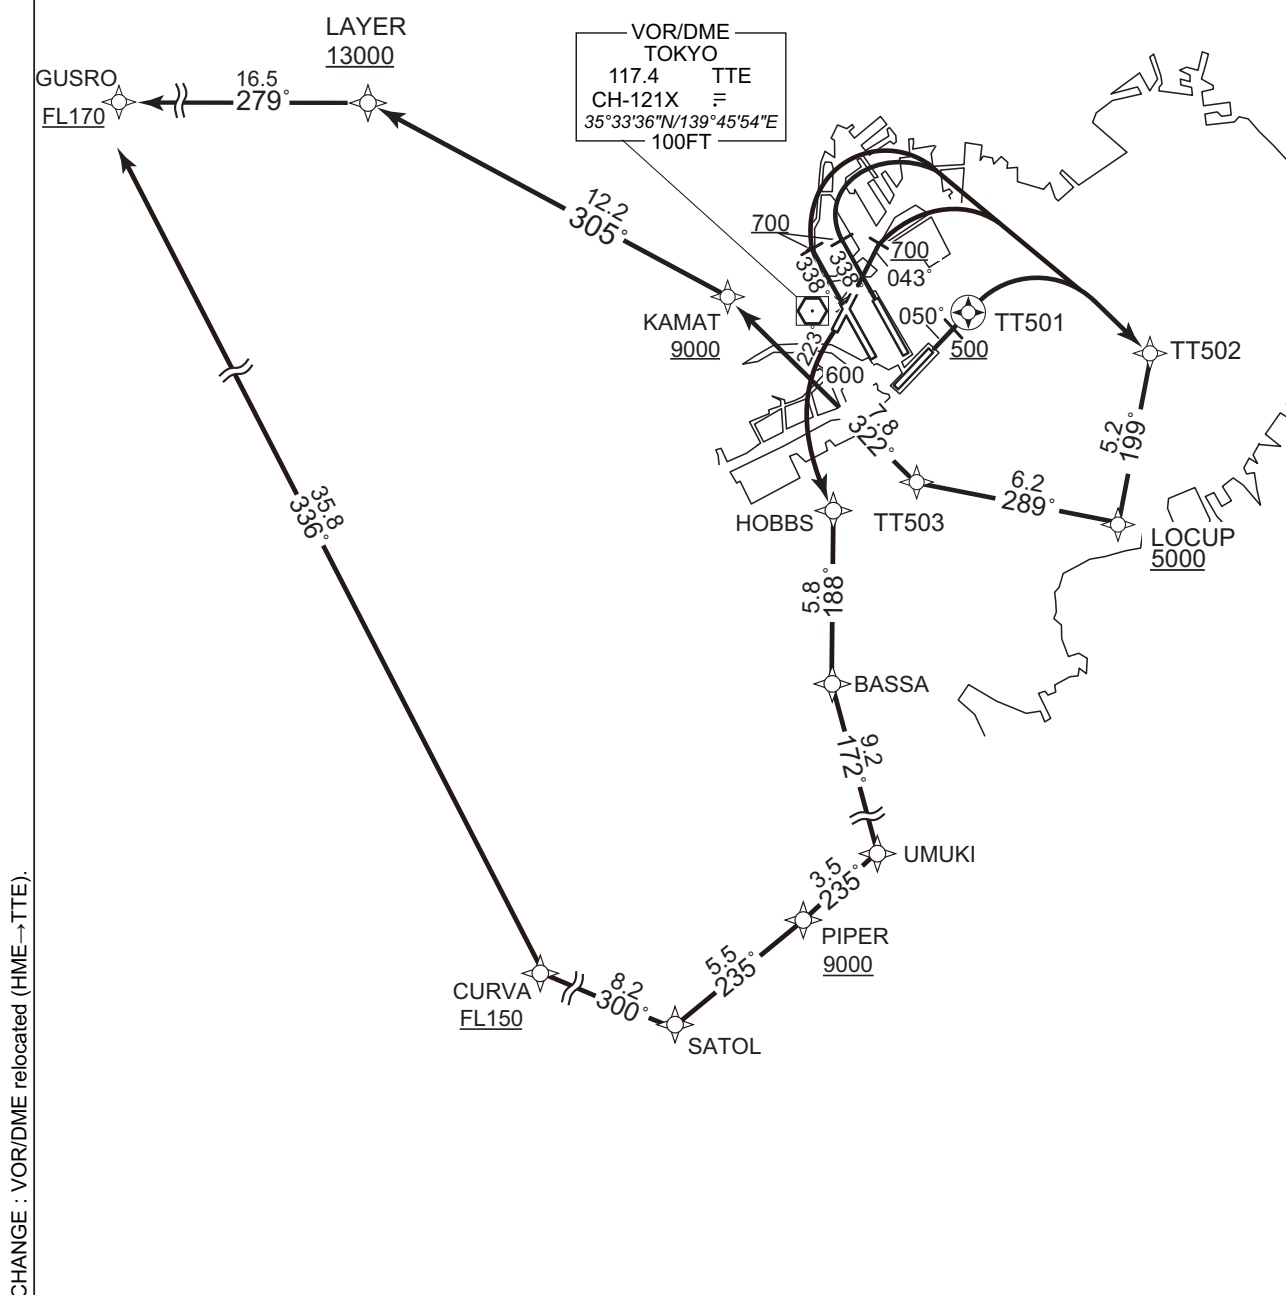GUSRO ONE DEPARTURE RWY 34L/34R/04/05/22

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

GUSRO ONE DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R13,
to HATBA, to KAMAT at or above 9000FT, to LAYER at or above
13000FT, to GUSRO at or above FL170.

RWY16L : Climb on HDG 158° at or above 500FT, direct to T6L43,
to HATBA, to KAMAT at or above 9000FT, to LAYER at or above
13000FT, to GUSRO at or above FL170.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to
TT502, to LOCUP at or above 5000FT, to TT503, to KAMAT
at or above 9000FT, to LAYER at or above 13000FT,
to GUSRO at or above FL170.

RWY04 : Climb on HDG 043° at or above 700FT, turn right direct to TT502,
to LOCUP at or above 5000FT, to TT503, to KAMAT at or above
9000FT, to LAYER at or above 13000FT, to GUSRO at or above FL170.

RWY05 : Climb on HDG 050° at or above 500FT, direct to TT501, turn right
direct to TT502, to LOCUP at or above 5000FT, to TT503, to
KAMAT at or above 9000FT, to LAYER at or above 13000FT,
to GUSRO at or above FL170.

RWY22 : Climb on HDG 223° at or above 600FT, turn left direct to HOBBS,
to BASSA, to UMUKI, to PIPER at or above 9000FT, to SATOL,
to CURVA at or above FL150, to GUSRO at or above FL170.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.
RWY05 : 5.0% climb gradient required up to 500FT.
RWY22 : 5.0% climb gradient required up to 600FT.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

GUSRO ONE DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6R13	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	HATBA	—	262 (253.8)	-7.9	5.8	—	—	—	—	RNAV1
004	TF	KAMAT	—	359 (351.1)	-7.9	7.6	—	+9000	—	—	RNAV1
005	TF	LAYER	—	305 (297.1)	-7.9	12.2	—	+13000	—	—	RNAV1
006	TF	GUSRO	—	279 (271.2)	-7.9	16.5	—	+FL170	—	—	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.0)	-7.9	—	—	+500	—	—	RNAV1
002	DF	T6L43	—	—	-7.9	—	—	—	—	—	RNAV1
003	TF	HATBA	—	260 (251.9)	-7.9	6.7	—	—	—	—	RNAV1
004	TF	KAMAT	—	359 (351.1)	-7.9	7.6	—	+9000	—	—	RNAV1
005	TF	LAYER	—	305 (297.1)	-7.9	12.2	—	+13000	—	—	RNAV1
006	TF	GUSRO	—	279 (271.2)	-7.9	16.5	—	+FL170	—	—	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.0)	-7.9	—	—	+700	—	—	RNAV1
002	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
004	TF	TT503	—	289 (280.8)	-7.9	6.2	—	—	—	—	RNAV1
005	TF	KAMAT	—	322 (314.2)	-7.9	7.8	—	+9000	—	—	RNAV1
006	TF	LAYER	—	305 (297.1)	-7.9	12.2	—	+13000	—	—	RNAV1
007	TF	GUSRO	—	279 (271.2)	-7.9	16.5	—	+FL170	—	—	RNAV1

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	043 (034.9)	-7.9	—	—	+700	—	—	RNAV1
002	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
003	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
004	TF	TT503	—	289 (280.8)	-7.9	6.2	—	—	—	—	RNAV1
005	TF	KAMAT	—	322 (314.2)	-7.9	7.8	—	+9000	—	—	RNAV1
006	TF	LAYER	—	305 (297.1)	-7.9	12.2	—	+13000	—	—	RNAV1
007	TF	GUSRO	—	279 (271.2)	-7.9	16.5	—	+FL170	—	—	RNAV1

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	050 (042.4)	-7.9	—	—	+500	—	—	RNAV1
002	DF	TT501	Y	—	-7.9	—	—	—	—	—	RNAV1
003	DF	TT502	—	—	-7.9	—	R	—	—	—	RNAV1
004	TF	LOCUP	—	199 (190.9)	-7.9	5.2	—	+5000	—	—	RNAV1
005	TF	TT503	—	289 (280.8)	-7.9	6.2	—	—	—	—	RNAV1
006	TF	KAMAT	—	322 (314.2)	-7.9	7.8	—	+9000	—	—	RNAV1
007	TF	LAYER	—	305 (297.1)	-7.9	12.2	—	+13000	—	—	RNAV1
008	TF	GUSRO	—	279 (271.2)	-7.9	16.5	—	+FL170	—	—	RNAV1

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	223 (214.9)	-7.9	—	—	+600	—	—	RNAV1
002	DF	HOBBS	—	—	-7.9	—	L	—	—	—	RNAV1
003	TF	BASSA	—	188 (179.9)	-7.9	5.8	—	—	—	—	RNAV1
004	TF	UMUKI	—	172 (163.9)	-7.9	9.2	—	—	—	—	RNAV1
005	TF	PIPER	—	235 (227.4)	-7.9	3.5	—	+9000	—	—	RNAV1
006	TF	SATOL	—	235 (227.4)	-7.9	5.5	—	—	—	—	RNAV1
007	TF	CURVA	—	300 (292.2)	-7.9	8.2	—	+FL150	—	—	RNAV1
008	TF	GUSRO	—	336 (328.3)	-7.9	35.8	—	+FL170	—	—	RNAV1

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
BASSA	352108.8N / 1394542.2E	PIPER	350958.3N / 1394542.0E
CURVA	350919.0N / 1393124.4E	SATOL	350613.3N / 1394043.4E
GUSRO	353944.8N / 1390813.1E	T6L43	352828.4N / 1395104.6E
HATBA	352623.4N / 1394315.9E	T6R13	352800.8N / 1395006.4E
HOBBS	352653.9N / 1394541.3E	TT501	353328.7N / 1395029.9E
KAMAT	353353.6N / 1394148.9E	TT502	353224.4N / 1395720.7E
LAYER	353925.4N / 1392829.5E	TT503	352828.0N / 1394840.4E
LOCUP	352718.8N / 1395608.5E	UMUKI	351219.1N / 1394849.2E

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

STAR

SULPU 1S/1D ARRIVAL, OLRAT 1A/1B ARRIVAL established. VOR/DME relocated (HME→TTE).
CHANGE : SINGO ARRIVAL, DOYLE ARRIVAL, ADDUM ARRIVAL, BONUS ARRIVAL abolished.

SULPU 1S ARRIVAL

From over SULPU, via TTE R037 to intercept and proceed via TTE 22.0DME clockwise ARC to SAPTI.

Cross SULPU at 11000FT, cross TTE R037/28.0DME at or above 8000FT.

SULPU 1D ARRIVAL

From over SULPU, via TTE R037 to TTE 22.0DME, via TTE 22.0DME clockwise ARC to intercept and proceed via ITL LOC course to DOYLE.

Cross SULPU at 11000FT, cross TTE R037/28.0DME at or above 8000FT.

OLRAT 1A ARRIVAL

From over OLRAT, via TTE R157 to ARLON.

Cross OLRAT at 10000FT.


OLRAT 1B ARRIVAL

From over OLRAT, via TTE R157 to TTE 22.0DME, via TTE 22.0DME counterclockwise ARC to intercept and proceed via IKL LOC course to BONUS.


Cross OLRAT at 10000FT.

RJTT / TOKYO INTL

CHANGE : PROC course. VOR/DME relocated (HME→TTE). SULPU, OLRAT established. STONE, ADDUM abolished.

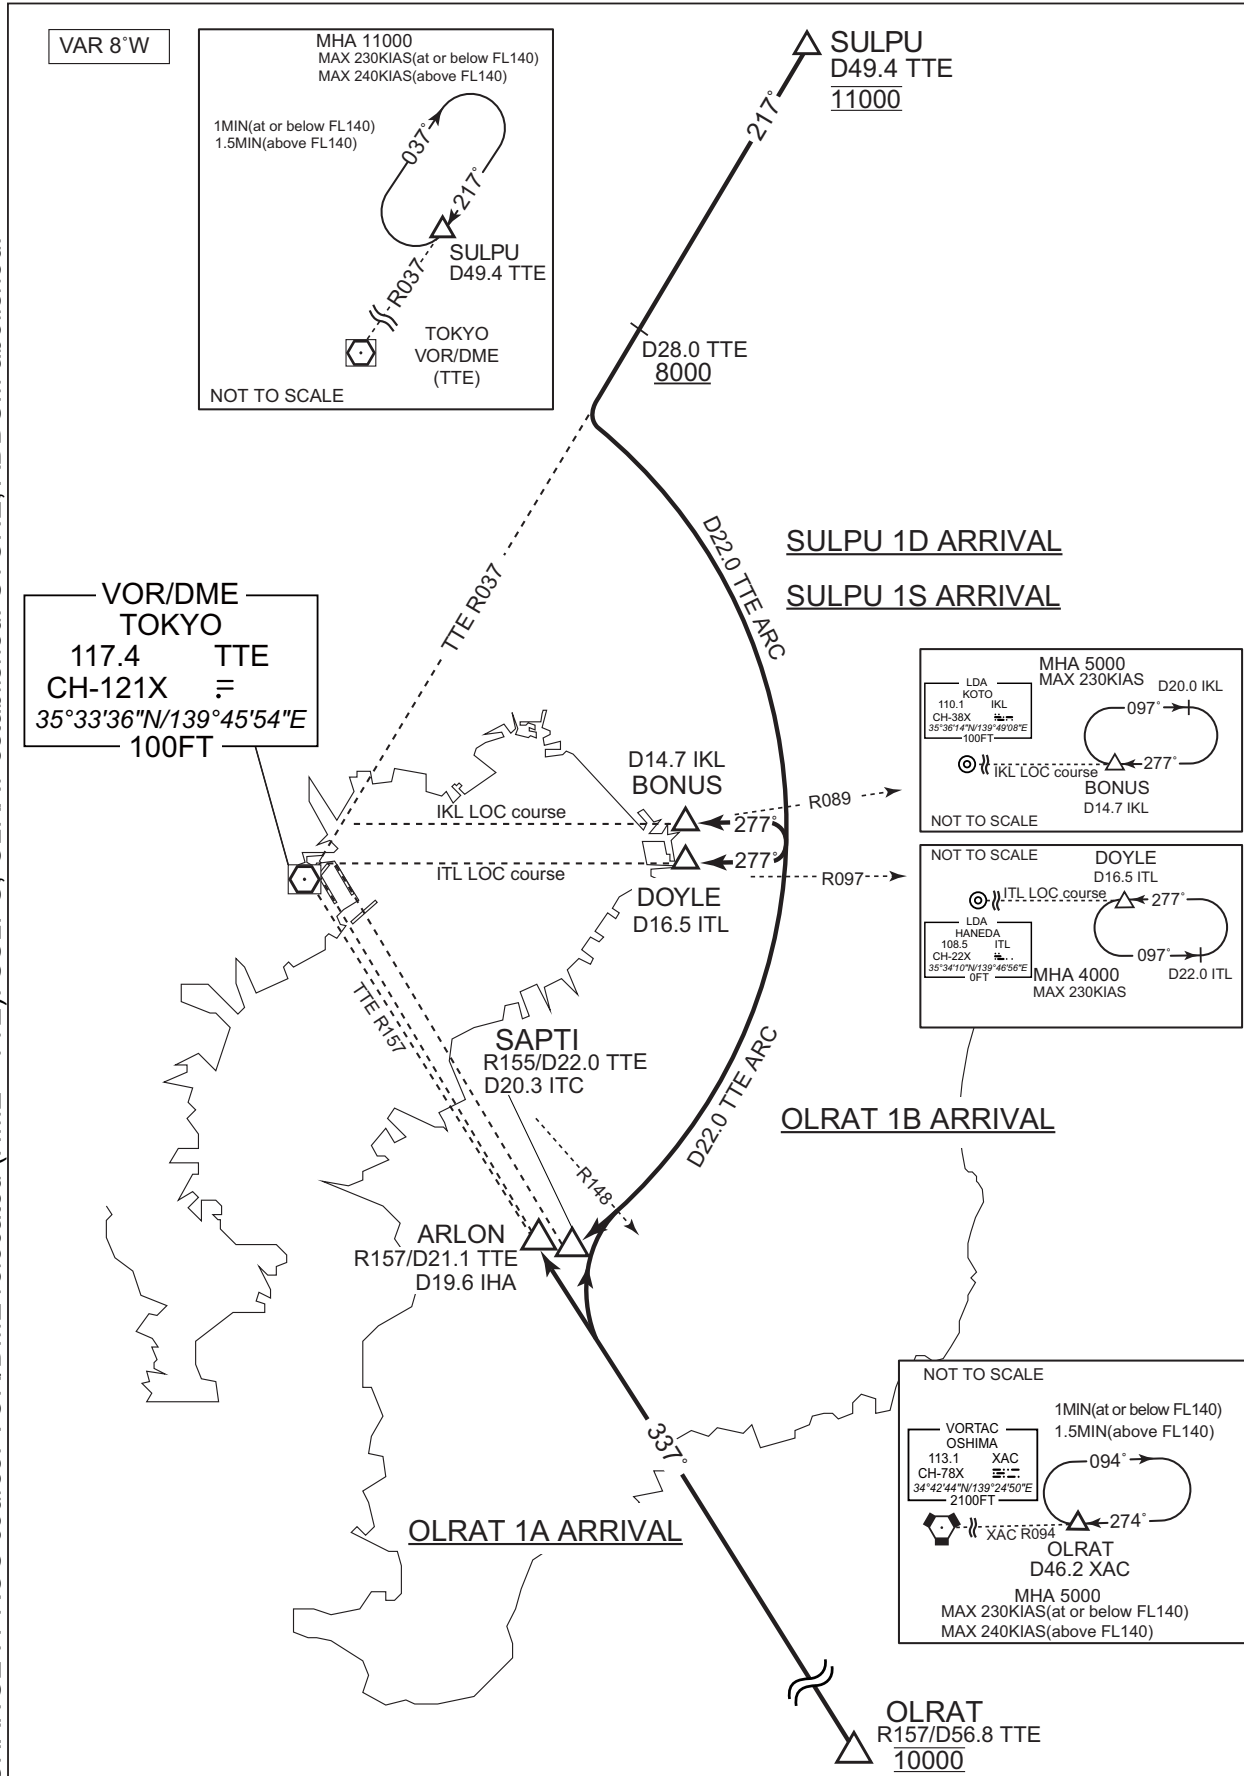

STANDARD ARRIVAL CHART-INSTRUMENT

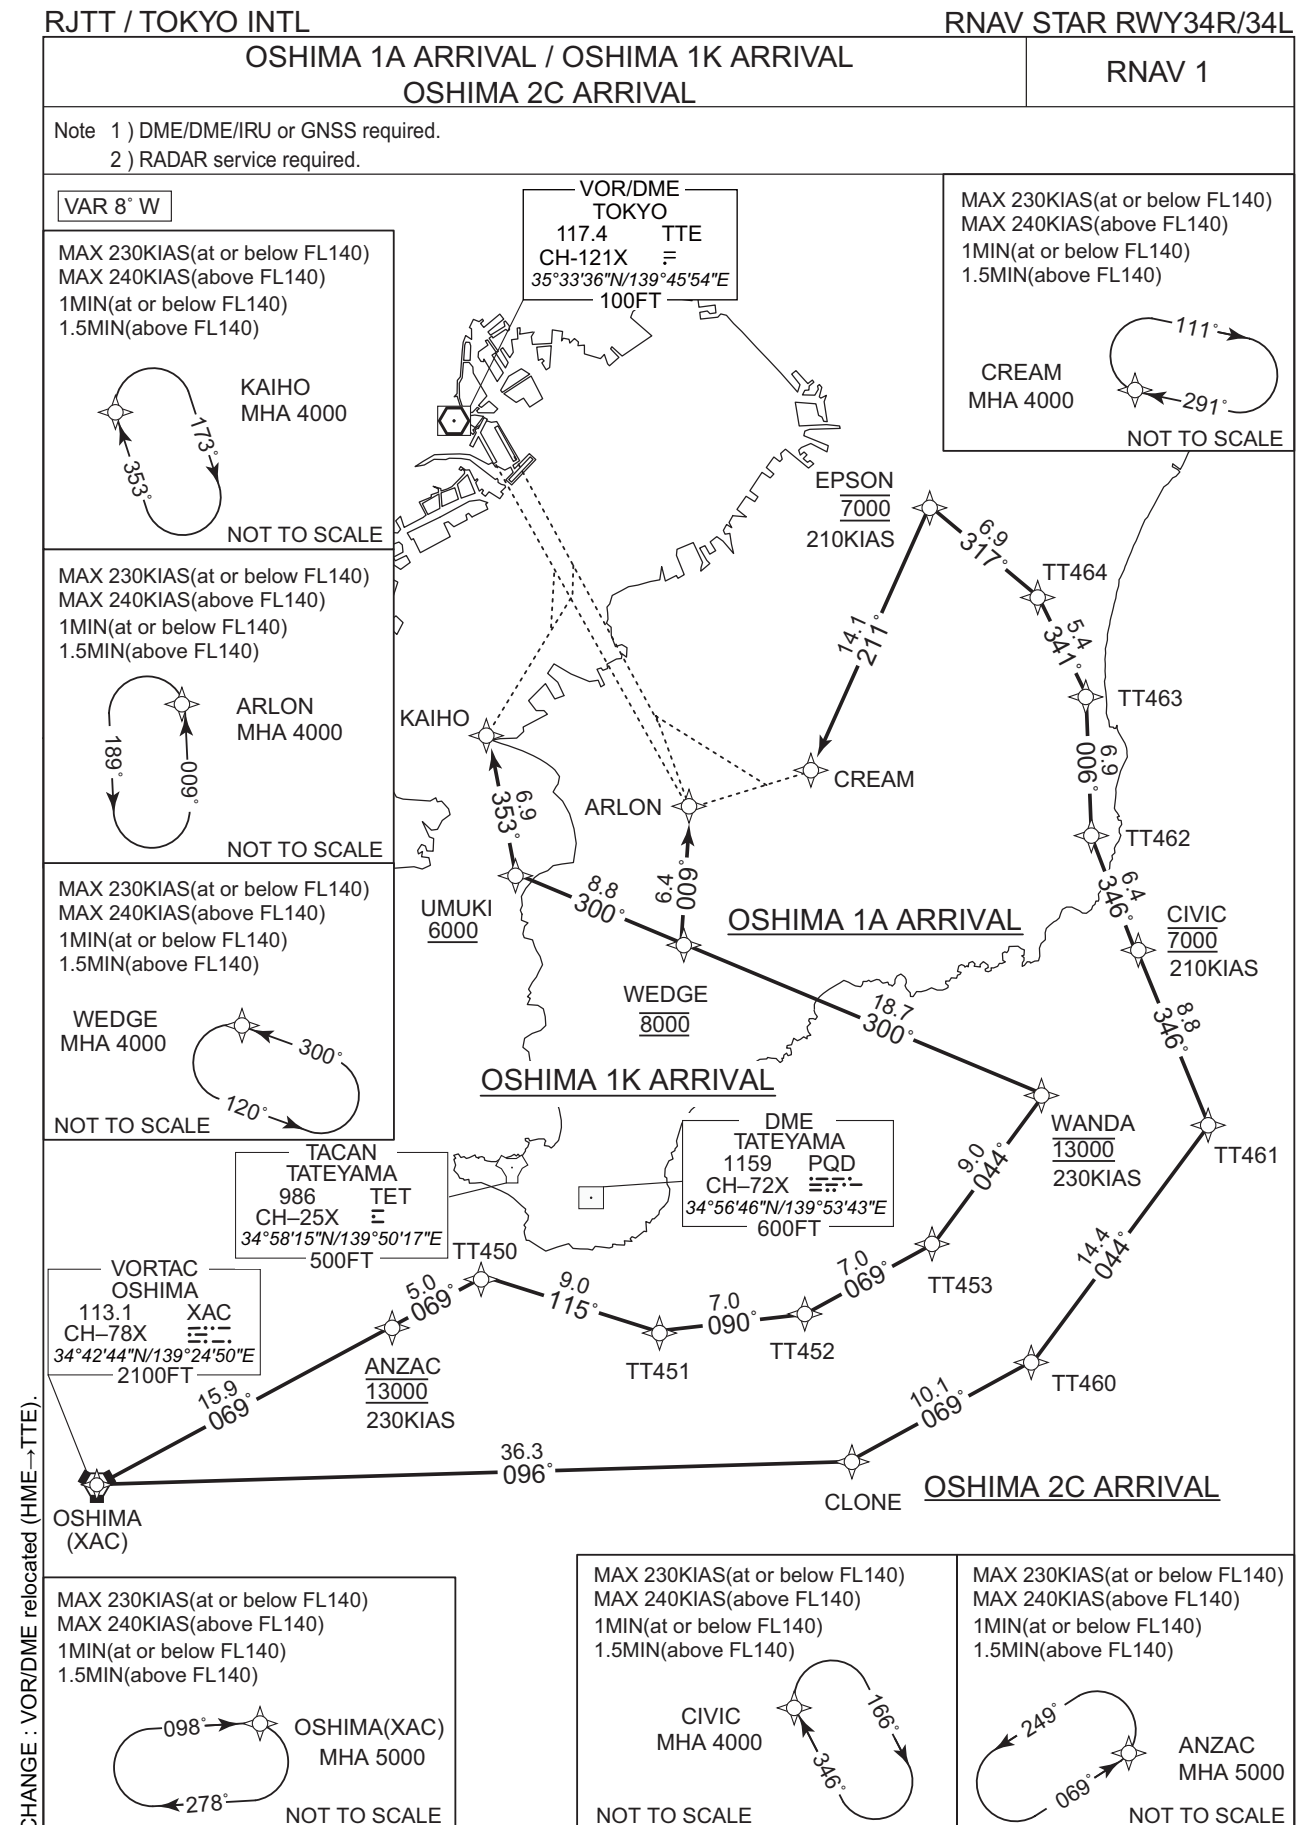

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

OSHIMA 1A ARRIVAL

From XAC, to ANZAC at 13000FT, to TT450, to TT451, to TT452, to TT453, to WANDA at 13000FT, to WEDGE at 8000FT, to ARLON.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	ANZAC	—	069 (060.8)	-7.9	15.9	—	13000	230	—	RNAV1
003	TF	TT450	—	069 (061.0)	-7.9	5.0	—	—	—	—	RNAV1
004	TF	TT451	—	115 (106.9)	-7.9	9.0	—	—	—	—	RNAV1
005	TF	TT452	—	090 (082.2)	-7.9	7.0	—	—	—	—	RNAV1
006	TF	TT453	—	069 (060.7)	-7.9	7.0	—	—	—	—	RNAV1
007	TF	WANDA	—	044 (036.0)	-7.9	9.0	—	13000	230	—	RNAV1
008	TF	WEDGE	—	300 (292.4)	-7.9	18.7	—	8000	—	—	RNAV1
009	TF	ARLON	—	009 (001.6)	-7.9	6.4	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ANZAC	069 (060.8)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at ANZAC.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTLRNAV STAR RWY34R/34L

OSHIMA 1K ARRIVAL

From XAC, to ANZAC at 13000FT, to TT450, to TT451, to TT452, to TT453, to WANDA at 13000FT, to WEDGE at 8000FT, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	ANZAC	—	069 (060.8)	-7.9	15.9	—	13000	230	—	RNAV1
003	TF	TT450	—	069 (061.0)	-7.9	5.0	—	—	—	—	RNAV1
004	TF	TT451	—	115 (106.9)	-7.9	9.0	—	—	—	—	RNAV1
005	TF	TT452	—	090 (082.2)	-7.9	7.0	—	—	—	—	RNAV1
006	TF	TT453	—	069 (060.7)	-7.9	7.0	—	—	—	—	RNAV1
007	TF	WANDA	—	044 (036.0)	-7.9	9.0	—	13000	230	—	RNAV1
008	TF	WEDGE	—	300 (292.4)	-7.9	18.7	—	8000	—	—	RNAV1
009	TF	UMUKI	—	300 (292.2)	-7.9	8.8	—	+6000	—	—	RNAV1
010	TF	KAIHO	—	353 (345.5)	-7.9	6.9	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ANZAC	069 (060.8)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at ANZAC.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

OSHIMA 2C ARRIVAL

From XAC, to CLONE, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM.

Critical DME	—
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	CLONE	—	096 (087.8)	-7.9	36.3	—	—	—	—	RNAV1
003	TF	TT460	—	069 (060.7)	-7.9	10.1	—	—	—	—	RNAV1
004	TF	TT461	—	044 (036.1)	-7.9	14.4	—	—	—	—	RNAV1
005	TF	CIVIC	—	346 (337.7)	-7.9	8.8	—	7000	210	—	RNAV1
006	TF	TT462	—	346 (337.7)	-7.9	6.4	—	—	—	—	RNAV1
007	TF	TT463	—	006 (358.0)	-7.9	6.9	—	—	—	—	RNAV1
008	TF	TT464	—	341 (333.5)	-7.9	5.4	—	—	—	—	RNAV1
009	TF	EPSON	—	317 (309.0)	-7.9	6.9	—	7000	210	—	RNAV1
010	TF	CREAM	—	211 (203.6)	-7.9	14.1	—	—	—	—	RNAV1


Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	346 (337.7)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ANZAC	345028.8N / 1394146.7E	TT453	345438.5N / 1401325.9E
ARLON	351525.3N / 1395859.8E	TT460	344852.6N / 1401936.8E
CIVIC	350840.6N / 1402552.1E	TT461	350030.2N / 1402957.9E
CLONE	344357.8N / 1400856.0E	TT462	351433.3N / 1402254.8E
CREAM	351743.4N / 1400612.4E	TT463	352125.4N / 1402237.1E
EPSON	353036.2N / 1401305.9E	TT464	352617.6N / 1401938.6E
KAIHO	351857.8N / 1394642.4E	UMUKI	351219.1N / 1394849.2E
TT450	345254.0N / 1394706.0E	WANDA	350155.3N / 1401954.1E
TT451	345016.8N / 1395734.3E	WEDGE	350900.4N / 1395846.5E
TT452	345113.2N / 1400600.1E	XAC	344244.1N / 1392450.5E

CHANGE : PROC course. VAR. HLDG pattern at CIVIC.

STANDARD ARRIVAL CHART-INSTRUMENT

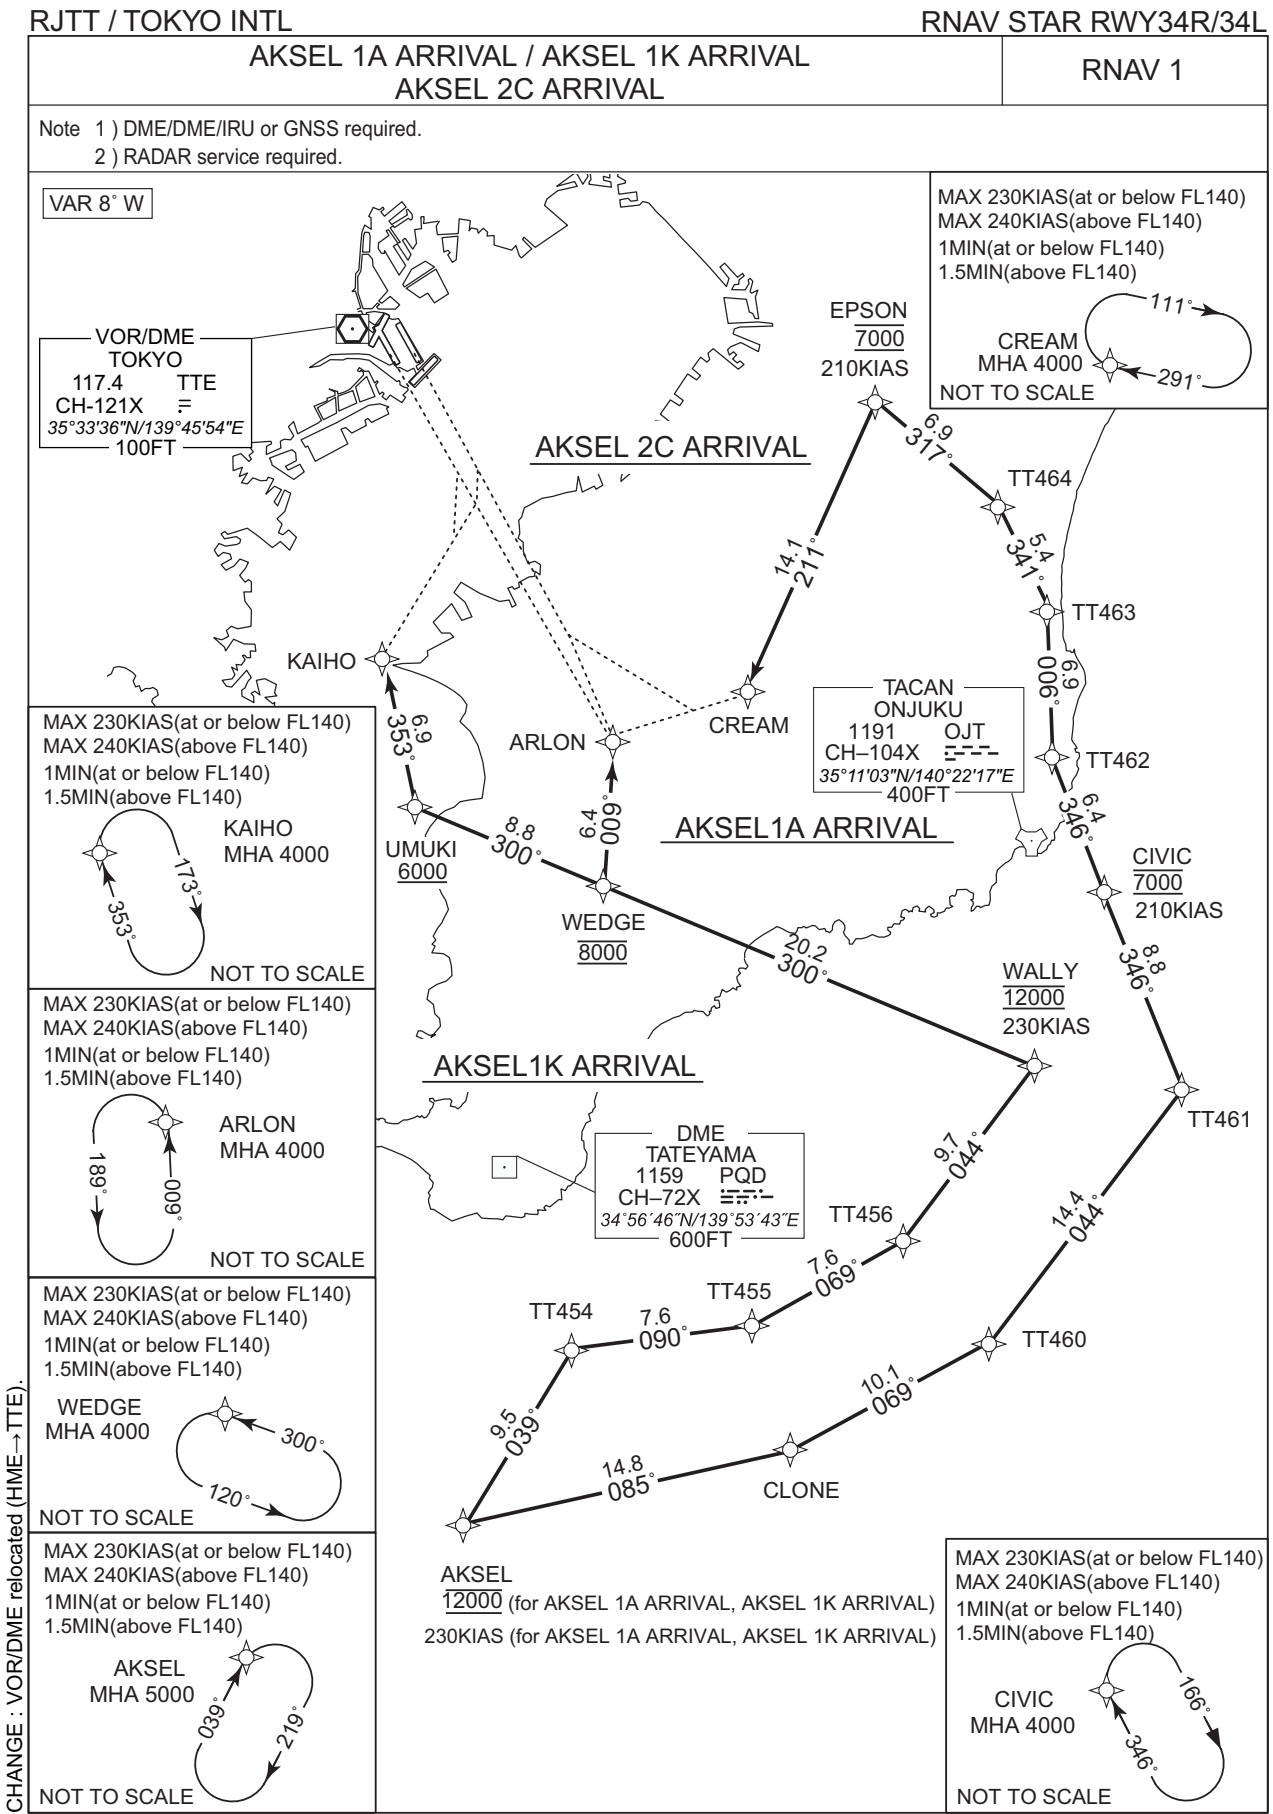

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AKSEL 1A ARRIVAL

From AKSEL at 12000FT, to TT454, to TT455, to TT456, to WALLY at 12000FT, to WEDGE at 8000FT, to ARLON.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	—	—	-7.9	—	—	12000	230	—	RNAV1
002	TF	TT454	—	039 (031.2)	-7.9	9.5	—	—	—	—	RNAV1
003	TF	TT455	—	090 (082.2)	-7.9	7.6	—	—	—	—	RNAV1
004	TF	TT456	—	069 (060.7)	-7.9	7.6	—	—	—	—	RNAV1
005	TF	WALLY	—	044 (036.0)	-7.9	9.7	—	12000	230	—	RNAV1
006	TF	WEDGE	—	300 (292.4)	-7.9	20.2	—	8000	—	—	RNAV1
007	TF	ARLON	—	009 (001.6)	-7.9	6.4	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AKSEL 1K ARRIVAL

From AKSEL at 12000FT, to TT454, to TT455, to TT456, to WALLY at 12000FT, to WEDGE at 8000FT, to UMUKEI at or above 6000FT, to KAIHO.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	—	—	-7.9	—	—	12000	230	—	RNAV1
002	TF	TT454	—	039 (031.2)	-7.9	9.5	—	—	—	—	RNAV1
003	TF	TT455	—	090 (082.2)	-7.9	7.6	—	—	—	—	RNAV1
004	TF	TT456	—	069 (060.7)	-7.9	7.6	—	—	—	—	RNAV1
005	TF	WALLY	—	044 (036.0)	-7.9	9.7	—	12000	230	—	RNAV1
006	TF	WEDGE	—	300 (292.4)	-7.9	20.2	—	8000	—	—	RNAV1
007	TF	UMUKI	—	300 (292.2)	-7.9	8.8	—	+6000	—	—	RNAV1
008	TF	KAIHO	—	353 (345.5)	-7.9	6.9	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AKSEL 2C ARRIVAL

From AKSEL, to CLONE, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM.

Critical DME	—
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	CLONE	—	085 (077.0)	-7.9	14.8	—	—	—	—	RNAV1
003	TF	TT460	—	069 (060.7)	-7.9	10.1	—	—	—	—	RNAV1
004	TF	TT461	—	044 (036.1)	-7.9	14.4	—	—	—	—	RNAV1
005	TF	CIVIC	—	346 (337.7)	-7.9	8.8	—	7000	210	—	RNAV1
006	TF	TT462	—	346 (337.7)	-7.9	6.4	—	—	—	—	RNAV1
007	TF	TT463	—	006 (358.0)	-7.9	6.9	—	—	—	—	RNAV1
008	TF	TT464	—	341 (333.5)	-7.9	5.4	—	—	—	—	RNAV1
009	TF	EPSON	—	317 (309.0)	-7.9	6.9	—	7000	210	—	RNAV1
010	TF	CREAM	—	211 (203.6)	-7.9	14.1	—	—	—	—	RNAV1


Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	346 (337.7)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	TT456	345329.3N / 1401440.2E
ARLON	351525.3N / 1395859.8E	TT460	344852.6N / 1401936.8E
CIVIC	350840.6N / 1402552.1E	TT461	350030.2N / 1402957.9E
CLONE	344357.8N / 1400856.0E	TT462	351433.3N / 1402254.8E
CREAM	351743.4N / 1400612.4E	TT463	352125.4N / 1402237.1E
EPSON	353036.2N / 1401305.9E	TT464	352617.6N / 1401938.6E
KAIHO	351857.8N / 1394642.4E	UMUKI	351219.1N / 1394849.2E
TT454	344844.8N / 1395725.3E	WALLY	350120.1N / 1402138.6E
TT455	344946.2N / 1400635.3E	WEDGE	350900.4N / 1395846.5E

CHANGE : PROC course. VAR. HLDG pattern at CIVIC.

STANDARD ARRIVAL CHART-INSTRUMENT

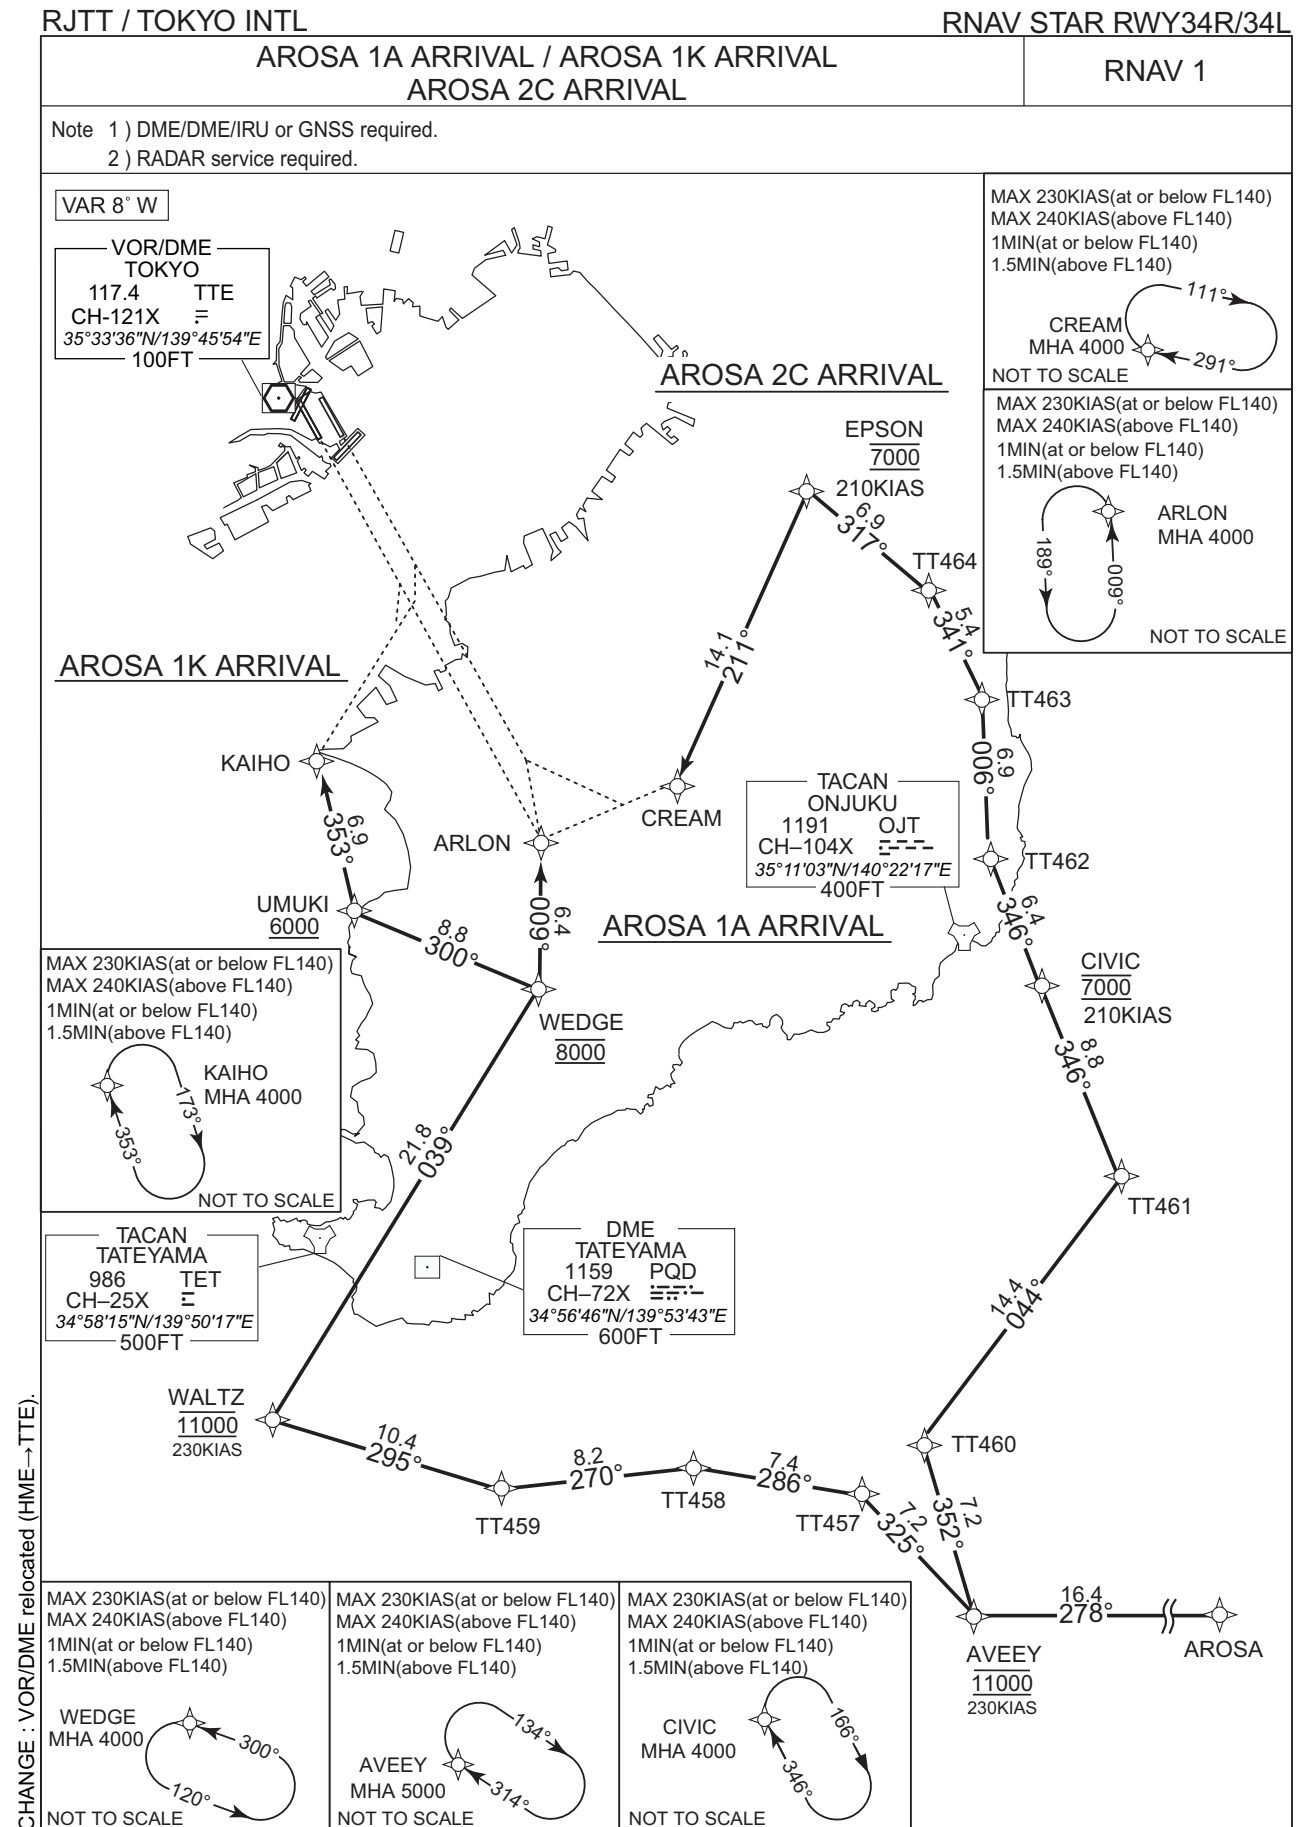

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AROSA 1A ARRIVAL

From AROSA, to AVEEY at 11000FT, to TT457, to TT458, to TT459, to WALTZ at 11000FT, to WEDGE at 8000FT, to ARLON.

Critical DME	—
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	AVEEY	—	278 (269.8)	-7.9	16.4	—	11000	230	—	RNAV1
003	TF	TT457	—	325 (317.5)	-7.9	7.2	—	—	—	—	RNAV1
004	TF	TT458	—	286 (278.5)	-7.9	7.4	—	—	—	—	RNAV1
005	TF	TT459	—	270 (262.3)	-7.9	8.2	—	—	—	—	RNAV1
006	TF	WALTZ	—	295 (287.0)	-7.9	10.4	—	11000	230	—	RNAV1
007	TF	WEDGE	—	039 (030.6)	-7.9	21.8	—	8000	—	—	RNAV1
008	TF	ARLON	—	009 (001.6)	-7.9	6.4	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AROSA 1K ARRIVAL

From AROSA, to AVEEY at 11000FT, to TT457, to TT458, to TT459, to WALTZ at 11000FT, to WEDGE at 8000FT, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	—
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	AVEEY	—	278 (269.8)	-7.9	16.4	—	11000	230	—	RNAV1
003	TF	TT457	—	325 (317.5)	-7.9	7.2	—	—	—	—	RNAV1
004	TF	TT458	—	286 (278.5)	-7.9	7.4	—	—	—	—	RNAV1
005	TF	TT459	—	270 (262.3)	-7.9	8.2	—	—	—	—	RNAV1
006	TF	WALTZ	—	295 (287.0)	-7.9	10.4	—	11000	230	—	RNAV1
007	TF	WEDGE	—	039 (030.6)	-7.9	21.8	—	8000	—	—	RNAV1
008	TF	UMUKI	—	300 (292.2)	-7.9	8.8	—	+6000	—	—	RNAV1
009	TF	KAIHO	—	353 (345.5)	-7.9	6.9	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AROSA 2C ARRIVAL

From AROSA, to AVEEY at 11000FT, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM.

Critical DME	—
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	AVEEY	—	278 (269.8)	-7.9	16.4	—	11000	230	—	RNAV1
003	TF	TT460	—	352 (344.5)	-7.9	7.2	—	—	—	—	RNAV1
004	TF	TT461	—	044 (036.1)	-7.9	14.4	—	—	—	—	RNAV1
005	TF	CIVIC	—	346 (337.7)	-7.9	8.8	—	7000	210	—	RNAV1
006	TF	TT462	—	346 (337.7)	-7.9	6.4	—	—	—	—	RNAV1
007	TF	TT463	—	006 (358.0)	-7.9	6.9	—	—	—	—	RNAV1
008	TF	TT464	—	341 (333.5)	-7.9	5.4	—	—	—	—	RNAV1
009	TF	EPSON	—	317 (309.0)	-7.9	6.9	—	7000	210	—	RNAV1
010	TF	CREAM	—	211 (203.6)	-7.9	14.1	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	346 (337.7)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ARLON	351525.3N / 1395859.8E	TT459	344712.8N / 1395716.3E
AROSA	344201.7N / 1404157.3E	TT460	344852.6N / 1401936.8E
AVEEY	344155.9N / 1402158.0E	TT461	350030.2N / 1402957.9E
CIVIC	350840.6N / 1402552.1E	TT462	351433.3N / 1402254.8E
CREAM	351743.4N / 1400612.4E	TT463	352125.4N / 1402237.1E
EPSON	353036.2N / 1401305.9E	TT464	352617.6N / 1401938.6E
KAIHO	351857.8N / 1394642.4E	UMUKI	351219.1N / 1394849.2E
TT457	344714.3N / 1401602.7E	WALTZ	345014.4N / 1394510.7E
TT458	344819.1N / 1400710.5E	WEDGE	350900.4N / 1395846.5E

CHANGE : PROC course. VAR. HLDG pattern at CIVIC.

RJTT / TOKYO INTL

GODIN 2A ARRIVAL / GODIN 2K ARRIVAL
GODIN 1C ARRIVAL

RNAV 1

VAR 8° W

A diagram showing a closed curve with a star at one end. The curve is labeled with angles 173° and 353° .

NOT TO SCALE

A diagram showing a 180-degree turn. A compass rose is at the top with an arrow pointing to 009°. A curved arrow below it points to 189°.

NOT TO SCALE

VOR/DME
TOKYO
117.4 TTE
CH-121X =
35°33'36"N/139°45'54"E
100FT

TACAN
 SHIMOFUSA
 980 SHT
 CH-19X :::
 35°48'07"N/140°00'36"E
 100FT

NARITA INTL AP
VOR/DME
NARITA
117.9 NRE
CH-126X
35°46'56"N/140°21'45"E
200FT

Diagram illustrating the geometry of the Godin MHA 8000. The diagram shows a circular arc with two points marked. The angle between the tangent lines at these points is labeled as 17°. The angle between the tangent line at the lower point and the horizontal line is labeled as 197°. The text "NOT TO SCALE" is present above the diagram. The text "GODIN MHA 8000" is present below the diagram.

NOT TO SCALE

017° 197°

COLOR
MHA 8000

NOT TO SCALE

186°

006°

COACH
MHA 4000

CREAM
MHA 4000
NOT TO SCALE



111°
291°

TACAN
ONJUKU
1191 OJT
CH-104X ---
35°11'03"N/140°22'17"E
400FT

TACAN
TATEYAMA
986 TET
CH-25X 三
34°58'15"N/139°50'17"E
500FT

DME
TATEYAMA
1159 PQD
CH-72X 三三三
34°56'46"N/139°53'43"E
600FT

CHANGE : VOR/DME relocated (HME→TTE).

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

GODIN 2A ARRIVAL

From GODIN, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to TT468, to ANDEN, to ARLON.

Critical DME	—
DME GAP	—
Inappropriate NavAids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	CHIPS	—	197 (189.1)	-7.9	11.8	—	-13000	—	—	RNAV1
003	TF	COLOR	—	197 (189.1)	-7.9	11.7	—	-11000	—	—	RNAV1
004	TF	COPSE	—	189 (180.8)	-7.9	14.3	—	—	—	—	RNAV1
005	TF	COACH	—	186 (177.8)	-7.9	9.4	—	8000	210	—	RNAV1
006	TF	TT465	—	188 (179.6)	-7.9	8.0	—	—	—	—	RNAV1
007	TF	TT466	—	137 (128.9)	-7.9	6.4	—	—	—	—	RNAV1
008	TF	TT467	—	161 (153.5)	-7.9	5.0	—	—	—	—	RNAV1
009	TF	EDDIE	—	186 (178.0)	-7.9	6.4	—	8000	210	—	RNAV1
010	TF	TT468	—	256 (248.1)	-7.9	6.7	—	—	—	—	RNAV1
011	TF	ANDEN	—	278 (270.2)	-7.9	6.9	—	—	—	—	RNAV1
012	TF	ARLON	—	308 (300.2)	-7.9	6.2	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	186 (177.8)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at COACH.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

GODIN 2K ARRIVAL

From GODIN ,to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to TT468, to ANDEN, to UMUKEI at or above 6000FT, to KAIHO.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	CHIPS	—	197 (189.1)	-7.9	11.8	—	-13000	—	—	RNAV1
003	TF	COLOR	—	197 (189.1)	-7.9	11.7	—	-11000	—	—	RNAV1
004	TF	COPSE	—	189 (180.8)	-7.9	14.3	—	—	—	—	RNAV1
005	TF	COACH	—	186 (177.8)	-7.9	9.4	—	8000	210	—	RNAV1
006	TF	TT465	—	188 (179.6)	-7.9	8.0	—	—	—	—	RNAV1
007	TF	TT466	—	137 (128.9)	-7.9	6.4	—	—	—	—	RNAV1
008	TF	TT467	—	161 (153.5)	-7.9	5.0	—	—	—	—	RNAV1
009	TF	EDDIE	—	186 (178.0)	-7.9	6.4	—	8000	210	—	RNAV1
010	TF	TT468	—	256 (248.1)	-7.9	6.7	—	—	—	—	RNAV1
011	TF	ANDEN	—	278 (270.2)	-7.9	6.9	—	—	—	—	RNAV1
012	TF	UMUKI	—	278 (270.2)	-7.9	13.7	—	+6000	—	—	RNAV1
013	TF	KAIHO	—	353 (345.5)	-7.9	6.9	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	186 (177.8)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at COACH.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

GODIN 1C ARRIVAL

From GODIN ,to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to CREAM.

Critical DME	—
DME GAP	—
Inappropriate NavAids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	CHIPS	—	197 (189.1)	-7.9	11.8	—	-13000	—	—	RNAV1
003	TF	COLOR	—	197 (189.1)	-7.9	11.7	—	-11000	—	—	RNAV1
004	TF	COPSE	—	189 (180.8)	-7.9	14.3	—	—	—	—	RNAV1
005	TF	COACH	—	186 (177.8)	-7.9	9.4	—	8000	210	—	RNAV1
006	TF	TT465	—	188 (179.6)	-7.9	8.0	—	—	—	—	RNAV1
007	TF	TT466	—	137 (128.9)	-7.9	6.4	—	—	—	—	RNAV1
008	TF	TT467	—	161 (153.5)	-7.9	5.0	—	—	—	—	RNAV1
009	TF	EDDIE	—	186 (178.0)	-7.9	6.4	—	8000	210	—	RNAV1
010	TF	CREAM	—	291 (283.1)	-7.9	13.0	—	—	—	—	RNAV1


Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	186 (177.8)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ANDEN	351217.9N / 1400534.7E	GODIN	362425.3N / 1401655.9E
ARLON	351525.3N / 1395859.8E	KAIHO	351857.8N / 1394642.4E
CHIPS	361247.7N / 1401436.9E	TT465	352939.2N / 1401235.4E
COACH	353736.0N / 1401231.5E	TT466	352539.0N / 1401840.1E
COLOR	360116.3N / 1401219.8E	TT467	352110.2N / 1402124.4E
COPSE	354658.8N / 1401205.4E	TT468	351216.4N / 1401402.6E
CREAM	351743.4N / 1400612.4E	UMUKI	351219.1N / 1394849.2E
EDDIE	351447.4N / 1402140.9E		

CHANGE : PROC course. VAR. HLDG pattern at COACH.

STANDARD ARRIVAL CHART-INSTRUMENT

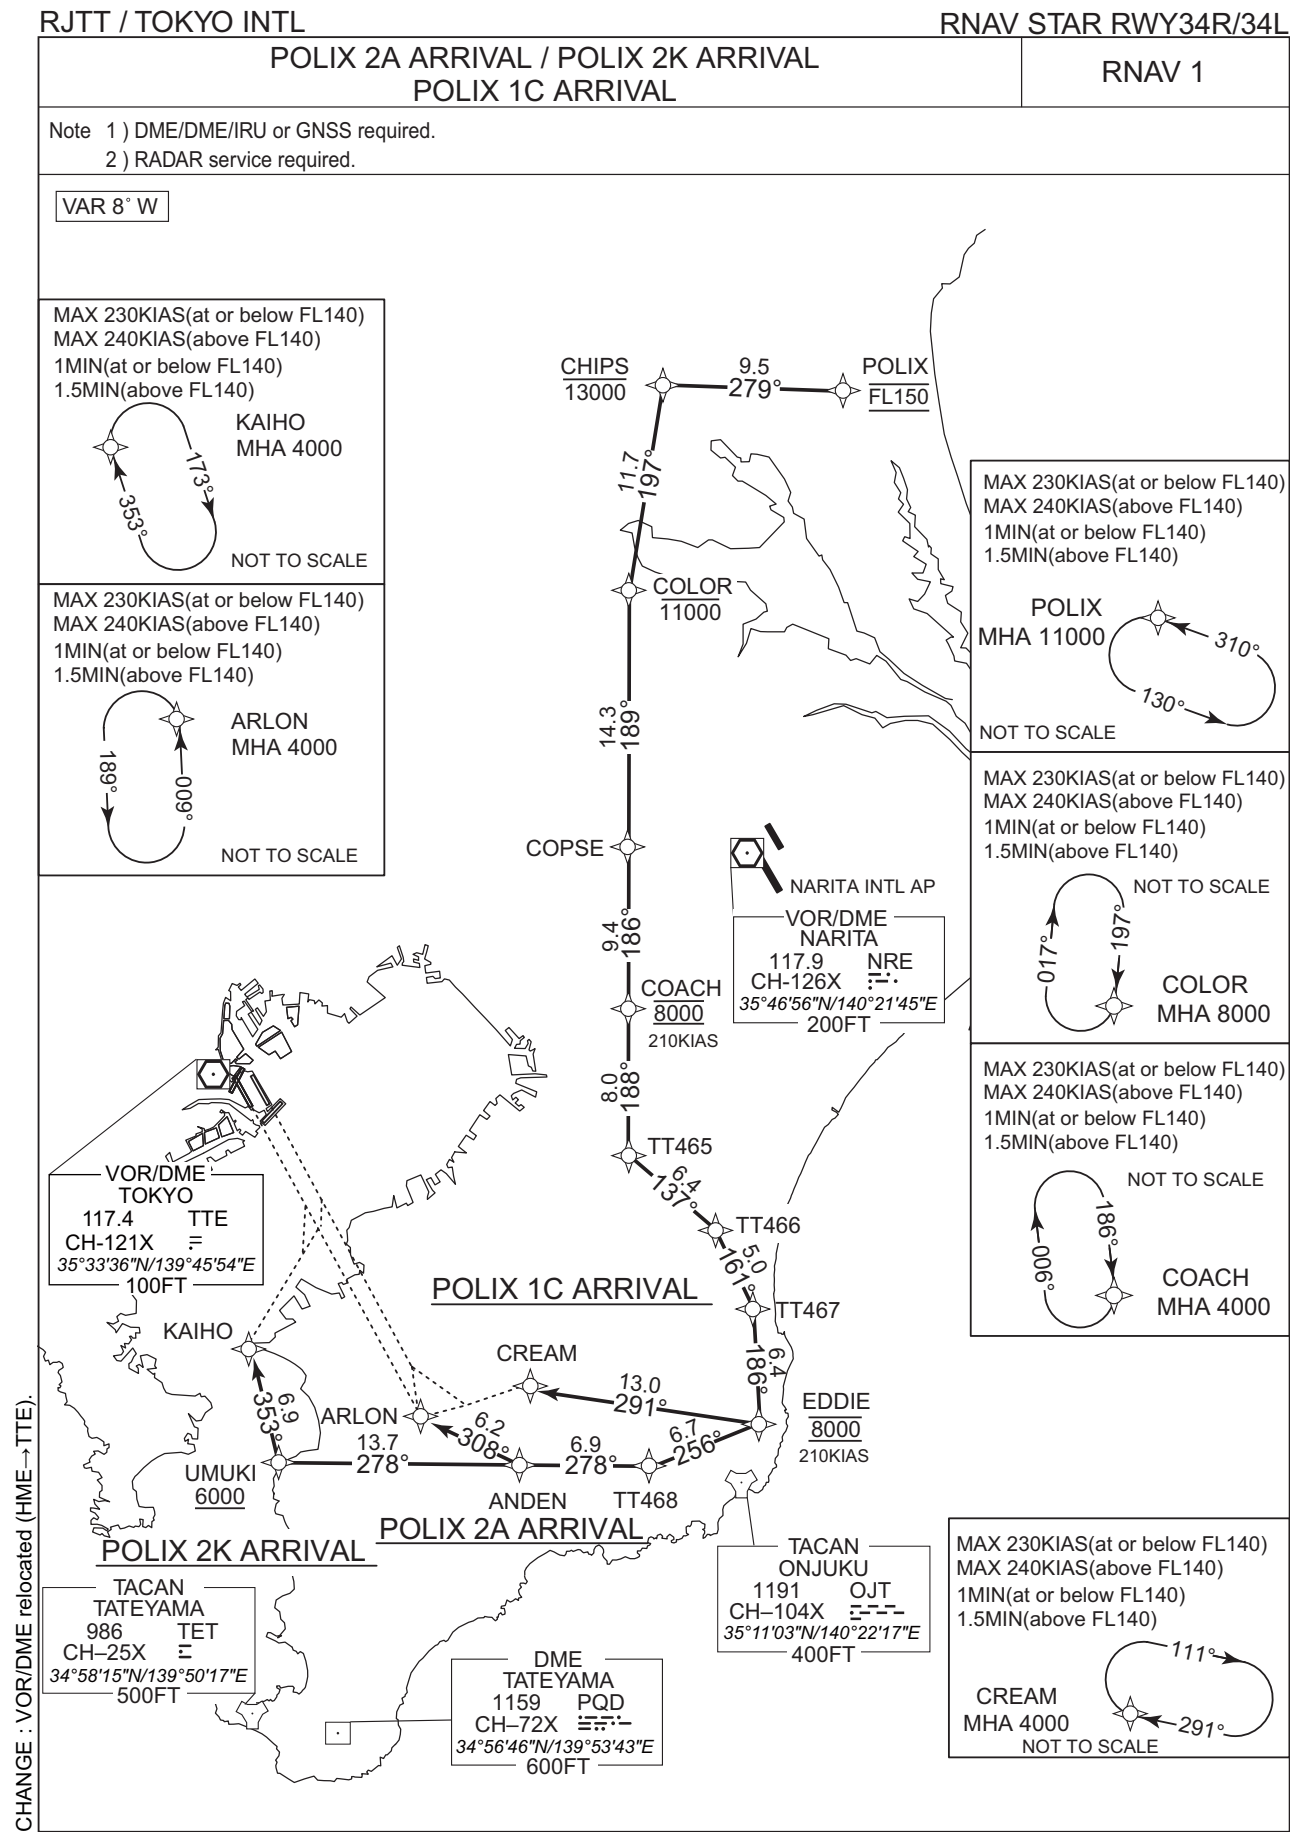

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

POLIX 2A ARRIVAL

From POLIX at FL150, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to TT468, to ANDEN, to ARLON.

Critical DME	—
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	—	—	-7.9	—	—	FL150	—	—	RNAV1
002	TF	CHIPS	—	279 (271.1)	-7.9	9.5	—	-13000	—	—	RNAV1
003	TF	COLOR	—	197 (189.1)	-7.9	11.7	—	-11000	—	—	RNAV1
004	TF	COPSE	—	189 (180.8)	-7.9	14.3	—	—	—	—	RNAV1
005	TF	COACH	—	186 (177.8)	-7.9	9.4	—	8000	210	—	RNAV1
006	TF	TT465	—	188 (179.6)	-7.9	8.0	—	—	—	—	RNAV1
007	TF	TT466	—	137 (128.9)	-7.9	6.4	—	—	—	—	RNAV1
008	TF	TT467	—	161 (153.5)	-7.9	5.0	—	—	—	—	RNAV1
009	TF	EDDIE	—	186 (178.0)	-7.9	6.4	—	8000	210	—	RNAV1
010	TF	TT468	—	256 (248.1)	-7.9	6.7	—	—	—	—	RNAV1
011	TF	ANDEN	—	278 (270.2)	-7.9	6.9	—	—	—	—	RNAV1
012	TF	ARLON	—	308 (300.2)	-7.9	6.2	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.9	1.0(-14000) 1.5(+14001)	—	L	11000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	186 (177.8)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at COACH.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

POLIX 2K ARRIVAL

From POLIX at FL150, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to TT468, to ANDEN, to UMUKEI at or above 6000FT, to KAIHO.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	—	—	-7.9	—	—	FL150	—	—	RNAV1
002	TF	CHIPS	—	279 (271.1)	-7.9	9.5	—	-13000	—	—	RNAV1
003	TF	COLOR	—	197 (189.1)	-7.9	11.7	—	-11000	—	—	RNAV1
004	TF	COPSE	—	189 (180.8)	-7.9	14.3	—	—	—	—	RNAV1
005	TF	COACH	—	186 (177.8)	-7.9	9.4	—	8000	210	—	RNAV1
006	TF	TT465	—	188 (179.6)	-7.9	8.0	—	—	—	—	RNAV1
007	TF	TT466	—	137 (128.9)	-7.9	6.4	—	—	—	—	RNAV1
008	TF	TT467	—	161 (153.5)	-7.9	5.0	—	—	—	—	RNAV1
009	TF	EDDIE	—	186 (178.0)	-7.9	6.4	—	8000	210	—	RNAV1
010	TF	TT468	—	256 (248.1)	-7.9	6.7	—	—	—	—	RNAV1
011	TF	ANDEN	—	278 (270.2)	-7.9	6.9	—	—	—	—	RNAV1
012	TF	UMUKI	—	278 (270.2)	-7.9	13.7	—	+6000	—	—	RNAV1
013	TF	KAIHO	—	353 (345.5)	-7.9	6.9	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.9	1.0(-14000) 1.5(+14001)	—	L	11000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	186 (177.8)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR: HLDG pattern at COACH.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

POLIX 1C ARRIVAL

From POLIX at FL150, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to CREAM.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	-	-	-7.9	-	-	FL150	-	-	RNAV1
002	TF	CHIPS	-	279 (271.1)	-7.9	9.5	-	-13000	-	-	RNAV1
003	TF	COLOR	-	197 (189.1)	-7.9	11.7	-	-11000	-	-	RNAV1
004	TF	COPSE	-	189 (180.8)	-7.9	14.3	-	-	-	-	RNAV1
005	TF	COACH	-	186 (177.8)	-7.9	9.4	-	8000	210	-	RNAV1
006	TF	TT465	-	188 (179.6)	-7.9	8.0	-	-	-	-	RNAV1
007	TF	TT466	-	137 (128.9)	-7.9	6.4	-	-	-	-	RNAV1
008	TF	TT467	-	161 (153.5)	-7.9	5.0	-	-	-	-	RNAV1
009	TF	EDDIE	-	186 (178.0)	-7.9	6.4	-	8000	210	-	RNAV1
010	TF	CREAM	-	291 (283.1)	-7.9	13.0	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.9	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.9	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	186 (177.8)	-7.9	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.9	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ANDEN	351217.9N / 1400534.7E	KAIHO	351857.8N / 1394642.4E
ARLON	351525.3N / 1395859.8E	POLIX	361237.1N / 1402622.5E
CHIPS	361247.7N / 1401436.9E	TT465	352939.2N / 1401235.4E
COACH	353736.0N / 1401231.5E	TT466	352539.0N / 1401840.1E
COLOR	360116.3N / 1401219.8E	TT467	352110.2N / 1402124.4E
COPSE	354658.8N / 1401205.4E	TT468	351216.4N / 1401402.6E
CREAM	351743.4N / 1400612.4E	UMUKI	351219.1N / 1394849.2E
EDDIE	351447.4N / 1402140.9E		

CHANGE : PROC course. VAR. HLDG pattern at COACH.

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

RNAV 1

VAR 8° W

RNAV HLDG
MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

RNAV HLDG
MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

NOT TO SCALE

VOR/DME
TOKYO
117.4 TTE
CH-121X =
35°33'36"N/139°45'54"E
100FT

A diagram showing a 330-degree turn from CACAO to D19.0 TTE. The turn is indicated by a curved arrow labeled '330°'. The starting point is CACAO (D13.8 TTE) and the ending point is D19.0 TTE. The aircraft is labeled MHA 4000/MAX 230KIAS.

TACAN
ONJUKU
1191 OJT
CH-104X ---
35°11'03"N/140°22'17"E

DME
TATEYAMA
1159 PQD
CH-72X 
34°56'46"N/139°53'43"E
600FT

VORTAC
OSHIMA
113.1 XAC
CH-78X $\equiv \equiv \equiv$
34°42'44"N/139°24'50"E
2100FT

OSHIMA 2H ARRIVAL

OSHIMA
(XAC)

AKSEL 

AKSEL 2H ARRIVAL

1999 218 2000
OKIAS AROSA
AROSA 2H ARRIVAL

RNAV HLDG

RNAV HLDG

RNAV HLDG

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

098°

OSHIMA(XAC)
MHA 5000

278°

NOT TO SCALE

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

AKSEL
MHA 5000

039°

219°

NOT TO SCALE

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

AVEEY
MHA 5000
NOT TO SCALE

CHANGE : VOR/DME relocated (HME→TTE). HLDG pattern at CACAO.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

OSHIMA 2H ARRIVAL

From XAC, to CLONE, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM, to CLOAK, to CAMEL, to CACAO.

Note: When cleared HIGHWAY VISUAL RWY34R APPROACH, aircraft should fly via last routing cleared until CACAO.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	CLONE	—	096 (087.8)	-7.9	36.3	—	—	—	—	RNAV1
003	TF	TT460	—	069 (060.7)	-7.9	10.1	—	—	—	—	RNAV1
004	TF	TT461	—	044 (036.1)	-7.9	14.4	—	—	—	—	RNAV1
005	TF	CIVIC	—	346 (337.7)	-7.9	8.8	—	7000	210	—	RNAV1
006	TF	TT462	—	346 (337.7)	-7.9	6.4	—	—	—	—	RNAV1
007	TF	TT463	—	006 (358.0)	-7.9	6.9	—	—	—	—	RNAV1
008	TF	TT464	—	341 (333.5)	-7.9	5.4	—	—	—	—	RNAV1
009	TF	EPSON	—	317 (309.0)	-7.9	6.9	—	7000	210	—	RNAV1
010	TF	CREAM	—	211 (203.6)	-7.9	14.1	—	—	—	—	RNAV1
011	TF	CLOAK	—	248 (240.0)	-7.9	3.8	—	—	—	—	RNAV1
012	TF	CAMEL	—	308 (300.1)	-7.9	3.0	—	—	—	—	RNAV1
013	TF	CACAO	—	338 (330.1)	-7.9	5.7	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	346 (337.7)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at CIVIC.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AKSEL 2H ARRIVAL

From AKSEL, to CLONE, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM, to CLOAK, to CAMEL, to CACAO.

Note: When cleared HIGHWAY VISUAL RWY34R APPROACH, aircraft should fly via last routing cleared until CACAO.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	CLONE	—	085 (077.0)	-7.9	14.8	—	—	—	—	RNAV1
003	TF	TT460	—	069 (060.7)	-7.9	10.1	—	—	—	—	RNAV1
004	TF	TT461	—	044 (036.1)	-7.9	14.4	—	—	—	—	RNAV1
005	TF	CIVIC	—	346 (337.7)	-7.9	8.8	—	7000	210	—	RNAV1
006	TF	TT462	—	346 (337.7)	-7.9	6.4	—	—	—	—	RNAV1
007	TF	TT463	—	006 (358.0)	-7.9	6.9	—	—	—	—	RNAV1
008	TF	TT464	—	341 (333.5)	-7.9	5.4	—	—	—	—	RNAV1
009	TF	EPSON	—	317 (309.0)	-7.9	6.9	—	7000	210	—	RNAV1
010	TF	CREAM	—	211 (203.6)	-7.9	14.1	—	—	—	—	RNAV1
011	TF	CLOAK	—	248 (240.0)	-7.9	3.8	—	—	—	—	RNAV1
012	TF	CAMEL	—	308 (300.1)	-7.9	3.0	—	—	—	—	RNAV1
013	TF	CACAO	—	338 (330.1)	-7.9	5.7	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	346 (337.7)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at CIVIC.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

AROSA 2H ARRIVAL

From AROSA, to AVEEY at 11000FT, to TT460, to TT461, to CIVIC at 7000FT, to TT462, to TT463, to TT464, to EPSON at 7000FT, to CREAM, to CLOAK, to CAMEL, to CACAO.

Note: When cleared HIGHWAY VISUAL RWY34R APPROACH, aircraft should fly via last routing cleared until CACAO.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	AVEEY	—	278 (269.8)	-7.9	16.4	—	11000	230	—	RNAV1
003	TF	TT460	—	352 (344.5)	-7.9	7.2	—	—	—	—	RNAV1
004	TF	TT461	—	044 (036.1)	-7.9	14.4	—	—	—	—	RNAV1
005	TF	CIVIC	—	346 (337.7)	-7.9	8.8	—	7000	210	—	RNAV1
006	TF	TT462	—	346 (337.7)	-7.9	6.4	—	—	—	—	RNAV1
007	TF	TT463	—	006 (358.0)	-7.9	6.9	—	—	—	—	RNAV1
008	TF	TT464	—	341 (333.5)	-7.9	5.4	—	—	—	—	RNAV1
009	TF	EPSON	—	317 (309.0)	-7.9	6.9	—	7000	210	—	RNAV1
010	TF	CREAM	—	211 (203.6)	-7.9	14.1	—	—	—	—	RNAV1
011	TF	CLOAK	—	248 (240.0)	-7.9	3.8	—	—	—	—	RNAV1
012	TF	CAMEL	—	308 (300.1)	-7.9	3.0	—	—	—	—	RNAV1
013	TF	CACAO	—	338 (330.1)	-7.9	5.7	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CIVIC	346 (337.7)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at CIVIC.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	CREAM	351743.4N / 1400612.4E
AROSA	344201.7N / 1404157.3E	EPSON	353036.2N / 1401305.9E
AVEEY	344155.9N / 1402158.0E	TT460	344852.6N / 1401936.8E
CACAO	352212.8N / 1395530.1E	TT461	350030.2N / 1402957.9E
CAMEL	351718.2N / 1395857.8E	TT462	351433.3N / 1402254.8E
CIVIC	350840.6N / 1402552.1E	TT463	352125.4N / 1402237.1E
CLOAK	351548.0N / 1400208.2E	TT464	352617.6N / 1401938.6E
CLONE	344357.8N / 1400856.0E	XAC	344244.1N / 1392450.5E


CHANGE : AVEEY renamed

INTENTIONALLY LEFT BLANK

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

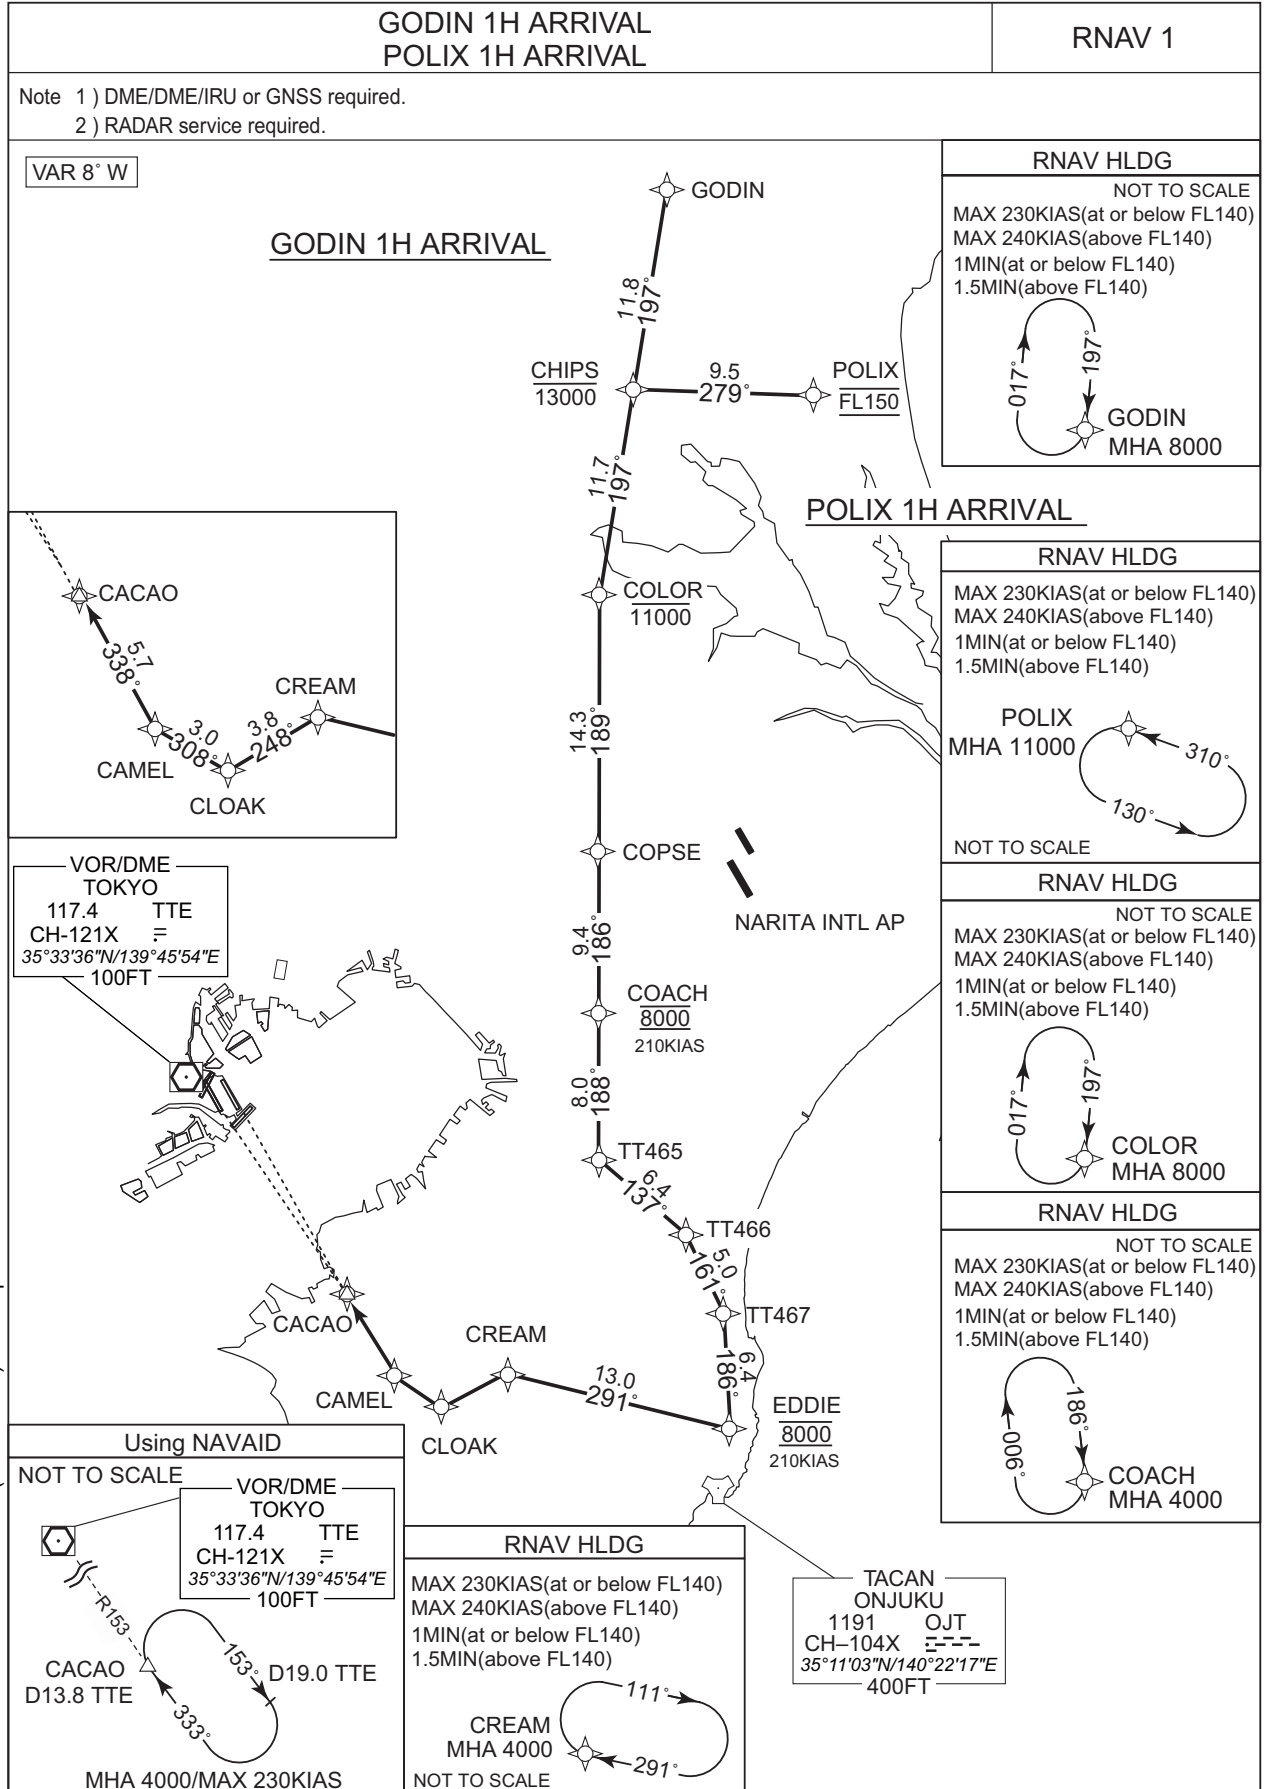

CHANGE : VOR/DME relocated (HME→TTE). HLDG pattern at CACAO.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

GODIN 1H ARRIVAL

From GODIN, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to CREAM, to CLOAK, to CAMEL, to CACAO.

Note: When cleared HIGHWAY VISUAL RWY34R APPROACH, aircraft should fly via last routing cleared until CACAO.

Critical DME	—
DME GAP	—
Inappropriate NavAids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	CHIPS	—	197 (189.1)	-7.9	11.8	—	-13000	—	—	RNAV1
003	TF	COLOR	—	197 (189.1)	-7.9	11.7	—	-11000	—	—	RNAV1
004	TF	COPSE	—	189 (180.8)	-7.9	14.3	—	—	—	—	RNAV1
005	TF	COACH	—	186 (177.8)	-7.9	9.4	—	8000	210	—	RNAV1
006	TF	TT465	—	188 (179.6)	-7.9	8.0	—	—	—	—	RNAV1
007	TF	TT466	—	137 (128.9)	-7.9	6.4	—	—	—	—	RNAV1
008	TF	TT467	—	161 (153.5)	-7.9	5.0	—	—	—	—	RNAV1
009	TF	EDDIE	—	186 (178.0)	-7.9	6.4	—	8000	210	—	RNAV1
010	TF	CREAM	—	291 (283.1)	-7.9	13.0	—	—	—	—	RNAV1
011	TF	CLOAK	—	248 (240.0)	-7.9	3.8	—	—	—	—	RNAV1
012	TF	CAMEL	—	308 (300.1)	-7.9	3.0	—	—	—	—	RNAV1
013	TF	CACAO	—	338 (330.1)	-7.9	5.7	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	186 (177.8)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at COACH.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

POLIX 1H ARRIVAL

From POLIX at FL150, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to CREAM, to CLOAK, to CAMEL, to CACAO.

Note: When cleared HIGHWAY VISUAL RWY34R APPROACH, aircraft should fly via last routing cleared until CACAO.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	—	—	-7.9	—	—	FL150	—	—	RNAV1
002	TF	CHIPS	—	279 (271.1)	-7.9	9.5	—	-13000	—	—	RNAV1
003	TF	COLOR	—	197 (189.1)	-7.9	11.7	—	-11000	—	—	RNAV1
004	TF	COPSE	—	189 (180.8)	-7.9	14.3	—	—	—	—	RNAV1
005	TF	COACH	—	186 (177.8)	-7.9	9.4	—	8000	210	—	RNAV1
006	TF	TT465	—	188 (179.6)	-7.9	8.0	—	—	—	—	RNAV1
007	TF	TT466	—	137 (128.9)	-7.9	6.4	—	—	—	—	RNAV1
008	TF	TT467	—	161 (153.5)	-7.9	5.0	—	—	—	—	RNAV1
009	TF	EDDIE	—	186 (178.0)	-7.9	6.4	—	8000	210	—	RNAV1
010	TF	CREAM	—	291 (283.1)	-7.9	13.0	—	—	—	—	RNAV1
011	TF	CLOAK	—	248 (240.0)	-7.9	3.8	—	—	—	—	RNAV1
012	TF	CAMEL	—	308 (300.1)	-7.9	3.0	—	—	—	—	RNAV1
013	TF	CACAO	—	338 (330.1)	-7.9	5.7	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.9	1.0(-14000) 1.5(+14001)	—	L	11000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	186 (177.8)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at COACH.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
CACAO	352212.8N / 1395530.1E	CREAM	351743.4N / 1400612.4E
CAMEL	351718.2N / 1395857.8E	EDDIE	351447.4N / 1402140.9E
CHIPS	361247.7N / 1401436.9E	GODIN	362425.3N / 1401655.9E
CLOAK	351548.0N / 1400208.2E	POLIX	361237.1N / 1402622.5E
COACH	353736.0N / 1401231.5E	TT465	352939.2N / 1401235.4E
COLOR	360116.3N / 1401219.8E	TT466	352539.0N / 1401840.1E
COPSE	354658.8N / 1401205.4E	TT467	352110.2N / 1402124.4E


CHANGE : New PROC

RJTT / TOKYO INTL

OSHIMA 1N ARRIVAL
OSHIMA 2N ARRIVAL

RNAV 1

VAR 8° W

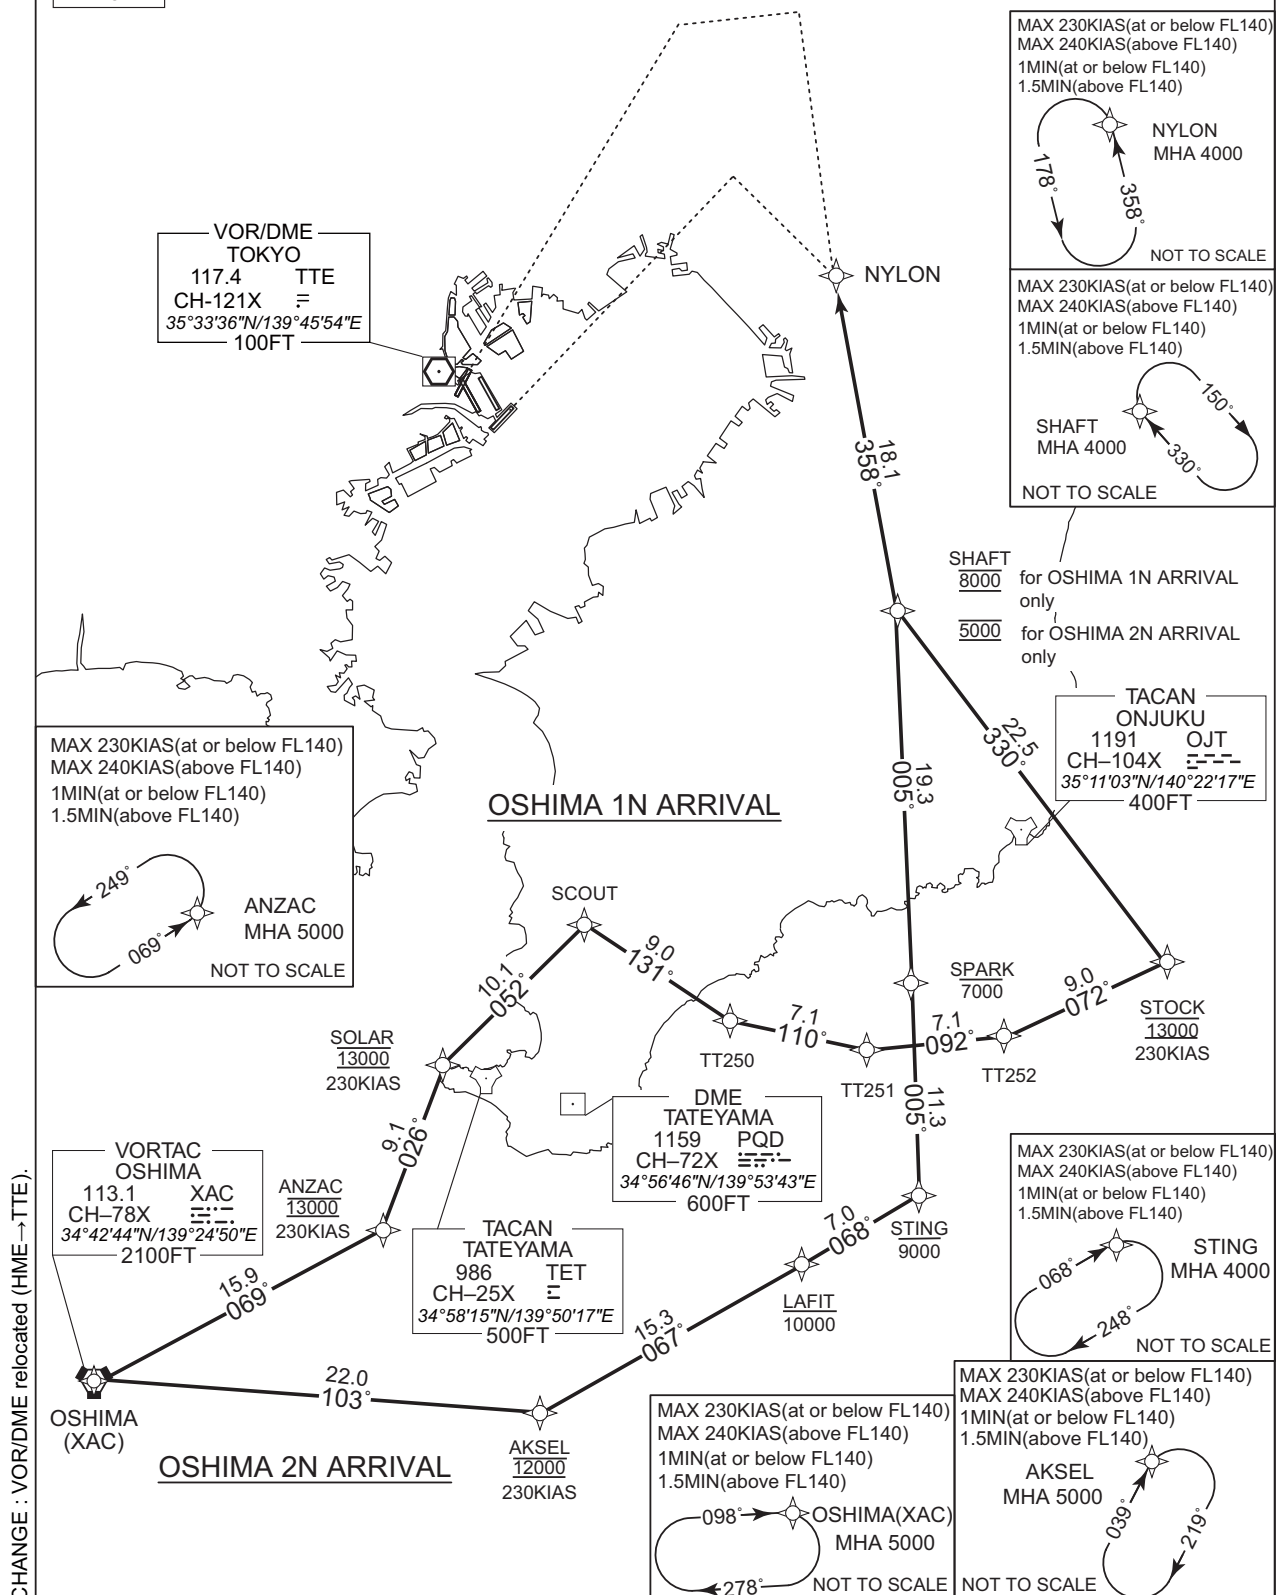

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

OSHIMA 1N ARRIVAL

From XAC, to ANZAC at 13000FT, to SOLAR at 13000FT, to SCOUT, to TT250, to TT251, to TT252, to STOCK at 13000FT, to SHAFT at 8000FT, to NYLON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.9	-	-	-	-	-	RNAV1
002	TF	ANZAC	-	069 (060.8)	-7.9	15.9	-	13000	230	-	RNAV1
003	TF	SOLAR	-	026 (018.4)	-7.9	9.1	-	13000	230	-	RNAV1
004	TF	SCOUT	-	052 (044.3)	-7.9	10.1	-	-	-	-	RNAV1
005	TF	TT250	-	131 (123.1)	-7.9	9.0	-	-	-	-	RNAV1
006	TF	TT251	-	110 (102.5)	-7.9	7.1	-	-	-	-	RNAV1
007	TF	TT252	-	092 (084.3)	-7.9	7.1	-	-	-	-	RNAV1
008	TF	STOCK	-	072 (063.6)	-7.9	9.0	-	13000	230	-	RNAV1
009	TF	SHAFT	-	330 (322.4)	-7.9	22.5	-	8000	-	-	RNAV1
010	TF	NYLON	-	358 (350.0)	-7.9	18.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.9	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	ANZAC	069 (060.8)	-7.9	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	358 (350.0)	-7.9	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at ANZAC, NYLON.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

OSHIMA 2N ARRIVAL

From XAC, to AKSEL at 12000FT, to LAFIT at or below 10000FT, to STING at or below 9000FT, to SPARK at or below 7000FT, to SHAFT at 5000FT, to NYLON.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.9	-	-	-	-	-	RNAV1
002	TF	AKSEL	-	103 (095.3)	-7.9	22.0	-	12000	230	-	RNAV1
003	TF	LAFIT	-	067 (059.5)	-7.9	15.3	-	-10000	-	-	RNAV1
004	TF	STING	-	068 (059.6)	-7.9	7.0	-	-9000	-	-	RNAV1
005	TF	SPARK	-	005 (357.4)	-7.9	11.3	-	-7000	-	-	RNAV1
006	TF	SHAFT	-	005 (357.4)	-7.9	19.3	-	5000	-	-	RNAV1
007	TF	NYLON	-	358 (350.0)	-7.9	18.1	-	-	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.9	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	AKSEL	039 (031.2)	-7.9	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	STING	068 (059.6)	-7.9	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	358 (350.0)	-7.9	1.0(-14000) 1.5(+14001)	-	L	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	SPARK	350312.0N / 1401416.7E
ANZAC	345028.8N / 1394146.7E	STOCK	350438.7N / 1403002.9E
LAFIT	344826.0N / 1400732.4E	STING	345157.9N / 1401453.4E
NYLON	354018.5N / 1400919.9E	TT250	350129.7N / 1400308.5E
SCOUT	350624.1N / 1395356.8E	TT251	345957.7N / 1401136.0E
SHAFT	352227.4N / 1401313.3E	TT252	350039.9N / 1402013.0E
SOLAR	345909.2N / 1394518.5E	XAC	344244.1N / 1392450.5E

CHANGE : PROC course. VAR. HLDG pattern at STING, NYLON.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL


RNAV STAR RWY22/23

OSHIMA 1B ARRIVAL
OSHIMA 2B ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8° W

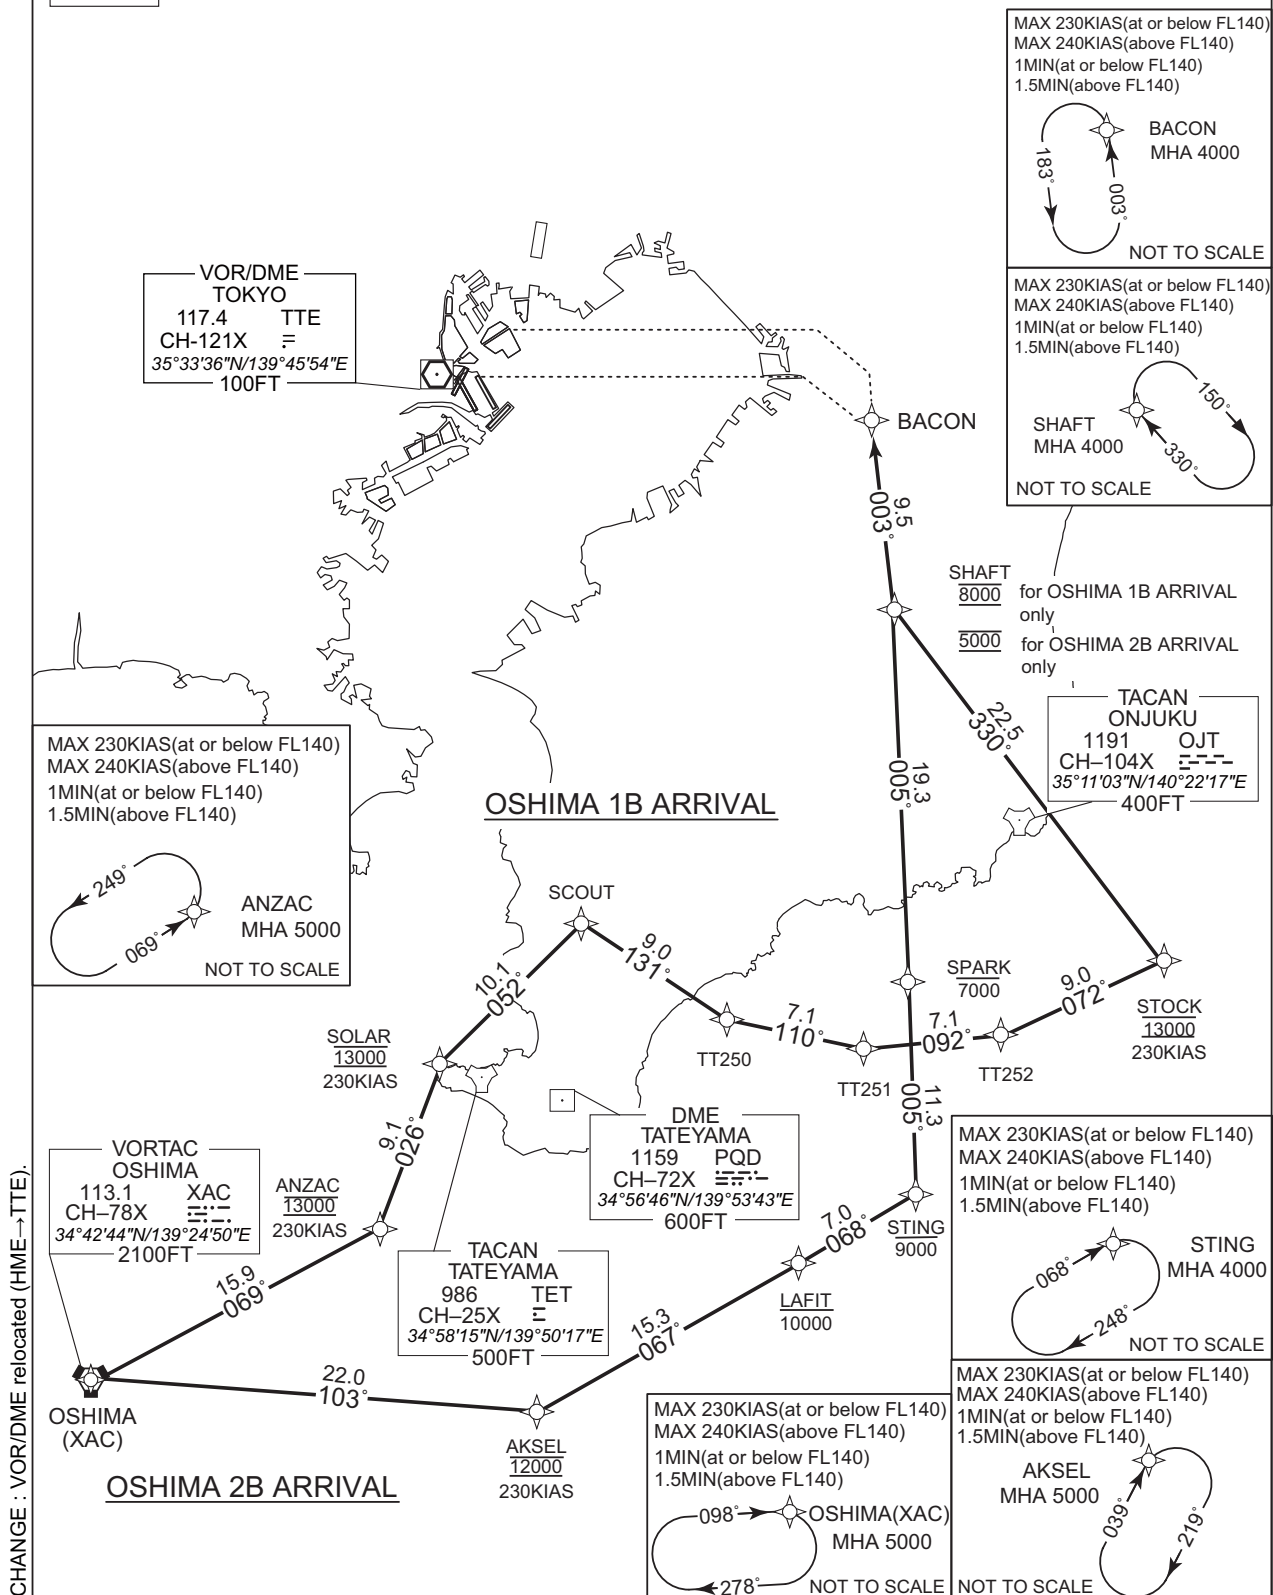

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

OSHIMA 1B ARRIVAL

From XAC, to ANZAC at 13000FT, to SOLAR at 13000FT, to SCOUT, to TT250, to TT251, to TT252, to STOCK at 13000FT, to SHAFT at 8000FT, to BACON.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	ANZAC	—	069 (060.8)	-7.9	15.9	—	13000	230	—	RNAV1
003	TF	SOLAR	—	026 (018.4)	-7.9	9.1	—	13000	230	—	RNAV1
004	TF	SCOUT	—	052 (044.3)	-7.9	10.1	—	—	—	—	RNAV1
005	TF	TT250	—	131 (123.1)	-7.9	9.0	—	—	—	—	RNAV1
006	TF	TT251	—	110 (102.5)	-7.9	7.1	—	—	—	—	RNAV1
007	TF	TT252	—	092 (084.3)	-7.9	7.1	—	—	—	—	RNAV1
008	TF	STOCK	—	072 (063.6)	-7.9	9.0	—	13000	230	—	RNAV1
009	TF	SHAFT	—	330 (322.4)	-7.9	22.5	—	8000	—	—	RNAV1
010	TF	BACON	—	003 (355.2)	-7.9	9.5	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ANZAC	069 (060.8)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR: HLDG pattern at ANZAC.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

OSHIMA 2B ARRIVAL

From XAC, to AKSEL at 12000FT, to LAFIT at or below 10000FT, to STING at or below 9000FT, to SPARK at or below 7000FT, to SHAFT at 5000FT, to BACON.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	AKSEL	—	103 (095.3)	-7.9	22.0	—	12000	230	—	RNAV1
003	TF	LAFIT	—	067 (059.5)	-7.9	15.3	—	-10000	—	—	RNAV1
004	TF	STING	—	068 (059.6)	-7.9	7.0	—	-9000	—	—	RNAV1
005	TF	SPARK	—	005 (357.4)	-7.9	11.3	—	-7000	—	—	RNAV1
006	TF	SHAFT	—	005 (357.4)	-7.9	19.3	—	5000	—	—	RNAV1
007	TF	BACON	—	003 (355.2)	-7.9	9.5	—	—	—	—	RNAV1


Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	AKSEL	039 (031.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	STING	068 (059.6)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	SPARK	350312.0N / 1401416.7E
ANZAC	345028.8N / 1394146.7E	STOCK	350438.7N / 1403002.9E
BACON	353155.0N / 1401215.1E	STING	345157.9N / 1401453.4E
LAFIT	344826.0N / 1400732.4E	TT250	350129.7N / 1400308.5E
SCOUT	350624.1N / 1395356.8E	TT251	345957.7N / 1401136.0E
SHAFT	352227.4N / 1401313.3E	TT252	350039.9N / 1402013.0E
SOLAR	345909.2N / 1394518.5E	XAC	344244.1N / 1392450.5E

CHANGE : PROC course. VAR. HLDG pattern at STING.

STANDARD ARRIVAL CHART-INSTRUMENT

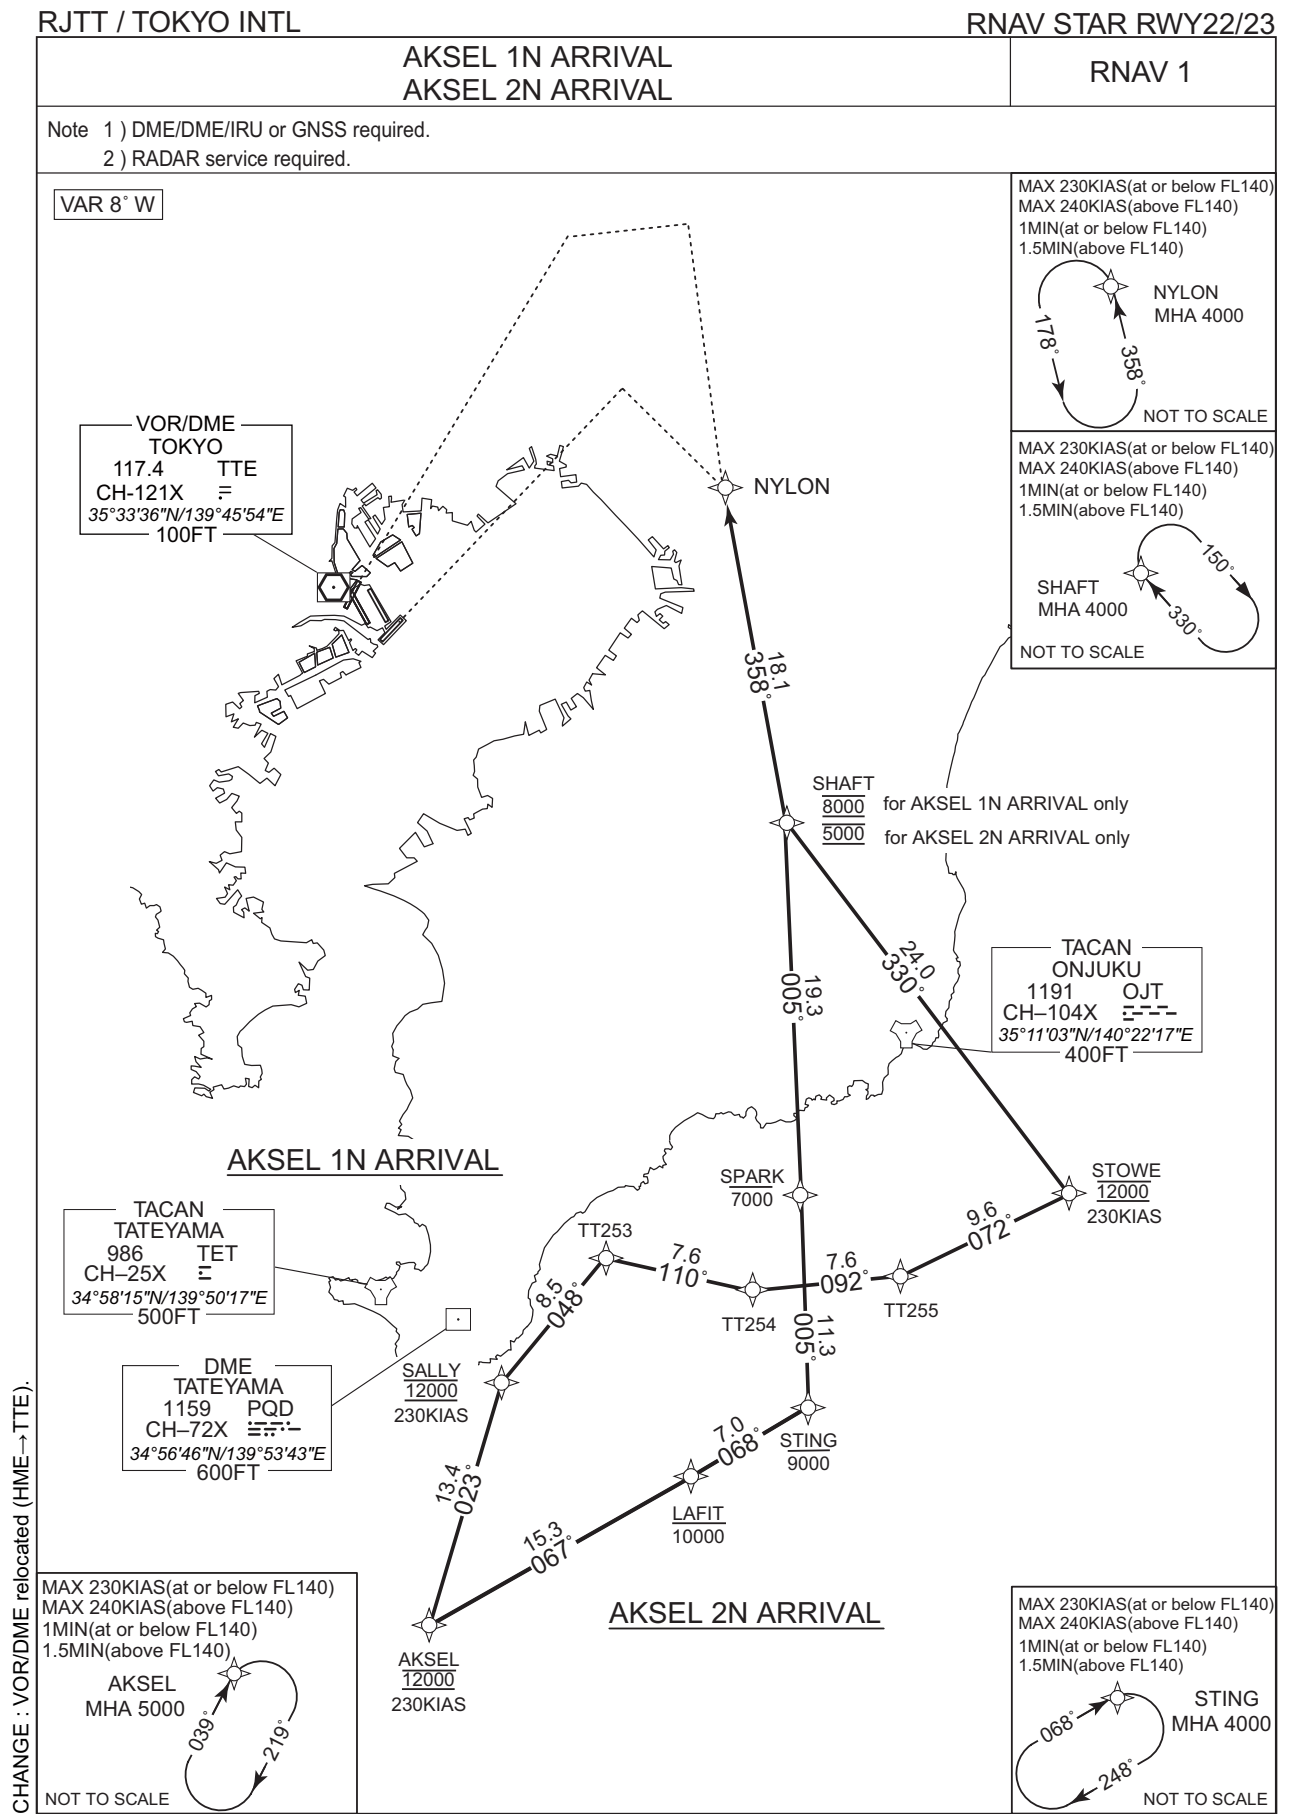

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AKSEL 1N ARRIVAL

From AKSEL at 12000FT, to SALLY at 12000FT, to TT253, to TT254, to TT255, to STOWE at 12000FT, to SHAFT at 8000FT, to NYLON.

Critical DME	—
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	—	—	-7.9	—	—	12000	230	—	RNAV1
002	TF	SALLY	—	023 (015.0)	-7.9	13.4	—	12000	230	—	RNAV1
003	TF	TT253	—	048 (040.5)	-7.9	8.5	—	—	—	—	RNAV1
004	TF	TT254	—	110 (102.0)	-7.9	7.6	—	—	—	—	RNAV1
005	TF	TT255	—	092 (084.4)	-7.9	7.6	—	—	—	—	RNAV1
006	TF	STOWE	—	072 (063.6)	-7.9	9.6	—	12000	230	—	RNAV1
007	TF	SHAFT	—	330 (322.4)	-7.9	24.0	—	8000	—	—	RNAV1
008	TF	NYLON	—	358 (350.0)	-7.9	18.1	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	358 (350.0)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at NYLON.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AKSEL 2N ARRIVAL

From AKSEL at 12000FT, to LAFIT at or below 10000FT, to STING at or below 9000FT, to SPARK at or below 7000FT, to SHAFT at 5000FT, to NYLON.

Critical DME	—
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	—	—	-7.9	—	—	12000	230	—	RNAV1
002	TF	LAFIT	—	067 (059.5)	-7.9	15.3	—	-10000	—	—	RNAV1
003	TF	STING	—	068 (059.6)	-7.9	7.0	—	-9000	—	—	RNAV1
004	TF	SPARK	—	005 (357.4)	-7.9	11.3	—	-7000	—	—	RNAV1
005	TF	SHAFT	—	005 (357.4)	-7.9	19.3	—	5000	—	—	RNAV1
006	TF	NYLON	—	358 (350.0)	-7.9	18.1	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	STING	068 (059.6)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	358 (350.0)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	STING	345157.9N / 1401453.4E
LAFIT	344826.0N / 1400732.4E	STOWE	350325.9N / 1403111.4E
NYLON	354018.5N / 1400919.9E	TT253	350001.4N / 1400224.6E
SALLY	345333.9N / 1395540.1E	TT254	345826.5N / 1401129.4E
SHAFT	352227.4N / 1401313.3E	TT255	345910.9N / 1402041.4E
SPARK	350312.0N / 1401416.7E		

CHANGE : PROC course. VAR. HLDG pattern at STING, NYLON.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AKSEL 1B ARRIVAL
AKSEL 2B ARRIVAL


RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.


VAR 8° W

VOR/DME
TOKYO
117.4 TTE
CH-121X
35°33'36"N/139°45'54"E
100FT

MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)



MAX 230KIAS(at or below FL140)
MAX 240KIAS(above FL140)
1MIN(at or below FL140)
1.5MIN(above FL140)

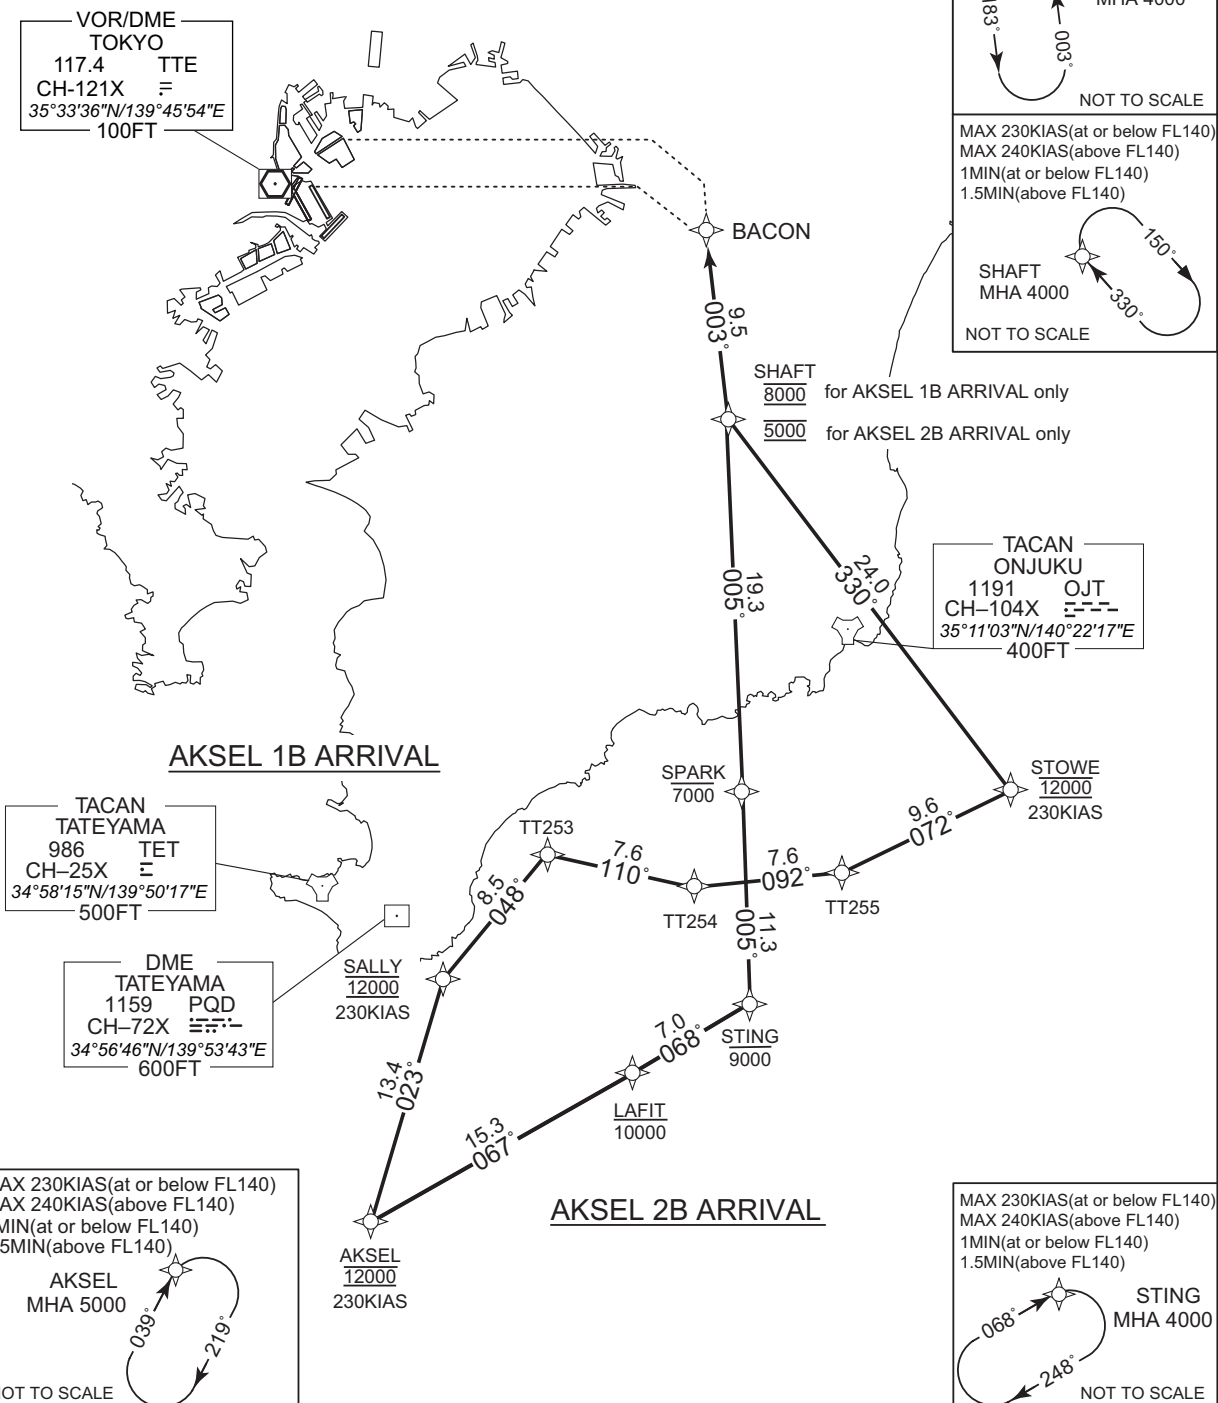

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AKSEL 1B ARRIVAL

From AKSEL at 12000FT, to SALLY at 12000FT, to TT253, to TT254, to TT255, to STOWE at 12000FT, to SHAFT at 8000FT, to BACON.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	—	—	-7.9	—	—	12000	230	—	RNAV1
002	TF	SALLY	—	023 (015.0)	-7.9	13.4	—	12000	230	—	RNAV1
003	TF	TT253	—	048 (040.5)	-7.9	8.5	—	—	—	—	RNAV1
004	TF	TT254	—	110 (102.0)	-7.9	7.6	—	—	—	—	RNAV1
005	TF	TT255	—	092 (084.4)	-7.9	7.6	—	—	—	—	RNAV1
006	TF	STOWE	—	072 (063.6)	-7.9	9.6	—	12000	230	—	RNAV1
007	TF	SHAFT	—	330 (322.4)	-7.9	24.0	—	8000	—	—	RNAV1
008	TF	BACON	—	003 (355.2)	-7.9	9.5	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AKSEL 2B ARRIVAL

From AKSEL at 12000FT, to LAFIT at or below 10000FT, to STING at or below 9000FT, to SPARK at or below 7000FT, to SHAFT at 5000FT, to BACON.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	—	—	-7.9	—	—	12000	230	—	RNAV1
002	TF	LAFIT	—	067 (059.5)	-7.9	15.3	—	-10000	—	—	RNAV1
003	TF	STING	—	068 (059.6)	-7.9	7.0	—	-9000	—	—	RNAV1
004	TF	SPARK	—	005 (357.4)	-7.9	11.3	—	-7000	—	—	RNAV1
005	TF	SHAFT	—	005 (357.4)	-7.9	19.3	—	5000	—	—	RNAV1
006	TF	BACON	—	003 (355.2)	-7.9	9.5	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	STING	068 (059.6)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	STING	345157.9N / 1401453.4E
BACON	353155.0N / 1401215.1E	STOWE	350325.9N / 1403111.4E
LAFIT	344826.0N / 1400732.4E	TT253	350001.4N / 1400224.6E
SALLY	345333.9N / 1395540.1E	TT254	345826.5N / 1401129.4E
SHAFT	352227.4N / 1401313.3E	TT255	345910.9N / 1402041.4E
SPARK	350312.0N / 1401416.7E		

CHANGE : PROC course. VAR. HLDG pattern at STING.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

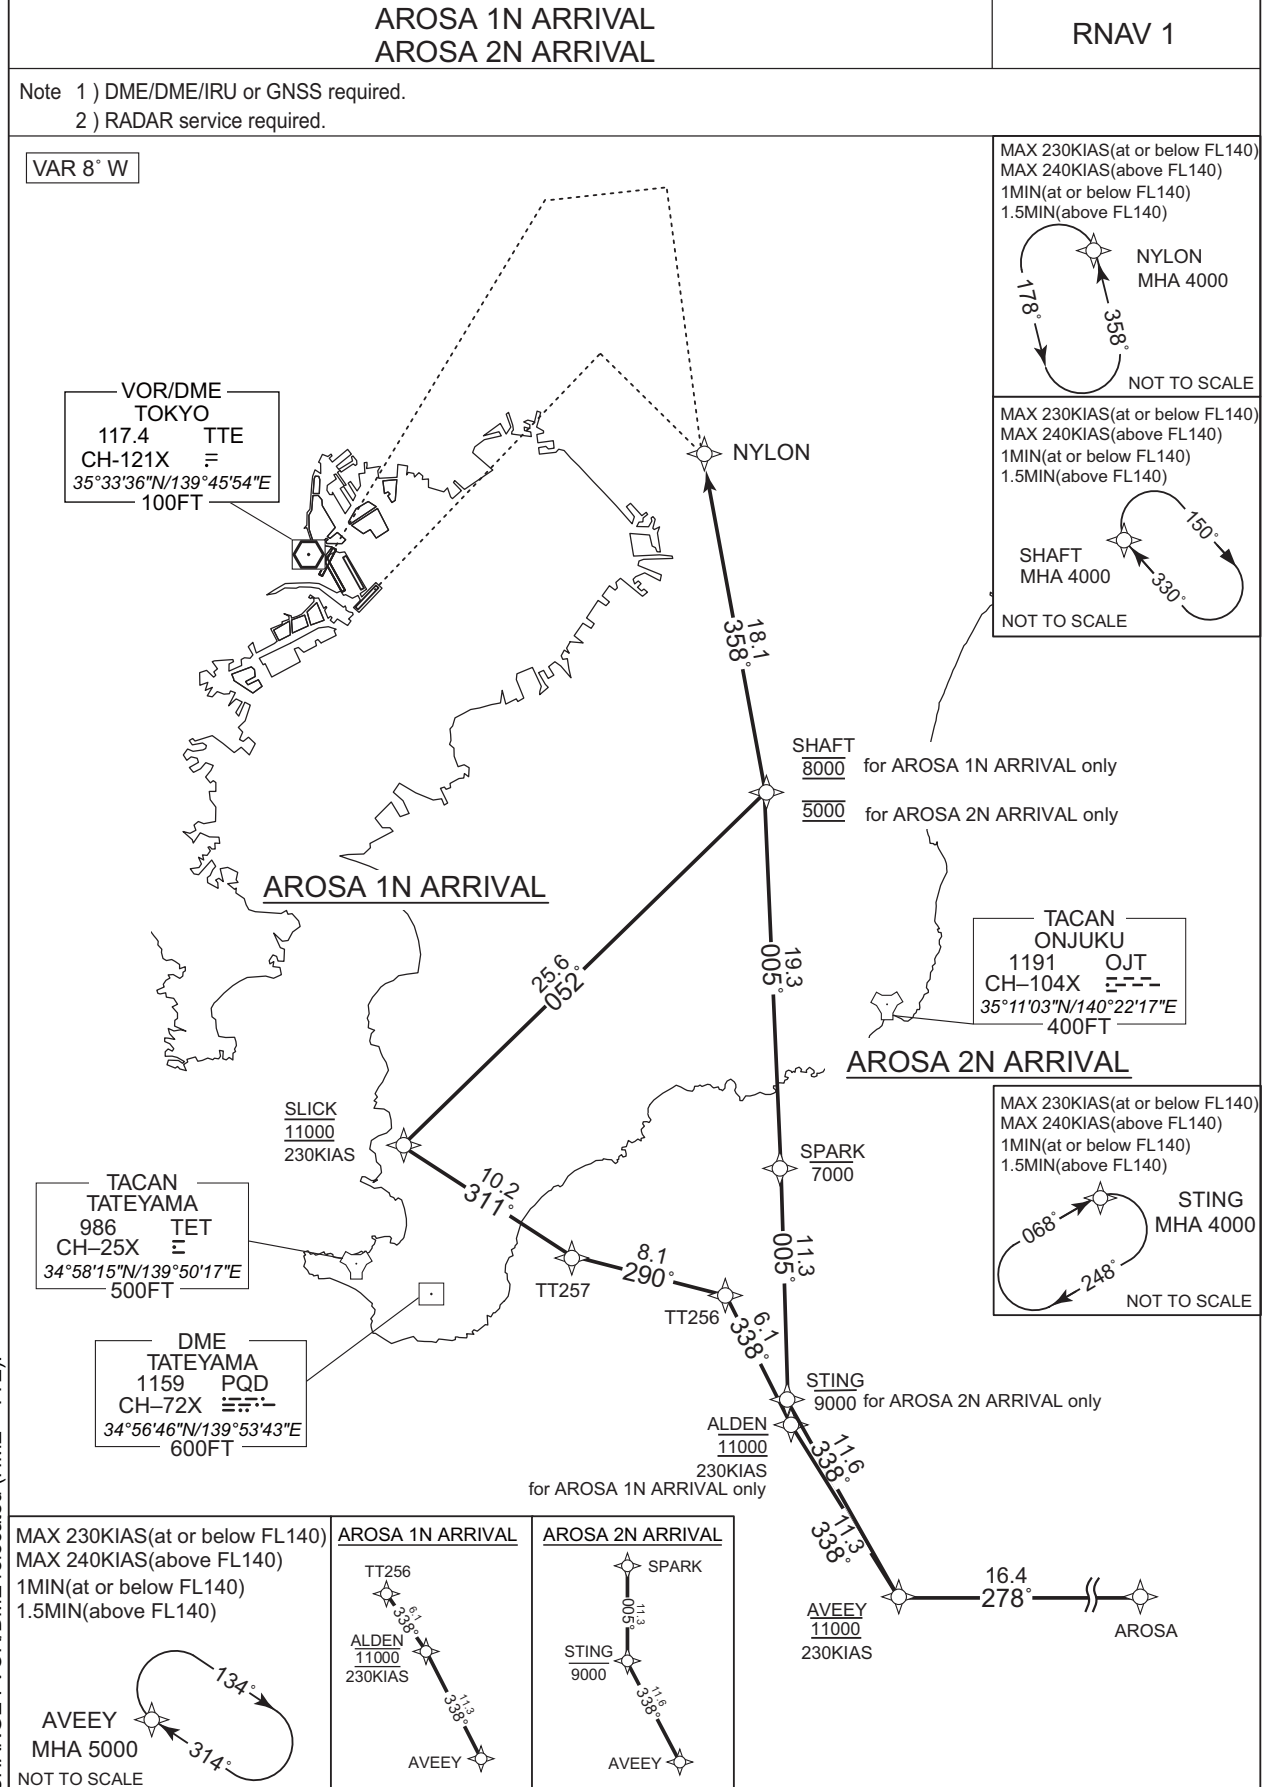

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 1N ARRIVAL

From AROSA, to AVEEY at 11000FT, to ALDEN at 11000FT, to TT256, to TT257, to SLICK at 11000FT, to SHAFT at 8000FT, to NYLON.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	AVEEY	—	278 (269.8)	-7.9	16.4	—	11000	230	—	RNAV1
003	TF	ALDEN	—	338 (330.0)	-7.9	11.3	—	11000	230	—	RNAV1
004	TF	TT256	—	338 (329.9)	-7.9	6.1	—	—	—	—	RNAV1
005	TF	TT257	—	290 (282.4)	-7.9	8.1	—	—	—	—	RNAV1
006	TF	SLICK	—	311 (303.1)	-7.9	10.2	—	11000	230	—	RNAV1
007	TF	SHAFT	—	052 (044.3)	-7.9	25.6	—	8000	—	—	RNAV1
008	TF	NYLON	—	358 (350.0)	-7.9	18.1	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	358 (350.0)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at NYLON.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 2N ARRIVAL

From AROSA, to AVEEY at 11000FT, to STING at or below 9000FT, to SPARK at or below 7000FT, to SHAFT at 5000FT, to NYLON.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	AVEEY	—	278 (269.8)	-7.9	16.4	—	11000	230	—	RNAV1
003	TF	STING	—	338 (330.0)	-7.9	11.6	—	-9000	—	—	RNAV1
004	TF	SPARK	—	005 (357.4)	-7.9	11.3	—	-7000	—	—	RNAV1
005	TF	SHAFT	—	005 (357.4)	-7.9	19.3	—	5000	—	—	RNAV1
006	TF	NYLON	—	358 (350.0)	-7.9	18.1	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	STING	068 (059.6)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	358 (350.0)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ALDEN	345141.1N / 1401505.3E	SLICK	350412.7N / 1395120.0E
AROSA	344201.7N / 1404157.3E	SPARK	350312.0N / 1401416.7E
AVEEY	344155.9N / 1402158.0E	STING	345157.9N / 1401453.4E
NYLON	354018.5N / 1400919.9E	TT256	345655.4N / 1401122.9E
SHAFT	352227.4N / 1401313.3E	TT257	345838.5N / 1400146.6E

CHANGE : PROC course. VAR. HLDG pattern at STING, NYLON.

Civil Aviation Bureau,Japan (EFF:31 OCT 2024)

5/9/24

STANDARD ARRIVAL CHART-INSTRUMENT


RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 1B ARRIVAL
AROSA 2B ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

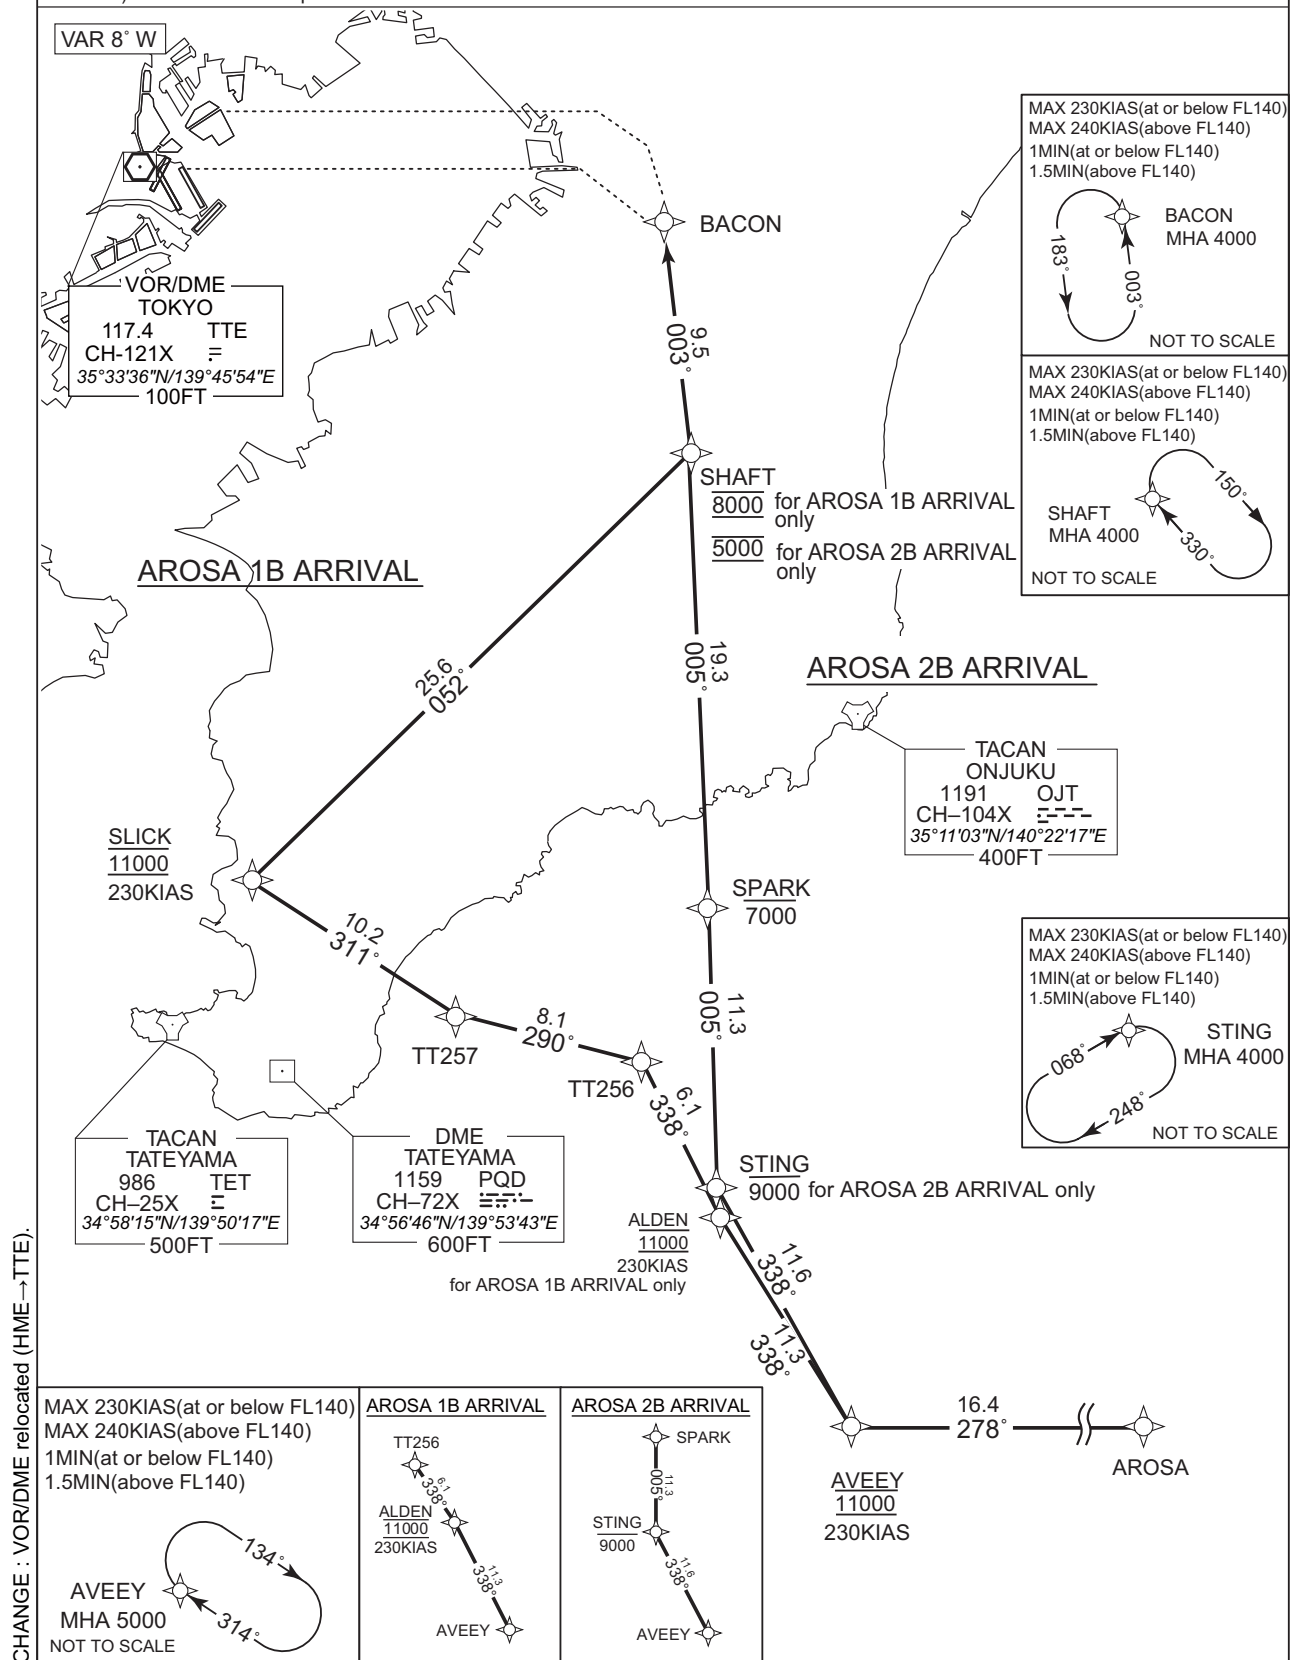

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 1B ARRIVAL

From AROSA, to AVEEY at 11000FT, to ALDEN at 11000FT, to TT256, to TT257, to SLICK at 11000FT, to SHAFT at 8000FT, to BACON.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	AVEEY	—	278 (269.8)	-7.9	16.4	—	11000	230	—	RNAV1
003	TF	ALDEN	—	338 (330.0)	-7.9	11.3	—	11000	230	—	RNAV1
004	TF	TT256	—	338 (329.9)	-7.9	6.1	—	—	—	—	RNAV1
005	TF	TT257	—	290 (282.4)	-7.9	8.1	—	—	—	—	RNAV1
006	TF	SLICK	—	311 (303.1)	-7.9	10.2	—	11000	230	—	RNAV1
007	TF	SHAFT	—	052 (044.3)	-7.9	25.6	—	8000	—	—	RNAV1
008	TF	BACON	—	003 (355.2)	-7.9	9.5	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

AROSA 2B ARRIVAL

From AROSA, to AVEEY at 11000FT, to STING at or below 9000FT , to SPARK at or below 7000FT, to SHAFT at 5000FT, to BACON.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	AVEEY	—	278 (269.8)	-7.9	16.4	—	11000	230	—	RNAV1
003	TF	STING	—	338 (330.0)	-7.9	11.6	—	-9000	—	—	RNAV1
004	TF	SPARK	—	005 (357.4)	-7.9	11.3	—	-7000	—	—	RNAV1
005	TF	SHAFT	—	005 (357.4)	-7.9	19.3	—	5000	—	—	RNAV1
006	TF	BACON	—	003 (355.2)	-7.9	9.5	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	STING	068 (059.6)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ALDEN	345141.1N / 1401505.3E	SLICK	350412.7N / 1395120.0E
AROSA	344201.7N / 1404157.3E	SPARK	350312.0N / 1401416.7E
AVEEY	344155.9N / 1402158.0E	STING	345157.9N / 1401453.4E
BACON	353155.0N / 1401215.1E	TT256	345655.4N / 1401122.9E
SHAFT	352227.4N / 1401313.3E	TT257	345838.5N / 1400146.6E

CHANGE : PROC course. VAR. HLDG pattern at STING.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

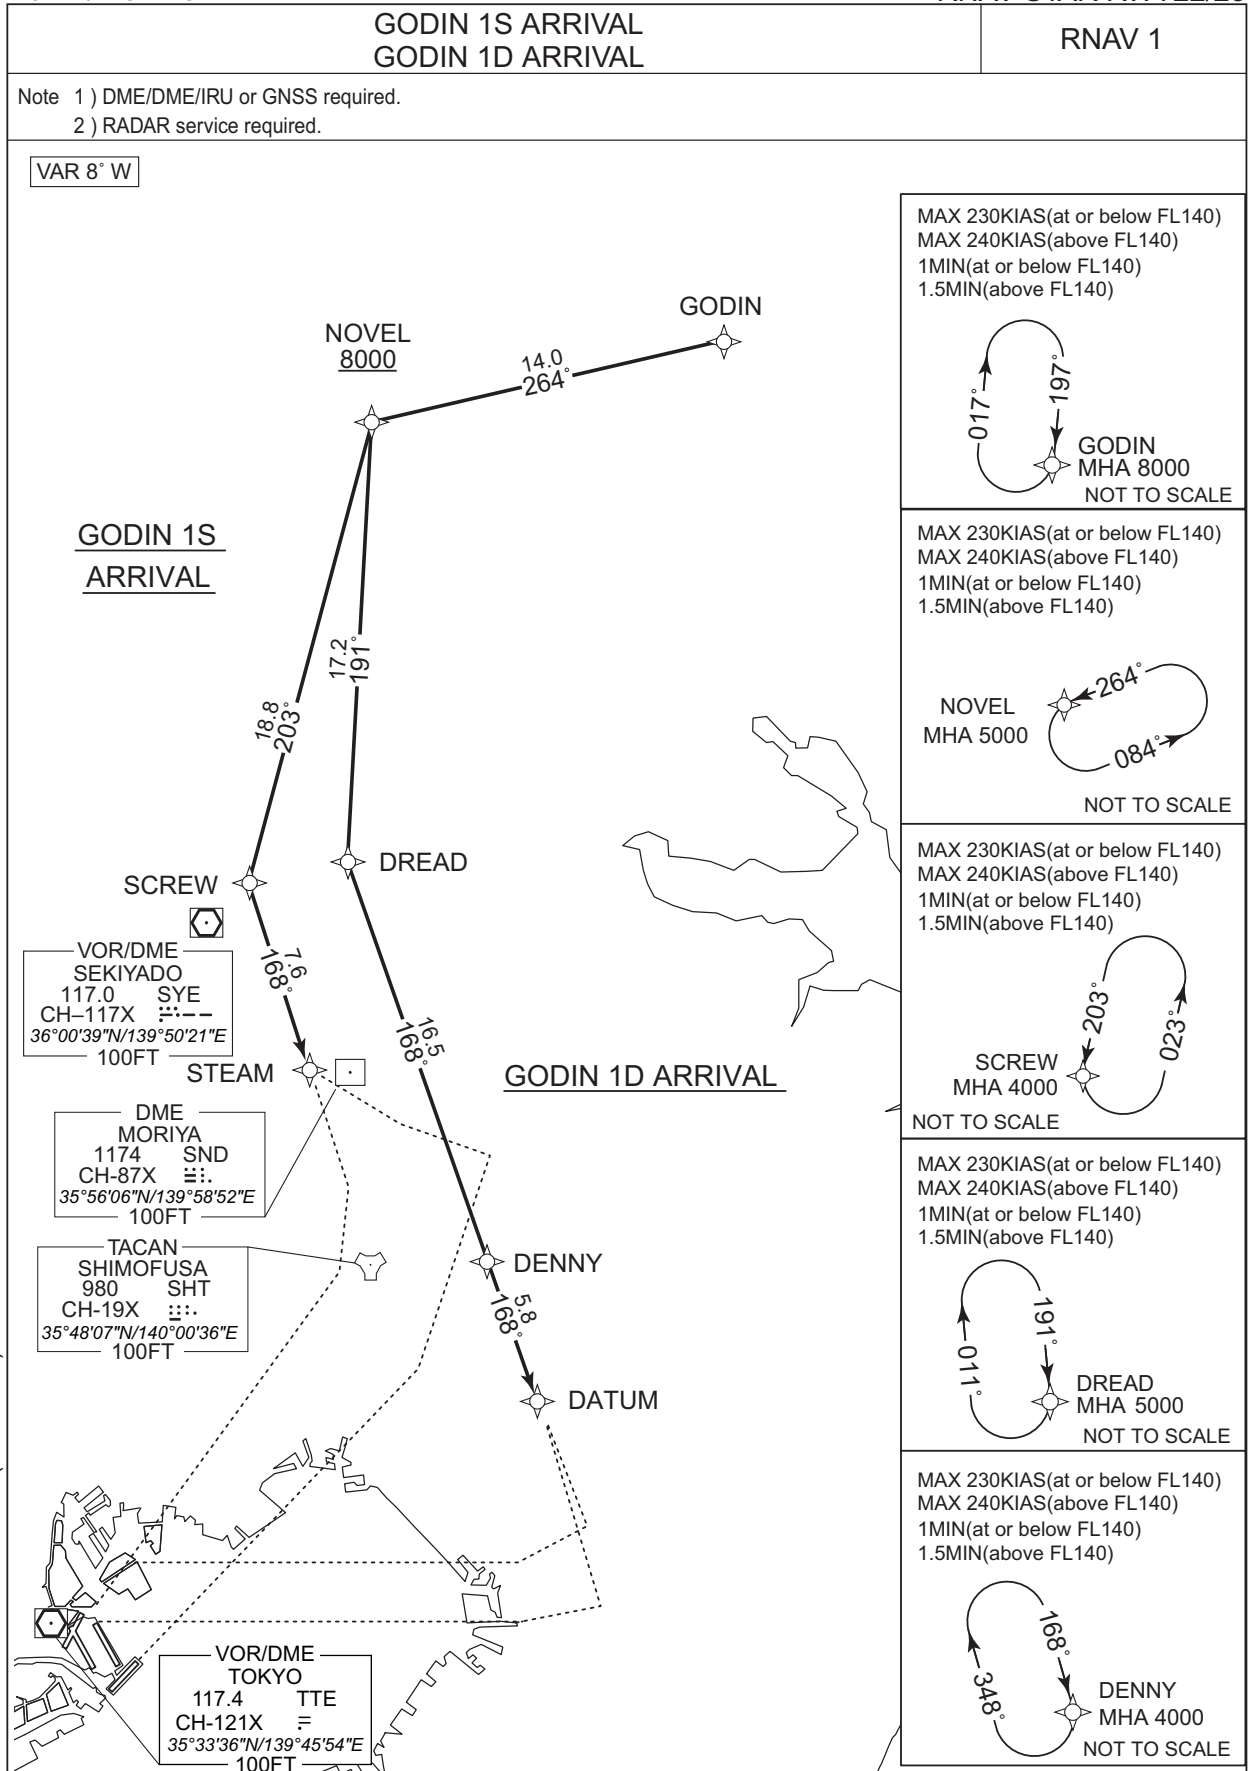

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

GODIN 1S ARRIVAL

From GODIN, to NOVEL at or above 8000FT, to SCREW, to STEAM.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	NOVEL	—	264 (256.4)	-7.9	14.0	—	+8000	—	—	RNAV1
003	TF	SCREW	—	203 (195.2)	-7.9	18.8	—	—	—	—	RNAV1
004	TF	STEAM	—	168 (160.4)	-7.9	7.6	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SCREW	203 (195.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : VAR.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

GODIN 1D ARRIVAL

From GODIN, to NOVEL at or above 8000FT, to DREAD, to DENNY, to DATUM.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	NOVEL	—	264 (256.4)	-7.9	14.0	—	+8000	—	—	RNAV1
003	TF	DREAD	—	191 (183.1)	-7.9	17.2	—	—	—	—	RNAV1
004	TF	DENNY	—	168 (159.9)	-7.9	16.5	—	—	—	—	RNAV1
005	TF	DATUM	—	168 (160.0)	-7.9	5.8	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	DREAD	191 (183.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	DENNY	168 (159.9)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
DATUM	354259.6N / 1400824.3E	NOVEL	362106.9N / 1400004.9E
DENNY	354828.8N / 1400556.4E	SCREW	360301.2N / 1395400.4E
DREAD	360359.2N / 1395856.9E	STEAM	355553.3N / 1395708.4E
GODIN	362425.3N / 1401655.9E		

CHANGE : PROC course. VAR. HLDG pattern at DENNY.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

POLIX 1S ARRIVAL
POLIX 1D ARRIVAL

RNAV 1


Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8° W

POLIX 1S
ARRIVAL

POLIX 1D ARRIVAL

CHANGE : VOR/DME relocated (HME→TTE).

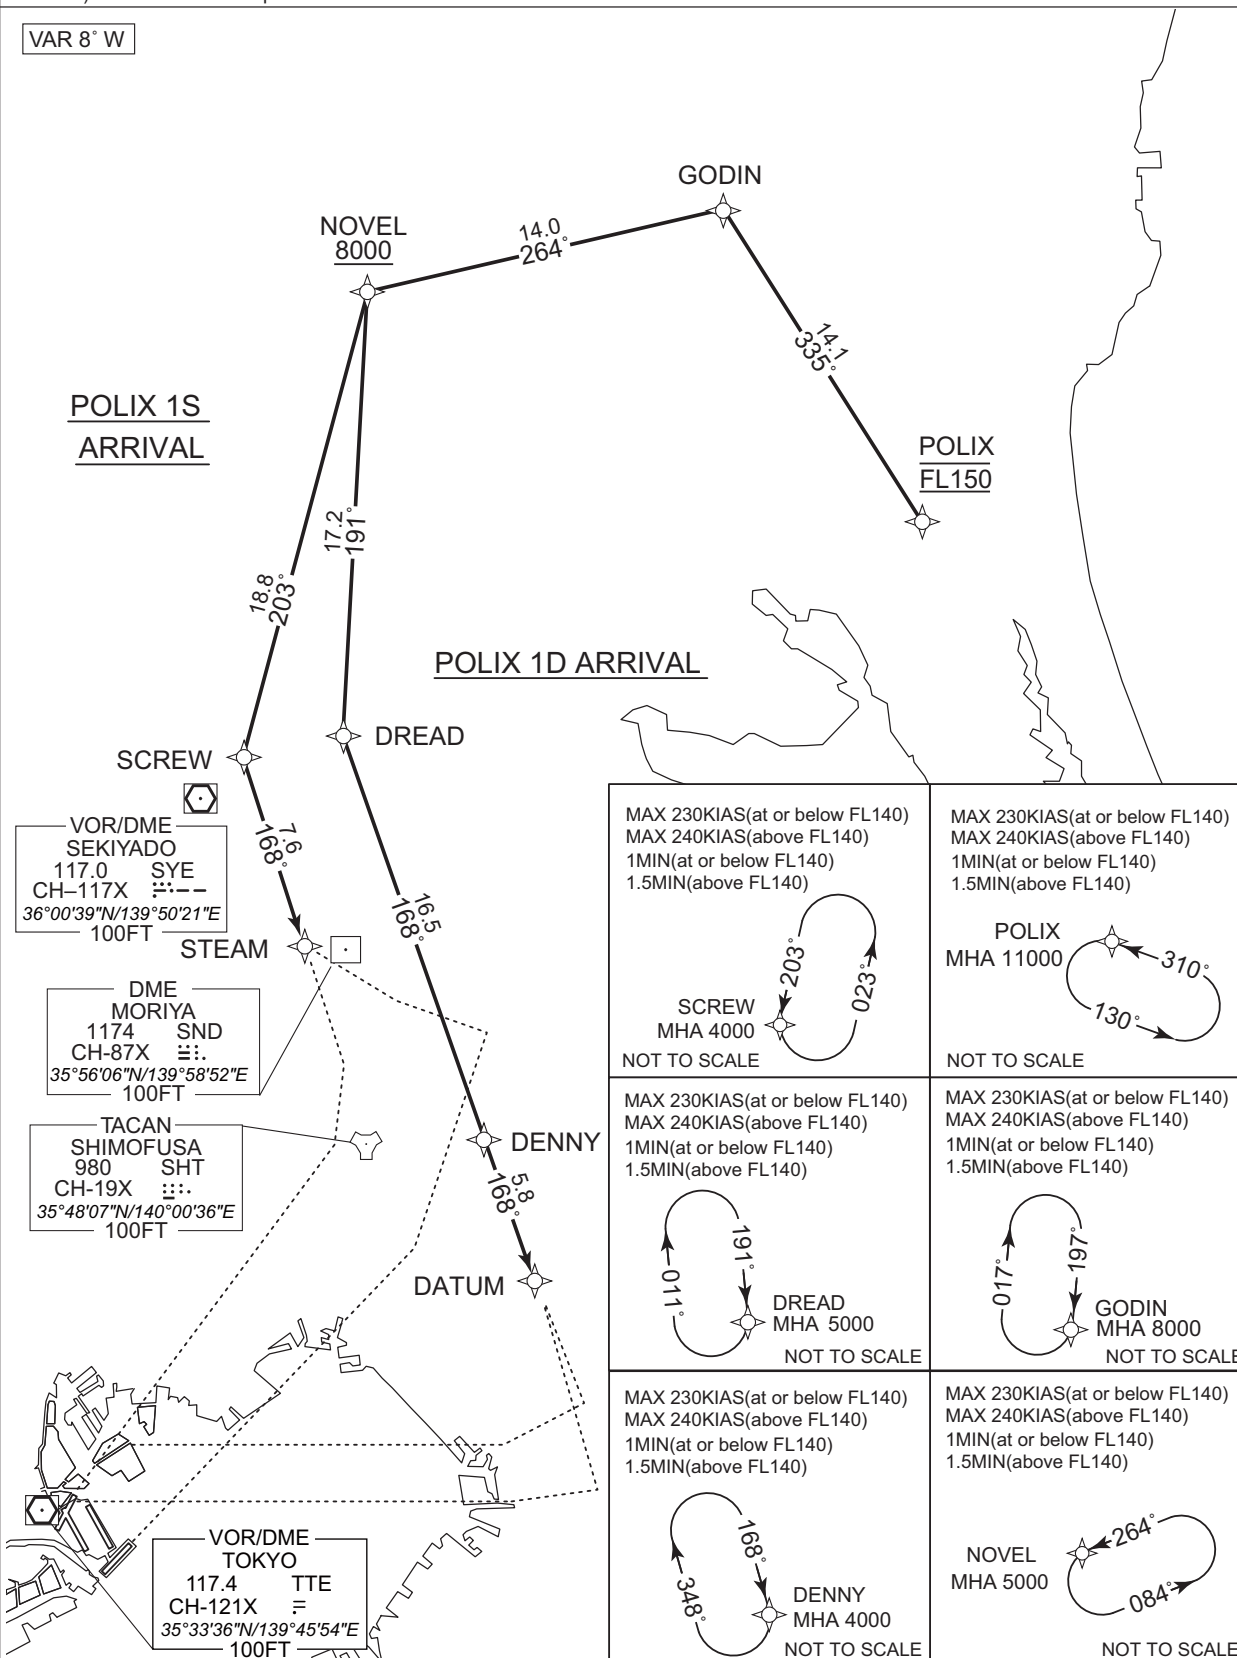

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

POLIX 1S ARRIVAL

From POLIX at FL150, to GODIN, to NOVEL at or above 8000FT, to SCREW, to STEAM.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	—	—	-7.9	—	—	FL150	—	—	RNAV1
002	TF	GODIN	—	335 (327.2)	-7.9	14.1	—	—	—	—	RNAV1
003	TF	NOVEL	—	264 (256.4)	-7.9	14.0	—	+8000	—	—	RNAV1
004	TF	SCREW	—	203 (195.2)	-7.9	18.8	—	—	—	—	RNAV1
005	TF	STEAM	—	168 (160.4)	-7.9	7.6	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.9	1.0(-14000) 1.5(+14001)	—	L	11000	—	-230(-14000) -240(+14001)	RNAV1
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SCREW	203 (195.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : VAR.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY22/23

POLIX 1D ARRIVAL

From POLIX at FL150, to GODIN, to NOVEL at or above 8000FT, to DREAD, to DENNY, to DATUM.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	-	-	-7.9	-	-	FL150	-	-	RNAV1
002	TF	GODIN	-	335 (327.2)	-7.9	14.1	-	-	-	-	RNAV1
003	TF	NOVEL	-	264 (256.4)	-7.9	14.0	-	+8000	-	-	RNAV1
004	TF	DREAD	-	191 (183.1)	-7.9	17.2	-	-	-	-	RNAV1
005	TF	DENNY	-	168 (159.9)	-7.9	16.5	-	-	-	-	RNAV1
006	TF	DATUM	-	168 (160.0)	-7.9	5.8	-	-	-	-	RNAV1


Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.9	1.0(-14000) 1.5(+14001)	-	L	11000	-	-230(-14000) -240(+14001)	RNAV1
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	-	R	8000	-	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.9	1.0(-14000) 1.5(+14001)	-	L	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	DREAD	191 (183.1)	-7.9	1.0(-14000) 1.5(+14001)	-	R	5000	-	-230(-14000) -240(+14001)	RNAV1
Hold	DENNY	168 (159.9)	-7.9	1.0(-14000) 1.5(+14001)	-	R	4000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
DATUM	354259.6N / 1400824.3E	NOVEL	362106.9N / 1400004.9E
DENNY	354828.8N / 1400556.4E	POLIX	361237.1N / 1402622.5E
DREAD	360359.2N / 1395856.9E	SCREW	360301.2N / 1395400.4E
GODIN	362425.3N / 1401655.9E	STEAM	355553.3N / 1395708.4E

CHANGE : PROC course. VAR. HLDG pattern at DENNY.

STANDARD ARRIVAL CHART-INSTRUMENT

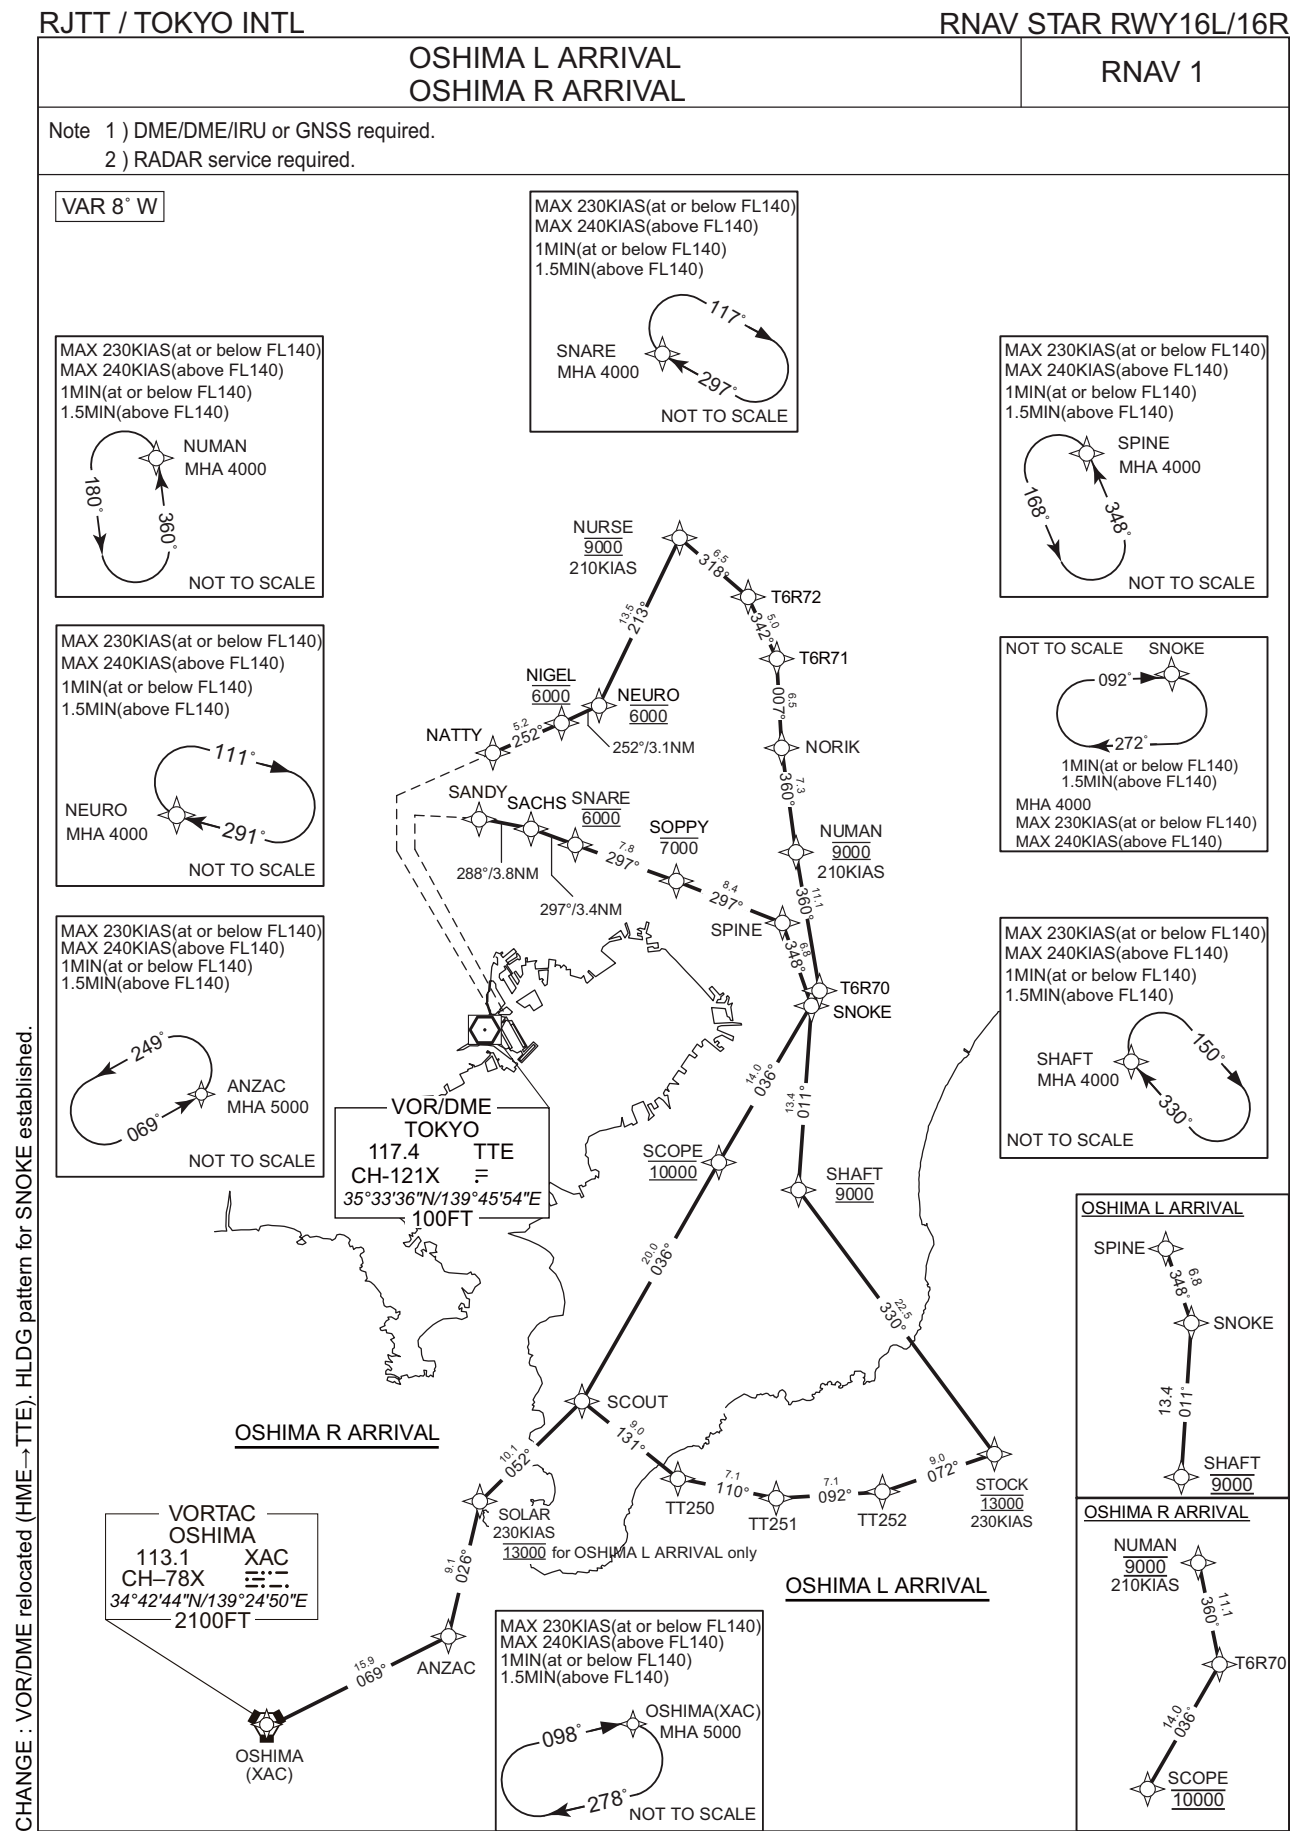

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

OSHIMA L ARRIVAL

From XAC, to ANZAC, to SOLAR at 13000FT, to SCOUT, to TT250, to TT251, to TT252, to STOCK at 13000FT, to SHAFT at 9000FT, to SNOKE, to SPINE, to SOPPY at or below 7000FT, to SNARE at 6000FT, to SACHS, to SANDY.

Critical DME	—
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	ANZAC	—	069 (060.8)	-7.9	15.9	—	—	—	—	RNAV1
003	TF	SOLAR	—	026 (018.4)	-7.9	9.1	—	13000	230	—	RNAV1
004	TF	SCOUT	—	052 (044.3)	-7.9	10.1	—	—	—	—	RNAV1
005	TF	TT250	—	131 (123.1)	-7.9	9.0	—	—	—	—	RNAV1
006	TF	TT251	—	110 (102.5)	-7.9	7.1	—	—	—	—	RNAV1
007	TF	TT252	—	092 (084.3)	-7.9	7.1	—	—	—	—	RNAV1
008	TF	STOCK	—	072 (063.6)	-7.9	9.0	—	13000	230	—	RNAV1
009	TF	SHAFT	—	330 (322.4)	-7.9	22.5	—	9000	—	—	RNAV1
010	TF	SNOKE	—	011 (003.4)	-7.9	13.4	—	—	—	—	RNAV1
011	TF	SPINE	—	348 (340.6)	-7.9	6.8	—	—	—	—	RNAV1
012	TF	SOPPY	—	297 (289.2)	-7.9	8.4	—	-7000	—	—	RNAV1
013	TF	SNARE	—	297 (289.1)	-7.9	7.8	—	6000	—	—	RNAV1
014	TF	SACHS	—	297 (289.0)	-7.9	3.4	—	—	—	—	RNAV1
015	TF	SANDY	—	288 (280.0)	-7.9	3.8	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ANZAC	069 (060.8)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SNOKE	092 (084.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SPINE	348 (340.6)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : HLDG pattern for SNOKE established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

OSHIMA R ARRIVAL

From XAC, to ANZAC, to SOLAR, to SCOUT, to SCOPE at 10000FT, to T6R70, to NUMAN at 9000FT, to NORIK, to T6R71, to T6R72, to NURSE at 9000FT, to NEURO at 6000FT, to NIGEL at 6000FT, to NATTY.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	ANZAC	—	069 (060.8)	-7.9	15.9	—	—	—	—	RNAV1
003	TF	SOLAR	—	026 (018.4)	-7.9	9.1	—	—	230	—	RNAV1
004	TF	SCOUT	—	052 (044.3)	-7.9	10.1	—	—	—	—	RNAV1
005	TF	SCOPE	—	036 (028.5)	-7.9	20.0	—	10000	—	—	RNAV1
006	TF	T6R70	—	036 (028.6)	-7.9	14.0	—	—	—	—	RNAV1
007	TF	NUMAN	—	360 (352.5)	-7.9	11.1	—	9000	210	—	RNAV1
008	TF	NORIK	—	360 (352.5)	-7.9	7.3	—	—	—	—	RNAV1
009	TF	T6R71	—	007 (358.9)	-7.9	6.5	—	—	—	—	RNAV1
010	TF	T6R72	—	342 (334.4)	-7.9	5.0	—	—	—	—	RNAV1
011	TF	NURSE	—	318 (309.8)	-7.9	6.5	—	9000	210	—	RNAV1
012	TF	NEURO	—	213 (205.5)	-7.9	13.5	—	6000	—	—	RNAV1
013	TF	NIGEL	—	252 (244.1)	-7.9	3.1	—	6000	—	—	RNAV1
014	TF	NATTY	—	252 (244.1)	-7.9	5.2	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ANZAC	069 (060.8)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NUMAN	360 (352.5)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	291 (282.9)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at ANZAC, NEURO.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL


RNAV STAR RWY16L/16R

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ANZAC	345028.8N / 1394146.7E	SNOKE	353551.6N / 1401411.7E
NATTY	355350.9N / 1394531.3E	SOLAR	345909.2N / 1394518.5E
NEURO	355727.6N / 1395441.3E	SOPPY	354458.8N / 1400140.3E
NIGEL	355607.5N / 1395117.8E	SPINE	354213.5N / 1401125.8E
NORIK	355428.9N / 1401054.5E	STOCK	350438.7N / 1403002.9E
NUMAN	354714.4N / 1401204.9E	T6R70	353614.4N / 1401351.4E
NURSE	360939.3N / 1400153.3E	T6R71	360059.5N / 1401045.1E
SACHS	354838.2N / 1394838.4E	T6R72	360530.2N / 1400804.3E
SANDY	354917.5N / 1394402.8E	TT250	350129.7N / 1400308.5E
SCOPE	352358.4N / 1400538.3E	TT251	345957.7N / 1401136.0E
SCOUT	350624.1N / 1395356.8E	TT252	350039.9N / 1402013.0E
SHAFT	352227.4N / 1401313.3E	XAC	344244.1N / 1392450.5E
SNARE	354731.1N / 1395238.1E		

CHANGE : ACORN, T6L60 abolished. ANZAC, SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

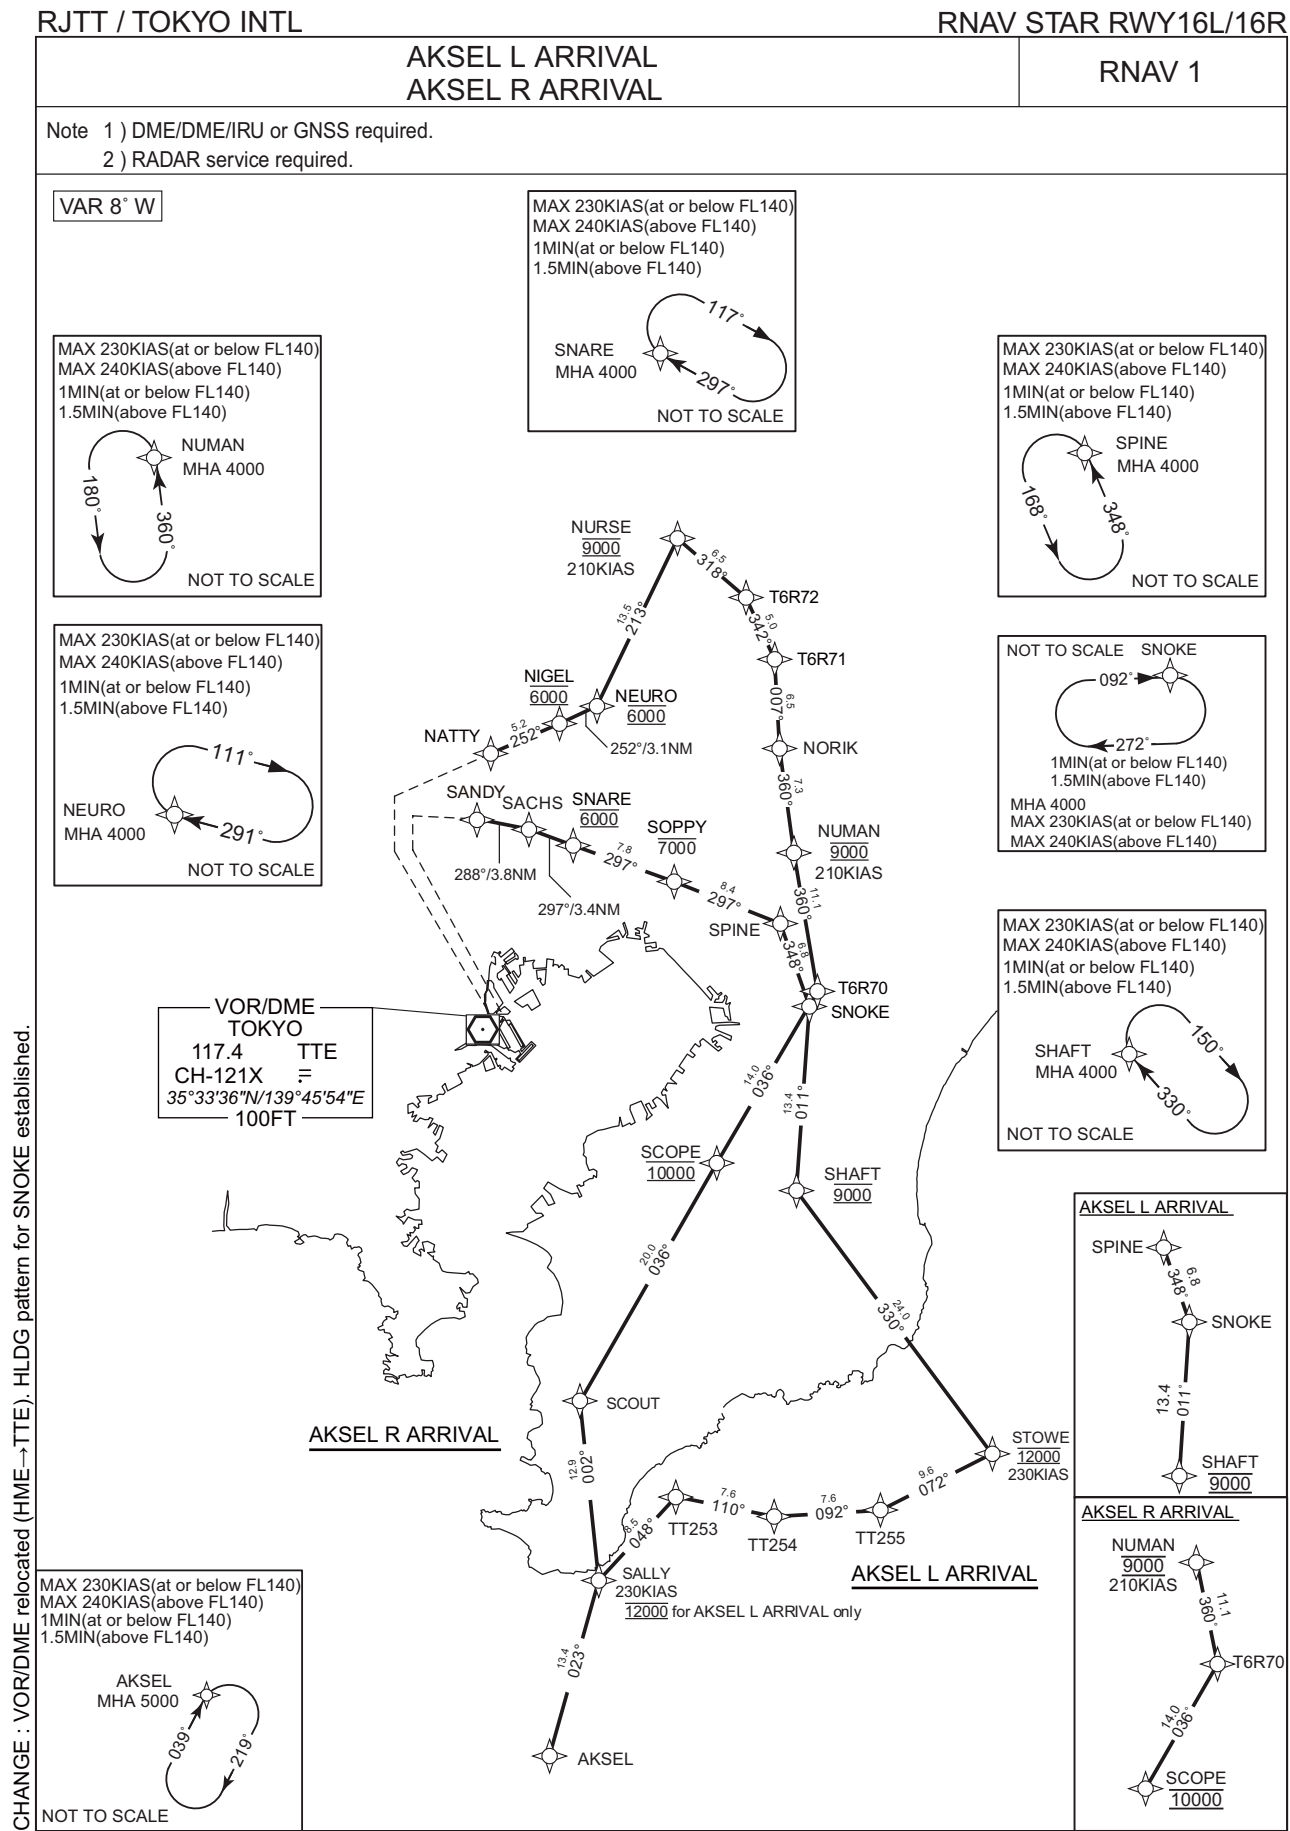

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

AKSEL L ARRIVAL

From AKSEL, to SALLY at 12000FT, to TT253, to TT254, to TT255, to STOWE at 12000FT, to SHAFT at 9000FT, to SNOKE, to SPINE, to SOPPY at or below 7000FT, to SNARE at 6000FT, to SACHS, to SANDY.

Critical DME	—
DME GAP	—
Inappropriate NavAids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	SALLY	—	023 (015.0)	-7.9	13.4	—	12000	230	—	RNAV1
003	TF	TT253	—	048 (040.5)	-7.9	8.5	—	—	—	—	RNAV1
004	TF	TT254	—	110 (102.0)	-7.9	7.6	—	—	—	—	RNAV1
005	TF	TT255	—	092 (084.4)	-7.9	7.6	—	—	—	—	RNAV1
006	TF	STOWE	—	072 (063.6)	-7.9	9.6	—	12000	230	—	RNAV1
007	TF	SHAFT	—	330 (322.4)	-7.9	24.0	—	9000	—	—	RNAV1
008	TF	SNOKE	—	011 (003.4)	-7.9	13.4	—	—	—	—	RNAV1
009	TF	SPINE	—	348 (340.6)	-7.9	6.8	—	—	—	—	RNAV1
010	TF	SOPPY	—	297 (289.2)	-7.9	8.4	—	-7000	—	—	RNAV1
011	TF	SNARE	—	297 (289.1)	-7.9	7.8	—	6000	—	—	RNAV1
012	TF	SACHS	—	297 (289.0)	-7.9	3.4	—	—	—	—	RNAV1
013	TF	SANDY	—	288 (280.0)	-7.9	3.8	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SNOKE	092 (084.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SPINE	348 (340.6)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : HLDG pattern for SNOKE established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

AKSEL R ARRIVAL

From AKSEL, to SALLY, to SCOUT, to SCOPE at 10000FT, to T6R70, to NUMAN at 9000FT, to NORIK, to T6R71, to T6R72, to NURSE at 9000FT, to NEURO at 6000FT, to NIGEL at 6000FT, to NATTY.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	SALLY	—	023 (015.0)	-7.9	13.4	—	—	230	—	RNAV1
003	TF	SCOUT	—	002 (353.7)	-7.9	12.9	—	—	—	—	RNAV1
004	TF	SCOPE	—	036 (028.5)	-7.9	20.0	—	10000	—	—	RNAV1
005	TF	T6R70	—	036 (028.6)	-7.9	14.0	—	—	—	—	RNAV1
006	TF	NUMAN	—	360 (352.5)	-7.9	11.1	—	9000	210	—	RNAV1
007	TF	NORIK	—	360 (352.5)	-7.9	7.3	—	—	—	—	RNAV1
008	TF	T6R71	—	007 (358.9)	-7.9	6.5	—	—	—	—	RNAV1
009	TF	T6R72	—	342 (334.4)	-7.9	5.0	—	—	—	—	RNAV1
010	TF	NURSE	—	318 (309.8)	-7.9	6.5	—	9000	210	—	RNAV1
011	TF	NEURO	—	213 (205.5)	-7.9	13.5	—	6000	—	—	RNAV1
012	TF	NIGEL	—	252 (244.1)	-7.9	3.1	—	6000	—	—	RNAV1
013	TF	NATTY	—	252 (244.1)	-7.9	5.2	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NUMAN	360 (352.5)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	291 (282.9)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at NEURO.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	SHAFT	352227.4N / 1401313.3E
NATTY	355350.9N / 1394531.3E	SNARE	354731.1N / 1395238.1E
NEURO	355727.6N / 1395441.3E	SNOKE	353551.6N / 1401411.7E
NIGEL	355607.5N / 1395117.8E	SOPPY	354458.8N / 1400140.3E
NORIK	355428.9N / 1401054.5E	SPINE	354213.5N / 1401125.8E
NUMAN	354714.4N / 1401204.9E	STOWE	350325.9N / 1403111.4E
NURSE	360939.3N / 1400153.3E	T6R70	353614.4N / 1401351.4E
SACHS	354838.2N / 1394838.4E	T6R71	360059.5N / 1401045.1E
SALLY	345333.9N / 1395540.1E	T6R72	360530.2N / 1400804.3E
SANDY	354917.5N / 1394402.8E	TT253	350001.4N / 1400224.6E
SCOPE	352358.4N / 1400538.3E	TT254	345826.5N / 1401129.4E
SCOUT	350624.1N / 1395356.8E	TT255	345910.9N / 1402041.4E

CHANGE : T6L60 abolished. SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

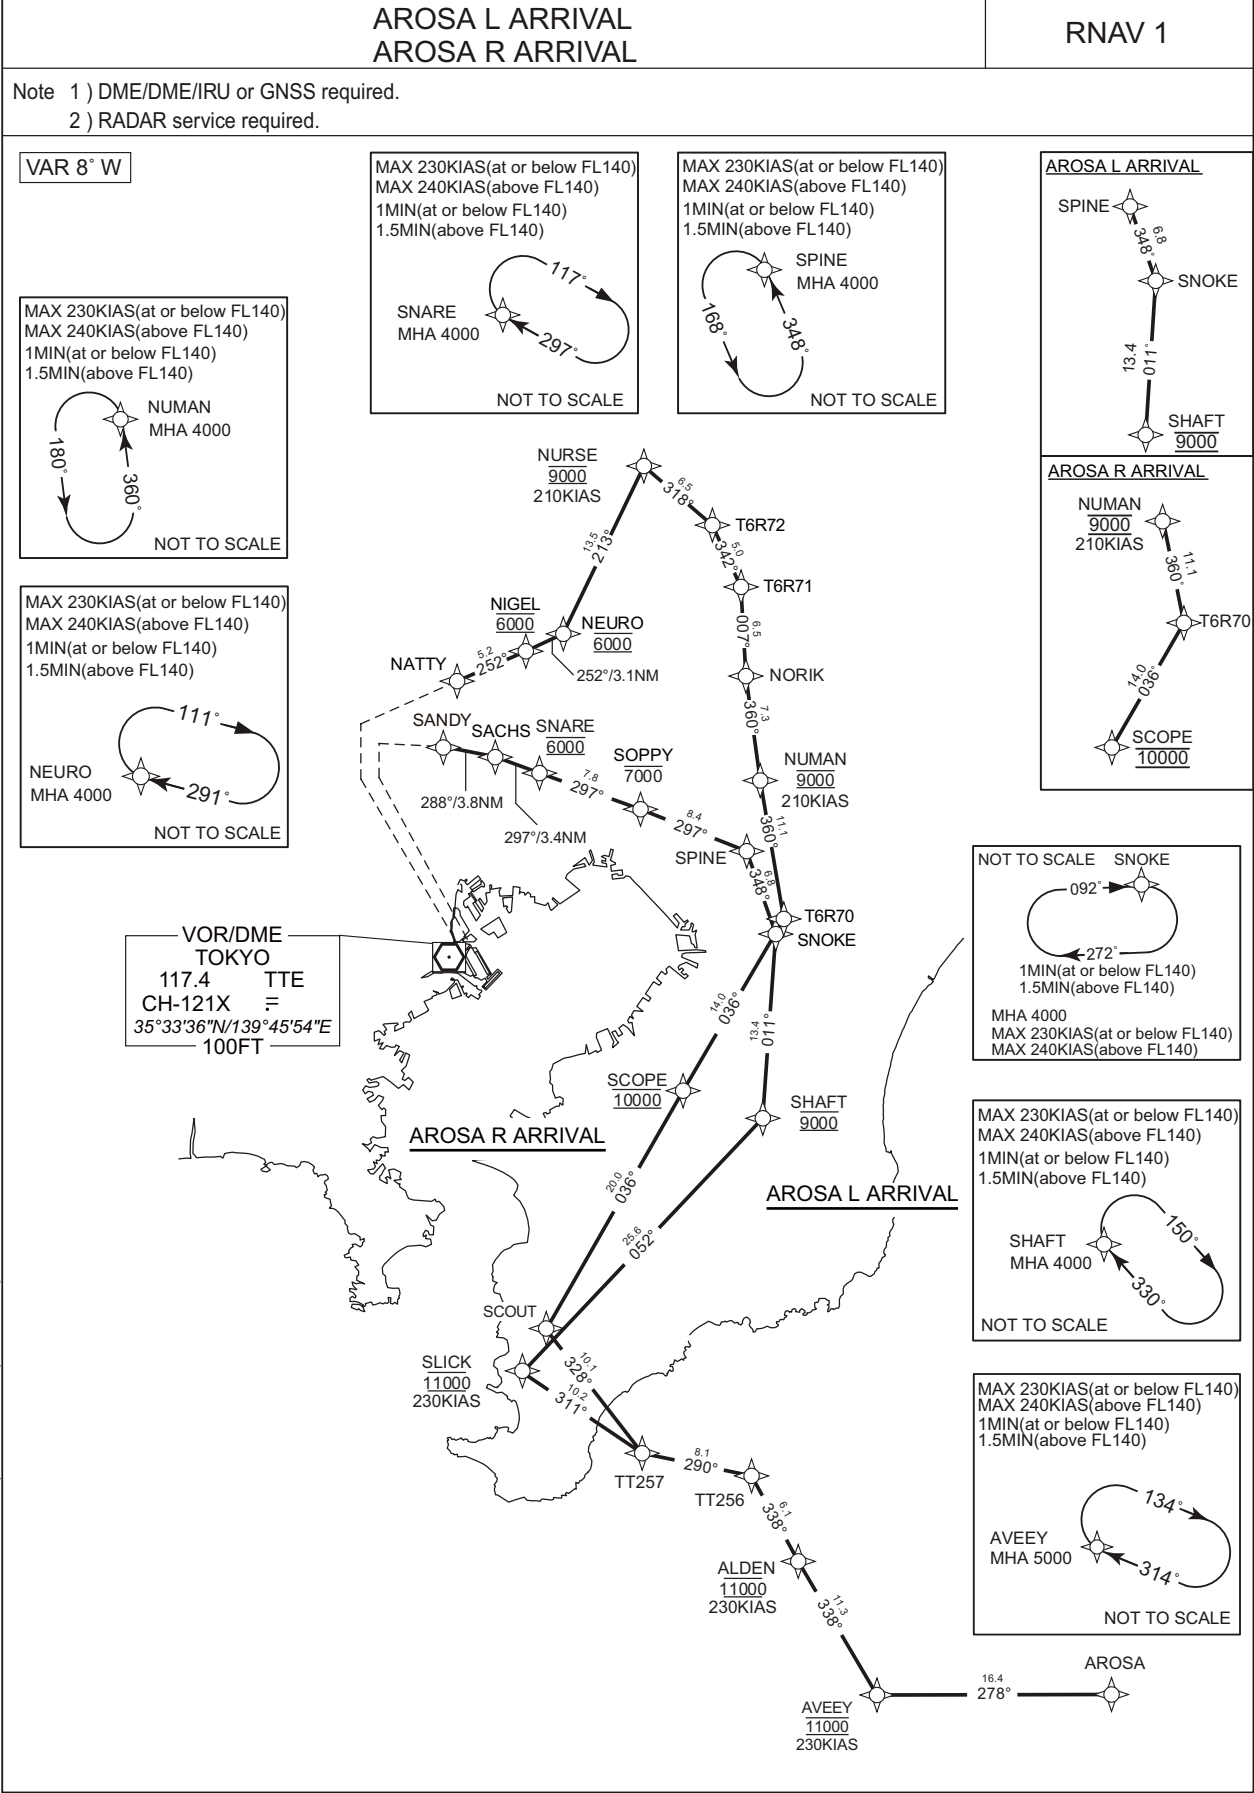

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

AROSA L ARRIVAL

From AROSA, to AVEEY at 11000FT, to ALDEN at 11000FT, to TT256, to TT257, to SLICK at 11000FT, to SHAFT at 9000FT, to SNOKE, to SPINE, to SOPPY at or below 7000FT, to SNARE at 6000FT, to SACHS, to SANDY.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	AVEEY	—	278 (269.8)	-7.9	16.4	—	11000	230	—	RNAV1
003	TF	ALDEN	—	338 (330.0)	-7.9	11.3	—	11000	230	—	RNAV1
004	TF	TT256	—	338 (329.9)	-7.9	6.1	—	—	—	—	RNAV1
005	TF	TT257	—	290 (282.4)	-7.9	8.1	—	—	—	—	RNAV1
006	TF	SLICK	—	311 (303.1)	-7.9	10.2	—	11000	230	—	RNAV1
007	TF	SHAFT	—	052 (044.3)	-7.9	25.6	—	9000	—	—	RNAV1
008	TF	SNOKE	—	011 (003.4)	-7.9	13.4	—	—	—	—	RNAV1
009	TF	SPINE	—	348 (340.6)	-7.9	6.8	—	—	—	—	RNAV1
010	TF	SOPPY	—	297 (289.2)	-7.9	8.4	—	-7000	—	—	RNAV1
011	TF	SNARE	—	297 (289.1)	-7.9	7.8	—	6000	—	—	RNAV1
012	TF	SACHS	—	297 (289.0)	-7.9	3.4	—	—	—	—	RNAV1
013	TF	SANDY	—	288 (280.0)	-7.9	3.8	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SNOKE	092 (084.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SPINE	348 (340.6)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : HLDG pattern for SNOKE established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

AROSA R ARRIVAL

From AROSA, to AVEEY at 11000FT, to ALDEN at 11000FT, to TT256, to TT257, to SCOUT, to SCOPE at 10000FT, to T6R70, to NUMAN at 9000FT, to NORIK, to T6R71, to T6R72, to NURSE at 9000FT, to NEURO at 6000FT, to NIGEL at 6000FT, to NATTY.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	AVEEY	—	278 (269.8)	-7.9	16.4	—	11000	230	—	RNAV1
003	TF	ALDEN	—	338 (330.0)	-7.9	11.3	—	11000	230	—	RNAV1
004	TF	TT256	—	338 (329.9)	-7.9	6.1	—	—	—	—	RNAV1
005	TF	TT257	—	290 (282.4)	-7.9	8.1	—	—	—	—	RNAV1
006	TF	SCOUT	—	328 (320.5)	-7.9	10.1	—	—	—	—	RNAV1
007	TF	SCOPE	—	036 (028.5)	-7.9	20.0	—	10000	—	—	RNAV1
008	TF	T6R70	—	036 (028.6)	-7.9	14.0	—	—	—	—	RNAV1
009	TF	NUMAN	—	360 (352.5)	-7.9	11.1	—	9000	210	—	RNAV1
010	TF	NORIK	—	360 (352.5)	-7.9	7.3	—	—	—	—	RNAV1
011	TF	T6R71	—	007 (358.9)	-7.9	6.5	—	—	—	—	RNAV1
012	TF	T6R72	—	342 (334.4)	-7.9	5.0	—	—	—	—	RNAV1
013	TF	NURSE	—	318 (309.8)	-7.9	6.5	—	9000	210	—	RNAV1
014	TF	NEURO	—	213 (205.5)	-7.9	13.5	—	6000	—	—	RNAV1
015	TF	NIGEL	—	252 (244.1)	-7.9	3.1	—	6000	—	—	RNAV1
016	TF	NATTY	—	252 (244.1)	-7.9	5.2	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NUMAN	360 (352.5)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	291 (282.9)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at NEURO.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ALDEN	345141.1N / 1401505.3E	SCOUT	350624.1N / 1395356.8E
AROSA	344201.7N / 1404157.3E	SHAFT	352227.4N / 1401313.3E
AVEEY	344155.9N / 1402158.0E	SLICK	350412.7N / 1395120.0E
NATTY	355350.9N / 1394531.3E	SNARE	354731.1N / 1395238.1E
NEURO	355727.6N / 1395441.3E	SNOKE	353551.6N / 1401411.7E
NIGEL	355607.5N / 1395117.8E	SOPPY	354458.8N / 1400140.3E
NORIK	355428.9N / 1401054.5E	SPINE	354213.5N / 1401125.8E
NUMAN	354714.4N / 1401204.9E	T6R70	353614.4N / 1401351.4E
NURSE	360939.3N / 1400153.3E	T6R71	360059.5N / 1401045.1E
SACHS	354838.2N / 1394838.4E	T6R72	360530.2N / 1400804.3E
SANDY	354917.5N / 1394402.8E	TT256	345655.4N / 1401122.9E
SCOPE	352358.4N / 1400538.3E	TT257	345838.5N / 1400146.6E

CHANGE : T6L60 abolished. SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

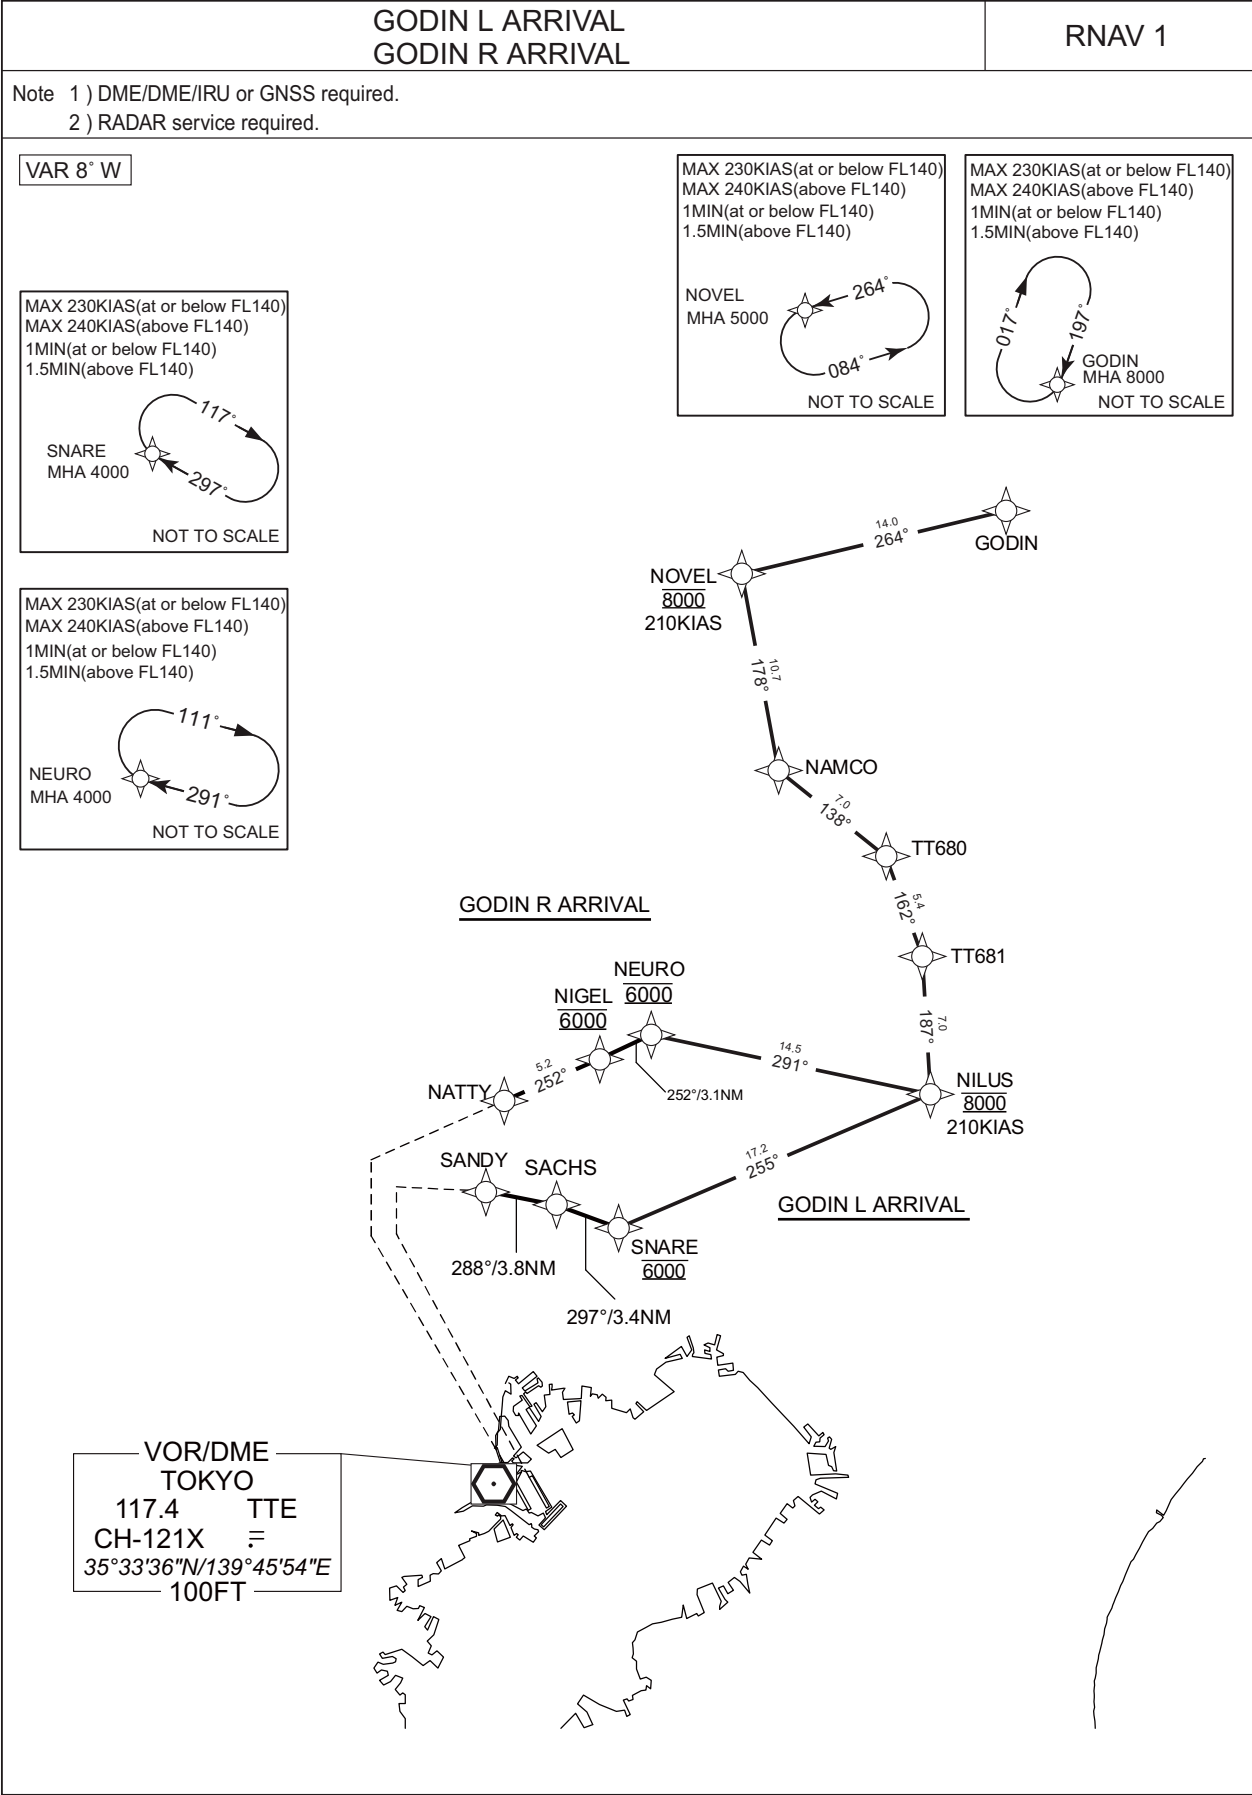

CHANGE : VOR/DME relocated (HME→TTE).

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

GODIN L ARRIVAL

From GODIN, to NOVEL at 8000FT, to NAMCO, to TT680, to TT681, to NILUS at 8000FT, to SNARE at 6000FT, to SACHS, to SANDY.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	NOVEL	—	264 (256.4)	-7.9	14.0	—	8000	210	—	RNAV1
003	TF	NAMCO	—	178 (169.8)	-7.9	10.7	—	—	—	—	RNAV1
004	TF	TT680	—	138 (129.7)	-7.9	7.0	—	—	—	—	RNAV1
005	TF	TT681	—	162 (154.3)	-7.9	5.4	—	—	—	—	RNAV1
006	TF	NILUS	—	187 (178.9)	-7.9	7.0	—	8000	210	—	RNAV1
007	TF	SNARE	—	255 (247.0)	-7.9	17.2	—	6000	—	—	RNAV1
008	TF	SACHS	—	297 (289.0)	-7.9	3.4	—	—	—	—	RNAV1
009	TF	SANDY	—	288 (280.0)	-7.9	3.8	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

GODIN R ARRIVAL

From GODIN, to NOVEL at 8000FT, to NAMCO, to TT680, to TT681, to NILUS at 8000FT, to NEURO at 6000FT, to NIGEL at 6000FT, to NATTY.

Critical DME	—
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	NOVEL	—	264 (256.4)	-7.9	14.0	—	8000	210	—	RNAV1
003	TF	NAMCO	—	178 (169.8)	-7.9	10.7	—	—	—	—	RNAV1
004	TF	TT680	—	138 (129.7)	-7.9	7.0	—	—	—	—	RNAV1
005	TF	TT681	—	162 (154.3)	-7.9	5.4	—	—	—	—	RNAV1
006	TF	NILUS	—	187 (178.9)	-7.9	7.0	—	8000	210	—	RNAV1
007	TF	NEURO	—	291 (282.9)	-7.9	14.5	—	6000	—	—	RNAV1
008	TF	NIGEL	—	252 (244.1)	-7.9	3.1	—	6000	—	—	RNAV1
009	TF	NATTY	—	252 (244.1)	-7.9	5.2	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	291 (282.9)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at NEURO.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
GODIN	362425.3N / 1401655.9E	NOVEL	362106.9N / 1400004.9E
NAMCO	361035.1N / 1400226.3E	SACHS	354838.2N / 1394838.4E
NATTY	355350.9N / 1394531.3E	SANDY	354917.5N / 1394402.8E
NEURO	355727.6N / 1395441.3E	SNARE	354731.1N / 1395238.1E
NIGEL	355607.5N / 1395117.8E	TT680	360608.2N / 1400904.0E
NILUS	355415.2N / 1401208.8E	TT681	360113.8N / 1401158.7E

CHANGE : T6L60 abolished. SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

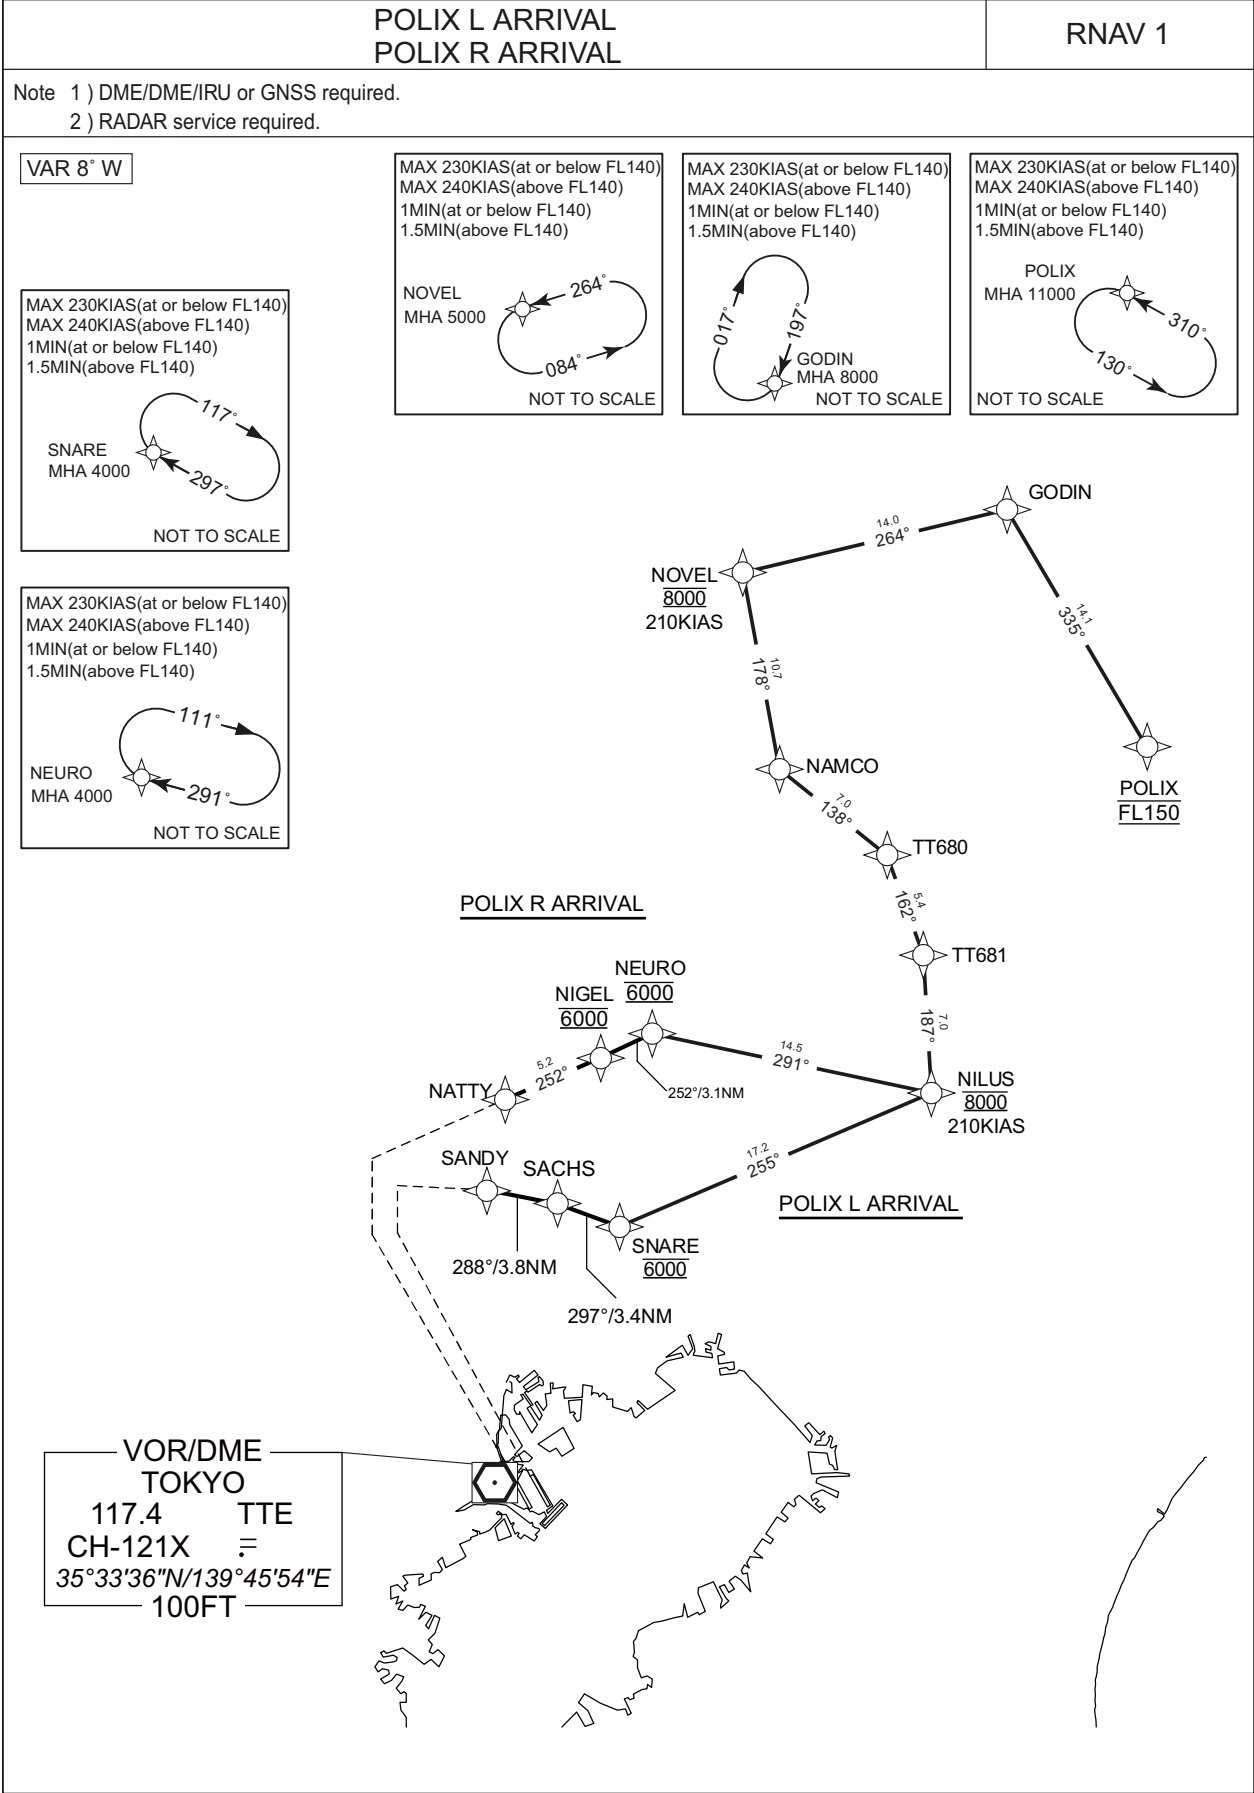

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY16L/16R

POLIX L ARRIVAL

From POLIX at FL150, to GODIN, to NOVEL at 8000FT, to NAMCO, to TT680, to TT681, to NILUS at 8000FT, to SNARE at 6000FT, to SACHS, to SANDY.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	—	—	-7.9	—	—	FL 150	—	—	RNAV1
002	TF	GODIN	—	335 (327.2)	-7.9	14.1	—	—	—	—	RNAV1
003	TF	NOVEL	—	264 (256.4)	-7.9	14.0	—	8000	210	—	RNAV1
004	TF	NAMCO	—	178 (169.8)	-7.9	10.7	—	—	—	—	RNAV1
005	TF	TT680	—	138 (129.7)	-7.9	7.0	—	—	—	—	RNAV1
006	TF	TT681	—	162 (154.3)	-7.9	5.4	—	—	—	—	RNAV1
007	TF	NILUS	—	187 (178.9)	-7.9	7.0	—	8000	210	—	RNAV1
008	TF	SNARE	—	255 (247.0)	-7.9	17.2	—	6000	—	—	RNAV1
009	TF	SACHS	—	297 (289.0)	-7.9	3.4	—	—	—	—	RNAV1
010	TF	SANDY	—	288 (280.0)	-7.9	3.8	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.9	1.0(-14000) 1.5(+14001)	—	L	11000	—	-230(-14000) -240(+14001)	RNAV1
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL RNAV STAR RWY16L/16R

POLIX R ARRIVAL

From POLIX at FL150, to GODIN, to NOVEL at 8000FT, to NAMCO, to TT680, to TT681, to NILUS at 8000FT, to NEURO at 6000FT, to NIGEL at 6000FT, to NATTY.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	POLIX	—	—	-7.9	—	—	FL150	—	—	RNAV1
002	TF	GODIN	—	335 (327.2)	-7.9	14.1	—	—	—	—	RNAV1
003	TF	NOVEL	—	264 (256.4)	-7.9	14.0	—	8000	210	—	RNAV1
004	TF	NAMCO	—	178 (169.8)	-7.9	10.7	—	—	—	—	RNAV1
005	TF	TT680	—	138 (129.7)	-7.9	7.0	—	—	—	—	RNAV1
006	TF	TT681	—	162 (154.3)	-7.9	5.4	—	—	—	—	RNAV1
007	TF	NILUS	—	187 (178.9)	-7.9	7.0	—	8000	210	—	RNAV1
008	TF	NEURO	—	291 (282.9)	-7.9	14.5	—	6000	—	—	RNAV1
009	TF	NIGEL	—	252 (244.1)	-7.9	3.1	—	6000	—	—	RNAV1
010	TF	NATTY	—	252 (244.1)	-7.9	5.2	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	POLIX	310 (302.3)	-7.9	1.0(-14000) 1.5(+14001)	—	L	11000	—	-230(-14000) -240(+14001)	RNAV1
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	291 (282.9)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at NEURO.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL


RNAV STAR RWY16L/16R

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
GODIN	362425.3N / 1401655.9E	POLIX	361237.1N / 1402622.5E
NAMCO	361035.1N / 1400226.3E	SACHS	354838.2N / 1394838.4E
NATTY	355350.9N / 1394531.3E	SANDY	354917.5N / 1394402.8E
NEURO	355727.6N / 1395441.3E	SNARE	354731.1N / 1395238.1E
NIGEL	355607.5N / 1395117.8E	TT680	360608.2N / 1400904.0E
NILUS	355415.2N / 1401208.8E	TT681	360113.8N / 1401158.7E
NOVEL	362106.9N / 1400004.9E		

CHANGE : T6L60 abolished. SACHS established.

STANDARD ARRIVAL CHART-INSTRUMENT

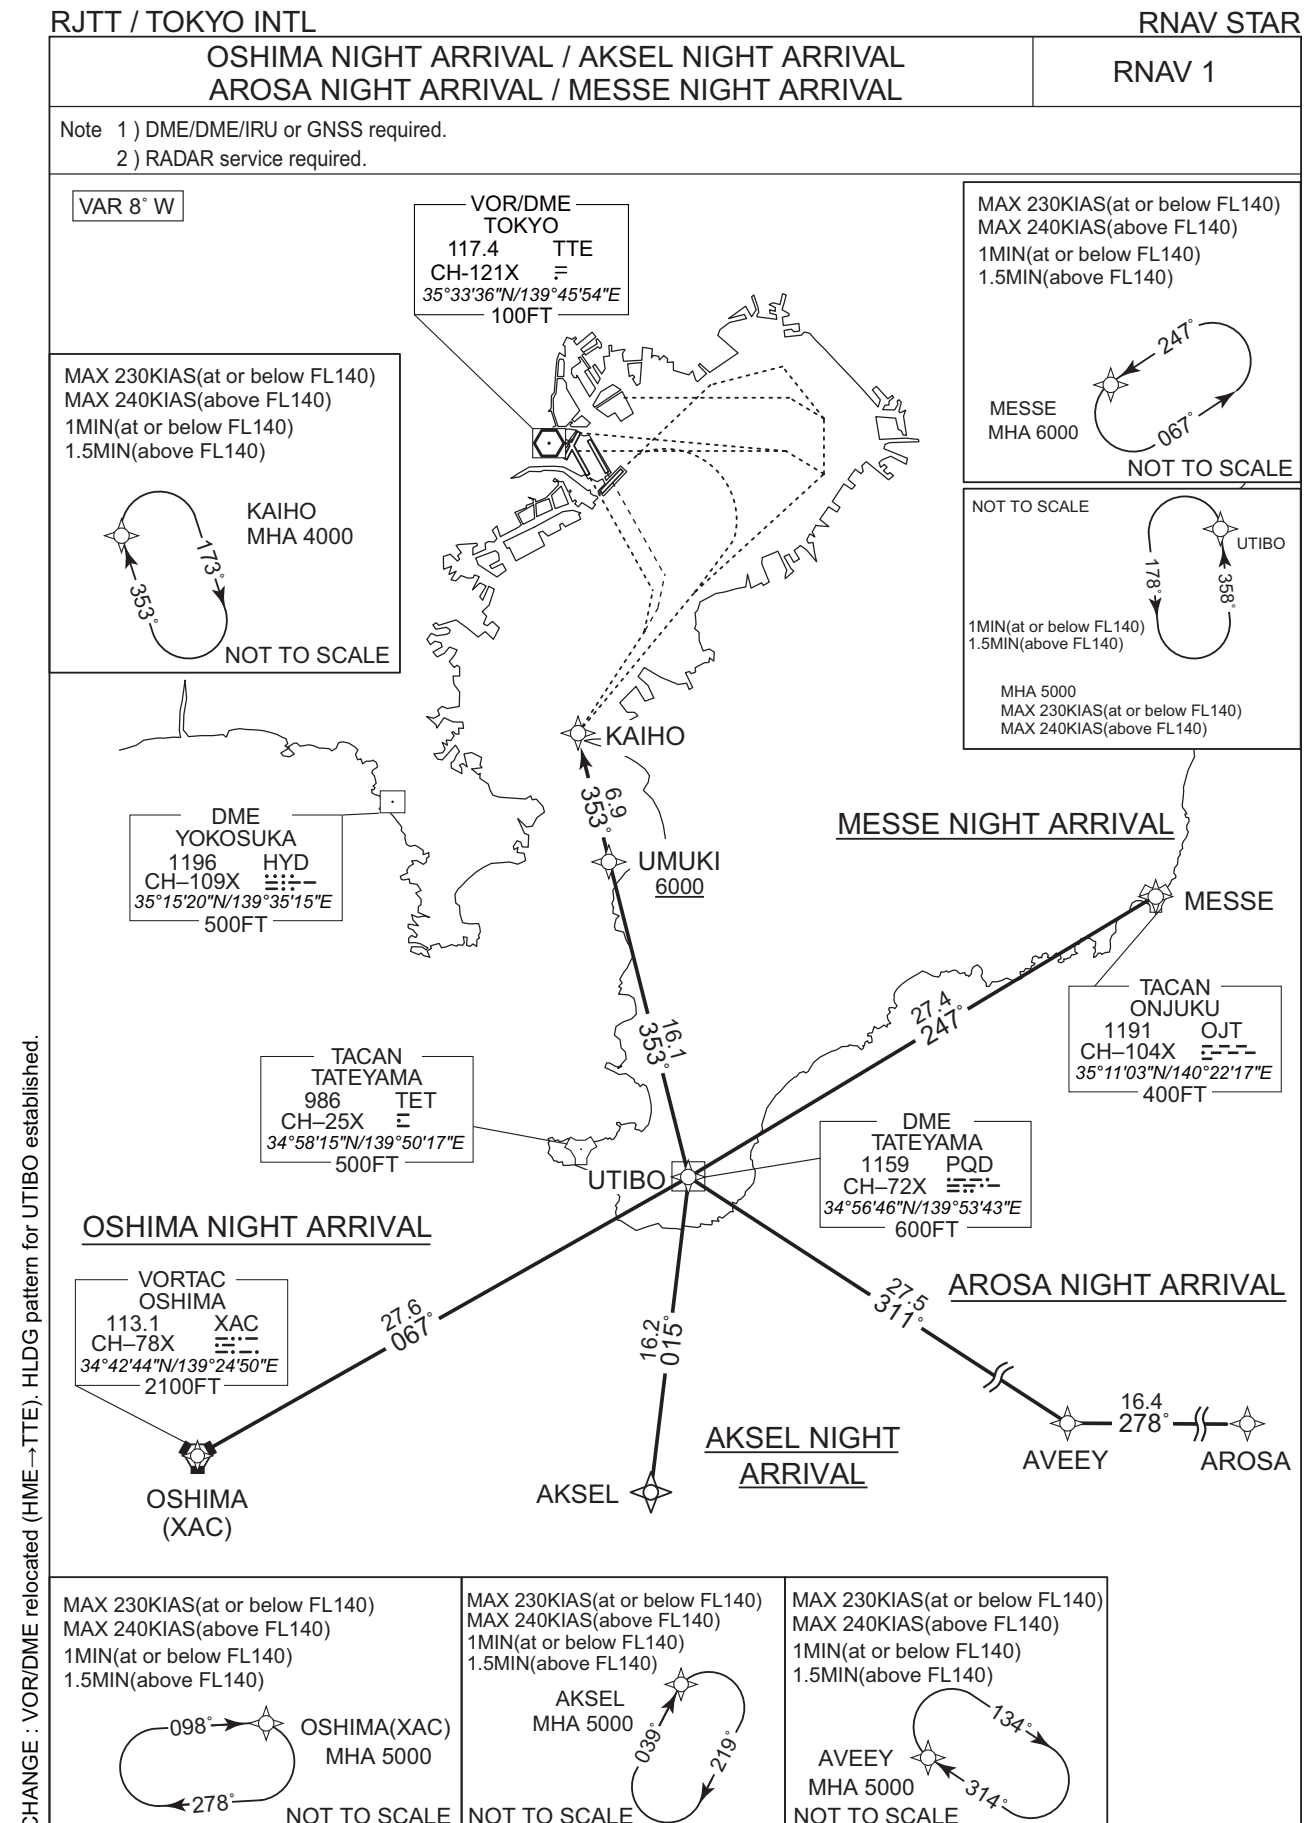

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

OSHIMA NIGHT ARRIVAL

From XAC, to UTIBO, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	UTIBO	—	067 (059.2)	-7.9	27.6	—	—	—	—	RNAV1
003	TF	UMUKI	—	353 (345.5)	-7.9	16.1	—	+6000	—	—	RNAV1
004	TF	KAIHO	—	353 (345.5)	-7.9	6.9	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	UTIBO	358 (350.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : HLDG pattern for UTIBO established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

AKSEL NIGHT ARRIVAL

From AKSEL, to UTIBO, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	UTIBO	—	015 (006.6)	-7.9	16.2	—	—	—	—	RNAV1
003	TF	UMUKI	—	353 (345.5)	-7.9	16.1	—	+6000	—	—	RNAV1
004	TF	KAIHO	—	353 (345.5)	-7.9	6.9	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	UTIBO	358 (350.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : HLDG pattern for UTIBO established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

AROSA NIGHT ARRIVAL

From AROSA, to AVEEY, to UTIBO, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	AVEEY	—	278 (269.8)	-7.9	16.4	—	—	—	—	RNAV1
003	TF	UTIBO	—	311 (302.8)	-7.9	27.5	—	—	—	—	RNAV1
004	TF	UMUKI	—	353 (345.5)	-7.9	16.1	—	+6000	—	—	RNAV1
005	TF	KAIHO	—	353 (345.5)	-7.9	6.9	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	UTIBO	358 (350.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : HLDG pattern for UTIBO established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

MESSE NIGHT ARRIVAL

From MESSE, to UTIBO, to UMUKI at or above 6000FT, to KAIHO.

Critical DME	—
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MESSE	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	UTIBO	—	247 (238.8)	-7.9	27.4	—	—	—	—	RNAV1
003	TF	UMUKI	—	353 (345.5)	-7.9	16.1	—	+6000	—	—	RNAV1
004	TF	KAIHO	—	353 (345.5)	-7.9	6.9	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	MESSE	247 (238.8)	-7.9	1.0(-14000) 1.5(+14001)	—	L	6000	—	-230(-14000) -240(+14001)	RNAV1
Hold	UTIBO	358 (350.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : HLDG pattern for UTIBO established.

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	MESSE	351100.8N / 1402214.7E
AROSA	344201.7N / 1404157.3E	UMUKI	351219.1N / 1394849.2E
AVEEY	344155.9N / 1402158.0E	UTIBO	345647.0N / 1395343.9E
KAIHO	351857.8N / 1394642.4E	XAC	344244.1N / 1392450.5E

RJTT / TOKYO INTL

OSHIMA V ARRIVAL / AKSEL V ARRIVAL
AROSA V ARRIVAL / MESSE V ARRIVAL

RNAV1

VAR 8°W

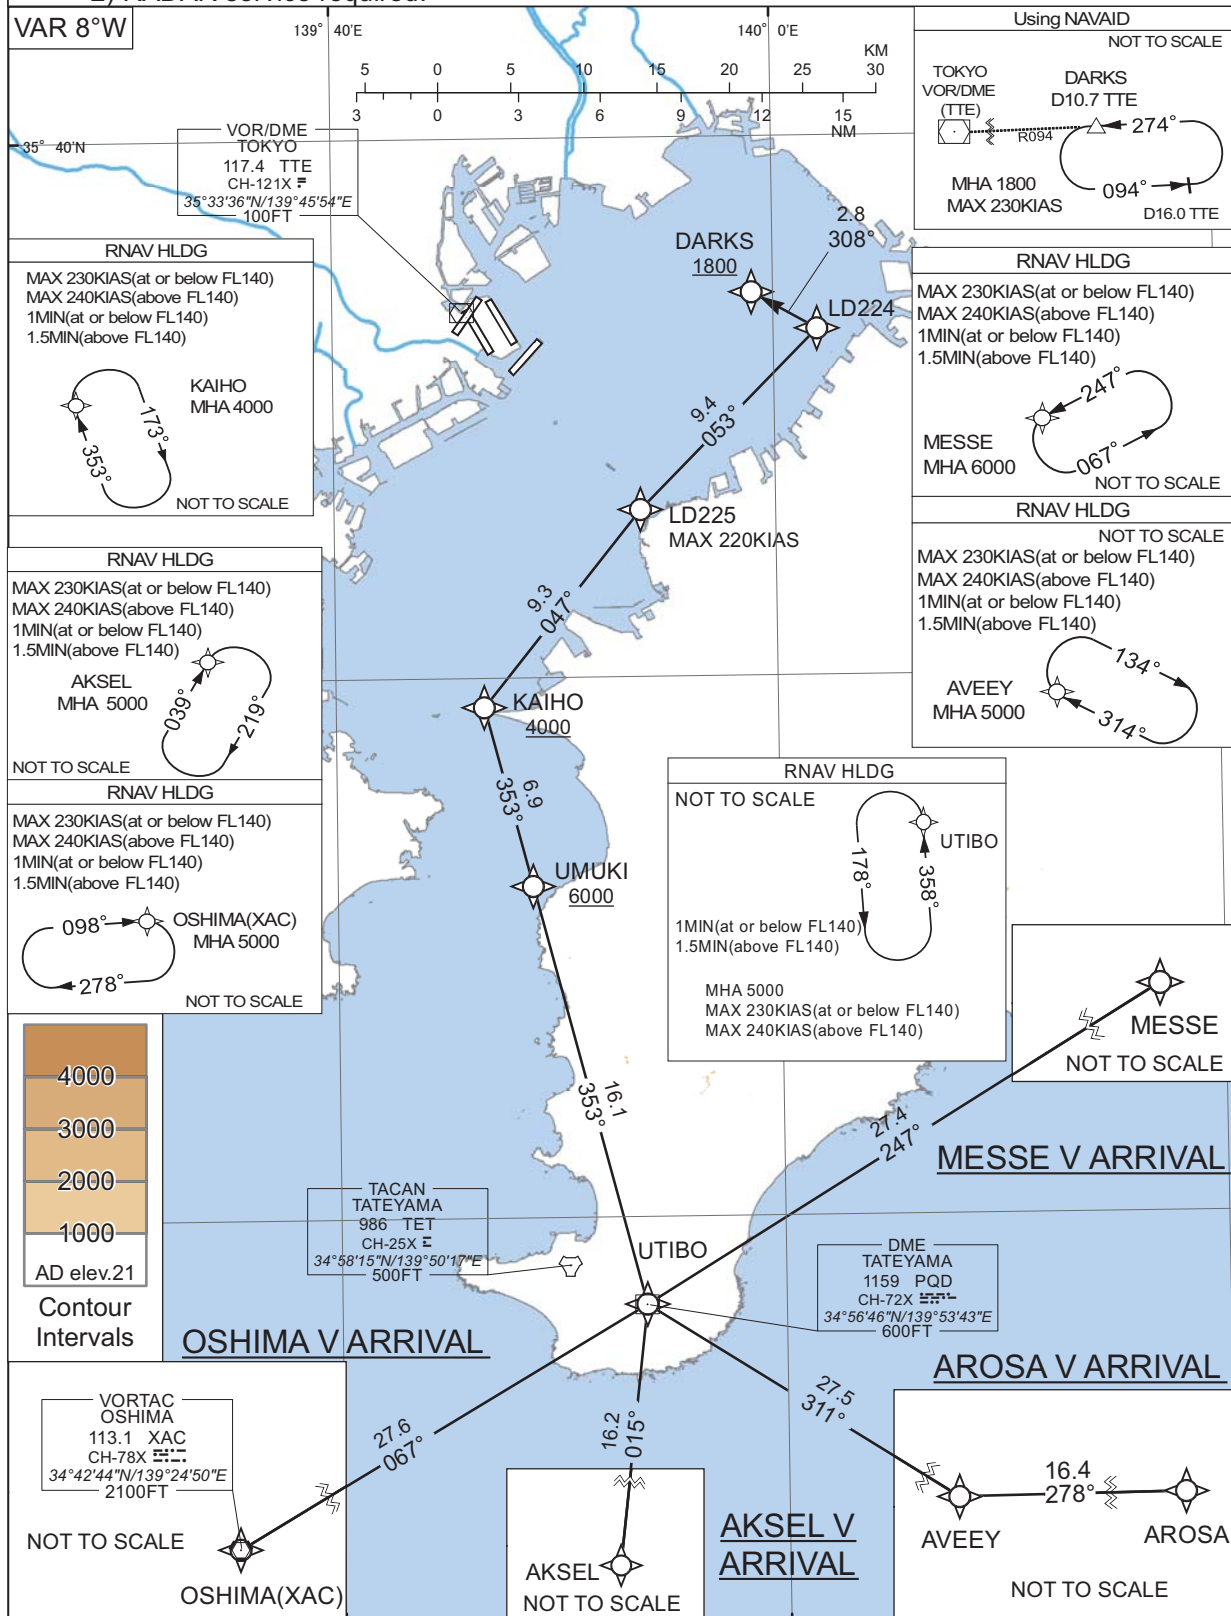

CHANGE : VOR/DME relocated(HME → TTE). HLDG pattern for UTIBO established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

OSHIMA V ARRIVAL

From XAC, to UTIBO, to UMUKI at or above 6000FT, to KAIHO at or above 4000FT, to LD225, to LD224, to DARKS at or above 1800FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	XAC	-	-	-7.9	-	-	-	-	-	RNAV1
002	TF	UTIBO	-	067 (059.2)	-7.9	27.6	-	-	-	-	RNAV1
003	TF	UMUKI	-	353 (345.5)	-7.9	16.1	-	+6000	-	-	RNAV1
004	TF	KAIHO	-	353 (345.5)	-7.9	6.9	-	+4000	-	-	RNAV1
005	TF	LD225	-	047 (038.8)	-7.9	9.3	-	-	-220	-	RNAV1
006	TF	LD224	-	053 (044.8)	-7.9	9.4	-	-	-	-	RNAV1
007	TF	DARKS	-	308 (299.8)	-7.9	2.8	-	+1800	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	XAC	098 (090.3)	-7.9	1.0 (-14000) 1.5 (+14001)	-	R	5000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	UTIBO	358 (350.2)	-7.9	1.0 (-14000) 1.5 (+14001)	-	L	5000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.9	1.0 (-14000) 1.5 (+14001)	-	R	4000	-	-230 (-14000) -240 (+14001)	RNAV1

CHANGE : HLDG pattern for UTIBO established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

AKSEL V ARRIVAL

From AKSEL, to UTIBO, to UMUKI at or above 6000FT, to KAIHO at or above 4000FT, to LD225, to LD224, to DARKS at or above 1800FT.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AKSEL	-	-	-7.9	-	-	-	-	-	RNAV1
002	TF	UTIBO	-	015 (006.6)	-7.9	16.2	-	-	-	-	RNAV1
003	TF	UMUKI	-	353 (345.5)	-7.9	16.1	-	+6000	-	-	RNAV1
004	TF	KAIHO	-	353 (345.5)	-7.9	6.9	-	+4000	-	-	RNAV1
005	TF	LD225	-	047 (038.8)	-7.9	9.3	-	-	-220	-	RNAV1
006	TF	LD224	-	053 (044.8)	-7.9	9.4	-	-	-	-	RNAV1
007	TF	DARKS	-	308 (299.8)	-7.9	2.8	-	+1800	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.9	1.0 (-14000) 1.5 (+14001)	-	R	5000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	UTIBO	358 (350.2)	-7.9	1.0 (-14000) 1.5 (+14001)	-	L	5000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.9	1.0 (-14000) 1.5 (+14001)	-	R	4000	-	-230 (-14000) -240 (+14001)	RNAV1

CHANGE : HLDG pattern for UTIBO established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

AROSA V ARRIVAL

From AROSA, to AVEEY, to UTIBO, to UMUKI at or above 6000FT, to KAIHO at or above 4000FT, to LD225, to LD224, to DARKS at or above 1800FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AROSA	-	-	-7.9	-	-	-	-	-	RNAV1
002	TF	AVEEY	-	278 (269.8)	-7.9	16.4	-	-	-	-	RNAV1
003	TF	UTIBO	-	311 (302.8)	-7.9	27.5	-	-	-	-	RNAV1
004	TF	UMUKI	-	353 (345.5)	-7.9	16.1	-	+6000	-	-	RNAV1
005	TF	KAIHO	-	353 (345.5)	-7.9	6.9	-	+4000	-	-	RNAV1
006	TF	LD225	-	047 (038.8)	-7.9	9.3	-	-	-220	-	RNAV1
007	TF	LD224	-	053 (044.8)	-7.9	9.4	-	-	-	-	RNAV1
008	TF	DARKS	-	308 (299.8)	-7.9	2.8	-	+1800	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AVEEY	314 (306.1)	-7.9	1.0 (-14000) 1.5 (+14001)	-	R	5000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	UTIBO	358 (350.2)	-7.9	1.0 (-14000) 1.5 (+14001)	-	L	5000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.9	1.0 (-14000) 1.5 (+14001)	-	R	4000	-	-230 (-14000) -240 (+14001)	RNAV1

CHANGE : HLDG pattern for UTIBO established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR

MESSE V ARRIVAL

From MESSE, to UTIBO, to UMUKI at or above 6000FT, to KAIHO at or above 4000FT, to LD225, to LD224, to DARKS at or above 1800FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MESSE	-	-	-7.9	-	-	-	-	-	RNAV1
002	TF	UTIBO	-	247 (238.8)	-7.9	27.4	-	-	-	-	RNAV1
003	TF	UMUKI	-	353 (345.5)	-7.9	16.1	-	+6000	-	-	RNAV1
004	TF	KAIHO	-	353 (345.5)	-7.9	6.9	-	+4000	-	-	RNAV1
005	TF	LD225	-	047 (038.8)	-7.9	9.3	-	-	-220	-	RNAV1
006	TF	LD224	-	053 (044.8)	-7.9	9.4	-	-	-	-	RNAV1
007	TF	DARKS	-	308 (299.8)	-7.9	2.8	-	+1800	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	MESSE	247 (238.8)	-7.9	1.0 (-14000) 1.5 (+14001)	-	L	6000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	UTIBO	358 (350.2)	-7.9	1.0 (-14000) 1.5 (+14001)	-	L	5000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.9	1.0 (-14000) 1.5 (+14001)	-	R	4000	-	-230 (-14000) -240 (+14001)	RNAV1

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	LD225	352614.1N / 1395353.4E
AROSA	344201.7N / 1404157.3E	MESSE	351100.8N / 1402214.7E
AVEEY	344155.9N / 1402158.0E	UMUKI	351219.1N / 1394849.2E
DARKS	353414.8N / 1395902.9E	UTIBO	345647.0N / 1395343.9E
KAIHO	351857.8N / 1394642.4E	XAC	344244.1N / 1392450.5E
LD224	353252.5N / 1400200.0E		

CHANGE : HLDG pattern for UTIBO established.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

ILS Z RWY34L

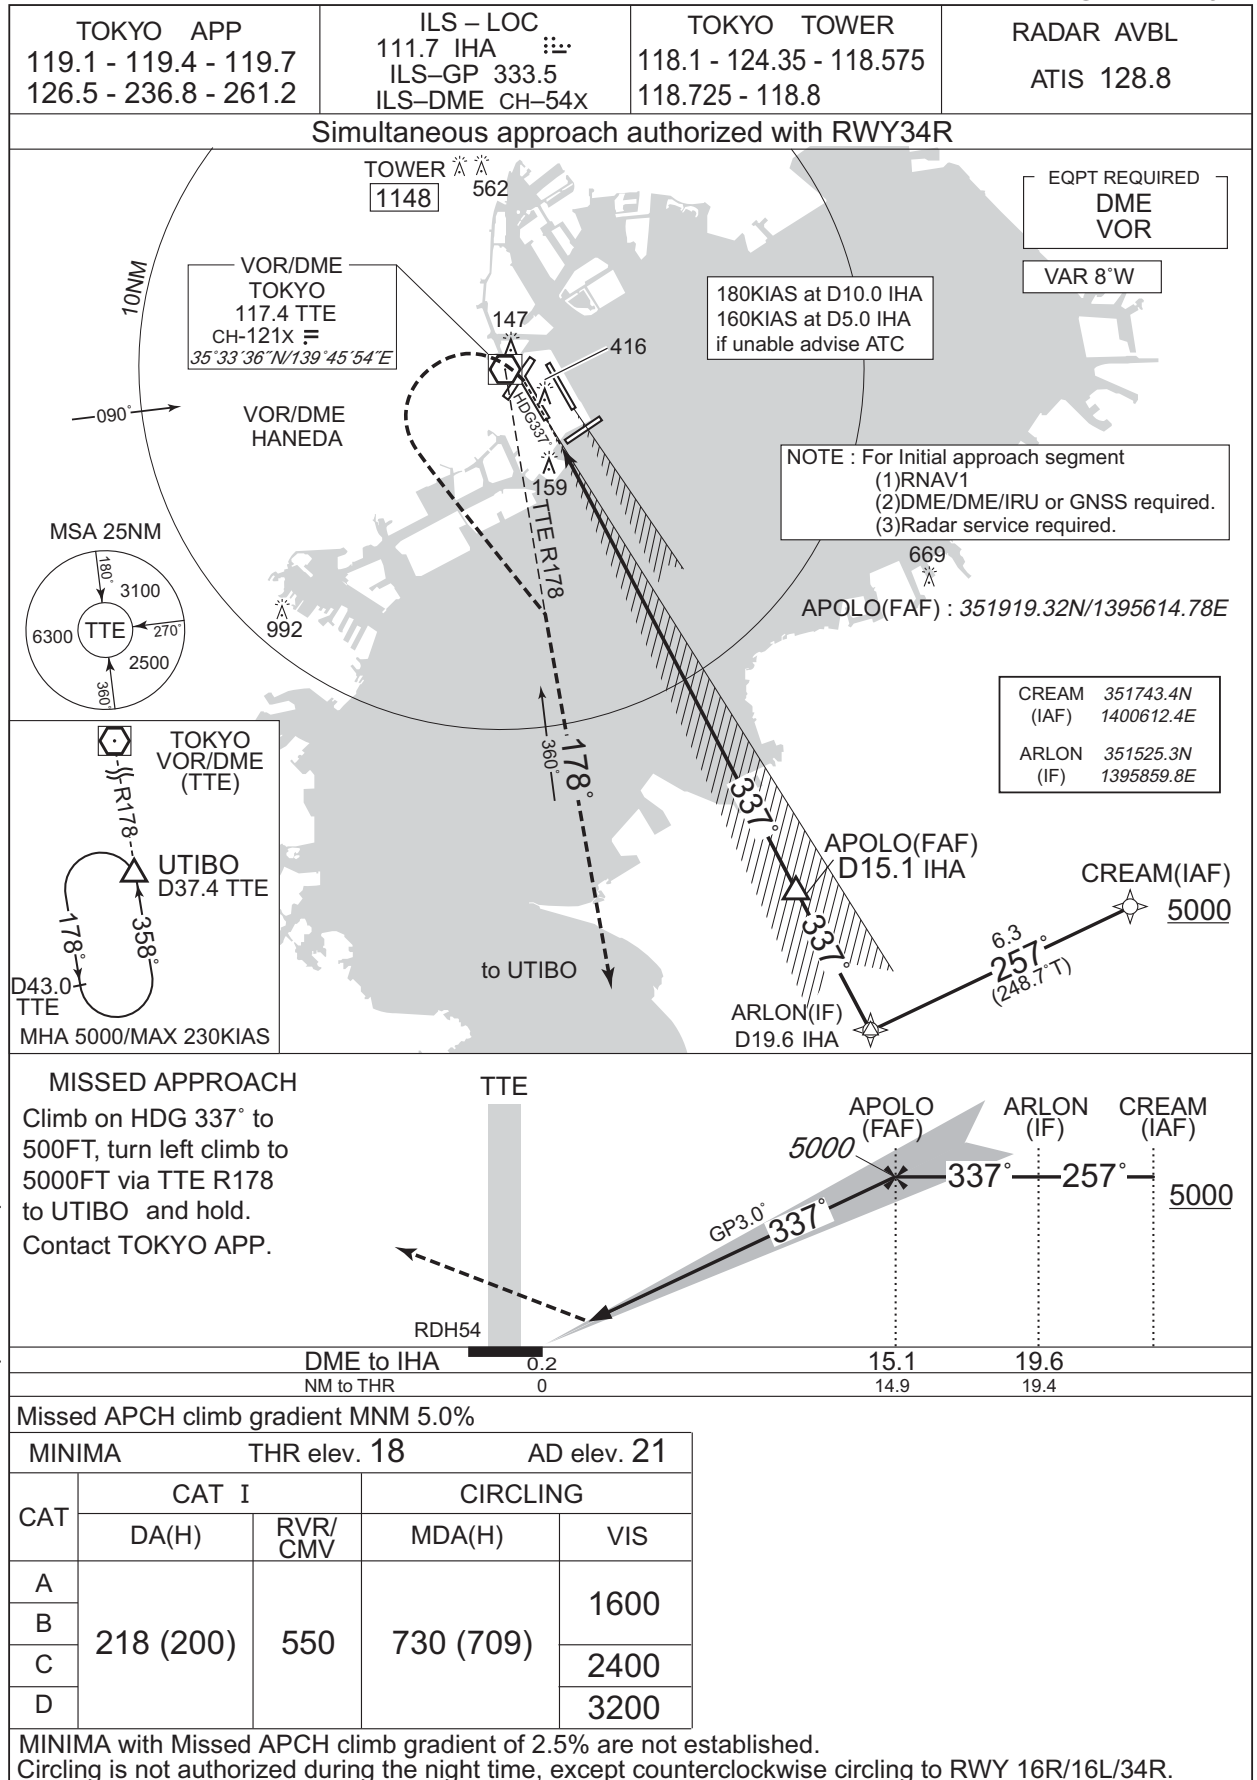

CHANGE : VOR/DME relocated (HME→TTE), PROC course. MHA at UTIBO.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


LOC Z RWY34L

TOKYO APP	ILS – LOC	TOKYO TOWER	RADAR AVBL
119.1 - 119.4 - 119.7	111.7 IHA	118.1 - 124.35 - 118.575	ATIS 128.8
126.5 - 236.8 - 261.2	ILS-DME CH-54X	118.725 - 118.8	

CHANGE : VOR/DME relocated (HME→TTE). PROC course. Missed APCH climb gradient MNM. MHA at UTIBO.

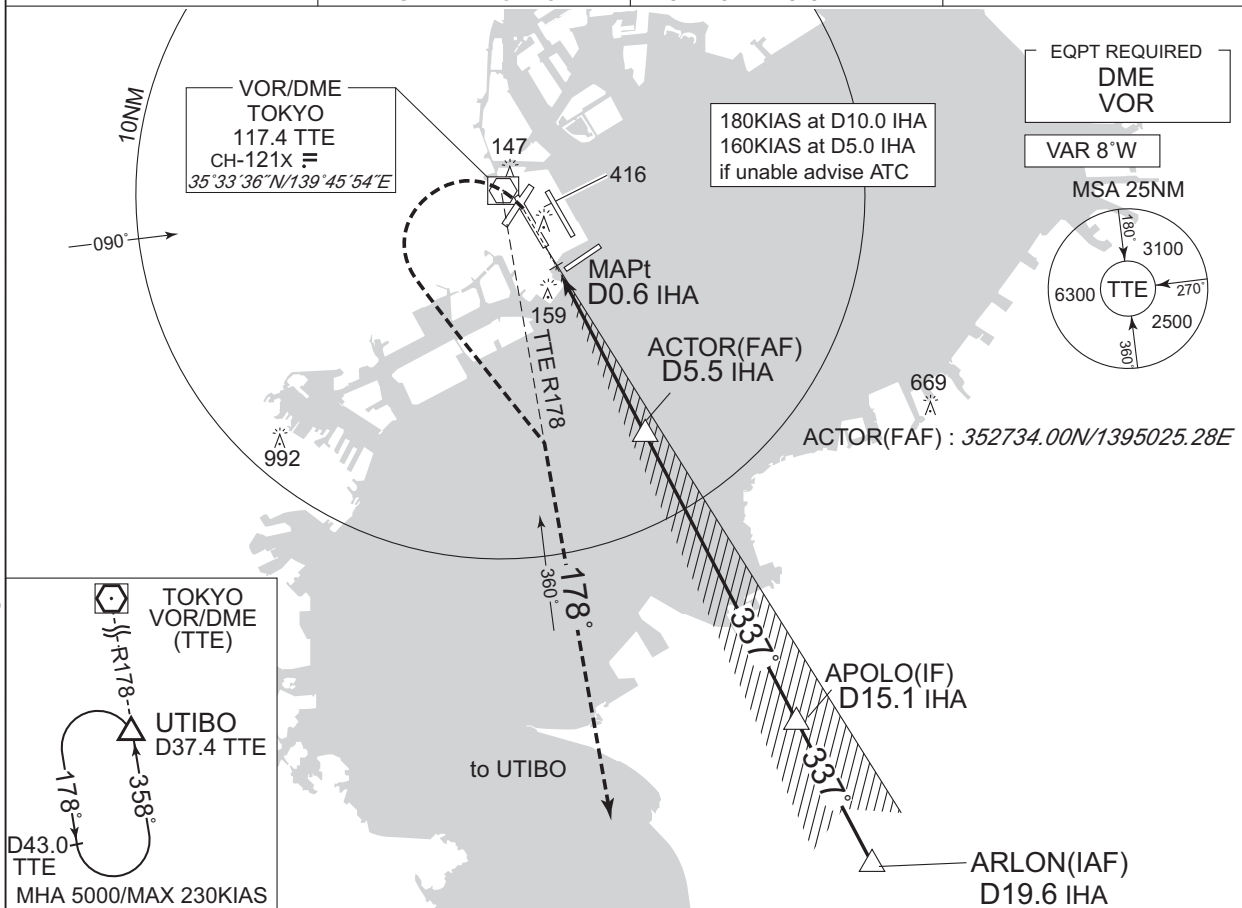

NM to IHA	MAPt	2	3	4	5	FAF
ALT (3.0° APCH Path)	—	646	964	1283	1601	1768

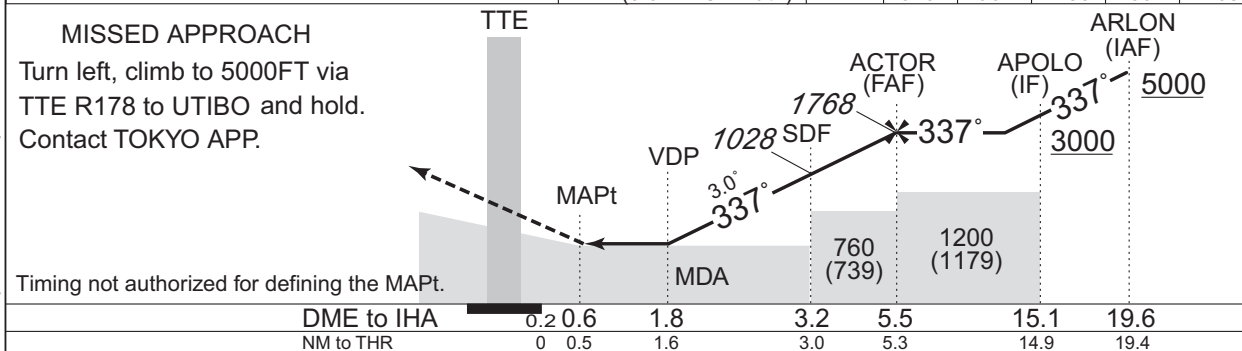

DME to IHA	0.2	0.6	1.8	3.2	5.5	15.1	19.6
NM to THR	0	0.5	1.6	3.0	5.3	14.9	19.4

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 18	AD elev. 21	
CAT	LOC		CIRCLING	
	MDA(H)	RVR/CMV	MDA(H)	VIS
A	560 (539)	1000	730 (709)	1600
B		1200		2400
C		1600		3200
D				

MINIMA with Missed APCH climb gradient of 2.5% are not established.
 Circling is not authorized during the night time, except counterclockwise circling to RWY 16R/16L/34R.

RJTT / TOKYO INTL

ILS Y RWY34L




Circling is not authorized during the night time, except counterclockwise circling to RWY16R/16L/34R.

CHANGE : VOR/DME relocated (HME→TTE). Missed APCH climb gradient MNM.


LOC Y RWY34L

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS - LOC 111.7 IHA ILS-DME CH-54X	TOKYO TOWER 118.1 - 124.35 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------

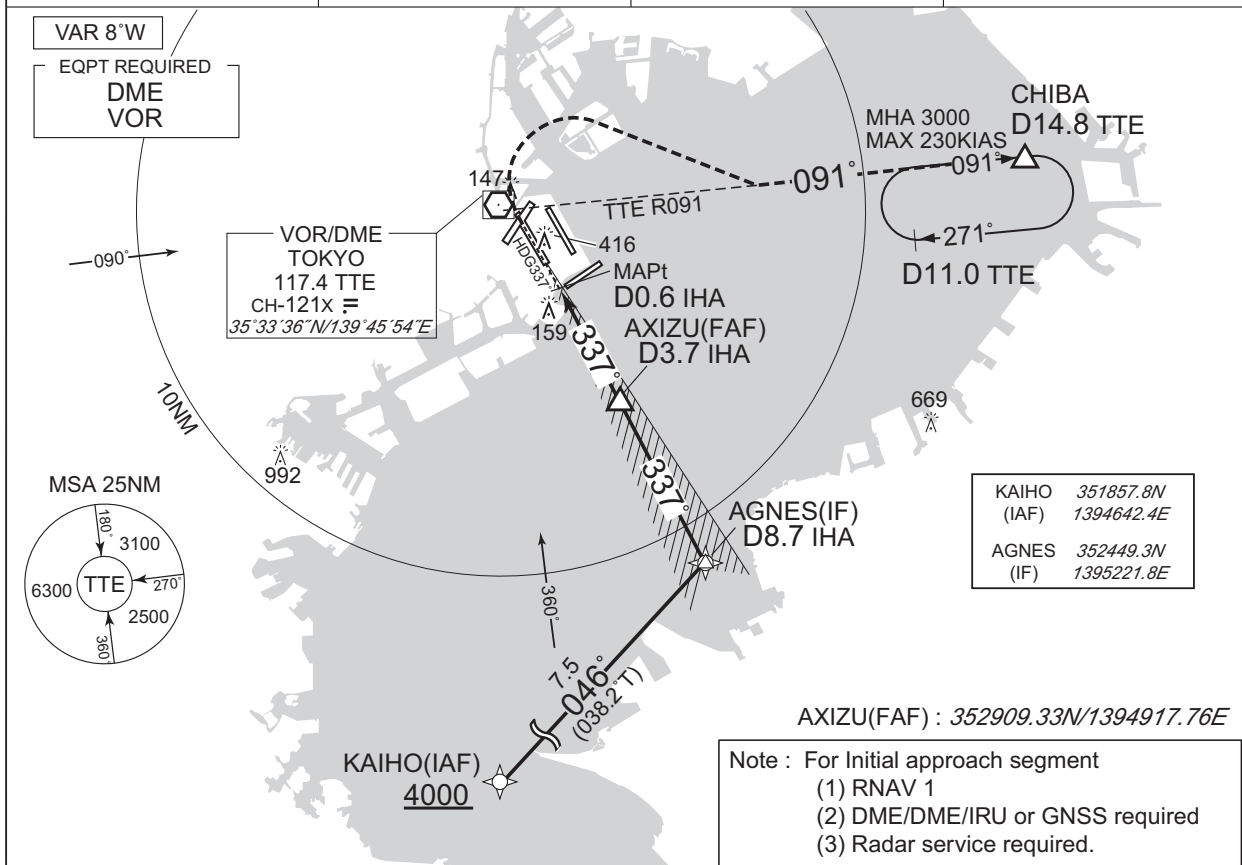

NM to IHA	MAPt	2	3	FAF
ALT (3.0° APCH Path)	–	646	964	1184

Climb on HDG 337° to 800FT, turn right,
climb to 3000FT via TTE R091 to
CHIBA and hold.
Contact TOKYO APP.

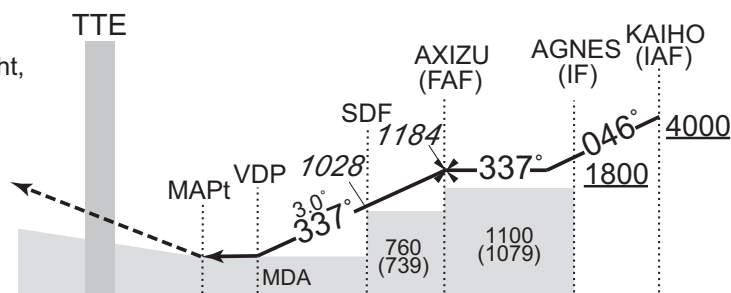

DME to IHA	0.206	1.8	3.2	3.7	8.7
NM to THR	0.05	1.6	3.0	3.5	8.5

Missed APCH climb gradient MNM 5.0%.


MINIMA		THR elev. 18		AD elev. 21	
CAT	LOC		CIRCLING		
	MDA(H)	RVR/ CMV	MDA(H)	VIS	
A	560 (539)	1000	730 (709)	1600	
B		1200		2400	
C				3200	
D				1600	3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling is not authorized during the night time, except counterclockwise circling to RWY 16R/16L/34R.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


ILS X RWY34L

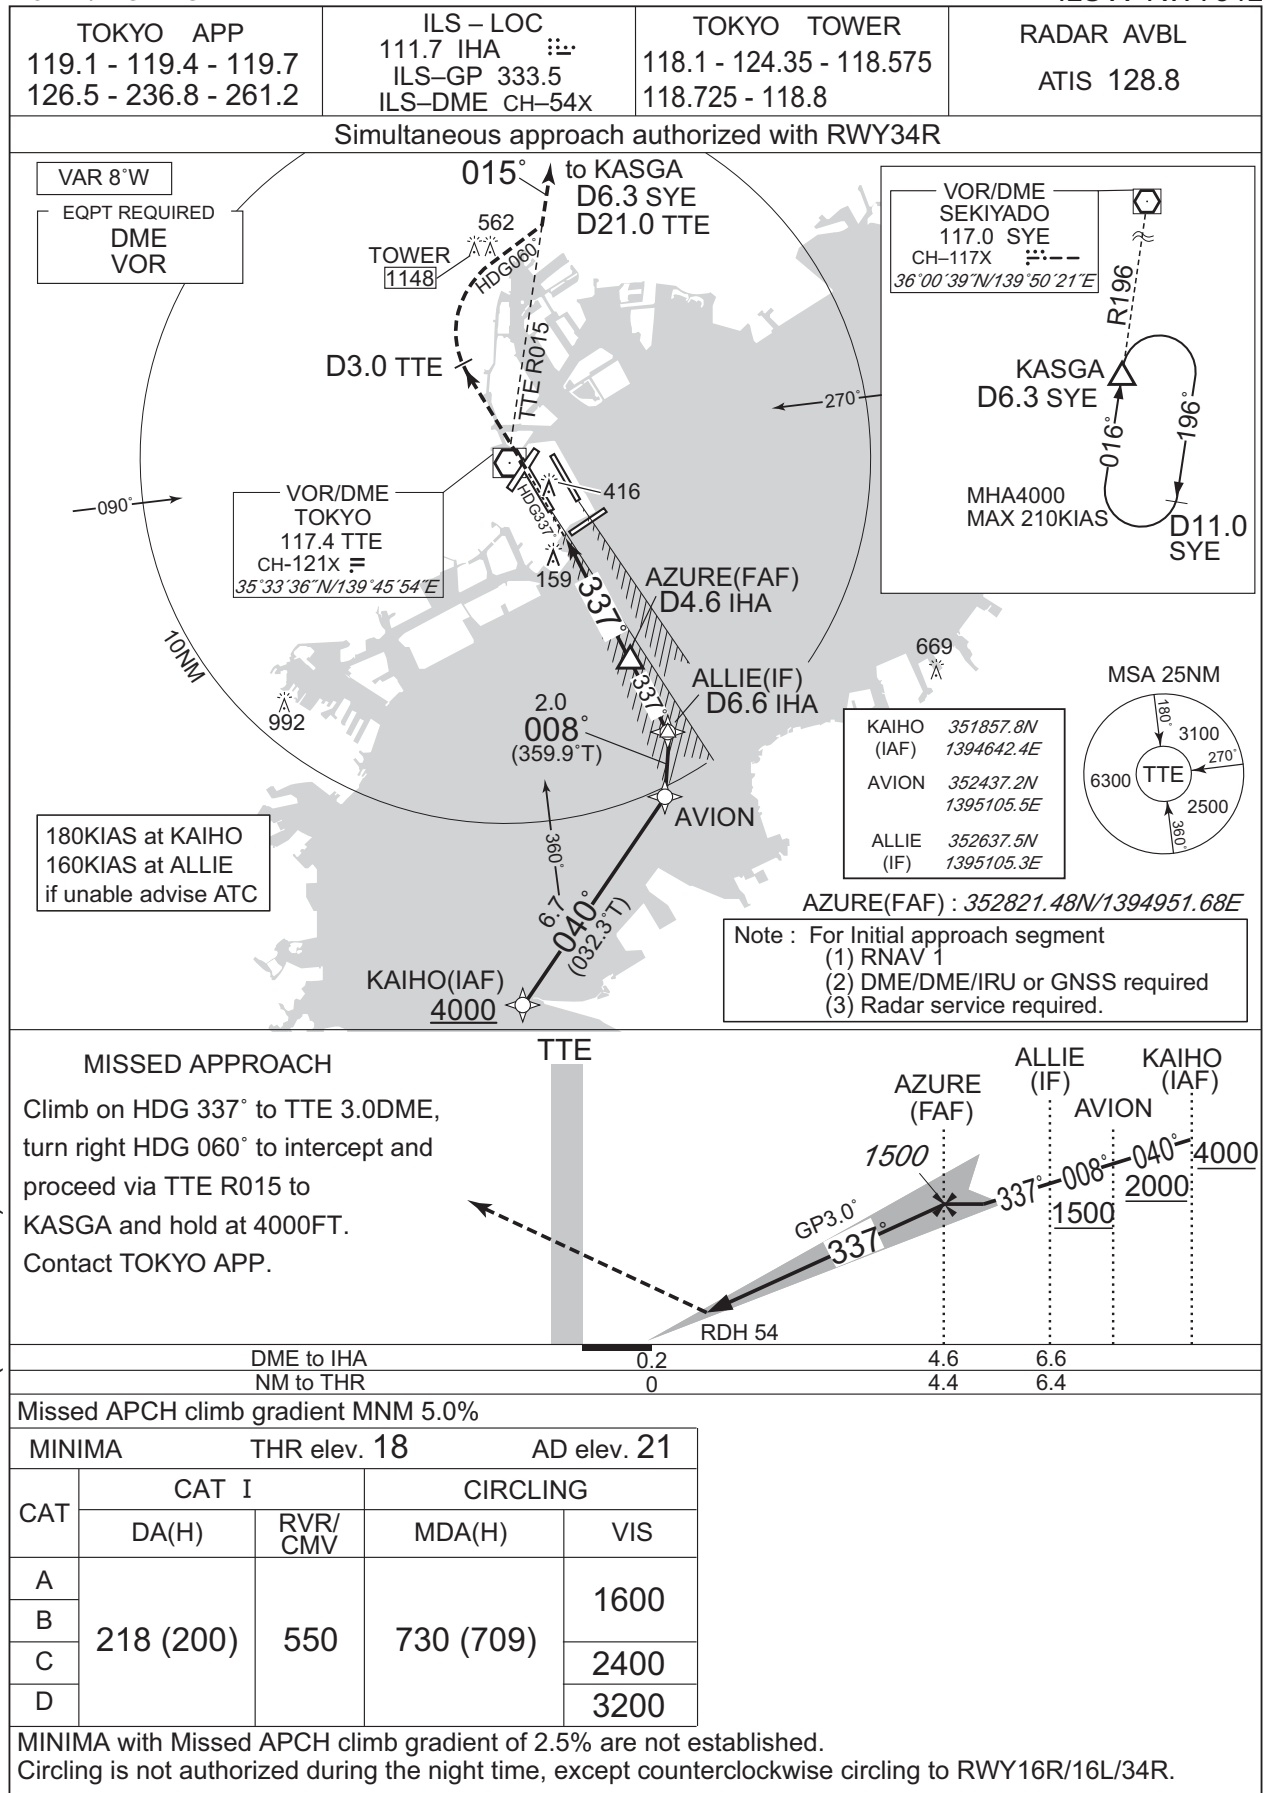


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


LOC X RWY34L

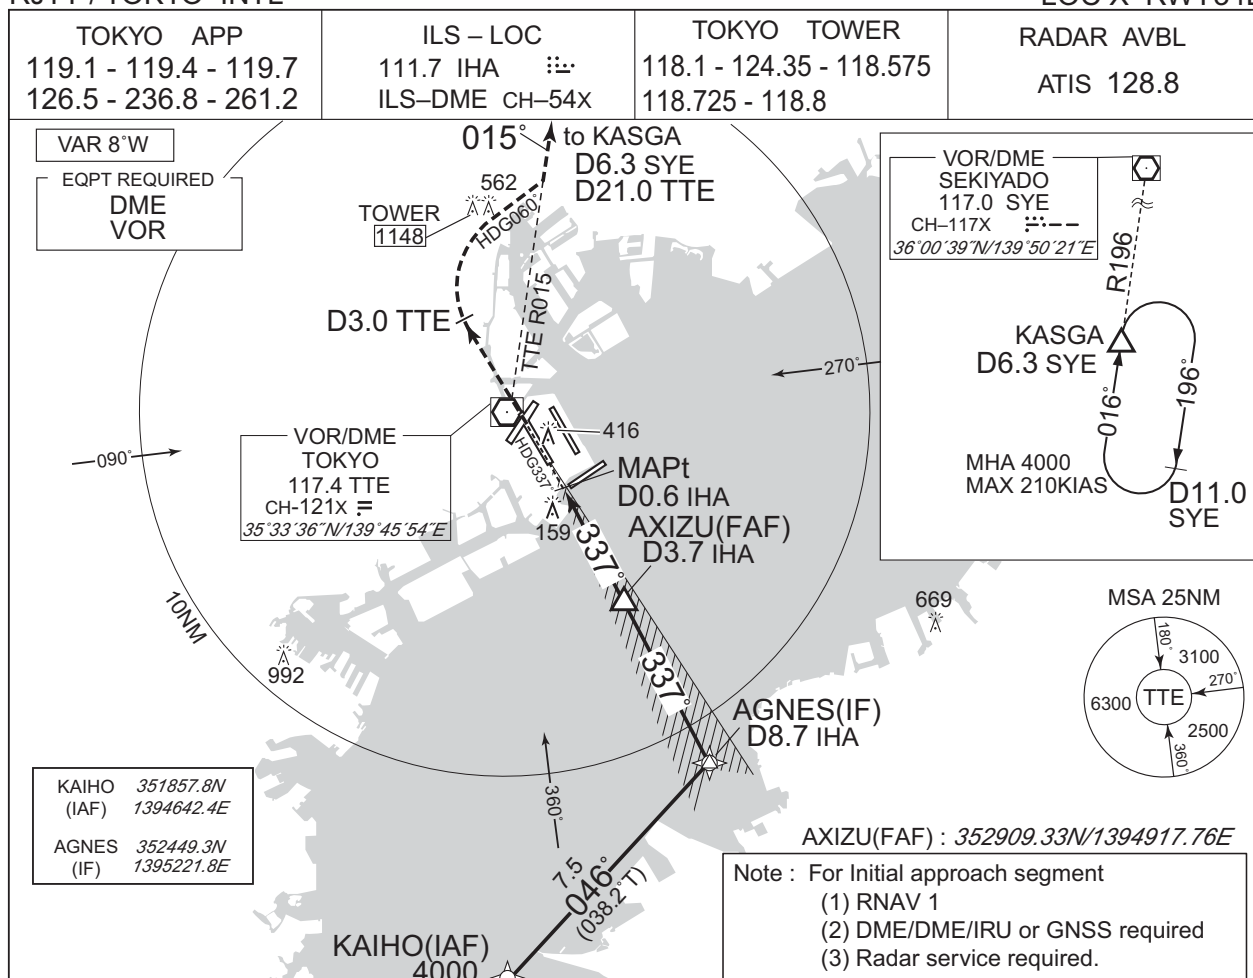

CHANGE : VOR/DME relocated (HME→TTE). Missed APCH climb gradient MNM.

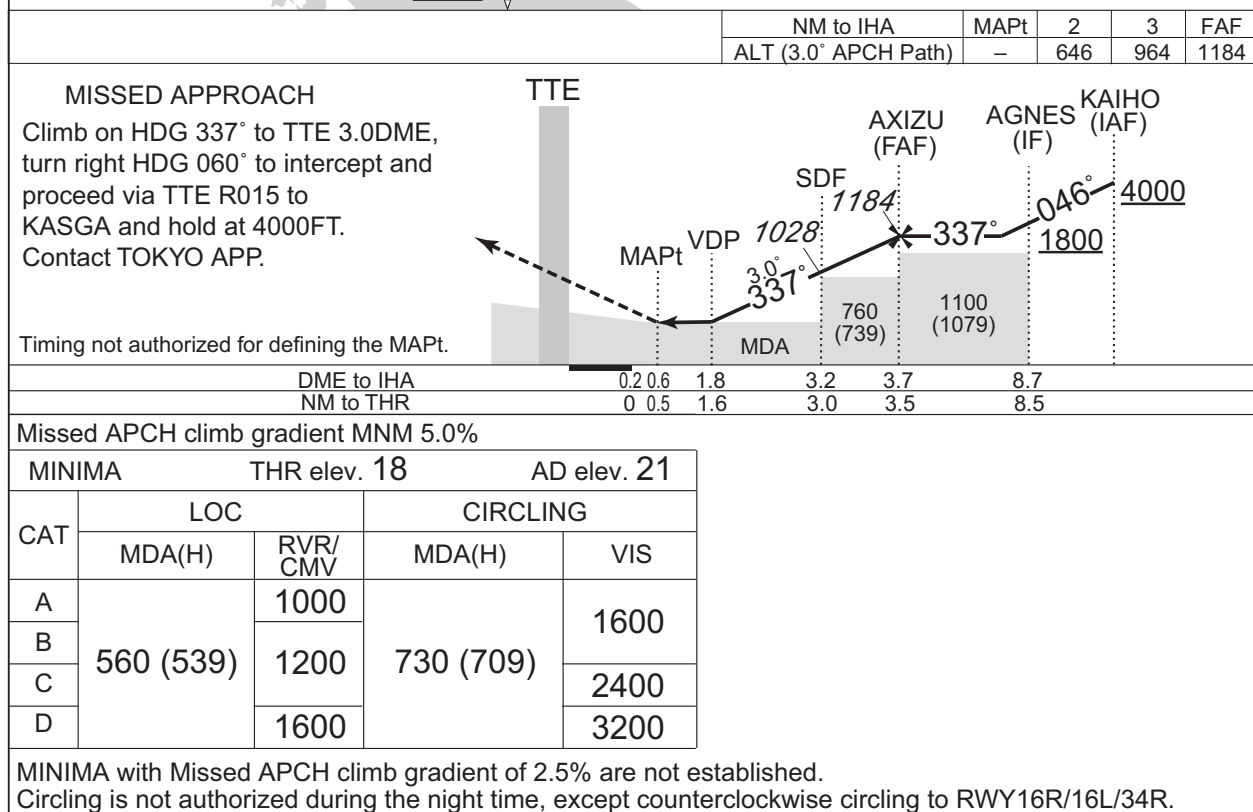


INSTRUMENT APPROACH CHART

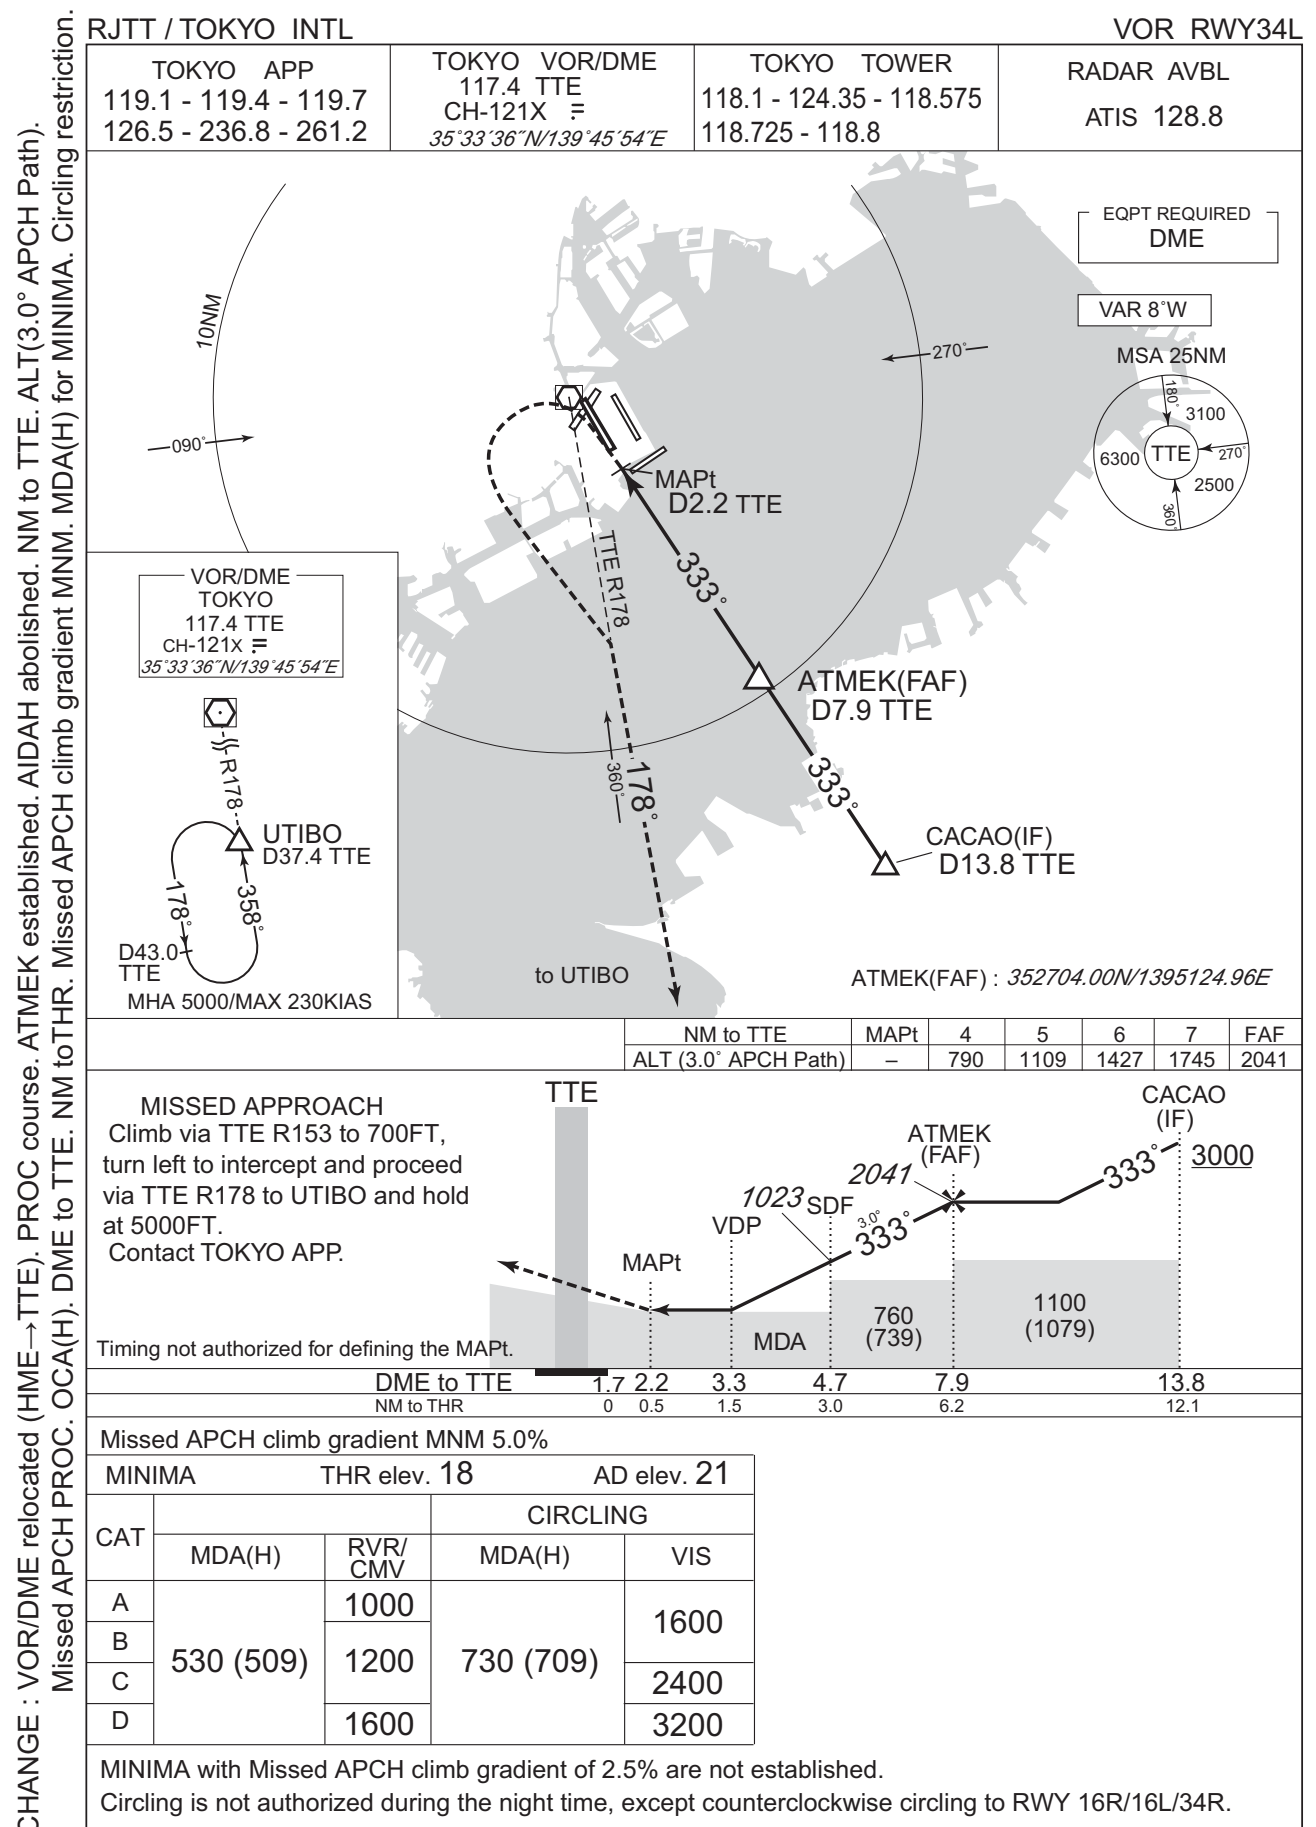

INSTRUMENT APPROACH CHART


RJTT / TOKYO INTL

GLS RWY34L

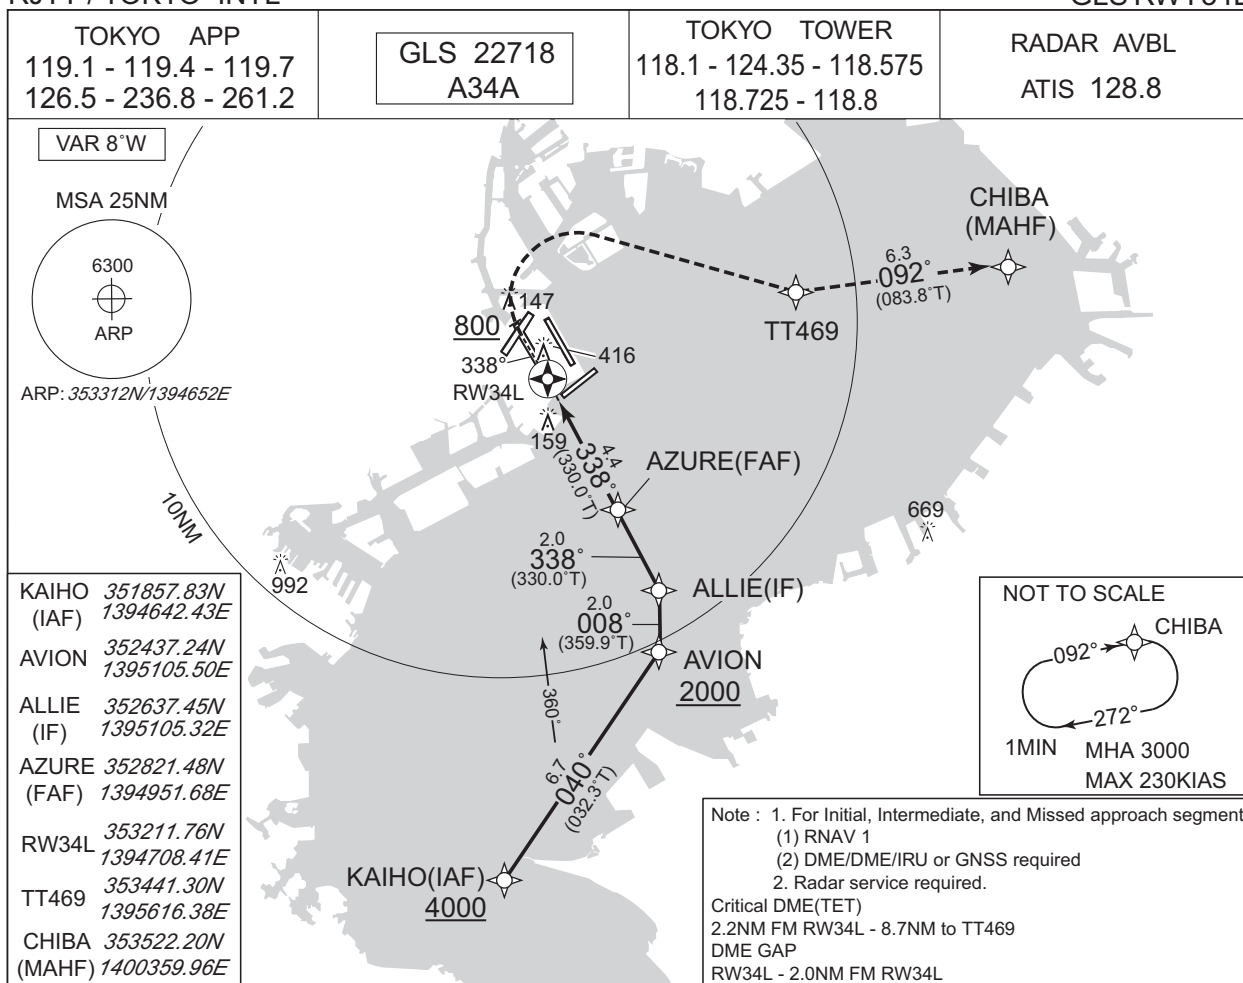

MISSED APPROACH

Climb on course 338°, at or above 800FT turn right direct to TT469, to CHIBA and hold at 3000FT. Contact TOKYO APP.

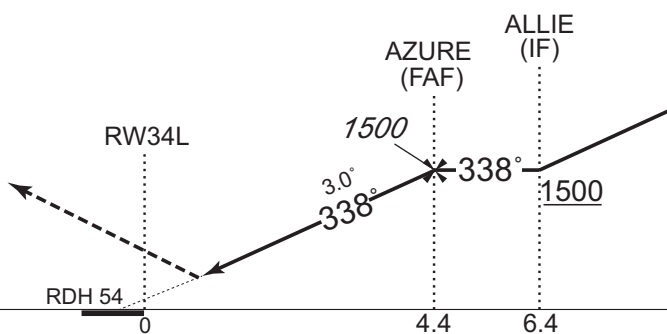

NM to THR

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 18	AD elev. 21	
CAT	GLS		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	VIS
A	218 (200)	550	730 (709)	1600
B				2400
C				3200
D				

MINIMA with Missed APCH climb gradient of 2.5% are not established.


Circling is not authorized during the night time, except counterclockwise circling to RWY16R/16L/34R.

CHANGE : Critical DME, DME GAP.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

ILS Z RWY34R (CAT II & III)

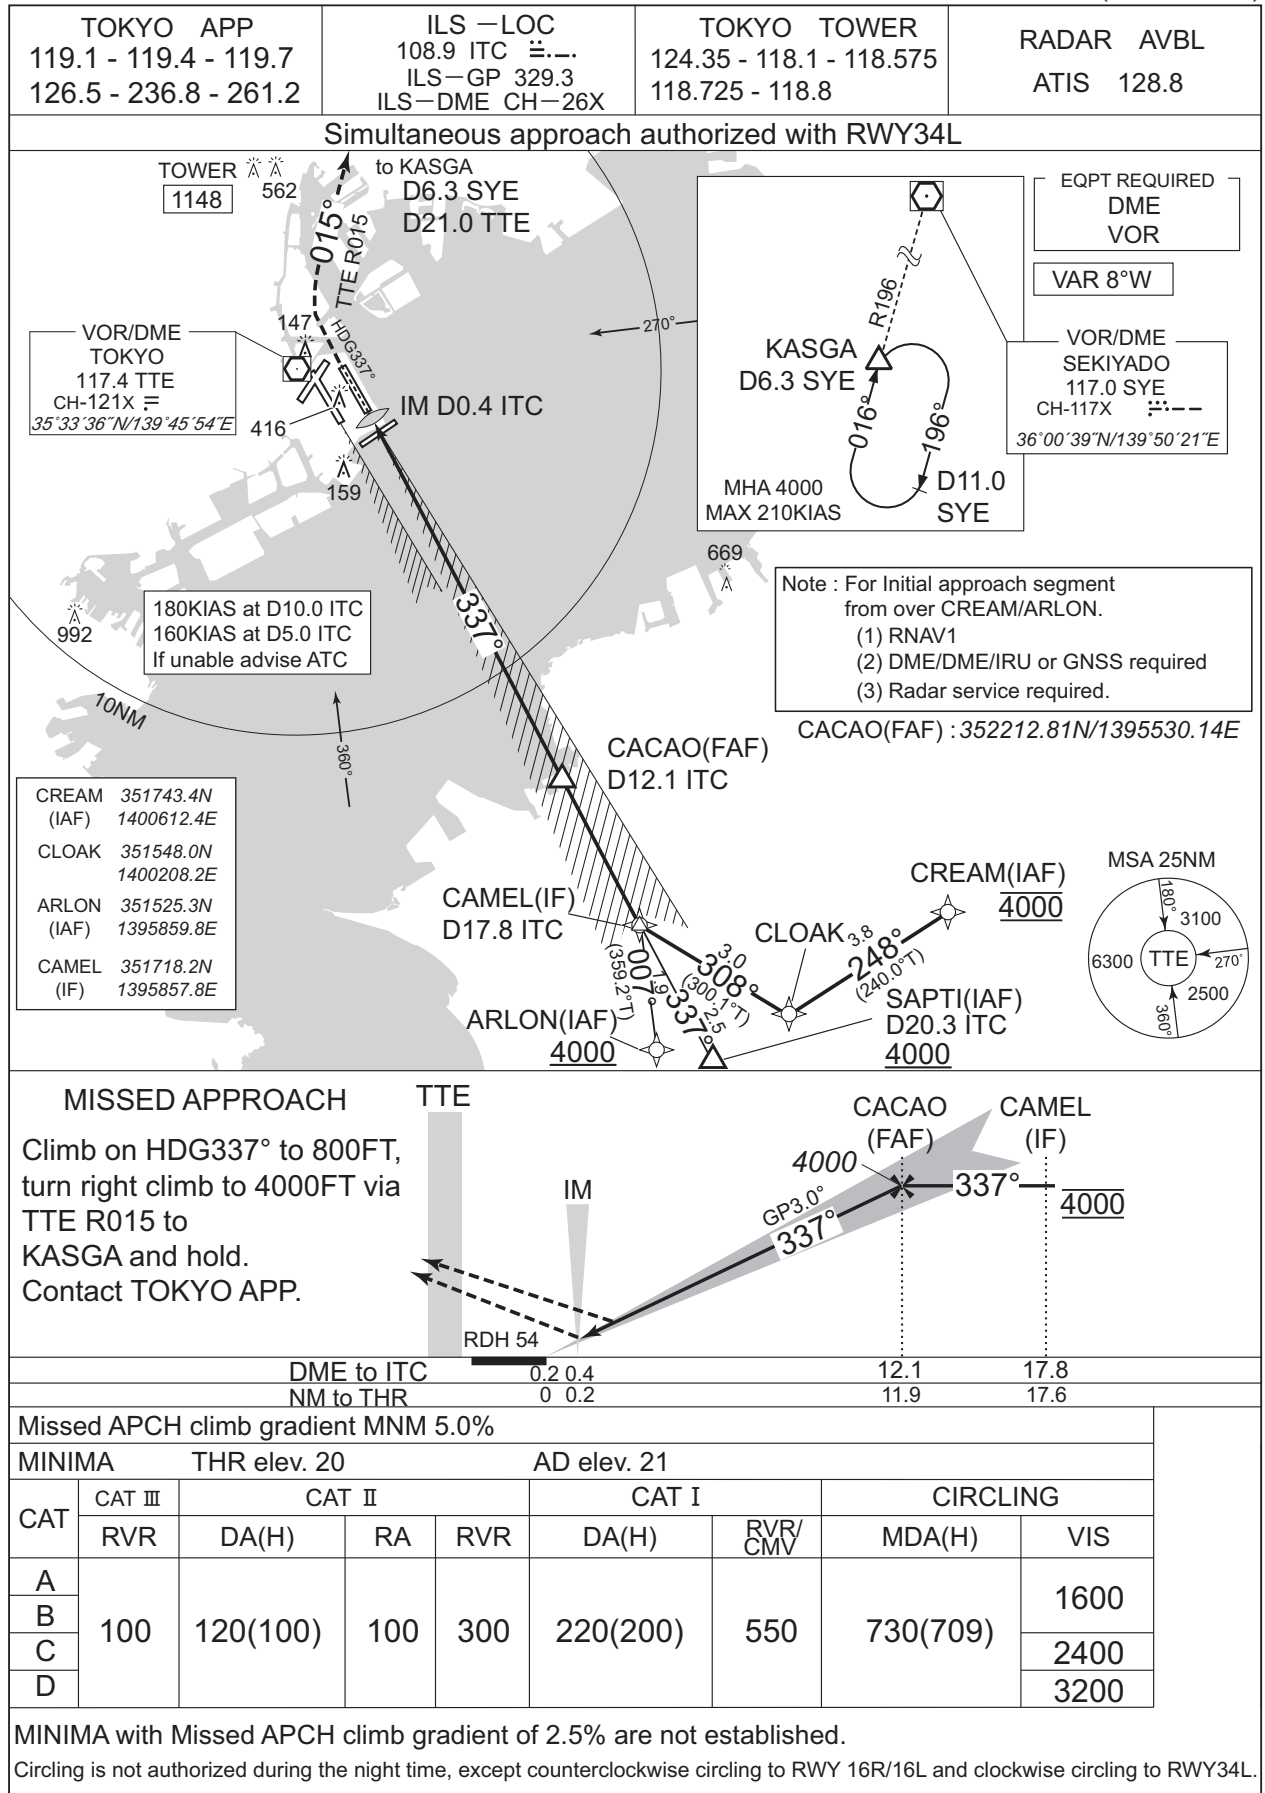

CHANGE : VOR/DME relocated (HME→TTE). SAPTI established. SINGO abolished.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LOC Z RWY34R

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS - LOC 108.9 ITC 3.0° ILS-DME CH-26X	TOKYO TOWER 124.35 - 118.1 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	---	--	--------------------------

CHANGE : VOR/DME relocated (HME→TTE). SAPTI established. SINGO abolished. Missed APCH climb gradient MNM.

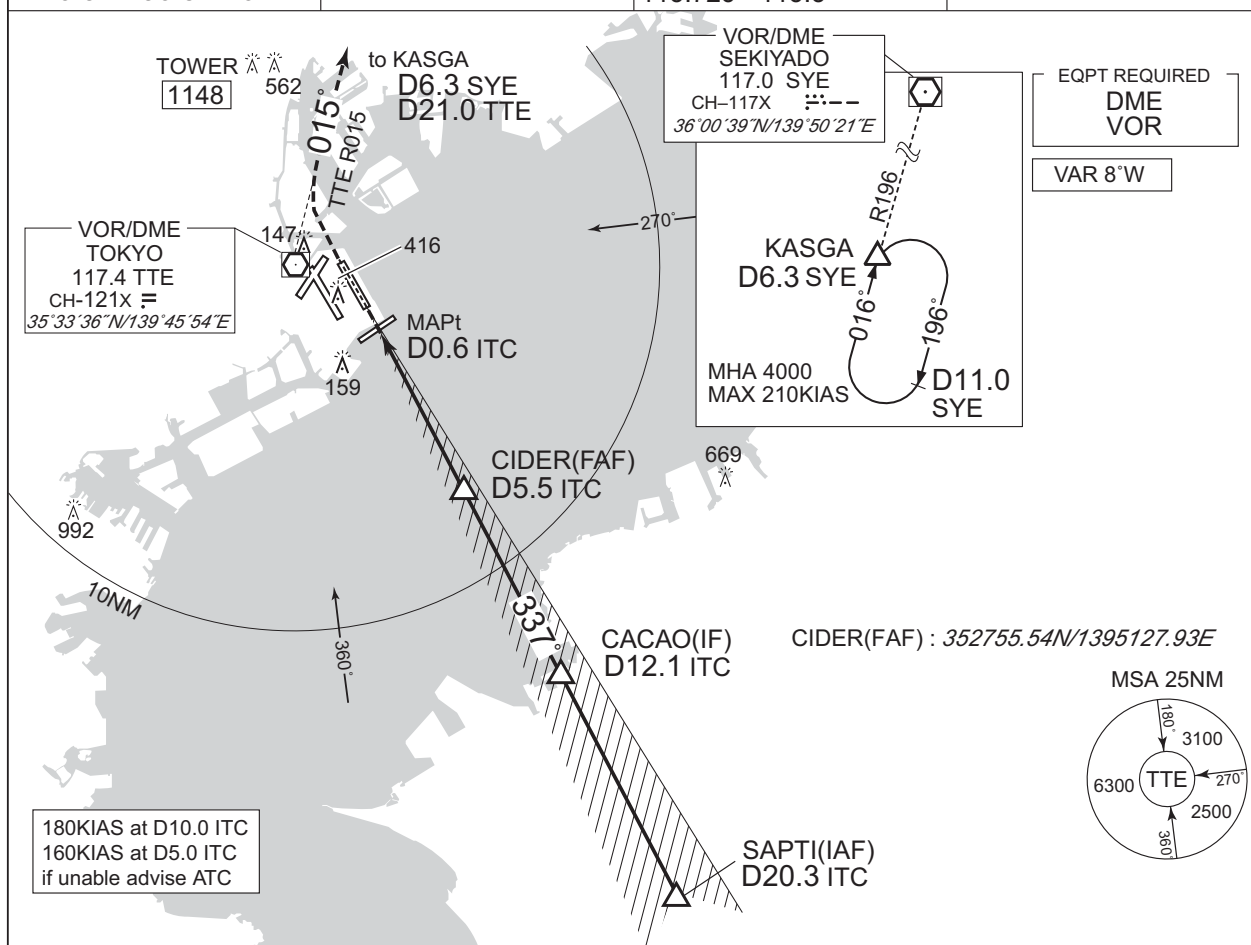


NM to ITC	MAPt	3	4	5	FAF
ALT (3.0° APCH Path)	—	970	1289	1607	1768

MISSED APPROACH

Turn right, climb to 4000FT via
TTE R015 to KASGA
and hold.
Contact TOKYO APP.

Timing not authorized for defining the MAPt.
No turn before MAPt.

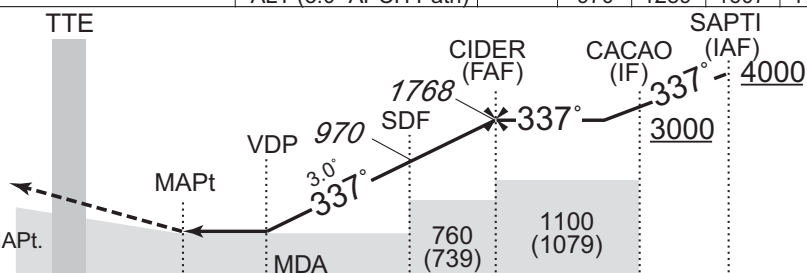

DME to ITC	0.2	0.6	2.1	3.0	5.5	12.1	20.3
NM to THR	0	0.5	1.9	2.8	5.3	11.9	20.1

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 20		AD elev. 21	
CAT	LOC		CIRCLING		
	MDA(H)	RVR/ CMV	MDA(H)	VIS	
A	700 (679)	1200	730 (709)	1600	
B		1400		2400	
C				3200	
D				1800	3200



MINIMA with Missed APCH climb gradient of 2.5% are not established.

Circling is not authorized during the night time, except counterclockwise circling to RWY 16R/16L and clockwise circling to RWY 34L.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

ILS Y RWY34R (CAT II & III)

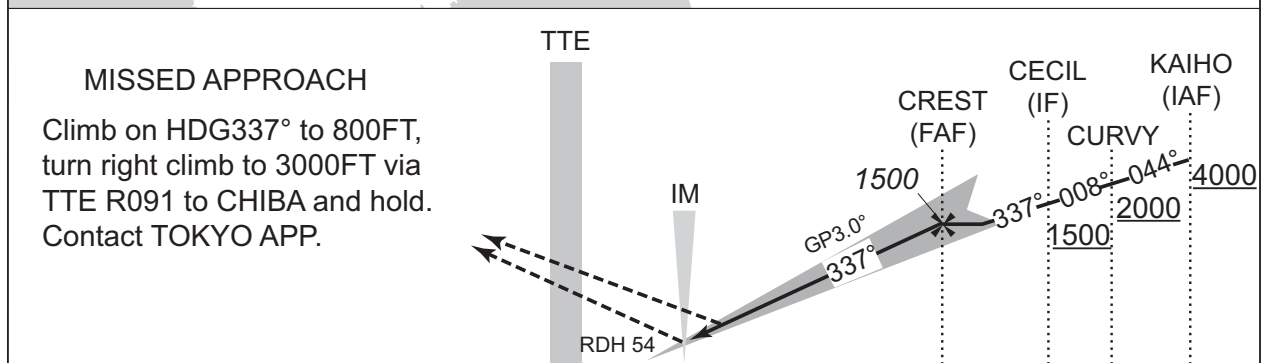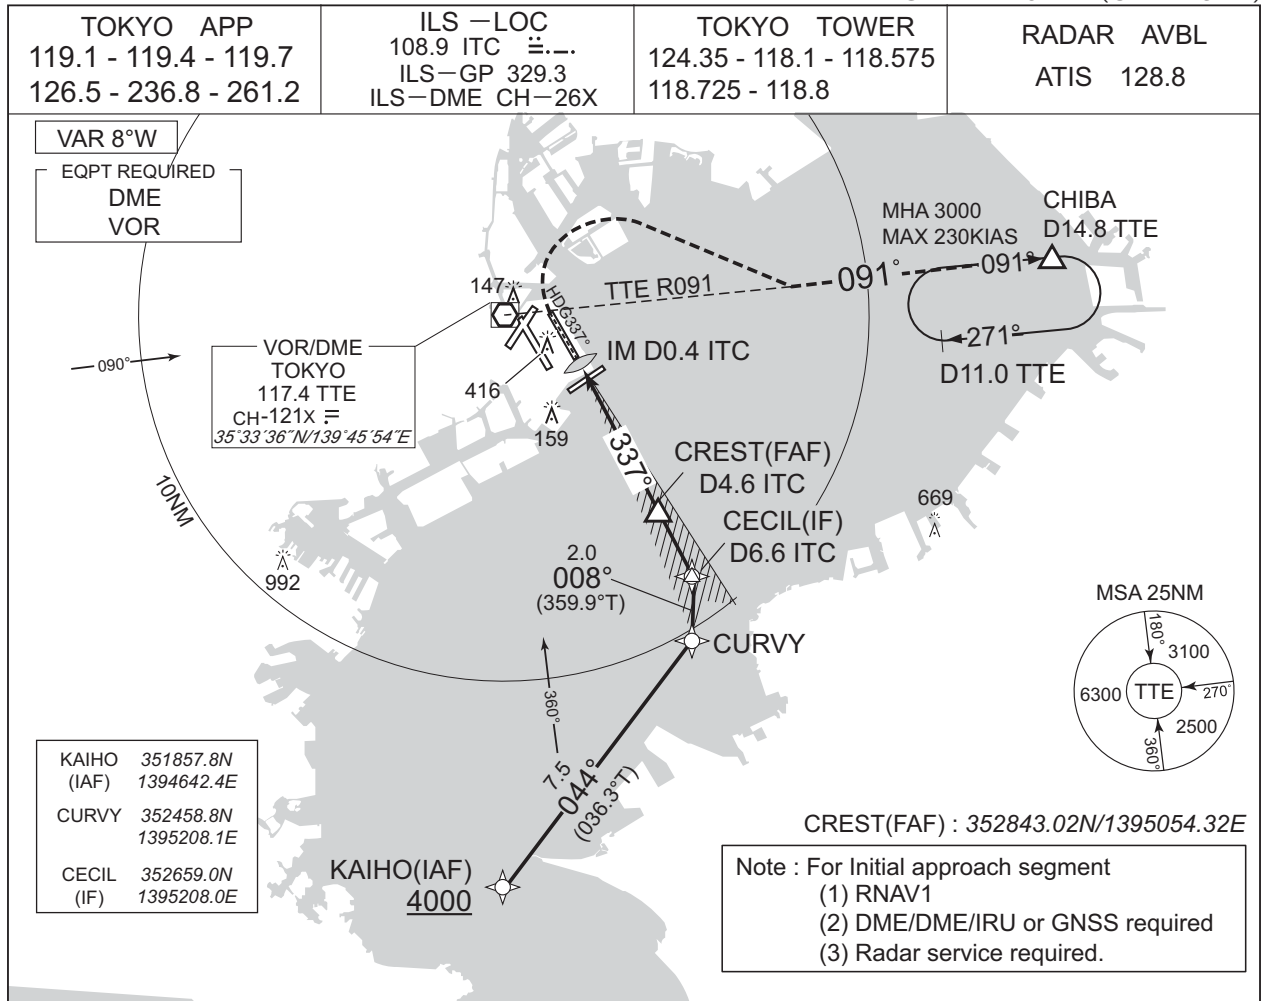

DME to ITC	0.2	0.4	4.6	6.6
NM to THR	0	0.2	4.4	6.4

Missed APCH climb gradient MNM 5.0%								
MINIMA		THR elev. 20		AD elev. 21				
CAT	CAT III	CAT II		CAT I		CIRCLING		
	RVR	DA(H)	RA	RVR	DA(H)	RVR/CMV	MDA(H)	VIS
A	100	120(100)	100	300	220(200)	550	730(709)	1600
B								2400
C								3200
D								

MINIMA with Missed APCH climb gradient of 2.5% are not established.


Circling is not authorized during the night time, except counterclockwise circling to RWY 16R/16L and clockwise circling to RWY34L.

CHANGE : VOR/DME relocated (HME → TTE).

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


LOC Y RWY34R

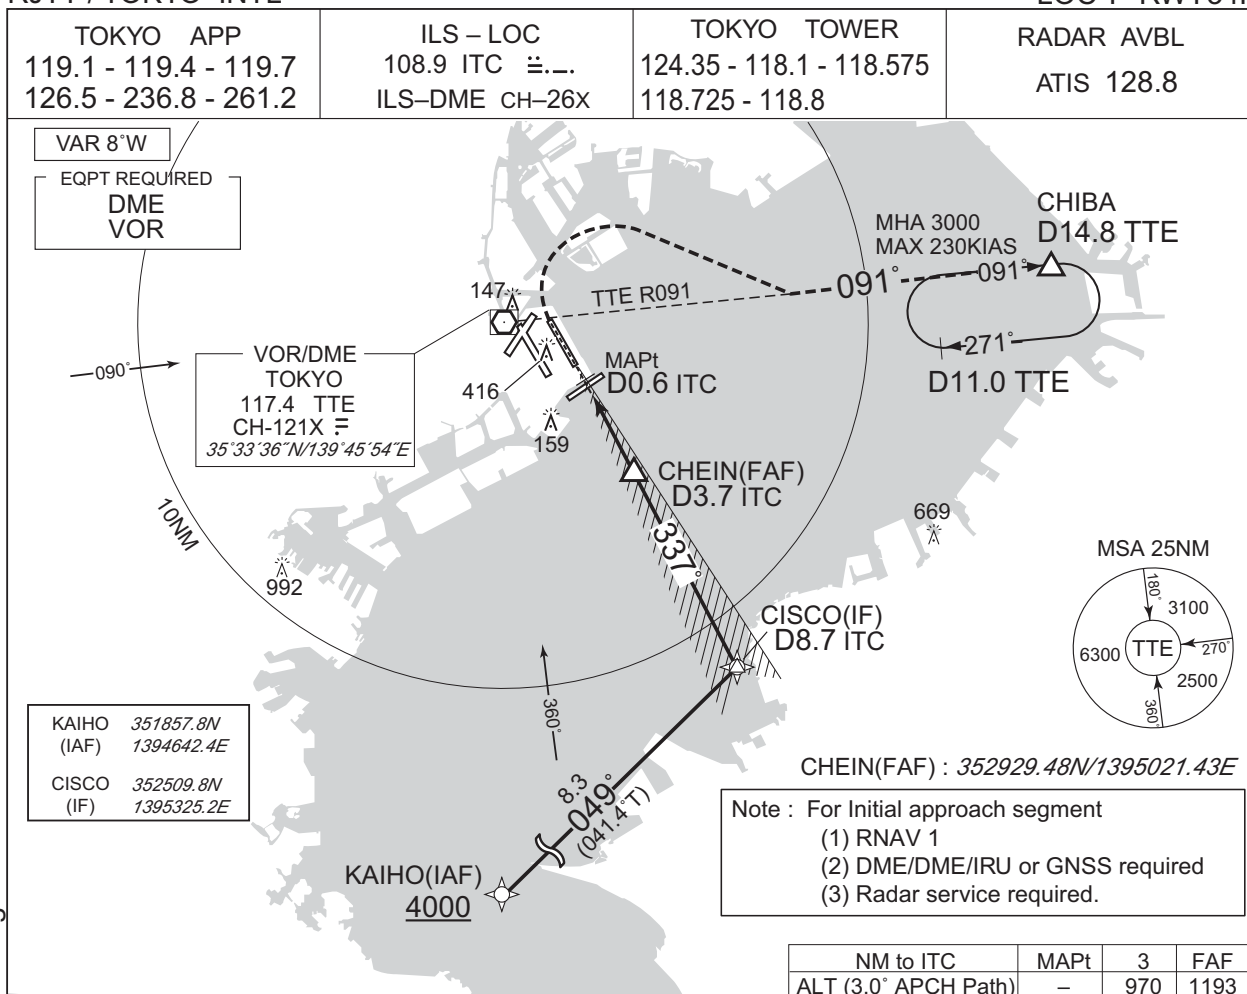

MISSED APPROACH

Turn right, climb to 3000FT via
TTE R091 to CHIBA and hold.
Contact TOKYO APP.

Timing not authorized for defining the MAPt.
No turn before MAPt.

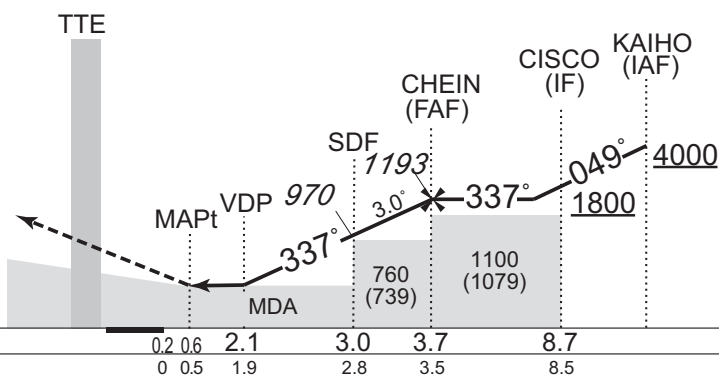

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 20	AD elev. 21	
CAT	LOC		CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	700 (679)	1200	730 (709)	1600
B				
C		1400		2400
D		1800		3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Circling is not authorized during the night time, except counterclockwise circling to RWY 16R/16L and clockwise circling to RWY 34L.

CHANGE : VOR/DME relocated (HME→TTE). Missed APCH climb gradient MNM.

RJTT / TOKYO INTL

GLS RWY34R

VAR 8°W

MSA 255NM

6300

ARP

ARP: 353312N/1394652E

10NM

**KAIHO 351857.83N
(IAF) 1394642.43E**

**CURVY 352458.76N
(IF) 1395208.10E**

**CECIL 352658.98N
(IF) 1395207.95E**

**CREST 352843.02N
(FAF) 1395054.32E**

**RW34R 353233.02N
(RW) 1394811.34E**

**TT469 353441.30N
(T) 1395616.38E**

**CHIBA 353522.20N
(MAHF) 1400359.96E**

KAIHO(IAF) 4000

CREST(FAF)

CECIL(IF)

CURVY 2000

RW34R

CHIBA (MAHF)

NOT TO SCALE

CHIBA

092°


272°

**1MIN MHA 3000
MAX 230KIAS**

**Note : 1. For Initial, Intermediate, and Missed approach segment
(1) RNAV 1
(2) DME/DME/IRU or GNSS required
2. Radar service required.**

**Critical DME(TET)
2.7NM FM RW34R - 8.3NM to TT469
DME GAP
RW34R - 2.2NM FM RW34R**

Climb on course 338°, at or above
800FT turn right direct to TT469,
to CHIBA and hold at 3000FT.
Contact TOKYO APP.

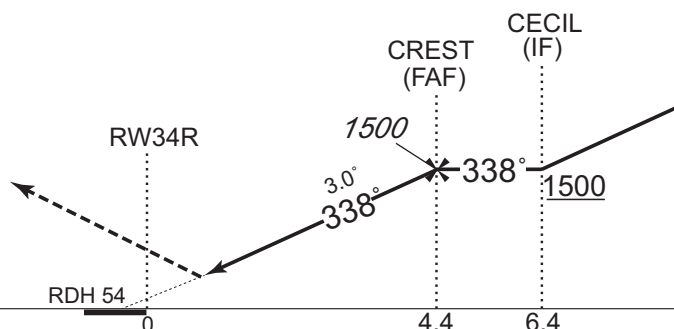

Missed APCH climb gradient MNM 5.0%

MINIMA					THR elev. 20		AD elev. 21	
CAT	GLS			CIRCLING				
	DA(H)		RVR/ CMV	MDA(H)		VIS		
A	220 (200)		550	730 (709)		1600		
B								
C								
D								
						2400		
						3200		

MINIMA with Missed APCH climb gradient of 2.5% are not established.


Circling is not authorized during the night time, except counterclockwise circling to RWY 16R/16L and clockwise circling to RWY34L.

CHANGE : Critical DME. DME GAP.

INSTRUMENT APPROACH CHART


RJTT / TOKYO INTL

ILS RWY22

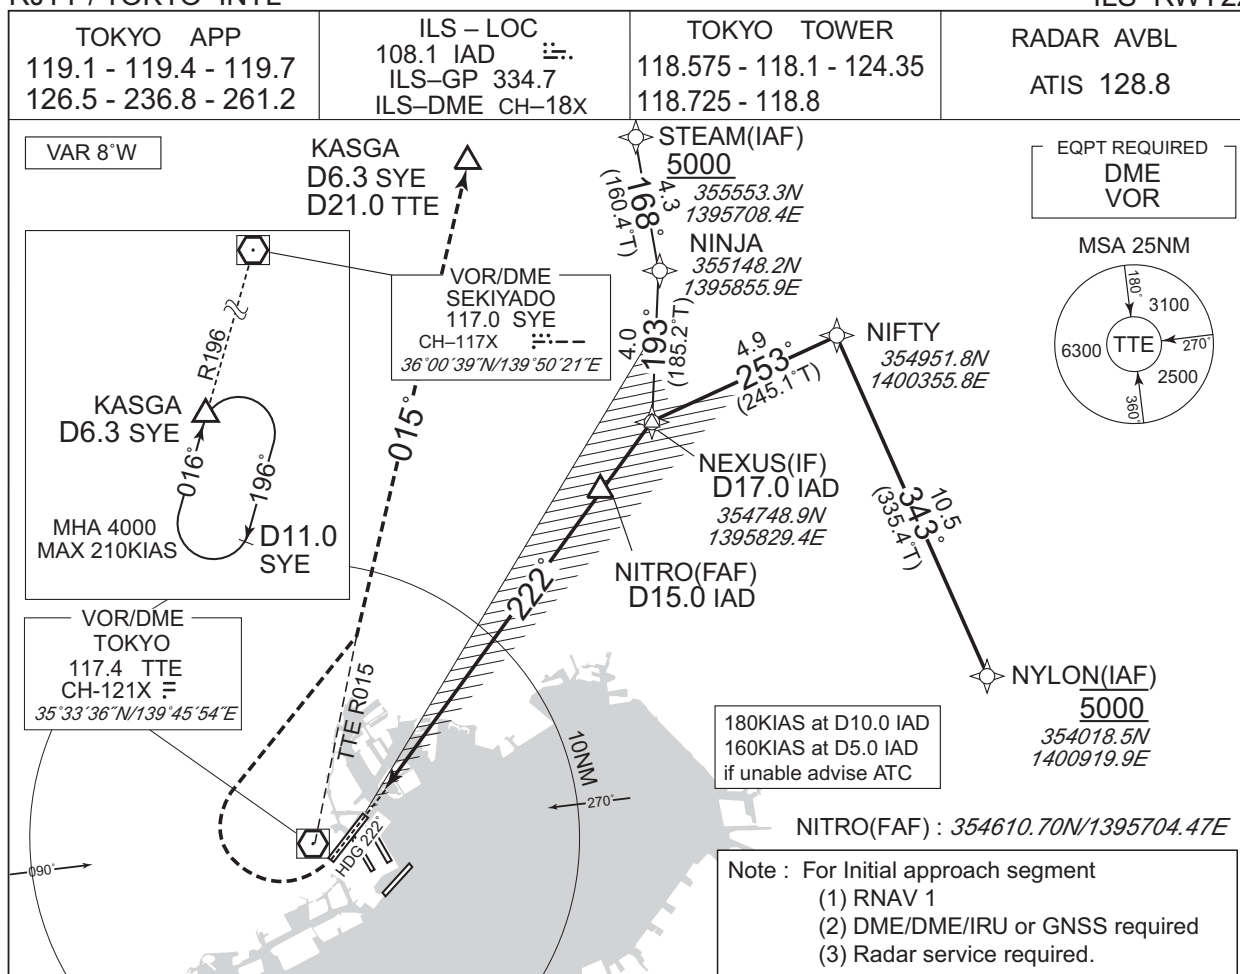

MISSED APPROACH

Climb on HDG222° to 500FT,
turn right climb to 4000FT via
TTE R015 to KASGA and hold.
Contact TOKYO APP.

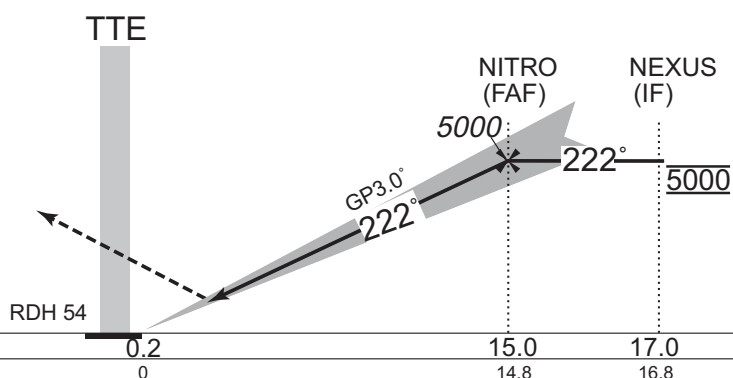


Missed APCH climb gradient MNM 6.0% due to airspace restrictions.

MINIMA		THR elev. 35	AD elev. 21	
CAT	CAT I		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	VIS
A	235 (200)	550	730 (709)	1600
B				2400
C				
D				

MINIMA with Missed APCH climb gradient below 6.0% are not established.
 Circling is not authorized during the night time, except counterclockwise circling to RWY16R/16L and clockwise circling to RWY23, RWY34R/34L.


INSTRUMENT APPROACH CHART

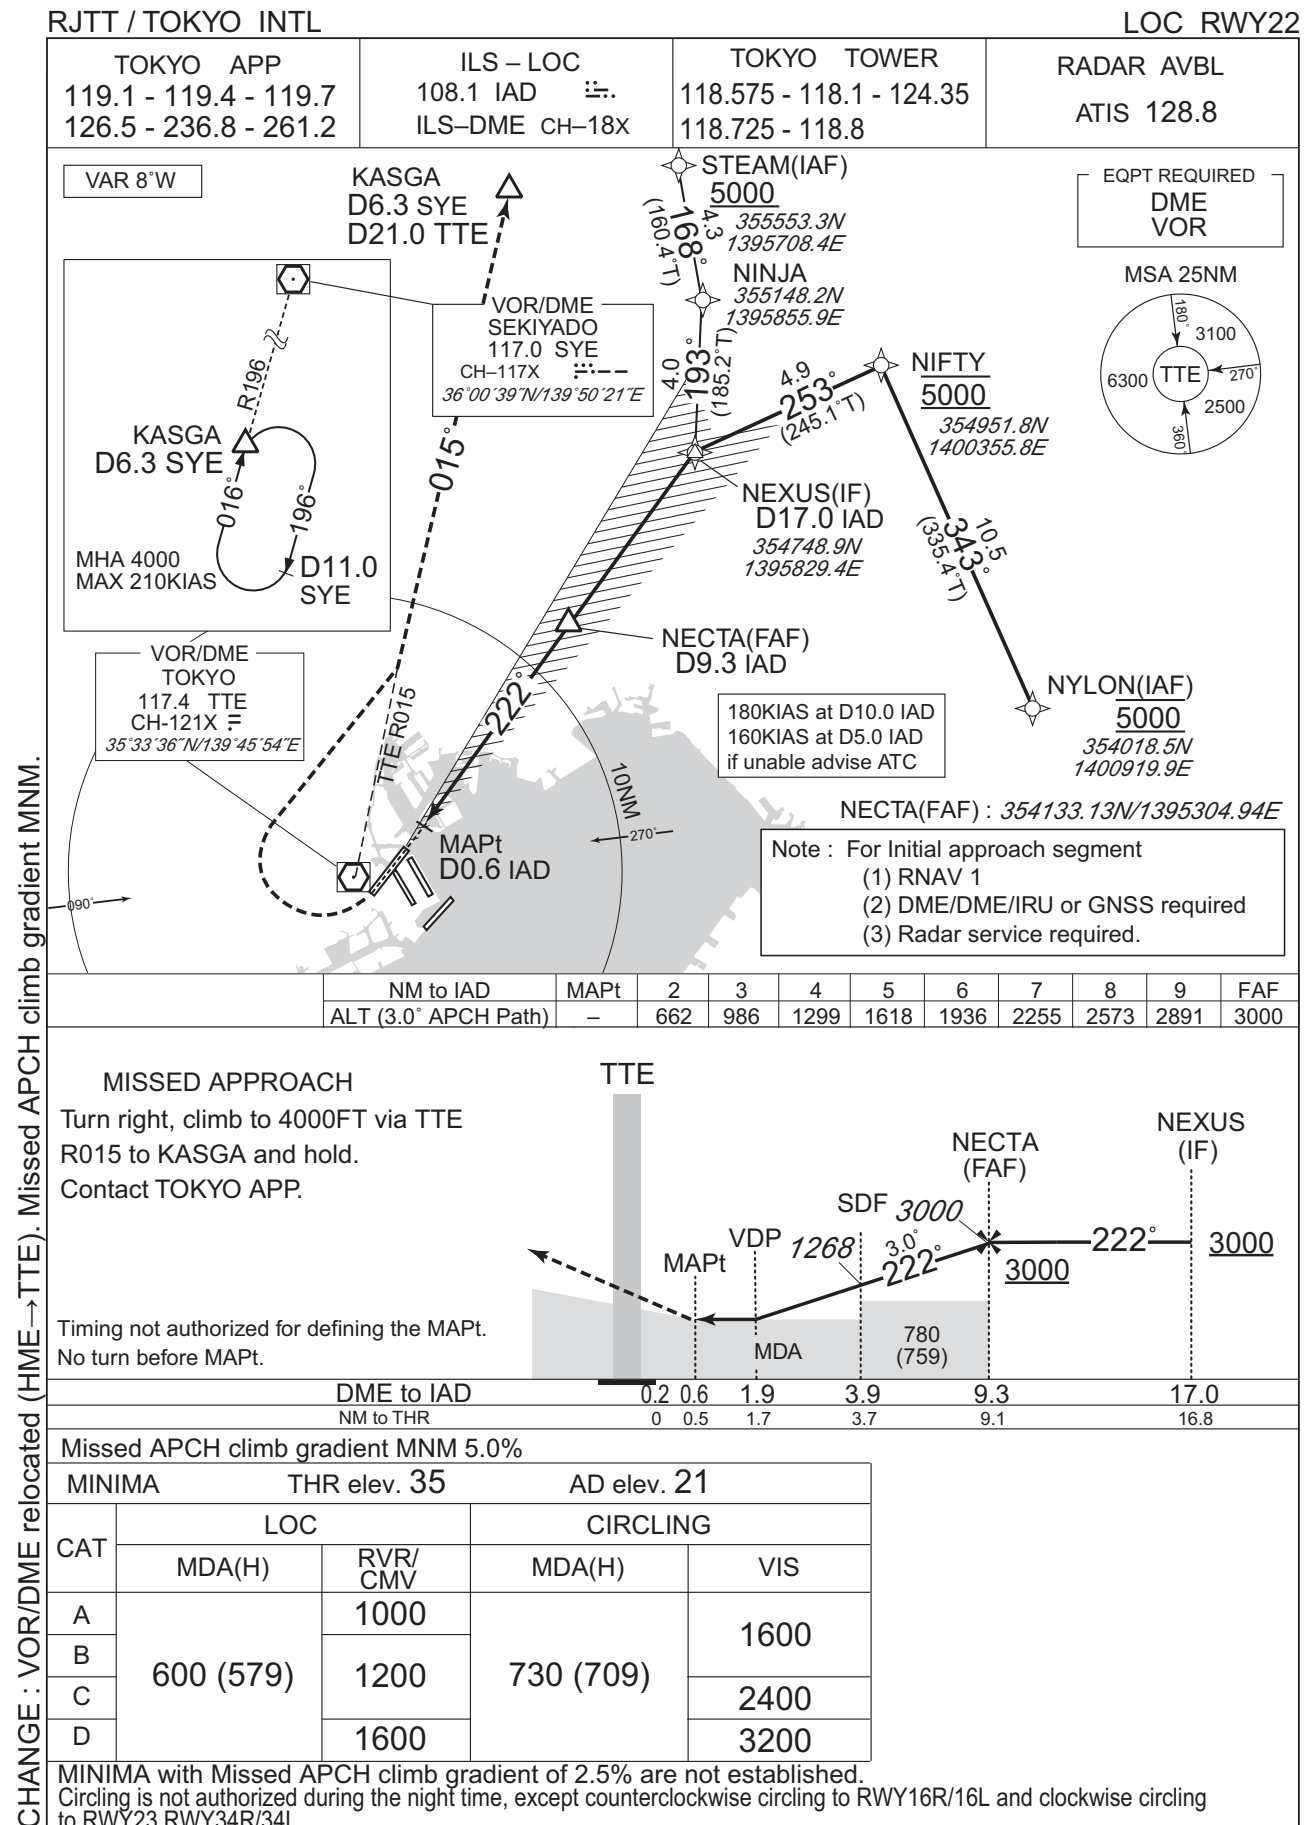

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL


LDA Z RWY22

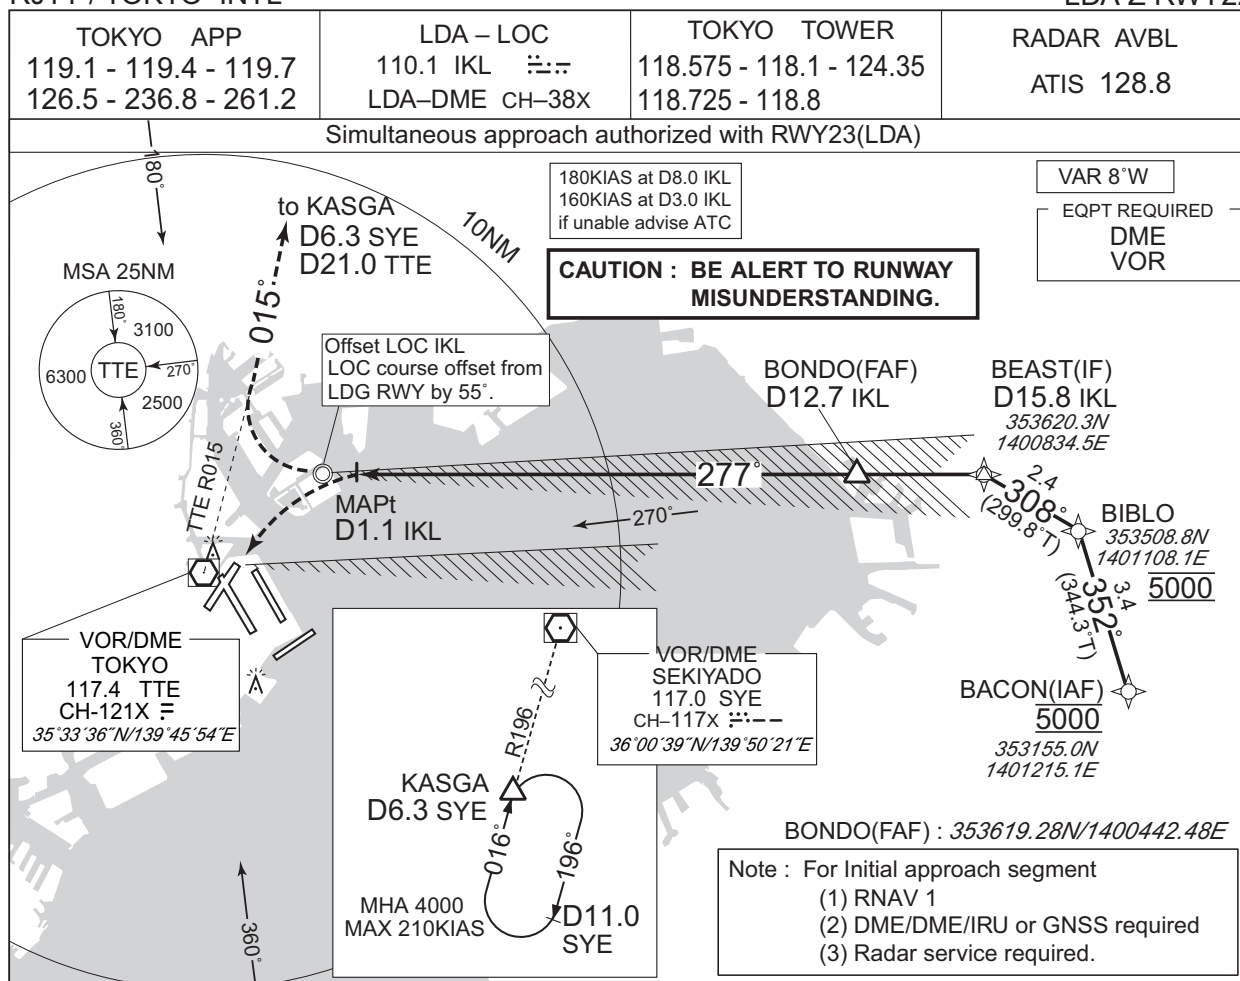

MISSED APPROACH

At MAPt, turn right climb to 4000FT via
TTE R015 to KASGA and hold.
Contact TOKYO APP.

Timing not authorized for defining the MAPt.

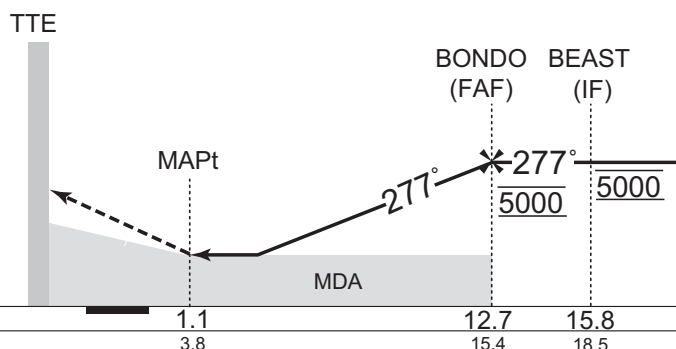

Missed APCH climb gradient MNM 4.0%

MINIMA	THR elev. 35	AD elev. 21
CAT	MDA(H)	VIS
A	1000 (979)	6000
B		
C		
D		

**Do Not turn left
until D1.1 IKL**

**SO AS NOT TO MISUNDERSTAND
THE RUNWAY**

MINIMA with Missed APCH climb gradient of 2.5% are not established.
MINIMA APPLICATION CRITERIA in AD1.1.6.10.1.4 are not applicable.

CHANGE : VOR/DME relocated (HME→TTE).

INSTRUMENT APPROACH CHART


RJTT / TOKYO INTL

LDA Z RWY22

Visual Prescribed Track for LDA Z RWY22

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.
Note : Remain on the LDA until passing MAPt so as not to penetrate the NTZ, and to avoid the RWY23 traffic.

CHANGE : VOR/DME relocated (HME→TTE). WIND POWER PLANT abolished.

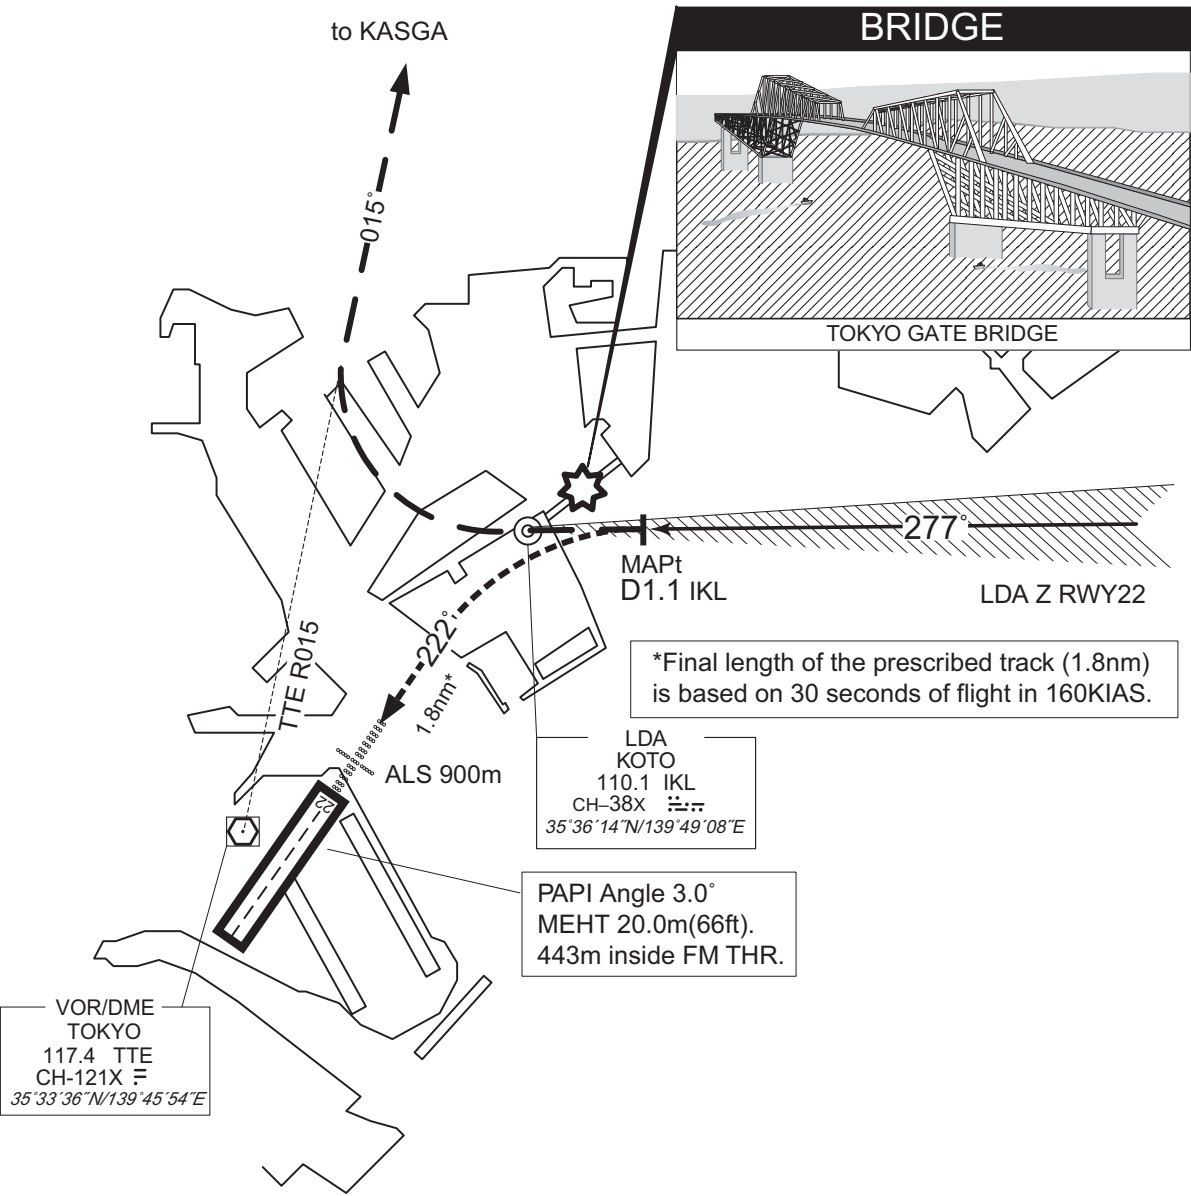


In case of GO AROUND, pilot should report ATC as soon as practicable.
Until receiving ATC instructions, aircraft turn right for joining TTE R015 and missed approach procedure.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA Y RWY22

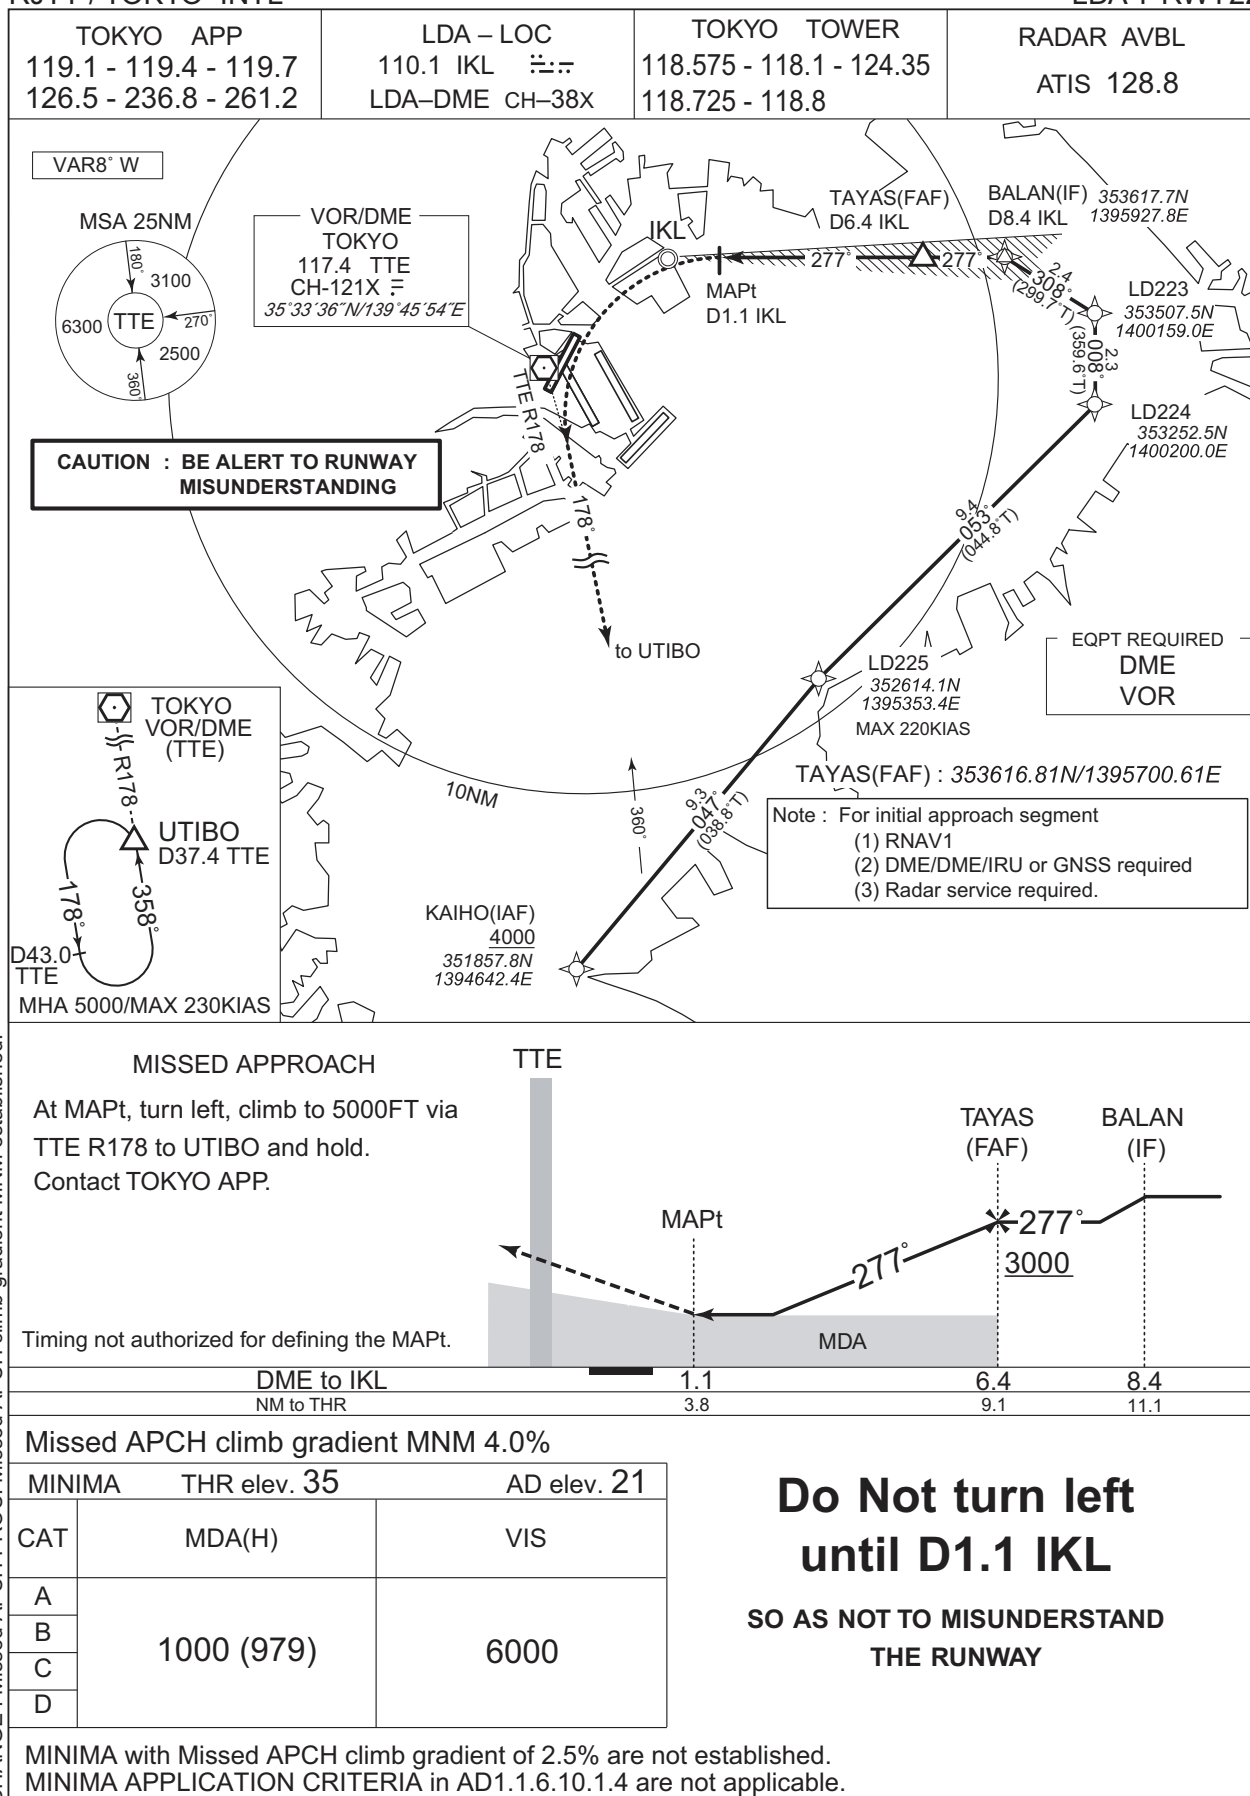
 VOR/DME relocated (HME→TTE). PROC course. MHA at UTIBO. Critical DME abolished.
 CHANGE : Missed APCH PROC. Missed APCH climb gradient MNM established.

INSTRUMENT APPROACH CHART


RJTT / TOKYO INTL

LDA Y RWY22

Visual Prescribed Track for LDA Y RWY22

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.
Note : Remain on the LDA until passing MAPt so as not to penetrate the NTZ, and to avoid the RWY23 traffic.

CHANGE : VOR/DME relocated (HME→TTE). WIND POWER PLANT abolished. PROC course.

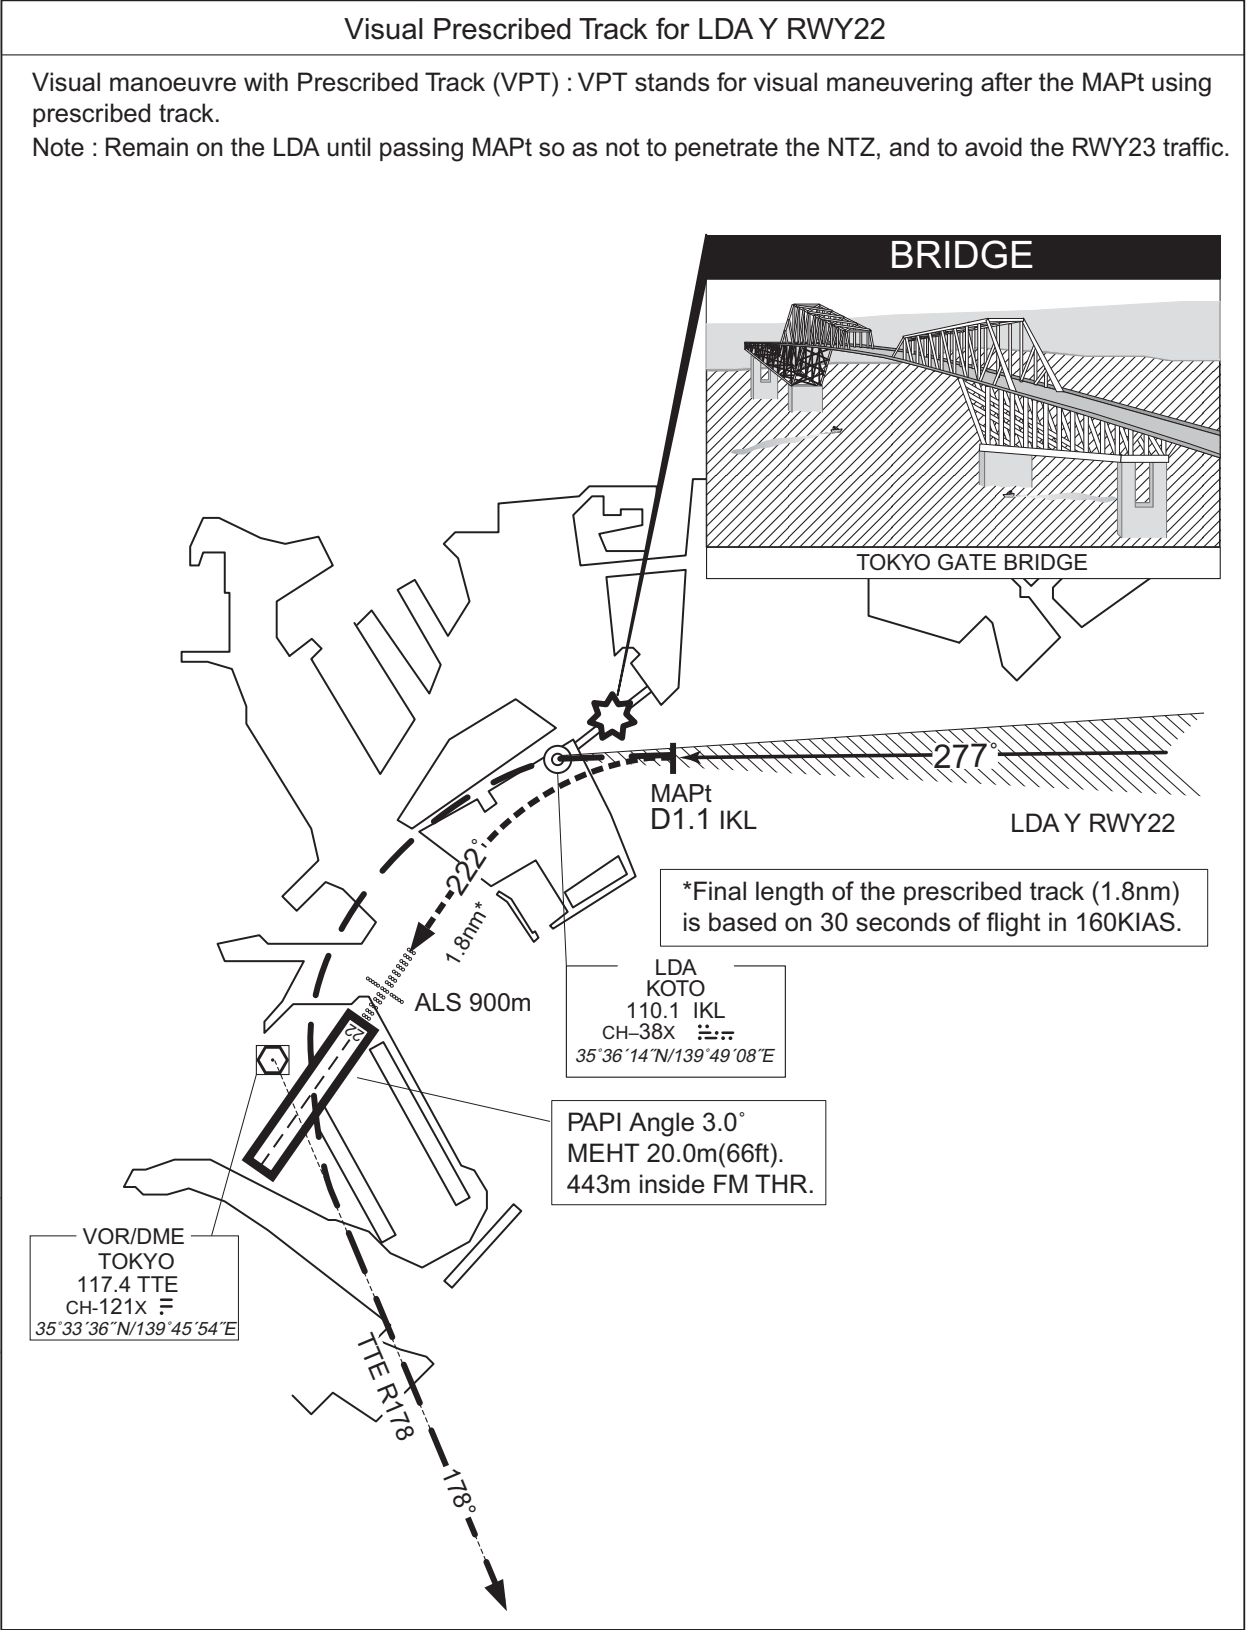


In case of GO AROUND, pilot should report ATC as soon as practicable.
Until receiving ATC instructions, aircraft turn left for joining TTE R178 and missed approach procedure.

RJTT / TOKYO INTL

LDA X RWY22


TOKYO APP	LDA – LOC	TOKYO TOWER	RADAR AVBL
119.1 - 119.4 - 119.7	110.1 IKL 三三	118.575 - 118.1 - 124.35	ATIS 128.8
126.5 - 236.8 - 261.2	LDA-DME CH-38X	118.725 - 118.8	

Simultaneous approach authorized with RWY23(LDA)

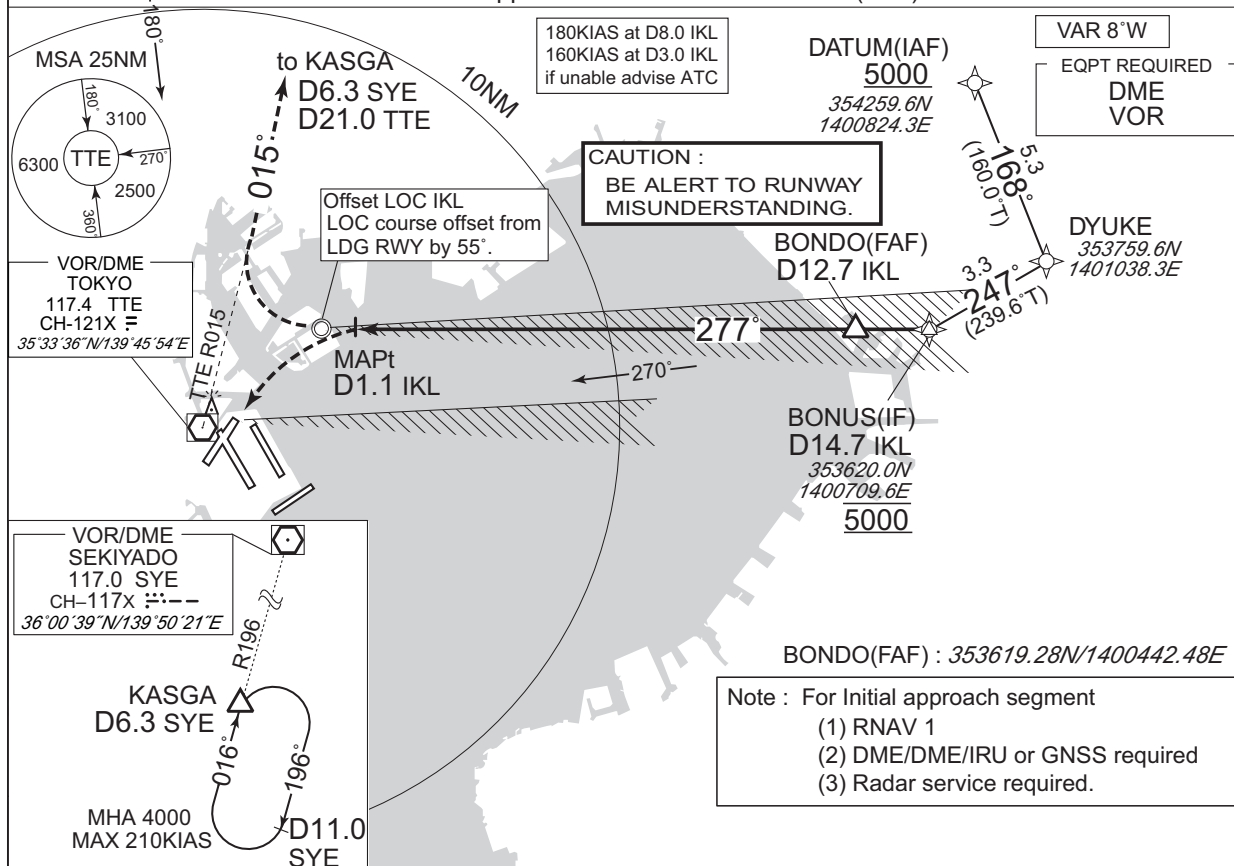

At MAPt, turn right climb to 4000FT via
TTE R015 to KASGA and hold.
Contact TOKYO APP

Timing not authorized for defining the MAPt.

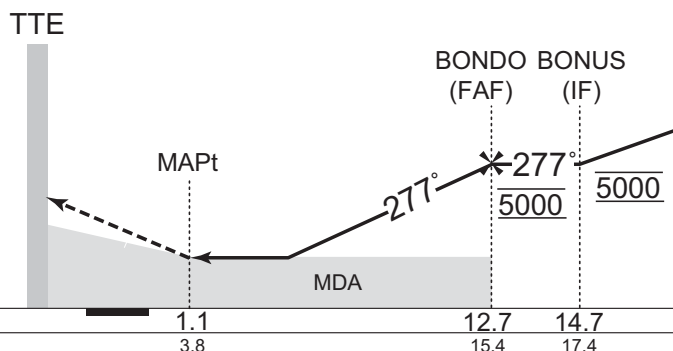

Missed APCH climb gradient MNM 4.0%

MINIMA	THR elev. 35	AD elev. 21
CAT	MDA(H)	VIS
A	1000 (979)	6000
B		
C		
D		

MINIMA with Missed APCH climb gradient of 2.5% are not established.
MINIMA APPLICATION CRITERIA in AD1.6.10.1.4 are not applicable

**Do Not turn left
until D1.1 IKL**

SO AS NOT TO MISUNDERSTAND THE RUNWAY

INSTRUMENT APPROACH CHART


RJTT / TOKYO INTL

LDA X RWY22

Visual Prescribed Track for LDA X RWY22

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.
Note : Remain on the LDA until passing MAPt so as not to penetrate the NTZ, and to avoid the RWY23 traffic.

CHANGE : VOR/DME relocated (HME→TTE). WIND POWER PLANT abolished.

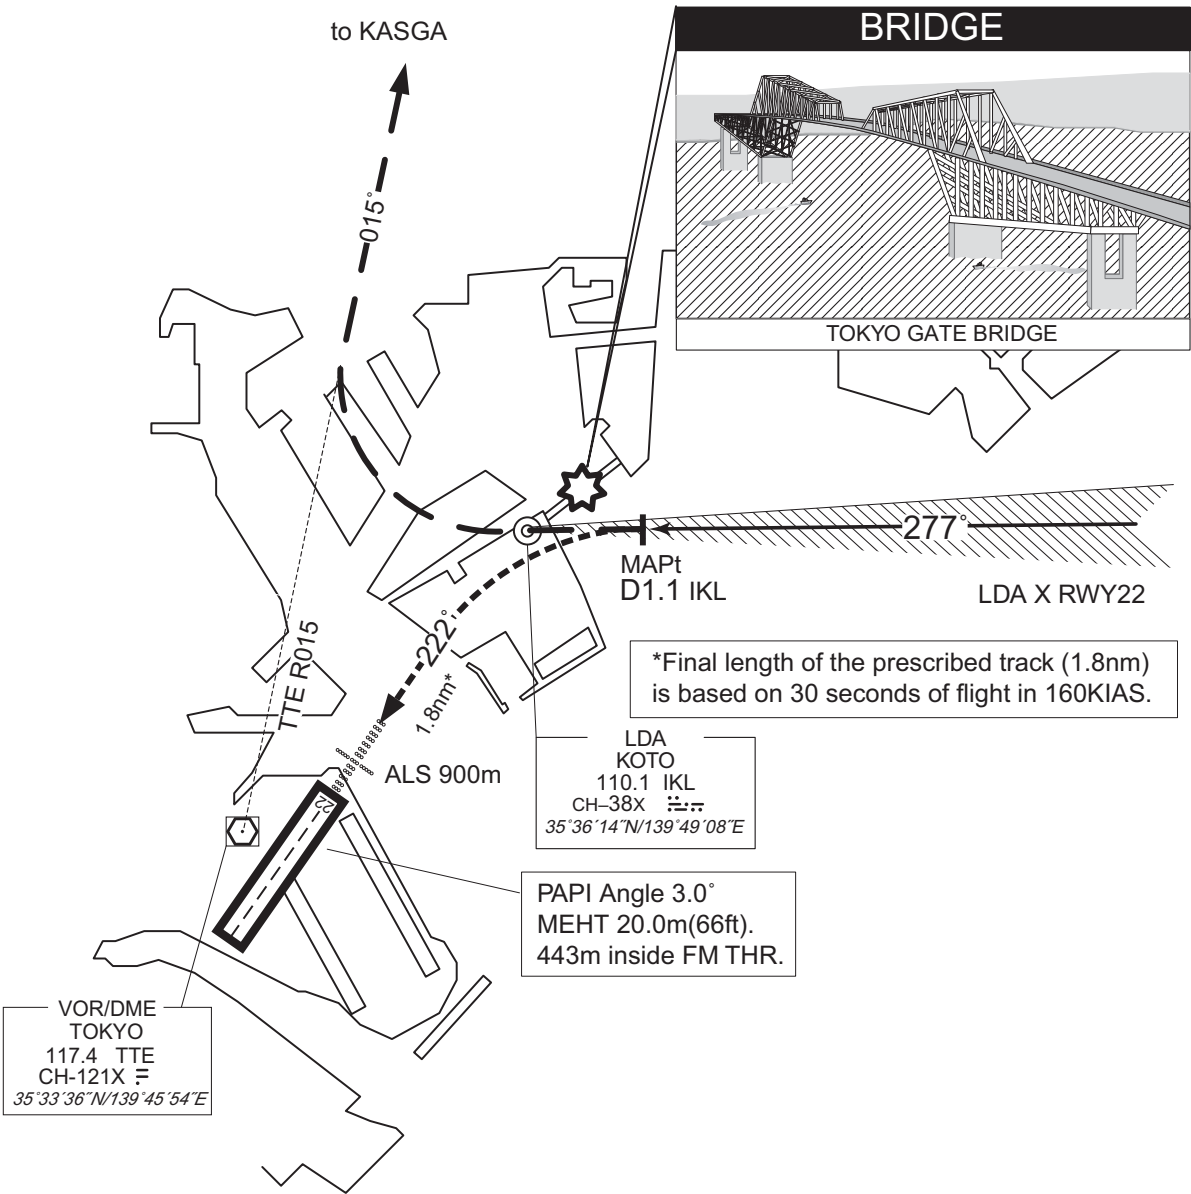


In case of GO AROUND, pilot should report ATC as soon as practicable.
Until receiving ATC instructions, aircraft turn right for joining TTE R015 and missed approach procedure.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA W RWY22

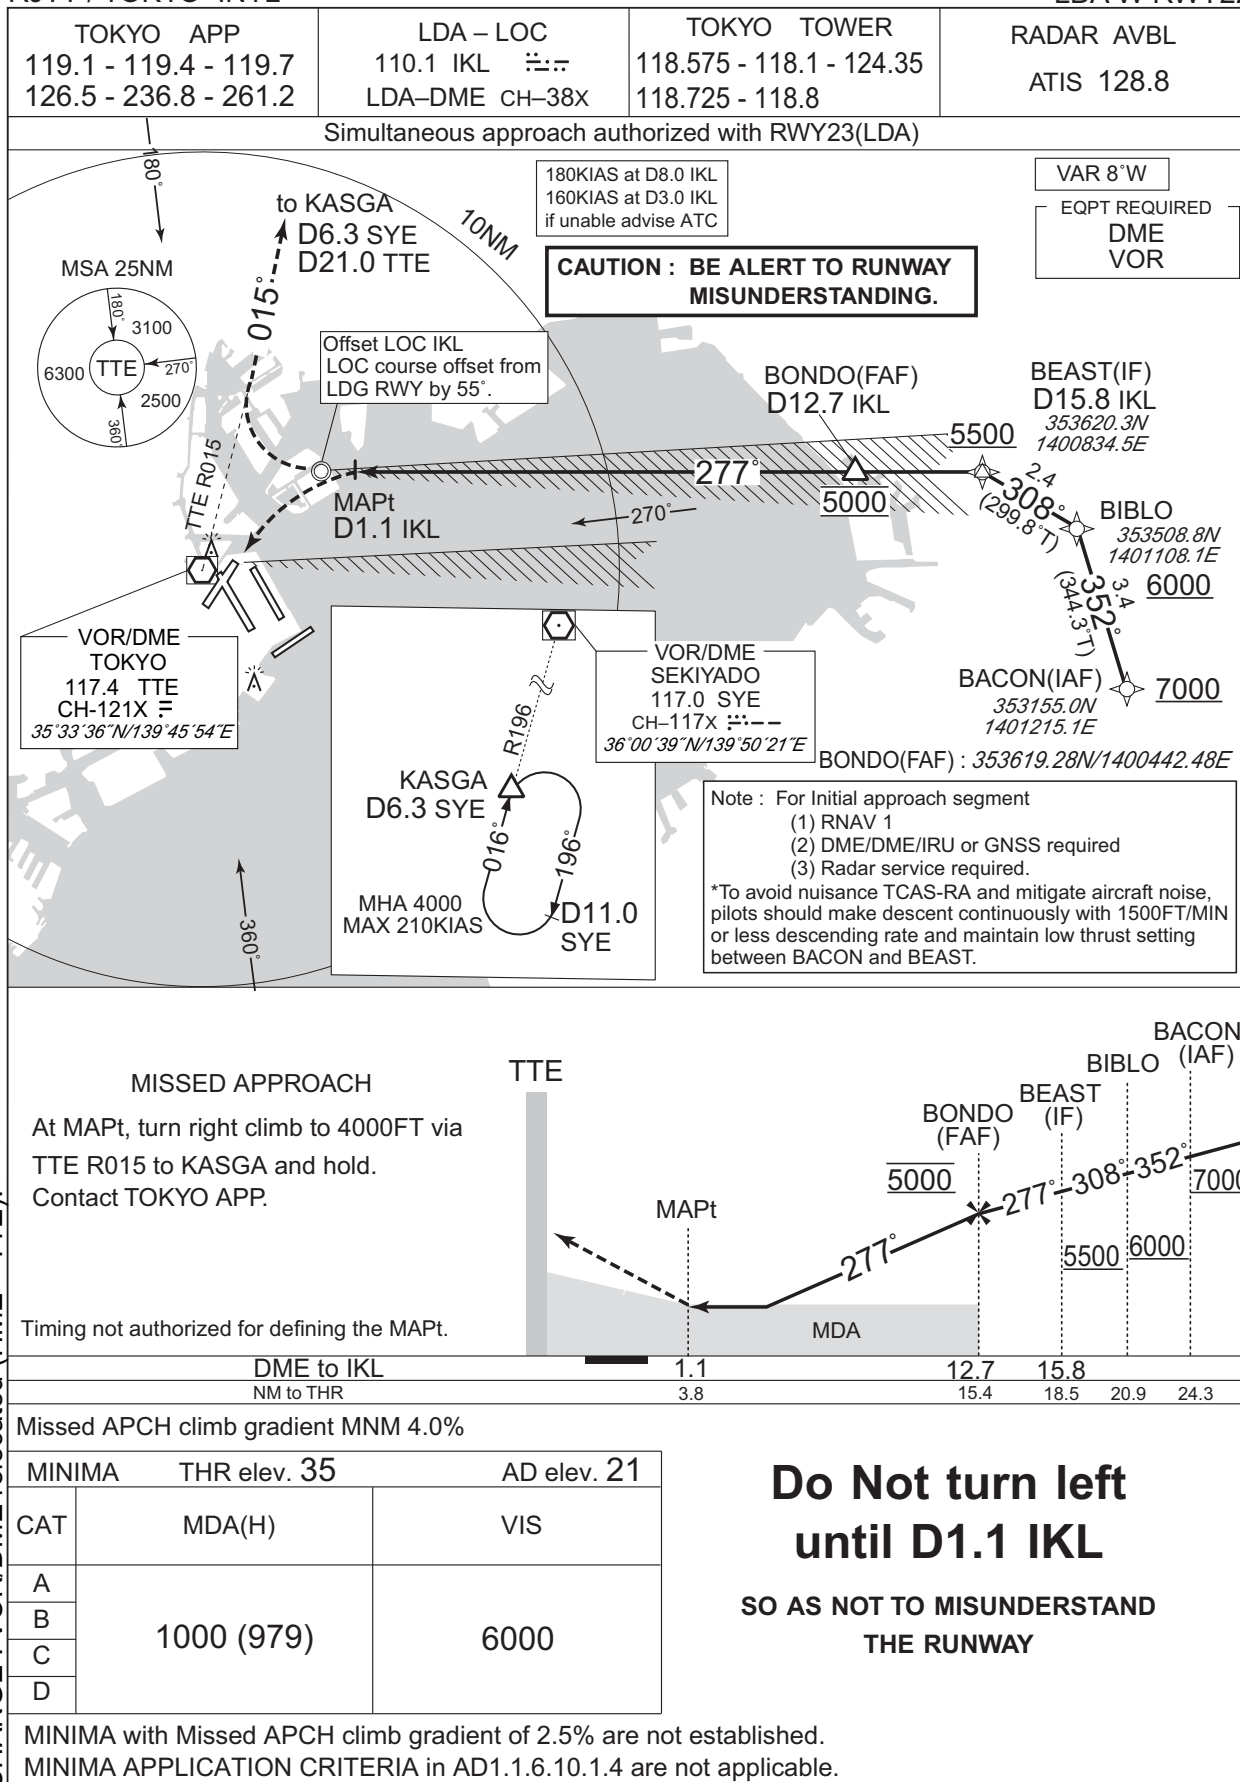

CHANGE : VOR/DME relocated (HME→TTE).

INSTRUMENT APPROACH CHART


RJTT / TOKYO INTL

LDA W RWY22

Visual Prescribed Track for LDA W RWY22

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.
Note : Remain on the LDA until passing MAPt so as not to penetrate the NTZ, and to avoid the RWY23 traffic.

CHANGE : VOR/DME relocated (HME→TTE). WIND POWER PLANT abolished.

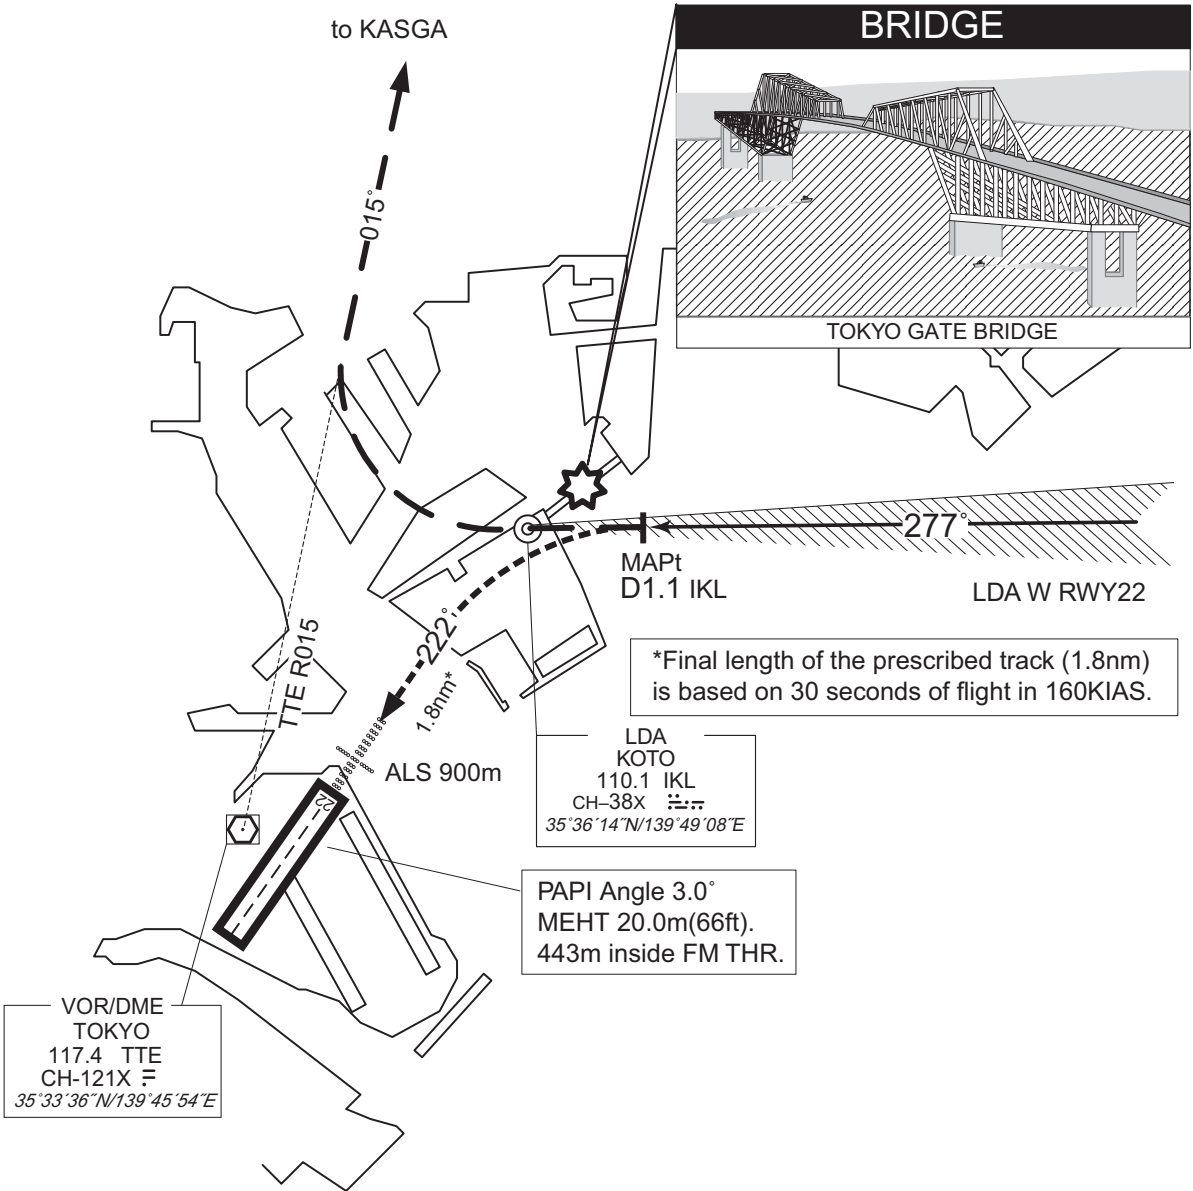

In case of GO AROUND, pilot should report ATC as soon as practicable.
Until receiving ATC instructions, aircraft turn right for joining TTE R015 and missed approach procedure.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

ILS Z RWY23


TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS - LOC 110.5 ITD 3.. ILS-GP 329.6 ILS-DME CH-42X	TOKYO TOWER 124.35 - 118.1 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------

VAR 8°W

EQPT REQUIRED
DME
VOR

Note : For Initial approach segment
(1) RNAV 1
(2) DME/DME/IRU or GNSS required.
(3) Radar service required.


180KIAS at D10.0 ITD
160KIAS at D5.0 ITD
if unable advise ATC

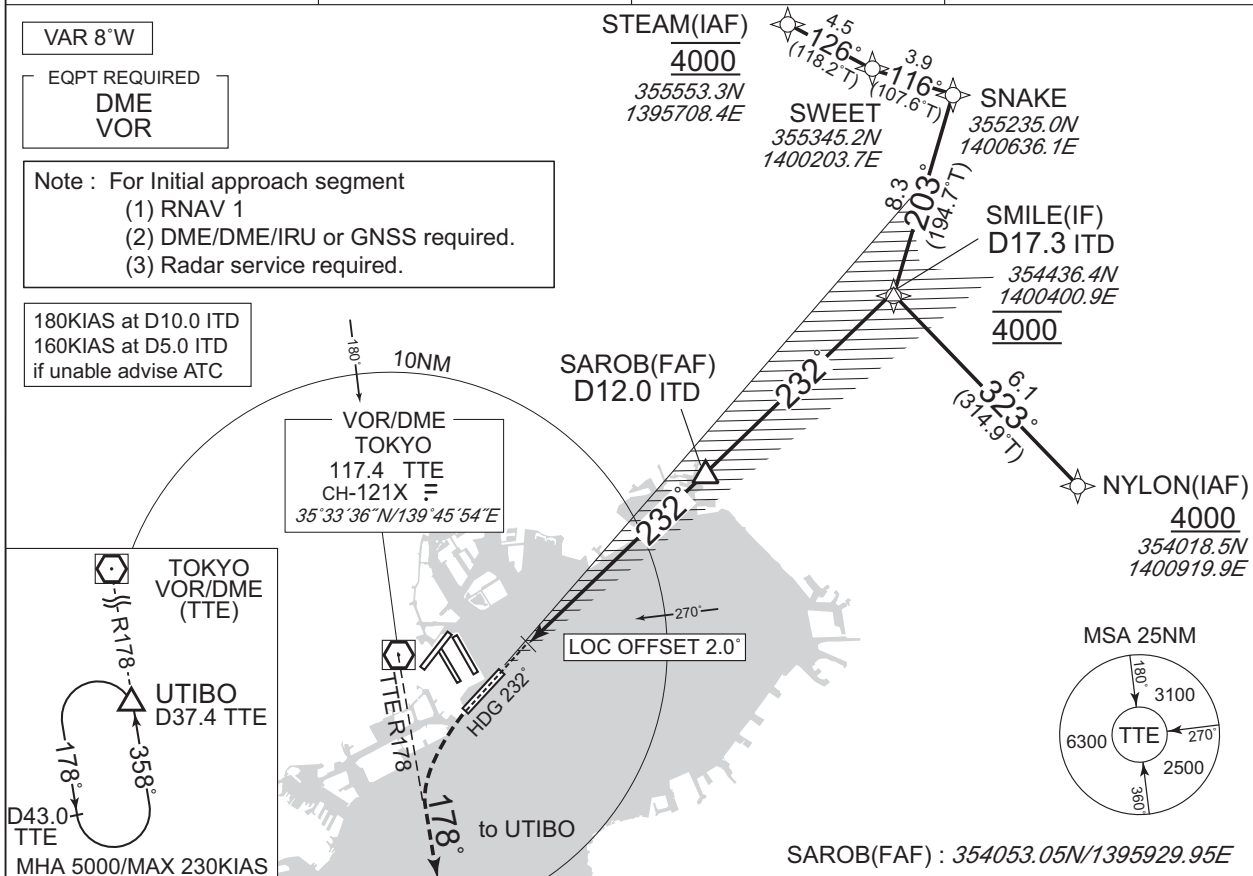

MISSED APPROACH

Climb on HDG232° to 500FT,
turn left climb to 5000FT via
TTE R178 to UTIBO
and hold.
Contact TOKYO APP.

No turn before ITD 1.1 DME.

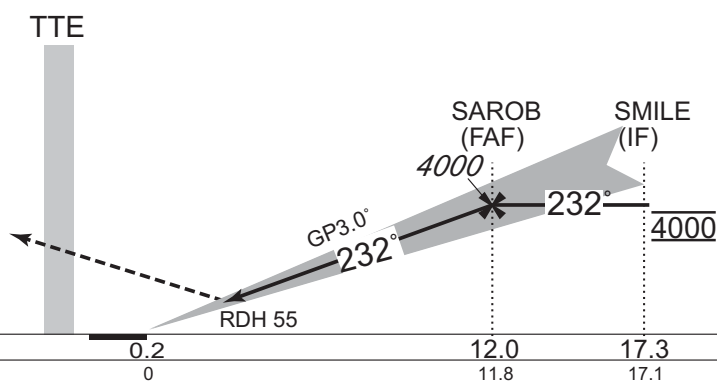

MINIMA		THR elev. 55	AD elev. 21	
CAT	CAT I		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	VIS
A	388 (333)	800	730 (709)	1600
B				2400
C				3200
D				


Circling is not authorized during the night time, except counterclockwise circling to RWY22, RWY16R/16L and clockwise circling to RWY34R/34L.

CHANGE : VOR/DME relocated (HME→TTE). PROC course. No turn before ITD established. MHA at UTIBO.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LOC Z RWY23

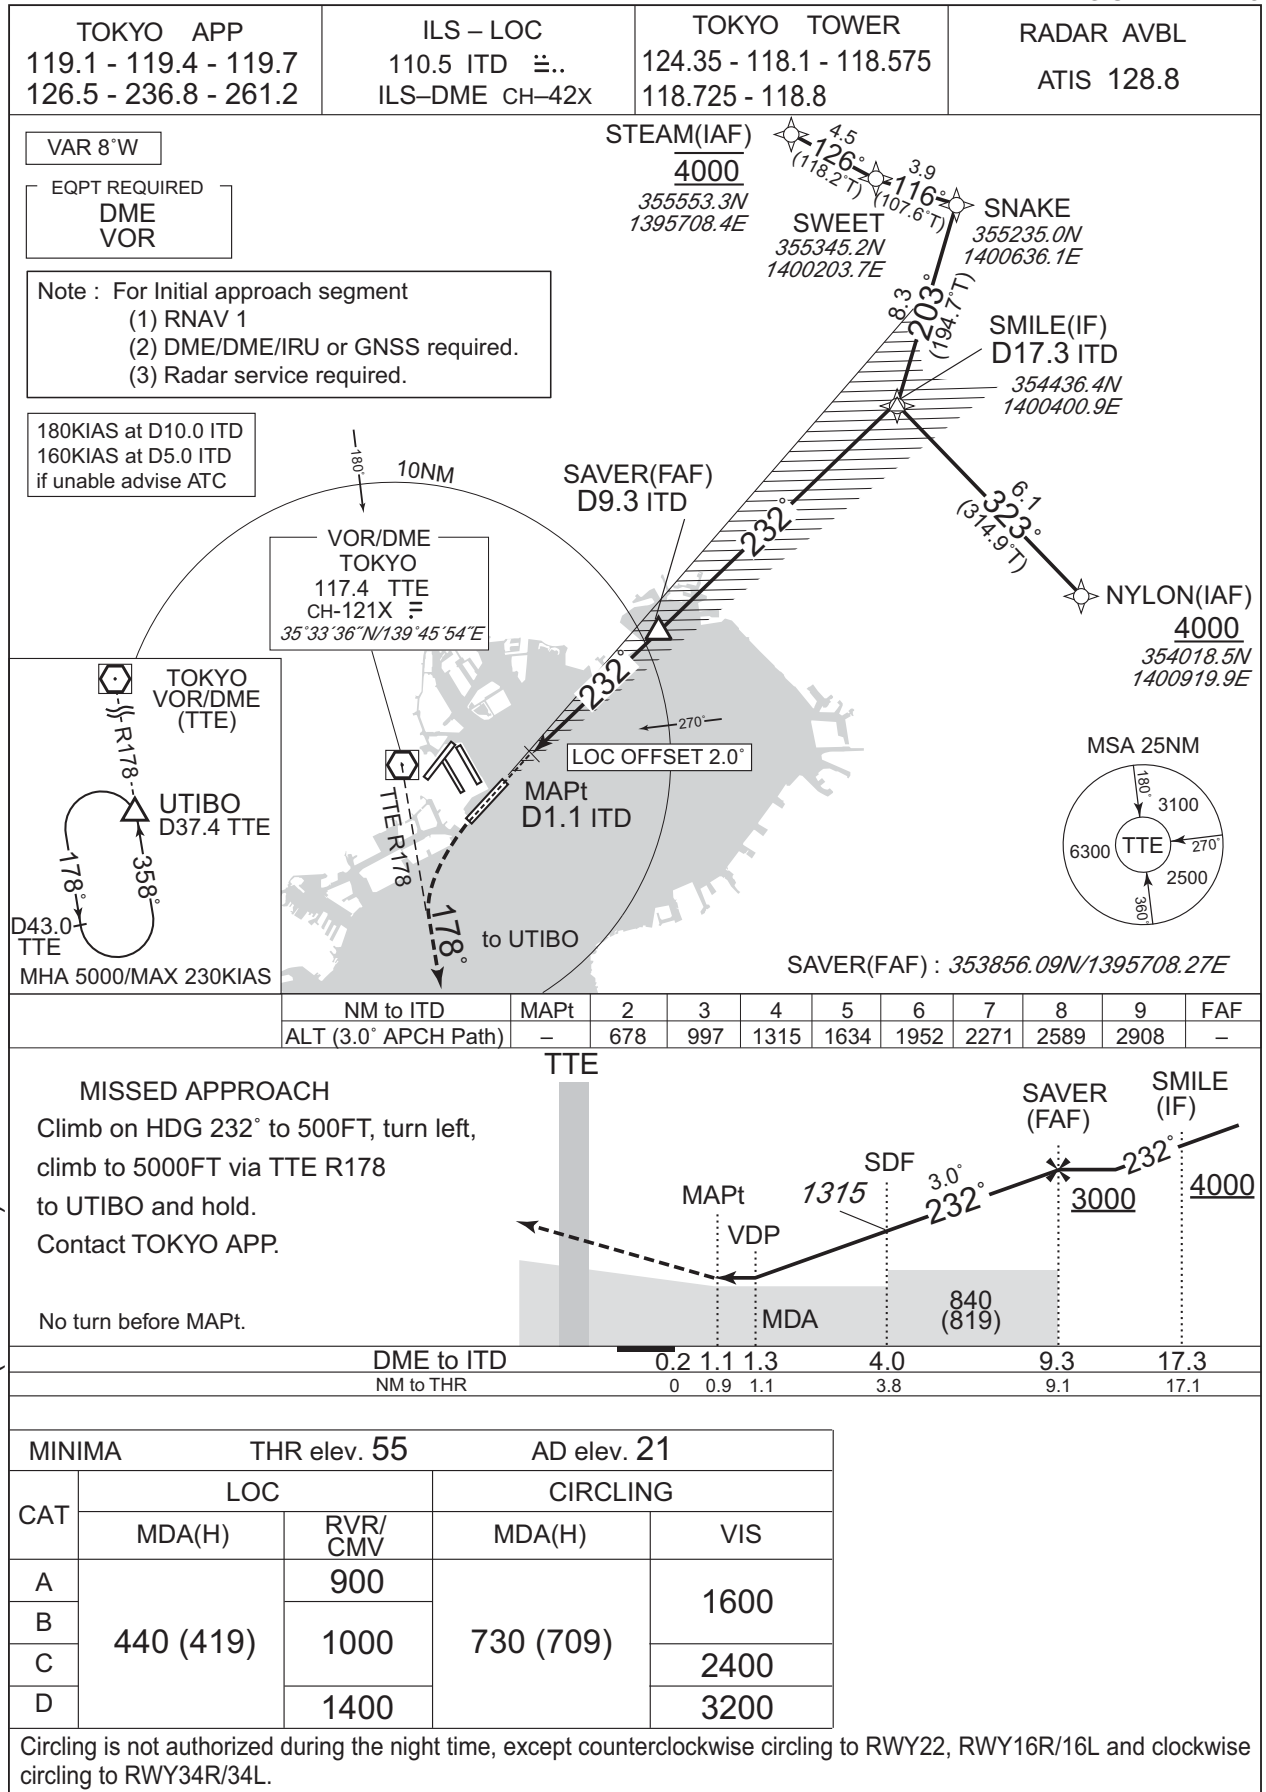


CHANGE : VOR/DME relocated (HME→TTE). PROC course: MHA at UTIBO.

INSTRUMENT APPROACH CHART


RJTT / TOKYO INTL

ILS Y or LOC Y RWY23

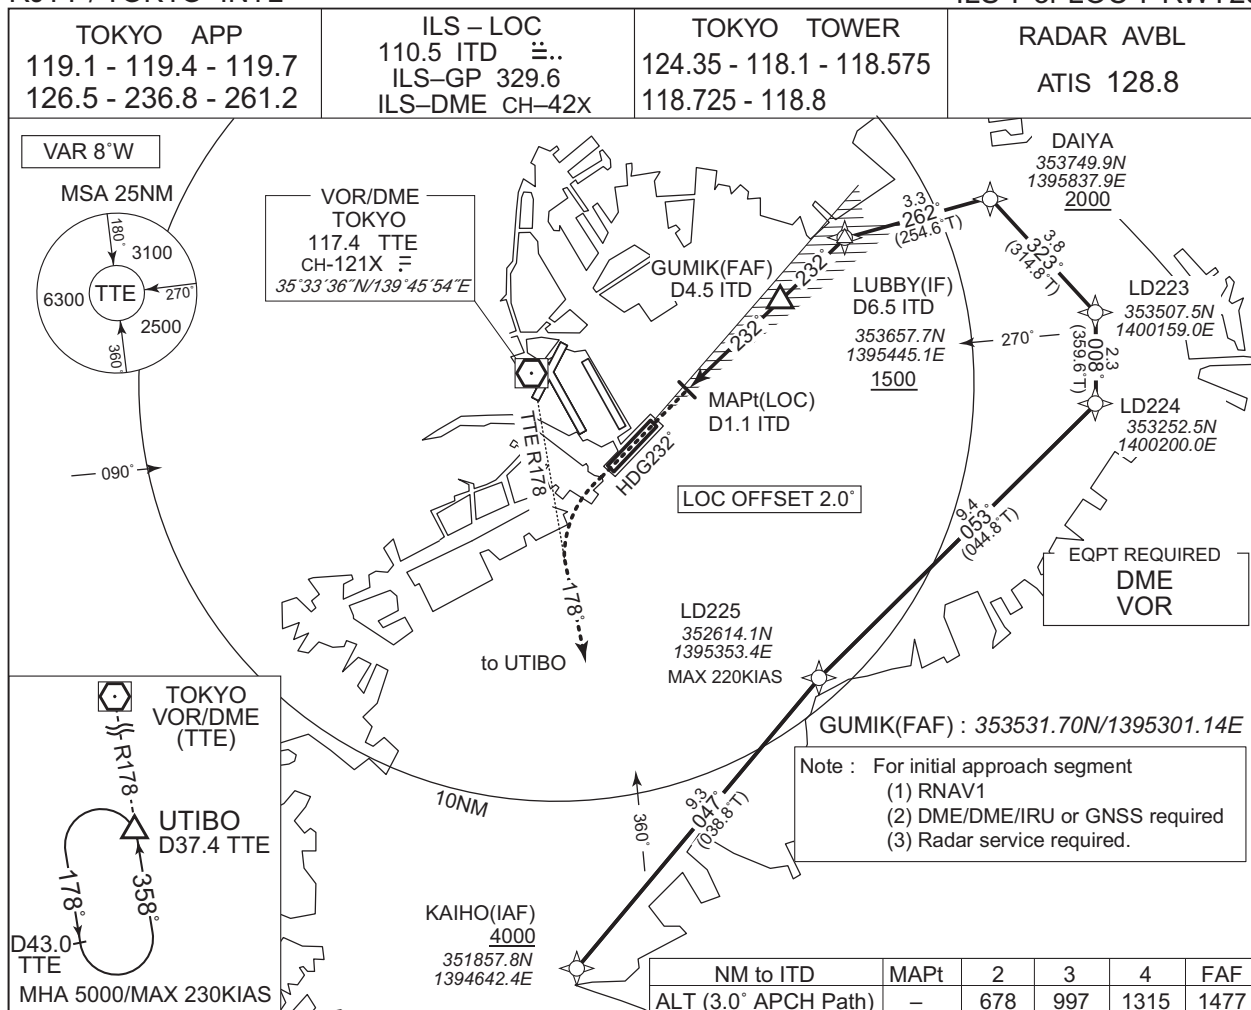**MISSED APPROACH**

Climb on HDG232° to 500FT, turn left,
climb to 5000FT via TTE R178
to UTIBO and hold.
Contact TOKYO APP.

Timing not authorized for defining the MAPt.
No turn before ITD 1.1 DME.

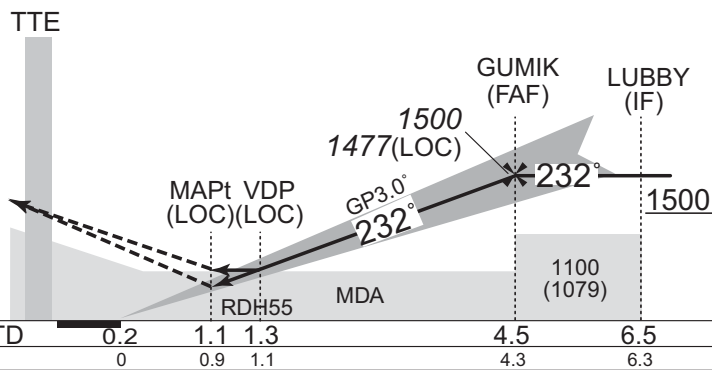**MINIMA**

THR elev. 55

AD elev. 21


CAT	CAT I		LOC		CIRCLING		
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS	
A	388 (333)	800	440 (419)	900	730 (709)	1600	
B				1000		2400	
C				1400		3200	
D							

Circling is not authorized during the night time, except counterclockwise circling to RWY22, RWY16R/16L and clockwise circling to RWY34R/34L.


CHANGE : VOR/DME relocated (HME→TTE), PROC course. No turn before ITD established. Critical DME abolished.

RJTT / TOKYO INTL

LDA Z RWY23

Simultaneous approach authorized with RWY22(LDA)

Timing not authorized for defining the MAPt.

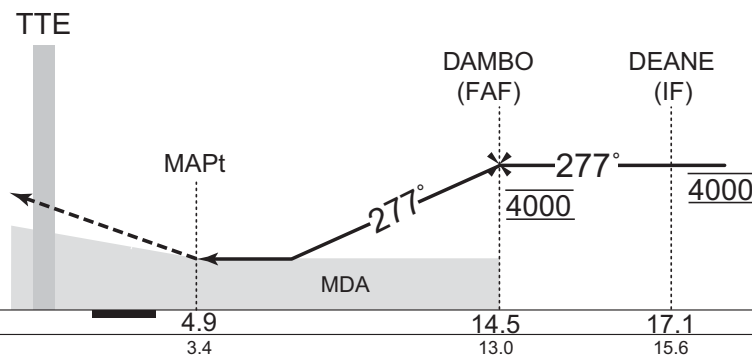

MINIMA APPLICATION CRITERIA in AD1.1.6.10.1.4 are not applicable.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA Z RWY23

Visual Prescribed Track for LDA Z RWY23


Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.

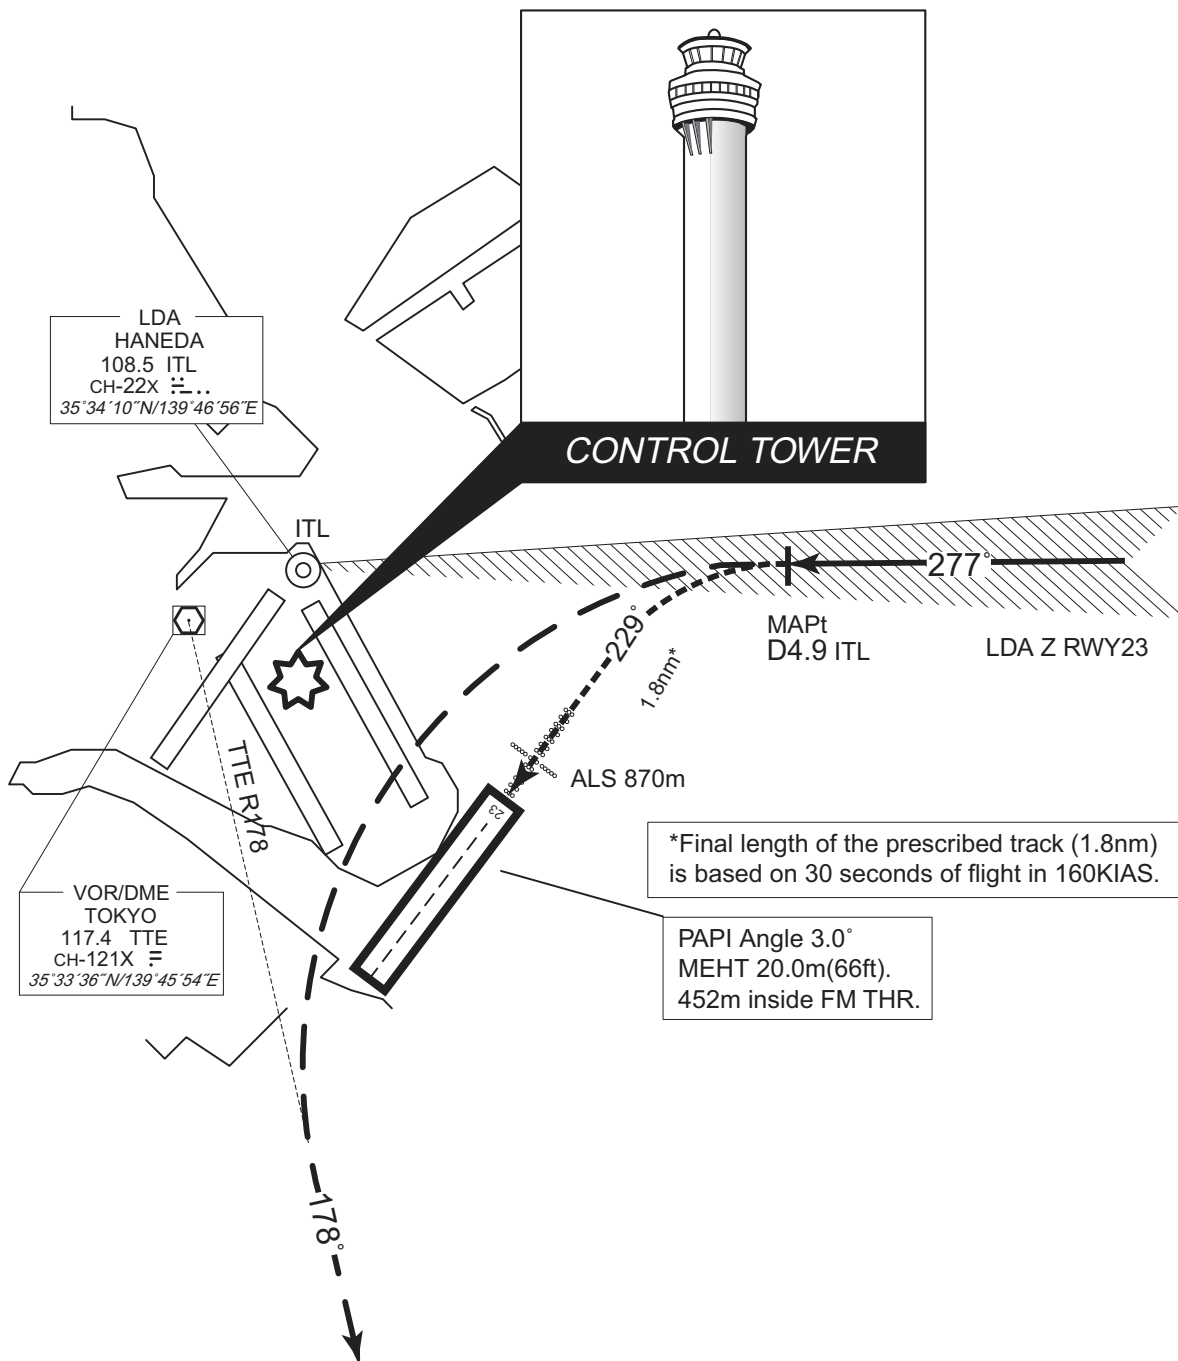

CHANGE : VOR/DME relocated (HME→TTE). PROC course.

In case of GO AROUND, pilot should report ATC as soon as practicable.
Until receiving ATC instructions, aircraft turn left HDG 229° for joining TTE R178 and missed approach procedure.

INSTRUMENT APPROACH CHART

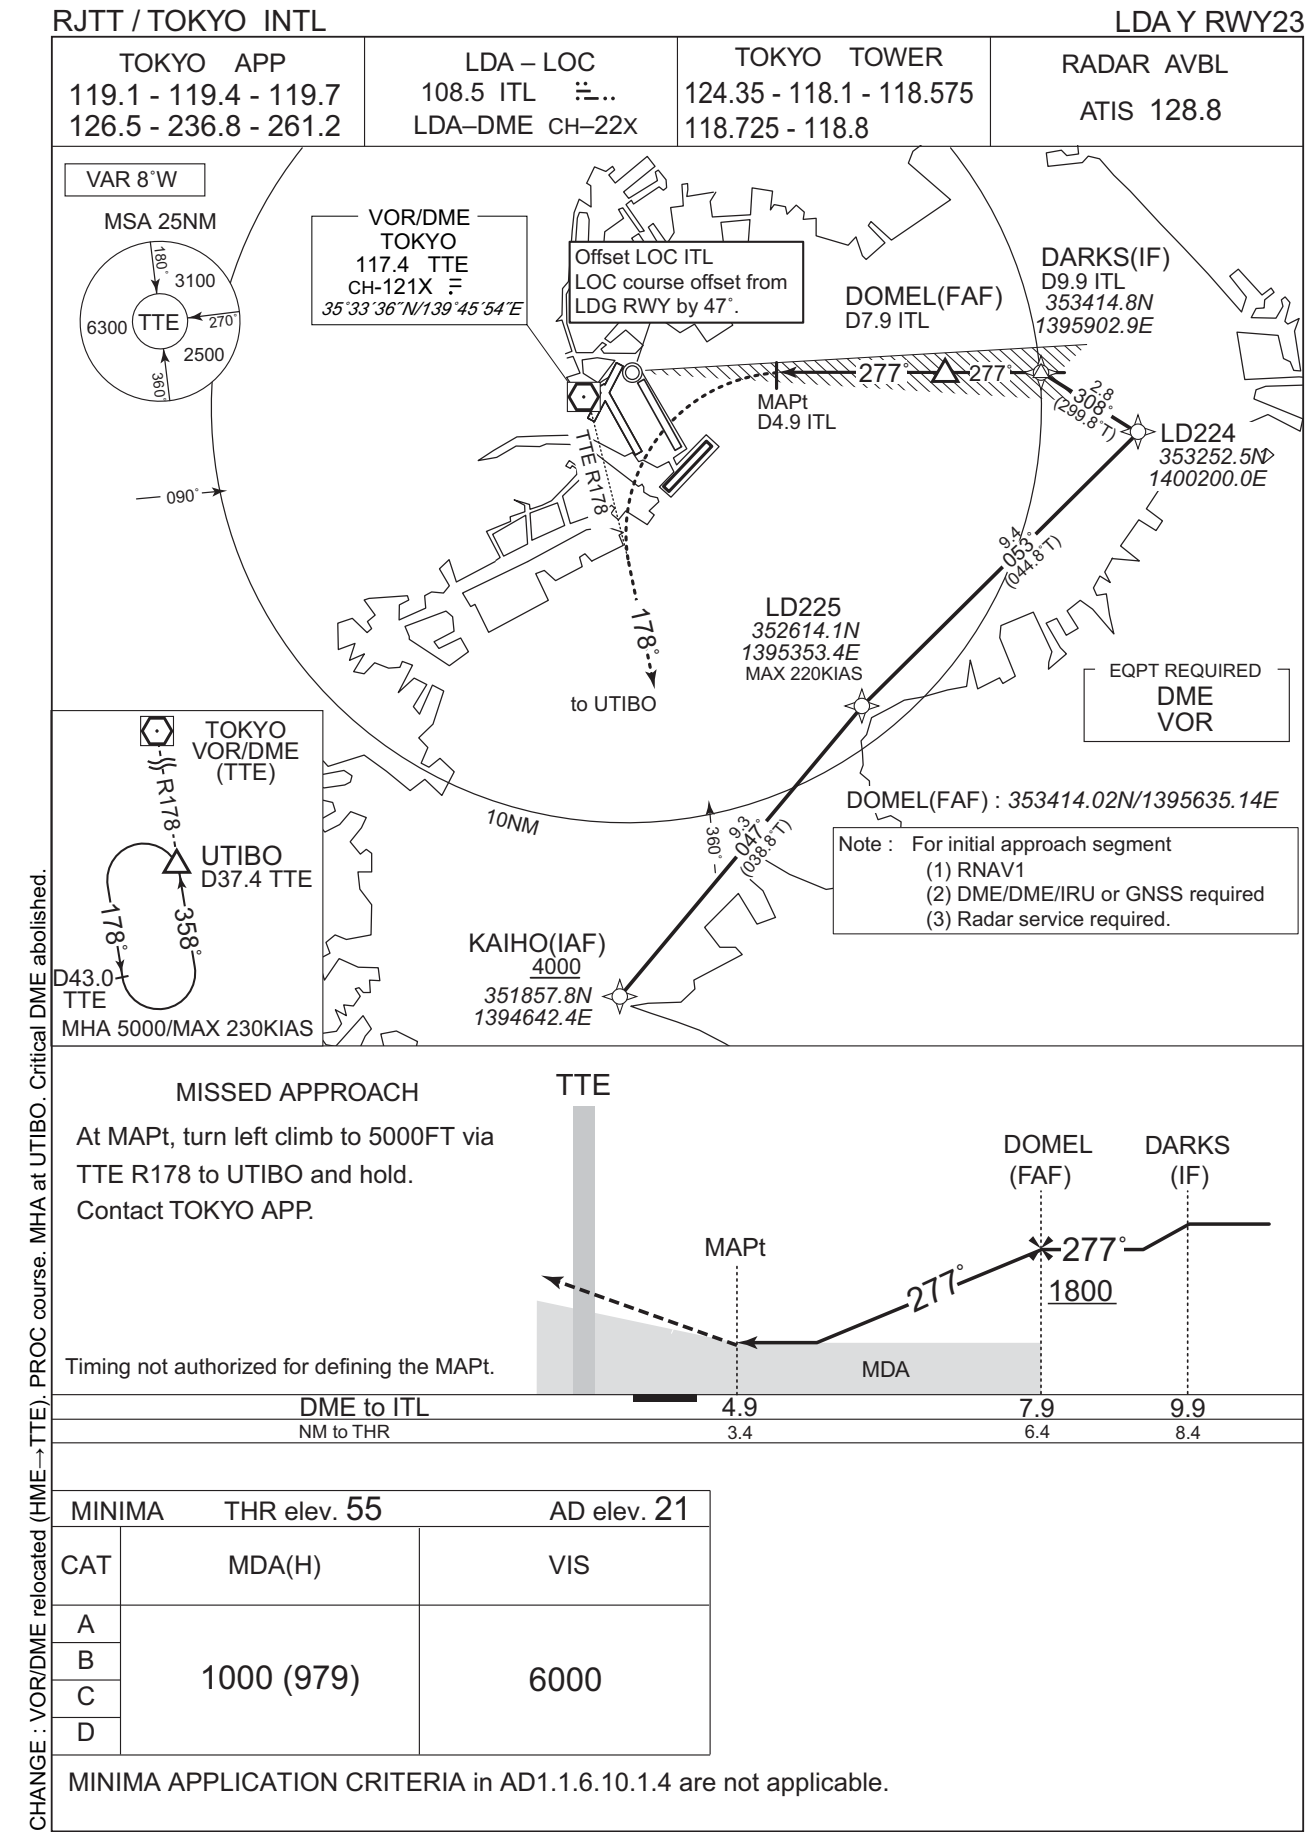


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA Y RWY23

Visual Prescribed Track for LDA Y RWY23


Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.

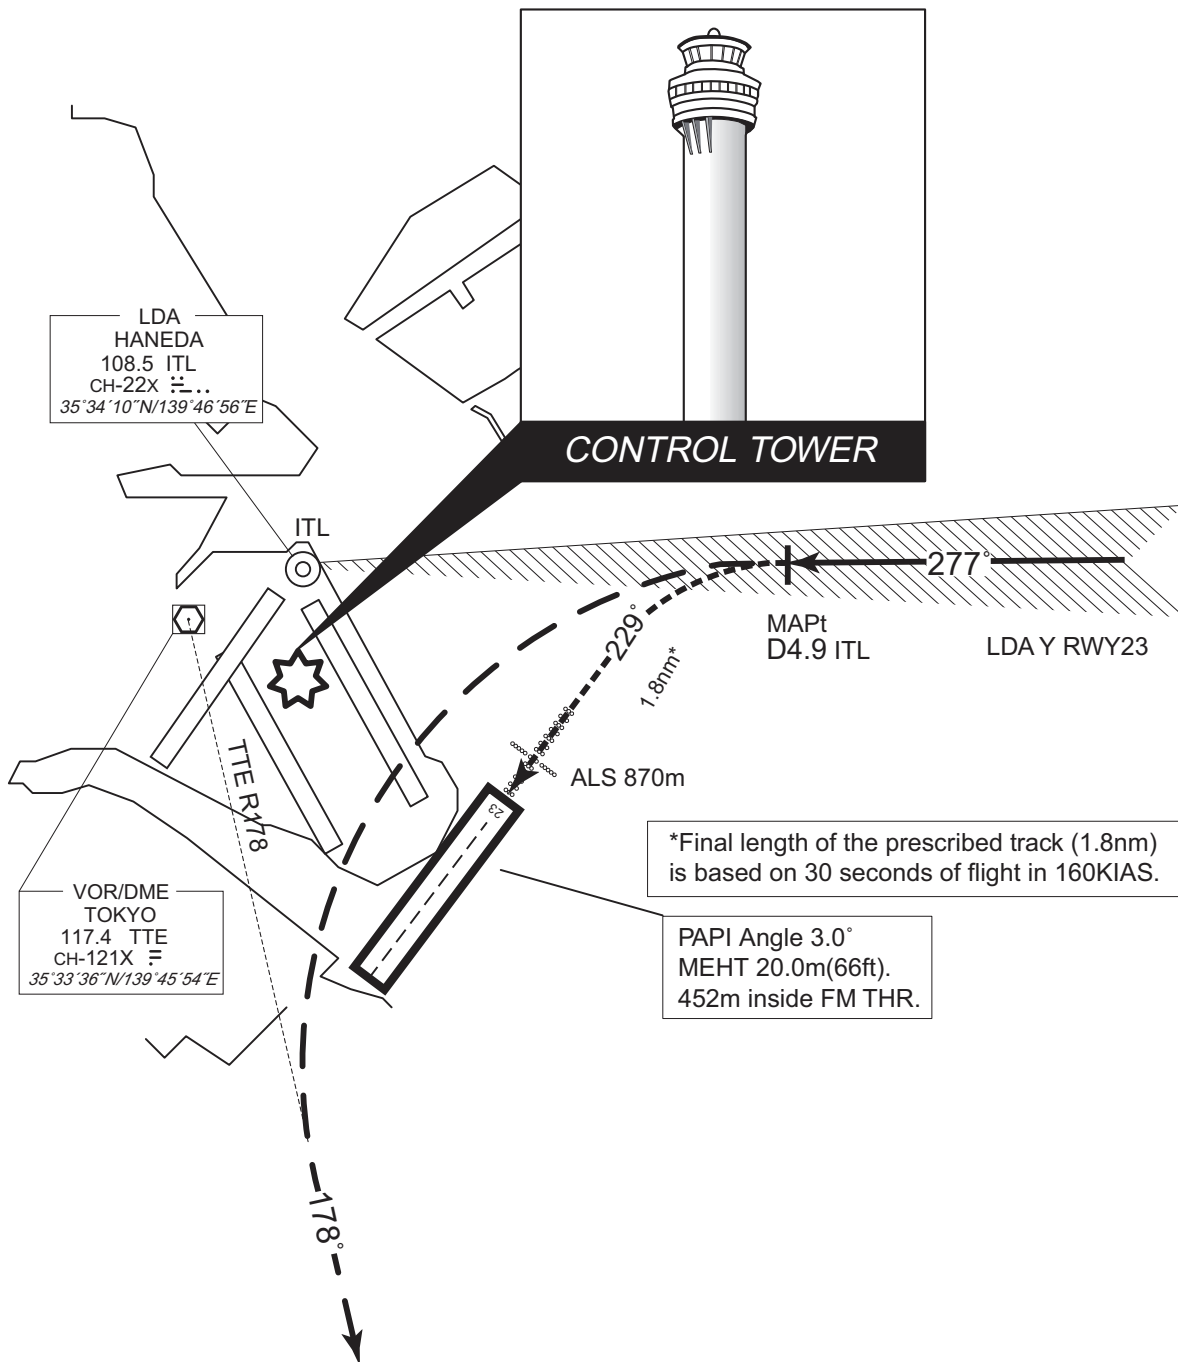

In case of GO AROUND, pilot should report ATC as soon as practicable.
Until receiving ATC instructions, aircraft turn left HDG 229° for joining TTE R178 and missed approach procedure.

CHANGE : VOR/DME relocated (HME→TTE). PROC course.

INSTRUMENT APPROACH CHART

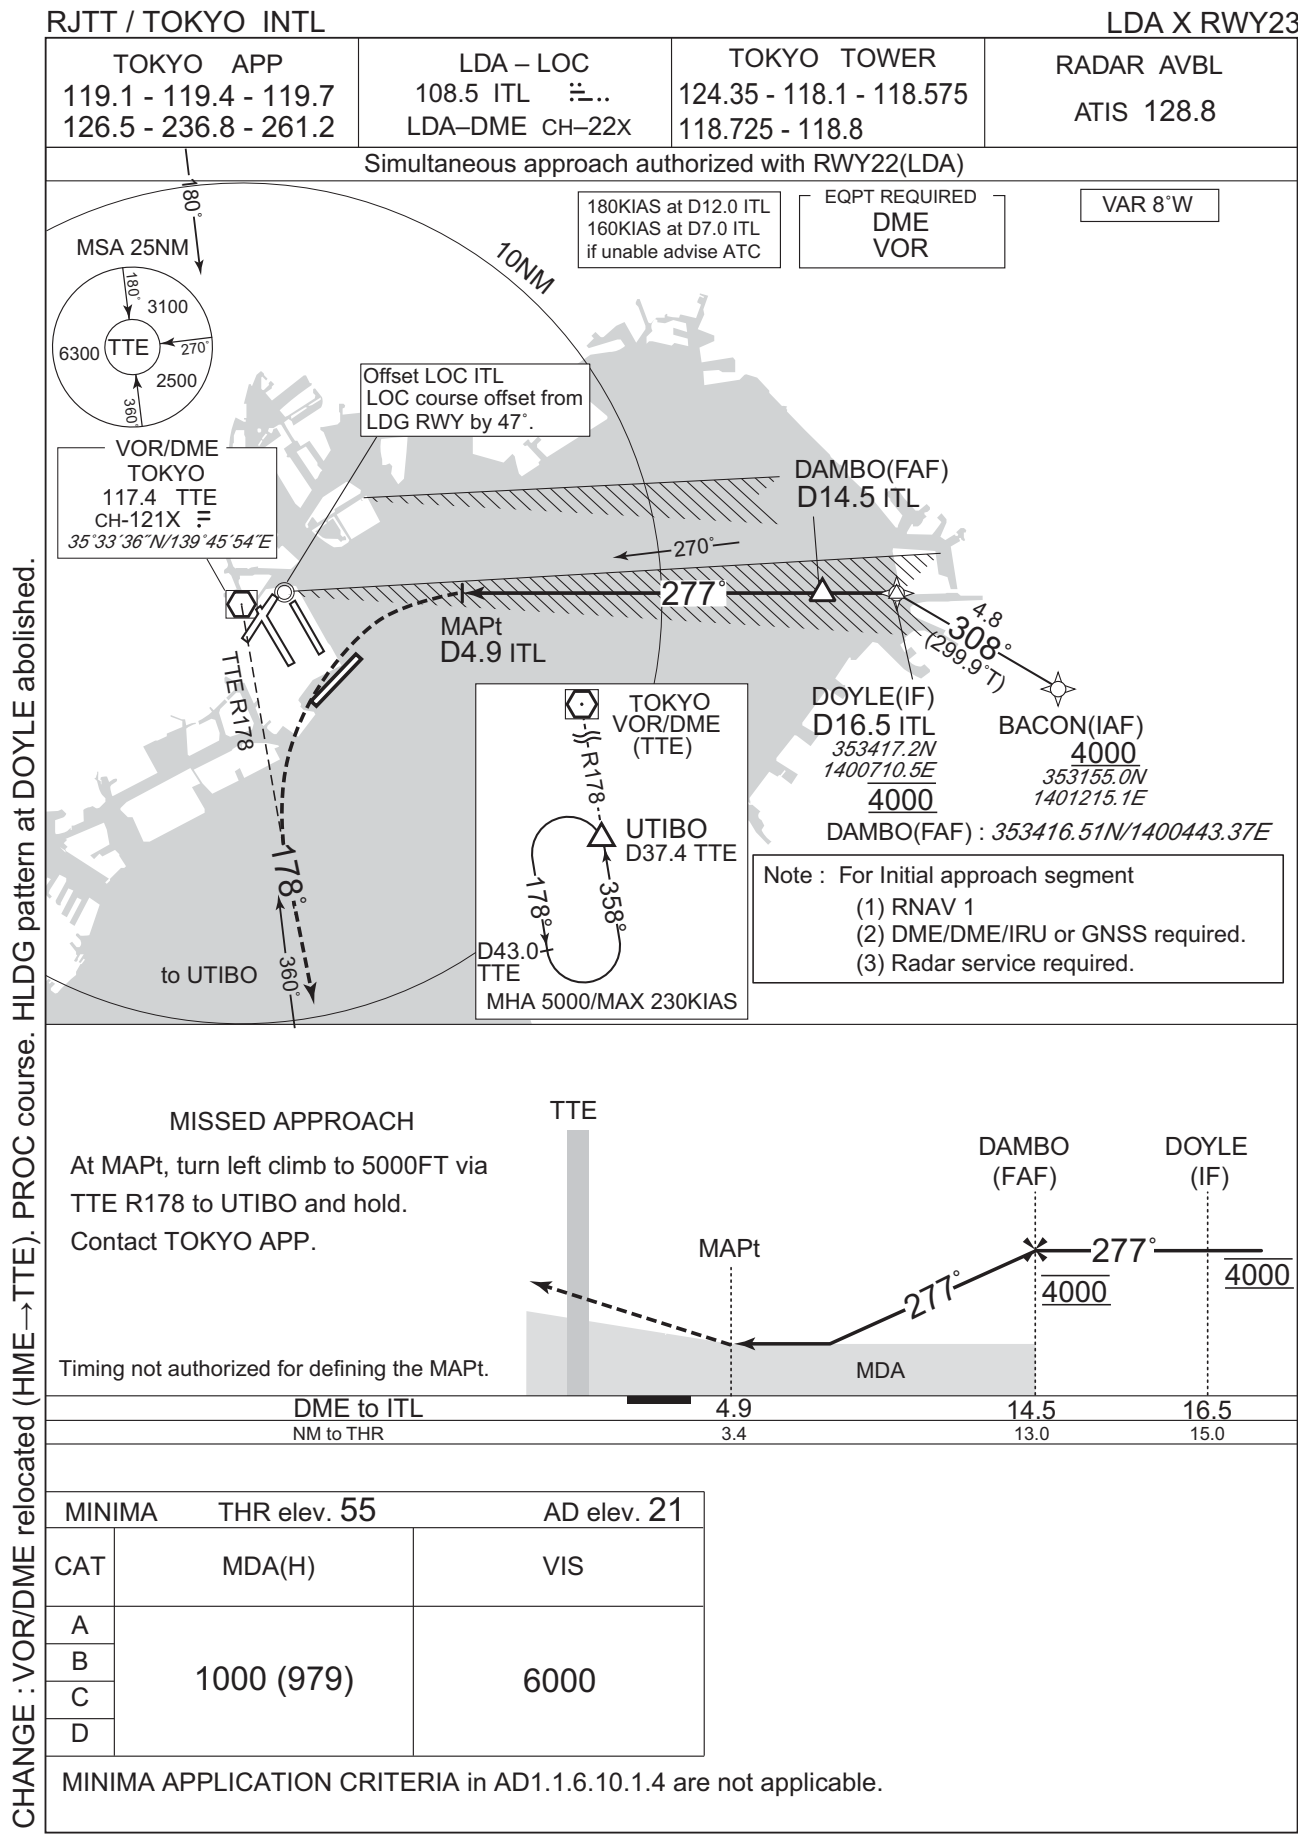


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA X RWY23

Visual Prescribed Track for LDA X RWY23

Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.

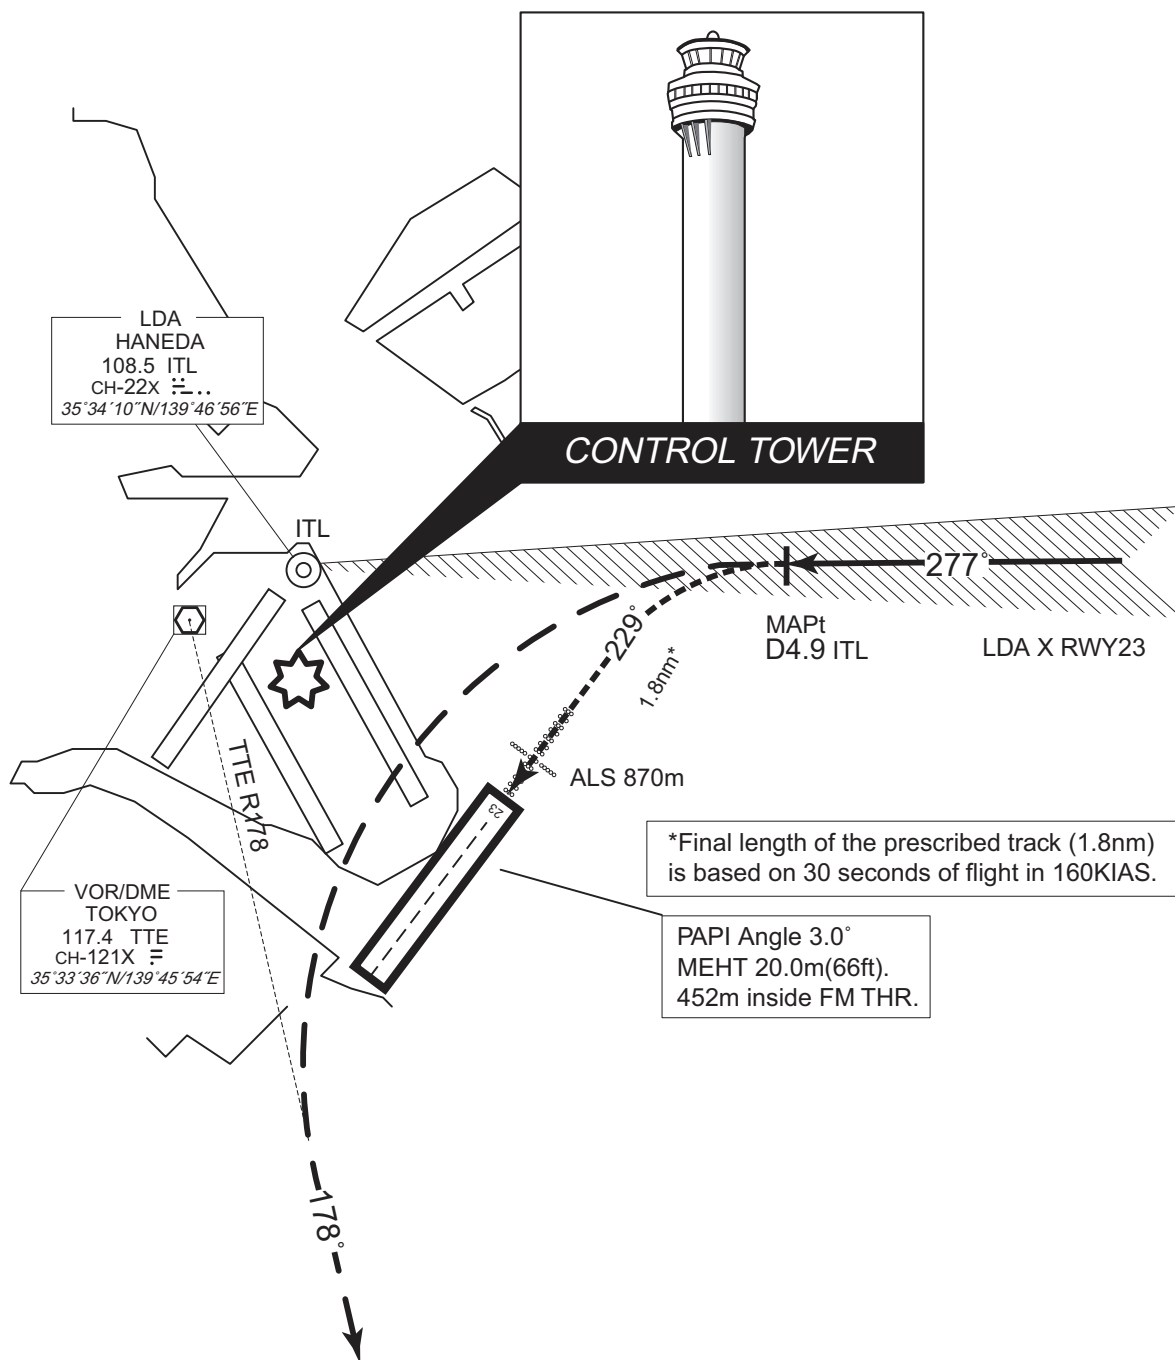

In case of GO AROUND, pilot should report ATC as soon as practicable.
Until receiving ATC instructions, aircraft turn left HDG 229° for joining TTE R178 and missed approach procedure.

CHANGE : VOR/DME relocated (HME→TTE). PROC course.


RJTT / TOKYO INTL

LDA W RWY23



At MAPt, turn left climb to 5000FT via
TTE R178 to UTIBO and hold.
Contact TOKYO APP

Timing not authorized for defining the MAPt.

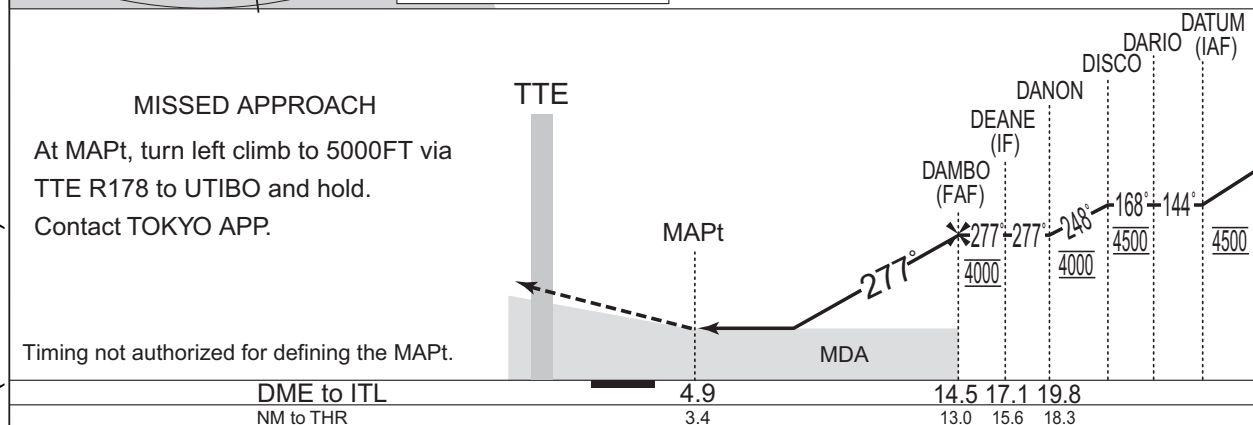

MINIMA APPLICATION CRITERIA in AD1.1.6.10.1.4 are not applicable.


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

LDA W RWY23

Visual Prescribed Track for LDA W RWY23


Visual manoeuvre with Prescribed Track (VPT) : VPT stands for visual maneuvering after the MAPt using prescribed track.

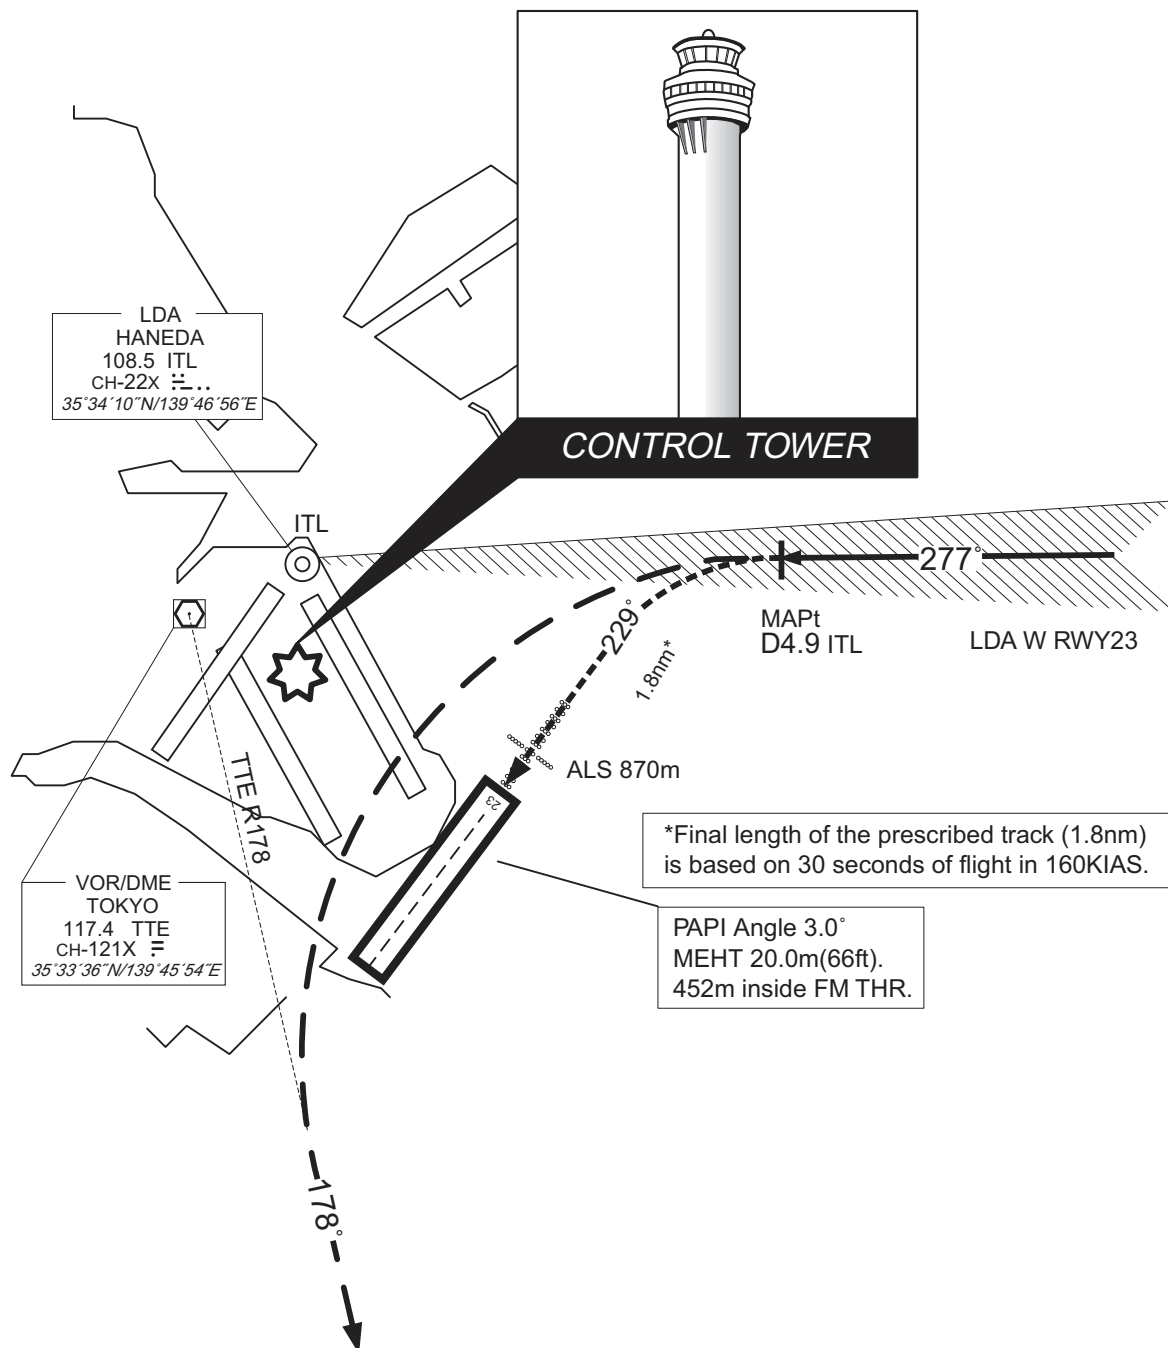

CHANGE : VOR/DME relocated (HME→TTE). PROC course.

In case of GO AROUND, pilot should report ATC as soon as practicable.
Until receiving ATC instructions, aircraft turn left HDG 229° for joining TTE R178 and missed approach procedure.

INSTRUMENT APPROACH CHART

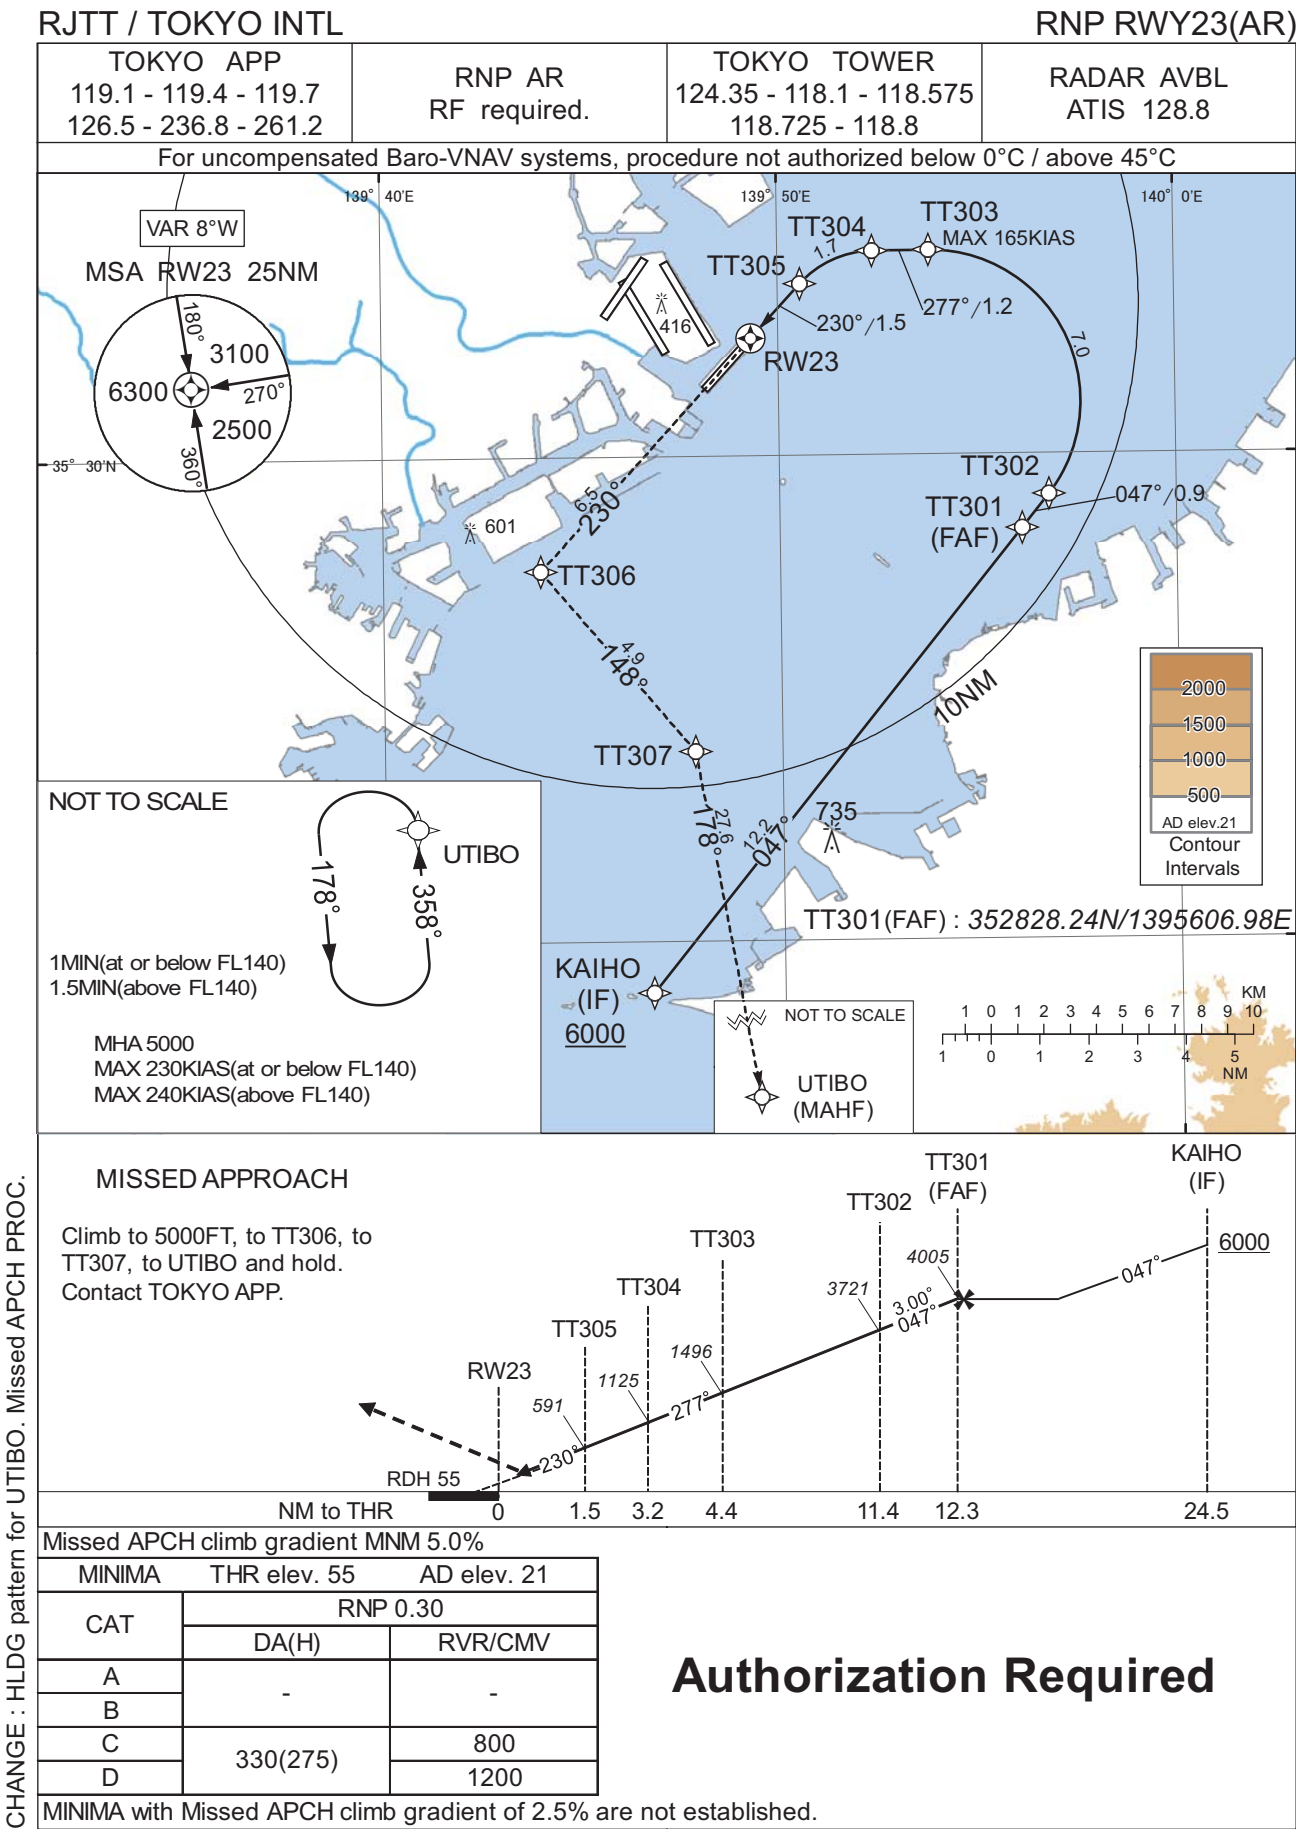

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

RNP RWY23(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	KAIHO	-	-	-7.9	-	-	+6000	-	-	-
002	TF	TT301	-	047 (038.9)	-7.9	12.2	-	4005	-	-	1.0
003	TF	TT302	-	047 (038.7)	-7.9	0.9	-	3721	-	-3.00	0.3
004	RF Center: TTRF1 r=3.10NM	TT303	-	-	-7.9	7.0	L	1496	-165	-3.00	0.3
005	TF	TT304	-	277 (269.6)	-7.9	1.2	-	1125	-	-3.00	0.3
006	RF Center: TTRF2 r=2.00NM	TT305	-	-	-7.9	1.7	L	591	-	-3.00	0.3
007	TF	RW23	Y	230 (222.5)	-7.9	1.5	-	110	-	-3.00/55	0.3
008	TF	TT306	-	230 (222.5)	-7.9	6.5	-	-	-	-	1.0
009	TF	TT307	-	148 (139.9)	-7.9	4.9	-	-	-	-	1.0
010	TF	UTIBO	-	178 (169.9)	-7.9	27.6	-	5000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	UTIBO	358 (350.2)	-7.9	1.0 (-14000) 1.5(+14001)	L	5000	-	-230(-14000) -240(+14001)	1.0

Waypoint Coordinates


Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
KAIHO	351857.83N / 1394642.43E	TTRF1	353106.44N / 1395349.88E
TT301	352828.24N / 1395606.98E	TTRF2	353212.62N / 1395225.48E
TT302	352909.99N / 1395647.99E		
TT303	353413.28N / 1395350.00E		
TT304	353412.77N / 1395224.45E		
TT305	353332.98N / 1395034.74E		
RW23	353226.15N / 1394919.61E		
TT306	352740.05N / 1394357.98E		
TT307	352356.01N / 1394749.03E		
UTIBO	345647.02N / 1395343.90E		

CHANGE : HLDG pattern for UTIBO established. ALT restriction at UTIBO.

RJT / TOKYO INTL

TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	ILS – LOC 111.55 ITA 32.75 ILS-GP 332.75 ILS-DME CH-52Y	TOKYO TOWER 118.1 - 124.35 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	--	--	--------------------------

VAR 8°W






NATTY (IAF)	355350.9N 1394531.3E
RANGY	355231.6N 1394210.9E
RESIN	355027.5N 1393657.6E
RUGBY (IF)	354627.4N 1393658.8E


EQPT REQUIRED -
DME
VOR

Note : For Initial approach segment

- (1) RNAV1
- (2) DME/DME/IRU or GNSS required
- (3) Radar service required.

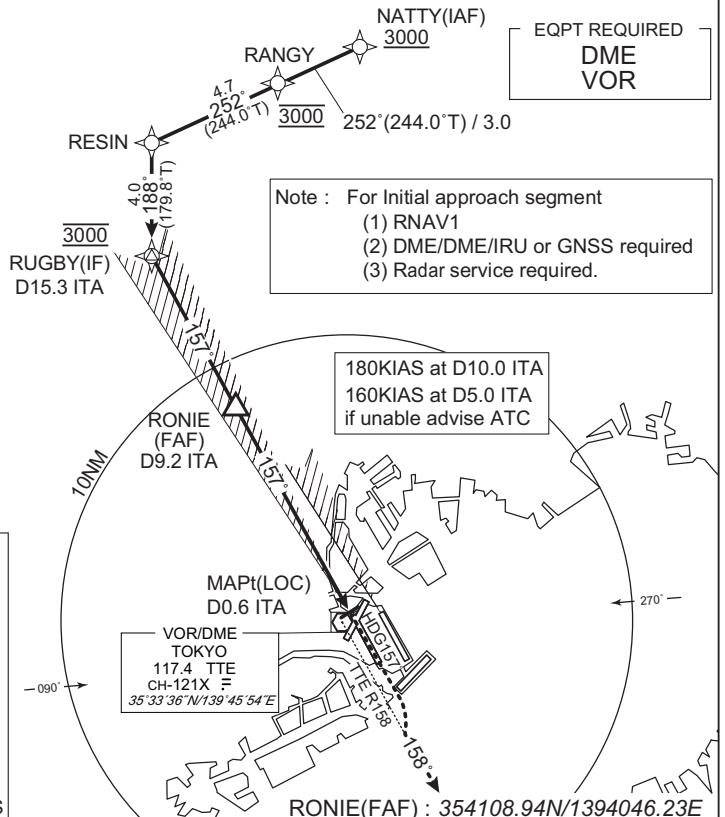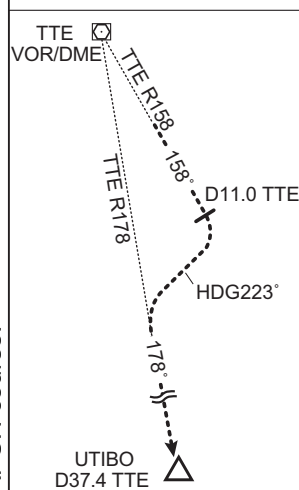

NM to Next ITA	FAF	9	8	7	6	5	4	3	MAPt
ALT (3.0° APCH Path)	2924	2873	2554	2236	1918	1599	1281	962	—

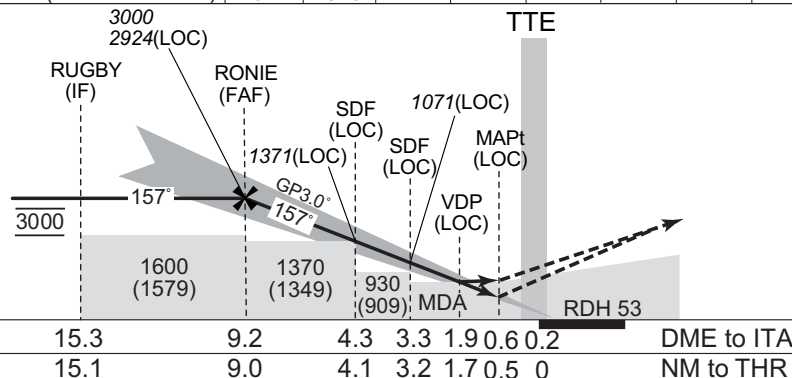

MISSED APPROACH

Climb on HDG157° to 700FT, via
TTE R158 to 11.0DME, turn right
HDG223° to intercept and proceed
via TTE R178 to UTIBO and hold
at 5000FT.
Contact TOKYO APP.

Timing not authorized for defining the MAPt.

		RT(%)	RT(%)	RT(%)	RT(%)	RT(%)	RT(%)	RT(%)
15.3	9.2	4.3	3.3	1.9	0.6	0.2		DME to ITA
15.1	9.0	4.1	3.2	1.7	0.5	0		NM to THR

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 16		AD elev. 21		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	216 (200)	550	570 (549)	1000	730 (709)	1600
B				1200		
C				2400		
D				1600		

MINIMA with Missed APCH climb gradient of 2.5% are not established.


Circling is not authorized during the night time, except clockwise circling to RWY16L/22/23/34R/34L.

CHANGE : VOR/DME relocated (HME→TTE). PROC course. Missed APCH course.

RJTT / TOKYO INTL


TOKYO APP 119.1 - 119.4 - 119.7 126.5 - 236.8 - 261.2	RNP APCH	TOKYO TOWER 118.1 - 124.35 - 118.575 118.725 - 118.8	RADAR AVBL ATIS 128.8
---	----------	--	--------------------------

Baro-VNAV not authorized below -10°C

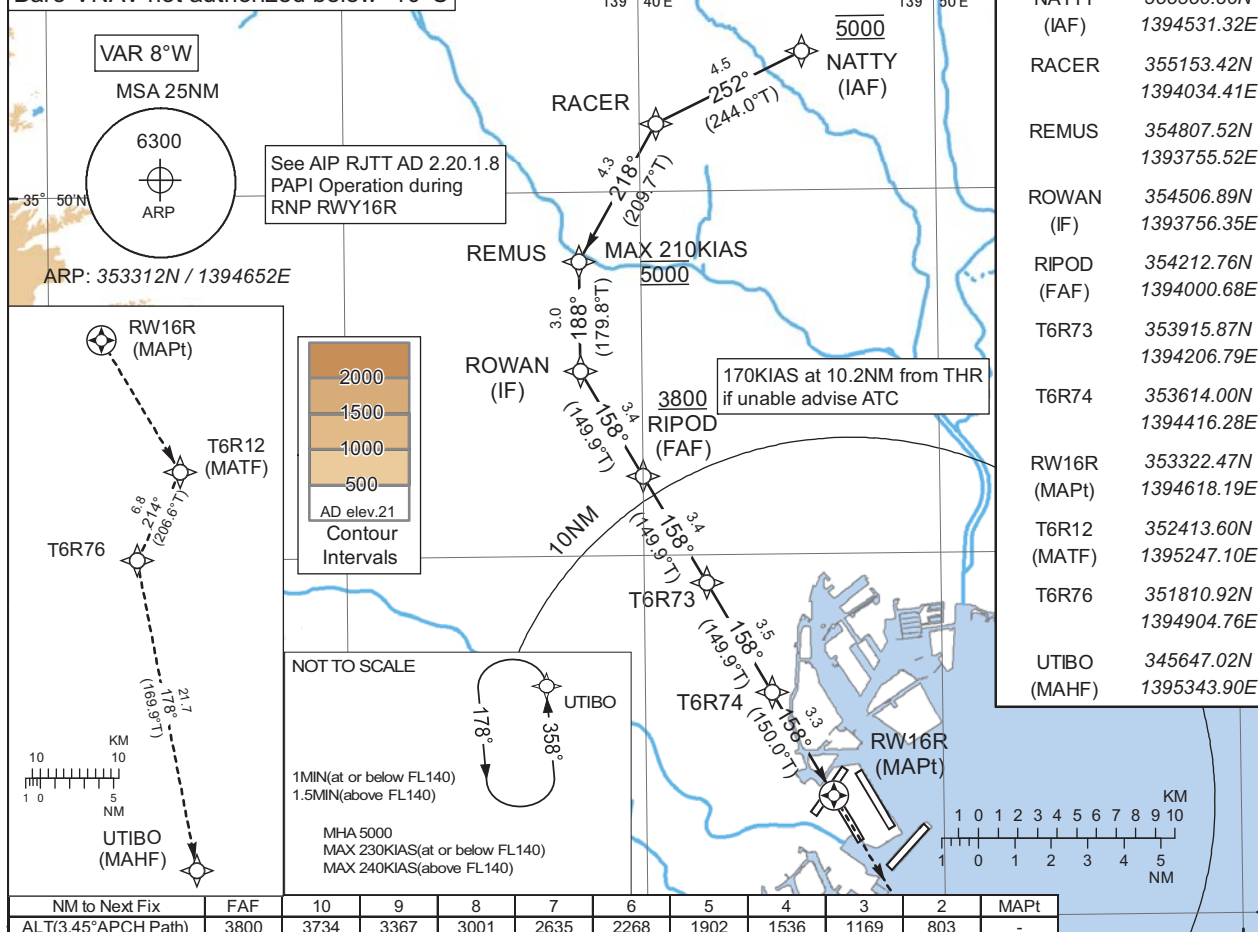

Direct to T6R12, to T6R76, to
UTIBO and hold at 5000FT.
Contact TOKYO APP.

PAPI and descent angles not coincident.
(PAPI Angle 3.25°)

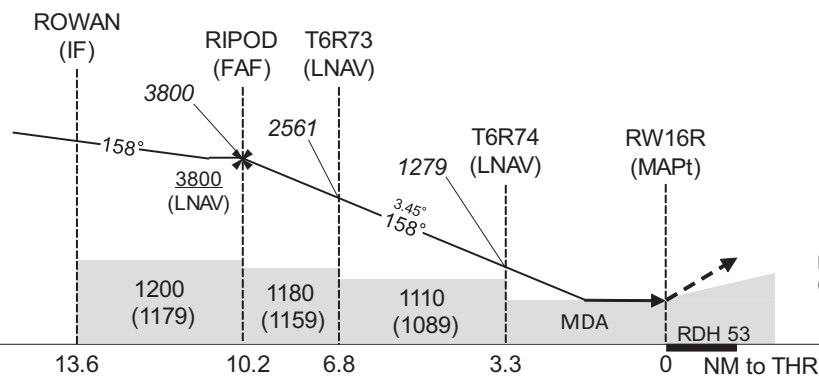

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 16	AD elev. 21			
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A	630(614)	1000	630(609)	1000	730(709)	1600
B		1200		1200		2400
C						
D						


MINIMA with Missed APCH climb gradient of 2.5% are not established.

Circling is not authorized during the night time, except clockwise circling to RWY16L/22/23/34R/34L.

INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

ILS or LOC RWY16L

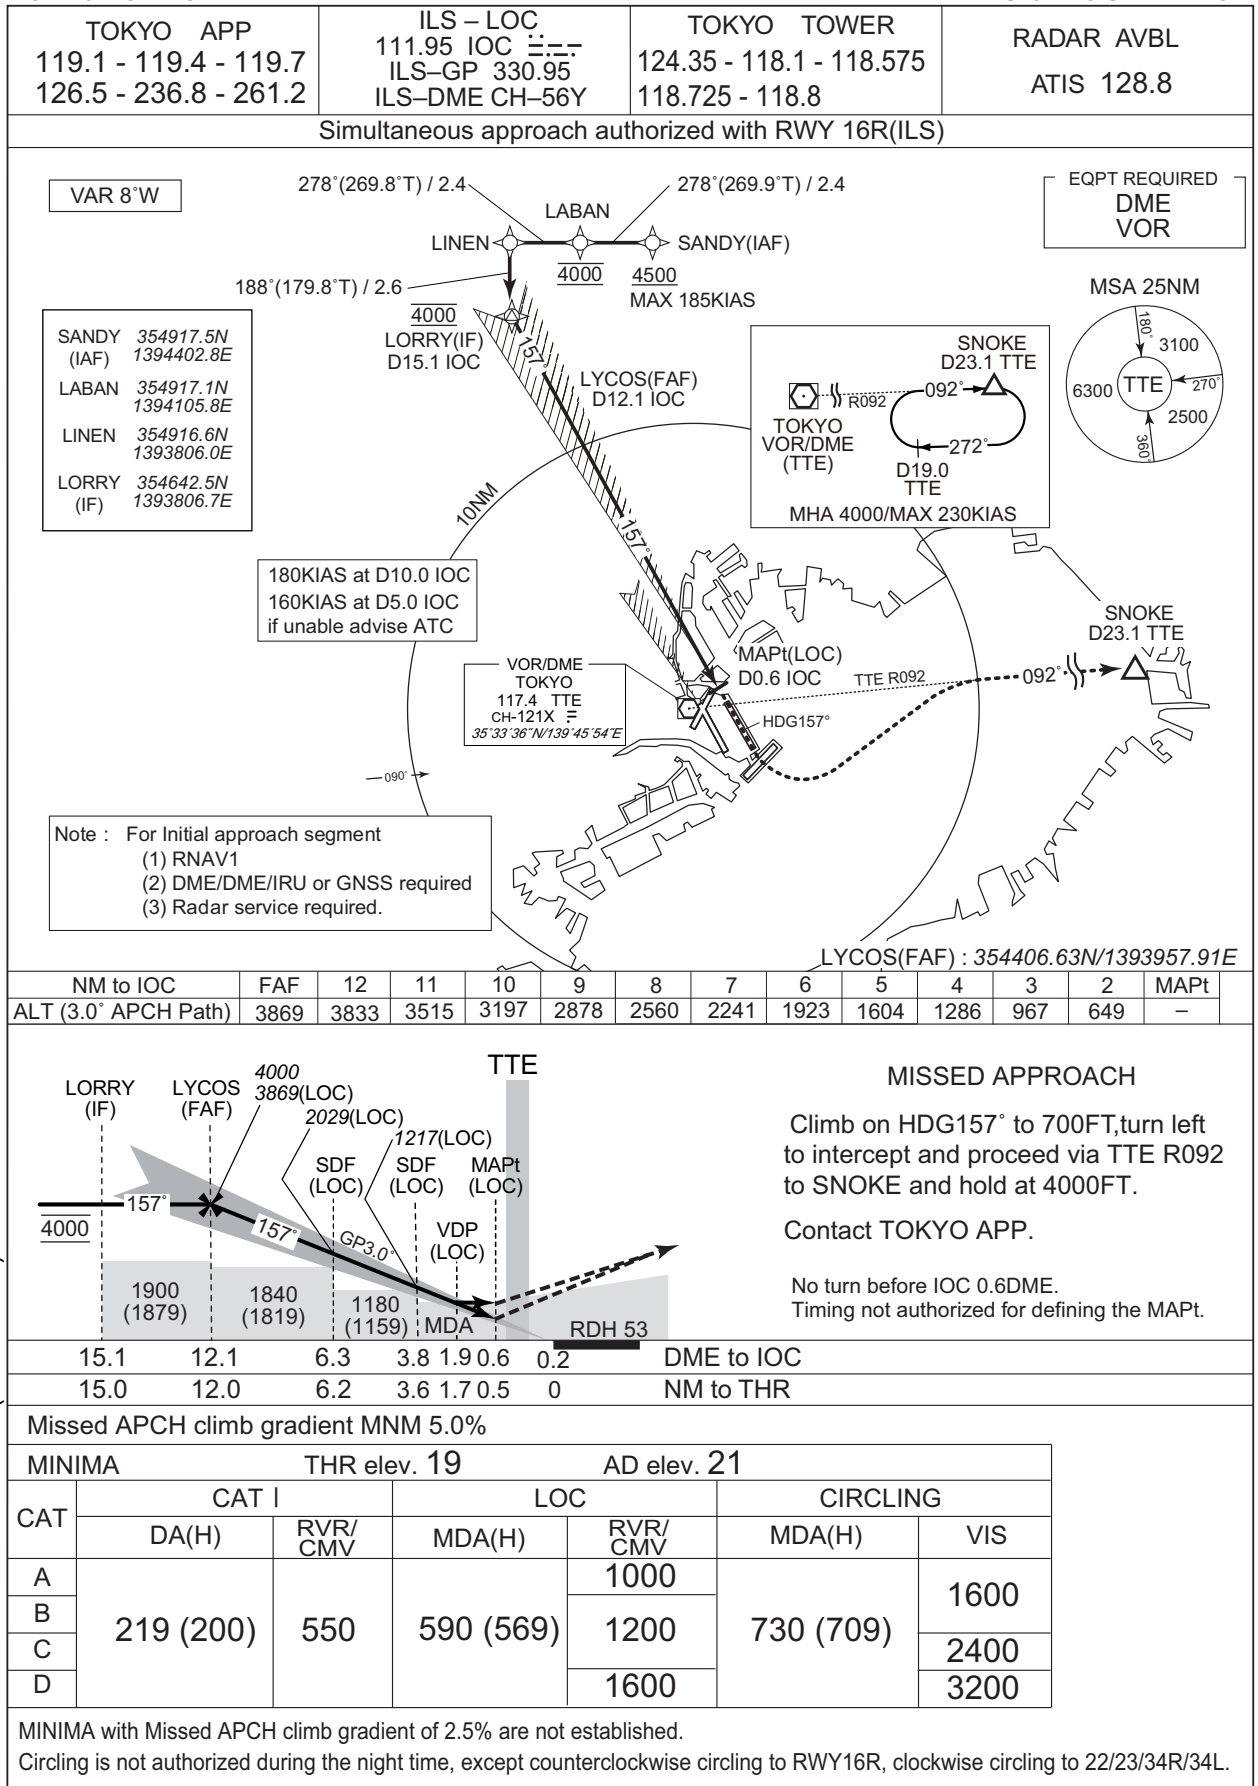


CHANGE : VOR/DME relocated (HME→TTE).


INSTRUMENT APPROACH CHART

RJTT / TOKYO INTL

RNP RWY16L

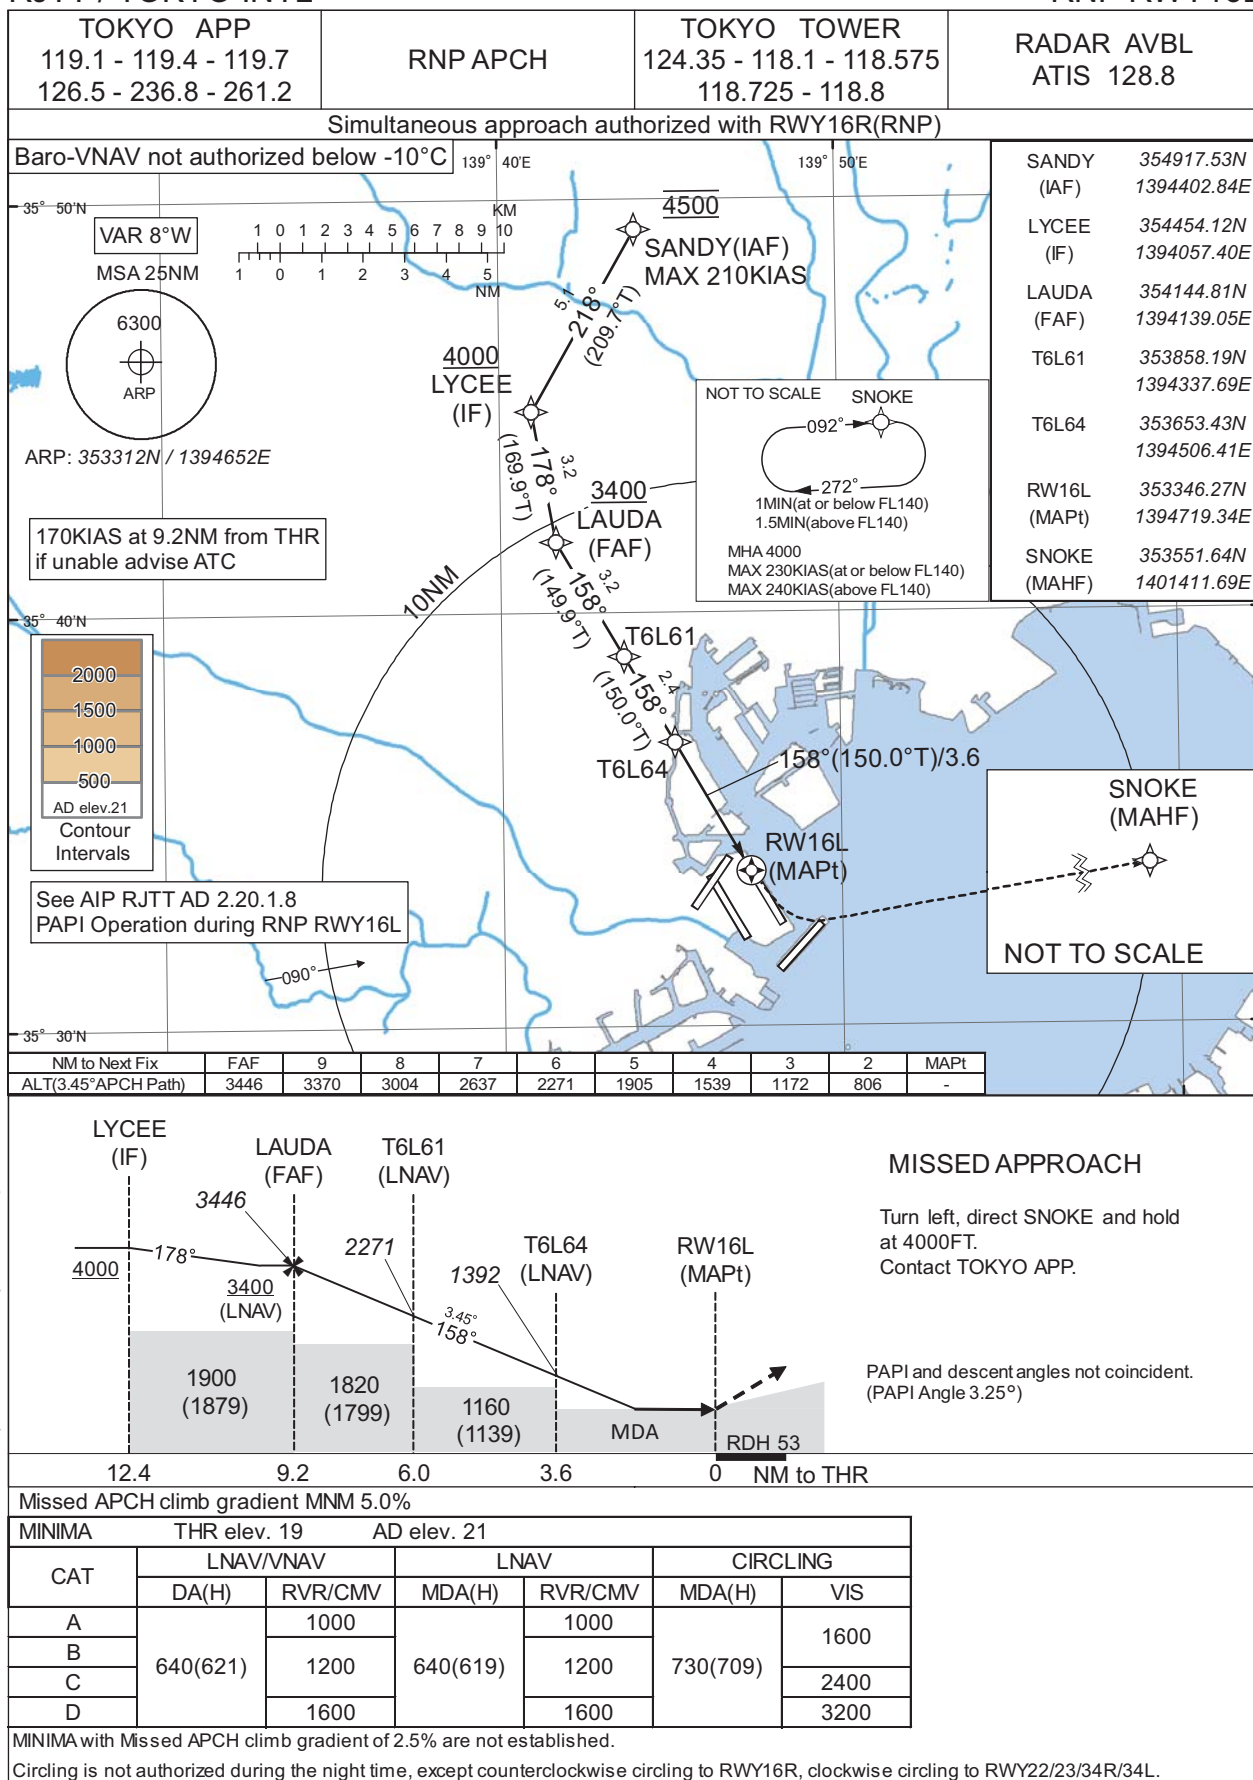


INSTRUMENT APPROACH CHART

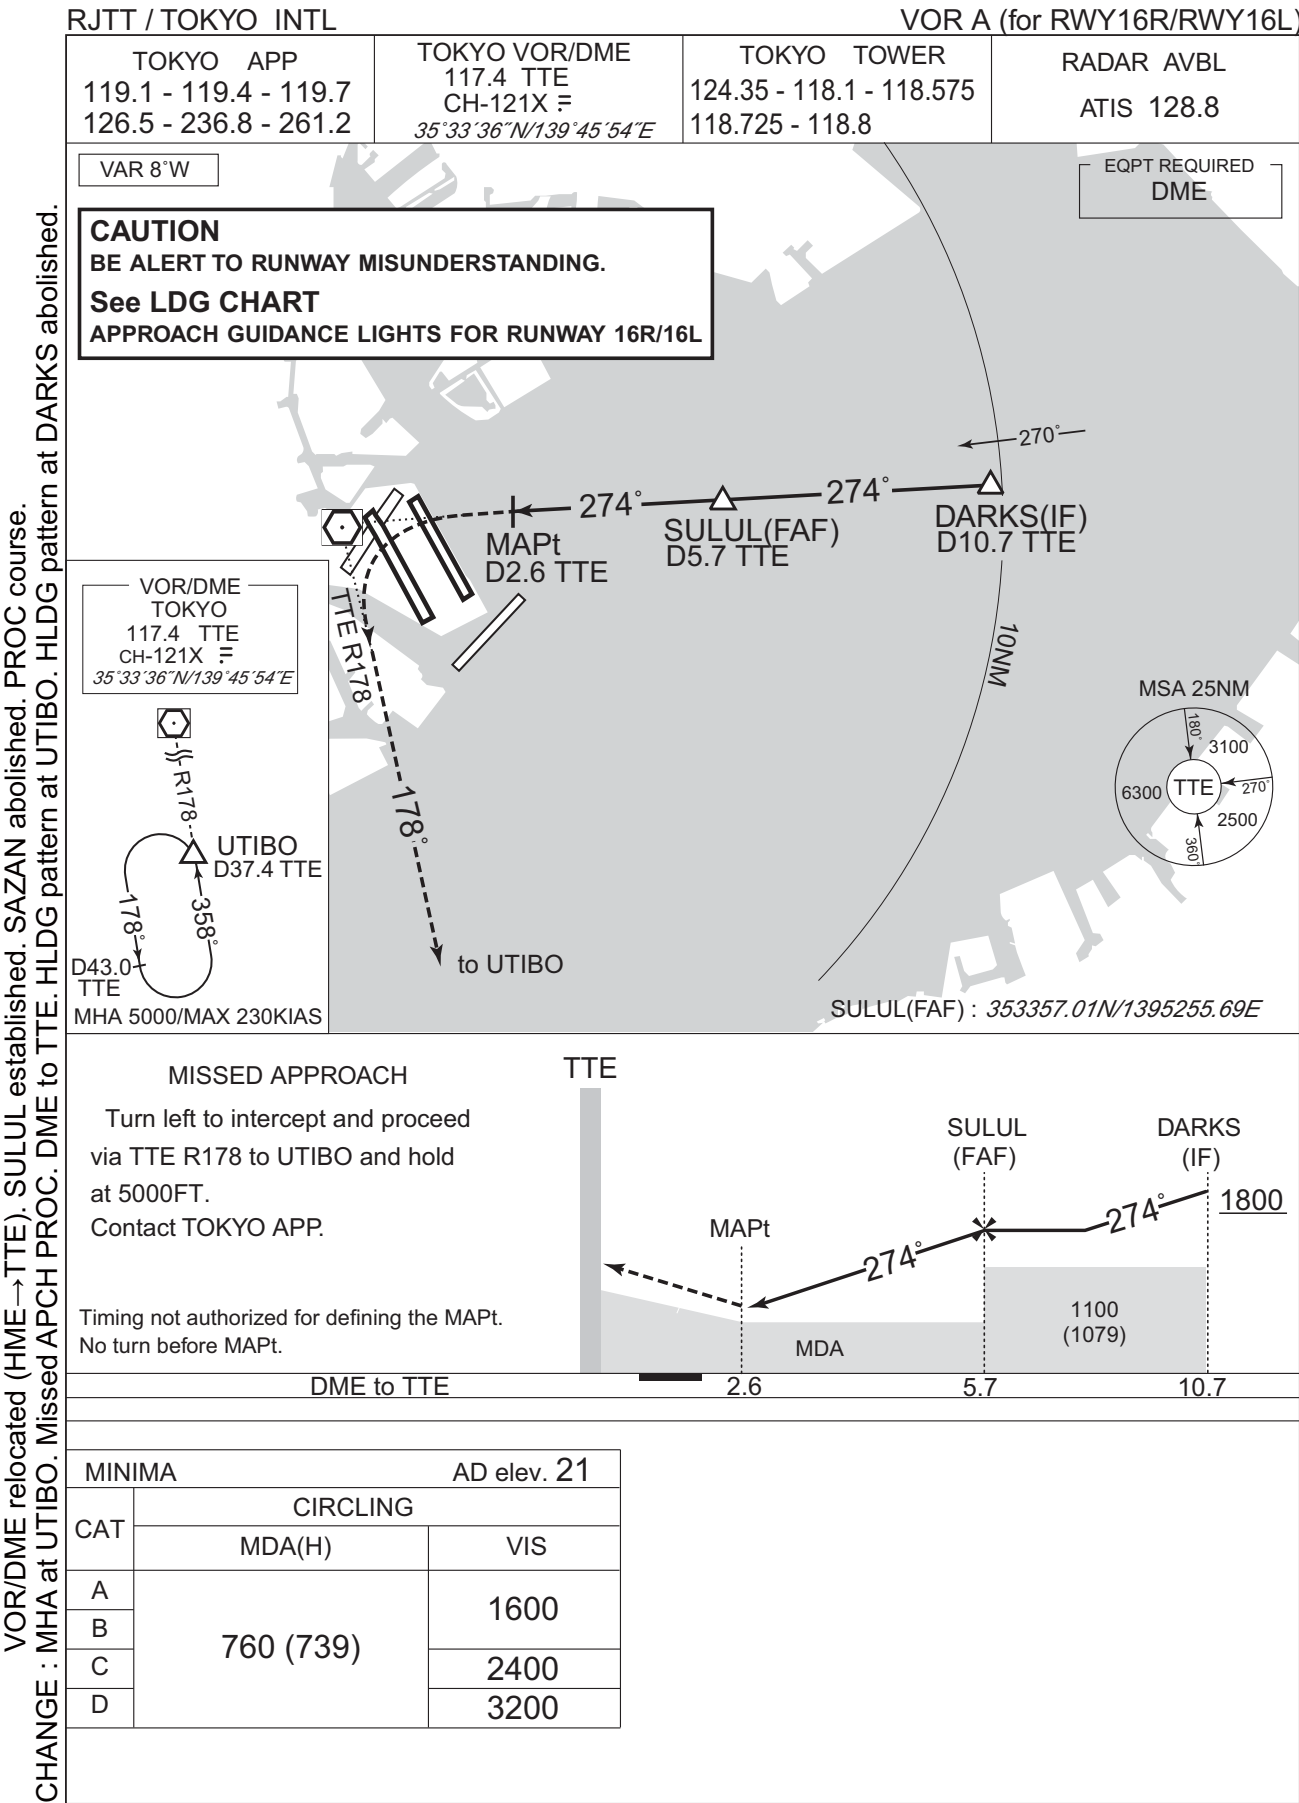

INTENTIONALLY LEFT BLANK

RJTT / TOKYO INTL

VISUAL APPROACH
HIGHWAY VISUAL RWY34R

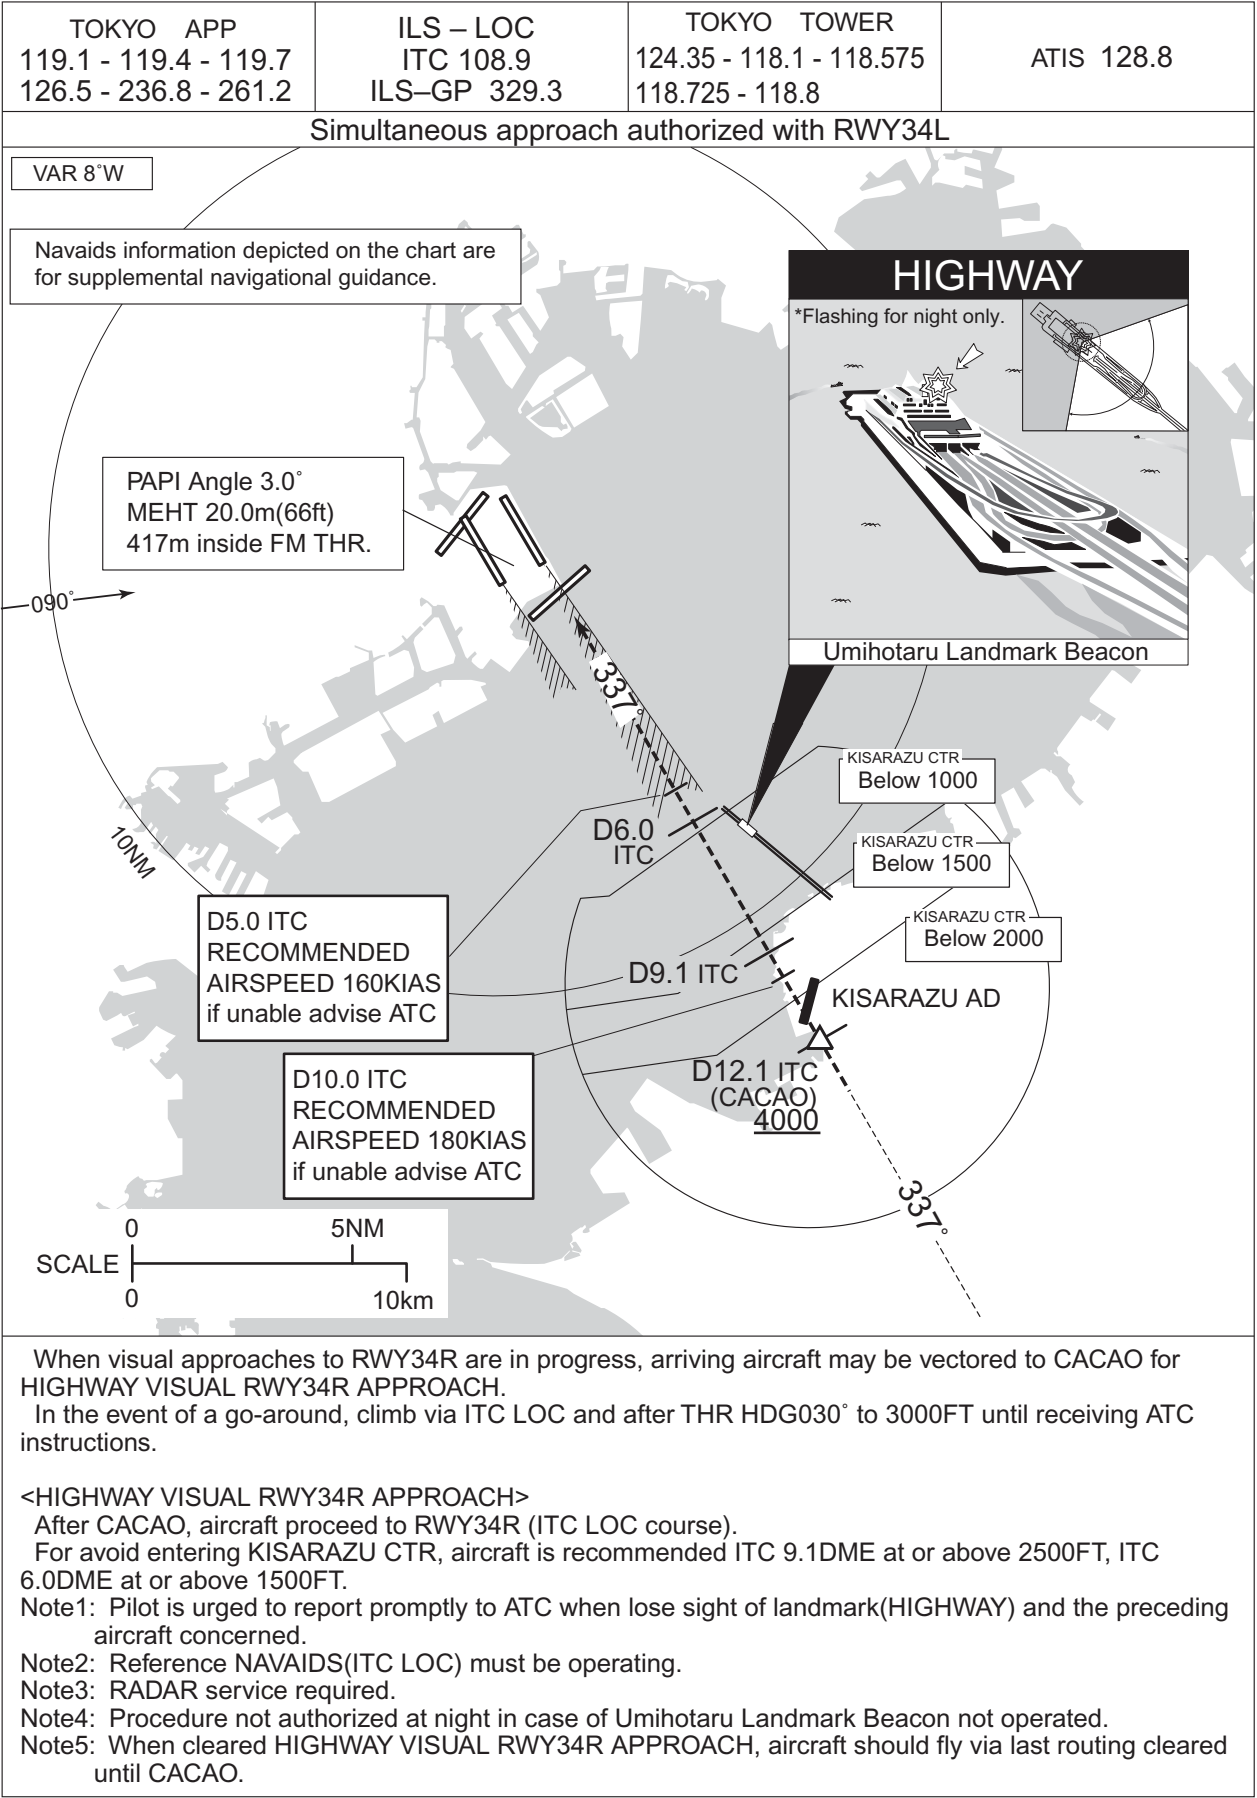


CHANGE : VAR.

RJTT / TOKYO INTL

HLDG PATTERN


VOR/DME relocated (HME→TTE). SULPU, SAPTI, OLRAT established. STONE, SINGO, ADDUM abolished.
CHANGE : PROC course. MHA at UTIBO. HLDG pattern at OLRAT established.

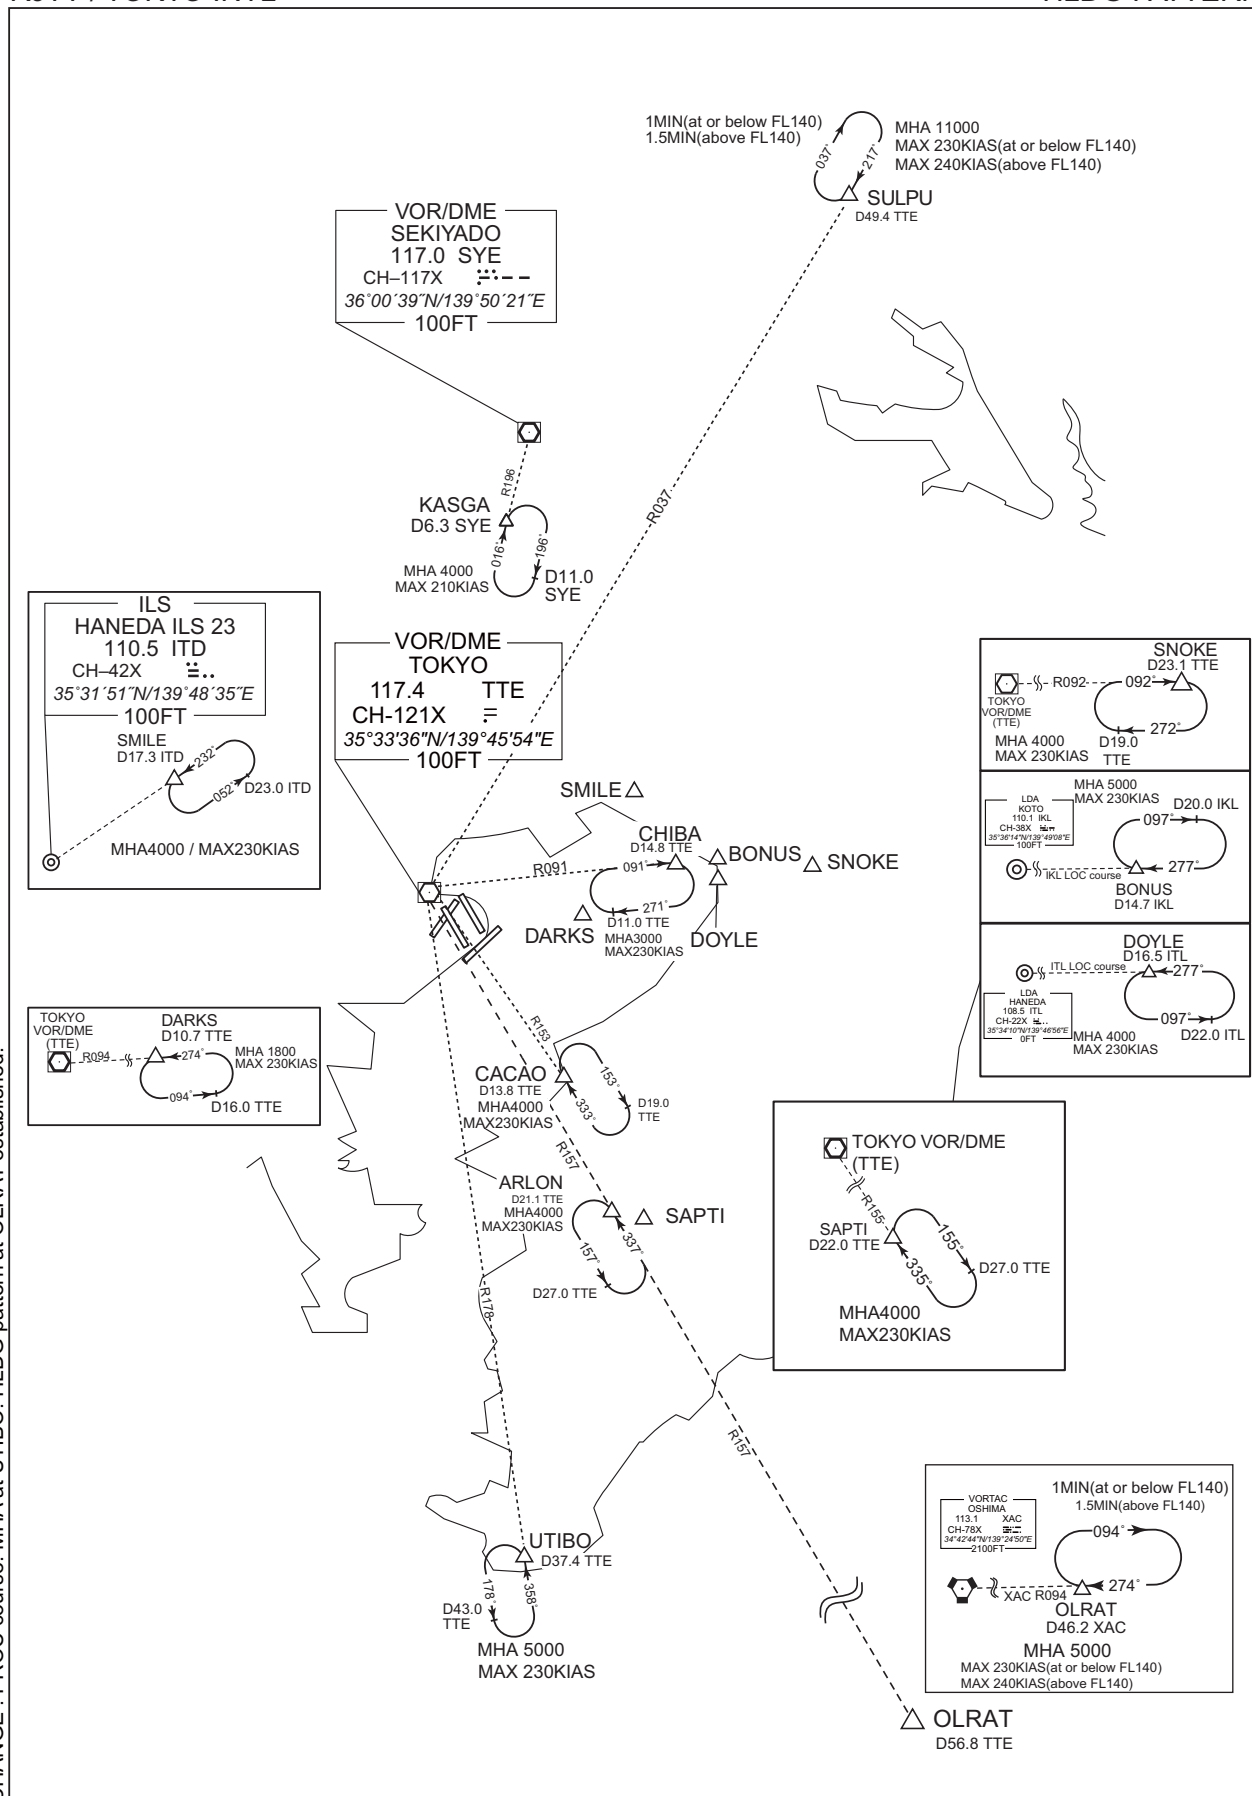

RNAV HLDG PATTERN

RNAV 1

ARLON MHA 4000	BACON MHA 4000
COACH MHA 4000	CREAM MHA 4000
DREAD MHA 5000	MESSE MHA 6000
SCREW MHA 4000	STING MHA 4000
NUMAN MHA 4000	OSHIMA(XA) MHA 5000
NEURO MHA 4000	OSMA MHA 4000

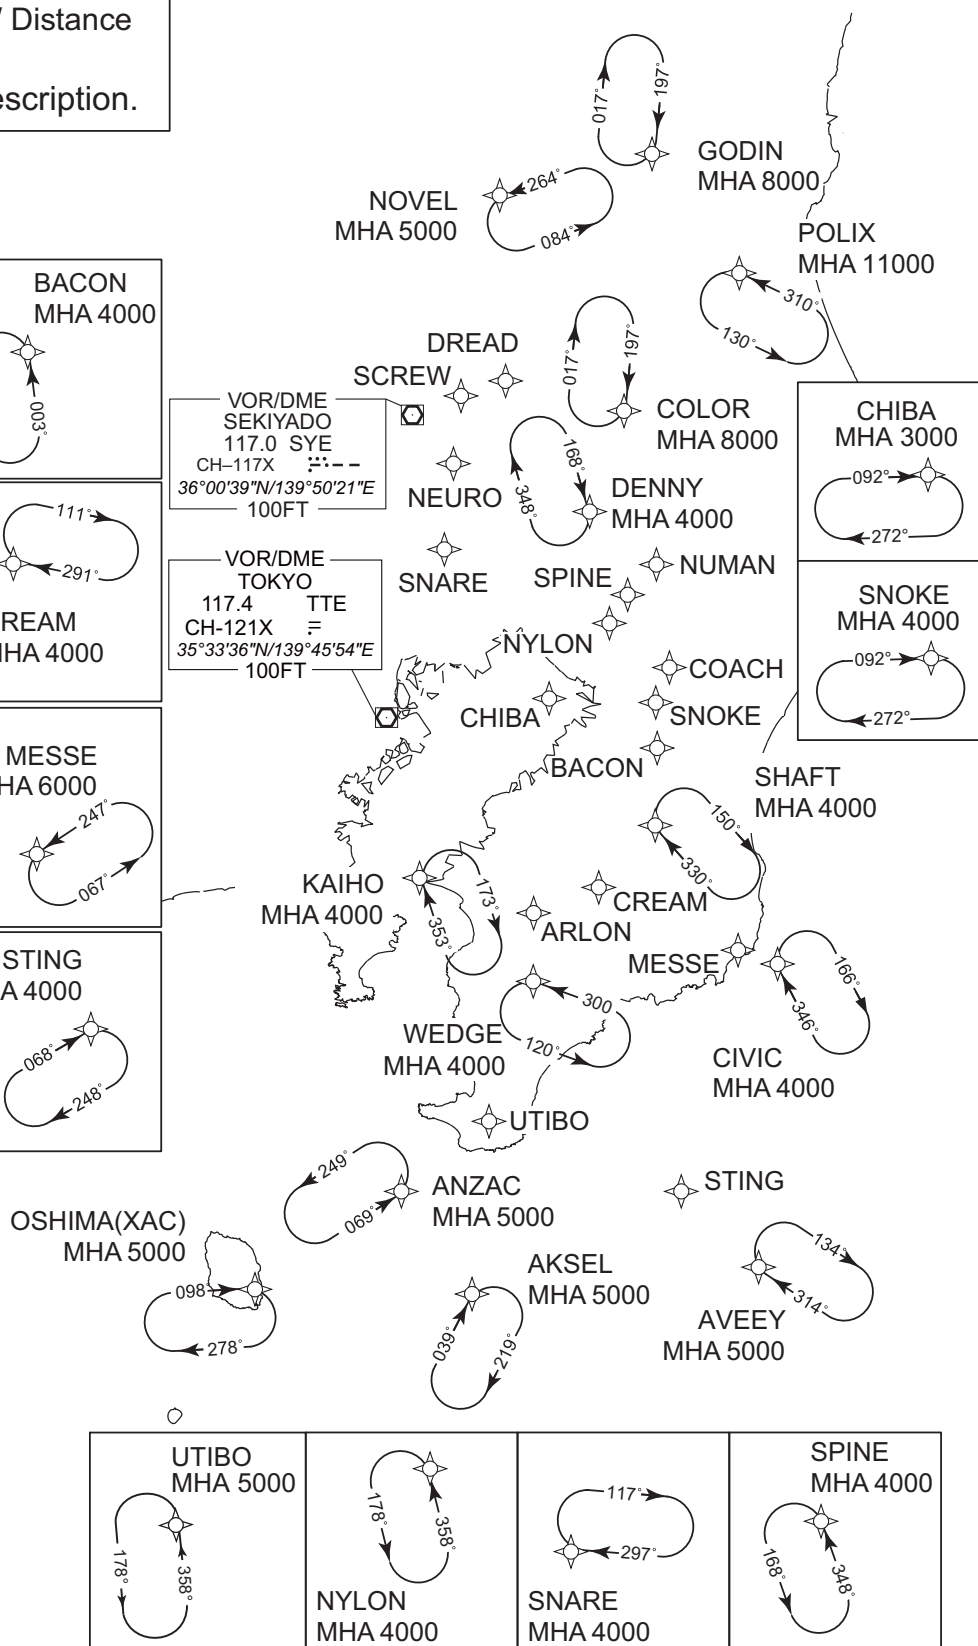

CHANGE :VOR/DME relocated (HME→TTE). HLDG pattern for SNOKE, UTIBO established.

RJTT / TOKYO INTL

RNAV HLDG PATTERN

CHANGE : HLDG pattern (SNOKE, UTIBO) established.

Path	Waypoint Identifier	Inbound Course 'M('T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ANZAC	069 (060.8)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	AVEEY	314 (306.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CHIBA	092 (083.7)	-7.9	1.0(-14000)	—	R	3000	—	-230(-14000)	RNAV1
Hold	CIVIC	346 (337.7)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	186 (177.8)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	DENNY	168 (159.9)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	DREAD	191 (183.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	MESSE	247 (238.8)	-7.9	1.0(-14000) 1.5(+14001)	—	L	6000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	291 (282.9)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NUMAN	360 (352.5)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	358 (350.0)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	POLIX	310 (302.3)	-7.9	1.0(-14000) 1.5(+14001)	—	L	11000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SCREW	203 (195.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SNOKE	092 (084.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SPINE	348 (340.6)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	STING	068 (059.6)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	UTIBO	358 (350.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	XAC	098 (090.3)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1

RJTT / TOKYO INTL

RNAV HLDG PATTERN


Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	NEURO	355727.6N / 1395441.3E
ANZAC	345028.8N / 1394146.7E	NOVEL	362106.9N / 1400004.9E
ARLON	351525.3N / 1395859.8E	NUMAN	354714.4N / 1401204.9E
AVEEY	344155.9N / 1402158.0E	NYLON	354018.5N / 1400919.9E
BACON	353155.0N / 1401215.1E	POLIX	361237.1N / 1402622.5E
CHIBA	353522.2N / 1400400.0E	SCREW	360301.2N / 1395400.4E
CIVIC	350840.6N / 1402552.1E	SHAFT	352227.4N / 1401313.3E
COACH	353736.0N / 1401231.5E	SNARE	354731.1N / 1395238.1E
COLOR	360116.3N / 1401219.8E	SNOKE	353551.6N / 1401411.7E
CREAM	351743.4N / 1400612.4E	SPINE	354213.5N / 1401125.8E
DENNY	354828.8N / 1400556.4E	STING	345157.9N / 1401453.4E
DREAD	360359.2N / 1395856.9E	UTIBO	345647.0N / 1395343.9E
GODIN	362425.3N / 1401655.9E	WEDGE	350900.4N / 1395846.5E
KAIHO	351857.8N / 1394642.4E	XAC	344244.1N / 1392450.5E
MESSE	351100.8N / 1402214.7E		

CHANGE : HLDG pattern (SNOKE, UTIBO) established.

RJTT / TOKYO INTL

Visual REP

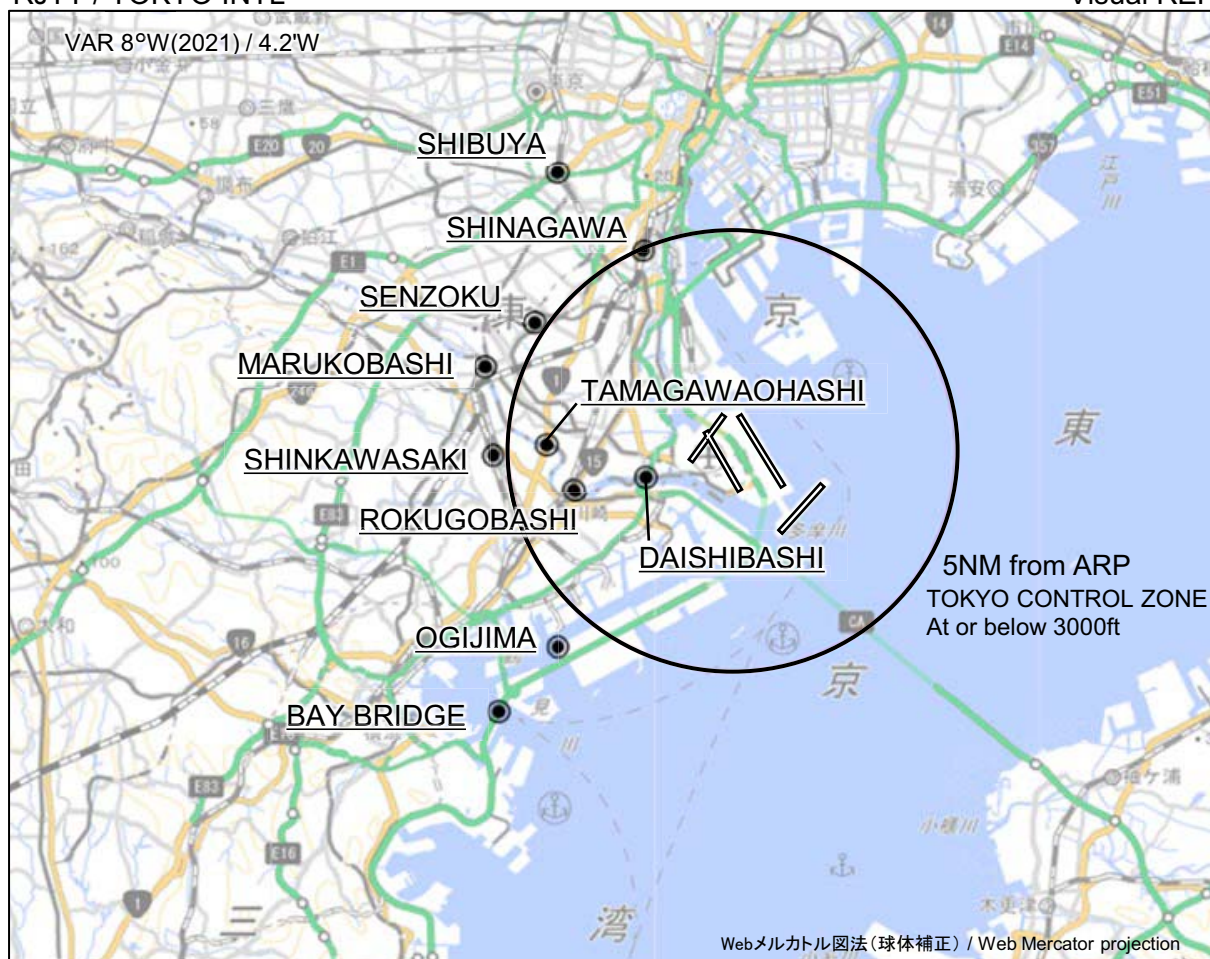


※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).


CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
渋谷 Shibuya	328°T / 7.4NM	JR駅 JR Station
品川 Shinagawa	336°T / 5.0NM	JR駅 JR Station
洗足 Senzoku	303°T / 5.3NM	池 Pond
丸子橋 Marukobashi	289°T / 5.8NM	橋 Bridge
多摩川大橋 Tamagawaohashi	272°T / 4.2NM	橋 Bridge
新川崎 Shinkawasaki	269°T / 5.4NM	JR駅 JR Station
大師橋 Daishibashi	253°T / 2.0NM	橋 Bridge
六郷橋 Rokugobashi	255°T / 3.7NM	橋 Bridge
扇島 Ogijima	221°T / 5.9NM	扇島の西端 West edge of the island
ベイブリッジ Bay Bridge	221°T / 7.9NM	(首都高速湾岸線)橋 Bridge

RJTT / TOKYO INTL

Minimum Vectoring Altitude CHART

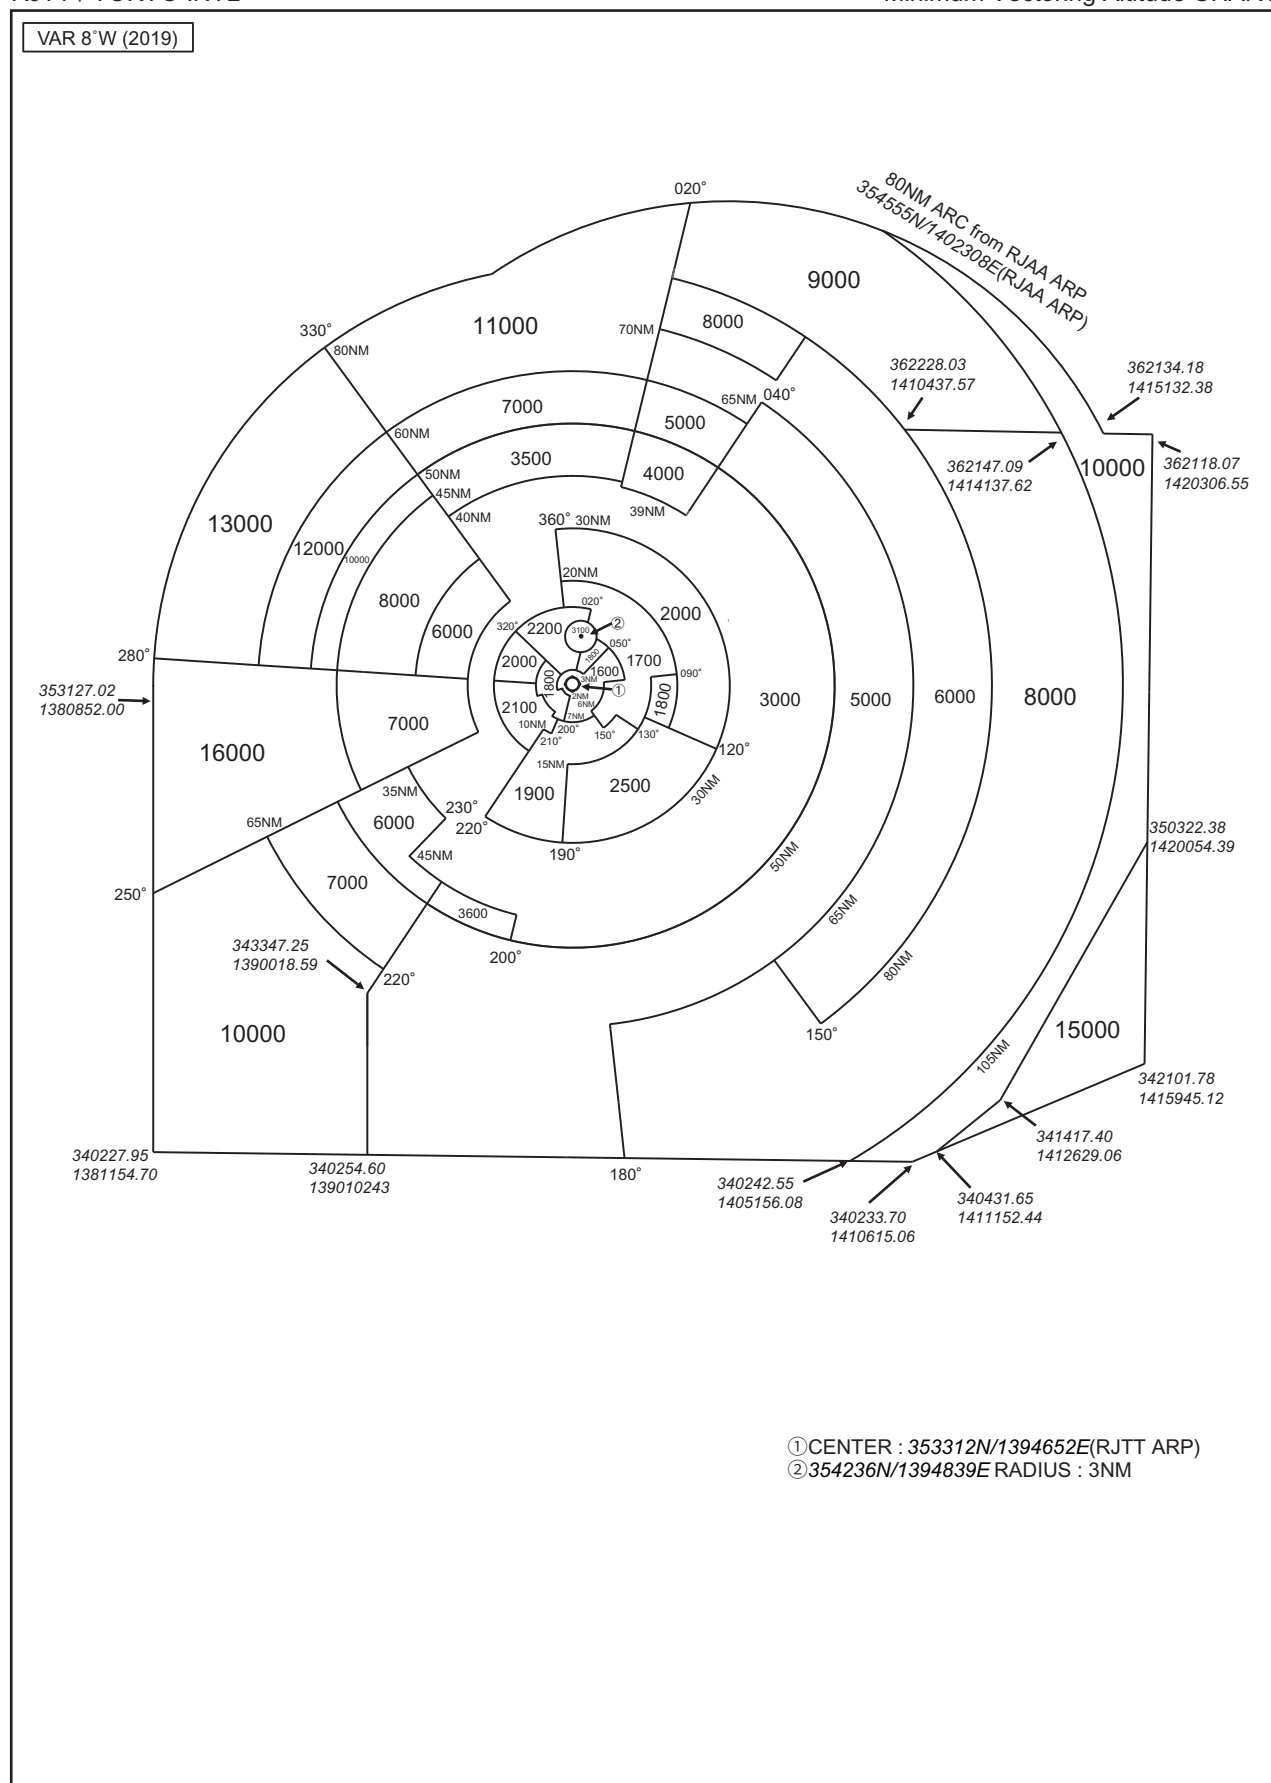

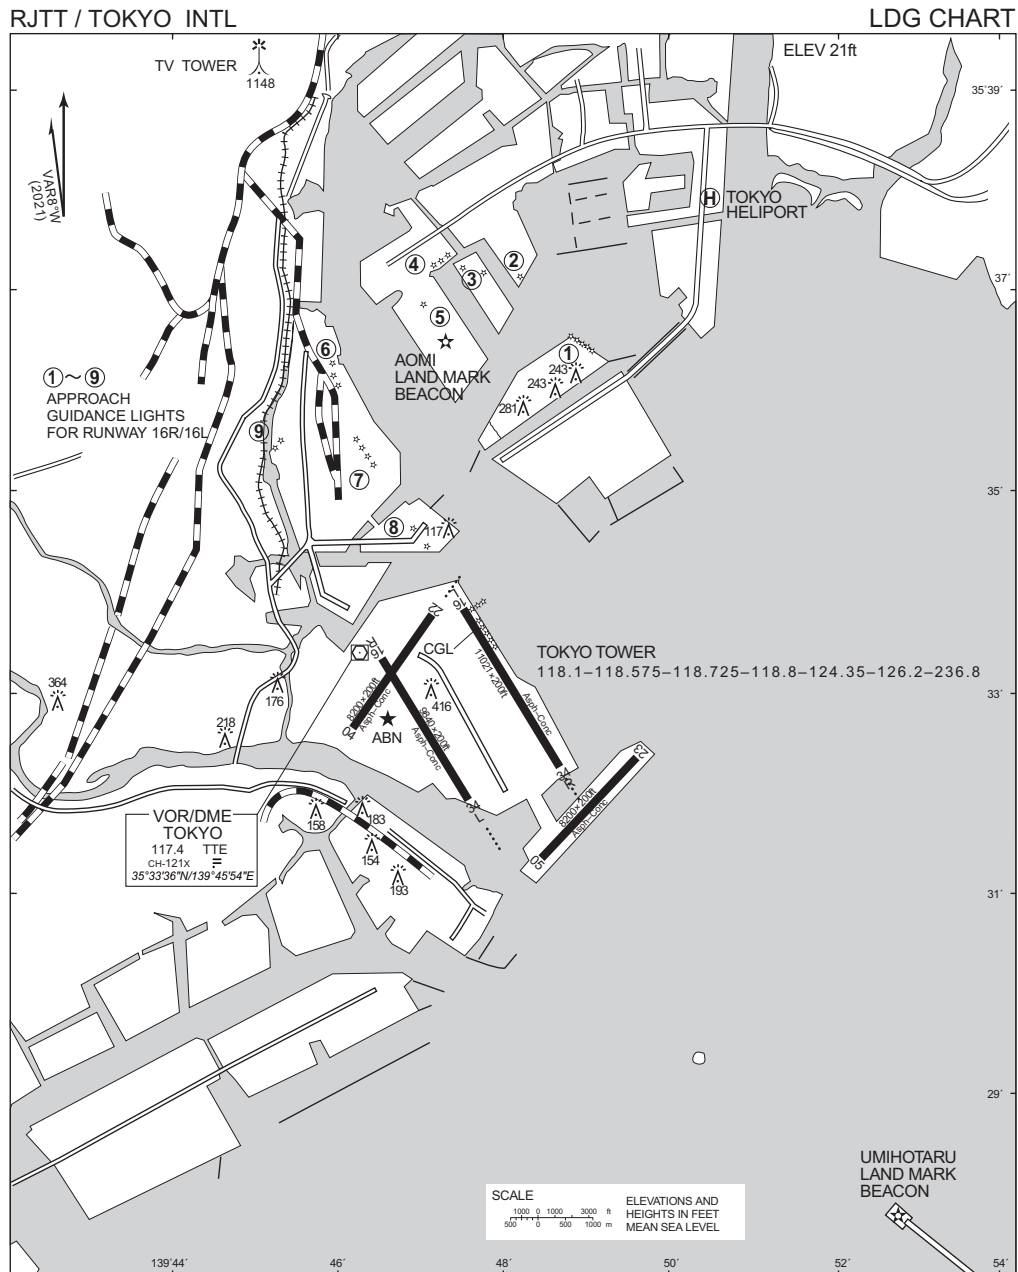

CHANGE : VOR/DME relocated (HME→TTE).

PAPI:

RWY16L-3.0°, MEHT 19.9m (65ft)

412m inside from THR.

RWY16L-3.25°, MEHT 19.9m(65ft)

378m inside from THR.

RWY34R-3.0°, MEHT 20.0m (66ft)

416m inside from THR.

RWY16R-3.0°, MEHT 19.9m (65ft)

432m inside from THR.

RWY16R-3.25°, MEHT 19.9m(65ft)

397m inside from THR.

RWY34L-3.0°, MEHT 20.0m (66ft)

449m inside from THR.

RWY04-3.0°, MEHT 18.5m (61ft)

369m inside from THR.

RWY22-3.0°, MEHT 19.5m (63ft)

438m inside from THR.

RWY23-3.0°, MEHT 20.0m (66ft)

452m inside from THR.

RWY Grooving :

RWY16L/34R 3360m X 40m

RWY16R/34L 3000m X 40m

RWY04/22 2500m X 40m

RWY05/23 2500m X 40m

Attachment-1

