



KITADAITO AP

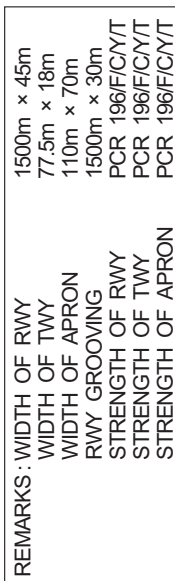

## LONGITUDINAL PROFILE OF RWY

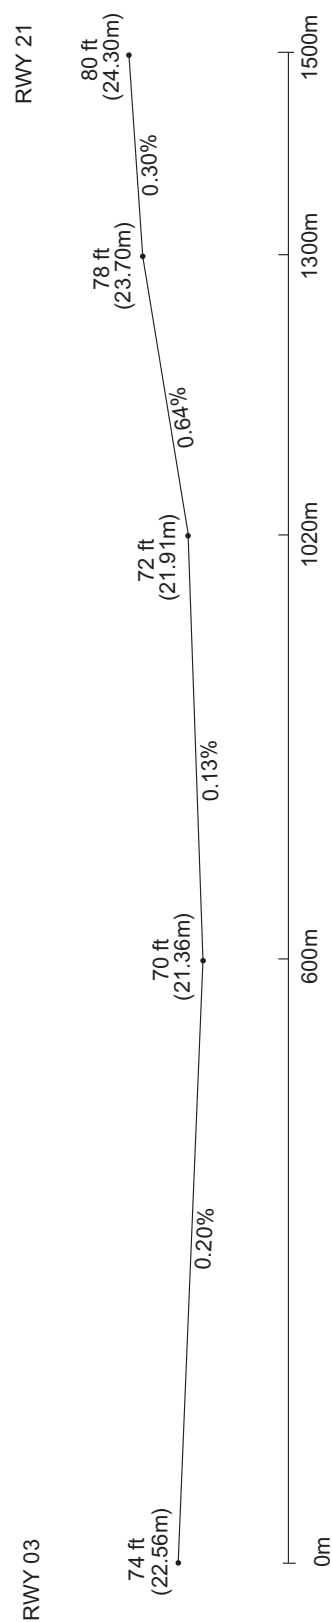

STANDARD DEPARTURE CHART -INSTRUMENT

RORK / KITADAITO

SID


SOUTH SIX DEPARTURE

RWY03 : Climb RWY HDG to 500FT, turn right, direct to MDE VOR/DME.


RWY21 : Climb to MDE VOR/DME.

Cross MDE VOR/DME at or above 2400FT.

SOUTH SIX DEPARTURE

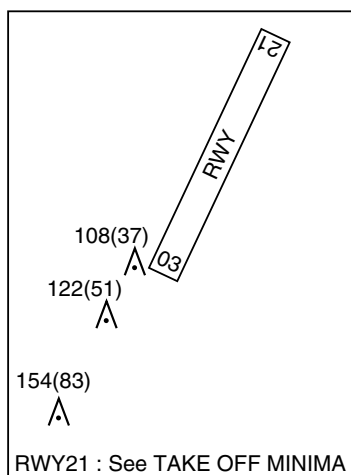

VOR/DME  
MINAMIDAITO  
117.8 MDE  
CH-125X  
25°51'16"N/131°15'50"E  
200FT

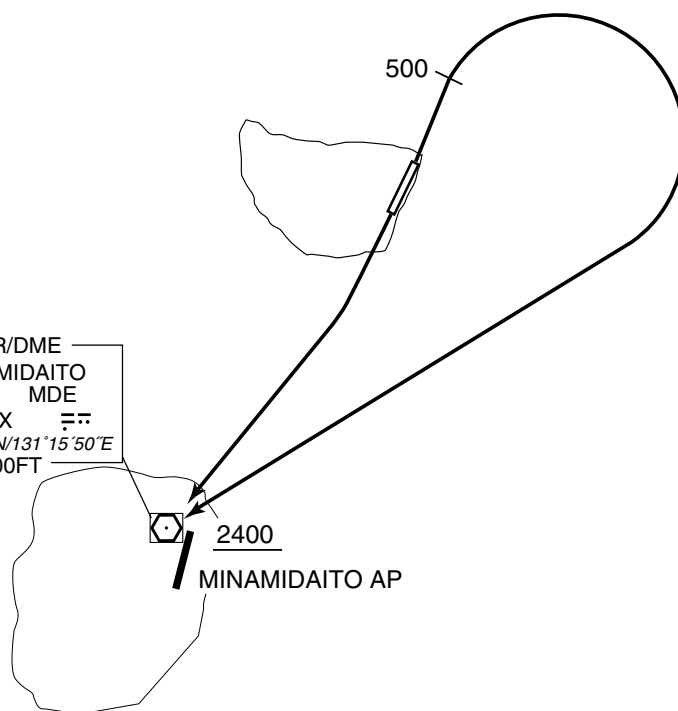

## RORK / KITADAITO

## RNAV SID




NOTE RWY03 : 4.0% climb gradient required up to 500FT due to airspace restrictions only.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 210<br>(205.4) | -4.9               | —             | —              | +500          | —            | —              | RNP1                     |
| 002           | DF              | CORCO               | —        | —              | -4.9               | —             | R              | +5000         | —            | —              | RNP1                     |


INSTRUMENT APPROACH CHART

RORK / KITADAITO

VOR Z RWY03

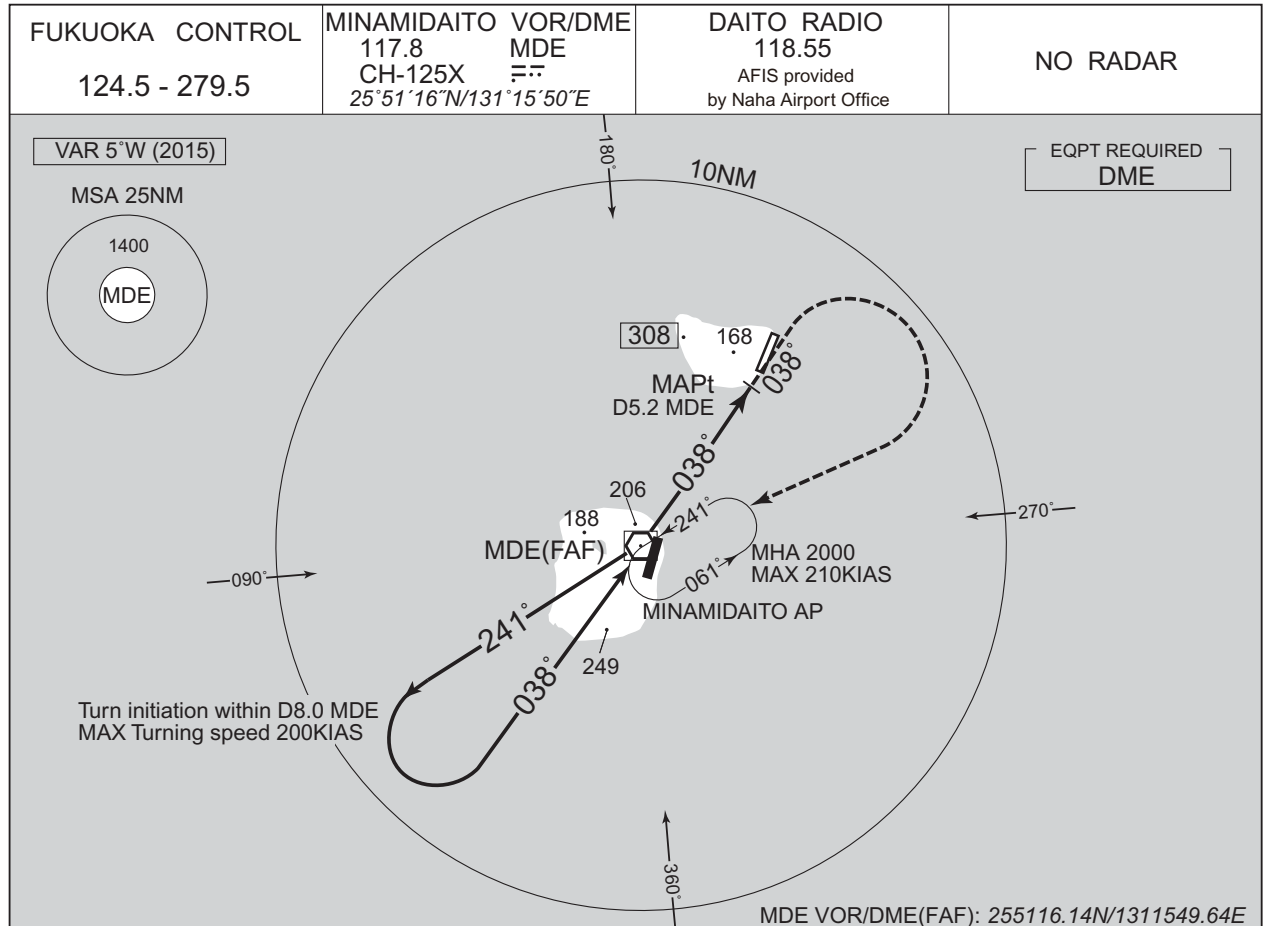

| NM from MDE          | FAF  | 1    | 2    | 3    | 4   | MAPt |
|----------------------|------|------|------|------|-----|------|
| ALT (3.0° APCH Path) | 2030 | 1711 | 1393 | 1075 | 756 | —    |

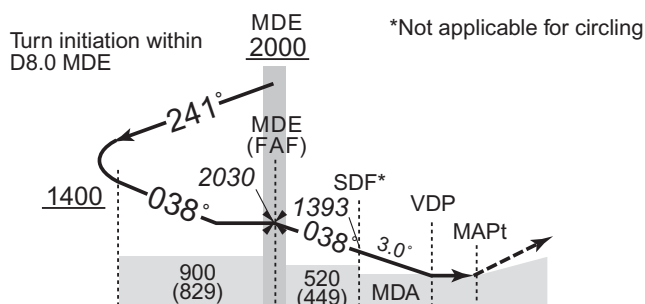

**MISSED APPROACH**

Climb to 500FT via MDE R038,  
turn right, direct to MDE VOR/DME  
and hold at 2000FT.  
Contact DAITO RADIO.

Timing not authorized for defining the MAPt.

| DME from MDE | 0   | 2.0 | 4.8 | 5.2 | 6.0 |
|--------------|-----|-----|-----|-----|-----|
| NM to THR    | 6.0 | 4.0 | 1.2 | 0.8 | 0   |


| MINIMA |           | THR elev. 74 | AD elev. 71 |      |
|--------|-----------|--------------|-------------|------|
| CAT    | MDA(H)    | CMV          | MDA(H)      | VIS  |
| A      | 480 (409) | 1500         | 560 (489)   | 1600 |
| B      | 480 (409) | 1500         | 560 (489)   | 1600 |
| C      | 490 (419) | 1800         | 630 (559)   | 2400 |
| D      | —         | —            | —           | —    |

CHANGE : ATC call sign.

## INSTRUMENT APPROACH CHART

RORK / KITADAITO

VOR Y RWY03

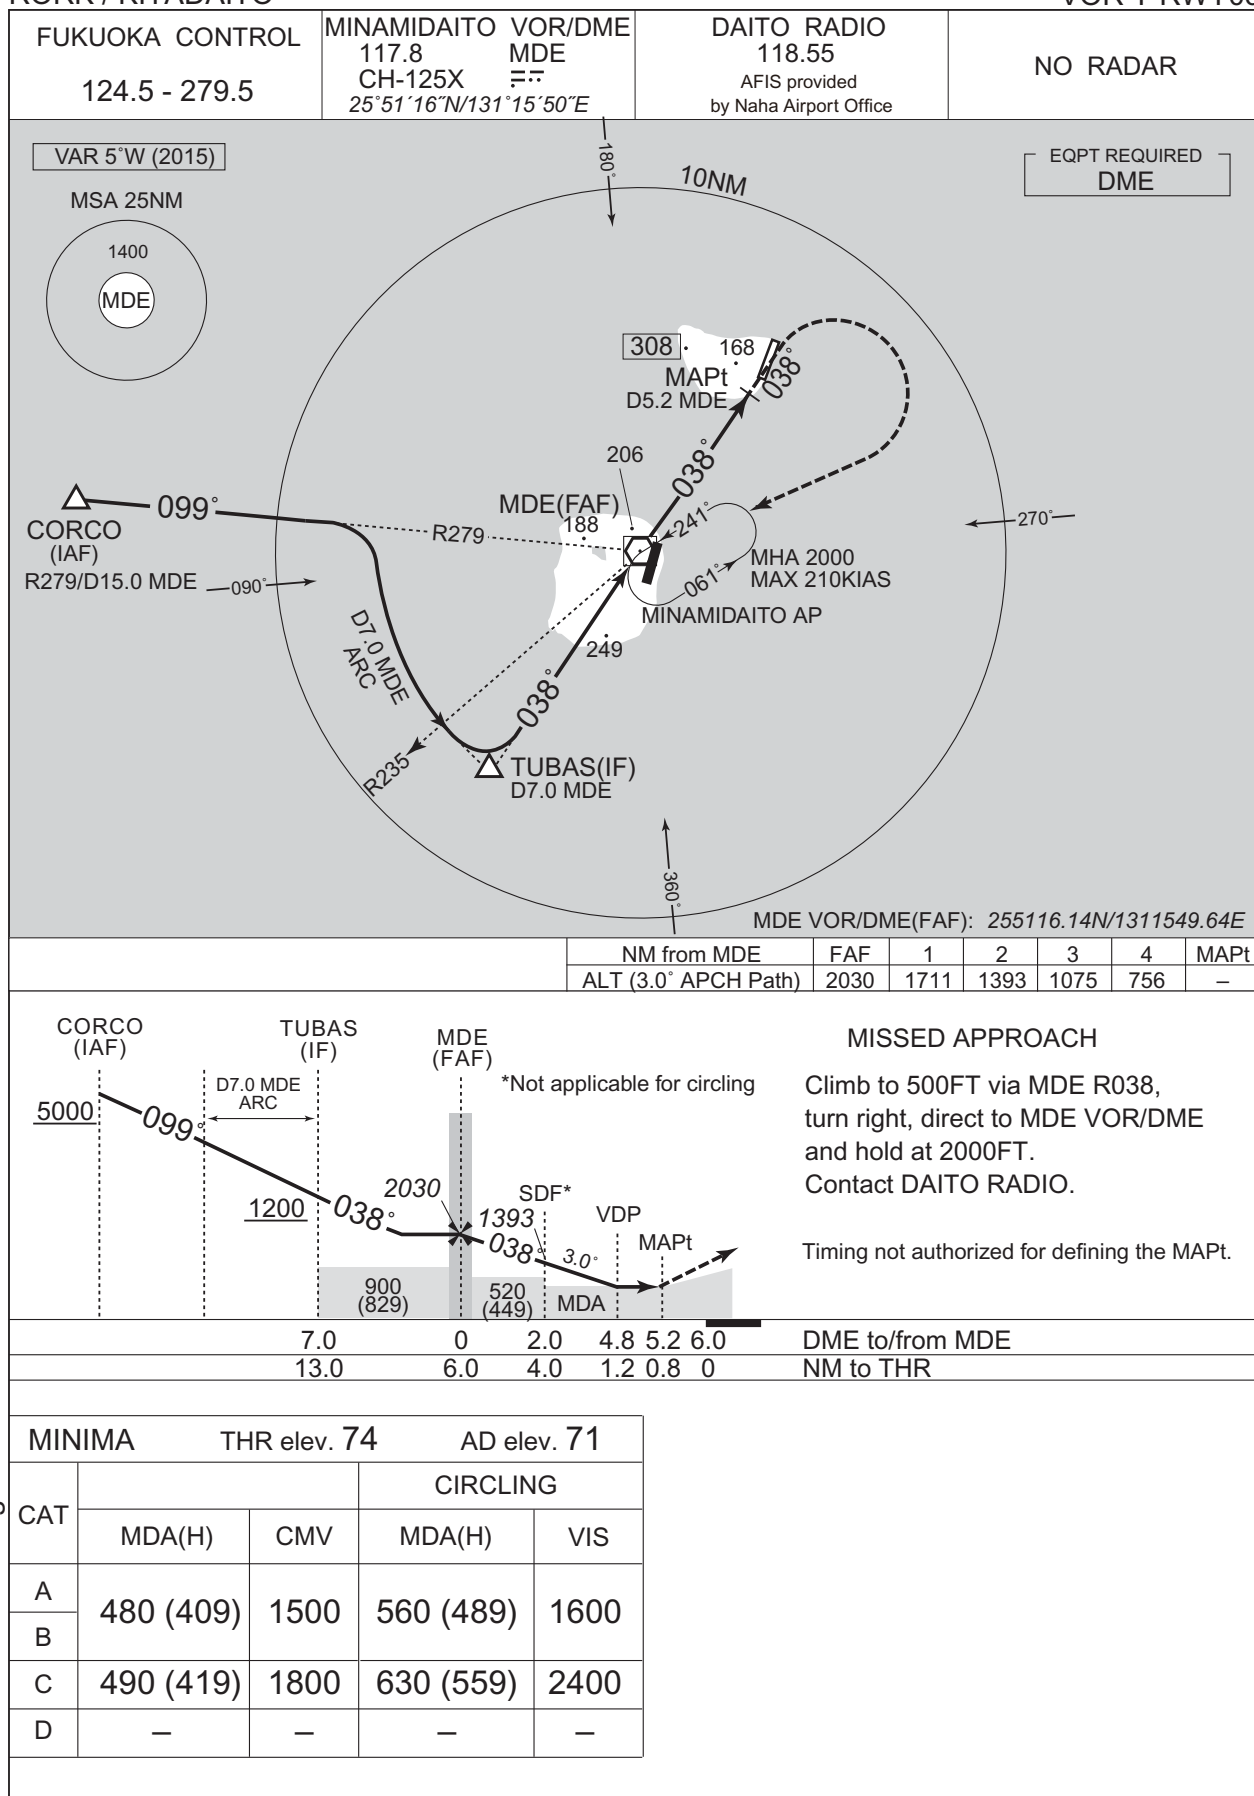


CHANGE : ATC call sign.

INSTRUMENT APPROACH CHART

RORK / KITADAITO


RNP RWY03

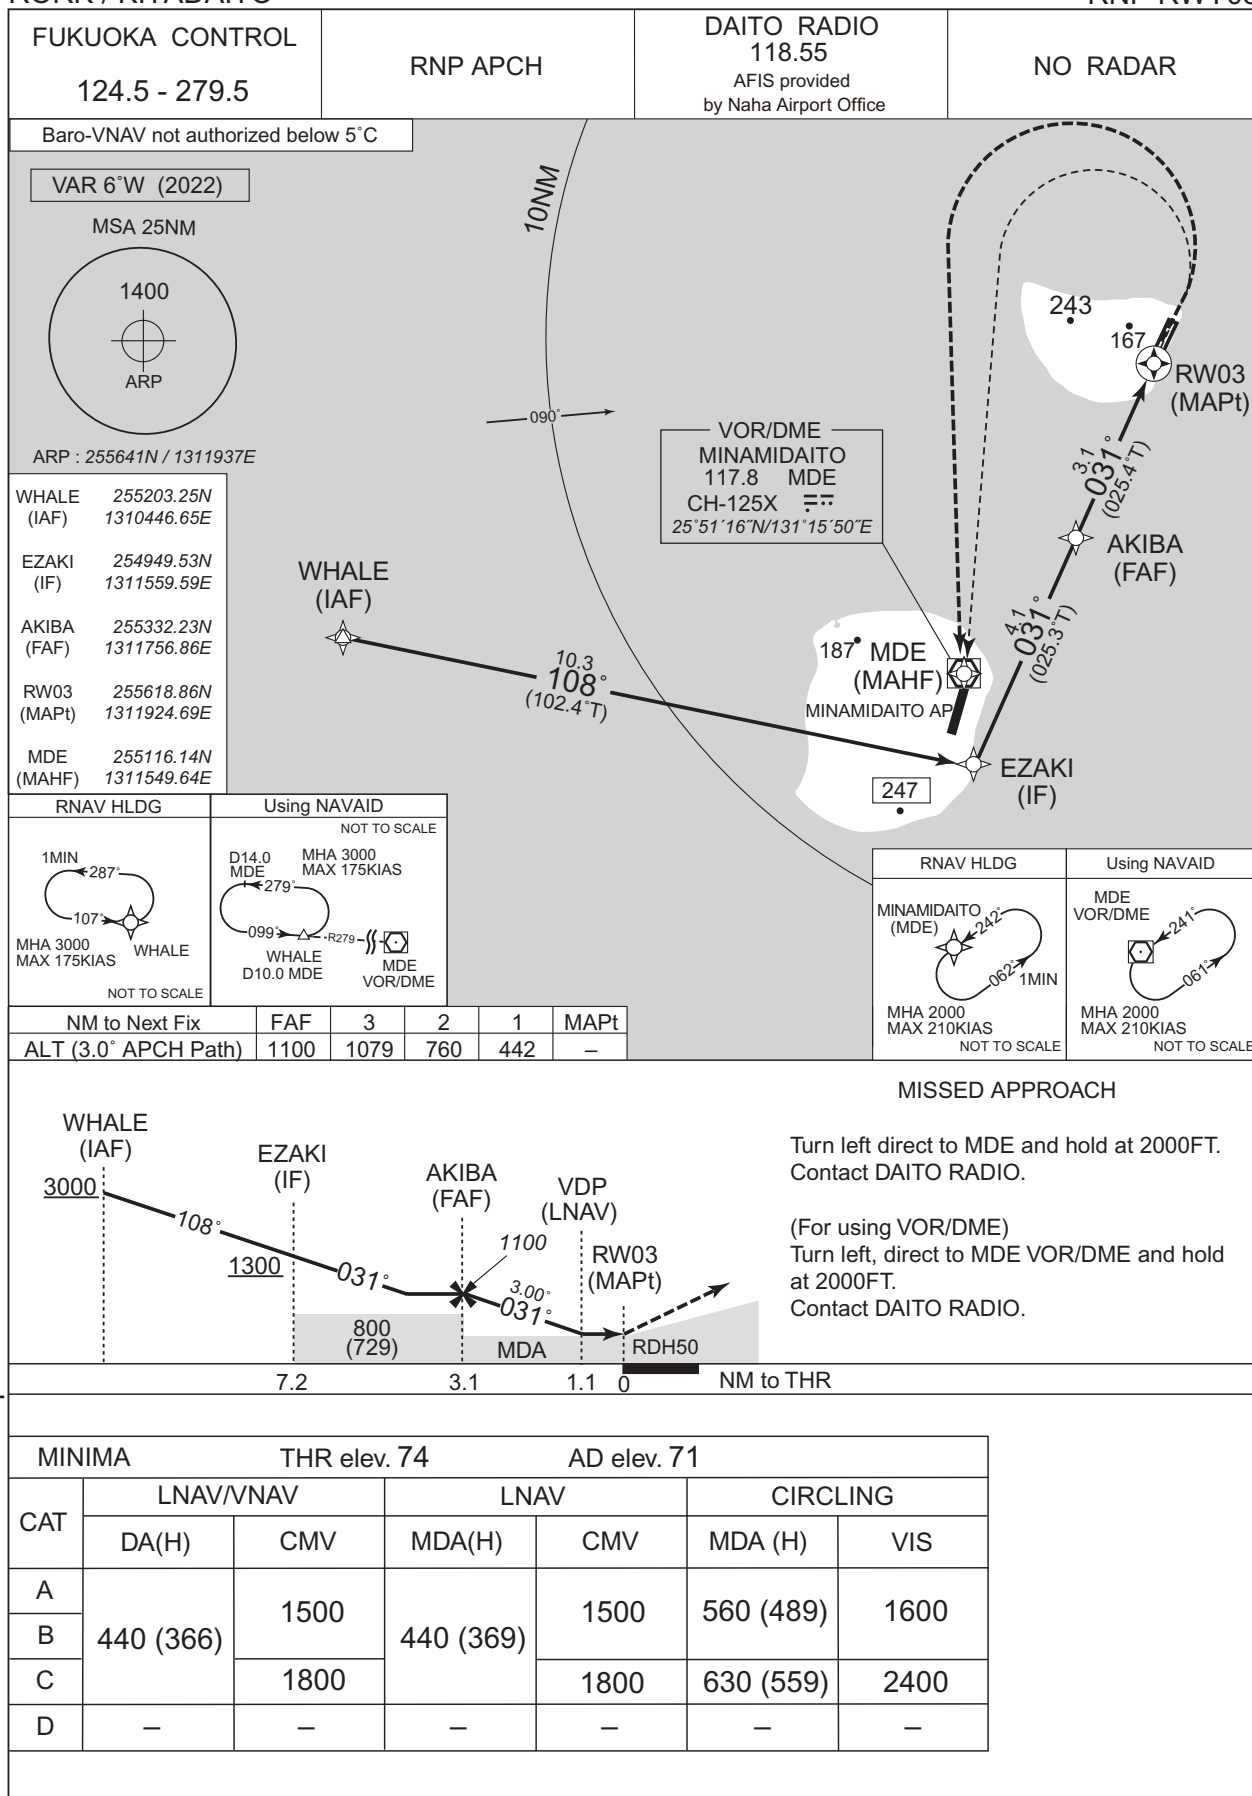

CHANGE:PROC renamed. Requirement for RNP:

RORK / KITADAITO

Visual REP

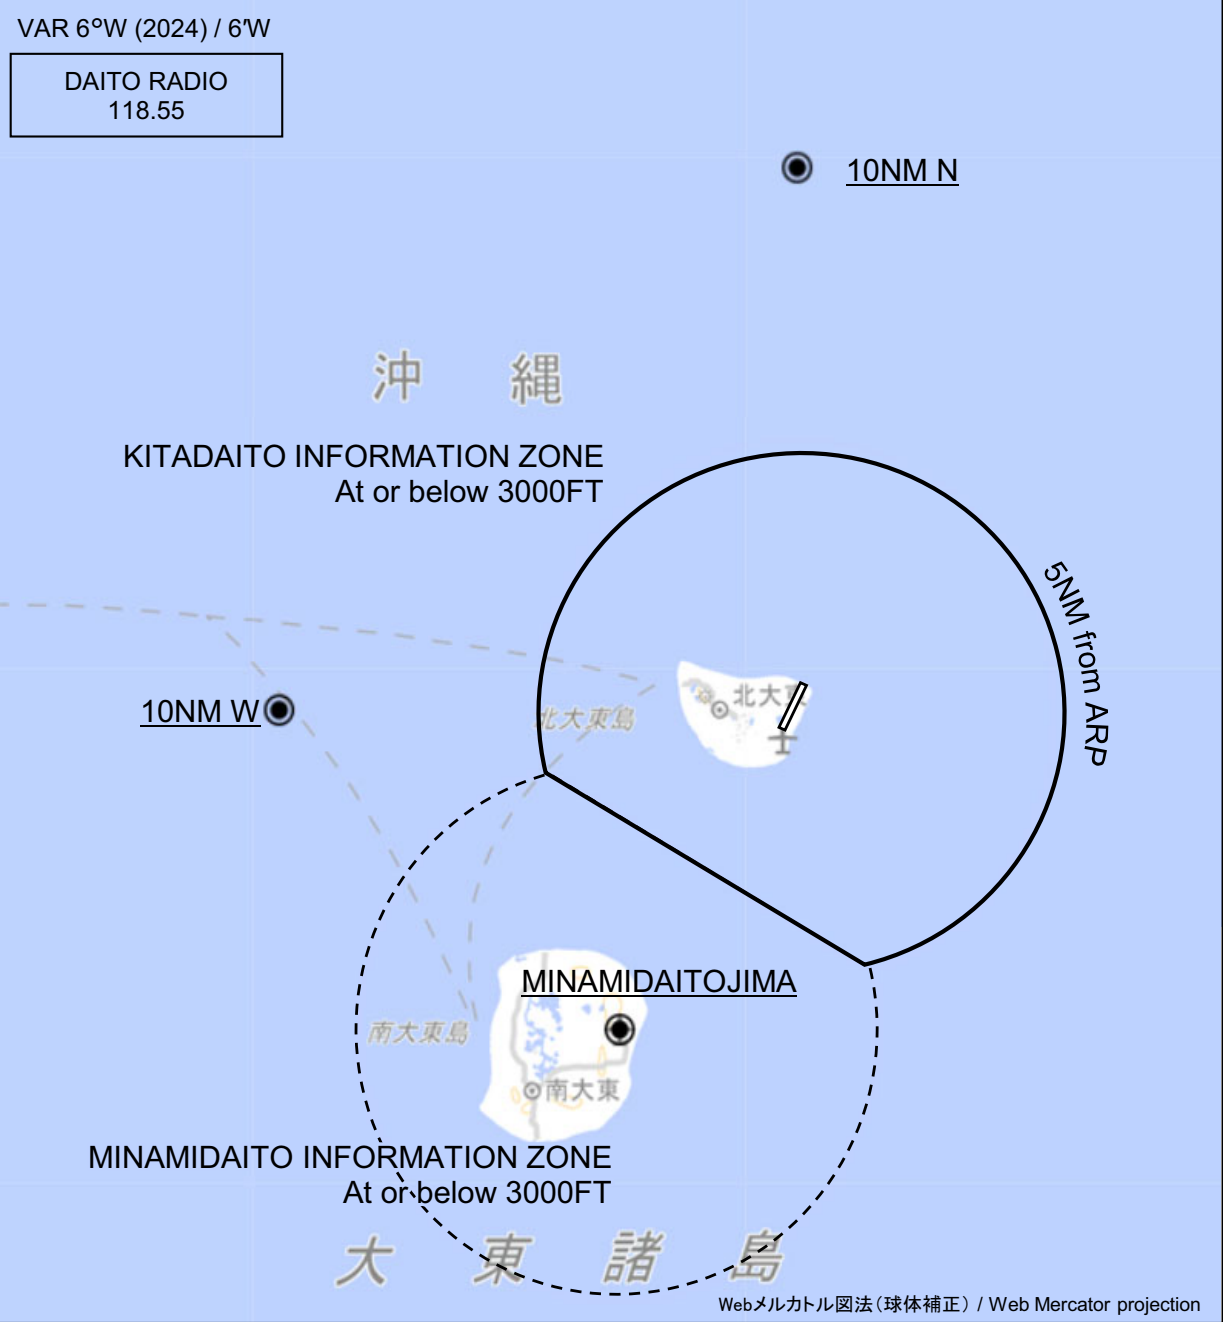

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

| CHANGE : VAR. | Call sign               | BRG / DIST from ARP | Remarks                      |
|---------------|-------------------------|---------------------|------------------------------|
|               | 10NM N                  | 360°T / 10.0NM      | 海上<br>Over the sea           |
|               | 10NM W                  | 270°T / 10.0NM      | 海上<br>Over the sea           |
|               | 南大東島<br>Minamidaitojima | 210°T / 6.8NM       | 南大東空港<br>Minamidaito Airport |

RORK / KITADAITO

Minimum Vectoring Altitude CHART

CHANGE : Shape of segment. Minimum vectoring altitude.

