

STANDARD DEPARTURE CHART - INSTRUMENT

RJAW / IWOTO

SID and TRANSITION

IWO TWO DEPARTURE

RWY 07/25 : Climb RWY HDG to 1000FT or above, then proceed as directed by ATC.
Remarks: IWO TWO DEPARTURE is not illustrated.


NIKOP ONE DEPARTURE

RWY 07 : Climb RWY HDG to 900FT, turn left HDG292° to intercept and proceed via IJT R337 to NIKOP.
RWY 25 : Climb RWY HDG to 800FT, turn right HDG022° to intercept and proceed via IJT R337 to NIKOP.

VASHU TRANSITION

From over NIKOP, via IJT R337 to VASHU.
Cross VASHU at assigned altitude.

CHANGE : NIKOP ONE DEPARTURE established. TIDRI TWO DEPARTURE abolished. PROC course.

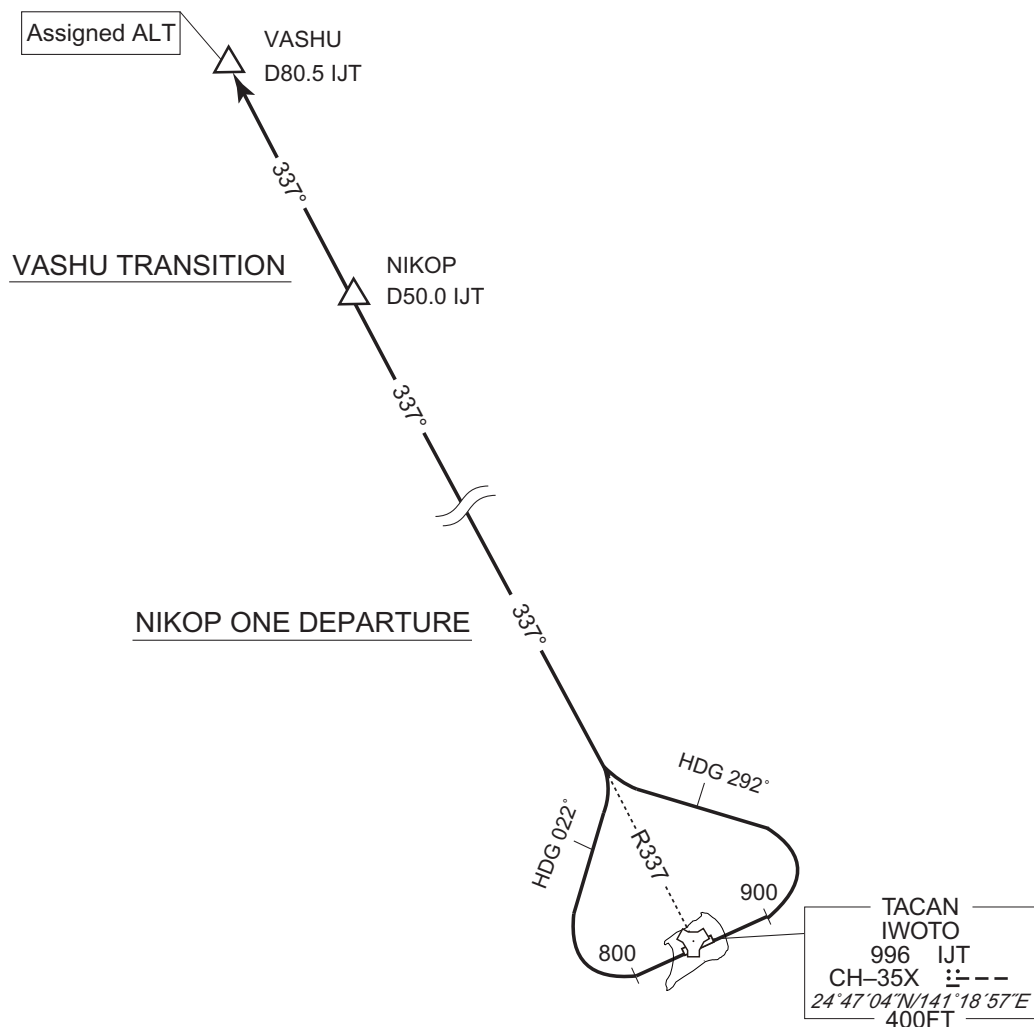

STANDARD DEPARTURE CHART - INSTRUMENT


RJAW / IWOTO

SID

KAGUN ONE DEPARTURE

RWY 07 : Climb RWY HDG to 900FT, via IJT R094 to KAGUN.

RWY 25 : Climb RWY HDG to 800FT, turn left HDG049° to intercept and proceed via IJT R094 to KAGUN.

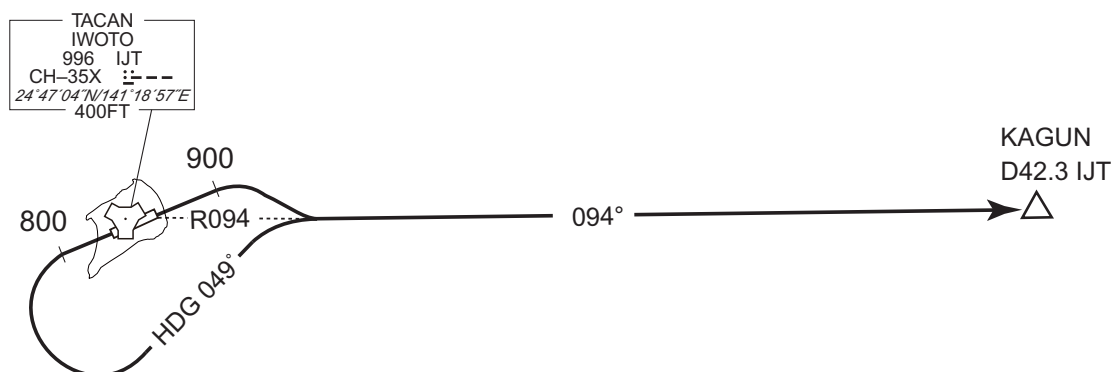

CHANGE : New PROC.

STANDARD DEPARTURE CHART - INSTRUMENT

RJAW /IWOTO

RNAV SID

VASKO THREE DEPARTURE

RNP1

Note GNSS required.

VAR 4°W

RWY07 : Climb on HDG072° at or above 900FT, direct to VASKO at or above 6000FT.
RWY25 : Climb on HDG252° at or above 800FT, turn right direct to VASKO at or above 6000FT.

RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	072 (067.7)	-4.0	—	—	+900	—	—	RNP1
002	DF	VASKO	—	—	-4.0	—	—	+6000	—	—	RNP1

RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	252 (247.8)	-4.0	—	—	+800	—	—	RNP1
002	DF	VASKO	—	—	-4.0	—	R	+6000	—	—	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates
VASKO	250015.8N / 1420213.0E

CHANGE : PROC renamed. PROC course. VAR. Waypoint Coordinates added.

INTENTIONALLY LEFT BLANK

STANDARD ARRIVAL CHART - INSTRUMENT

RJAW / IWOTO

STAR

TOPON NORTH ARRIVAL


From over VASHU, via IJT R337, turn right, via IJT 11.0DME counterclockwise ARC to TOPON.

Cross NIKOP at assigned altitude, cross TOPON at or above 3000FT.

IGORI NORTH ARRIVAL

From over VASHU, via IJT R337, turn left, via IJT 11.0DME clockwise ARC to IGORI.

Cross NIKOP at assigned altitude, cross IGORI at or above 3000FT.

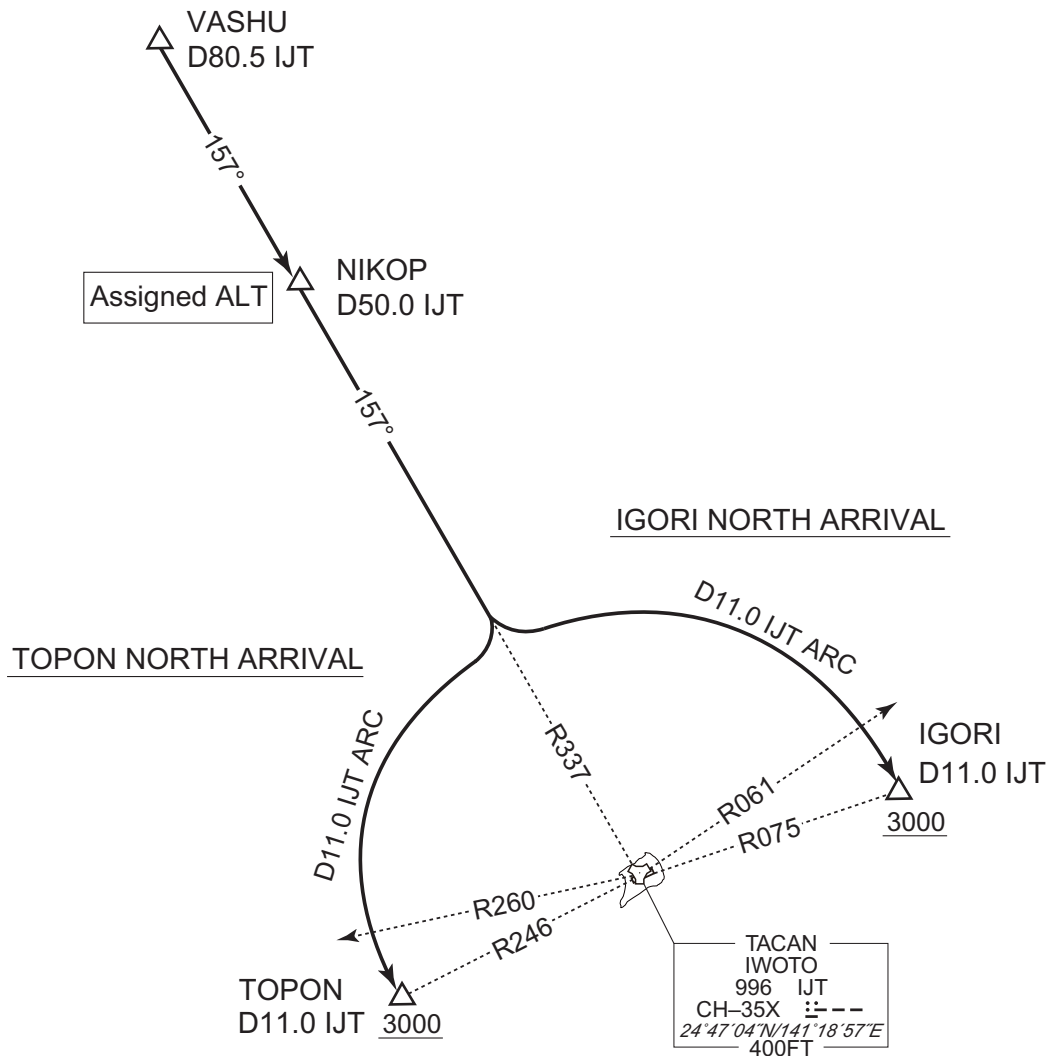

CHANGE : New PROC.

STANDARD ARRIVAL CHART - INSTRUMENT

RJA W / IWOTO


STAR

TOPON EAST ARRIVAL

From over KAGUN, via IJT R094 to IJT TACAN, via IJT R246 to TOPON.
Cross TOPON at or above 3000FT.

IGORI EAST ARRIVAL

From over KAGUN, via IJT R094, turn right, via IJT 16.0DME counterclockwise ARC to intercept and proceed via IJT R075 to IGORI.
Cross IGORI at or above 3000FT.

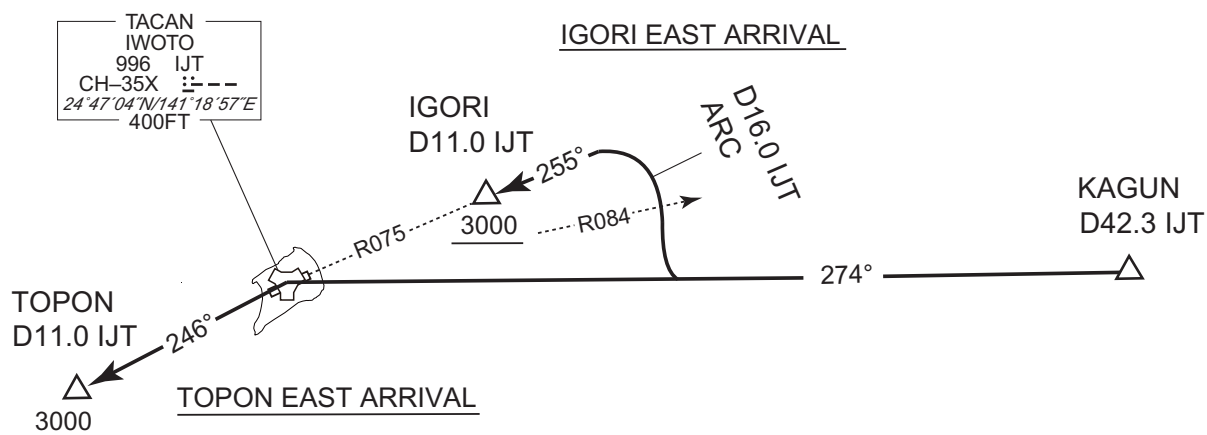

CHANGE : New PROC.

STANDARD ARRIVAL CHART - INSTRUMENT


RJAW /IWOTO

RNAV STAR

VASKO ARRIVAL	RNP1
---------------	------

Note GNSS required.

VAR 4°W

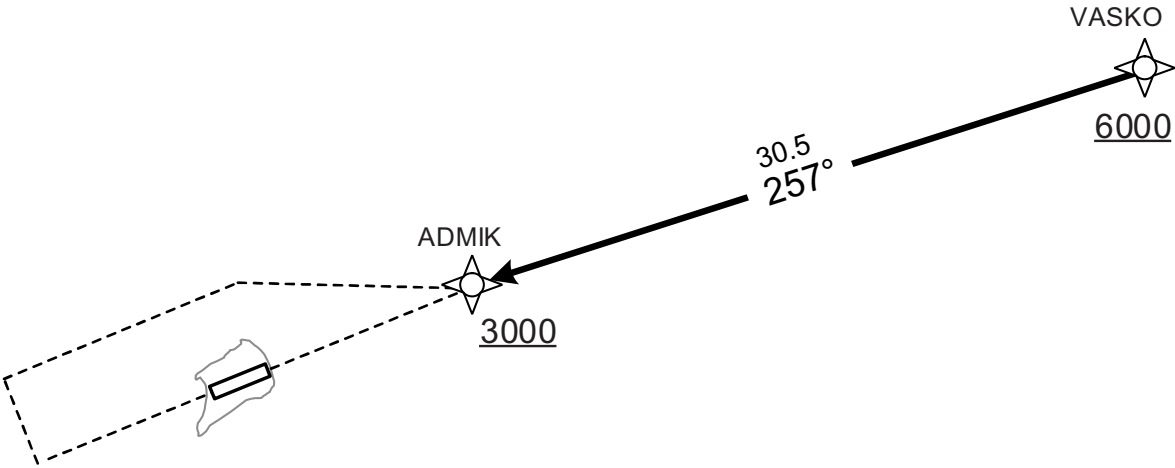

From VASKO at or above 6000FT, to ADMIK at or above 3000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	VASKO	—	—	-4.0	—	—	+6000	—	—	RNP1
002	TF	ADMIK	—	257 (252.5)	-4.0	30.5	—	+3000	—	—	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates
VASKO	250015.8N / 1420213.0E
ADMIK	245102.9N / 1413009.6E

CHANGE : Course FM VASKO to ADMIK. VAR. Waypoint Coordinates added.


INTENTIONALLY LEFT BLANK

RJAW / IWOTO

TACAN RWY07

SASGA(FAF) : 244419.44N/1411305.02E

NM to IJT	FAF	5	4	3	2	MAPt
ALT (3.0° APCH Path)	2232	1913	1595	1276	958	-

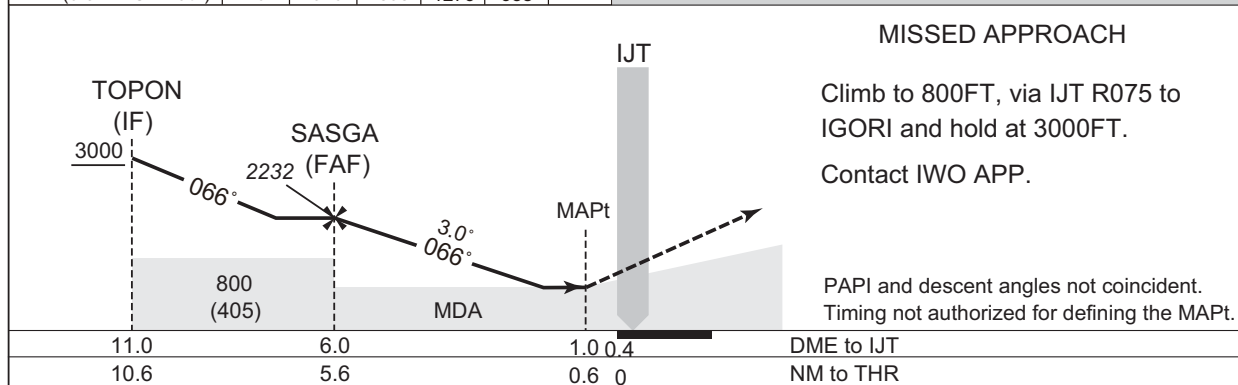

MINIMA		THR elev. 395	AD elev. 419	
CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	650 (255)	1500	820 (401)	1600
B	670 (275)		870 (451)	
C	700 (305)	1800		
D	710 (315)	2000	970 (551)	3200


CHANGE : FREQ for APP and TOWER.

INSTRUMENT APPROACH CHART

RJAW / IWOTO

TACAN RWY25


IWO APP 125.3 – 138.3 284.6 – 335.6	IWOTO TACAN 996 IJT CH-35X --- 24°47'04"N/141°18'57"E	IWO TOWER 126.2 – 133.4 228.2 – 255.4	RADAR AVAILABLE CALL IWO APP
---	--	---	------------------------------------

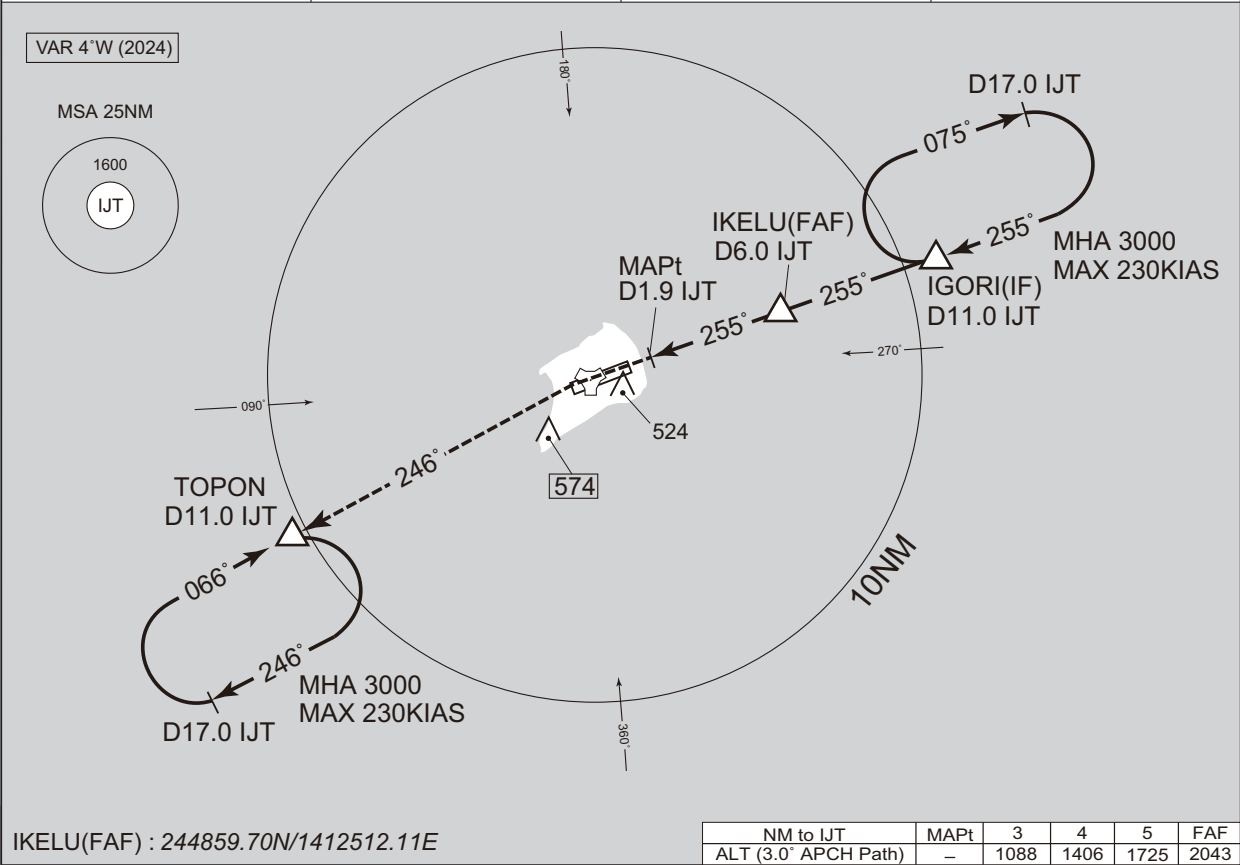

MISSED APPROACH

Climb to 900FT, via IJT R246 to TOPON and hold at 3000FT.
Contact IWO APP.

PAPI and descent angles not coincident.
Timing not authorized for defining the MAPt.

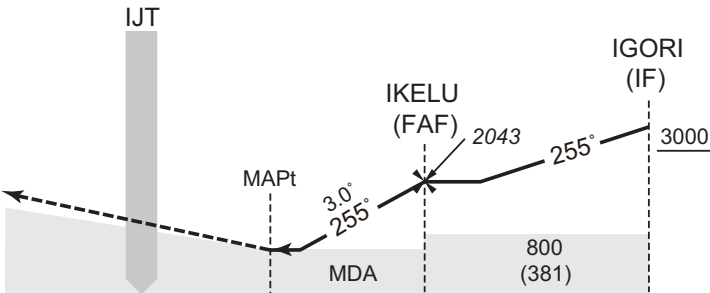

DME to IJT	1.1	1.9	6.0	11.0
NM to THR	0	0.8	4.9	9.9

MINIMA THR elev. 419 AD elev. 419


CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	800 (381)	1500	820 (401)	1600
B			870 (451)	
C		1800		2400
D		2000	970 (551)	3200

CHANGE : FREQ for APP and TOWER.


INSTRUMENT APPROACH CHART

RJAW /IWOTO

RNP RWY07

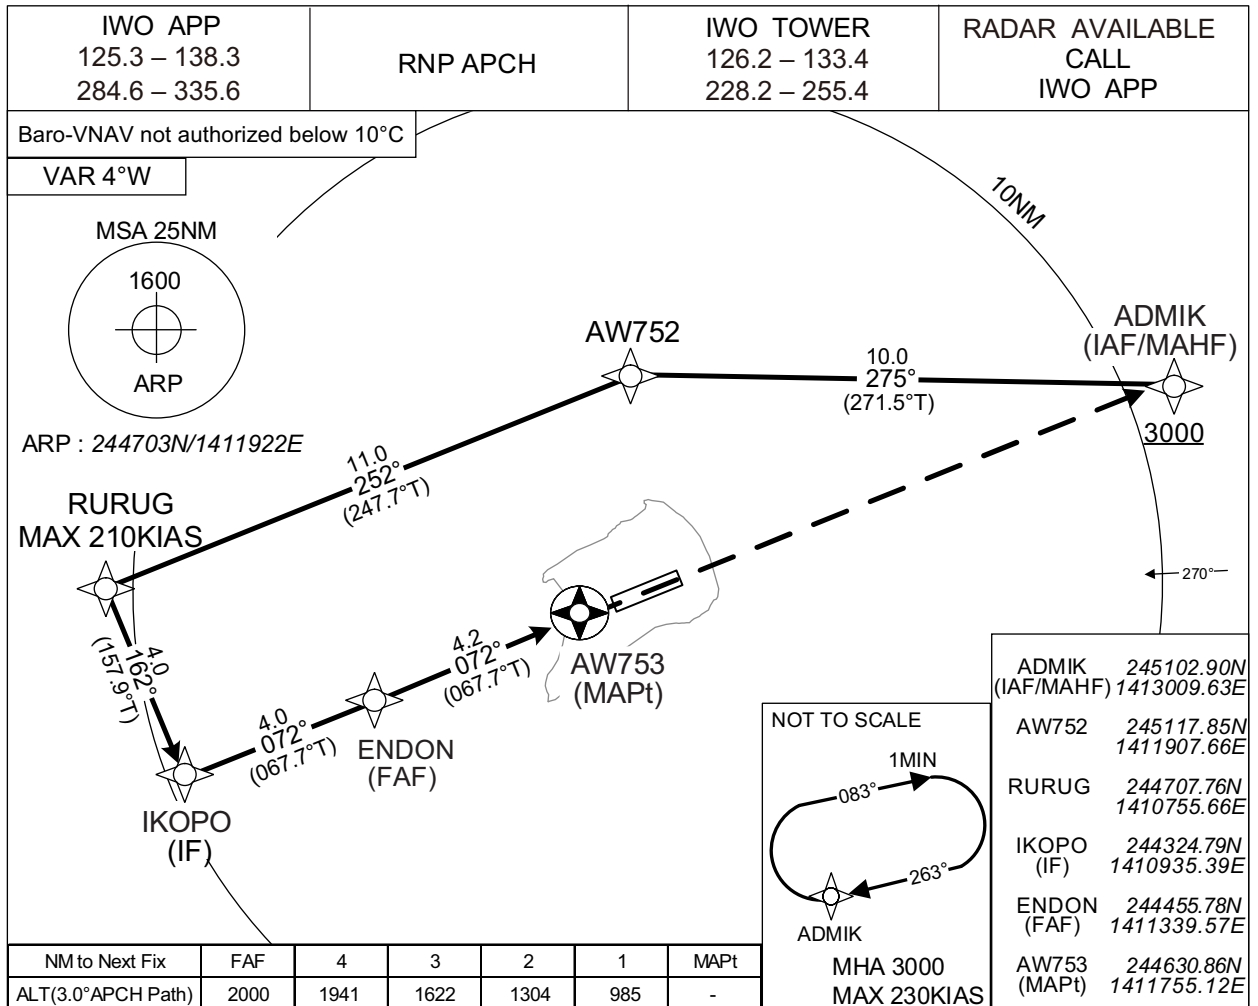


CHANGE : FREQ for APP and TOWER.

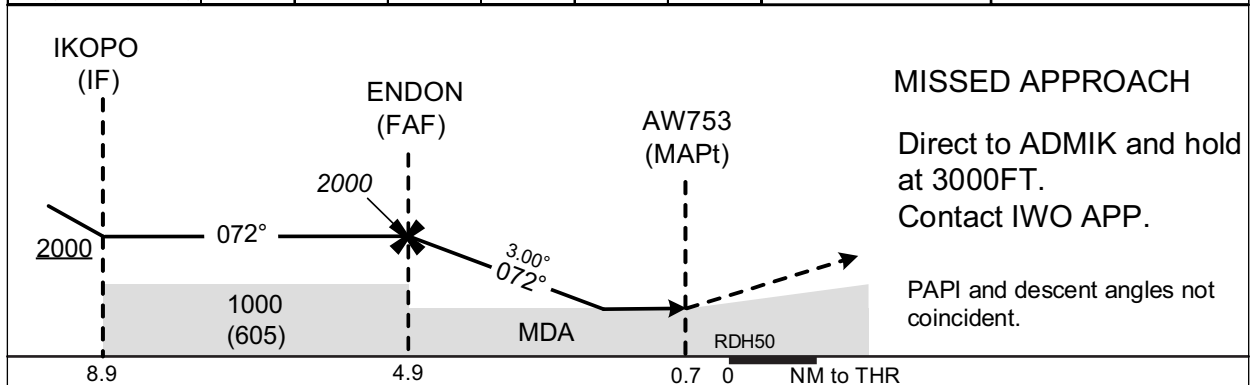

INSTRUMENT APPROACH CHART

RJAW /IWOTO


RNP RWY25

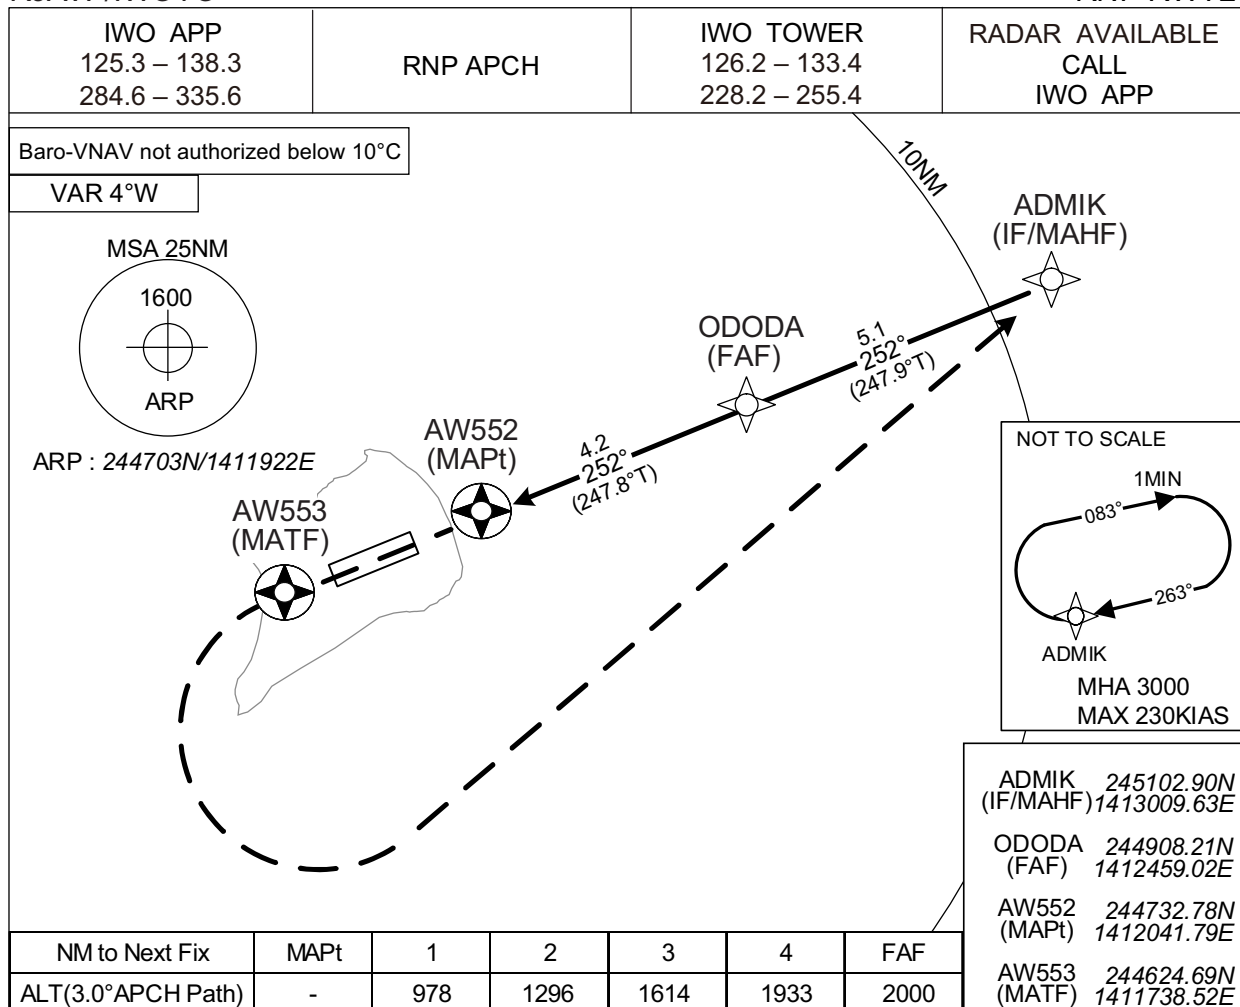

MISSED APPROACH

Direct to AW553, turn left
direct to ADMIK and hold at
3000FT.
Contact IWO APP.

PAPI and descent angles not
coincident.

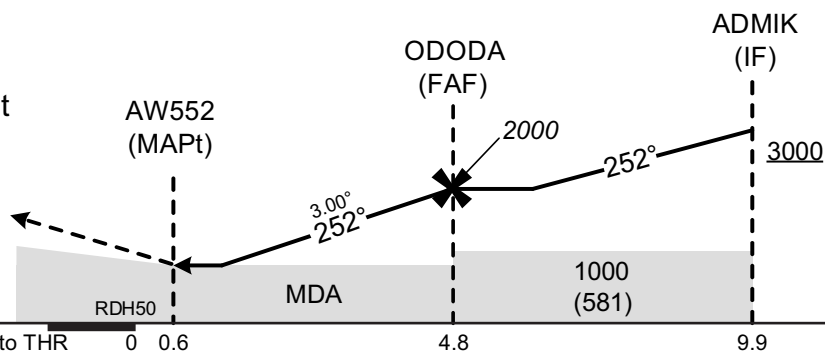

MINIMA		THR elev. 419		AD elev. 419		
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	695(276)	1500	690(271)	1500	820(401)	1600
B					870(451)	
C		1600		1600		2400
D		1800		1800	970(551)	3200