


AD CHART

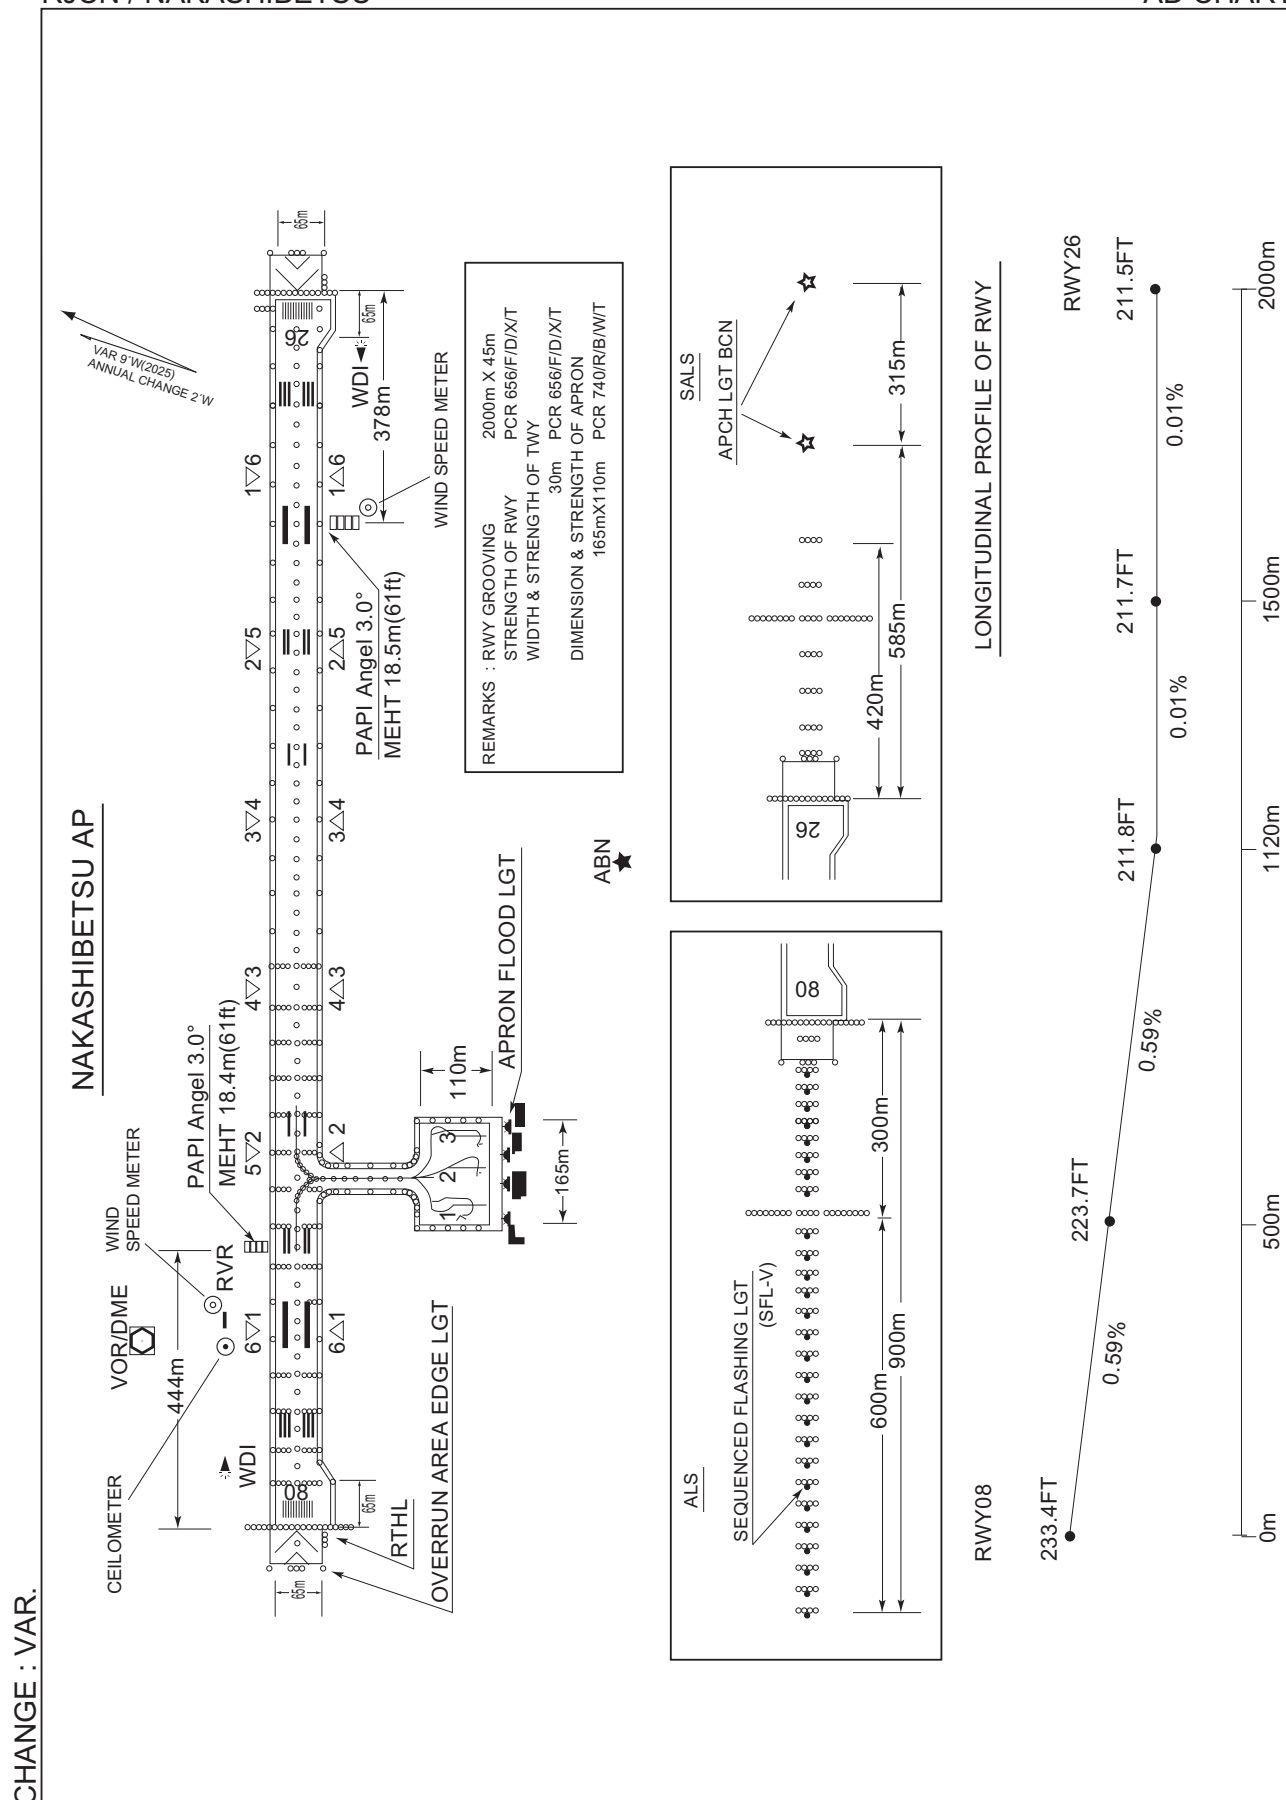

STANDARD DEPARTURE CHART-INSTRUMENT

RJCN / NAKASHIBETSU


SID

MASHU FIVE DEPARTURE

RWY08: Climb RWY HDG to 700FT, turn right HDG305° to intercept and proceed...

RWY26: Climb...
... via NSE R260 to MASHU.
Cross MASHU at or above 5000FT.

CHANGE : Description of PROC name.

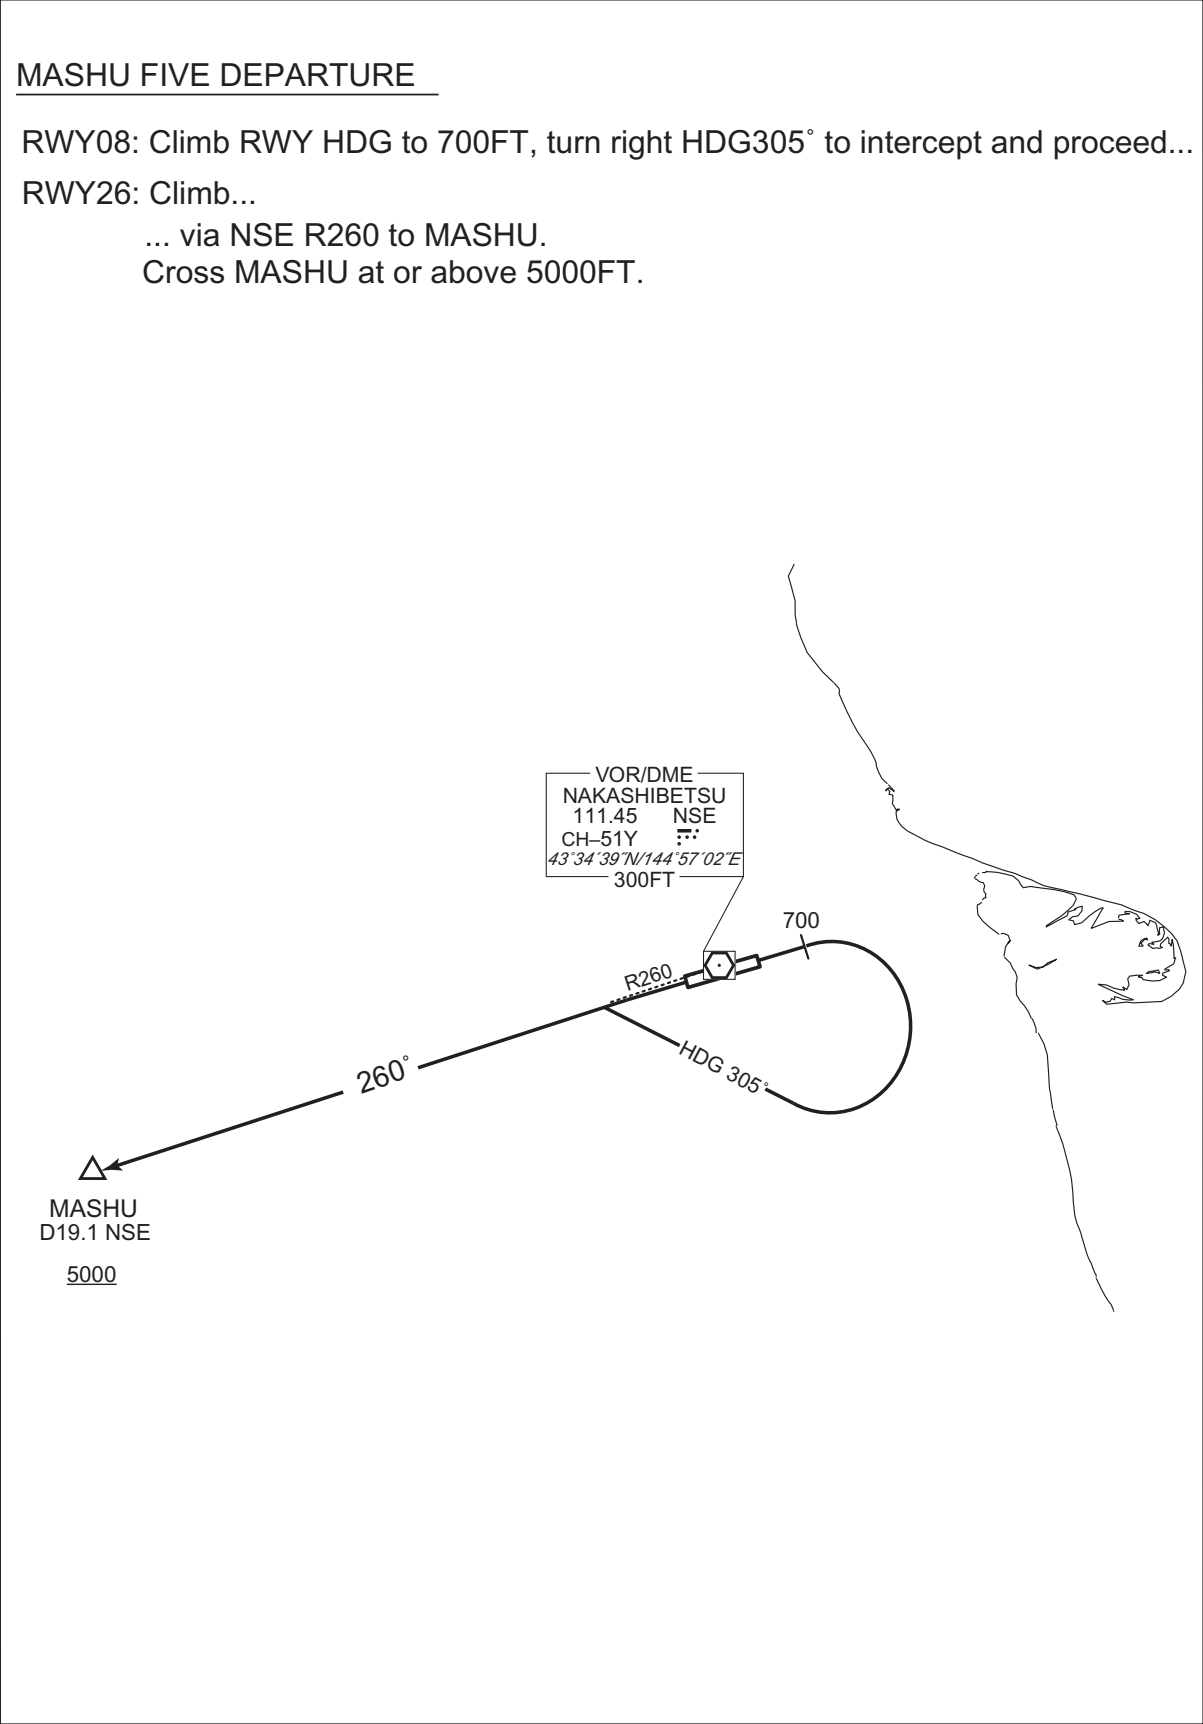


STANDARD DEPARTURE CHART-INSTRUMENT

RJCN / NAKASHIBETSU

SID

NAKASHIBETSU REVERSAL FOUR DEPARTURE

RWY08: Climb via NSE R081 to NSE 7.0DME, turn right,...

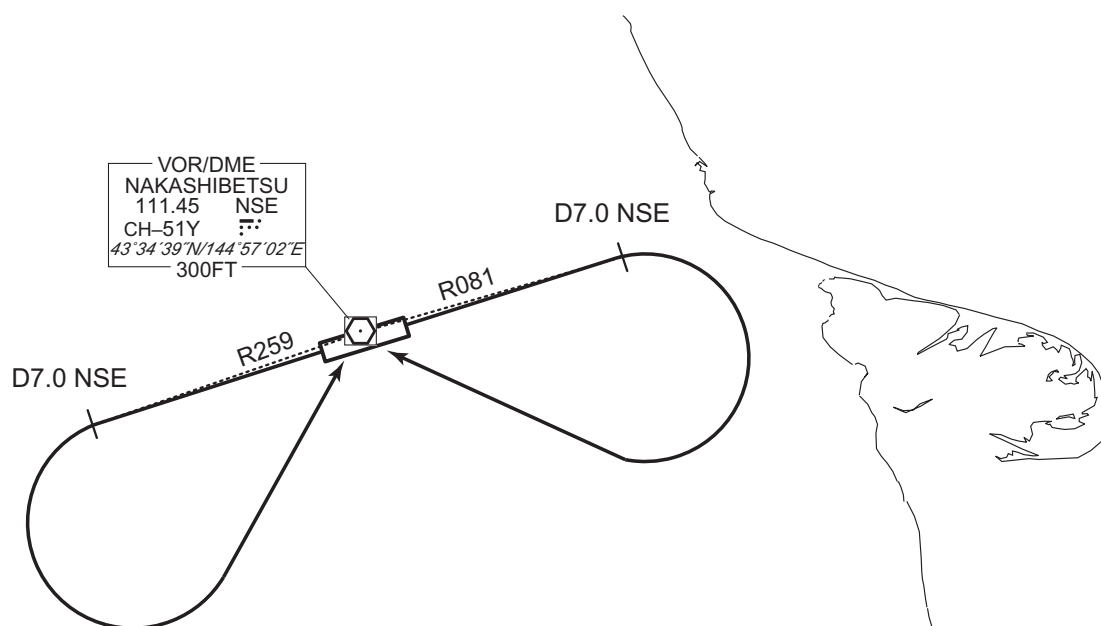
RWY26: Climb via NSE R259 to NSE 7.0DME, turn left, ...
... direct to NSE VOR/DME.

CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART-INSTRUMENT

RJCN / NAKASHIBETSU

RNAV SID and TRANSITION

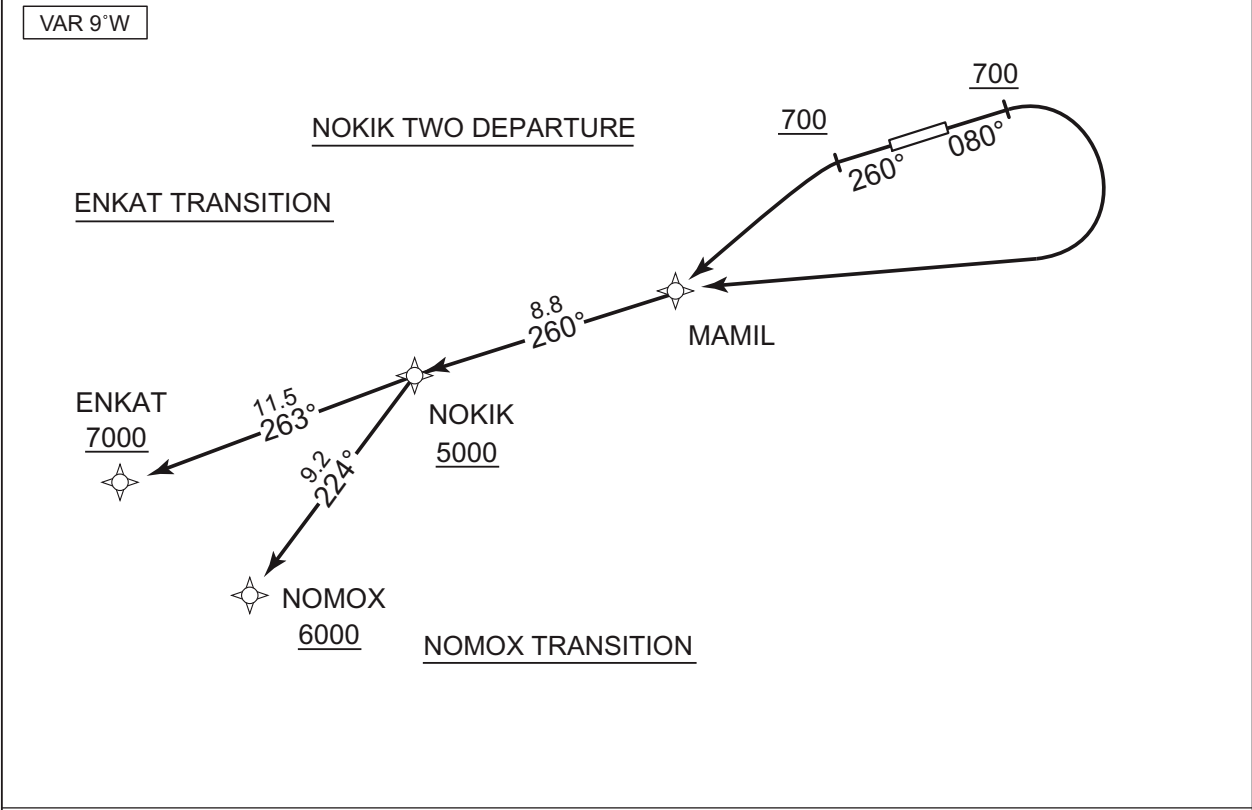NOKIK TWO DEPARTURE ENKAT TRANSITION / NOMOX TRANSITION		RNP1
Note GNSS required.		
VAR 9°W 		
NOKIK TWO DEPARTURE RWY08 : Climb on HDG080° at or above 700FT, turn right direct to MAMIL, to NOKIK at or above 5000FT. RWY26 : Climb on HDG260° at or above 700FT, turn left direct to MAMIL, to NOKIK at or above 5000FT.		
ENKAT TRANSITION From NOKIK at or above 5000FT, to ENKAT at or above 7000FT.		
NOMOX TRANSITION From NOKIK at or above 5000FT, to NOMOX at or above 6000FT.		

CHANGE : PROC renamed. MAMIL established. CN743 abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

CHANGE : PROC renamed. MAMIL established. CN743 abolished. Waypoint Coordinates added.

RJCN / NAKASHIBETSU

RNAV SID and TRANSITION

NOKIK TWO DEPARTURE

RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	080 (071.0)	-9.3	-	-	+700	-	-	RNP1
002	DF	MAMIL	-	-	-9.3	-	R	-	-	-	RNP1
003	TF	NOKIK	-	260 (250.8)	-9.3	8.8	-	+5000	-	-	RNP1

RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	260 (251.0)	-9.3	-	-	+700	-	-	RNP1
002	DF	MAMIL	-	-	-9.3	-	L	-	-	-	RNP1
003	TF	NOKIK	-	260 (250.8)	-9.3	8.8	-	+5000	-	-	RNP1

ENKAT TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	NOKIK	-	-	-9.3	-	-	+5000	-	-	RNP1
002	TF	ENKAT	-	263 (254.1)	-9.3	11.5	-	+7000	-	-	RNP1


NOMOX TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	NOKIK	-	-	-9.3	-	-	+5000	-	-	RNP1
002	TF	NOMOX	-	224 (215.2)	-9.3	9.2	-	+6000	-	-	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates
MAMIL	432936.1N / 1444705.2E
NOKIK	432642.6N / 1443539.6E
ENKAT	432331.5N / 1442024.1E
NOMOX	431912.2N / 1442823.8E



STANDARD ARRIVAL CHART - INSTRUMENT

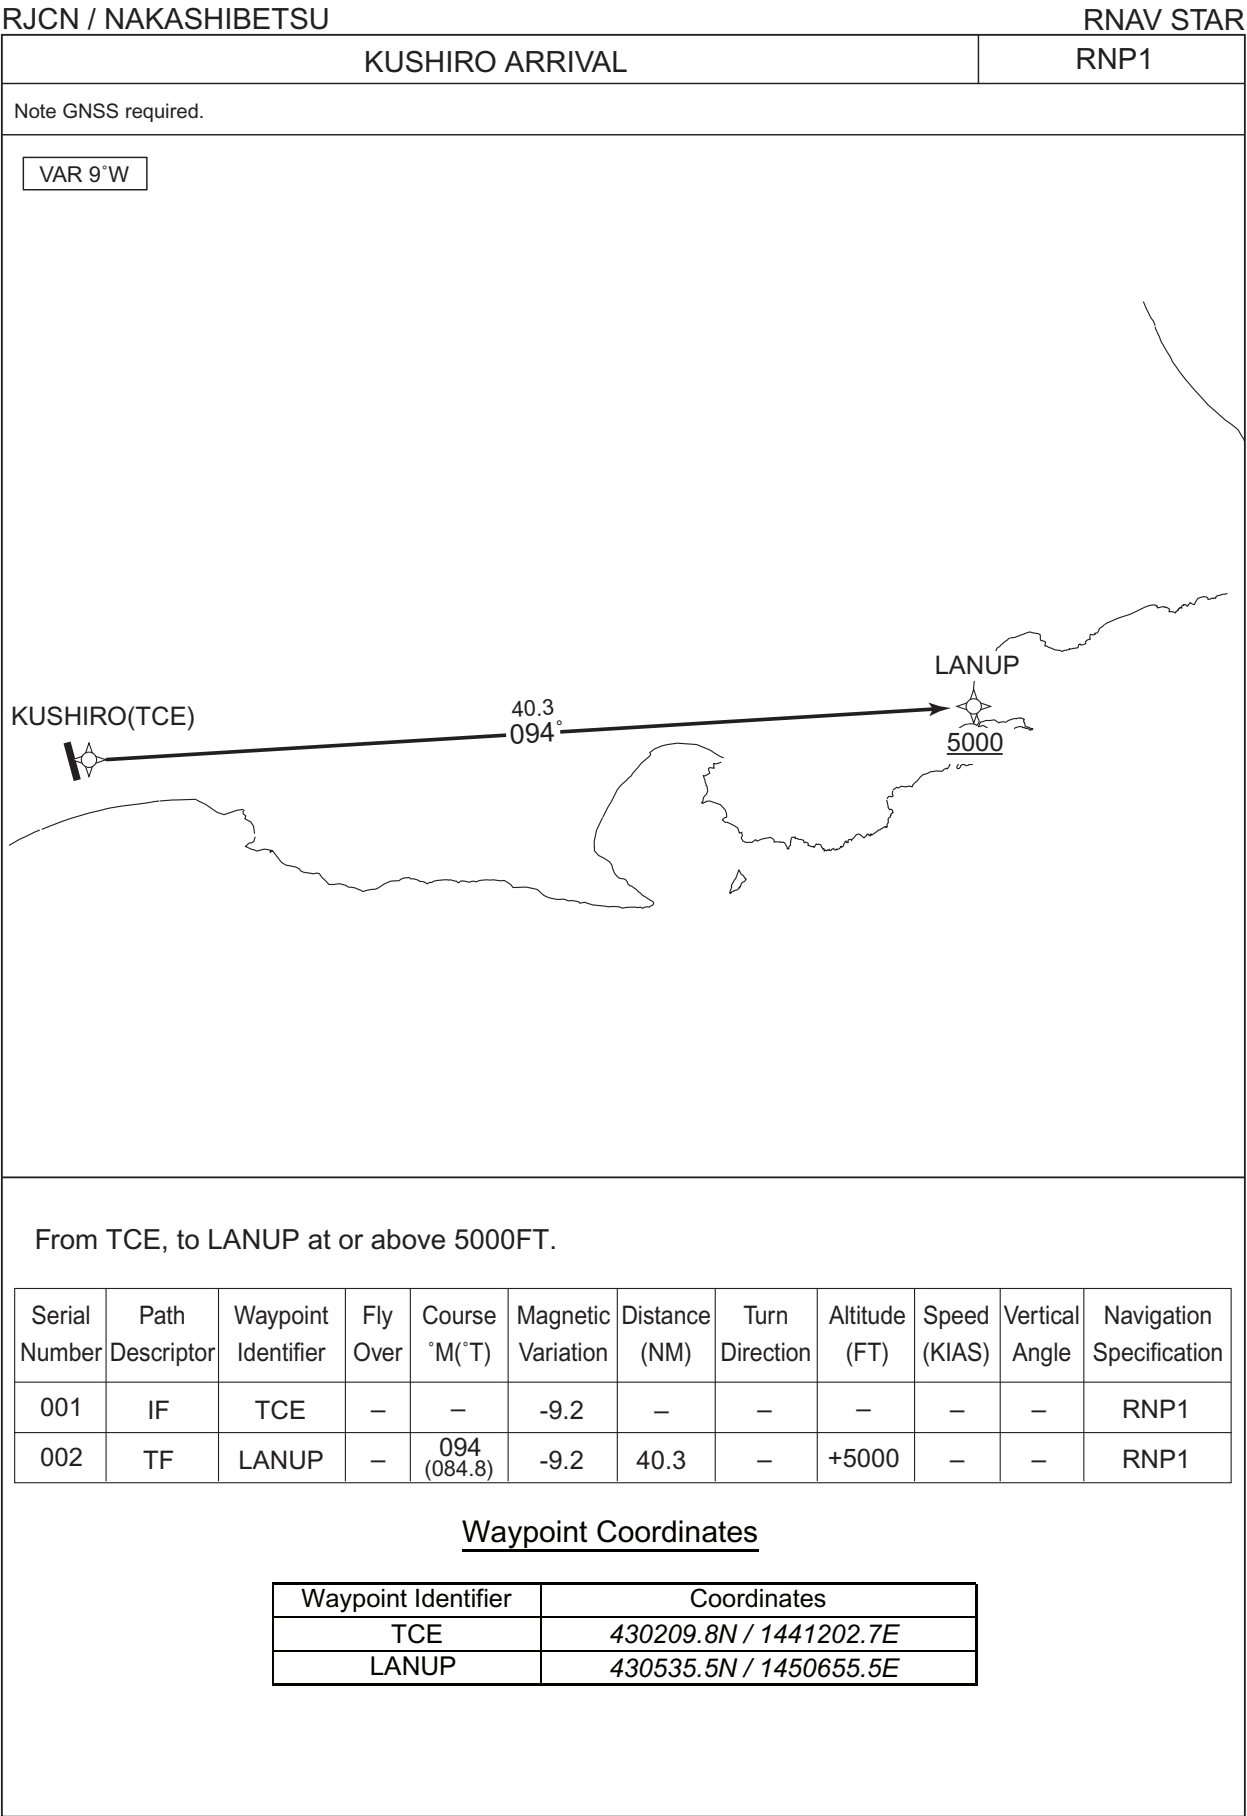

CHANGE : LANUP established. OMOTI abolished. Waypoint Coordinates added.



RJCN / NAKASHIBETSU

ILS Z or LOC Z RWY08




RJCN / NAKASHIBETSU

ILS Y or LOC Y RWY08

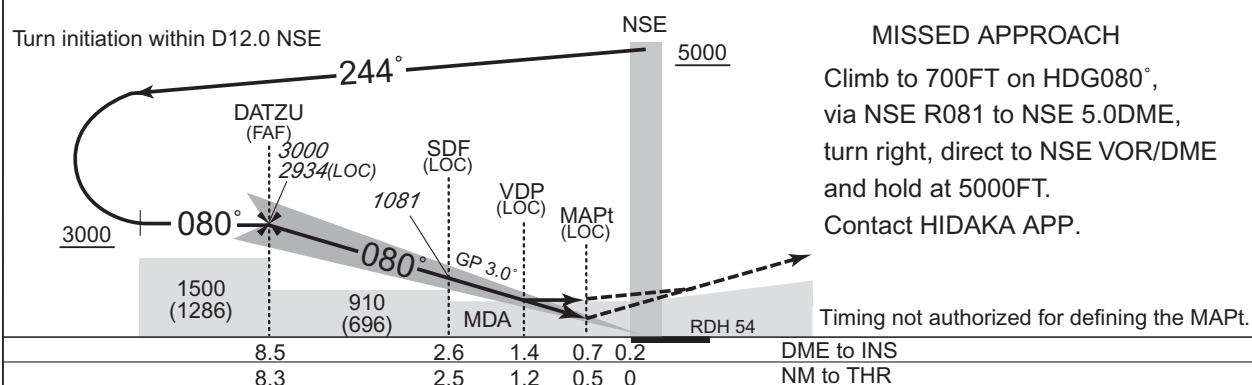

MINIMA		THR elev. 233		AD elev. 214		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
	433 (200)	550	640 (426)	900	690 (476)	1600
				1000		
				1400		

INSTRUMENT APPROACH CHART

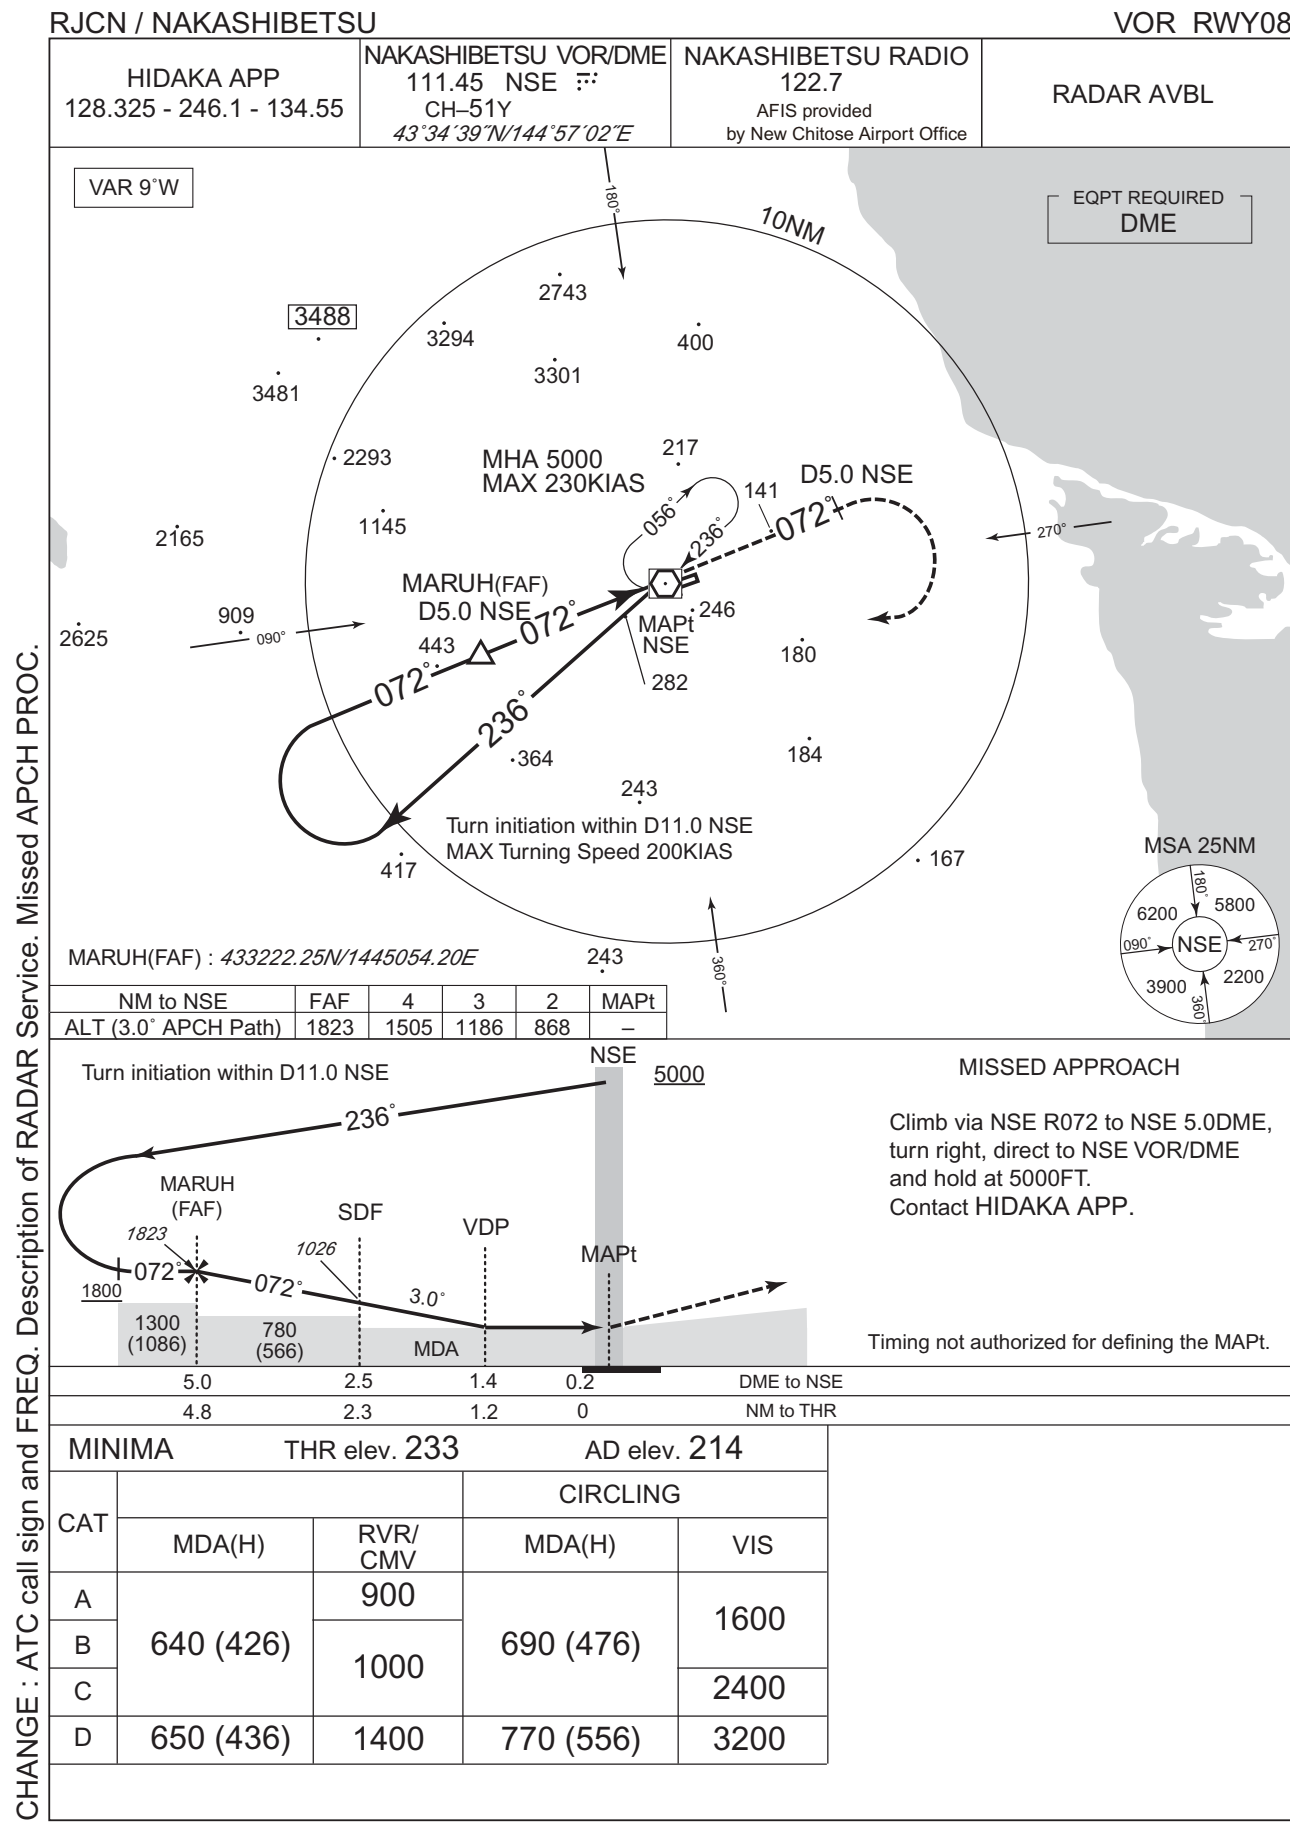

RJCN / NAKASHIBETSU

HIDAKA APP 128.325 - 246.1 - 134.55	NAKASHIBETSU VOR/DME 111.45 NSE CH-51Y <i>43°34'39"N/144°57'02"E</i>	NAKASHIBETSU RADIO 122.7 AFIS provided by New Chitose Airport Office	RADAR AVBL
---	--	--	-------------------

VAR 9°W

EQPT REQUIRED
DME

MOJAO(FAF) : 433608.06N/1450455.60E

NM to NSE	MAPt	2	3	4	5	FAF
ALT (3.0° APCH Path)	-	602	920	1239	1557	1853

MISSED APPROACH

Climb via NSE R264 to NSE 5.0DME,
turn left, direct to NSE VOR/DME and
hold at 5000FT.
Contact HIDAKA APP.


Timing not authorized for defining the MAPt.

	DME to NSE	NM to THR
MAPt	0.9	0
VDP	2.0	1.0
MDA	5.9	5.0

MINIMA		THR elev. 212	AD elev. 214	
CAT			CIRCLING	
	MDA(H)	CMV	MDA(H)	VIS
	A	580 (366)	1200	1600
	B		1300	
	C		1400	
D	1600			
		770 (556)	3200	

RJCN / NAKASHIBETSU

RNP RWY08

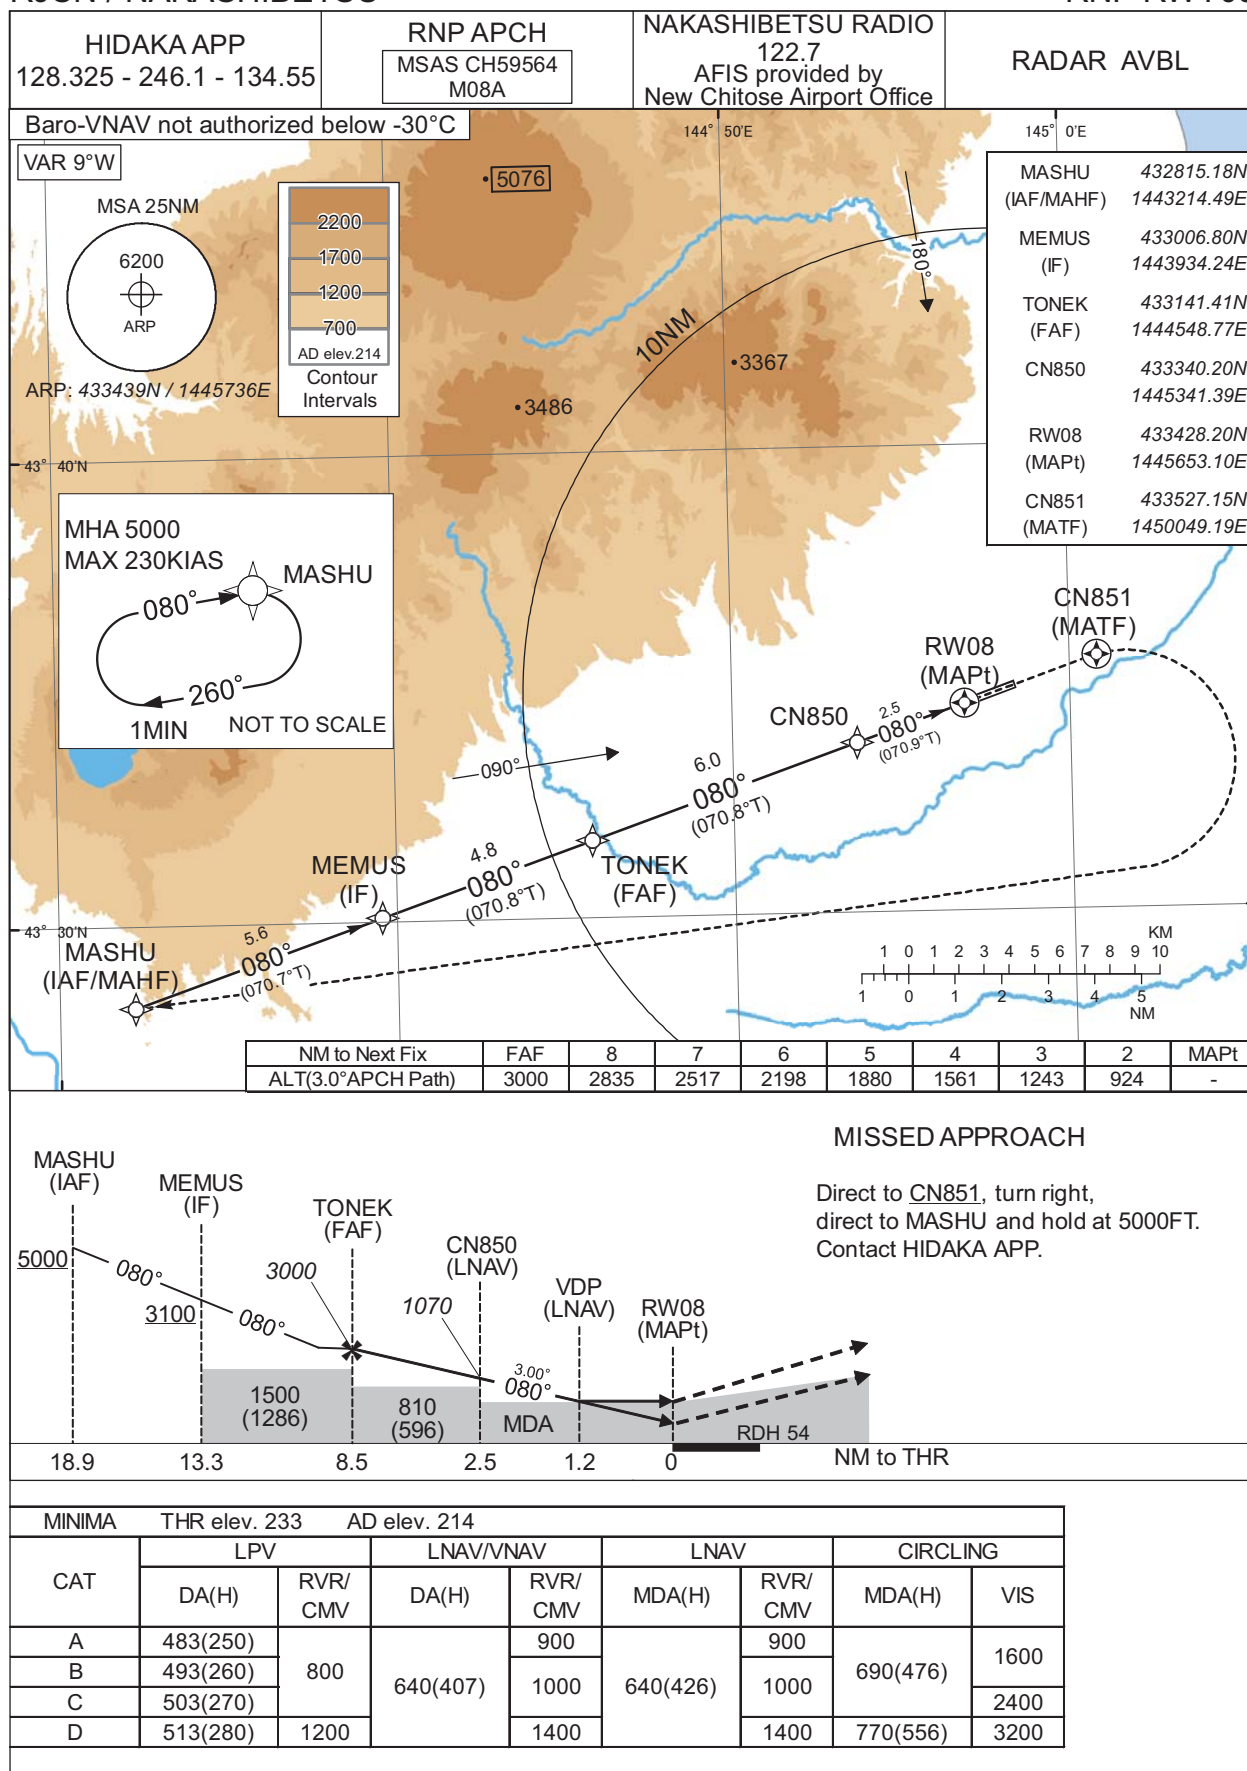

INSTRUMENT APPROACH CHART

RJCN / NAKASHIBETSU

RNP RWY08

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+01021
SBAS service provider identifier	2	FPAP latitude	433449.2600N
Airport identifier	RJCN	FPAP longitude	1445817.3505E
Runway	08	Threshold crossing height	00016.5
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M08A	∟ length offset	0000
LTP/FTP latitude	433428.1900N	HAL	40.0
LTP/FTP longitude	1445653.0495E	VAL	50.0
CRC remainder	71C61926		


Required additional data

LTP/FTP orthometric height	70.6
----------------------------	------


CHANGE : New PROC.

RJCN / NAKASHIBETSU

RNP Z RWY26(AR)



Climb to 5000FT, to MASHU
and hold.
Contact HIDAKA APP.

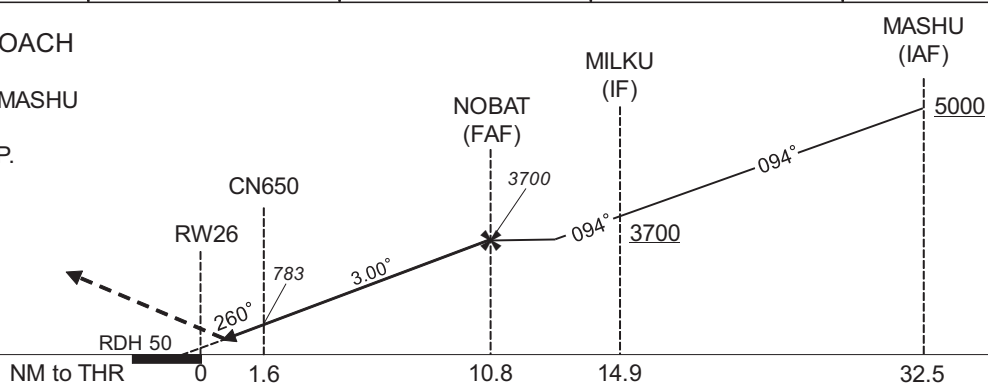

MINIMA	THR elev. 212	AD elev. 214
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B		
C	512(300)	1400
D		1600

Authorization Required

INSTRUMENT APPROACH CHART

RJCN / NAKASHIBETSU

RNP Z RWY26(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	MASHU	-	-	-9.2	-	-	+5000	-	-	-
002	TF	MILKU	-	094 (084.9)	-9.2	17.6	-	+3700	-	-	1.0
003	TF	NOBAT	-	094 (085.2)	-9.2	4.1	-	3700	-	-	1.0
004	RF Center: CNRF2 r=2.70NM	CN650	-	-	-9.2	9.2	L	783	-	-3.00	0.3
005	TF	RW26	Y	260 (251.0)	-9.2	1.6	-	262	-	-3.00/50	0.3
006	TF	MASHU	-	260 (251.0)	-9.2	20.0	-	5000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	MASHU	080 (070.4)	-9.2	1.0 (-14000)	R	5000	FL140	-230 (-14000)	1.0

Waypoint Coordinates


Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
MASHU	432815.18N / 1443214.49E	CNRF2	433247.93N / 1450139.17E
MILKU	432945.72N / 1445620.67E		
NOBAT	433006.06N / 1450157.52E		
CN650	433521.30N / 1450025.71E		
RW26	433449.27N / 1445817.40E		

CHANGE : NOBAT established. CN661 abolished.

INSTRUMENT APPROACH CHART


RJCN / NAKASHIBETSU

RNP Y RWY26

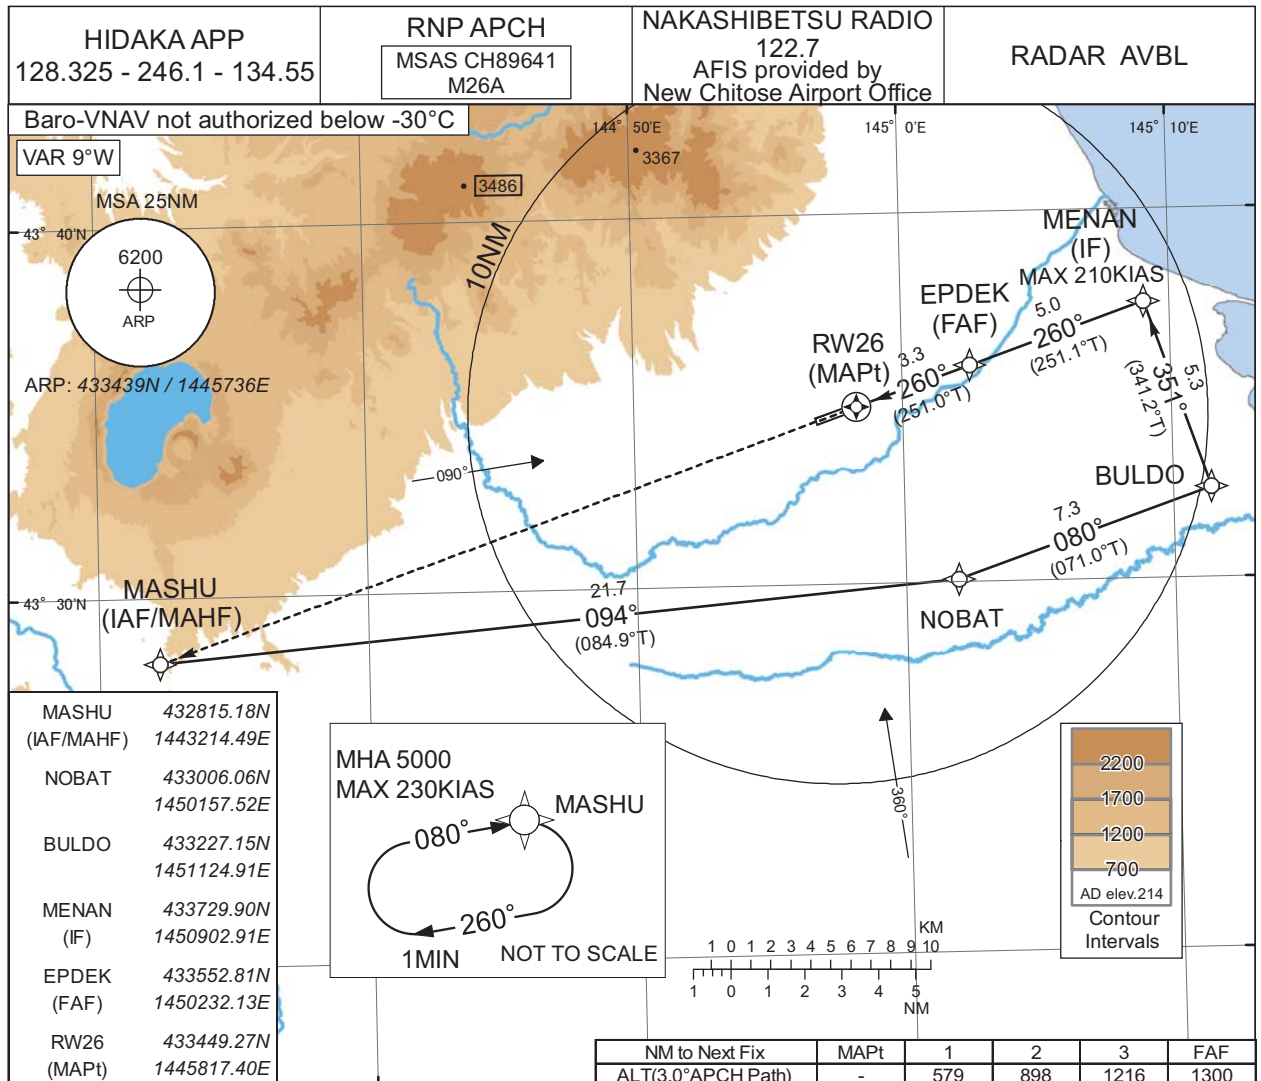

MISSED APPROACH

Direct to MASHU and hold at 5000FT.
Contact HIDAKA APP.

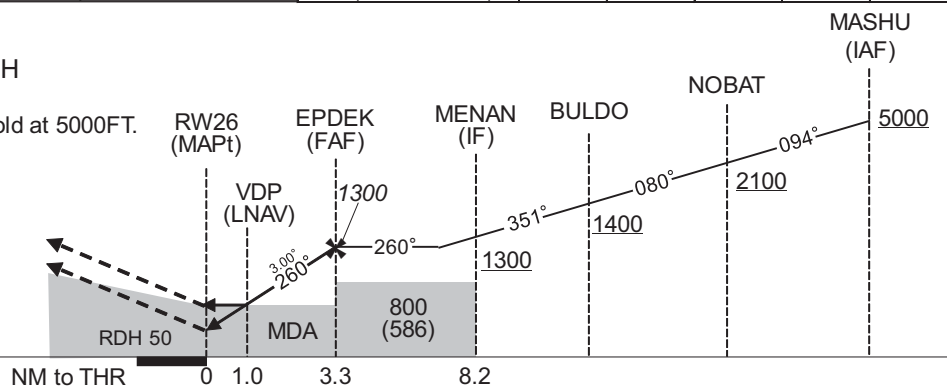

MINIMA		THR elev. 212	AD elev. 214					
CAT	LPV		LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	462(250)	1000	560(348)	1200	560(346)	1200	690(476)	1600
B		1100		1300		1300		
C		1200		1400		1400		
D		1400		1600		1600		
							770(556)	3200

CHANGE : NOBAT established. CN661 abolished.

INSTRUMENT APPROACH CHART

RJCN / NAKASHIBETSU

RNP Y RWY26

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00954
SBAS service provider identifier	2	FPAP latitude	433428.1900N
Airport identifier	RJCN	FPAP longitude	1445653.0495E
Runway	26	Threshold crossing height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator	Y	Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M26A	∠ length offset	0000
LTP/FTP latitude	433449.2600N	HAL	40.0
LTP/FTP longitude	1445817.3505E	VAL	50.0
CRC remainder	12630585		

Required additional data


LTP/FTP orthometric height	63.9
----------------------------	------

CHANGE : New PROC.

INSTRUMENT APPROACH CHART

RJCN / NAKASHIBETSU


RNP X RWY26(AR)

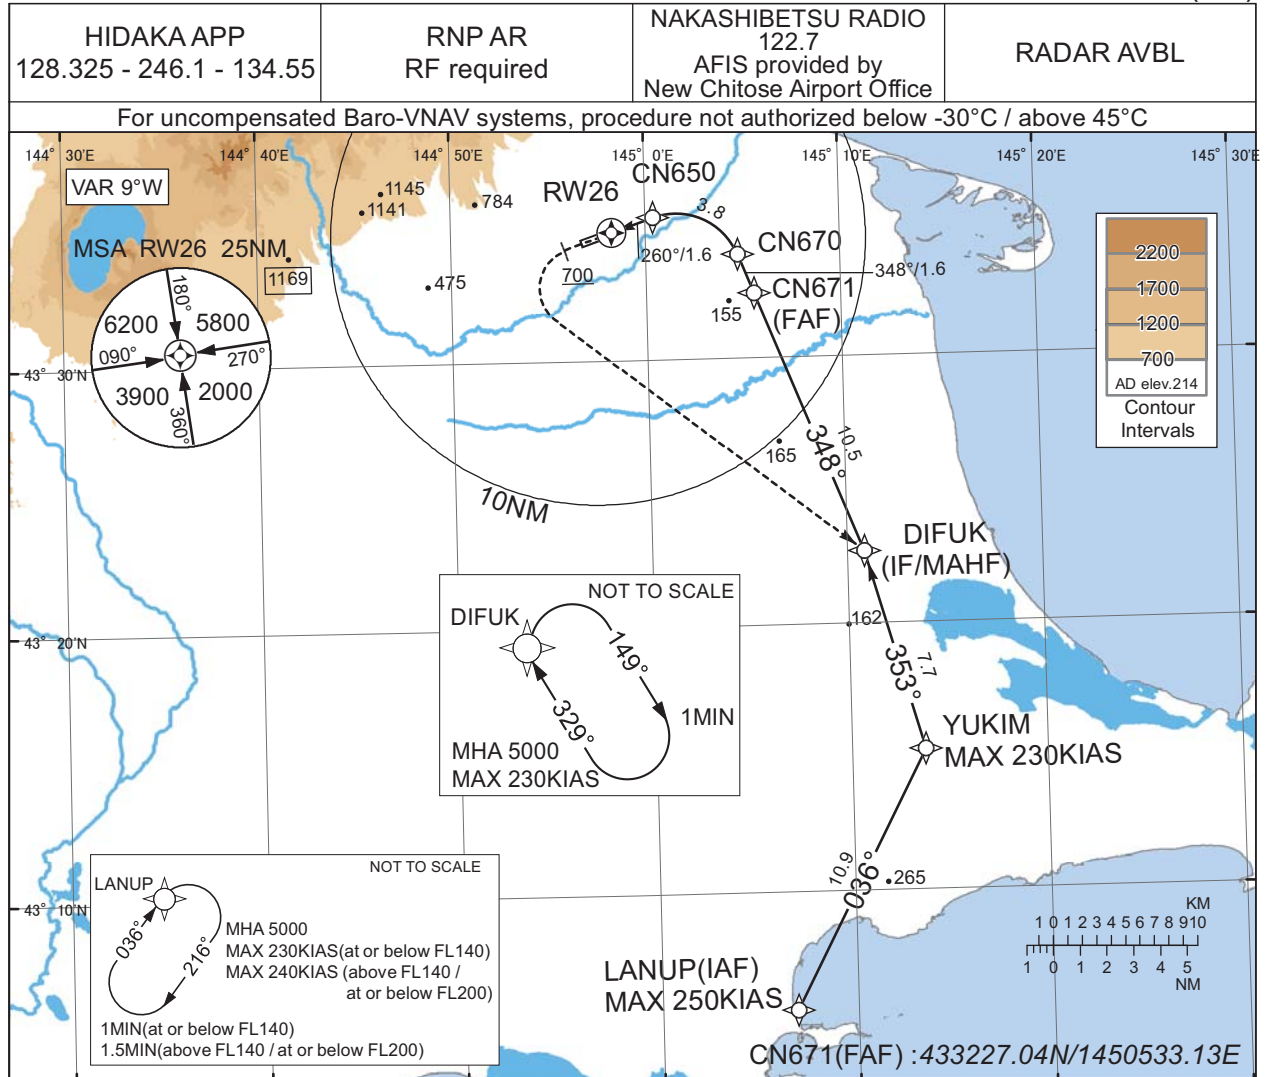

CHANGE : Correction of misdescription(LANUP(FAF→IAF)).

MISSED APPROACH

From RW26 on track 260°,
at or above 700FT turn left,
direct to DIFUK and hold at
5000FT.
Contact HIDAKA APP.

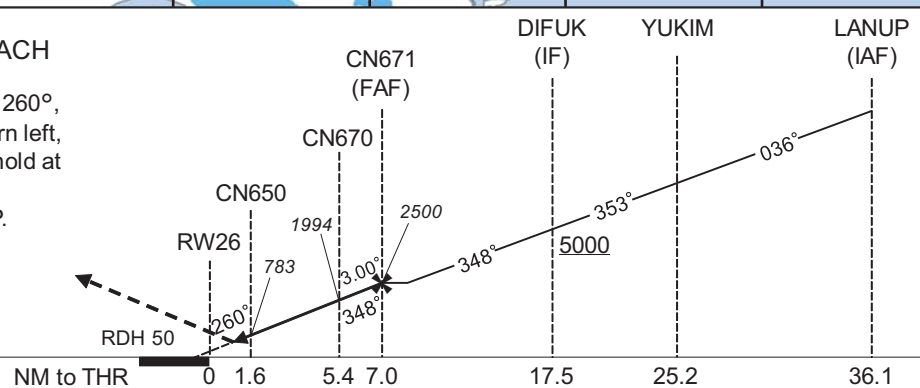

Missed APCH climb gradient MNM 5.0%

MINIMA	THR elev. 212	AD elev. 214
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B	-	-
C	512(300)	1400
D		1600

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Authorization Required

INSTRUMENT APPROACH CHART

RJCN / NAKASHIBETSU

RNP X RWY26(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	LANUP	-	-	-9.2	-	-	+5000	-250	-	-
002	TF	YUKIM	-	036 (027.2)	-9.2	10.9	-	+5000	-230	-	1.0
003	TF	DIFUK	-	353 (344.3)	-9.2	7.7	-	+5000	-	-	1.0
004	TF	CN671	-	348 (338.4)	-9.2	10.5	-	2500	-	-	1.0
005	TF	CN670	-	348 (338.3)	-9.2	1.6	-	1994	-	-3.00	0.3
006	RF Center: CNRF1 r=2.50NM	CN650	-	-	-9.2	3.8	L	783	-	-3.00	0.3
007	TF	RW26	Y	260 (251.0)	-9.2	1.6	-	262	-	-3.00/50	0.3
008	FA	-	-	260 (251.0)	-9.2	-	-	+700	-	-	1.0
009	DF	DIFUK	-	-	-9.2	-	L	5000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	DIFUK	329 (320.0)	-9.2	1.0 (-14000)	R	5000	FL140	-230(-14000)	1.0
Hold	LANUP	036 (027.1)	-9.2	1.0 (-14000) 1.5 (-20000)	R	5000	FL200	-230(-14000) -240(-20000)	1.0


Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
LANUP	430535.54N / 1450655.47E	CNRF1	433259.00N / 1450132.84E
YUKIM	431516.17N / 1451345.84E		
DIFUK	432242.79N / 1451052.79E		
CN671	433227.04N / 1450533.13E		
CN670	433354.84N / 1450444.93E		
CN650	433521.30N / 1450025.71E		
RW26	433449.27N / 1445817.40E		

CHANGE : LANUP established. OMOTI abolished.

RJCN / NAKASHIBETSU


Visual REP

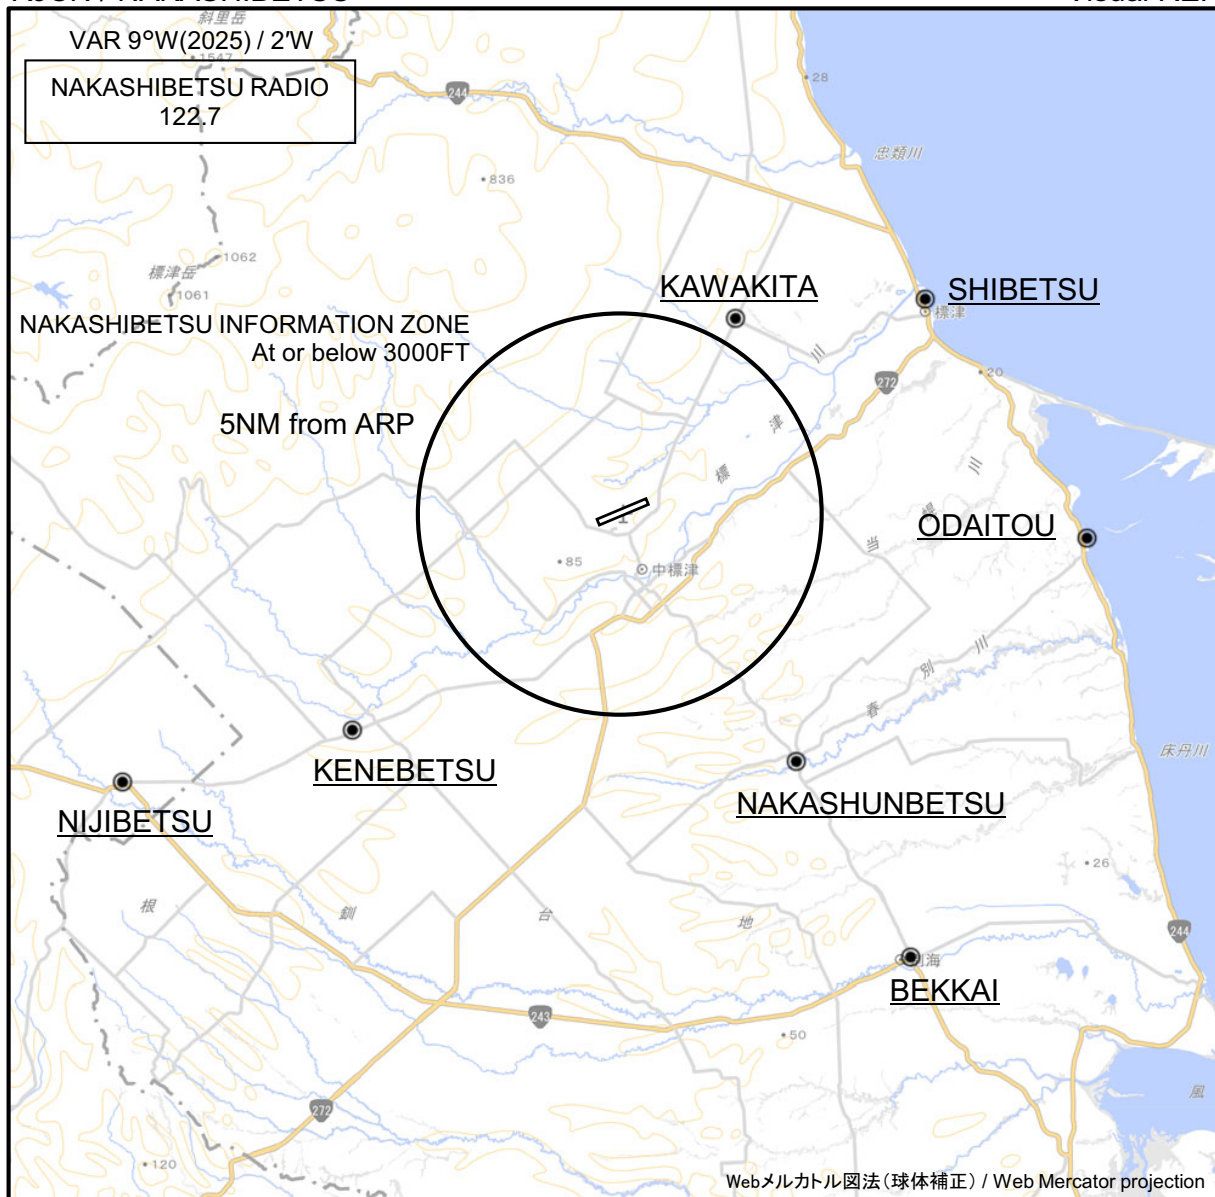

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
標津 Shibetsu	055°T / 9.1NM	標津港 Harbor
川北 Kawakita	030°T / 5.6NM	市街地 Town
尾岱沼 Odaitou	093°T / 11.5NM	尾岱沼港 Harbor
計根別 Kenebetsu	231°T / 8.5NM	市街地 Town
中春別 Nakashunbetsu	145°T / 7.5NM	市街地 Town
虹別 Nijibetsu	242°T / 13.9NM	市街地 Town
別海 Bekkai	147°T / 13.1NM	市街地 Town

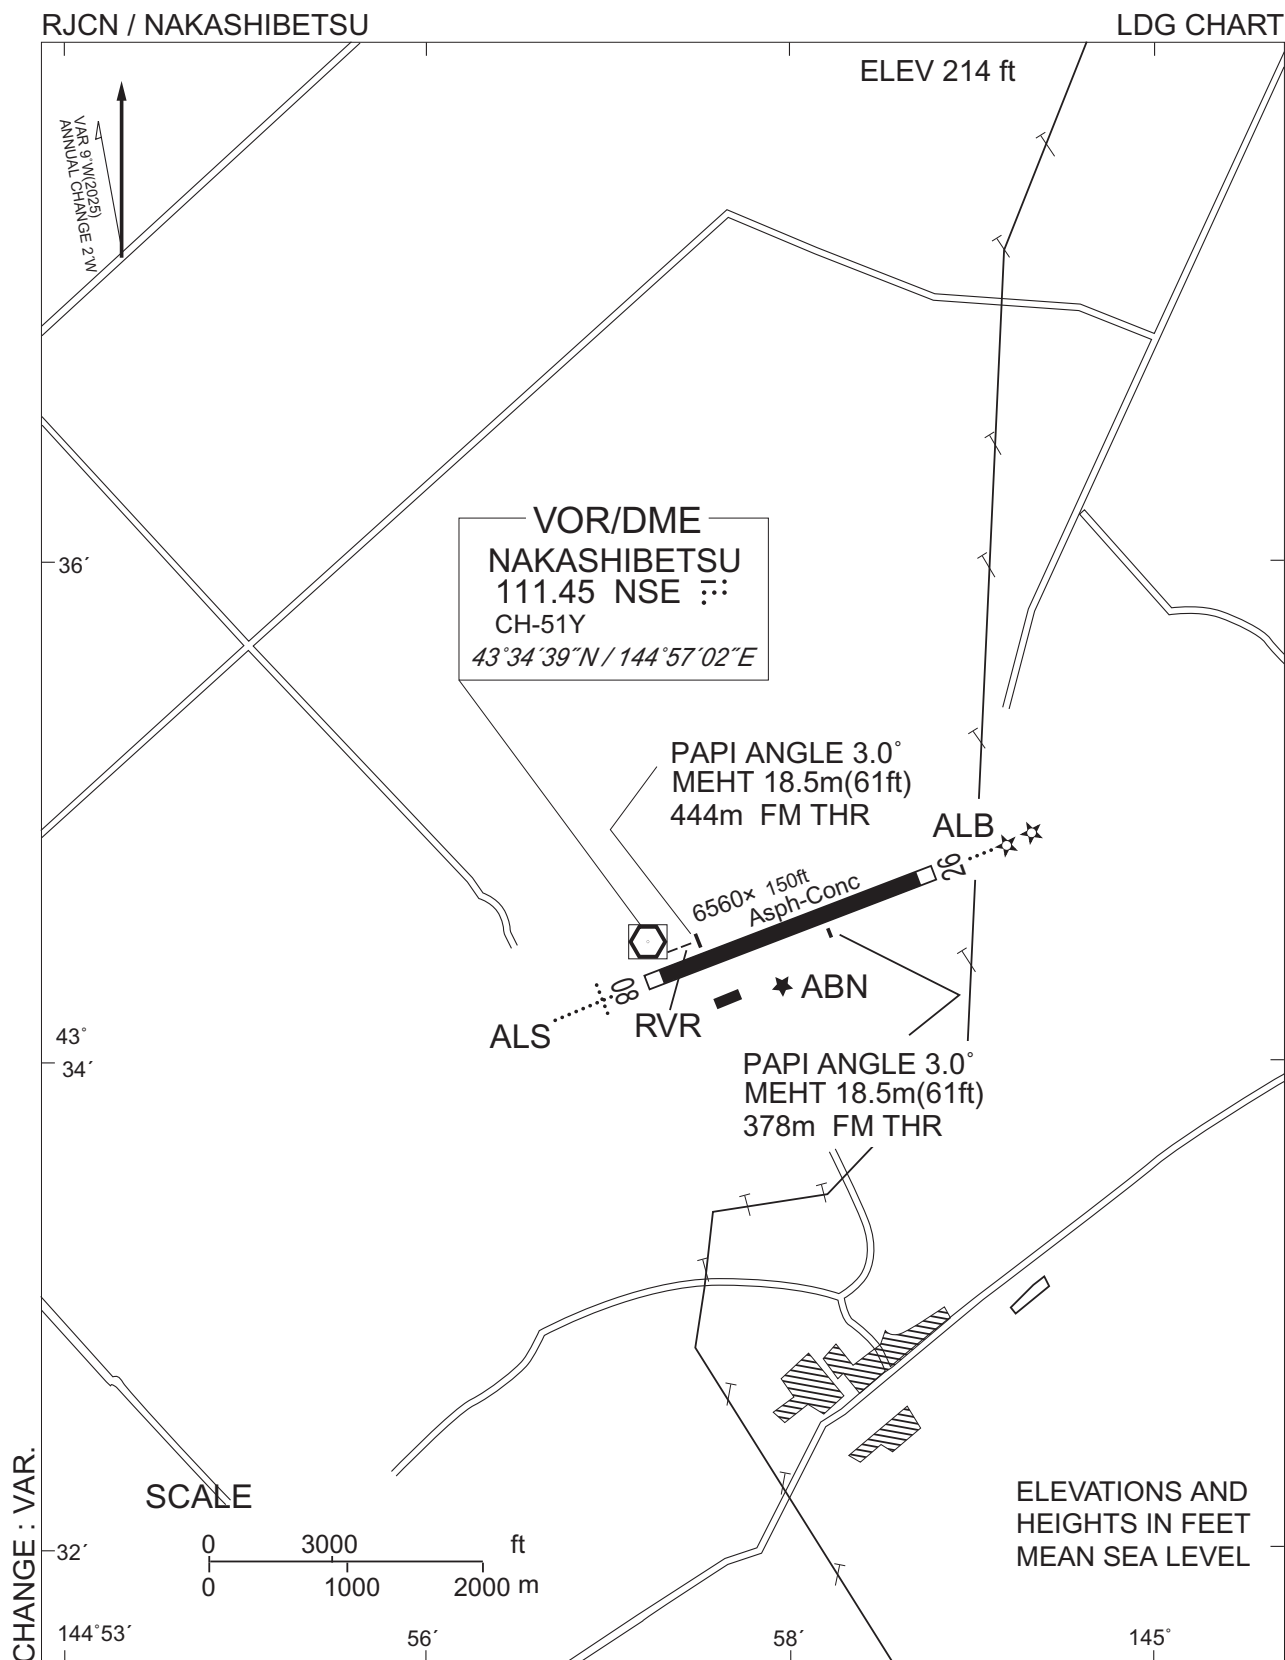

RJCN / NAKASHIBETSU

Minimum Vectoring Altitude CHART

