


RJFO / OITA

AD CHART


CHANGE : Description of strength of pavement.

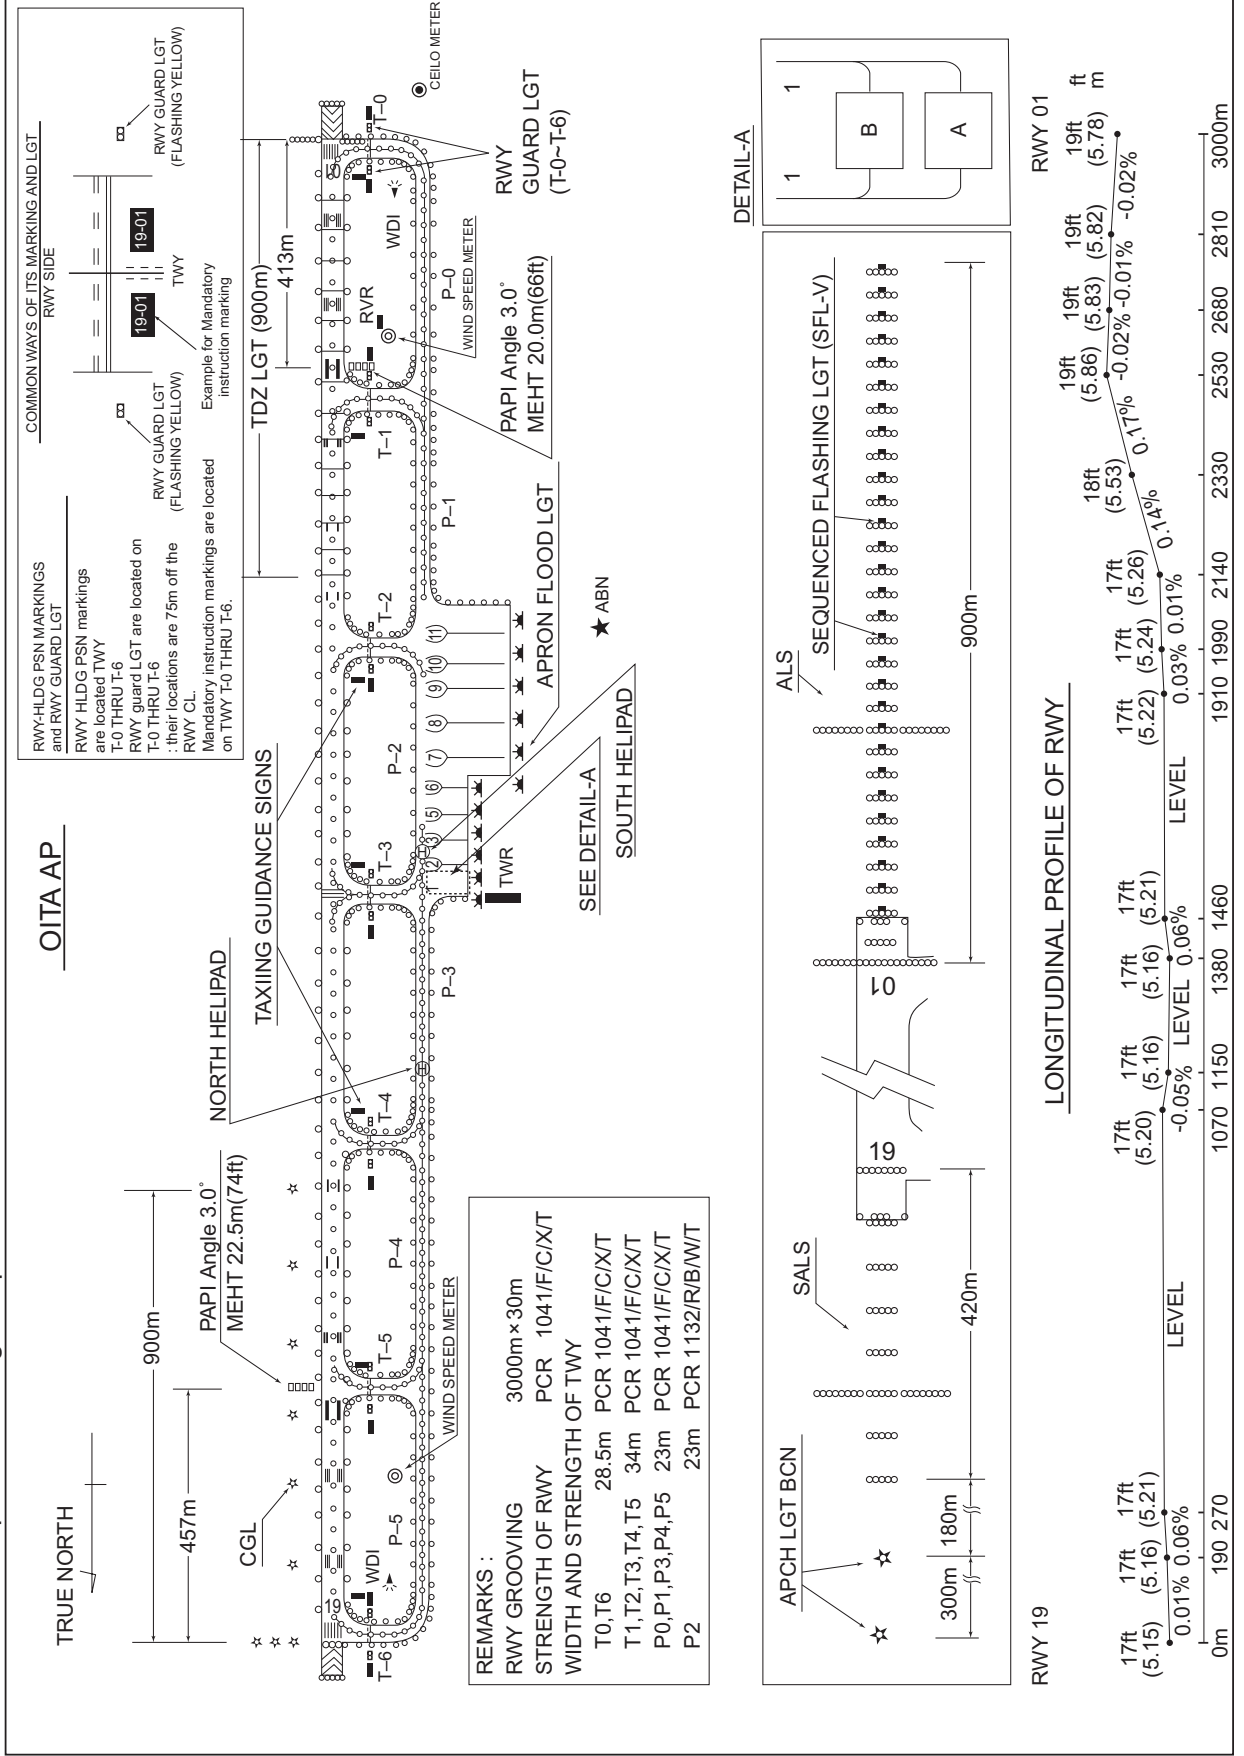

DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC  
Transverse Mercator Projection


## AERODROME OBSTACLE CHART - ICAO

MAGNETIC VARIATION 8°W - JAN 2026

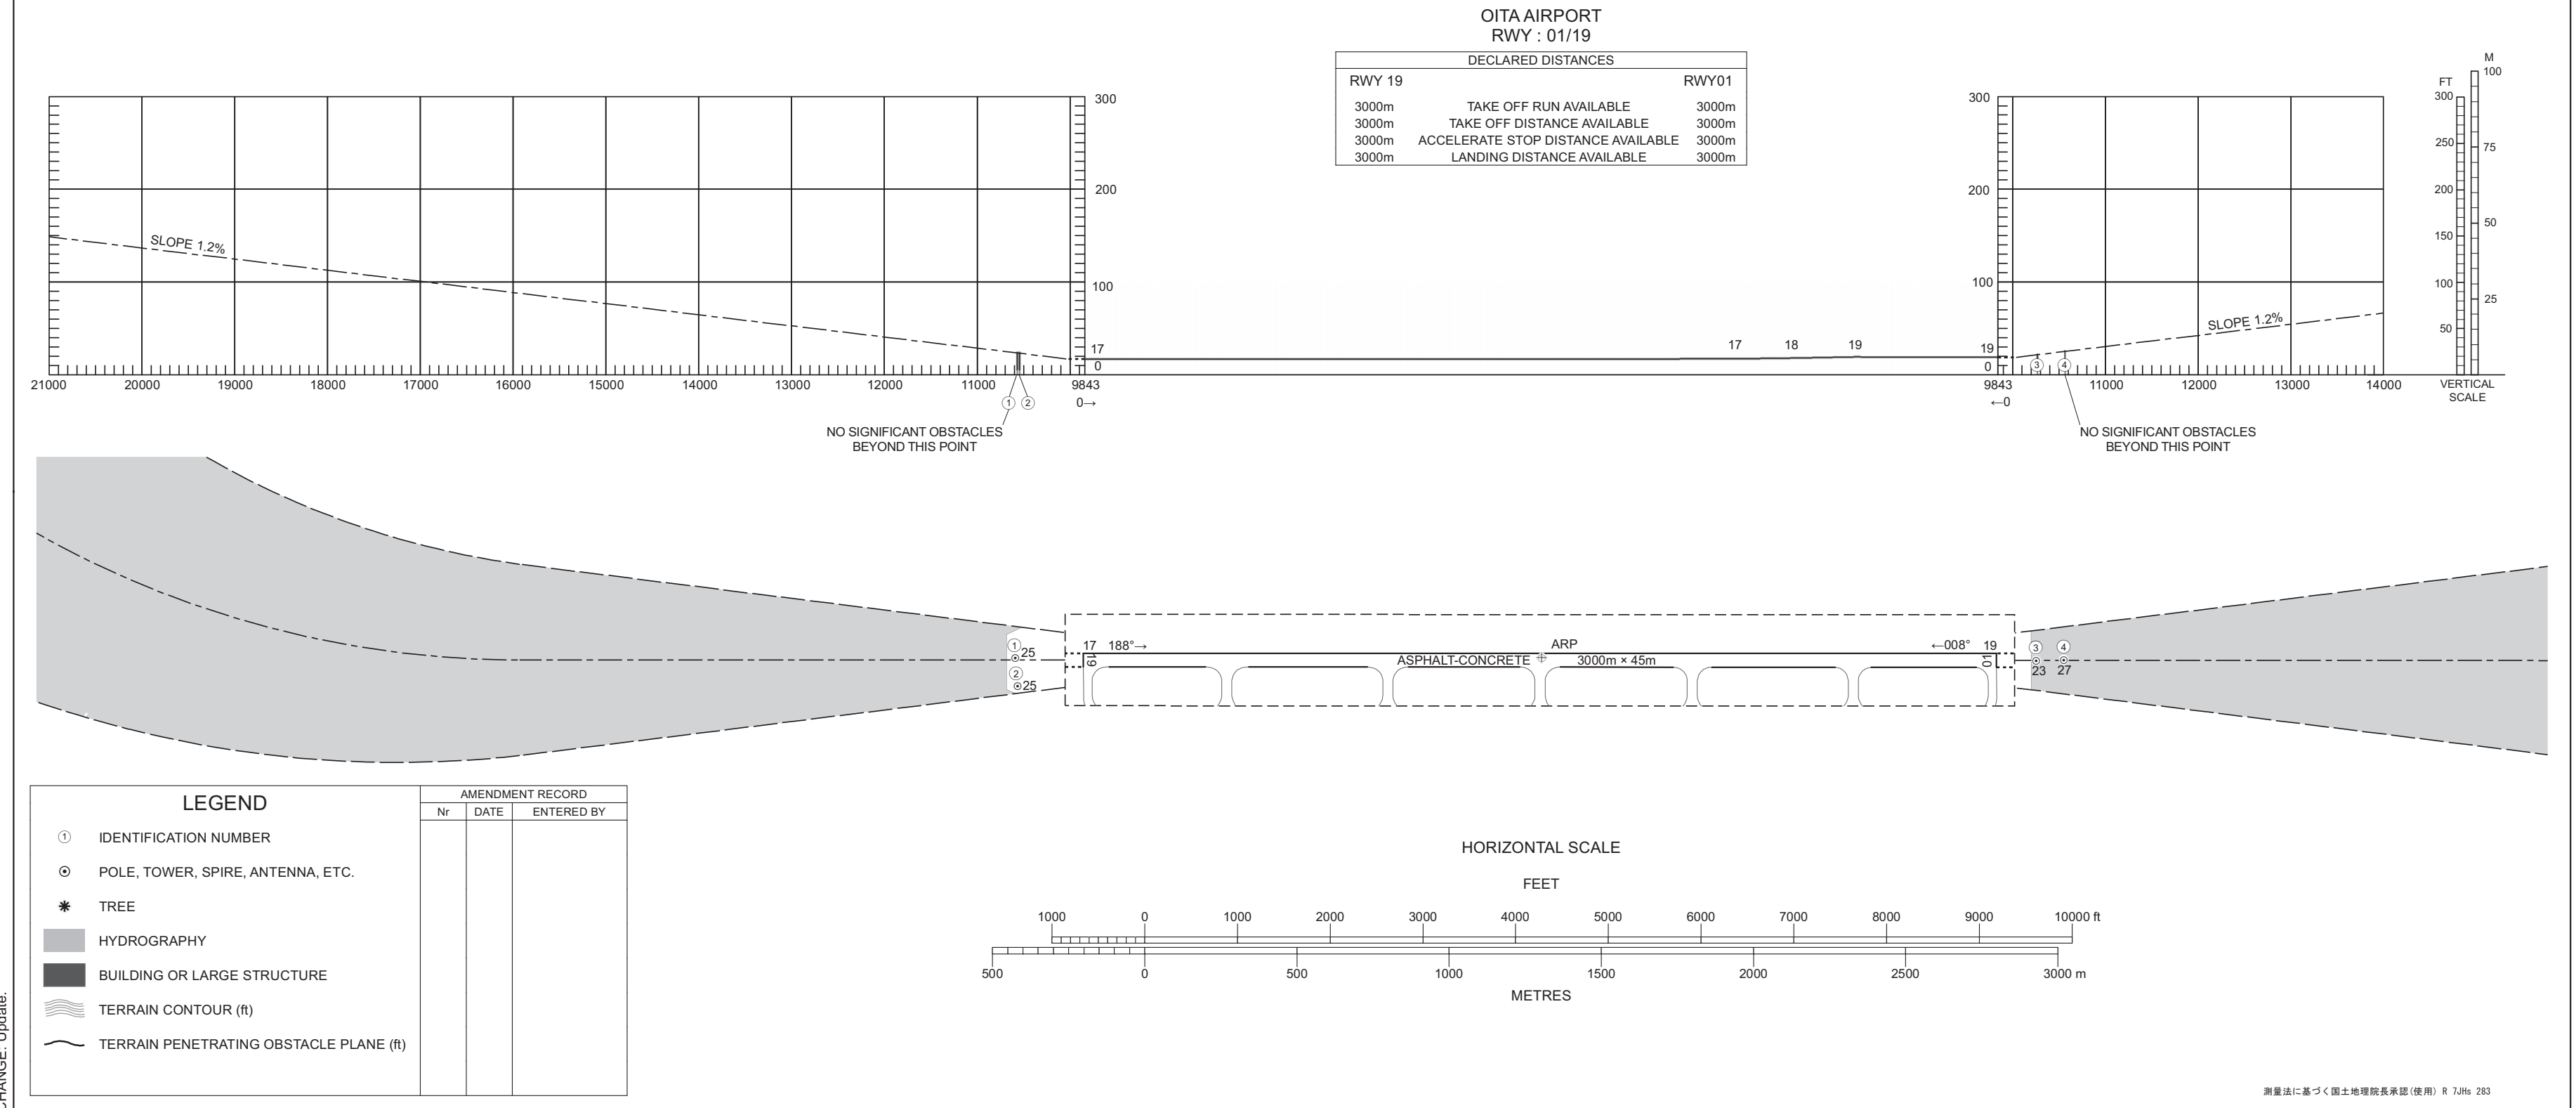

DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC  
Transverse Mercator Projection

AERODROME OBSTACLE CHART - ICAO  
TYPE B

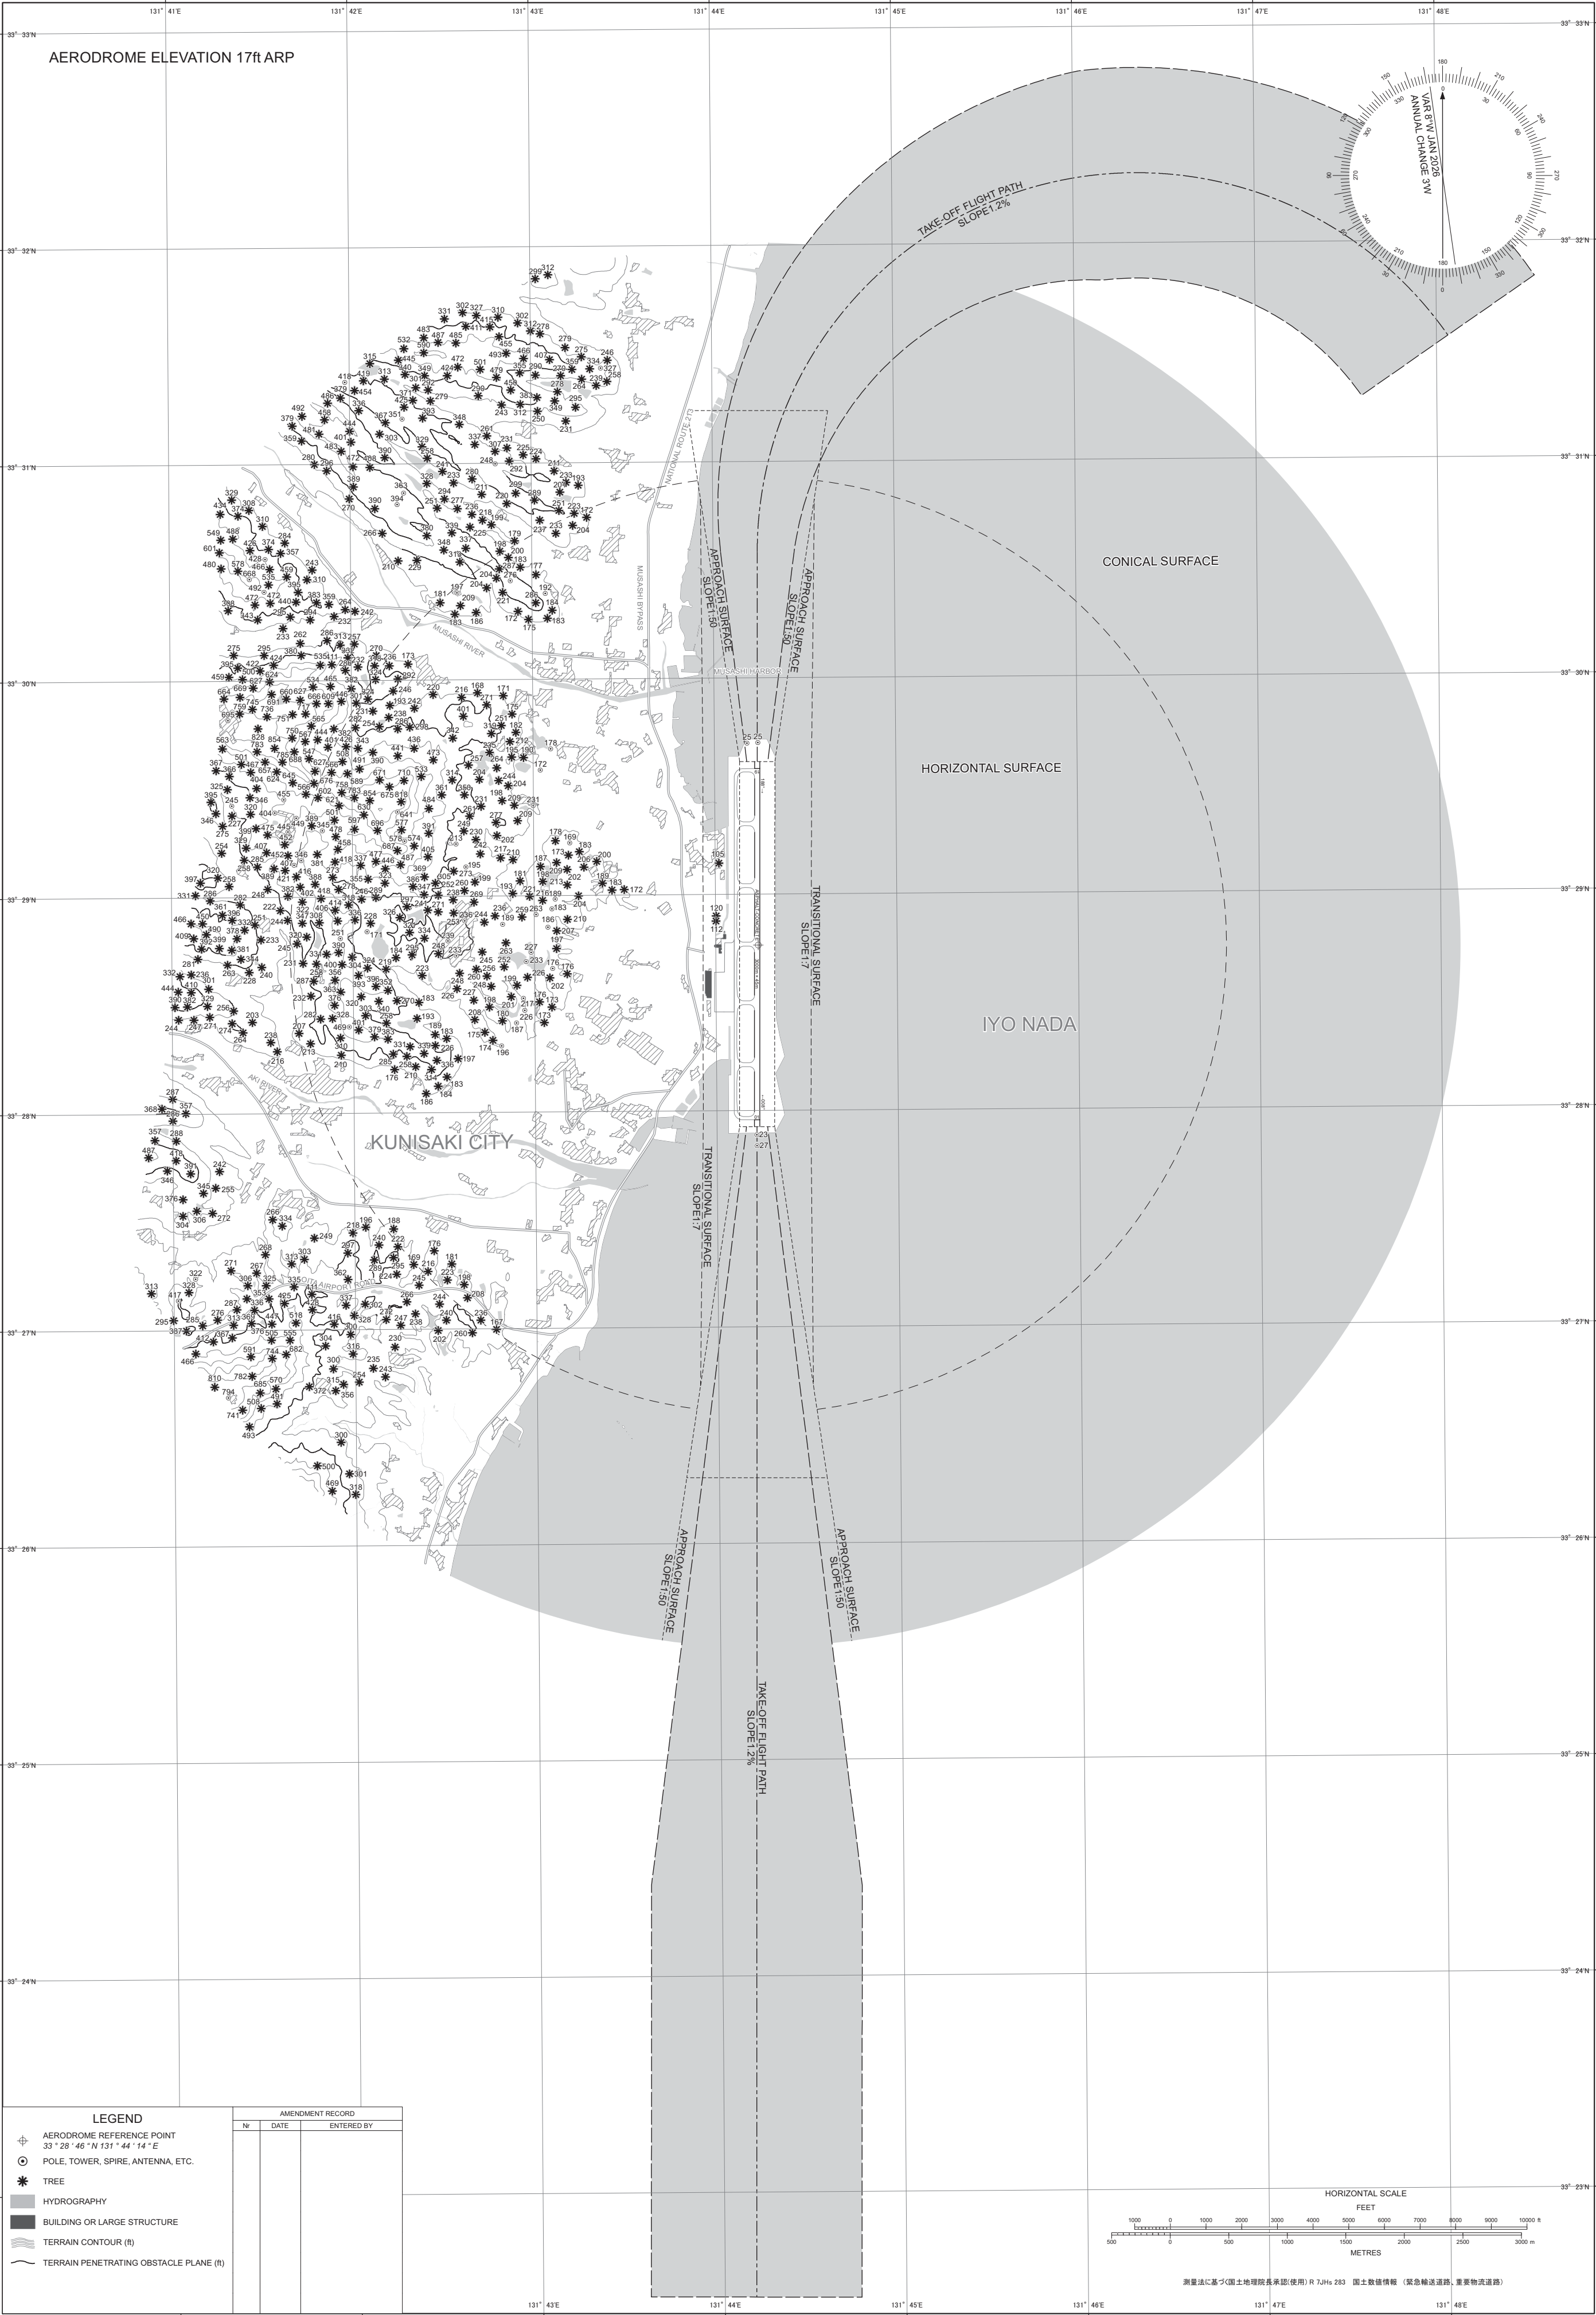

STANDARD DEPARTURE CHART - INSTRUMENT

RJFO / OITA

SID


MUSASHI REVERSAL TWO DEPARTURE

RWY01 : Climb RWY HDG to 500FT, turn right HDG177° to intercept and proceed via TFE R132 to TFE 10.0DME,...


RWY19 : Turn left, climb via TFE R132 to TFE 10.0DME,...  
...turn right, direct to TFE VOR/DME.  
Cross TFE VOR/DME at or above 4000FT.

Note RWY01 : 5.0% climb gradient required up to 500FT.  
OBST ALT 321FT located at 2.5NM 352° FM end of RWY01.

CHANGE : OBST.

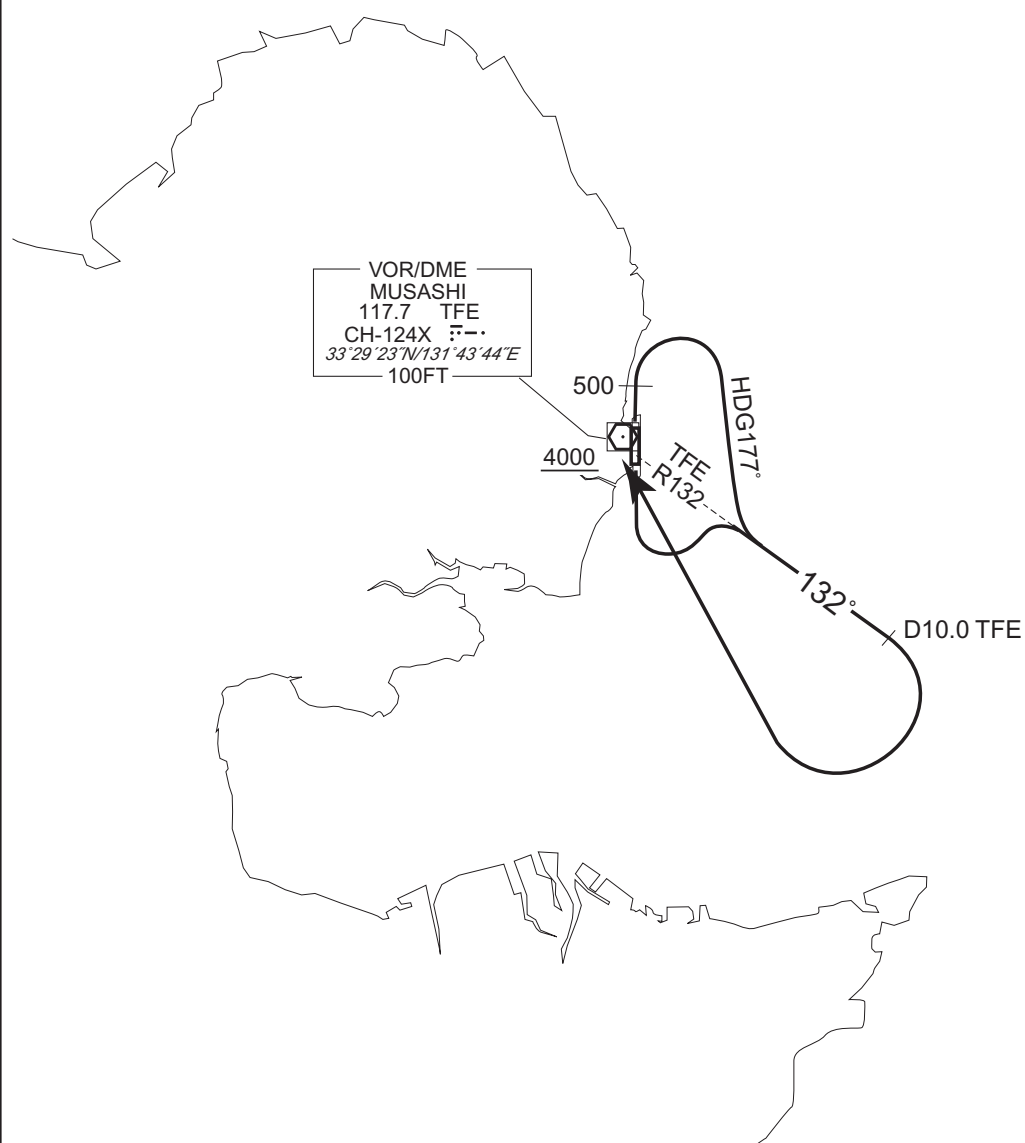

STANDARD DEPARTURE CHART - INSTRUMENT

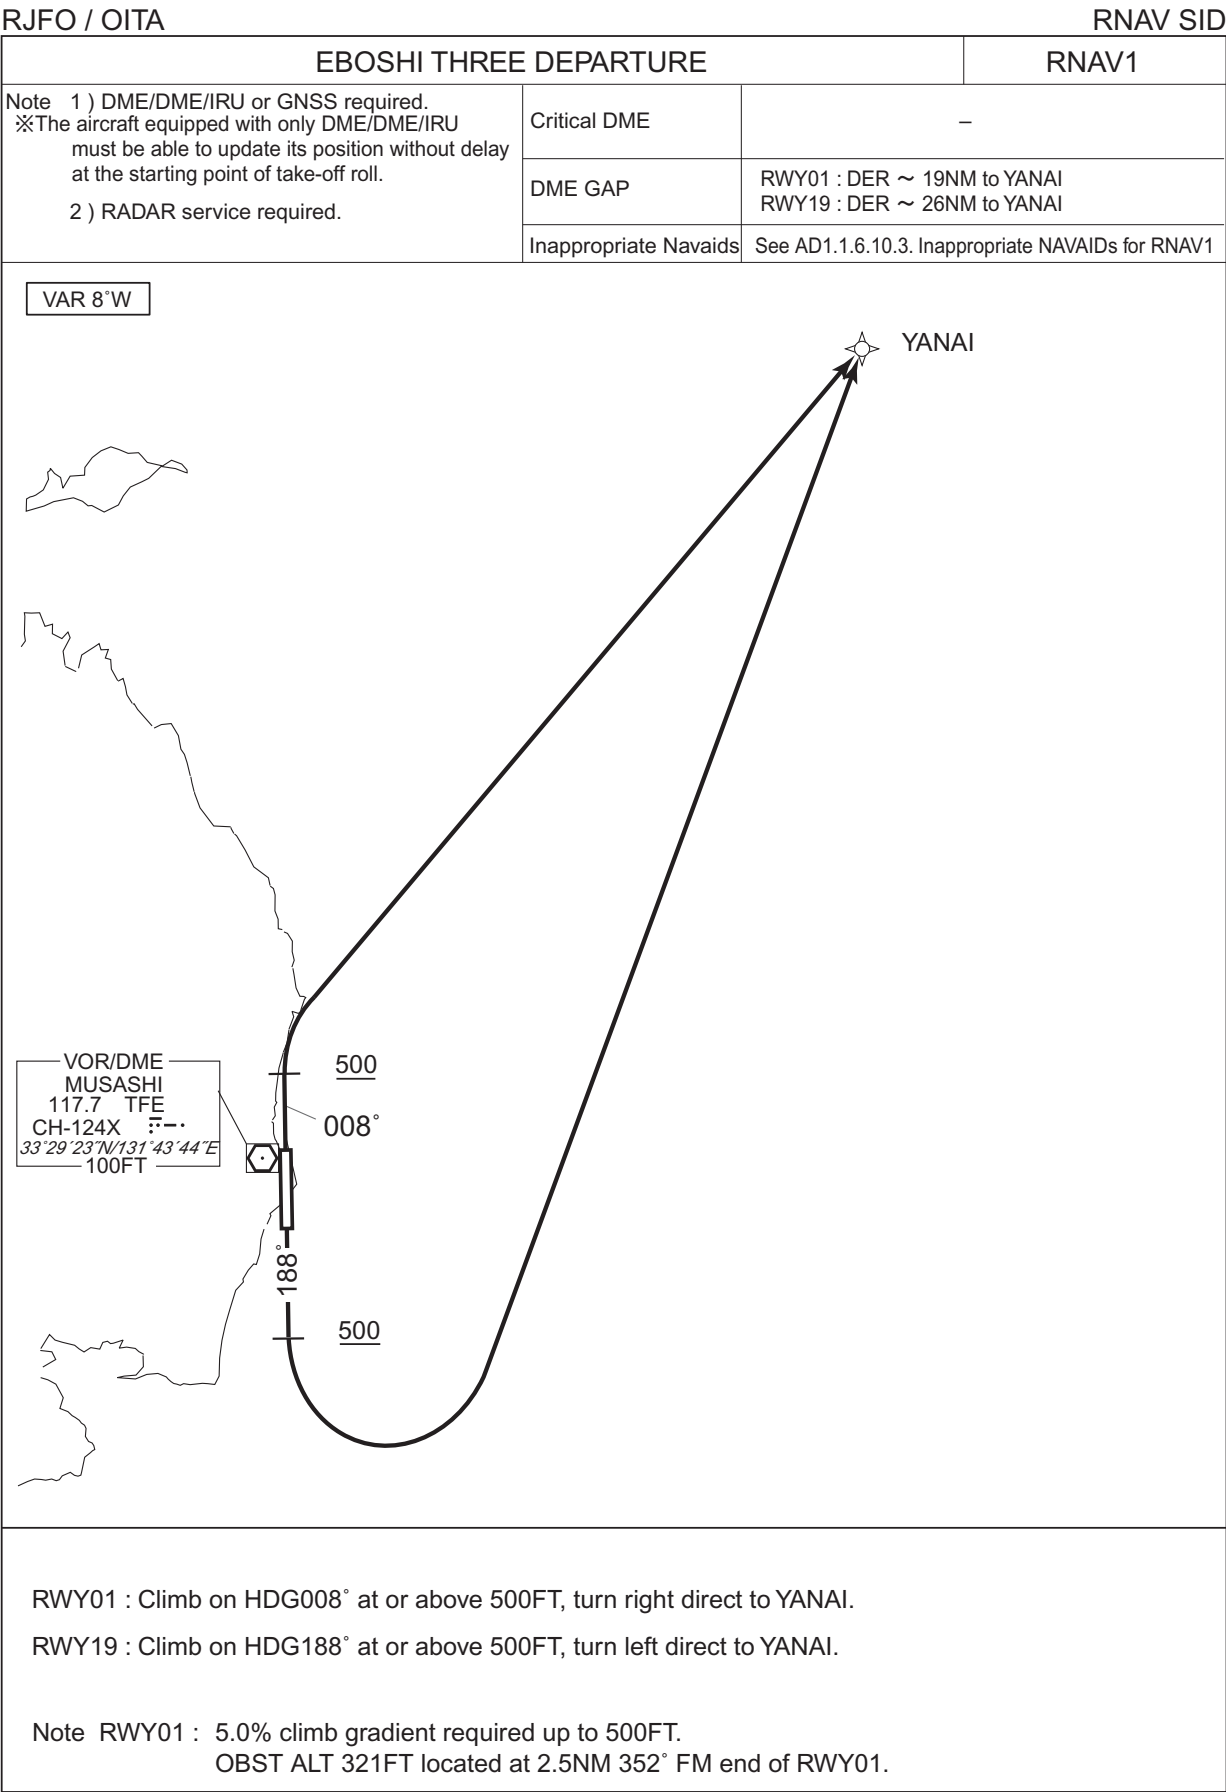

CHANGE : PROC renamed. VAR. PROC course. OBST.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFO / OITA

RNAV SID

EBOSHI THREE DEPARTURE

RWY01

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 008<br>(000.4) | -8.0               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | YANAI               | —        | —              | -8.0               | —             | R              | —             | —            | —              | RNAV1                    |

RWY19

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 188<br>(180.4) | -8.0               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | YANAI               | —        | —              | -8.0               | —             | L              | —             | —            | —              | RNAV1                    |


Waypoint Coordinates

| Waypoint Identifier | Coordinates            |
|---------------------|------------------------|
| YANAI               | 334622.9N / 1315917.1E |

CHANGE : PROC renamed. PROC course. Waypoint Coordinates added.



STANDARD DEPARTURE CHART- INSTRUMENT

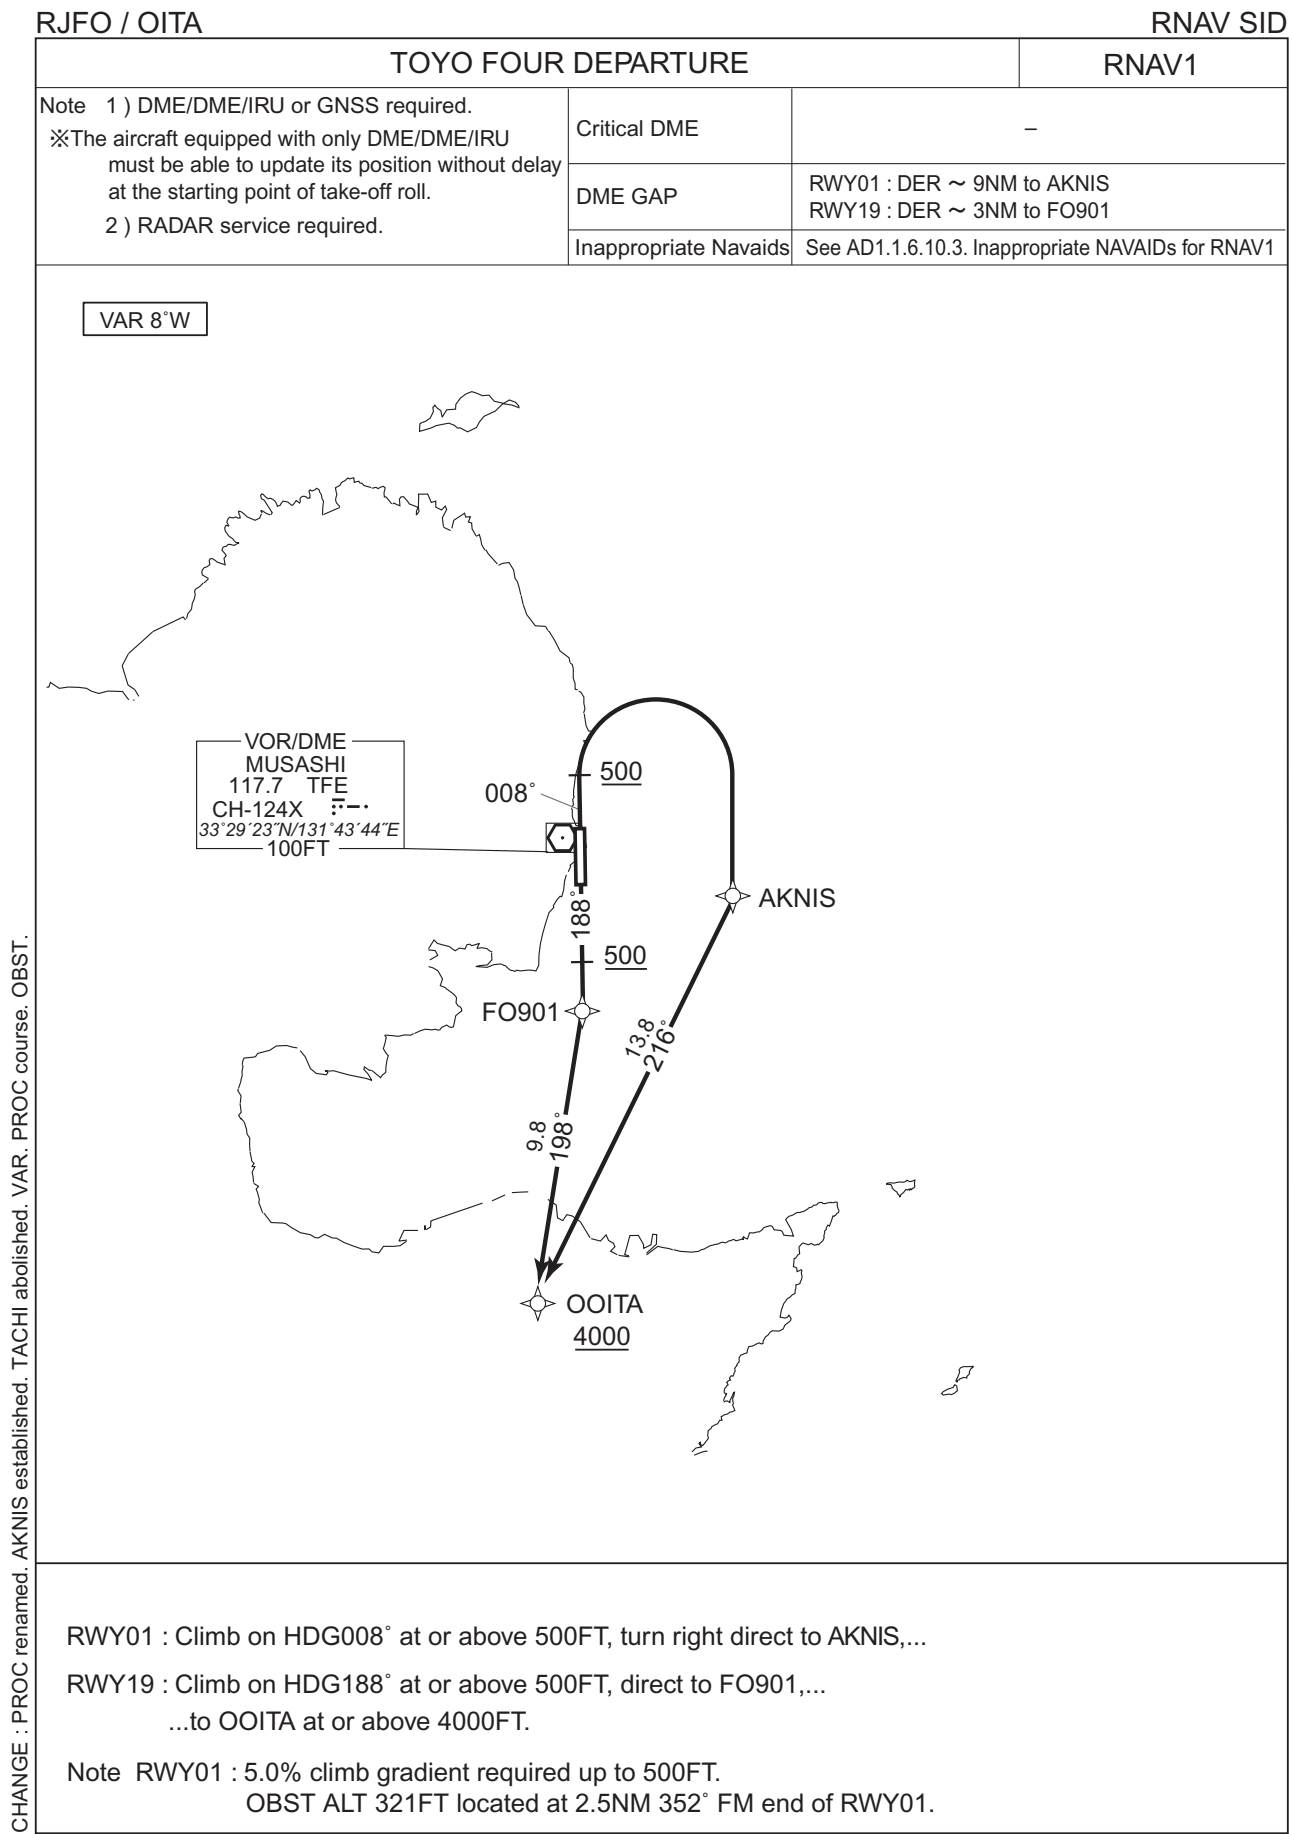

STANDARD DEPARTURE CHART- INSTRUMENT

RJFO / OITA

RNAV SID

TOYO FOUR DEPARTURE

RWY01

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 008<br>(000.4) | -8.0               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | AKNIS               | —        | —              | -8.0               | —             | R              | —             | —            | —              | RNAV1                    |
| 003           | TF              | OOITA               | —        | 216<br>(208.1) | -8.0               | 13.8          | —              | +4000         | —            | —              | RNAV1                    |

RWY19

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 188<br>(180.4) | -8.0               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | FO901               | —        | —              | -8.0               | —             | —              | —             | —            | —              | RNAV1                    |
| 003           | TF              | OOITA               | —        | 198<br>(189.8) | -8.0               | 9.8           | —              | +4000         | —            | —              | RNAV1                    |


Waypoint Coordinates

| Waypoint Identifier | Coordinates            |
|---------------------|------------------------|
| AKNIS               | 332524.3N / 1314958.2E |
| FO901               | 332251.1N / 1314410.5E |
| OOITA               | 331313.2N / 1314211.7E |

CHANGE : AKNIS established. TACHI abolished. PROC course. Waypoint Coordinates added.



STANDARD DEPARTURE CHART - INSTRUMENT

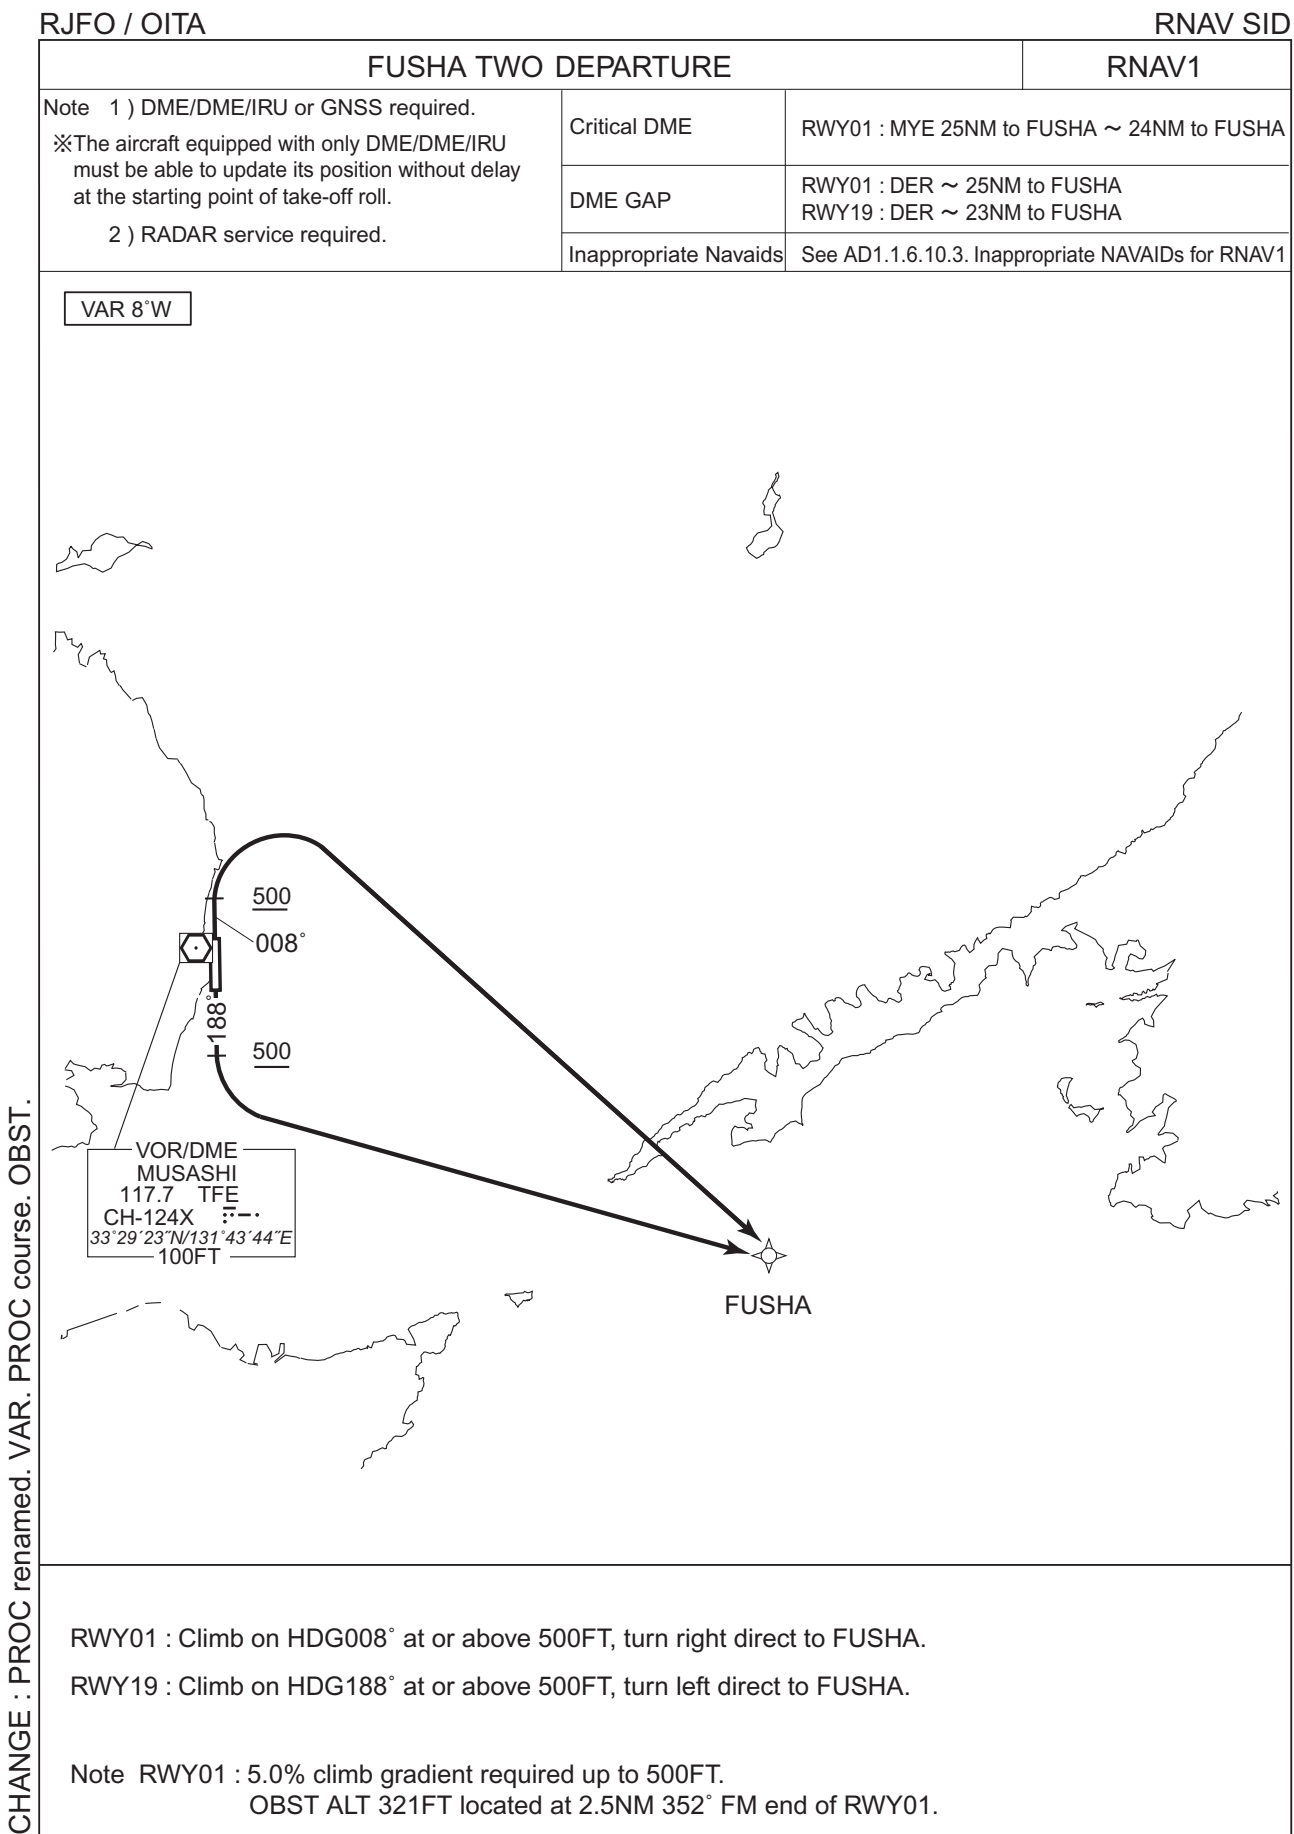

CHANGE : PROC renamed. VAR. PROC course. OBST.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFO / OITA

RNAV SID

FUSHA TWO DEPARTURE

RWY01

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 008<br>(000.4) | -8.0               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | FUSHA               | —        | —              | -8.0               | —             | R              | —             | —            | —              | RNAV1                    |

RWY19

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 188<br>(180.4) | -8.0               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | FUSHA               | —        | —              | -8.0               | —             | L              | —             | —            | —              | RNAV1                    |

Waypoint Coordinates

| Waypoint Identifier | Coordinates            |
|---------------------|------------------------|
| FUSHA               | 331737.7N / 1320814.6E |

CHANGE : PROC renamed. PROC course. VAR. Waypoint Coordinates added.

| RJFO / OITA                                                                                                         |                                                                                                                                                                                                                                                                  | RNAV TRANSITION                                                                                                                                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DONAR TRANSITION / DOUGO TRANSITION / FIATO TRANSITION<br>SALTY TRANSITION / SPIDE TRANSITION / ASHIZURI TRANSITION |                                                                                                                                                                                                                                                                  | RNAV1                                                                                                                                                                                                                                                                       |
| Note 1 ) DME/DME/IRU or GNSS required.<br>2 ) RADAR service required.                                               | <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">Critical DME</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">DME GAP</div> <div style="border: 1px solid black; padding: 2px;">Inappropriate Navaids</div> | <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">-</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">-</div> <div style="border: 1px solid black; padding: 2px;">See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1</div> |
| <div style="border: 1px solid black; padding: 2px; margin-bottom: 10px; display: inline-block;">VAR 8°W</div>       |                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                             |
| <u>DONAR TRANSITION</u><br>From FUSHA, to DONAR at or above FL160.                                                  |                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                             |
| <u>DOUGO TRANSITION</u><br>From FUSHA, to DONAR at or above FL160, to MYE.                                          |                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                             |
| <u>FIATO TRANSITION</u><br>From FUSHA, to DONAR at or above FL160, to SALTY, to FIATO.                              |                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                             |
| <u>SALTY TRANSITION</u><br>From FUSHA, to DONAR at or above FL160, to SALTY.                                        |                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                             |
| <u>SPIDE TRANSITION</u><br>From FUSHA, to DONAR at or above FL160, to SPIDE.                                        |                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                             |
| <u>ASHIZURI TRANSITION</u><br>From FUSHA, to SUC.                                                                   |                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                             |

## STANDARD DEPARTURE CHART - INSTRUMENT

## RJFO / OITA

## RNAV TRANSITION

DONAR TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | FUSHA               | —        | —              | -8.0               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | DONAR               | —        | 087<br>(078.7) | -8.0               | 17.8          | —              | +FL160        | —            | —              | RNAV1                    |

DOUGO TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | FUSHA               | —        | —              | -8.0               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | DONAR               | —        | 087<br>(078.7) | -8.0               | 17.8          | —              | +FL160        | —            | —              | RNAV1                    |
| 003           | TF              | MYE                 | —        | 028<br>(019.8) | -8.0               | 30.6          | —              | —             | —            | —              | RNAV1                    |

FIATO TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | FUSHA               | —        | —              | -8.0               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | DONAR               | —        | 087<br>(078.7) | -8.0               | 17.8          | —              | +FL160        | —            | —              | RNAV1                    |
| 003           | TF              | SALTY               | —        | 044<br>(036.1) | -8.0               | 37.3          | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | FIATO               | —        | 044<br>(036.3) | -8.0               | 11.8          | —              | —             | —            | —              | RNAV1                    |

SALTY TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | FUSHA               | —        | —              | -8.0               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | DONAR               | —        | 087<br>(078.7) | -8.0               | 17.8          | —              | +FL160        | —            | —              | RNAV1                    |
| 003           | TF              | SALTY               | —        | 044<br>(036.1) | -8.0               | 37.3          | —              | —             | —            | —              | RNAV1                    |

CHANGE : PROC course. VAR.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFO / OITA

RNAV TRANSITION

SPIDE TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | FUSHA               | —        | —              | -8.0               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | DONAR               | —        | 087<br>(078.7) | -8.0               | 17.8          | —              | +FL160        | —            | —              | RNAV1                    |
| 003           | TF              | SPIDE               | —        | 062<br>(054.1) | -8.0               | 30.1          | —              | —             | —            | —              | RNAV1                    |

ASHIZURI TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | FUSHA               | —        | —              | -8.0               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | SUC                 | —        | 135<br>(126.5) | -8.0               | 54.0          | —              | —             | —            | —              | RNAV1                    |

Waypoint Coordinates

| Waypoint Identifier | Coordinates            |
|---------------------|------------------------|
| FUSHA               | 331737.7N / 1320814.6E |
| DONAR               | 332105.1N / 1322904.7E |
| MYE                 | 334948.4N / 1324132.0E |
| SALTY               | 335109.7N / 1325530.8E |
| FIATO               | 340037.4N / 1330354.6E |
| SPIDE               | 333840.2N / 1325818.0E |
| SUC                 | 324521.5N / 1325947.9E |

CHANGE : PROC course. VAR. Waypoint Coordinates added.

STANDARD ARRIVAL CHART- INSTRUMENT


RJFO / OITA

STAR


JEWEL ARRIVAL

From over DONKO, via TFE R038 to JEWEL.

Cross DONKO at or above 5000FT, cross JEWEL at or above 3000FT.

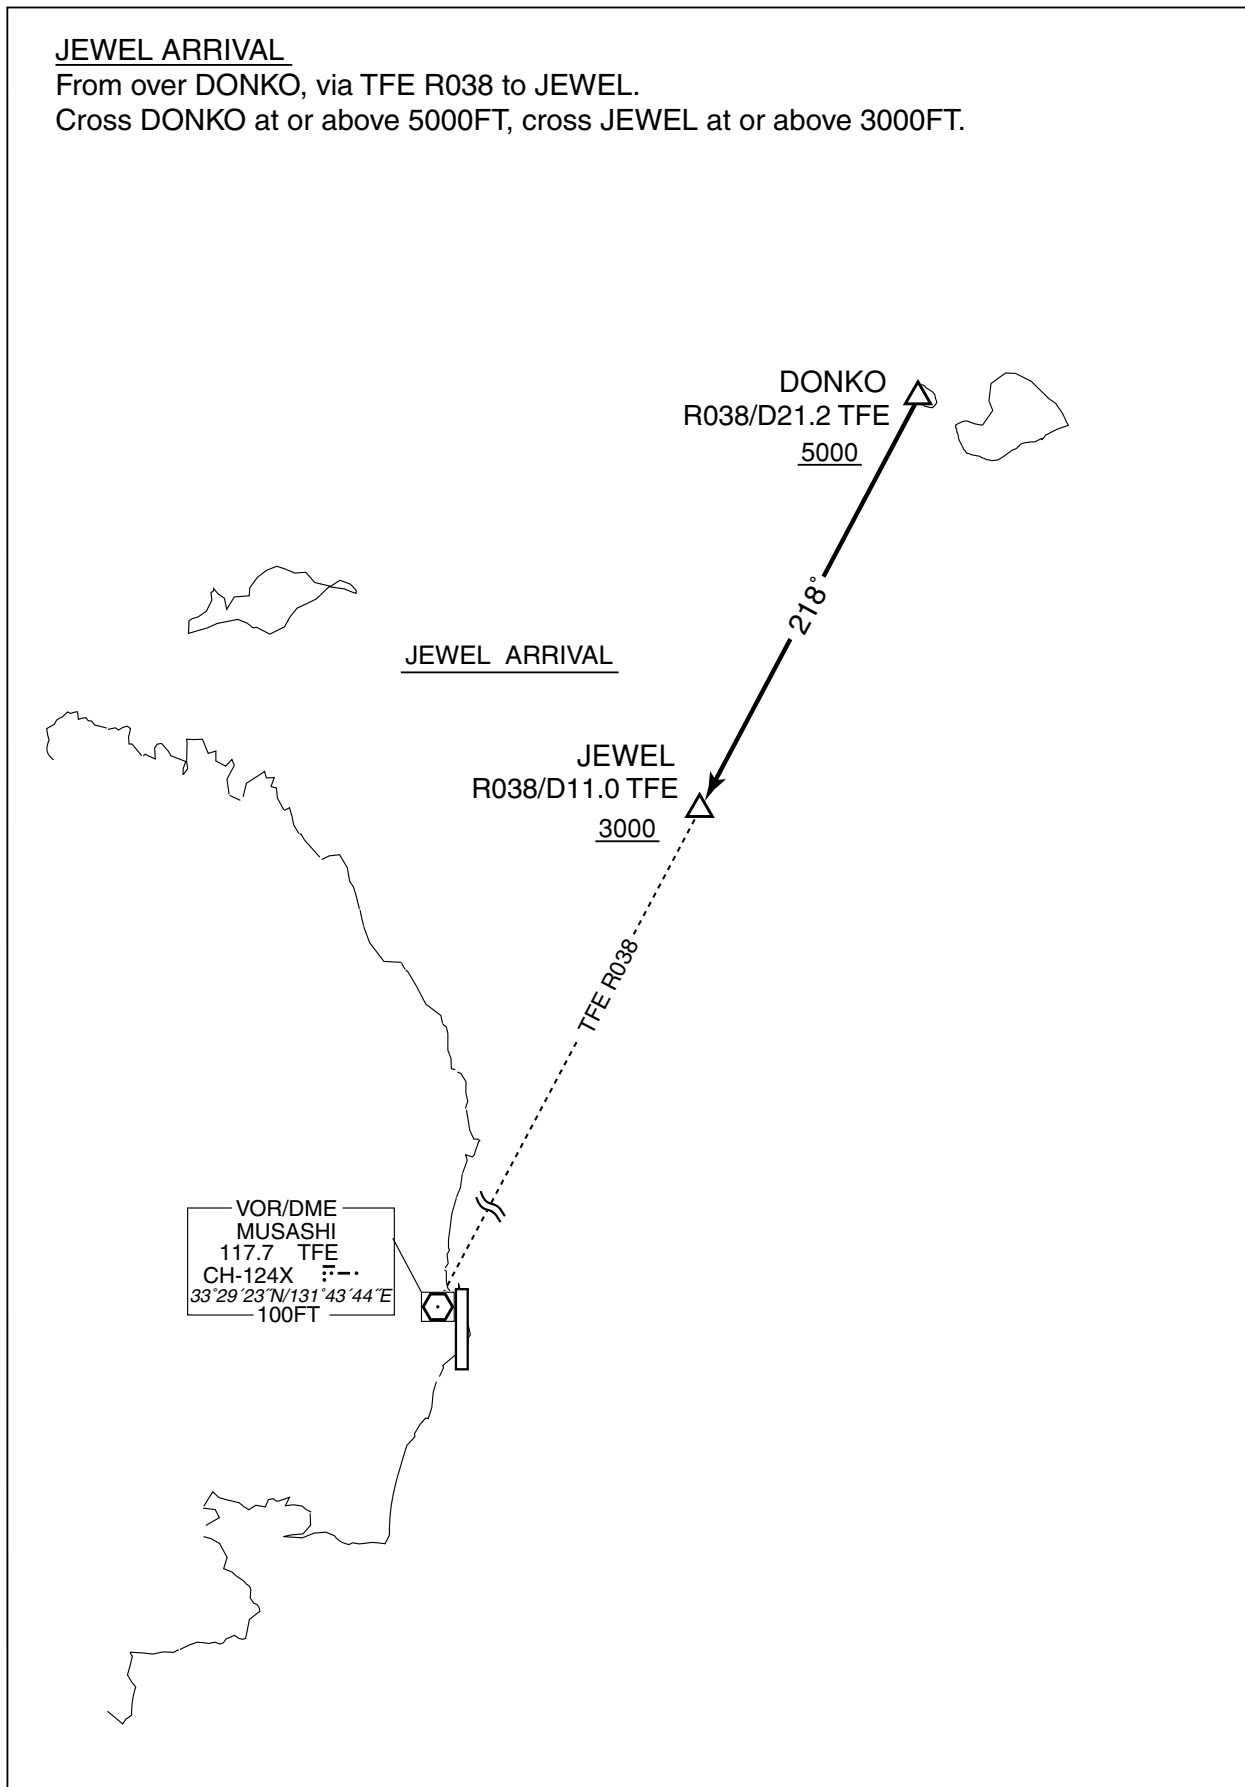

STANDARD ARRIVAL CHART- INSTRUMENT

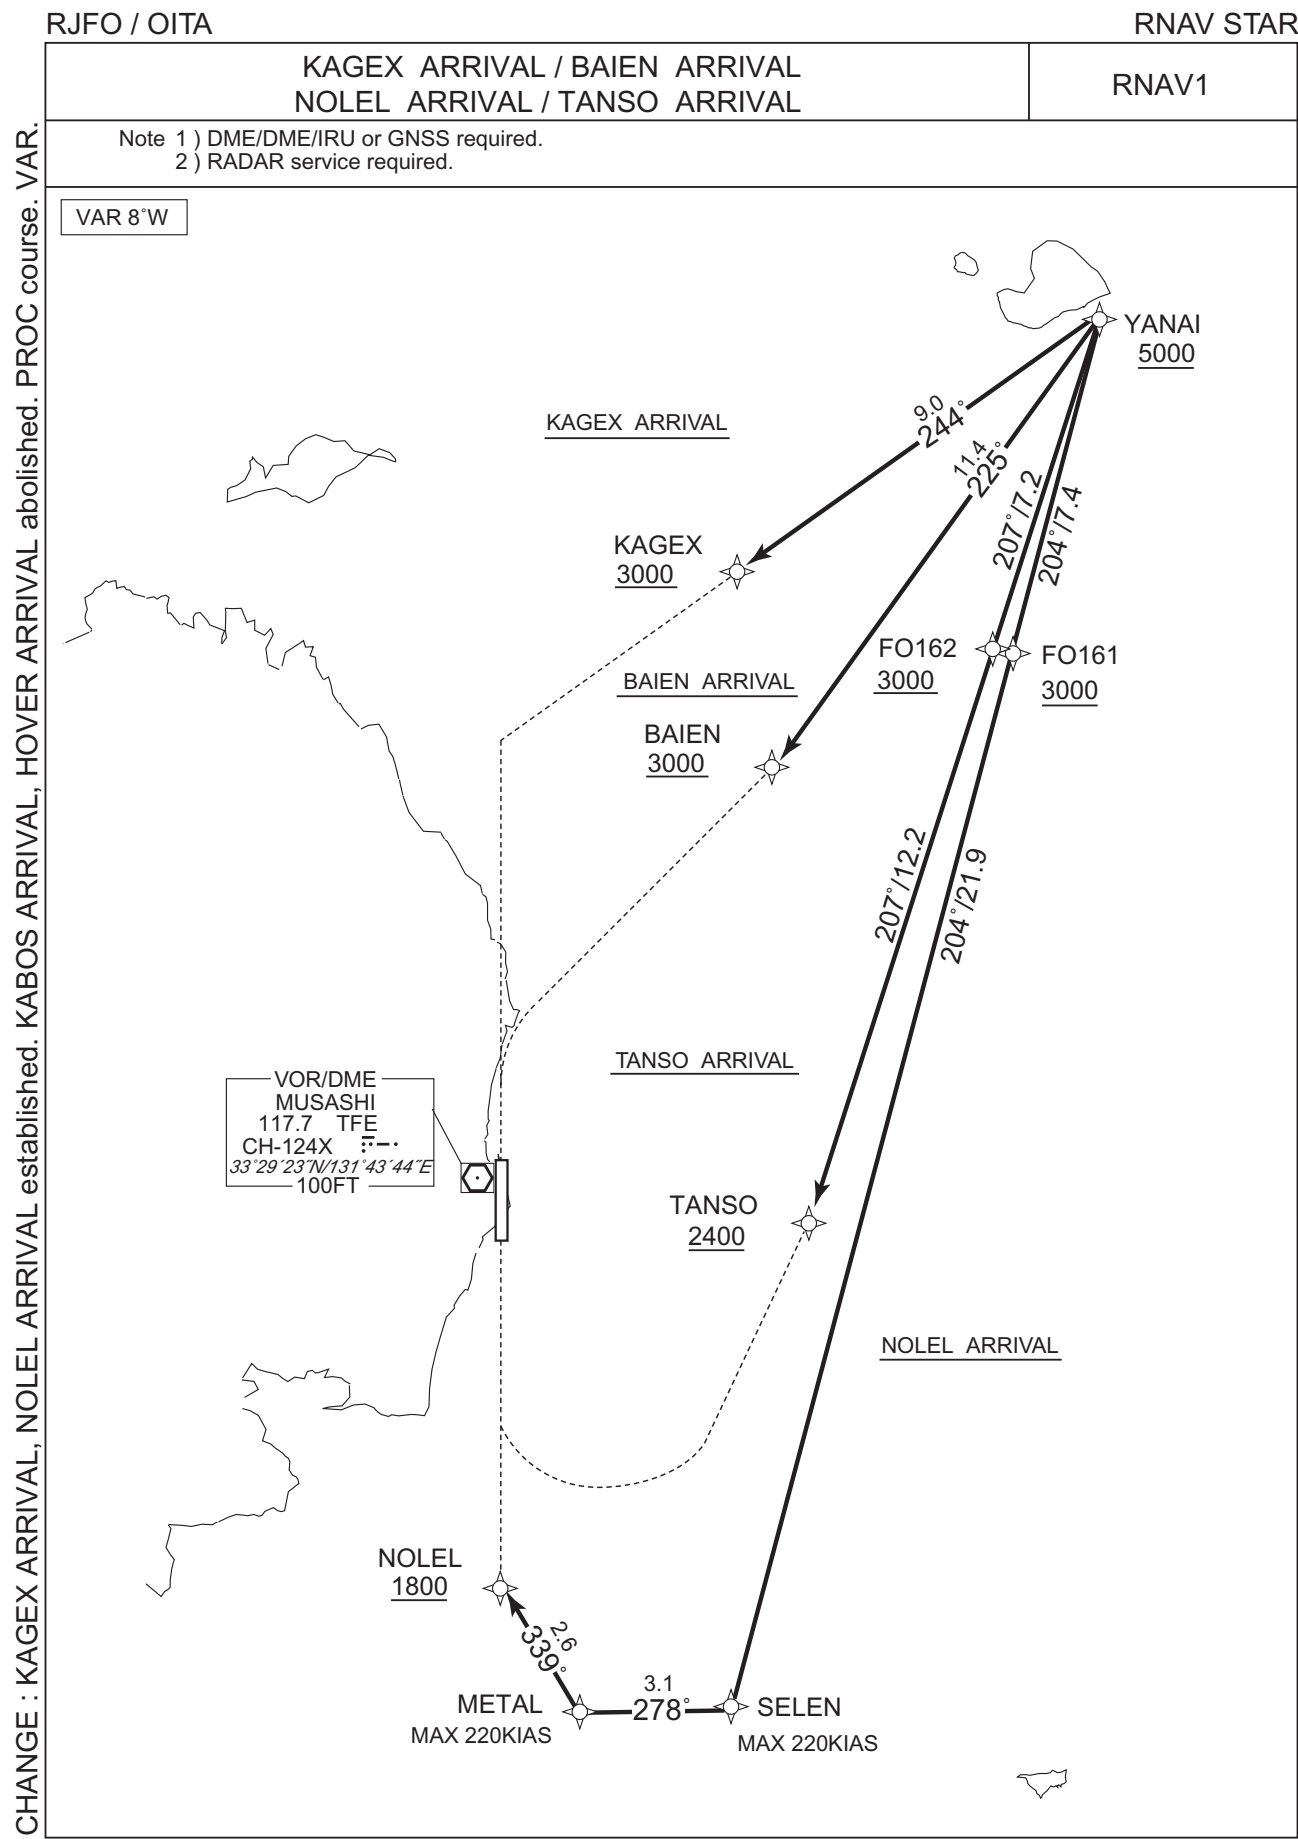



## STANDARD ARRIVAL CHART - INSTRUMENT

RJFO / OITA

RNAV STAR

KAGEX ARRIVAL

From YANAI at or above 5000FT, to KAGEX at or above 3000FT.

|                        |                                                   |
|------------------------|---------------------------------------------------|
| Critical DME           | —                                                 |
| DME GAP                | —                                                 |
| Inappropriate Nav aids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | YANAI               | —        | —              | -8.0               | —             | —              | +5000         | —            | —              | RNAV1                    |
| 002           | TF              | KAGEX               | —        | 244<br>(236.2) | -8.0               | 9.0           | —              | +3000         | —            | —              | RNAV1                    |

BAIEN ARRIVAL

From YANAI at or above 5000FT, to BAIEN at or above 3000FT.

|                        |                                                   |
|------------------------|---------------------------------------------------|
| Critical DME           | —                                                 |
| DME GAP                | —                                                 |
| Inappropriate Nav aids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | YANAI               | —        | —              | -8.0               | —             | —              | +5000         | —            | —              | RNAV1                    |
| 002           | TF              | BAIEN               | —        | 225<br>(217.4) | -8.0               | 11.4          | —              | +3000         | —            | —              | RNAV1                    |

TANSO ARRIVAL

From YANAI at or above 5000FT, to FO162 at or above 3000FT, to TANSO at or above 2400FT.

|                        |                                                   |
|------------------------|---------------------------------------------------|
| Critical DME           | —                                                 |
| DME GAP                | —                                                 |
| Inappropriate Nav aids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | YANAI               | —        | —              | -8.0               | —             | —              | +5000         | —            | —              | RNAV1                    |
| 002           | TF              | FO162               | —        | 207<br>(199.4) | -8.0               | 7.2           | —              | +3000         | —            | —              | RNAV1                    |
| 003           | TF              | TANSO               | —        | 207<br>(199.4) | -8.0               | 12.2          | —              | +2400         | —            | —              | RNAV1                    |

CHANGE : KAGEX ARRIVAL established. PROC course. VAR.

STANDARD ARRIVAL CHART - INSTRUMENT

RJFO / OITA

RNAV STAR

NOLEL ARRIVAL  
From YANAI at or above 5000FT, to FO161 at or above 3000FT, to SELEN, to METAL, to NOLEL at or above 1800FT.

|                       |                                                   |
|-----------------------|---------------------------------------------------|
| Critical DME          | —                                                 |
| DME GAP               | —                                                 |
| Inappropriate Navaids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | YANAI               | —        | —              | -8.0               | —             | —              | +5000         | —            | —              | RNAV1                    |
| 002           | TF              | FO161               | —        | 204<br>(196.4) | -8.0               | 7.4           | —              | +3000         | —            | —              | RNAV1                    |
| 003           | TF              | SELEN               | —        | 204<br>(196.4) | -8.0               | 21.9          | —              | —             | -220         | —              | RNAV1                    |
| 004           | TF              | METAL               | —        | 278<br>(270.5) | -8.0               | 3.1           | —              | —             | -220         | —              | RNAV1                    |
| 005           | TF              | NOLEL               | —        | 339<br>(330.5) | -8.0               | 2.6           | —              | +1800         | —            | —              | RNAV1                    |

Waypoint Coordinates


| Waypoint Identifier | Coordinates            |
|---------------------|------------------------|
| YANAI               | 334622.9N / 1315917.1E |
| KAGEX               | 334121.2N / 1315016.7E |
| BAIEN               | 333720.4N / 1315059.8E |
| FO162               | 333936.2N / 1315624.8E |
| TANSO               | 332806.6N / 1315133.7E |
| FO161               | 333918.2N / 1315646.6E |
| SELEN               | 331818.8N / 1314923.1E |
| METAL               | 331820.3N / 1314541.2E |
| NOLEL               | 332036.2N / 1314409.4E |

CHANGE : NOLEL ARRIVAL established. Waypoint Coordinates added. .

STANDARD ARRIVAL CHART - INSTRUMENT

RJFO / OITA

RNAV STAR RWY01

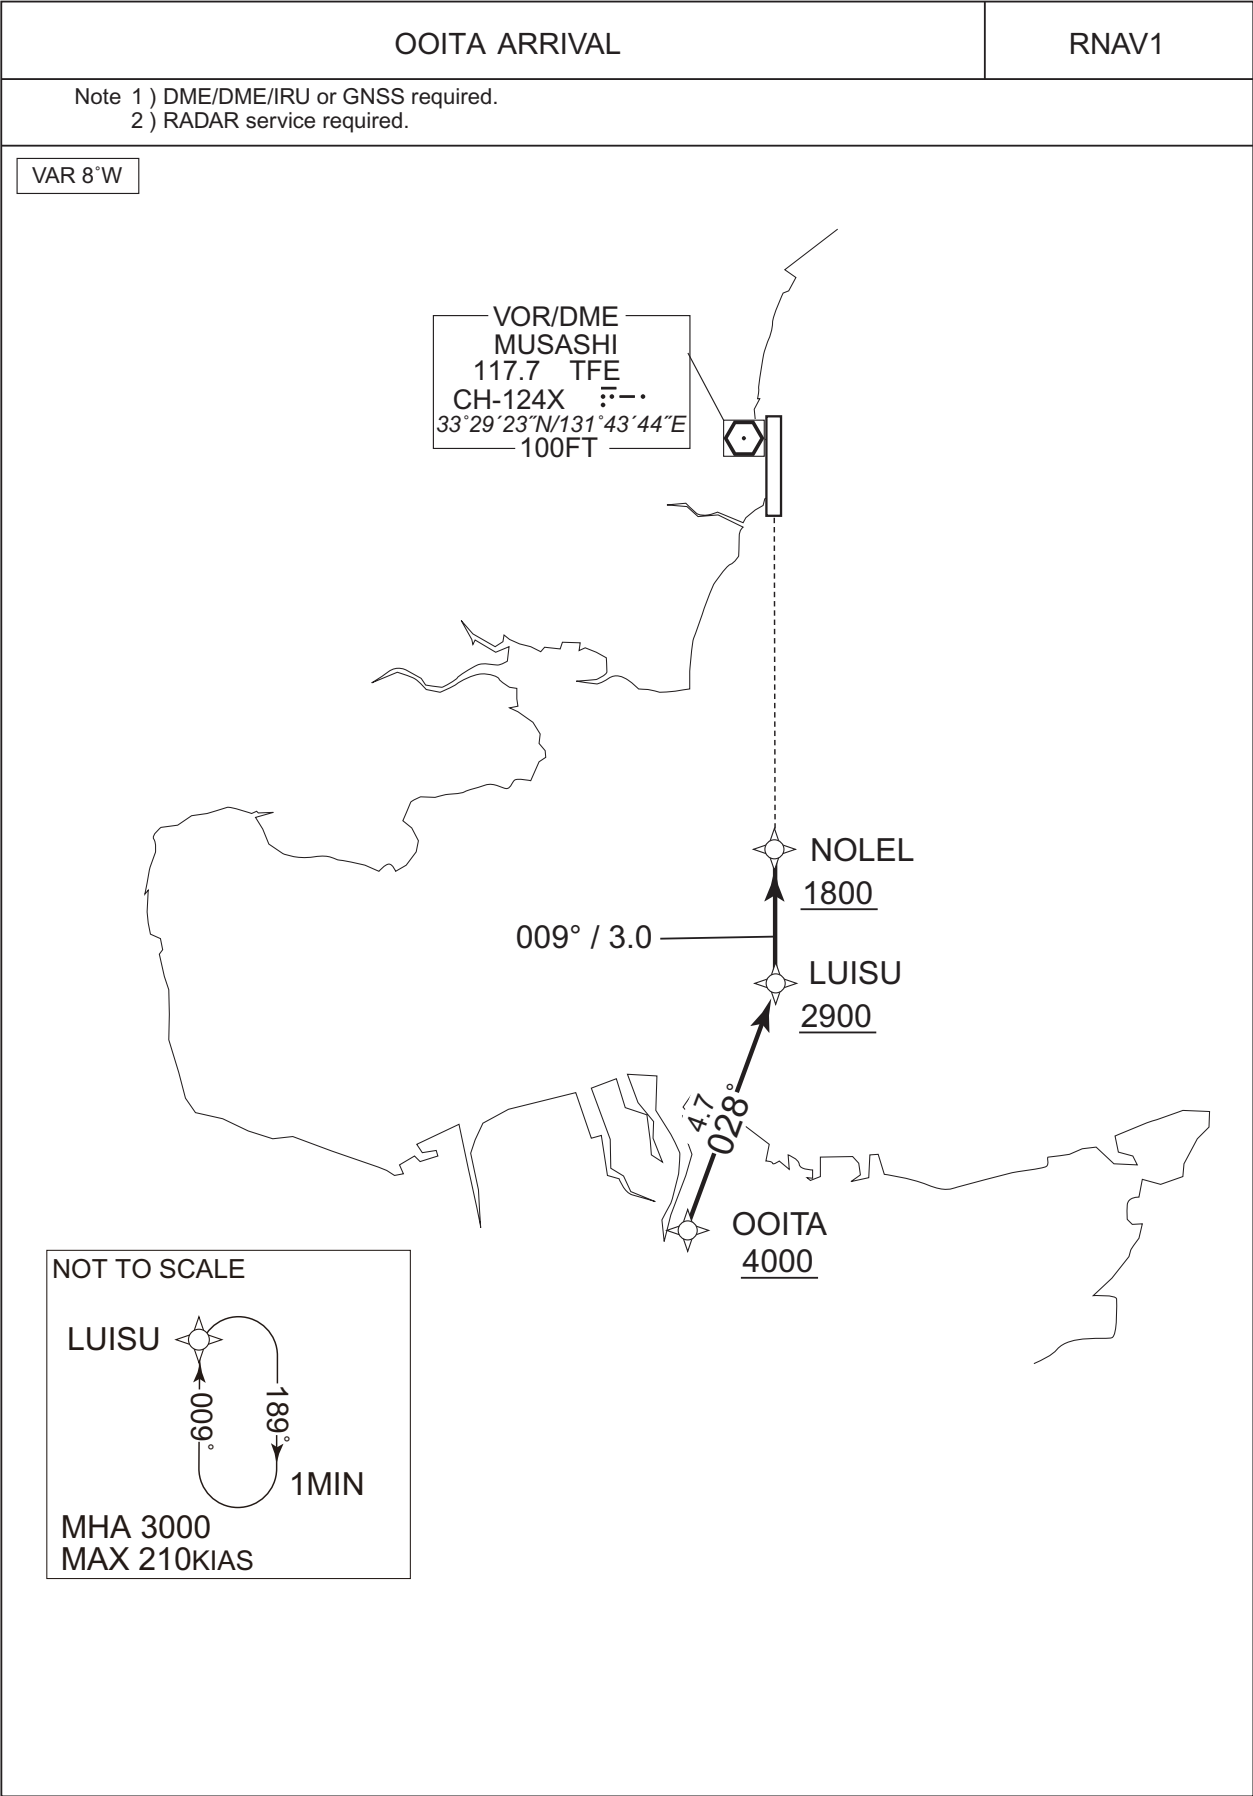

STANDARD ARRIVAL CHART - INSTRUMENT

RJFO / OITA

RNAV STAR

OOITA ARRIVAL

From OOITA at or above 4000FT, to LUISU at or above 2900FT, to NOLEL at or above 1800FT.

|                        |                                                   |
|------------------------|---------------------------------------------------|
| Critical DME           | —                                                 |
| DME GAP                | —                                                 |
| Inappropriate Nav aids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 |

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | OOITA               | —        | —              | -8.0               | —             | —              | +4000         | —            | —              | RNAV1                    |
| 002           | TF              | LUISU               | —        | 028<br>(020.2) | -8.0               | 4.7           | —              | +2900         | —            | —              | RNAV1                    |
| 003           | TF              | NOLEL               | —        | 009<br>(000.5) | -8.0               | 3.0           | —              | +1800         | —            | —              | RNAV1                    |


| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|--------------|--------------------------|
| Hold | LUISU               | 009<br>(000.5)        | -8.0               | 1.0(-14000)         | R              | 3000                  | FL140                 | -210(-14000) | RNAV1                    |

Waypoint Coordinates

| Waypoint Identifier | Coordinates            |
|---------------------|------------------------|
| OOITA               | 331313.2N / 1314211.7E |
| LUISU               | 331735.8N / 1314407.5E |
| NOLEL               | 332036.2N / 1314409.4E |

CHANGE : New PROC.



INSTRUMENT APPROACH CHART

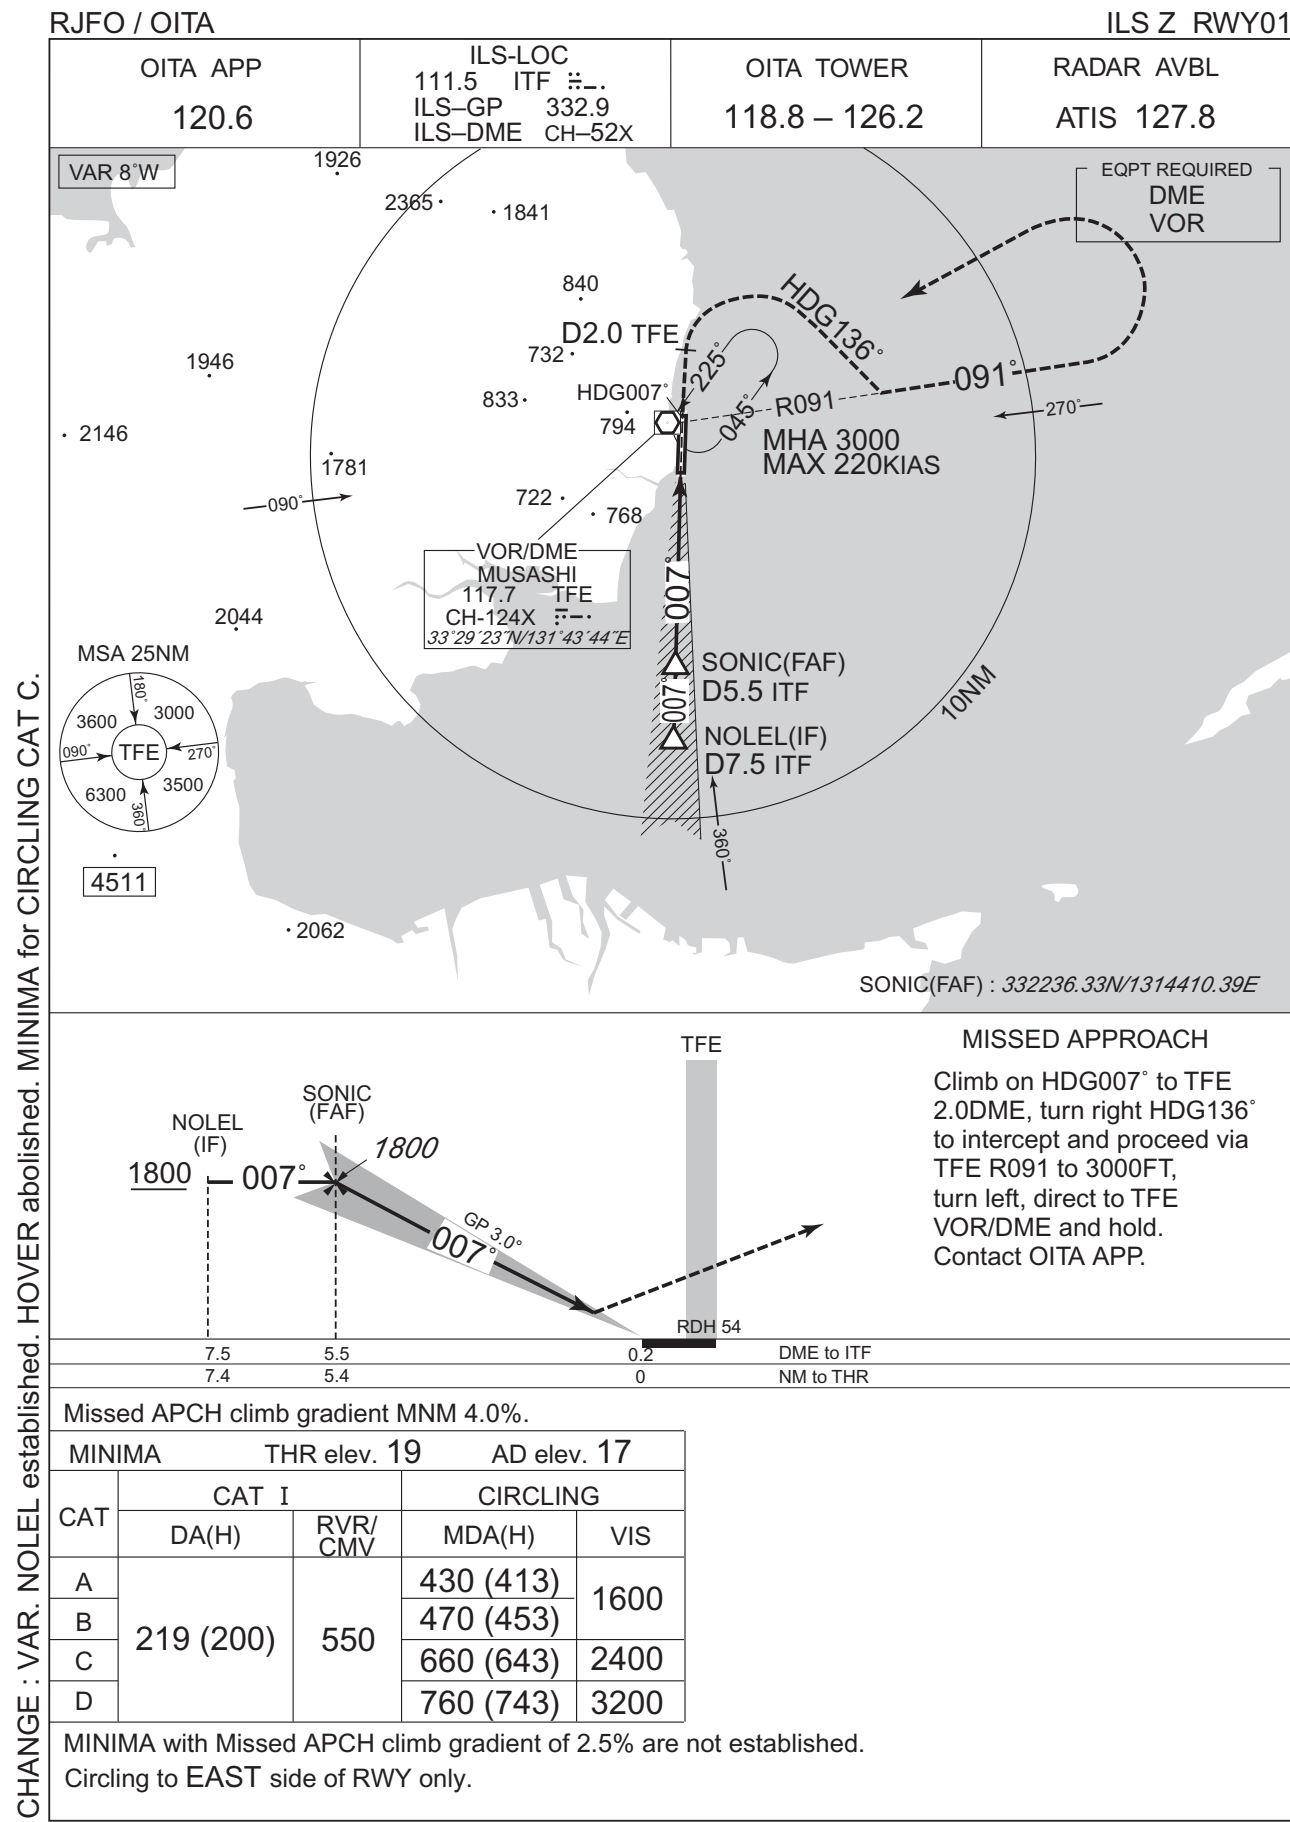

## INSTRUMENT APPROACH CHART

RJFO / OITA

ILS Y or LOC RWY01

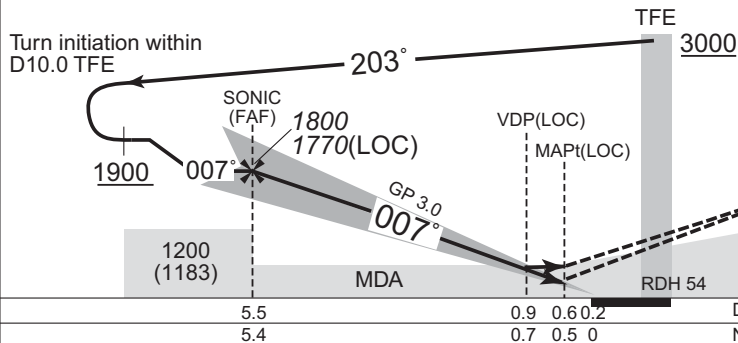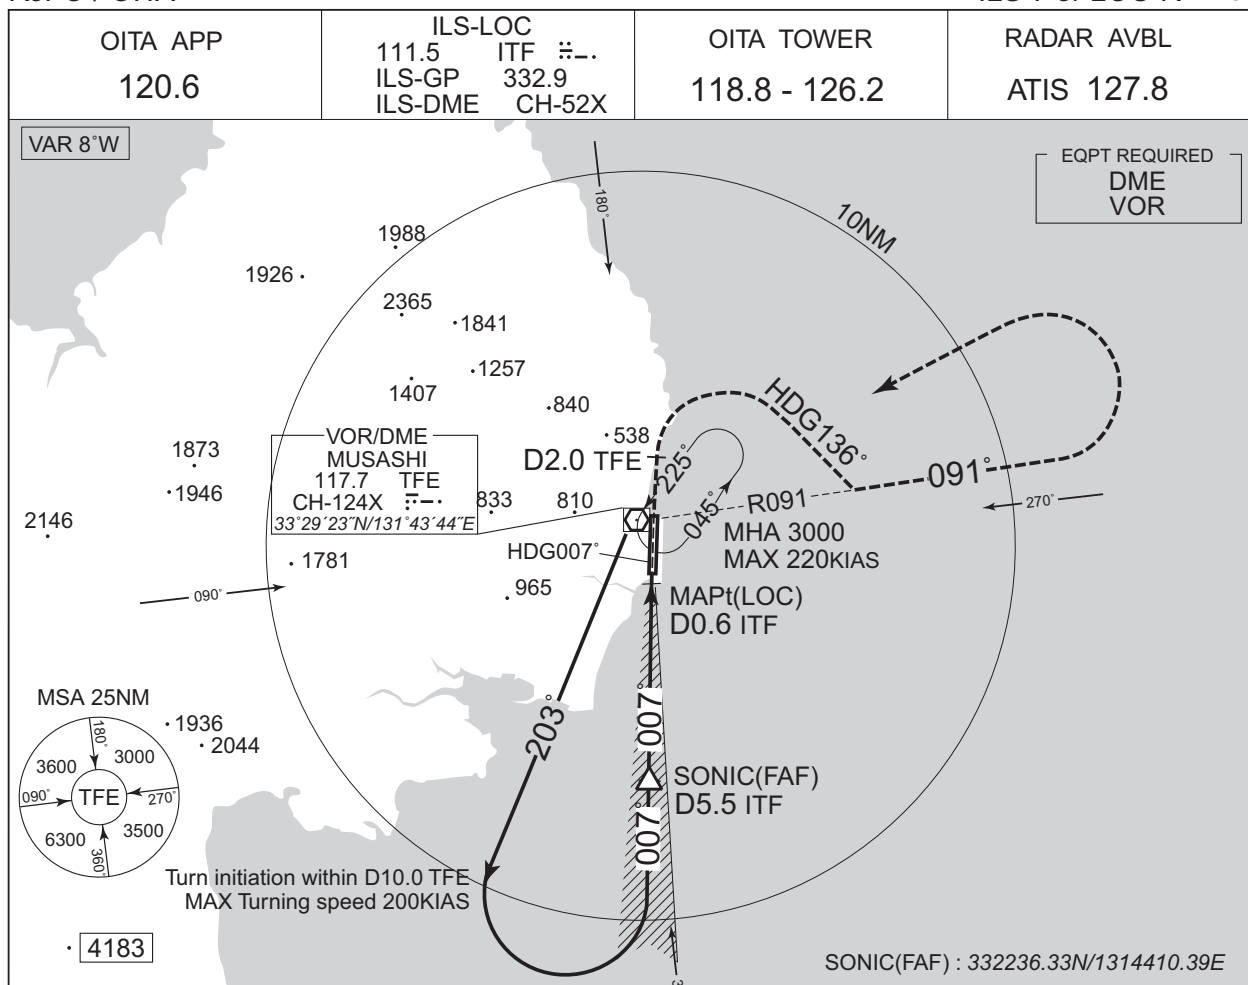

**MISSED APPROACH**  
Climb on HDG007° to TFE 2.0DME, turn right HDG136° to intercept and proceed via TFE R091 to 3000FT, turn left, direct to TFE VOR/DME and hold. Contact OITA APP.


Missed APCH climb gradient MNM 4.0%.

| MINIMA |           | THR elev. 19 |           | AD elev. 17 |            |
|--------|-----------|--------------|-----------|-------------|------------|
| CAT    | CAT I     |              | LOC       |             | CIRCLING   |
|        | DA(H)     | RVR/CMV      | MDA(H)    | RVR/CMV     | MDA(H) VIS |
| A      | 219 (200) | 550          | 300 (283) | 800         | 430 (413)  |
| B      |           |              |           |             | 470 (453)  |
| C      |           |              |           |             | 660 (643)  |
| D      |           |              |           |             | 760 (743)  |

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling to EAST side of RWY only.

CHANGE : PROC renamed.

INSTRUMENT APPROACH CHART

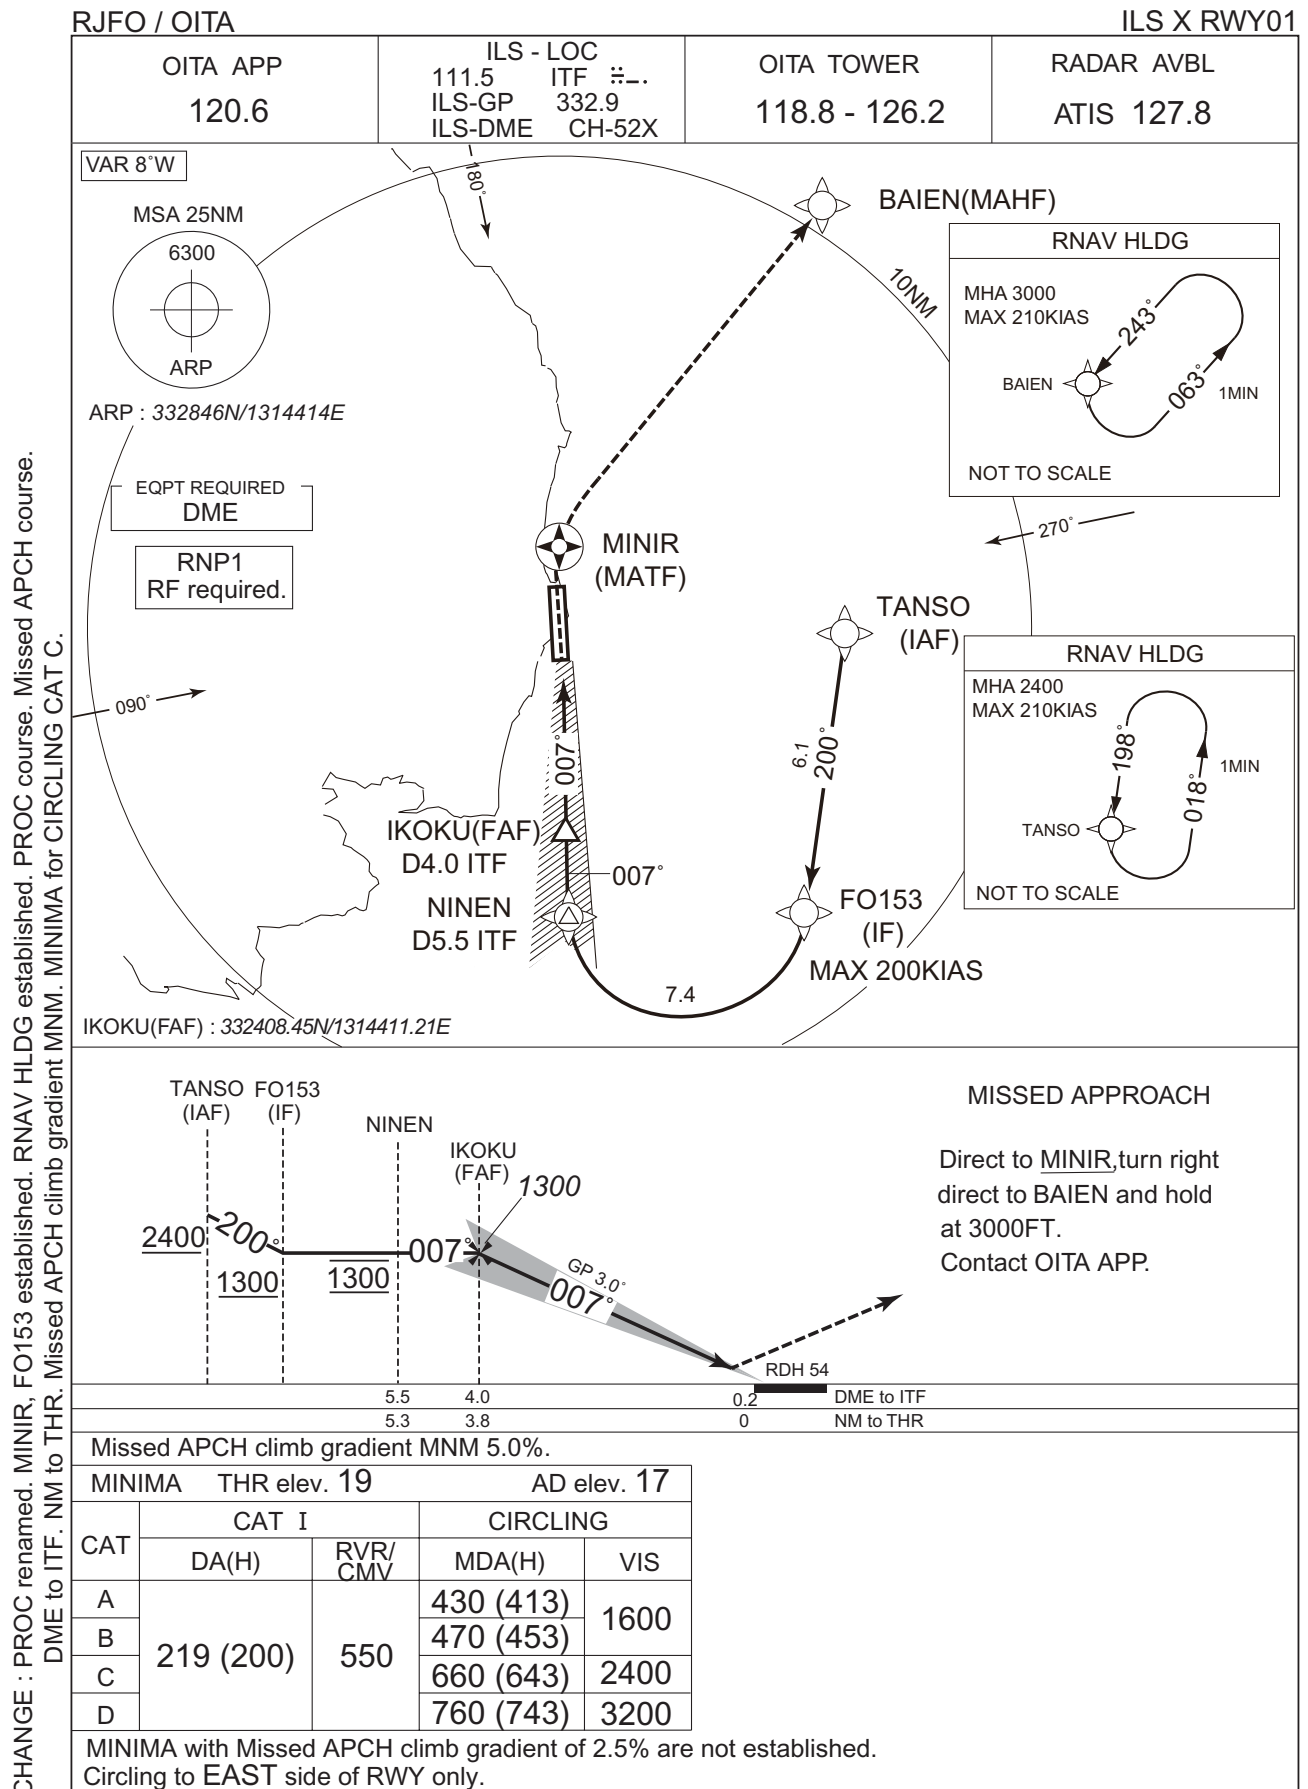

INSTRUMENT APPROACH CHART

RJFO / OITA

ILS X RWY01

Coding Table

| Serial Number | Path Descriptor                    | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|------------------------------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF                                 | TANSO               | -        | -              | -8.0               | -             | -              | +2400         | -            | -              | RNP1                     |
| 002           | TF                                 | FO153               | -        | 200<br>(191.7) | -8.0               | 6.1           | -              | +1300         | -200         | -              | RNP1                     |
| 003           | RF<br>Center:<br>FORF3<br>r=2.50NM | NINEN               | -        | -              | -8.0               | 7.4           | R              | 1300          | -            | -              | RNP1                     |

|     |    |       |   |   |      |   |   |      |   |   |      |
|-----|----|-------|---|---|------|---|---|------|---|---|------|
| 001 | DF | MINIR | Y | - | -8.0 | - | - | -    | - | - | RNP1 |
| 002 | DF | BAIEN | - | - | -8.0 | - | R | 3000 | - | - | RNP1 |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|--------------|--------------------------|
| Hold | TANSO               | 198<br>(190.0)        | -8.0               | 1.0(-14000)         | L              | 2400                  | FL140                 | -210(-14000) | RNP1                     |
| Hold | BAIEN               | 243<br>(234.9)        | -8.0               | 1.0(-14000)         | L              | 3000                  | FL140                 | -210(-14000) | RNP1                     |


Waypoint Coordinates

| Waypoint Identifier | Coordinates              | RF Arc Center Identifier | Coordinates              |
|---------------------|--------------------------|--------------------------|--------------------------|
| TANSO               | 332806.56N / 1315133.74E | FORF3                    | 332237.18N / 1314709.46E |
| FO153               | 332206.75N / 1315004.78E |                          |                          |
| NINEN               | 332238.32N / 1314410.42E |                          |                          |
| MINIR               | 333001.00N / 1314414.31E |                          |                          |
| BAIEN               | 333720.39N / 1315059.77E |                          |                          |

CHANGE : PROC renamed. MINIR, FO153 established. HLDG pattern. Waypoint Coordinates added.




INSTRUMENT APPROACH CHART

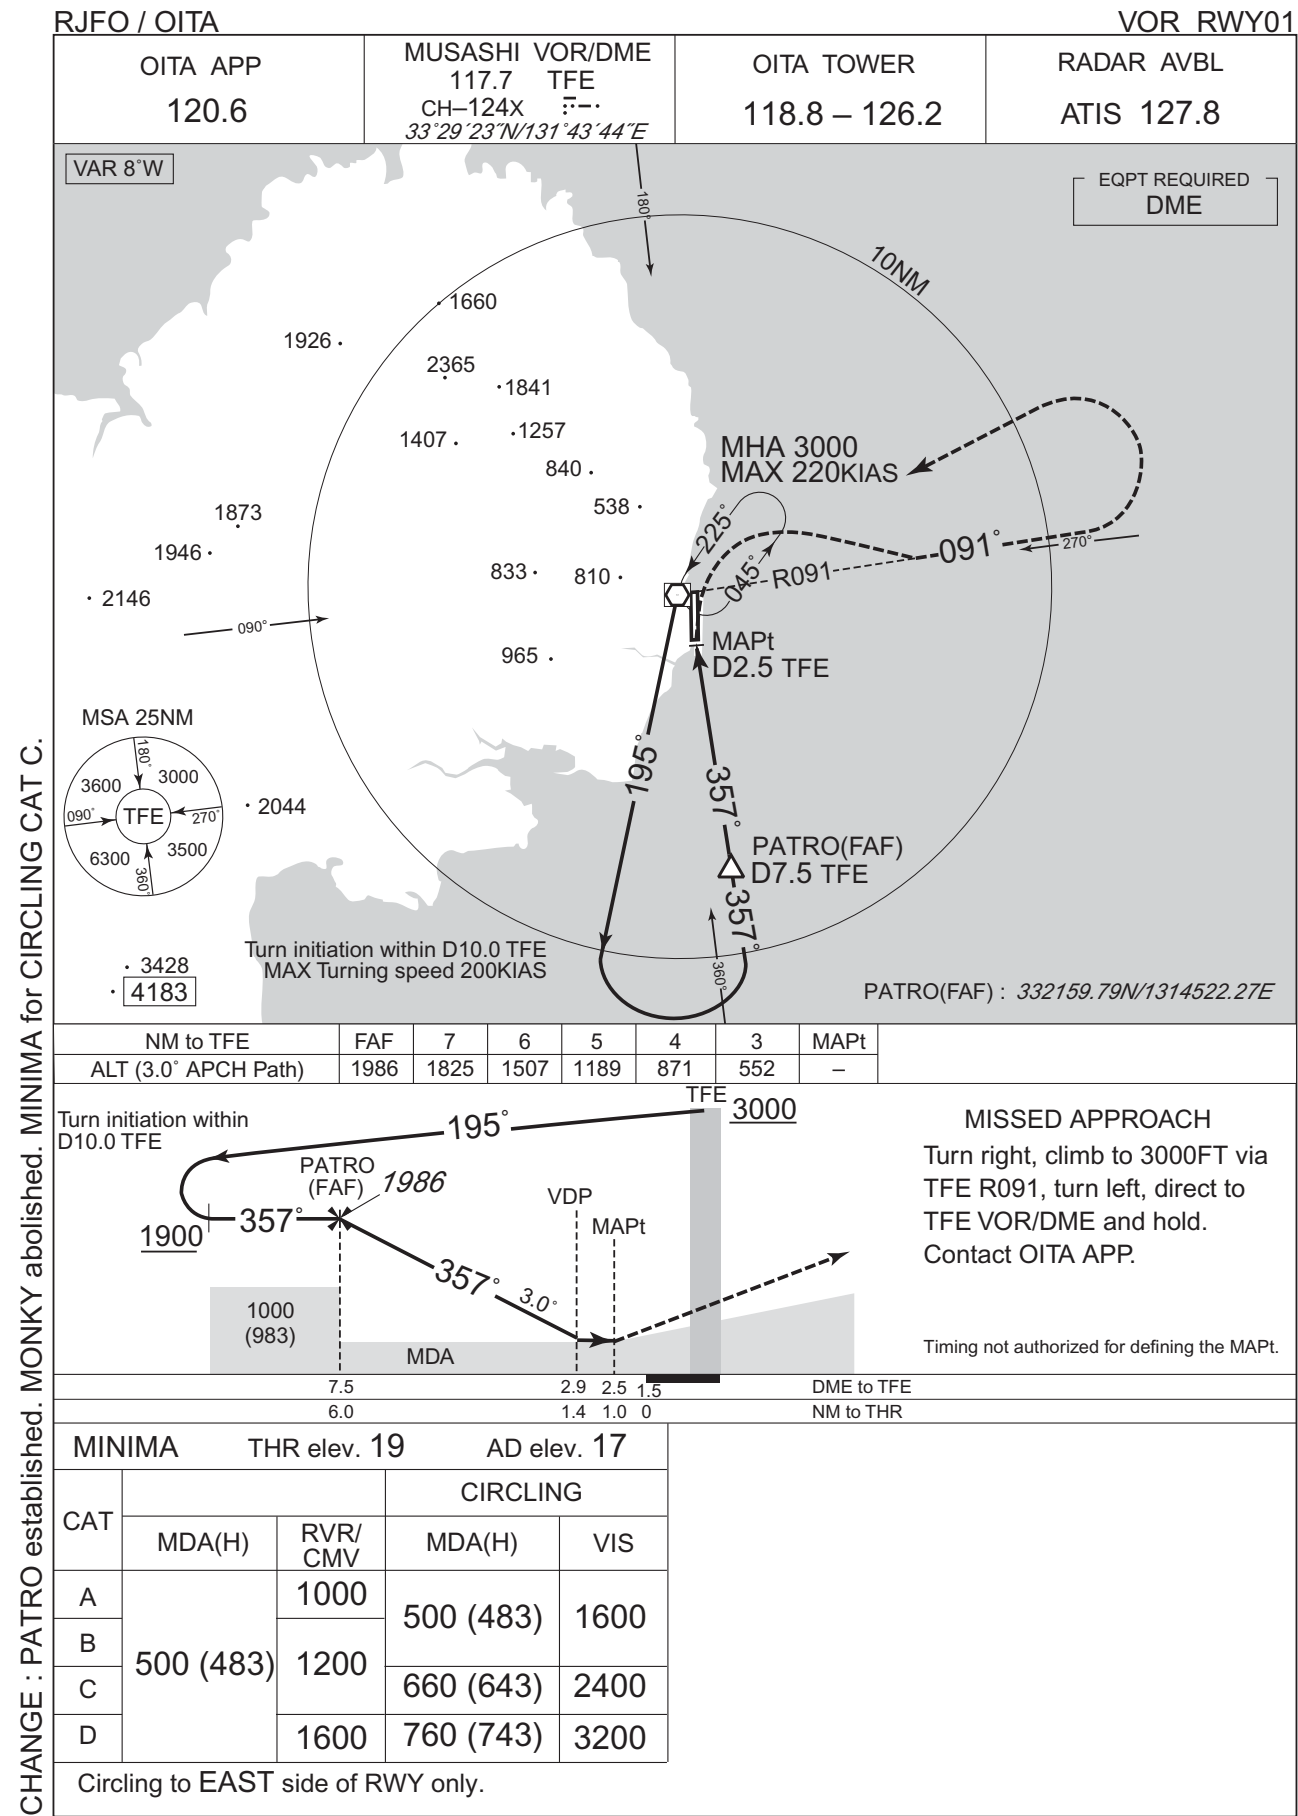

## INSTRUMENT APPROACH CHART


RJFO / OITA

VOR A

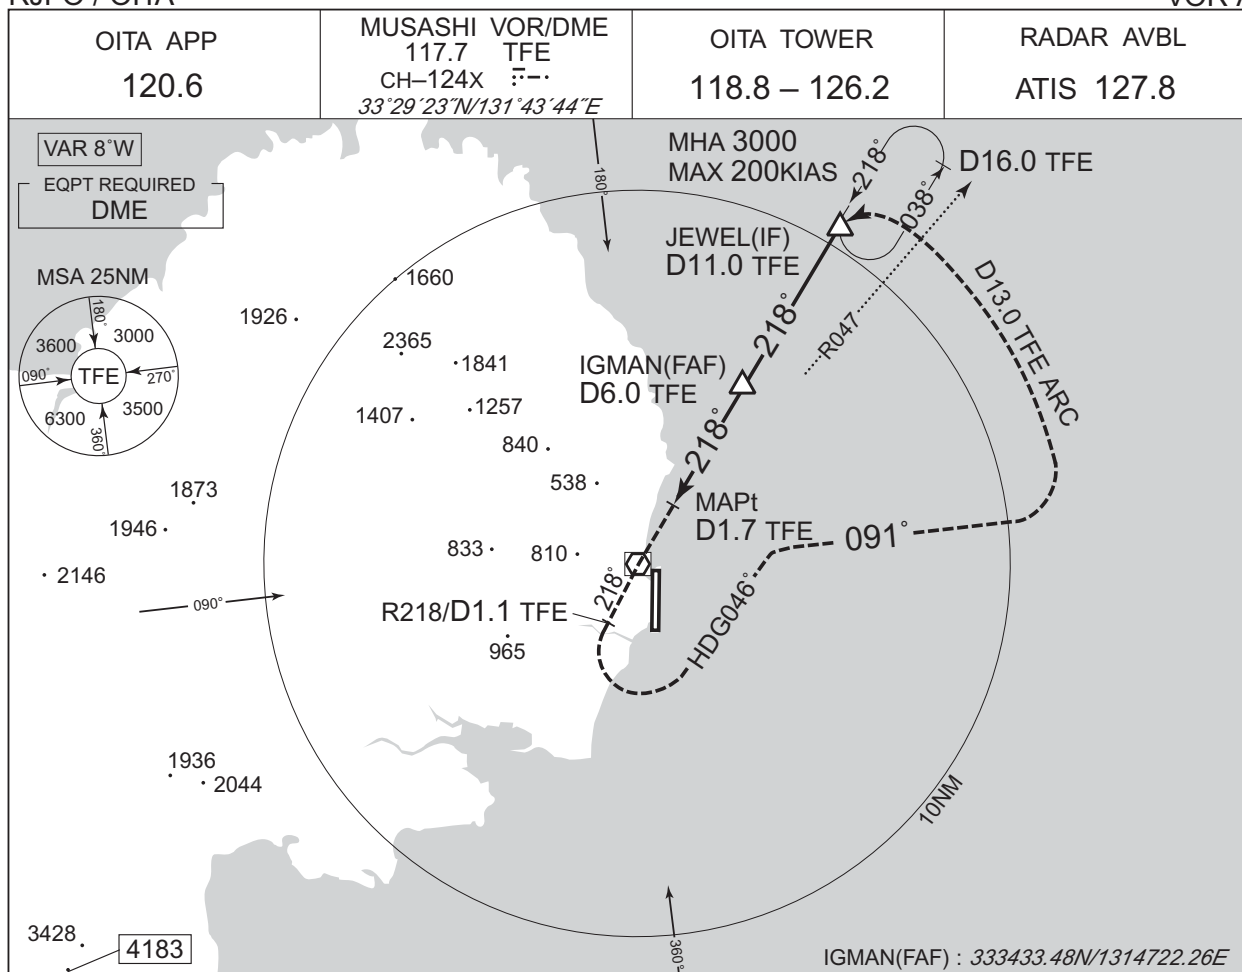**MISSED APPROACH**

Climb to 3000FT via TFE R218 to TFE 1.1DME, turn left HDG046° to intercept and proceed via TFE R091 to TFE 13.0DME, turn left, via TFE 13.0DME counterclockwise ARC to intercept and proceed via TFE R038 to JEWEL and hold. Contact OITA APP.

Timing not authorized for defining the MAPt.

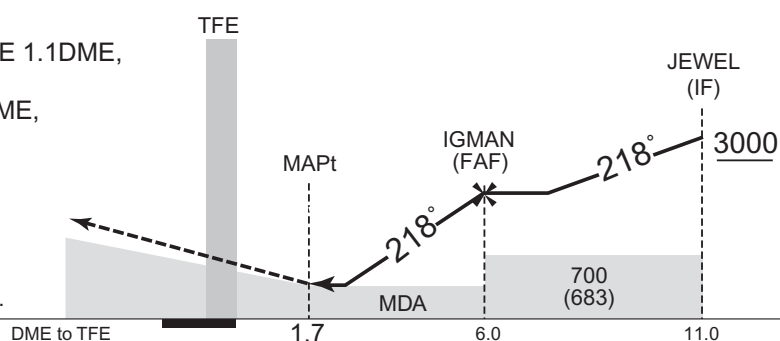

Missed APCH climb gradient MNM 5.0%.

| MINIMA |           |  | AD elev. 17 |
|--------|-----------|--|-------------|
| CAT    | CIRCLING  |  | VIS         |
|        | MDA(H)    |  |             |
| A      | 440 (423) |  | 1600        |
| B      | 480 (463) |  |             |
| C      | 660 (643) |  | 2400        |
| D      | 760 (743) |  | 3200        |


MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling to EAST side of RWY only.

CHANGE : IGMAN established. MELDY abolished. VAR.

CHANGE : KAGEX, AKILU established. KABOS, KUROSZ abolished. PROC course. VAR. HLDG pattern at TFE. ALT restriction at KAREI.  
NIM to THR. Missed APCH climb gradient MNM. MINIMA.



INSTRUMENT APPROACH CHART

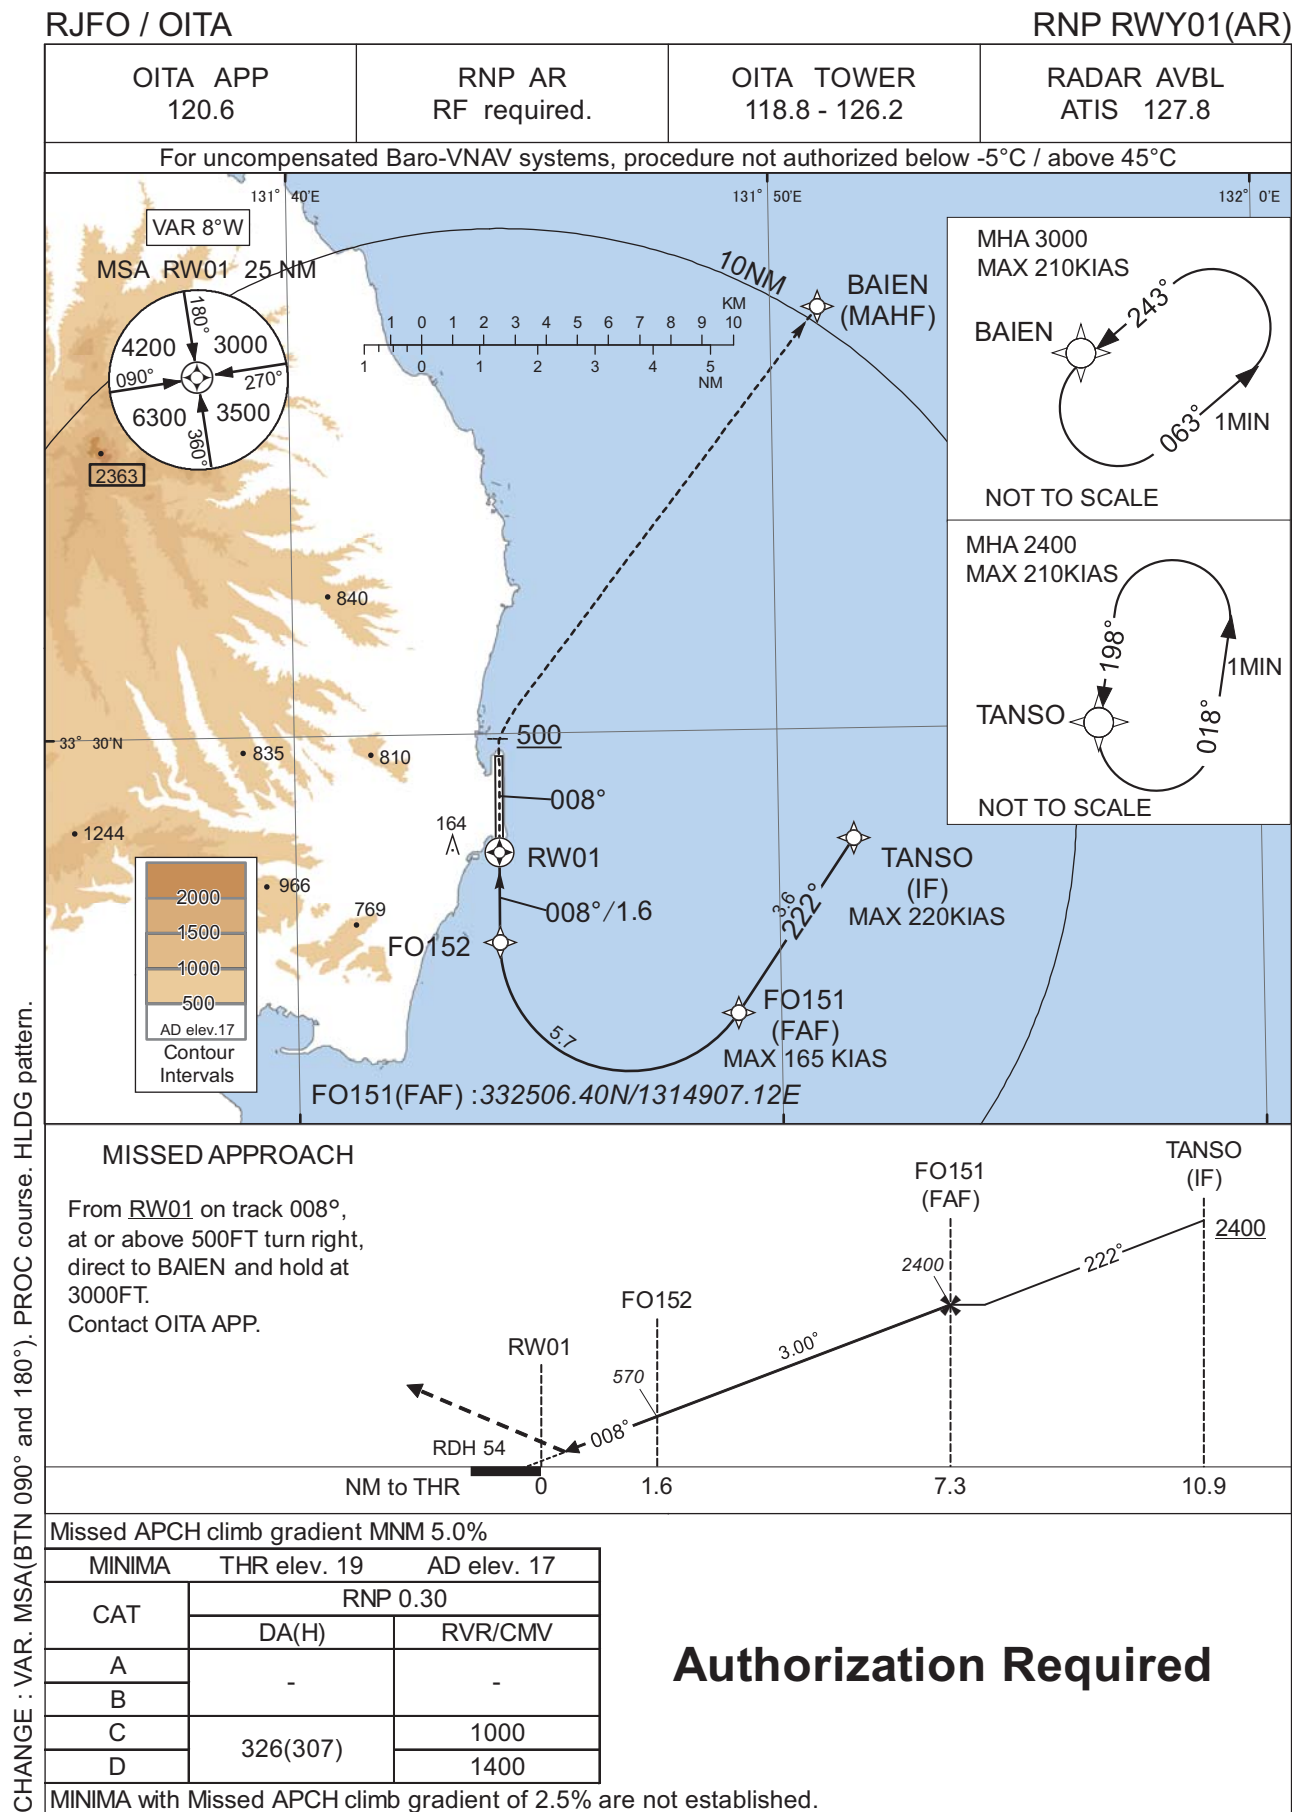

INSTRUMENT APPROACH CHART

RJFO / OITA

RNP RWY01(AR)

| Coding Table  |                           |                     |          |               |                    |               |                |               |              |                 |           |
|---------------|---------------------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| Serial Number | Path Descriptor           | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
| 001           | IF                        | TANSO               | -        | -             | -8.0               | -             | -              | +2400         | -220         | -               | -         |
| 002           | TF                        | FO151               | -        | 222 (214.2)   | -8.0               | 3.6           | -              | 2400          | -165         | -               | 1.0       |
| 003           | RF Center: FORF1 r=2.25NM | FO152               | -        | -             | -8.0               | 5.7           | R              | 570           | -            | -3.00           | 0.3       |
| 004           | TF                        | RW01                | Y        | 008 (000.4)   | -8.0               | 1.6           | -              | 73            | -            | -3.00/54        | 0.3       |
| 005           | FA                        | -                   | -        | 008 (000.4)   | -8.0               | -             | -              | +500          | -            | -               | 1.0       |
| 006           | DF                        | BAIEN               | -        | -             | -8.0               | -             | R              | 3000          | -            | -               | 1.0       |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|--------------|-----------|
| Hold | TANSO               | 198 (190.0)           | -8.0               | 1.0 (-14000)        | L              | 2400                  | FL140                 | -210(-14000) | 1.0       |
| Hold | BAIEN               | 243 (234.9)           | -8.0               | 1.0 (-14000)        | L              | 3000                  | FL140                 | -210(-14000) | 1.0       |

Waypoint Coordinates


| Waypoint Identifier | Coordinates              | RF Arc Center Identifier | Coordinates              |
|---------------------|--------------------------|--------------------------|--------------------------|
| TANSO               | 332806.56N / 1315133.74E | FORF1                    | 332622.64N / 1314653.79E |
| FO151               | 332506.40N / 1314907.12E |                          |                          |
| FO152               | 332623.67N / 1314412.39E |                          |                          |
| RW01                | 332757.53N / 1314413.22E |                          |                          |
| BAIEN               | 333720.39N / 1315059.77E |                          |                          |

CHANGE : PROC course. VAR. HLDG pattern added.

INSTRUMENT APPROACH CHART


RJFO / OITA

RNP Y RWY19(AR)

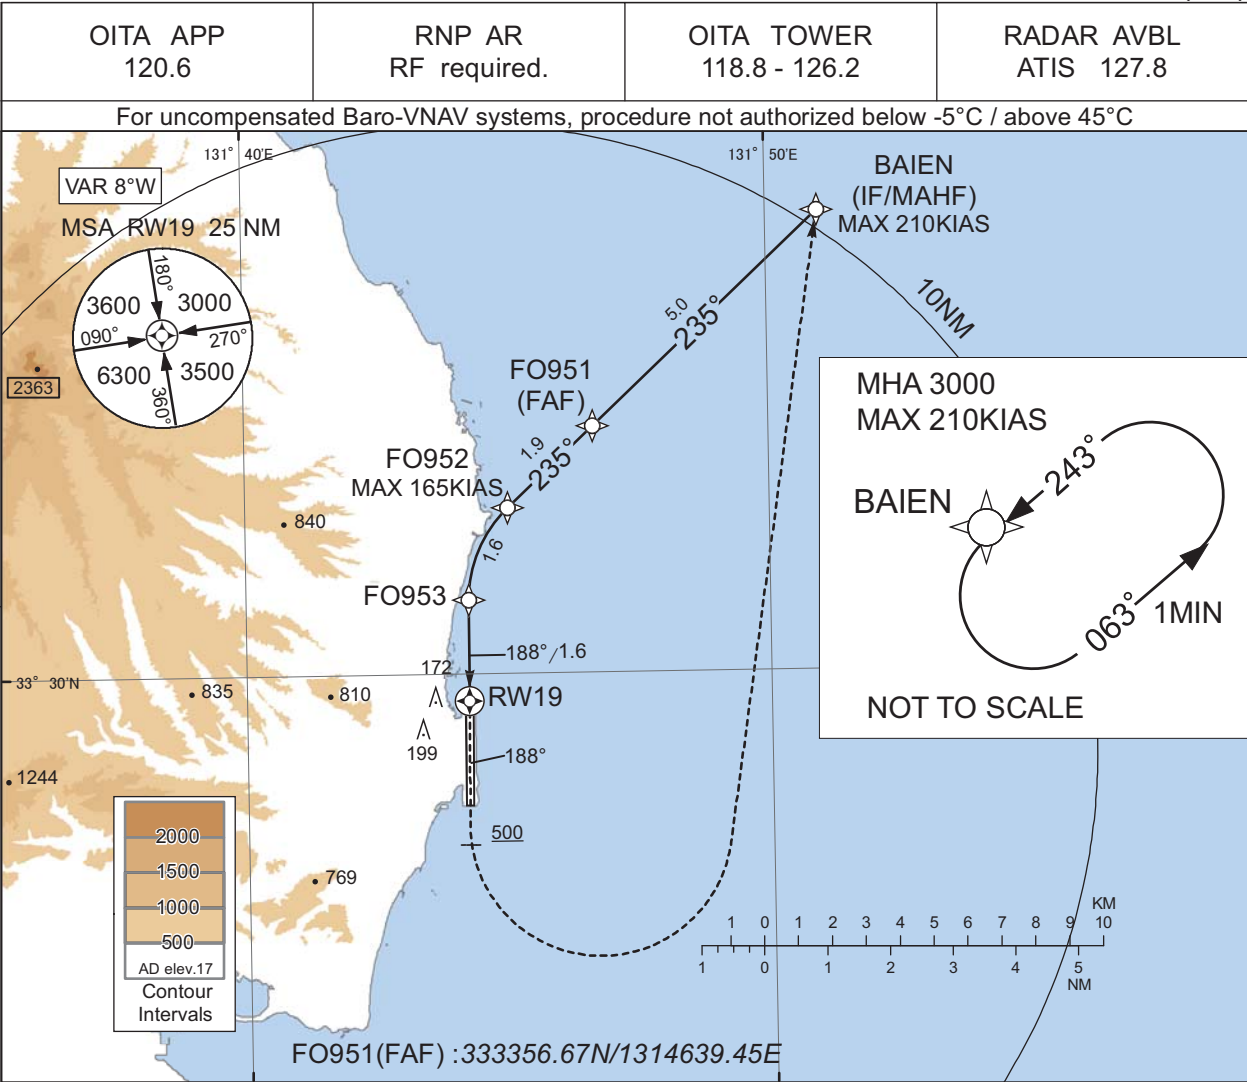

MISSED APPROACH

From RW19 on track 188°, at or above 500FT turn left, direct to BAIEN and hold at 3000FT.  
Contact OITA APP.

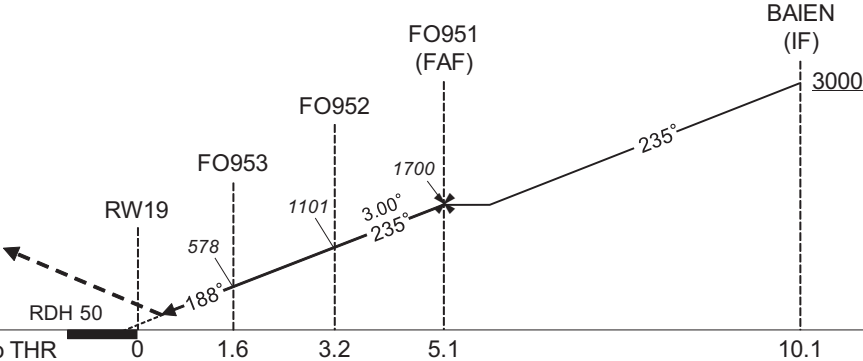

Missed APCH climb gradient MNM 5.0%

| MINIMA | THR elev. 17 | AD elev. 17 |
|--------|--------------|-------------|
| CAT    | RNP 0.30     |             |
|        | DA(H)        | CMV         |
| A      | -            | -           |
| B      | -            | -           |
| C      | 357(340)     | 1400        |
| D      |              | 1600        |

Authorization Required

MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : DA(H). OBST.

INSTRUMENT APPROACH CHART

RJFO / OITA

RNP Y RWY19(AR)

| Coding Table  |                           |                     |          |               |                    |               |                |               |              |                 |           |
|---------------|---------------------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| Serial Number | Path Descriptor           | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
| 001           | IF                        | BAIEN               | -        | -             | -8.0               | -             | -              | +3000         | -210         | -               | -         |
| 002           | TF                        | FO951               | -        | 235 (226.8)   | -8.0               | 5.0           | -              | 1700          | -            | -               | 1.0       |
| 003           | TF                        | FO952               | -        | 235 (226.8)   | -8.0               | 1.9           | -              | 1101          | -165         | -3.00           | 0.3       |
| 004           | RF Center: FORF2 r=2.02NM | FO953               | -        | -             | -8.0               | 1.6           | L              | 578           | -            | -3.00           | 0.3       |
| 005           | TF                        | RW19                | Y        | 188 (180.4)   | -8.0               | 1.6           | -              | 67            | -            | -3.00/50        | 0.3       |
| 006           | FA                        | -                   | -        | 188 (180.4)   | -8.0               | -             | -              | +500          | -            | -               | 1.0       |
| 007           | DF                        | BAIEN               | -        | -             | -8.0               | -             | L              | 3000          | -            | -               | 1.0       |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|--------------|-----------|
| Hold | BAIEN               | 243 (234.9)           | -8.0               | 1.0 (-14000)        | L              | 3000                  | FL140                 | -210(-14000) | 1.0       |

| Waypoint Coordinates |  |  |  |  |  |  |  |  |  |  |  |
| Waypoint Identifier |  | Coordinates |  | RF Arc Center Identifier |  | Coordinates |  |  |  |  |  |
| BAIEN |  | 333720.39N / 1315059.77E |  | FORF2 |  | 333110.65N / 1314640.11E |  |  |  |  |  |
| FO951 |  | 333356.67N / 1314639.45E |  |  |  |  |  |  |  |  |  |
| FO952 |  | 333239.42N / 1314500.88E |  |  |  |  |  |  |  |  |  |
| FO953 |  | 333111.58N / 1314414.94E |  |  |  |  |  |  |  |  |  |
| RW19 |  | 332934.89N / 1314414.08E |  |  |  |  |  |  |  |  |  |

CHANGE : PROC course. VAR. HLDG pattern added.



RJFO / OITA

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP.


| Call sign              | BRG / DIST from ARP | Remarks                           |
|------------------------|---------------------|-----------------------------------|
| 姫島<br>Himeshima        | 346°T / 15.3NM      | 島<br>Island                       |
| ゴルフコース<br>Golf course  | 345°T / 9.7NM       | ゴルフ場<br>Golf course               |
| 行入ダム<br>Gyonyu dam     | 321°T / 7.0NM       | ダム<br>Dam                         |
| イーストポイント<br>East point | 090°T / 10.0NM      | 海上<br>Over the sea                |
| 杵築<br>Kitsuki          | 232°T / 6.7NM       | 八坂川河口<br>River mouth (The Yasaka) |
| 佐賀関<br>Saganoseki      | 152°T / 15.0NM      | 精錬所煙突<br>Chimney                  |



RJFO / OITA

Minimum Vectoring Altitude CHART

VAR 7°W (2008)

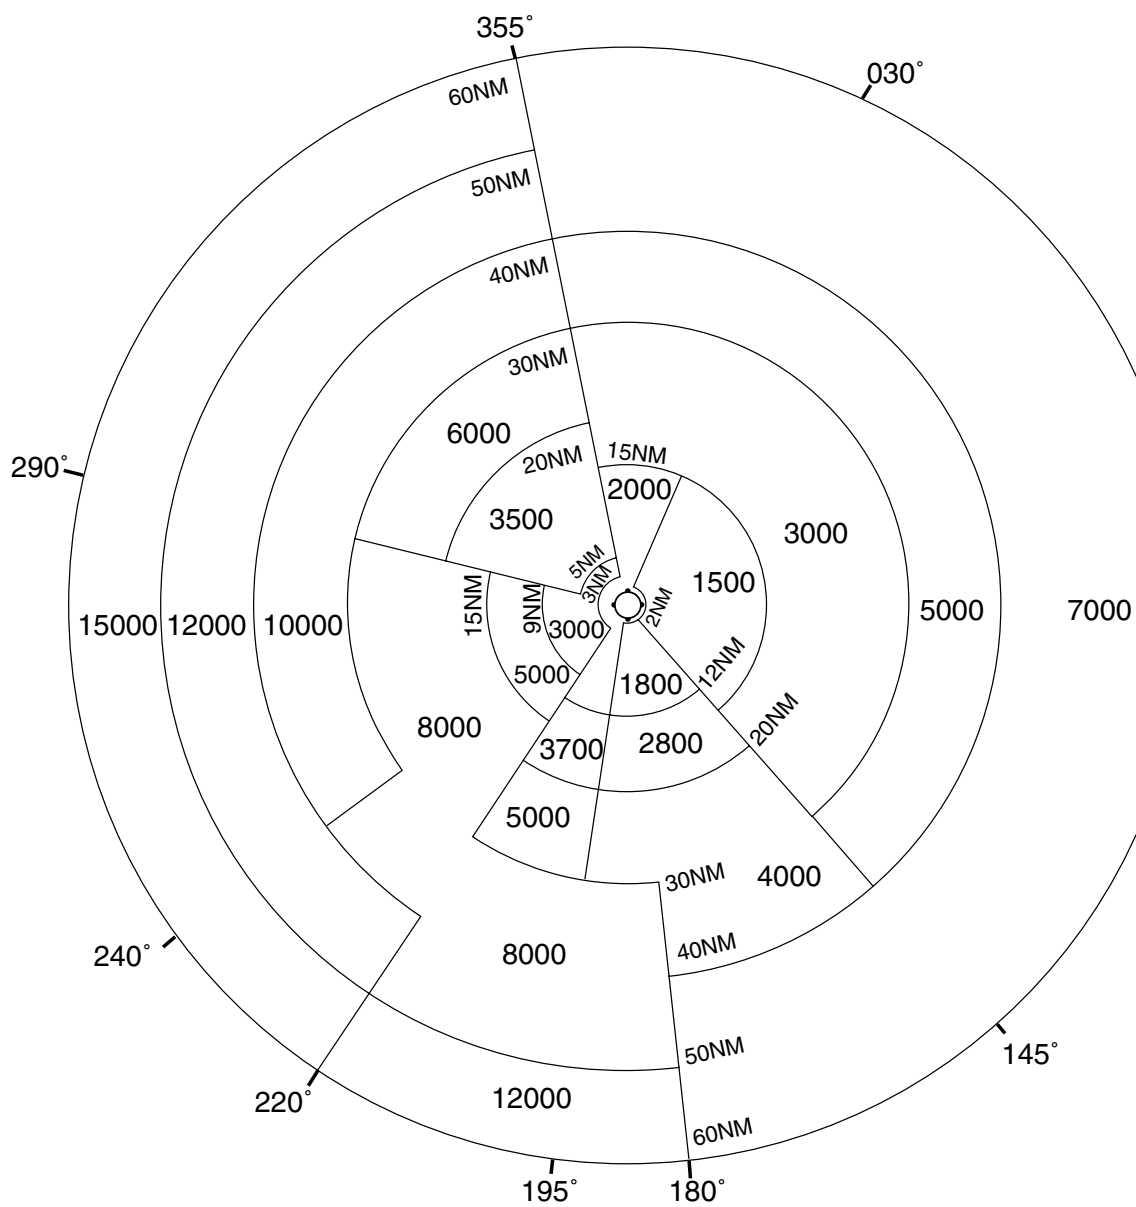

CENTER : 332842N/1314351E ( RADAR SITE)