

## AD 2 AERODROMES

## RJFY AD 2.1 AERODROME LOCATION INDICATOR AND NAME

## RJFY - KANOYA

## RJFY AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

|   |                                                                                                    |                                                                           |
|---|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| 1 | ARP coordinates and site at AD                                                                     | 312205N/1305017E                                                          |
| 2 | Direction and distance from (city)                                                                 | 1.5NM SW                                                                  |
| 3 | Elevation/ Reference temperature                                                                   | 202ft / -                                                                 |
| 4 | Geoid undulation at AD ELEV<br>PSN                                                                 | Nil                                                                       |
| 5 | MAG VAR/ Annual change                                                                             | Nil                                                                       |
| 6 | AD Administration, address,<br>telephone, telefax, telex, AFS,<br>e-mail and/or Web-site addresses | JSDF-M                                                                    |
| 7 | Types of traffic permitted<br>(IFR/VFR)                                                            | IFR/VFR                                                                   |
| 8 | Remarks                                                                                            | Headquarters Fleet Air Wing 1(FAW1)<br>Tel: 0994-43-3111 ext.2208 or 2209 |

## RJFY AD 2.3 OPERATIONAL HOURS

|    |                           |                          |
|----|---------------------------|--------------------------|
| 1  | AD Administration         | H24                      |
| 2  | Customs and immigration   | Nil                      |
| 3  | Health and sanitation     | Nil                      |
| 4  | AIS Briefing Office       | H24                      |
| 5  | ATS Reporting Office(ARO) | Nil                      |
| 6  | MET Briefing Office       | H24                      |
| 7  | ATS                       | H24                      |
| 8  | Fuelling                  | Nil                      |
| 9  | Handling                  | Nil                      |
| 10 | Security                  | Nil                      |
| 11 | De-icing                  | Nil                      |
| 12 | Remarks                   | 24HR PPR for all flights |

**RJFY AD 2.4 HANDLING SERVICES AND FACILITIES**

|   |                                         |                    |
|---|-----------------------------------------|--------------------|
| 1 | Cargo-handling facilities               | Nil                |
| 2 | Fuel/ oil types                         | JP-5               |
| 3 | Fuelling facilities/ capacity           | To be issued later |
| 4 | De-icing facilities                     | Nil                |
| 5 | Hangar space for visiting aircraft      | Nil                |
| 6 | Repair facilities for visiting aircraft | Nil                |
| 7 | Remarks                                 | Nil                |

**RJFY AD 2.5 PASSENGER FACILITIES**

|   |                      |     |
|---|----------------------|-----|
| 1 | Hotels               | Nil |
| 2 | Restaurants          | Nil |
| 3 | Transportation       | Nil |
| 4 | Medical facilities   | Nil |
| 5 | Bank and Post Office | Nil |
| 6 | Tourist Office       | Nil |
| 7 | Remarks              | Nil |

**RJFY AD 2.6 RESCUE AND FIRE FIGHTING SERVICES**

|   |                                             |     |
|---|---------------------------------------------|-----|
| 1 | AD category for fire fighting               | Nil |
| 2 | Rescue equipment                            | Nil |
| 3 | Capability for removal of disabled aircraft | Nil |
| 4 | Remarks                                     | Nil |

**RJFY AD 2.7 SEASONAL AVAILABILITY-CLEARING**

|   |                             |     |
|---|-----------------------------|-----|
| 1 | Types of clearing equipment | Nil |
| 2 | Clearance priorities        | Nil |
| 3 | Remarks                     | Nil |

**RJFY AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA**

|   |                                     |                    |
|---|-------------------------------------|--------------------|
| 1 | Apron surface and strength          | To be issued later |
| 2 | Taxiway width, surface and strength | To be issued later |
| 3 | ACL and elevation                   | Not available      |
| 4 | VOR checkpoints                     | Nil                |
| 5 | INS checkpoints                     | Nil                |
| 6 | Remarks                             | Nil                |

**RJFY AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS**

|   |                                                                                                                |                                                        |
|---|----------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| 1 | Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands | Nil                                                    |
| 2 | RWY and TWY markings and LGT                                                                                   | RWY:08R/26L<br>(LGT) RTHL<br>TWY:<br>(LGT)TWY edge LGT |
| 3 | Stop bars                                                                                                      | Nil                                                    |
| 4 | Remarks                                                                                                        |                                                        |

**RJFY AD 2.10 AERODROME OBSTACLES**

| RWY/Area affected | Obstacle type | Coordinates | Elevation | Markings/ LGT | Remarks |
|-------------------|---------------|-------------|-----------|---------------|---------|
| Nil               |               |             |           |               |         |

## RJFY AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

|    |                                                                        |        |
|----|------------------------------------------------------------------------|--------|
| 1  | Associated MET Office                                                  | KANOYA |
| 2  | Hours of service<br>MET Office outside hours                           | H24    |
| 3  | Office responsible for TAF preparation<br>Periods of validity          | Nil    |
| 4  | Trend forecast<br>Interval of issuance                                 | Nil    |
| 5  | Briefing/ consultation provided                                        | Nil    |
| 6  | Flight documentation<br>Language(s) used                               | Ja, En |
| 7  | Charts and other information available<br>for briefing or consultation | S, U   |
| 8  | Supplementary equipment<br>available for providing information         | Nil    |
| 9  | ATS units provided with information                                    | Nil    |
| 10 | Additional information(limitation of<br>service, etc.)                 | Nil    |

## RJFY AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

| Designations<br>RWY NR | TRUE BRG | Dimensions of<br>RWY(M) | Strength(PCN) and<br>surface of RWY                                                     | THR coordinates<br>THR geoid undulation | THR elevation and<br>highest elevation of TDZ<br>of precision APP RWY |
|------------------------|----------|-------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------------------------------------------|
| 1                      | 2        | 3                       | 4                                                                                       | 5                                       | 6                                                                     |
| 08R                    | 079.34°  | 2250×45                 | SW43000kg (94800lbs)<br>DW56000kg (123500lbs)<br>DTW117000kg<br>(258000lbs)<br>Concrete | 312153.61N<br>1304938.66E               | THR ELEV : 222.4FT<br>TDZ ELEV : 217.6FT                              |
| 26L                    | 259.35°  | 2250×45                 |                                                                                         | 312207.12N<br>1305102.36E               | THR ELEV : 186.6FT<br>TDZ ELEV : 190.9FT                              |
| 08L                    | 079.44°  | 1200×40                 | SW20000kg (44000lbs)                                                                    | Nil                                     | Nil                                                                   |
| 26R                    | 259.45°  | 1200×40                 | DW25000kg (35000lbs)<br>Asphalt-Concrete                                                | Nil                                     | Nil                                                                   |
| Slope of RWY           |          | Strip<br>Dimensions (M) | Remarks                                                                                 |                                         |                                                                       |
| 7                      |          | 10                      | 12                                                                                      |                                         |                                                                       |
| Nil                    |          | 2370×300<br>2370×300    | RWY 08L/26R OPR SR-SS and VMC only, Other time usable TWY.                              |                                         |                                                                       |
| Nil                    |          | 1320×150<br>1320×150    |                                                                                         |                                         |                                                                       |

## RJFY AD 2.13 DECLARED DISTANCES

| RWY Designator | TORA<br>(m) | TODA<br>(m) | ASDA<br>(m) | LDA<br>(m) | Remarks |
|----------------|-------------|-------------|-------------|------------|---------|
| 1              | 2           | 3           | 4           | 5          | 6       |
|                |             |             |             |            |         |
|                |             |             |             |            |         |


## RJFY AD 2.14 APPROACH AND RUNWAY LIGHTING

| RWY<br>Designator                                                                                              | APCH<br>LGT<br>type<br>LEN<br>INTST | RTHL<br>Color<br>WBAR | PAPI<br>(VASIS)<br>Angle<br>DIST FM THR<br>MEHT | RTZL<br>LEN | RCLL<br>LEN<br>Spacing<br>Color<br>INTST | REDL<br>LEN<br>Spacing<br>Color<br>INTST | RENL<br>Color<br>WBAR | STWL<br>LEN<br>Color |
|----------------------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------|-------------------------------------------------|-------------|------------------------------------------|------------------------------------------|-----------------------|----------------------|
| 1                                                                                                              | 2                                   | 3                     | 4                                               | 5           | 6                                        | 7                                        | 8                     | 9                    |
| 08R                                                                                                            |                                     |                       | PAPI<br>3.0°<br>311m<br>45ft                    |             |                                          |                                          |                       | Nil                  |
| 26L                                                                                                            | AVBL                                |                       | PAPI<br>3.0°<br>319m<br>54ft                    |             |                                          |                                          |                       | Nil                  |
| 08L                                                                                                            |                                     |                       |                                                 |             |                                          |                                          |                       | Nil                  |
| 26R                                                                                                            |                                     |                       |                                                 |             |                                          |                                          |                       | Nil                  |
| Remarks                                                                                                        |                                     |                       |                                                 |             |                                          |                                          |                       |                      |
| 10                                                                                                             |                                     |                       |                                                 |             |                                          |                                          |                       |                      |
| RWY THR ID LGT for RWY08R/26L THR (Color: White)<br>Usable area of PAPI for RWY08R is within 1NM FM RWY08R THR |                                     |                       |                                                 |             |                                          |                                          |                       |                      |

## Usable area of PAPI

滑走路08R末端側進入角指示灯の使用範囲は、障害物(樹木)のため  
滑走路08R側末端から1NM以内とする。

Usable area of PAPI for RWY 08R is within 1NM from RWY 08R THR  
due to obstruction(trees)

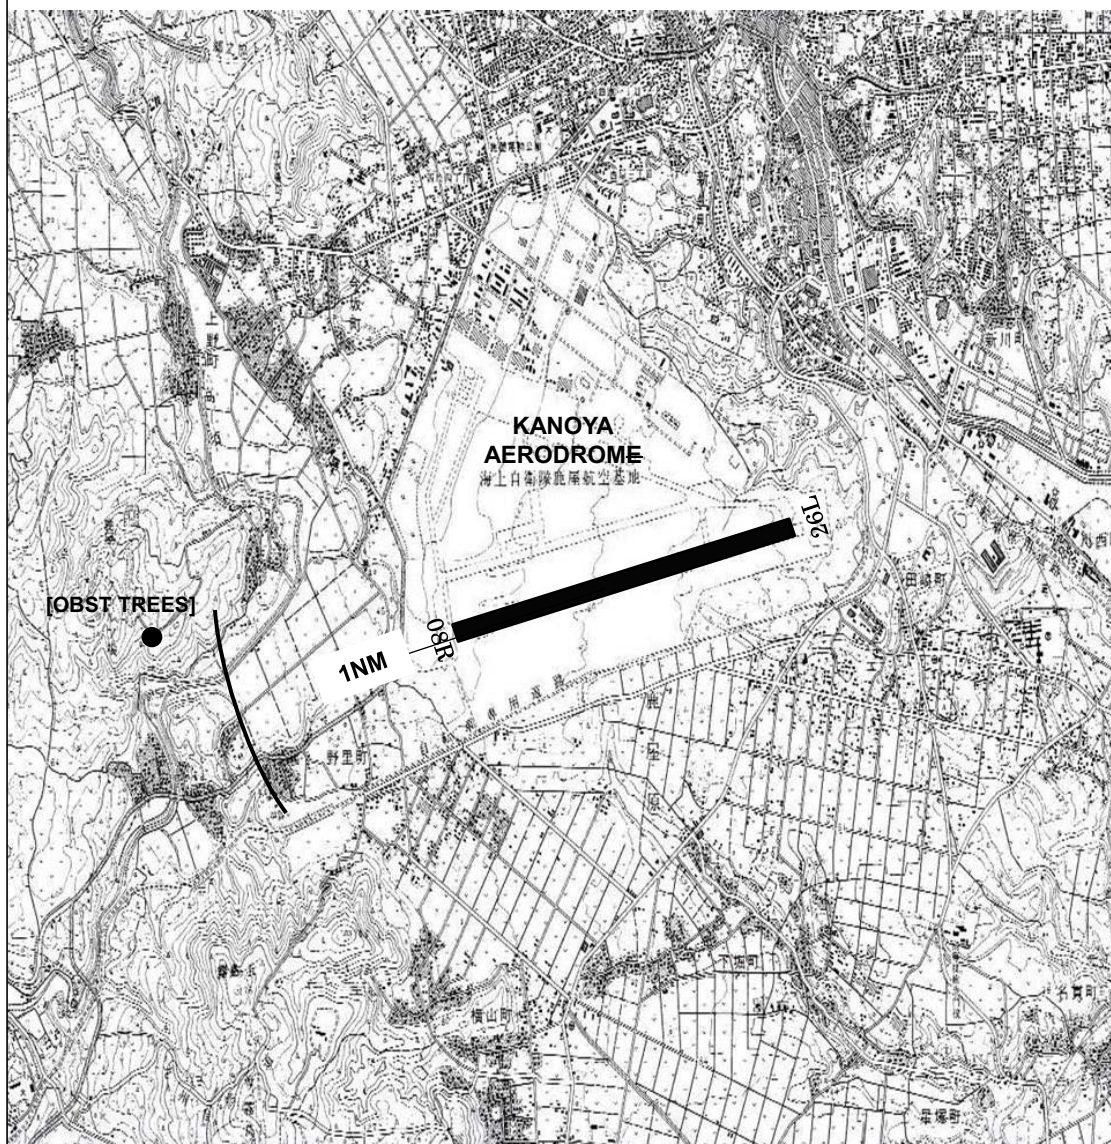

**RJFY AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY**

|   |                                                          |                                                |
|---|----------------------------------------------------------|------------------------------------------------|
| 1 | ABN/IBN location, characteristics and hours of operation | ABN:312239N/1305010E, White/Green EV4.3sec, HO |
| 2 | LDI location and LGT<br>Anemometer location and LGT      | LDI : LGTD                                     |
| 3 | TWY edge and center line lighting                        | TWY edge LGT : AVBL                            |
| 4 | Secondary power supply/ switch-over time                 | Nil                                            |
| 5 | Remarks                                                  | WDI LGT, OBST LGT                              |

**RJFY AD 2.16 HELICOPTER LANDING AREA**


|                    |
|--------------------|
| To be issued later |
|--------------------|

## RJFY AD 2.17 ATS AIRSPACE

| Designation and limits |                                                                                                                                                                                                                                                                                       | Vertical limits<br>(ft) | Airspace classification | ATS unit call sign Language | Remarks |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------|-----------------------------|---------|
| 1                      |                                                                                                                                                                                                                                                                                       | 2                       | 3                       | 4                           | 6       |
| Kanoya CTR             | Area within a radius of 5NM of Kanoya ARP (31°22'N/130°50'E).                                                                                                                                                                                                                         | -----<br>5000           | D                       | KANOYA TOWER<br>En          |         |
|                        | Area within radius of 5NM of Kanoya ARP, in the south side of a north parallel line at a distance of 5NM from a line extending from 312121N/1305056E on 077°T and 257°T and in the east side of a east parallel line at a distance of 4NM from a line connecting HKC VOR and TGE VOR. | -----<br>6000           |                         |                             |         |
| Kanoya ACA             |                                                                                                                                                                                                                                                                                       | See below Chart         |                         |                             |         |

### 鹿屋進入管制区

### Kanoya Approach Control Area

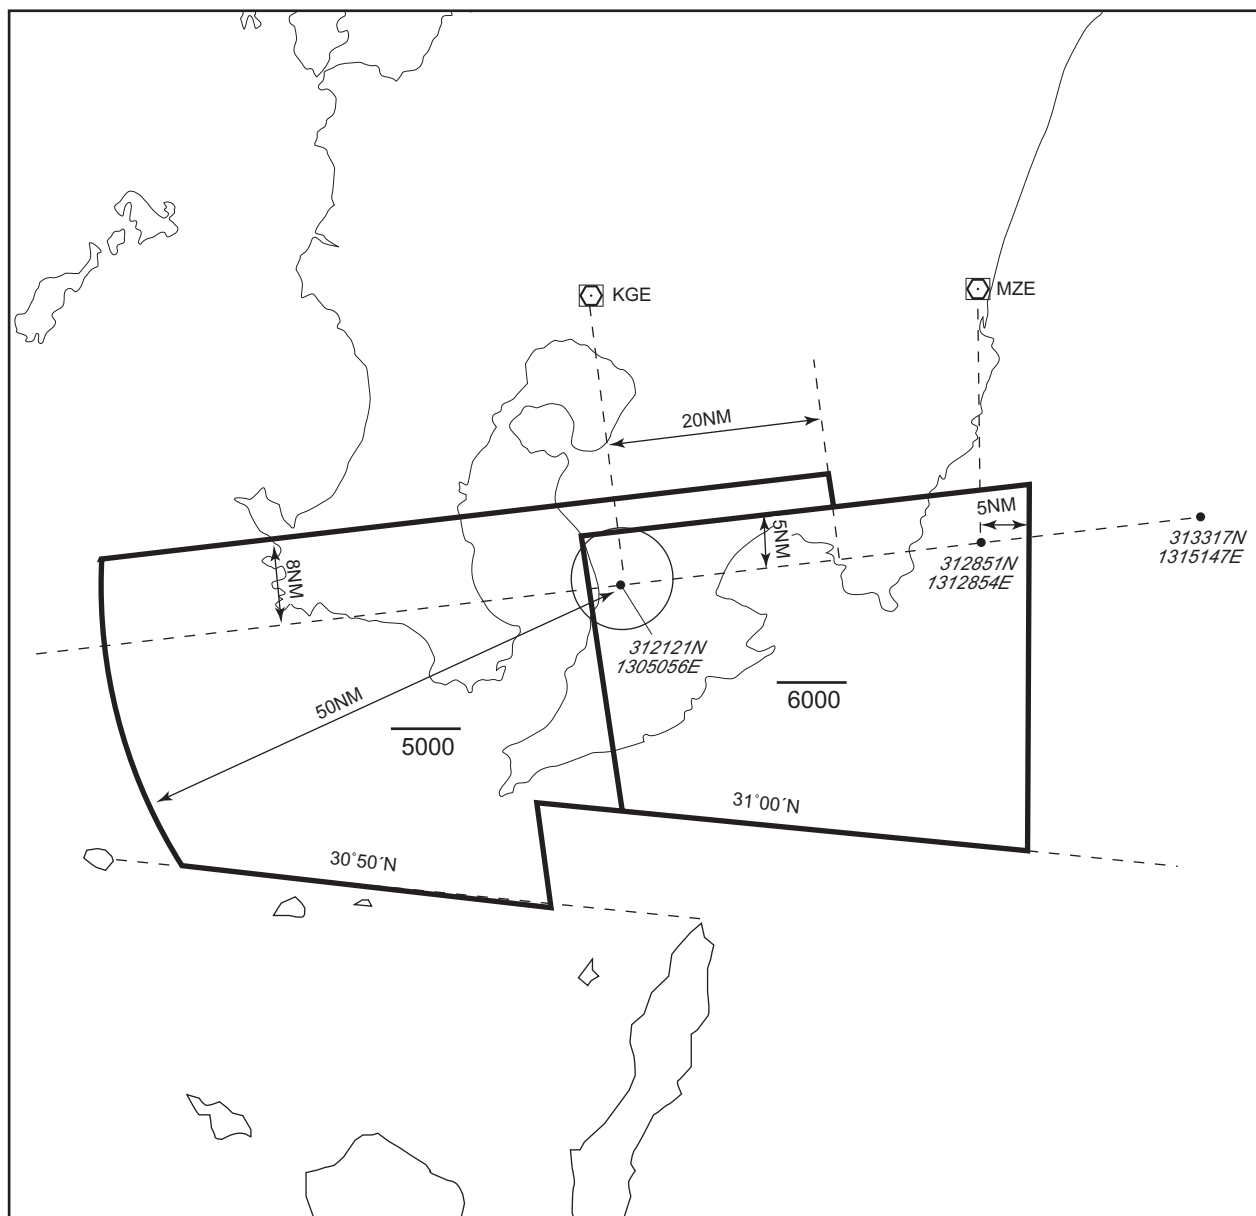




## RJFY AD 2.18 ATS COMMUNICATION FACILITIES

| Service designation | Call sign                                             | Frequency                                                                                                                   | Hours of operation                               | Remarks                                                                                                                                                                                                                                                   |
|---------------------|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                   | 2                                                     | 3                                                                                                                           | 4                                                | 5                                                                                                                                                                                                                                                         |
| TWR                 | Kanoya Tower                                          | 228.2MHz<br>133.4MHz<br>236.8MHz<br>126.2MHz<br>243.0MHz(E)<br>121.5MHz(E)                                                  | H24                                              |                                                                                                                                                                                                                                                           |
| DEP/APP/ASR         | Kanoya Departure<br>/Kanoya Approach<br>/Kanoya Radar | 284.6MHz<br>122.15MHz<br>362.3MHz<br>321.2MHz(1)<br>261.2MHz(1)<br>133.0MHz(1)<br>126.2MHz<br>243.0MHz(E)<br>121.5MHz(E)    | H24                                              | (1)AVBL on request<br><br>Maintenance period: 2300-0800 SAT in VMC                                                                                                                                                                                        |
| GND                 | Kanoya Ground                                         | 236.8MHz                                                                                                                    | H24                                              |                                                                                                                                                                                                                                                           |
| GCA-ASR<br>-PAR     | Kanoya Radar<br>/Kanoya GCA                           | 335.6MHz<br>270.8MHz<br>134.1MHz<br>125.3MHz<br>258.6MHz<br>139.55MHz<br>317.2MHz<br>306.8MHz<br>243.0MHz(E)<br>121.5MHz(E) | H24                                              | ASR RWY 26L/08R.<br>PAR RWY 26L.<br>Glide path 3.0°<br>Maintenance period: 2300-0800 SAT in VMC.<br>Blind zone lies BTN<br>175degrees -180degrees ,<br>190degrees - 195degrees and<br>340degrees - 360degrees 10NM,<br>ARC FM ASR site (312149N/1305004E) |
| ATIS                | Kanoya Airport                                        | 246.8MHz                                                                                                                    | 2100 - 1300<br>EXC<br>FRI1301-SUN2059<br>AND HOL |                                                                                                                                                                                                                                                           |

## RJFY AD 2.19 RADIO NAVIGATION AND LANDING AIDS

| Type of aid | ID  | Frequency         | Hours of operation | Position of transmitting antenna coordinates | Elevation of DME transmitting antenna | Remarks                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------|-----|-------------------|--------------------|----------------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1           | 2   | 3                 | 4                  | 5                                            | 6                                     | 7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| TACAN       | JAT | 1172 MHz (CH-85X) | H24                | 312146N/1304949E                             | 252ft                                 | TACAN Unusable:<br>R360-010 beyond 11NM BLW 7000FT.<br>R010-020 beyond 12NM BLW 8000FT.<br>R080-090 beyond 35NM BLW 4000FT.<br>R090-100 beyond 18NM BLW 5000FT.<br>R100-110 beyond 16NM BLW 5000FT.<br>R110-170 beyond 16NM BLW 6000FT.<br>R170-200 beyond 14NM BLW 6000FT.<br>R200-220 beyond 10NM BLW 5000FT.<br>R220-230 beyond 12NM BLW 6000FT.<br>R230-250 beyond 20NM BLW 6000FT.<br>R250-280 beyond 25NM BLW 4000FT.<br>R280-310 beyond 25NM BLW 5000FT.<br>R310-320 beyond 14NM BLW 6000FT.<br>R320-360 beyond 11NM BLW 7000FT. |
| ILS-LOC 26L | IJA | 110.3MHz          | H24                | 312152N/1304930E                             |                                       | LOC:223m (733FT) away FM RWY 08R THR, BRG (MAG) 265°                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| ILS-GP 26L  | -   | 335MHz            | H24                | 312203N/1305052E                             |                                       | GP:286m(937FT) inside FM RWY 26L THR, 90m(295FT) S of RCL.<br>HGT of ILS Ref datum 15.6m(51FT).<br>GP angle 3.0°.                                                                                                                                                                                                                                                                                                                                                                                                                       |
| MM 26L      |     | 75MHz             | H24                | 312212.65N/1305135.33E                       |                                       | MM:888m(2913FT) away FM RWY 26L on the extended RCL.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## ILS

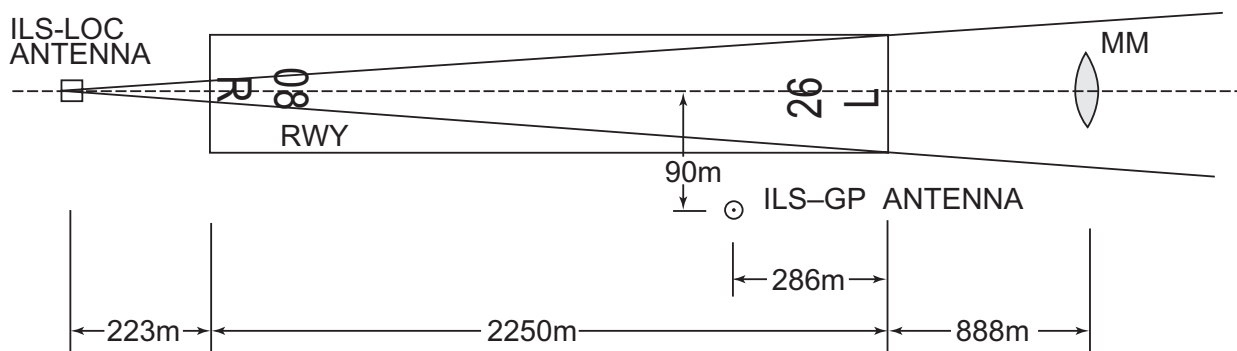

REMARKS : 1.LOC beam BRG(MAG) 265°  
 2.HGT of ILS REF datum 15.6m(51FT)  
 3.GP Angle 3.0°

---

### RJFY AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

Nil

2. Taxiing to and from stands

Nil

3. Parking area for small aircraft(General aviation)

Nil

4. Parking area for helicopters

Nil

5. Apron - taxiing during winter conditions

Nil

6. Taxiing - limitations

Nil

7. School and training flights - technical test flights - use of runways

Nil

8. Helicopter traffic - limitation

Nil

9. Removal of disabled aircraft from runways

Nil

### RJFY AD 2.21 NOISE ABATEMENT PROCEDURES

Nil

## RJFY AD 2.22 FLIGHT PROCEDURES

| 1. TAKE OFF MINIMA    |     |                 |            |          |            |
|-----------------------|-----|-----------------|------------|----------|------------|
|                       | RWY | REDL AVBL       |            | REDL OUT |            |
|                       |     | CEIL-RVR        | CEIL-VIS   | CEIL-RVR | CEIL-VIS   |
| TKOF ALTN<br>AP FILED | 08R | -               | 300'-1600m | -        | 300'-1600m |
|                       | 26L | -               | 700'-2400m | -        | 700'-2400m |
| OTHER                 | 08R | AVBL LDG MINIMA |            |          |            |
|                       | 26L |                 |            |          |            |

NOTE: SIDs are designed in accordance with provisional standards for FLIGHT PROCEDURE DESIGN.

## 2. WX MINIMA CONCERNING PAR/ASR APCH PROCEDURE

ASR RWY 08R

| MINIMA |          | THR elev. 222 | AD elev. 202 |      |
|--------|----------|---------------|--------------|------|
| CAT    |          |               | CIRCLING     |      |
|        | MDA(H)   | CMV           | MDA(H)       | VIS  |
| A      | 980(778) | 1500          | 980(778)     | 1600 |
| B      |          |               |              |      |
| C      |          | 2000          | 1380(1178)   | 2400 |
| D      |          |               |              | 3200 |

ASR RWY 26L

| MINIMA |          | THR elev. 187 | AD elev. 202 |      |
|--------|----------|---------------|--------------|------|
| CAT    |          |               | CIRCLING     |      |
|        | MDA(H)   | RVR/<br>CMV   | MDA(H)       | VIS  |
| A      | 720(533) | 1400          | 940(738)     | 1600 |
| B      |          | 1500          |              |      |
| C      |          | 1600          | 1380(1178)   | 2400 |
| D      |          | 1800          |              | 3200 |

PAR RWY 26L

| MINIMA |          | THR elev. 187 | AD elev. 202 |      |
|--------|----------|---------------|--------------|------|
| CAT    |          |               | CIRCLING     |      |
|        | DA(H)    | RVR/<br>CMV   | MDA(H)       | VIS  |
| A      | 450(263) | 800           | 940(738)     | 1600 |
| B      |          |               |              |      |
| C      |          |               | 1380(1178)   | 2400 |
| D      |          |               |              | 3200 |

### 3. Lost communication procedures for arrival aircraft under radar navigational guidance

If radio communications with KANOYA Radar/Approach/GCA are lost for 1 minute in the pattern or 5 seconds (PAR)/15 seconds (ASR) on final approach, Squawk Mode A/3 Code 7600 and;

- (I) 1. Contact KANOYA Tower.
2. If unable, proceed in accordance with visual flight rules.
3. If unable,
  - (1) In the vector
    - a. Proceed to DAGRI at last assigned altitude or 3,000ft whichever is higher and execute instrument approach as follows:  
TACAN Z RWY26L, ILS Y or LOC Y RWY26L.
    - b. Proceed to TILAN at last assigned altitude or 3,200ft whichever is higher and execute TACAN RWY08R approach.
  - (2) On final approach  
Execute instrument final approach.
- (II) Procedures other than above will be issued when situation required.

NOTE: On dog leg(235 DEG/2200) under GCA, execute final approach as follows:  
TACAN Z RWY26L, ILS Z or LOC Z RWY26L.

### 4. Automated Radar Terminal System (ARTS)

鹿屋進入管制所の指示のもとに、鹿屋進入管制区を飛行する航空機は、モード A/3 の二次レーダー個別コード及びモード C による応答を指示される。

モード A/3 又はモード C 応答用の ATC トランスポンダーを搭載していない航空機が、当該モードによる応答を指示された場合は、鹿屋進入管制所に対しその旨通報すること。

Aircraft flying within the approach control area under the control of KANOYA approach control will be instructed to reply with discrete code on Mode A/3 and Mode C. If an aircraft non equipped with ATC trasponder A/3 or Mode C instructed to reply with such Mode, it shall report KANOYA approach control accordingly.

## RJFY AD 2.23 ADDITIONAL INFORMATION

481FT height group of trees exist near APCH surface 1.13NM WNW FM RWY08R THR.

## RJFY AD 2.24 CHARTS RELATED TO AN AERODROME

Standard Departure Chart - Instrument (EAST REVERSAL)  
Standard Departure Chart - Instrument (WEST REVERSAL)  
Standard Departure Chart - Instrument (EKORU)  
Standard Departure Chart - Instrument (MAKRA)  
Standard Departure Chart - Instrument (QUEEN)  
Standard Arrival Chart - Instrument (AIRAH)  
Instrument Approach Chart (ILS Z or LOC Z RWY 26L)  
Instrument Approach Chart (ILS Y or LOC Y RWY 26L)  
Instrument Approach Chart (ILS X or LOC X RWY 26L)  
Instrument Approach Chart (TACAN Z RWY 26L)  
Instrument Approach Chart (TACAN Y RWY 26L)  
Instrument Approach Chart (TACAN RWY 08R)

**INTENTIONALLY LEFT BLANK**

## STANDARD DEPARTURE CHART - INSTRUMENT

RJFY / KANOYA

SID

EAST REVERSAL TWO DEPARTURE

RWY08R : Climb via JAT R083 to 4000FT or above within 13NM

from RWY end(JAT 14DME), then turn right proceed to JAT TACAN.

RWY26L : Not established.

Note:

- 1 Following climb gradient should be maintained until passing 2000FT.


| Speed (Knots)   | 60  | 90  | 120 | 150 | 180 | 210  |
|-----------------|-----|-----|-----|-----|-----|------|
| Rate (Feet/Min) | 300 | 450 | 600 | 750 | 900 | 1050 |

- 2 SHIBUSHI PETROLEUM COMBINAT at JAT R094 10DME.

- 3 Obstructions exist,

- a 229FT MSL height group of trees at 0.76NM E from ARP.
- b 1934FT MSL height mountain at 10.8NM ESE from ARP.

CHANGE : PROC renamed. NDB (JA) deleted. Radial FM JAT (SHIBUSHI PETROLEUM COMBINAT).

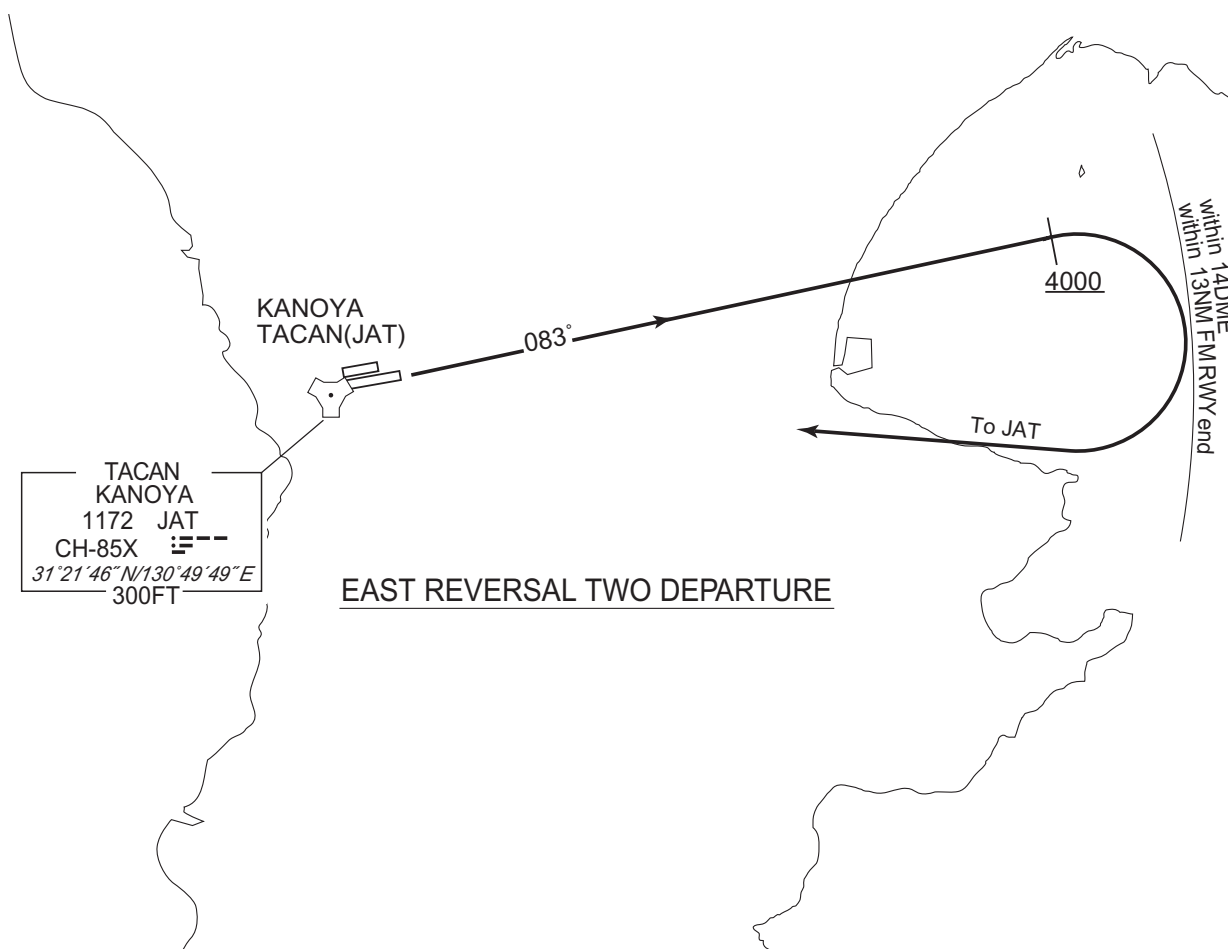

## STANDARD DEPARTURE CHART - INSTRUMENT

RJFY / KANOYA

SID

WEST REVERSAL TWO DEPARTURE

RWY08R : Not established.

RWY26L : Climb via JAT R270 to 4000FT or above within 13NM from RWY end  
(JAT 13DME), then turn left proceed to JAT TACAN.

Note:


- 1 Following climb gradient should be maintained until passing 600FT.

| Speed (Knots)   | 60  | 90  | 120 | 150 | 180 | 210  |
|-----------------|-----|-----|-----|-----|-----|------|
| Rate (Feet/Min) | 300 | 450 | 600 | 750 | 900 | 1050 |

- 2 Obstructions exist,

- a 582FT MSL height hill at 1NM SW from ARP.
- b 630FT MSL height antenna tower at 1.1NM SW from ARP.
- c 493FT MSL height antenna tower at 1.8NM W from ARP.
- d 555FT MSL height hill at 2.2NM W from ARP.

CHANGE : SID (RWY26L). Note:2 Obstructions. NDB (JA) deleted.

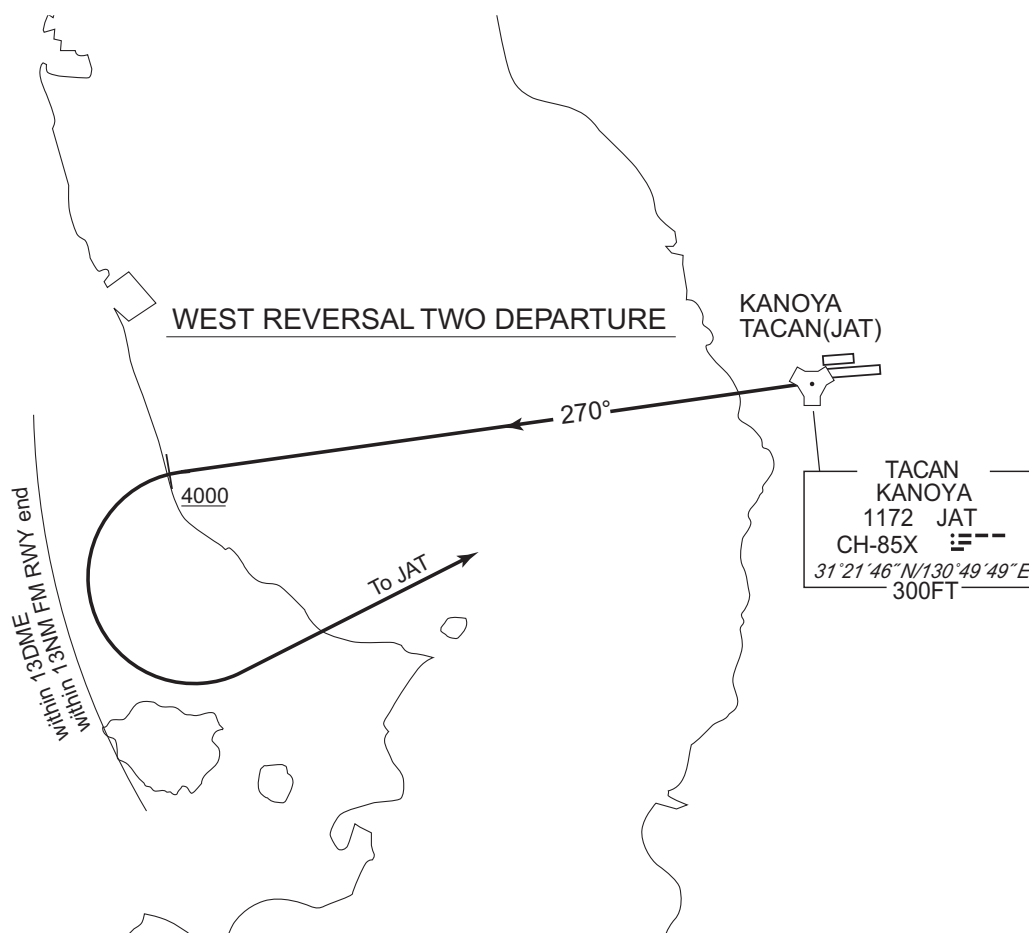



STANDARD DEPARTURE CHART - INSTRUMENT

RJFY / KANOYA

SID

EKORU ONE DEPARTURE

RWY08R : Climb via JAT R084 to EKORU.

RWY26L : Climb RWY HDG until 3.5NM from RWY end (JAT 3.6DME) to 1000FT  
or above, turn left proceed to JAT TACAN, via JAT R084 to EKORU.

Note:

- 1 Following climb gradient should be maintained,
  - a until passing 2000FT when take off RWY08R.
  - b until passing 1600FT when take off RWY26L.


|                 |     |     |     |     |     |      |
|-----------------|-----|-----|-----|-----|-----|------|
| Speed (Knots)   | 60  | 90  | 120 | 150 | 180 | 210  |
| Rate (Feet/Min) | 300 | 450 | 600 | 750 | 900 | 1050 |

- 2 SHIBUSHI PETROLEUM COMBINAT at JAT R094 10DME.

- 3 Obstructions exist,

- a when take off RWY08R,
  - (a)229FT MSL height group of trees at 0.76NM E from ARP.
  - (b)1934FT MSL height mountain at 10.8NM ESE from ARP.
- b when take off RWY26L,
  - (a)582FT MSL height hill at 1NM SW from ARP.
  - (b)630FT MSL height antenna tower at 1.1NM SW from ARP.
  - (c)493FT MSL height antenna tower at 1.8NM W from ARP.
  - (d)555FT MSL height hill at 2.2NM W from ARP.
  - (e)814FT MSL height mountain at 3.0NM SW from ARP.
  - (f)837FT MSL height mountain at 3.2NM SW from ARP.
  - (g)1378FT MSL height mountain at 3.5NM S from ARP.
  - (h)1582FT MSL height mountain at 3.9NM S from ARP.

CHANGE : New PROC

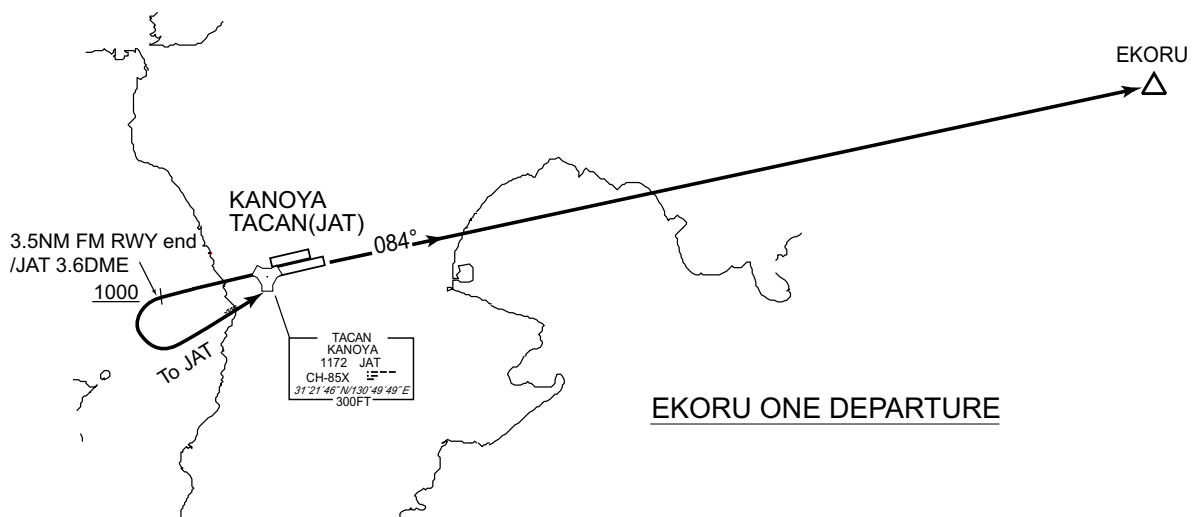

## STANDARD DEPARTURE CHART - INSTRUMENT

RJFY / KANOYA

SID

MAKRA THREE DEPARTURE

RWY08R : Not established.

RWY26L : Climb RWY HDG until 1NM from RWY end (JAT 1.0DME), climb via  
JAT R263 to MAKRA.

Note:


- 1 Following climb gradient should be maintained until passing 600FT.

| Speed (Knots)   | 60  | 90  | 120 | 150 | 180 | 210  |
|-----------------|-----|-----|-----|-----|-----|------|
| Rate (Feet/Min) | 300 | 450 | 600 | 750 | 900 | 1050 |

- 2 Obstructions exist,

- a 493FT MSL height antenna tower at 1.8NM W from ARP.  
b 555FT MSL height hill at 2.2NM W from ARP.

CHANGE : PROC renamed. NDB(JA) abolished.

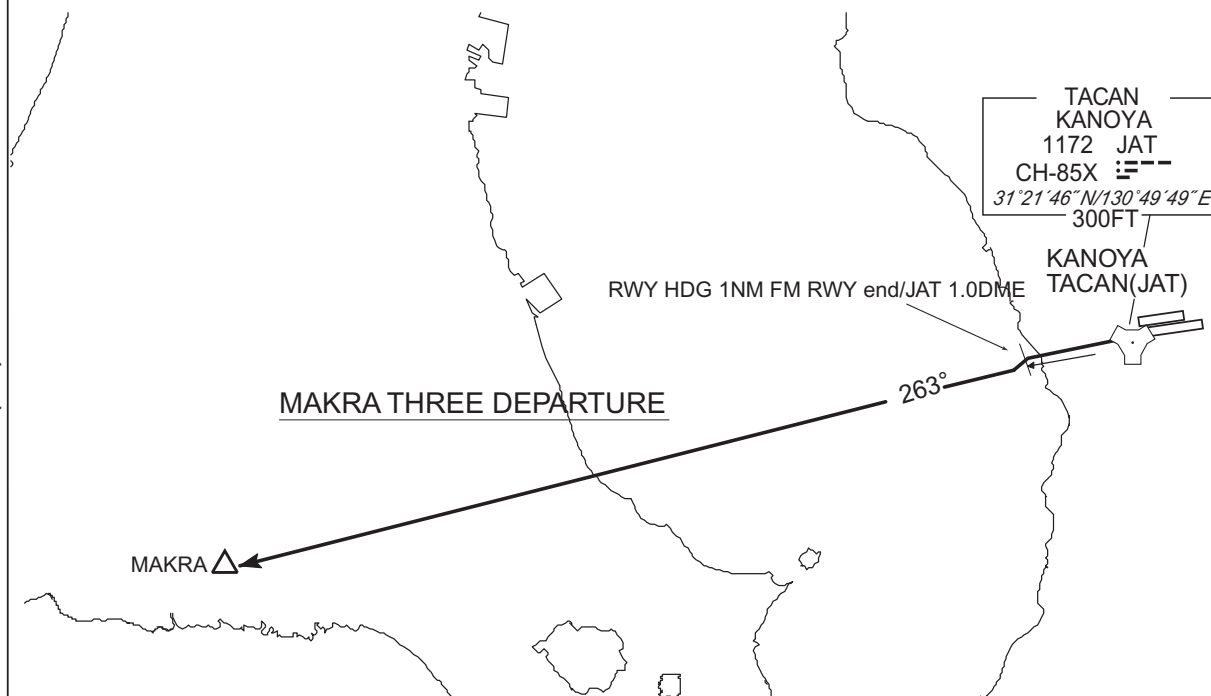

STANDARD DEPARTURE CHART - INSTRUMENT

RJFY / KANOYA

SID

**QUEEN FOUR DEPARTURE**

RWY08R : Climb via JAT R083 to intercept and proceed via HKC R127 to QUEEN.

RWY26L : Climb RWY HDG until 3.5NM from RWY end (JAT 3.6DME) to 1000FT or above, turn left proceed to JAT TACAN then, climb via JAT R083 to intercept and proceed via HKC R127 to QUEEN.

**Note:**

- 1 Following climb gradient should be maintained,
  - a. until passing 2000FT when take off RWY08R.
  - b. until passing 3000FT when take off RWY26L.


| Speed (Knots)   | 60  | 90  | 120 | 150 | 180 | 210  |
|-----------------|-----|-----|-----|-----|-----|------|
| Rate (Feet/Min) | 300 | 450 | 600 | 750 | 900 | 1050 |

- 2 SHIBUSHI PETROLEUM COMBINAT at JAT R094 10DME.

- 3 Obstructions exist,

- a. when take off RWY08R,
  - (a)229FT MSL height group of trees at 0.76NM E from ARP.
  - (b)1934FT MSL height mountain at 10.8NM ESE from ARP.
- b. when take off RWY26L,
  - (a)582FT MSL height hill at 1NM SW from ARP.
  - (b)630FT MSL height antenna tower at 1.1NM SW from ARP.
  - (c)493FT MSL height antenna tower at 1.8NM W from ARP.
  - (d)555FT MSL height hill at 2.2NM W from ARP.
  - (e)814FT MSL height mountain at 3.0NM SW from ARP.
  - (f)837FT MSL height mountain at 3.2NM SW from ARP.
  - (g)1378FT MSL height mountain at 3.5NM S from ARP.
  - (h)1582FT MSL height mountain at 3.9NM S from ARP.
  - (i)2907FT MSL height mountain at 10NM SE from ARP.

CHANGE : PROC renamed. Radial FM HKC.

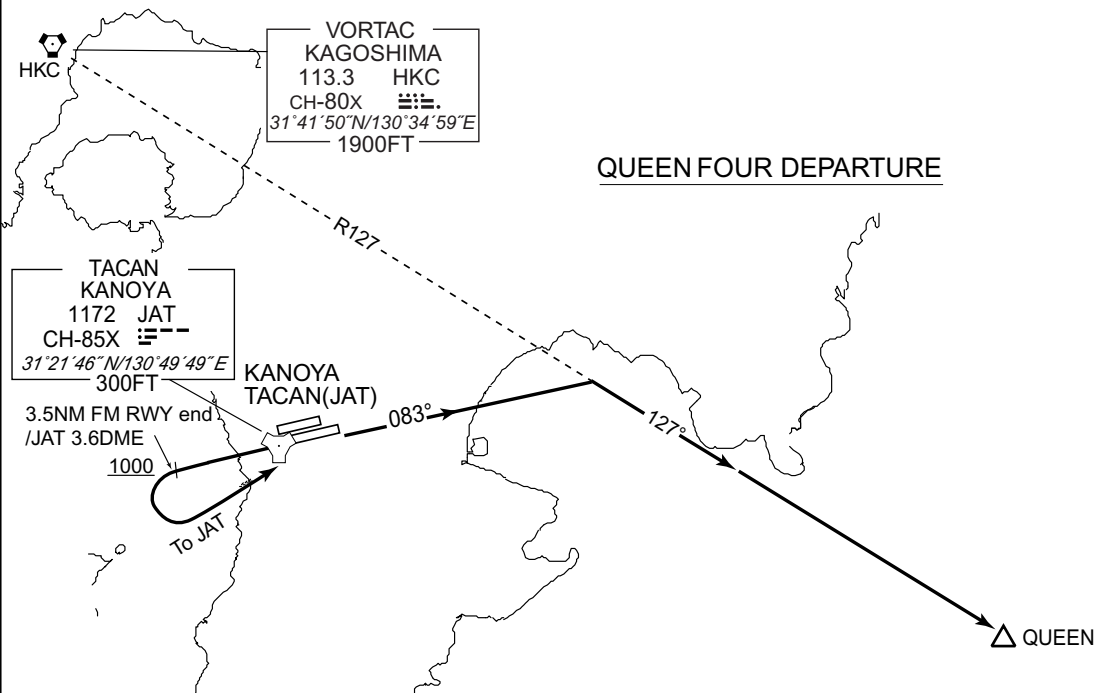

**INTENTIONALLY LEFT BLANK**


STANDARD ARRIVAL CHART - INSTRUMENT

RJFY / KANOYA

STAR

AIRAH ARRIVAL


From over JAT TACAN, proceed via JAT R125 to AIRAH (JAT R125 16.0DME), maintain last assigned altitude until 2DME from JAT TACAN, cross AIRAH at or above 6000FT or specified altitude.

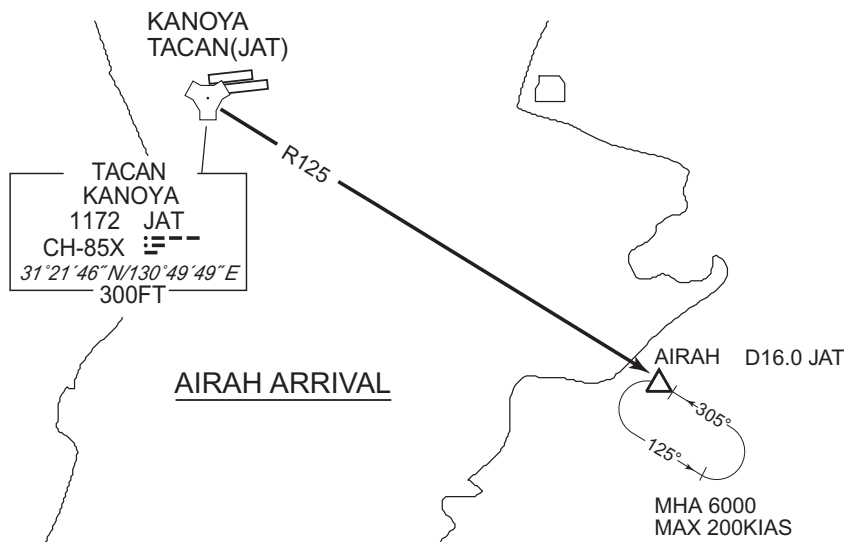

CHANGE : KANOYA ARRIVAL abolished.

**INTENTIONALLY LEFT BLANK**


INSTRUMENT APPROACH CHART

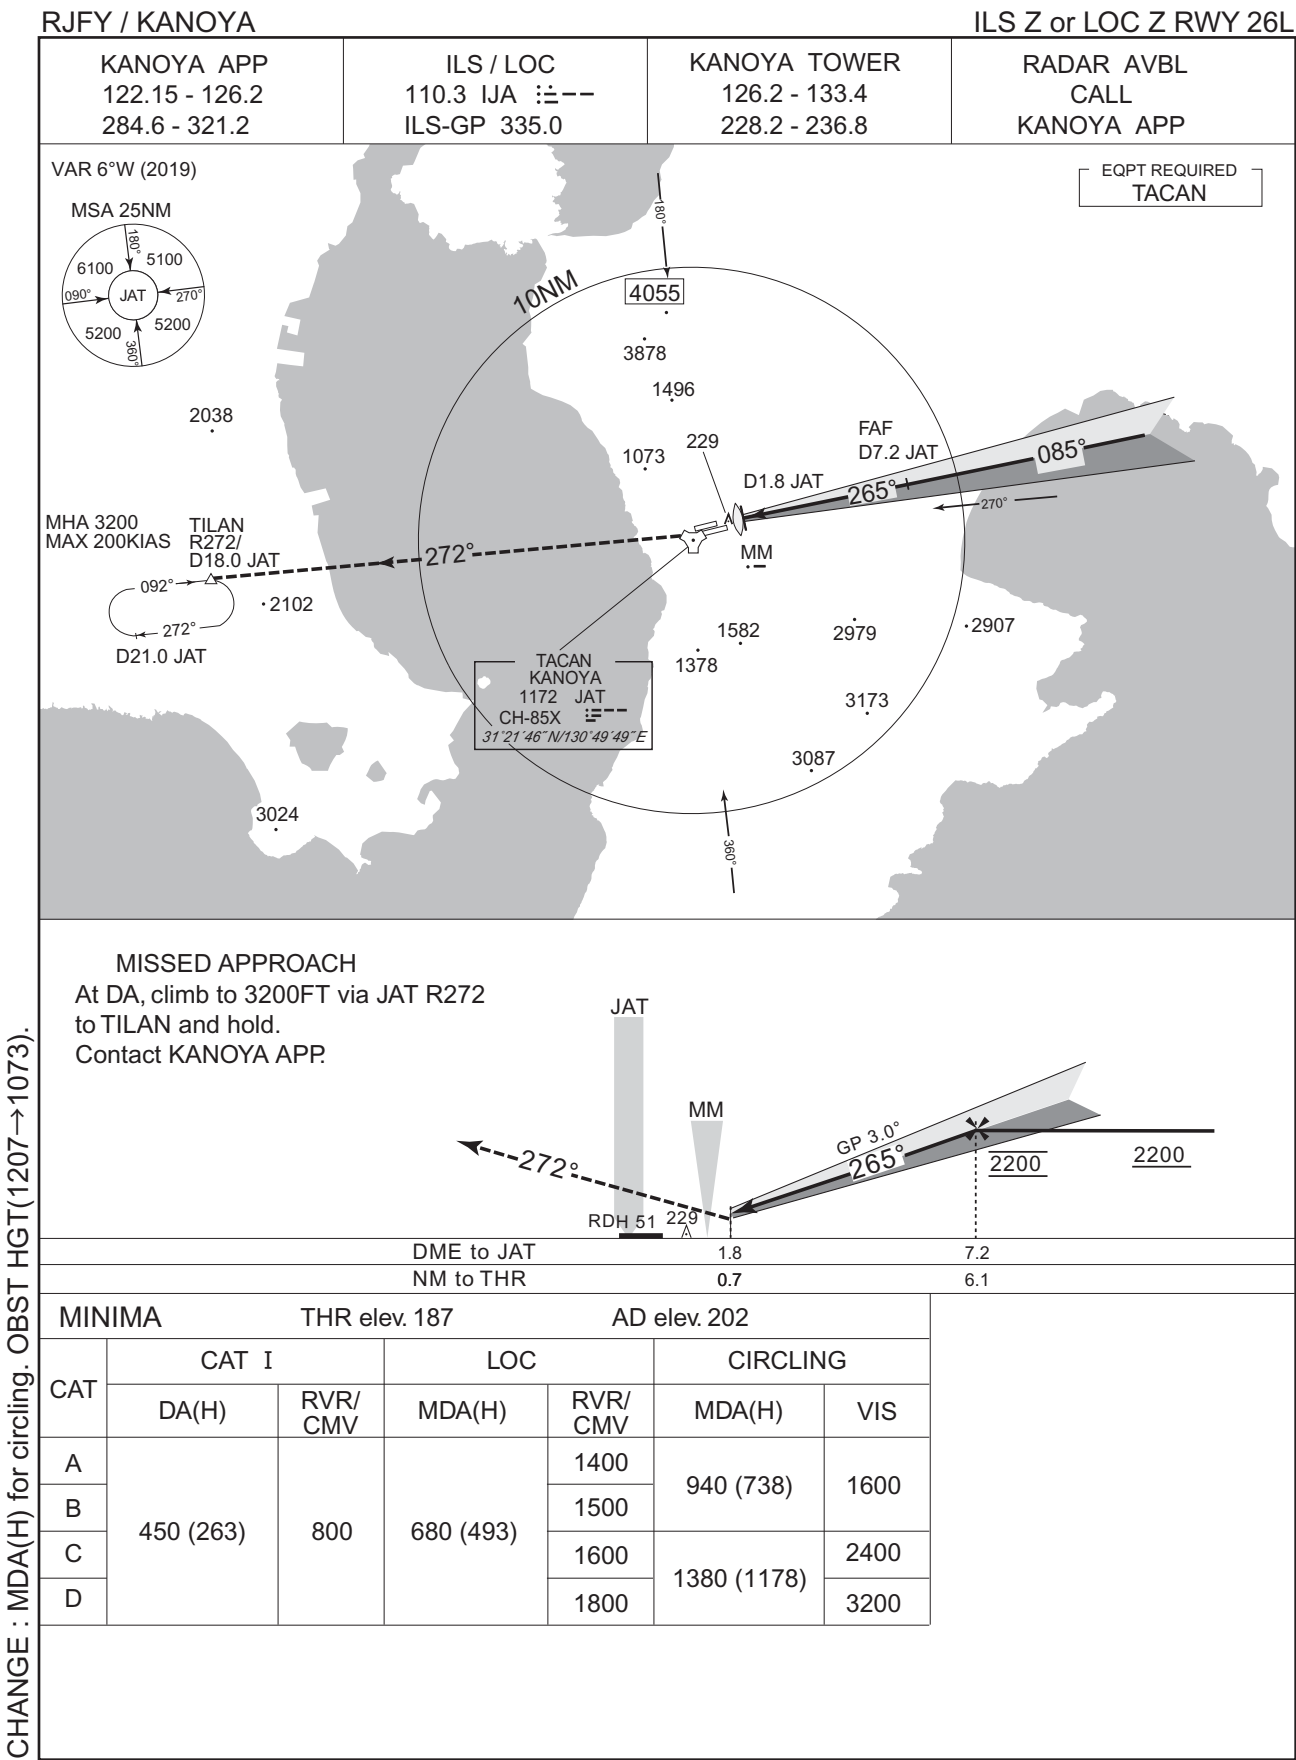

## INSTRUMENT APPROACH CHART


RJFY / KANOYA

ILS Y or LOC Y RWY 26L

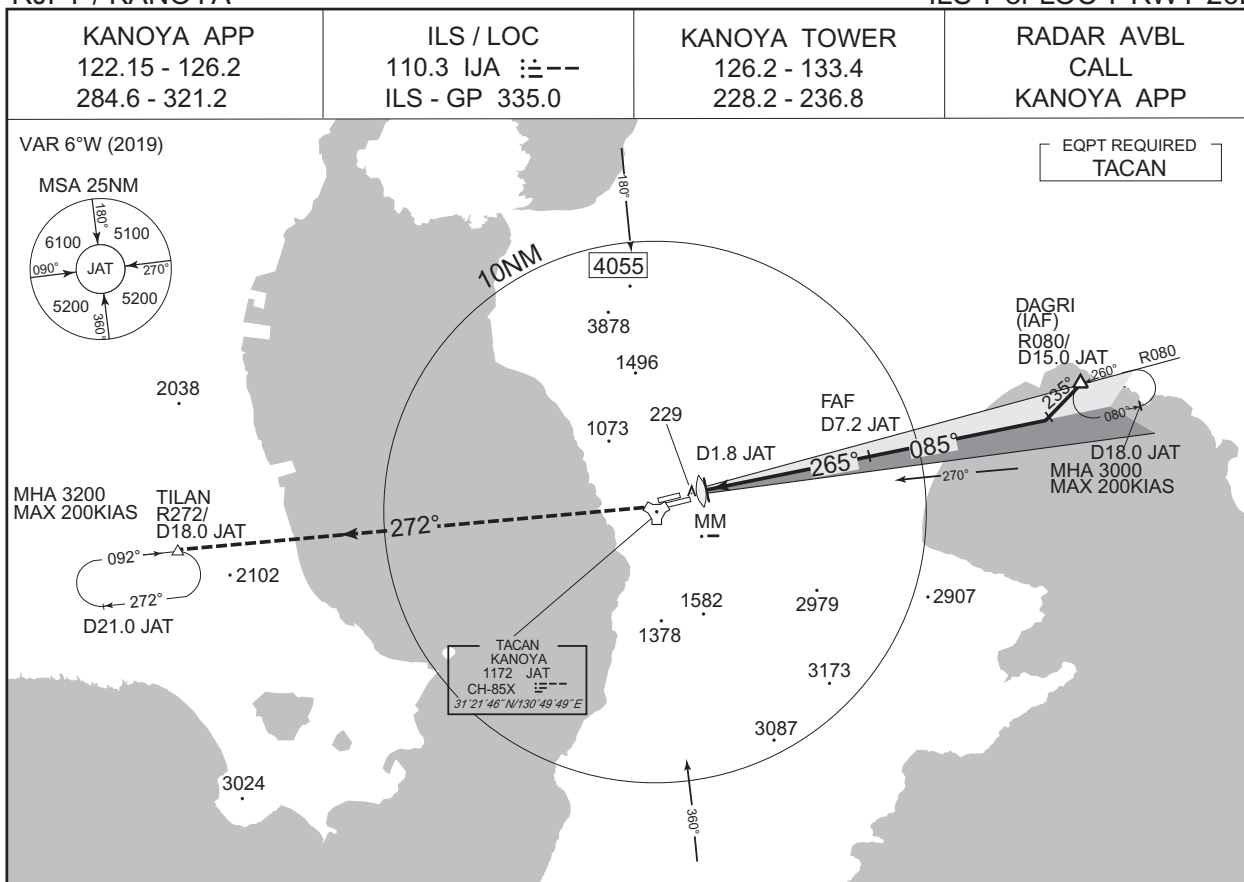

## MISSED APPROACH

At DA, climb to 3200FT via JAT R272 to TILAN and hold.  
Contact KANOYA APP.

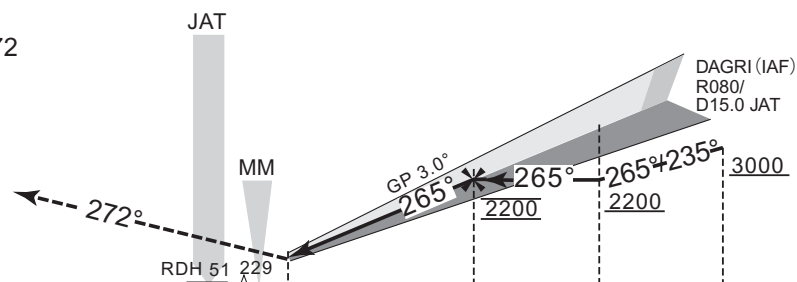

DME to JAT

1.8

7.2

10.0

NM to THR

0.7

6.1

8.9

MINIMA

THR elev. 187

AD elev. 202

| CAT | CAT I     |         | LOC       |         | CIRCLING    |      |
|-----|-----------|---------|-----------|---------|-------------|------|
|     | DA(H)     | RVR/CMV | MDA(H)    | RVR/CMV | MDA(H)      | VIS  |
| A   | 450 (263) | 800     | 680 (493) | 1400    | 940 (738)   | 1600 |
| B   |           |         |           | 1500    |             |      |
| C   |           |         |           | 1600    | 1380 (1178) | 2400 |
| D   |           |         |           | 1800    |             | 3200 |

CHANGE : MDA(H) for circling. OBST HGT(1207→1073).



## RJFY / KANOYA


ILS X or LOC X RWY 26L

CHANGE : MDA(H) for circling. OBST HGT(1207→1073).

INSTRUMENT APPROACH CHART


RJFY / KANOYA

TACAN Z RWY 26L

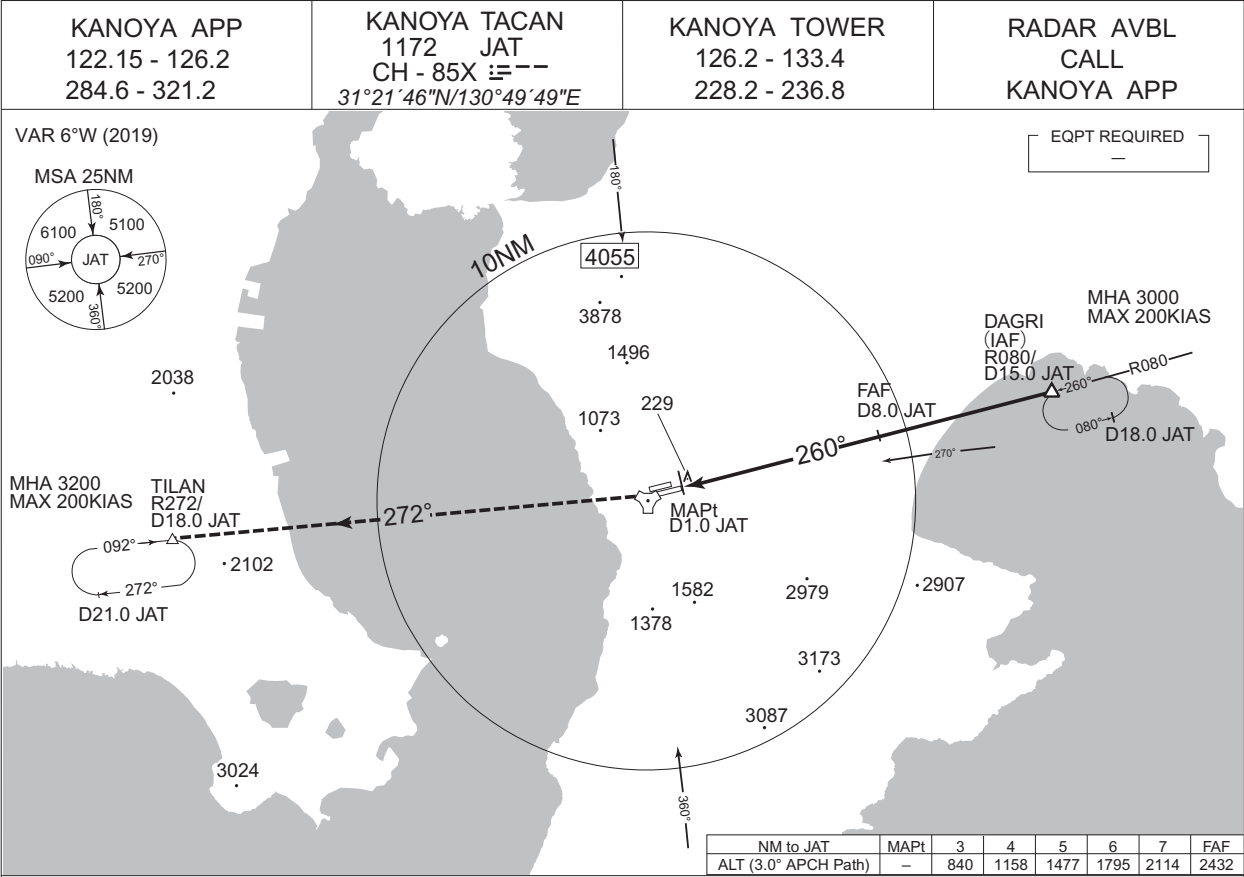

MISSED APPROACH

At 1.0DME prior to JAT TACAN,  
climb to 3200FT via JAT R272  
to TILAN and hold.  
Contact KANOYA APP.

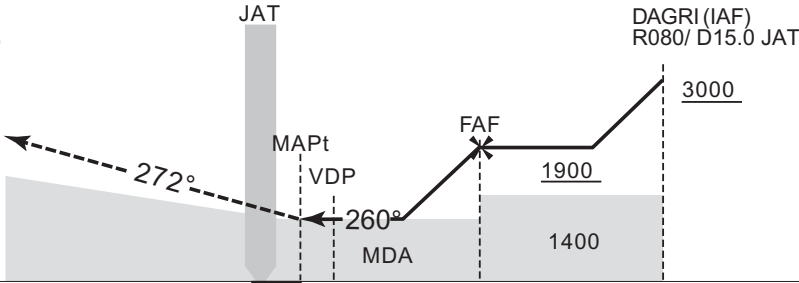

|            |     |     |      |      |
|------------|-----|-----|------|------|
| DME to JAT | 1.0 | 2.7 | 8.0  | 15.0 |
| NM to THR  | 1.6 | 6.9 | 13.9 |      |

| MINIMA |           | THR elev. 187 | AD elev. 202 |      |
|--------|-----------|---------------|--------------|------|
| CAT    |           |               | CIRCLING     |      |
|        | MDA(H)    | RVR/<br>CMV   | MDA(H)       | VIS  |
| A      | 700 (513) | 1400          | 940 (738)    | 1600 |
| B      |           | 1500          |              |      |
| C      |           | 1600          | 1380 (1178)  | 2400 |
| D      |           | 1800          |              |      |

CHANGE : MDA(H) for circling. OBST HGT(1207→1073).

## RJFY / KANOYA

TACAN Y RWY 26L

VAR 6°W (2019)

MSA 25NM

JAT

6100 5100 5200 5200

090° 270° 360° 180°

2038

MHA 3200 MAX 200KIAS

TILAN R272/D18.0 JAT

092° 272°

D21.0 JAT

2102

10NM

4055

3878 1496 1073 229

MAPt D1.0 JAT

1582 1378 3173 3087

2979 2907

260° 270°

FAF D8.0 JAT

DAGRI R080/D15.0 JAT

MHA 3000 MAX 200KIAS

R080 D18.0 JAT

D16.0 JAT ARC

AIRAH (IAF) R125/D16.0 JAT

MHA 6000 MAX 200KIAS

D19.0 JAT


125° 305°

360°

EQPT REQUIRED

| NM to JAT            | MAPt | 3   | 4    | 5    | 6    | 7    | FAF  |
|----------------------|------|-----|------|------|------|------|------|
| ALT (3.0° APCH Path) | —    | 840 | 1158 | 1477 | 1795 | 2114 | 2432 |

At 1.0DME prior to JAT TACAN,  
climb to 3200FT via JAT R272  
to TILAN and hold.  
Contact KANOYA APP,

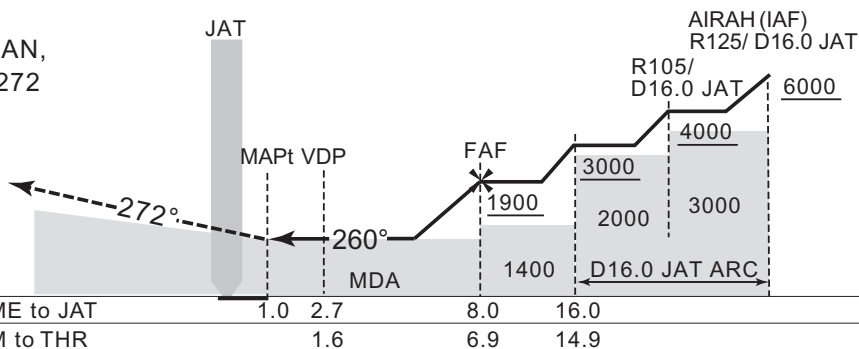

| MINIMA |           | THR elev. 187 | AD elev. 202 |      |
|--------|-----------|---------------|--------------|------|
| CAT    |           |               | CIRCLING     |      |
|        | MDA(H)    | RVR/<br>CMV   | MDA(H)       | VIS  |
| A      | 700 (513) | 1400          | 940 (738)    | 1600 |
| B      |           | 1500          |              |      |
| C      |           | 1600          | 1380 (1178)  | 2400 |
| D      |           | 1800          |              | 3200 |

CHANGE : MDA(H) for circling. OBST HGT(1207→1073).

## RJFY / KANOYA

|                |                                                                                          |               |            |
|----------------|------------------------------------------------------------------------------------------|---------------|------------|
| KANOYA APP     | KANOYA TACAN                                                                             | KANOYA TOWER  | RADAR AVBL |
| 122.15 - 126.2 | 1172 JAT                                                                                 | 126.2 - 133.4 | CALL       |
| 284.6 - 321.2  | CH-85X  | 228.2 - 236.8 | KANOYA APP |
|                | <i>31°21'46"N/130°49'49"E</i>                                                            |               |            |

