

## AD 2 AERODROMES

## RJSS AD 2.1 AERODROME LOCATION INDICATOR AND NAME

## RJSS - SENDAI

## RJSS AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

|   |                                                                                              |                                                                                                                                                                                                                                                     |
|---|----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | ARP coordinates and site at AD                                                               | 380823N/1405501E<br>283° / 0.9km from TWR                                                                                                                                                                                                           |
| 2 | Direction and distance from (city)                                                           | 13.6km (7.3NM) SSE of Sendai JR Station                                                                                                                                                                                                             |
| 3 | Elevation/ Reference temperature                                                             | 5.6FT / 27°C (2002-2006)                                                                                                                                                                                                                            |
| 4 | Geoid undulation at AD ELEV PSN                                                              | 137FT                                                                                                                                                                                                                                               |
| 5 | MAG VAR/ Annual change                                                                       | 9° W (2024) / 4'W                                                                                                                                                                                                                                   |
| 6 | AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses | Sendai International Airport Co., Ltd.<br>Sendai Airport, Minamihara, Shimomasuda, Natori City, Miyagi Pref.<br>Tel: 022-382-4057, Fax: 022-382-4068<br>Web-site: <a href="https://www.sendai-airport.co.jp/">https://www.sendai-airport.co.jp/</a> |
| 7 | Types of traffic permitted(IFR/VFR)                                                          | IFR/VFR                                                                                                                                                                                                                                             |
| 8 | Remarks                                                                                      | Sendai Airport Office(CAB)<br>Sendai Airport, Minamihara, Shimomasuda, Natori City, Miyagi Pref.<br>Tel: 022-383-1211<br>(2330-0815UTC EXC 2330UTC on FRI - 0815UTC on SUN)                                                                         |

## RJSS AD 2.3 OPERATIONAL HOURS

|    |                           |                                                                                                                                                                                                                                     |
|----|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1  | AD Administration         | 2230 - 1300                                                                                                                                                                                                                         |
| 2  | Customs and immigration   | Customs: 2330-0800<br>Immigration: SUN 0000-SUN 1045, SUN 2330-MON 0845,<br>TUE 0000-TUE 1045, TUE 2330-WED 0845,<br>THU 0000-THU 1045, THU 2330-FRI 0845,<br>FRI 2330-SAT 0845                                                     |
| 3  | Health and sanitation     | Quarantine (human): 2230-1300<br>Quarantine (animal): 2330-0800<br>Quarantine (plant): SUN 0030-SUN 1015, SUN 2330-MON 0900,<br>TUE 0030-TUE 1015, WED 0030-WED 0900,<br>THU 0030-THU 1015, FRI 0030-FRI 0900,<br>SAT 0030-SAT 0900 |
| 4  | AIS Briefing Office       | Nil                                                                                                                                                                                                                                 |
| 5  | ATS Reporting Office(ARO) | Nil                                                                                                                                                                                                                                 |
| 6  | MET Briefing Office       | H24 (TOKYO)                                                                                                                                                                                                                         |
| 7  | ATS                       | 2230 - 1300<br>Remarks: 1200 - 1300, AFIS provided by New Chitose Airport Office.                                                                                                                                                   |
| 8  | Fuelling                  | 2230 - 1300                                                                                                                                                                                                                         |
| 9  | Handling                  | 2230 - 1300                                                                                                                                                                                                                         |
| 10 | Security                  | 2230 - 1300                                                                                                                                                                                                                         |
| 11 | De-icing                  | Nil                                                                                                                                                                                                                                 |
| 12 | Remarks                   | Nil                                                                                                                                                                                                                                 |

**RJSS AD 2.4 HANDLING SERVICES AND FACILITIES8**

|   |                                         |                                                                                         |
|---|-----------------------------------------|-----------------------------------------------------------------------------------------|
| 1 | Cargo-handling facilities               | All the modern institutions that deal with the weight thing to boeing747 Type freighter |
| 2 | Fuel/ oil types                         | Fuel Grades : 100, JET A-1<br>Oil grades : W80, 100, ASTO 500, MJO-II                   |
| 3 | Fuelling facilities/ capacity           | Truck refueling, No limitation                                                          |
| 4 | De-icing facilities                     | Nil                                                                                     |
| 5 | Hangar space for visiting aircraft      | Nil                                                                                     |
| 6 | Repair facilities for visiting aircraft | Nil                                                                                     |
| 7 | Remarks                                 | Nil                                                                                     |

**RJSS AD 2.5 PASSENGER FACILITIES**

|   |                      |                                   |
|---|----------------------|-----------------------------------|
| 1 | Hotels               | Hotels in the Sendai city         |
| 2 | Restaurants          | At Airport                        |
| 3 | Transportation       | Railways, Busses and Taxis        |
| 4 | Medical facilities   | Hospitals in the iwanuma city 9km |
| 5 | Bank and Post Office | At Airport                        |
| 6 | Tourist Office       | At Airport                        |
| 7 | Remarks              | Nil                               |

**RJSS AD 2.6 RESCUE AND FIRE FIGHTING SERVICES**

|   |                                             |                                                                                                                                        |
|---|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| 1 | AD category for fire fighting               | Fire protection :<br>Scale of protection, ICAO required : CAT 9<br>Available : CAT 9                                                   |
| 2 | Rescue equipment                            | Chemical fire fighting truck x 3<br>Water-supply truck<br>Lighting power supply truck<br>Emergency medical equipments conveyance truck |
| 3 | Capability for removal of disabled aircraft | Nil                                                                                                                                    |
| 4 | Remarks                                     | Nil                                                                                                                                    |

**RJSS AD 2.7 SEASONAL AVAILABILITY-CLEARING**


|   |                             |                                                                   |
|---|-----------------------------|-------------------------------------------------------------------|
| 1 | Types of clearing equipment | Snow removal available                                            |
| 2 | Clearance priorities        | Snow removal priority: RWY09/27, TWY A1, B1, B3, B6, C1-C6, APRON |
| 3 | Remarks                     | Seasonal availability : All seasons                               |

## RJSS AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

|   |                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Apron surface and strength          | Surface :SPOT NR 1-14 :Cement -Concrete<br>:SOUTH ONE APRON, SOUTH TWO APRON,<br>SOUTH THREE APRON, RUN-UP APRON, WEST HELI PAD:<br>Asphalt Concrete<br>Strength :SPOT NR 1-14 : PCR 1132/R/B/X/T<br>:SOUTH ONE APRON : PCR 229/F/B/Y/T<br>:SOUTH TWO APRON : PCR 183/F/B/Y/T<br>:SOUTH THREE APRON : PCR 265/F/C/Y/T<br>:RUN-UP APRON, WEST HELI PAD : AUW 5700kg/0.28MPa                                                                                                                                    |
| 2 | Taxiway width, surface and strength | Width :TWY A1-A3, D1 : 18m<br>:TWY C1-C6 : 23m<br>:TWY B1, B6 : 28.5m<br>:TWY B2-B5 : 34m<br>:TWY A4, TWY(BTN RWY 09/27 AND RWY 12 THR) : 45m<br><br>Surface :C6: Cement -Concrete<br>Other: Asphalt-Concrete<br><br>Strength: TWY A1-A3, D1 : PCR 160/F/C/Y/T<br>TWY A4 : PCR 180/F/C/Y/T<br>TWY C2 : PCR 745/F/A/X/T<br>TWY C6 : PCR 1129R/B/X/T<br>TWY B2 -B5 : PCR 945/F/A/X/T<br>TWY(BTN RWY 09/27 AND RWY 12 THR) : PCR 797/F/B/X/T<br>TWY B1, B6, C1, C3 -C5 : PCR 945/F/B/X/T                         |
| 3 | ACL and elevation                   | Not available                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 4 | VOR checkpoints                     | Not available                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 5 | INS checkpoints                     | Spot NR<br>1 : 380820.38N/1405556.75E<br>2 : 380820.12N/1405554.31E<br>2L : 380820.21N/1405554.42E<br>3 : 380819.91N/1405551.55E<br>4 : 380819.59N/1405548.49E<br>5 : 380819.29N/1405545.54E<br>6 : 380819.18N/1405542.89E<br>7 : 380819.18N/1405540.69E<br>8 : 380819.64N/1405538.75E<br>9 : 380819.45N/1405536.92E<br>10 : 380819.26N/1405535.09E<br>11 : 380817.91N/1405533.18E<br>12 : 380817.70N/1405531.10E<br>13 : 380817.48N/1405529.02E<br>14 : 380817.27N/1405526.95E<br>A : 380817.80N/1405532.14E |
| 6 | Remarks                             | Nil                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## RJSS AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

|   |                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands | Aircraft stand identification sign :NR2 - 6, 10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 2 | RWY and TWY markings and LGT                                                                                   | <p>RWY:09/27, 12/30<br/>(Marking) RWY designation, RWY CL, RWY THR, RWY middle point, Aiming point, TDZ, RWY side stripe<br/>(LGT) RCLL(RWY09/27), REDL, RTHL, RENL, RTZL(RWY27), WBAR(RWY27)</p> <p>TWY:<br/>(Marking) TWY CL, RWY HLDG PSN, TWY side stripe, Mandatory instruction marking (A1, A2, A4, B1-B6, C3, C4, D1)<br/>(LGT) TWY edge LGT, TWY CL LGT(B1-B6,C1-C6), Stop bar LGT(B1-B6), RWY guard LGT(B1-B6,C3,C4), Taxiing guidance sign(B1-B6)</p>                                                                                                                                                                                                                                                                         |
| 3 | Stop bars                                                                                                      | <p>Stop Bar Lights: B1-B6<br/>Stop Bar Lights operations</p> <ol style="list-style-type: none"> <li>1) Stop Bar Lights are installed at each taxi holding position associated with Runway 09/27.</li> <li>2) Stop Bar Lights will be operated during operating hours of ATC Service.</li> <li>3) Stop Bar Lights will be operated when the visibility or the lowest RVR of Runway 09/27 is at or less than 600m.</li> <li>4) Stop Bar Lights on Taxiway B1 and B6 are controlled individually by ATC.</li> <li>5) Stop Bar Lights on Taxiways B2 through B5 are not controlled individually by ATC.</li> <li>6) During the period Stop Bar Lights operated, Taxiways B2 through B5 are not available for departure aircraft.</li> </ol> |
| 4 | Remarks                                                                                                        | <p>(Marking) Overrun area<br/>(LGT) Apron flood LGT</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

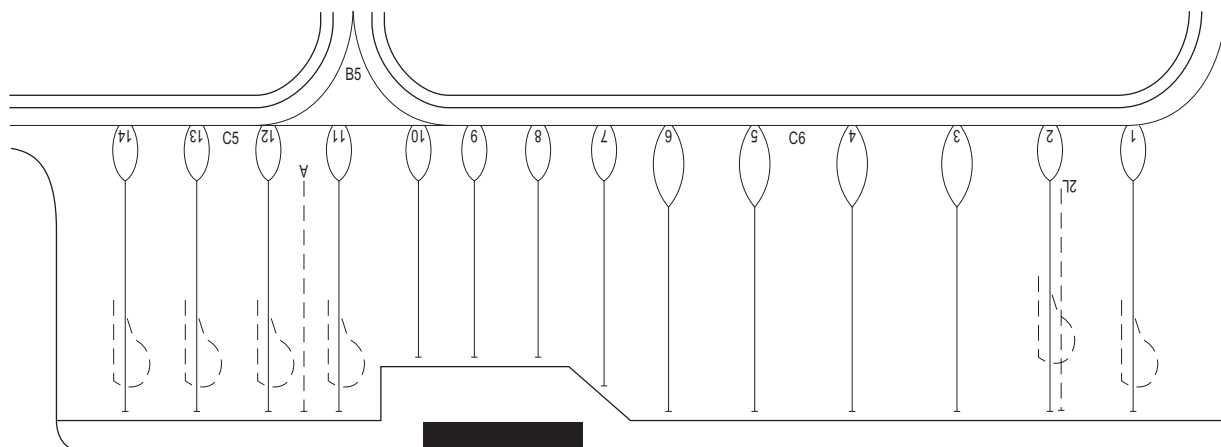Marking Aids and Parking Area

## RJSS AD 2.10 AERODROME OBSTACLES

In Area2 See Obstacle data

In Area3 To be developed


## RJSS AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

|    |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----|------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1  | Associated MET Office                                                  | TOKYO                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 2  | Hours of service<br>MET Office outside hours                           | H24 (TOKYO)                                                                                                                                                                                                                                                                                                                                                                                                                |
| 3  | Office responsible for TAF preparation<br>Periods of validity          | TOKYO<br>30 Hours                                                                                                                                                                                                                                                                                                                                                                                                          |
| 4  | Trend forecast<br>Interval of issuance                                 | Nil                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 5  | Briefing/ consultation provided                                        | Briefing is available upon inquiry at TOKYO                                                                                                                                                                                                                                                                                                                                                                                |
| 6  | Flight documentation<br>Language(s) used                               | C<br>En                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 7  | Charts and other information available for<br>briefing or consultation | S <sub>6</sub> , U <sub>85</sub> , U <sub>7</sub> , U <sub>5</sub> , U <sub>3</sub> , U <sub>25</sub> , U <sub>2</sub> /T <sub>r</sub> , P <sub>S</sub> , P <sub>5</sub> , P <sub>3</sub> , P <sub>25</sub> , P <sub>SWE</sub> , P <sub>SWF</sub> ,<br>P <sub>SWG</sub> , P <sub>SWI</sub> , P <sub>SWM</sub> , P <sub>SW(domestic)</sub> , E, C, W <sub>E</sub> , W <sub>F</sub> , W <sub>G</sub> , W <sub>I</sub> , W, N |
| 8  | Supplementary equipment<br>available for providing information         | Nil                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 9  | ATS units provided with information                                    | TWR, APP, ATIS, RADIO                                                                                                                                                                                                                                                                                                                                                                                                      |
| 10 | Additional information (limitation of service,<br>etc.)                | Nil                                                                                                                                                                                                                                                                                                                                                                                                                        |

RJSS AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

| Designations<br>RWY NR | TRUE BRG | Dimensions of<br>RWY(M) | Strength(PCR) and<br>surface of RWY    | THR coordinates<br>THR geoid undulation | THR elevation and<br>highest elevation of TDZ<br>of precision APP RWY |
|------------------------|----------|-------------------------|----------------------------------------|-----------------------------------------|-----------------------------------------------------------------------|
| 1                      | 2        | 3                       | 4                                      | 5                                       | 6                                                                     |
| 09                     | 82.56°   | 3000×45                 | PCR 945/F/B/X/T<br>Asphalt Concrete    | 380819.58N<br>1405355.40E<br>136.8ft    | THR ELEV:11.5ft                                                       |
| 27                     | 262.56°  | 3000×45                 | PCR 945/F/B/X/T<br>Asphalt Concrete    | 380832.18N<br>1405557.56E<br>136.8ft    | THR ELEV:15.1ft<br>TDZ ELEV:15.1ft                                    |
| 12                     | 117.70°  | 1200×45                 | PCR 160/F/C/Y/T(*)<br>Asphalt Concrete | 380822.05N<br>1405453.09E<br>137ft      | THR ELEV:6ft                                                          |
| 30                     | 297.70°  | 1200×45                 | PCR 160/F/C/Y/T(*)<br>Asphalt Concrete | 380803.96N<br>1405536.72E<br>137ft      | THR ELEV:5ft                                                          |

| Slope of RWY    | Strip<br>Dimensions(M) | RESA(Overrun)<br>Dimensions(M)                                                           | Remarks                                                                                                          |
|-----------------|------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| 7               | 10                     | 11                                                                                       | 14                                                                                                               |
| See below chart | 3120x300<br>3120x300   | 90x(MNM:90 MAX:300)*<br>191x(MNM:130 MAX:300)*<br>*For detail, ask airport administrator | 09/27 grooving:3000mx30m                                                                                         |
| See below chart | 1320x150<br>1320x150   | 90x150<br>240x150                                                                        | (*)RWY12/30(BTN RWY09/27 AND<br>TWY C3-C4) : PCR 1079/F/B/X/T<br>RWY12/30(INT OF TWY C3-C4) :<br>PCR 737/F/B/X/T |

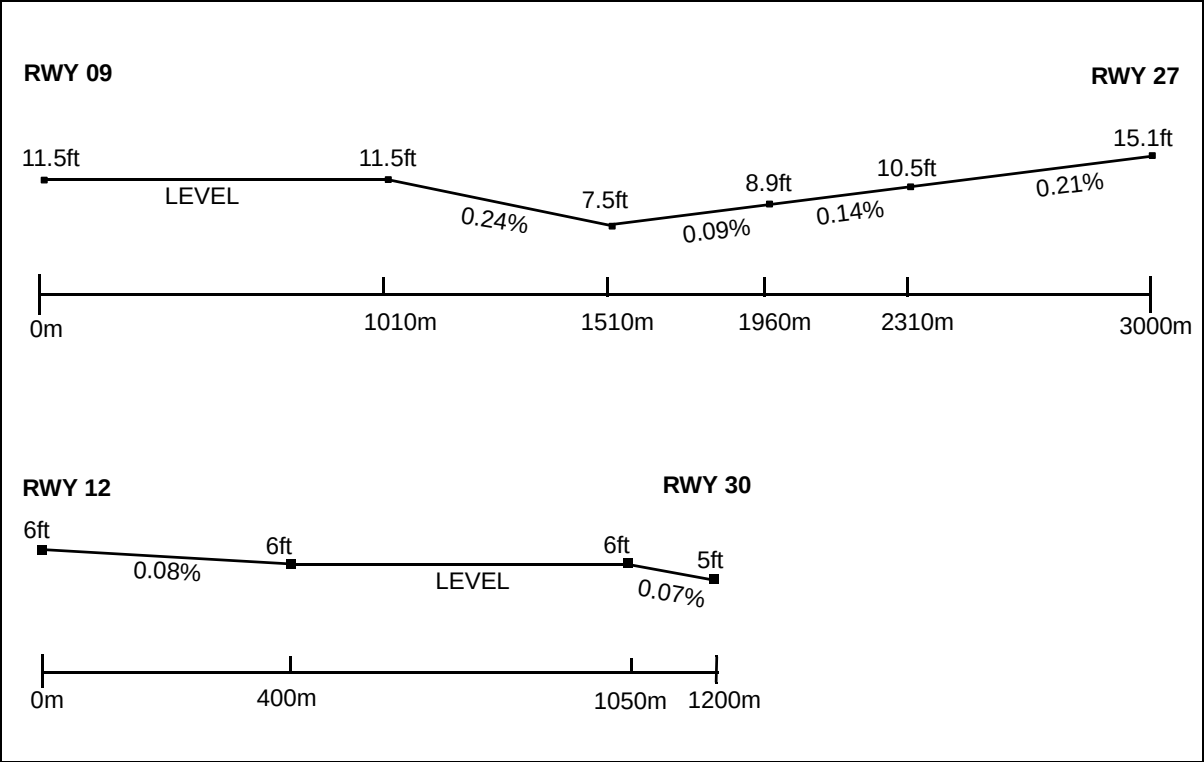

## RJSS AD 2.13 DECLARED DISTANCES

| RWY Designator | TORA<br>(m) | TODA<br>(m) | ASDA<br>(m) | LDA<br>(m) | Remarks |
|----------------|-------------|-------------|-------------|------------|---------|
| 1              | 2           | 3           | 4           | 5          | 6       |
| 09             | 3000        | 3000        | 3000        | 3000       | Nil     |
| TWY:B2         | 2420        | 2420        | 2420        |            |         |
| TWY:B3         | 1930        | 1930        | 1930        |            |         |
| 27             | 3000        | 3000        | 3000        | 3000       | Nil     |
| TWY:B4         | 1630        | 1630        | 1630        |            |         |
| TWY:B5         | 2300        | 2300        | 2300        |            |         |
| 12             | 1200        | 1200        | 1200        | 1200       | Nil     |
| 30             | 1200        | 1200        | 1200        | 1200       | Nil     |

誘導路の TORA,TODA 及び ASDA は、誘導路中心線と滑走路中心線の交点から滑走路末端までの距離を示す。  
(TORA,TODA and ASDA for TWY indicate distances BTN the point where TWY CL meets RWY CL and RWY THR.)

## RJSS AD 2.14 APPROACH AND RUNWAY LIGHTING

| RWY<br>Designator                                                                                                                                                       | APCH<br>LGT<br>type<br>LEN<br>INTST | RTHL<br>Color<br>WBAR | PAPI<br>(VASIS)<br>Angle<br>DIST FM THR<br>MEHT | RTZL<br>LEN | RCLL<br>LEN<br>Spacing<br>Color<br>INTST          | REDL<br>LEN<br>Spacing<br>Color<br>INTST             | RENL<br>Color<br>WBAR | STWL<br>LEN<br>Color |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------|-------------------------------------------------|-------------|---------------------------------------------------|------------------------------------------------------|-----------------------|----------------------|
| 1                                                                                                                                                                       | 2                                   | 3                     | 4                                               | 5           | 6                                                 | 7                                                    | 8                     | 9                    |
| 09                                                                                                                                                                      | SALS<br>420m<br>(*1)                | Green<br>Nil          | PAPI<br>3.0°<br>456m<br>73.8ft                  |             | 3000m<br>30m<br>Coded Color<br>(White/Red)<br>LIH | 3000m<br>60m<br>Coded Color<br>(White/Yellow)<br>LIH | Red                   | Nil<br>(*2)          |
| 27                                                                                                                                                                      | PALS<br>(CAT I)<br>900m             | Green<br>Green        | PAPI<br>3.0°<br>439m<br>65.6ft                  | 900m        | 3000m<br>30m<br>Coded Color<br>(White/Red)<br>LIH | 3000m<br>60m<br>Coded Color<br>(White/Yellow)<br>LIH | Red                   | Nil<br>(*2)          |
| 12                                                                                                                                                                      |                                     | Green<br>Nil          | PAPI<br>3.0°<br>306m<br>44.5ft                  |             |                                                   | 1200m<br>60m<br>Coded Color<br>(White/Yellow)<br>LIH | Red                   | Nil<br>(*2)          |
| 30                                                                                                                                                                      |                                     | Green<br>Nil          | PAPI<br>3.1°<br>262m<br>44.5ft                  |             |                                                   | 1200m<br>60m<br>Coded Color<br>(White/Yellow)<br>LIH | Red                   | Nil<br>(*2)          |
| Remarks                                                                                                                                                                 |                                     |                       |                                                 |             |                                                   |                                                      |                       |                      |
| 10                                                                                                                                                                      |                                     |                       |                                                 |             |                                                   |                                                      |                       |                      |
| SALS with APCH LGT beacon(560m and 916m FM RWY 09 THR)(*1)<br>Overrun area edge LGT(Color:Red)(*2)<br>CGL for RWY 09<br>RWY THR ID LGT for RWY 12/30 THR (Color: White) |                                     |                       |                                                 |             |                                                   |                                                      |                       |                      |

**RJSS AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY**

|   |                                                          |                                                                                                                                                             |
|---|----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | ABN/IBN location, characteristics and hours of operation | ABN: 380816N/1405552E, White/Green EV4.3sec, HO                                                                                                             |
| 2 | LDI location and LGT<br>Anemometer location and LGT      | LDI:Nil<br>Anemometer:<br>RWY12:440M FROM RWY12 THR, LGTD<br>RWY09:400M FROM RWY09 THR, LGTD<br>RWY27:385M FROM RWY27 THR, LGTD                             |
| 3 | TWY edge and center line lighting                        | TWY edge and center line lights installed, see AD2.9                                                                                                        |
| 4 | Secondary power supply/ switch-over time                 | Within 1 sec : RCLL, REDL(RWY09/27), RTHL(RWY09/27),<br>RENL(RWY09/27), WBAR, Stop bar LGT, Overrun area edge LGT(RWY09/27)<br>Within 15 sec : Other lights |
| 5 | Remarks                                                  | Nil                                                                                                                                                         |

**RJSS AD 2.16 HELICOPTER LANDING AREA**

|   |                                                              |                                                                                                                                                                                                                                      |
|---|--------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Coordinates TLOF or THR of FATO<br>Geoid undulation          | WEST HELIPAD: 380810.18N/1405501.21E, Nil<br>EAST1 HELIPAD: 380759.06N/1405533.38E, Nil<br>EAST2 HELIPAD: 380800.59N/1405528.17E, Nil                                                                                                |
| 2 | TLOF and/or FATO elevation                                   | WEST HELIPAD: 3ft<br>EAST1 HELIPAD: 3ft<br>EAST2 HELIPAD: 4ft                                                                                                                                                                        |
| 3 | TLOF and FATO area dimensions,<br>surface, strength, marking | TLOF and FATO area dimensions: WEST HELIPAD:20m×25m<br>EAST1 HELIPAD, EAST2 HELIPAD: 18m×25m<br>Surface: Asphalt-Concrete<br>Strength: WEST HELIPAD: 6ton<br>EAST1 HELIPAD, EAST2 HELIPAD: 29ton<br>Marking: See AIP AD2.24 AD chart |
| 4 | True BRG of FATO                                             | WEST HELIPAD: 117.70°/297.70°<br>EAST1 HELIPAD: 110.50°/280.50°<br>EAST2 HELIPAD: 110.50°/290.50°                                                                                                                                    |
| 5 | Declared distance available                                  | Nil                                                                                                                                                                                                                                  |
| 6 | APCH and FATO lighting                                       | Nil                                                                                                                                                                                                                                  |
| 7 | Remarks                                                      | WEST HELIPAD:<br>• MAX helicopter type: B412<br>• daytime use only<br>EAST1 HELIPAD, EAST2 HELIPAD:<br>• MAX helicopter type: UH1<br>• only available to who obtain prior permission<br>• daytime use only                           |




## RJSS AD 2.17 ATS AIRSPACE


| Designation and lateral limits |                                                                                                | Vertical limits (ft) | Airspace classification | ATS unit call sign Language                         | Remarks        |
|--------------------------------|------------------------------------------------------------------------------------------------|----------------------|-------------------------|-----------------------------------------------------|----------------|
| 1                              |                                                                                                | 2                    | 3                       | 4                                                   | 6              |
| SENDAI CTR                     | Area within a radius of 5nm of SENDAI ARP (38° 08'N 140° 55'E) exclude KASUMINOME control zone | 3 000 or below       | D                       | SENDAI TOWER<br>SENDAI RADIO(1)<br>En               | (1)1200 - 1300 |
| SENDAI PCA                     | SEE RJSS ATTACHED CHART                                                                        |                      | C                       | SENDAI APP<br>SENDAI TOWER<br>SENDAI RADIO(1)<br>En | (1)1200 - 1300 |
| SENDAI ACA                     | SEE RJSS ATTACHED CHART                                                                        |                      | E                       | SENDAI APP<br>SENDAI DEP<br>SENDAI RADAR<br>En      |                |
| SENDAI TCA                     | SEE RJSS ATTACHED CHART                                                                        |                      | E                       | SENDAI TCA<br>En                                    |                |

仙台特別管制区  
Sendai Positive Control Area


| NAME         | LATERAL LIMITS                    | UPPER LIMIT<br>(AMSL)          | UNIT<br>PROVIDING<br>SERVICE                                                                      | REMARKS                                                                                                                                                                                                                                                                                              |
|--------------|-----------------------------------|--------------------------------|---------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|              |                                   | LOWER LIMIT<br>(AMSL)<br>M(ft) |                                                                                                   |                                                                                                                                                                                                                                                                                                      |
| 1            | 2                                 | 3                              | 4                                                                                                 | 5                                                                                                                                                                                                                                                                                                    |
| 仙台<br>Sendai | 下記に示される区域<br>The area shown below |                                | Primary<br>Sendai APP<br>120.4-261.2<br>Secondary<br>Sendai TWR<br>126.2<br>Sendai Radio<br>118.7 | 当該空域を飛行しようとする航空機は、仙台アプローチ、仙台タワー又は仙台レディオに連絡し、コールサイン、現在位置、高度及び意図を通報し指示を受けること。<br>Pilot of aircraft operating in this area shall contact Sendai Approach, Sendai Tower or Sendai Radio for ATC instructions giving informations on aircraft identification, positions, altitude and pilot's intentions. |

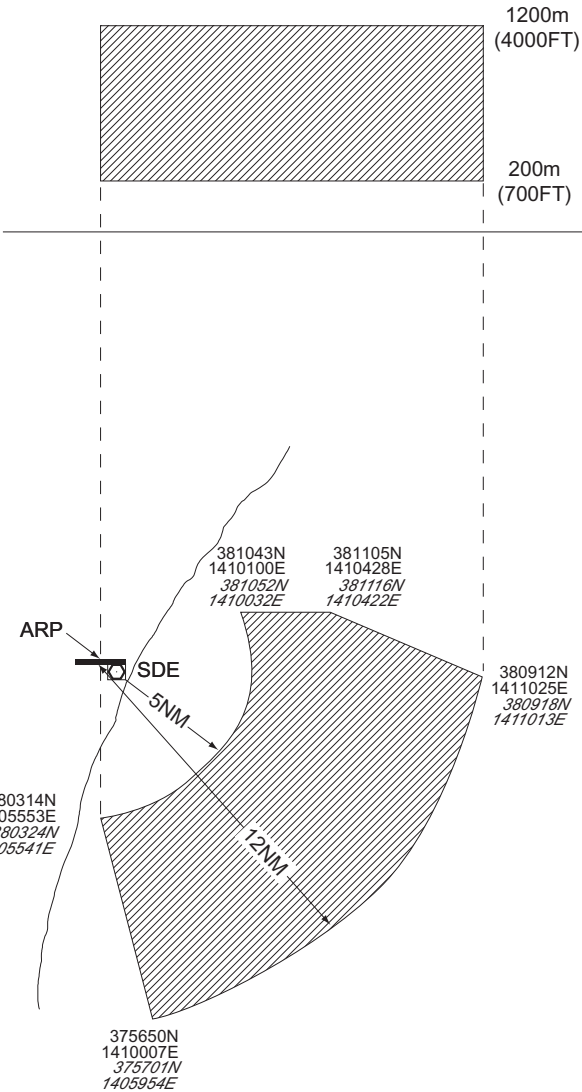

仙台進入管制区  
Sendai Approach Control Area

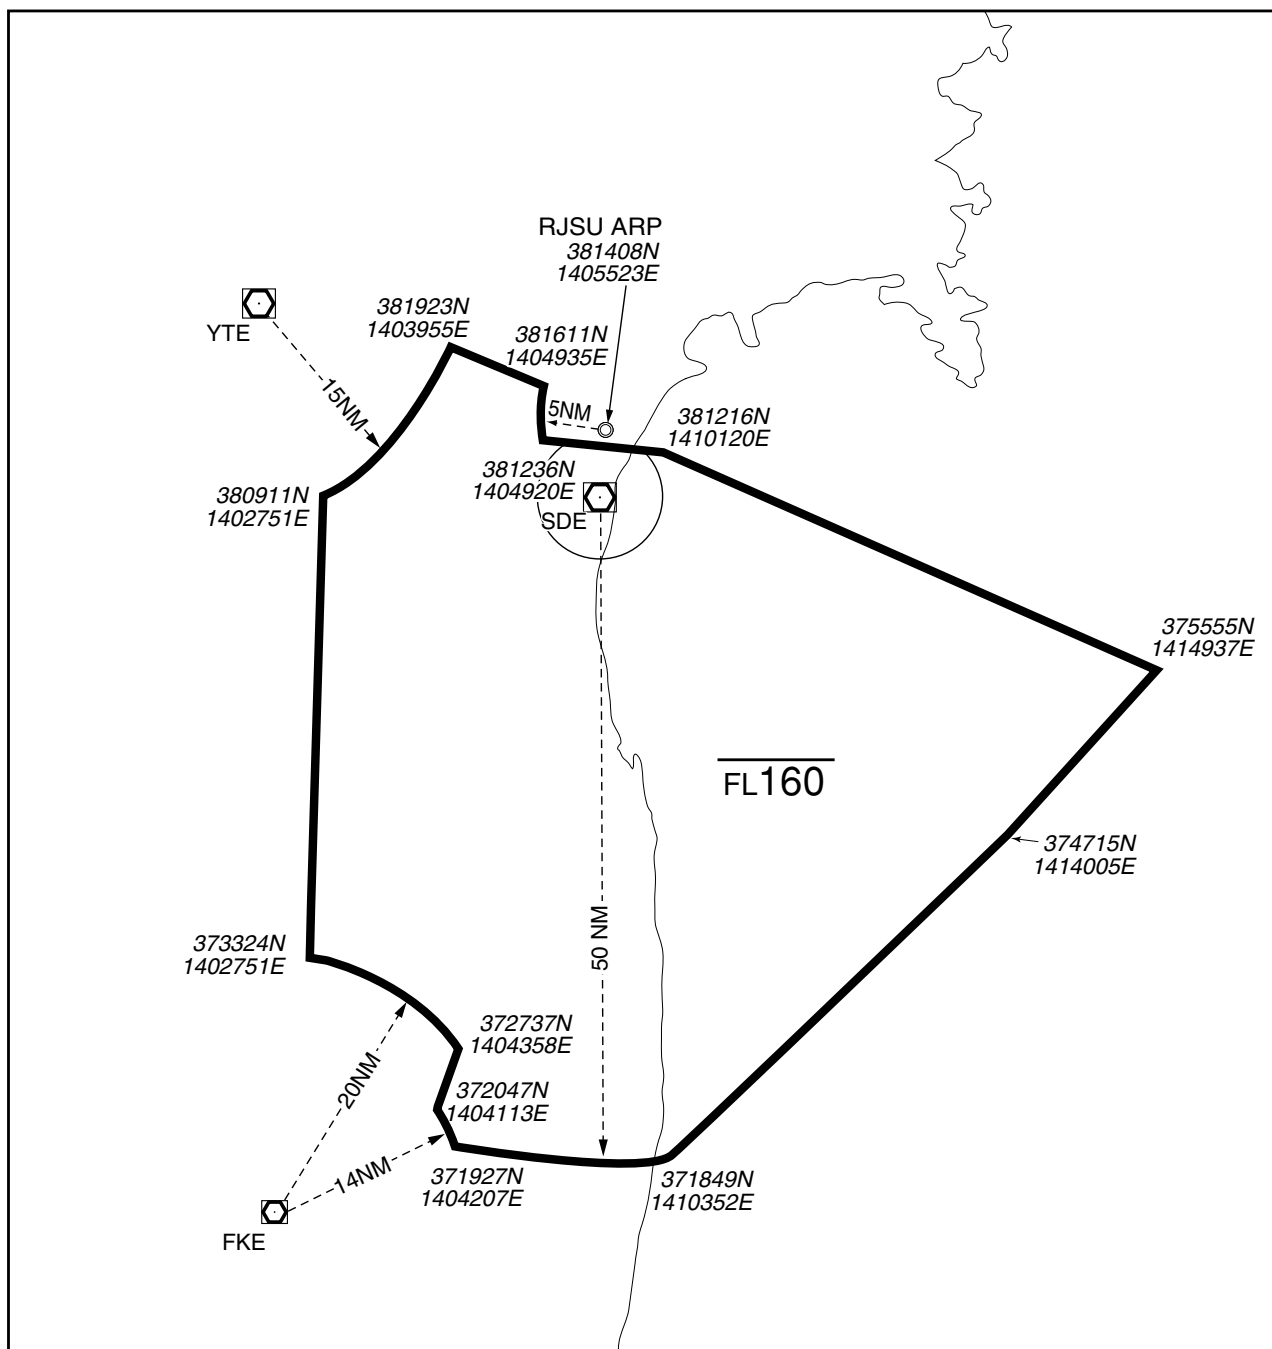

仙台ターミナルコントロールエリア  
Sendai Terminal Control Area

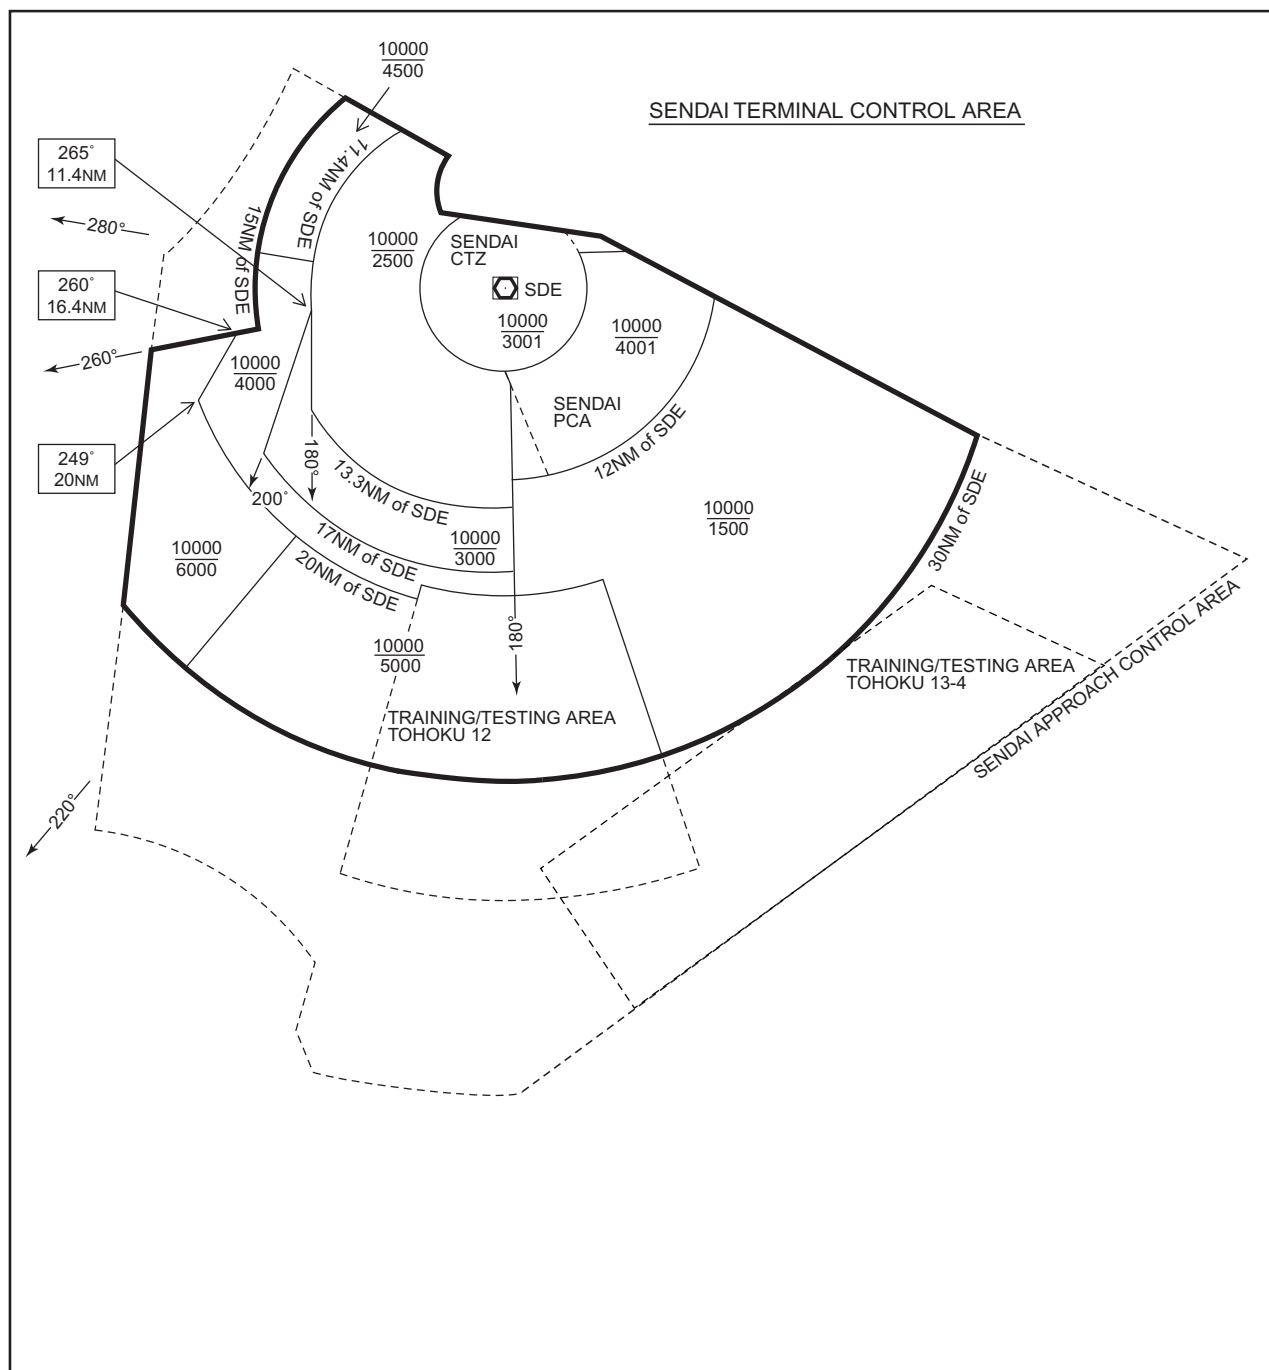


## RJSS AD 2.18 ATS COMMUNICATION FACILITIES

| Service designation                                                                   | Call sign        | Frequency                                              | Hours of operation | Remarks                                |
|---------------------------------------------------------------------------------------|------------------|--------------------------------------------------------|--------------------|----------------------------------------|
| 1                                                                                     | 2                | 3                                                      | 4                  | 5                                      |
| APP                                                                                   | Sendai Approach  | 120.4MHz<br>261.2MHz<br><br>121.5MHz(E)<br>243.0MHz(E) | 2230 - 1300        | (1)Primary                             |
| ASR                                                                                   | Sendai Radar     | 121.2MHz<br>121.5MHz(E)<br>243.0MHz(E)                 | 2230 - 1300        |                                        |
| DEP                                                                                   | Sendai Departure | 120.0MHz<br>121.5MHz(E)<br>243.0MHz(E)                 | 2230 - 1300        |                                        |
| TCA                                                                                   | Sendai TCA       | 121.025MHz<br>225.2MHz                                 | 2300 - 1030        |                                        |
| TWR                                                                                   | Sendai Tower     | 118.7MHz(1)<br>126.2MHz<br>121.5MHz(E)<br>243.0MHz(E)  | 2230 - 1200(*)     |                                        |
| GND                                                                                   | Sendai Ground    | 121.7MHz                                               | 2230 - 1200(*)     |                                        |
| ATIS                                                                                  | Sendai Airport   | 126.45MHz                                              | 2230 - 1300        |                                        |
| AFIS                                                                                  | Sendai Radio     | 118.7MHz                                               | 1200 - 1300(*)     | Operated by New Chitose Airport Office |
| * Depending on air traffic situation, ATC service will be provided from 1200 to 1215. |                  |                                                        |                    |                                        |

## RJSS AD 2.19 RADIO NAVIGATION AND LANDING AIDS

| Type of aid<br>(VOR<br>declination) | ID  | Frequency            | Hours of<br>operation | Position of<br>transmitting<br>antenna<br>coordinates | Elevation of<br>DME<br>transmitting<br>antenna | Remarks                                                                                                                    |
|-------------------------------------|-----|----------------------|-----------------------|-------------------------------------------------------|------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| 1                                   | 2   | 3                    | 4                     | 5                                                     | 6                                              | 7                                                                                                                          |
| VOR<br>(8°W/2010)                   | SDE | 116.3MHz             | H24                   | 380818.86N/<br>1405517.34E                            |                                                | VOR unusable:<br><br>271° BTN 20 - 22nm                                                                                    |
| DME                                 | SDE | 1197MHz<br>(CH-110X) | H24                   | 380818.86N/<br>1405517.34E                            | 54ft                                           |                                                                                                                            |
| ILS-LOC 27                          | ISD | 111.7MHz             | 2230 - 1300           | 380818.56N/<br>1405345.94E                            |                                                | LOC:235m(771ft) away FM<br>RWY 09 THR,<br>BRG (MAG) 270°.                                                                  |
| ILS-GP 27                           | -   | 333.5MHz             | 2230 - 1300           | 380835.20N/<br>1405543.58E                            |                                                | GP:328m(1076ft) inside FM<br>RWY 27 THR,<br>138m(453ft) N of RCL.<br>HGT of ILS Ref datum<br>16.4m(54ft)<br>GP angle 3.0°. |
| ILS-DME 27                          | ISD | 1015MHz              | 2230 - 1300           | 380835.09N/<br>1405543.23E                            | 24ft                                           | DME:337m(1106ft) inside<br>FM RWY 27 THR,<br>136m(446ft) N of RCL.                                                         |
| MSAS                                |     | 1575.42MHz           | H24                   |                                                       |                                                | Transmitting antennas are<br>satellite based                                                                               |

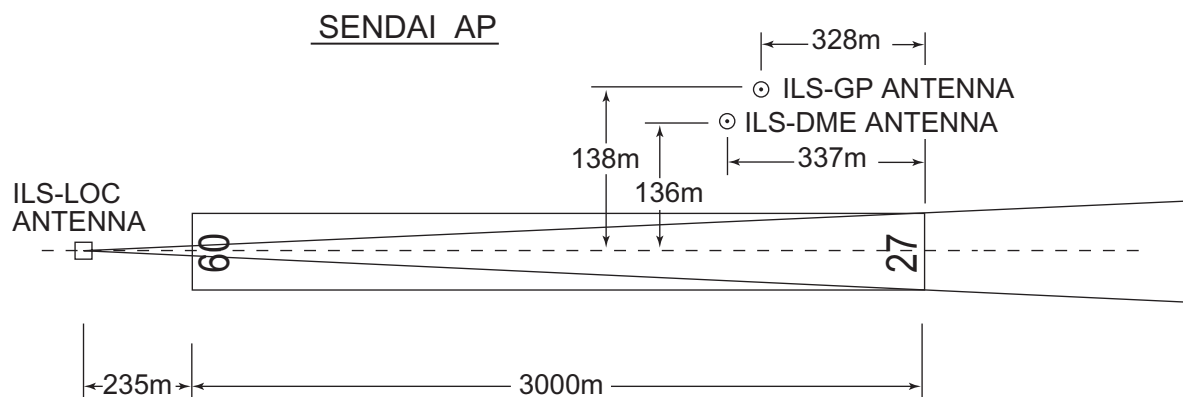ILS

REMARKS : 1 LOC beam BRG(MAG) 270°  
 2 ILS-GP Angle 3.0°  
 3 HGT of ILS REF datum 16.4m(54ft)  
 4 ELEV of ILS-DME 7.4m(24ft)

## RJSS AD 2.20 LOCAL TRAFFIC REGULATIONS

## 1. Airport regulations

## 1.1 Aircraft operations, other than scheduled or in emergency.

When using this airport, aircraft operators are required to obtain prior permission of the airport administrator in order to allocate appropriate parking area.

## 1.2 Prior notification should be required with AD Administration for the purpose of getting the permission when crossing Sendai CTR from 1200UTC to 1300UTC.

For further information (0000UTC - 0800UTC MON - FRI EXC HOL)  
Air Traffic Controller Office, Sendai Airport Office  
TEL: 022-383-1669

21 時 00 分から 22 時 00 分までの間、仙台管制圏を通過する場合は、当該通過の許可を得るためにあらかじめ仙台空港事務所へ調整すること。

問い合わせ先

仙台空港事務所管制官事務室

(月曜日から金曜日までのうち、9 時 00 分から 17 時 00 分までの間。ただし休日を除く。)

TEL: 022-383-1669

## 1.3 Time restriction on departures and arrivals.

RWY 12/30 is not available for take-off and landing when AFIS provided.

## 2. Taxiing to and from stands

Nil

## 3. Parking area for small aircraft(General aviation)

Nil

## 4. Parking area for helicopters

Nil

## 5. Apron - taxiing during winter conditions

Nil

## 6. Taxiing - limitations

## 1. Wing tip clearance at the TWY intersection (REF AD1.1.6.8)

Wing tip clearance at the TWY intersection between the aircraft holding at the stop marking on the TWY and the other aircraft taxiing behind it are as follows.

When B773 holding at the stop marking on TWY B2, B3, B4 or B5

| Wing Span (WS) of aircraft taxiing on TWY C1-C6 | WS ≤ 30.2m | WS > 30.2m |
|-------------------------------------------------|------------|------------|
| Wing tip clearance                              | *B         | *C         |

Legend:

\*A : wing tip clearance ≥ 15m

\*B : 6.5m ≤ wing tip clearance < 15m

\*C : wing tip clearance < 6.5m

## 7. School and training flights - technical test flights - use of runways

Nil

## 8. Helicopter traffic - limitation

Nil

## 9. Removal of disabled aircraft from runways

Nil

## RJSS AD 2.21 NOISE ABATEMENT PROCEDURES

## 1 騒音軽減運航方式

すべてのジェット機に対して、空港周辺における航空機騒音軽減のため、運航の安全に支障のない範囲で、以下の方式が適用される。ただし、これらの方式によることができない航空機は実効的にこれらと同等と認められる代替方式を実施するものとする。

- 1) 離陸について（滑走路 27）  
急上昇方式
- 2) 着陸について（滑走路 09）  
ディレイド・フラップ進入方式及び低フラップ角  
着陸方式
- 3) リバース・スラストについて  
21 時 30 分以降翌朝 7 時 30 分までの間、着陸機におけるリ  
バース・スラスト使用についてはアイドルまでに制限する。

## 2 優先滑走路方式

すべてのジェット機及び証明された最大離陸重量が 5,700kg (12,500lbs) を超えるプロペラ機を対象とし、離陸は滑走路 09、着陸は滑走路 27 により優先的に行うこととする。ただし、航行の安全確保などに万全を期すため、以下に示す条件等にあっては、本方式は適用されない。

- 1) 機長が航行の安全を考慮して、反対側滑走路に離着陸を行う必要があると判断した場合
- 2) 滑走路面の状況が適当でない場合
- 3) 突風を含め追風成分が 5knot を超える場合
- 4) 突風を含め横風成分が 15knot を超える場合
- 5) 秩序ある航空交通流が乱される恐れがある場合
- 6) 特別な訓練、航行援助施設の検査のために反対側滑走路に離着陸を行うことが特に必要であると認められる場合

(See AIP AD 1.1.6.5)

## 1 Noise Abatement Operating Procedures

For all jet aircraft, in order to reduce aircraft noise in the vicinity of airport, the following procedures shall be applied unless compliance of the procedures adversely affects the safety of aircraft operations. In case that the aircraft is unable to take these procedures, pilots should execute alternative procedures which are considered to be practically equivalent.

- 1) For take-off from RWY27  
Steepest Climb Procedure
- 2) For landing to RWY09  
Delayed Flap Approach Procedure and Reduced Flap Setting Procedure
- 3) Reverse Thrust  
Between 1230UTC(2130JST) and 2230UTC(0730JST), pilots are requested to limit the use of reverse thrust to idle reverse after landing.


## 2 Preferential Runways Procedures

For all jet aircraft and propeller-driven aircraft having a maximum certificated take-off weight of more than 5,700kg (12,500lbs), in principle, RWY09 for take-off and RWY27 for landing are preferentially to be used. However, in order to achieve maximum flight safety, this procedure is not applied under the following circumstances.

- 1) When a pilot-in-command determines that the use of other runway is necessary in consideration of safety of the aircraft operation.
- 2) When the condition of the specified runway is not suitable for landing or take-off.
- 3) When the tail wind component, including gusts, exceeds 5 knots.
- 4) When the cross wind component, including gusts, exceeds 15 knots.
- 5) When the possibility exists that orderly flow of traffic may be impeded.
- 6) When the use of other runways is considered especially necessary for the purpose of special training, inspection of navigational facilities, etc.



|                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>3. 優先飛行経路</div> <div>1) 滑走路 27 からの離陸<br/>滑走路 27 から離陸する航空機にあつては、空港の西南西 4 海里付近の住居地区（別添図参照）上空を可能な限り避けて飛行すること。</div> <div>2) 滑走路 09 への着陸<br/>滑走路 09 へ着陸する航空機にあつては、空港の西北西 2.5 海里付近の住居地区（別添図参照）上空を可能な限り避けて飛行すること。</div> <div>4. 標準計器出発方式の使用<br/>空港周辺地域における航空機騒音を減少させるため、21 時 30 分以降翌朝 7 時までの間においては、緊急またはやむを得ない状況にある航空機を除き、以下の標準計器出発方式に従うこと。</div> <div>滑走路 27 からの離陸<br/>DERBY DEPARTURE</div> | <div>3 Noise Preferential Routes</div> <div>1) Take-off from RWY27<br/>All aircraft departing from RWY27 are urged to avoid, as far as practicable, flying over the residential area located about 4NM WSW of the airport. (See the attached chart.)</div> <div>2) Landing on RWY09<br/>All aircraft arriving on RWY09 are urged to avoid, as far as practicable, flying over the residential area located about 2.5NM WNW of the airport. (See the attached chart.)</div> <div>4 Use of SIDs for Noise Abatement<br/>In order to reduce aircraft noise around the airport, all aircraft are requested to fly via following SIDs during the hours from 1230UTC(2130JST) to 2200UTC(0700JST) except aircraft an emergency or in an unavoidable situation.</div> <div>Take-off from RWY27<br/>DERBY DEPARTURE</div> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

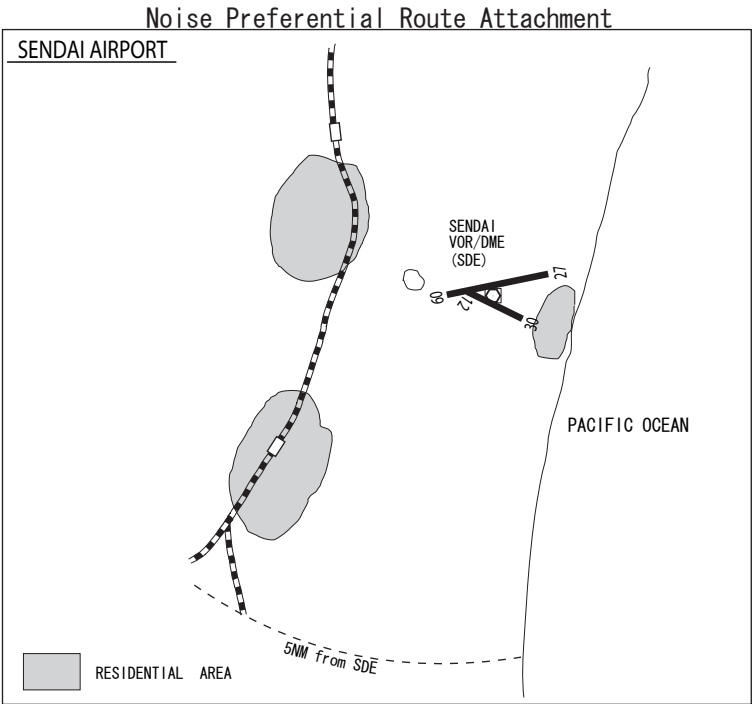

RJSS AD 2.22 FLIGHT PROCEDURES

1. TAKE OFF MINIMA

|                                                    | RWY | ACFT<br>CAT | REDL & RCLL     |          | REDL or RCLL<br>or RCL Marking |            | NIL<br>(DAYTIME ONLY) |            |
|----------------------------------------------------|-----|-------------|-----------------|----------|--------------------------------|------------|-----------------------|------------|
|                                                    |     |             | CEIL-RVR        | CEIL-VIS | CEIL-RVR                       | CEIL-VIS   | CEIL-RVR              | CEIL-VIS   |
| Multi-Engine<br>ACFT with<br>TKOF ALTN<br>AP FILED | 09  | A,B,C,D     | -               | 0'-400m  | -                              | 0'-400m    | -                     | 0'-500m    |
|                                                    | 27  |             | 0'-400m         | 0'-400m  | 0'-400m                        | 0'-400m    | -                     | 0'-500m    |
|                                                    | 12  | A,B,C       | -               | -        | -                              | 200'-1600m | -                     | 200'-1600m |
|                                                    | 30  |             | -               | -        | -                              | 0'-400m    | -                     | 0'-500m    |
| OTHER                                              | 09  | A,B,C,D     | AVBL LDG MINIMA |          |                                |            |                       |            |
|                                                    | 27  |             |                 |          |                                |            |                       |            |
|                                                    | 12  | A,B,C       |                 |          |                                |            |                       |            |
|                                                    | 30  |             |                 |          |                                |            |                       |            |

**2. Lost communication procedures for arrival aircraft under radar navigational guidance**

If radio communications with Sendai Approach/Radar are lost for 1 minute, squawk Mode A/3 Code 7600 and :

- (I) 1. Contact Sendai Tower / Sendai Radio  
2. If unable, proceed in accordance with Visual Flight Rules.  
3. If unable, proceed to Sendai VOR/DME at last assigned altitude or 3,000 feet whichever is higher, and execute instrument approach.
- (II) Procedures other than above will be issued when situation required.

**3. Trajectorized Airport Traffic Data Processing System (TAPS)**

Aircraft flying in Sendai approach control area under its control will be instructed to reply with discrete code on Mode A/3 and Mode C.

If an aircraft has no capability of replying with discrete code, the pilot shall report ATC if so instructed.

仙台アプローチの指示のもとに、当該進入管制区を飛行する航空機は、モード A/3 の二次レーダー個別コード及びモード C による応答を指示される。  
二次レーダー個別コードを搭載していない航空機が個別コードによる応答を指示された場合は、管制官に対しその旨通報すること。

**4. Traffic pattern**

- (1) In order to avoid congestion of arriving aircraft and to make orderly flow on traffic pattern, aircraft are desirable to fly at the altitude from 2230UTC to 1200UTC.

However, in case it is difficult to fly at the altitude due to weather and so on, aircraft shall report it to "SENDAI TWR" with your proposed altitude.

Traffic pattern altitude as follows.

- i) Fixed wing ACFT
- |              |         |
|--------------|---------|
| a) JET       | 1,500ft |
| b) PROPELLER | 1,000ft |
- ii) Rotor craft 600ft
- (2) Aircraft are desirable to fly at or above 1,000ft in hours other than (1) above.
- (3) Aircraft using north traffic pattern should pay enough attention to keep out of KASUMINOME CTR.
- (1) 到着機が輻輳することを避け、かつ秩序ある飛行場周辺の航空交通の流れを促進するために、7 時 30 分から 21 時までの間、場周経路において航空機は以下の高度で飛行することが望ましい。  
ただし、天候等により以下の高度により飛行できない場合は“仙台タワー”に希望飛行高度とともにその旨を通報すること。  
場周経路を飛行する際の高度は以下のとおり
- i) 固定翼航空機
- |         |         |
|---------|---------|
| a) ジェット | 1,500ft |
| b) プロペラ | 1,000ft |
- ii) 回転翼航空機 600ft
- (2) (1) 以外の時間は、すべての航空機は高度 1,000 フィート以上で飛行することが望ましい。
- (3) 北側の場周経路を使用する場合は霞目管制圏に入域しないように留意すること。

## RJSS AD 2.23 ADDITIONAL INFORMATION

**Experimental Radio Facilities**

Experimental radio facilities of Aeronautical Safety College Iwanuma Training Center at Sendai Airport as follows. These radio facilities are not to be used as Naviaids.


| Facility  | Frequency (MHz) | Power    | ID  | Coordinate of antenna                | Hour of OPS                         |
|-----------|-----------------|----------|-----|--------------------------------------|-------------------------------------|
| LOC       | 109.9           | 10W      | EKD | 380812N/1405505E                     | H24<br>(Intermittent transmissions) |
| GP        | 333.8           | 2W       | -   | 380811N/1405504E                     |                                     |
| DME       | 997.0           | 100W     | EKD | 380811N/1405507E                     |                                     |
|           |                 |          |     |                                      |                                     |
| VOR/TACAN | 112.4/1158      | 100W/1KW | EIW | 380810N/1405506E<br>380811N/1405507E |                                     |
|           |                 |          |     |                                      |                                     |
|           |                 |          |     |                                      |                                     |

## RJSS AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome Chart -1  
Aerodrome Chart -2  
Aerodrome Obstacle Chart-ICAO type A (RWY09/27)  
Aerodrome Obstacle Chart-ICAO type B  
Standard Departure Chart - Instrument (IWAKI)  
Standard Departure Chart - Instrument (SENDAI)  
Standard Departure Chart - Instrument (DERBY-RNAV)  
Standard Departure Chart - Instrument (STEED-RNAV)  
Standard Departure Chart - Instrument (CUBIC-RNAV)  
Standard Arrival Chart - Instrument (PERID)  
Standard Arrival Chart - Instrument (LANCE WEST-RNAV)  
Standard Arrival Chart - Instrument (OWLET WEST-RNAV)  
Standard Arrival Chart - Instrument (LANCE EAST ALFA-RNAV)  
Standard Arrival Chart - Instrument (LANCE EAST BRAVO-RNAV)  
Standard Arrival Chart - Instrument (OWLET EAST ALFA-RNAV)  
Standard Arrival Chart - Instrument (OWLET EAST BRAVO-RNAV)  
Instrument Approach Chart (ILS Z or LOC Z RWY27)  
Instrument Approach Chart (ILS Y or LOC Y RWY27)  
Instrument Approach Chart (VOR RWY27)  
Instrument Approach Chart (VOR RWY30)  
Instrument Approach Chart (RNP RWY09 (LNAV/VNAV only))  
  
Instrument Approach Chart (RNP RWY27 (AR))  
Other Chart (Visual REP)  
Other Chart (LDG CHART)  
Other Chart (MVA CHART)


**INTENTIONALLY LEFT BLANK**

SENDAI AIRPORT  
ELEV 1.7m(5.6ft)

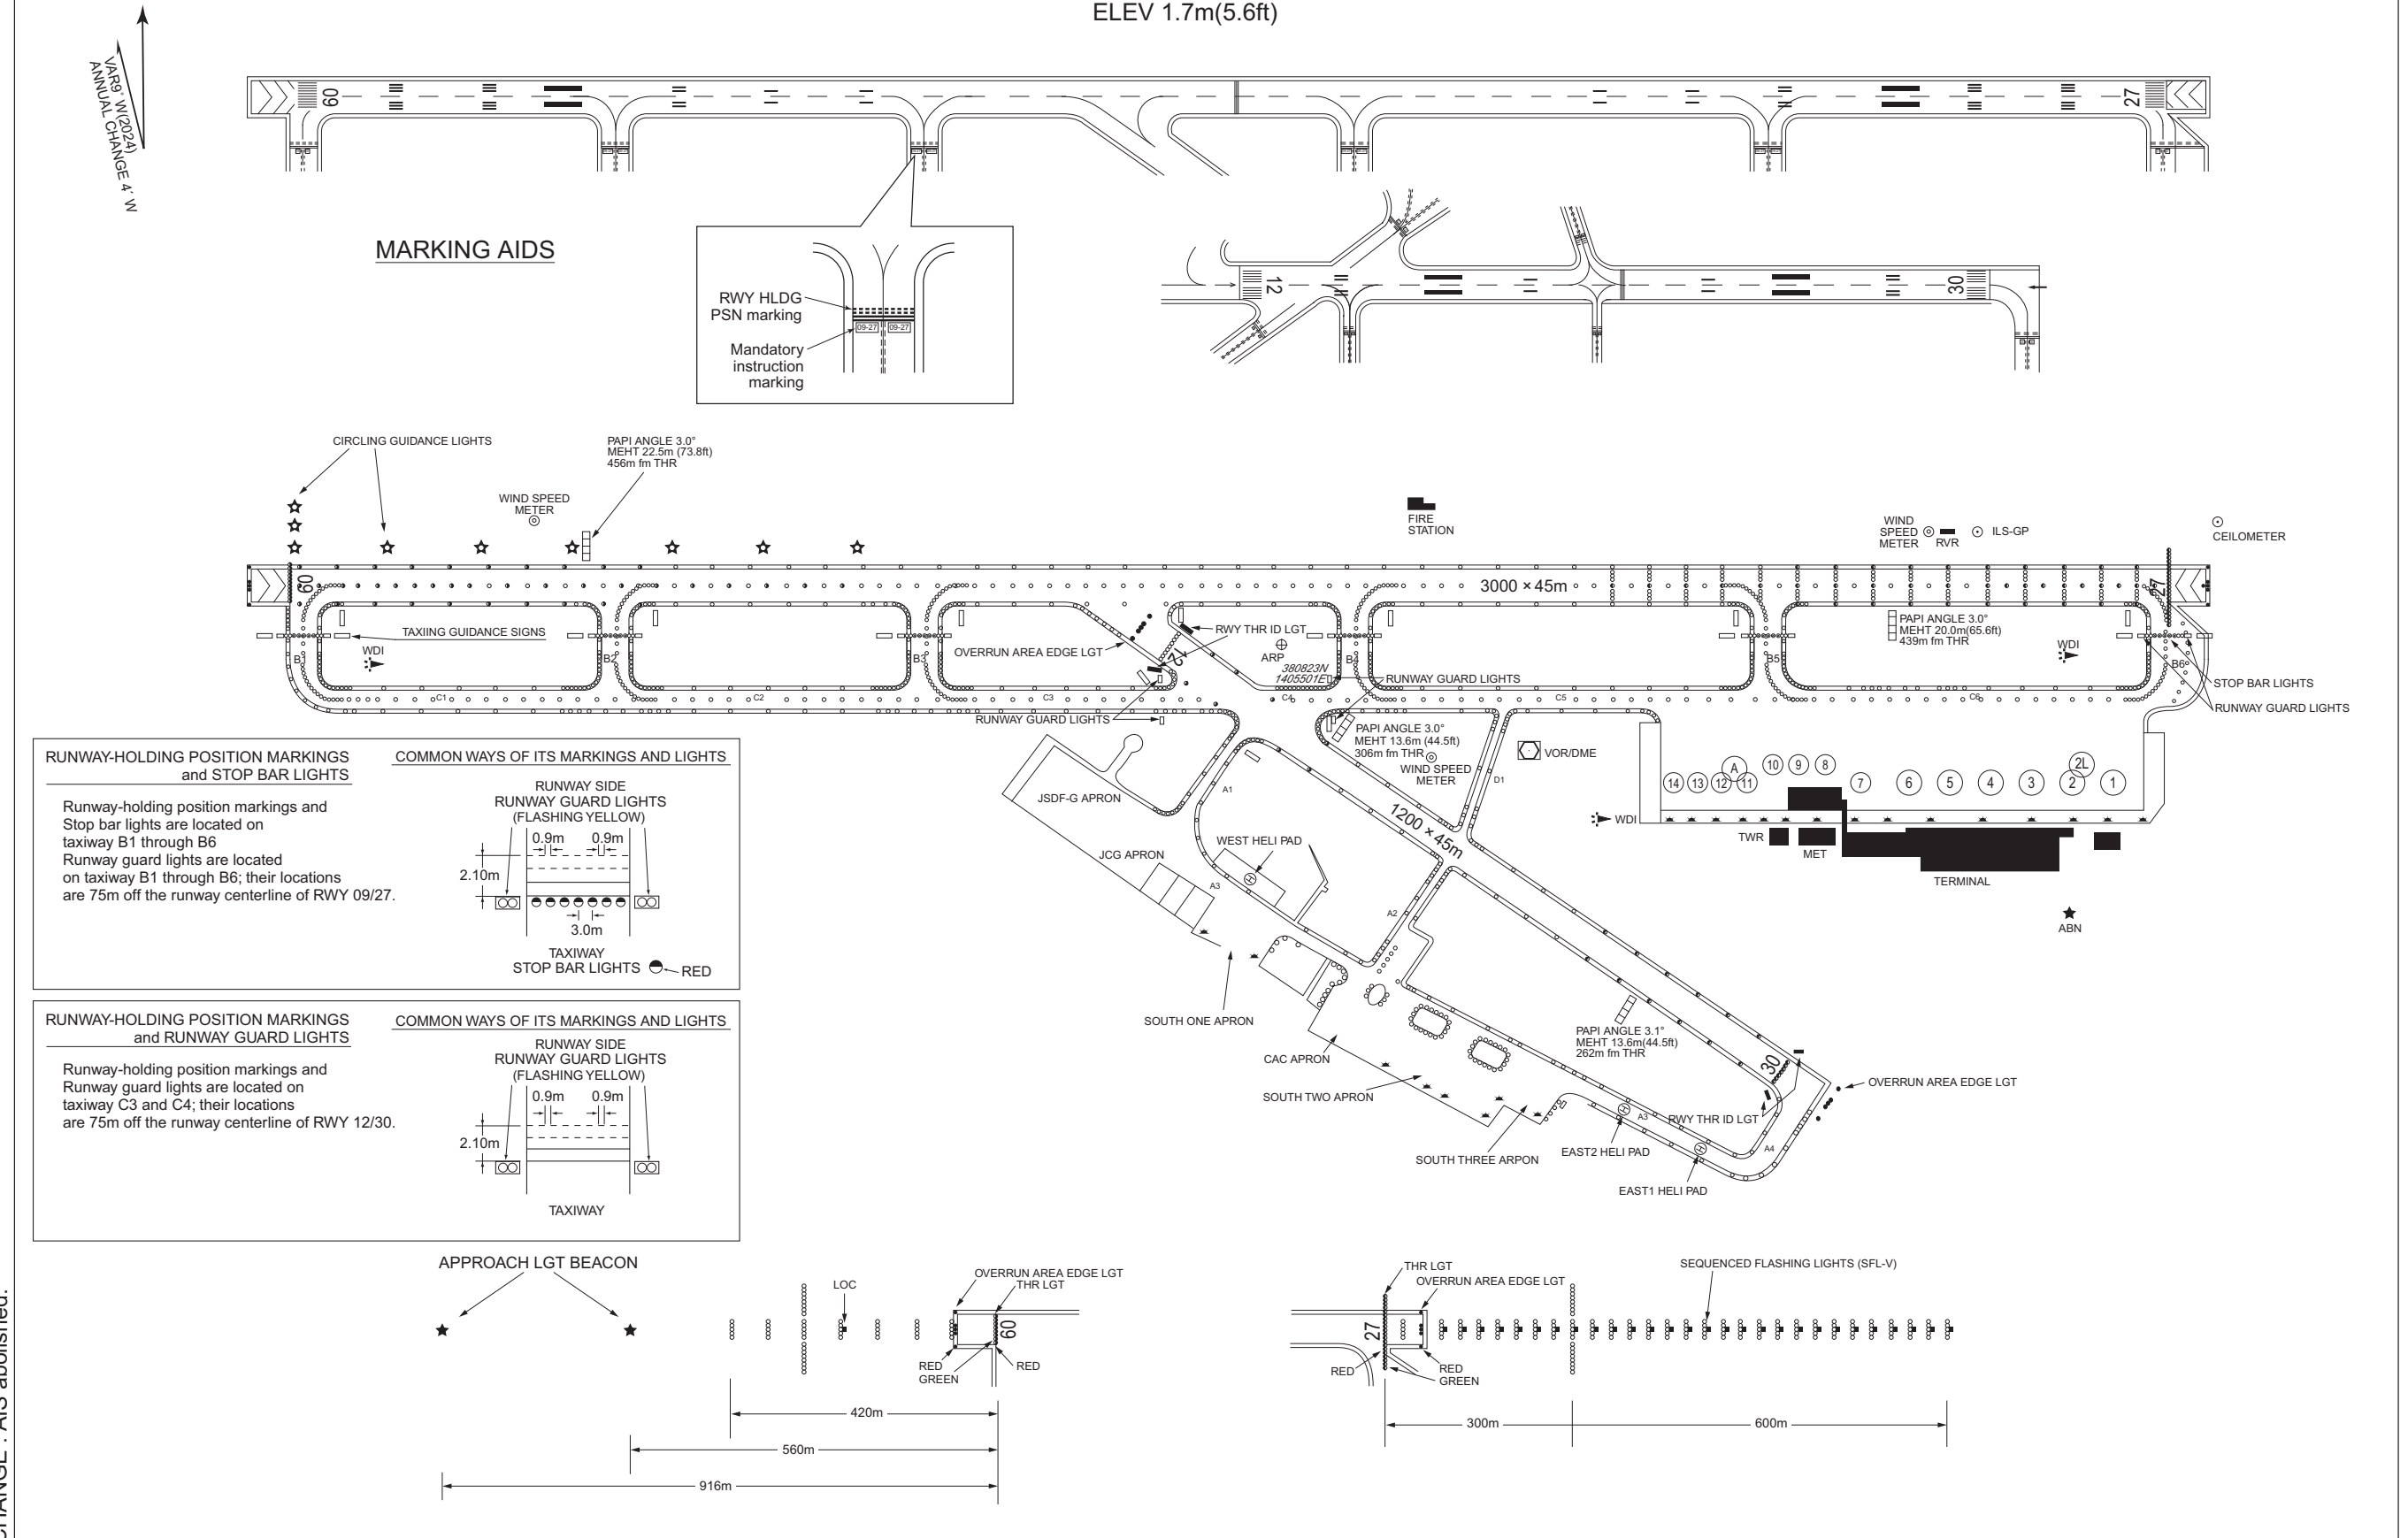

SENDAI AIRPORT  
ELEV 1.7m(5.6ft)


| Designation | Call Sign       | Frequency (MHz) | OPR HR(UTC) |
|-------------|-----------------|-----------------|-------------|
| ATIS        | Sentral Airport | 126.45          | 2230 - 1300 |
| GND         | Sentral Ground  | 121.7           | 2230 - 1200 |
| TWR         | Sentral Tower   | 118.7<br>126.2  | 2230 - 1200 |
| AFIS        | Sentral Radio   | 118.7           | 1200 - 1300 |

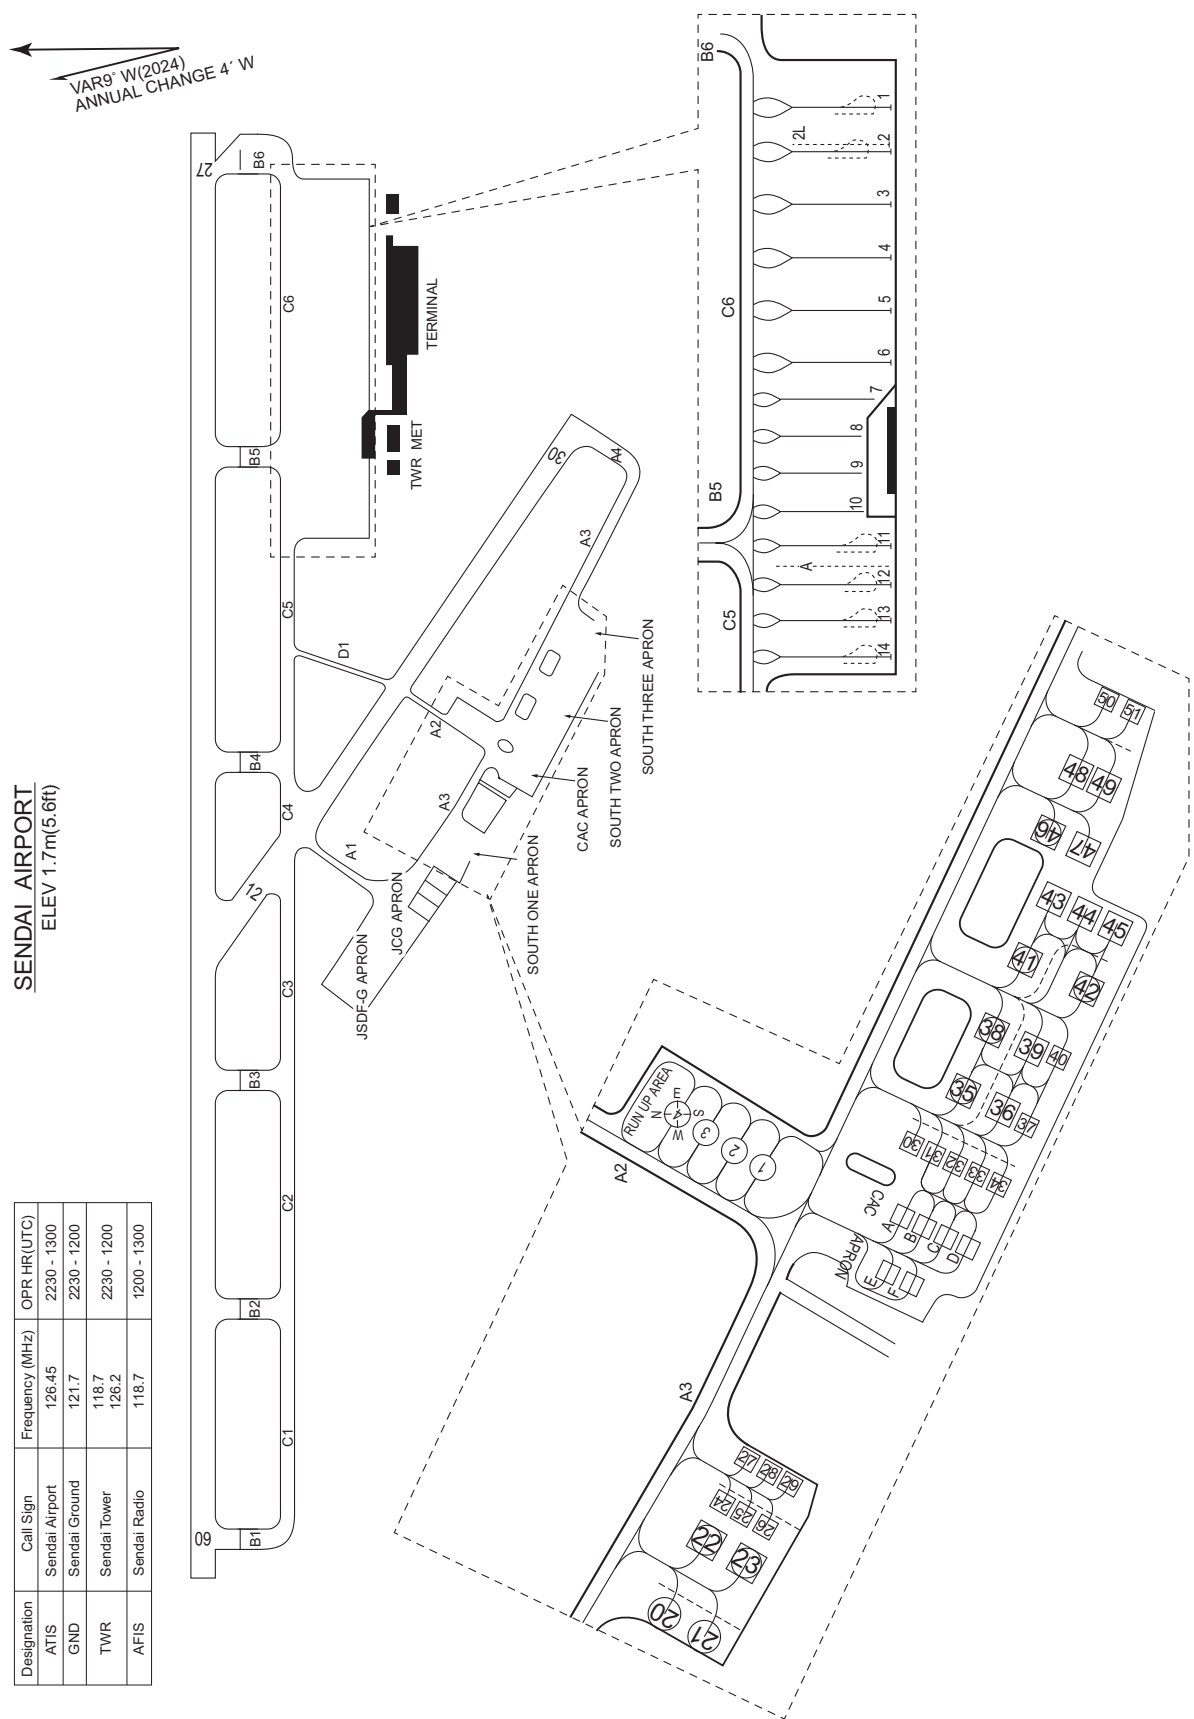

DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC  
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO  
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8° W-MAR 2025

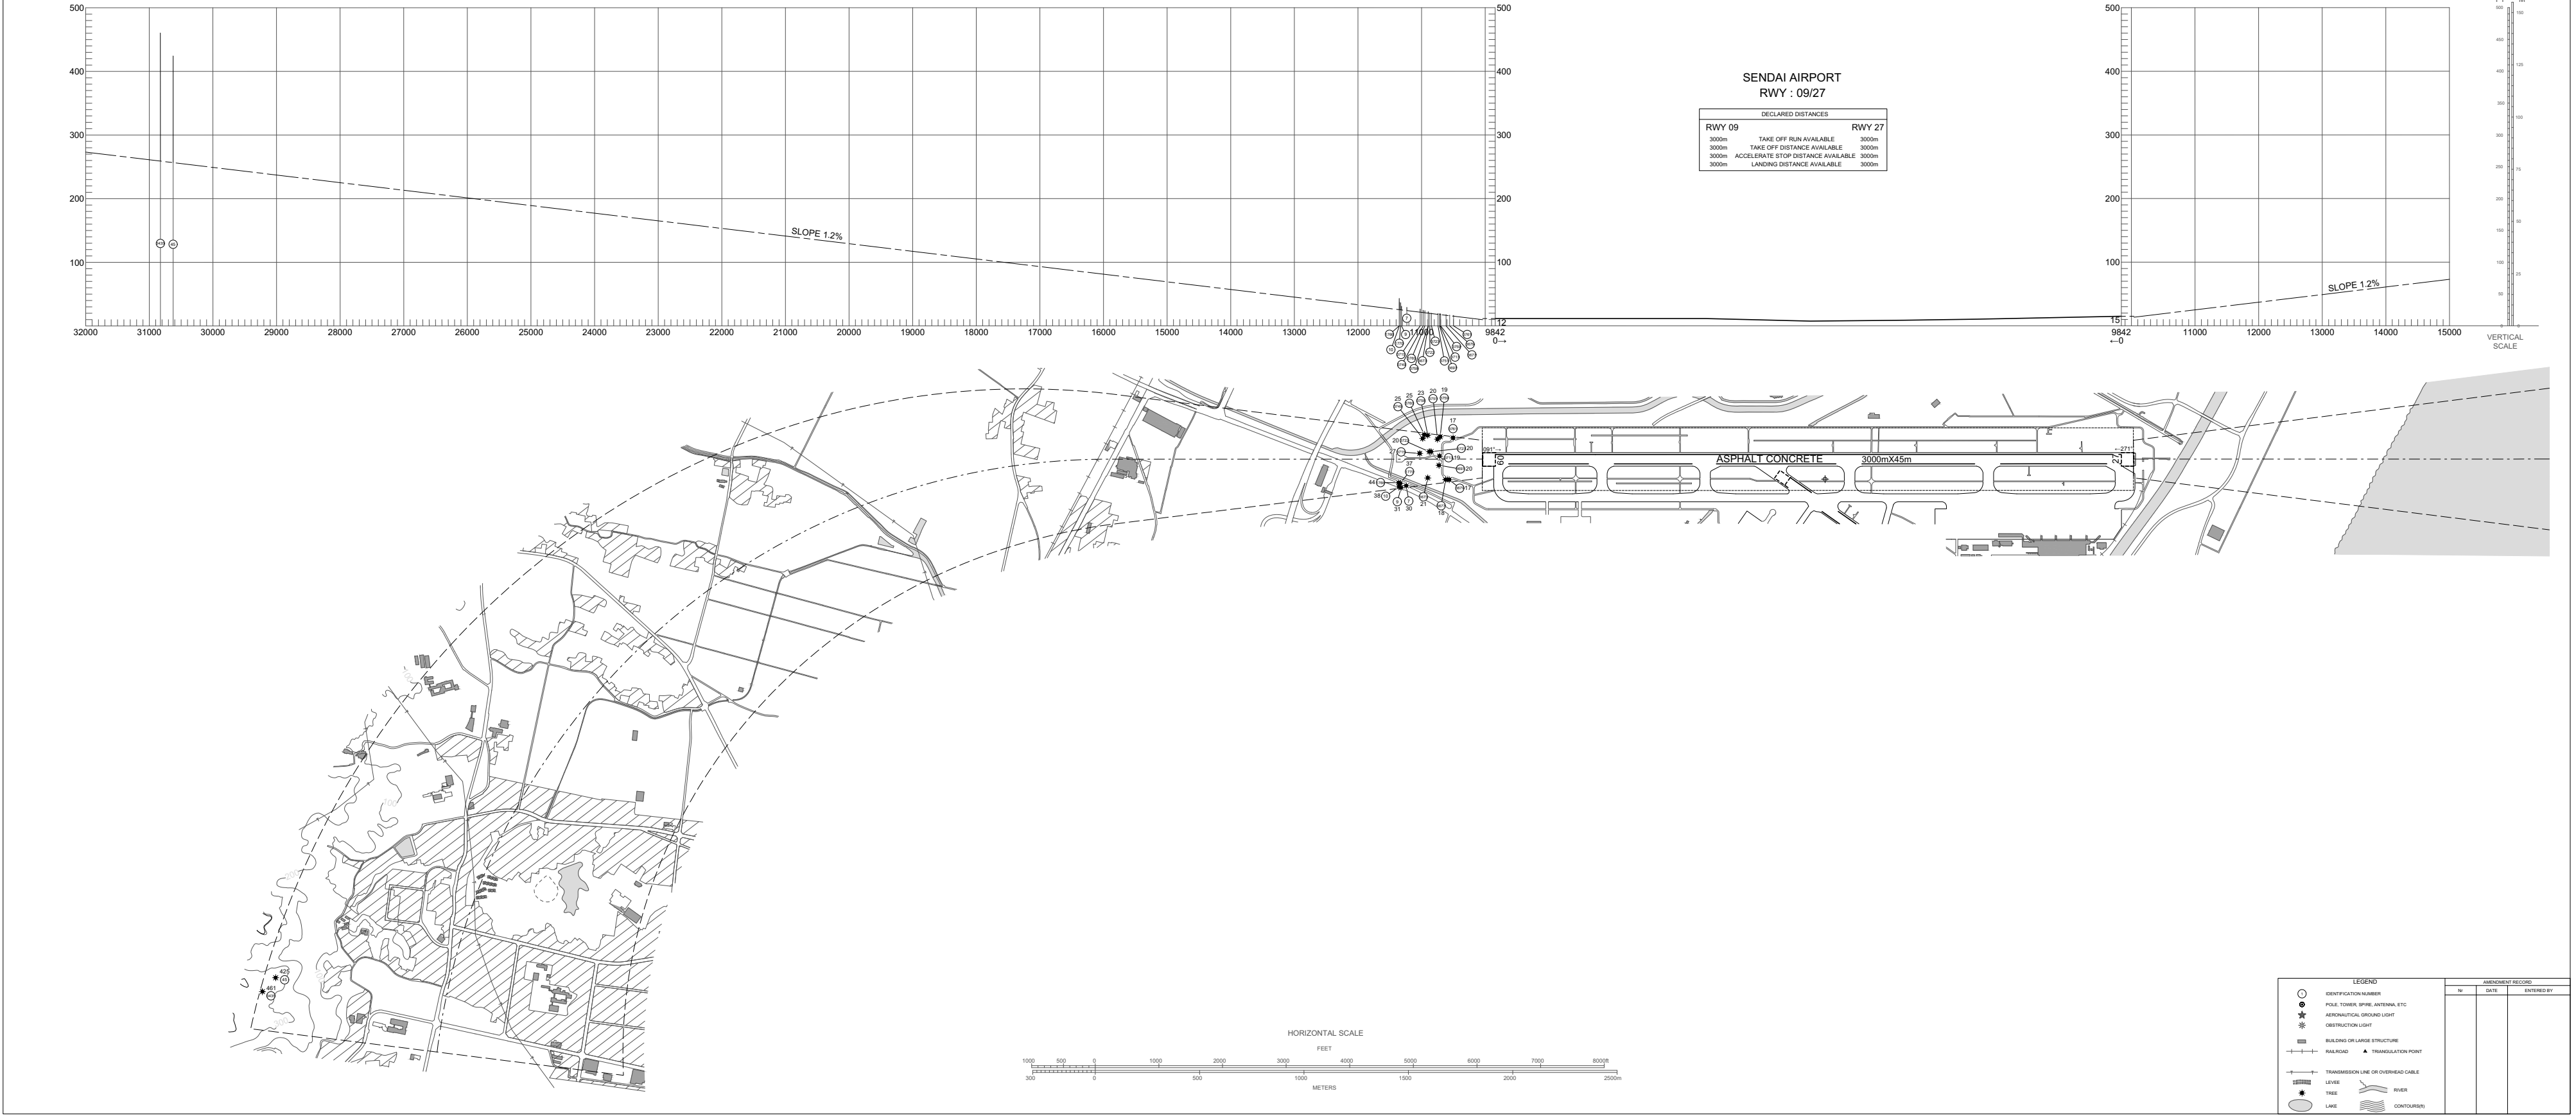



DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC  
Transverse Mercator Projection





STANDARD DEPARTURE CHART-INSTRUMENT

RJSS / SENDAI

SID

IWAKI EIGHT DEPARTURE

RWY 09 : Climb RWY HDG to SDE 3.4DME (2.8NM FM DER), turn right to intercept and proceed...

RWY 12 : Climb ...

RWY 27 : Climb RWY HDG to 500FT, turn left HDG 090° to intercept and proceed...

RWY 30 : Climb RWY HDG to 500FT, turn left HDG 090° to intercept and proceed...  
...via SDE R120, via IXE R024 to IXE VOR/DME.

Cross IXE R024/46.7DME at or above 11000FT, cross IXE R024/28.0DME at or above FL150, cross IXE VOR/DME at assigned altitude.

Note RWY 09 : 5.0% climb gradient required up to 500FT.

OBST ALT 62FT located at 0.2NM 102° FM end of RWY09.


RWY 27 : 5.0% climb gradient required up to 1000FT.

OBST ALT 919FT located at 4.1NM 269° FM end of RWY27.

RWY 30 : 5.0% climb gradient required up to 1200FT.

OBST ALT 1181FT located at 5.3NM 283° FM end of RWY30.

CHANGE : Description of PROC name.

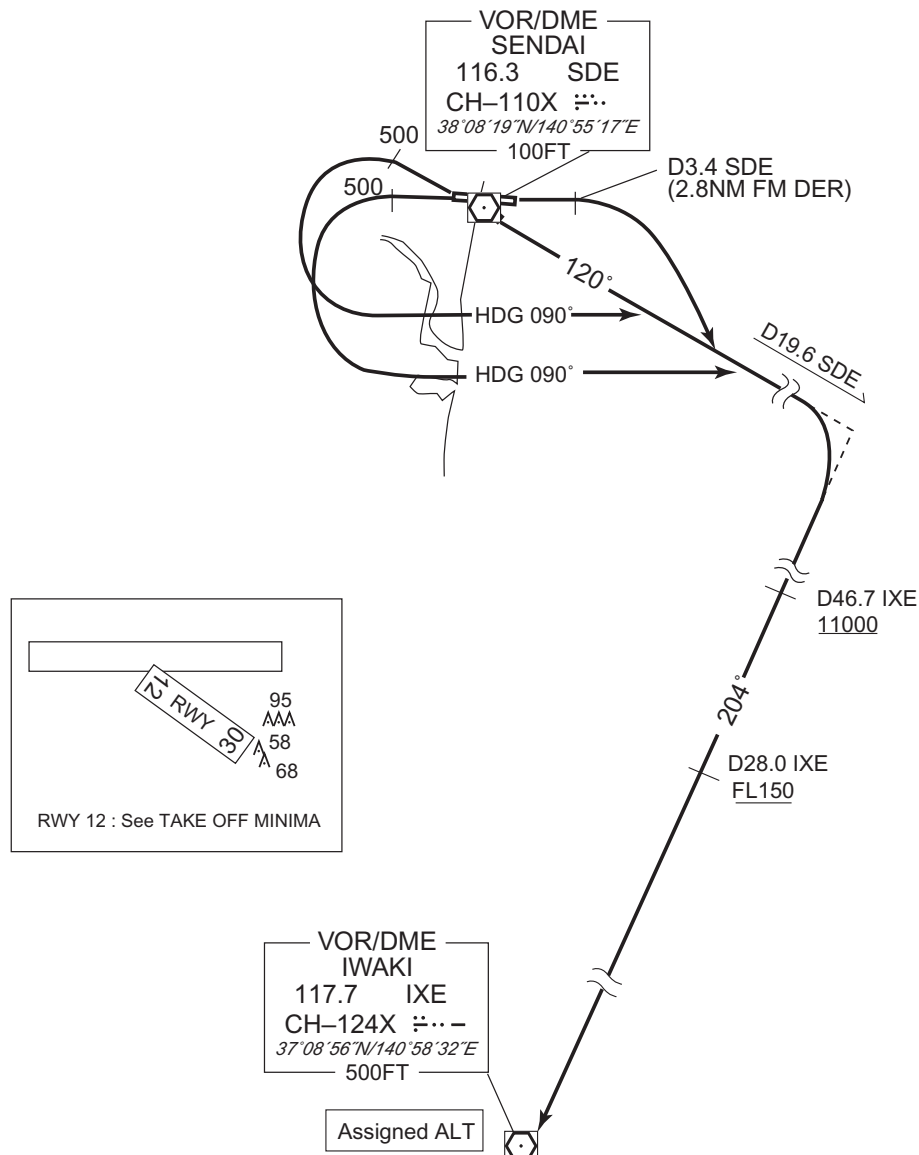

## STANDARD DEPARTURE CHART-INSTRUMENT

RJSS / SENDAI

SID

SENDAI REVERSAL SIX DEPARTURE

RWY 09 : Climb RWY HDG to SDE 3.4DME (2.8NM fm DER), turn right to intercept and proceed...

RWY 12 : Climb ...

RWY 27 : Climb RWY HDG to 500FT, turn left HDG 090° to intercept and proceed...

RWY 30 : Climb RWY HDG to 500FT, turn left HDG 090° to intercept and proceed...  
...via SDE R120 to 10.0DME, turn right, direct to SDE VOR/DME.

Cross SDE VOR/DME at or above 7000FT(\*).

\* In case of proceeding to IXE VOR/DME : Cross SDE VOR/DME at or above 5000FT.

In case of proceeding to FKE VOR/DME : Cross SDE VOR/DME at or above 6000FT.

Note RWY 09 : 5.0% climb gradient required up to 500FT.


OBST ALT 62FT located at 0.2NM 102° FM end of RWY09.

RWY 27 : 5.0% climb gradient required up to 1000FT.

OBST ALT 919FT located at 4.1NM 269° FM end of RWY27.


RWY 30 : 5.0% climb gradient required up to 1200FT.

OBST ALT 1181FT located at 5.3NM 283° FM end of RWY30.

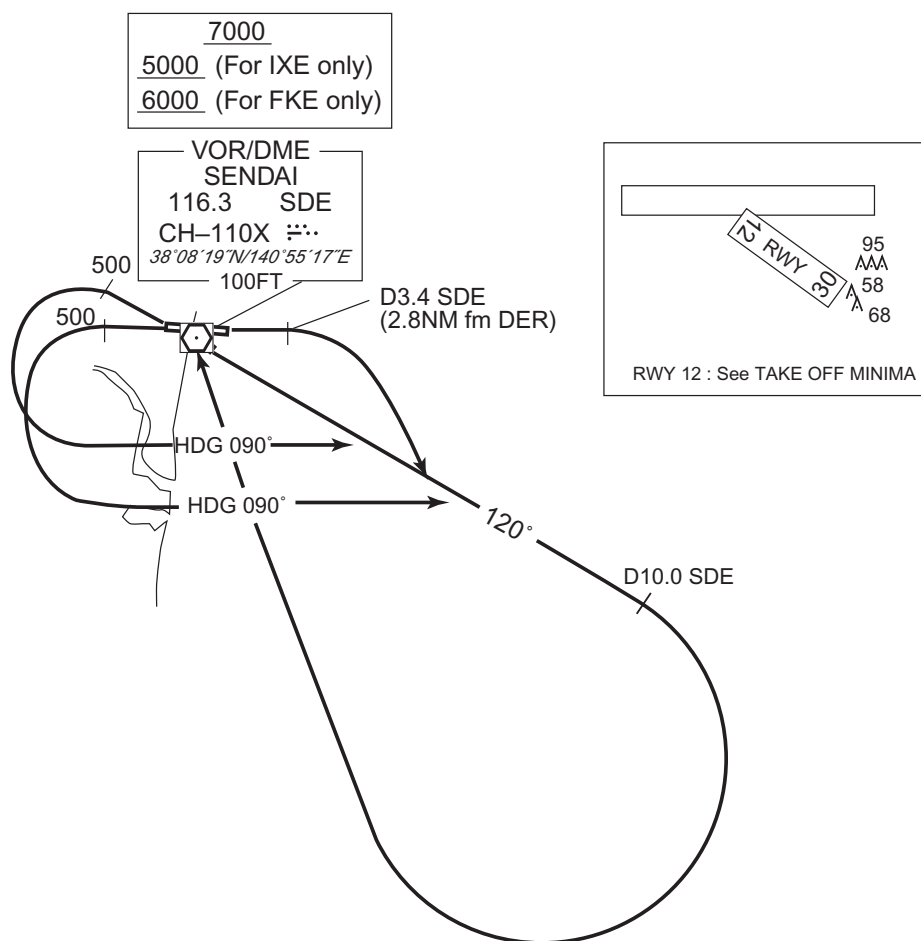

CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART - INSTRUMENT

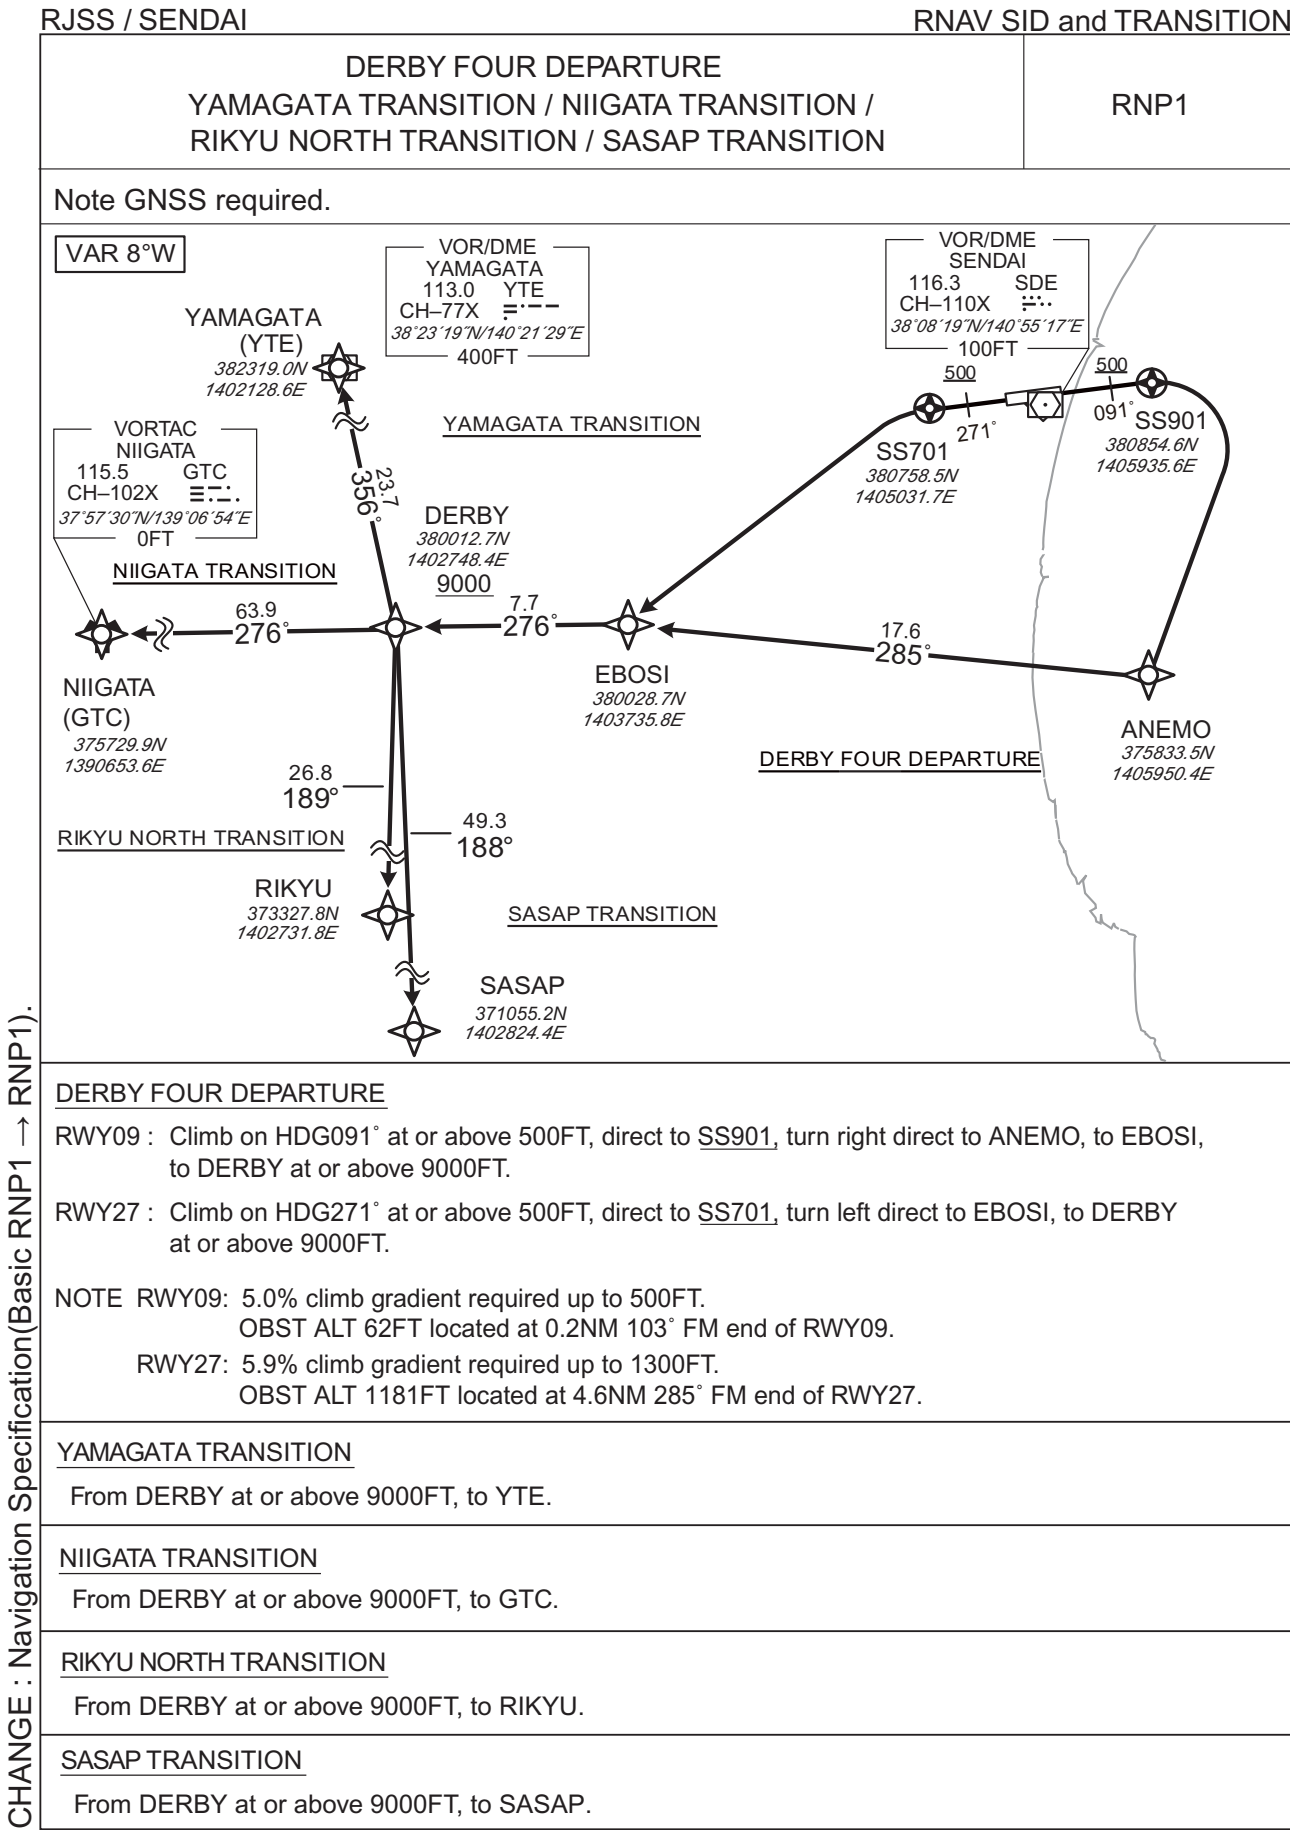

STANDARD DEPARTURE CHART - INSTRUMENT

RJSS / SENDAI

RNAV SID and TRANSITION

| DERBY FOUR DEPARTURE                                  |                 |                     |          |                |                    |               |                |               |              |                |                          |
|-------------------------------------------------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| RWY09                                                 |                 |                     |          |                |                    |               |                |               |              |                |                          |
| Serial Number                                         | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001                                                   | VA              | -                   | -        | 091<br>(082.5) | -8.3               | -             | -              | +500          | -            | -              | RNP1                     |
| 002                                                   | DF              | SS901               | Y        | -              | -8.3               | -             | -              | -             | -            | -              | RNP1                     |
| 003                                                   | DF              | ANEMO               | -        | -              | -8.3               | -             | R              | -             | -            | -              | RNP1                     |
| 004                                                   | TF              | EBOSI               | -        | 285<br>(276.4) | -8.3               | 17.6          | -              | -             | -            | -              | RNP1                     |
| 005                                                   | TF              | DERBY               | -        | 276<br>(268.1) | -8.3               | 7.7           | -              | +9000         | -            | -              | RNP1                     |
| RWY27                                                 |                 |                     |          |                |                    |               |                |               |              |                |                          |
| Serial Number                                         | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001                                                   | VA              | -                   | -        | 271<br>(262.5) | -8.3               | -             | -              | +500          | -            | -              | RNP1                     |
| 002                                                   | DF              | SS701               | Y        | -              | -8.3               | -             | -              | -             | -            | -              | RNP1                     |
| 003                                                   | DF              | EBOSI               | -        | -              | -8.3               | -             | L              | -             | -            | -              | RNP1                     |
| 004                                                   | TF              | DERBY               | -        | 276<br>(268.1) | -8.3               | 7.7           | -              | +9000         | -            | -              | RNP1                     |
| CHANGE : Navigation Specification(Basic RNP1 → RNP1). |                 |                     |          |                |                    |               |                |               |              |                |                          |

STANDARD DEPARTURE CHART - INSTRUMENT

RJSS / SENDAI

RNAV SID and TRANSITION

YAMAGATA TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | DERBY               | -        | -              | -8.3               | -             | -              | +9000         | -            | -              | RNP1                     |
| 002           | TF              | YTE                 | -        | 356<br>(347.9) | -8.3               | 23.7          | -              | -             | -            | -              | RNP1                     |

NIIGATA TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | DERBY               | -        | -              | -8.3               | -             | -              | +9000         | -            | -              | RNP1                     |
| 002           | TF              | GTC                 | -        | 276<br>(268.0) | -8.3               | 63.9          | -              | -             | -            | -              | RNP1                     |

RIKYU NORTH TRANSITION


| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | DERBY               | -        | -              | -8.3               | -             | -              | +9000         | -            | -              | RNP1                     |
| 002           | TF              | RIKYU               | -        | 189<br>(180.5) | -8.3               | 26.8          | -              | -             | -            | -              | RNP1                     |

SASAP TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | DERBY               | -        | -              | -8.3               | -             | -              | +9000         | -            | -              | RNP1                     |
| 002           | TF              | SASAP               | -        | 188<br>(179.4) | -8.3               | 49.3          | -              | -             | -            | -              | RNP1                     |

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART - INSTRUMENT

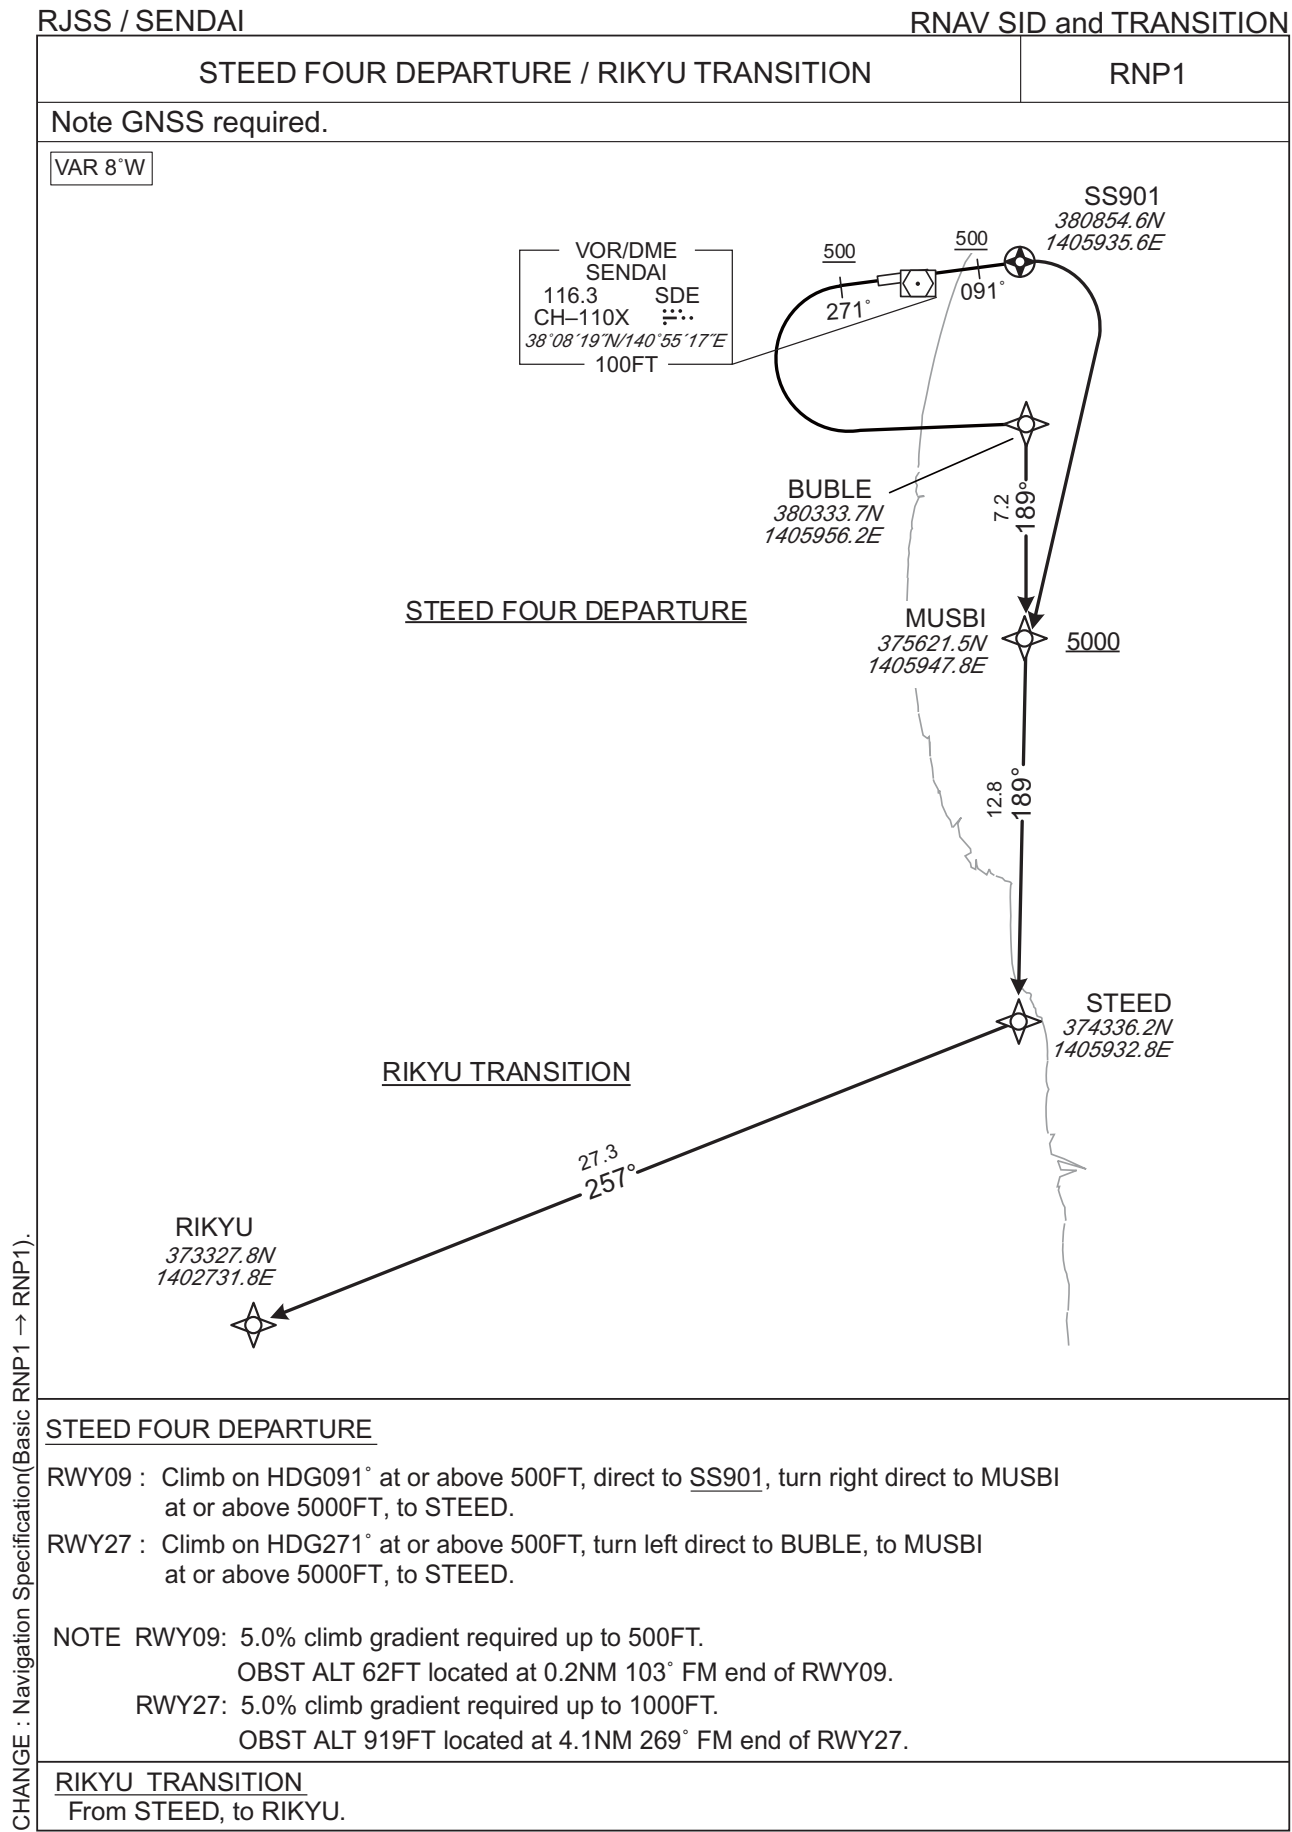

STANDARD DEPARTURE CHART - INSTRUMENT

RJSS / SENDAI

RNAV SID and TRANSITION

STEED FOUR DEPARTURE

RWY09

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 091<br>(082.5) | -8.3               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | SS901               | Y        | -              | -8.3               | -             | -              | -             | -            | -              | RNP1                     |
| 003           | DF              | MUSBI               | -        | -              | -8.3               | -             | R              | +5000         | -            | -              | RNP1                     |
| 004           | TF              | STEED               | -        | 189<br>(180.9) | -8.3               | 12.8          | -              | -             | -            | -              | RNP1                     |

RWY27

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 271<br>(262.5) | -8.3               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | BUBLE               | -        | -              | -8.3               | -             | L              | -             | -            | -              | RNP1                     |
| 003           | TF              | MUSBI               | -        | 189<br>(180.9) | -8.3               | 7.2           | -              | +5000         | -            | -              | RNP1                     |
| 004           | TF              | STEED               | -        | 189<br>(180.9) | -8.3               | 12.8          | -              | -             | -            | -              | RNP1                     |

RIKYU TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | STEED               | -        | -              | -8.3               | -             | -              | -             | -            | -              | RNP1                     |
| 002           | TF              | RIKYU               | -        | 257<br>(248.4) | -8.3               | 27.3          | -              | -             | -            | -              | RNP1                     |


CHANGE : Navigation Specification(Basic RNP1 → RNP1).

## RJSS / SENDAI

## CUBIC FOUR DEPARTURE / TOHOKU TRANSITION

RNP1

VAR 8°W

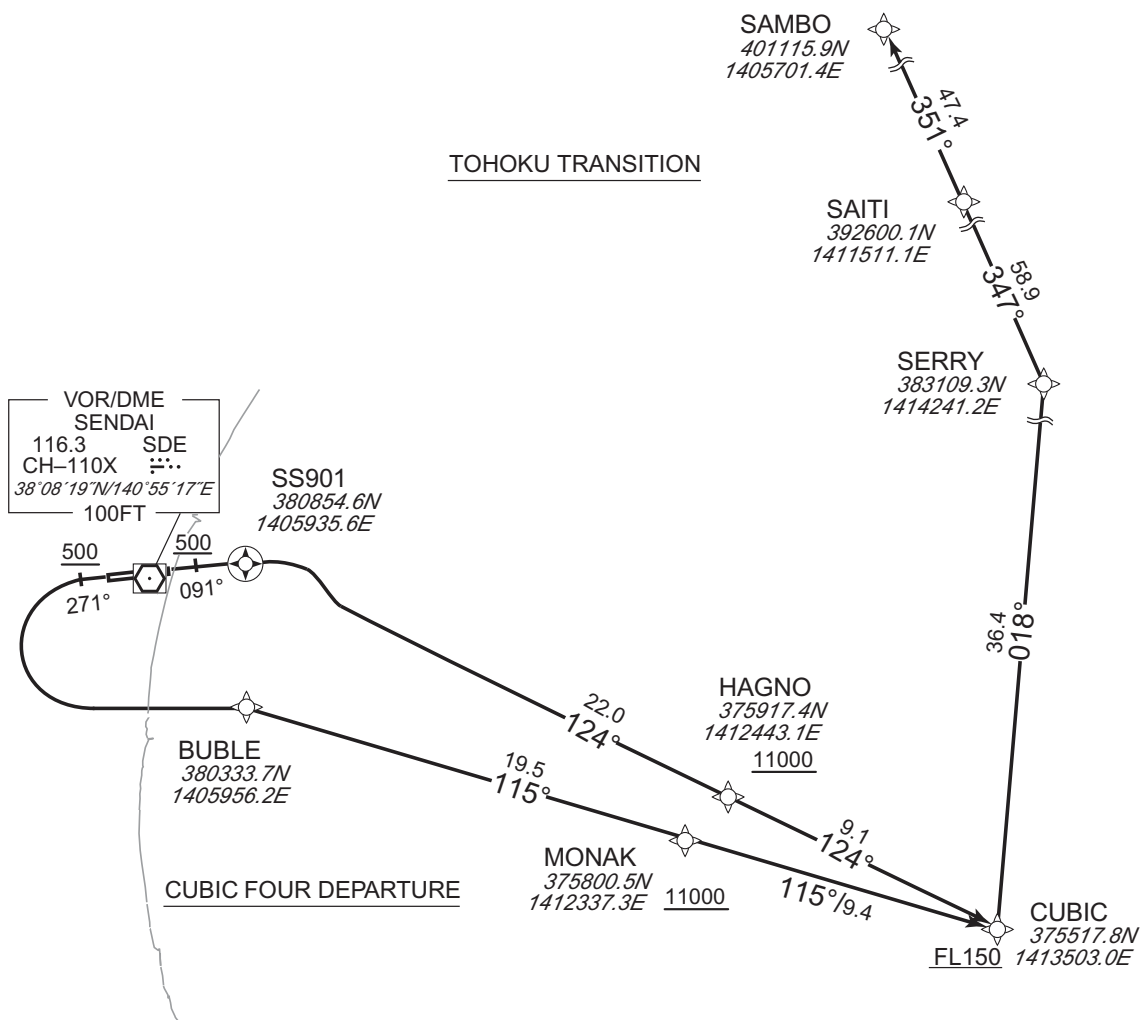

RWY09 : Climb on HDG091° at or above 500FT, direct to SS901, to HAGNO at or above 11000FT,  
to CUBIC at or above FL150.

RWY27 : Climb on HDG271° at or above 500FT, turn left direct to BUBLE, to MONAK at or above 11000FT, to CUBIC at or above FL150.

NOTE RWY09: 5.0% climb gradient required up to 500FT.

OBST ALT 62FT located at 0.2NM 103° FM end of RWY09.

RWY27: 5.0% climb gradient required up to 1000FT.

OBST ALT 919FT located at 4.1NM 269° FM end of RWY27.

## TOHOKU TRANSITION

From CUBIC at or above FL150, to SERRY, to SAITI, to SAMBO.

CHANGE : Navigation Specification(Basic RNP1  $\rightarrow$  RNP1).



STANDARD DEPARTURE CHART - INSTRUMENT

RJSS / SENDAI

RNAV SID and TRANSITION

| CUBIC FOUR DEPARTURE |                 |                     |          |                |                    |               |                |               |              |                |                          |
|----------------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| RWY09                |                 |                     |          |                |                    |               |                |               |              |                |                          |
| Serial Number        | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001                  | VA              | -                   | -        | 091<br>(082.5) | -8.3               | -             | -              | +500          | -            | -              | RNP1                     |
| 002                  | DF              | SS901               | Y        | -              | -8.3               | -             | -              | -             | -            | -              | RNP1                     |
| 003                  | TF              | HAGNO               | -        | 124<br>(115.8) | -8.3               | 22.0          | -              | +11000        | -            | -              | RNP1                     |
| 004                  | TF              | CUBIC               | -        | 124<br>(116.1) | -8.3               | 9.1           | -              | +FL150        | -            | -              | RNP1                     |
| RWY27                |                 |                     |          |                |                    |               |                |               |              |                |                          |
| Serial Number        | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001                  | VA              | -                   | -        | 271<br>(262.5) | -8.3               | -             | -              | +500          | -            | -              | RNP1                     |
| 002                  | DF              | BUBLE               | -        | -              | -8.3               | -             | L              | -             | -            | -              | RNP1                     |
| 003                  | TF              | MONAK               | -        | 115<br>(106.4) | -8.3               | 19.5          | -              | +11000        | -            | -              | RNP1                     |
| 004                  | TF              | CUBIC               | -        | 115<br>(106.7) | -8.3               | 9.4           | -              | +FL150        | -            | -              | RNP1                     |
| TOHOKU TRANSITION    |                 |                     |          |                |                    |               |                |               |              |                |                          |
| Serial Number        | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001                  | IF              | CUBIC               | -        | -              | -8.3               | -             | -              | +FL150        | -            | -              | RNP1                     |
| 002                  | TF              | SERRY               | -        | 018<br>(009.5) | -8.3               | 36.4          | -              | -             | -            | -              | RNP1                     |
| 003                  | TF              | SAITI               | -        | 347<br>(338.8) | -8.3               | 58.9          | -              | -             | -            | -              | RNP1                     |
| 004                  | TF              | SAMBO               | -        | 351<br>(343.0) | -8.3               | 47.4          | -              | -             | -            | -              | RNP1                     |

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD ARRIVAL CHART-INSTRUMENT


RJSS / SENDAI

STAR

PERID ARRIVAL


From over AOBAR, via SDE R135 to intercept and proceed via SDE 10.0DME counterclockwise ARC to PERID.

Cross PERID at or above 1500FT.

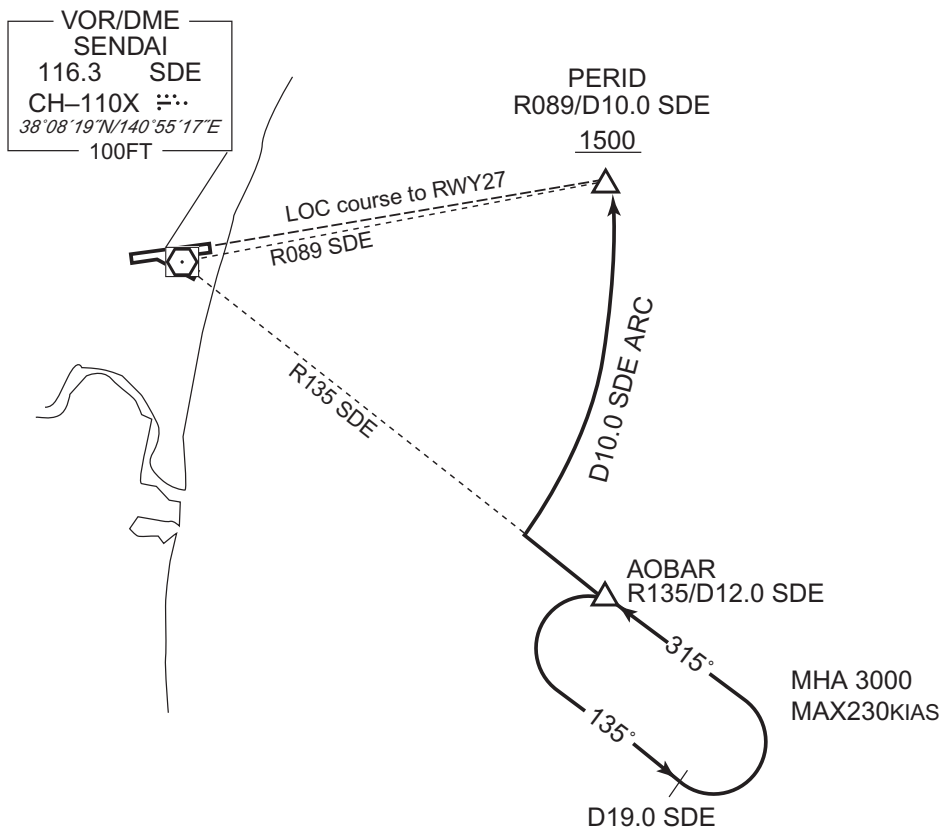


CHANGE : HLDG abolished(PERID).

STANDARD ARRIVAL CHART - INSTRUMENT

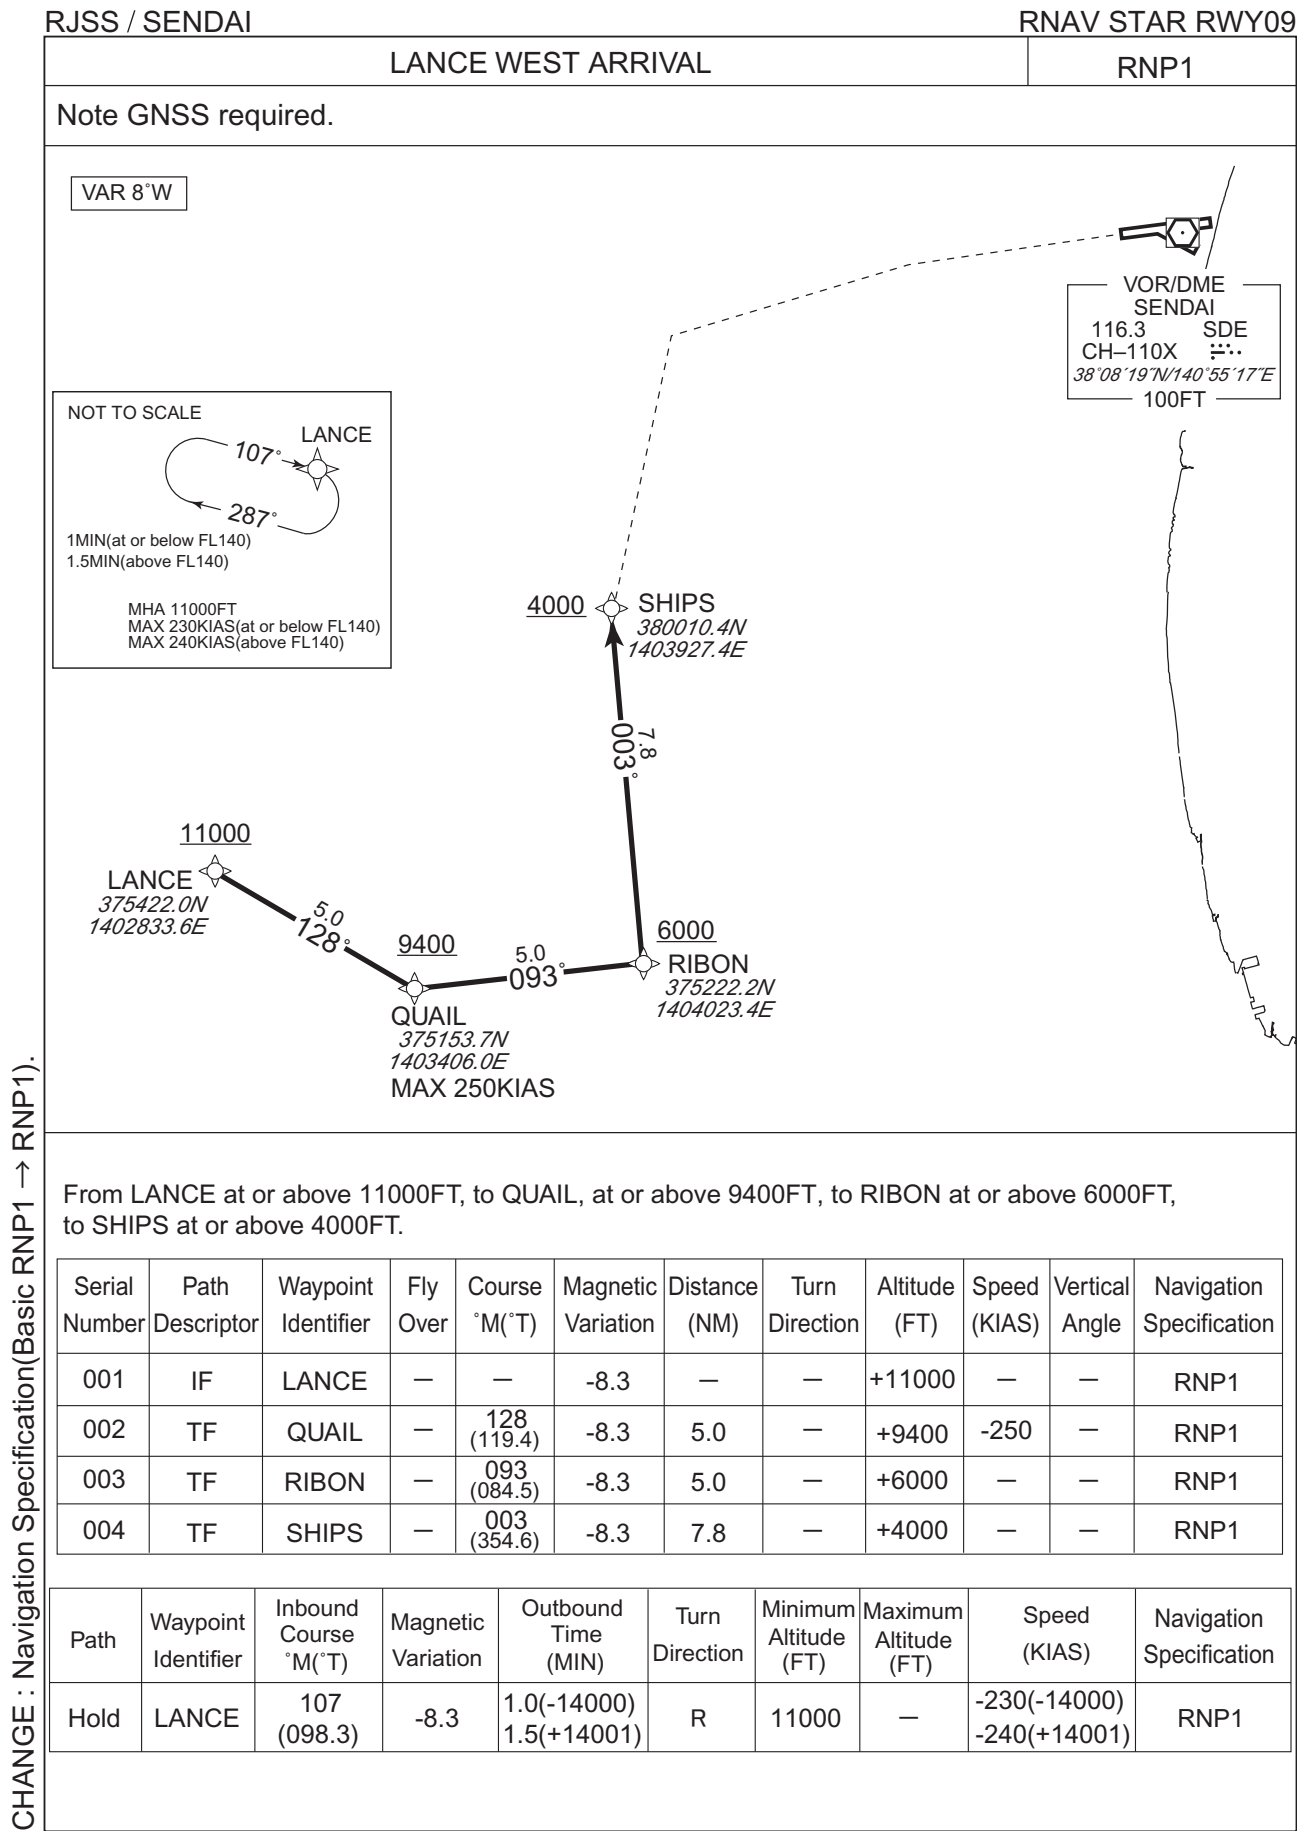


STANDARD ARRIVAL CHART-INSTRUMENT

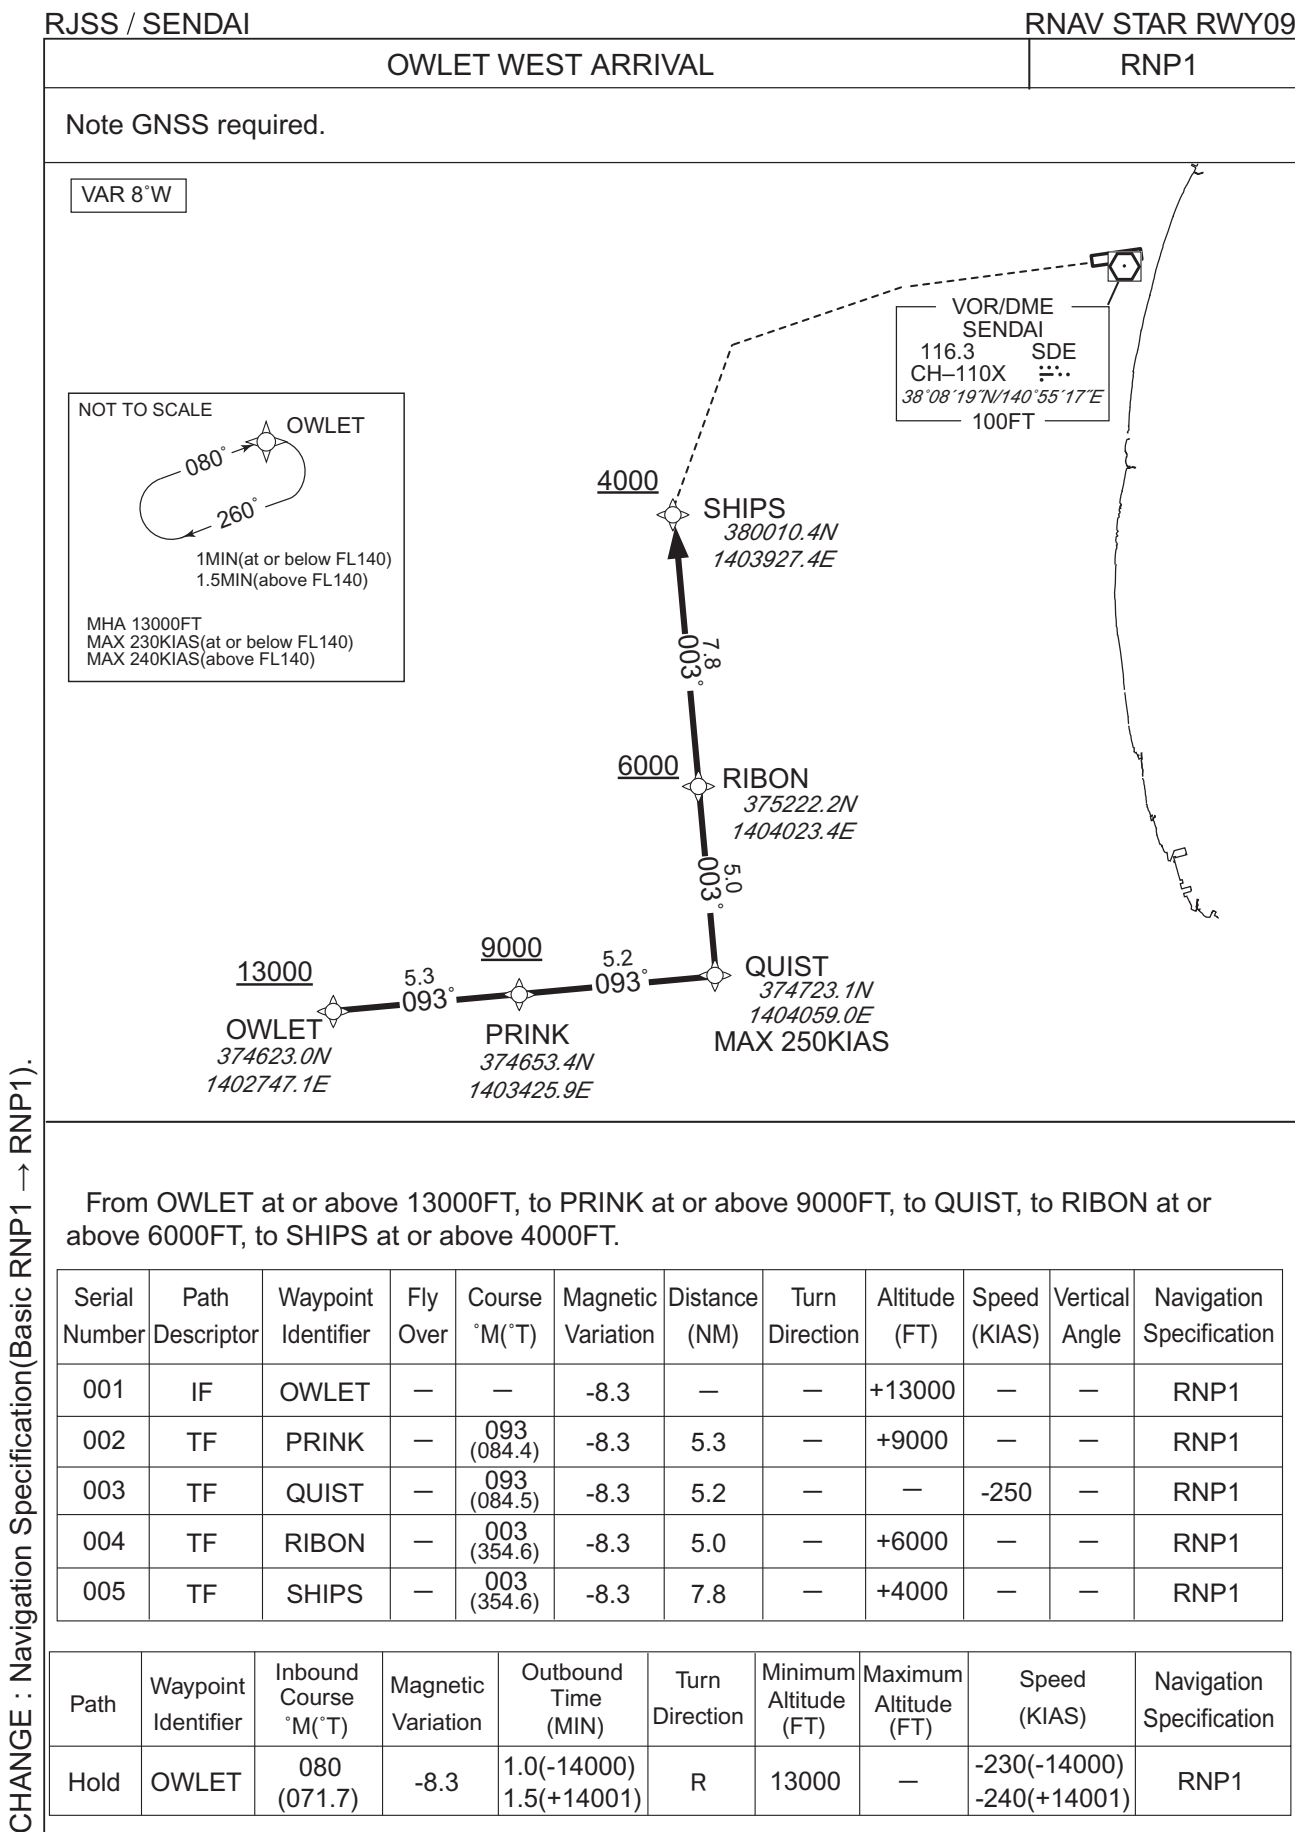


CHANGE : Navigation Specification(Basic RNP1 → RNP1).


STANDARD ARRIVAL CHART-INSTRUMENT

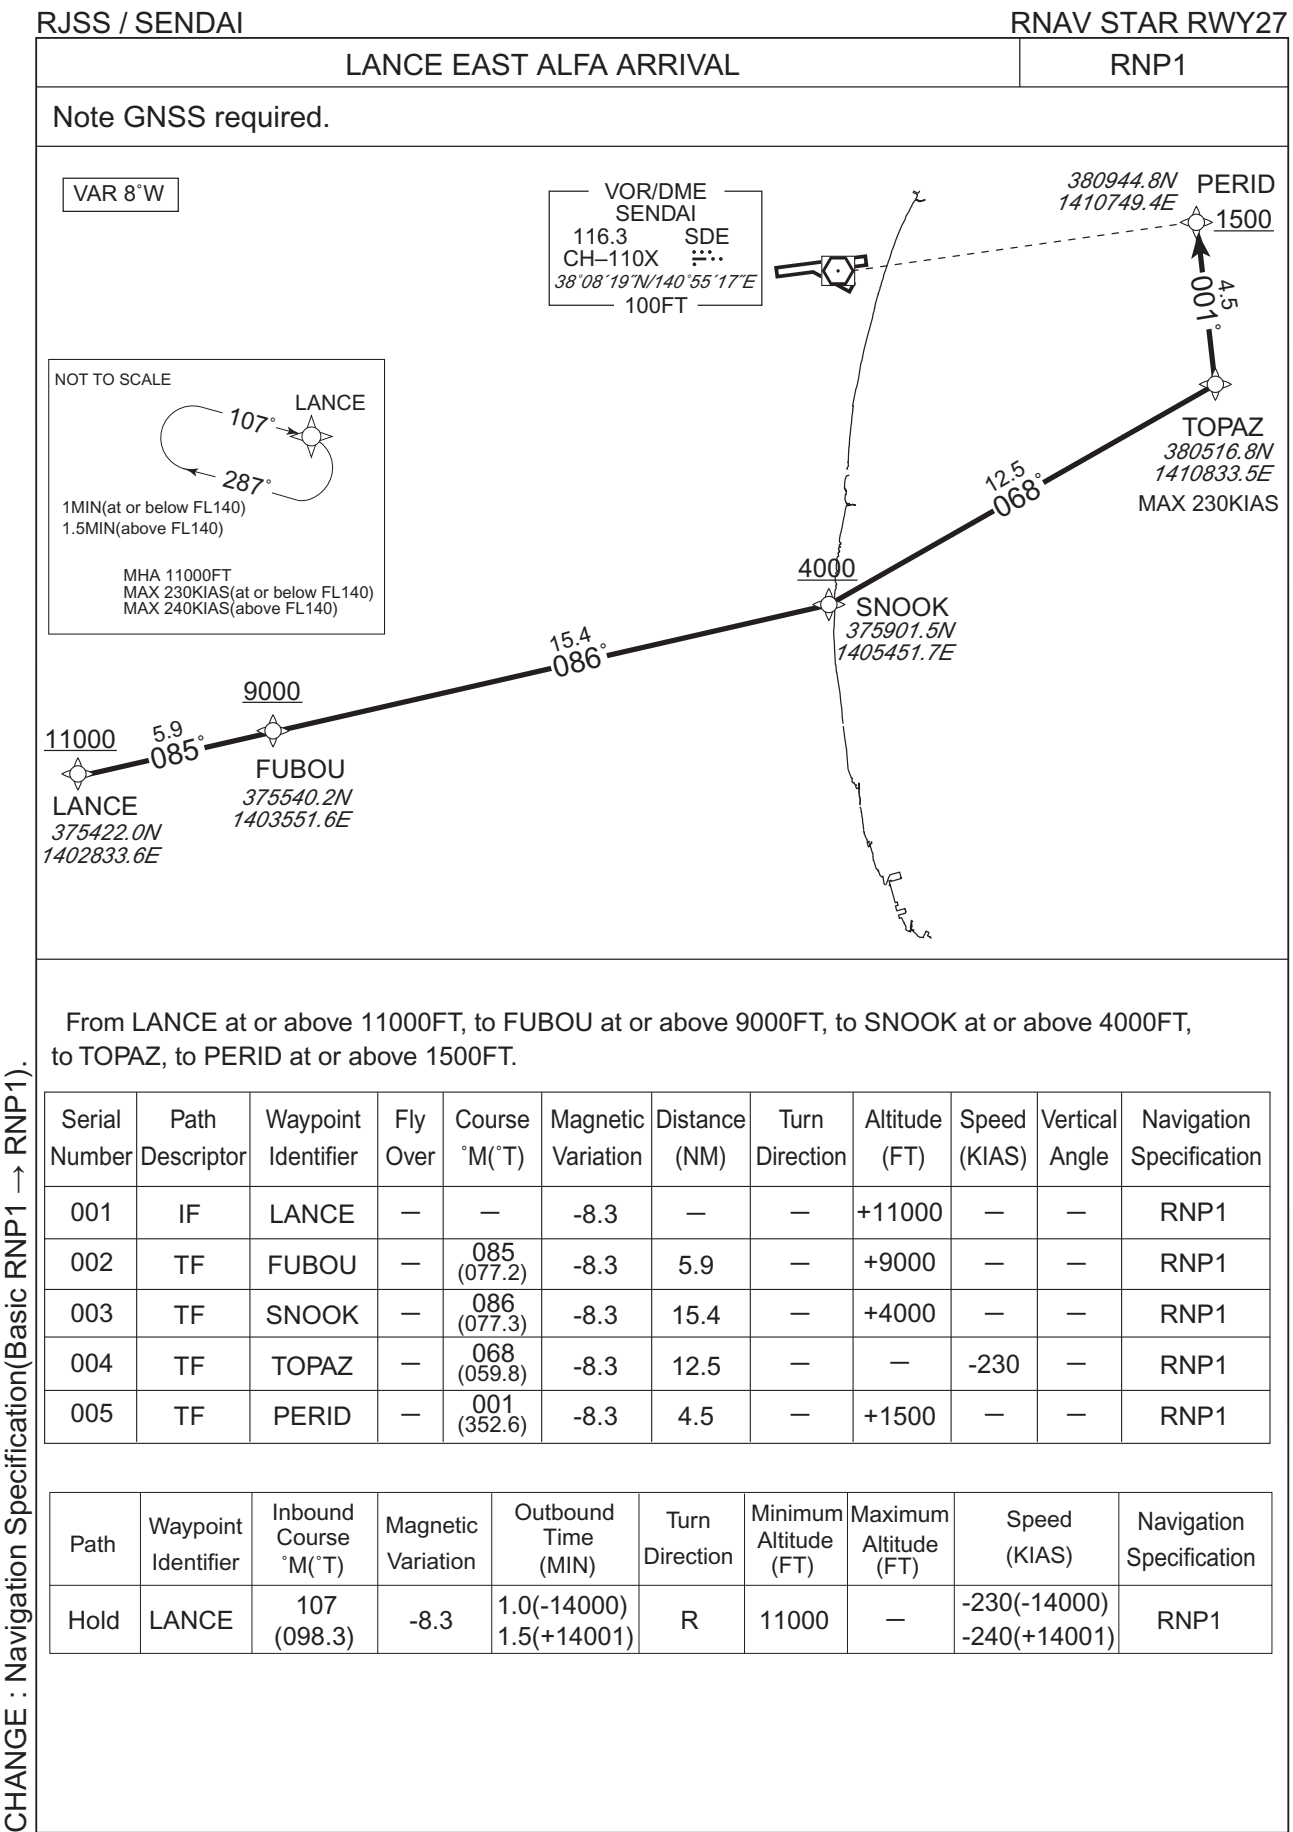


STANDARD ARRIVAL CHART-INSTRUMENT

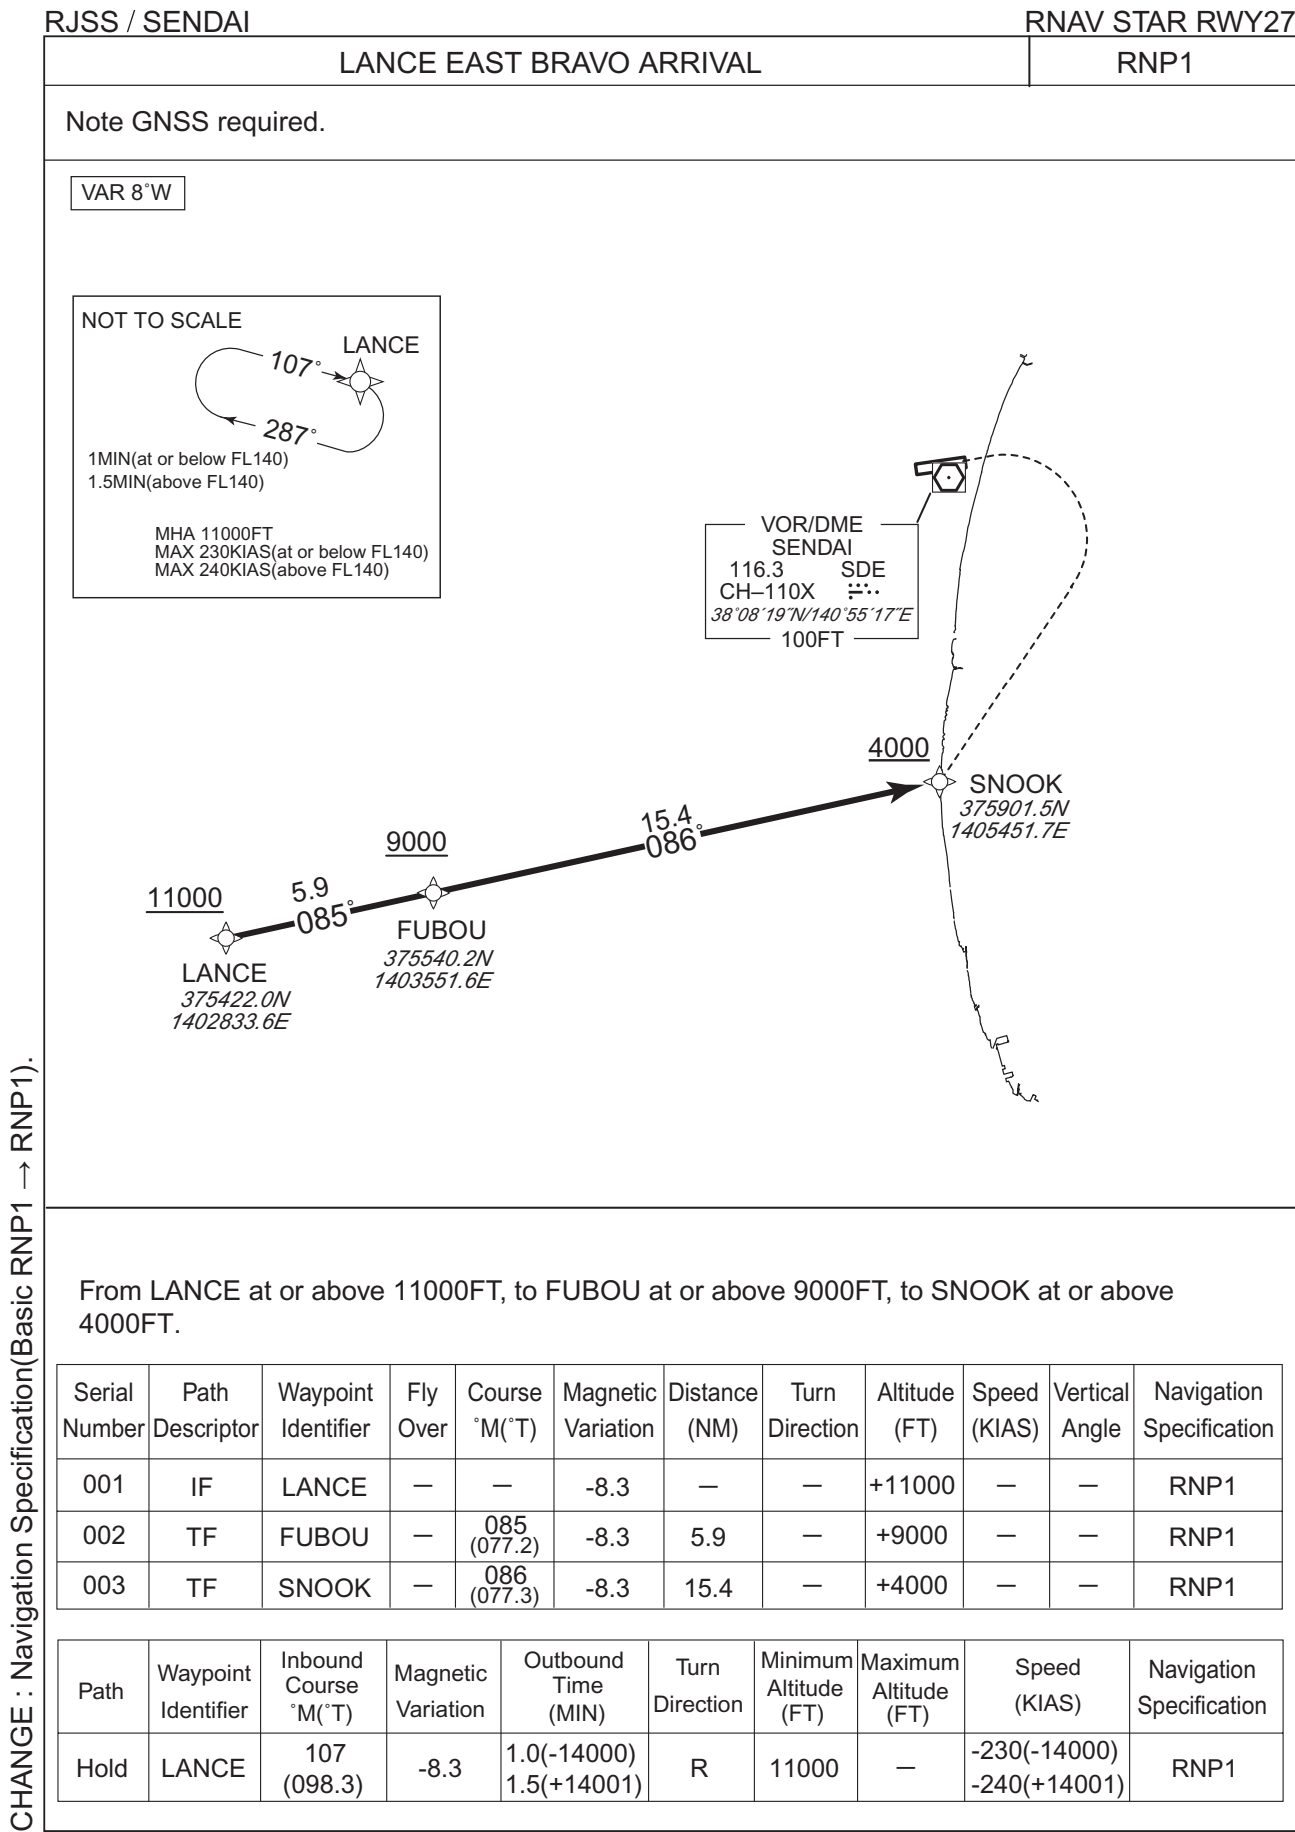

STANDARD ARRIVAL CHART-INSTRUMENT

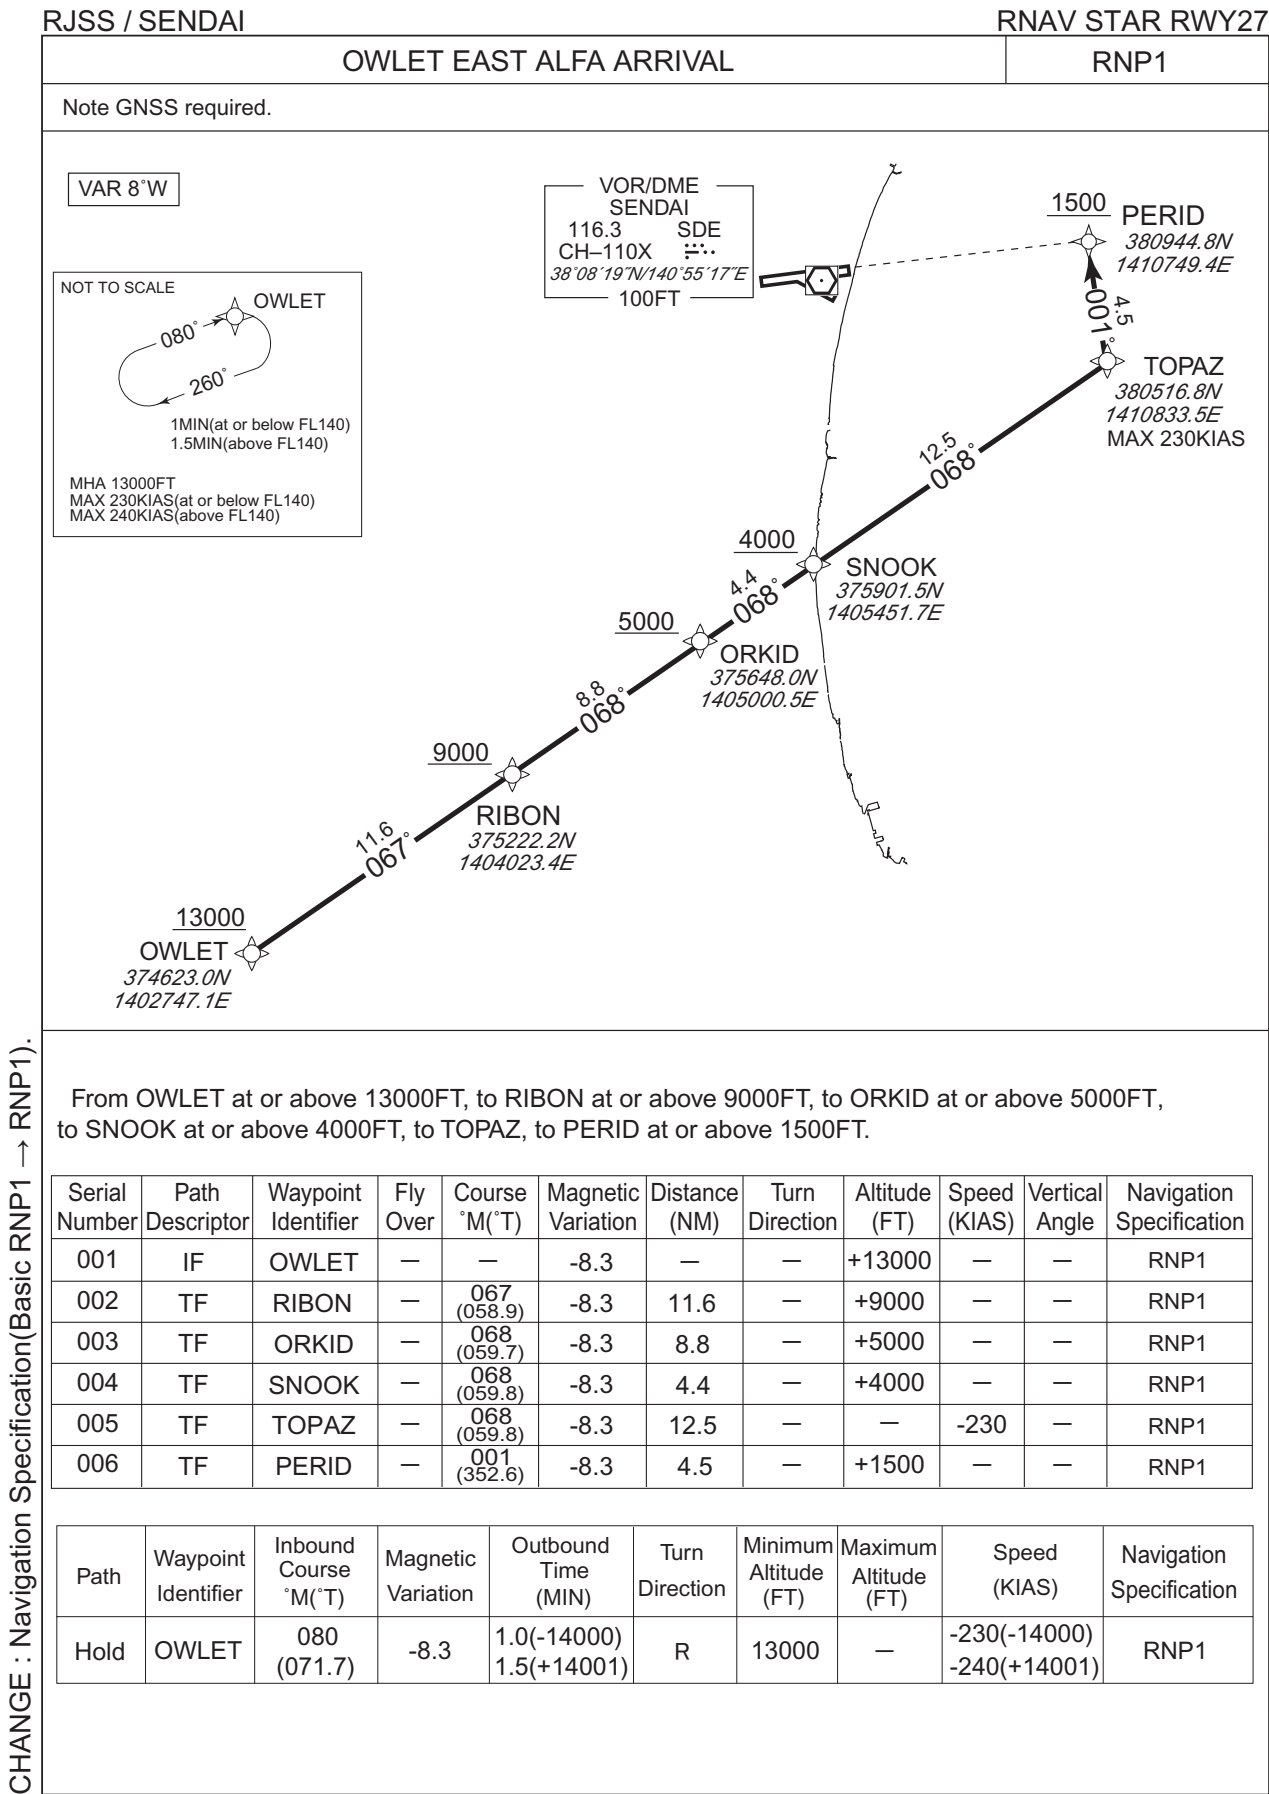

STANDARD ARRIVAL CHART-INSTRUMENT

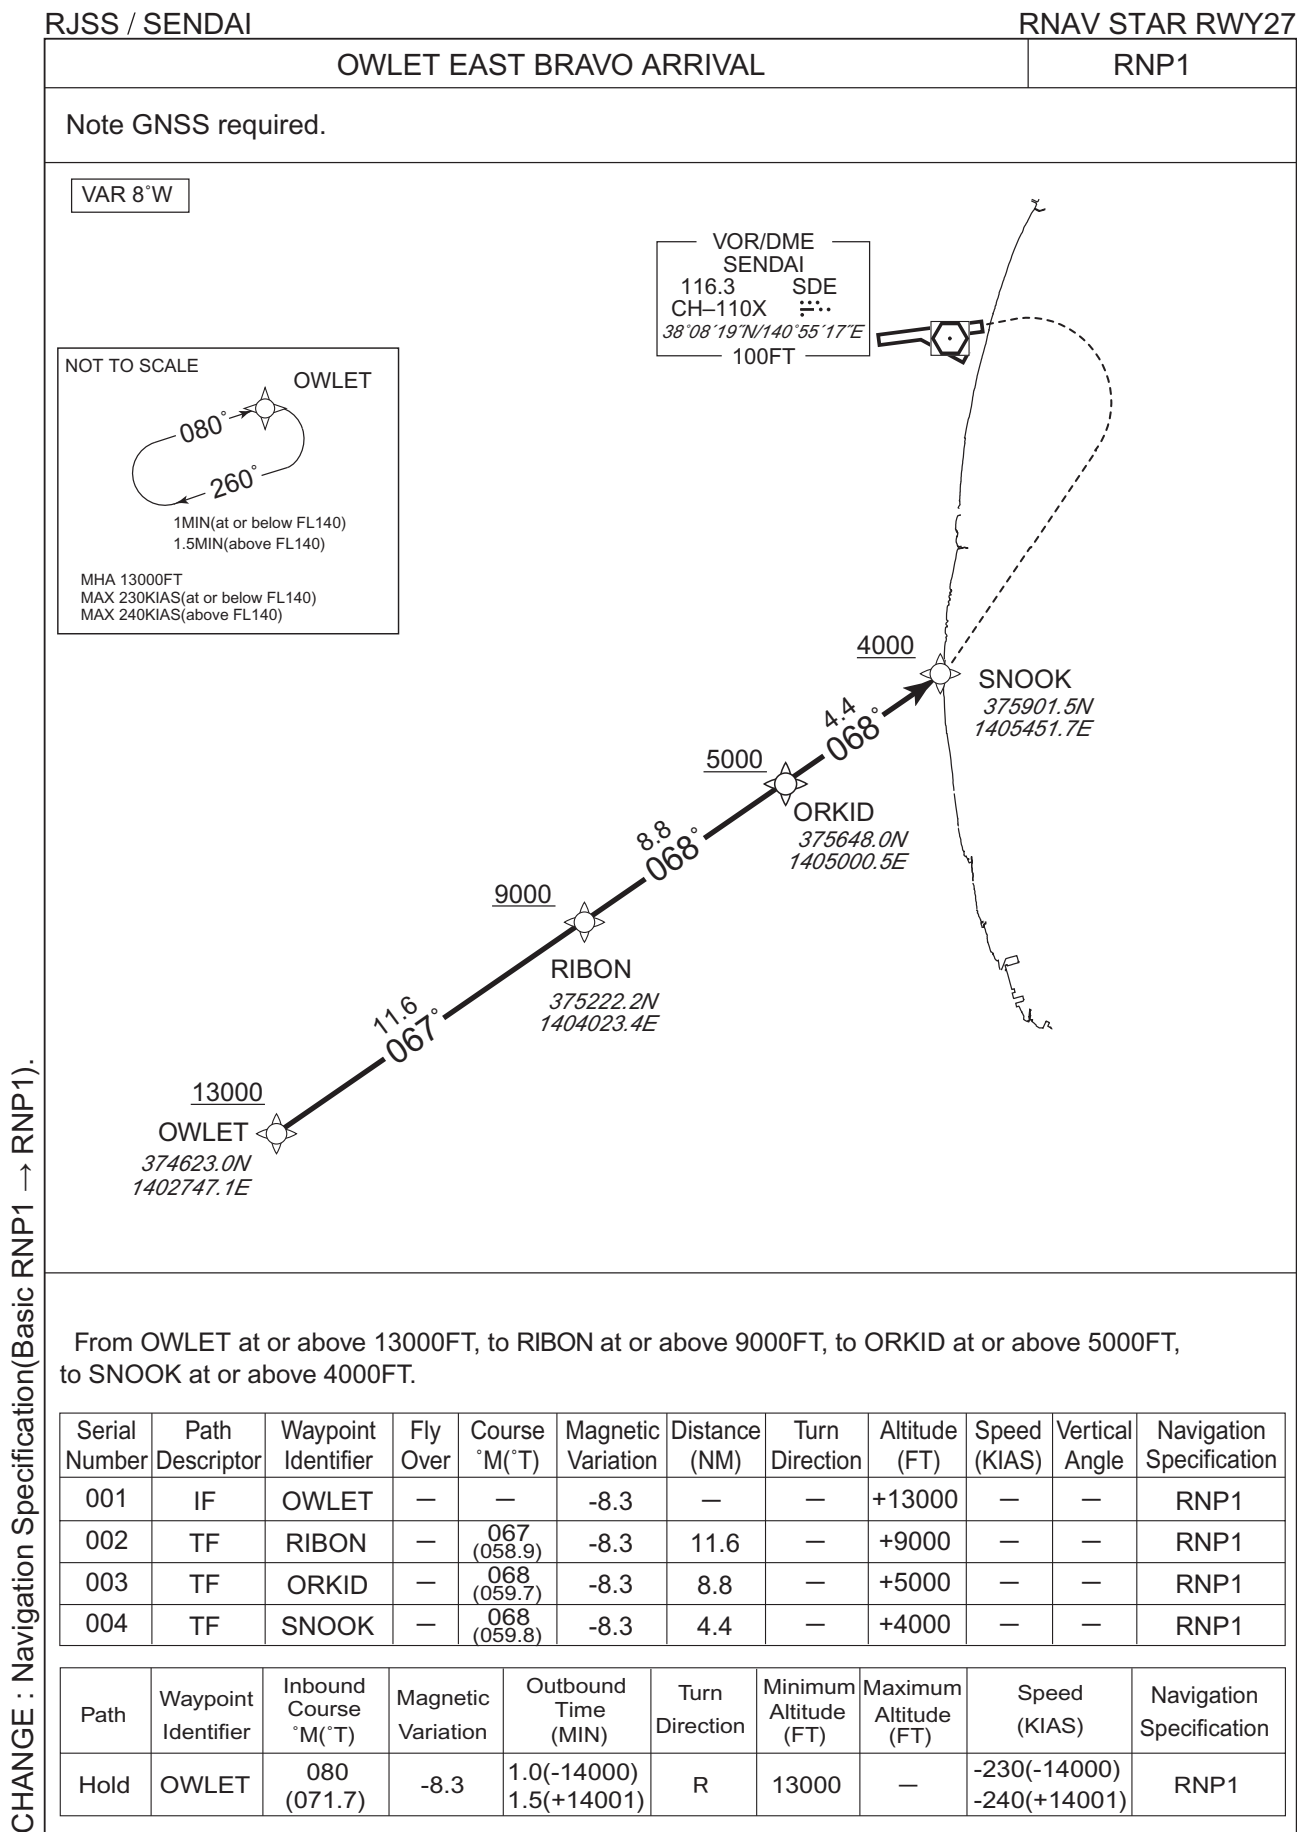




**INTENTIONALLY LEFT BLANK**

## INSTRUMENT APPROACH CHART

RJSS / SENDAI


ILS Z or LOC Z RWY27

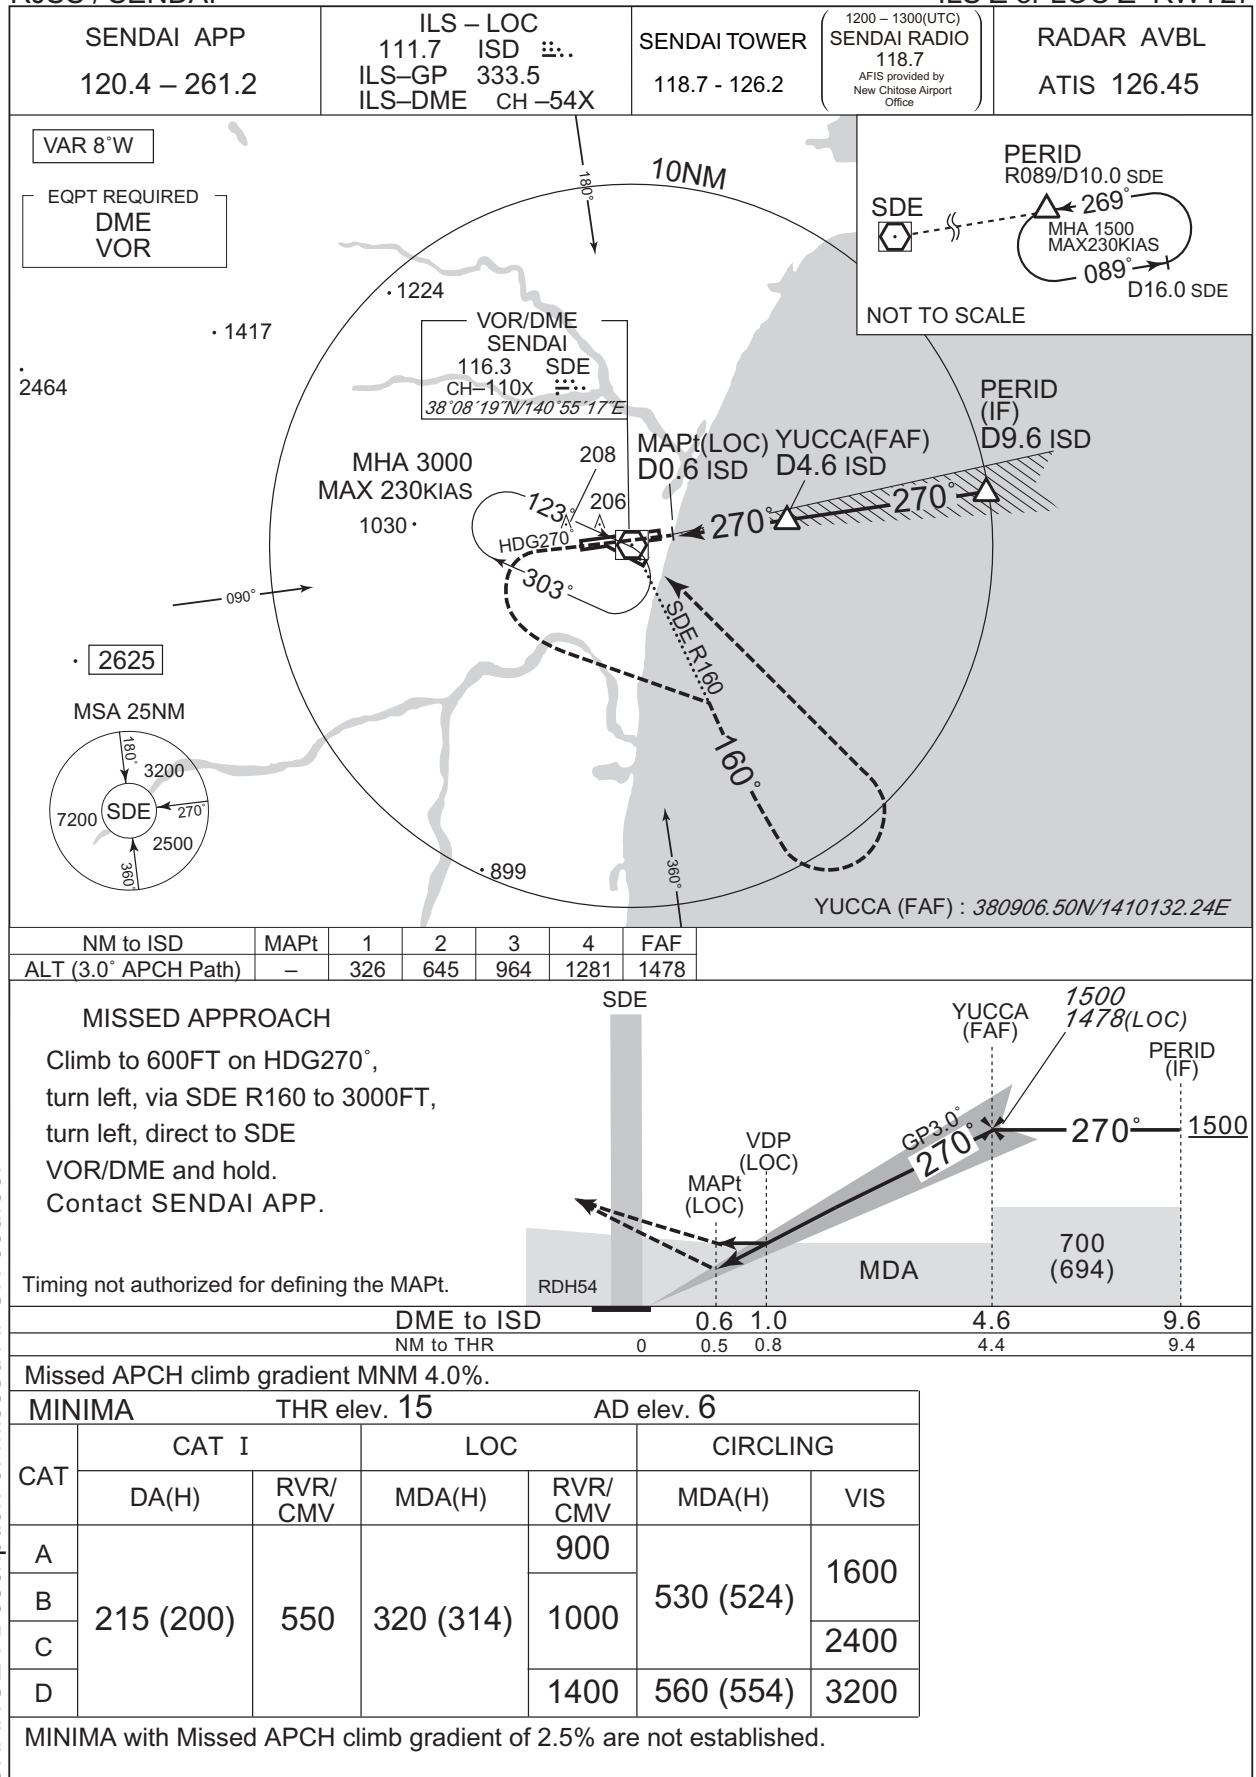

## INSTRUMENT APPROACH CHART

RJSS / SENDAI


ILS Y or LOC Y RWY27

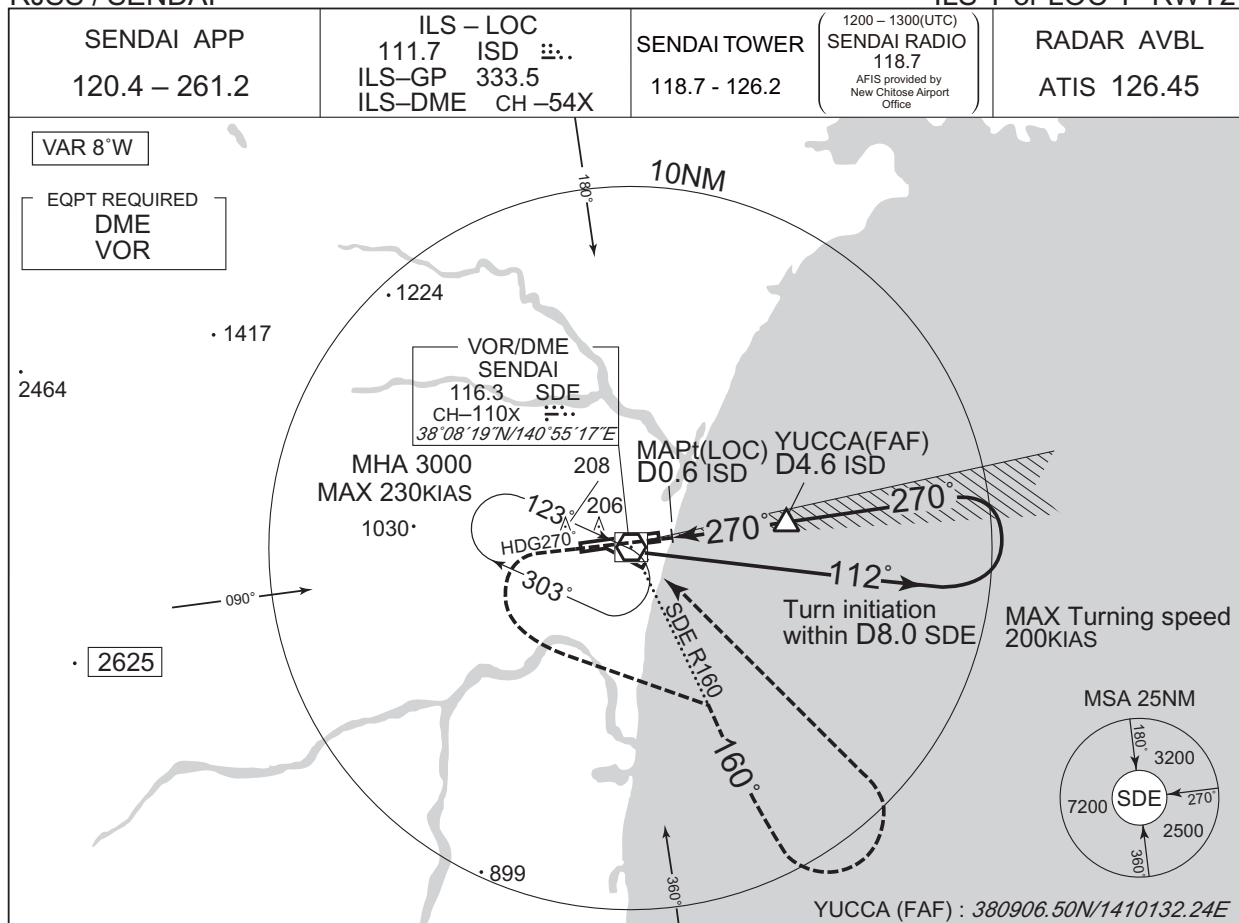

## MISSED APPROACH

Climb to 600FT on HDG270°,  
turn left, via SDE R160 to 3000FT,  
turn left, direct to SDE  
VOR/DME and hold.  
Contact SENDAI APP.

Timing not authorized for defining the MAPt.

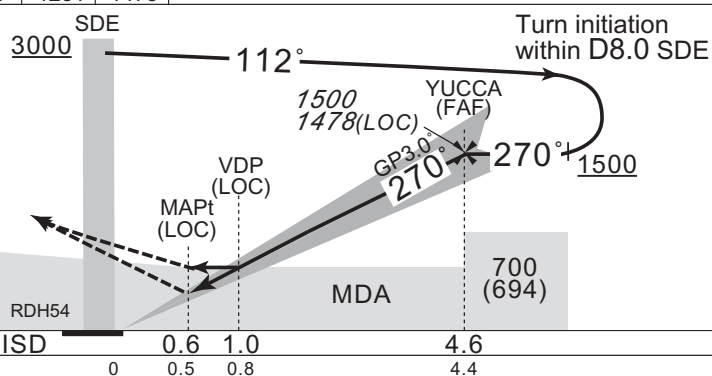

| DME to ISD | 0.6 | 1.0 | 4.6 |
|------------|-----|-----|-----|
| NM to THR  | 0   | 0.5 | 0.8 |

Missed APCH climb gradient MNM 4.0%.

| MINIMA |           | THR elev. 15 |           | AD elev. 6  |           |      |
|--------|-----------|--------------|-----------|-------------|-----------|------|
| CAT    | CAT I     |              | LOC       |             | CIRCLING  |      |
|        | DA(H)     | RVR/<br>CMV  | MDA(H)    | RVR/<br>CMV | MDA(H)    | VIS  |
| A      | 215 (200) | 550          | 320 (314) | 900         | 530 (524) | 1600 |
| B      |           |              |           | 1000        |           | 2400 |
| C      |           |              |           |             |           |      |
| D      |           |              |           | 1400        | 560 (554) | 3200 |


MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : Description of Missed APCH course.

## INSTRUMENT APPROACH CHART

RJSS / SENDAI


VOR RWY27

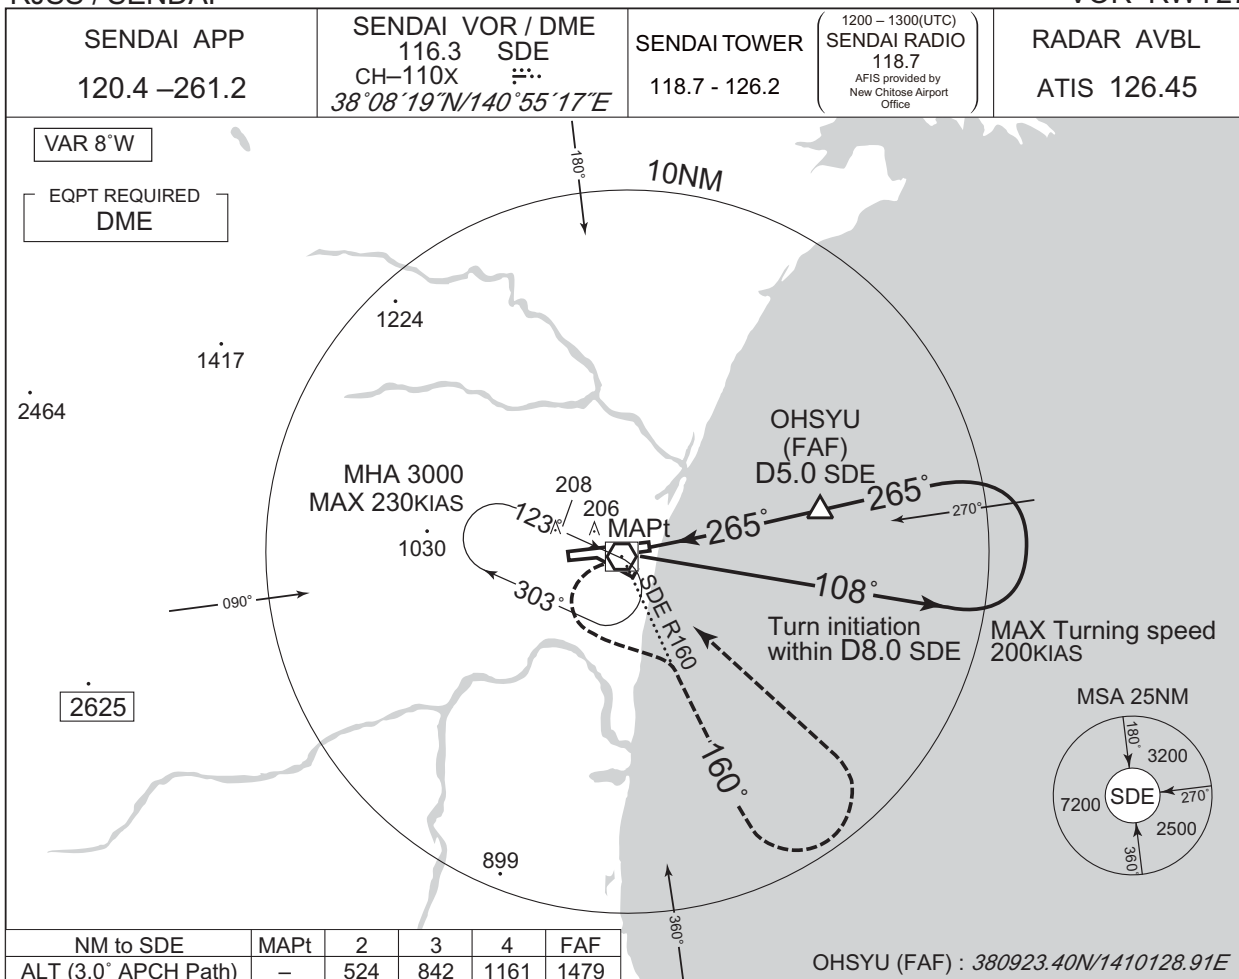

## MISSED APPROACH

Turn left, climb via SDE R160 to 3000FT,  
turn left, direct to SDE VOR/DME  
and hold.  
Contact SENDAI APP.


Timing not authorized for defining the MAPt.

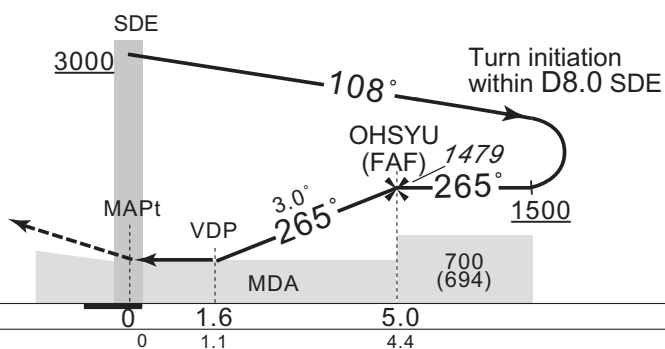


CHANGE : Description of PROC course.

| MINIMA |           | THR elev. 15 |           | AD elev. 6 |      |
|--------|-----------|--------------|-----------|------------|------|
| CAT    |           |              | CIRCLING  |            |      |
|        | MDA(H)    | RVR/<br>CMV  | MDA(H)    | VIS        |      |
| A      | 390 (384) | 900          | 530 (524) | 1600       |      |
| B      |           | 1000         |           | 2400       |      |
| C      |           |              |           | 3200       |      |
| D      |           |              | 1400      | 560 (554)  | 3200 |

INSTRUMENT APPROACH CHART

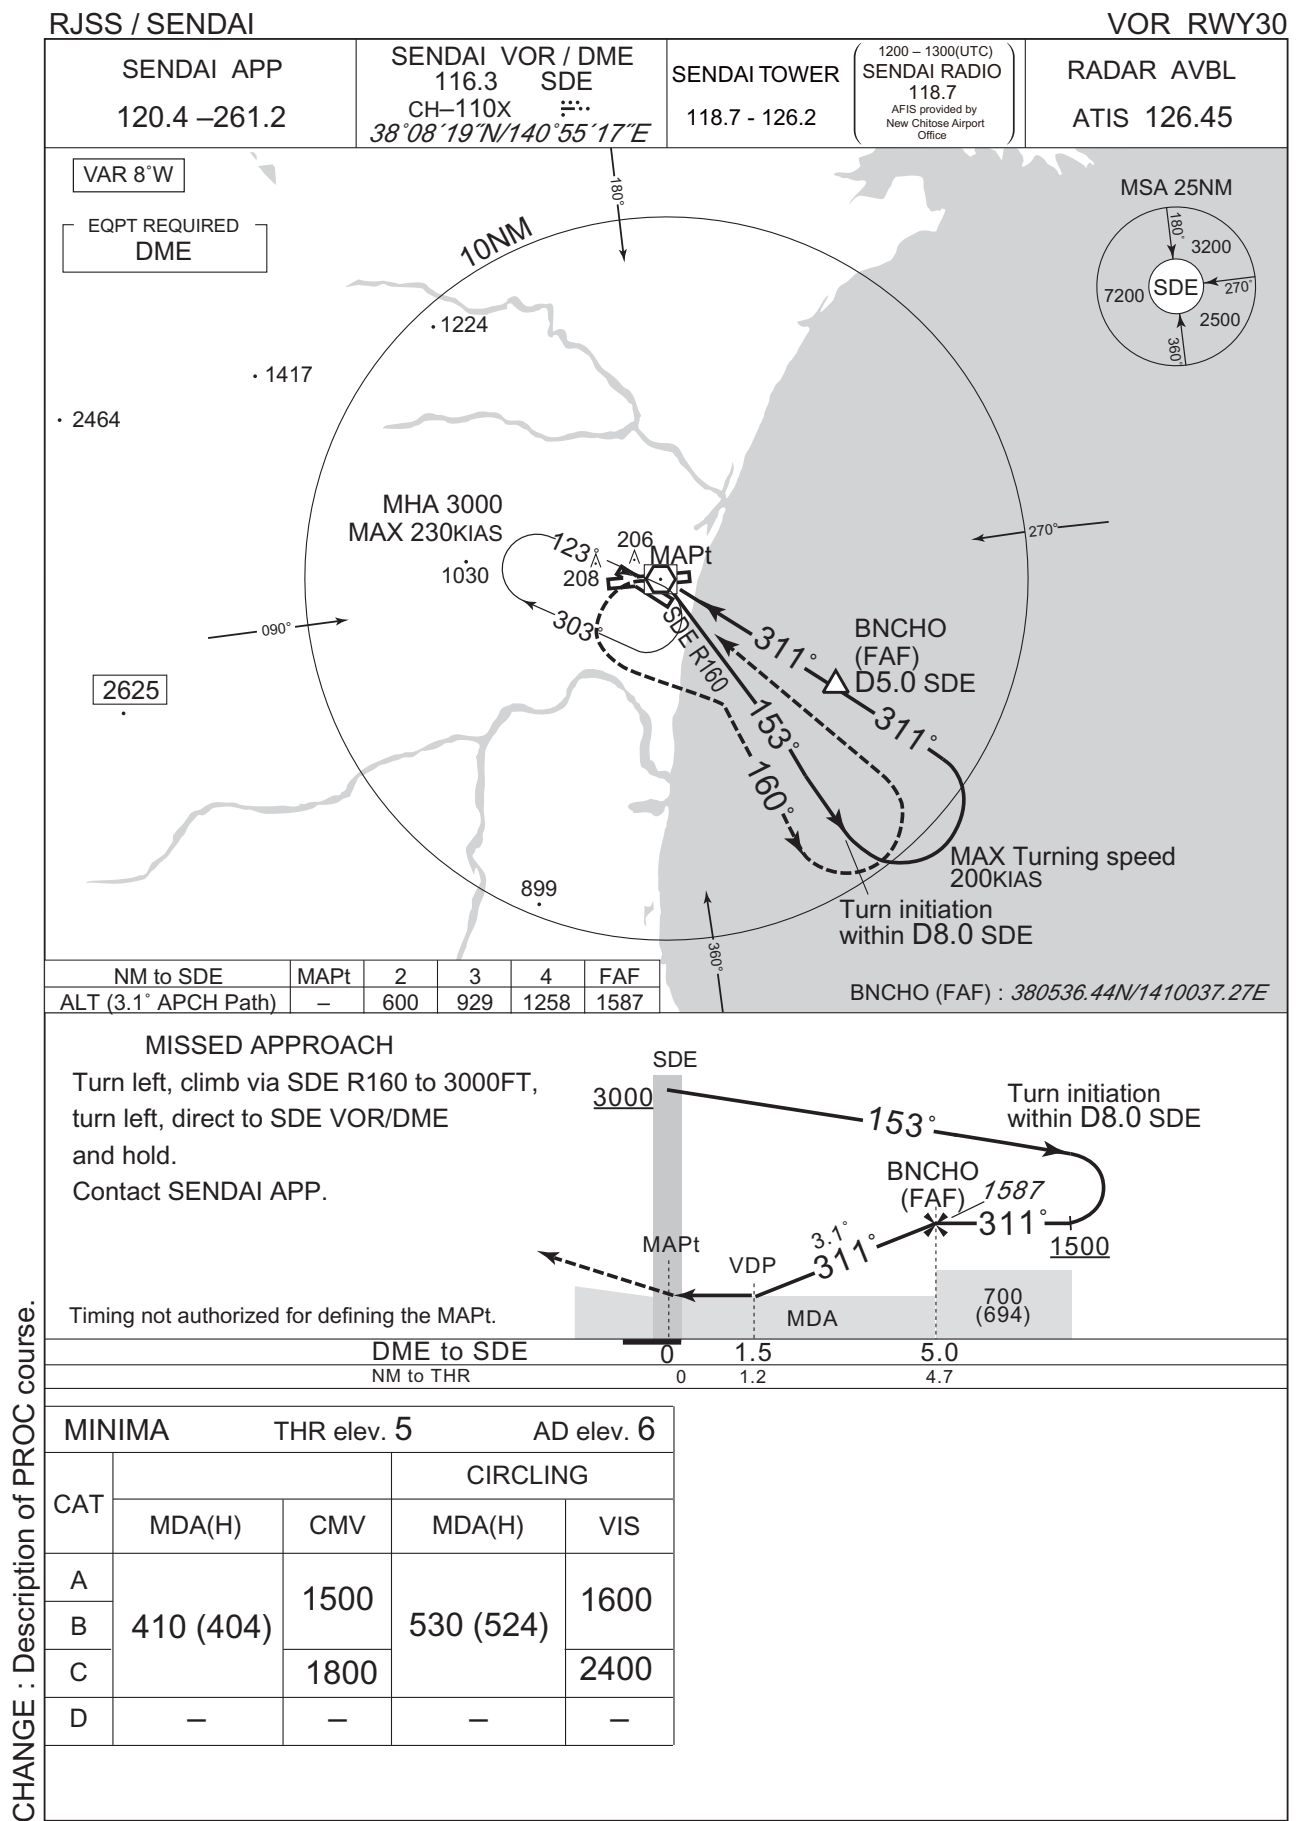

INSTRUMENT APPROACH CHART

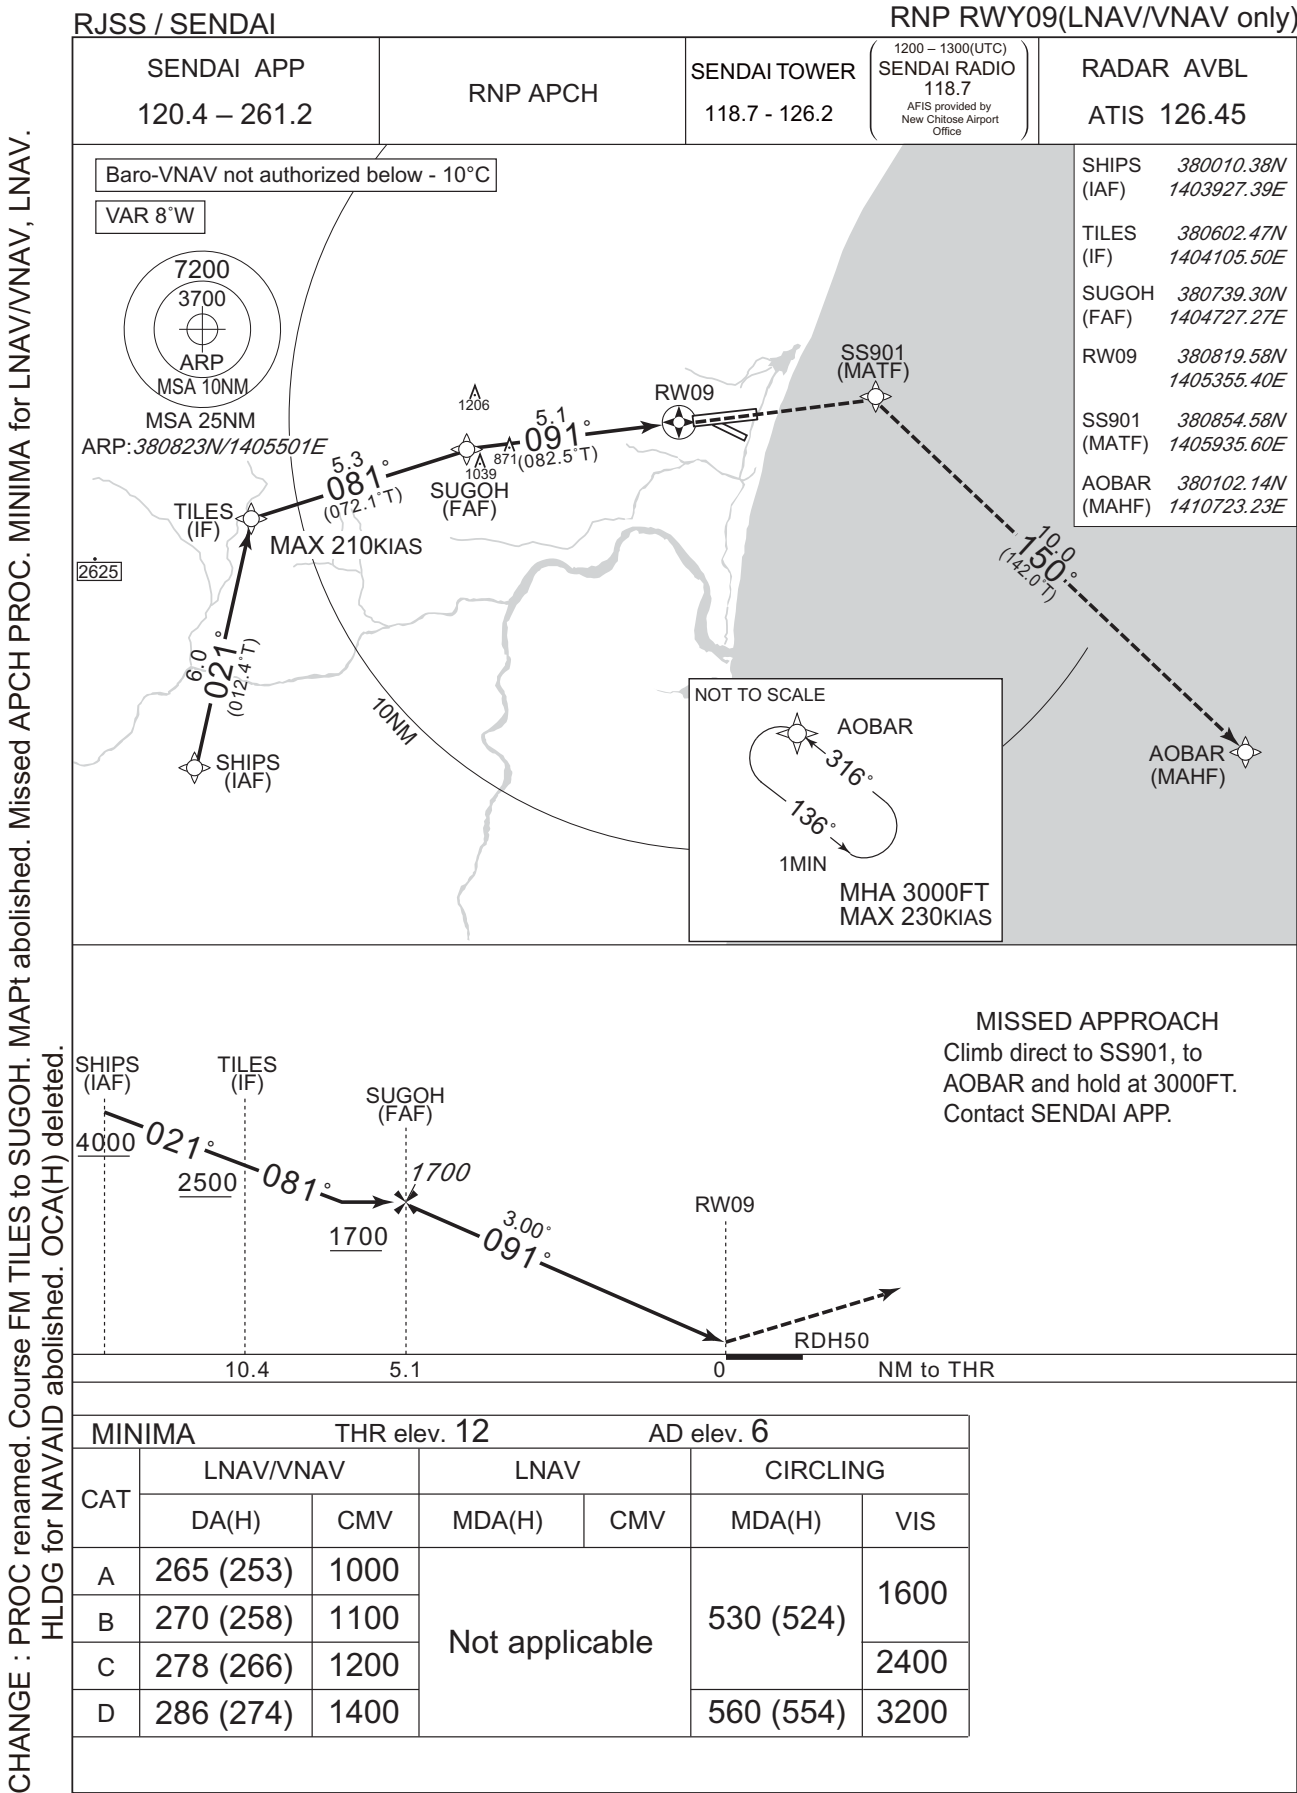


## INSTRUMENT APPROACH CHART

RJSS / SENDAI

RNP RWY27(AR)

|                             |                        |                               |                                                                                                |                           |
|-----------------------------|------------------------|-------------------------------|------------------------------------------------------------------------------------------------|---------------------------|
| SENDAI APP<br>120.4 - 261.2 | RNP AR<br>RF required. | SENDAI TOWER<br>118.7 - 126.2 | 1200 - 1300(UTC)<br>SENDAI RADIO<br>118.7<br>AFIS provided by<br>New Chitose Airport<br>Office | RADAR AVBL<br>ATIS 126.45 |
|-----------------------------|------------------------|-------------------------------|------------------------------------------------------------------------------------------------|---------------------------|

For uncompensated Baro-VNAV systems, procedure not authorized below -10°C / above 45°C

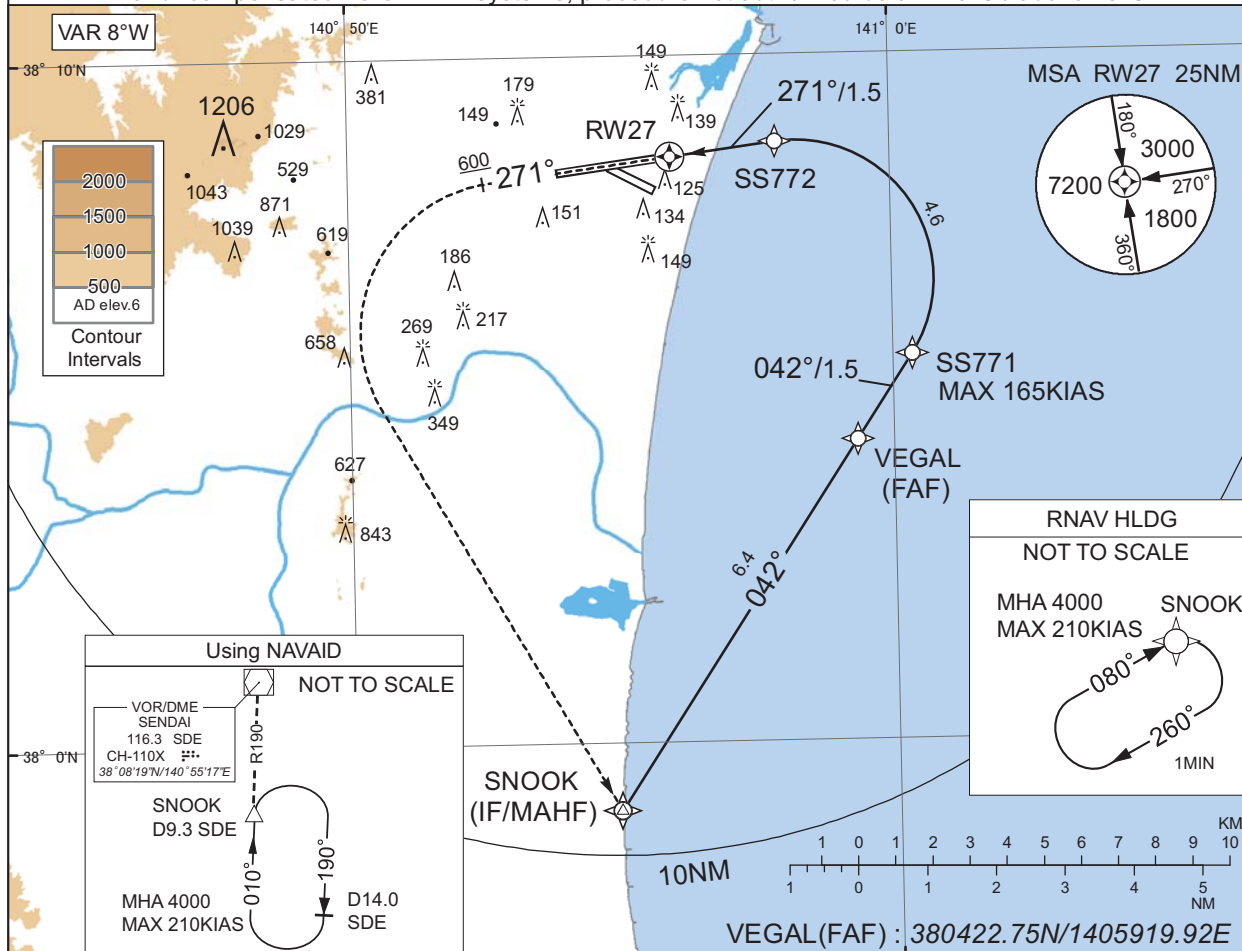

CHANGE : Description of VAR.

| MINIMA | THR elev. 15 | AD elev. 6 |
|--------|--------------|------------|
| CAT    | RNP 0.30     |            |
|        | DA(H)        | RVR/CMV    |
| A      | -            | -          |
| B      | -            | -          |
| C      | 315(300)     | 1000       |
| D      |              | 1400       |

**Authorization Required**

\* Missed APCH climb gradient MNM 4.0%

## INSTRUMENT APPROACH CHART

RJSS / SENDAI

RNP RWY27(AR)

Coding Table

| Serial Number | Path Descriptor                    | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
|---------------|------------------------------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| 001           | IF                                 | SNOOK               | -        | -             | -8.3               | -             | -              | +4000         | -            | -               | -         |
| 002           | TF                                 | VEGAL               | -        | 042 (033.3)   | -8.3               | 6.4           | -              | 2500          | -            | -               | 1.0       |
| 003           | TF                                 | SS771               | -        | 042 (033.4)   | -8.3               | 1.5           | -              | 2030          | -165         | -3.00           | 0.3       |
| 004           | RF<br>Center:<br>SSRF1<br>r=2.02NM | SS772               | -        | -             | -8.3               | 4.6           | L              | 560           | -            | -3.00           | 0.3       |
| 005           | TF                                 | RW27                | Y        | 271 (262.6)   | -8.3               | 1.5           | -              | 69            | -            | -3.00/54        | 0.3       |
| 006           | FA                                 | -                   | -        | 271 (262.6)   | -8.3               | -             | -              | +600          | -            | -               | 1.0       |
| 007           | DF                                 | SNOOK               | -        | -             | -8.3               | -             | L              | 4000          | -            | -               | 1.0       |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)  | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|---------------|-----------|
| Hold | SNOOK               | 080 (071.9)           | -8.3               | 1.0 (-14000)        | R              | 4000                  | FL140                 | -210 (-14000) | 1.0       |


Waypoint Coordinates

| Waypoint Identifier | Coordinates              | RF Arc Center Identifier | Coordinates              |
|---------------------|--------------------------|--------------------------|--------------------------|
| SNOOK               | 375901.53N / 1405451.66E | SSRF1                    | 380643.74N / 1405813.69E |
| VEGAL               | 380422.75N / 1405919.92E |                          |                          |
| SS771               | 380536.78N / 1410021.86E |                          |                          |
| SS772               | 380844.14N / 1405753.87E |                          |                          |
| RW27                | 380832.18N / 1405557.56E |                          |                          |



RJSS / SENDAI

Visual REP

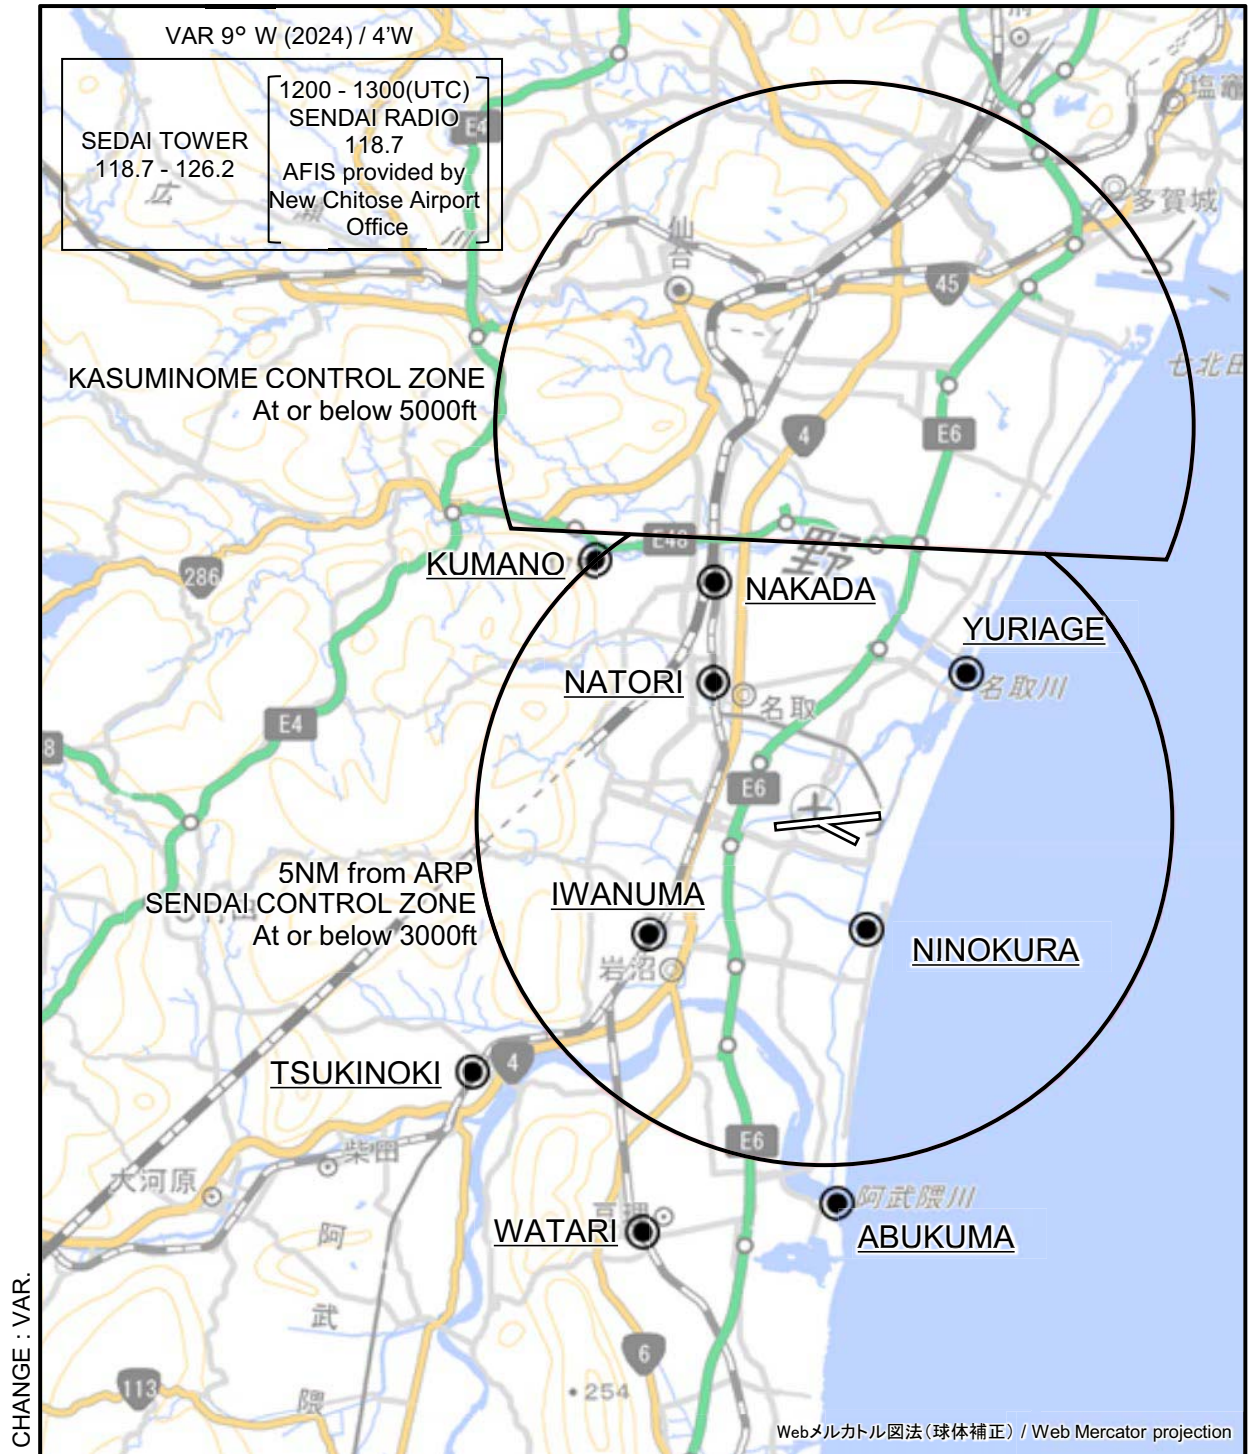

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

RJSS / SENDAI

Visual REP

| Call sign       | BRG / DIST from ARP | Remarks                              |
|-----------------|---------------------|--------------------------------------|
| 熊野<br>Kumano    | 319°T / 5.0NM       | 熊野神社<br>Kumano Shrine                |
| 中田<br>Nakada    | 336°T / 3.8NM       | JR南仙台駅<br>Station                    |
| 閑上<br>Yuriage   | 043°T / 2.9NM       | 名取川河口<br>River-mouth of the Natori   |
| 名取<br>Natori    | 321°T / 2.6NM       | JR名取駅<br>Station                     |
| 二の倉<br>Ninokura | 160°T / 1.7NM       | 県南浄化センター<br>Sewage disposal center   |
| 岩沼<br>Iwanuma   | 236°T / 3.0NM       | JR岩沼駅<br>Station                     |
| 槻木<br>Tsukinoki | 234°T / 6.2NM       | JR槻木駅<br>Station                     |
| 阿武隈<br>Abukuma  | 178°T / 5.6NM       | 阿武隈川河口<br>River-mouth of the Abukuma |
| 亘理<br>Watari    | 204°T / 6.5NM       | JR亘理駅<br>Station                     |


注：有視界飛行方式により霞目管制圏から仙台管制圏へ進入しようとする航空機は、仙台管制圏に入圏する前に仙台タワーまたは仙台レディオへ通報すること。

NOTE : When any VFR flight enters SENDAI CTR directly via KASUMINOME CTR, the pilot shall report to "SENDAI TWR" or "SENDAI RADIO" before entering SENDAI CTR.

注：VFR機とIFR機の航行の安全のため、仙台進入管制区のうち、仙台空港から15NM以内の地域をVFRで航行する場合は、仙台TCAと積極的にコンタクトすること。

NOTE : In order to ensure the safety operations for both VFR and IFR aircraft, VFR aircraft should contact SENDAI TCA positively when the flight includes SENDAI Approach Control Area, within 15 miles from Sendai Airport.


CHANGE : SENDAI RADIO added to NOTE.



RJSS / SENDAI

Minimum Vectoring Altitude CHART

VAR 9°W (2024)

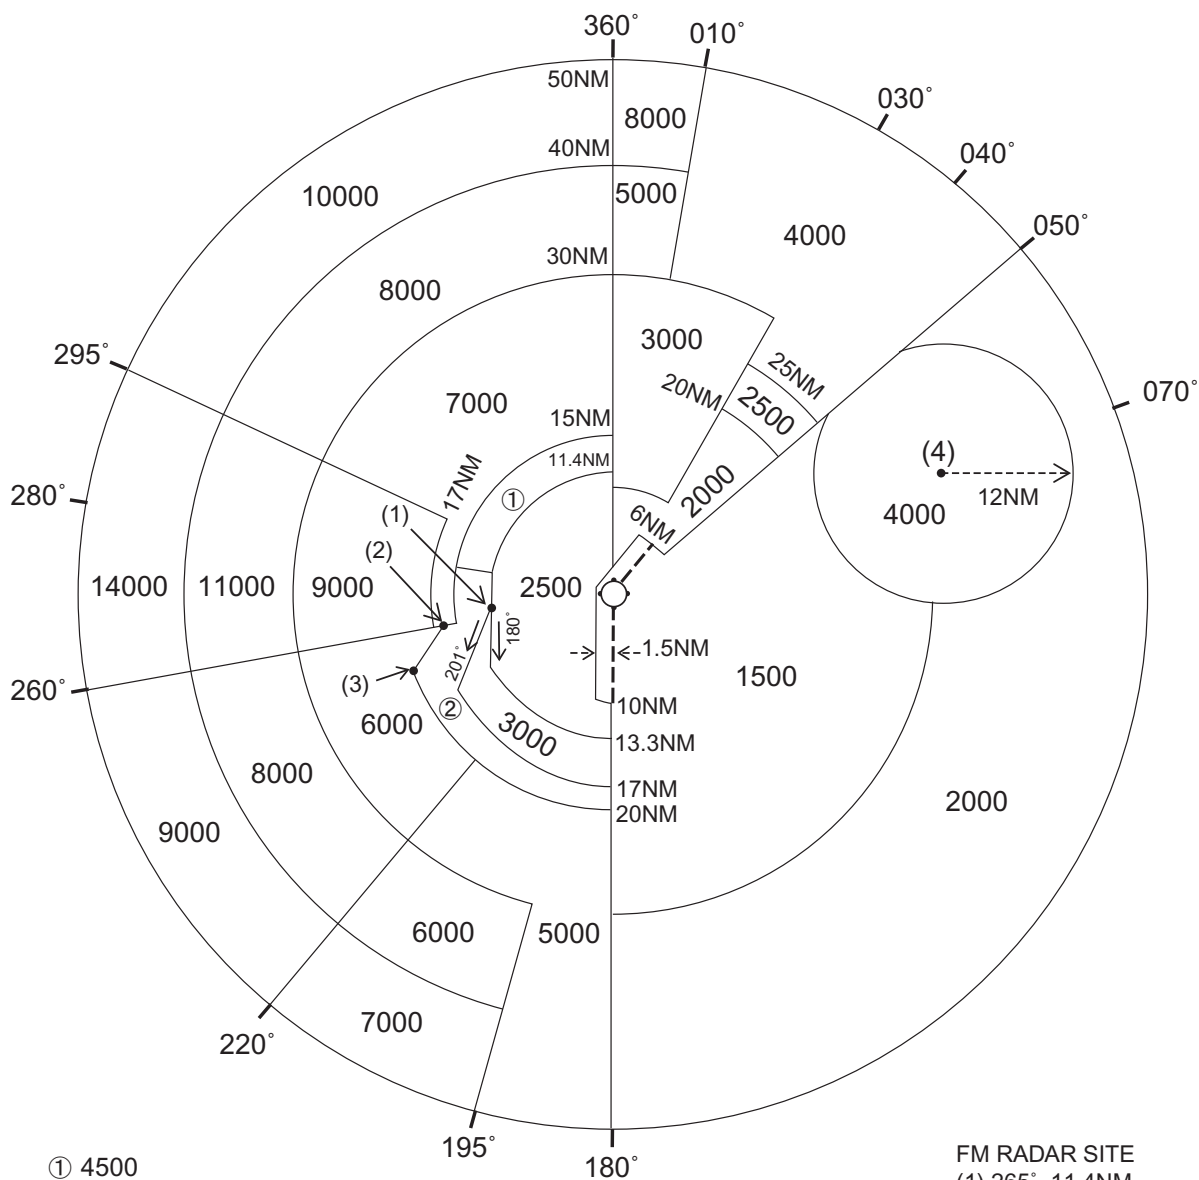

CHANGE : VAR.