


RJTY / YOKOTA

AD CHART

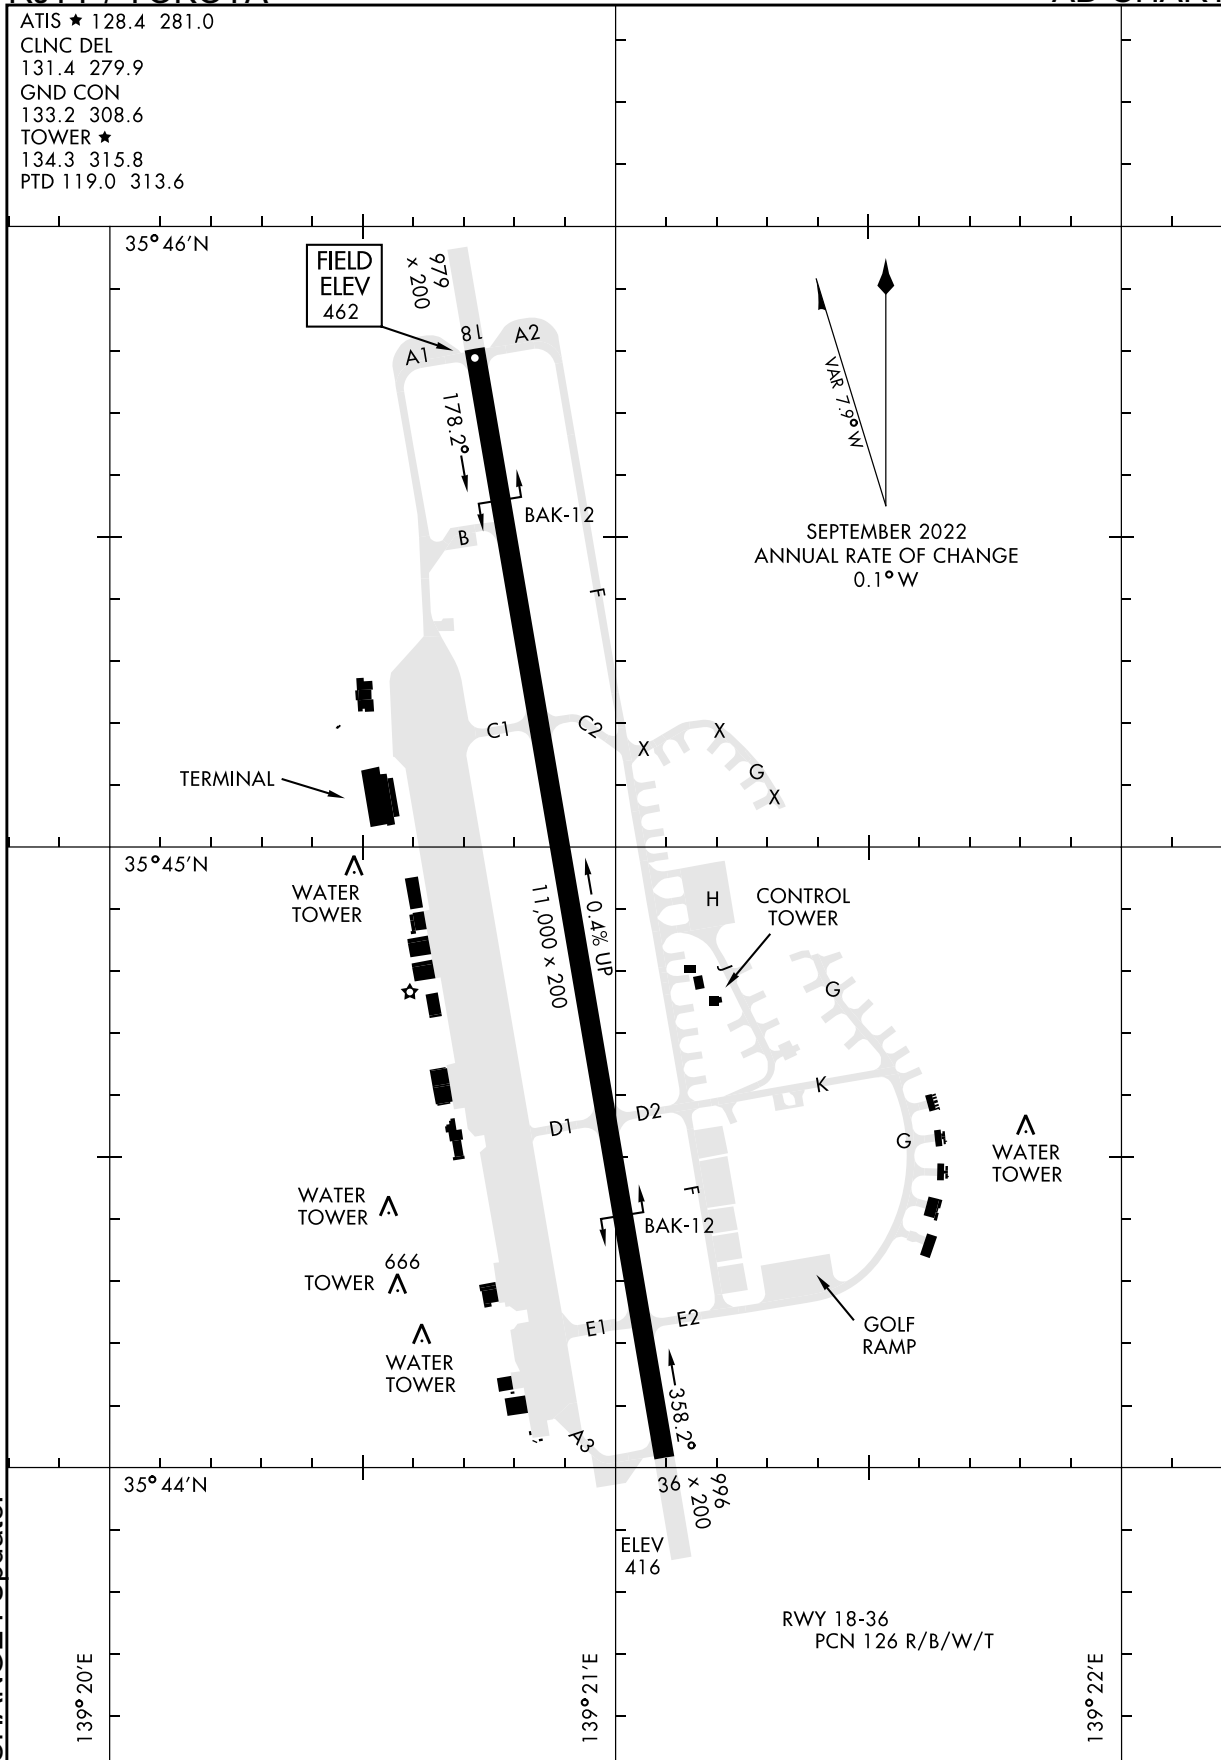


NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY/YOKOTA

BREEE SIX DEPARTURE(OBSTACLE)

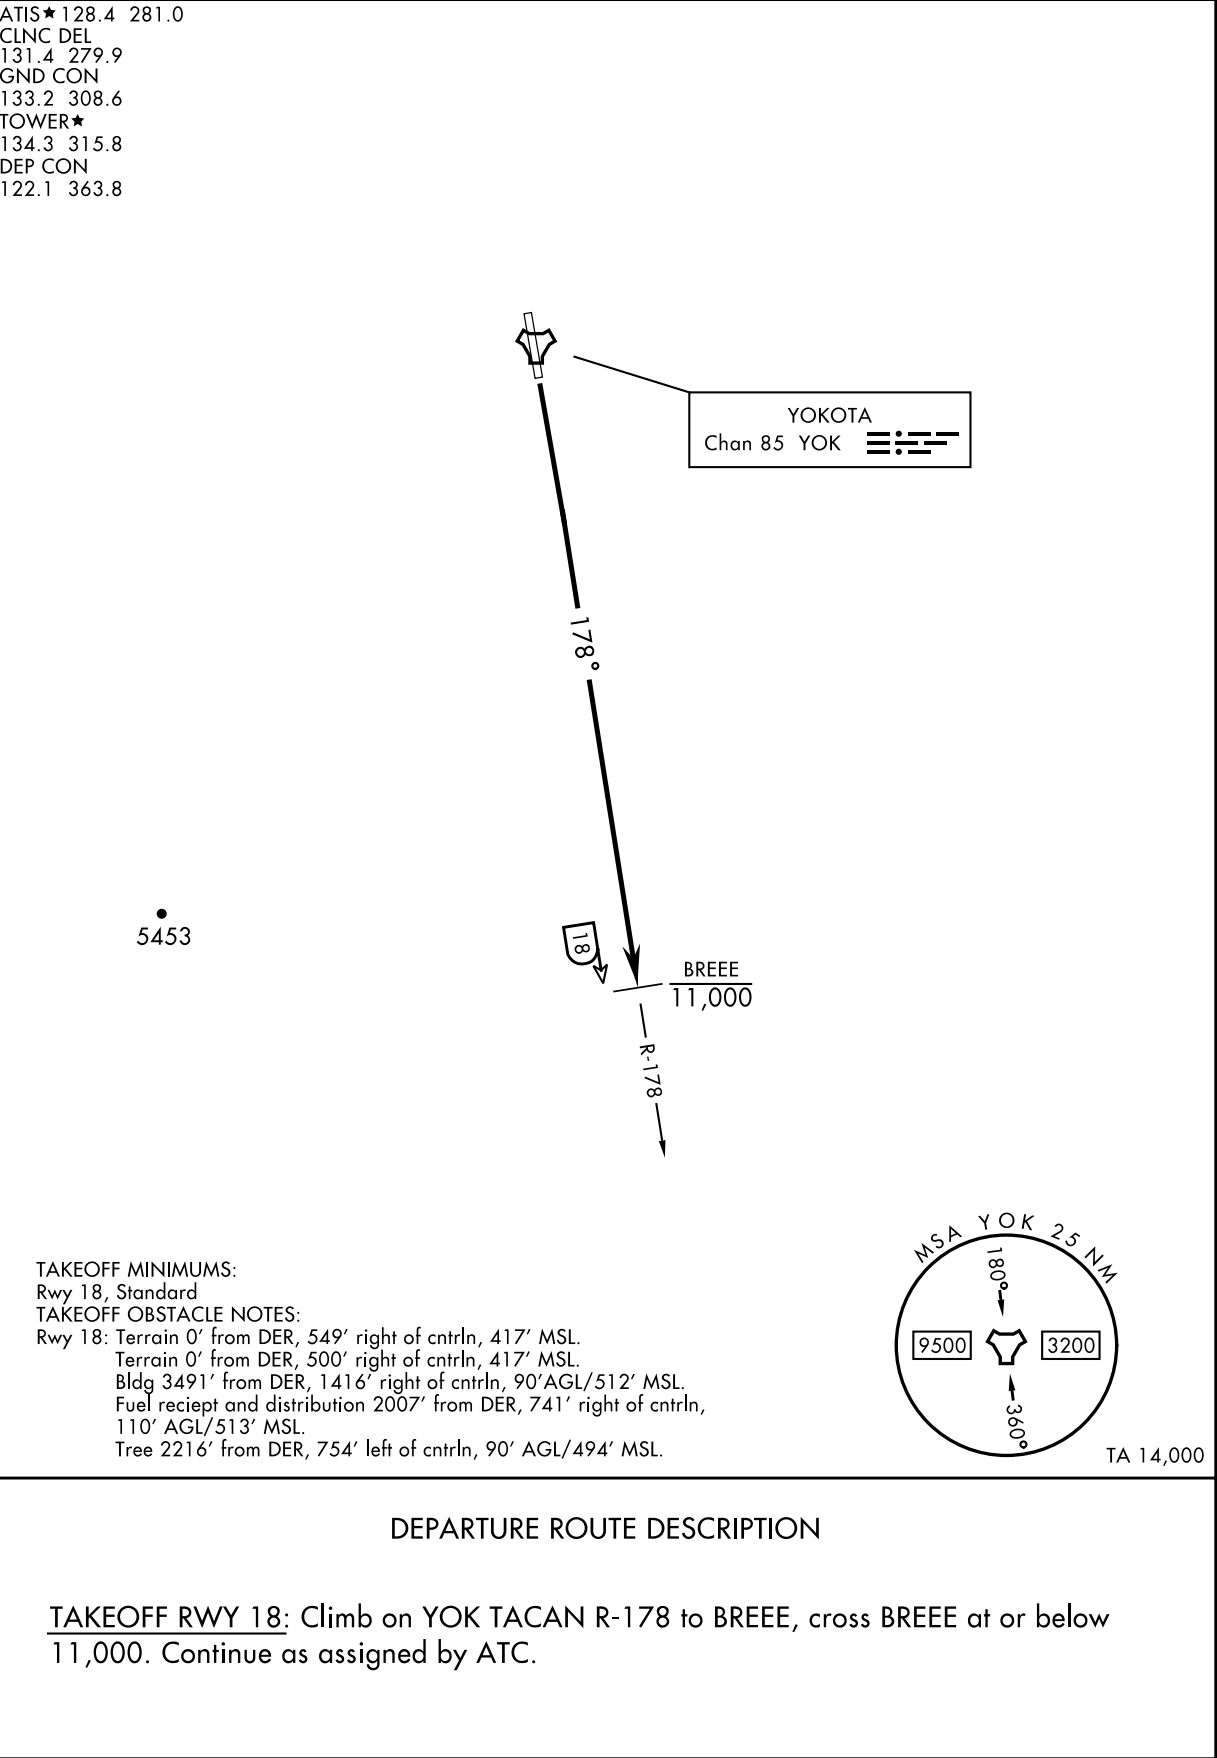


STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

TIMAP FIVE DEPARTURE(OBSTACLE)

ATIS★128.4 281.0
 CLNC DEL
 131.4 279.9
 GND CON
 133.2 308.6
 TOWER★
 134.3 315.8
 DEP CON
 122.1 363.8

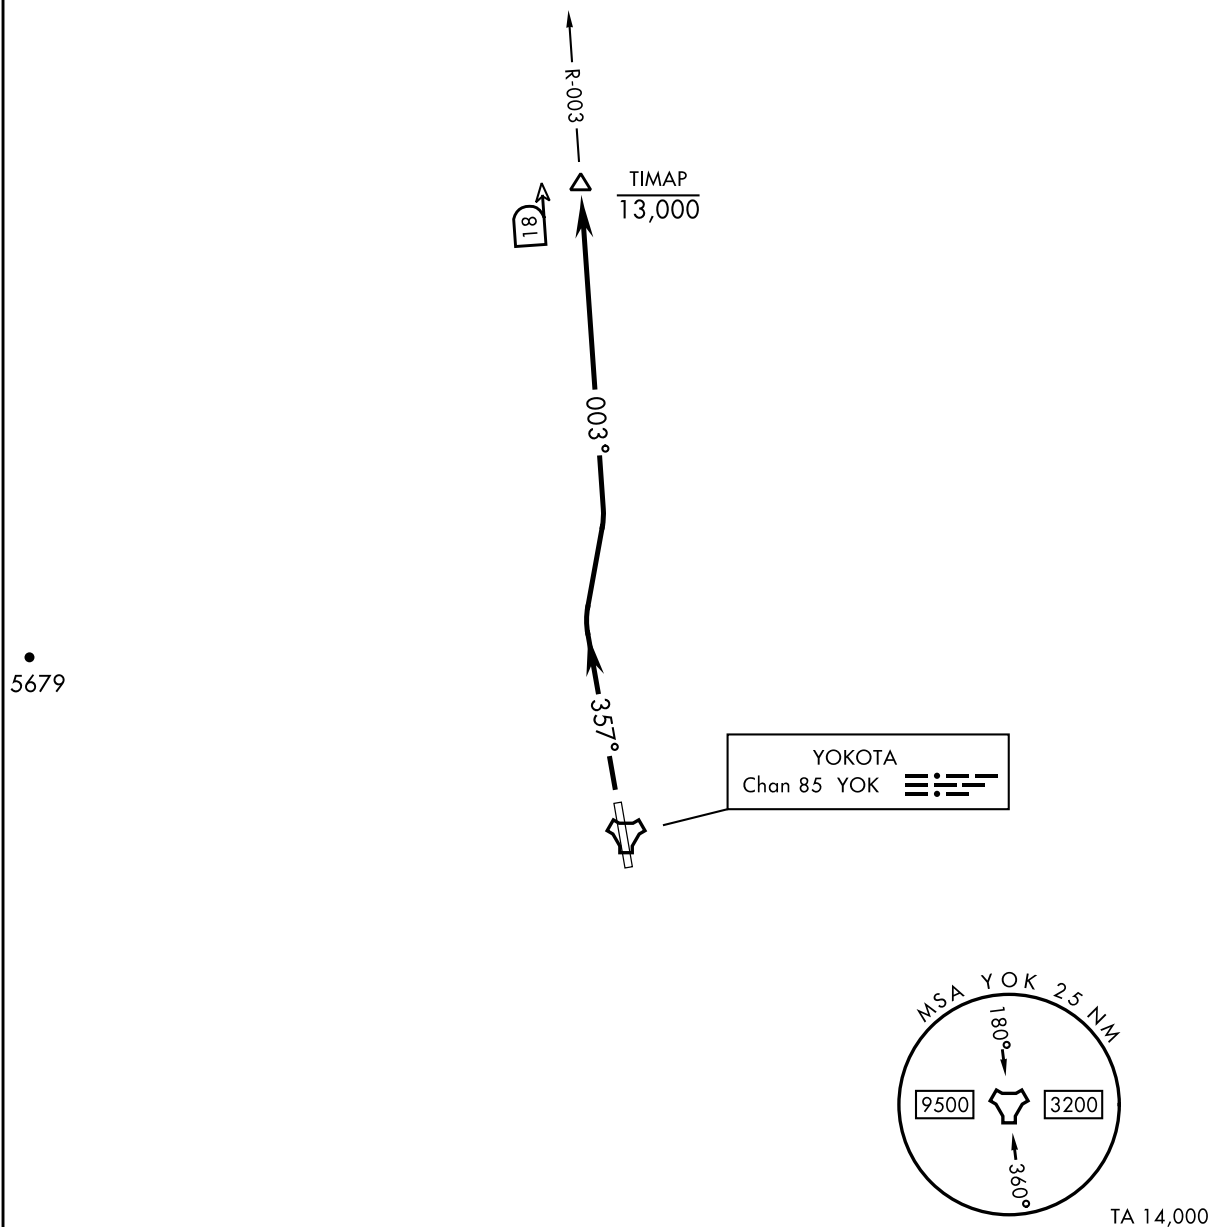

CHANGE : Update.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 36: Climb to 4000, turn right to intercept YOK TACAN R-003 to TIMAP.
 Cross TIMAP at or below 13,000. Continue as assigned by ATC.


NOTE: REPRINTING DOD FLIP

RJTY / YOKOTA

BUSYU TWO DEPARTURE

Rwy	Knots	60	120	180	240	300	360
* 18 (a)	V/V(fpm)	360	720	1080	1440	1800	2160
† 18 (b)	V/V(fpm)	465	930	1395	1860	2325	2790
* 36 (c)	V/V(fpm)	383	766	1149	1532	1915	2298
† 36 (d)	V/V(fpm)	476	952	1428	1904	2380	2856

(a) to 8000
 (b) to 13,400
 (c) to 7900

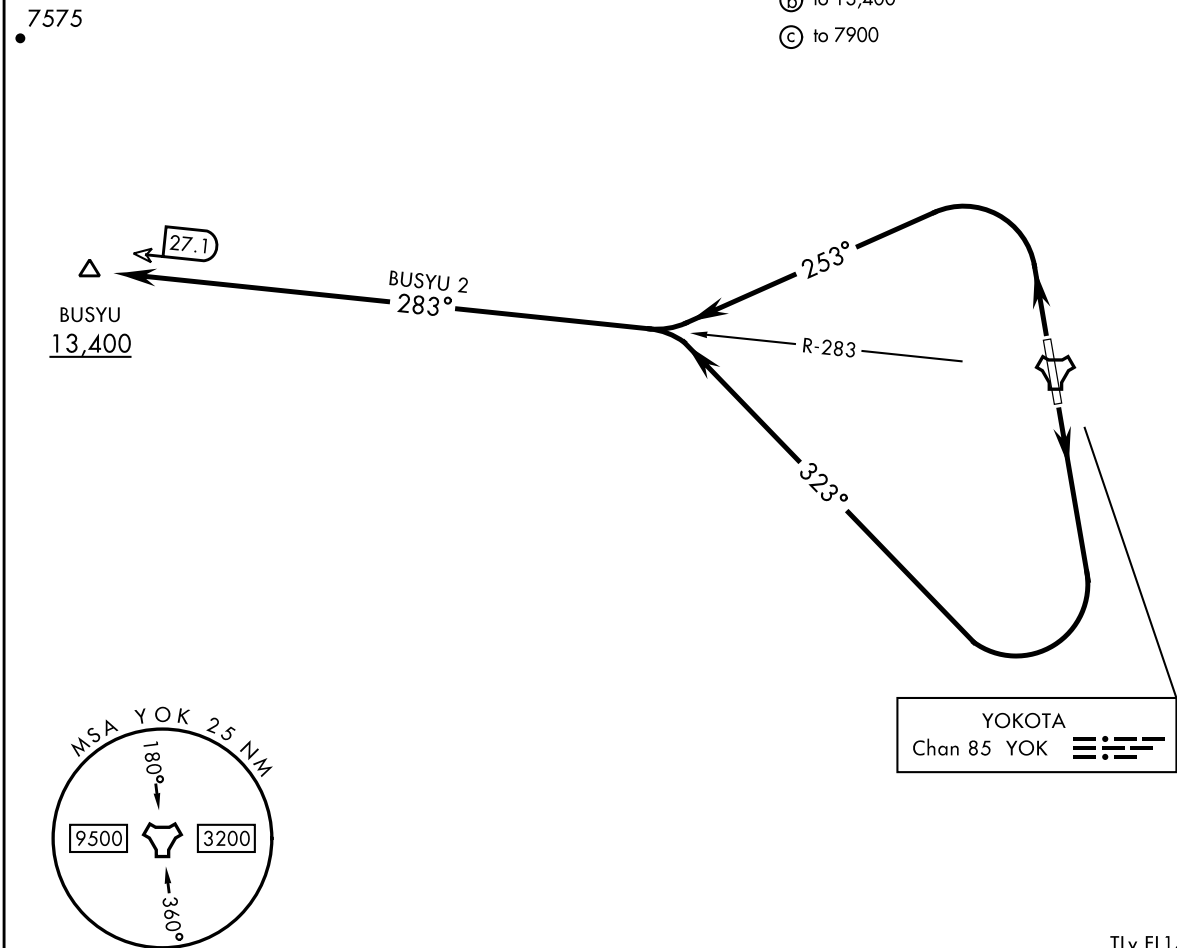

TLv FL140
TA 14,000

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 36: Climbing left turn to intercept YOK TACAN R-283 to BUSYU. Cross BUSYU at or above 13,400. Maintain ATC assigned altitude.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA


KANTO ONE DEPARTURE(RNAV)

DEP CON
122.1 363.8

RNAV1-GPS

RADAR required (non-GPS equipped
acft)TIMAP
13,000

3478

TLv FL140
TA 14,000

DEPARTURE ROUTE DESCRIPTION


TAKEOFF RWY 36: Climb direct TIMAP, cross at or below 13,000 or as assigned by ATC.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA


FUSSA TWO DEPARTURE(RNAV)

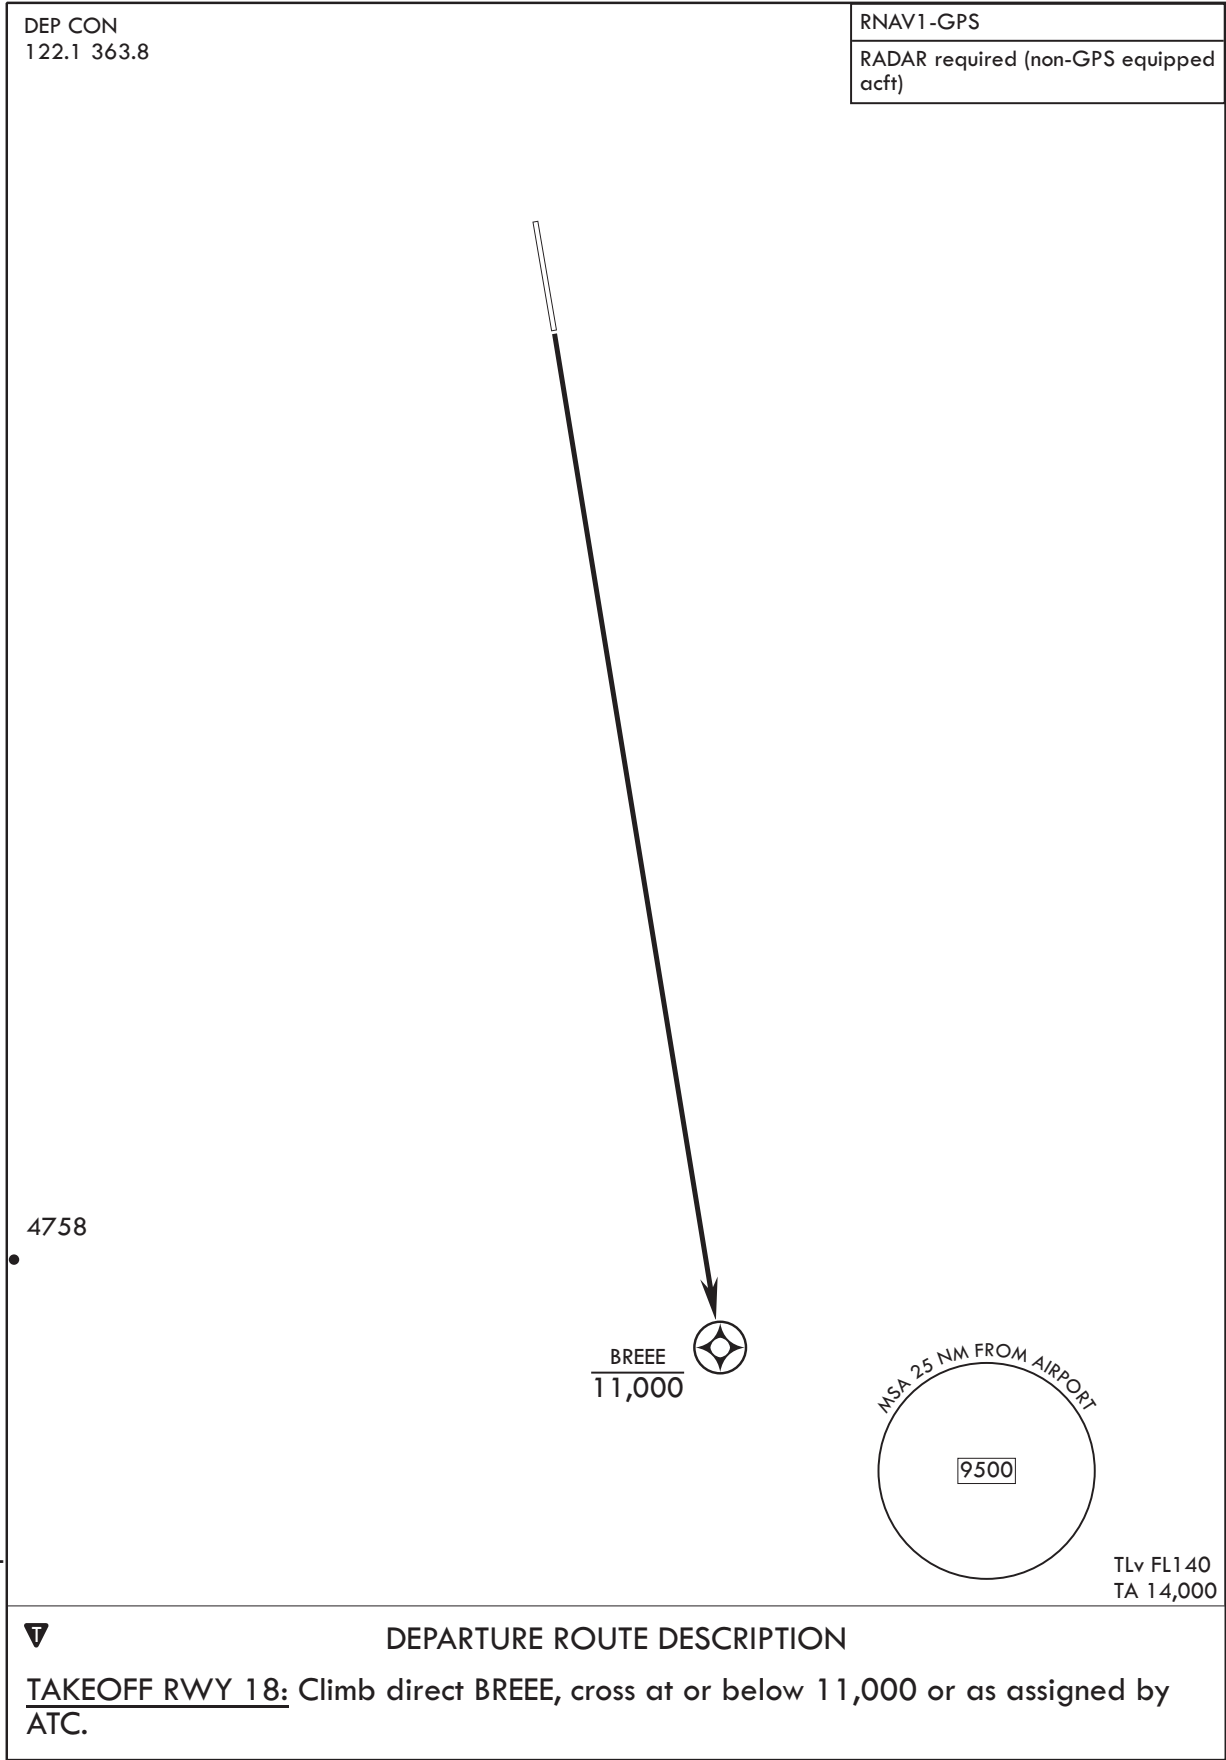

NOTE: REPRINTING DOD FLIP


INTENTIONALLY LEFT BLANK

INSTRUMENT APPROACH CHART

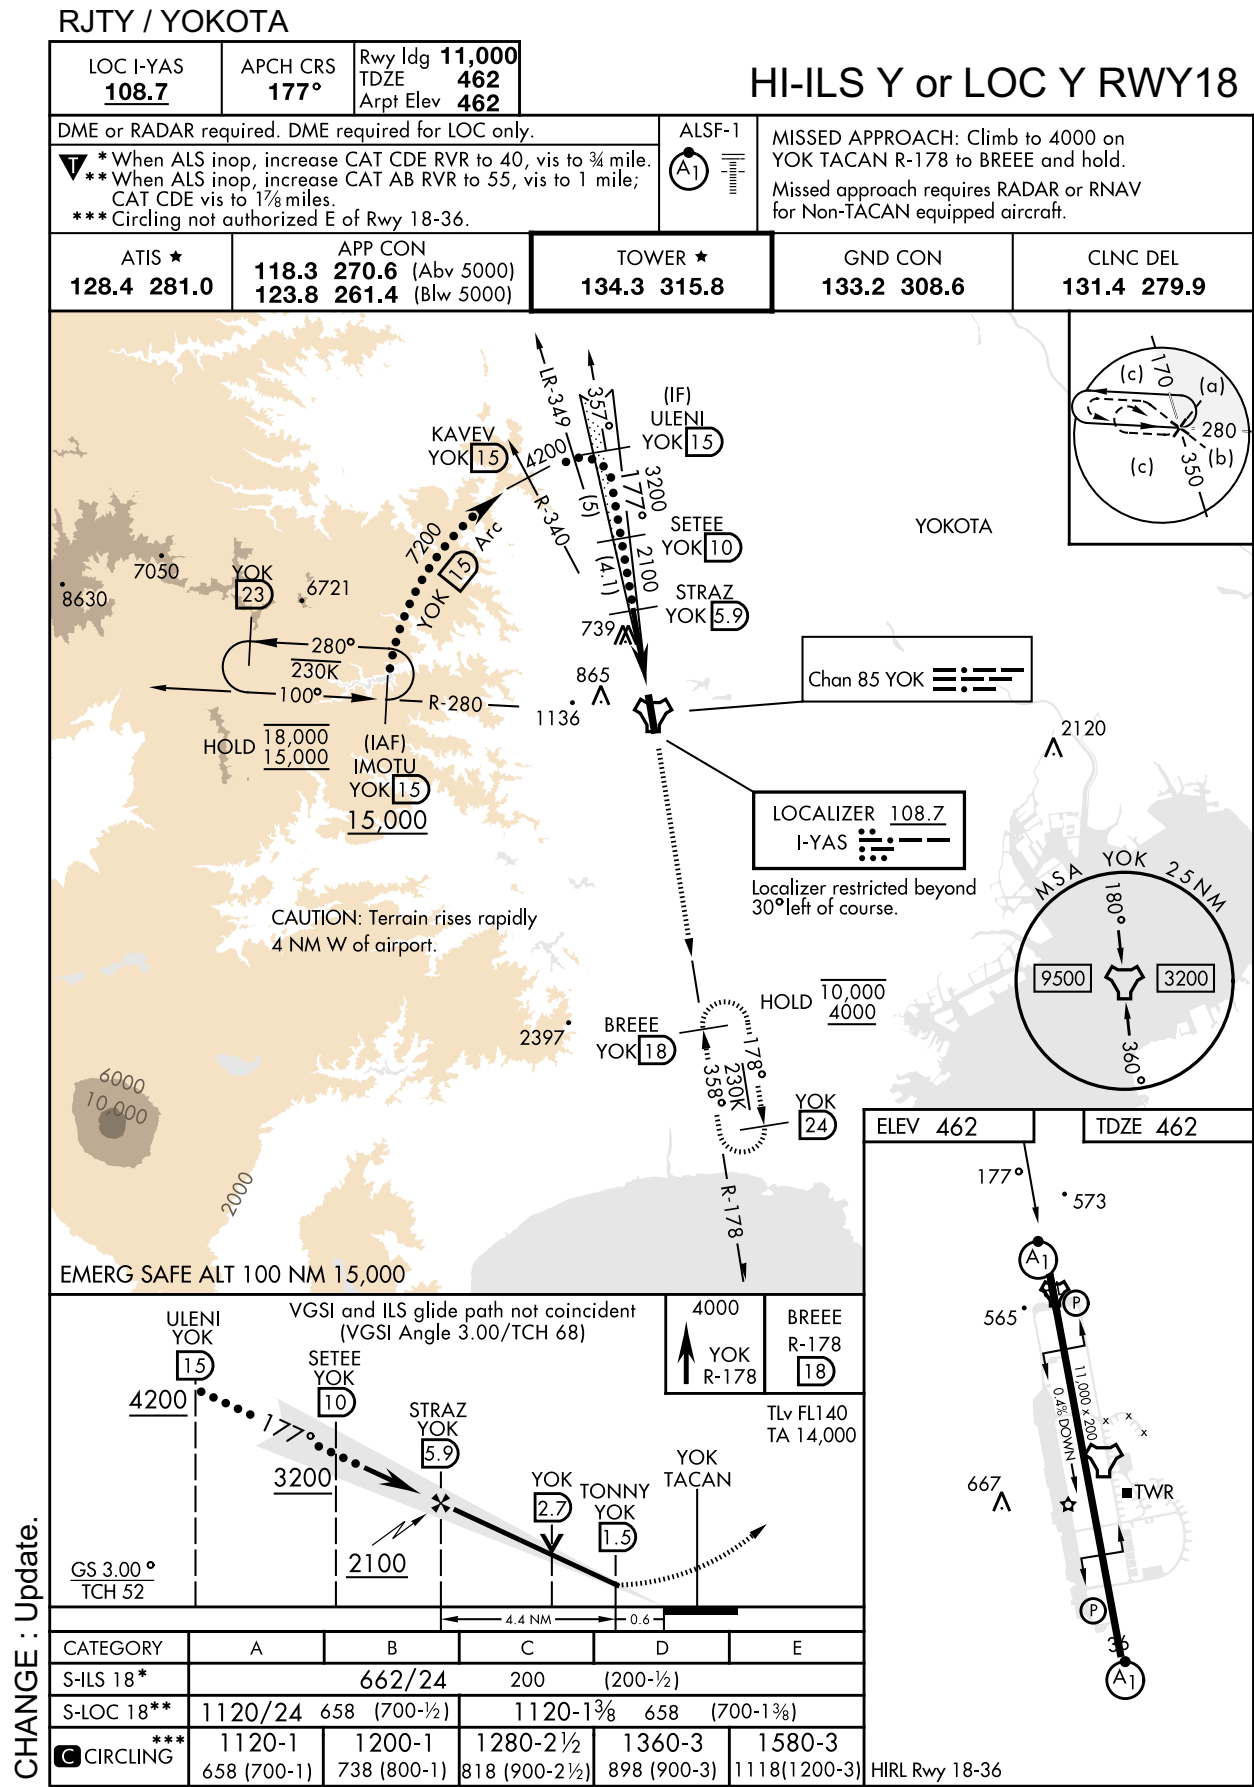


INSTRUMENT APPROACH CHART


RJTY/YOKOTA

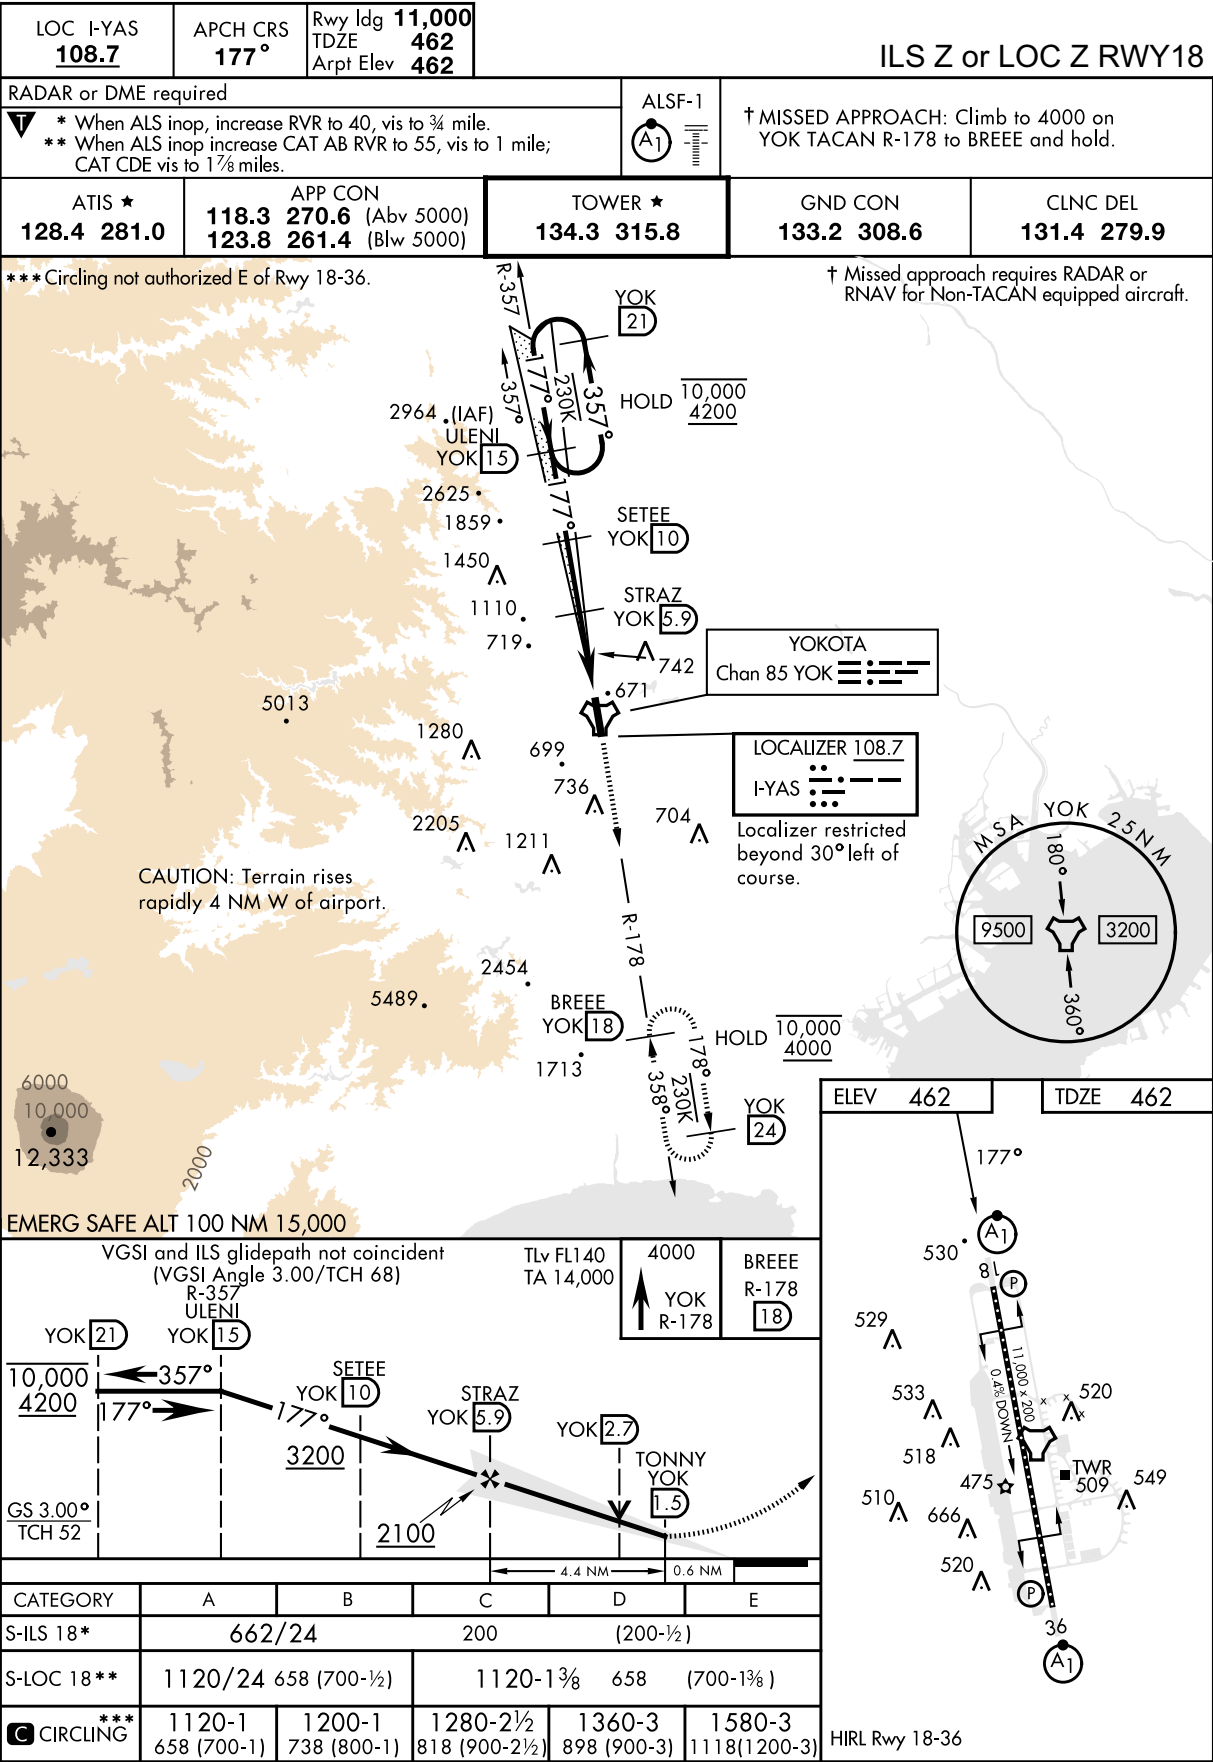

INSTRUMENT APPROACH CHART

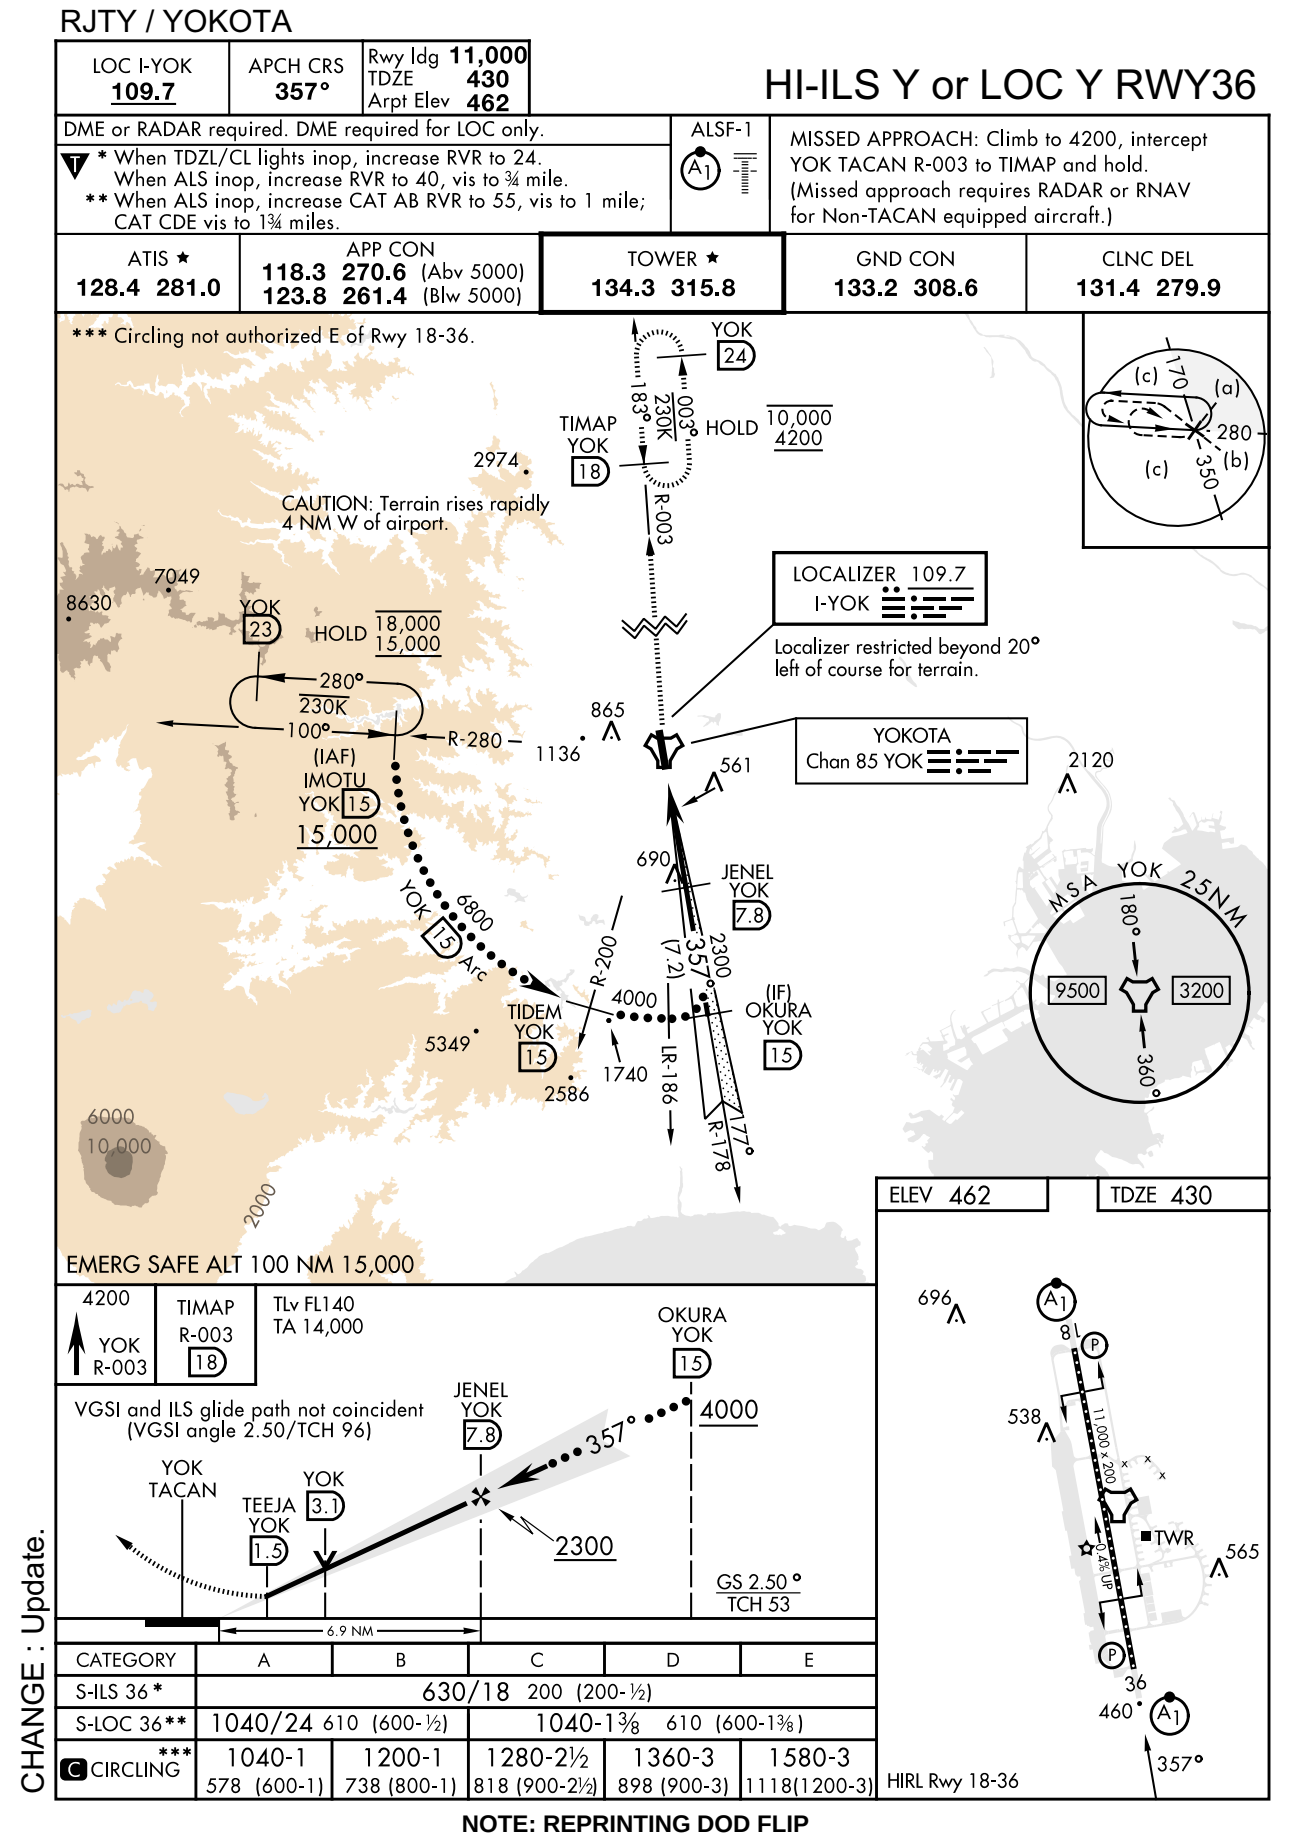

INSTRUMENT APPROACH CHART

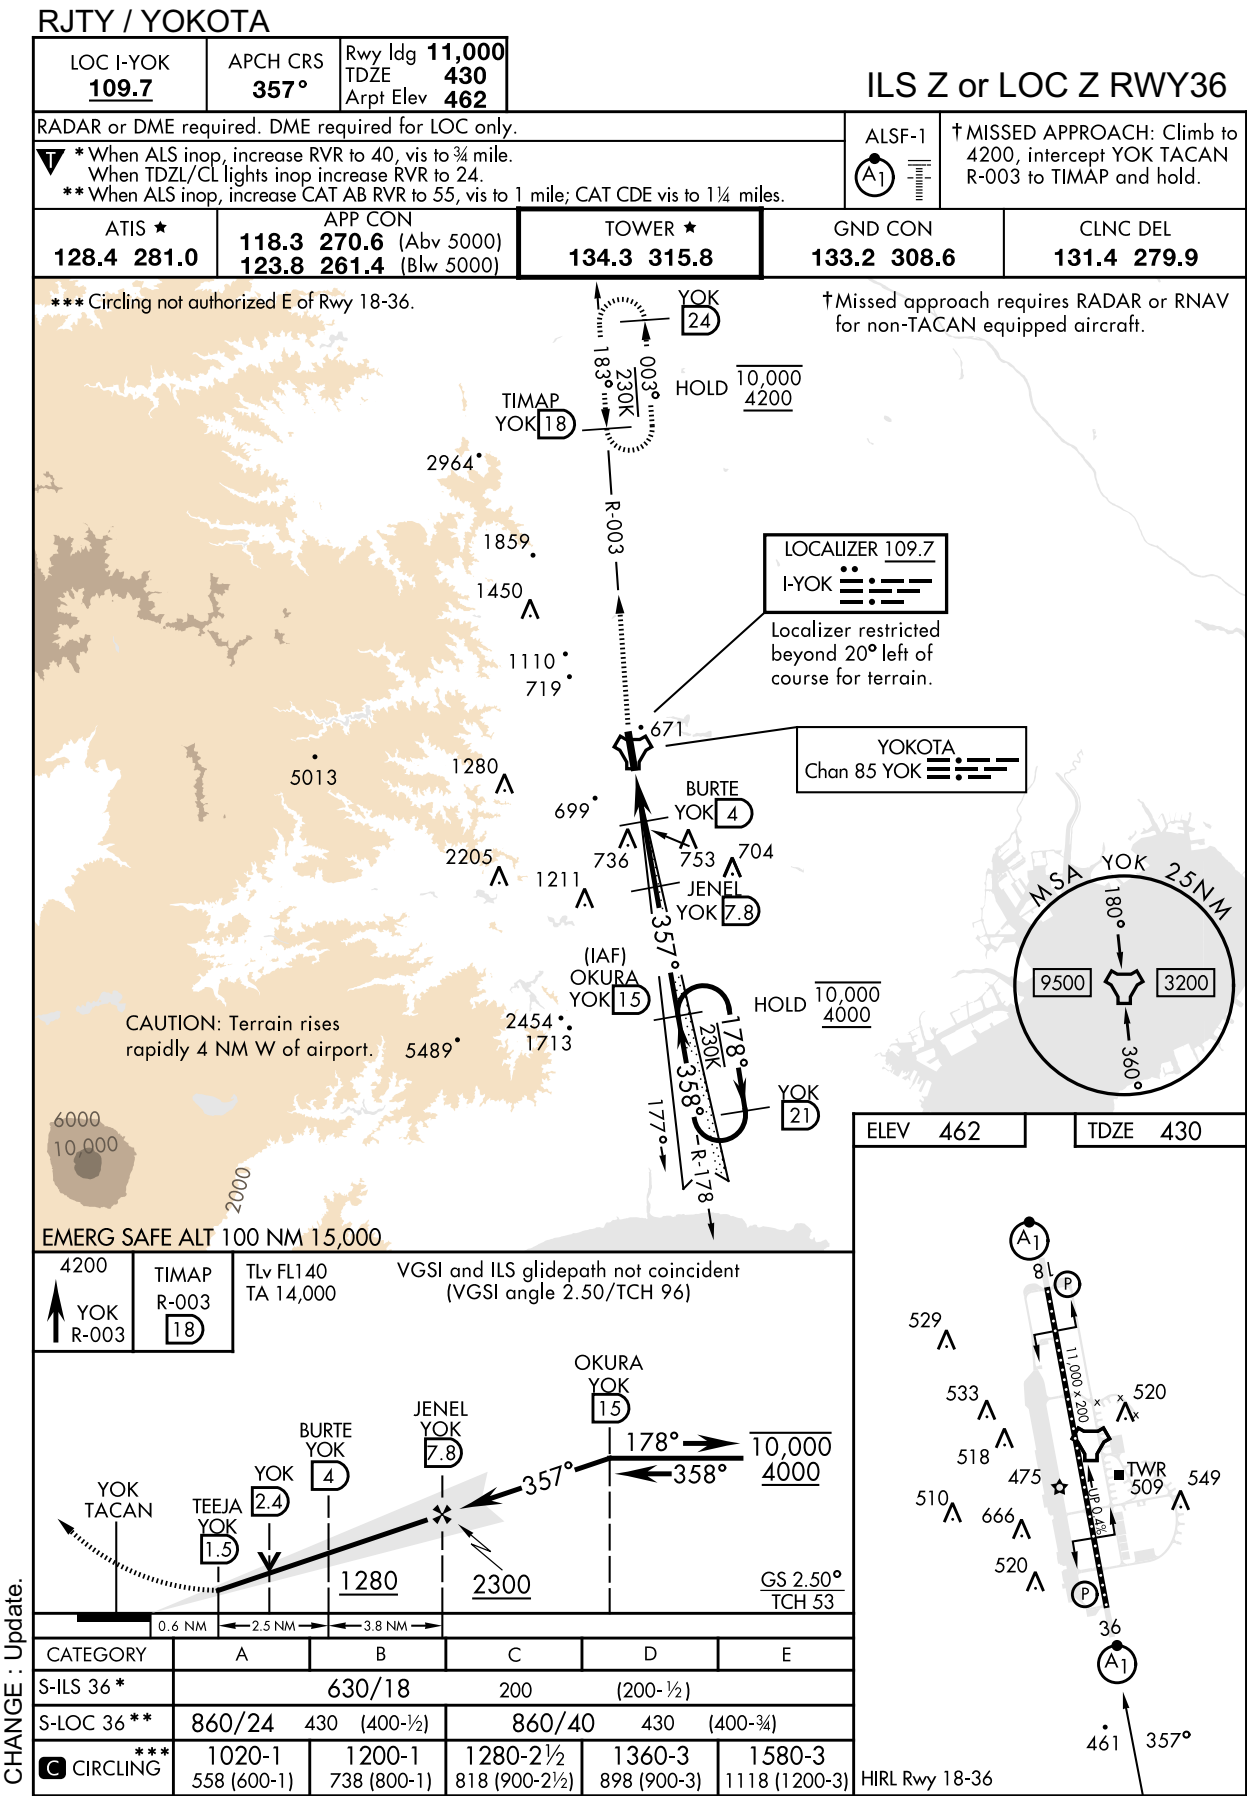

RJTY / YOKOTA

APCH CRS 177°		Rwy Idg 11,000 TDZE 462 Arpt Elev 462	RNAV(GPS)RWY18			
DME/DME RNP - 0.3 NA			ALSF-1	MISSED APPROACH: Climb to 4000 direct MESTR WPT and hold.		
* When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CD vis to 1½ miles. ** Circling not authorized E of Rwy 18-36.						
ATIS ★ 128.4 281.0		APP CON 118.3 270.6 (Abv 5000) 123.8 261.4 (Blw 5000)	TOWER ★ 134.3 315.8		GND CON 133.2 308.6	CLNC DEL 131.4 279.9

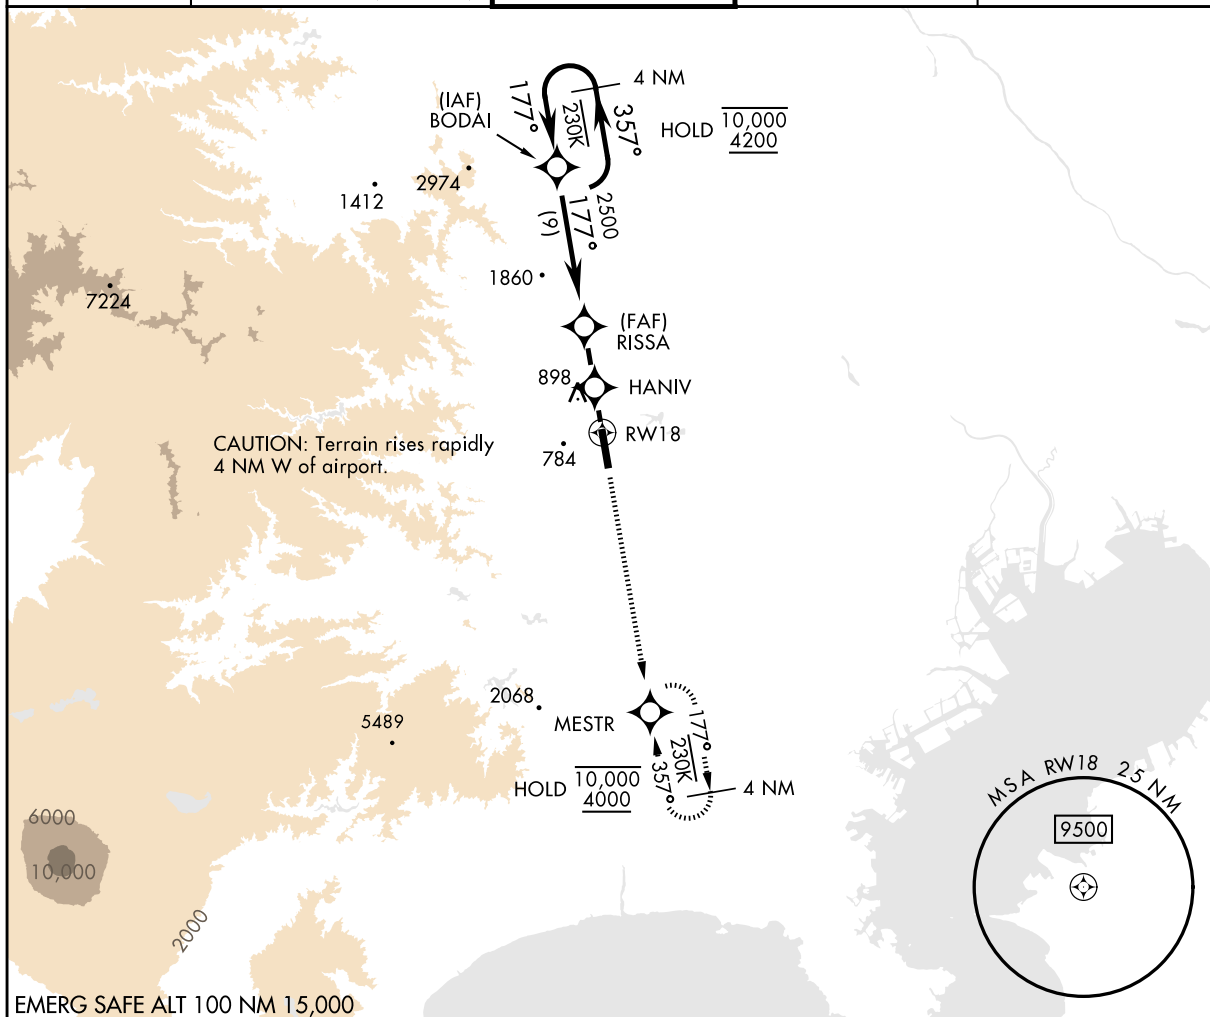


Figure 1: Instrument approach chart for RWY 18 at BODAI. The chart shows a 3.13° glide path (TCH 68) from 10,000 feet MSL to 4,200 feet MSL, then a 177° heading to 2,500 feet MSL, and finally a 177° heading to 1,360 feet MSL. Key points include BODAI, RISSA, HANIV, and RW18. The chart also shows a 1.4 NM distance to RW18 and a 3.5 NM distance to HANIV. The chart includes a table of minimum altitudes for different categories and a diagram of the runway layout.

CATEGORY	A	B	C	D
LNAV MDA *	980/24	518 (600-½)	980/55	518 (600-1)
CIRCLING **	1020-1 558 (600-1)	1200-1 738 (800-1)	1280-2½ 818 (900-2½)	1360-3 898 (900-3)

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART


RJTY / YOKOTA

APCH CRS 357°	Rwy Idg 11,000
	TDZE 430
	Arpt Elev 462

RNAV(GPS)RWY36

▽ * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 3/8 miles. ** Circling not authorized East of Rwy 18-36.	ALSF-1 	MISSED APPROACH: Climb to 4200 direct BODAI and hold.
---	--------------------	--

ATIS★ 128.4 281.0	APP CON 118.3 270.6 (ABV 5000MSL) 123.8 261.4 (BLW 5000MSL)	TOWER★ 134.3 315.8	GND CON 133.2 308.6	CLNC DEL 131.4 279.9
-------------------------------------	--	--------------------------------------	---------------------------------------	--

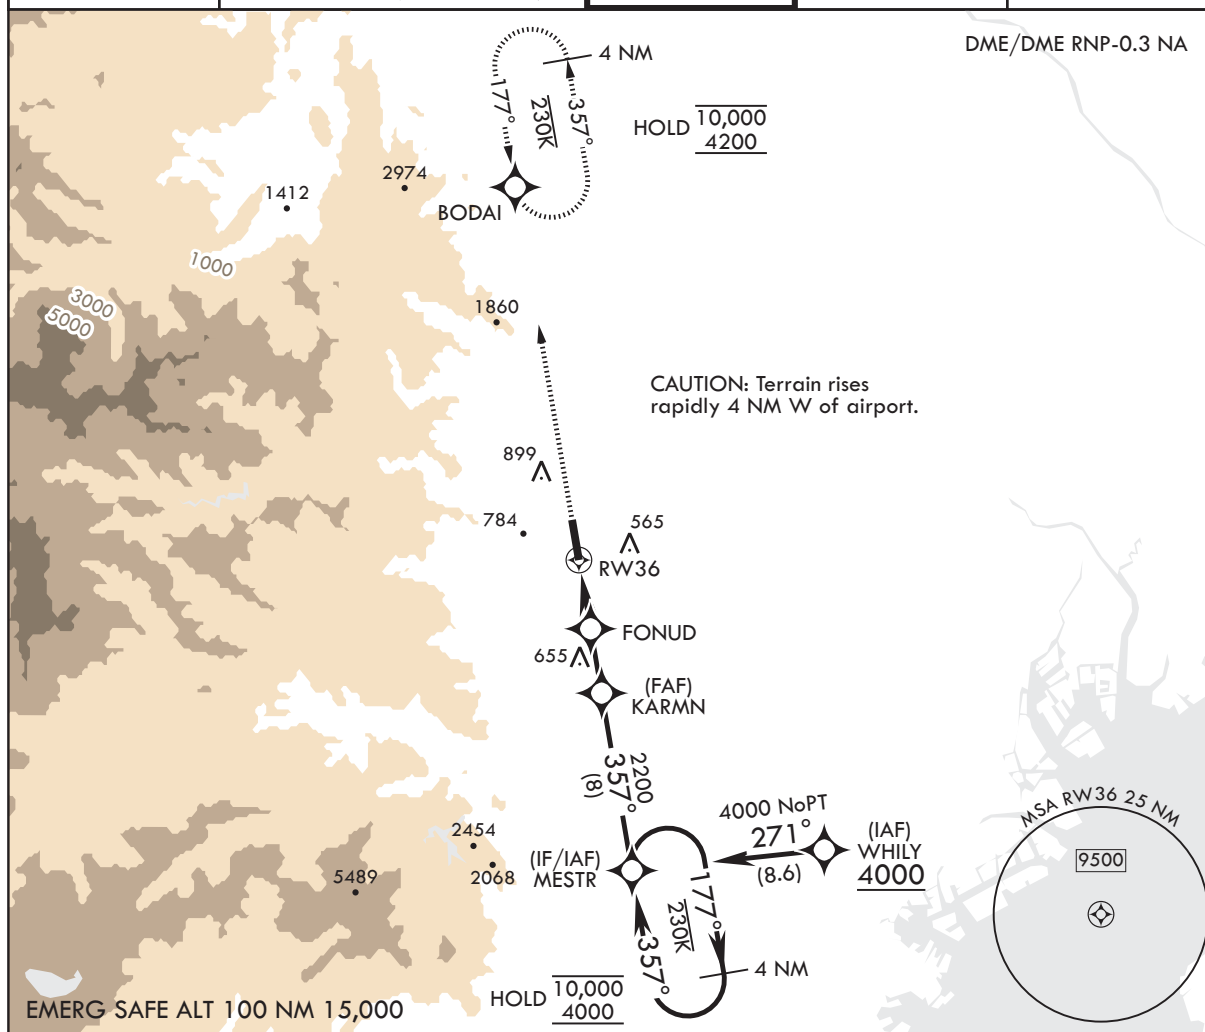

4200

BODAI

TLv FL140

TA 14,000

VGSI and descent angles not not coincident (VGSI Angle 2.50/TCH 96).

RW36

1.5 NM to RW36

3.1 NM

2.9 NM

FONUD

KARMN

MESTR

4 NM Holding Pattern

177°

357°

10,000

4000

357°

1360

2200

≤ 2.68°

TCH 75

CATEGORY	A	B	C	D
LNAV MDA*	900/24	470 (500-½)	900/50	470 (500-1)
CIRCLING**	1020-1 558 (600-1)	1200-1 738 (800-1)	1280-2½ 818 (900-2½)	1360-3 898 (900-3)

ELEV 462

TDZE 430

81

529

533

518

510

666

520

36

1,000 x 200

0.4% Up

TWR

509

549

357°

HIRL all rwys

NOTE: REPRINTING DOD FLIP