



AERODROME CHART

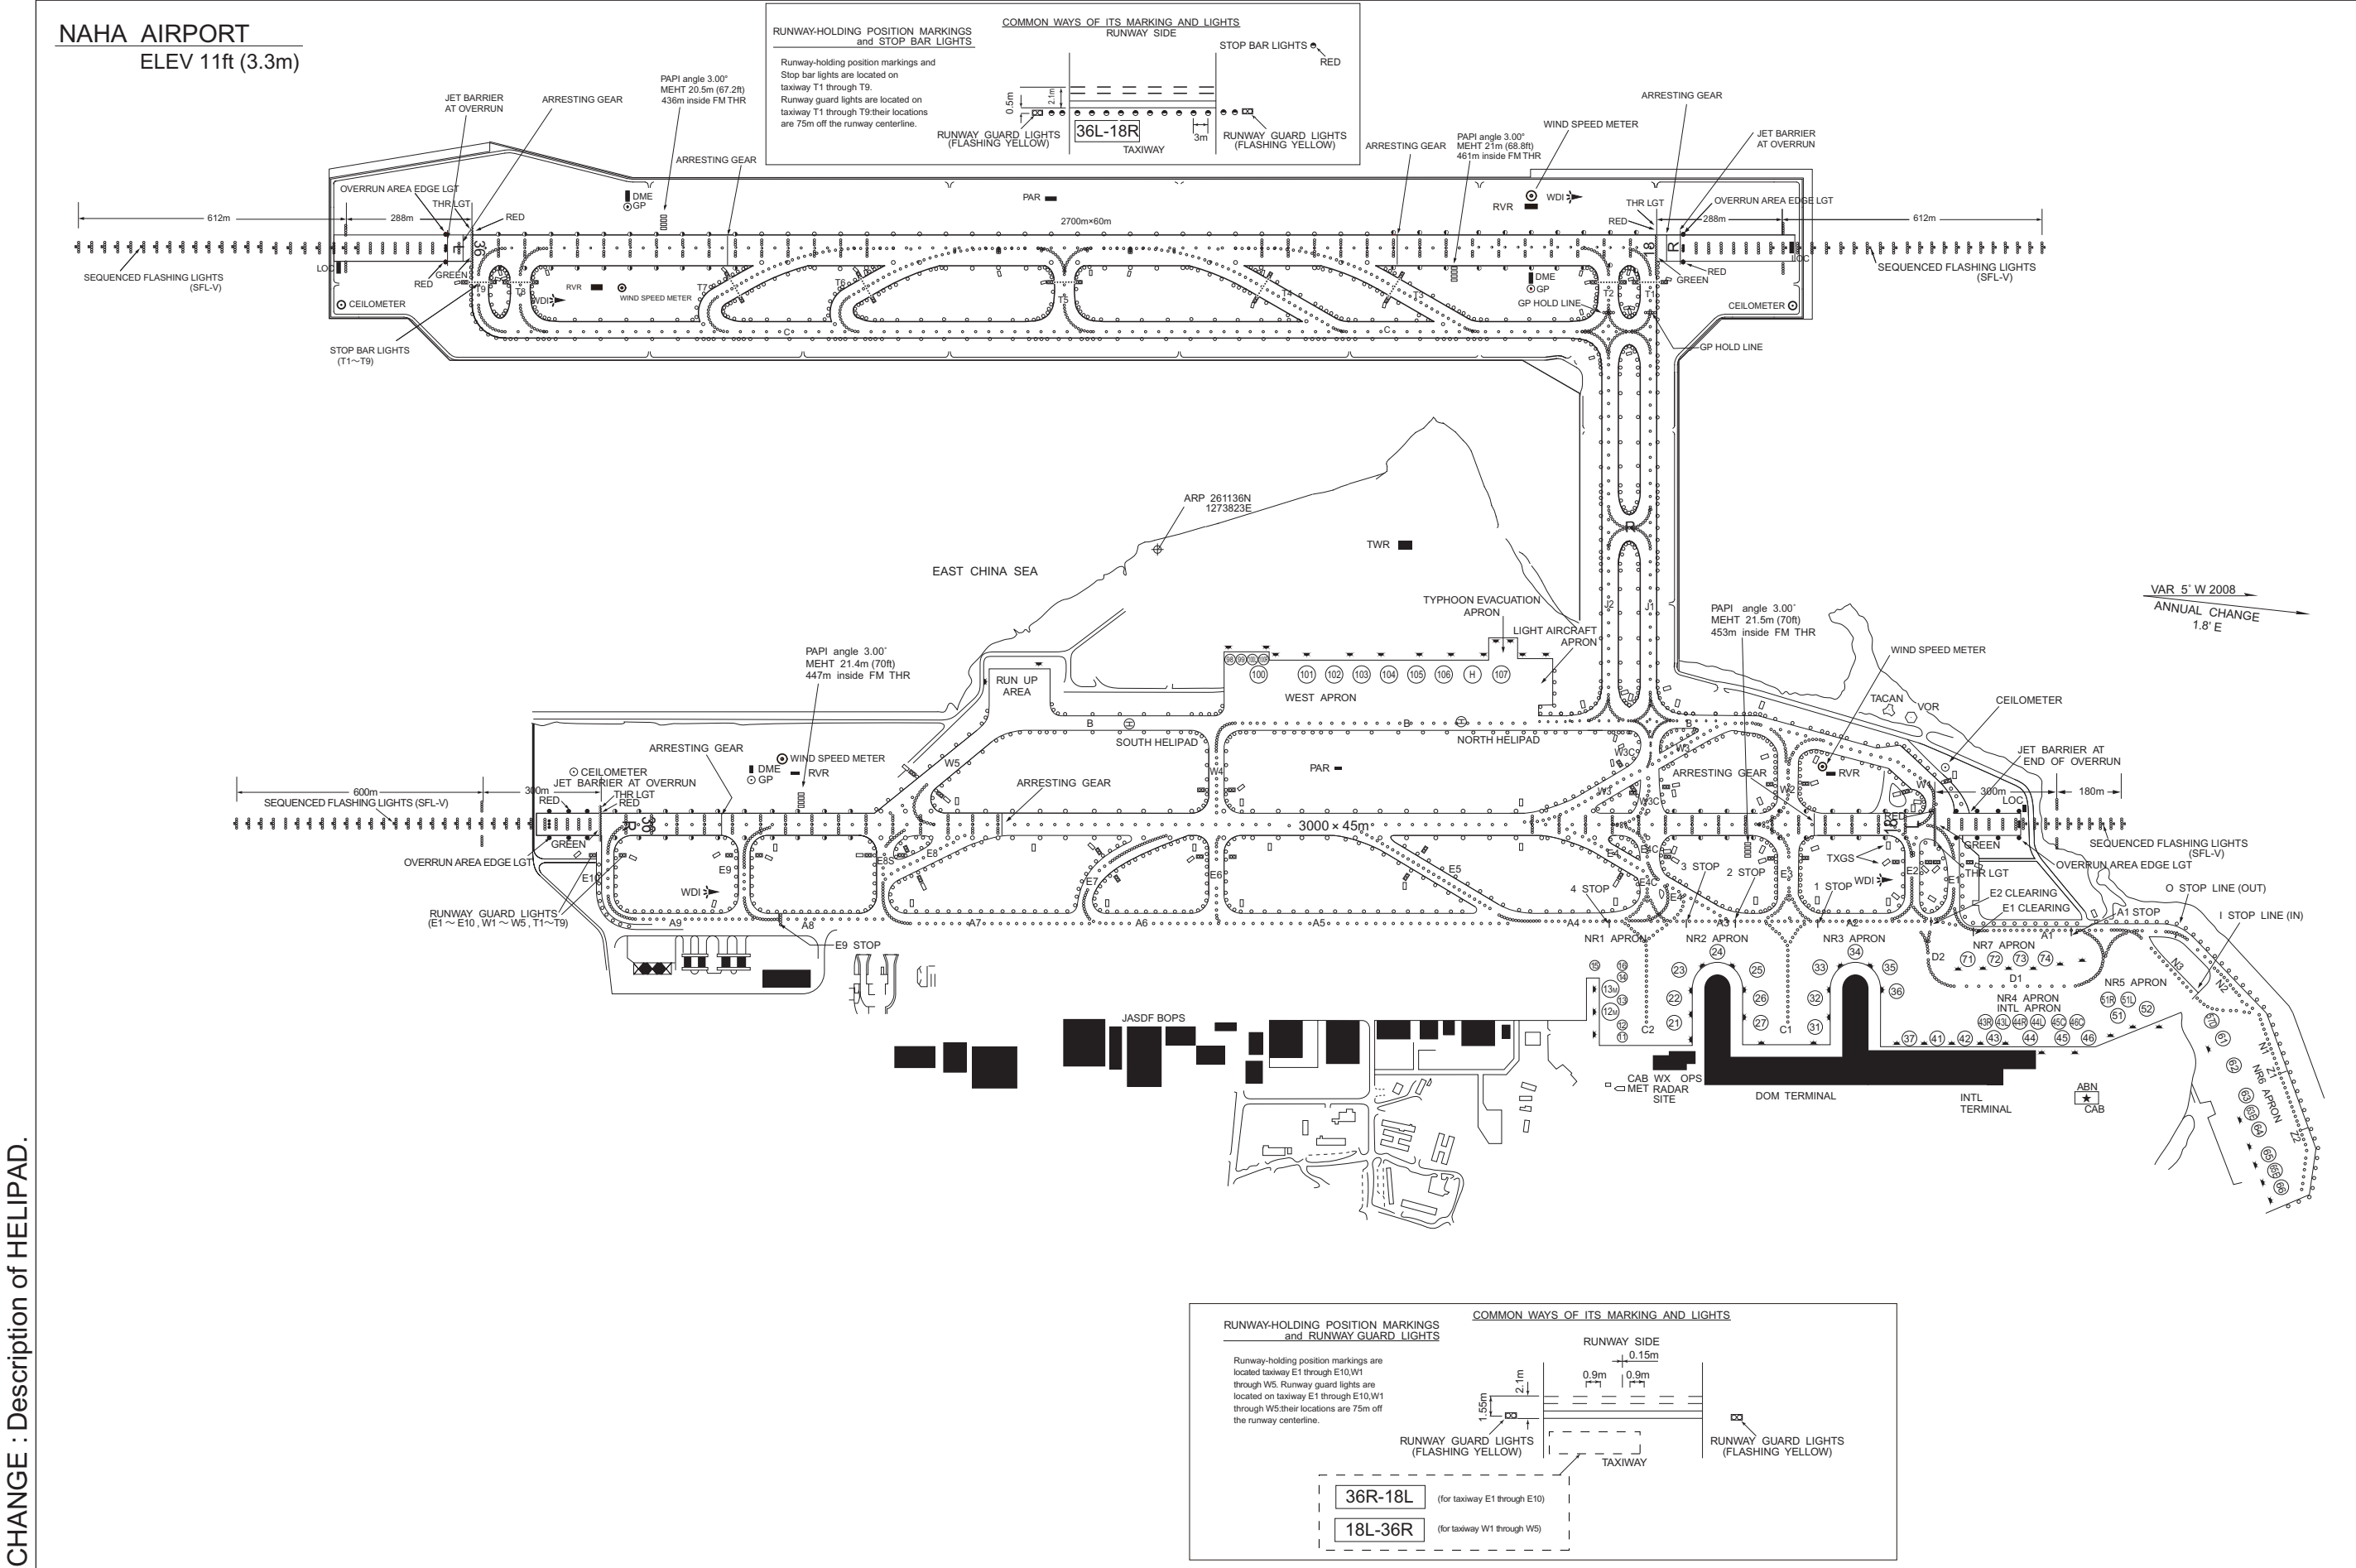

CHANGE : Description of HELIPAD.



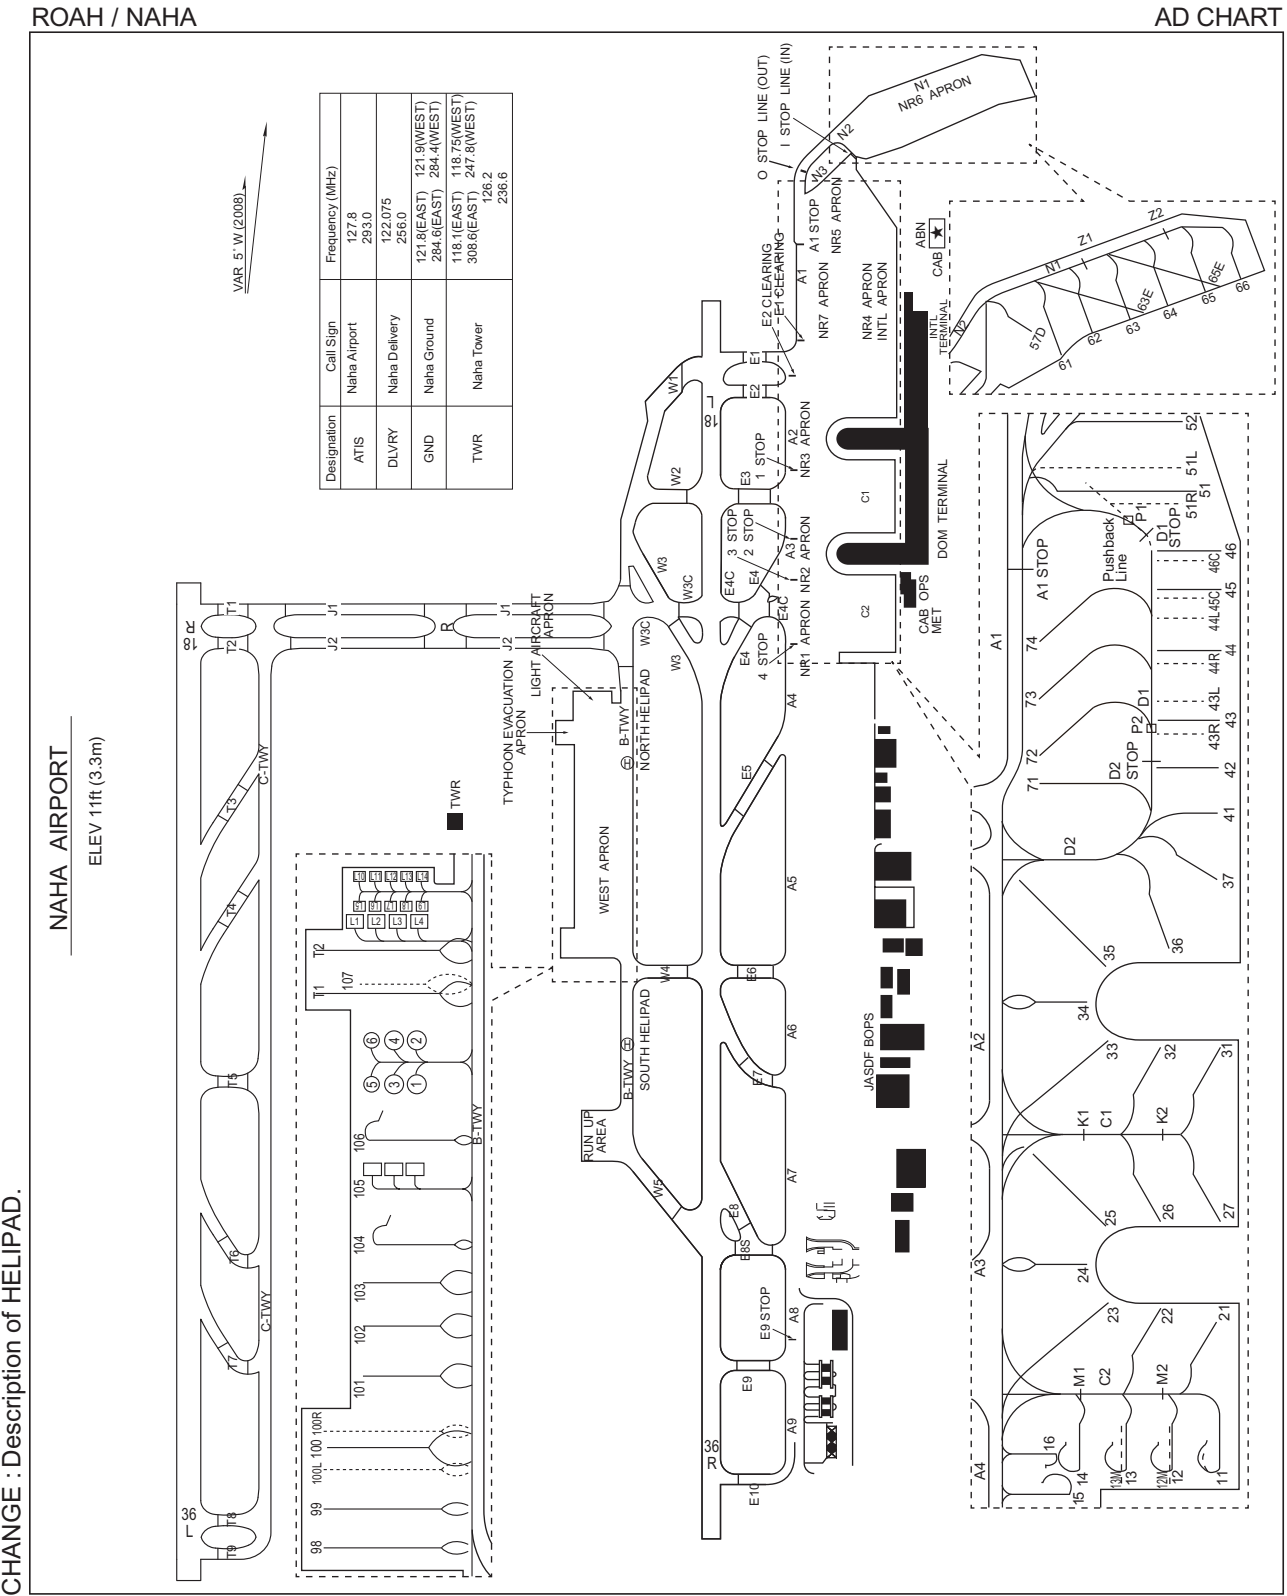


**INTENTIONALLY LEFT BLANK**

DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC  
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO  
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 6°W - SEP 2025

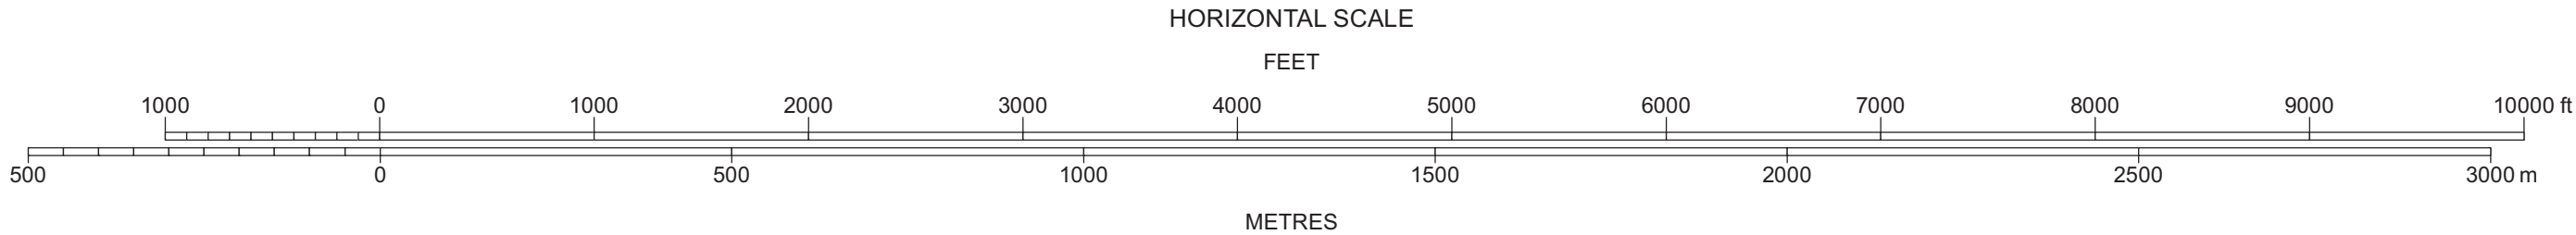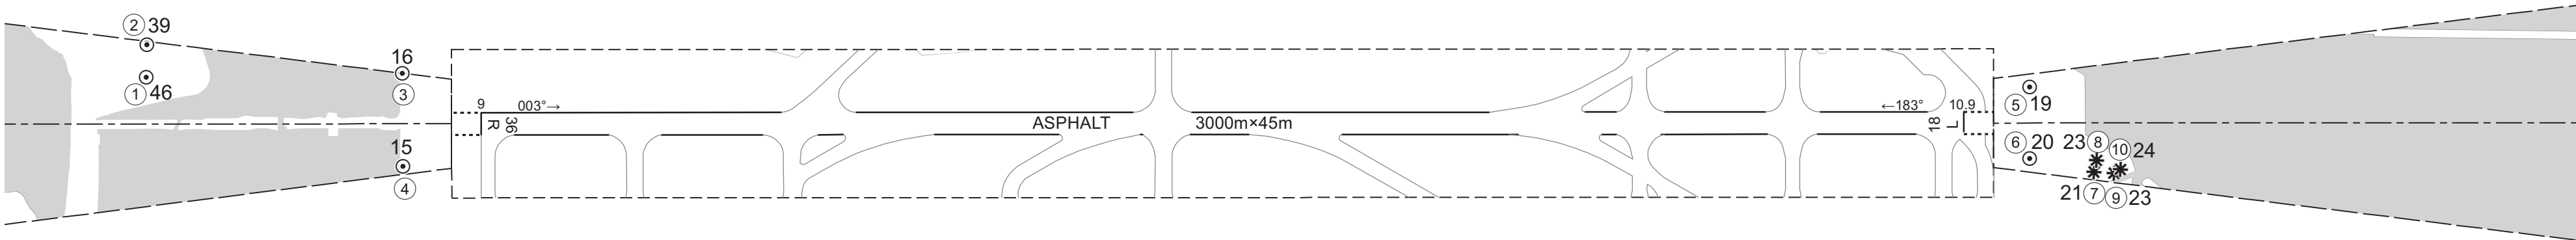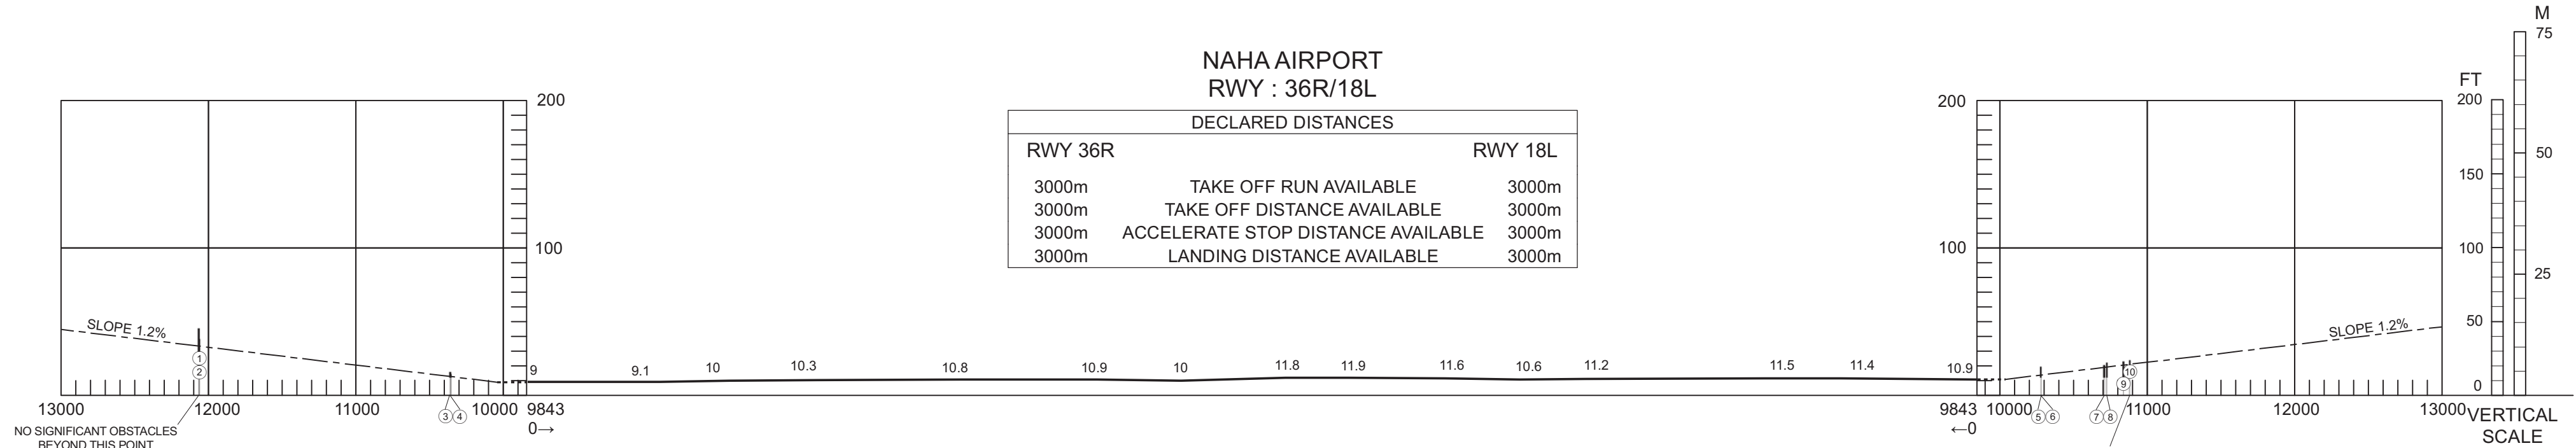

| LEGEND |                                         | AMENDMENT RECORD |      |            |
|--------|-----------------------------------------|------------------|------|------------|
| ①      | IDENTIFICATION NUMBER                   | Nr               | DATE | ENTERED BY |
| ⊙      | POLE, TOWER, SPIRE, ANTENNA, ETC.       |                  |      |            |
| *      | TREE                                    |                  |      |            |
| ■      | HYDROGRAPHY                             |                  |      |            |
| ■      | BUILDING OR LARGE STRUCTURE             |                  |      |            |
| ⋯      | TERRAIN CONTOUR (ft)                    |                  |      |            |
| —      | TERRAIN PENETRATING OBSTACLE PLANE (ft) |                  |      |            |
| —      | RAILROAD                                |                  |      |            |

測量法に基づく国土地理院長承認(使用) R 6JHs 299

CHANGE : Update.



DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC  
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO  
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 6°W - SEP 2025

NAHA AIRPORT  
RWY : 36L/18R

| DECLARED DISTANCES |                                    |         |
|--------------------|------------------------------------|---------|
| RWY 36L            |                                    | RWY 18R |
| 2700m              | TAKE OFF RUN AVAILABLE             | 2700m   |
| 2700m              | TAKE OFF DISTANCE AVAILABLE        | 2700m   |
| 2700m              | ACCELERATE STOP DISTANCE AVAILABLE | 2700m   |
| 2700m              | LANDING DISTANCE AVAILABLE         | 2700m   |

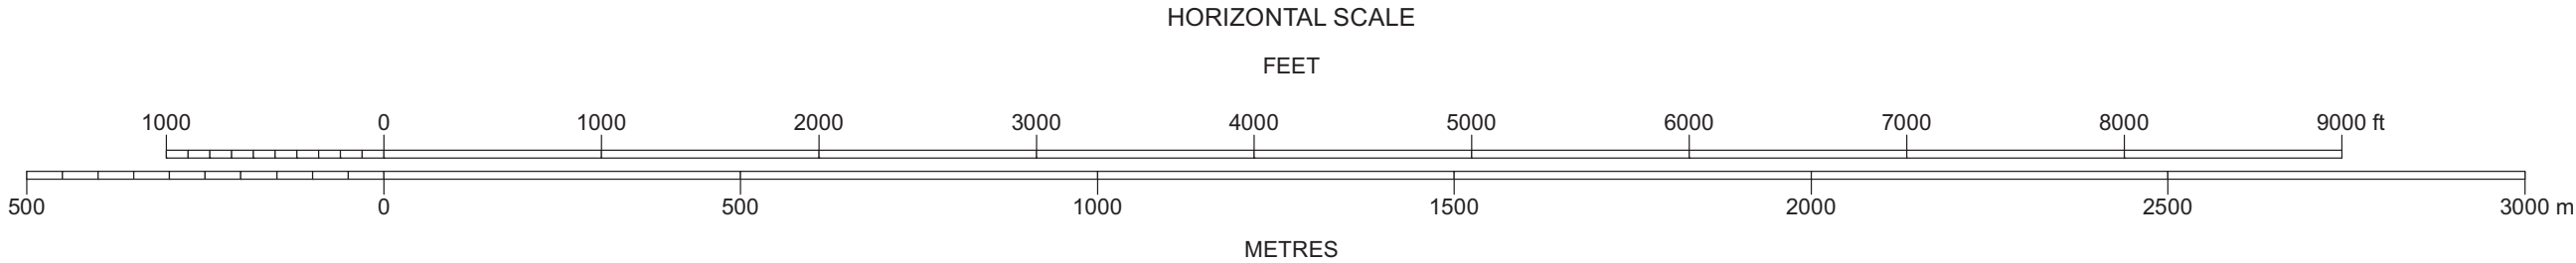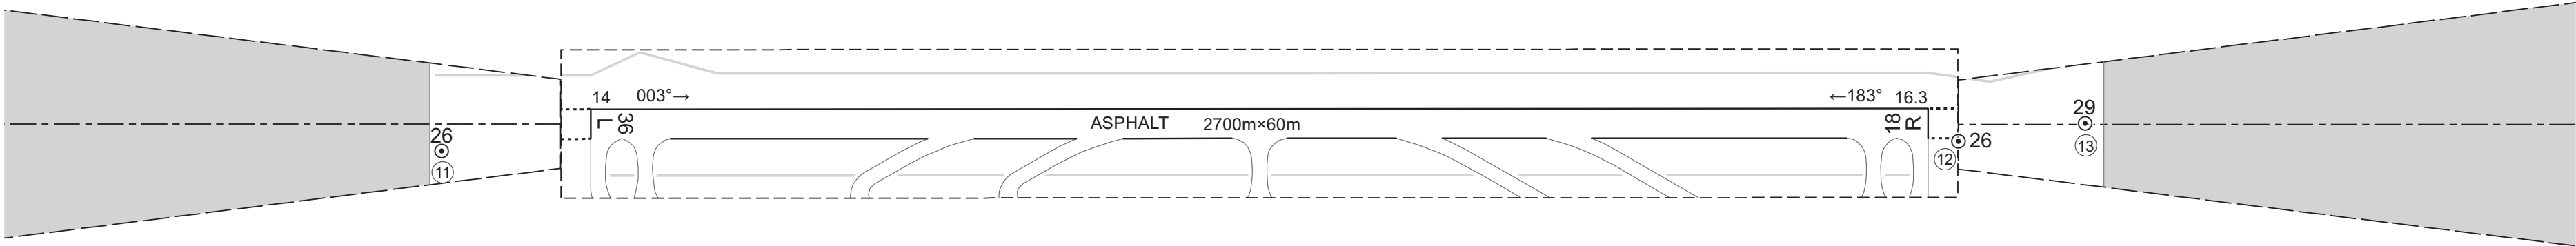


| LEGEND |                                         | AMENDMENT RECORD |          |            |
|--------|-----------------------------------------|------------------|----------|------------|
|        |                                         | Nr               | DATE     | ENTERED BY |
| ①      | IDENTIFICATION NUMBER                   |                  |          |            |
| ⦿      | POLE, TOWER, SPIRE, ANTENNA, ETC.       |                  |          |            |
| ✱      | TREE                                    | —+—              | RAILROAD |            |
| ■      | HYDROGRAPHY                             |                  |          |            |
| ■      | BUILDING OR LARGE STRUCTURE             |                  |          |            |
| ≡      | TERRAIN CONTOUR (ft)                    |                  |          |            |
| —      | TERRAIN PENETRATING OBSTACLE PLANE (ft) |                  |          |            |

測量法に基づく国土地理院長承認(使用) R 6JHs 299

CHANGE : Update.



# AERODROME OBSTACLE CHART-ICAO TYPE B



STANDARD DEPARTURE CHART-INSTRUMENT

ROAH/ NAHA

SID

NAHA NORTH FOUR DEPARTURE

RWY18L/18R: (Not established)  
RWY36R : Climb RWY HDG to NHC 2.4DME,...  
RWY36L : Climb RWY HDG to 500FT,...  
...turn left, via NHC R341 to EISAR.

Note RWY36R/36L: 5.0% climb gradient required up to 500FT.

SCUBA TRANSITION

From over EISAR, via NHC R341 to 24.1DME, turn right to intercept NHC R344 to SCUBA.  
Cross SCUBA at or above 4000FT.

LAVON ONE DEPARTURE

RWY18L : Climb RWY HDG to NHC 4.7DME, turn right, via NHC R196...  
RWY18R : Climb RWY HDG to 600FT, turn right, via NHC R211...  
... to intercept and proceed via NHC 15.0DME clockwise ARC to LAVON.

RWY36R : Climb RWY HDG to NHC 2.4DME, turn left, via NHC R341...  
RWY36L : Climb RWY HDG to 500FT, turn left, via NHC R308...  
...to intercept and proceed via NHC 15.0DME counterclockwise ARC to LAVON.

Note RWY36R/36L: 5.0% climb gradient required up to 500FT.

OLVAL ONE DEPARTURE

RWY18L : Climb RWY HDG to NHC 4.7DME, turn right, via NHC R196...  
RWY18R : Climb RWY HDG to 600FT, turn right, via NHC R211...  
... to intercept and proceed via NHC 15.0DME clockwise ARC to OLVAL.

RWY36R : Climb RWY HDG to NHC 2.4DME, turn left, via NHC R341...  
RWY36L : Climb RWY HDG to 500FT, turn left, via NHC R308...  
...to intercept and proceed via NHC 15.0DME counterclockwise ARC to OLVAL.

Note RWY36R/36L: 5.0% climb gradient required up to 500FT.

NAHA SOUTHWEST FOUR DEPARTURE


RWY18L : Climb RWY HDG to NHC 4.7DME,...  
RWY18R : Climb RWY HDG to 500FT,...  
... turn right, via NHC R196 to LAFTY.  
RWY36R/36L: (Not established)

CHANGE:New PROC

## STANDARD DEPARTURE CHART-INSTRUMENT


ROAH/NAHA

SID

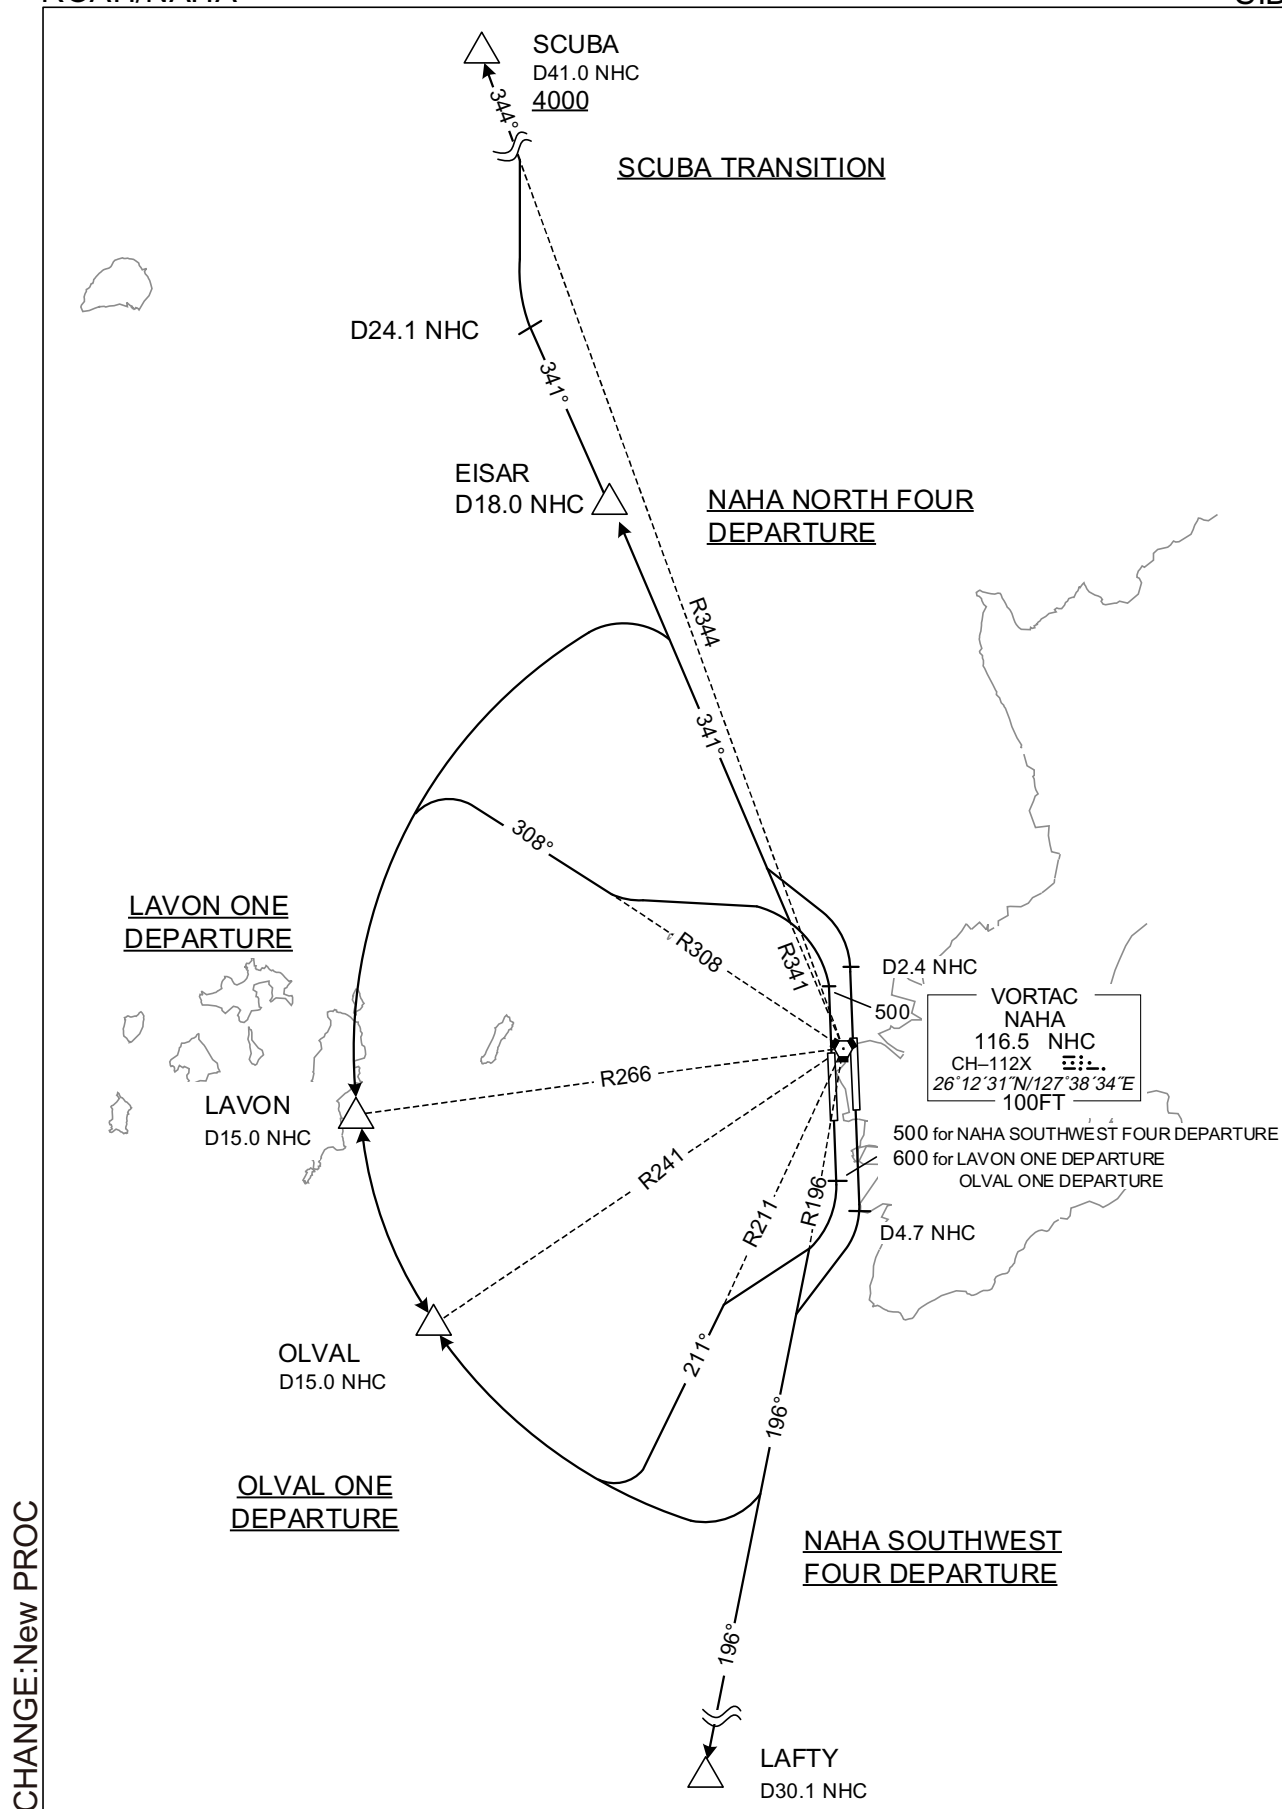



STANDARD DEPARTURE CHART-INSTRUMENT

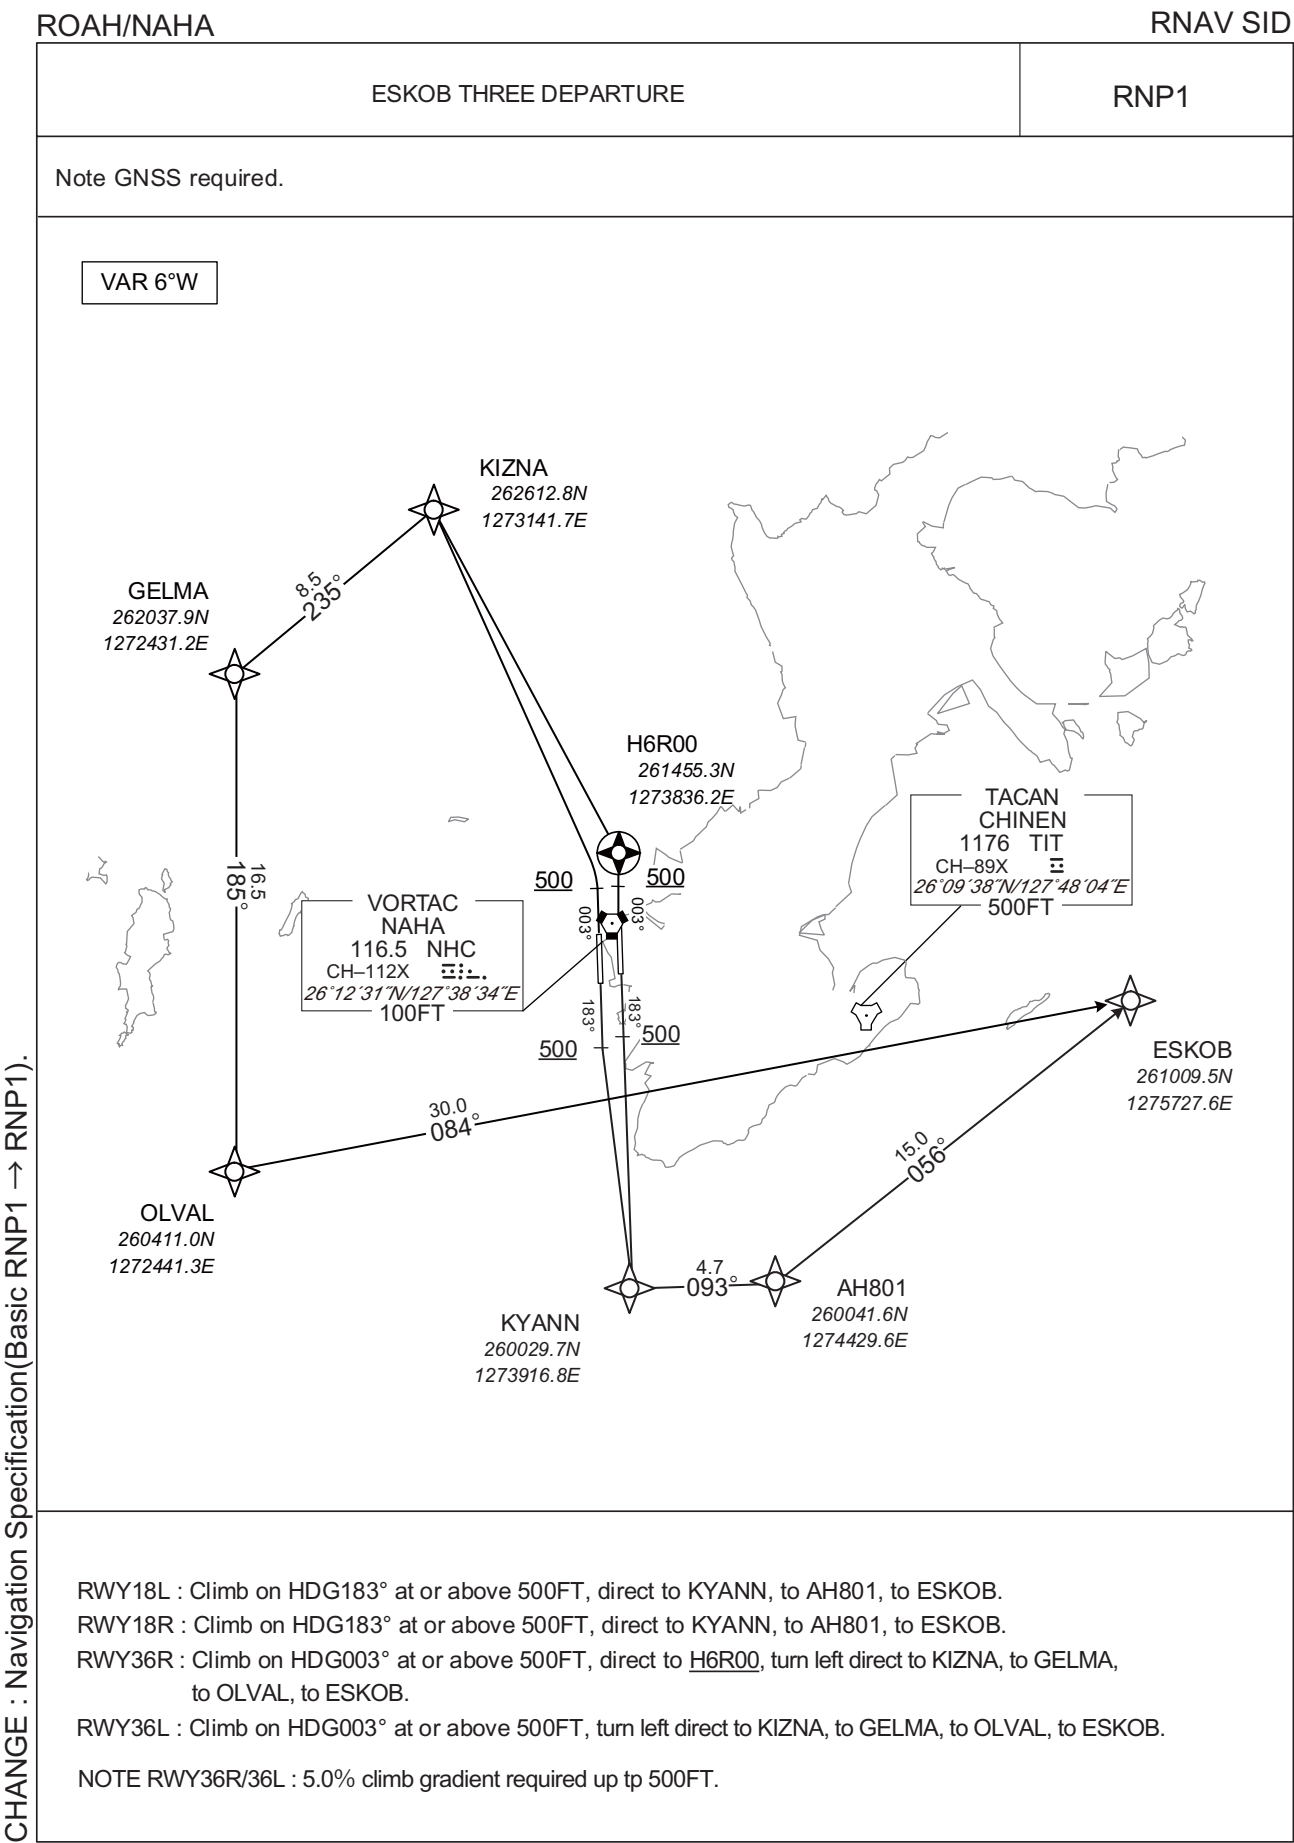

## STANDARD DEPARTURE CHART-INSTRUMENT

ROAH/ NAHA

RNAV SID

ESKOB THREE DEPARTURE

## RWY18L

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 183<br>(177.6) | -5.6               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | KYANN               | -        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 003           | TF              | AH801               | -        | 093<br>(087.6) | -5.6               | 4.7           | -              | -             | -            | -              | RNP1                     |
| 004           | TF              | ESKOB               | -        | 056<br>(050.9) | -5.6               | 15.0          | -              | -             | -            | -              | RNP1                     |

## RWY18R

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 183<br>(177.6) | -5.6               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | KYANN               | -        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 003           | TF              | AH801               | -        | 093<br>(087.6) | -5.6               | 4.7           | -              | -             | -            | -              | RNP1                     |
| 004           | TF              | ESKOB               | -        | 056<br>(050.9) | -5.6               | 15.0          | -              | -             | -            | -              | RNP1                     |

## RWY36R


| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 003<br>(357.6) | -5.6               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | H6R00               | Y        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 003           | DF              | KIZNA               | -        | -              | -5.6               | -             | L              | -             | -            | -              | RNP1                     |
| 004           | TF              | GELMA               | -        | 235<br>(229.0) | -5.6               | 8.5           | -              | -             | -            | -              | RNP1                     |
| 005           | TF              | OLVAL               | -        | 185<br>(179.5) | -5.6               | 16.5          | -              | -             | -            | -              | RNP1                     |
| 006           | TF              | ESKOB               | -        | 084<br>(078.4) | -5.6               | 30.0          | -              | -             | -            | -              | RNP1                     |

## RWY36L

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 003<br>(357.6) | -5.6               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | KIZNA               | -        | -              | -5.6               | -             | L              | -             | -            | -              | RNP1                     |
| 003           | TF              | GELMA               | -        | 235<br>(229.0) | -5.6               | 8.5           | -              | -             | -            | -              | RNP1                     |
| 004           | TF              | OLVAL               | -        | 185<br>(179.5) | -5.6               | 16.5          | -              | -             | -            | -              | RNP1                     |
| 005           | TF              | ESKOB               | -        | 084<br>(078.4) | -5.6               | 30.0          | -              | -             | -            | -              | RNP1                     |

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART-INSTRUMENT

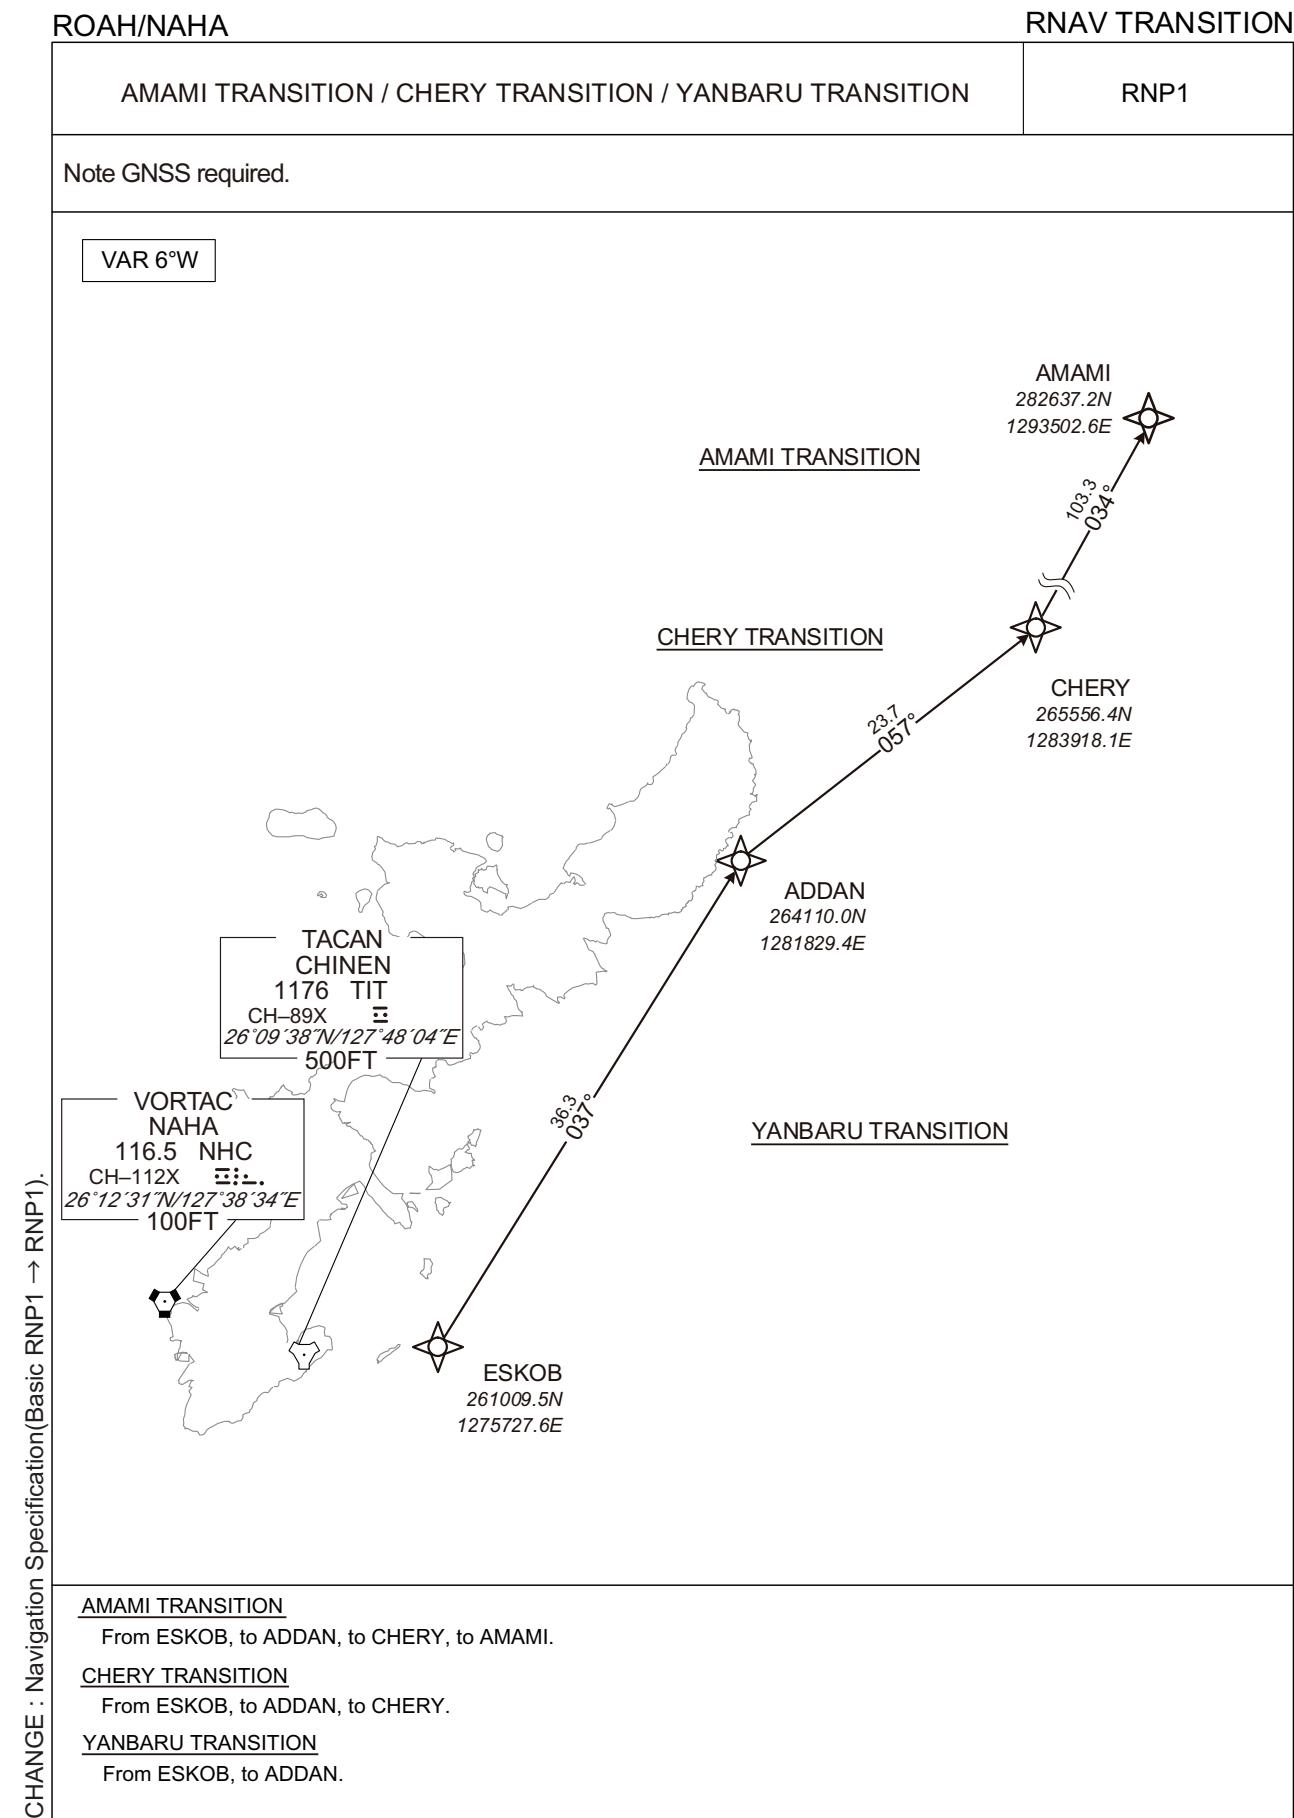

STANDARD DEPARTURE CHART-INSTRUMENT

ROAH / NAHA

RNAV TRANSITION


| AMAMI TRANSITION |                 |                     |          |                |                    |               |                |               |              |                |                          |
|------------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| Serial Number    | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001              | IF              | ESKOB               | -        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 002              | TF              | ADDAN               | -        | 037<br>(031.2) | -5.6               | 36.3          | -              | -             | -            | -              | RNP1                     |
| 003              | TF              | CHERY               | -        | 057<br>(051.4) | -5.6               | 23.7          | -              | -             | -            | -              | RNP1                     |
| 004              | TF              | AMAMI               | -        | 034<br>(028.3) | -5.6               | 103.3         | -              | -             | -            | -              | RNP1                     |

| CHERY TRANSITION |                 |                     |          |                |                    |               |                |               |              |                |                          |
|------------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| Serial Number    | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001              | IF              | ESKOB               | -        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 002              | TF              | ADDAN               | -        | 037<br>(031.2) | -5.6               | 36.3          | -              | -             | -            | -              | RNP1                     |
| 003              | TF              | CHERY               | -        | 057<br>(051.4) | -5.6               | 23.7          | -              | -             | -            | -              | RNP1                     |

| YANBARU TRANSITION |                 |                     |          |                |                    |               |                |               |              |                |                          |
|--------------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| Serial Number      | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001                | IF              | ESKOB               | -        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 002                | TF              | ADDAN               | -        | 037<br>(031.2) | -5.6               | 36.3          | -              | -             | -            | -              | RNP1                     |

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART-INSTRUMENT

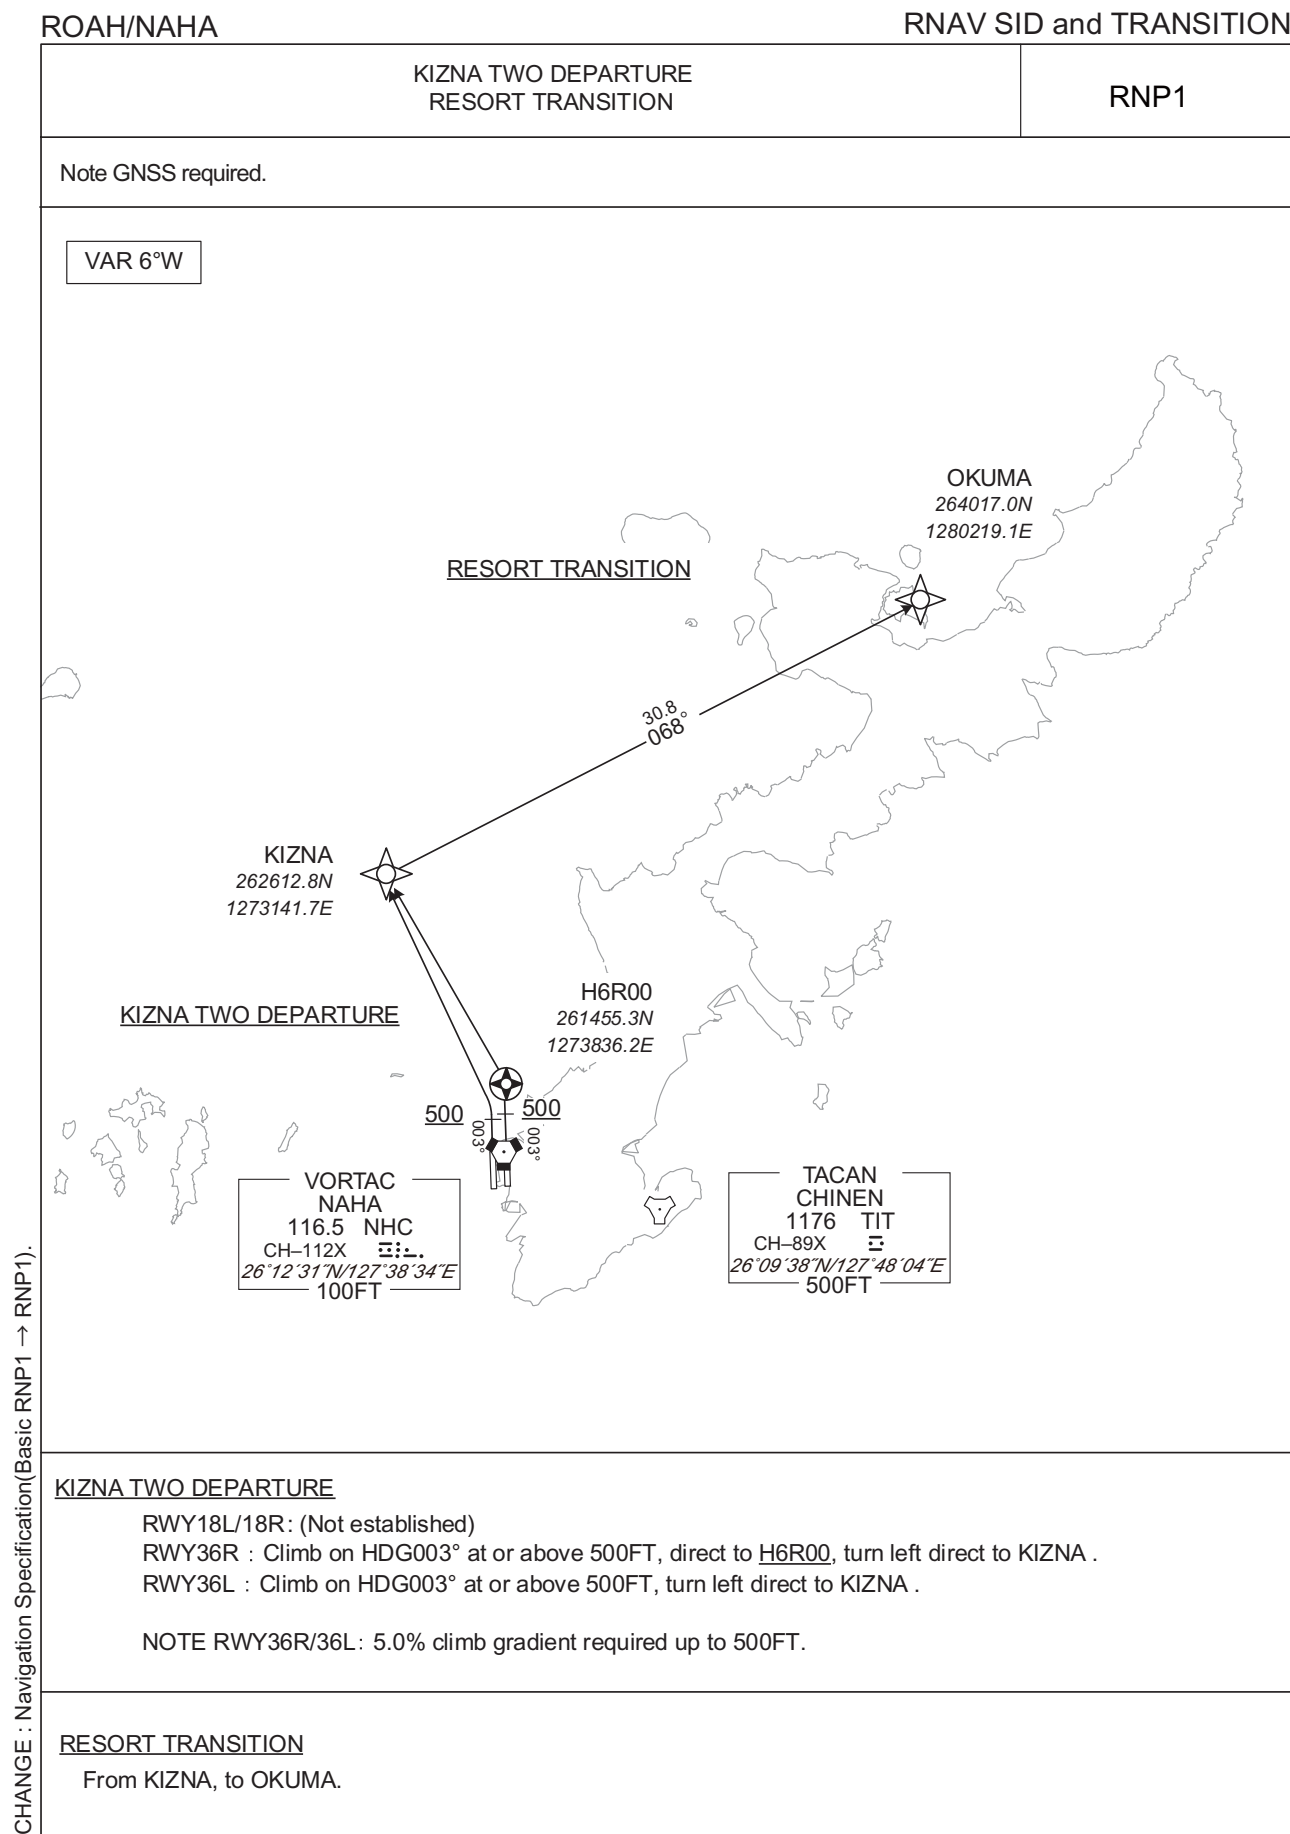

STANDARD DEPARTURE CHART-INSTRUMENT

ROAH/ NAHA

RNAV SID and TRANSITION

KIZNA TWO DEPARTURE

RWY36R

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 003<br>(357.6) | -5.6               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | H6R00               | Y        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 003           | DF              | KIZNA               | -        | -              | -5.6               | -             | L              | -             | -            | -              | RNP1                     |

RWY36L

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 003<br>(357.6) | -5.6               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | KIZNA               | -        | -              | -5.6               | -             | L              | -             | -            | -              | RNP1                     |

RESORT TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | KIZNA               | -        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 002           | TF              | OKUMA               | -        | 068<br>(062.7) | -5.6               | 30.8          | -              | -             | -            | -              | RNP1                     |

CHANGE : Navigation Specification(Basic RNP1 → RNP1).



STANDARD DEPARTURE CHART-INSTRUMENT


ROAH/NAHA

RNAV TRANSITION

|                                                            |      |
|------------------------------------------------------------|------|
| KUROUSA TRANSITION<br>CHAMP TRANSITION<br>YUGAF TRANSITION | RNP1 |
|------------------------------------------------------------|------|

Note GNSS required.

VAR 6°W

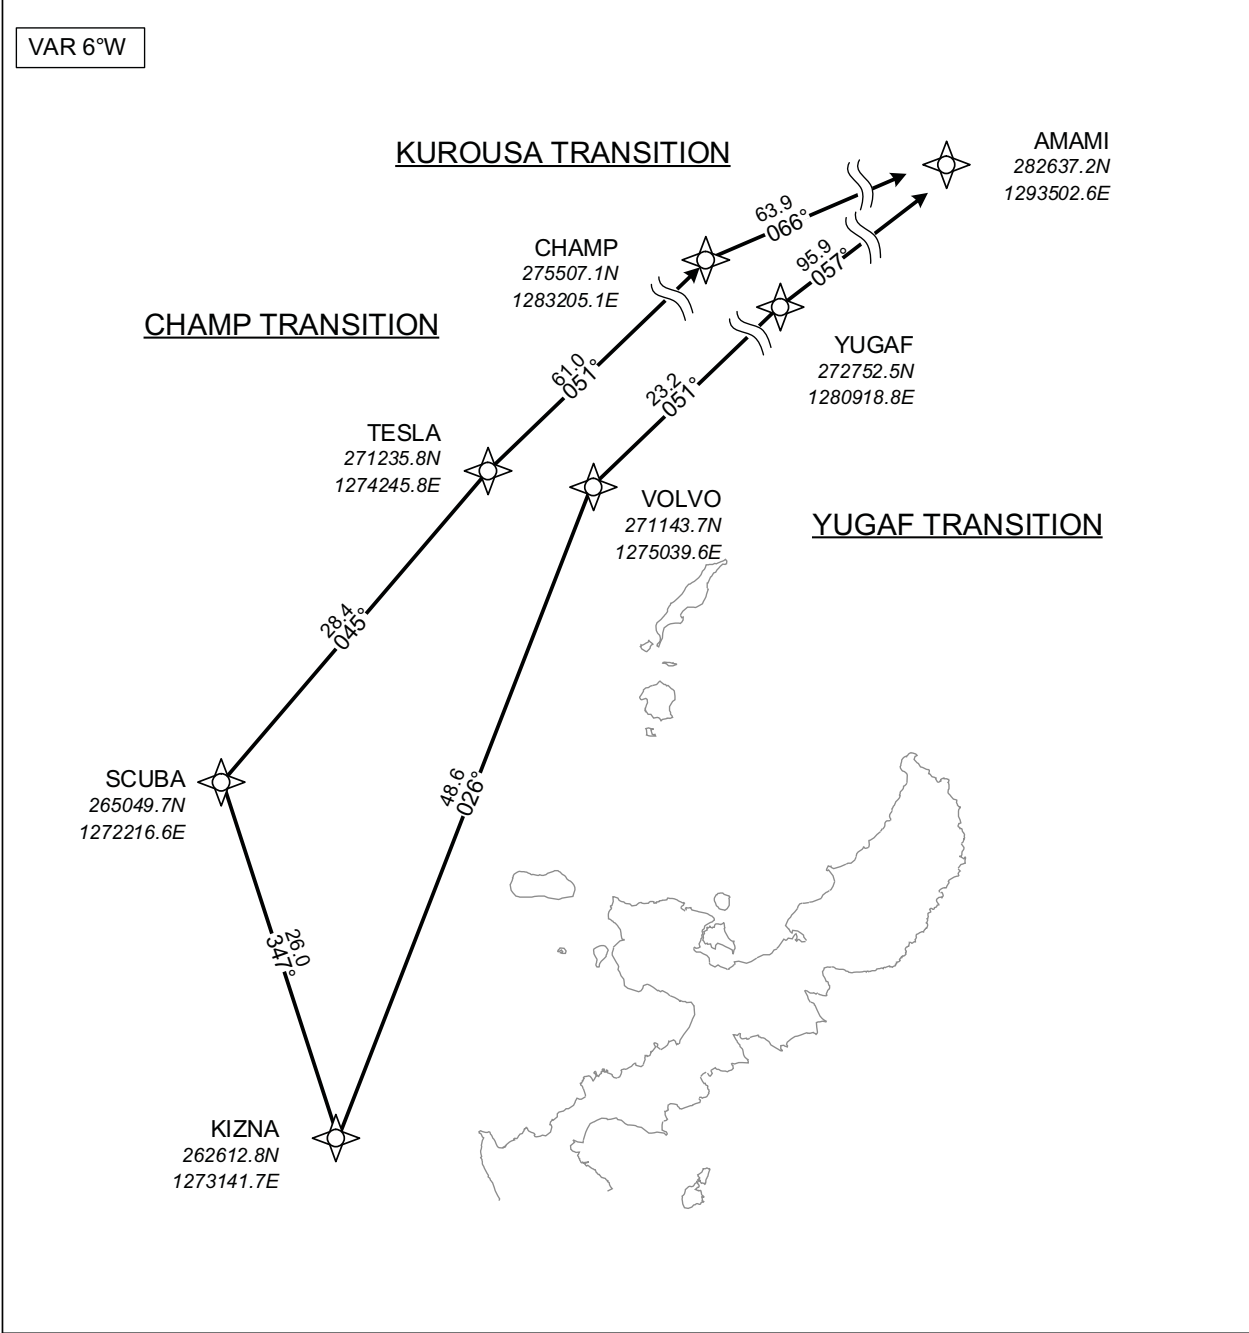

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

- KUROUSA TRANSITION**  
From KIZNA, to SCUBA, to TESLA, to CHAMP, to AMAMI.
- CHAMP TRANSITION**  
From KIZNA, to SCUBA, to TESLA, to CHAMP.
- YUGAF TRANSITION**  
From KIZNA, to VOLVO, to YUGAF, to AMAMI.

STANDARD DEPARTURE CHART-INSTRUMENT

ROAH / NAHA

RNAV TRANSITION

KUROUSA TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | KIZNA               | -        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 002           | TF              | SCUBA               | -        | 347<br>(341.2) | -5.6               | 26.0          | -              | -             | -            | -              | RNP1                     |
| 003           | TF              | TESLA               | -        | 045<br>(039.9) | -5.6               | 28.4          | -              | -             | -            | -              | RNP1                     |
| 004           | TF              | CHAMP               | -        | 051<br>(045.6) | -5.6               | 61.0          | -              | -             | -            | -              | RNP1                     |
| 005           | TF              | AMAMI               | -        | 066<br>(060.2) | -5.6               | 63.9          | -              | -             | -            | -              | RNP1                     |

CHAMP TRANSITION


| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | KIZNA               | -        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 002           | TF              | SCUBA               | -        | 347<br>(341.2) | -5.6               | 26.0          | -              | -             | -            | -              | RNP1                     |
| 003           | TF              | TESLA               | -        | 045<br>(039.9) | -5.6               | 28.4          | -              | -             | -            | -              | RNP1                     |
| 004           | TF              | CHAMP               | -        | 051<br>(045.6) | -5.6               | 61.0          | -              | -             | -            | -              | RNP1                     |

YUGAF TRANSITION

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | KIZNA               | -        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 002           | TF              | VOLVO               | -        | 026<br>(020.3) | -5.6               | 48.6          | -              | -             | -            | -              | RNP1                     |
| 003           | TF              | YUGAF               | -        | 051<br>(045.7) | -5.6               | 23.2          | -              | -             | -            | -              | RNP1                     |
| 004           | TF              | AMAMI               | -        | 057<br>(051.9) | -5.6               | 95.9          | -              | -             | -            | -              | RNP1                     |

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART-INSTRUMENT

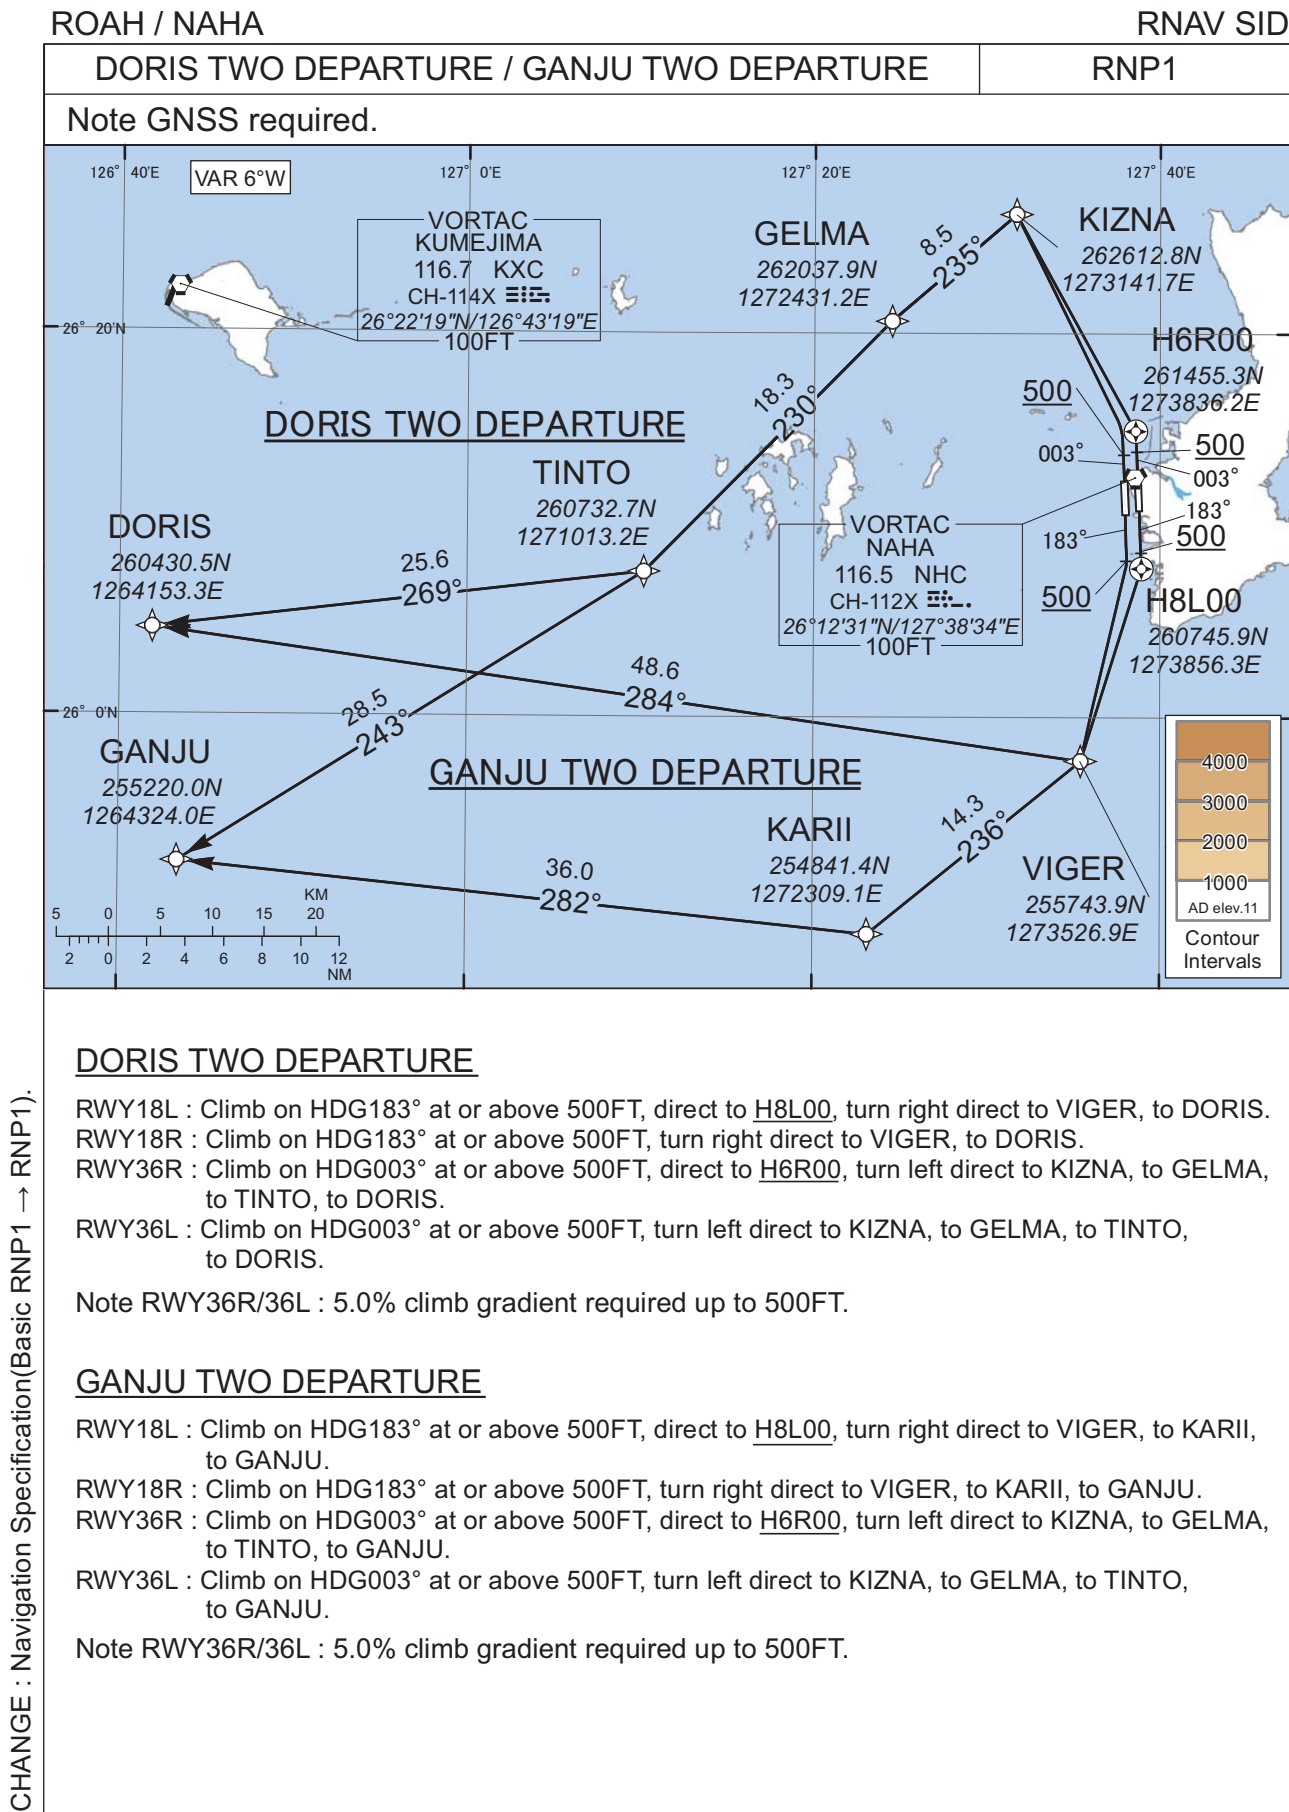

## STANDARD DEPARTURE CHART-INSTRUMENT

ROAH / NAHA

RNAV SID

DORIS TWO DEPARTURE

## RWY18L

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 183<br>(177.6) | -5.6               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | H8L00               | Y        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 003           | DF              | VIGER               | -        | -              | -5.6               | -             | R              | -             | -            | -              | RNP1                     |
| 004           | TF              | DORIS               | -        | 284<br>(278.2) | -5.6               | 48.6          | -              | -             | -            | -              | RNP1                     |

## RWY18R

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 183<br>(177.6) | -5.6               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | VIGER               | -        | -              | -5.6               | -             | R              | -             | -            | -              | RNP1                     |
| 003           | TF              | DORIS               | -        | 284<br>(278.2) | -5.6               | 48.6          | -              | -             | -            | -              | RNP1                     |

## RWY36R

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 003<br>(357.6) | -5.6               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | H6R00               | Y        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 003           | DF              | KIZNA               | -        | -              | -5.6               | -             | L              | -             | -            | -              | RNP1                     |
| 004           | TF              | GELMA               | -        | 235<br>(229.0) | -5.6               | 8.5           | -              | -             | -            | -              | RNP1                     |
| 005           | TF              | TINTO               | -        | 230<br>(224.5) | -5.6               | 18.3          | -              | -             | -            | -              | RNP1                     |
| 006           | TF              | DORIS               | -        | 269<br>(263.3) | -5.6               | 25.6          | -              | -             | -            | -              | RNP1                     |

## RWY36L

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 003<br>(357.6) | -5.6               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | KIZNA               | -        | -              | -5.6               | -             | L              | -             | -            | -              | RNP1                     |
| 003           | TF              | GELMA               | -        | 235<br>(229.0) | -5.6               | 8.5           | -              | -             | -            | -              | RNP1                     |
| 004           | TF              | TINTO               | -        | 230<br>(224.5) | -5.6               | 18.3          | -              | -             | -            | -              | RNP1                     |
| 005           | TF              | DORIS               | -        | 269<br>(263.3) | -5.6               | 25.6          | -              | -             | -            | -              | RNP1                     |

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

## STANDARD DEPARTURE CHART-INSTRUMENT

ROAH / NAHA

RNAV SID

GANJU TWO DEPARTURERWY18L

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 183<br>(177.6) | -5.6               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | H8L00               | Y        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 003           | DF              | VIGER               | -        | -              | -5.6               | -             | R              | -             | -            | -              | RNP1                     |
| 004           | TF              | KARII               | -        | 236<br>(230.8) | -5.6               | 14.3          | -              | -             | -            | -              | RNP1                     |
| 005           | TF              | GANJU               | -        | 282<br>(276.0) | -5.6               | 36.0          | -              | -             | -            | -              | RNP1                     |

RWY18R

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 183<br>(177.6) | -5.6               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | VIGER               | -        | -              | -5.6               | -             | R              | -             | -            | -              | RNP1                     |
| 003           | TF              | KARII               | -        | 236<br>(230.8) | -5.6               | 14.3          | -              | -             | -            | -              | RNP1                     |
| 004           | TF              | GANJU               | -        | 282<br>(276.0) | -5.6               | 36.0          | -              | -             | -            | -              | RNP1                     |

RWY36R

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 003<br>(357.6) | -5.6               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | H6R00               | Y        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 003           | DF              | KIZNA               | -        | -              | -5.6               | -             | L              | -             | -            | -              | RNP1                     |
| 004           | TF              | GELMA               | -        | 235<br>(229.0) | -5.6               | 8.5           | -              | -             | -            | -              | RNP1                     |
| 005           | TF              | TINTO               | -        | 230<br>(224.5) | -5.6               | 18.3          | -              | -             | -            | -              | RNP1                     |
| 006           | TF              | GANJU               | -        | 243<br>(237.8) | -5.6               | 28.5          | -              | -             | -            | -              | RNP1                     |

RWY36L

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 003<br>(357.6) | -5.6               | -             | -              | +500          | -            | -              | RNP1                     |
| 002           | DF              | KIZNA               | -        | -              | -5.6               | -             | L              | -             | -            | -              | RNP1                     |
| 003           | TF              | GELMA               | -        | 235<br>(229.0) | -5.6               | 8.5           | -              | -             | -            | -              | RNP1                     |
| 004           | TF              | TINTO               | -        | 230<br>(224.5) | -5.6               | 18.3          | -              | -             | -            | -              | RNP1                     |
| 005           | TF              | GANJU               | -        | 243<br>(237.8) | -5.6               | 28.5          | -              | -             | -            | -              | RNP1                     |

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD ARRIVAL CHART-INSTRUMENT

ROAH/NAHA

STAR

SCUBA ARRIVAL

From over SCUBA, via NHC R344 to 28.1 DME, turn right to intercept and proceed via NHC R341 to EISAR.

Cross NHC R344/28.1DME at or above 3000FT, cross EISAR at or above 2000FT.

LAVON ARRIVAL

From over LAVON, via NHC 15.0DME counterclockwise ARC to VIGER.

Cross VIGER at or above 2000FT.

(When using NHC TACAN only)

From over LAVON at or above 5000FT, via NHC 15.0DME counterclockwise ARC to VIGER.

Cross VIGER at or above 4400FT.

LAFTY ARRIVAL

From over LAFTY, via NHC R196 to VIGER.

Cross VIGER at or above 2000FT.

(When using NHC TACAN only)

From over LAFTY, via NHC R196 to VIGER.


Cross VIGER at or above 4400FT.

CHANGE: New PROC


## STANDARD ARRIVAL CHART-INSTRUMENT

ROAH/NAHA

STAR

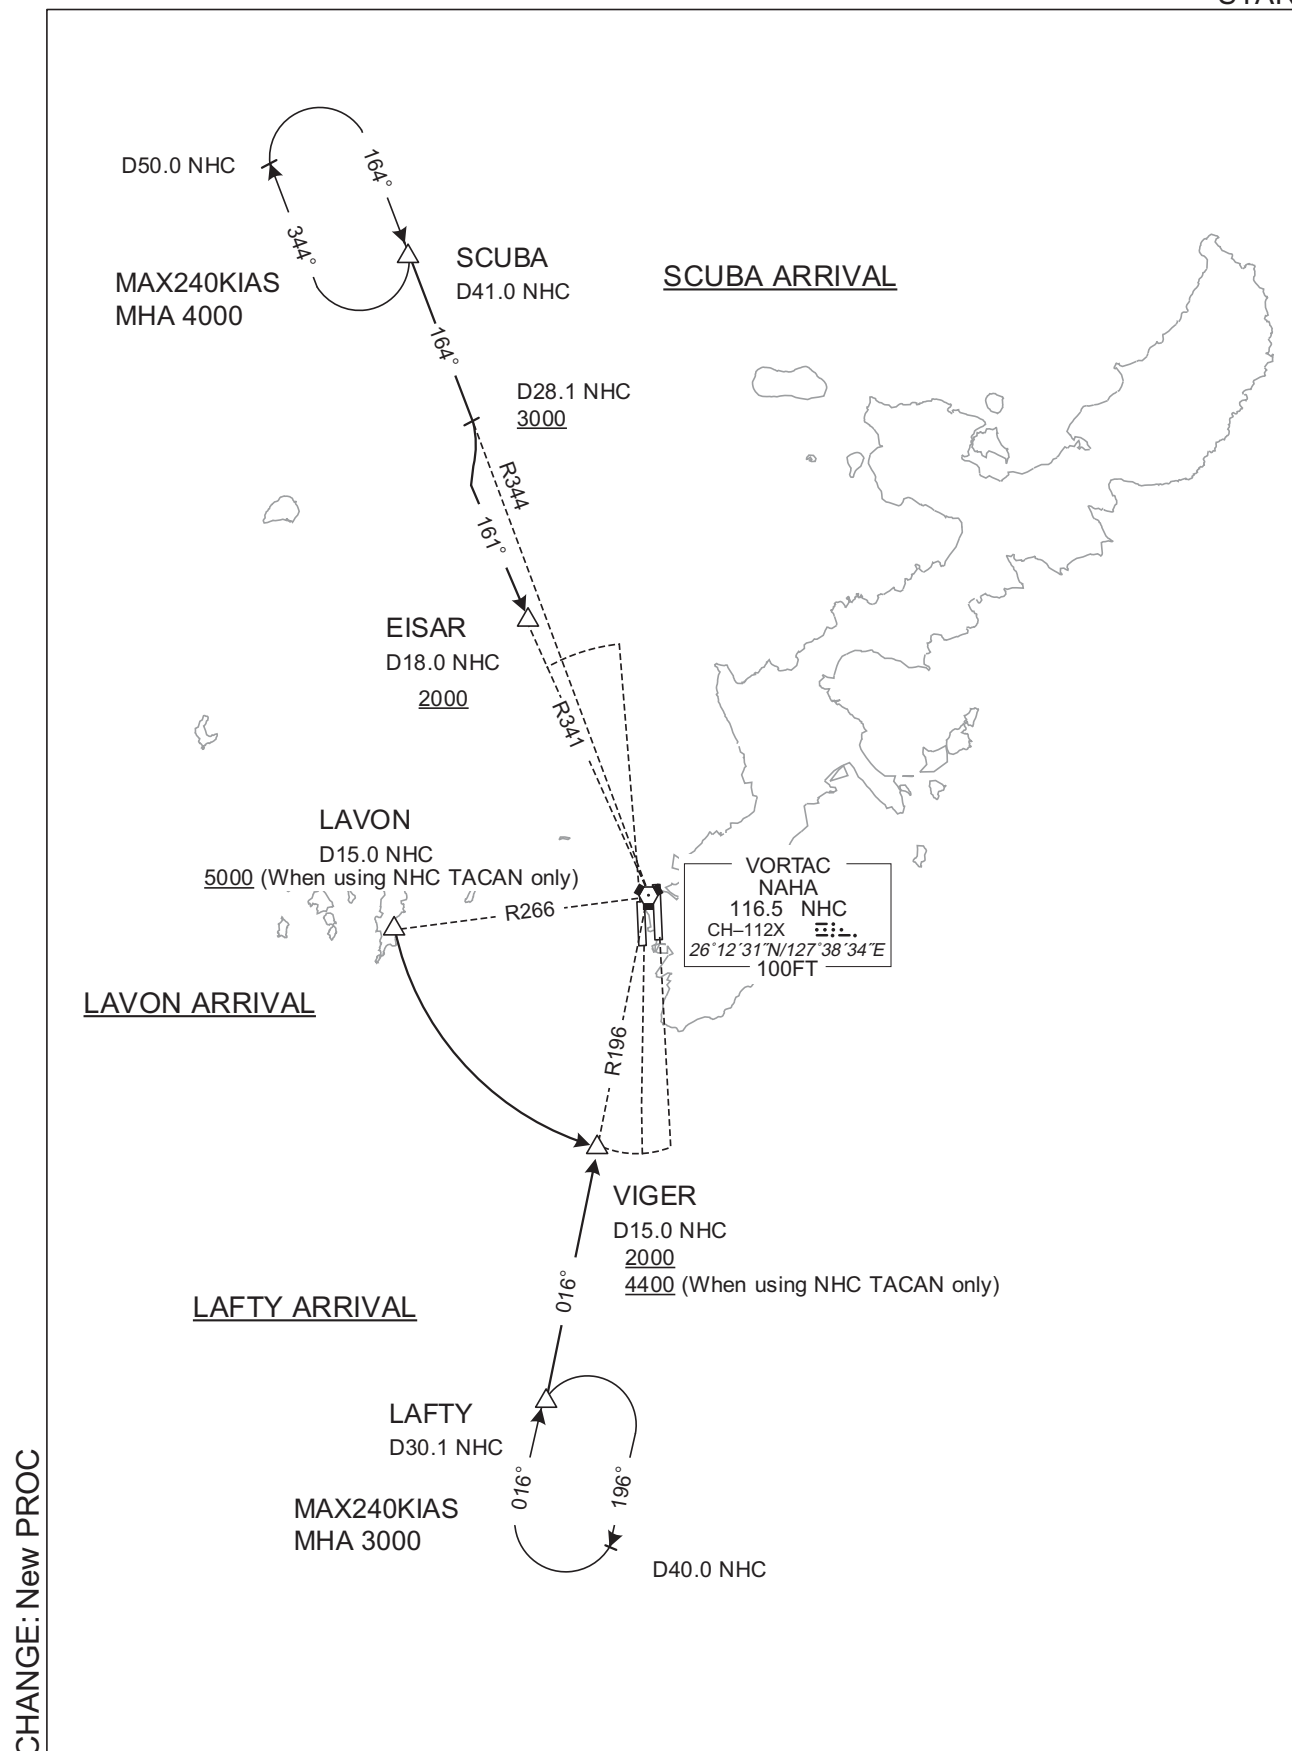

STANDARD ARRIVAL CHART-INSTRUMENT

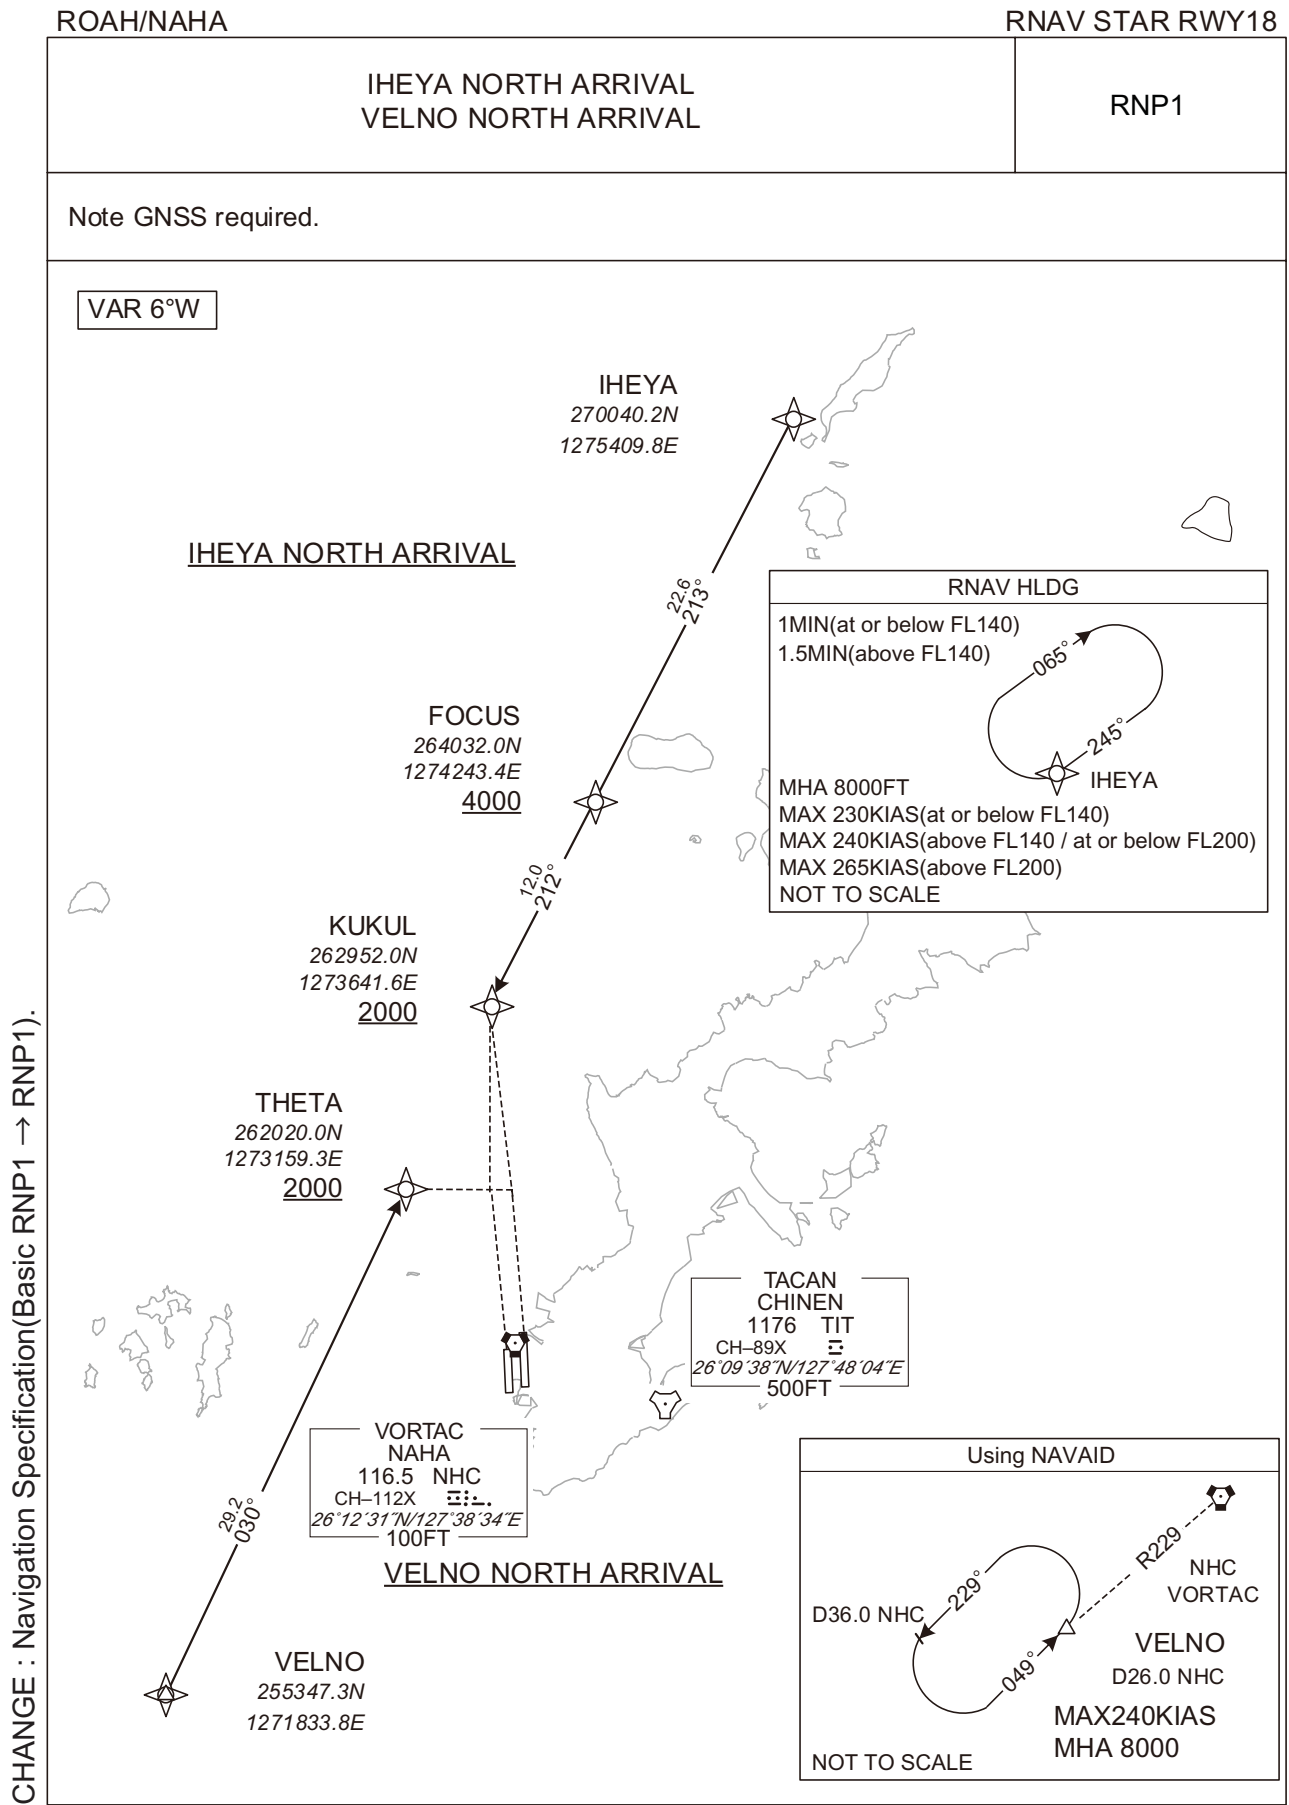



STANDARD ARRIVAL CHART-INSTRUMENT

ROAH / NAHA

RNAV STAR RWY18

IHEYA NORTH ARRIVAL

From IHEYA, to FOCUS at or above 4000FT, to KUKUL at or above 2000FT.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | IHEYA               | -        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 002           | TF              | FOCUS               | -        | 213<br>(206.9) | -5.6               | 22.6          | -              | +4000         | -            | -              | RNP1                     |
| 003           | TF              | KUKUL               | -        | 212<br>(206.8) | -5.6               | 12.0          | -              | +2000         | -            | -              | RNP1                     |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN)          | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)                                         | Navigation Specification |
|------|---------------------|-----------------------|--------------------|------------------------------|----------------|-----------------------|-----------------------|------------------------------------------------------|--------------------------|
| Hold | IHEYA               | 245<br>(239.1)        | -5.8               | 1.0 (-14000)<br>1.5 (+14001) | R              | 8000                  | -                     | -230 (-14000)<br>-240 (14001-20000)<br>-265 (+20001) | RNP1                     |


VELNO NORTH ARRIVAL

From VELNO, to THETA at or above 2000FT.


| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | VELNO               | -        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 002           | TF              | THETA               | -        | 030<br>(024.4) | -5.6               | 29.2          | -              | +2000         | -            | -              | RNP1                     |

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD ARRIVAL CHART-INSTRUMENT

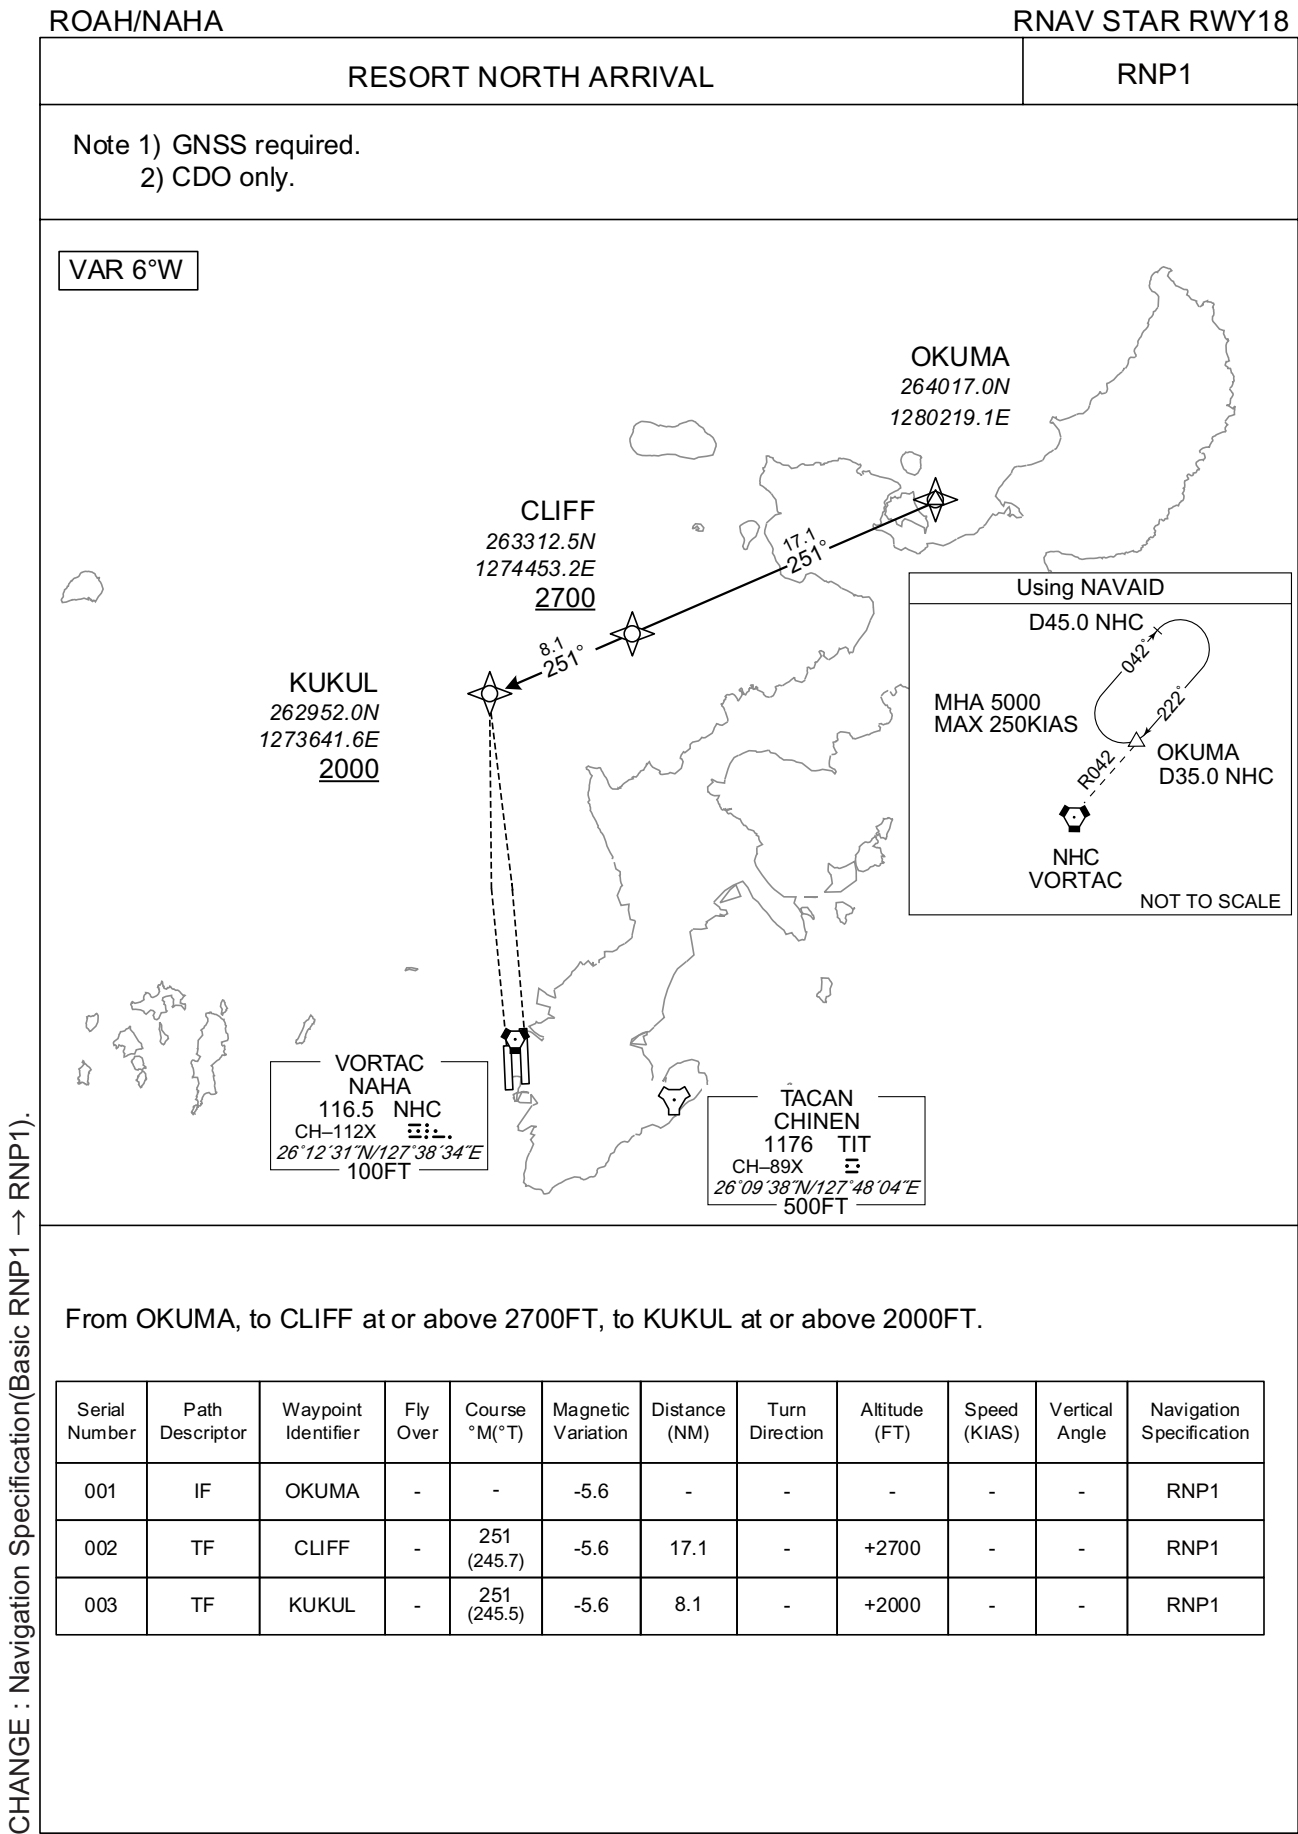

STANDARD ARRIVAL CHART-INSTRUMENT

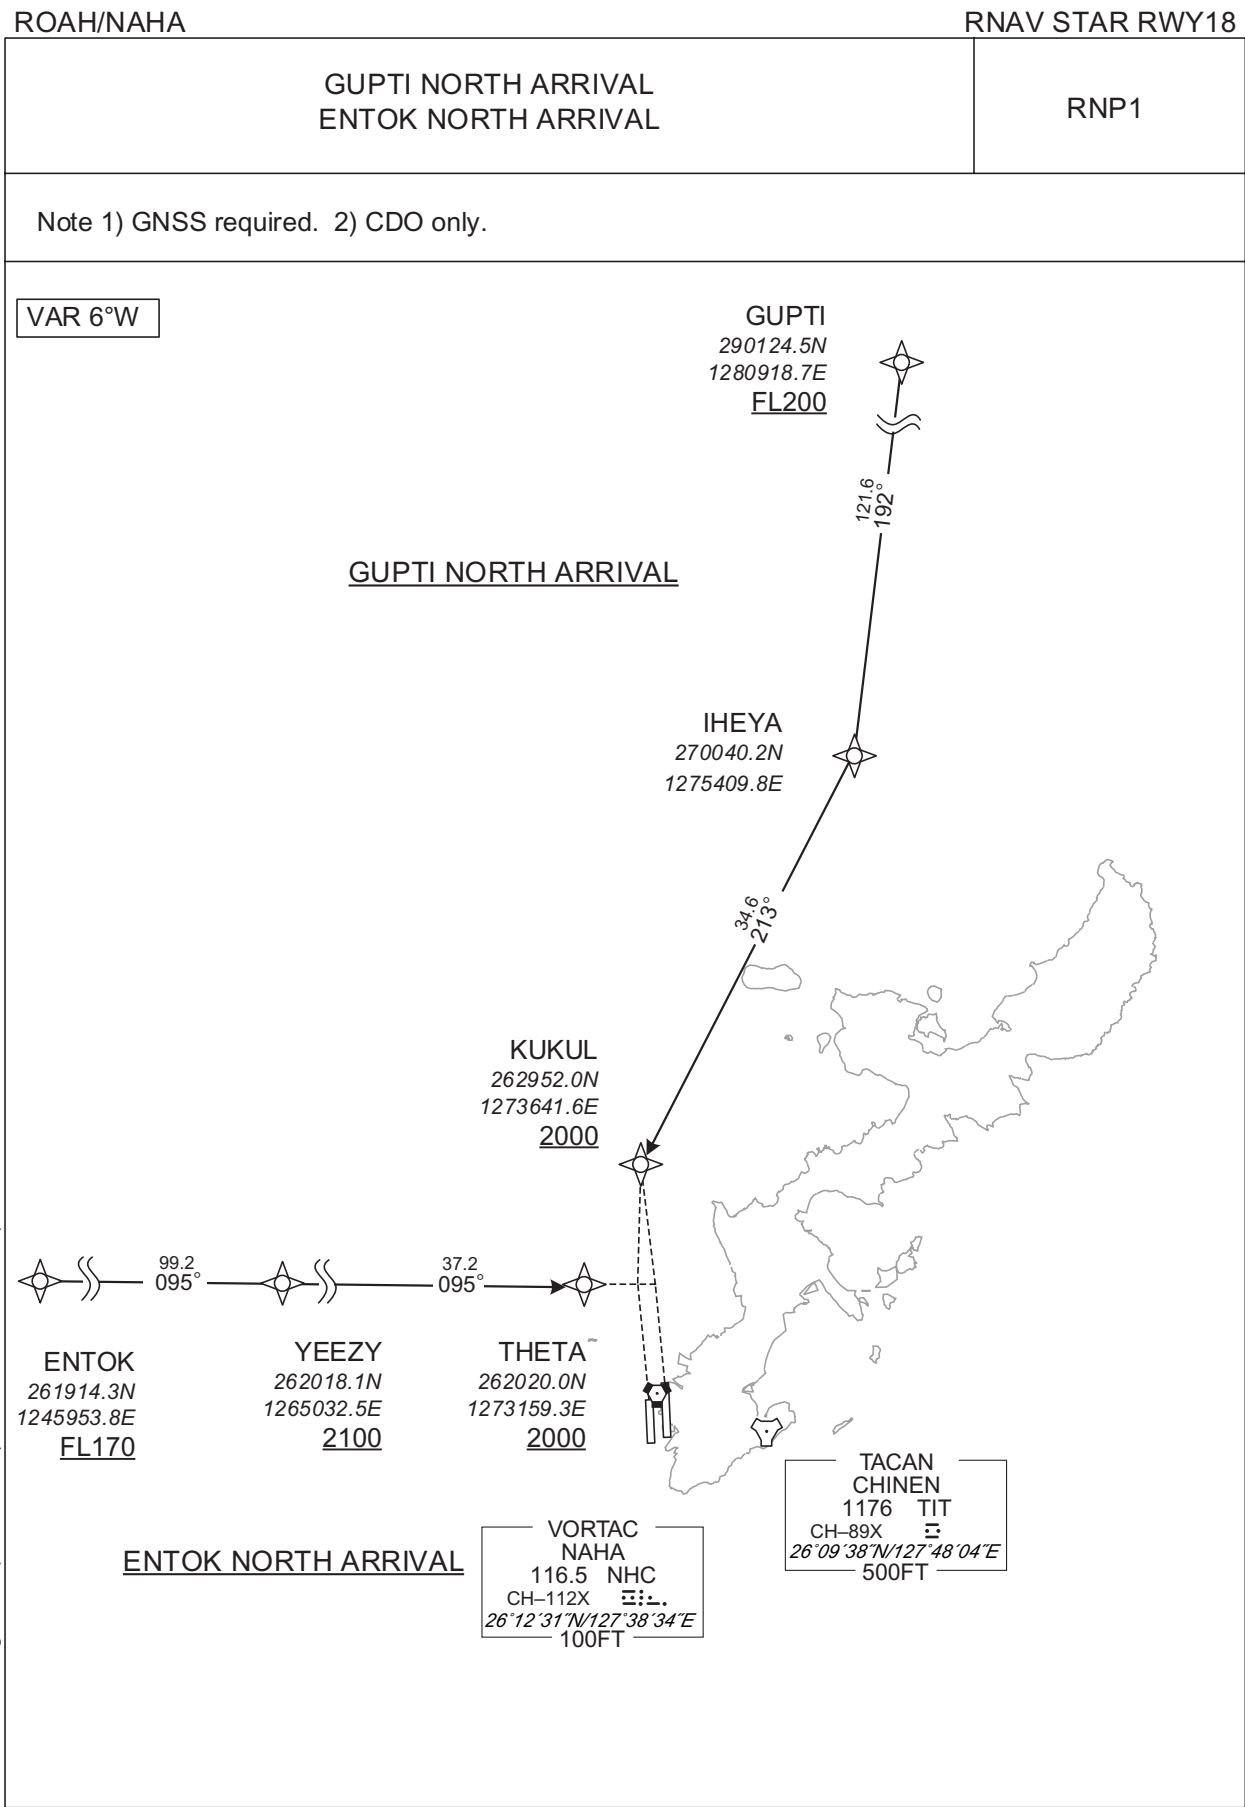

STANDARD ARRIVAL CHART-INSTRUMENT


ROAH / NAHA

RNAV STAR RWY18

| <div><div>GUPTI NORTH ARRIVAL</div><div>From GUPTI at or above FL200, to IHEYA, to KUKUL at or above 2000FT.</div></div>                    |                 |                     |          |                |                    |               |                |               |              |                |                          |
|---------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| Serial Number                                                                                                                               | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001                                                                                                                                         | IF              | GUPTI               | -        | -              | -5.6               | -             | -              | +FL200        | -            | -              | RNP1                     |
| 002                                                                                                                                         | TF              | IHEYA               | -        | 192<br>(186.4) | -5.6               | 121.6         | -              | -             | -            | -              | RNP1                     |
| 003                                                                                                                                         | TF              | KUKUL               | -        | 213<br>(206.9) | -5.6               | 34.6          | -              | +2000         | -            | -              | RNP1                     |
| <div><div>ENTOK NORTH ARRIVAL</div><div>From ENTOK at or above FL170, to YEEZY at or above 2100FT, to THETA at or above 2000FT.</div></div> |                 |                     |          |                |                    |               |                |               |              |                |                          |
| Serial Number                                                                                                                               | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001                                                                                                                                         | IF              | ENTOK               | -        | -              | -5.6               | -             | -              | +FL170        | -            | -              | RNP1                     |
| 002                                                                                                                                         | TF              | YEEZY               | -        | 095<br>(089.0) | -5.6               | 99.2          | -              | +2100         | -            | -              | RNP1                     |
| 003                                                                                                                                         | TF              | THETA               | -        | 095<br>(089.8) | -5.6               | 37.2          | -              | +2000         | -            | -              | RNP1                     |

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD ARRIVAL CHART-INSTRUMENT

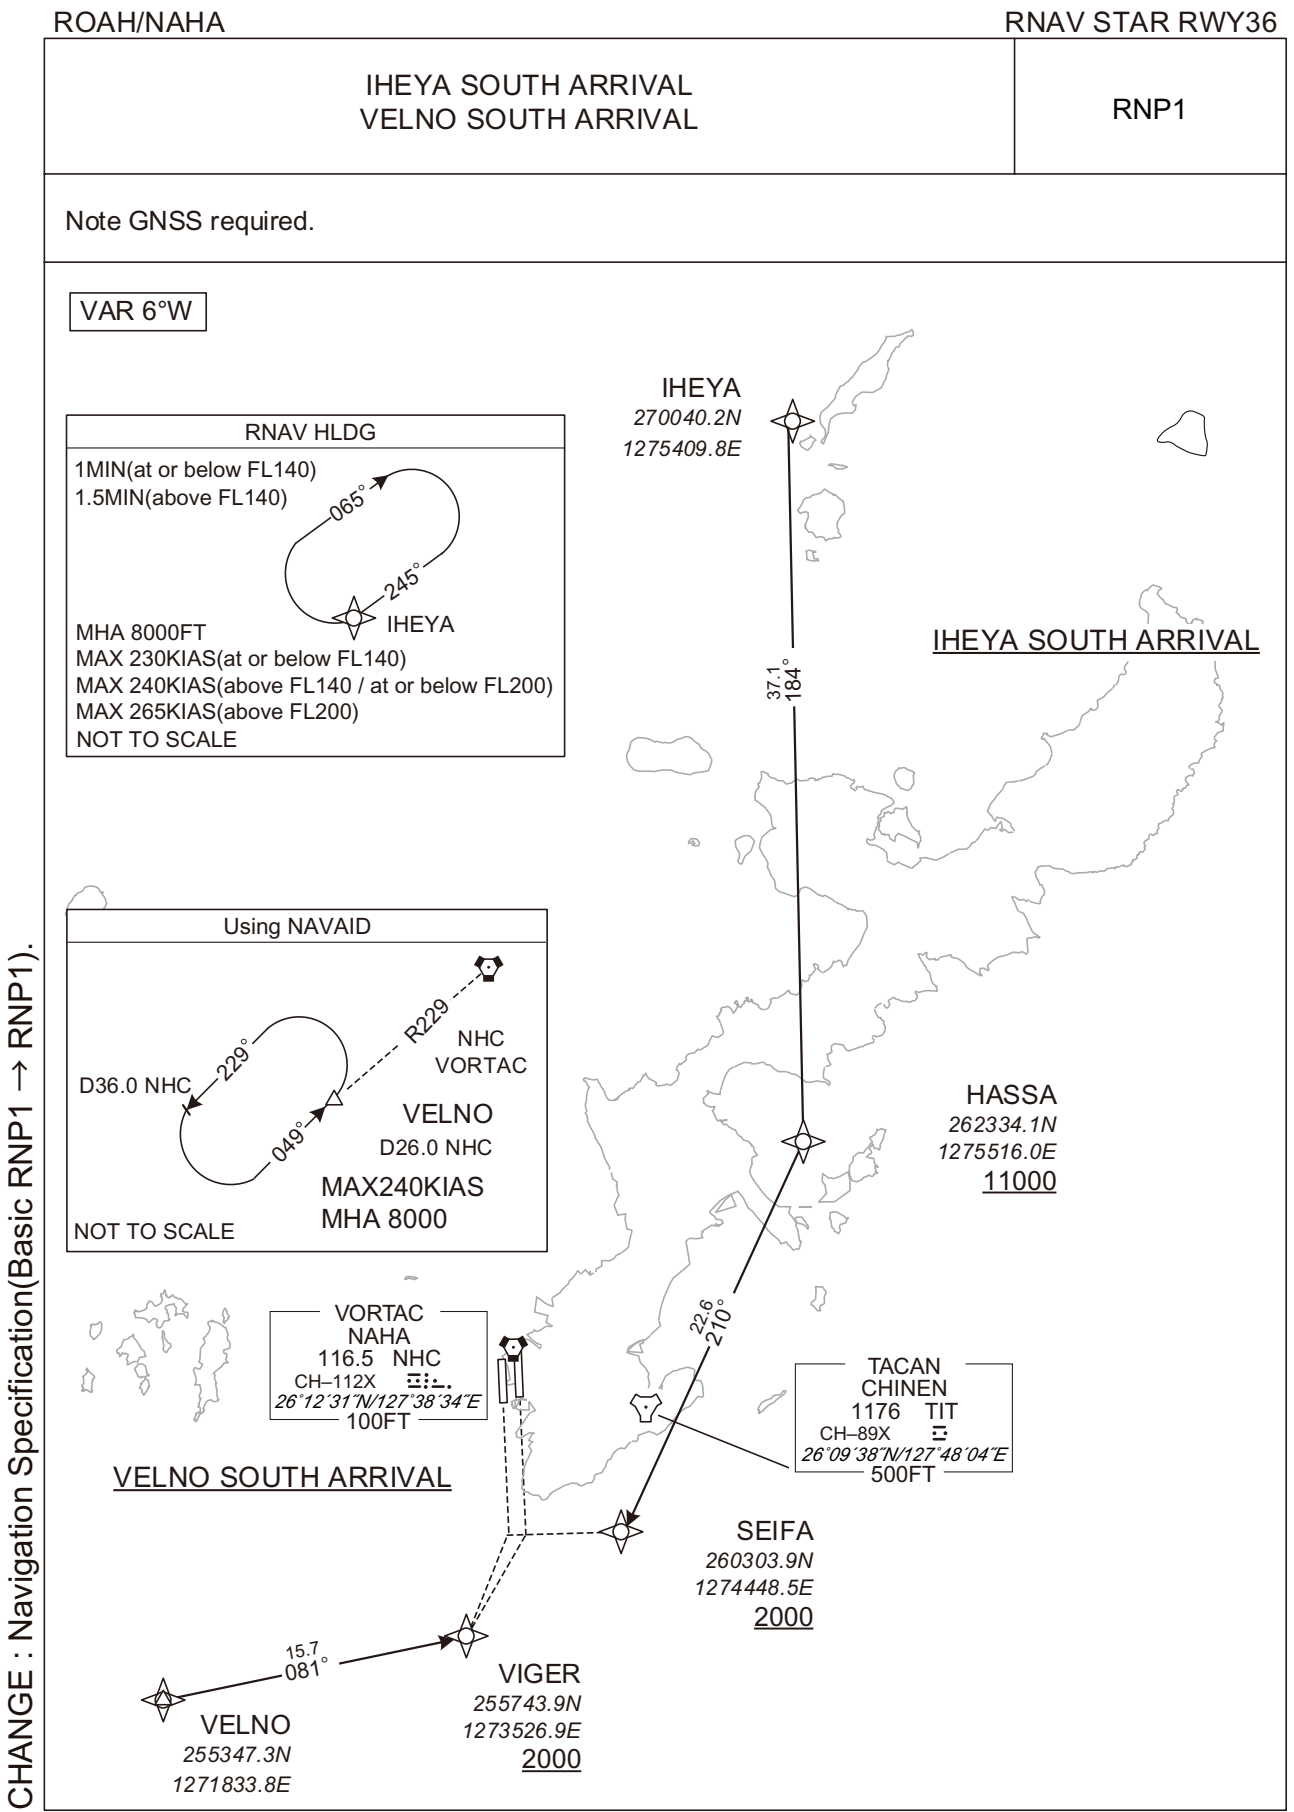

STANDARD ARRIVAL CHART-INSTRUMENT

ROAH / NAHA

RNAV STAR RWY36

IHEYA SOUTH ARRIVAL

From IHEYA, to HASSA at or above 11000FT, to SEIFA at or above 2000FT.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | IHEYA               | -        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 002           | TF              | HASSA               | -        | 184<br>(178.5) | -5.6               | 37.1          | -              | +11000        | -            | -              | RNP1                     |
| 003           | TF              | SEIFA               | -        | 210<br>(204.6) | -5.6               | 22.6          | -              | +2000         | -            | -              | RNP1                     |


| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN)          | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)                                         | Navigation Specification |
|------|---------------------|-----------------------|--------------------|------------------------------|----------------|-----------------------|-----------------------|------------------------------------------------------|--------------------------|
| Hold | IHEYA               | 245<br>(239.1)        | -5.8               | 1.0 (-14000)<br>1.5 (+14001) | R              | 8000                  | -                     | -230 (-14000)<br>-240 (14001-20000)<br>-265 (+20001) | RNP1                     |

VELNO SOUTH ARRIVAL


From VELNO, to VIGER at or above 2000FT.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | VELNO               | -        | -              | -5.6               | -             | -              | -             | -            | -              | RNP1                     |
| 002           | TF              | VIGER               | -        | 081<br>(075.4) | -5.6               | 15.7          | -              | +2000         | -            | -              | RNP1                     |

STANDARD ARRIVAL CHART-INSTRUMENT

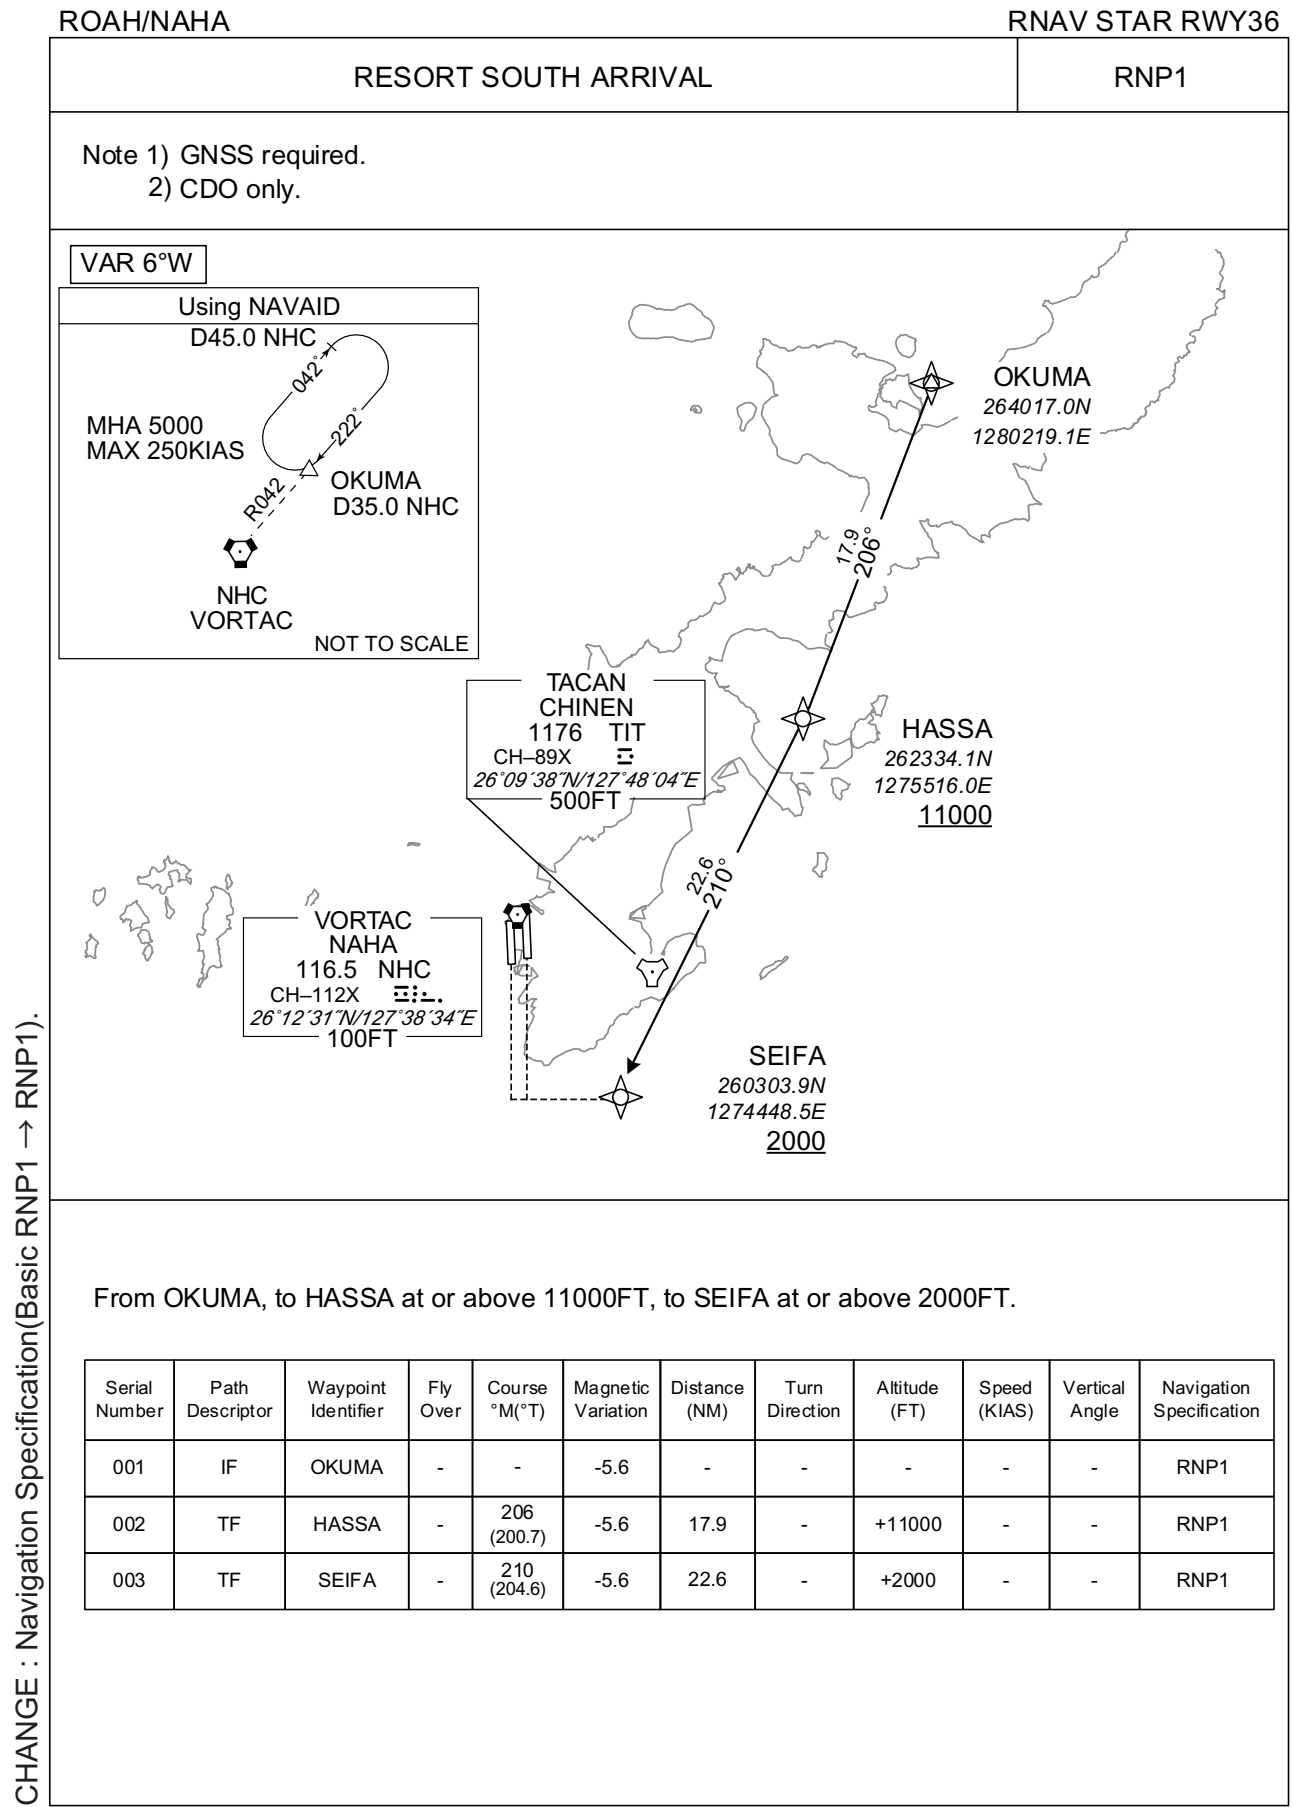

STANDARD ARRIVAL CHART-INSTRUMENT

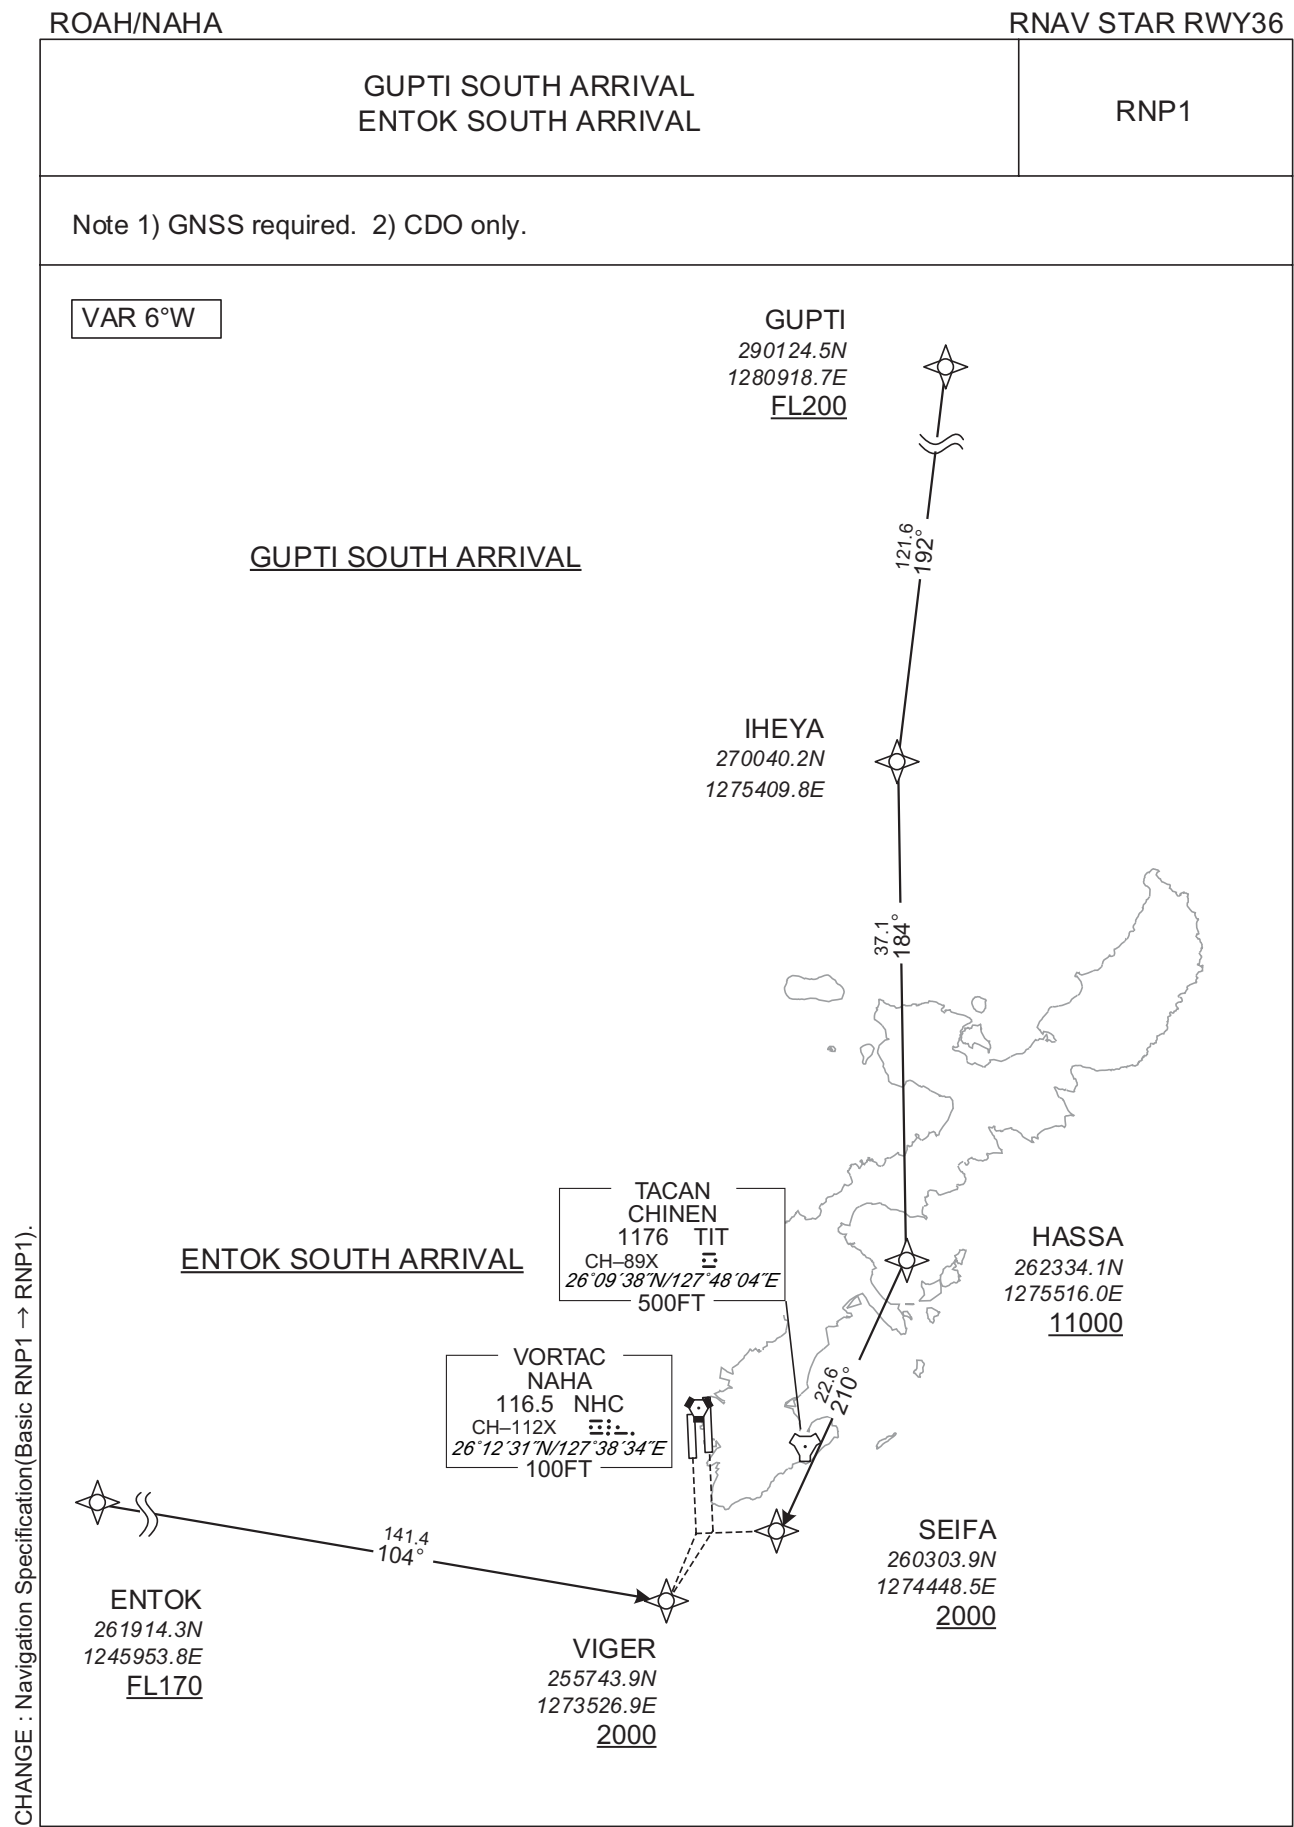



STANDARD ARRIVAL CHART-INSTRUMENT

ROAH / NAHA

RNAV STAR RWY36

**GUPTI SOUTH ARRIVAL**  
From GUPTI at or above FL200, to IHEYA, to HASSA at or above 11000FT, to SEIFA at or above 2000FT.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | GUPTI               | -        | -              | -5.6               | -             | -              | +FL200        | -            | -              | RNP1                     |
| 002           | TF              | IHEYA               | -        | 192<br>(186.4) | -5.6               | 121.6         | -              | -             | -            | -              | RNP1                     |
| 003           | TF              | HASSA               | -        | 184<br>(178.5) | -5.6               | 37.1          | -              | +11000        | -            | -              | RNP1                     |
| 004           | TF              | SEIFA               | -        | 210<br>(204.6) | -5.6               | 22.6          | -              | +2000         | -            | -              | RNP1                     |

**ENTOK SOUTH ARRIVAL**  
From ENTOK at or above FL170, to VIGER at or above 2000FT.


| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | ENTOK               | -        | -              | -5.6               | -             | -              | +FL170        | -            | -              | RNP1                     |
| 002           | TF              | VIGER               | -        | 104<br>(098.2) | -5.6               | 141.4         | -              | +2000         | -            | -              | RNP1                     |

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

## INSTRUMENT APPROACH CHART

## ROAH / NAHA


## ILS Z or LOC Z RWY36R

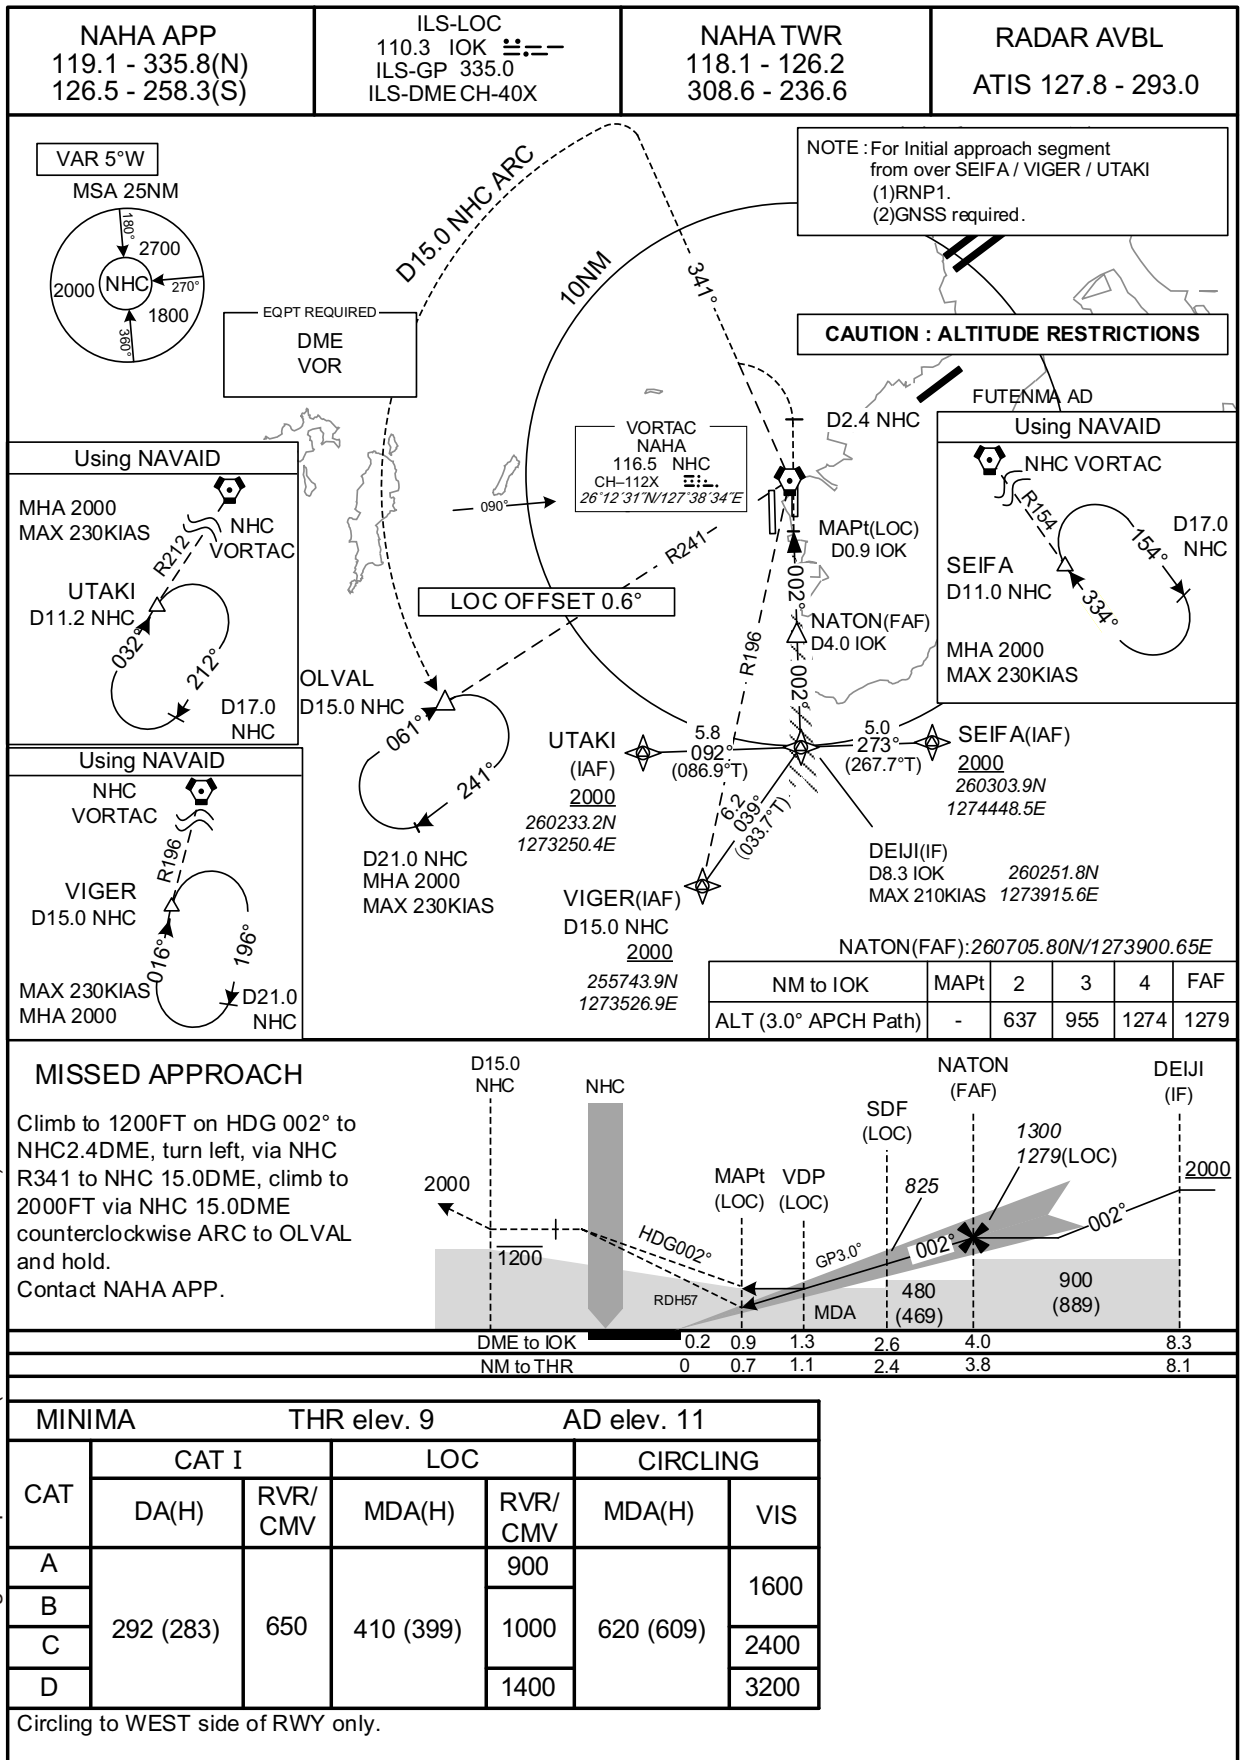

## INSTRUMENT APPROACH CHART

ROAH / NAHA

ILS Y or LOC Y RWY36R

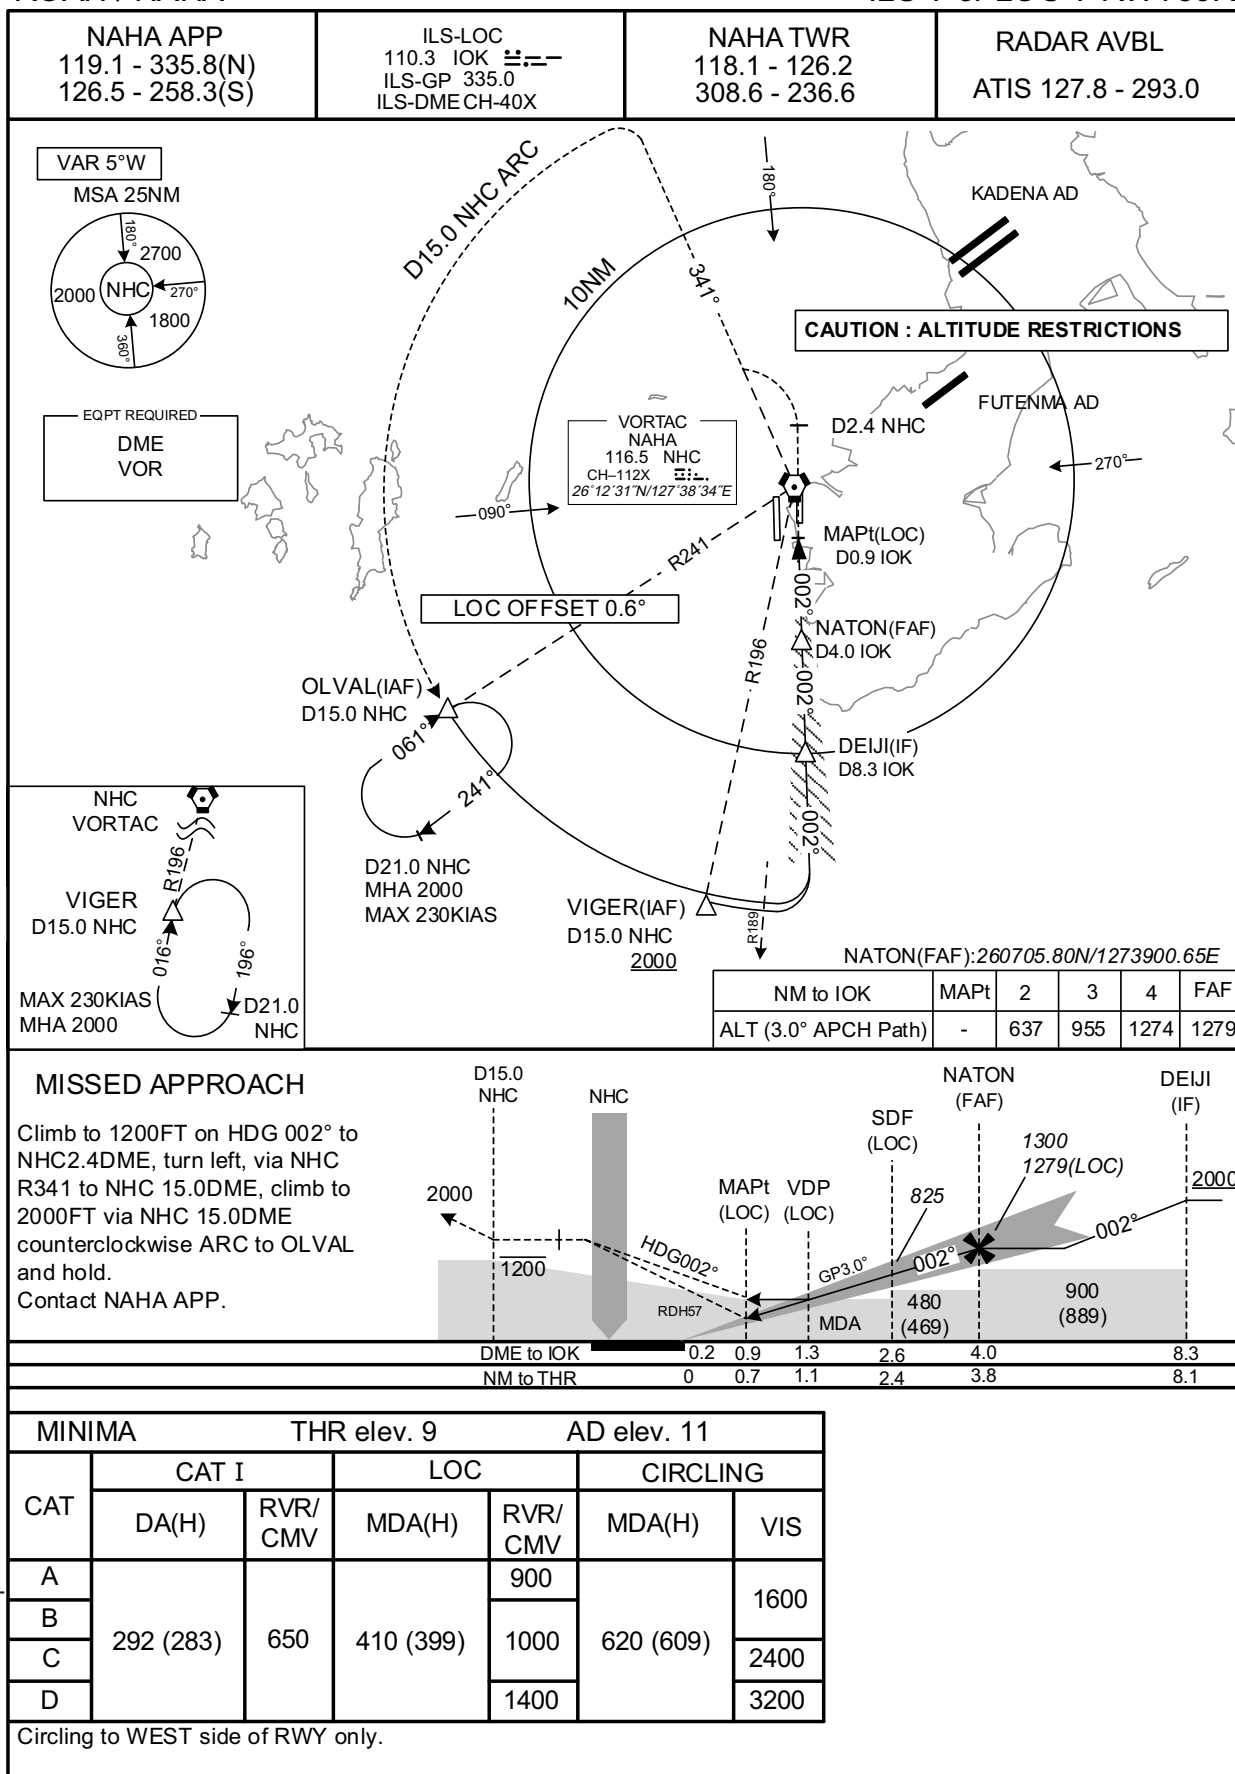


CHANGE : Description of VAR.

INSTRUMENT APPROACH CHART

ROAH / NAHA


ILS X or LOC X RWY36R

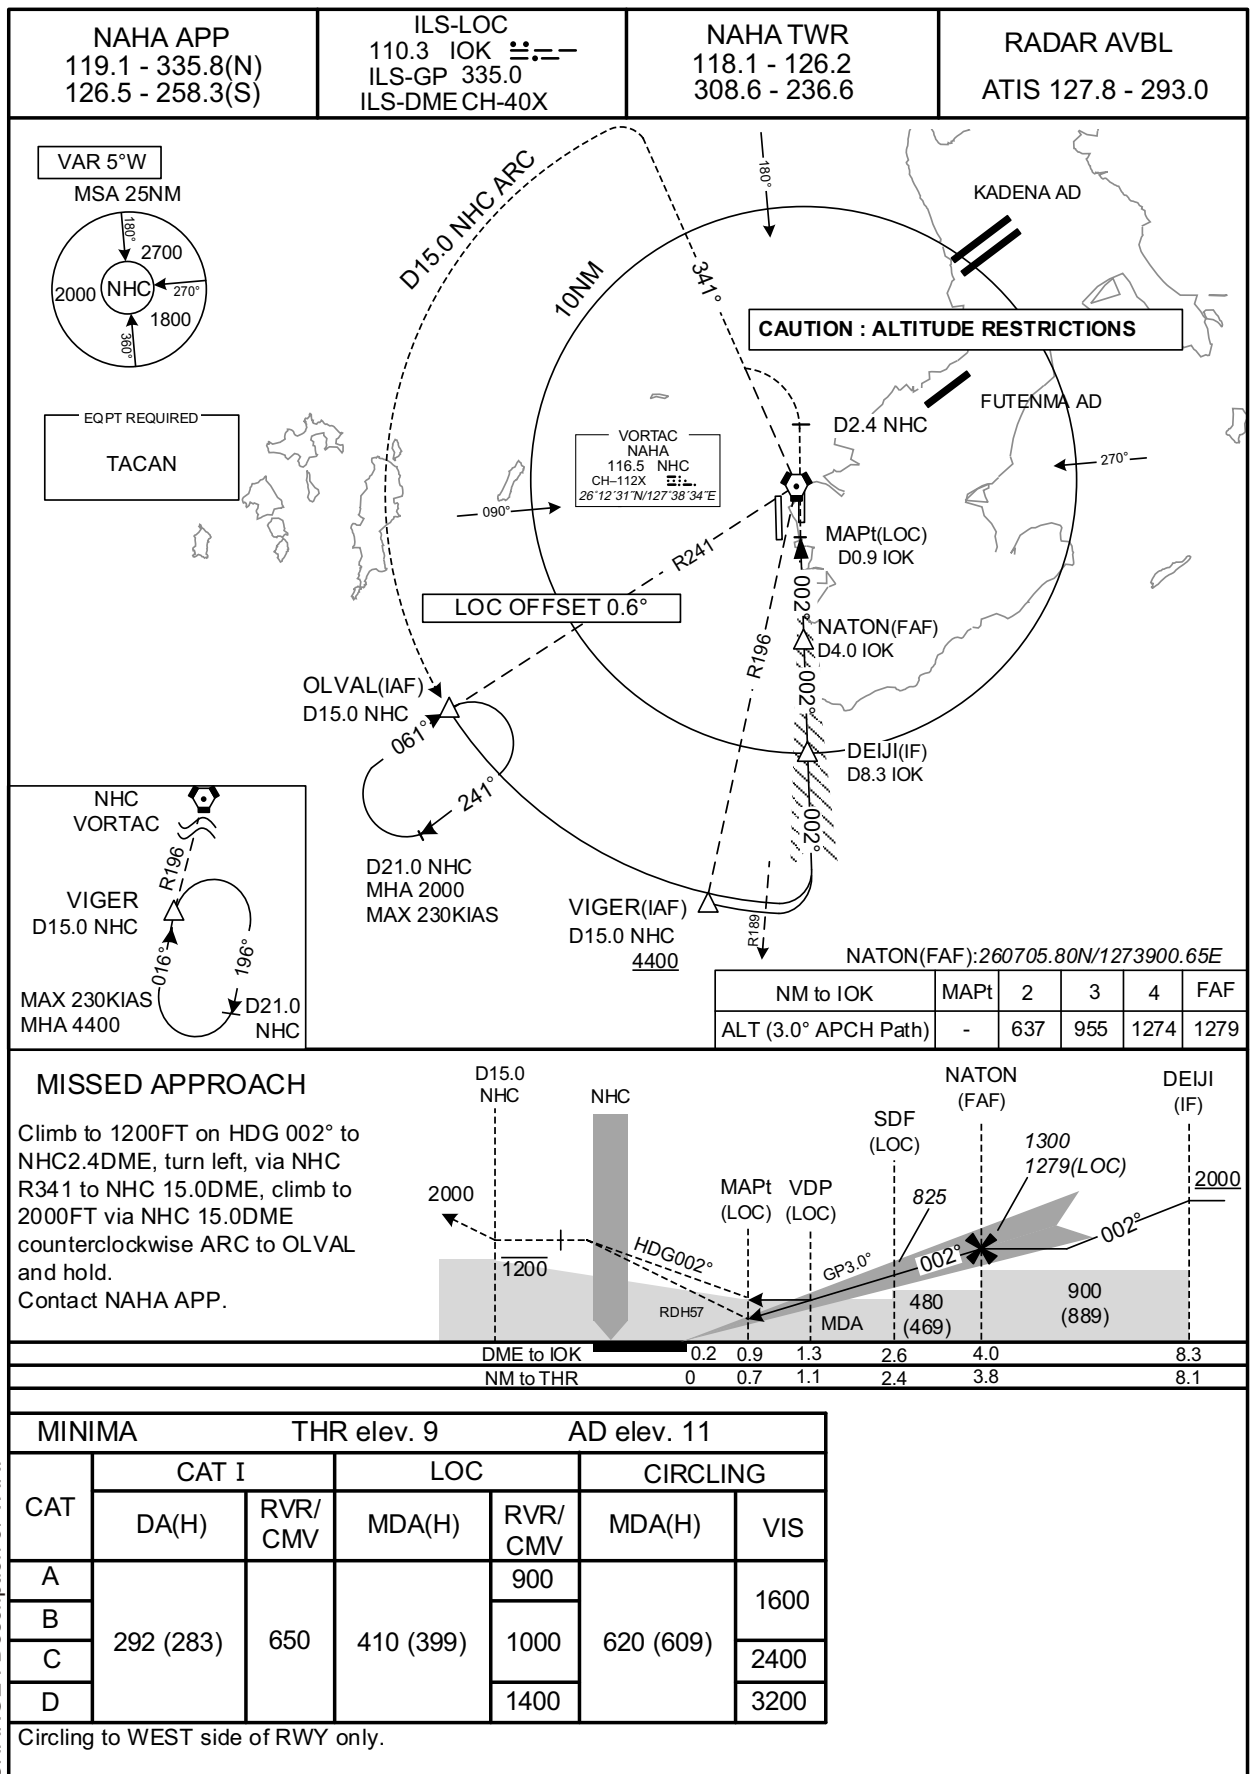

## INSTRUMENT APPROACH CHART


ROAH / NAHA

ILS Z or LOC Z RWY36L

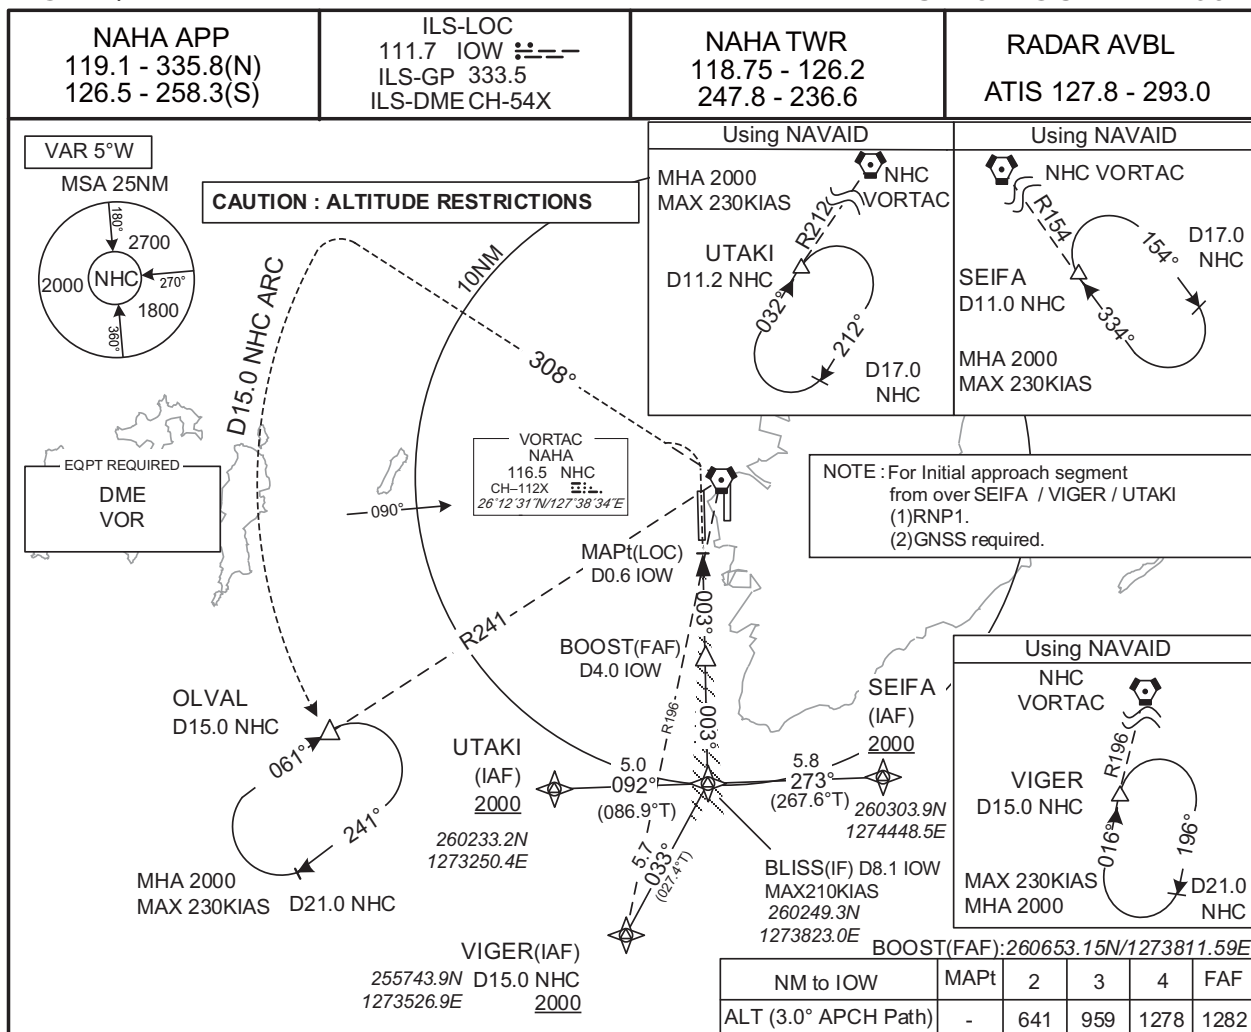

## MISSED APPROACH

Turn left, climb to 1200FT via NHC  
 R 308 to NHC8.5DME, climb to 2000FT  
 via NHC R308 to NHC 15.0DME, via  
 NHC 15.0DME counterclockwise ARC  
 to OLVAL and hold.  
 Cross NHC R308/12.0DME at or above  
 1400FT.  
 Contact NAHA APP.

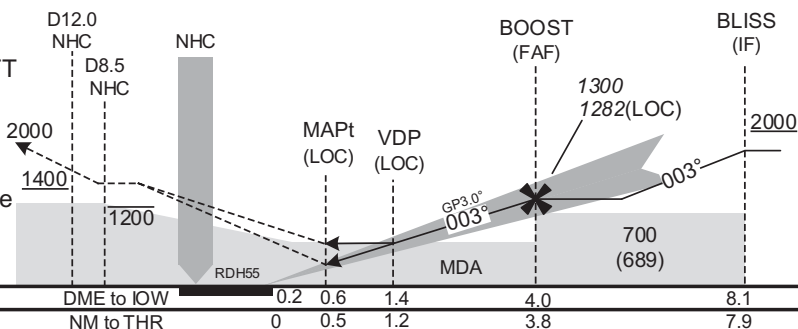

## MINIMA

THR elev. 14

AD elev. 11

| CAT | CAT I     |         | LOC       |         | CIRCLING  |      |
|-----|-----------|---------|-----------|---------|-----------|------|
|     | DA(H)     | RVR/CMV | MDA(H)    | RVR/CMV | MDA(H)    | VIS  |
| A   | 214 (200) | 550     | 430 (419) | 900     | 620 (609) | 1600 |
| B   |           |         |           | 1000    |           | 2400 |
| C   |           |         |           | 1400    |           | 3200 |
| D   |           |         |           |         |           |      |


Circling to WEST side of RWY only.

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

INSTRUMENT APPROACH CHART


ROAH / NAHA

ILS Y or LOC Y RWY36L

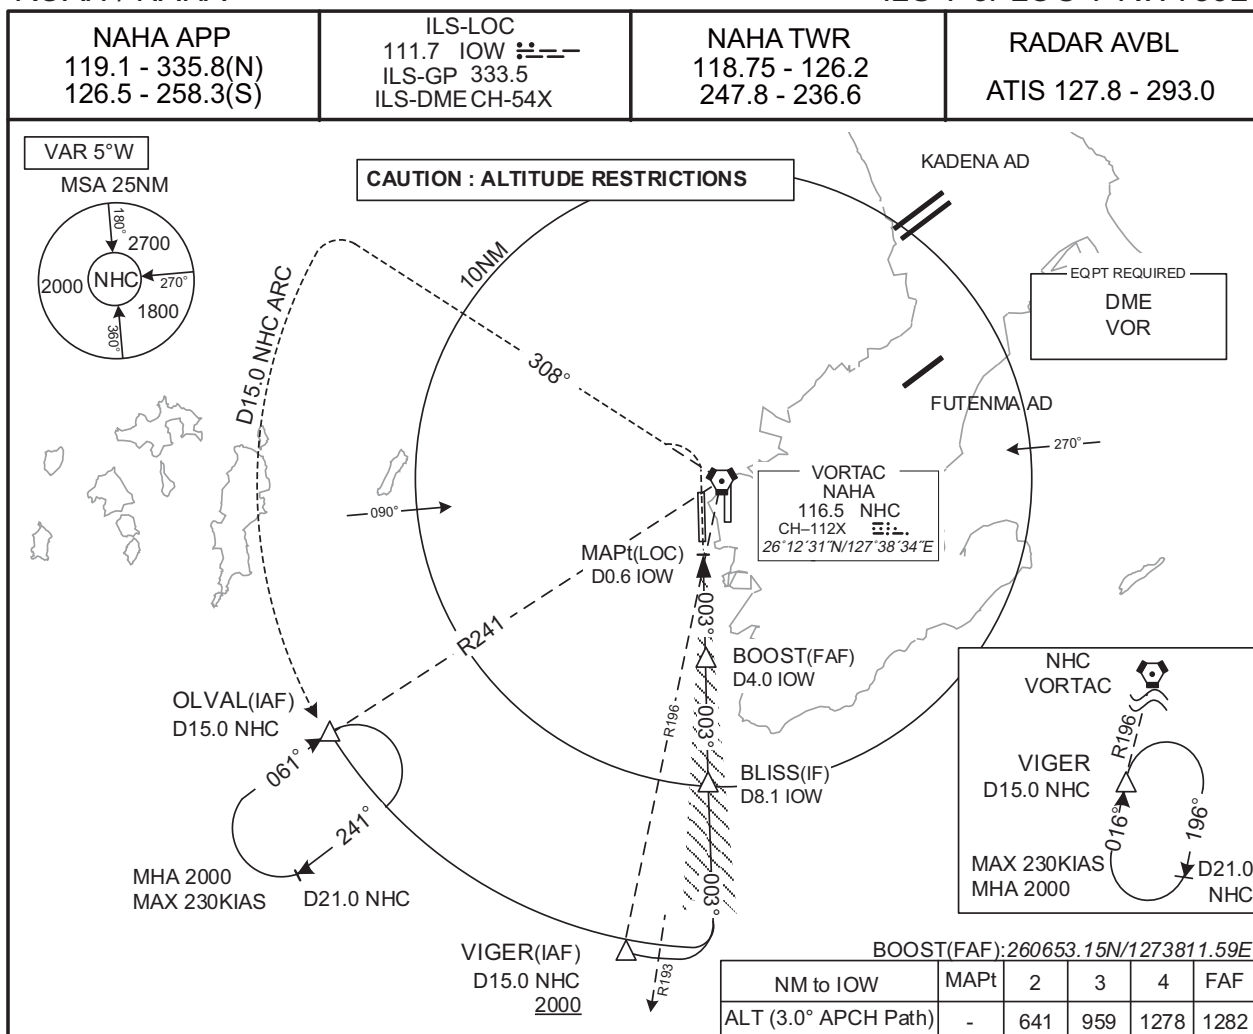

**MISSED APPROACH**

Turn left, climb to 1200FT via NHC  
 R308 to NHC8.5DME, climb to 2000FT  
 via NHC R308 to NHC 15.0DME, via  
 NHC 15.0DME counterclockwise ARC  
 to OLVAL and hold.  
 Cross NHC R308/12.0DME at or above  
 1400FT.  
 Contact NAHA APP.

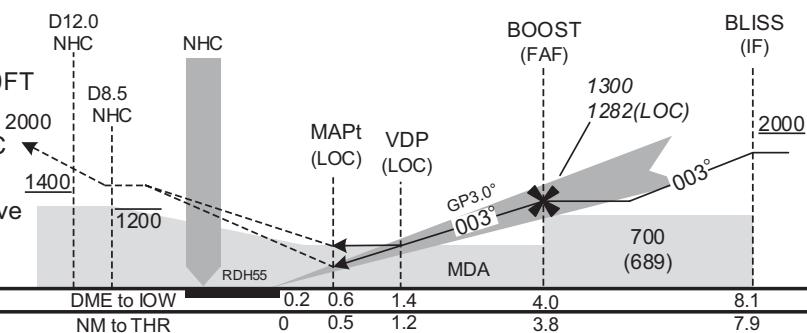


| MINIMA |           | THR elev. 14 |           | AD elev. 11 |           |      |
|--------|-----------|--------------|-----------|-------------|-----------|------|
| CAT    | CAT I     |              | LOC       |             | CIRCLING  |      |
|        | DA(H)     | RVR/<br>CMV  | MDA(H)    | RVR/<br>CMV | MDA(H)    | VIS  |
| A      | 214 (200) | 550          | 430 (419) | 900         | 620 (609) | 1600 |
| B      |           |              |           | 1000        |           |      |
| C      |           |              |           | 1400        |           |      |
| D      |           |              |           |             |           |      |

Circling to WEST side of RWY only.

## INSTRUMENT APPROACH CHART


ROAH / NAHA

ILS X or LOC X RWY36L

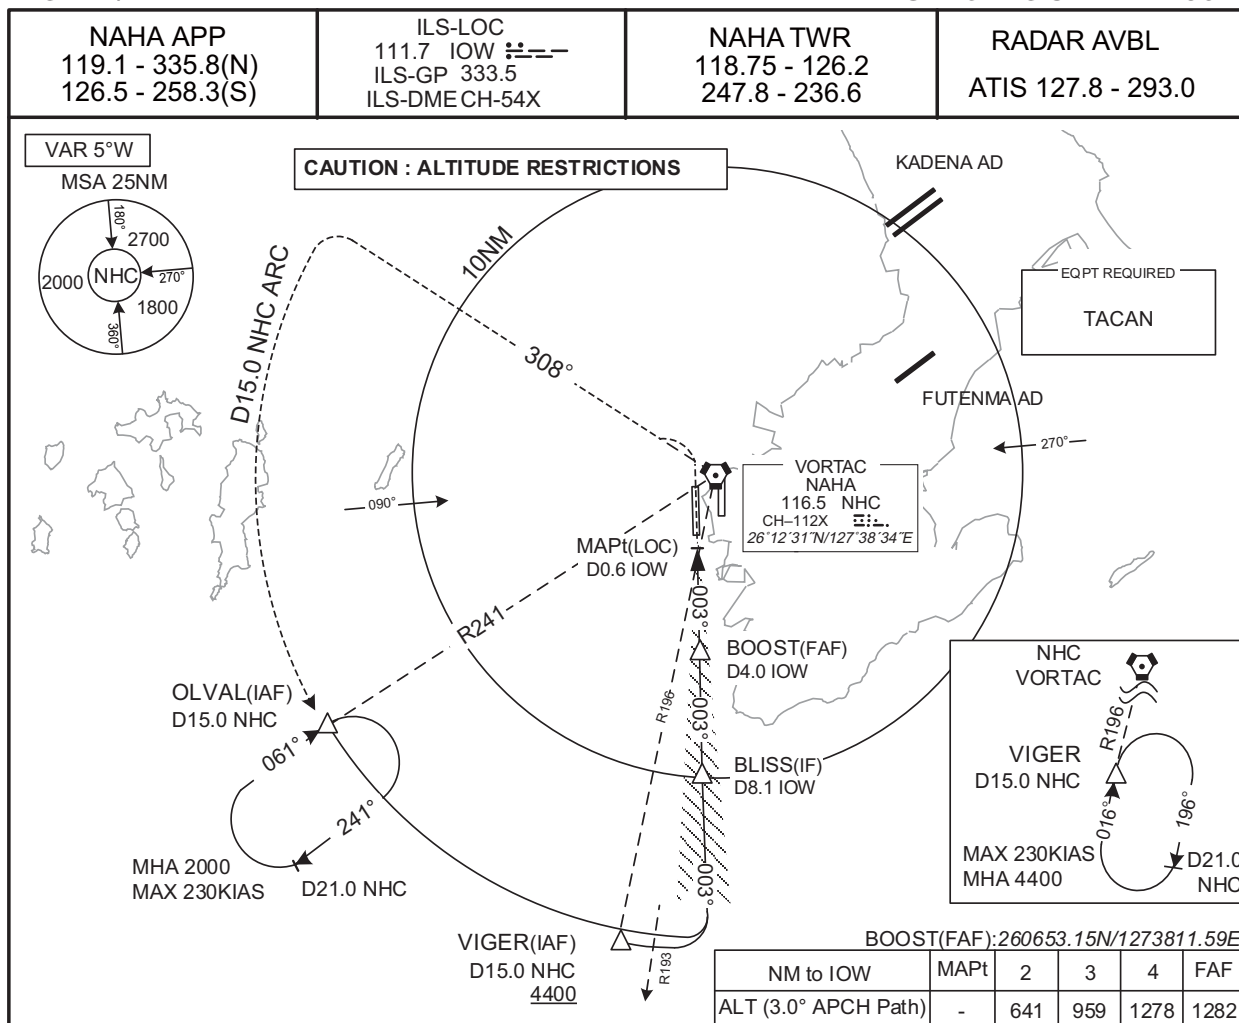

## MISSED APPROACH

Turn left, climb to 1200FT via NHC  
 R308 to NHC8.5DME, climb to 2000FT  
 via NHC R308 to NHC 15.0DME, via  
 NHC 15.0DME counterclockwise ARC 2000  
 to OLVAL and hold.  
 Cross NHC R308/12.0DME at or above  
 1400FT.  
 Contact NAHA APP.

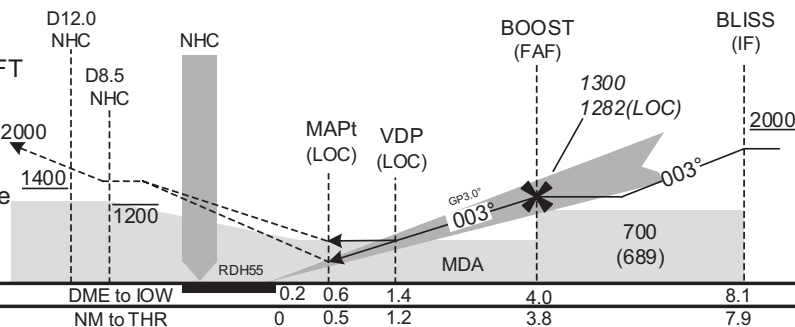

| MINIMA | THR elev. 14 |         | AD elev. 11 |         |           |      |
|--------|--------------|---------|-------------|---------|-----------|------|
| CAT    | CAT I        |         | LOC         |         | CIRCLING  |      |
|        | DA(H)        | RVR/CMV | MDA(H)      | RVR/CMV | MDA(H)    | VIS  |
| A      | 214 (200)    | 550     | 430 (419)   | 900     | 620 (609) | 1600 |
| B      |              |         |             | 1000    |           | 2400 |
| C      |              |         |             | 1400    |           | 3200 |
| D      |              |         |             |         |           |      |

| CAT | CAT I     |         | LOC       |         | CIRCLING  |      |
|-----|-----------|---------|-----------|---------|-----------|------|
|     | DA(H)     | RVR/CMV | MDA(H)    | RVR/CMV | MDA(H)    | VIS  |
| A   | 214 (200) | 550     | 430 (419) | 900     | 620 (609) | 1600 |
| B   |           |         |           | 1000    |           | 2400 |
| C   |           |         |           | 1400    |           | 3200 |
| D   |           |         |           |         |           |      |

Circling to WEST side of RWY only.


CHANGE : Description of VAR.



## INSTRUMENT APPROACH CHART

ROAH / NAHA

ILS or LOC RWY18R

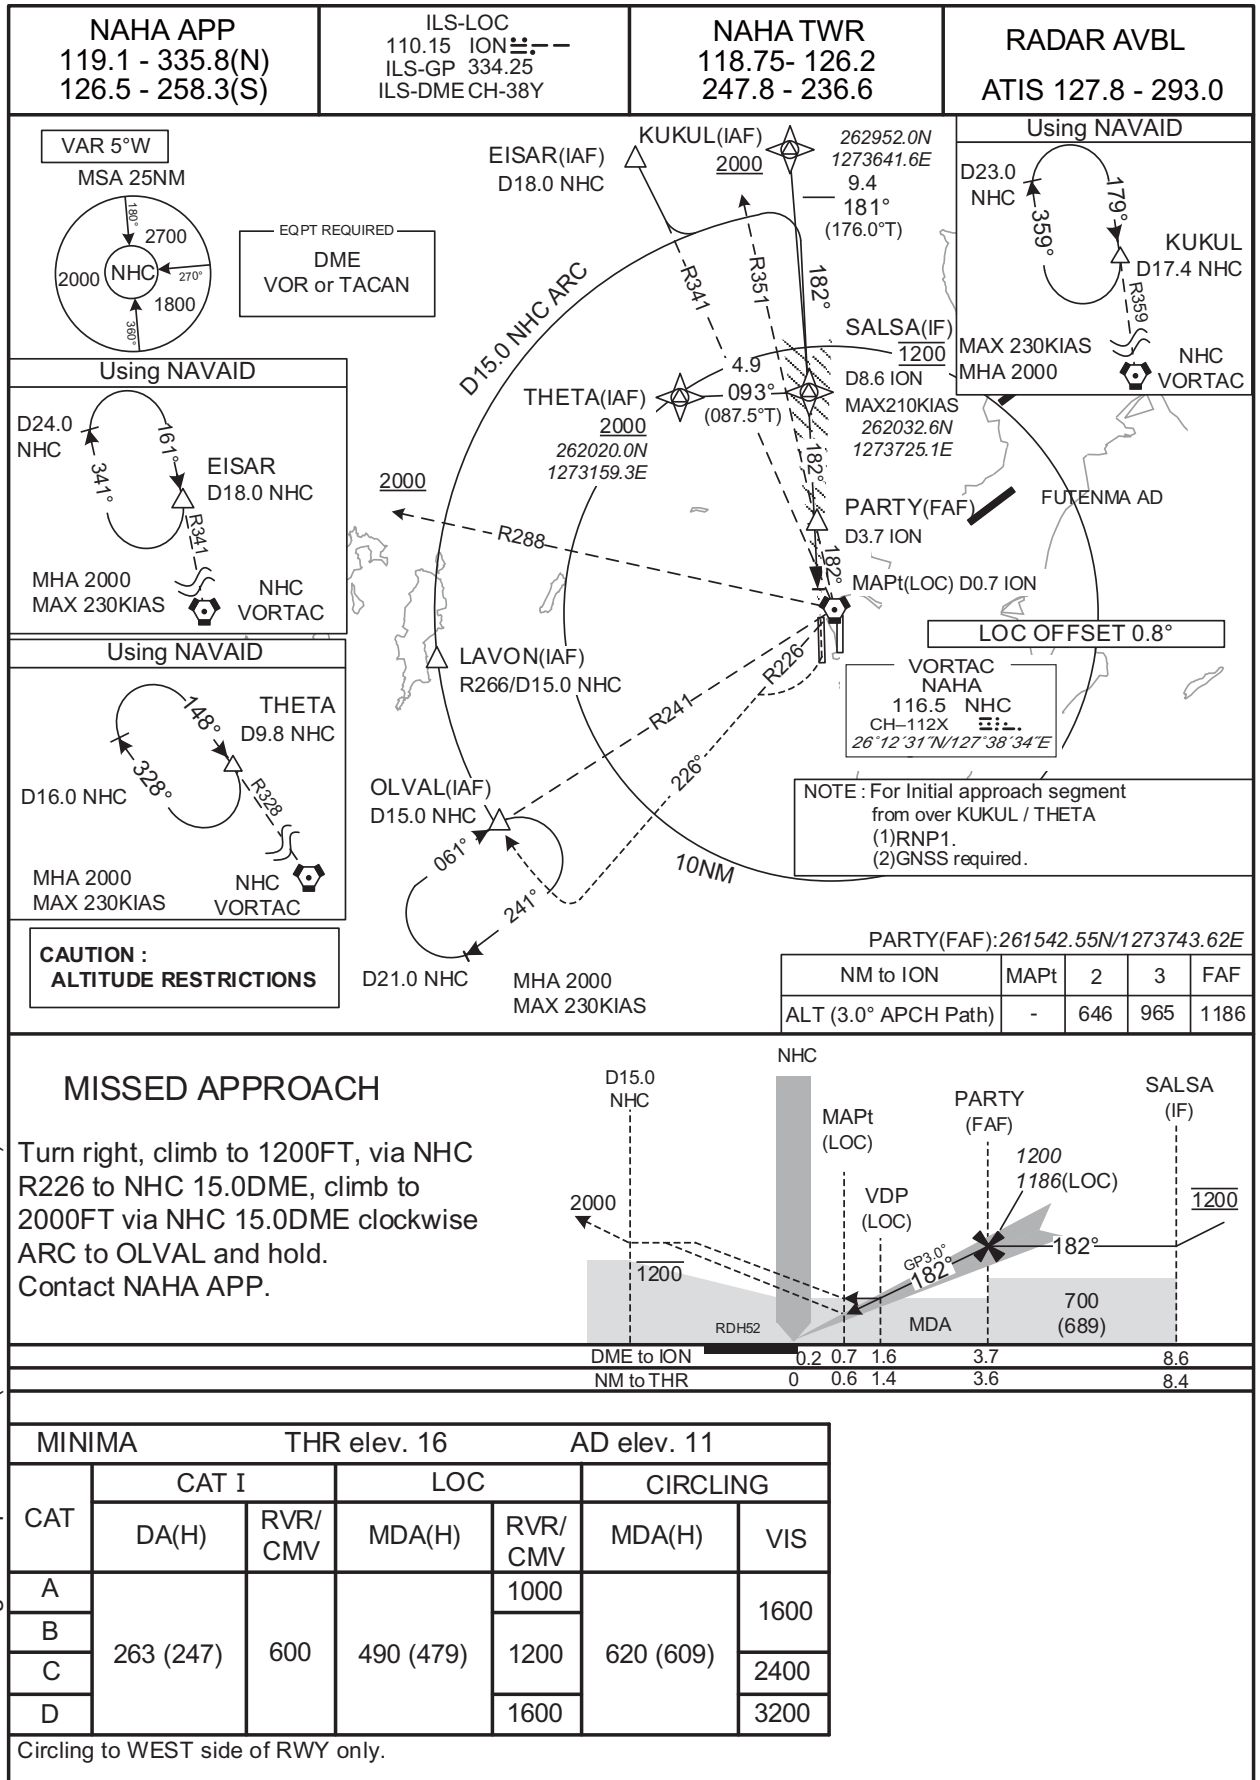




## INSTRUMENT APPROACH CHART

ROAH / NAHA


RNP RWY36R

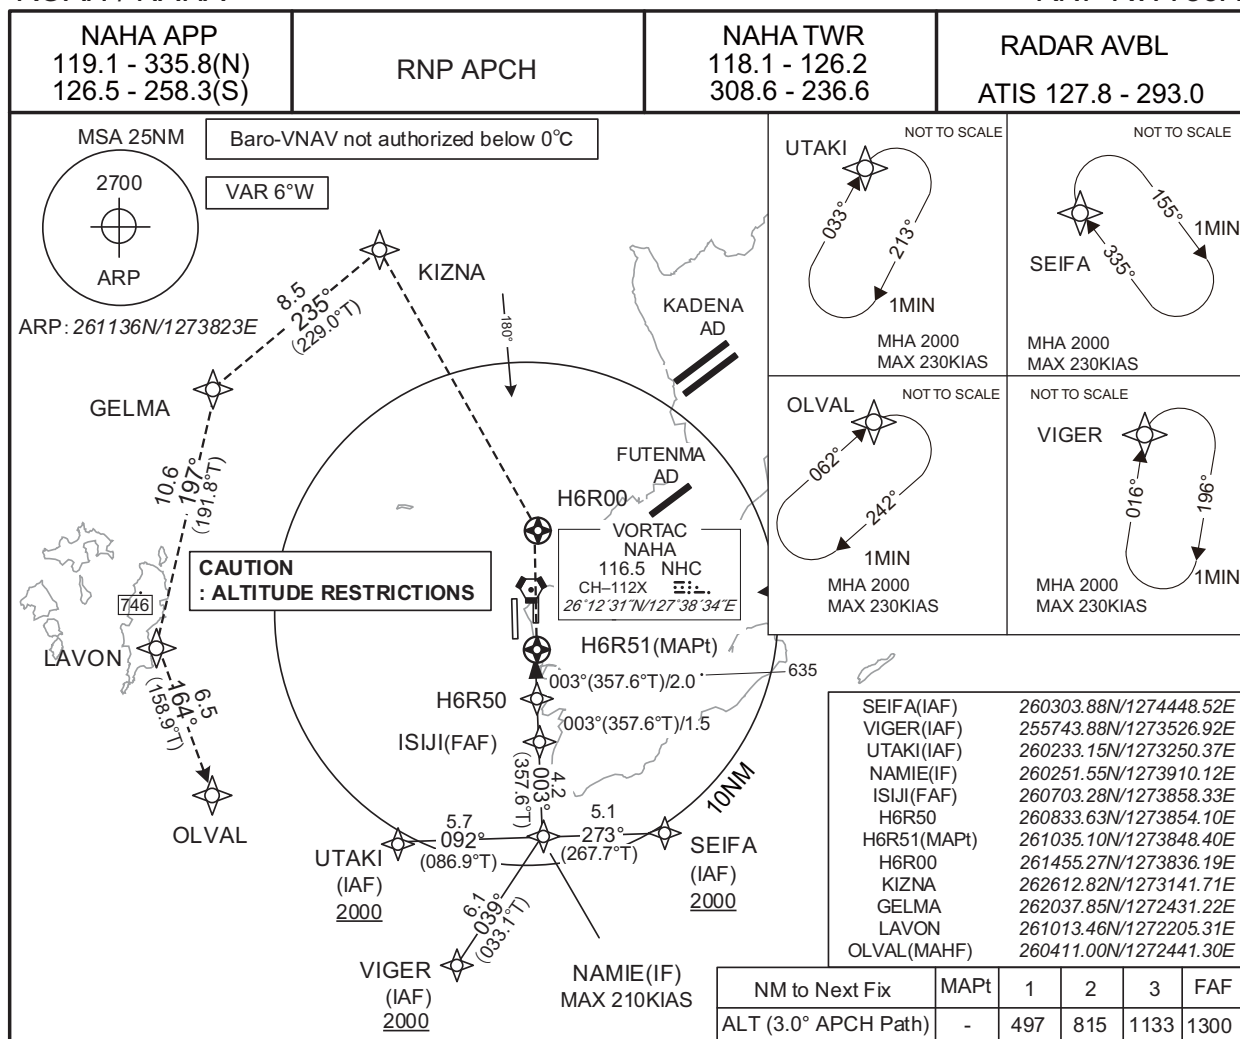

## MISSED APPROACH

Direct to H6R00, turn left direct to KIZNA at or below 1200FT, to GELMA, to LAVON, to OLVAL and hold at 2000FT.

Contact NAHA APP.

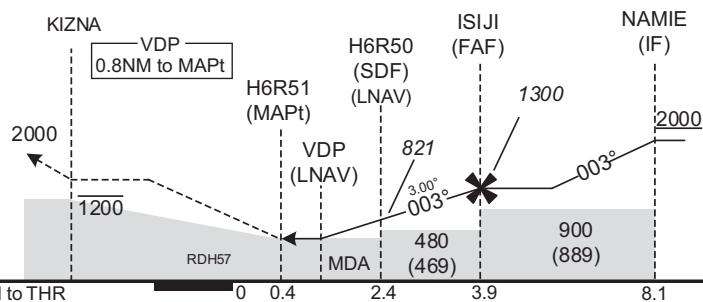

CHANGE : Description of VAR.


| MINIMA |           | THR elev. 9 |           | AD elev. 11 |           |      |      |
|--------|-----------|-------------|-----------|-------------|-----------|------|------|
| CAT    | LNAV/VNAV |             | LNAV      |             | CIRCLING  |      |      |
|        | DA(H)     | RVR/<br>CMV | MDA(H)    | RVR/<br>CMV | MDA(H)    | VIS  |      |
| A      | 410 (401) | 900         | 410 (399) | 900         | 620 (609) | 1600 |      |
| B      |           | 1000        |           | 1000        |           |      |      |
| C      |           |             |           |             |           |      | 2400 |
| D      |           |             |           |             |           |      |      |

Circling to WEST side of RWY only.

## INSTRUMENT APPROACH CHART

ROAH / NAHA


RNP RWY36L

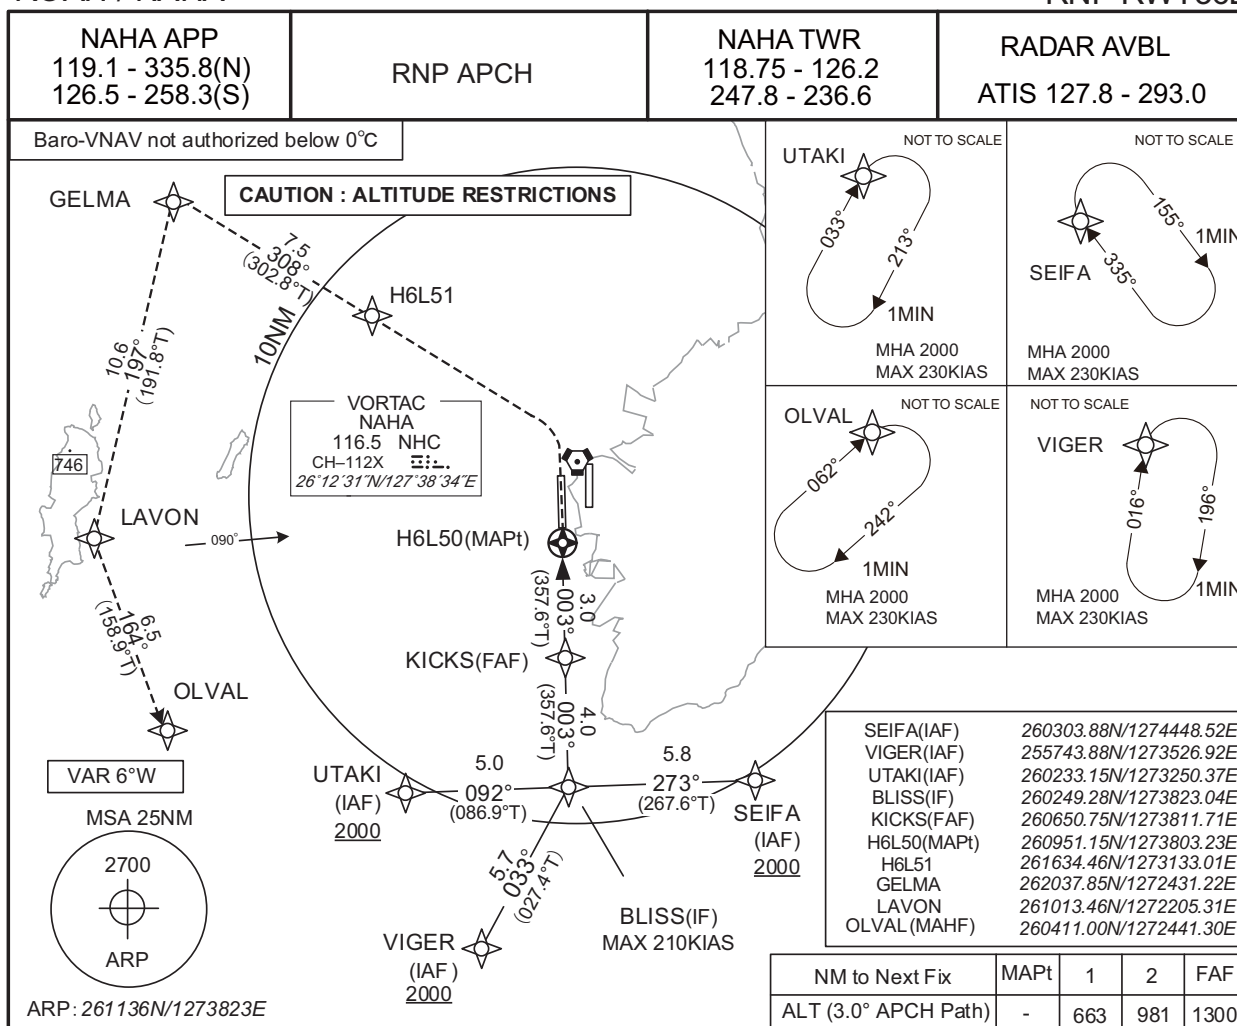

## MISSED APPROACH

Turn left direct to H6L51, to GELMA at or below 1200FT, to LAVON, to OLVAL and hold at 2000FT.

Contact NAHA APP.

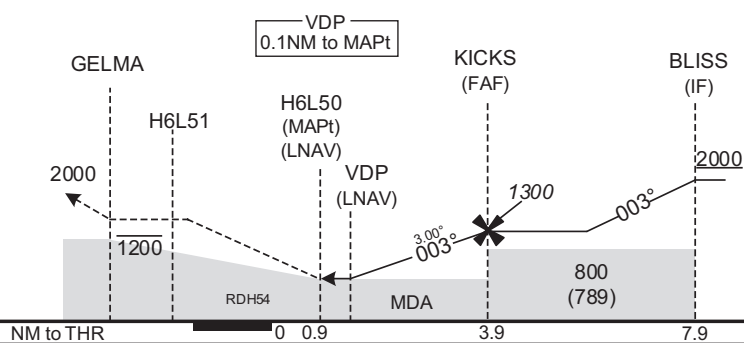


CHANGE : Description of VAR.

| MINIMA                             |           | THR elev. 14 |           | AD elev. 11 |           |      |
|------------------------------------|-----------|--------------|-----------|-------------|-----------|------|
| CAT                                | LNAV/VNAV |              | LNAV      |             | CIRCLING  |      |
|                                    | DA(H)     | RVR/CMV      | MDA(H)    | RVR/CMV     | MDA(H)    | VIS  |
| A                                  | 370 (356) | 900          | 370 (359) | 900         | 620 (609) | 1600 |
| B                                  |           | 1000         |           | 1000        |           | 2400 |
| C                                  |           |              |           |             |           |      |
| D                                  |           |              |           |             |           |      |
| Circling to WEST side of RWY only. |           |              |           |             |           |      |

## INSTRUMENT APPROACH CHART


ROAH / NAHA

RNP RWY18R

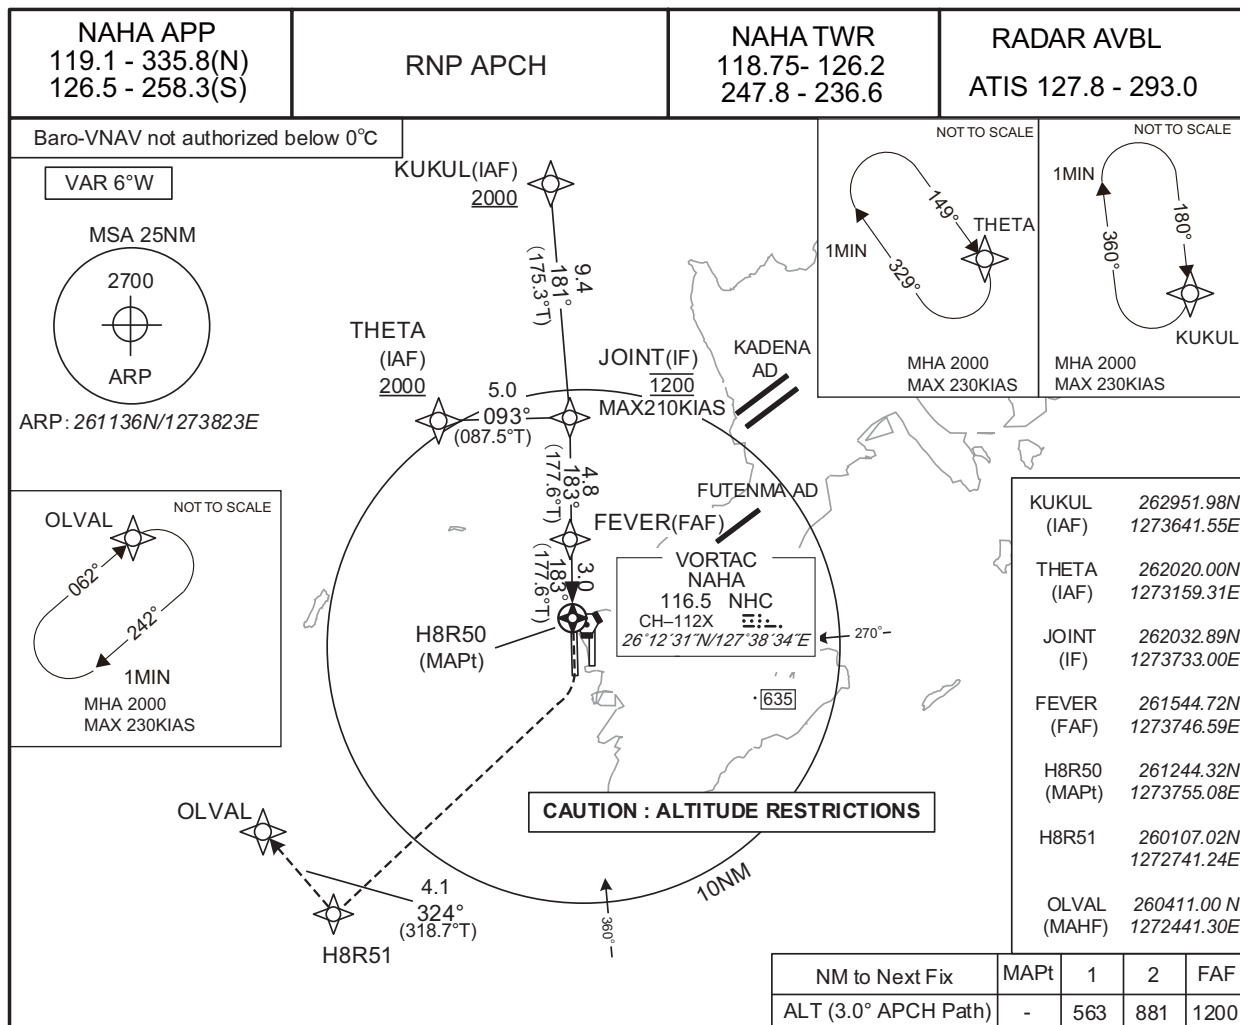

## MISSED APPROACH

Turn right direct to H8R51 at or below 1200FT, to OLVAL and hold at 2000FT.  
Contact NAHA APP.

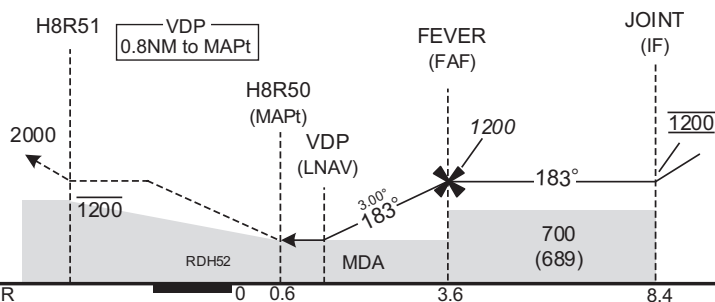

MINIMA THR elev. 16 AD elev. 11

| CAT | LNAV/VNAV |         | LNAV      |         | CIRCLING  |      |
|-----|-----------|---------|-----------|---------|-----------|------|
|     | DA(H)     | RVR/CMV | MDA(H)    | RVR/CMV | MDA(H)    | VIS  |
| A   | 490 (474) | 1000    | 490 (479) | 1000    | 620 (609) | 1600 |
| B   |           | 1200    |           | 1200    |           | 2400 |
| C   |           | 1600    |           | 1600    |           | 3200 |
| D   |           |         |           |         |           |      |


Circling to WEST side of RWY only.

CHANGE : Description of VAR.

## INSTRUMENT APPROACH CHART

ROAH / NAHA


RNP RWY18L

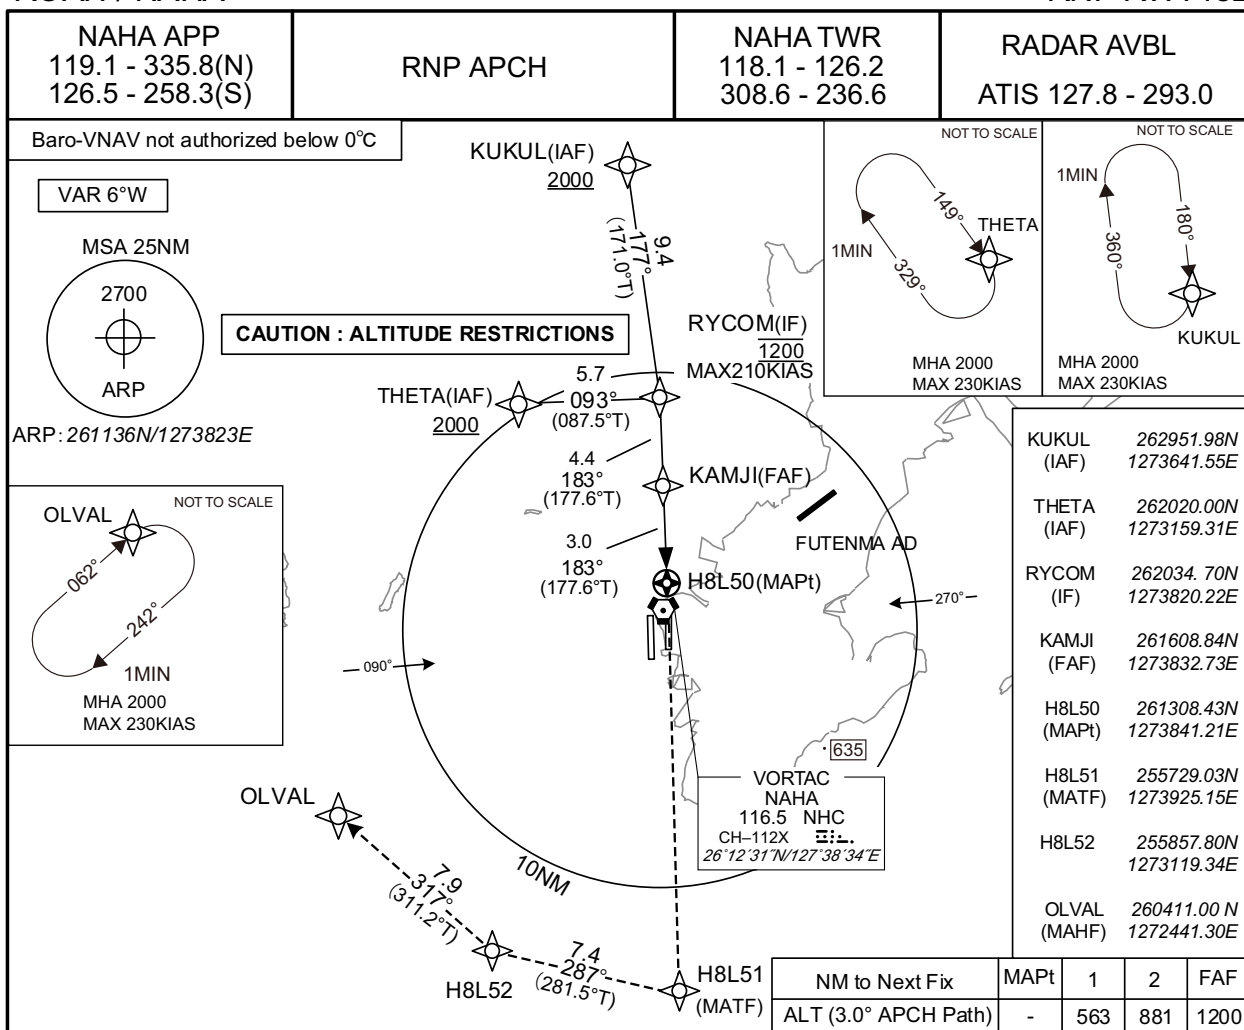

## MISSED APPROACH

Direct to H8L51 at or below 1200FT, to H8L52, to OLVAL and hold at 2000FT.

Contact NAHA APP.

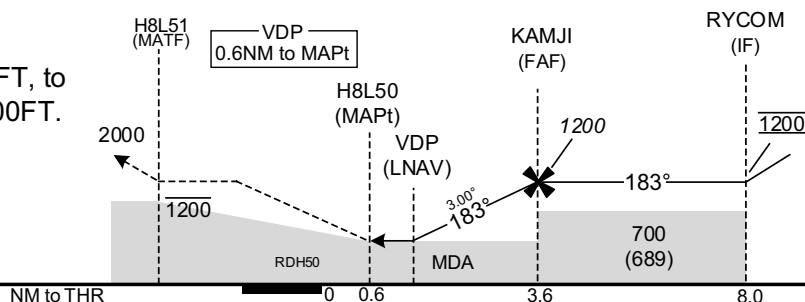

CHANGE : Description of VAR.


| MINIMA |           | THR elev. 11 |           | AD elev. 11 |           |      |      |
|--------|-----------|--------------|-----------|-------------|-----------|------|------|
| CAT    | LNAV/VNAV |              | LNAV      |             | CIRCLING  |      |      |
|        | DA(H)     | RVR/CMV      | MDA(H)    | RVR/CMV     | MDA(H)    | VIS  |      |
| A      | 430 (419) | 1200         | 430 (419) | 1200        | 620 (609) | 1600 |      |
| B      |           | 1300         |           | 1300        |           |      |      |
| C      |           | 1400         |           | 1400        |           |      | 2400 |
| D      |           | 1600         |           | 1600        |           |      | 3200 |

Circling to WEST side of RWY only.

## ROAH / NAHA


VOR A or TACAN B

|                                                  |                                                                                                                                                 |                                             |                                  |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|----------------------------------|
| NAHA APP<br>119.1 - 335.8(N)<br>126.5 - 258.3(S) | NAHA VORTAC<br>116.5 NHC<br>CH-112X <br>26°12'31"N/127°38'34"E | NAHA TWR<br>118.75 - 118.1<br>247.8 - 308.6 | RADAR AVBL<br>ATIS 127.8 - 293.0 |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|----------------------------------|

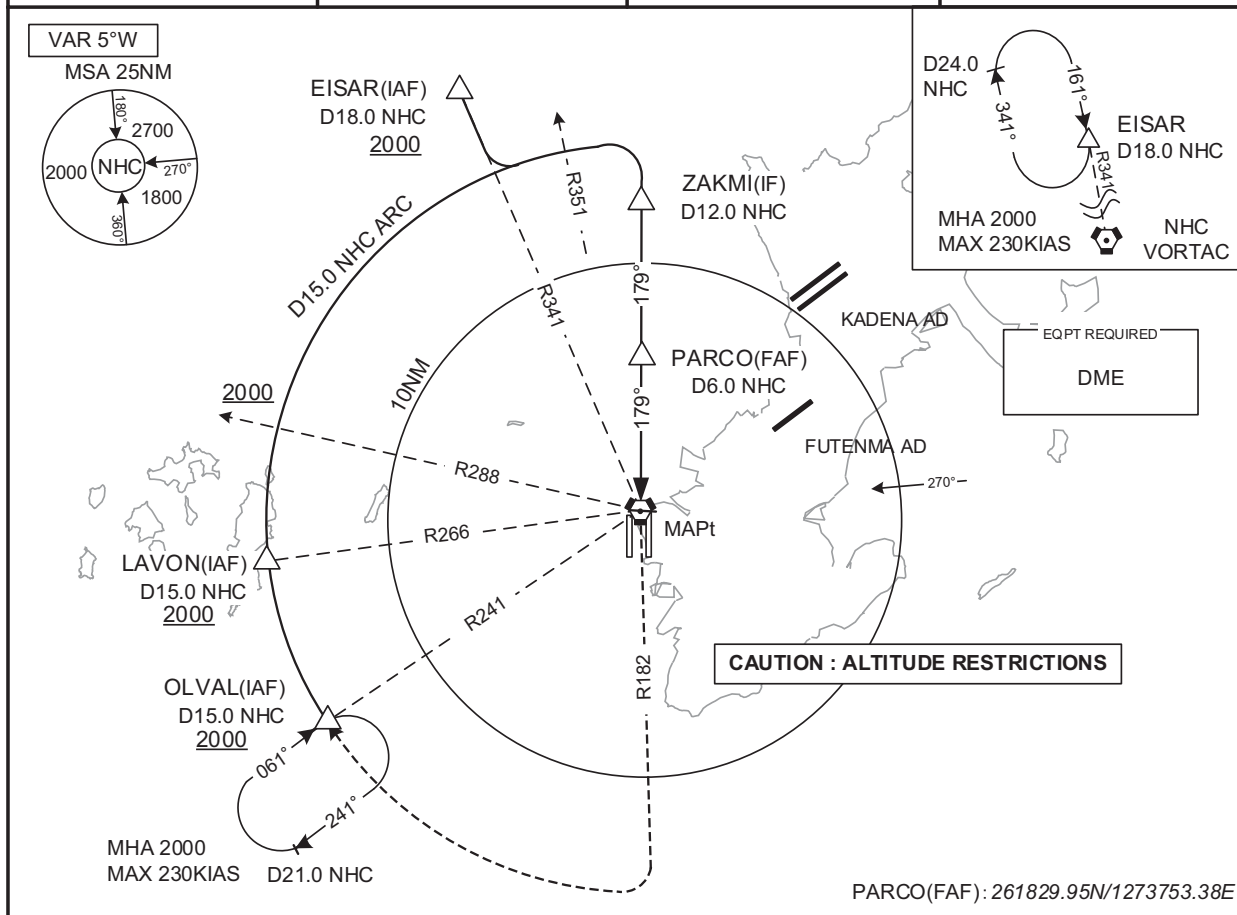

Climb to 1200FT via NHC R182 to NHC  
15.0DME, climb to 2000FT via NHC  
15.0DME clockwise ARC to OLVAL and  
hold.  
Contact NAHA APP.

Timing not authorized for defining the MAPt.

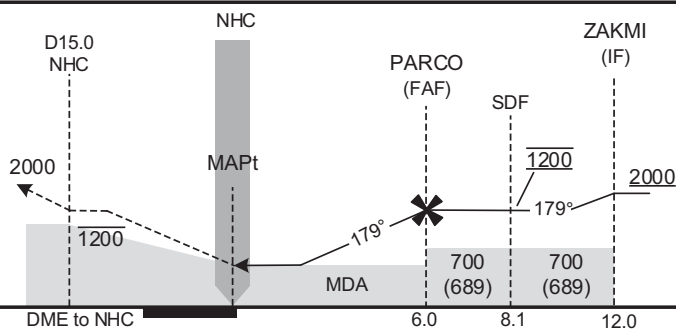

|        |           |             |  |
|--------|-----------|-------------|--|
| MINIMA |           | AD elev. 11 |  |
| CAT    | CIRCLING  |             |  |
|        | MDA(H)    | VIS         |  |
| A      | 620 (609) | 1600        |  |
| B      |           |             |  |
| C      |           | 2400        |  |
| D      |           | 3200        |  |


Circling to WEST side of RWY only.

CHANGE : Description of VAR.

INSTRUMENT APPROACH CHART

ROAH / NAHA

VOR C

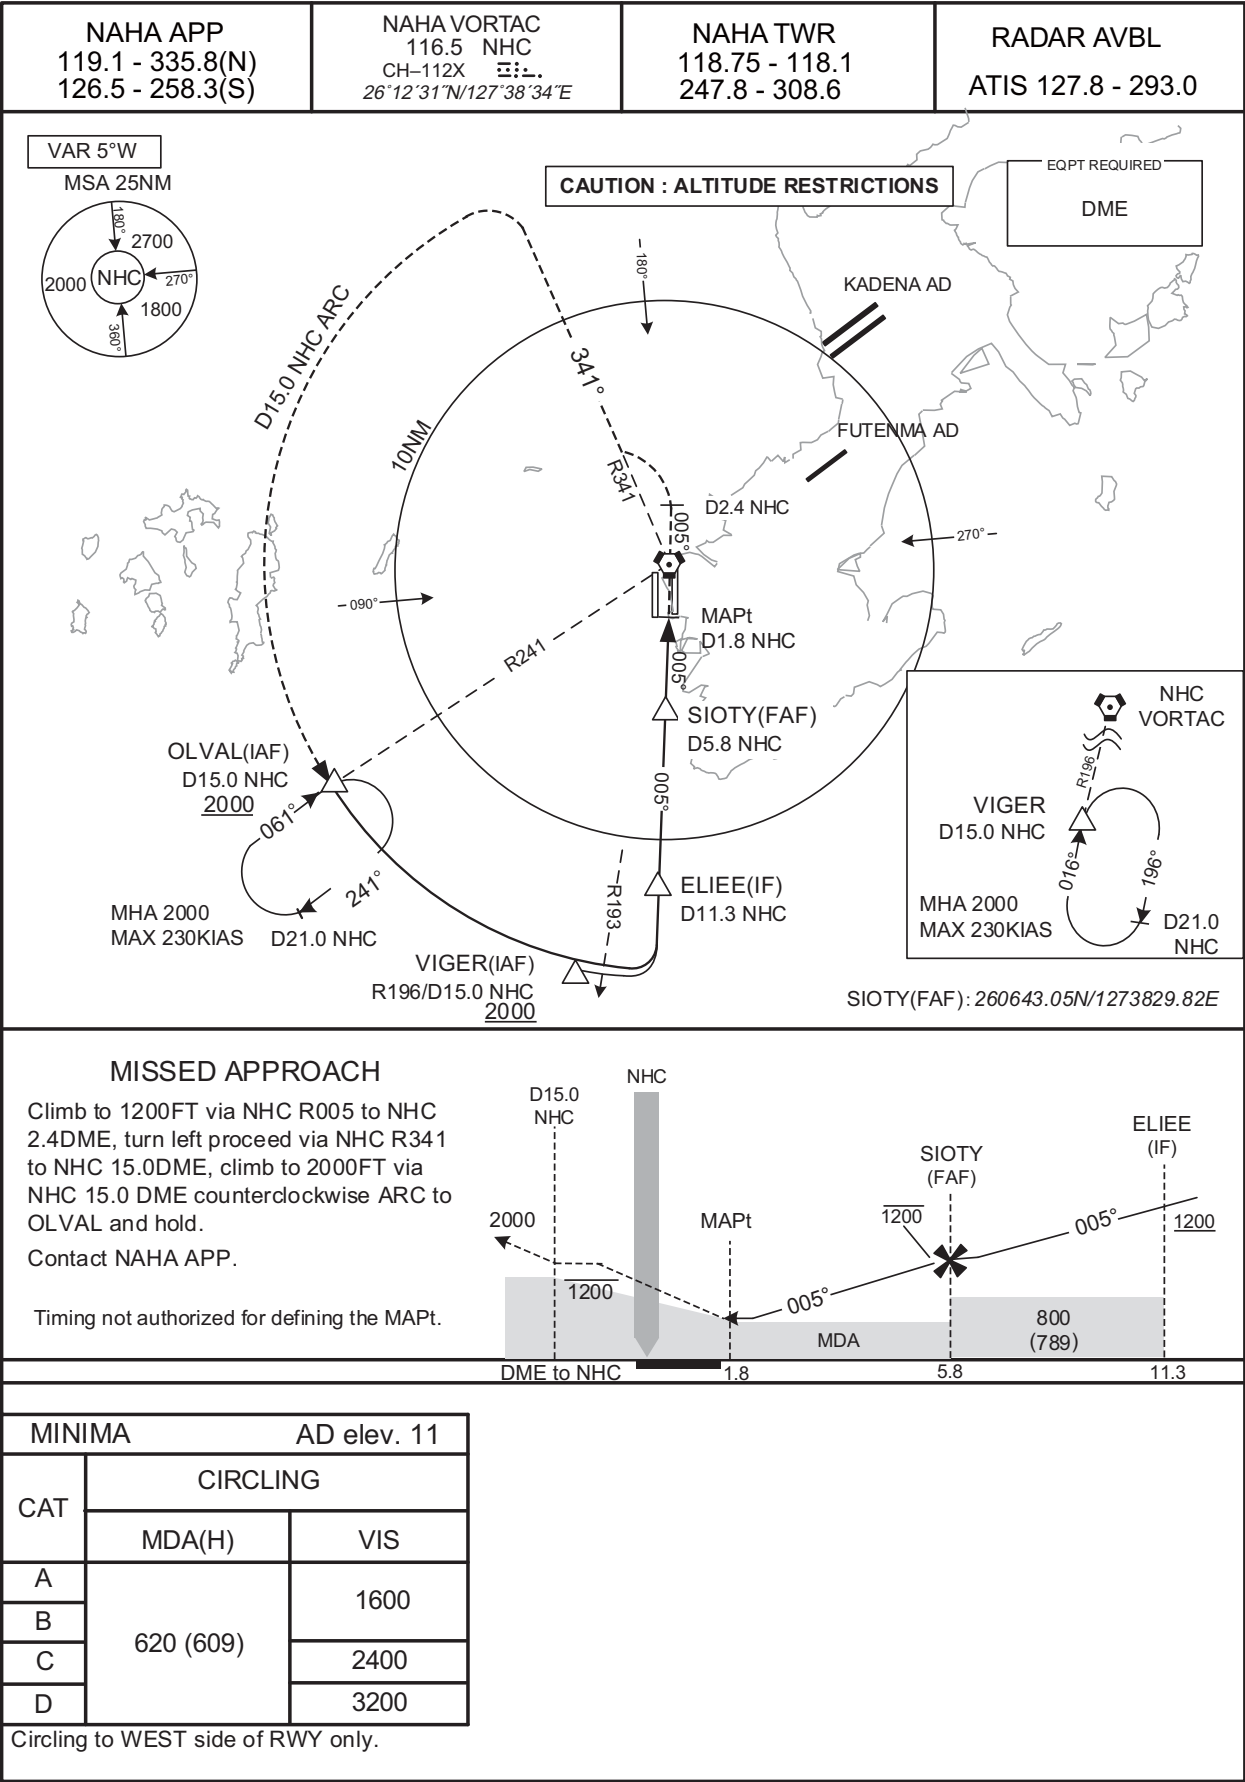


## ROAH / NAHA

|                                                         |                                                                                                                                                        |                                                    |                                         |
|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|-----------------------------------------|
| <b>NAHA APP</b><br>119.1 - 335.8(N)<br>126.5 - 258.3(S) | <b>NAHA VORTAC</b><br>116.5 NHC<br>CH-112X <br>26°12'31"N/127°38'34"E | <b>NAHA TWR</b><br>118.75 - 118.1<br>247.8 - 308.6 | <b>RADAR AVBL</b><br>ATIS 127.8 - 293.0 |
|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|-----------------------------------------|


VAR 5°W

MSA 25NM



**CAUTION : ALTITUDE RESTRICTIONS**

EQPT REQUIRED  
 —

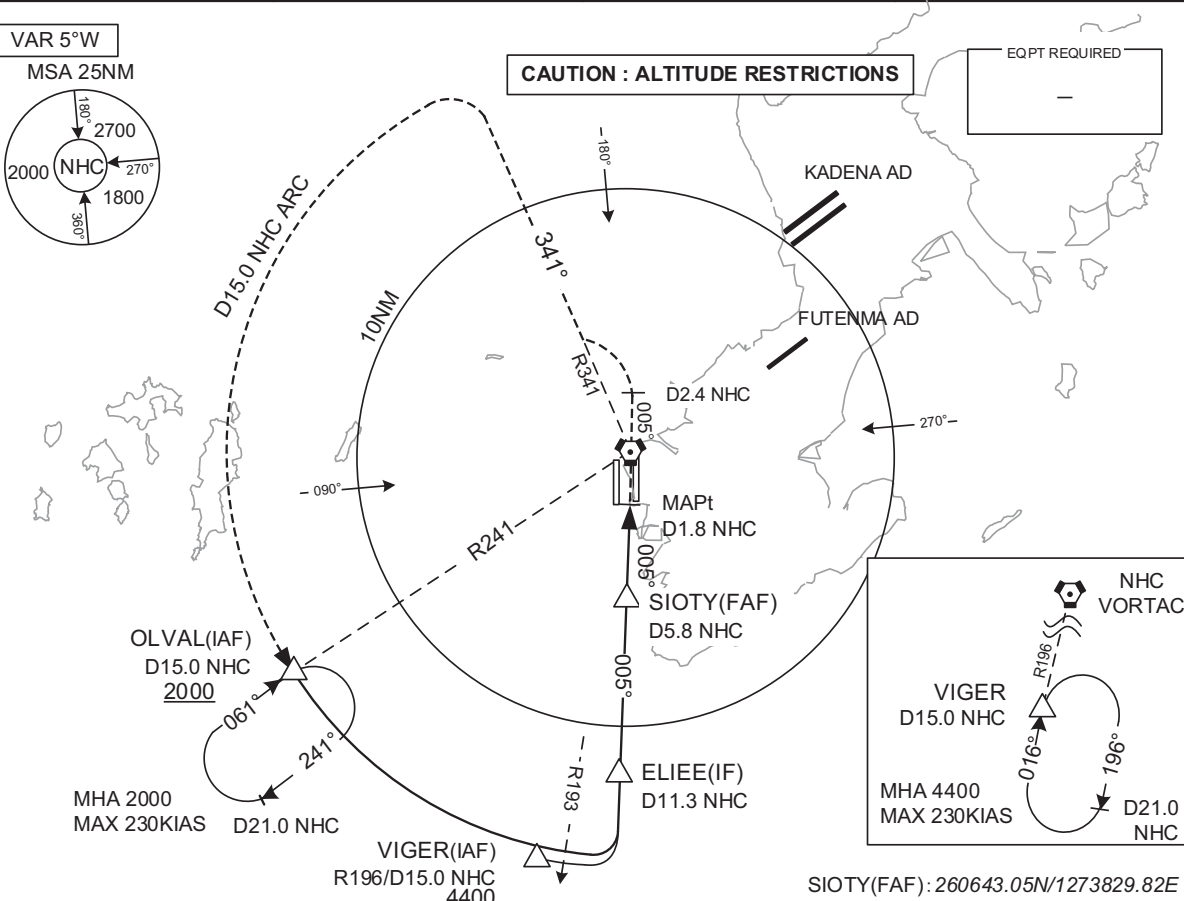


SIOTY (FAF) : 260643.05N/1273829.82E

CHANGE : Description of VAR.

23/3/23



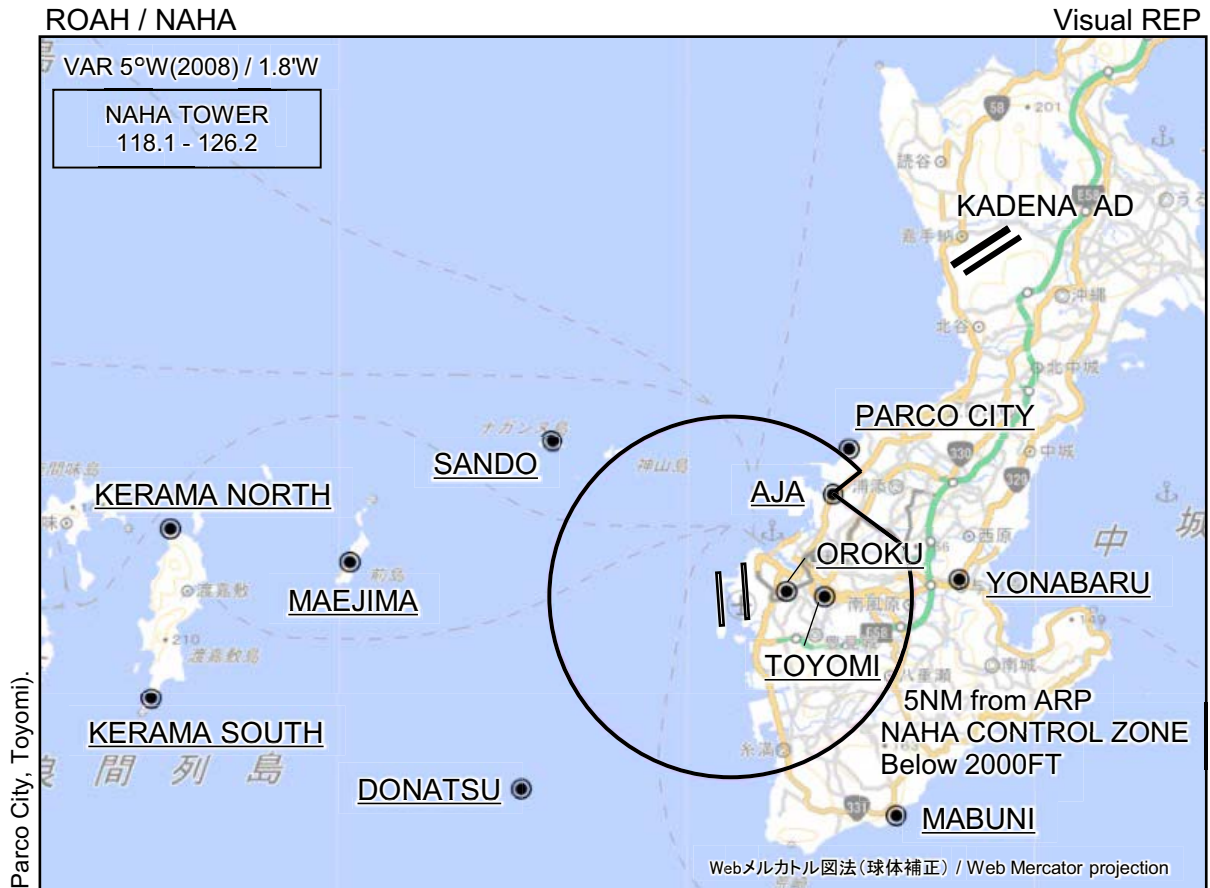

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP. Visual REP established(Oroku, Parco City, Toyomi).


| Call sign              | BRG / DIST from ARP | Remarks                        |
|------------------------|---------------------|--------------------------------|
| サンド<br>Sando           | 311°T / 6.6NM       | ナガンヌ島<br>Island                |
| 慶良間ノース<br>Kerama North | 277°T / 15.4NM      | 渡嘉敷島北端<br>North edge of island |
| 前島<br>Maejima          | 276°T / 10.5NM      | 前島<br>Island                   |
| 慶良間サウス<br>Kerama South | 260°T / 16.1NM      | 渡嘉敷島南端<br>South edge of island |
| ドーナツ<br>Donatsu        | 227°T / 7.8NM       | ルカン礁<br>Coral reef             |
| パルコシティ<br>Parco City   | 037°T / 5.2NM       | パルコシティ<br>Shopping mall        |
| 安謝<br>Aja              | 043°T / 4.0NM       | 国道58号線安謝橋<br>Bridge            |
| 小禄<br>Oroku            | 083°T / 1.5NM       | モノレール小禄駅<br>Station            |
| 与那原<br>Yonabaru        | 085°T / 6.2NM       | 国道329号線与那原交差点<br>Intersection  |
| とよみ<br>Toyomi          | 090°T / 2.5NM       | とよみ大橋と爬龍橋の交点<br>Intersection   |
| 摩文仁<br>Mabuni          | 143°T / 7.5NM       | 平和祈念公園<br>Park                 |



ROAH / NAHA

Minimum Vectoring Altitude CHART

VAR 5°W (2011)

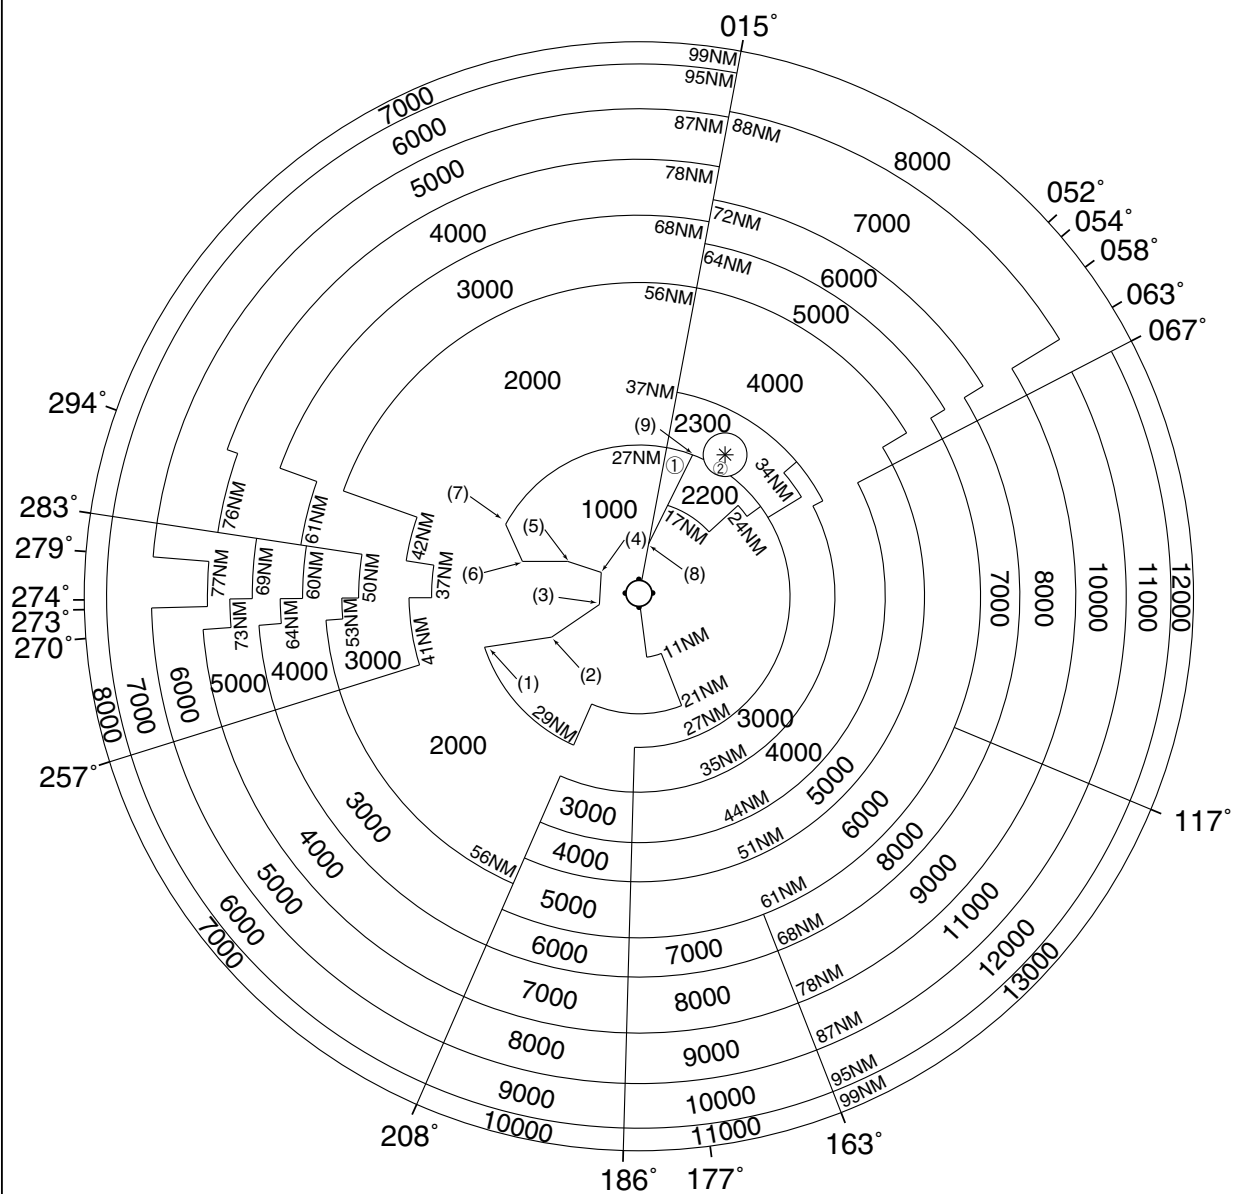

- |        |                      |                      |                                |
|--------|----------------------|----------------------|--------------------------------|
| ① 1500 | (1) 260301N/1270807E | (6) 261829N/1271524E | CENTER: 261231N/1273834E (NHC) |
| ② 2600 | (2) 260459N/1272121E | (7) 262505N/1271157E | * : 263759N/1275528E           |
|        | (3) 261057N/1273045E | (8) 262154N/1274025E | RADIUS 3.9NM                   |
|        | (4) 261640N/1273102E | (9) 263755N/1274900E |                                |
|        | (5) 261835N/1272422E |                      |                                |