



AERODROME CHART

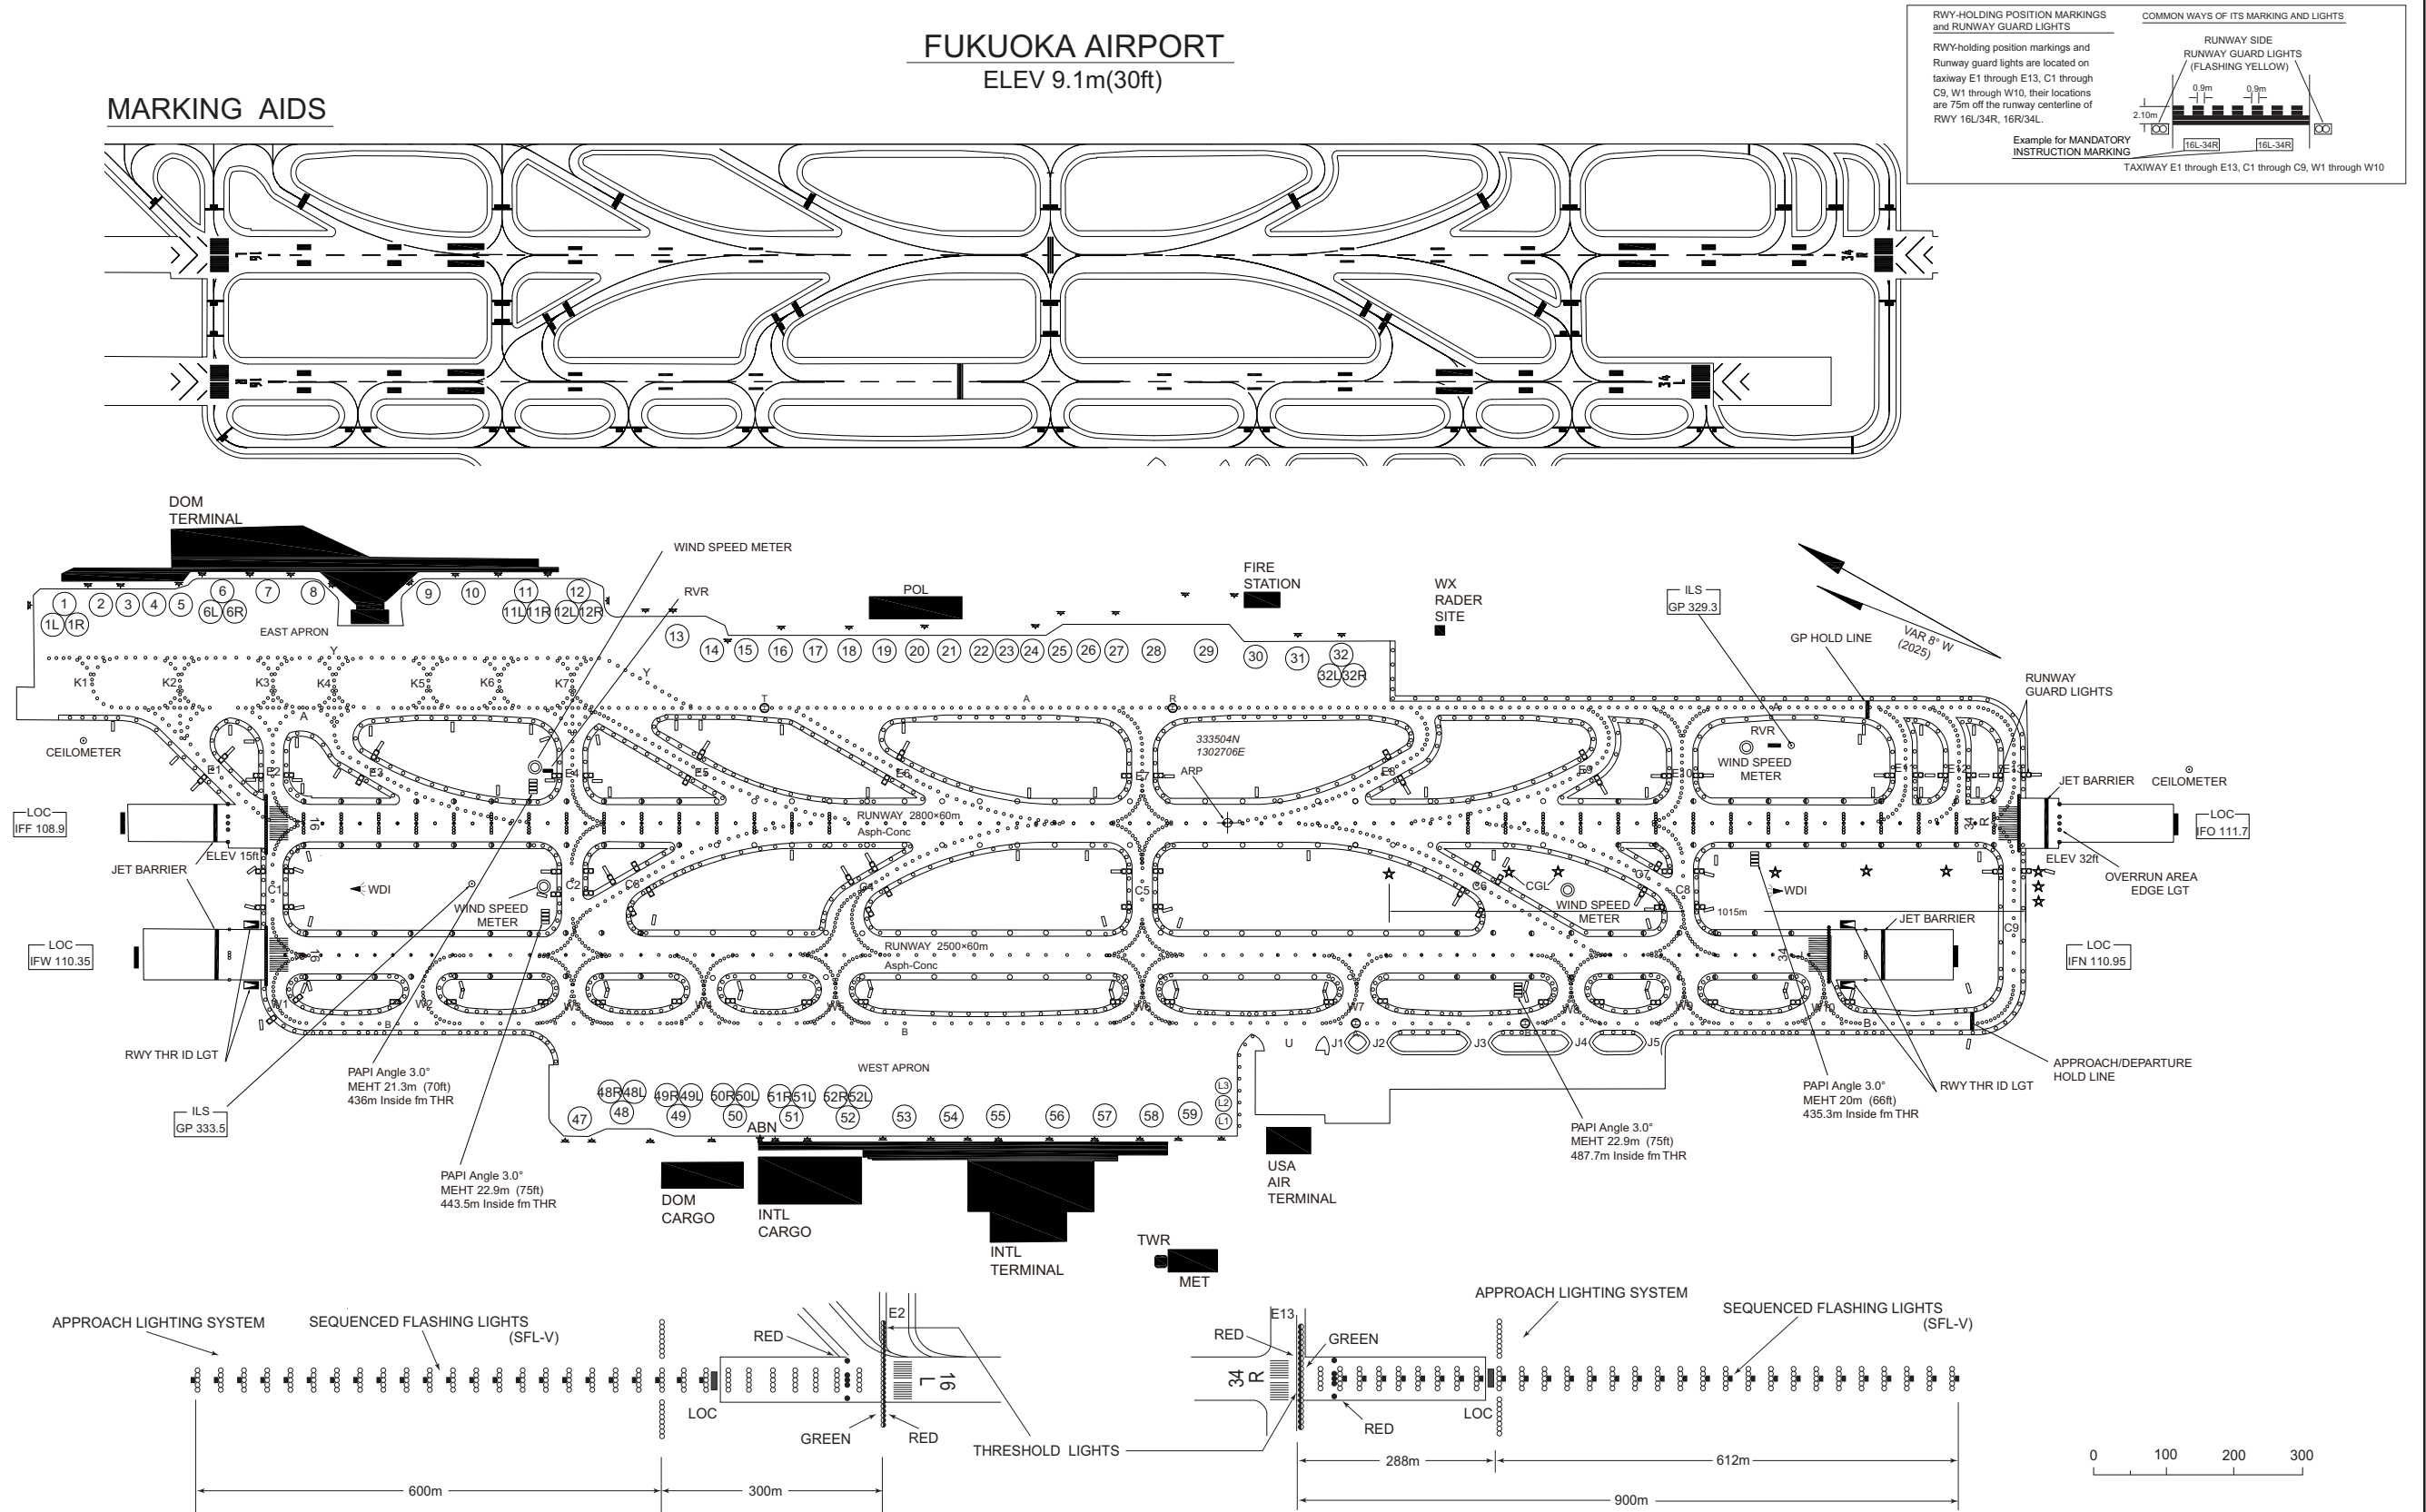

CHANGE : RWY DIST marker LGT for RWY 16L/34R abolished.

CHANGE : Update.

FUKUOKA AP
ELEV 9.1m(30ft)ARP

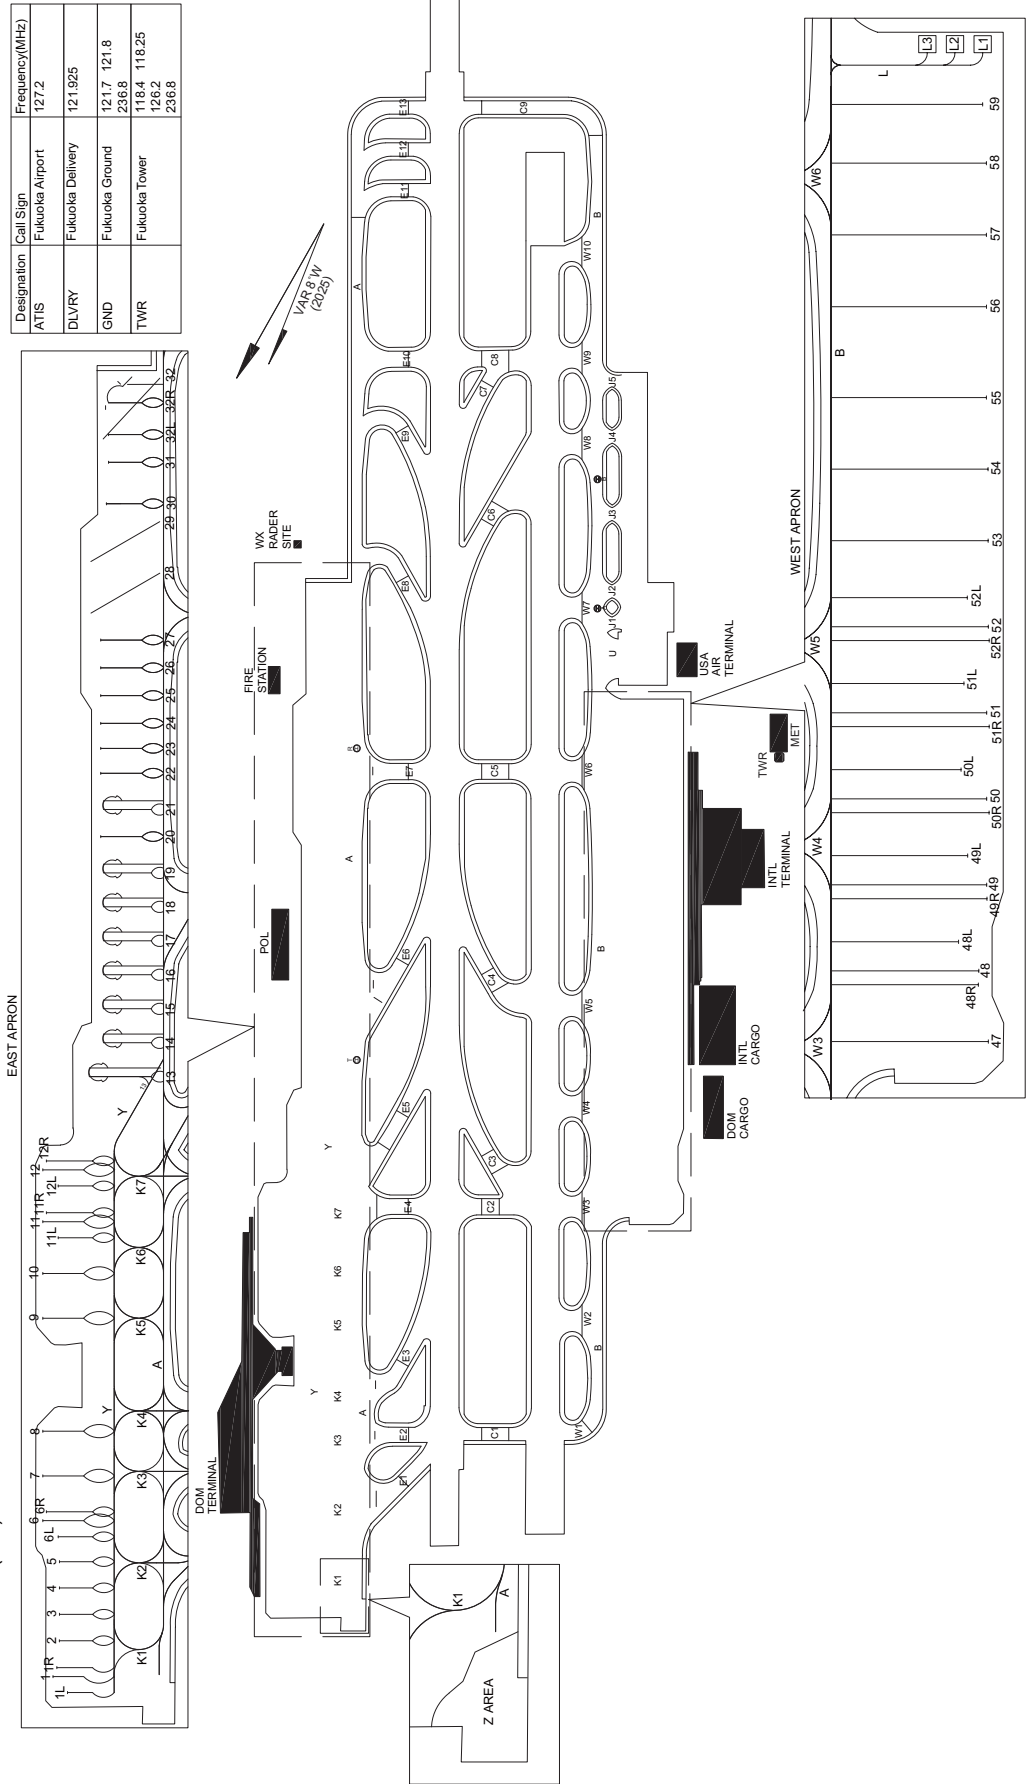

L : Aircraft stand taxi lane

INTENTIONALLY LEFT BLANK

DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC
Transverse Mercator Projection



AERODROME OBSTACLE CHART-ICAO

TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8° W-MAR 2025


FUKUOKA AIRPORT
RWY : 16L/34R

DECLARED DISTANCES		
RWY 16L		RWY 34R
2800m	TAKE OFF RUN AVAILABLE	2800m
2800m	TAKE OFF DISTANCE AVAILABLE	2800m
2800m	ACCELERATE STOP DISTANCE AVAILABLE	2800m
2800m	LANDING DISTANCE AVAILABLE	2800m

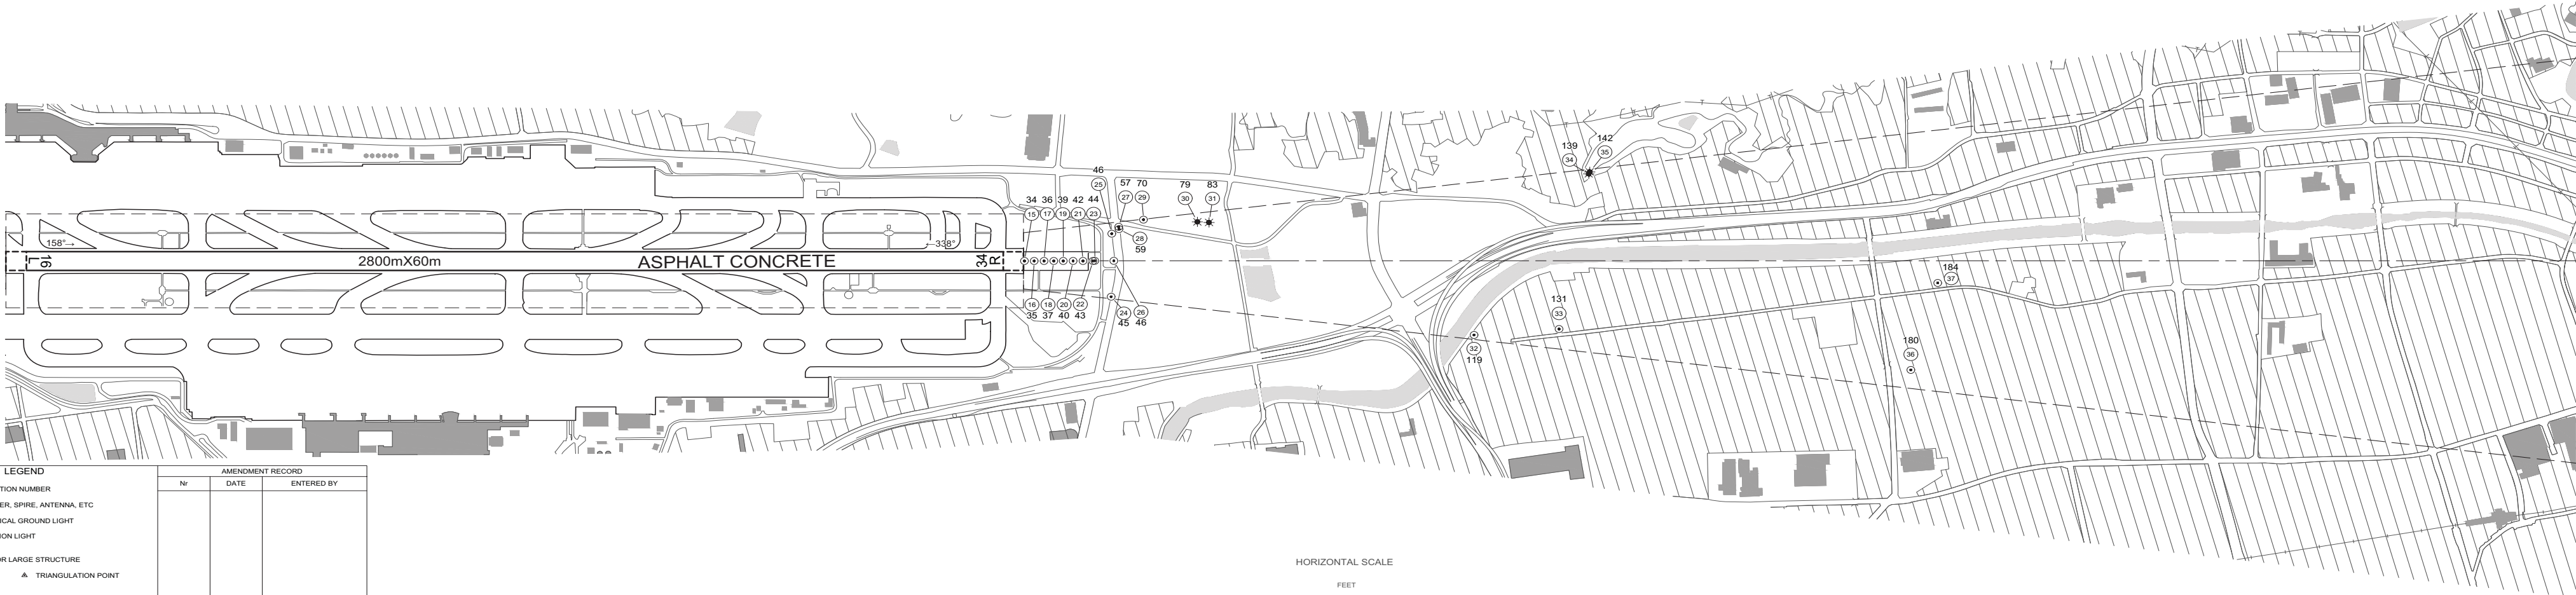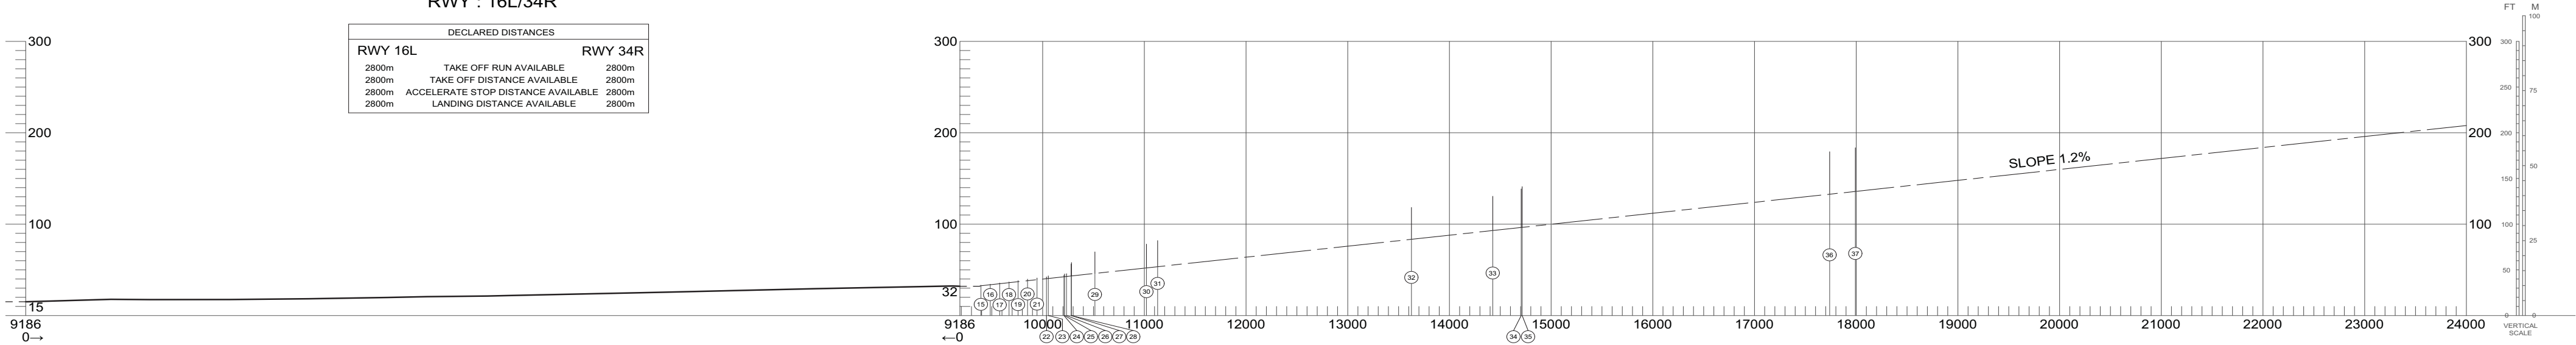

- LEGEND
- ① IDENTIFICATION NUMBER
 - POLE, TOWER, SPIRE, ANTENNA, ETC
 - ★ AERONAUTICAL GROUND LIGHT
 - ✱ OBSTRUCTION LIGHT
 - BUILDING OR LARGE STRUCTURE
 - RAILROAD
 - TRIANGULATION POINT
 - TRANSMISSION LINE OR OVERHEAD CABLE
 - ▨ LEVEE
 - RIVER
 - ✱ TREE
 - LAKE
 - CONTOURS(10)

AMENDMENT RECORD		
Nr	DATE	ENTERED BY

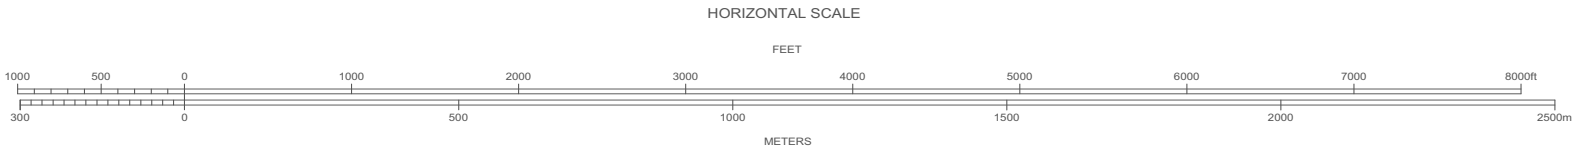

CHANGE:Update



DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8° W-MAR 2025

FUKUOKA AIRPORT
RWY : 16L/34R

DECLARED DISTANCES			
RWY 16L		RWY 34R	
2800m	TAKE OFF RUN AVAILABLE	2800m	
2800m	TAKE OFF DISTANCE AVAILABLE	2800m	
2800m	ACCELERATE STOP DISTANCE AVAILABLE	2800m	
2800m	LANDING DISTANCE AVAILABLE	2800m	

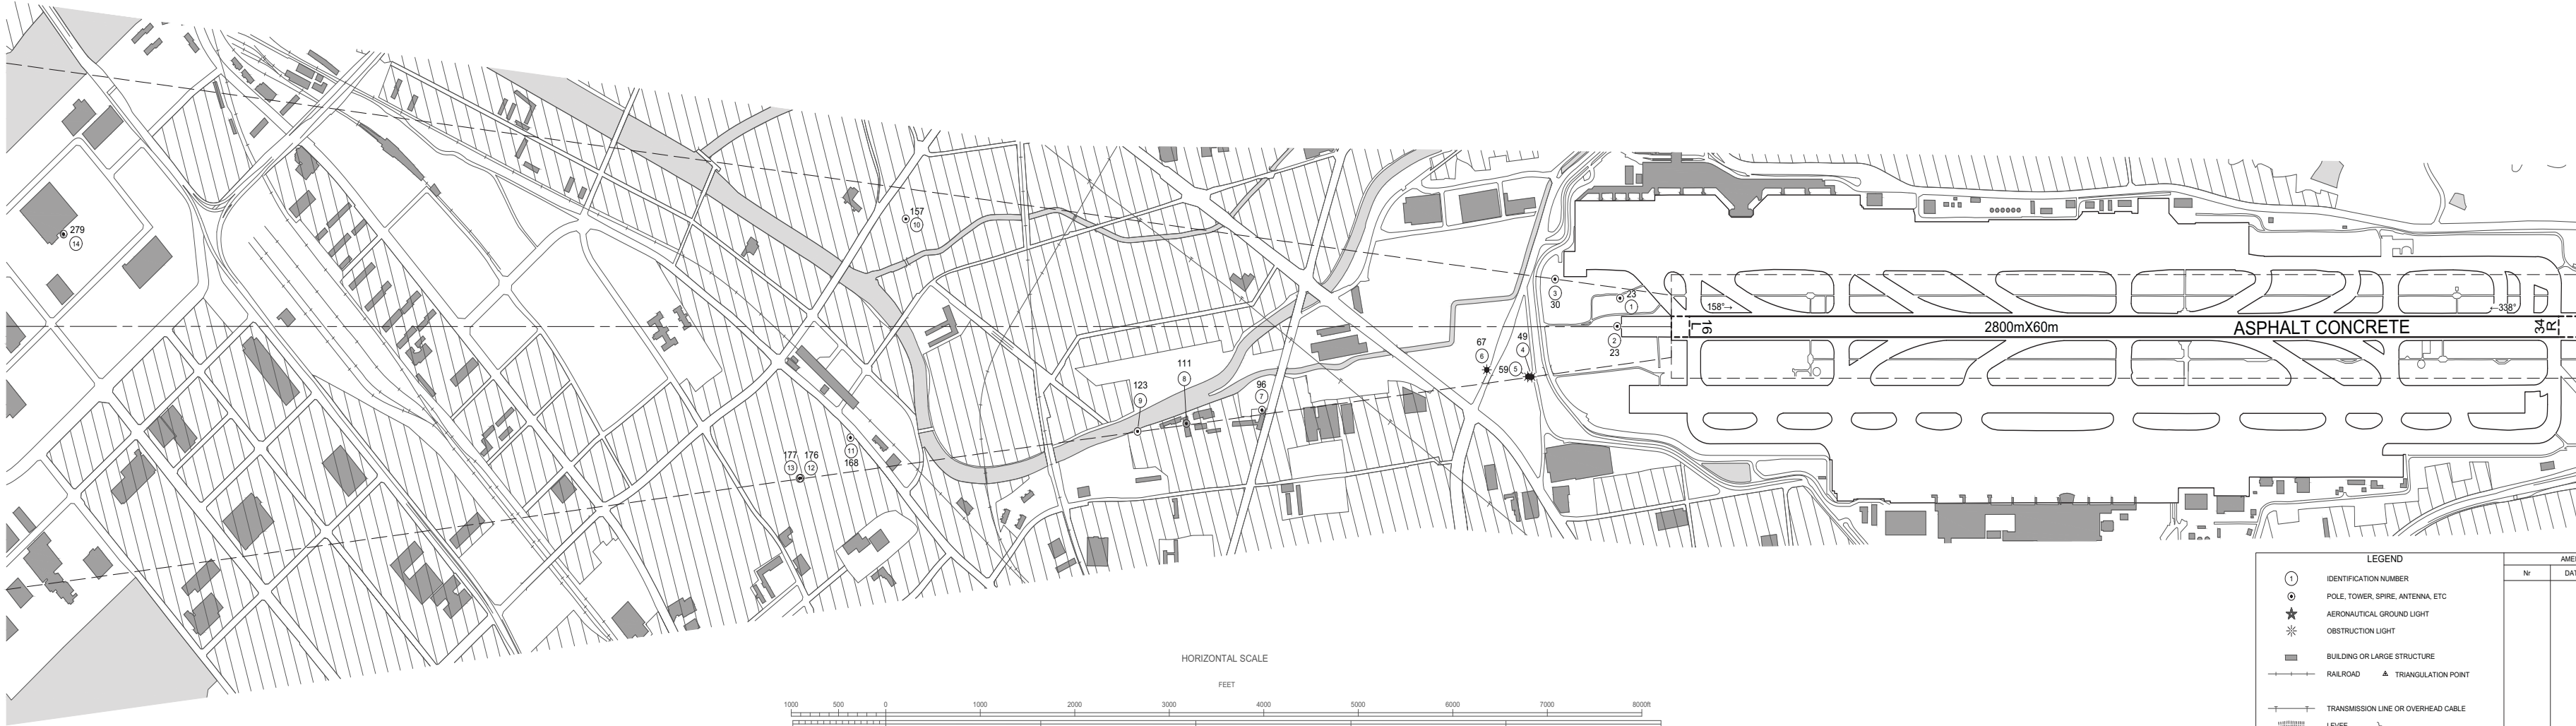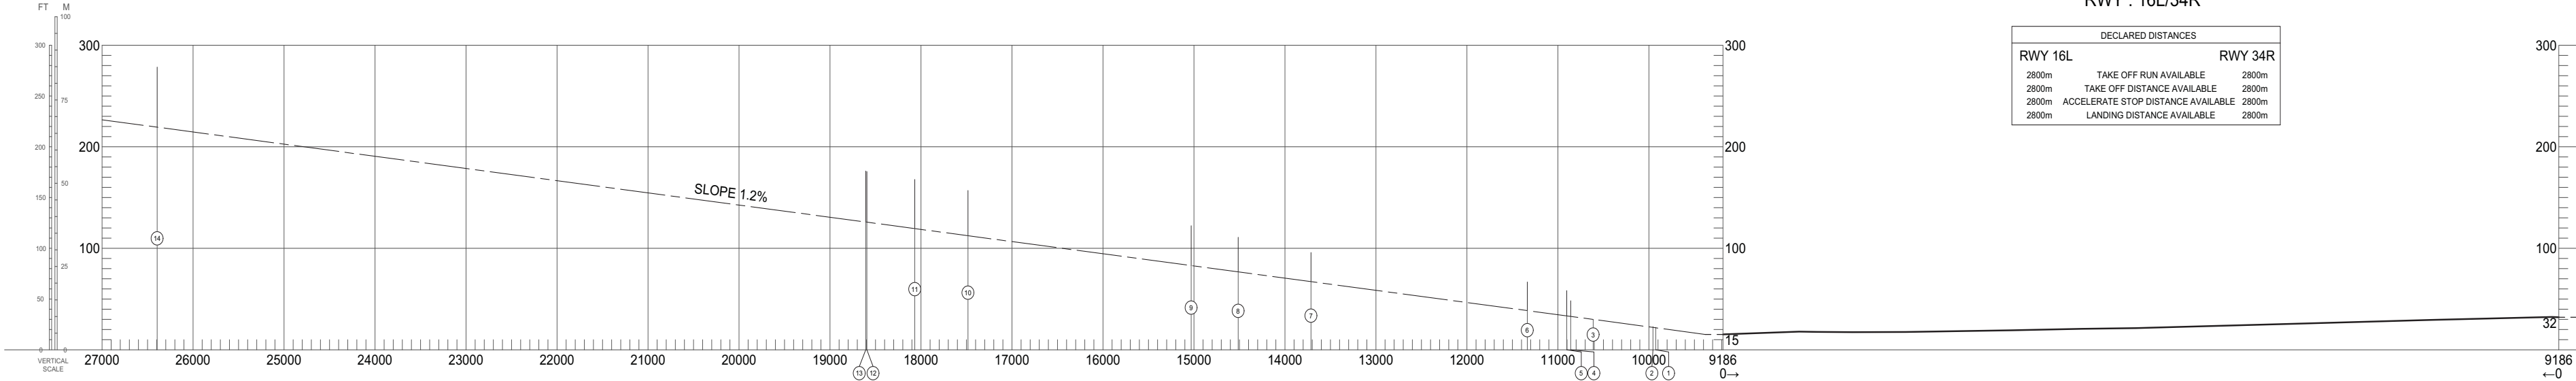

LEGEND		AMENDMENT RECORD		
①	IDENTIFICATION NUMBER	Nr	DATE	ENTERED BY
⊙	POLE, TOWER, SPIRE, ANTENNA, ETC			
★	AERONAUTICAL GROUND LIGHT			
✱	OBSTRUCTION LIGHT			
■	BUILDING OR LARGE STRUCTURE			
—+—	RAILROAD			
—+—	TRANSMISSION LINE OR OVERHEAD CABLE			
	LEVEE			
✱	TREE			
○	LAKE			
—	CONTOUR(S)			
—	RIVER			
▲	TRIANGULATION POINT			

CHANGE: Update


DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8° W-MAR 2025

FUKUOKA AIRPORT
RWY : 16R/34L

DECLARED DISTANCES			
RWY 16R		RWY 34L	
2500m	TAKE OFF RUN AVAILABLE	2500m	
2500m	TAKE OFF DISTANCE AVAILABLE	2500m	
2500m	ACCELERATE STOP DISTANCE AVAILABLE	2500m	
2500m	LANDING DISTANCE AVAILABLE	2500m	

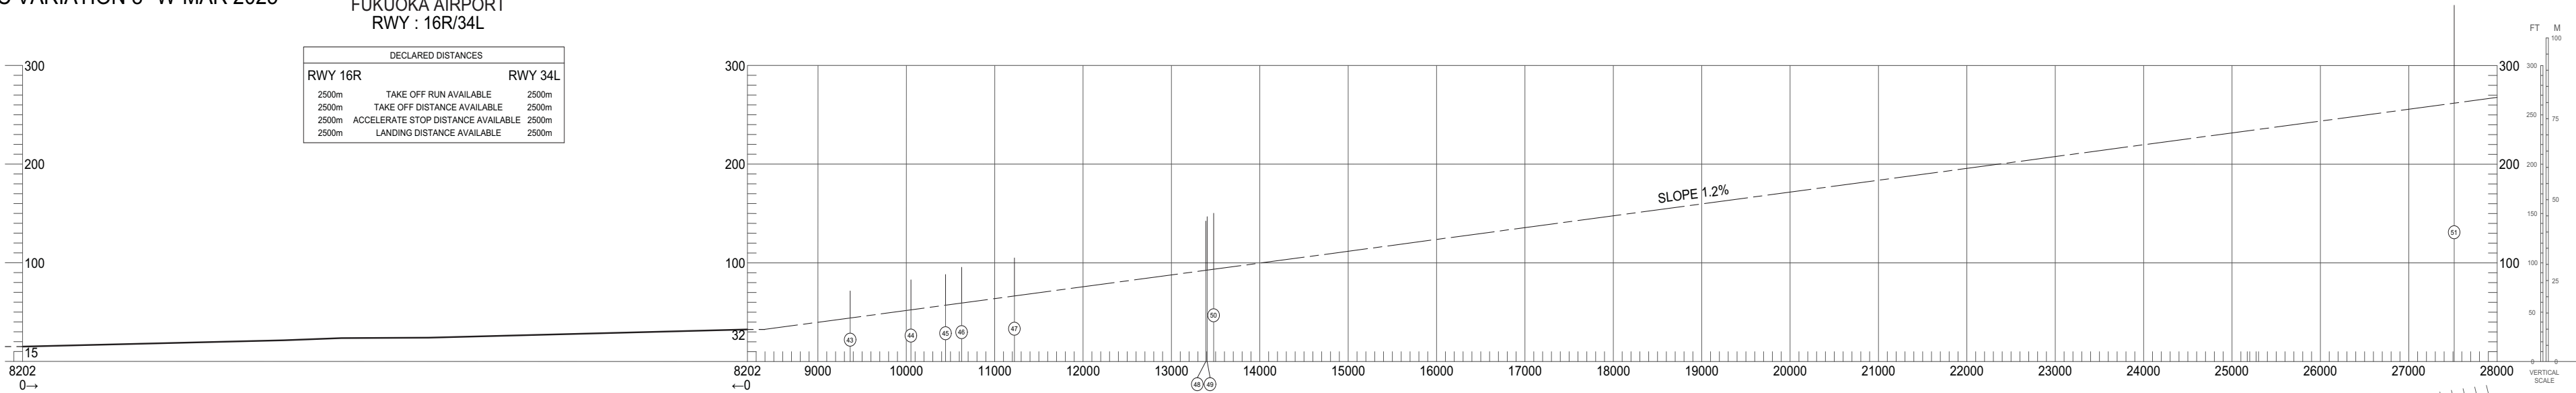

LEGEND		AMENDMENT RECORD		
①	IDENTIFICATION NUMBER	Nr	DATE	ENTERED BY
⊙	POLE, TOWER, SPIRE, ANTENNA, ETC			
★	AERONAUTICAL GROUND LIGHT			
✱	OBSTRUCTION LIGHT			
■	BUILDING OR LARGE STRUCTURE			
—+—	RAILROAD			
—+—	TRANSMISSION LINE OR OVERHEAD CABLE			
	LEVEE			
✱	TREE			
○	LAKE			
~~~~~	CONTOUR(S)			

CHANGE: Update



DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC  
Transverse Mercator Projection




# AERODROME OBSTACLE CHART-ICAO

TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8° W-MAR 2025

FUKUOKA AIRPORT  
RWY : 16R/34L

DECLARED DISTANCES			
RWY 16R		RWY 34L	
2500m	TAKE OFF RUN AVAILABLE	2500m	
2500m	TAKE OFF DISTANCE AVAILABLE	2500m	
2500m	ACCELERATE STOP DISTANCE AVAILABLE	2500m	
2500m	LANDING DISTANCE AVAILABLE	2500m	

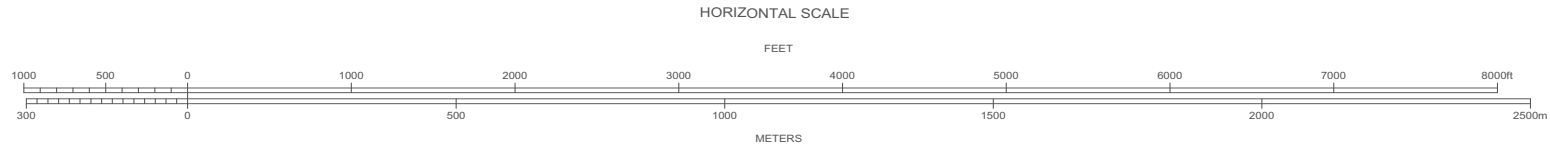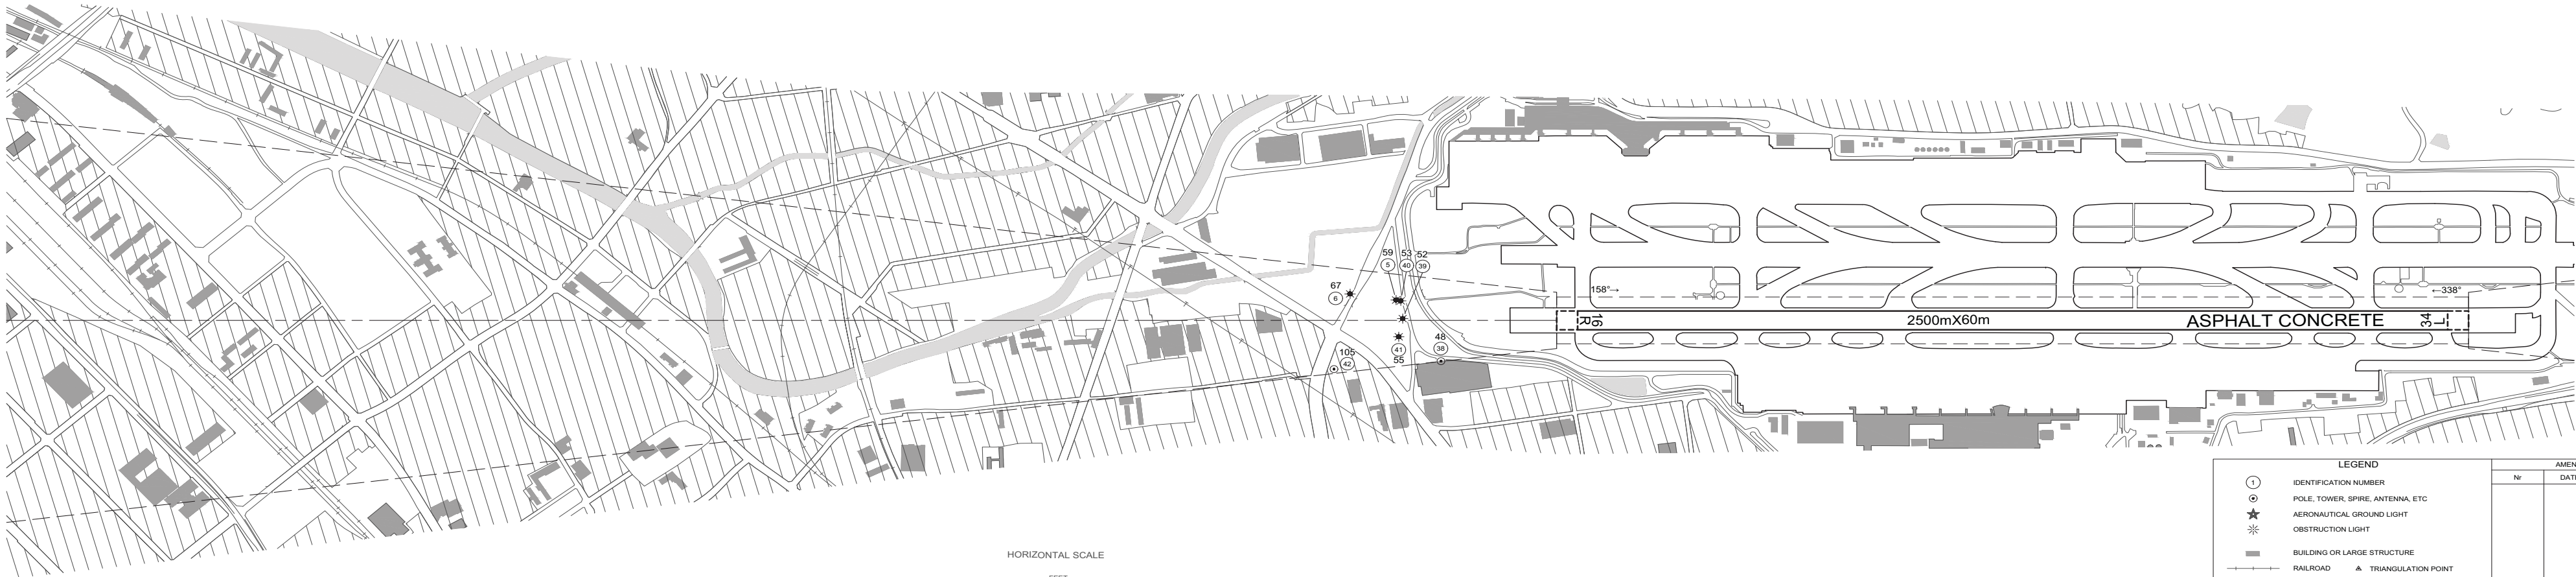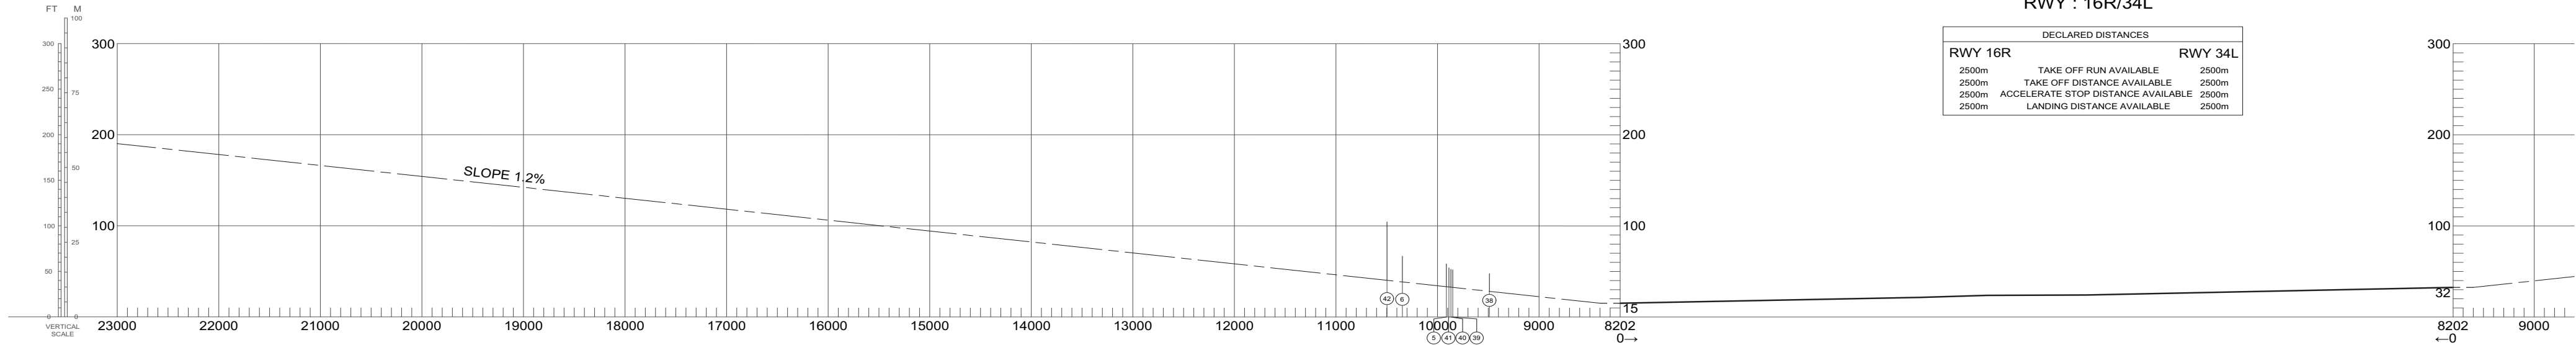


LEGEND		AMENDMENT RECORD		
①	IDENTIFICATION NUMBER	Nr	DATE	ENTERED BY
⊙	POLE, TOWER, SPIRE, ANTENNA, ETC			
★	AERONAUTICAL GROUND LIGHT			
✴	OBSTRUCTION LIGHT			
■	BUILDING OR LARGE STRUCTURE			
—+—	RAILROAD			
—+—	TRANSMISSION LINE OR OVERHEAD CABLE			
—+—	LEVEE			
★	TREE			
●	LAKE			
—+—	TRIANGULATION POINT			
—+—	RIVER			
—+—	CONTOUR(S)			

CHANGE: Update



DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC  
Transverse Mercator Projection





## STANDARD DEPARTURE CHART -INSTRUMENT

RJFF / FUKUOKA

SID and TRANSITION

OGUNI NINE DEPARTURE

RWY16L/16R : Climb RWY HDG to 700FT, turn right, via DGC R160 to 30.0DME, turn left, via TFE R256 to OGUNI.

Cross DGC R160/28.0DME between FL150 and FL200.

RWY34R/34L : Climb RWY HDG to 3000FT, turn right HDG176° to intercept and proceed via DGC R146 to OGUNI.

Cross DGC R146/28.0DME

at or below FL200, cross OGUNI at or above FL150.

Note RWY16L/16R : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16L.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16L.

OBST ALT 130FT located at 0.3NM 186° FM end of RWY16R.

RWY34R : 5.0% climb gradient required up to 500FT.

RWY34L : 7.0% climb gradient required up to 500FT.


OBST ALT 135FT located at 0.3NM 309° FM end of RWY34L.

MUSASHI TRANSITION

From over OGUNI, via TFE R256 to TFE VOR/DME.

Cross TFE R256/30.0DME at or above FL170.

CHANGE : PROC renamed. ALT restriction at D9.0 DGC abolished. Climb gradient restriction. OBST.

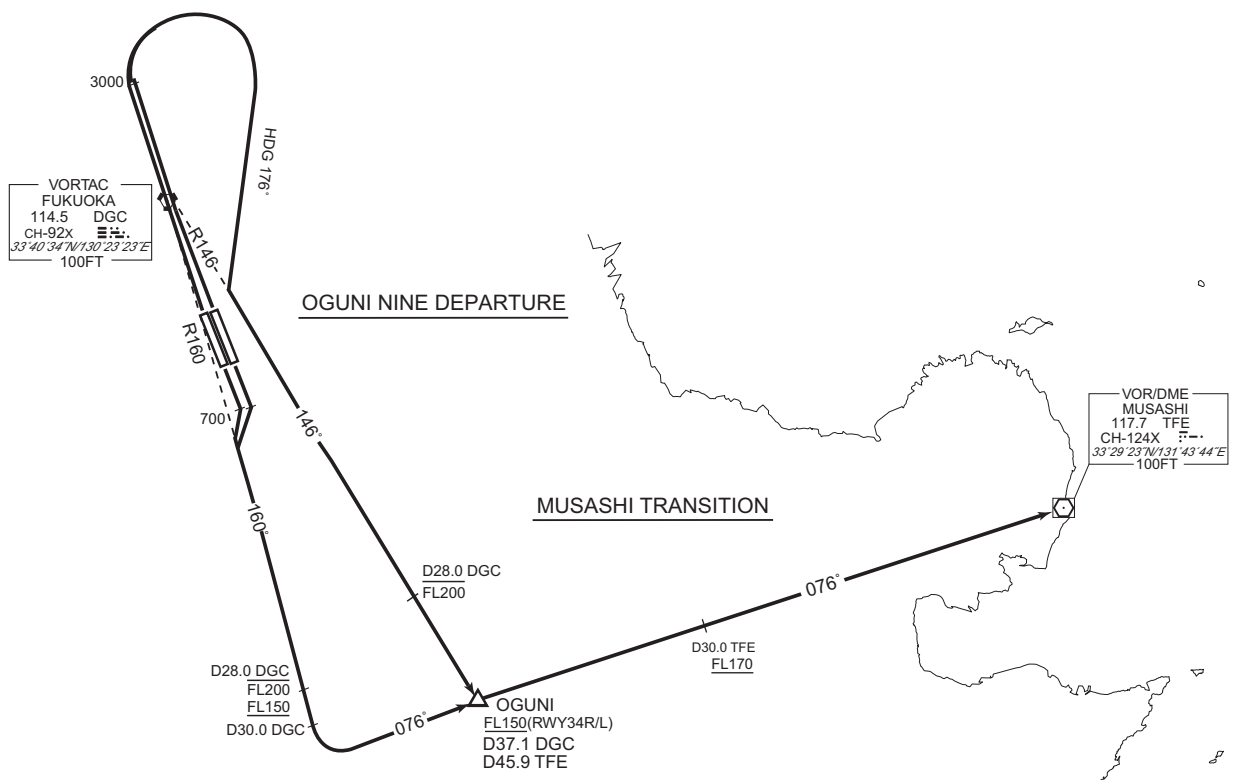

## STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

SID and TRANSITION

YAMEK ONE DEPARTURE

RWY16L/16R : Climb RWY HDG to 700FT, turn right, via DGC R160 to YAMEK.

Cross YAMEK at or above 5000FT.

RWY34R/34L : Climb RWY HDG to 3000FT, turn right HDG176° to intercept and proceed via DGC R146 to DGC 17.6DME, turn right, via SGE R058 to YAMEK.

Cross YAMEK at or above 5000FT.

Note RWY16L/16R : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16L.

OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16L.

OBST ALT 130FT located at 0.3NM 186° FM end of RWY16R.

RWY34R : 5.0% climb gradient required up to 500FT.

RWY34L : 7.0% climb gradient required up to 500FT.

OBST ALT 135FT located at 0.3NM 309° FM end of RWY34L.


SAGA TRANSITION

From over YAMEK, via SGE R058 to SGE VOR/DME.

MIZMA TRANSITION

From over YAMEK, via SGE R058 to MIZMA.

Cross MIZMA at or above 8000FT.

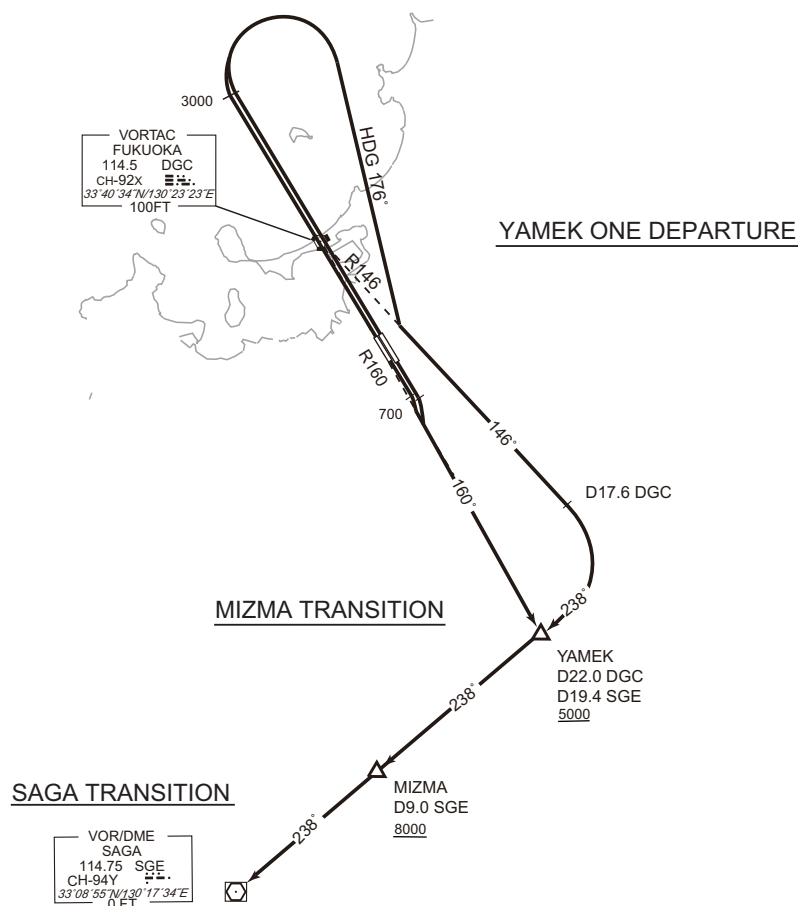

CHANGE : PROC renamed. ALT restriction at D9.0 DGC abolished. Climb gradient restriction. OBST.



## RJFF / FUKUOKA

## YAMGA EIGHT DEPARTURE

Cross DGC R160/28.0DME at or below FL200, cross YAMGA at or above 13000FT.


Cross KUE R351/28.0DME  
at or below FL200, cross YAMGA at or above 13000FT.

OBST ALT 130FT located at 0.3NM 186° FM end of RWY16R.

RWY34L : 7.0% climb gradient required up to 500FT.

OBST ALT 135FT located at 0.3NM 309° FM end of RWY34L.

From over YAMGA, via KUE R351 to KUE VOR/DME via ABECK.  
Cross ABECK at assigned altitude.

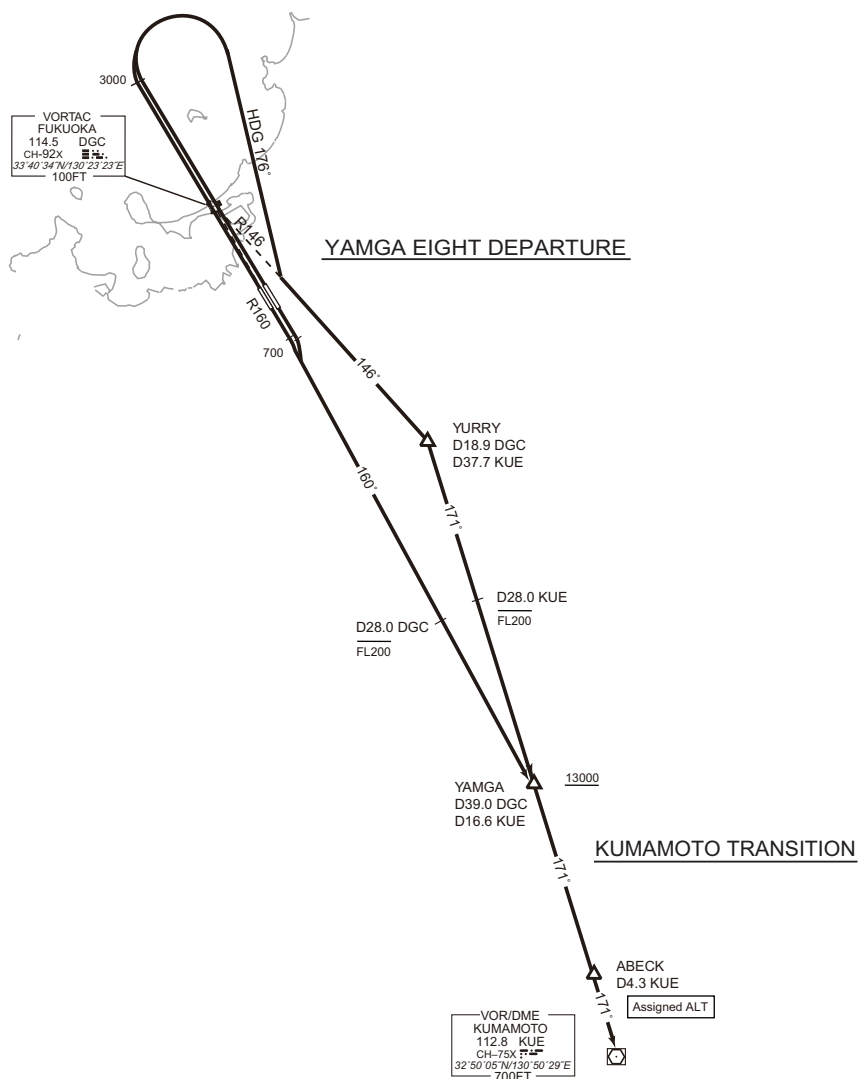

CHANGE : PROC renamed. ALT restriction at D9.0 DGC abolished. Climb gradient restriction. OBST.

## STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

SID

FUKUOKA FIVE DEPARTURE

RWY16L/16R : Climb RWY HDG to 700FT, turn right, via DGC R160 to YAMEK, turn right,  
via DGC R179 (MRA 7000FT) to DGC VORTAC.

Cross YAMEK at or above 5000FT.

RWY34R/34L : Climb direct to DGC VORTAC.

Note RWY16L/16R : 5.8% climb gradient required up to 1100FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16L.


OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16L.

OBST ALT 130FT located at 0.3NM 186° FM end of RWY16R.

RWY34R : 5.0% climb gradient required up to 500FT.

RWY34L : 7.0% climb gradient required up to 500FT.

OBST ALT 135FT located at 0.3NM 309° FM end of RWY34L.

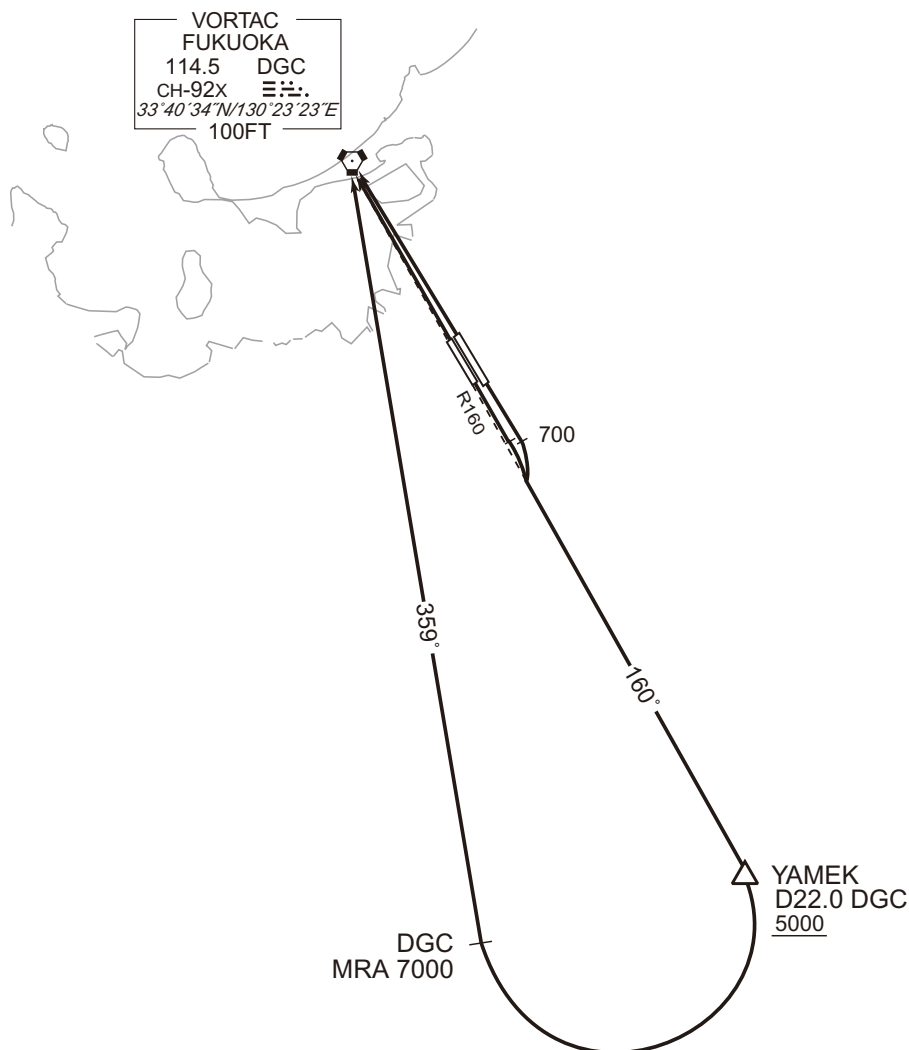


CHANGE : PROC renamed. Climb gradient restriction. OBST.

## STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV SID and TRANSITION

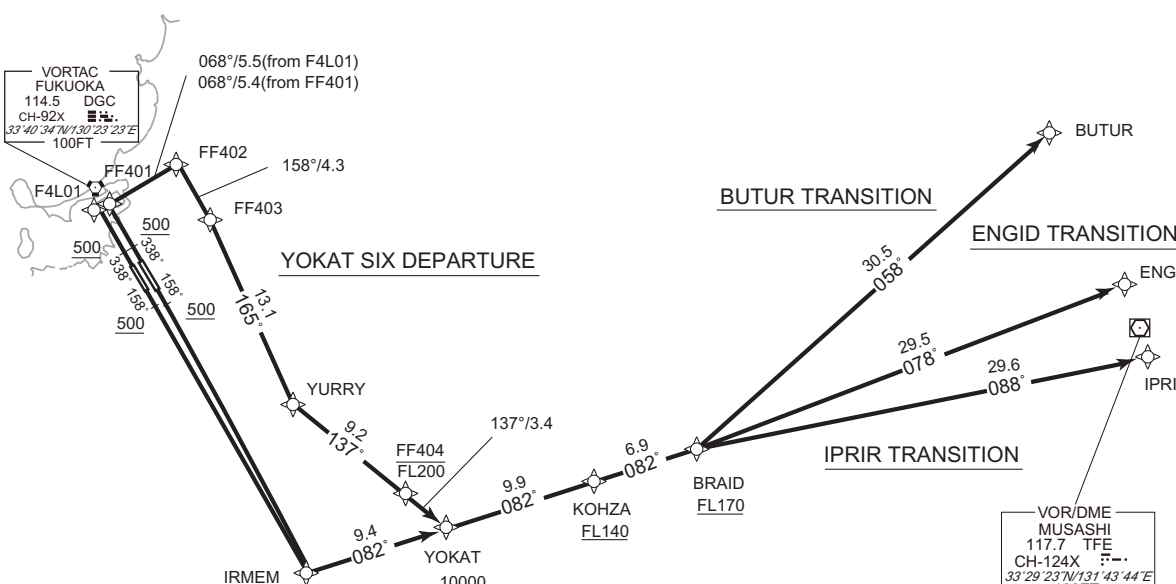YOKAT SIX DEPARTURE			RNAV 1
BUTUR TRANSITION / ENGID TRANSITION / IPRIR TRANSITION			
Note 1 ) DME/DME/IRU or GNSS required.   ※ The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.   2 ) RADAR service required.		Critical DME	RWY16L/16R DGC : 20.3NM to IRMEM - 15.5NM to IRMEM IKE : 20.3NM to IRMEM - 15.5NM to IRMEM
DME GAP	RWY16L/16R : DER - 20.3NM to IRMEM RWY34L : DER - 3.3NM to F4L01 1.8NM to F4L01 - F4L01 RWY34R : DER - 3.3NM to FF401 1.8NM to FF401 - FF401		RWY34L DGC : 3.3NM to F4L01 - 1.8NM to F4L01 IKE : 3.3NM to F4L01 - 1.8NM to F4L01 F4L01 - 2.8NM to FF402 AHT : F4L01 - 2.0NM to FF403
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1		RWY34R DGC : 3.3NM to FF401 - 1.8NM to FF401 IKE : 3.3NM to FF401 - 1.8NM to FF401 FF401 - 2.8NM to FF402 AHT : FF401 - 2.0NM to FF403
VAR 8°W    <b>YOKAT SIX DEPARTURE</b>   RWY34R : Climb on HDG 338° at or above 500FT, direct to FF401, to FF402, to FF403, to YURRY, to FF404 at or below FL200, to YOKAT at or above 10000FT.   RWY34L : Climb on HDG 338° at or above 500FT, direct to F4L01, to FF402, to FF403, to YURRY, to FF404 at or below FL200, to YOKAT at or above 10000FT.   RWY16L/16R : Climb on HDG 158° at or above 500FT, direct to IRMEM at or below FL200, to YOKAT at or above 10000FT.   Note RWY34R/34L : 7.0% climb gradient required up to 2800FT. RWY16L/16R : 5.8% climb gradient required up to 1100FT. OBST ALT 399FT located at 1.2NM 138° FM end of RWY16L. OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16L. OBST ALT 130FT located at 0.3NM 186° FM end of RWY16R.   <b>BUTUR TRANSITION</b> From YOKAT at or above 10000FT, to KOHZA at or above FL140, to BRAID at or above FL170, to BUTUR.   <b>ENGID TRANSITION</b> From YOKAT at or above 10000FT, to KOHZA at or above FL140, to BRAID at or above FL170, to ENGID.   <b>IPRIR TRANSITION</b> From YOKAT at or above 10000FT, to KOHZA at or above FL140, to BRAID at or above FL170, to IPRIR.			



## STANDARD DEPARTURE CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV SID

YOKAT SIX DEPARTURE

## RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.4)	-8.0	—	—	+500	—	—	RNAV1
002	DF	FF401	—	—	-8.0	—	—	—	—	—	RNAV1
003	TF	FF402	—	068 (060.1)	-8.0	5.4	—	—	—	—	RNAV1
004	TF	FF403	—	158 (150.4)	-8.0	4.3	—	—	—	—	RNAV1
005	TF	YURRY	—	165 (157.2)	-8.0	13.1	—	—	—	—	RNAV1
006	TF	FF404	—	137 (129.4)	-8.0	9.2	—	-FL200	—	—	RNAV1
007	TF	YOKAT	—	137 (129.4)	-8.0	3.4	—	+10000	—	—	RNAV1

## RWY34L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.4)	-8.0	—	—	+500	—	—	RNAV1
002	DF	F4L01	—	—	-8.0	—	—	—	—	—	RNAV1
003	TF	FF402	—	068 (060.1)	-8.0	5.5	—	—	—	—	RNAV1
004	TF	FF403	—	158 (150.4)	-8.0	4.3	—	—	—	—	RNAV1
005	TF	YURRY	—	165 (157.2)	-8.0	13.1	—	—	—	—	RNAV1
006	TF	FF404	—	137 (129.4)	-8.0	9.2	—	-FL200	—	—	RNAV1
007	TF	YOKAT	—	137 (129.4)	-8.0	3.4	—	+10000	—	—	RNAV1

## RWY16L/ RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.3)	-8.0	—	—	+500	—	—	RNAV1
002	DF	IRMEM	—	—	-8.0	—	—	-FL200	—	—	RNAV1
003	TF	YOKAT	—	082 (073.5)	-8.0	9.4	—	+10000	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
F4L01	333928.0N / 1302356.2E	YURRY	332622.1N / 1303817.8E
FF401	333931.4N / 1302403.3E	FF404	332032.3N / 1304647.7E
FF402	334212.3N / 1302939.7E	IRMEM	331544.5N / 1303908.3E
FF403	333827.6N / 1303213.2E	YOKAT	331824.0N / 1304954.8E

## STANDARD DEPARTURE CHART-INSTRUMENT

## RJFF / FUKUOKA

## RNAV TRANSITION

BUTUR TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YOKAT	—	—	-8.0	—	—	+10000	—	—	RNAV1
002	TF	KOHZA	—	082 (073.6)	-8.0	9.9	—	+FL140	—	—	RNAV1
003	TF	BRAID	—	082 (073.8)	-8.0	6.9	—	+FL170	—	—	RNAV1
004	TF	BUTUR	—	058 (049.7)	-8.0	30.5	—	—	—	—	RNAV1

ENGID TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YOKAT	—	—	-8.0	—	—	+10000	—	—	RNAV1
002	TF	KOHZA	—	082 (073.6)	-8.0	9.9	—	+FL140	—	—	RNAV1
003	TF	BRAID	—	082 (073.8)	-8.0	6.9	—	+FL170	—	—	RNAV1
004	TF	ENGID	—	078 (070.4)	-8.0	29.5	—	—	—	—	RNAV1

IPRIR TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YOKAT	—	—	-8.0	—	—	+10000	—	—	RNAV1
002	TF	KOHZA	—	082 (073.6)	-8.0	9.9	—	+FL140	—	—	RNAV1
003	TF	BRAID	—	082 (073.8)	-8.0	6.9	—	+FL170	—	—	RNAV1
004	TF	IPRIR	—	088 (079.8)	-8.0	29.6	—	—	—	—	RNAV1


Waypoint Coordinates

Waypoint Identifier	Coordinates
YOKAT	331824.0N / 1304954.8E
KOHZA	332110.5N / 1310116.1E
BRAID	332305.6N / 1310911.1E
BUTUR	334245.3N / 1313707.9E
ENGID	333254.3N / 1314232.6E
IPRIR	332815.0N / 1314401.8E

## STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID and TRANSITION

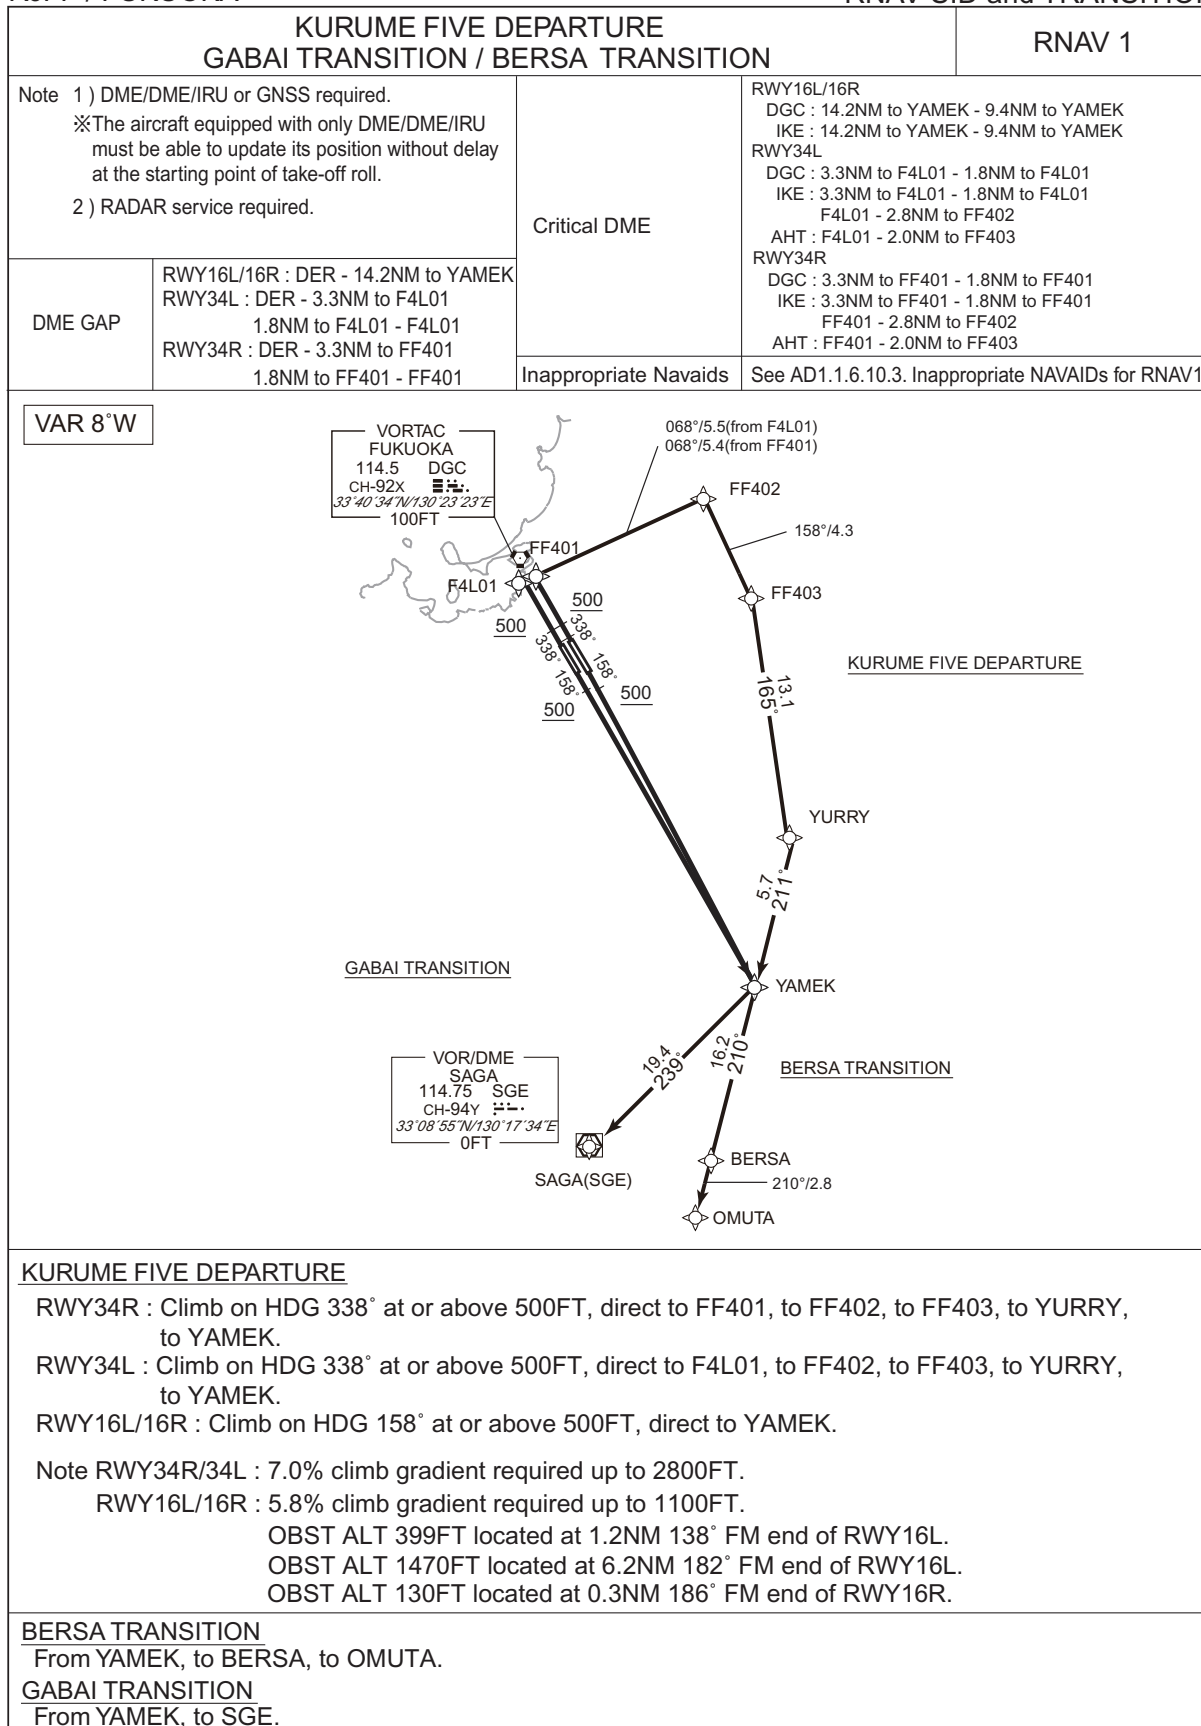



## STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID

KURUME FIVE DEPARTURE

## RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.4)	-8.0	—	—	+500	—	—	RNAV1
002	DF	FF401	—	—	-8.0	—	—	—	—	—	RNAV1
003	TF	FF402	—	068 (060.1)	-8.0	5.4	—	—	—	—	RNAV1
004	TF	FF403	—	158 (150.4)	-8.0	4.3	—	—	—	—	RNAV1
005	TF	YURRY	—	165 (157.2)	-8.0	13.1	—	—	—	—	RNAV1
006	TF	YAMEK	—	211 (202.7)	-8.0	5.7	—	—	—	—	RNAV1

## RWY34L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.4)	-8.0	—	—	+500	—	—	RNAV1
002	DF	F4L01	—	—	-8.0	—	—	—	—	—	RNAV1
003	TF	FF402	—	068 (060.1)	-8.0	5.5	—	—	—	—	RNAV1
004	TF	FF403	—	158 (150.4)	-8.0	4.3	—	—	—	—	RNAV1
005	TF	YURRY	—	165 (157.2)	-8.0	13.1	—	—	—	—	RNAV1
006	TF	YAMEK	—	211 (202.7)	-8.0	5.7	—	—	—	—	RNAV1

## RWY16L/ RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.3)	-8.0	—	—	+500	—	—	RNAV1
002	DF	YAMEK	—	—	-8.0	—	—	—	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates
F4L01	333928.0N / 1302356.2E
FF401	333931.4N / 1302403.3E
FF402	334212.3N / 1302939.7E
FF403	333827.6N / 1303213.2E
YURRY	332622.1N / 1303817.8E
YAMEK	332105.9N / 1303539.5E

STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA RNAV TRANSITION

BERSA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YAMEK	—	—	-8.0	—	—	—	—	—	RNAV1
002	TF	BERSA	—	210 (202.4)	-8.0	16.2	—	—	—	—	RNAV1
003	TF	OMUTA	—	210 (202.3)	-8.0	2.8	—	—	—	—	RNAV1

GABAI TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YAMEK	—	—	-8.0	—	—	—	—	—	RNAV1
002	TF	SGE	—	239 (231.2)	-8.0	19.4	—	—	—	—	RNAV1


Waypoint Coordinates

Waypoint Identifier	Coordinates
YAMEK	332105.9N / 1303539.5E
BERSA	330609.6N / 1302818.4E
OMUTA	330332.2N / 1302701.4E
SGE	330855.0N / 1301734.4E

## STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID and TRANSITION

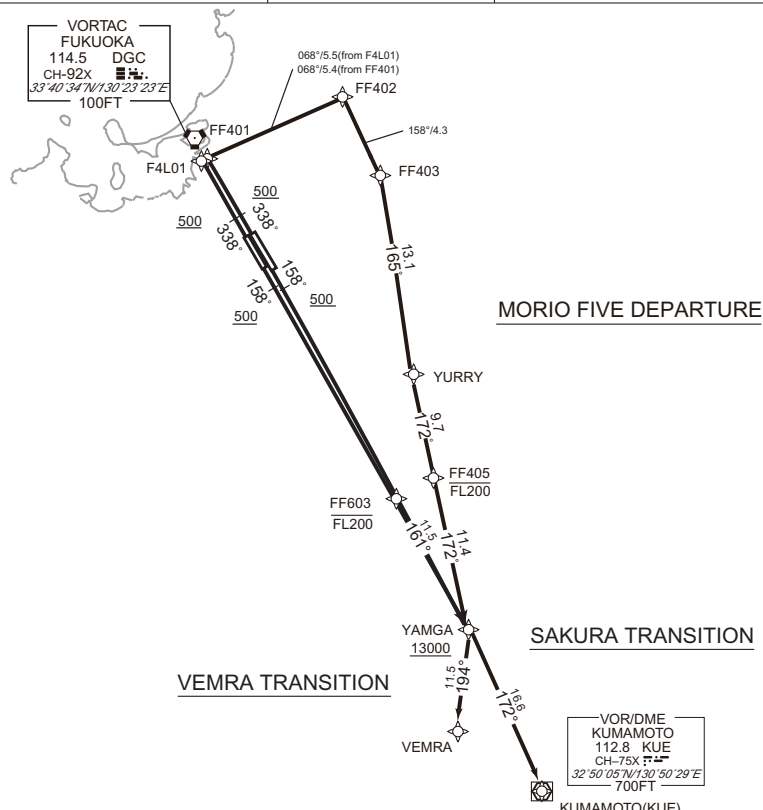MORIO FIVE DEPARTURE VEMRA TRANSITION / SAKURA TRANSITION			RNAV 1
Note 1 ) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2 ) RADAR service required.		Critical DME	RWY16L/16R DGC : 19.6NM to FF603 - 14.8NM to FF603 IKE : 19.6NM to FF603 - 14.8NM to FF603 RWY34L DGC : 3.3NM to F4L01 - 1.8NM to F4L01 IKE : 3.3NM to F4L01 - 1.8NM to F4L01 F4L01 - 2.8NM to FF402 AHT : F4L01 - 2.0NM to FF403 RWY34R DGC : 3.3NM to FF401 - 1.8NM to FF401 IKE : 3.3NM to FF401 - 1.8NM to FF401 FF401 - 2.8NM to FF402 AHT : FF401 - 2.0NM to FF403
DME GAP	RWY16L/16R : DER - 19.6NM to FF603 RWY34L : DER - 3.3NM to F4L01 1.8NM to F4L01 - F4L01 RWY34R : DER - 3.3NM to FF401 1.8NM to FF401 - FF401		
Inappropriate NavAids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1		
VAR 8°W    MORIO FIVE DEPARTURE   SAKURA TRANSITION   VEMRA TRANSITION			
<b>MORIO FIVE DEPARTURE</b> RWY34R : Climb on HDG 338° at or above 500FT, direct to FF401, to FF402, to FF403, to YURRY, to FF405 at or below FL200, to YAMGA at or above 13000FT. RWY34L : Climb on HDG 338° at or above 500FT, direct to F4L01, to FF402, to FF403, to YURRY, to FF405 at or below FL200, to YAMGA at or above 13000FT. RWY16L/16R : Climb on HDG 158° at or above 500FT, direct to FF603 at or below FL200, to YAMGA at or above 13000FT. Note RWY34R/34L : 7.0% climb gradient required up to 2800FT. RWY16L/16R : 5.8% climb gradient required up to 1100FT. OBST ALT 399FT located at 1.2NM 138° FM end of RWY16L. OBST ALT 1470FT located at 6.2NM 182° FM end of RWY16L. OBST ALT 130FT located at 0.3NM 186° FM end of RWY16R.			
<b>SAKURA TRANSITION</b> From YAMGA at or above 13000FT, to KUE.			
<b>VEMRA TRANSITION</b> From YAMGA at or above 13000FT, to VEMRA.			

## STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID

MORIO FIVE DEPARTURE

## RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.4)	-8.0	—	—	+500	—	—	RNAV1
002	DF	FF401	—	—	-8.0	—	—	—	—	—	RNAV1
003	TF	FF402	—	068 (060.1)	-8.0	5.4	—	—	—	—	RNAV1
004	TF	FF403	—	158 (150.4)	-8.0	4.3	—	—	—	—	RNAV1
005	TF	YURRY	—	165 (157.2)	-8.0	13.1	—	—	—	—	RNAV1
006	TF	FF405	—	172 (164.3)	-8.0	9.7	—	-FL200	—	—	RNAV1
007	TF	YAMGA	—	172 (164.3)	-8.0	11.4	—	+13000	—	—	RNAV1

## RWY34L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	338 (330.4)	-8.0	—	—	+500	—	—	RNAV1
002	DF	F4L01	—	—	-8.0	—	—	—	—	—	RNAV1
003	TF	FF402	—	068 (060.1)	-8.0	5.5	—	—	—	—	RNAV1
004	TF	FF403	—	158 (150.4)	-8.0	4.3	—	—	—	—	RNAV1
005	TF	YURRY	—	165 (157.2)	-8.0	13.1	—	—	—	—	RNAV1
006	TF	FF405	—	172 (164.3)	-8.0	9.7	—	-FL200	—	—	RNAV1
007	TF	YAMGA	—	172 (164.3)	-8.0	11.4	—	+13000	—	—	RNAV1

## RWY16L/ RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	158 (150.3)	-8.0	—	—	+500	—	—	RNAV1
002	DF	FF603	—	—	-8.0	—	—	-FL200	—	—	RNAV1
003	TF	YAMGA	—	161 (152.6)	-8.0	11.5	—	+13000	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
F4L01	333928.0N / 1302356.2E	YURRY	332622.1N / 1303817.8E
FF401	333931.4N / 1302403.3E	FF405	331704.3N / 1304125.8E
FF402	334212.3N / 1302939.7E	FF603	331620.4N / 1303847.3E
FF403	333827.6N / 1303213.2E	YAMGA	330605.9N / 1304507.3E



STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV TRANSITION

SAKURA TRANSITION											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YAMGA	—	—	-8.0	—	—	+13000	—	—	RNAV1
002	TF	KUE	—	172 (164.3)	-8.0	16.6	—	—	—	—	RNAV1
VEMRA TRANSITION											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YAMGA	—	—	-8.0	—	—	+13000	—	—	RNAV1
002	TF	VEMRA	—	194 (185.9)	-8.0	11.5	—	—	—	—	RNAV1
Waypoint Coordinates											
Waypoint Identifier			Coordinates								
YAMGA			330605.9N / 1304507.3E								
KUE			325005.3N / 1305029.5E								
VEMRA			325439.2N / 1304343.3E								

## STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID

## HAKATA FIVE DEPARTURE

## RNAV 1

Note 1) DME/DME/IRU or GNSS required.

※ The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.

2) RADAR service required.

Critical DME

RWY16L/16R

DGC: 10.8NM to UPSAM - 6.0NM to UPSAM

IKE: 10.8NM to UPSAM - 6.0NM to UPSAM

RWY34L/34R

DGC: 4.5NM to DGC - 3.0NM to DGC

IKE: 4.5NM to DGC - 3.0NM to DGC

DME GAP


RWY16L/16R: DER-10.8NM to UPSAM

RWY34L/34R: DER-4.5NM to DGC

3.0NM to DGC - DGC

Inappropriate Navaids

See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

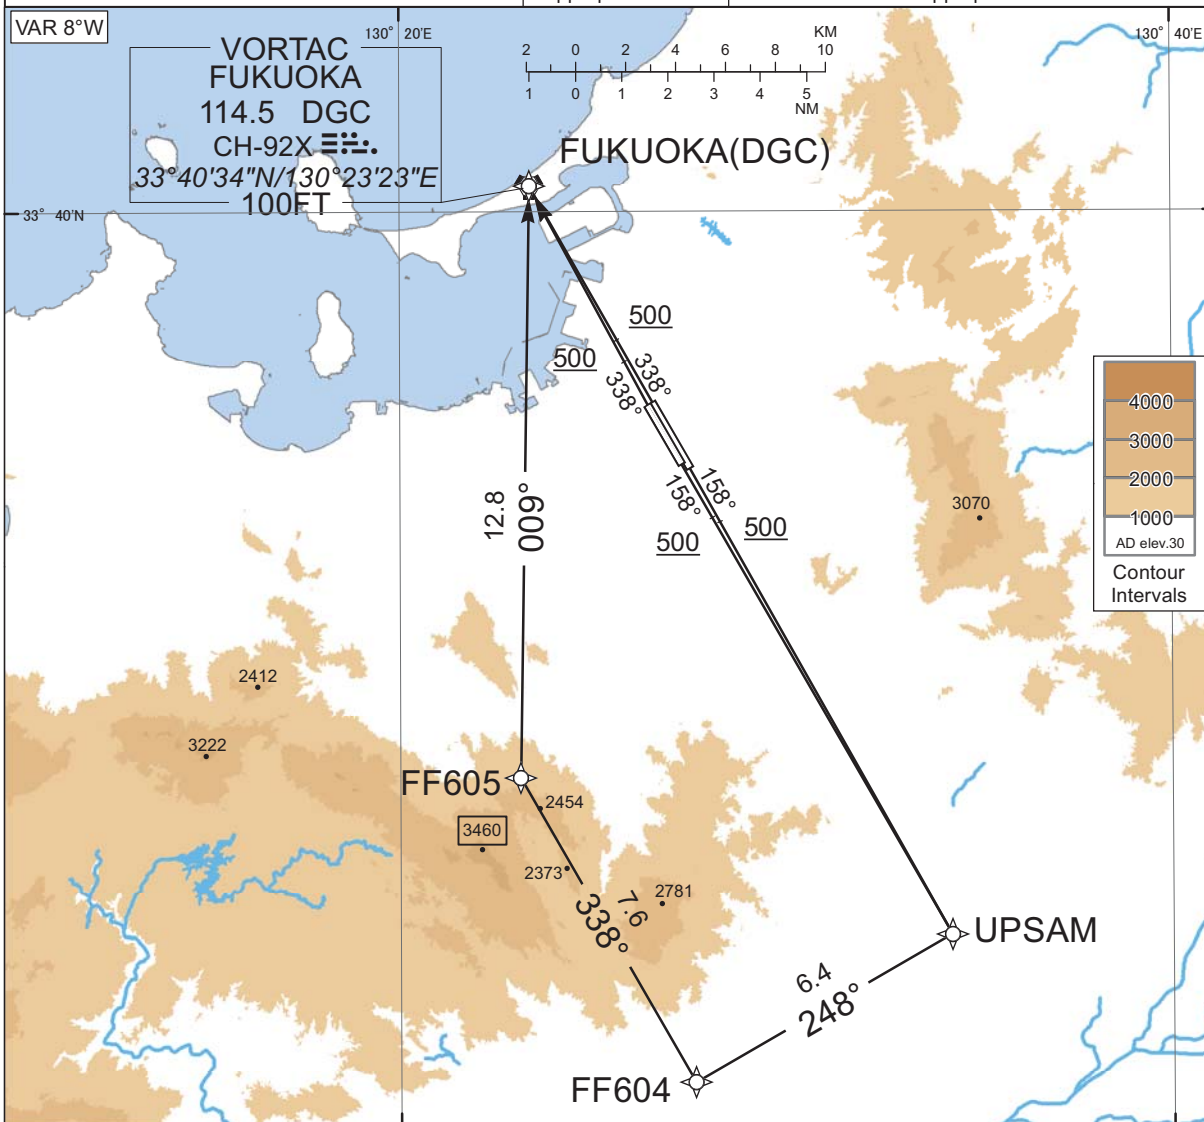

RWY34R/34L : Climb on HDG 338° at or above 500FT, direct to DGC.

RWY16L/16R : Climb on HDG 158° at or above 500FT, direct to UPSAM, to FF604, to FF605, to DGC.

Note RWY34R : 5.0% climb gradient required up to 500FT.

RWY34L : 7.0% climb gradient required up to 500FT.

OBST ALT 135FT located at 0.3NM 309° FM end of RWY34L.

RWY16L/16R : 5.8% climb gradient required up to 2900FT.

OBST ALT 399FT located at 1.2NM 138° FM end of RWY16L.

OBST ALT 3481FT located at 9.7NM 213° FM end of RWY16L.

OBST ALT 130FT located at 0.3NM 186° FM end of RWY16R.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFF / FUKUOKA

RNAV SID

HAKATA FIVE DEPARTURE

RWY34R / RWY34L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.4)	-8.0	-	-	+500	-	-	RNAV1
002	DF	DGC	-	-	-8.0	-	-	-	-	-	RNAV1

RWY16L / RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.3)	-8.0	-	-	+500	-	-	RNAV1
002	DF	UPSAM	-	-	-8.0	-	-	-	-	-	RNAV1
003	TF	FF604	-	248 (240.2)	-8.0	6.4	-	-	-	-	RNAV1
004	TF	FF605	-	338 (330.4)	-8.0	7.6	-	-	-	-	RNAV1
005	TF	DGC	-	009 (001.0)	-8.0	12.8	-	-	-	-	RNAV1


Waypoint Coordinates

Waypoint Identifier	Coordinates
UPSAM	332418.8N / 1303416.6E
FF604	332107.6N / 1302737.7E
FF605	332744.2N / 1302307.1E
DGC	334034.4N / 1302322.7E

## STANDARD DEPARTURE CHART -INSTRUMENT

## RJFF / FUKUOKA

## RNAV SID and TRANSITION

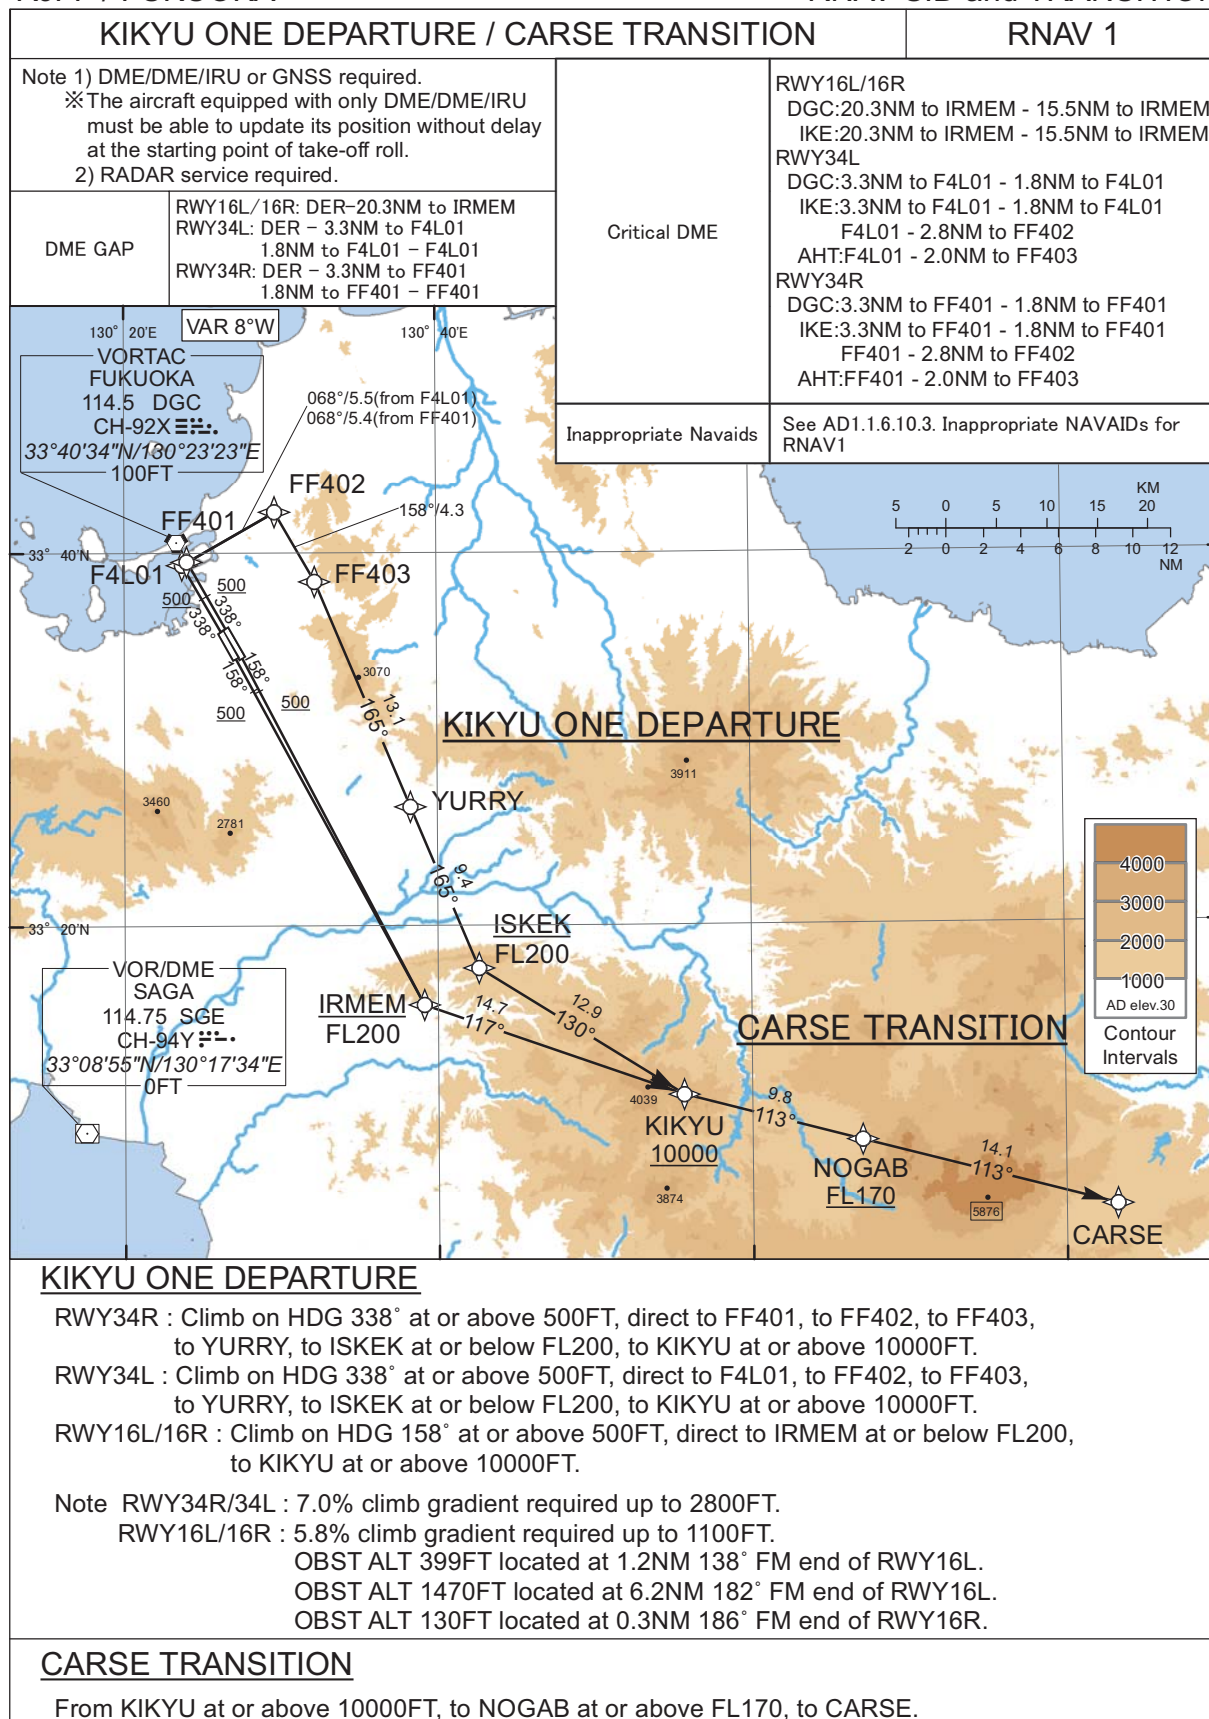



## STANDARD DEPARTURE CHART -INSTRUMENT

RJFF / FUKUOKA

RNAV SID

KIKYU ONE DEPARTURE

## RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.4)	-8.0	-	-	+500	-	-	RNAV1
002	DF	FF401	-	-	-8.0	-	-	-	-	-	RNAV1
003	TF	FF402	-	068 (060.1)	-8.0	5.4	-	-	-	-	RNAV1
004	TF	FF403	-	158 (150.4)	-8.0	4.3	-	-	-	-	RNAV1
005	TF	YURRY	-	165 (157.2)	-8.0	13.1	-	-	-	-	RNAV1
006	TF	ISKEK	-	165 (157.3)	-8.0	9.4	-	-FL200	-	-	RNAV1
007	TF	KIKYU	-	130 (122.1)	-8.0	12.9	-	+10000	-	-	RNAV1

## RWY34L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.4)	-8.0	-	-	+500	-	-	RNAV1
002	DF	F4L01	-	-	-8.0	-	-	-	-	-	RNAV1
003	TF	FF402	-	068 (060.1)	-8.0	5.5	-	-	-	-	RNAV1
004	TF	FF403	-	158 (150.4)	-8.0	4.3	-	-	-	-	RNAV1
005	TF	YURRY	-	165 (157.2)	-8.0	13.1	-	-	-	-	RNAV1
006	TF	ISKEK	-	165 (157.3)	-8.0	9.4	-	-FL200	-	-	RNAV1
007	TF	KIKYU	-	130 (122.1)	-8.0	12.9	-	+10000	-	-	RNAV1

## RWY16L/RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.3)	-8.0	-	-	+500	-	-	RNAV1
002	DF	IRMEM	-	-	-8.0	-	-	-FL200	-	-	RNAV1
003	TF	KIKYU	-	117 (109.4)	-8.0	14.7	-	+10000	-	-	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
F4L01	333928.0N / 1302356.2E	YURRY	332622.1N / 1303817.8E
FF401	333931.4N / 1302403.3E	ISKEK	331742.3N / 1304238.0E
FF402	334212.3N / 1302939.7E	IRMEM	331544.5N / 1303908.3E
FF403	333827.6N / 1303213.2E	KIKYU	331051.1N / 1305540.3E

STANDARD DEPARTURE CHART -INSTRUMENT

RJFF / FUKUOKA

RNAV TRANSITION

CARSE TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIKYU	-	-	-8.0	-	-	+10000	-	-	RNAV1
002	TF	NOGAB	-	113 (104.5)	-8.0	9.8	-	+FL170	-	-	RNAV1
003	TF	CARSE	-	113 (104.5)	-8.0	14.1	-	-	-	-	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates
KIKYU	331051.1N / 1305540.3E
NOGAB	330822.5N / 1310702.1E
CARSE	330448.4N / 1312315.4E

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

STAR

EBISU A ARRIVAL

From over EBISU, via IKE R074 to intercept and proceed via DGC R338 to AKTIB via LAGER.  
Cross LAGER at or above 3000FT, cross AKTIB at or above 2000FT.

EBISU B ARRIVAL

From over EBISU, via IKE R074 to intercept and proceed via DGC R336 to BIXAB.  
Cross BIXAB at or above 2000FT.


IKI A ARRIVAL

From over IKE VOR/DME, via IKE R074 to intercept and proceed via DGC R338 to AKTIB via LAGER.  
Cross LAGER at or above 3000FT, cross AKTIB at or above 2000FT.

IKI B ARRIVAL

From over IKE VOR/DME, via IKE R074 to intercept and proceed via DGC R336 to BIXAB.  
Cross BIXAB at or above 2000FT.

CHANGE : New PROC.

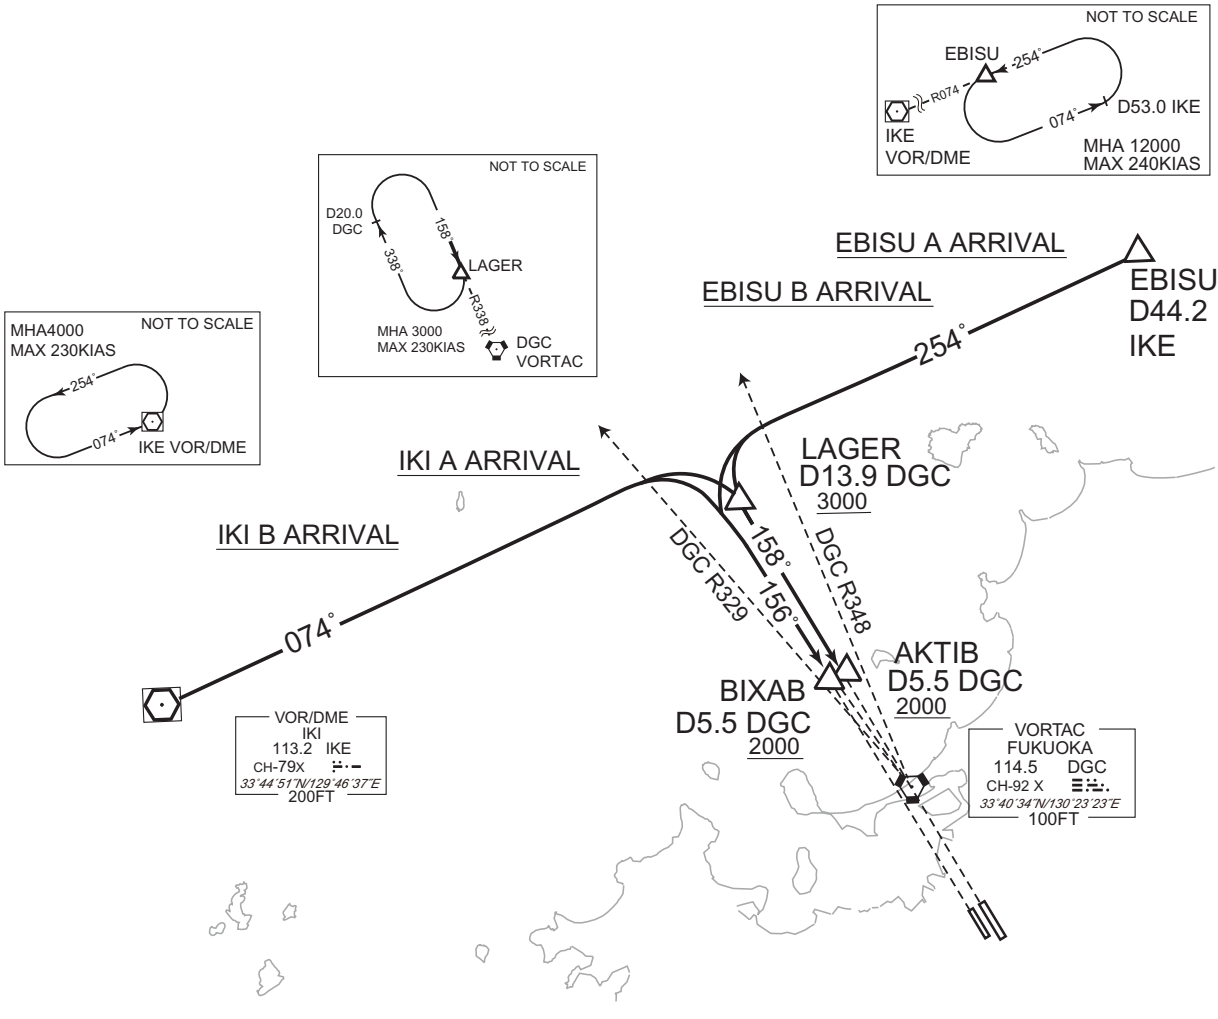

## STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

STAR

EBISU E ARRIVAL

From over EBISU, proceed via IKE R074 to intercept and proceed via SGE R353 to IGDER, via KUE R329, to intercept and proceed via SGE R064 to ADPAR.

Cross SGE R353/36.0DME between 7000FT and 10000FT, cross KUE R329/35.0DME at or above 6000FT, cross ADPAR at or above 4000FT.

EBISU W ARRIVAL

From over EBISU, proceed via IKE R074 to intercept and proceed via SGE R353 to IGDER, via KUE R329, to intercept and proceed via SGE R064 to BUBTI.

Cross SGE R353/36.0DME between 7000FT and 10000FT, cross KUE R329/35.0DME at or above 6000FT, cross BUBTI at or above 4000FT.

IKI E ARRIVAL


From over IKE VOR/DME, proceed via IKE R074 to intercept and proceed via SGE R353 to IGDER, via KUE R329, to intercept and proceed via SGE R064 to ADPAR.

Cross SGE R353/36.0DME between 7000FT and 10000FT, cross KUE R329/35.0DME at or above 6000FT, cross ADPAR at or above 4000FT.

IKI W ARRIVAL

From over IKE VOR/DME, proceed via IKE R074 to intercept and proceed via SGE R353 to IGDER, via KUE R329, to intercept and proceed via SGE R064 to BUBTI.

Cross SGE R353/36.0DME between 7000FT and 10000FT, cross KUE R329/35.0DME at or above 6000FT, cross BUBTI at or above 4000FT.

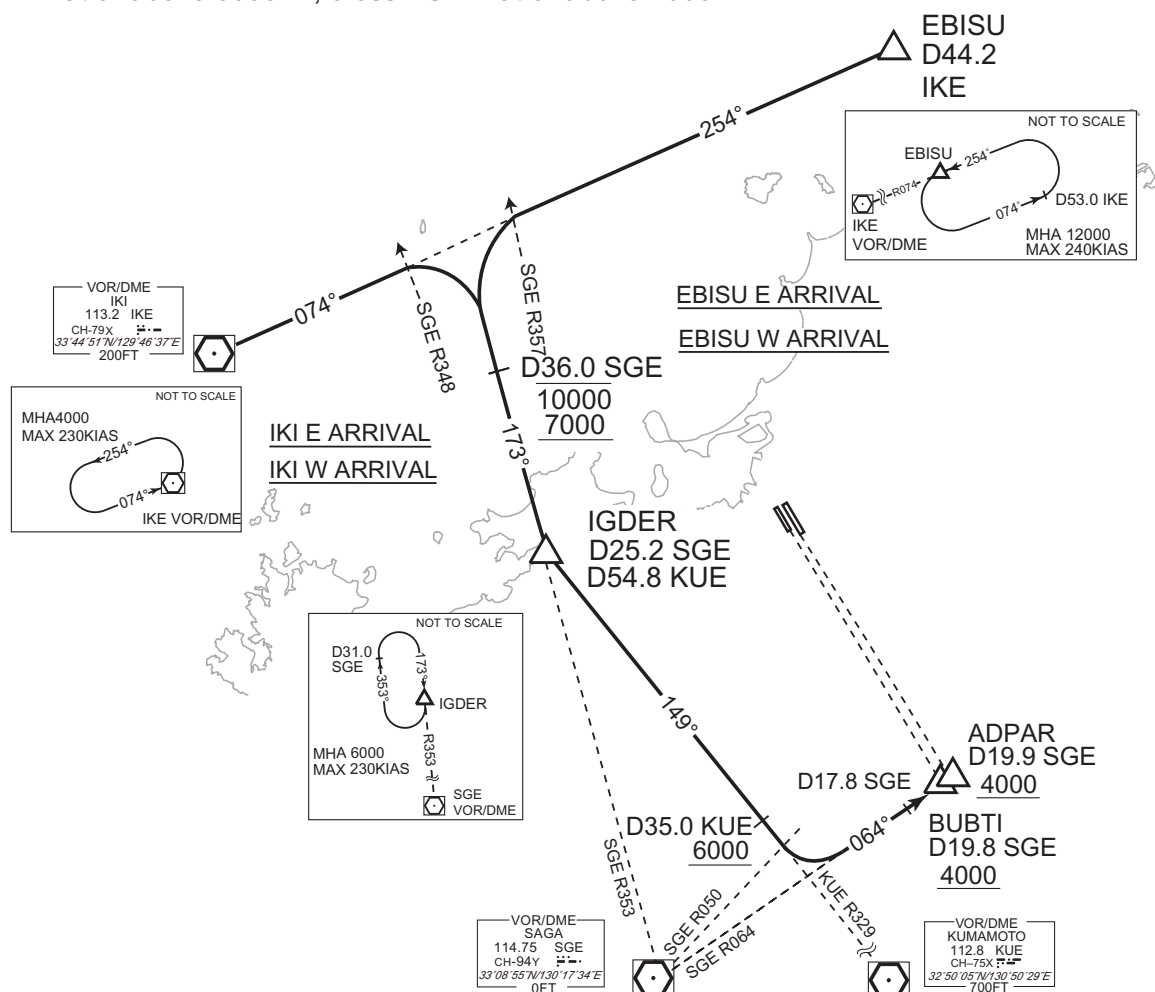


CHANGE : New PROC.



STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34R/34L

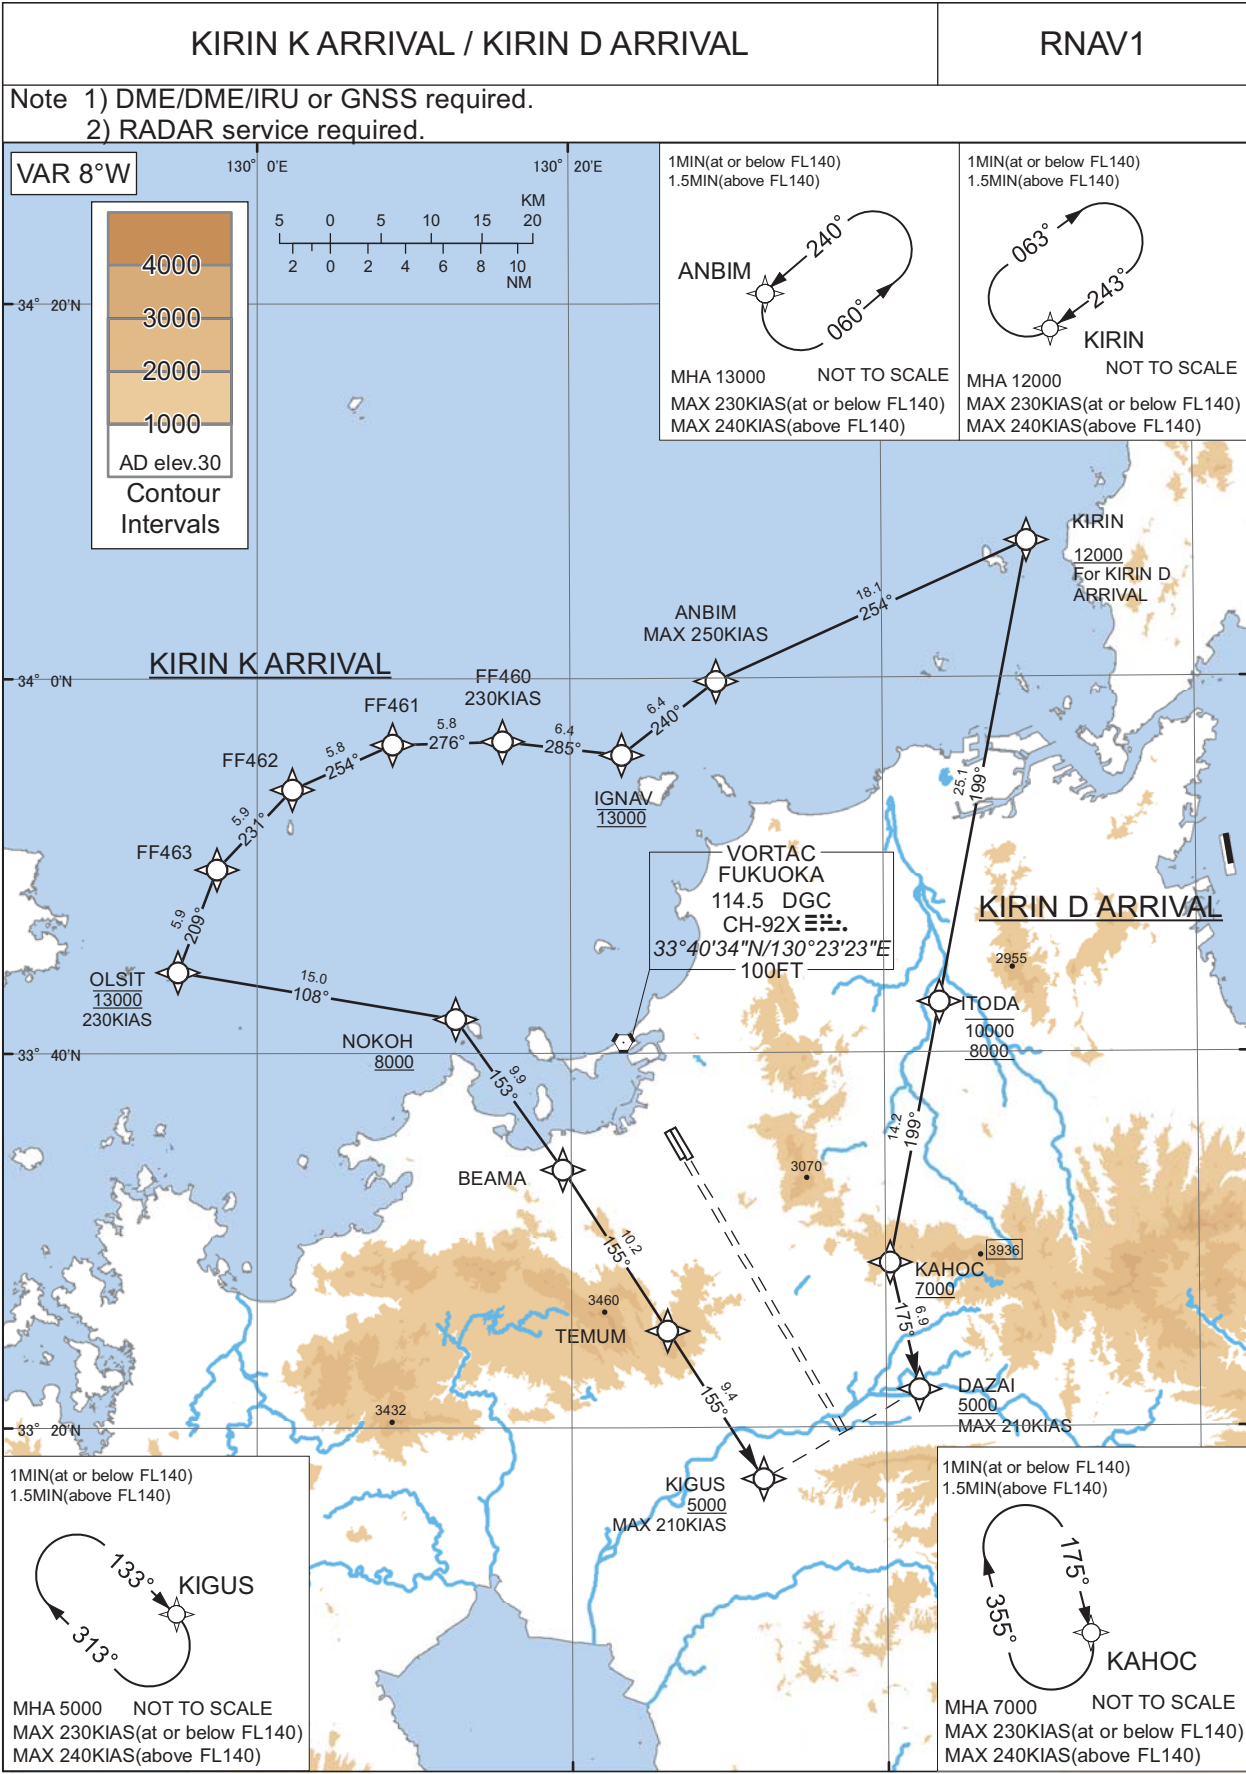

## STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34R/34L

KIRIN K ARRIVAL

From KIRIN, to ANBIM, to IGNAV at 13000FT, to FF460, to FF461, to FF462, to FF463, to OLSIT at 13000FT, to NOKOH at or above 8000FT, to BEAMA, to TEMUM, to KIGUS at or above 5000FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIRIN	-	-	-8.0	-	-	-	-	-	RNAV1
002	TF	ANBIM	-	254 (245.8)	-8.0	18.1	-	-	-250	-	RNAV1
003	TF	IGNAV	-	240 (232.0)	-8.0	6.4	-	13000	-	-	RNAV1
004	TF	FF460	-	285 (276.7)	-8.0	6.4	-	-	230	-	RNAV1
005	TF	FF461	-	276 (268.4)	-8.0	5.8	-	-	-	-	RNAV1
006	TF	FF462	-	254 (245.8)	-8.0	5.8	-	-	-	-	RNAV1
007	TF	FF463	-	231 (223.2)	-8.0	5.9	-	-	-	-	RNAV1
008	TF	OLSIT	-	209 (200.7)	-8.0	5.9	-	13000	230	-	RNAV1
009	TF	NOKOH	-	108 (099.5)	-8.0	15.0	-	+8000	-	-	RNAV1
010	TF	BEAMA	-	153 (144.8)	-8.0	9.9	-	-	-	-	RNAV1
011	TF	TEMUM	-	155 (147.2)	-8.0	10.2	-	-	-	-	RNAV1
012	TF	KIGUS	-	155 (147.3)	-8.0	9.4	-	+5000	-210	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	KIRIN	243 (235.1)	-8.0	1.0 (-14000) 1.5 (+14001)	R	12000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	ANBIM	240 (232.1)	-8.0	1.0 (-14000) 1.5 (+14001)	L	13000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	KIGUS	133 (125.2)	-8.0	1.0 (-14000) 1.5 (+14001)	R	5000	-	-230 (-14000) -240 (+14001)	RNAV1

CHANGE : New PROC.

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34R/34L

KIRIN D ARRIVAL

From KIRIN at or above 12000FT, to ITODA between 10000FT and 8000FT, to KAHOC at or above 7000FT, to DAZAI at or above 5000FT.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIRIN	-	-	-8.0	-	-	+12000	-	-	RNAV1
002	TF	ITODA	-	199 (191.0)	-8.0	25.1	-	-10000 +8000	-	-	RNAV1
003	TF	KAHOC	-	199 (191.0)	-8.0	14.2	-	+7000	-	-	RNAV1
004	TF	DAZAI	-	175 (167.3)	-8.0	6.9	-	+5000	-210	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	KIRIN	243 (235.1)	-8.0	1.0 (-14000) 1.5 (+14001)	R	12000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	KAHOC	175 (167.3)	-8.0	1.0 (-14000) 1.5 (+14001)	R	7000	-	-230 (-14000) -240 (+14001)	RNAV1

Waypoint Coordinates


Waypoint Identifier	Coordinates
KIRIN	340717.9N / 1304919.3E
ANBIM	335949.6N / 1302922.5E
IGNAV	335554.0N / 1302319.1E
FF460	335638.5N / 1301541.9E
FF461	335628.8N / 1300839.8E
FF462	335404.9N / 1300214.7E
FF463	334948.8N / 1295725.3E
OLSIT	334419.7N / 1295455.9E
NOKOH	334149.5N / 1301240.1E
BEAMA	333346.7N / 1301928.8E
TEMUM	332509.9N / 1302607.4E
KIGUS	331715.7N / 1303211.9E
ITODA	334242.2N / 1304333.1E
KAHOC	332847.4N / 1304018.8E
DAZAI	332200.9N / 1304208.1E

CHANGE : New PROC.

## STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34R/34L

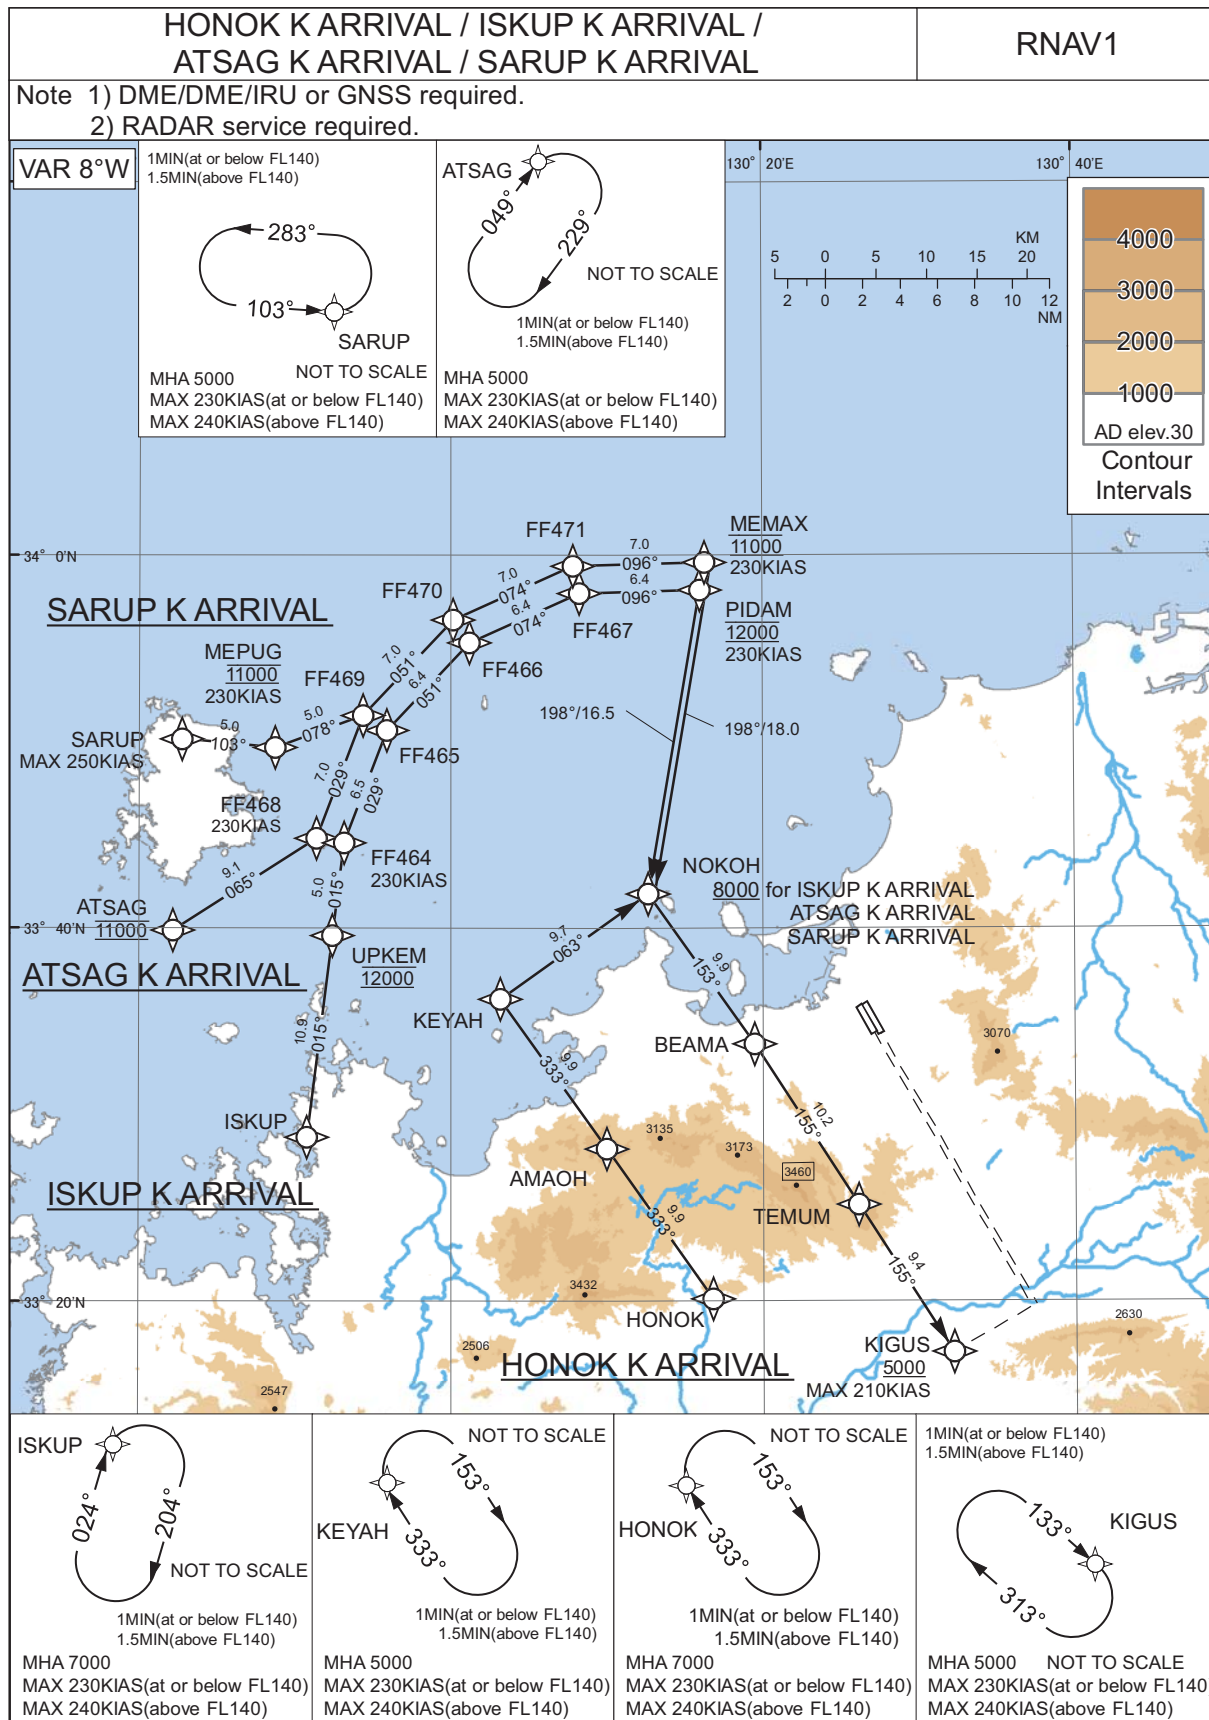

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34R/34L

HONOK K ARRIVAL

From HONOK, to AMAOH, to KEYAH, to NOKOH, to BEAMA, to TEMUM, to KIGUS  
at or above 5000FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	HONOK	-	-	-8.0	-	-	-	-	-	RNAV1
002	TF	AMAOH	-	333 (324.8)	-8.0	9.9	-	-	-	-	RNAV1
003	TF	KEYAH	-	333 (324.8)	-8.0	9.9	-	-	-	-	RNAV1
004	TF	NOKOH	-	063 (054.5)	-8.0	9.7	-	-	-	-	RNAV1
005	TF	BEAMA	-	153 (144.8)	-8.0	9.9	-	-	-	-	RNAV1
006	TF	TEMUM	-	155 (147.2)	-8.0	10.2	-	-	-	-	RNAV1
007	TF	KIGUS	-	155 (147.3)	-8.0	9.4	-	+5000	-210	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	HONOK	333 (324.9)	-8.0	1.0 (-14000) 1.5 (+14001)	R	7000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	KEYAH	333 (324.8)	-8.0	1.0 (-14000) 1.5 (+14001)	R	5000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	KIGUS	133 (125.2)	-8.0	1.0 (-14000) 1.5 (+14001)	R	5000	-	-230 (-14000) -240 (+14001)	RNAV1

CHANGE : New PROC.



## STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34R/34L

ISKUP K ARRIVAL

From ISKUP, to UPKEM at 12000FT, to FF464, to FF465, to FF466, to FF467, to PIDAM at 12000FT, to NOKOH at or above 8000FT, to BEAMA, to TEMUM, to KIGUS at or above 5000FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ISKUP	-	-	-8.0	-	-	-	-	-	RNAV1
002	TF	UPKEM	-	015 (007.1)	-8.0	10.9	-	12000	-	-	RNAV1
003	TF	FF464	-	015 (007.2)	-8.0	5.0	-	-	230	-	RNAV1
004	TF	FF465	-	029 (020.7)	-8.0	6.5	-	-	-	-	RNAV1
005	TF	FF466	-	051 (043.1)	-8.0	6.4	-	-	-	-	RNAV1
006	TF	FF467	-	074 (065.7)	-8.0	6.4	-	-	-	-	RNAV1
007	TF	PIDAM	-	096 (088.4)	-8.0	6.4	-	12000	230	-	RNAV1
008	TF	NOKOH	-	198 (189.7)	-8.0	16.5	-	+8000	-	-	RNAV1
009	TF	BEAMA	-	153 (144.8)	-8.0	9.9	-	-	-	-	RNAV1
010	TF	TEMUM	-	155 (147.2)	-8.0	10.2	-	-	-	-	RNAV1
011	TF	KIGUS	-	155 (147.3)	-8.0	9.4	-	+5000	-210	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	ISKUP	024 (016.5)	-8.0	1.0 (-14000) 1.5 (+14001)	R	7000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	KIGUS	133 (125.2)	-8.0	1.0 (-14000) 1.5 (+14001)	R	5000	-	-230 (-14000) -240 (+14001)	RNAV1

CHANGE : New PROC.

## STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34R/34L

ATSAG K ARRIVAL

From ATSAG at 11000FT, to FF468, to FF469, to FF470, to FF471, to MEMAX at 11000FT, to NOKOH at or above 8000FT, to BEAMA, to TEMUM, to KIGUS at or above 5000FT.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ATSAG	-	-	-8.0	-	-	11000	-	-	RNAV1
002	TF	FF468	-	065 (057.2)	-8.0	9.1	-	-	230	-	RNAV1
003	TF	FF469	-	029 (020.6)	-8.0	7.0	-	-	-	-	RNAV1
004	TF	FF470	-	051 (043.1)	-8.0	7.0	-	-	-	-	RNAV1
005	TF	FF471	-	074 (065.7)	-8.0	7.0	-	-	-	-	RNAV1
006	TF	MEMAX	-	096 (088.4)	-8.0	7.0	-	11000	230	-	RNAV1
007	TF	NOKOH	-	198 (189.7)	-8.0	18.0	-	+8000	-	-	RNAV1
008	TF	BEAMA	-	153 (144.8)	-8.0	9.9	-	-	-	-	RNAV1
009	TF	TEMUM	-	155 (147.2)	-8.0	10.2	-	-	-	-	RNAV1
010	TF	KIGUS	-	155 (147.3)	-8.0	9.4	-	+5000	-210	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	ATSAG	049 (040.9)	-8.0	1.0 (-14000) 1.5 (+14001)	R	5000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	KIGUS	133 (125.2)	-8.0	1.0 (-14000) 1.5 (+14001)	R	5000	-	-230 (-14000) -240 (+14001)	RNAV1

CHANGE : New PROC.

## STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34R/34L

SARUP K ARRIVAL

From SARUP, to MEPUG at 11000FT, to FF469, to FF470, to FF471, MEMAX at 11000FT, to NOKOH at or above 8000FT, to BEAMA, to TEMUM, to KIGUS at or above 5000FT.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SARUP	-	-	-8.0	-	-	-	-250	-	RNAV1
002	TF	MEPUG	-	103 (095.1)	-8.0	5.0	-	11000	230	-	RNAV1
003	TF	FF469	-	078 (069.9)	-8.0	5.0	-	-	-	-	RNAV1
004	TF	FF470	-	051 (043.1)	-8.0	7.0	-	-	-	-	RNAV1
005	TF	FF471	-	074 (065.7)	-8.0	7.0	-	-	-	-	RNAV1
006	TF	MEMAX	-	096 (088.4)	-8.0	7.0	-	11000	230	-	RNAV1
007	TF	NOKOH	-	198 (189.7)	-8.0	18.0	-	+8000	-	-	RNAV1
008	TF	BEAMA	-	153 (144.8)	-8.0	9.9	-	-	-	-	RNAV1
009	TF	TEMUM	-	155 (147.2)	-8.0	10.2	-	-	-	-	RNAV1
010	TF	KIGUS	-	155 (147.3)	-8.0	9.4	-	+5000	-210	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	SARUP	103 (094.9)	-8.0	1.0 (-14000) 1.5 (+14001)	L	5000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	KIGUS	133 (125.2)	-8.0	1.0 (-14000) 1.5 (+14001)	R	5000	-	-230 (-14000) -240 (+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
HONOK	332006.3N / 1301647.8E	FF468	334449.4N / 1295123.0E
AMAOH	332809.0N / 1300959.9E	SARUP	335008.4N / 1294244.7E
KEYAH	333611.4N / 1300310.7E	MEPUG	334941.5N / 1294843.5E
ISKUP	332847.3N / 1295046.6E	FF469	335124.4N / 1295422.1E
UPKEM	333936.3N / 1295224.4E	FF470	335631.8N / 1300009.2E
FF464	334434.6N / 1295309.4E	FF471	335924.6N / 1300751.6E
FF465	335036.6N / 1295553.7E	MEMAX	335936.3N / 1301618.4E
FF466	335518.3N / 1300112.0E	NOKOH	334149.5N / 1301240.1E
FF467	335756.7N / 1300815.7E	BEAMA	333346.7N / 1301928.8E
PIDAM	335807.4N / 1301600.1E	TEMUM	332509.9N / 1302607.4E
ATSAG	333953.2N / 1294210.5E	KIGUS	331715.7N / 1303211.9E



CHANGE : New PROC.

## RJFF / FUKUOKA

RNAV STAR RWY16L/16R

## RNAV 1

VAR 8° W

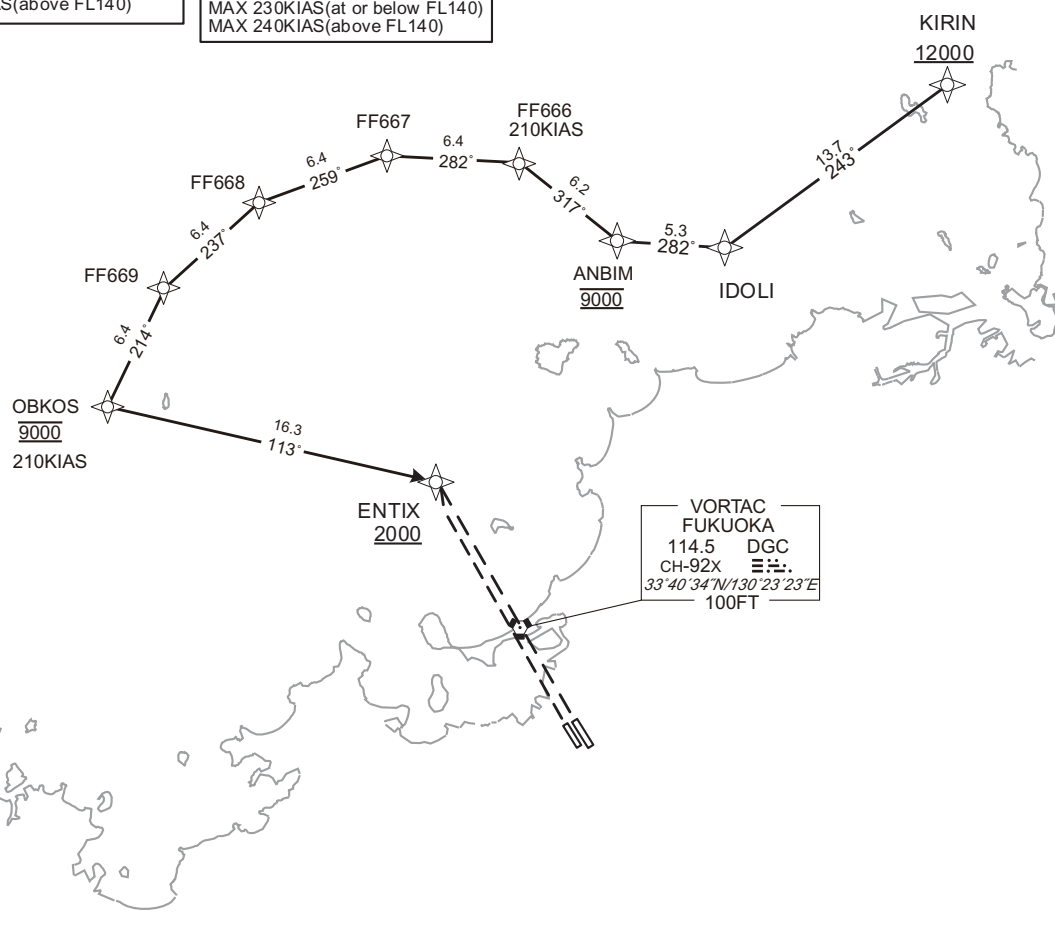

CHANGE : PROC renamed.

## STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY16L/16R

KIRIN E ARRIVAL

From KIRIN at or above 12000FT, to IDOLI, to ANBIM at 9000FT, to FF666, to FF667, to FF668, to FF669, to OBKOS at 9000FT, to ENTIX at or above 2000FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIRIN	-	-	-8.0	-	-	+12000	-	-	RNAV1
002	TF	IDOLI	-	243 (235.0)	-8.0	13.7	-	-	-	-	RNAV1
003	TF	ANBIM	-	282 (274.2)	-8.0	5.3	-	9000	-	-	RNAV1
004	TF	FF666	-	317 (308.8)	-8.0	6.2	-	-	210	-	RNAV1
005	TF	FF667	-	282 (274.1)	-8.0	6.4	-	-	-	-	RNAV1
006	TF	FF668	-	259 (251.4)	-8.0	6.4	-	-	-	-	RNAV1
007	TF	FF669	-	237 (228.8)	-8.0	6.4	-	-	-	-	RNAV1
008	TF	OBKOS	-	214 (206.3)	-8.0	6.4	-	9000	210	-	RNAV1
009	TF	ENTIX	-	113 (105.2)	-8.0	16.3	-	+2000	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	KIRIN	243 (235.1)	-8.0	1.0(-14000) 1.5(+14001)	R	12000	-	-230(-14000) -240(+14001)	RNAV1
Hold	IDOLI	282 (274.3)	-8.0	1.0(-14000) 1.5(+14001)	L	8000	-	-230(-14000) -240(+14001)	RNAV1


Waypoint Coordinates

Waypoint Identifier	Coordinates
KIRIN	340717.9N / 1304919.3E
IDOLI	335926.2N / 1303546.7E
ANBIM	335949.6N / 1302922.5E
FF666	340344.2N / 1302330.1E
FF667	340411.4N / 1301551.1E
FF668	340209.8N / 1300834.7E
FF669	335758.2N / 1300248.0E
OBKOS	335215.0N / 1295923.7E
ENTIX	334757.5N / 1301818.9E

CHANGE : PROC renamed.



STANDARD ARRIVAL CHART-INSTRUMENT

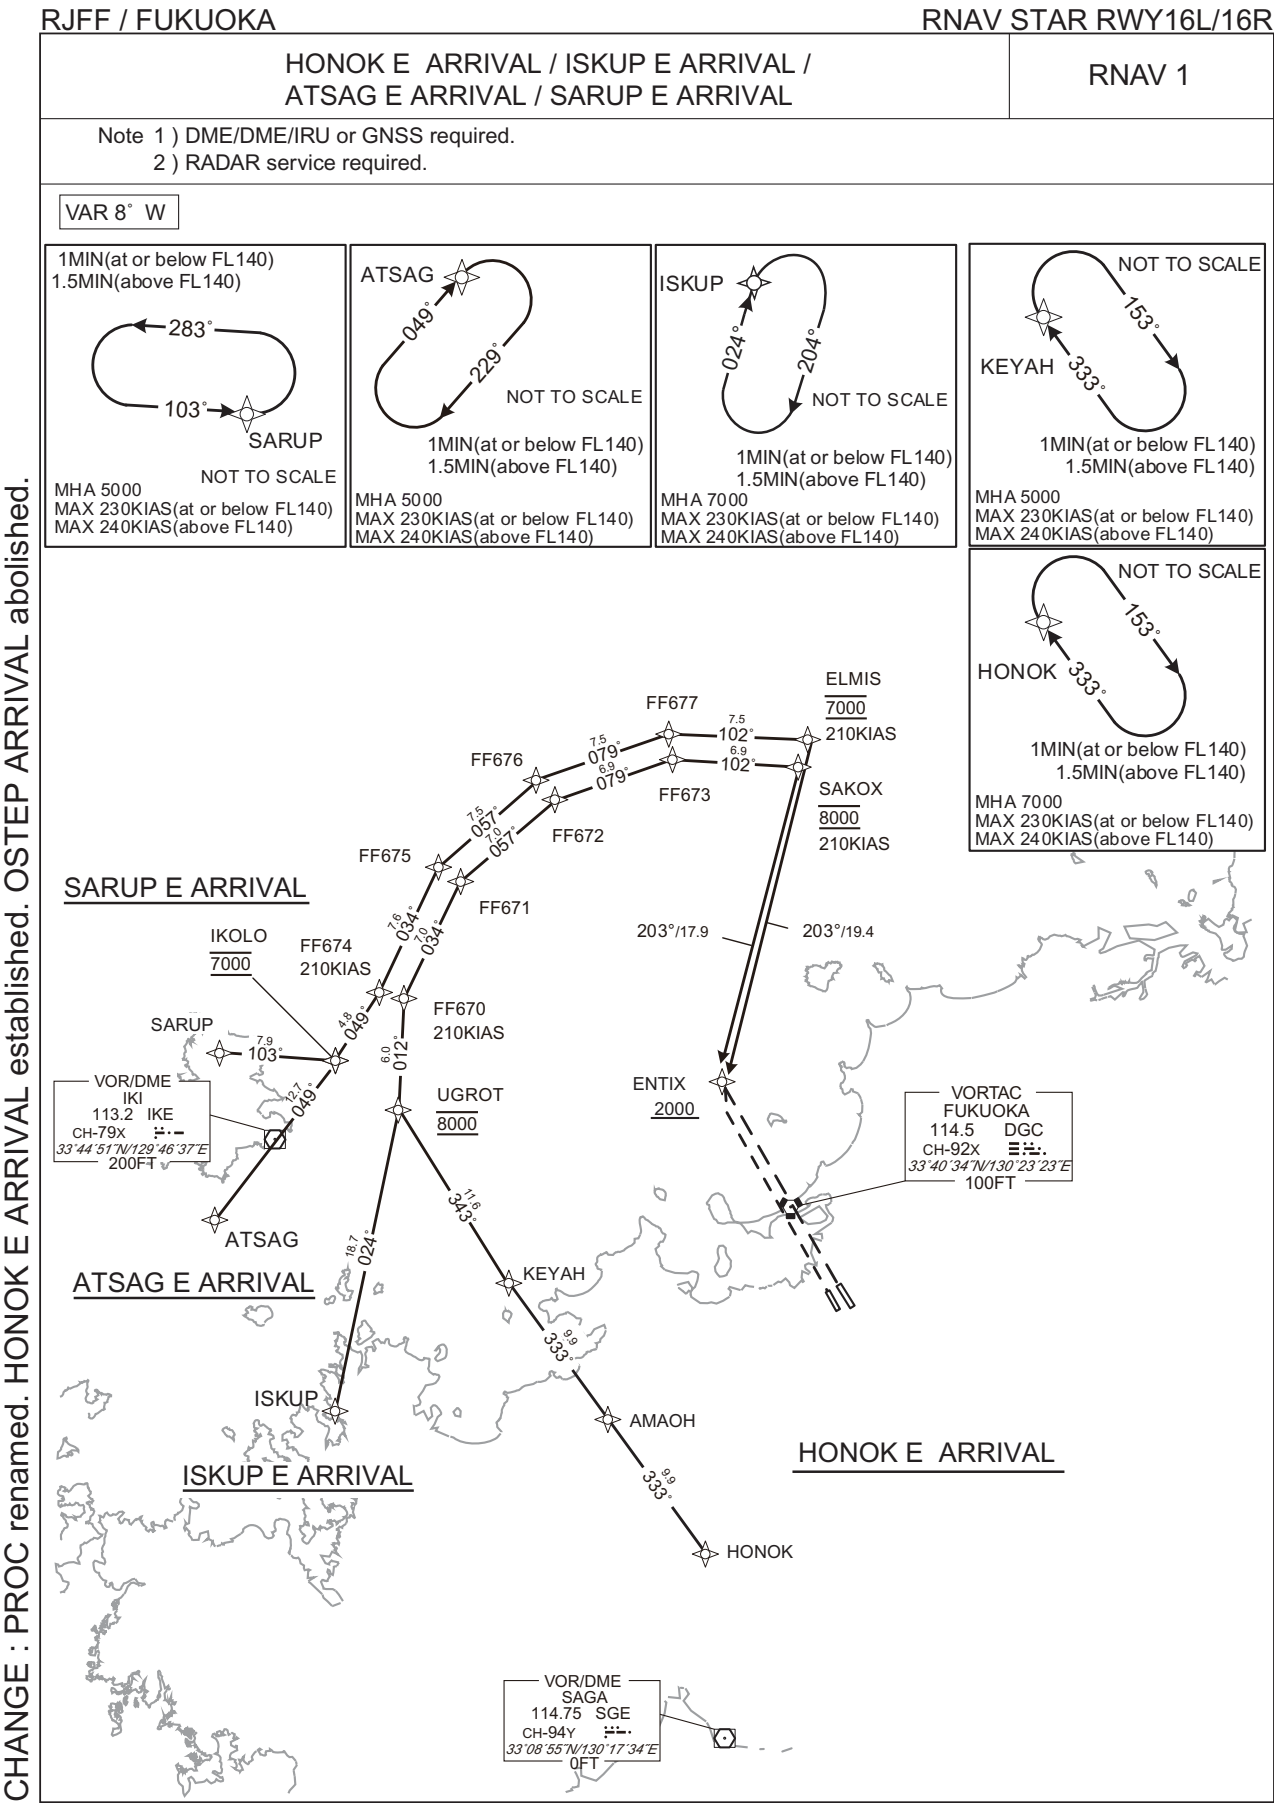

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY16L/16R

HONOK E ARRIVAL

From HONOK, to AMAOH, to KEYAH, to UGROT at 8000FT, to FF670, to FF671, to FF672, to FF673, to SAKOX at 8000FT, to ENTIX at or above 2000FT.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	I F	HONOK	-	-	-8.0	-	-	-	-	-	RNAV1
002	TF	AMAOH	-	333 (324.8)	-8.0	9.9	-	-	-	-	RNAV1
003	TF	KEYAH	-	333 (324.8)	-8.0	9.9	-	-	-	-	RNAV1
004	TF	UGROT	-	343 (334.6)	-8.0	11.6	-	8000	-	-	RNAV1
005	TF	FF670	-	012 (003.8)	-8.0	6.0	-	-	210	-	RNAV1
006	TF	FF671	-	034 (026.3)	-8.0	7.0	-	-	-	-	RNAV1
007	TF	FF672	-	057 (048.8)	-8.0	7.0	-	-	-	-	RNAV1
008	TF	FF673	-	079 (071.4)	-8.0	6.9	-	-	-	-	RNAV1
009	TF	SAKOX	-	102 (094.0)	-8.0	6.9	-	8000	210	-	RNAV1
010	TF	ENTIX	-	203 (195.3)	-8.0	17.9	-	+2000	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	HONOK	333 (324.9)	-8.0	1.0(-14000) 1.5(+14001)	R	7000	-	-230(-14000) -240(+14001)	RNAV1
Hold	KEYAH	333 (324.8)	-8.0	1.0(-14000) 1.5(+14001)	R	5000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : HONOK E ARRIVAL established. PROC course.

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY16L/16R

ISKUP E ARRIVAL

From ISKUP, to UGROT, at 8000FT, to FF670, to FF671, to FF672, to FF673, to SAKOX, at 8000FT, to ENTIX at or above 2000FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ISKUP	-	-	-8.0	-	-	-	-	-	RNAV1
002	TF	UGROT	-	024 (016.5)	-8.0	18.7	-	8000	-	-	RNAV1
003	TF	FF670	-	012 (003.8)	-8.0	6.0	-	-	210	-	RNAV1
004	TF	FF671	-	034 (026.3)	-8.0	7.0	-	-	-	-	RNAV1
005	TF	FF672	-	057 (048.8)	-8.0	7.0	-	-	-	-	RNAV1
006	TF	FF673	-	079 (071.4)	-8.0	6.9	-	-	-	-	RNAV1
007	TF	SAKOX	-	102 (094.0)	-8.0	6.9	-	8000	210	-	RNAV1
008	TF	ENTIX	-	203 (195.3)	-8.0	17.9	-	+2000	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	ISKUP	024 (016.5)	-8.0	1.0(-14000) 1.5(+14001)	R	7000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC renamed.

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY16L/16R

ATSAG E ARRIVAL

From ATSAG, to IKOLO, at 7000FT, to FF674, to FF675, to FF676, to FF677, to ELMIS at 7000FT, to ENTIX at or above 2000FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ATSAG	-	-	-8.0	-	-	-	-	-	RNAV1
002	TF	IKOLO	-	049 (040.9)	-8.0	12.7	-	7000	-	-	RNAV1
003	TF	FF674	-	049 (041.0)	-8.0	4.8	-	-	210	-	RNAV1
004	TF	FF675	-	034 (026.2)	-8.0	7.6	-	-	-	-	RNAV1
005	TF	FF676	-	057 (048.7)	-8.0	7.5	-	-	-	-	RNAV1
006	TF	FF677	-	079 (071.4)	-8.0	7.5	-	-	-	-	RNAV1
007	TF	ELMIS	-	102 (094.0)	-8.0	7.5	-	7000	210	-	RNAV1
008	TF	ENTIX	-	203 (195.3)	-8.0	19.4	-	+2000	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	ATSAG	049 (040.9)	-8.0	1.0(-14000) 1.5(+14001)	R	5000	-	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC renamed.

## STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY16L/16R

SARUP E ARRIVAL

From SARUP, to IKOLO at 7000FT, to FF674, to FF675, to FF676, to FF677, to ELMIS at 7000FT, to ENTIX at or above 2000FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SARUP	-	-	-8.0	-	-	-	-	-	RNAV1
002	TF	IKOLO	-	103 (095.0)	-8.0	7.9	-	7000	-	-	RNAV1
003	TF	FF674	-	049 (041.0)	-8.0	4.8	-	-	210	-	RNAV1
004	TF	FF675	-	034 (026.2)	-8.0	7.6	-	-	-	-	RNAV1
005	TF	FF676	-	057 (048.7)	-8.0	7.5	-	-	-	-	RNAV1
006	TF	FF677	-	079 (071.4)	-8.0	7.5	-	-	-	-	RNAV1
007	TF	ELMIS	-	102 (094.0)	-8.0	7.5	-	7000	210	-	RNAV1
008	TF	ENTIX	-	203 (195.3)	-8.0	19.4	-	+2000	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	SARUP	103 (094.9)	-8.0	1.0(-14000) 1.5(+14001)	L	5000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
HONOK	332006.3N / 1301647.8E	SAKOX	340511.2N / 1302358.8E
AMAOH	332809.0N / 1300959.9E	ATSAG	333953.2N / 1294210.5E
KEYAH	333611.4N / 1300310.7E	SARUP	335008.4N / 1294244.7E
ISKUP	332847.3N / 1295046.6E	IKOLO	334926.8N / 1295209.4E
UGROT	334642.0N / 1295710.6E	FF674	335302.0N / 1295555.0E
FF670	335238.5N / 1295739.4E	FF675	335948.3N / 1295956.5E
FF671	335853.2N / 1300122.2E	FF676	340446.3N / 1300647.0E
FF672	340328.1N / 1300740.9E	FF677	340710.3N / 1301523.8E
FF673	340540.8N / 1301537.4E	ELMIS	340638.1N / 1302427.5E
		ENTIX	334757.5N / 1301818.9E

CHANGE : PROC renamed.

CHANGE : PROC renamed. HLDG pattern for using NAVAID(ADPAR) established. Note added.  
ANGAG, KIGUS established. UGOLU, HAWKS abolished. OCA(H). FREQ for FUKUOKA TOWER.

## ILS or LOC RWY 34R


20/2/25



## INSTRUMENT APPROACH CHART

RJFF / FUKUOKA

LOC RWY 34L

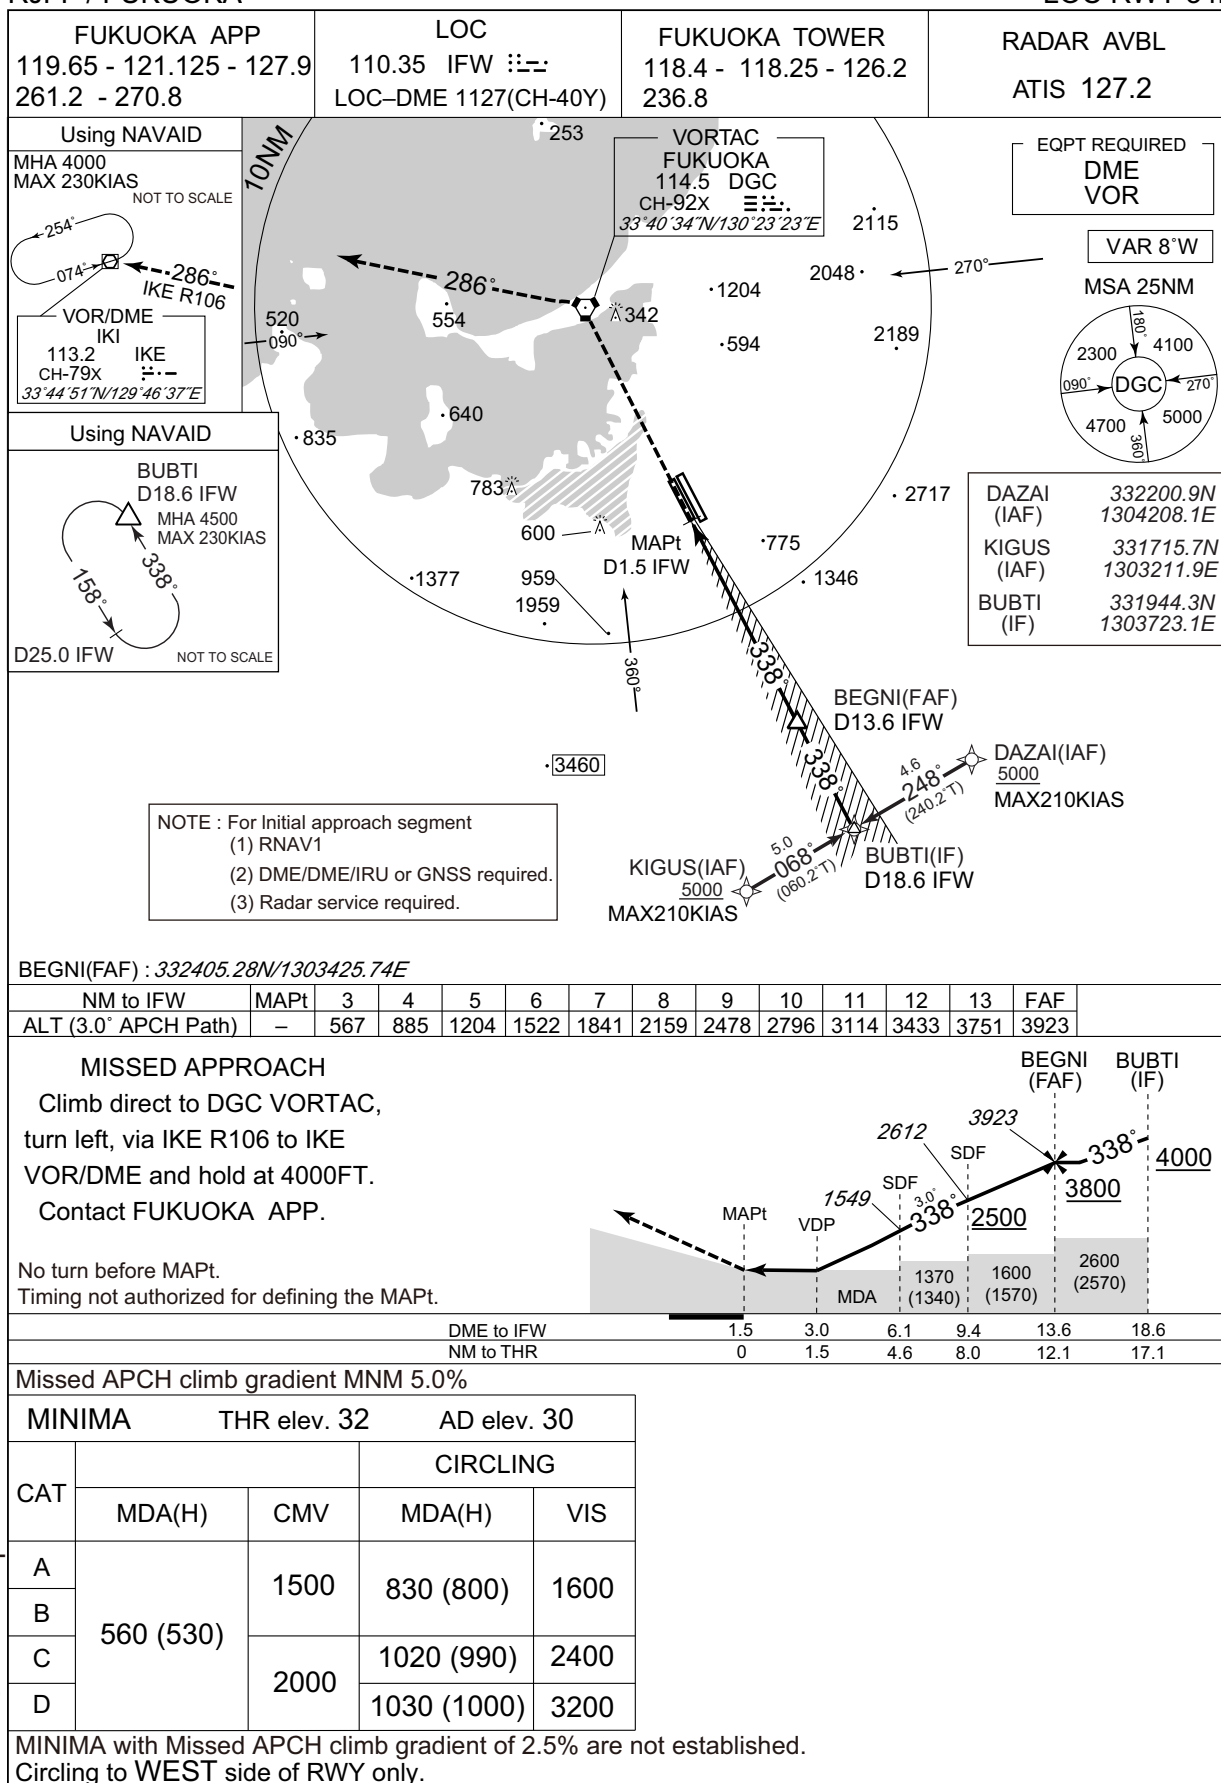

CHANGE : Description of NAVAID.

CHANGE : PROC renamed. KIGUS, ADPAR, AKROP, F4R50, F4R51, RW34R established. HLDG pattern at ADPAR established.  
BANKU, HAWKS, HARRY, FF451, FF452, RW34 abolished. ALT(3.0° APCH Path). OCA(H). NM to THR. PROC ALT. FREQ for FUKUOKA TOWER.



INSTRUMENT APPROACH CHART

RJFF / FUKUOKA

RNP RWY34R

FAS DATA BLOCK			
Operation type	0	LTP/FTP ellipsoidal height	+00424
SBAS service provider identifier	2	FPAP latitude	333548.8630N
Airport identifier	RJFF	FPAP longitude	1302635.4830E
Runway	341	Threshold crossing height	00016.5
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M34A	∟ length offset	0000
LTP/FTP latitude	333429.8705N	HAL	40.0
LTP/FTP longitude	1302729.4540E	VAL	50.0
CRC remainder	1C55BCEE		

Required additional data	
LTP/FTP orthometric height	9.8

CHANGE : Runway and CRC remainder of FAS DATA BLOCK.

## RJFF / FUKUOKA


## RNP RWY34L



## INSTRUMENT APPROACH CHART

RJFF / FUKUOKA

ILS or LOC RWY16L

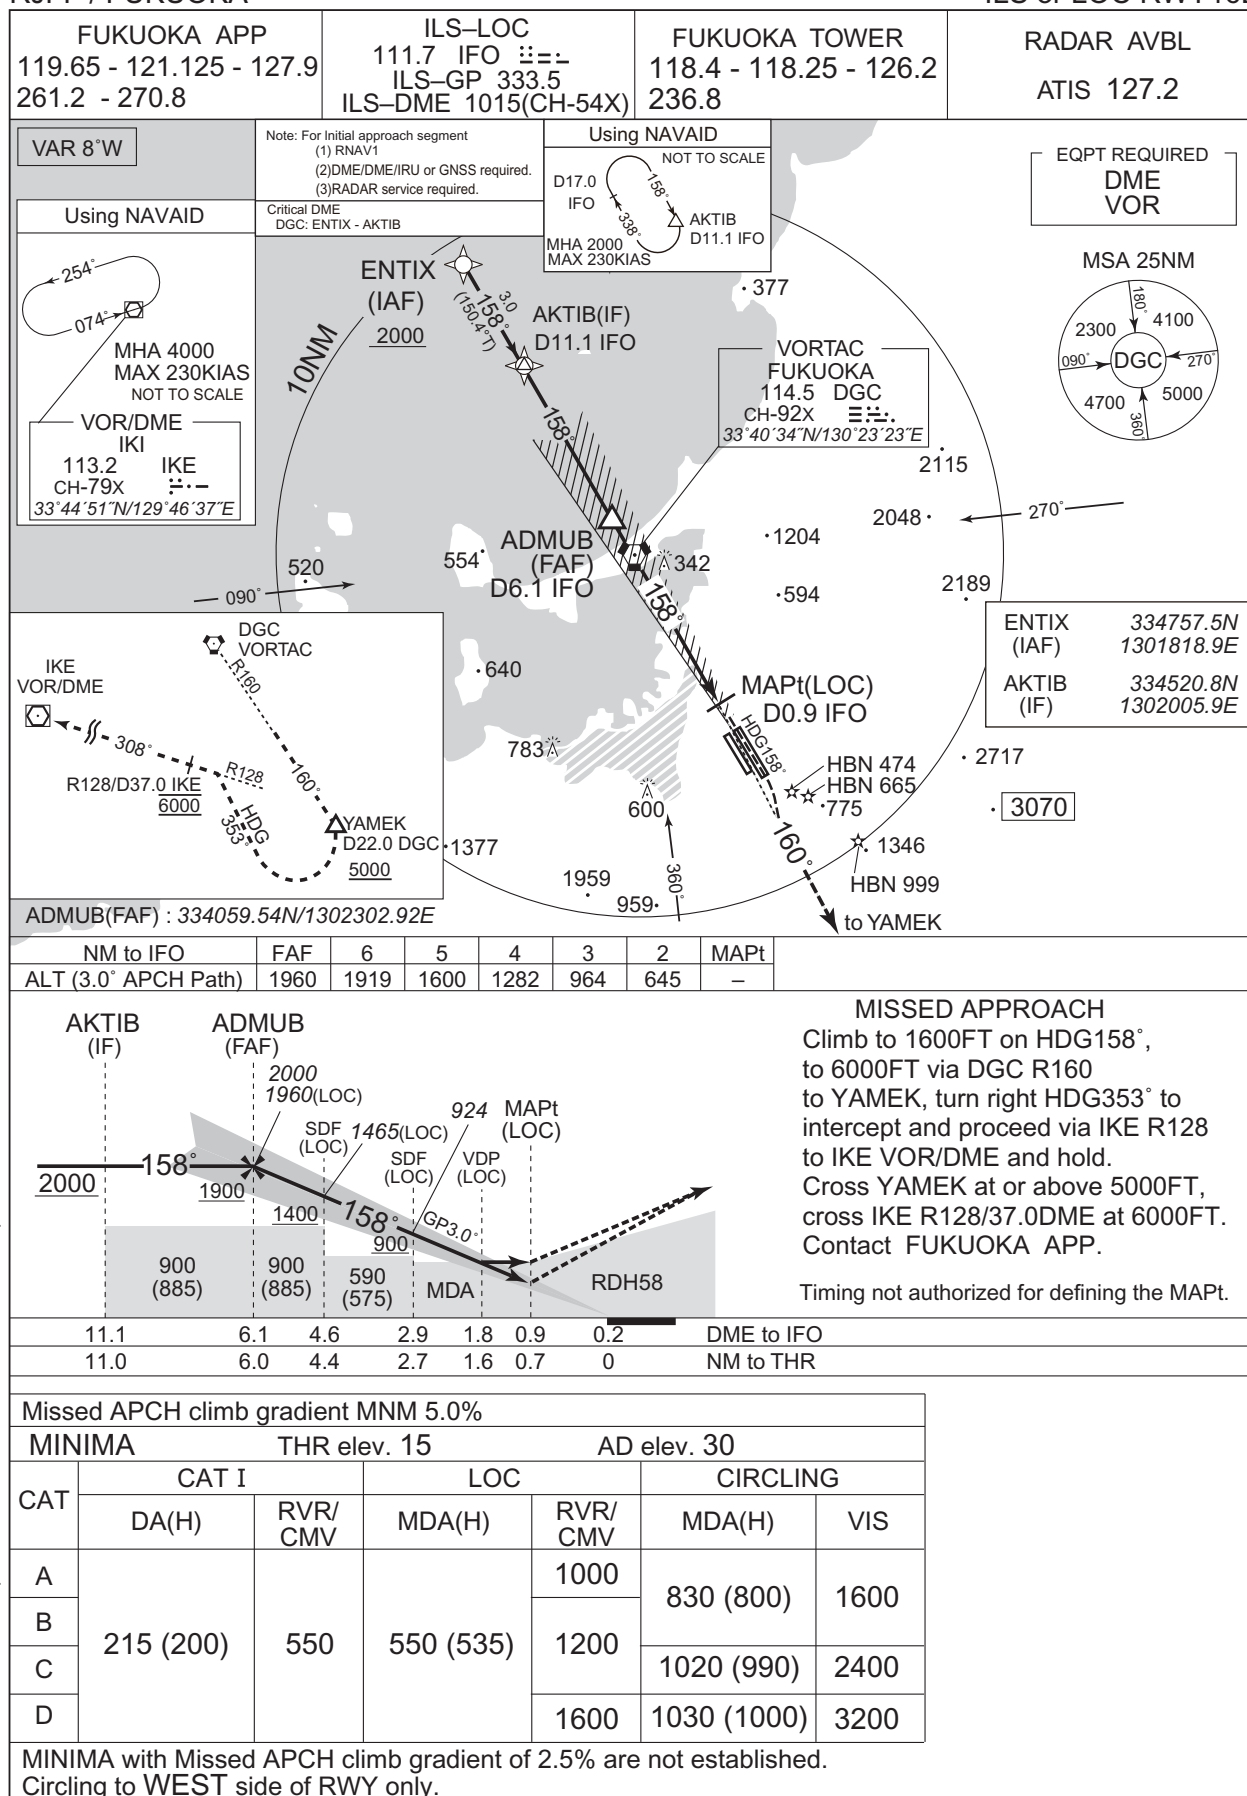

CHANGE : AKTIB, ADMUB established. MALTS, ANOS abolished. PROC renamed. FREQ for FUKUOKA TOWER.

## RJFF / FUKUOKA

LOC RWY16R





INSTRUMENT APPROACH CHART

CHANGE : AKTIB, ADMUB, F6L50, F6L51, RW16L, F6L52, IGDER established. MALTS, AINOS, FF651, FF652, RW16, FF653, KAFRI abolished.  
PROC renamed. OCA(H). HLDG pattern at AKTIB established. FREQ for FUKUOKA TOWER.

RJFF / FUKUOKA

RNP RWY16L

FUKUOKA APP

119.65 - 121.125 - 127.9

261.2 - 270.8

RNP APCH

MSAS CH56966

M16A

FUKUOKA TOWER

118.4 - 118.25 - 126.2

236.8

RADAR AVBL

ATIS 127.2

Baro-VNAV not authorized below -5°C

VAR 8°W

MSA 25NM

5000

ARP

ARP: 333504N/1302706E

ENTIX (IAF) 2000

OKINO (IAF) 4000

AKTIB (IF)

ADMUB (FAF) 554

NOKOH (IAF) 3000

F6L50

F6L51

RW16L (MAPt)

F6L52 (MATF)

FF601 (6000)

YAMEK (5000)

IGDER

IKI (IKE)

IKI(IKE) (MAHF)

1MIN(at or below FL140)

1.5MIN(above FL140)

NOT TO SCALE

1MIN(at or below FL140)

1.5MIN(above FL140)

NOT TO SCALE

1MIN(at or below FL140)

1.5MIN(above FL140)

NOT TO SCALE

1959 959 to YAMEK

NM to Next Fix

ALT (3.0° APCH Path)

FAF

5

4

3

2

MAPt

1969

1665

1347

1028

710

-

MISSED APPROACH

Direct to F6L52, to YAMEK at or above 5000FT, to FF601 at 6000FT, to IGDER, to IKE and hold at 6000FT. Contact FUKUOKA APP.

AKTIB (IF)

ADMUB (FAF)

F6L50 (LNAV)

F6L51 (LNAV)

VDP (LNAV)

RW16L (MAPt)

RDH58

MDA

1000 (985)

900 (885)

900 (625)

1400

1474

1969

1900

159°

158°

3.00°

11.0

6.0

4.4

2.7

1.5

0

NM to THR

Misssed APCH climb gradient MNM 5.0%

MINIMA

THR elev. 15

AD elev. 30

CAT	LPV		LNAV/VNAV		LNAV		CIRCLING			
	DA(H)	RVR/CMV	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS		
A	330 (315)	900	510 (495)	1000	510 (495)	1000	830 (800)	1600		
B	340 (325)	1000		1200		1200				
C	349 (334)					1020 (990)	2400			
D	359 (344)	1400		1600		1600	1030 (1000)	3200		

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Circling to WEST side of RWY only.

Civil Aviation Bureau,Japan (EFF:20 MAR 2025)

20/2/25

INSTRUMENT APPROACH CHART

RJFF / FUKUOKA

RNP RWY16L

FAS DATA BLOCK			
Operation type	0	LTP/FTP ellipsoidal height	+00371
SBAS service provider identifier	2	FPAP latitude	333429.8705N
Airport identifier	RJFF	FPAP longitude	1302729.4540E
Runway	163	Threshold crossing height	00017.7
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M16A	∠ length offset	0000
LTP/FTP latitude	333548.8630N	HAL	40.0
LTP/FTP longitude	1302635.4830E	VAL	50.0
CRC remainder	299CD01B		


Required additional data	
LTP/FTP orthometric height	4.5

CHANGE : Runway and CRC remainder of FAS DATA BLOCK.


## INSTRUMENT APPROACH CHART

RJFF / FUKUOKA

RNP RWY16R

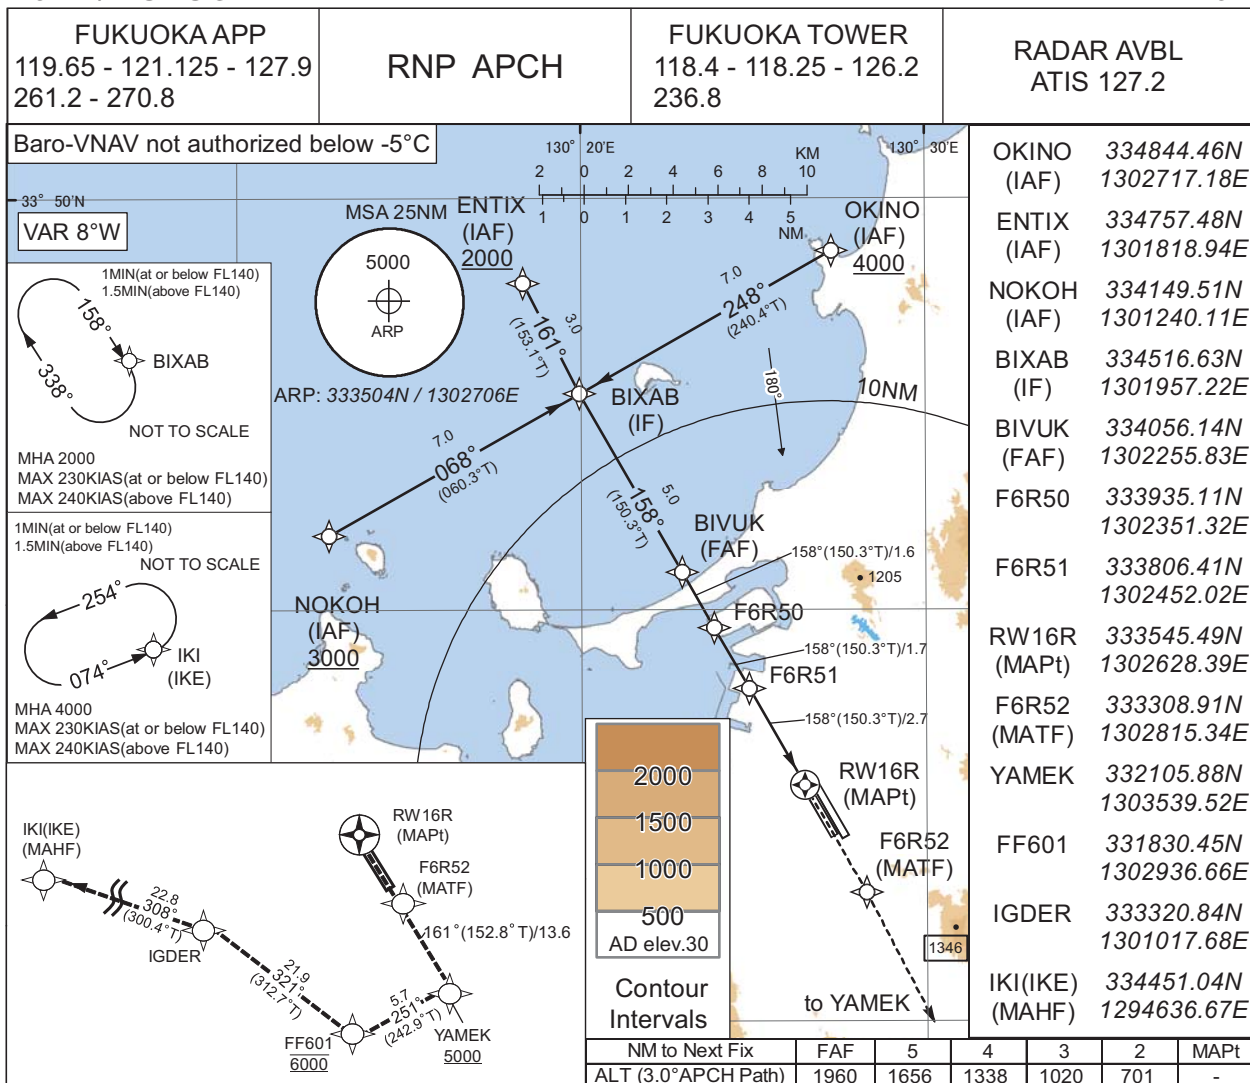

CHANGE : New PROC.

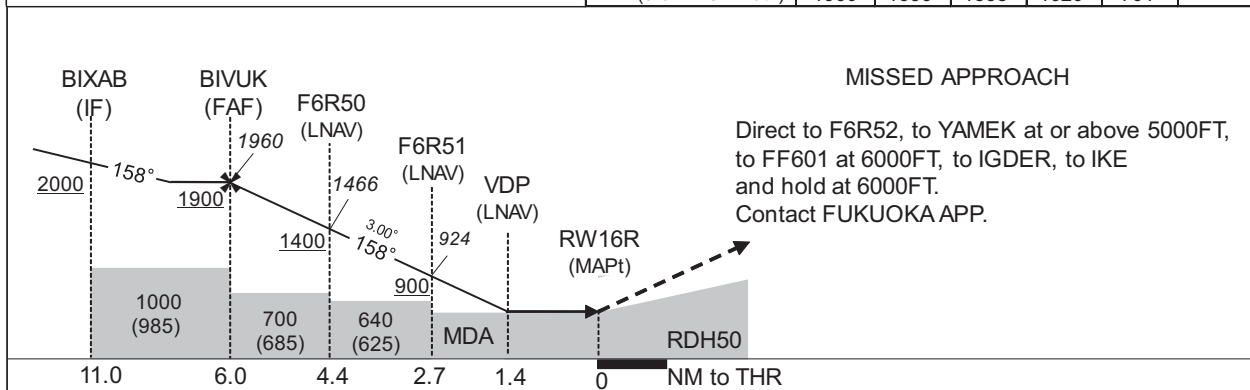


Missed APCH climb gradient MNM 5.0%

MINIMA							
THR elev. 15			AD elev. 30				
CAT	LNAV/VNAV		LNAV		CIRCLING		
	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS	
A	510(495)	1500	510(495)	1500	830(800)	1600	
B							
C		2000			2000	1020(990)	2400
D						1030(1000)	3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Circling to WEST side of RWY only.

INSTRUMENT APPROACH CHART

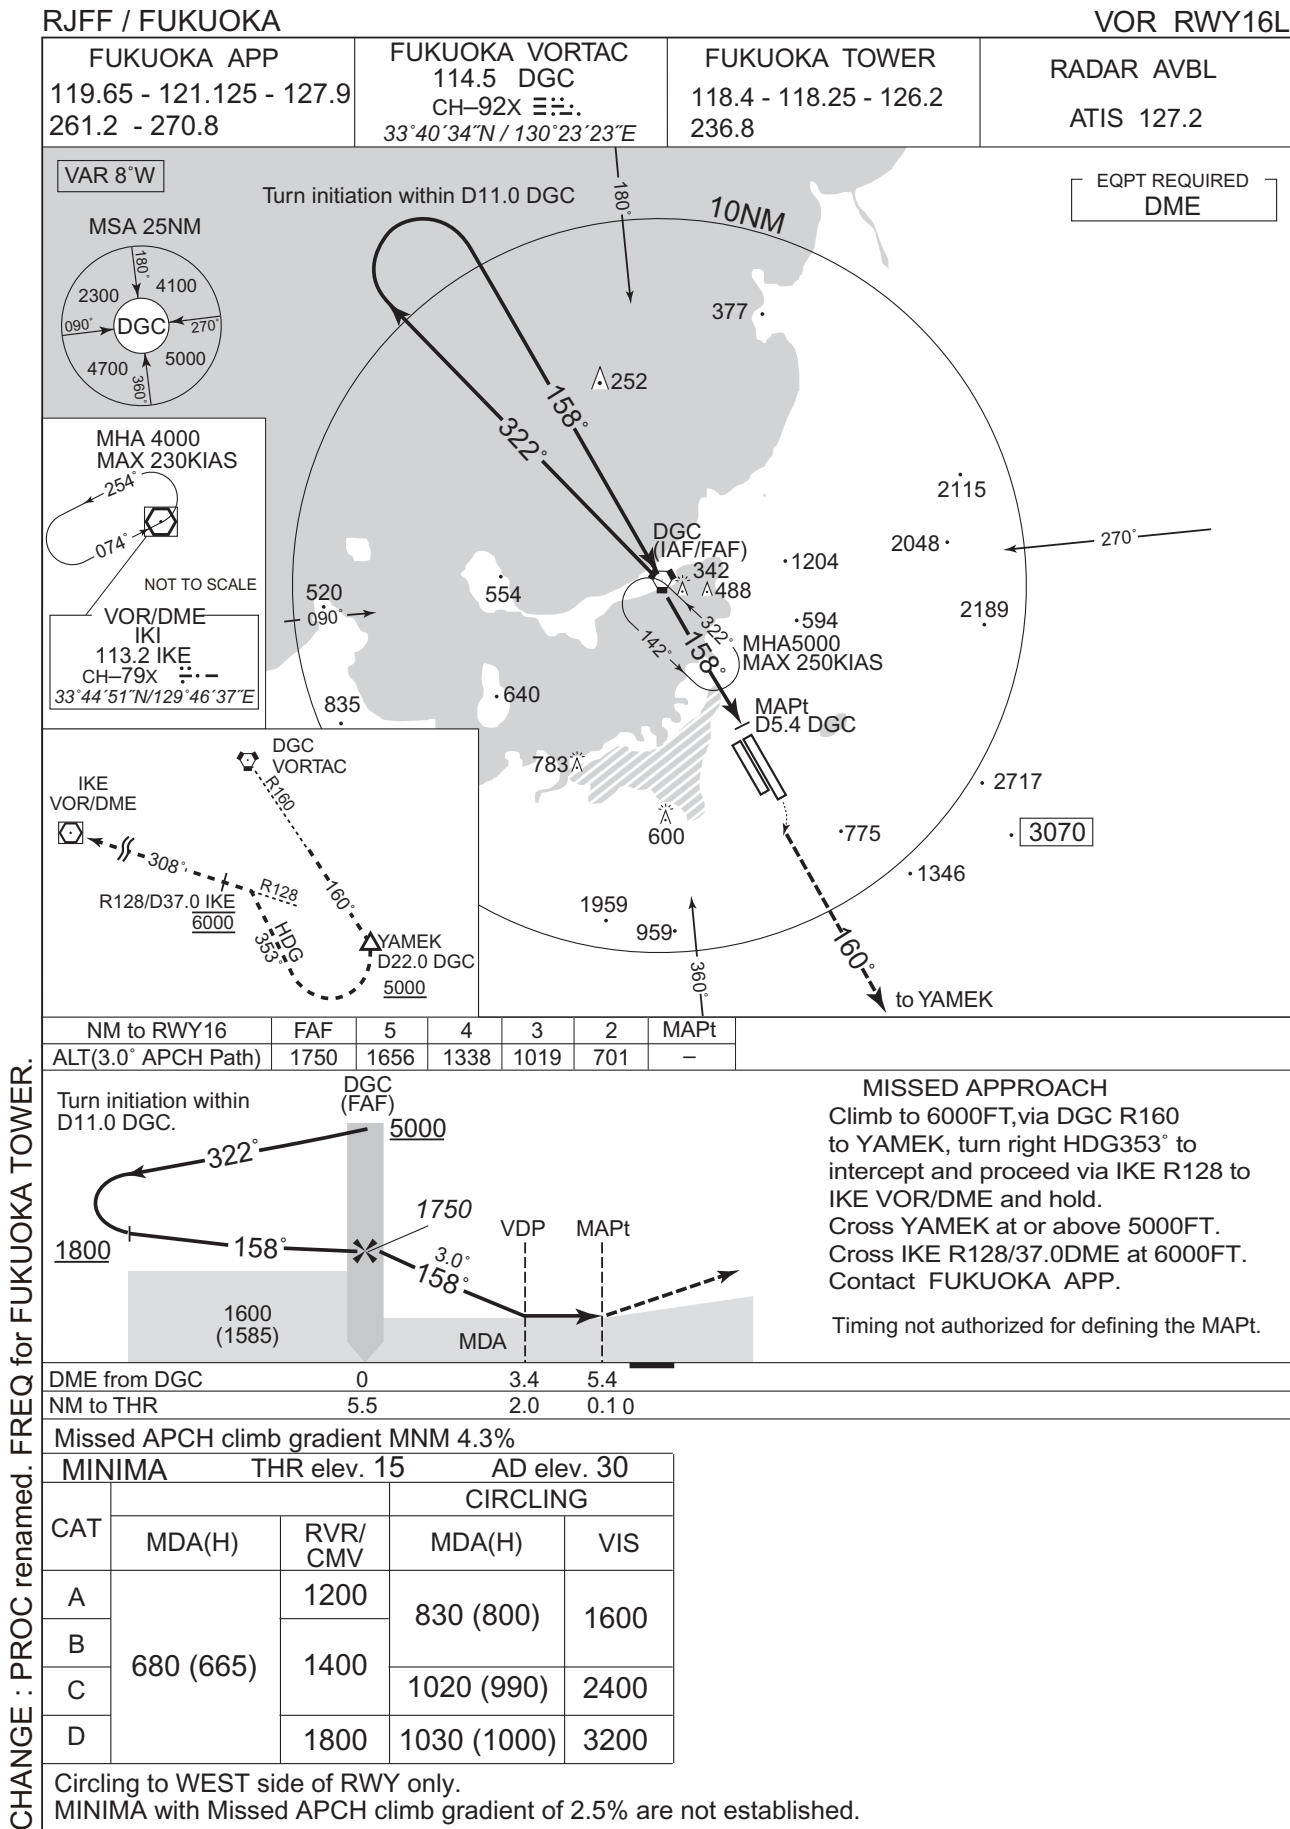


## RJFF / FUKUOKA

RADAR AVBL  
ATIS 127.2


FUKUOKA APP
119.65 - 121.125 - 127.9
261.2 - 270.8

FUKUOKA VORTAC  
114.5 DGC  
CH-92X   
33°40'34"N / 130°23'23"E

FUKUOKA TOWER  
118.4 - 118.25 - 126.2  
236.8

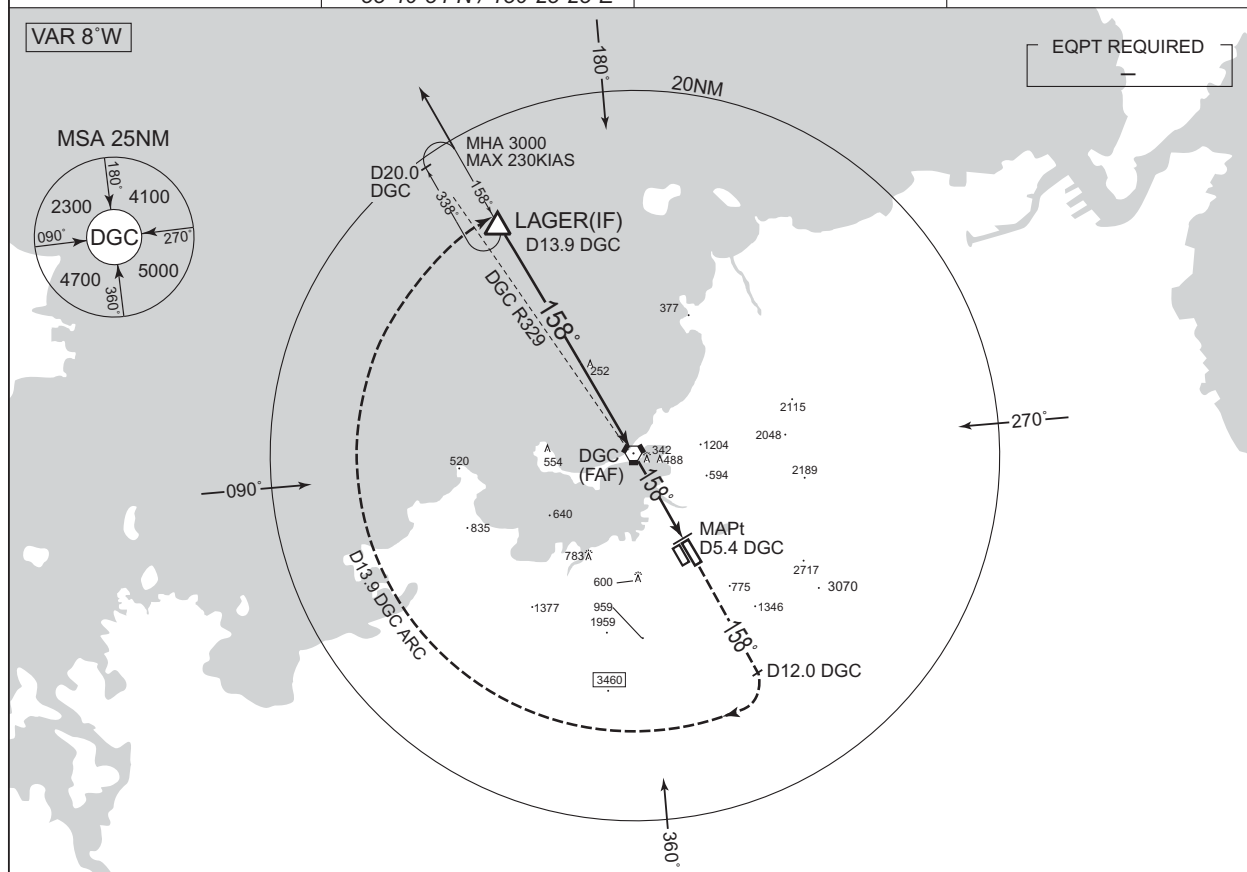

NM to RWY16	FAF	5	4	3	2	MAPt
ALT(3.0° APCH Path)	1750	1656	1338	1019	701	—

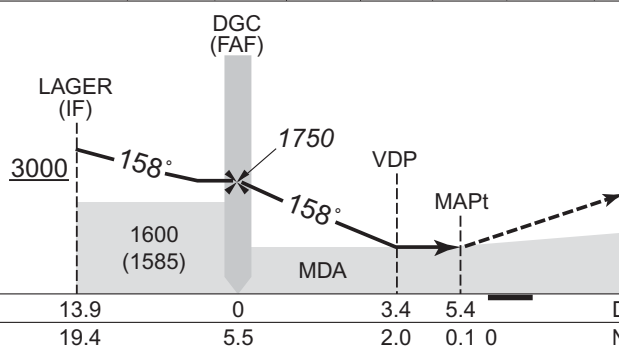

**MISSED APPROACH**  
Climb to 5000FT via DGC R158  
to DGC 12.0DME, turn right,  
via DGC 13.9DME  
clockwise ARC to LAGER  
and hold.  
Contact FUKUOKA APP.

Timing not authorized for defining the MAPt.

DME to/from DGC  
NM to THR

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 15	AD elev. 30	
CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	680 (665)	1200	830 (800)	1600
B		1400		
C			1020 (990)	2400
D			1800	1030 (1000)

Circling to WEST side of RWY only.

MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : PROC renamed. FREQ for FUKUOKA TOWER.



RJFF / FUKUOKA

Visual REP




※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : VAR. FREQ for FUKUOKA TOWER. New RWY installed.

Call sign	BRG / DIST from ARP	Remarks
古賀 Koga	014°T / 8.4NM	高速道路インターチェンジ Interchange
長者原 Chojabaru	046°T / 2.3NM	ドーム型建造物 Dome
太宰府 Dazaifu	133°T / 6.4NM	ゴルフ場 Golf Course
三沢 Mitsusawa	153°T / 10.4NM	ゴルフ場 Golf Course
*那珂川 Nakagawa	197°T / 5.8NM	松尾橋 Bridge
室見 Muromi	277°T / 5.4NM	室見川河口 River mouth
今津 Imazu	275°T / 9.4NM	今津橋 Bridge
志賀 Shika	305°T / 8.2NM	志賀島橋 Bridge
北崎 Kitazaki	289°T / 11.5NM	漁港 Harbor


*ヘリコプター用 Use For Helicopter



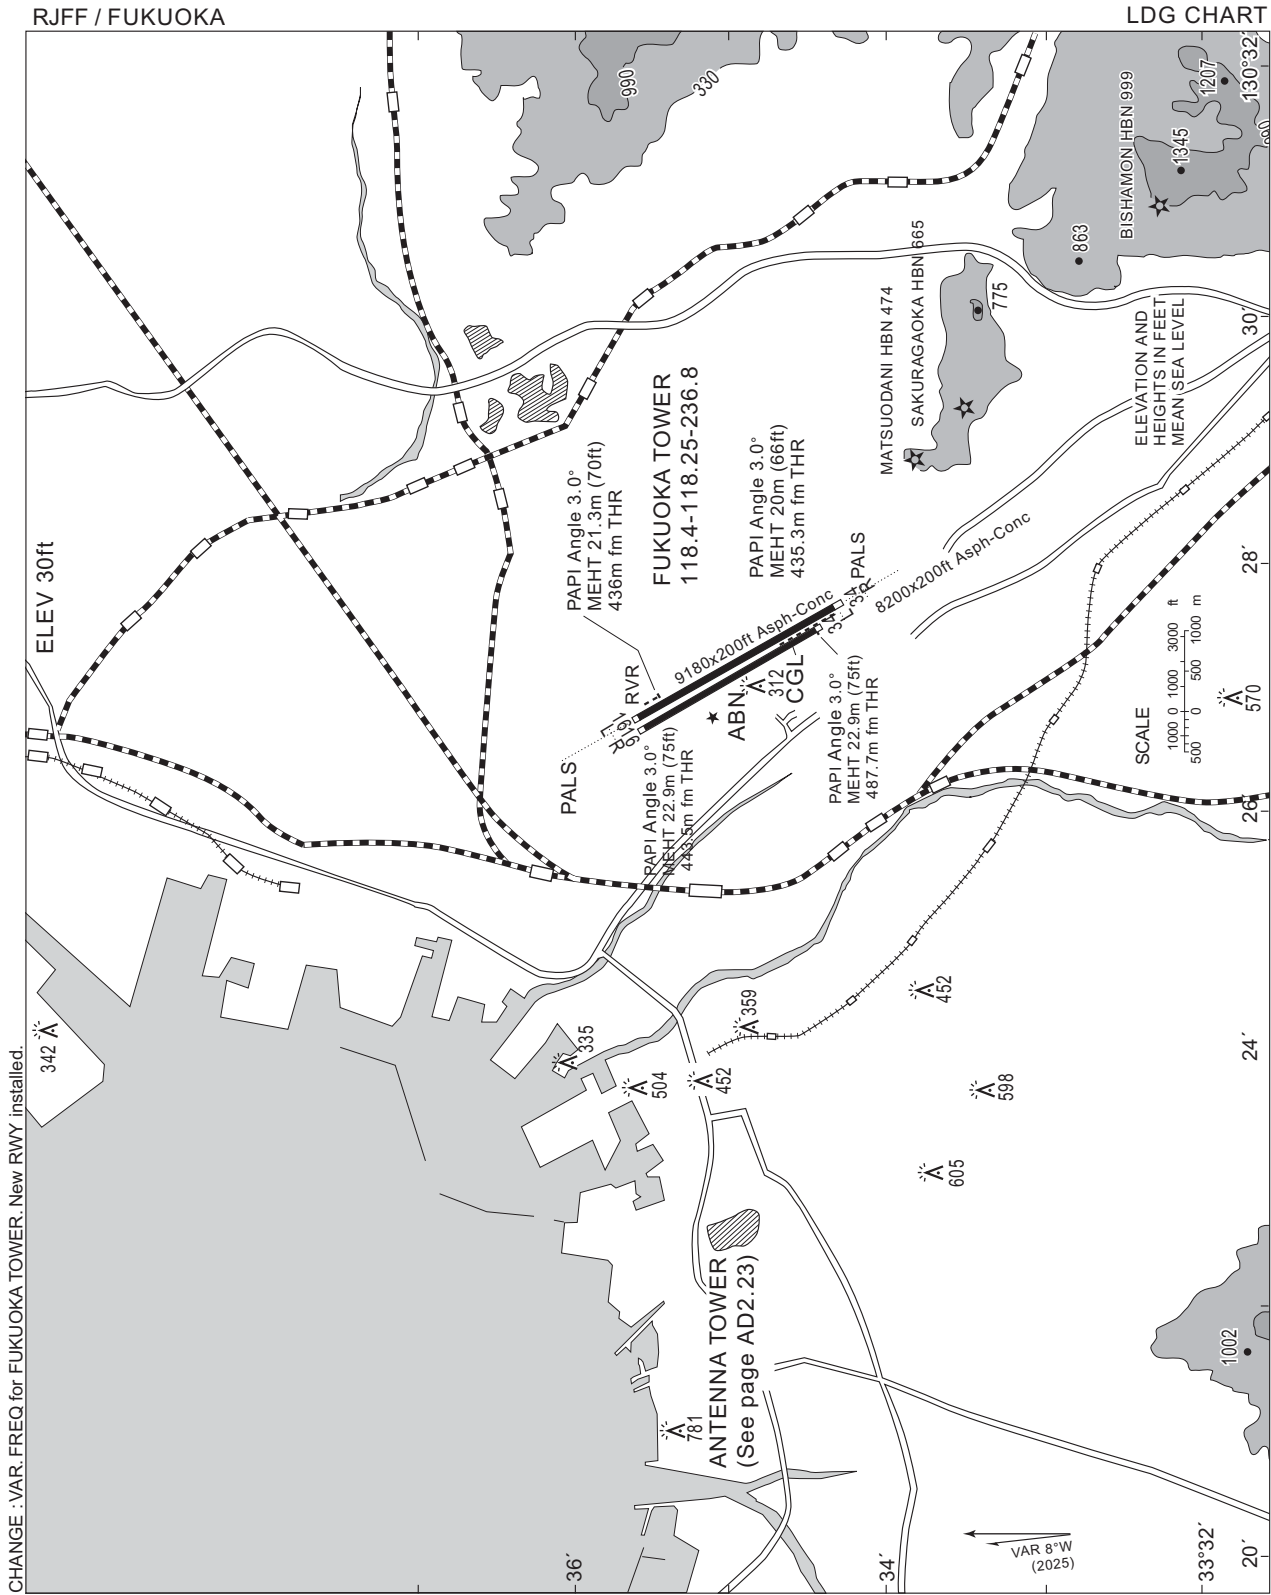

RJFF / FUKUOKA

Minimum Vectoring Altitude CHART

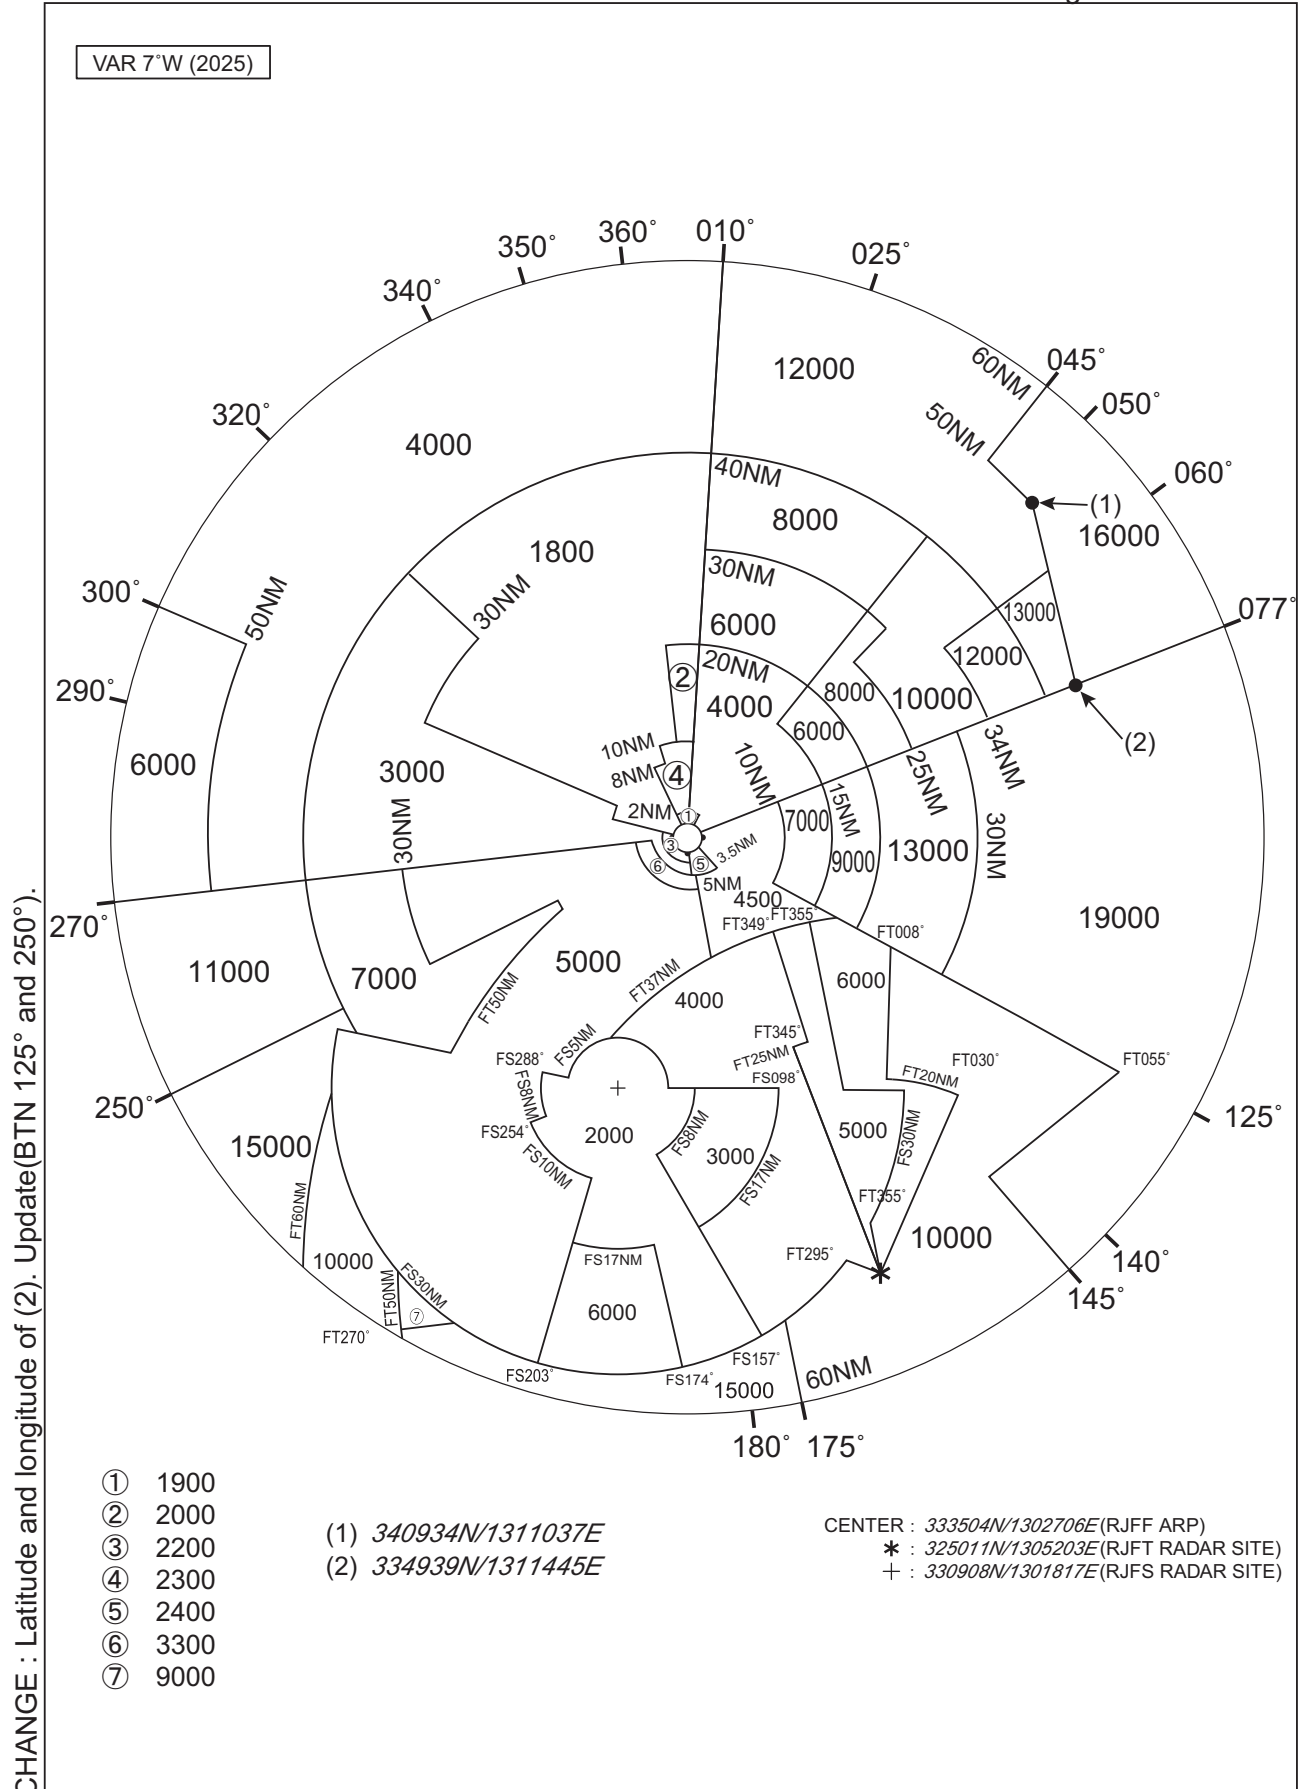

**INTENTIONALLY LEFT BLANK**