

## AD 2 AERODROMES

## RJFM AD 2.1 AERODROME LOCATION INDICATOR AND NAME

## RJFM - MIYAZAKI

## RJFM AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

|   |                                                                                                    |                                                                                                                                           |
|---|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | ARP coordinates and site at AD                                                                     | 315238N/1312655E<br>090°/1.25km from RWY 09 THR                                                                                           |
| 2 | Direction and distance from (city)                                                                 | 3.2km SSE from MIYAZAKI CITY                                                                                                              |
| 3 | Elevation/ Reference temperature                                                                   | 19ft / 31°C(2002-2006)                                                                                                                    |
| 4 | Geoid undulation at AD ELEV<br>PSN                                                                 | 92.114FT                                                                                                                                  |
| 5 | MAG VAR/ Annual change                                                                             | 7° W(2020) / 5°W                                                                                                                          |
| 6 | AD Administration, address,<br>telephone, telefax, telex, AFS,<br>e-mail and/or Web-site addresses | Miyazaki Airport Office(CAB)<br>Akae, Miyazaki-shi, Miyazaki Pref, 880-0912 JAPAN<br>TEL: 0985-51-3223 FAX: 0985-55-1239<br>AFS: RJFMYFYX |
| 7 | Types of traffic permitted<br>(IFR/VFR)                                                            | IFR/VFR                                                                                                                                   |
| 8 | Remarks                                                                                            | Nil                                                                                                                                       |

## RJFM AD 2.3 OPERATIONAL HOURS

|    |                           |                                                                                         |
|----|---------------------------|-----------------------------------------------------------------------------------------|
| 1  | AD Administration         | 2230 - 1230                                                                             |
| 2  | Customs and immigration   | Customs: 2330-0815<br>Immigration: INTL SKED FLT hours only                             |
| 3  | Health and sanitation     | Quarantine(human): 2330-0815<br><br>Quarantine(animal, plant): INTL SKED FLT hours only |
| 4  | AIS Briefing Office       | 2230 - 1230                                                                             |
| 5  | ATS Reporting Office(ARO) | Nil                                                                                     |
| 6  | MET Briefing Office       | H24 (FUKUOKA)                                                                           |
| 7  | ATS                       | 2230 - 1230                                                                             |
| 8  | Fuelling                  | 2130 - 1200                                                                             |
| 9  | Handling                  | 2130 - 1230                                                                             |
| 10 | Security                  | 2200 - 1130                                                                             |
| 11 | De-icing                  | Nil                                                                                     |
| 12 | Remarks                   | Nil                                                                                     |

**RJFM AD 2.4 HANDLING SERVICES AND FACILITIES**

|   |                                         |                                                                             |
|---|-----------------------------------------|-----------------------------------------------------------------------------|
| 1 | Cargo-handling facilities               | Except Freighter                                                            |
| 2 | Fuel/ oil types                         | Fuel grades: JET A-1, AVGAS 100<br>Oil grades: Piston:W80, W100 Turbo: MJO2 |
| 3 | Fuelling facilities/ capacity           | Fuel tank 500kl x 4(JET A-1) 100kl x 1(Octane)<br>Tanker car x 10           |
| 4 | De-icing facilities                     | Nil                                                                         |
| 5 | Hangar space for visiting aircraft      | Nil                                                                         |
| 6 | Repair facilities for visiting aircraft | Nil                                                                         |
| 7 | Remarks                                 | Nil                                                                         |

**RJFM AD 2.5 PASSENGER FACILITIES**

|   |                      |                                       |
|---|----------------------|---------------------------------------|
| 1 | Hotels               | Hotels in the city                    |
| 2 | Restaurants          | At Airport                            |
| 3 | Transportation       | Train, Buses and Taxi                 |
| 4 | Medical facilities   | Hospital is the south side of airport |
| 5 | Bank and Post Office | Only ATM at airport                   |
| 6 | Tourist Office       | Nil                                   |
| 7 | Remarks              | Nil                                   |

**RJFM AD 2.6 RESCUE AND FIRE FIGHTING SERVICES**

|   |                                             |                                                                                                                                        |
|---|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| 1 | AD category for fire fighting               | CAT 9                                                                                                                                  |
| 2 | Rescue equipment                            | Chemical fire fighting truck x 3<br>Water-supply truck<br>Lighting power supply truck<br>Emergency medical equipments conveyance truck |
| 3 | Capability for removal of disabled aircraft | Ask AD Administration                                                                                                                  |
| 4 | Remarks                                     | Nil                                                                                                                                    |

**RJFM AD 2.7 SEASONAL AVAILABILITY-CLEARING**

|   |                             |                                         |
|---|-----------------------------|-----------------------------------------|
| 1 | Types of clearing equipment | AVBL, Ask AD Administration for detail. |
| 2 | Clearance priorities        | Nil                                     |
| 3 | Remarks                     | Nil                                     |

## RJFM AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

|   |                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Apron surface and strength          | SPOT 1, 2, 3, 5, 6, 7, 8, 9 : Surface: Cement Concrete<br>Strength: PCR 925/R/B/W/T<br>SPOT 10, 11 : Surface: Cement Concrete Strength: PCR 1074/R/C/W/T<br>SPOT 12-17 : Surface: Asphalt Concrete Strength: PCR 685/F/D/X/T                                                                                                                                                                                                                                                                                                                        |
| 2 | Taxiway width, surface and strength | S1 : 26.5m Asphalt Concrete PCR 756/F/B/X/T<br>S2 : 28.5m Asphalt Concrete PCR 756/F/B/X/T<br>S3, S4, S5 : 34m Asphalt Concrete PCR 756/F/B/X/T<br>S6 : 30m Asphalt Concrete PCR 756/F/B/X/T<br>S7 : 28.5m Asphalt Concrete PCR 756/F/B/X/T<br>SP1 : 23m Asphalt Concrete PCR 756/F/B/X/T<br>SP2, SP3 : 23m Cement Concrete PCR 1074/R/C/W/T<br>SP4, SP5 : 23m Asphalt Concrete PCR 756/F/B/X/T<br>SP6 : 23m Asphalt Concrete PCR 756/F/B/X/T<br>N1 - N4 : 18m Asphalt Concrete 5,700kg/0.48MPa<br>NP1 - NP3 : 18m Asphalt Concrete 5,700kg/0.48MPa |
| 3 | ACL and elevation                   | Not Available                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 4 | VOR checkpoints                     | Not Available                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 5 | INS checkpoints                     | Spot NR<br>1: 315225.14N,1312642.38E<br>2: 315225.02N,1312640.72E<br>3: 315225.55N,1312639.35E<br>5: 315225.41N,1312637.25E<br>6: 315224.75N,1312634.45E<br>7: 315224.53N,1312632.04E<br>8: 315224.31N,1312629.39E<br>9: 315224.15N,1312626.73E<br>10: 315224.01N,1312624.07E<br>11: 315223.73N,1312621.42E                                                                                                                                                                                                                                         |
| 6 | Remarks                             | Nil                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

**RJFM AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS**

|   |                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands | Signification ACFT stand ID signs : NR6 - NR11                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 2 | RWY and TWY markings and LGT                                                                                   | <p>RWY: RWY09/27<br/>(Marking): RWY designation, RWY CL, RWY THR, RWY middle point, Aiming point, TDZ, RWY side stripe<br/>(LGT): RCLL, REDL, RTHL, RENL, WBAR</p> <p>TWY:ALL TWY<br/>(Marking):TWY CL, TWY side stripe<br/>(LGT): TWY edge LGT</p> <p>TWY:TWY S1-S5, S6, S7, SP1-SP4, SP5, SP6, SP7<br/>(LGT): TWY CL LGT</p> <p>TWY:TWY S1-S7<br/>(Marking): RWY HLDG PSN, Mandatory instruction<br/>(LGT): RWY guard LGT, Taxiing guidance sign</p> <p>TWY:TWY N1-N4<br/>(Marking): RWY HLDG PSN, Mandatory instruction<br/>(LGT): Taxiing guidance sign</p> |
| 3 | Stop bars                                                                                                      | <p>Stop bar LGT: S1-S7<br/>Stop bar LGT operations</p> <p>1) Stop bar LGT are installed at each RWY holding position associated with RWY 09/27.</p> <p>2) Stop bar LGT will be operated when the visibility or the lowest RVR of RWY 09/27 is at or less than 600m.</p> <p>3) Stop bar LGT on TWY S1, S7 are controlled individually by ATC.</p> <p>4) Stop bar LGT on TWY S2 through S6 are not controlled individually by ATC.</p> <p>5) During the period Stop bar LGT operated, TWY S2 through S6 are not available for departure aircraft.</p>             |
| 4 | Remarks                                                                                                        | <p>(Marking): Overrun area<br/>(LGT): Apron flood LGT</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

**RJFM AD 2.10 AERODROME OBSTACLES**

In Area2 See Obstacle data

In Area3 To be developed

## RJFM AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

|    |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                               |
|----|------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1  | Associated MET Office                                                  | FUKUOKA                                                                                                                                                                                                                                                                                                                                                                                                       |
| 2  | Hours of service<br>MET Office outside hours                           | H24 (FUKUOKA)                                                                                                                                                                                                                                                                                                                                                                                                 |
| 3  | Office responsible for TAF preparation<br>Periods of validity          | FUKUOKA<br>30 Hours                                                                                                                                                                                                                                                                                                                                                                                           |
| 4  | Trend forecast<br>Interval of issuance                                 | Nil                                                                                                                                                                                                                                                                                                                                                                                                           |
| 5  | Briefing/ consultation provided                                        | Briefing is available upon inquiry at FUKUOKA                                                                                                                                                                                                                                                                                                                                                                 |
| 6  | Flight documentation<br>Language(s) used                               | C<br>En                                                                                                                                                                                                                                                                                                                                                                                                       |
| 7  | Charts and other information available<br>for briefing or consultation | S <sub>6</sub> , U <sub>85</sub> , U <sub>7</sub> , U <sub>5</sub> , U <sub>3</sub> , U <sub>25</sub> , U <sub>2</sub> /Tr, P <sub>S</sub> , P <sub>5</sub> , P <sub>3</sub> , P <sub>25</sub> , P <sub>SWE</sub> , P <sub>SWF</sub> , P <sub>SWG</sub> , P <sub>SWI</sub> ,<br>P <sub>SWM</sub> , P <sub>SW</sub> (domestic), E, C, W <sub>E</sub> , W <sub>F</sub> , W <sub>G</sub> , W <sub>I</sub> , W, N |
| 8  | Supplementary equipment<br>available for providing information         | Nil                                                                                                                                                                                                                                                                                                                                                                                                           |
| 9  | ATS units provided with information                                    | TWR, APP, ATIS                                                                                                                                                                                                                                                                                                                                                                                                |
| 10 | Additional information(limitation of<br>service, etc.)                 | Nil                                                                                                                                                                                                                                                                                                                                                                                                           |

## RJFM AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

| Designations<br>RWY NR | TRUE<br>BRG | Dimensions of<br>RWY(M) | Strength(PCR) and<br>surface of RWY                              | THR coordinates<br>THR geoid undulation | THR elevation and<br>highest elevation of TDZ<br>of precision APP RWY |
|------------------------|-------------|-------------------------|------------------------------------------------------------------|-----------------------------------------|-----------------------------------------------------------------------|
| 1                      | 2           | 3                       | 4                                                                | 5                                       | 6                                                                     |
| 09                     | 085.18°     | 2500×45                 | PCR 756/F/B/X/T<br>Asphalt Concrete                              | 315234.26N<br>1312607.02E<br>92.52FT    | THR ELEV:15FT<br>TDZ ELEV:17FT                                        |
| 27                     | 265.18°     | 2500×45                 | PCR 756/F/B/X/T<br>Asphalt Concrete                              | 315241.06N<br>1312741.80E<br>91.73FT    | THR ELEV:20.7FT<br>TDZ ELEV:20.7FT                                    |
| Slope of RWY           |             | Strip<br>Dimensions(M)  | RESA (Overrun)<br>Dimensions (M)                                 |                                         | Remarks                                                               |
| 7                      |             | 10                      | 11                                                               |                                         | 14                                                                    |
| See AD CHART           |             | 2620×300                | 90×(MNM:90 MAX:291)*                                             |                                         | RWY Grooving : 2500m x 30m                                            |
|                        |             | 2620×300                | 123×(MNM:139 MAX:249)*<br>*For detail, ask airport administrator |                                         |                                                                       |

## RJFM AD 2.13 DECLARED DISTANCES

| RWY Designator | TORA<br>(m) | TODA<br>(m) | ASDA<br>(m) | LDA<br>(m) | Remarks |
|----------------|-------------|-------------|-------------|------------|---------|
| 1              | 2           | 3           | 4           | 5          | 6       |
| 09             | 2500        | 2500        | 2500        | 2500       | Nil     |
| 27             | 2500        | 2500        | 2500        | 2500       | Nil     |

## RJFM AD 2.14 APPROACH AND RUNWAY LIGHTING

| RWY<br>Designator                                                                                                                                                         | APCH<br>LGT<br>type<br>LEN<br>INTST | RTHL<br>Color<br>WBAR | PAPI<br>(VASIS)<br>Angle<br>DIST FM THR<br>MEHT | RTZL<br>LEN | RCLL<br>LEN<br>Spacing<br>Color<br>INTST          | REDL<br>LEN<br>Spacing<br>Color<br>INTST             | RENL<br>Color<br>WBAR | STWL<br>LEN<br>Color |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------|-------------------------------------------------|-------------|---------------------------------------------------|------------------------------------------------------|-----------------------|----------------------|
| 1                                                                                                                                                                         | 2                                   | 3                     | 4                                               | 5           | 6                                                 | 7                                                    | 8                     | 9                    |
| 09                                                                                                                                                                        | SALS<br>(*1)<br>420m<br>LIH         | Green<br>-            | PAPI<br>3.0° /LEFT<br>445m<br>74.5ft            | Nil         | 2500m<br>30m<br>Coded color<br>(White/Red)<br>LIH | 2500m<br>60m<br>Coded color<br>(White/Yellow)<br>LIH | Red                   | Nil(*2)              |
| 27                                                                                                                                                                        | Nil                                 | Green<br>Green        | PAPI<br>3.0° /LEFT<br>420m<br>66ft              | Nil         | 2500m<br>30m<br>Coded color<br>(White/Red)<br>LIH | 2500m<br>60m<br>Coded color<br>(White/Yellow)<br>LIH | Red                   | Nil(*2)              |
| Remarks                                                                                                                                                                   |                                     |                       |                                                 |             |                                                   |                                                      |                       |                      |
| 10                                                                                                                                                                        |                                     |                       |                                                 |             |                                                   |                                                      |                       |                      |
| SALS with APCH LGT beacon(592m and 847m FM RWY THR)(*1)<br>Overrun area edge LGT(LEN:60m Color:Red)(*2)<br>CGL for RWY 09<br>RWY THR ID LGT for RWY 27 THR (Color: White) |                                     |                       |                                                 |             |                                                   |                                                      |                       |                      |

## RJFM AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

|   |                                                          |                                                                                                              |
|---|----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| 1 | ABN/IBN location, characteristics and hours of operation | ABN: 315216N/1312617E, White/Green EV4.3sec, HO                                                              |
| 2 | LDI location and LGT<br>Anemometer location and LGT      | LDI: Nil<br>Anemometer: RWY09: 180m from RWY 09 THR, LGTD<br>RWY27: 150m from RWY 27 THR, LGTD               |
| 3 | TWY edge and center line lighting                        | TWY edge and center line lights installed, see AD2.9                                                         |
| 4 | Secondary power supply/ switch-over time                 | Within 1sec: REDL, RENL, RTHL, WBAR, RCLL, Overrun area edge LGT,<br>Stop bar LGT<br>Within 15sec: Other LGT |
| 5 | Remarks                                                  | WDI LGT                                                                                                      |

## RJFM AD 2.16 HELICOPTER LANDING AREA

|   |                                                              |                                                                                                                                                                    |
|---|--------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Coordinates TLOF or THR of FATO<br>Geoid undulation          | S3-HELIPAD: 315232.01N/1312629.52E, Nil<br>S4-HELIPAD: 315233.03N/1312645.14E, Nil                                                                                 |
| 2 | TLOF and/or FATO elevation                                   | S3-HELIPAD: 16ft<br>S4-HELIPAD: 19ft                                                                                                                               |
| 3 | TLOF and FATO area dimensions,<br>surface, strength, marking | TLOF and FATO area dimensions: S3,S4-HELIPAD: 24m×20m<br>Surface: S3,S4-HELIPAD: Asphalt Concrete<br>Strength: S3,S4-HELIPAD: 23ton<br>Marking: S3,S4-HELIPAD: TDZ |
| 4 | True BRG of FATO                                             | S3,S4-HELIPAD: 083°/263°                                                                                                                                           |
| 5 | Declared distance available                                  | Nil                                                                                                                                                                |
| 6 | APCH and FATO lighting                                       | Nil                                                                                                                                                                |
| 7 | Remarks                                                      | <ul style="list-style-type: none"> <li>MAX helicopter type: EC25</li> <li>daytime use only</li> </ul>                                                              |

## RJFM AD 2.17 ATS AIRSPACE

| Designation and lateral limits |                                                | Vertical limits<br>(ft) | Airspace<br>classification | ATS unit call<br>sign Language                          | Remarks                      |
|--------------------------------|------------------------------------------------|-------------------------|----------------------------|---------------------------------------------------------|------------------------------|
| 1                              |                                                | 2                       | 3                          | 4                                                       | 6                            |
| MIYAZAKI CTR                   | Area within a radius of 5nm<br>of MIYAZAKI ARP | 3,000 or below          | D                          | MIYAZAKI TWR<br>En                                      |                              |
| MIYAZAKI PCA                   | See attached chart                             |                         | C                          | KAGOSHIMA APP (1)<br>MIYAZAKI TWR (2)<br>En             | (1) Primary<br>(2) Secondary |
| KAGOSHIMA ACA                  | See RJFK attached chart                        |                         | E                          | KAGOSHIMA APP<br>KAGOSHIMA RADAR<br>KAGOSHIMA DEP<br>En |                              |
| KAGOSHIMA TCA                  | See RJFK attached chart                        |                         | E                          | KAGOSHIMA TCA<br>En                                     |                              |

## 宮崎特別管制区

Miyazaki Positive Control Area

| NAME           | LATERAL LIMITS                    | UPPER LIMIT<br>(AMSL)<br>LOWER LIMIT<br>(AMSL)<br>M(ft) | UNIT<br>PROVIDING<br>SERVICE                                                                     | REMARKS                                                                                                                                                                                                                                                                                                       |
|----------------|-----------------------------------|---------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1              | 2                                 | 3                                                       | 4                                                                                                | 5                                                                                                                                                                                                                                                                                                             |
| 宮崎<br>MIYAZAKI | 下記に示される区域<br>The area shown below |                                                         | Primary<br>Kagoshima APP<br>121.4<br>120.9 362.3<br><br>Secondary<br>Miyazaki TWR<br>118.3 261.2 | 当該空域を飛行しようとする航空機は、鹿児島アプロ<br>ーチ又は宮崎タワーに連絡し、コールサイン、現在位置、<br>高度及び意図を通報し指示を受けること。<br>Pilot of aircraft operating in this area shall con-<br>tact Kagoshima Approach or Miyazaki Tower for<br>ATC instructions giving informations on aircraft<br>identification, positions, altitude and pilot's inten-<br>tions. |

The diagram illustrates the Miyazaki Positive Control Area (MZE) as a rectangular region. The area is defined by the following coordinates and dimensions:

- Top-left corner: 31°56'04"N, 131°31'12"E
- Top-right corner: 31°57'06"N, 131°43'52"E
- Bottom-left corner: 31°50'04"N, 131°31'58"E
- Bottom-right corner: 31°51'06"N, 131°44'30"E

Dimensions and altitudes:

- Top horizontal dimension: 10.8NM
- Right vertical dimension: 6NM
- Bottom horizontal dimension: 9.7NM (top) and 10.7NM (bottom)
- Altitude: 2700 / 700

A dashed circle with a radius of 5NM is centered on the Miyazaki Airport (ARP), labeled 'MZE'.


## RJFM AD 2.18 ATS COMMUNICATION FACILITIES

| Service designation | Call sign                                   | Frequency                                                                        | Hours of operation | Remarks                                                    |
|---------------------|---------------------------------------------|----------------------------------------------------------------------------------|--------------------|------------------------------------------------------------|
| 1                   | 2                                           | 3                                                                                | 4                  | 5                                                          |
| APP/ASR             | Kagoshima<br>Approach or<br>Kagoshima Radar | 121.4MHz(1)<br>120.9MHz<br>362.3MHz(1)<br>261.2MHz<br>121.5MHz(E)<br>243.0MHz(E) | 2230 - 1230        | (1)Primary<br><br>APP Service provided by<br>KAGOSHIMA APP |
| DEP                 | Kagoshima<br>Departure                      | 120.1MHz(1)<br>121.4MHz<br>362.3MHz(1)<br>261.2MHz<br>121.5MHz(E)<br>243.0MHz(E) | 2230 - 1230        |                                                            |
| TWR                 | Miyazaki Tower                              | 118.3MHz(1)<br>126.2MHz<br>123.6MHz<br>261.2MHz<br>121.5MHz(E)<br>243.0MHz(E)    | 2230 - 1230        |                                                            |
| TCA                 | Kagoshima TCA                               | 121.25MHz<br>256.1MHz                                                            | 2330 - 1100        |                                                            |
| GND                 | Miyazaki<br>Ground                          | 121.9MHz(1)                                                                      | 2230 - 1230        |                                                            |
| ATIS                | Miyazaki Airport                            | 126.8MHz                                                                         | 2230 - 1230        |                                                            |



## RJFM AD 2.19 RADIO NAVIGATION AND LANDING AIDS

| Type of aid<br>(VOR<br>declination) | ID  | Frequency         | Hours of<br>operation | Position of<br>transmitting antenna<br>coordinates | Elevation of<br>DME<br>transmitting<br>antenna | Remarks                                                                                                                           |
|-------------------------------------|-----|-------------------|-----------------------|----------------------------------------------------|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| 1                                   | 2   | 3                 | 4                     | 5                                                  | 6                                              | 7                                                                                                                                 |
| VOR<br>(6°W/2013)                   | MZE | 112.4MHz          | H24                   | 315243.42N/<br>1312614.88E                         |                                                | Unusable :<br>200°-210° beyond 30nm BLW 7000ft.<br>210°-230° beyond 35nm BLW 7000ft.<br>230°-250° beyond 25nm BLW 7000ft.         |
| DME                                 | MZE | 1158MHz<br>CH-71X | H24                   | 315243.42N/<br>1312614.88E                         | 54ft                                           | Unusable:<br>016° between 3nm and 9nm at 6000ft.<br>033° between 7nm and 10nm at 9000ft.<br>339° between 2nm and 11nm at 10000ft. |
| ILS-LOC 27                          | IMZ | 108.9MHz          | 2230 - 1230           | 315233.66N/<br>1312558.68E                         |                                                | LOC:220m(722ft) away FM<br>RWY 09 THR.BRG(MAG)272°                                                                                |
| ILS-GP 27                           | -   | 329.3MHz          | 2230 - 1230           | 315244.23N/<br>1312729.39E                         |                                                | GP:316m(1037ft) inside FM RWY 27 THR.<br>125m(410ft) N of RCL. Angle 3.0° HGT of<br>ILS Ref 16.5m(54ft)                           |
| ILS-DME 27                          | IMZ | 987MHz            | 2230 - 1230           | 315244.44N/<br>1312729.01E                         | 31ft                                           | DME:320m(1050ft) inside FM RWY 27<br>THR.135m(443ft) N of RCL.                                                                    |
| MSAS                                |     | 1575.42MHz        | H24                   |                                                    |                                                | Transmitting antennas are satellite based                                                                                         |

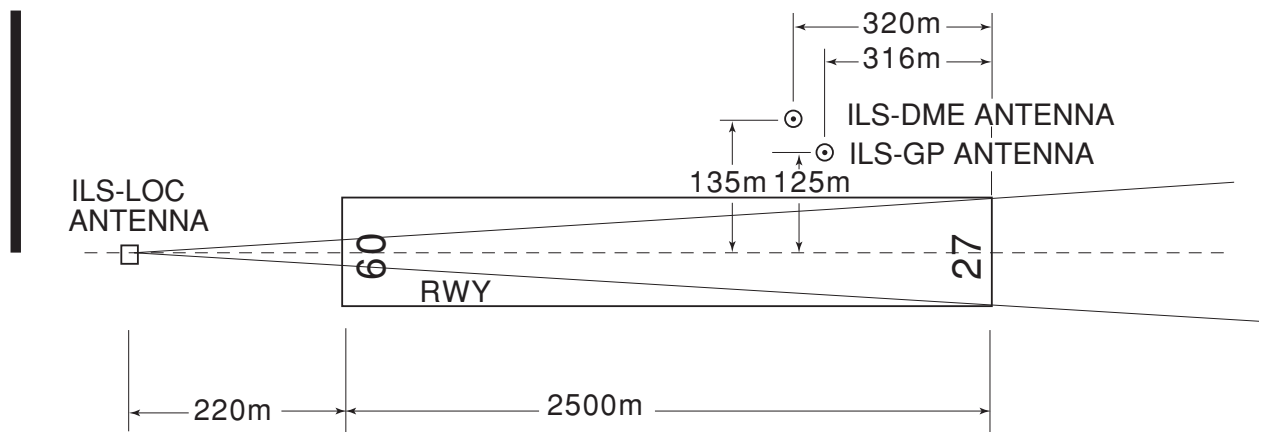

REMARKS: 1. LOC beam BRG(MAG) 272°  
 2. HGT of ILS REF datum 16.5m(54ft)  
 3. GP Angle 3.0°  
 4. ELEV of ILS-DME 9.4m

## RJFM AD 2.20 LOCAL TRAFFIC REGULATIONS

## 1. Airport regulations

**Intersection departure**

Separation for departure as in AD 1.1.6.3.2.2(2) will not be applied to aircraft departing from TWY S2 or N1.  
Aircraft requiring separation in AD 1.1.6.3.2.2(2) shall advise MIYAZAKI GROUND/TOWER accordingly.


## 2. Taxiing to and from stands

他の航空機又は障害物とのクリアランスの確保、及びジェットブラストによる影響の回避のため、スポット 6 とスポット 10 における自走アウトは、次の方式に従うこと。ただし、別途空港管理者の承認を受けた場合を除く。

- a) 自走アウトは、導入線直線部からの水平距離がスポット 6 にあっては 25.5m、スポット 10 にあっては 30.5m の区域内での旋回が可能な航空機に限ること。
- b) スポットにおける地上移動は、ブラストの影響が出ないことを確認の上行うこと。
- c) 自走アウトの旋回は、旋回線の起点までに開始すること。
- d) 旋回完了後は導入線に会合し、導入線を導出線として利用すること。

In order to keep the clearance with other aircraft or obstacles and avoid jet blast damage, operators shall comply with the following power-out procedure on spot NR6 and NR10, although the case that approved by AD administration is excluded.

- a) Only the aircraft which is available to turn within the area whose horizontal distance from the straight part of the lead-in line is 25.5 meters on spot NR6 and 30.5 meters on spot NR10 is permitted to use this power-out procedure.
- b) Operators must confirm jet blast cause no damage when maneuvering on aircraft stands.
- c) Commence turning of the power-out procedure at or before the starting point of the turning line.
- d) After completing the turn, intercept the lead-in line and use the line as the lead-out line.

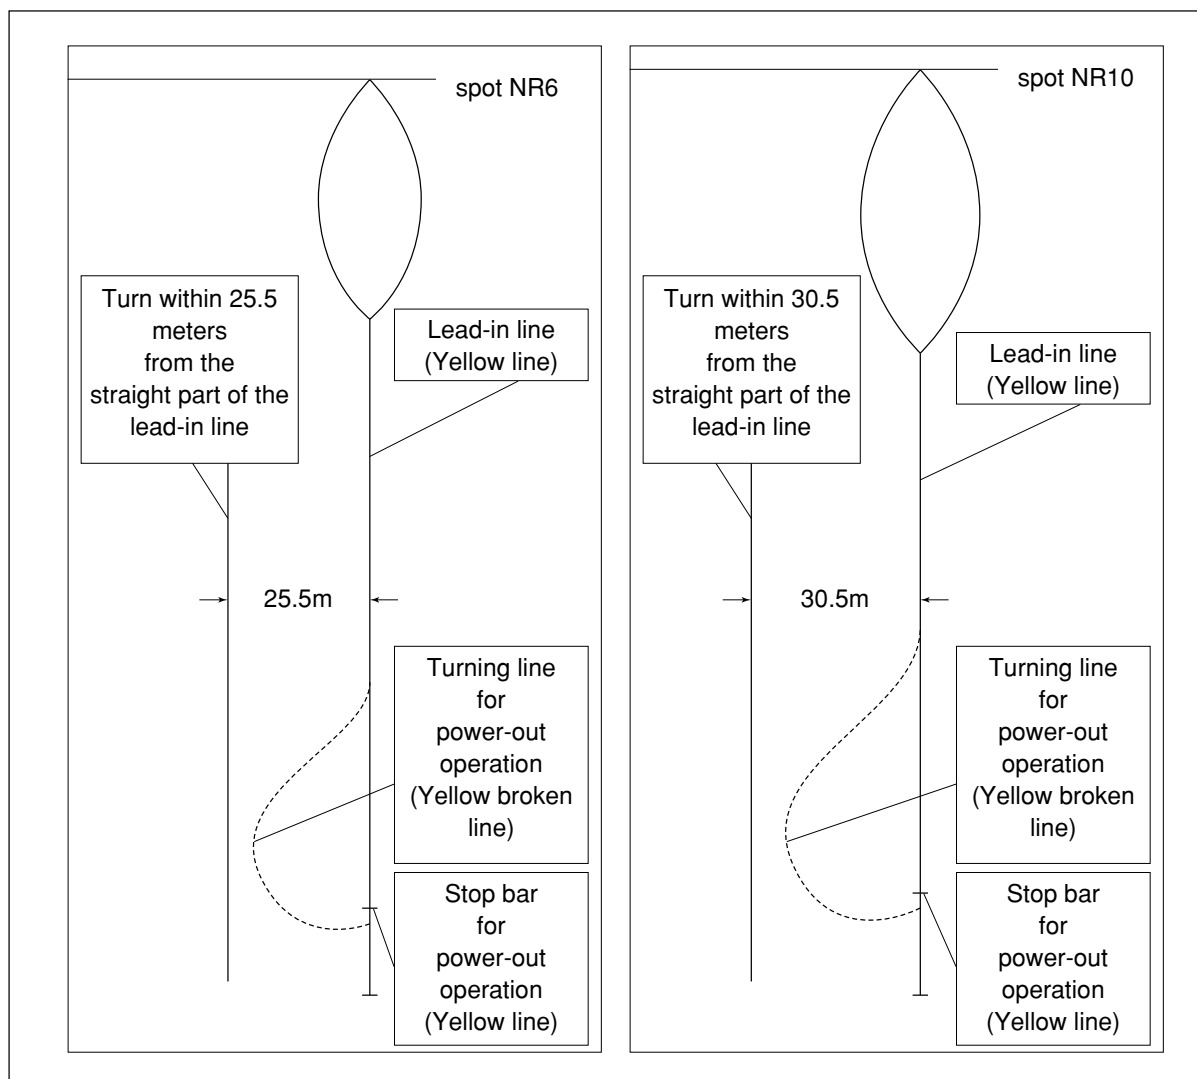

3. Parking area for small aircraft(General aviation)

Nil

4. Parking area for helicopters

Nil

5. Apron - taxiing during winter conditions

Nil

6. Taxiing - limitations

Nil

7. School and training flights - technical test flights - use of runways

Nil

8. Helicopter traffic - limitation

Nil

9. Removal of disabled aircraft from runways

Nil

**RJFM AD 2.21 NOISE ABATEMENT PROCEDURES**

**1. 騒音軽減運航方式**

すべてのジェット機に対して、空港周辺における航空機騒音軽減のため、運航の安全に支障のない範囲で、以下の方式が適用される。ただし、これらの方式によることができない航空機は実効的にこれらと同等と認められる代替方式を実施するものとする。

- (1) 離陸について（滑走路 27）  
急上昇方式
- (2) 着陸について（滑走路 09）  
ディレイド・フラップ進入方式及び低フラップ  
角着陸方式
- (3) リバース・スラストについて  
なし
- 2. 優先滑走路方式  
なし
- 3. 優先飛行経路  
なし

**1.Noise Abatement Operating Procedures**

For all jet aircraft, in order to reduce aircraft noise in the vicinity of airport, the following procedures shall be applied unless compliance of the procedures adversely affects the safety of aircraft operations. In case that the aircraft is unable to take these procedures, pilots should execute alternative procedures which are considered to be practically equivalent.

- 1) For take-off from RWY27  
Steepest Climb Procedure
- 2) For landing to RWY09  
Delayed Flap Approach Procedure and Reduced Flap  
Setting Procedure
- 3) Reverse Thrust  
Nil

**2. Preferential Runways Procedures**

Nil

**3. Noise Preferential Routes**

Nil

**RJFM AD 2.22 FLIGHT PROCEDURES****1. TAKE OFF MINIMA**

|                                                    | RWY | ACFT<br>CAT | REDL & RCLL     |      | REDL or RCLL<br>or RCL Marking |      | NIL<br>(DAYTIME ONLY) |      |
|----------------------------------------------------|-----|-------------|-----------------|------|--------------------------------|------|-----------------------|------|
|                                                    |     |             | RVR             | VIS  | RVR                            | VIS  | RVR                   | VIS  |
| Multi-Engine<br>ACFT with<br>TKOF ALTN<br>AP FILED | 09  | A,B,C,D     | -               | 400m | -                              | 400m | -                     | 500m |
|                                                    | 27  | A,B,C,D     | 400m            | 400m | 400m                           | 400m | -                     | 500m |
| OTHER                                              | 09  | A,B,C,D     | AVBL LDG MINIMA |      |                                |      |                       |      |
|                                                    | 27  | A,B,C,D     |                 |      |                                |      |                       |      |

**2. Lost Communication Procedures for Arrival Aircraft under Radar Navigational Guidance.**

If radio communications with Kagoshima Approach/Radar are lost for 30 seconds, squawk Mode A/3 Code 7600 and;

- I
  - 1) Contact Miyazaki Tower.
  - 2) If unable, proceed in accordance with Visual Flight Rules.
  - 3) If unable, proceed to Miyazaki VOR at last assigned altitude or 4500 feet whichever is higher and execute Instrument Approach.
- II Procedures other than above will be issued when situation required.

**RJFM AD 2.23 ADDITIONAL INFORMATION**


Nil

**RJFM AD 2.24 CHARTS RELATED TO AN AERODROME**

Aerodrome/Heliport Chart  
 Aerodrome Obstacle Chart type A (RWY 09/27)  
 Aerodrome Obstacle Chart type B  
 Standard Departure Chart-Instrument (SIIBA, LALAG)  
 Standard Departure Chart-Instrument (MIYAZAKI-REVERSAL, JACKY)  
 Standard Departure Chart-Instrument (KIZAK-RNAV)  
 Standard Departure Chart-Instrument (KIRISHIMA-RNAV)  
 Standard Arrival Chart-Instrument (OTOHIME)  
 Standard Arrival Chart-Instrument (RYUGU-RNAV)  
 Standard Arrival Chart-Instrument (MELAR-RNAV)  
 Standard Arrival Chart-Instrument (KARAH-RNAV)  
 Instrument Approach Chart (ILS Z or LOC Z RWY27)  
 Instrument Approach Chart (ILS Y or LOC Y RWY27)  
 Instrument Approach Chart (VOR RWY27)  
 Instrument Approach Chart (RNP Z RWY09(AR))  
 Instrument Approach Chart (RNP Y RWY09(AR))  
 Instrument Approach Chart (RNP X RWY09(AR))  
 Instrument Approach Chart (RNP RWY27(AR))  
 Other Chart (Visual REP)  
 Other Chart (LDG CHART)  
 Other Chart (MVA CHART)

## RJFM / MIYAZAKI

## AD CHART

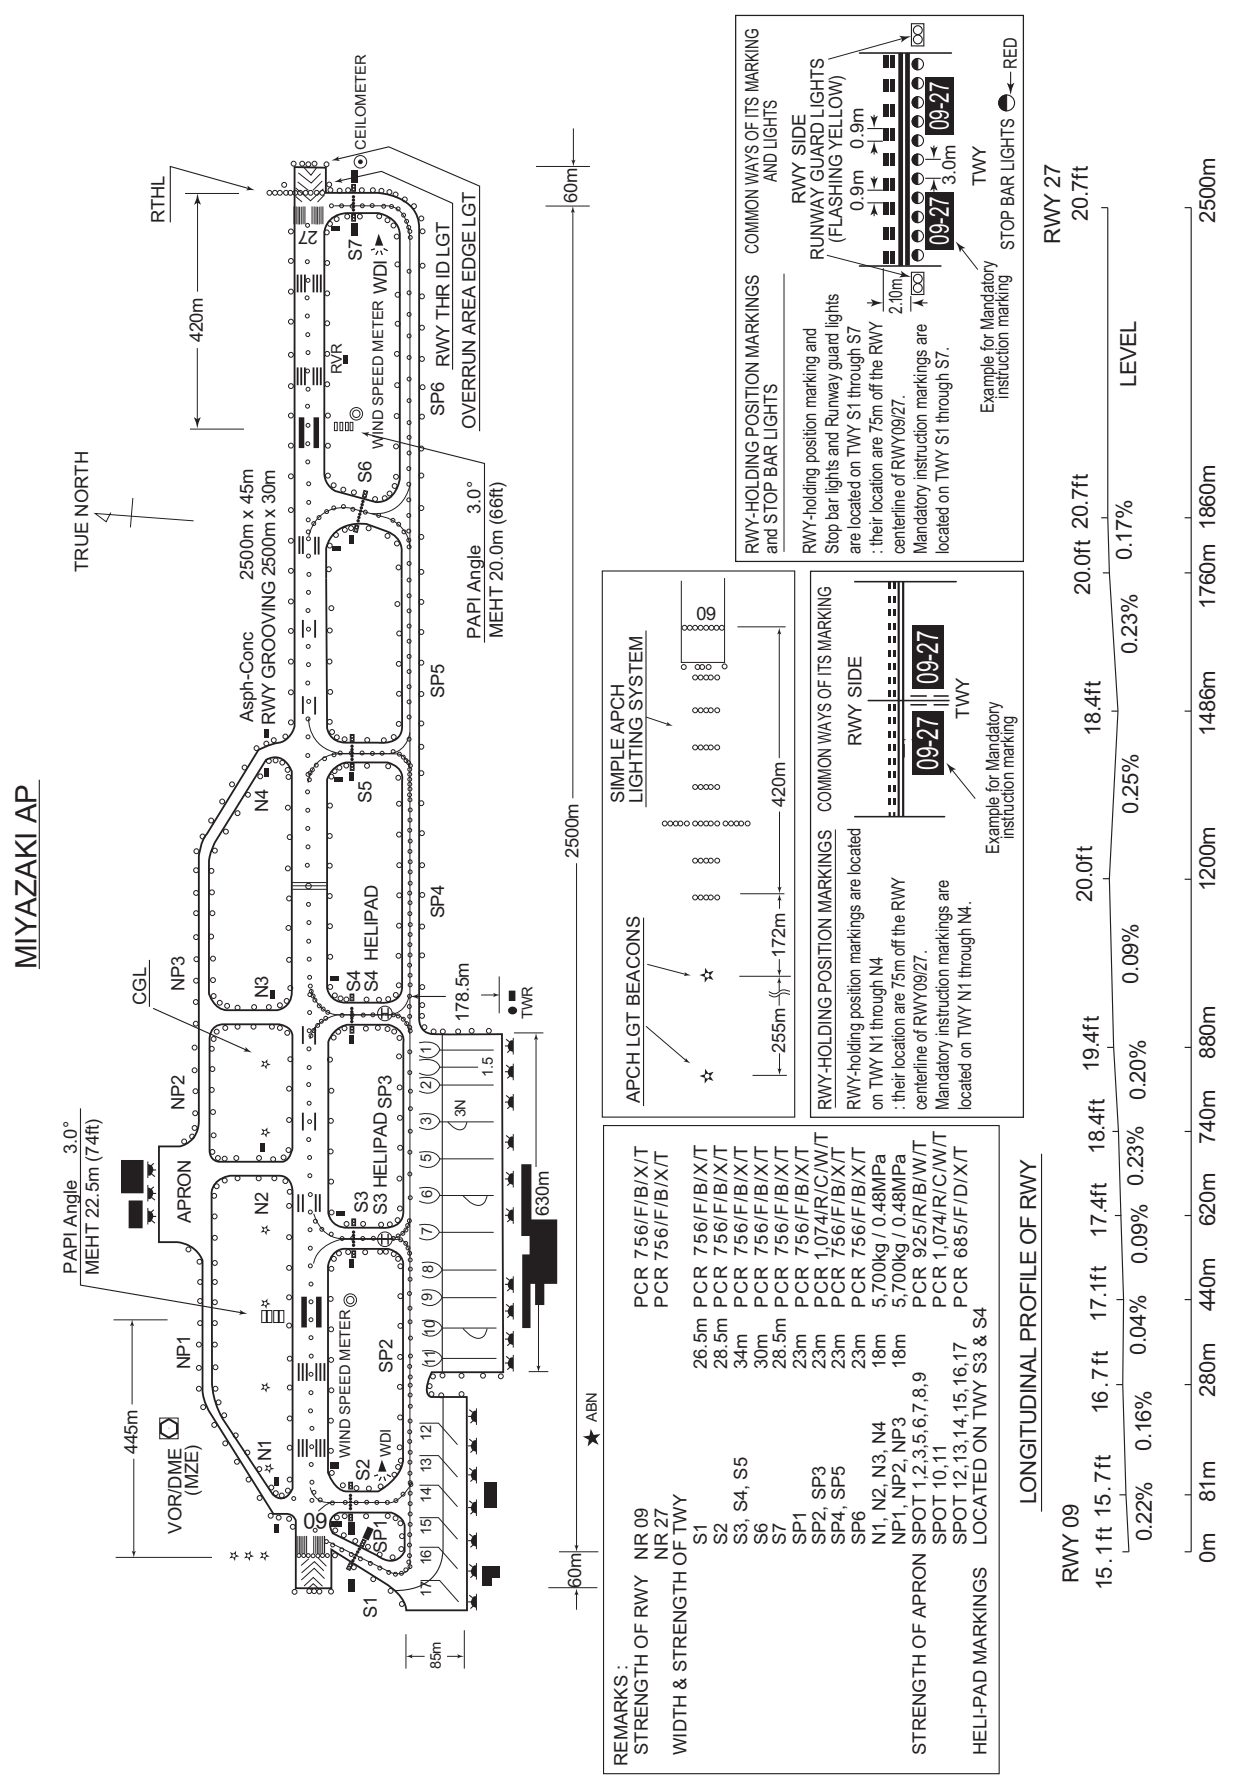


**INTENTIONALLY LEFT BLANK**

DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC  
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO  
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 7°W - AUG 2025

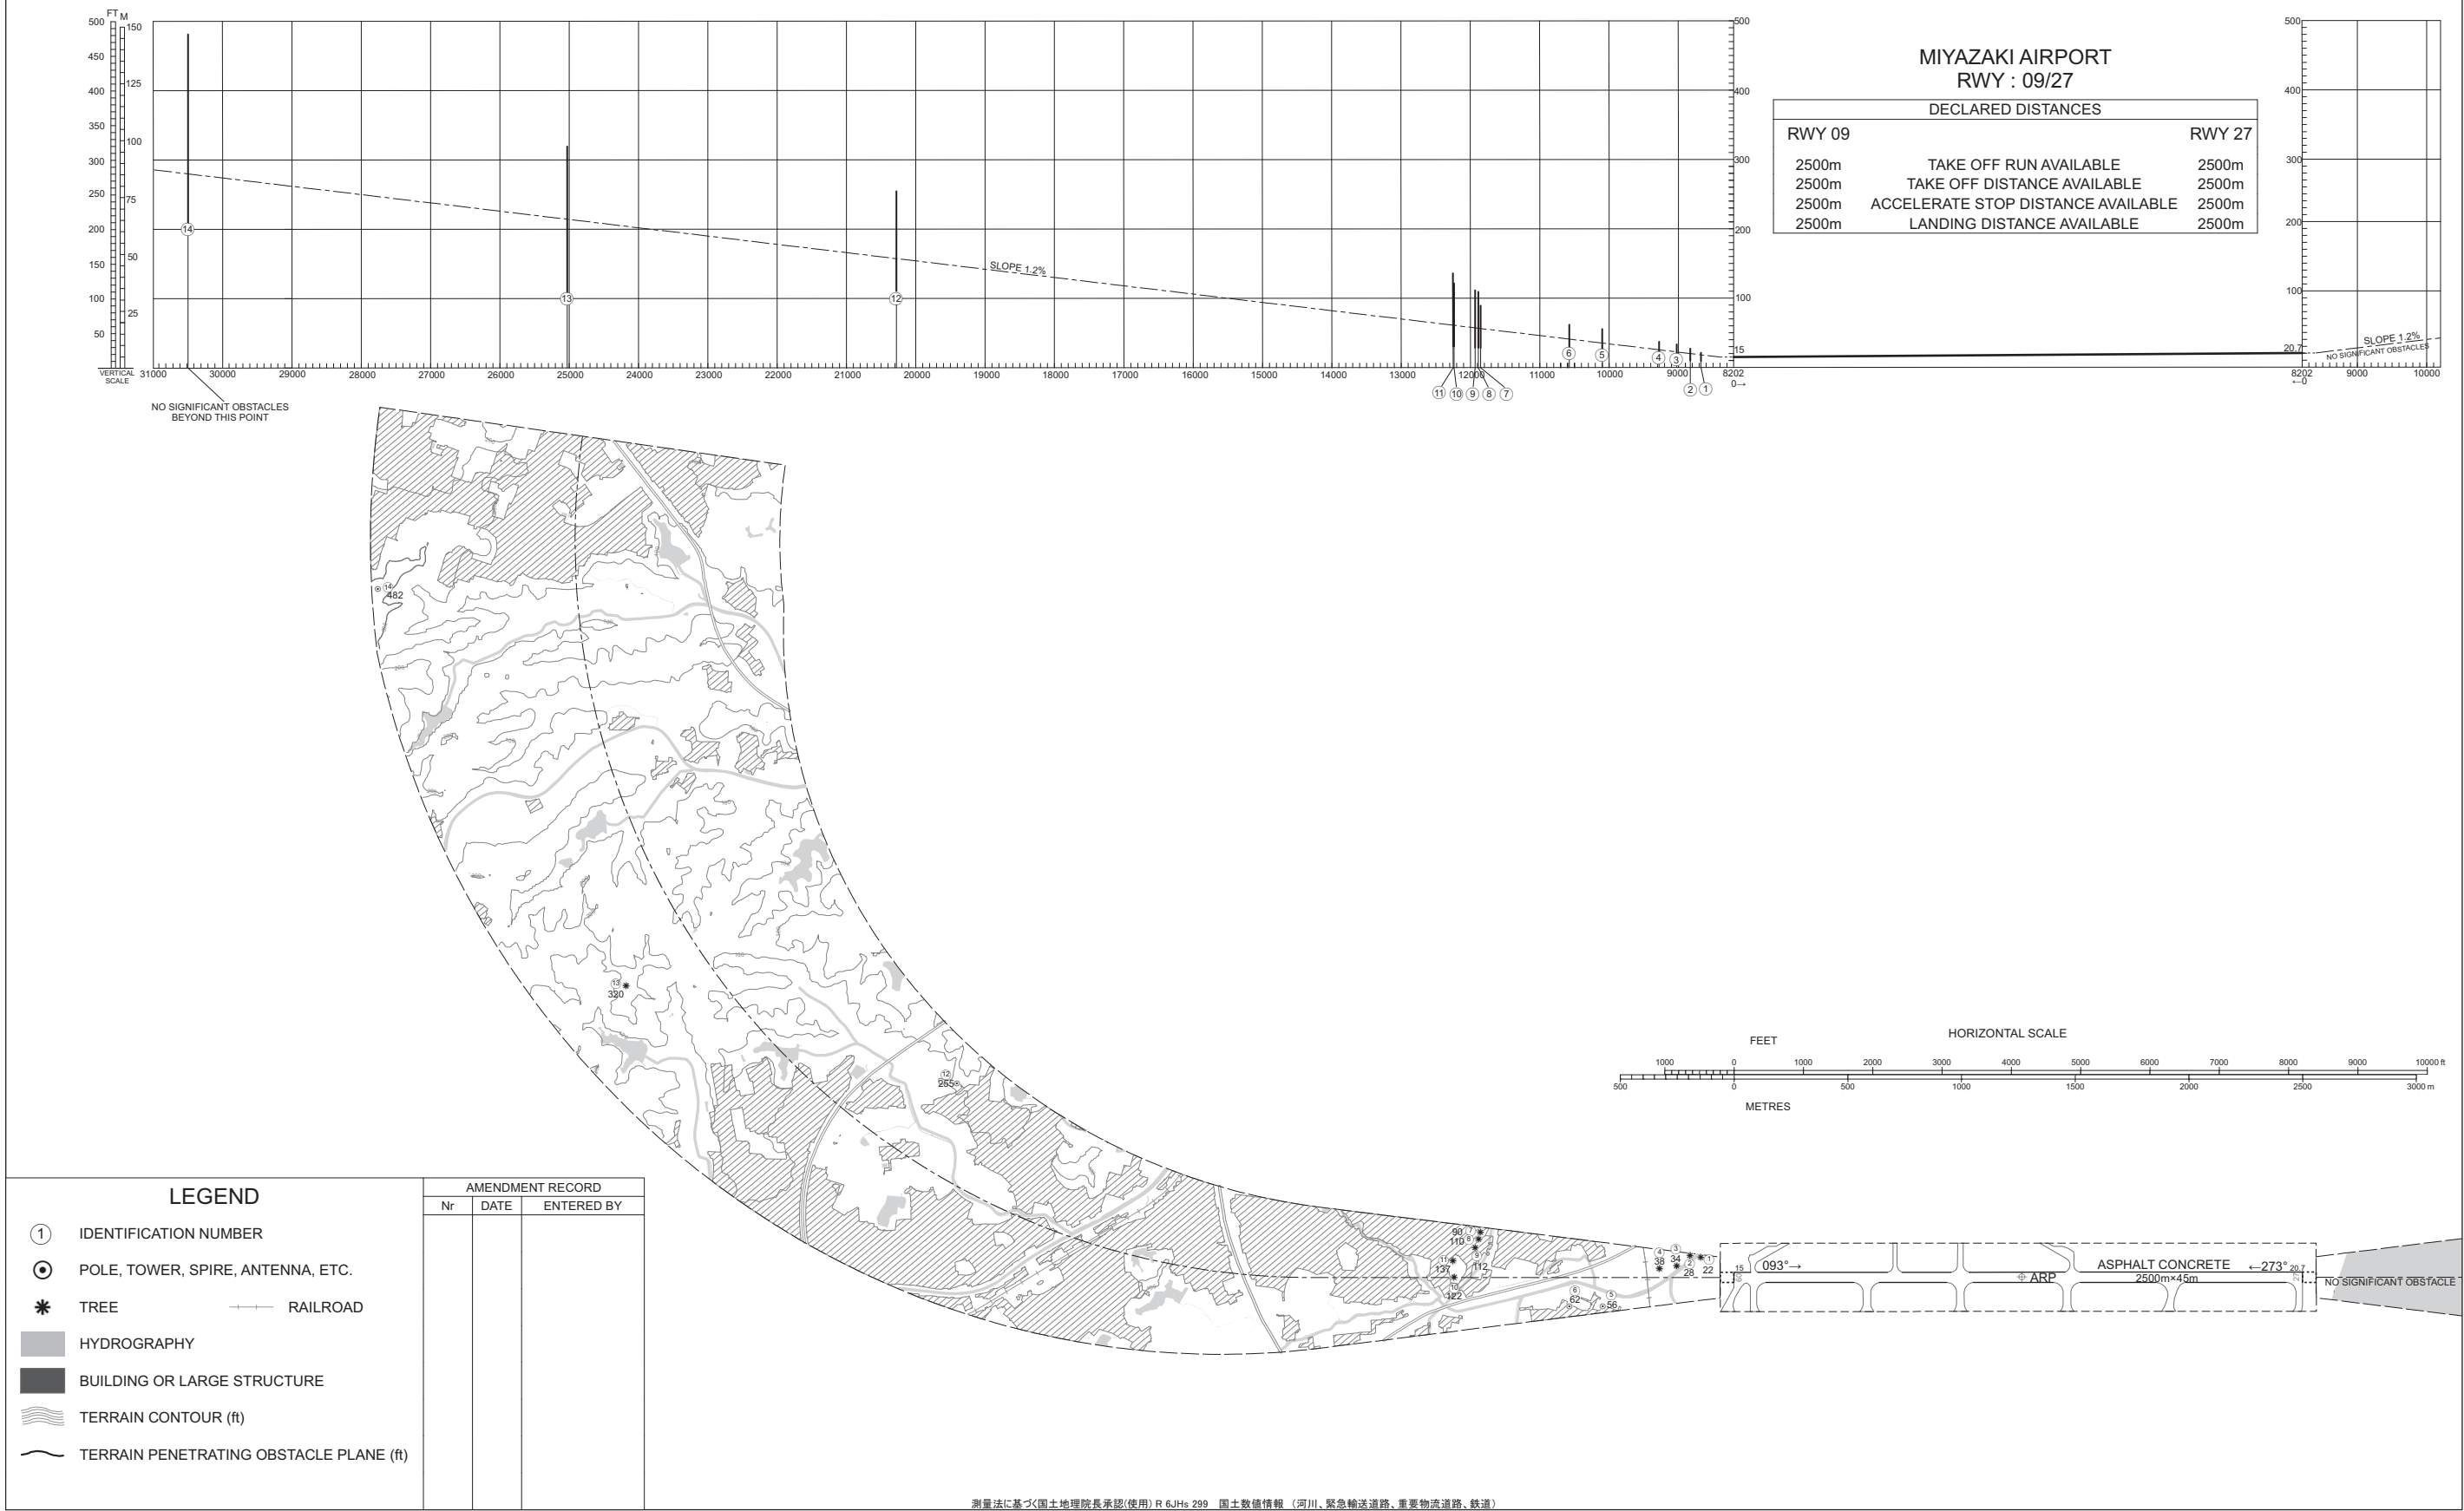


CHANGE: Update.



AERODROME OBSTACLE CHART-ICAO  
TYPE B

DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC  
Transverse Mercator Projection

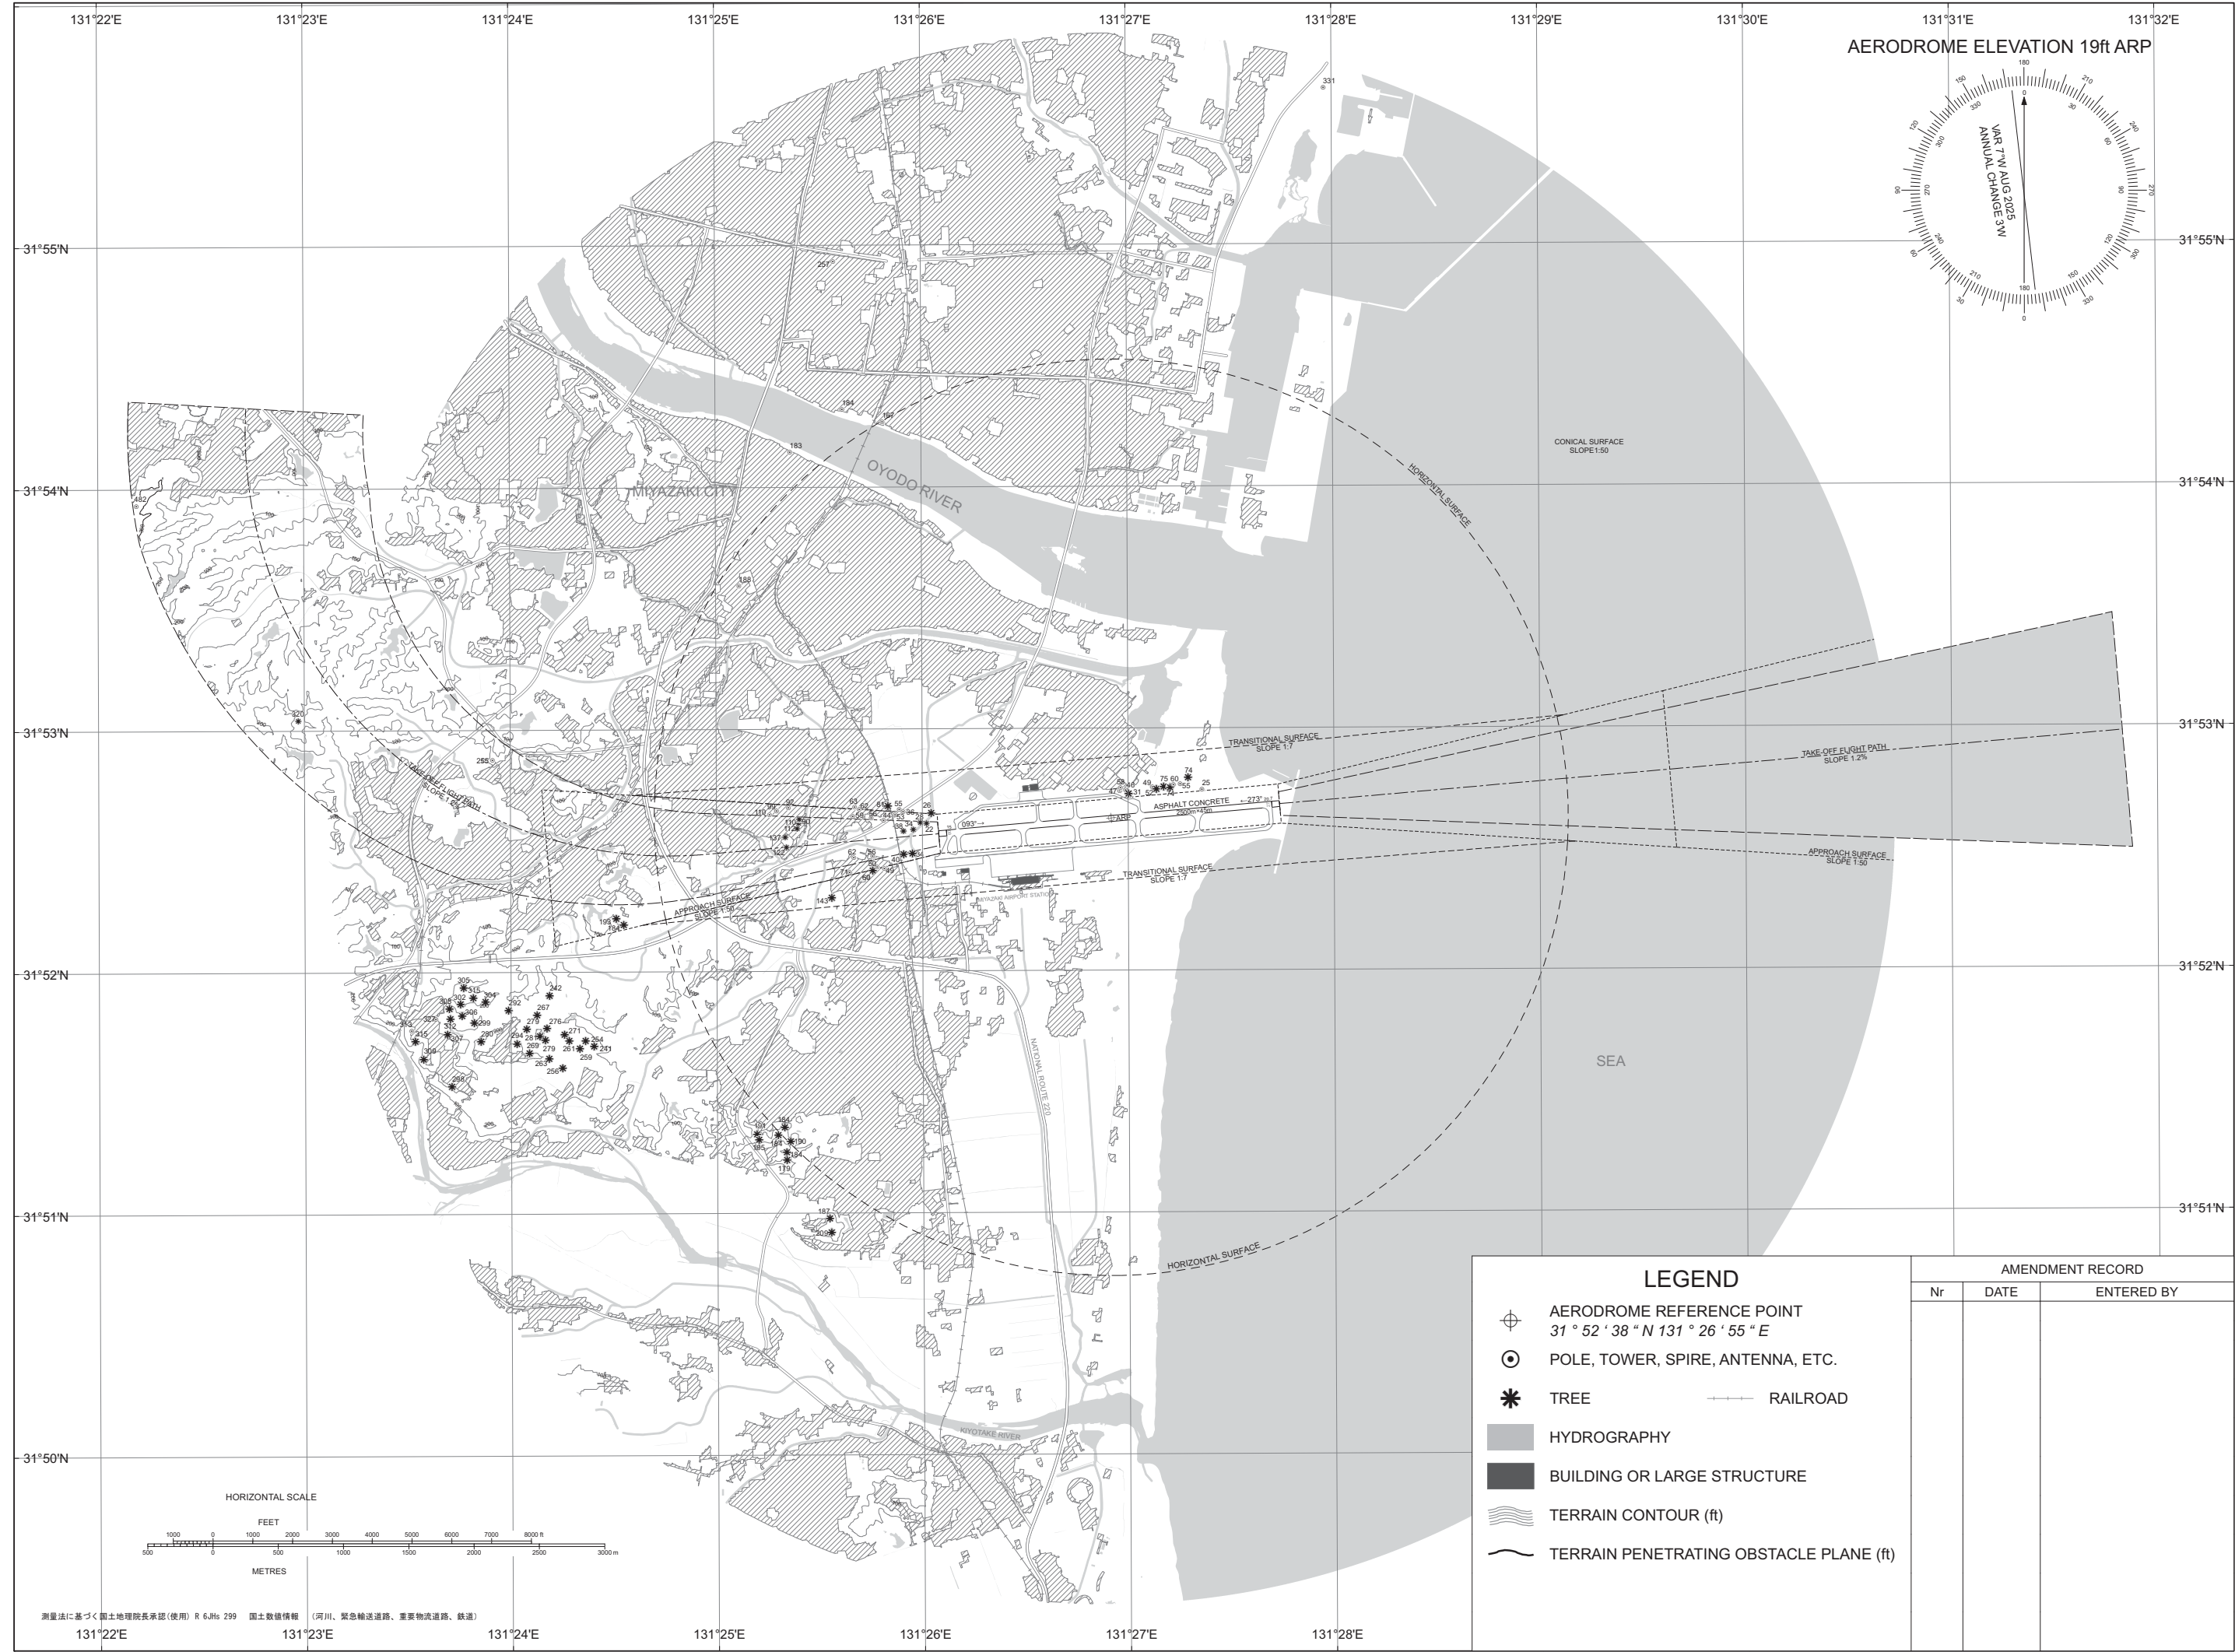

CHANGE: Update.



STANDARD DEPARTURE CHART - INSTRUMENT

RJFM / MIYAZAKI

SID

SIIBA ONE DEPARTURE

RWY27 : Climb via MZE R275 to 6.0DME, turn right HDG060° to intercept and proceed via MZE R015 to SIIBA.

Cross MZE R345 at or above 6000FT.


RWY09 : Climb via MZE R091 to 8.0DME, turn left HDG330° to intercept and proceed via MZE R015 to SIIBA.

Cross MZE R040 at or above 6000FT.

Note RWY27 : 5.0% climb gradient required up to 5000FT.

OBST ALT 1637FT located at 8.3NM 285° FM end of RWY27.

CHANGE : Description of PROC name.

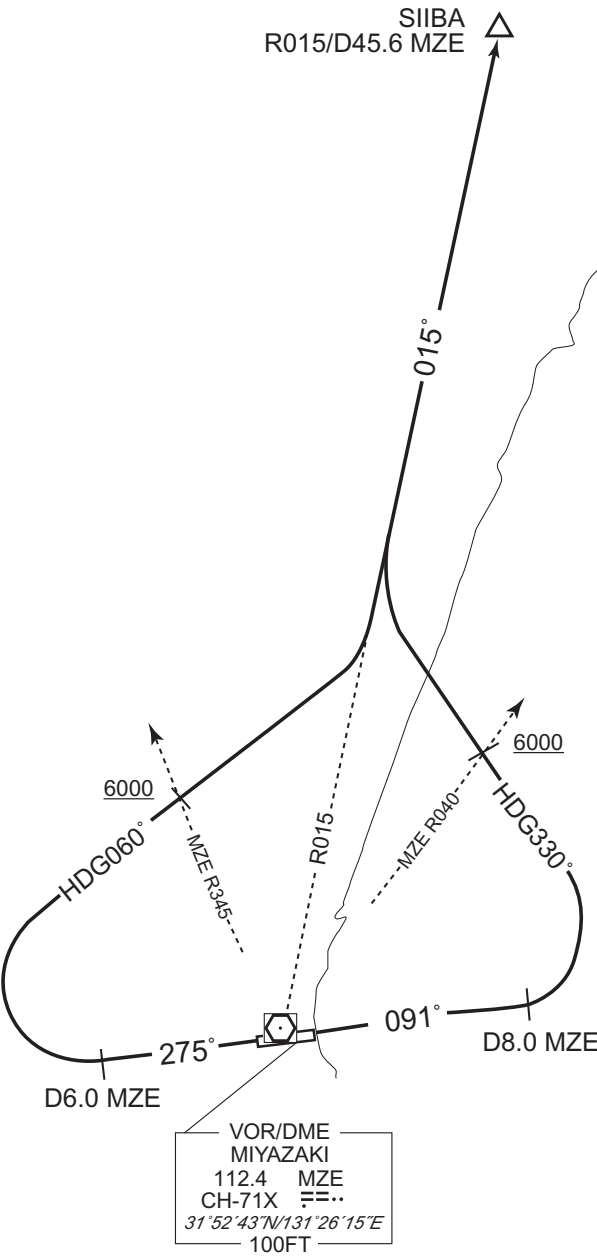

## STANDARD DEPARTURE CHART - INSTRUMENT

RJFM / MIYAZAKI

SID

LALAG ONE DEPARTURE

RWY27 : Climb via MZE R275 to 10.0DME, turn right HDG350°...

RWY09 : Climb RWY HDG to 1000FT, turn left HDG275°...


...to intercept and proceed via MZE R305 to LALAG via TORIK.

Cross TORIK at assigned altitude.

Note RWY27 : 5.0% climb gradient required up to 5000FT.

OBST ALT 152FT located at 0.7NM 276° FM end of RWY27.

RWY09 : 5.0% climb gradient required up to 1000FT.

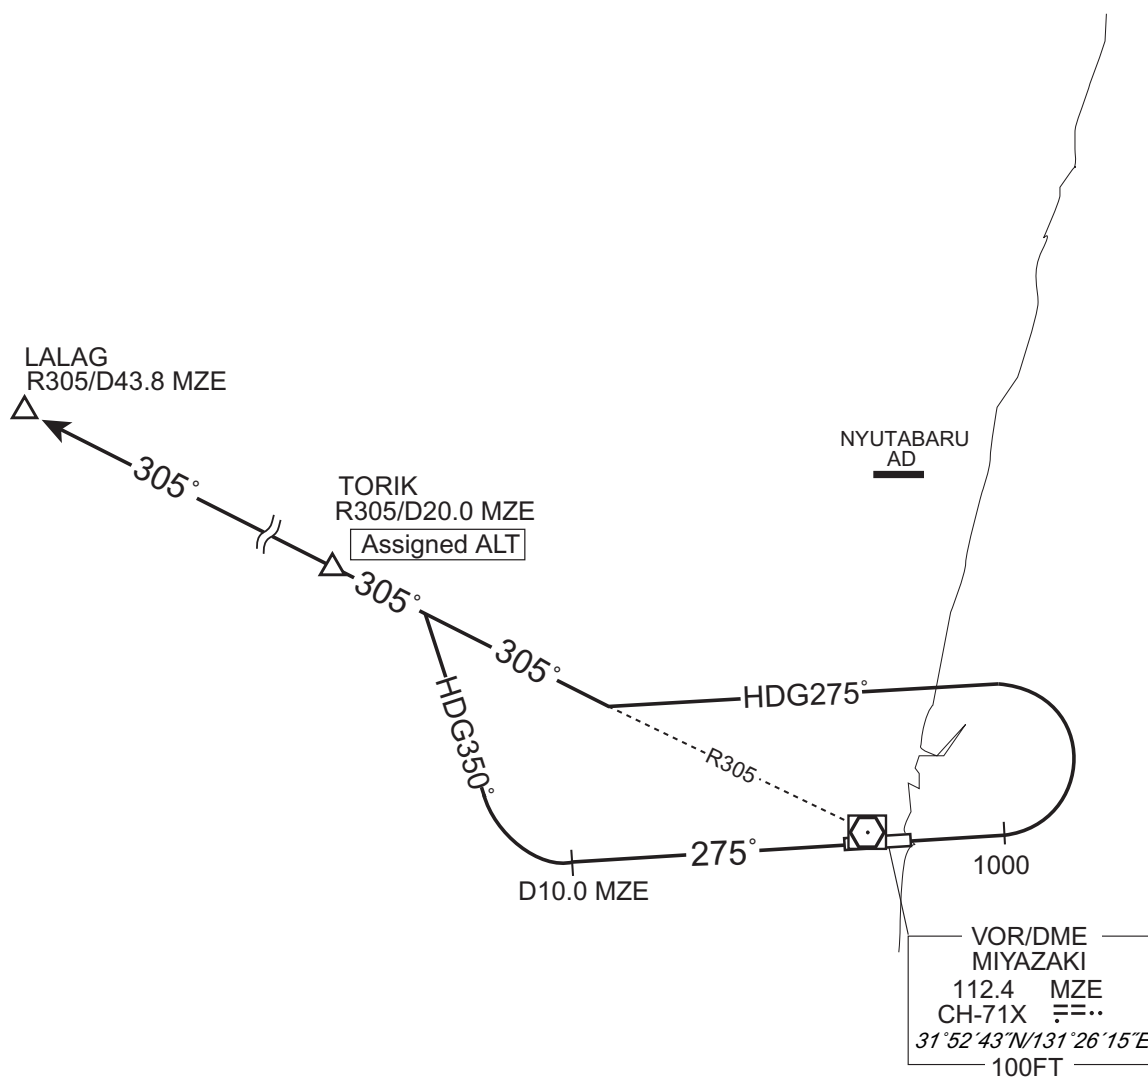

CHANGE : New PROC.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFM / MIYAZAKI

SID

MIYAZAKI REVERSAL ONE DEPARTURE

RWY 27 : Climb via MZE R275 to 10.0DME, turn right,...

RWY 09 : Turn right, climb via MZE R138 to 12.0DME, turn left,...  
...direct to MZE VOR/DME.

Note RWY27 : 5.0% climb gradient required up to 5000FT.

OBST ALT 152FT located at 0.7NM 276° FM end of RWY27.

JACKY ONE DEPARTURE


RWY 27 : Climb RWY HDG to MZE 2.0DME, turn right, direct to MZE VOR/DME,...

RWY 09 : Turn right, climb...  
...via MZE R138 to JACKY.

Note RWY27 : 5.0% climb gradient required up to 500FT.

OBST ALT 395FT located at 3.1NM 281° FM end of RWY27.

CHANGE : OBST(MIYAZAKI REVERSAL ONE DEPARTURE).

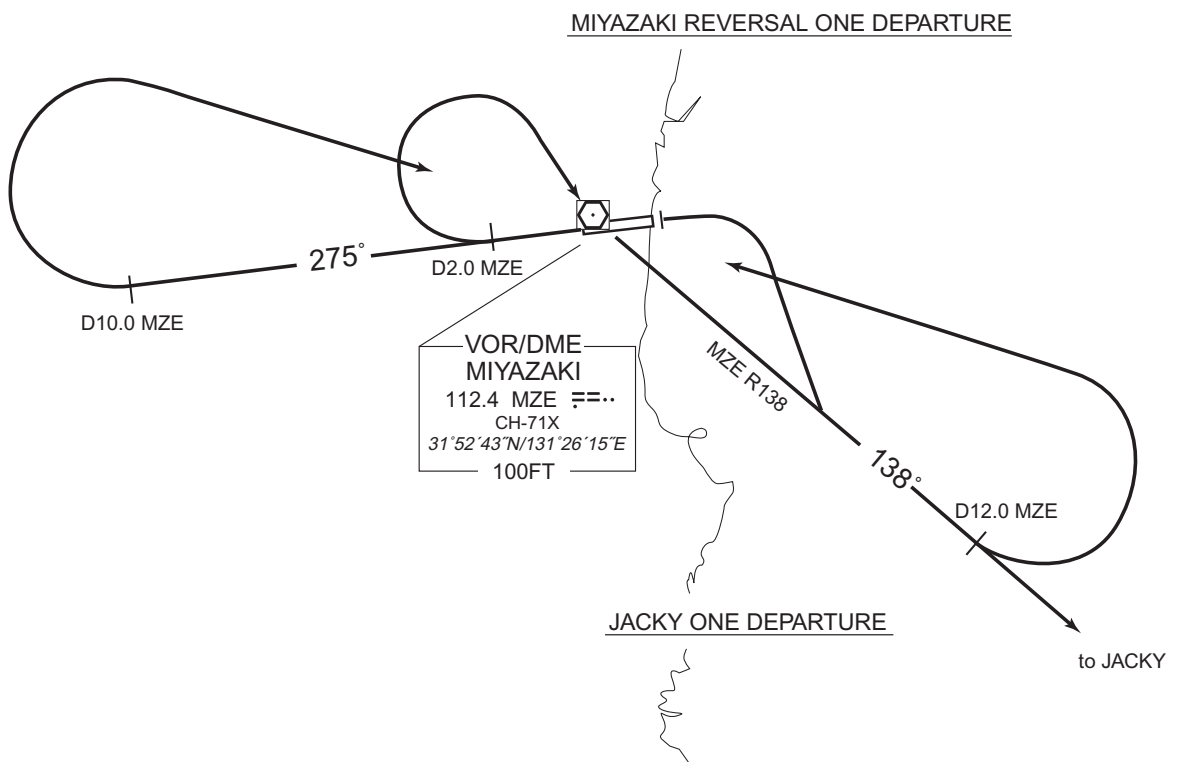


STANDARD DEPARTURE CHART - INSTRUMENT

RJFM / MIYAZAKI

RNAV SID and TRANSITION

| KIZAK THREE DEPARTURE<br>MADOG TRANSITION                                                                                                                                                                       |                       | RNAV1                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------------|
| Note 1 ) DME/DME/IRU or GNSS required.<br>※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.<br>2 ) RADAR service required. | Critical DME          | RWY27<br>TGE : 4.0NM to KIZAK - KIZAK                        |
|                                                                                                                                                                                                                 | DME GAP               | RWY09 : DER - 4.0NM to KIZAK<br>RWY27 : DER - 4.0NM to KIZAK |
|                                                                                                                                                                                                                 | Inappropriate Navaids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1            |

VAR 8° W

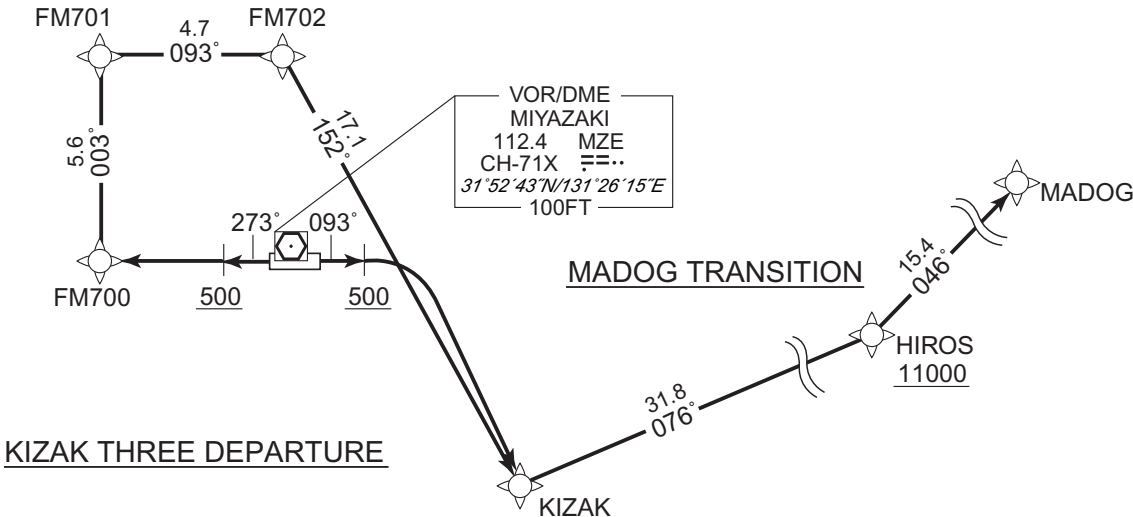

KIZAK THREE DEPARTURE

RWY09 : Climb on HDG093° at or above 500FT, direct to KIZAK.  
RWY27 : Climb on HDG273° at or above 500FT, direct to FM700, to FM701, to FM702, to KIZAK.  
Note RWY09: 5.0% climb gradient required up to 500FT.  
RWY27: 7.0% climb gradient required up to 900FT.

MADOG TRANSITION

From KIZAK, to HIROS at or above 11000FT, to MADOG.

CHANGE : PROC renamed. VAR. PROC course.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFM / MIYAZAKI

RNAV SID and TRANSITION

KIZAK THREE DEPARTURE

RWY09

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 093<br>(085.2) | -7.5               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | KIZAK               | —        | —              | -7.5               | —             | R              | —             | —            | —              | RNAV1                    |

RWY27

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 273<br>(265.2) | -7.5               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | FM700               | —        | —              | -7.5               | —             | —              | —             | —            | —              | RNAV1                    |
| 003           | TF              | FM701               | —        | 003<br>(355.2) | -7.5               | 5.6           | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | FM702               | —        | 093<br>(085.2) | -7.5               | 4.7           | —              | —             | —            | —              | RNAV1                    |
| 005           | TF              | KIZAK               | —        | 152<br>(144.5) | -7.5               | 17.1          | —              | —             | —            | —              | RNAV1                    |

MADOG TRANSITION


| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | KIZAK               | —        | —              | -7.5               | —             | —              | —             | —            | —              | RNAV1                    |
| 002           | TF              | HIROS               | —        | 076<br>(069.0) | -7.5               | 31.8          | —              | +11000        | —            | —              | RNAV1                    |
| 003           | TF              | MADOG               | —        | 046<br>(038.4) | -7.5               | 15.4          | —              | —             | —            | —              | RNAV1                    |

Waypoint Coordinates

| Waypoint Identifier | Coordinates            |
|---------------------|------------------------|
| FM700               | 315212.0N / 1312058.4E |
| FM701               | 315749.2N / 1312024.8E |
| FM702               | 315813.1N / 1312556.5E |
| KIZAK               | 314410.0N / 1313731.3E |
| HIROS               | 315530.2N / 1321230.5E |
| MADOG               | 320730.7N / 1322346.5E |

CHANGE : PROC renamed. PROC course. VAR. Waypoint Coordinates added.

STANDARD DEPARTURE CHART - INSTRUMENT

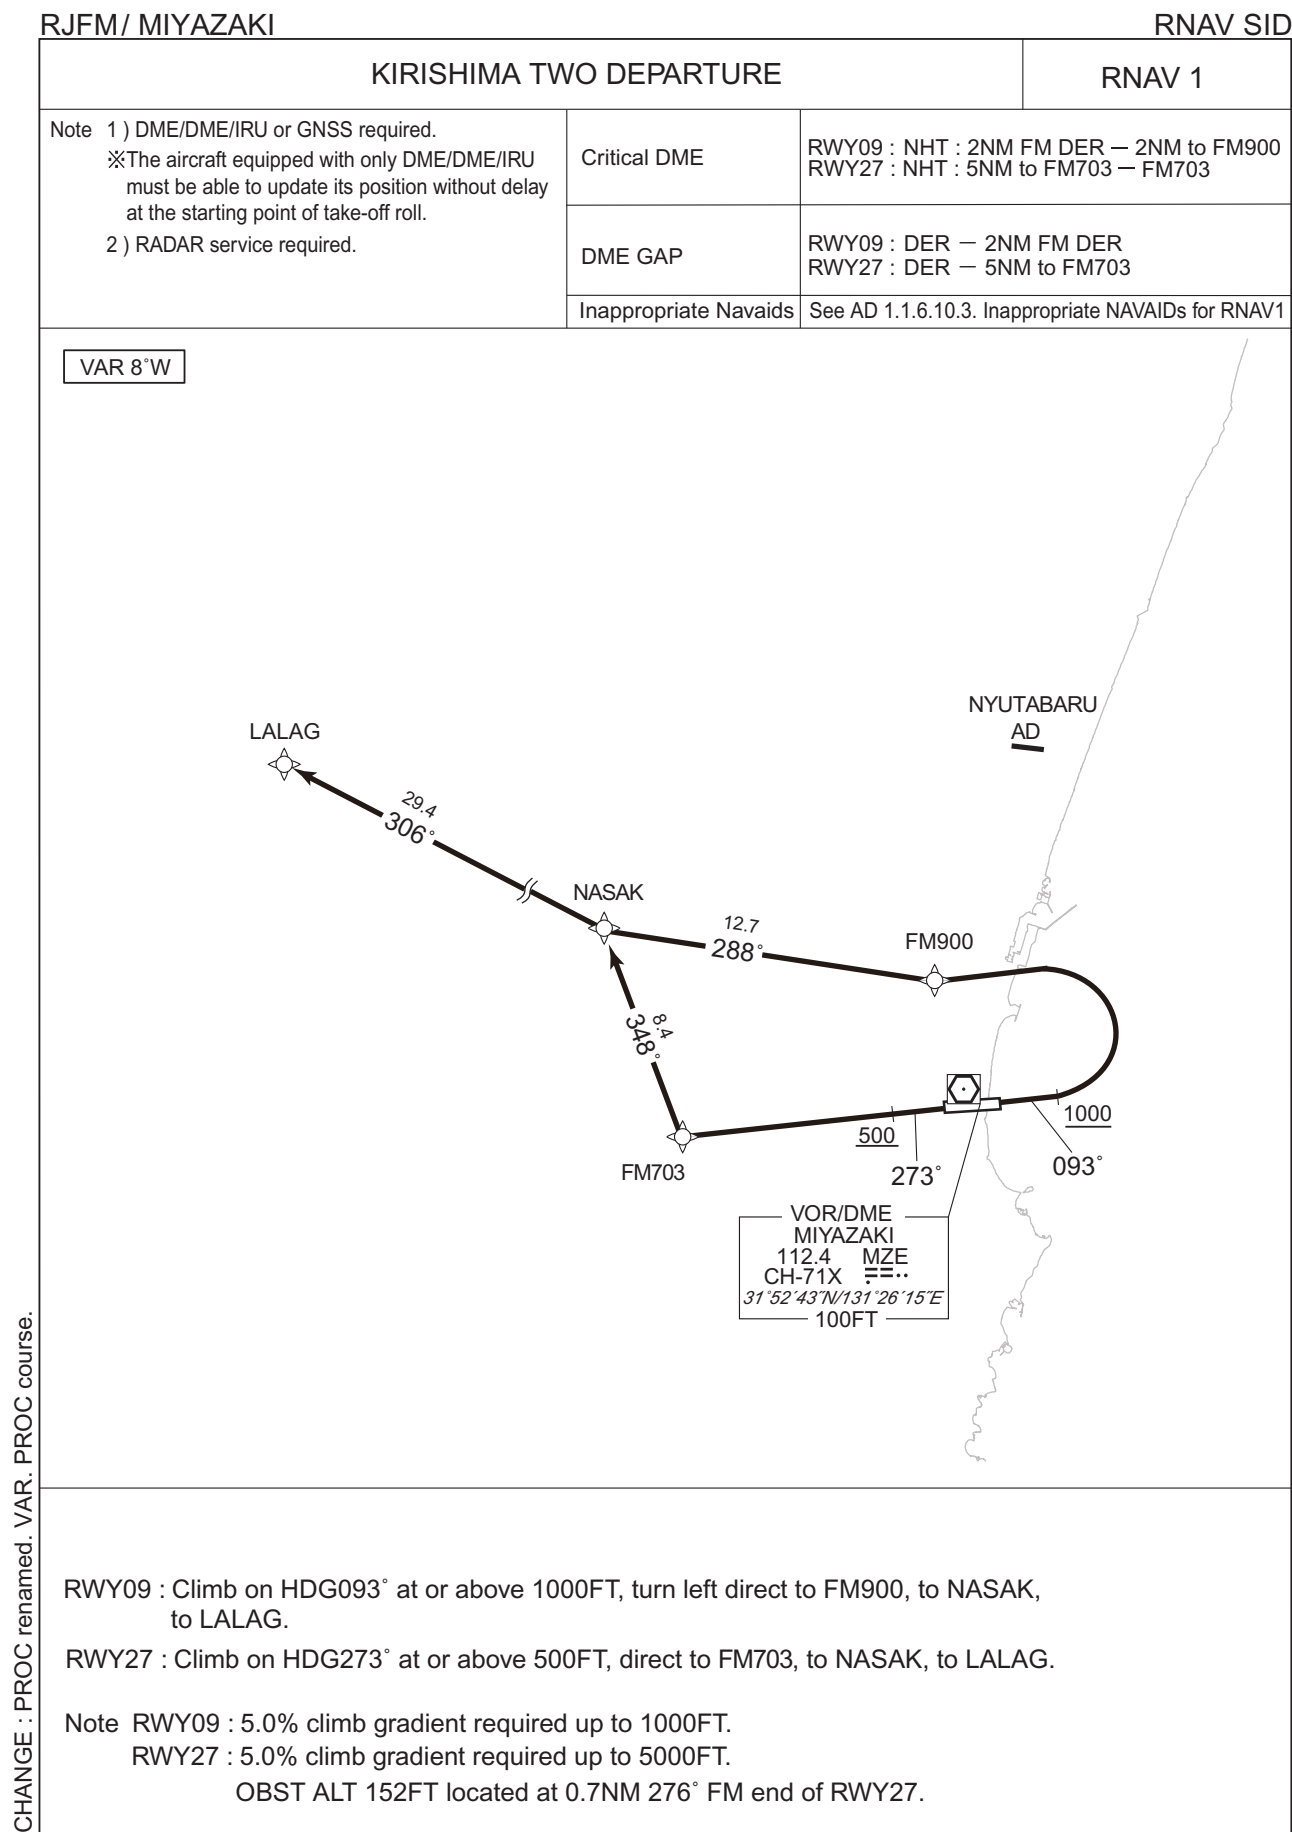

CHANGE : PROC renamed. VAR. PROC course.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFM /MIYAZAKI

RNAV SID

KIRISHIMA TWO DEPARTURE

RWY09

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 093<br>(085.2) | -7.5               | —             | —              | +1000         | —            | —              | RNAV1                    |
| 002           | DF              | FM900               | —        | —              | -7.5               | —             | L              | —             | —            | —              | RNAV1                    |
| 003           | TF              | NASAK               | —        | 288<br>(280.1) | -7.5               | 12.7          | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | LALAG               | —        | 306<br>(298.6) | -7.5               | 29.4          | —              | —             | —            | —              | RNAV1                    |

RWY27

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T)  | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | —                   | —        | 273<br>(265.2) | -7.5               | —             | —              | +500          | —            | —              | RNAV1                    |
| 002           | DF              | FM703               | —        | —              | -7.5               | —             | —              | —             | —            | —              | RNAV1                    |
| 003           | TF              | NASAK               | —        | 348<br>(340.6) | -7.5               | 8.4           | —              | —             | —            | —              | RNAV1                    |
| 004           | TF              | LALAG               | —        | 306<br>(298.6) | -7.5               | 29.4          | —              | —             | —            | —              | RNAV1                    |

Waypoint Coordinates

| Waypoint Identifier | Coordinates            |
|---------------------|------------------------|
| FM900               | 315726.5N / 1312601.1E |
| FM703               | 315144.1N / 1311433.9E |
| NASAK               | 315939.9N / 1311116.4E |
| LALAG               | 321338.3N / 1304049.6E |

CHANGE : PROC renamed. PROC course. VAR. Waypoint Coordinates added.

STANDARD ARRIVAL CHART - INSTRUMENT


RJFM / MIYAZAKI

STAR

OTOHIME ARRIVAL


From over RYUGU, via SUC R237 to CHAGA, via MZE R092 to OYODO.  
Cross CHAGA at or above 5000FT, cross OYODO at or above 2000FT.

CHANGE : Description of PROC name.

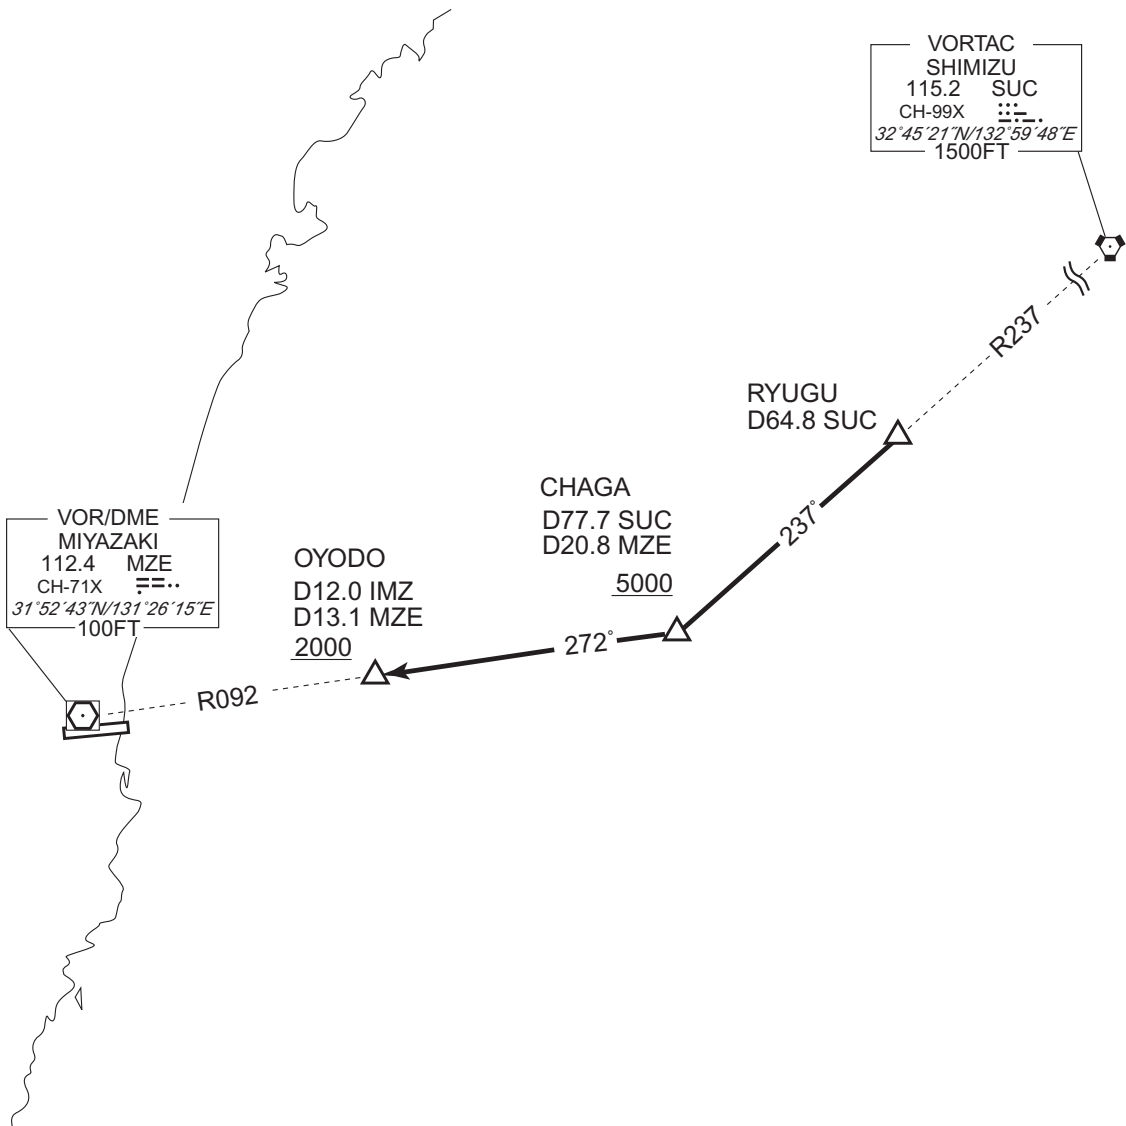




STANDARD ARRIVAL CHART - INSTRUMENT

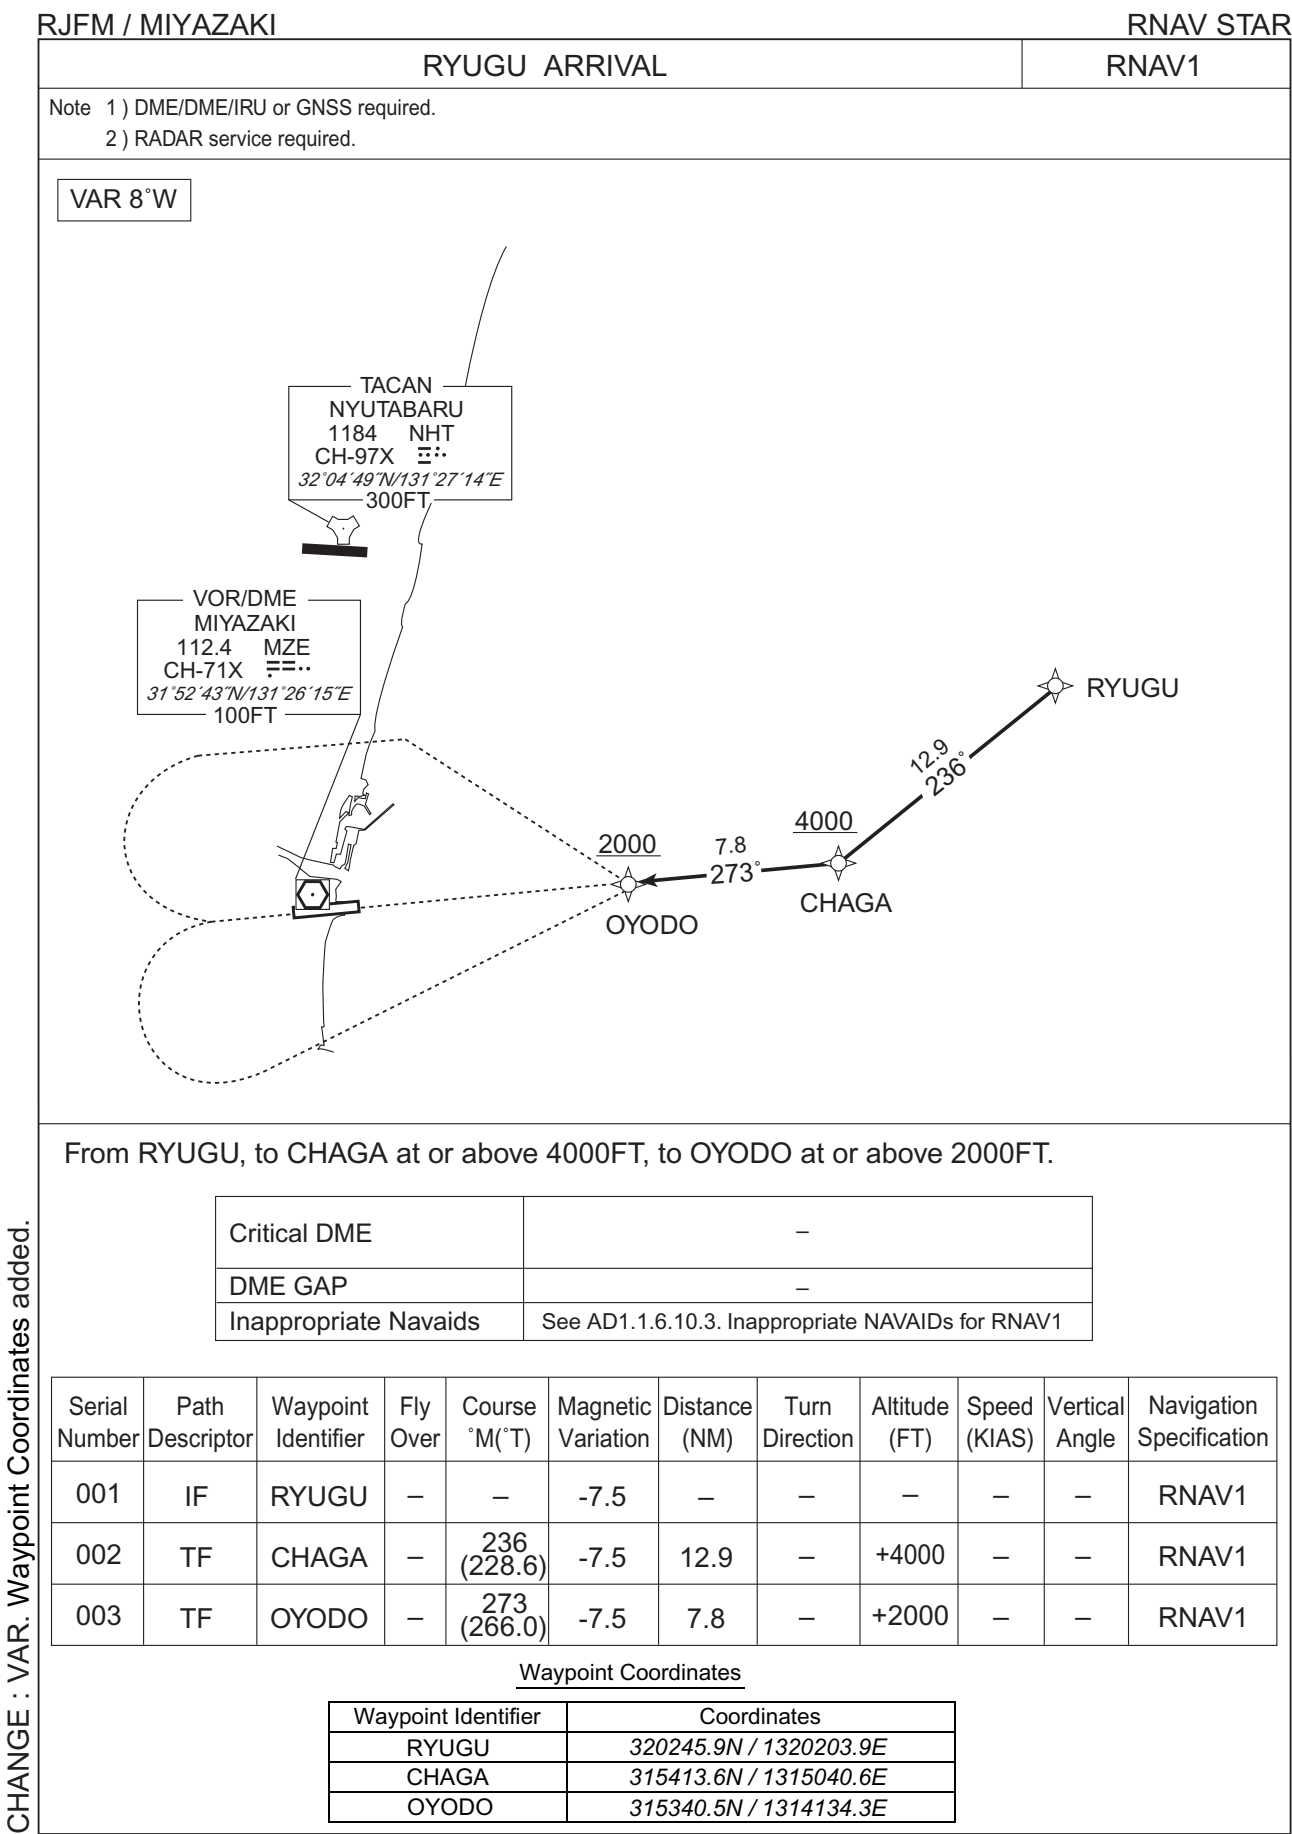


CHANGE : VAR. Waypoint Coordinates added.

STANDARD ARRIVAL CHART - INSTRUMENT

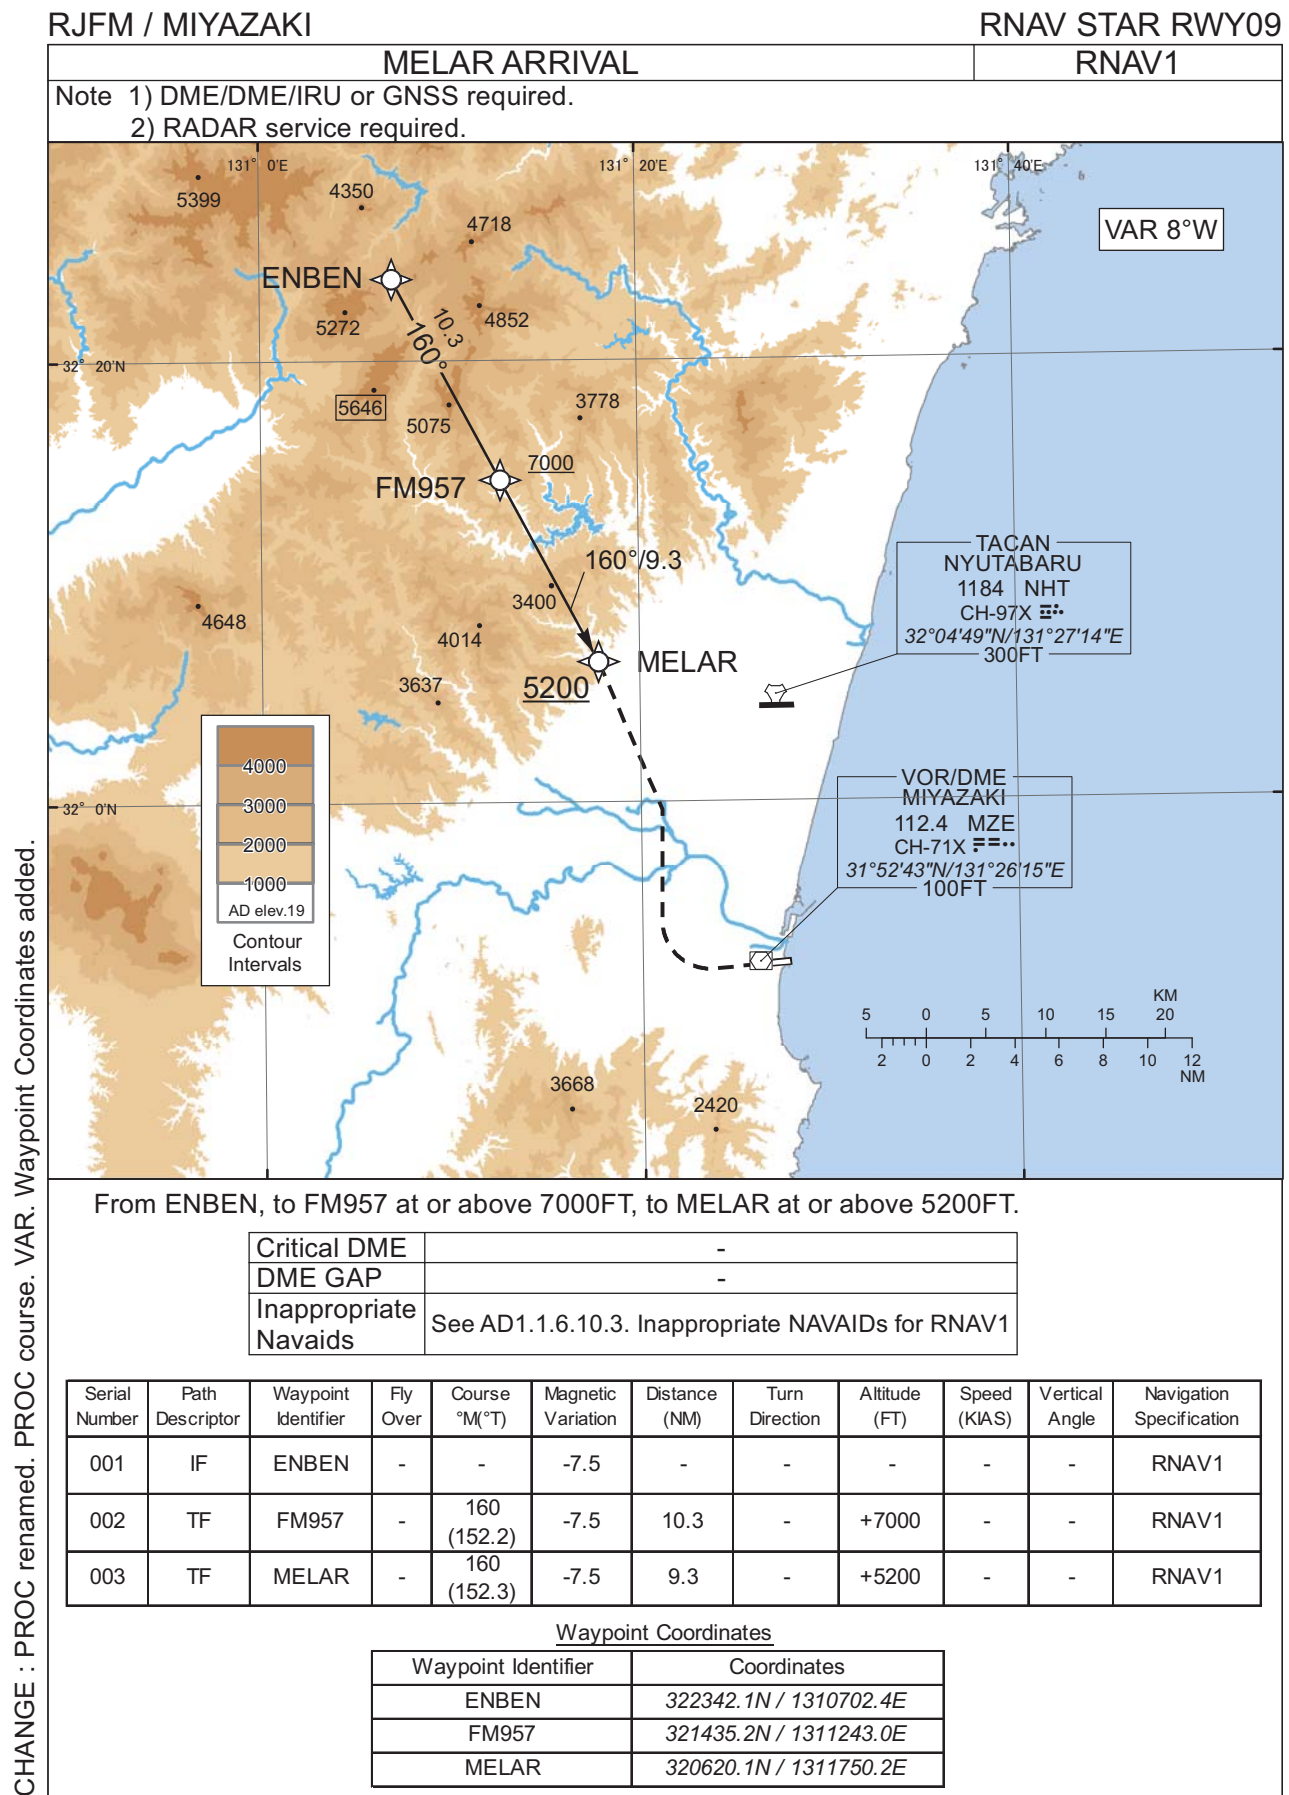


STANDARD ARRIVAL CHART - INSTRUMENT

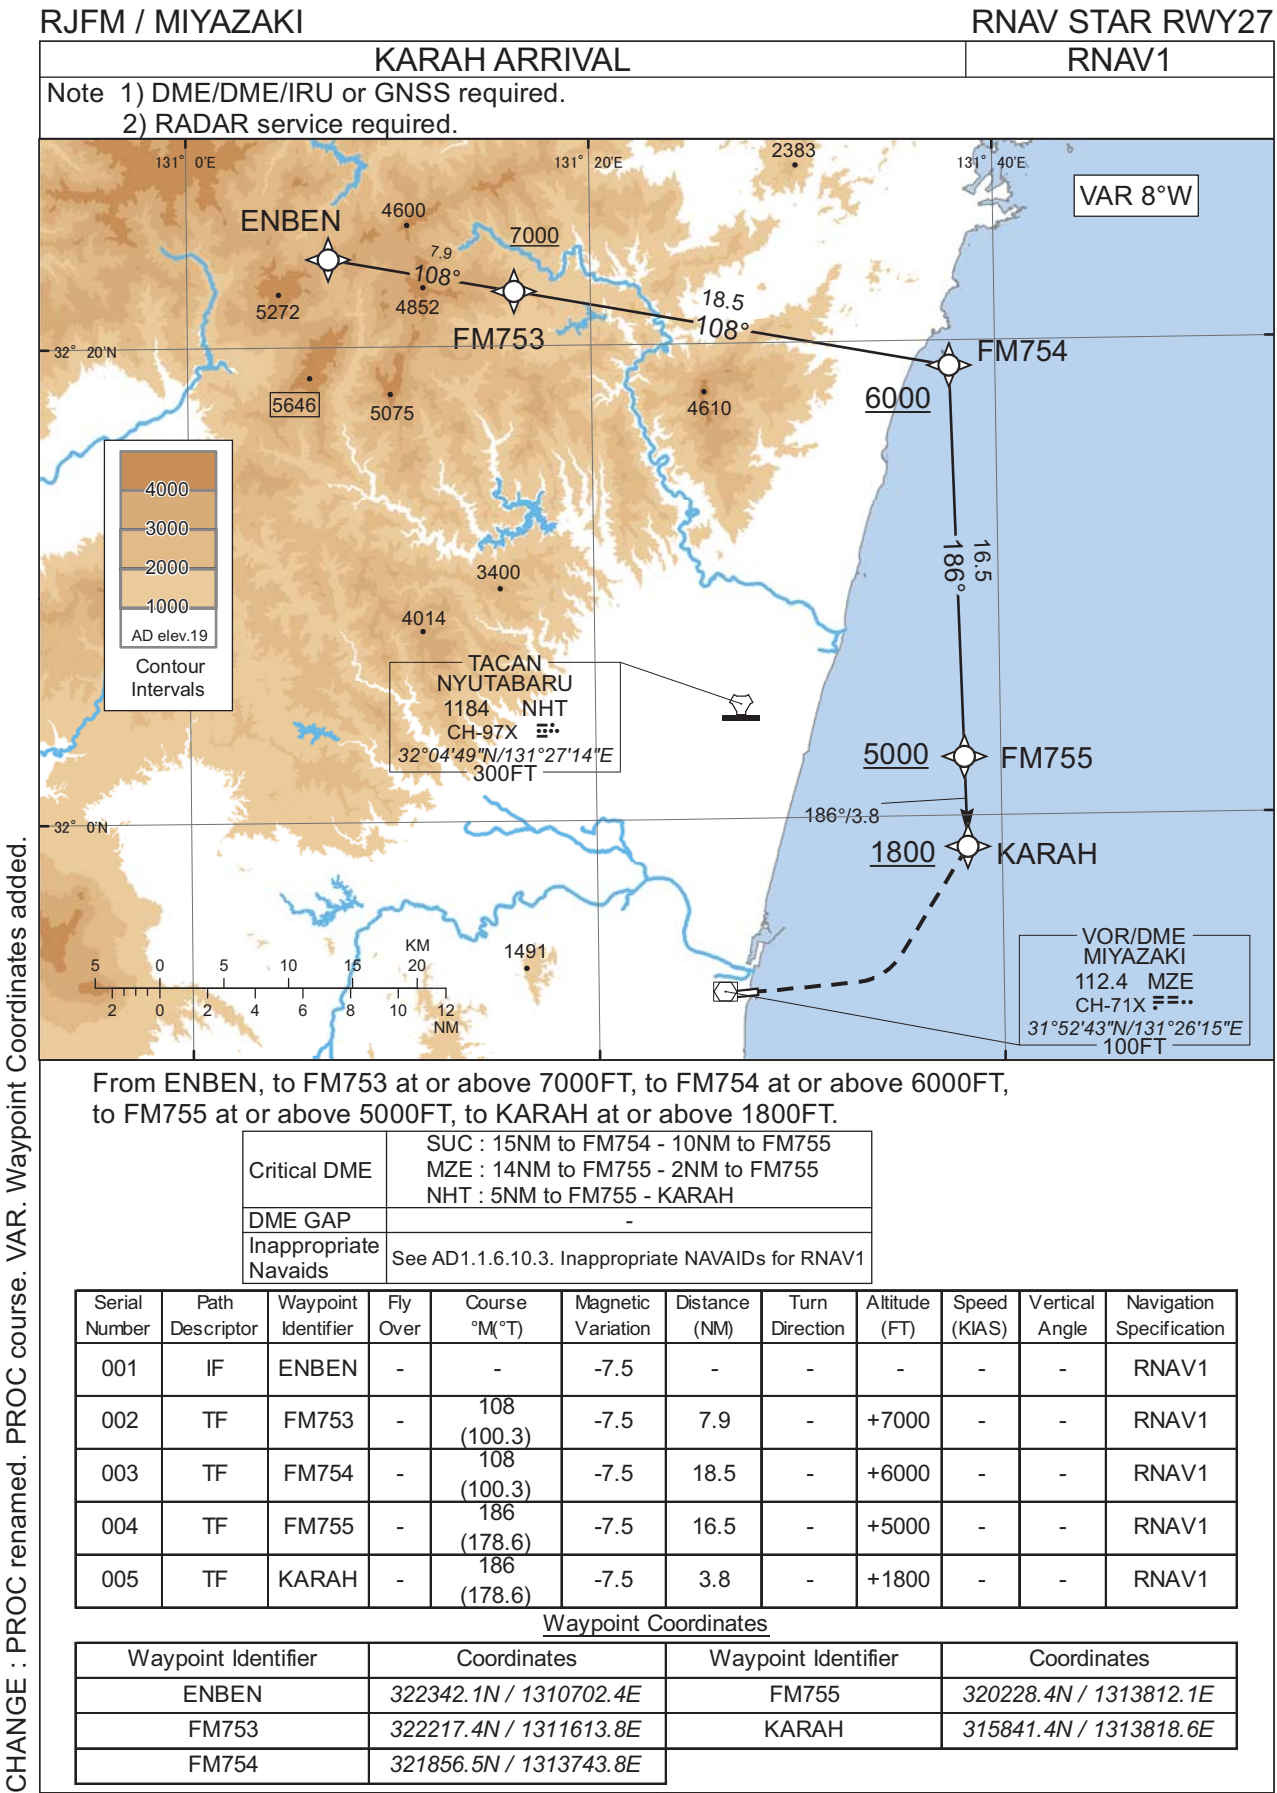

## INSTRUMENT APPROACH CHART


RJFM / MIYAZAKI

ILS Z or LOC Z RWY27

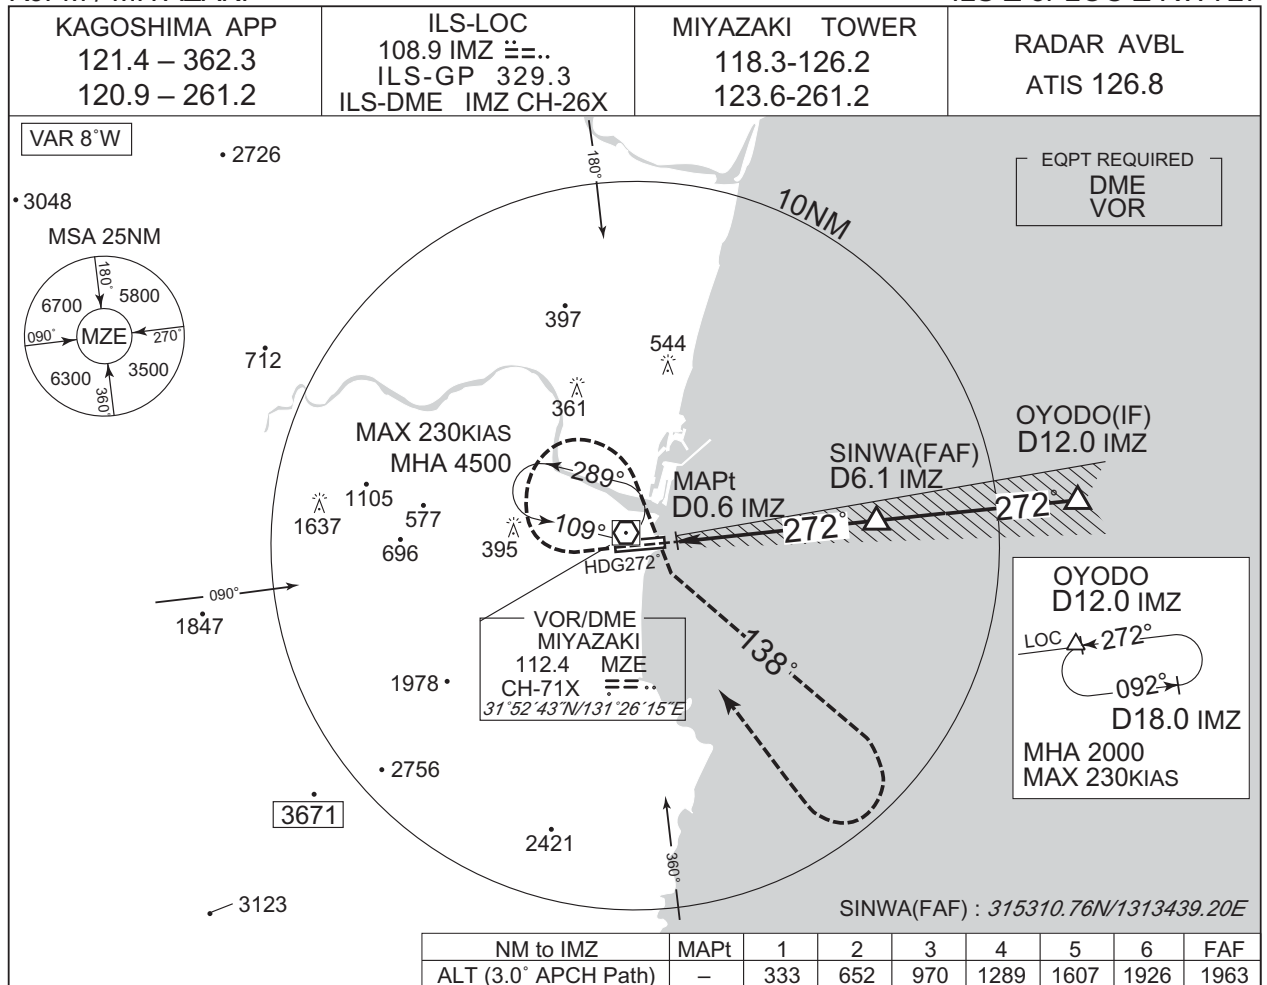

**MISSED APPROACH**  
Climb to 500FT on HDG 272°, turn right, via MZE R138 to 4500FT, turn right, direct to MZE VOR/DME and hold.  
Contact KAGOSHIMA APP.

Timing not authorized for defining the MAPt.

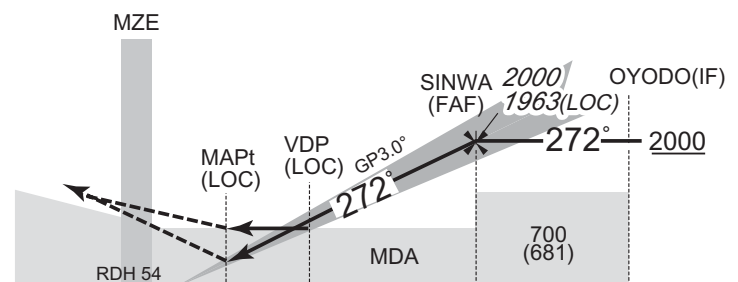

|            |     |     |     |     |      |
|------------|-----|-----|-----|-----|------|
| DME to IMZ | 0.2 | 0.6 | 0.8 | 6.1 | 12.0 |
| NM to THR  | 0   | 0.5 | 0.6 | 5.9 | 11.9 |

Missed APCH climb gradient MNM 4.0%

MINIMA      THR elev. 21      AD elev. 19


| CAT | CAT I     |         | LOC       |         | CIRCLING  |      |
|-----|-----------|---------|-----------|---------|-----------|------|
|     | DA(H)     | RVR/CMV | MDA(H)    | RVR/CMV | MDA(H)    | VIS  |
| A   | 221 (200) | 1000    | 270 (251) | 1500    | 520 (501) | 1600 |
| B   |           |         |           | 1600    | 650 (631) | 2400 |
| C   |           |         |           |         |           | 3200 |
| D   |           |         |           | 1800    |           |      |

MINIMA with Missed APCH climb gradient of 2.5% are not established.

## INSTRUMENT APPROACH CHART

RJFM / MIYAZAKI


ILS Y or LOC Y RWY27

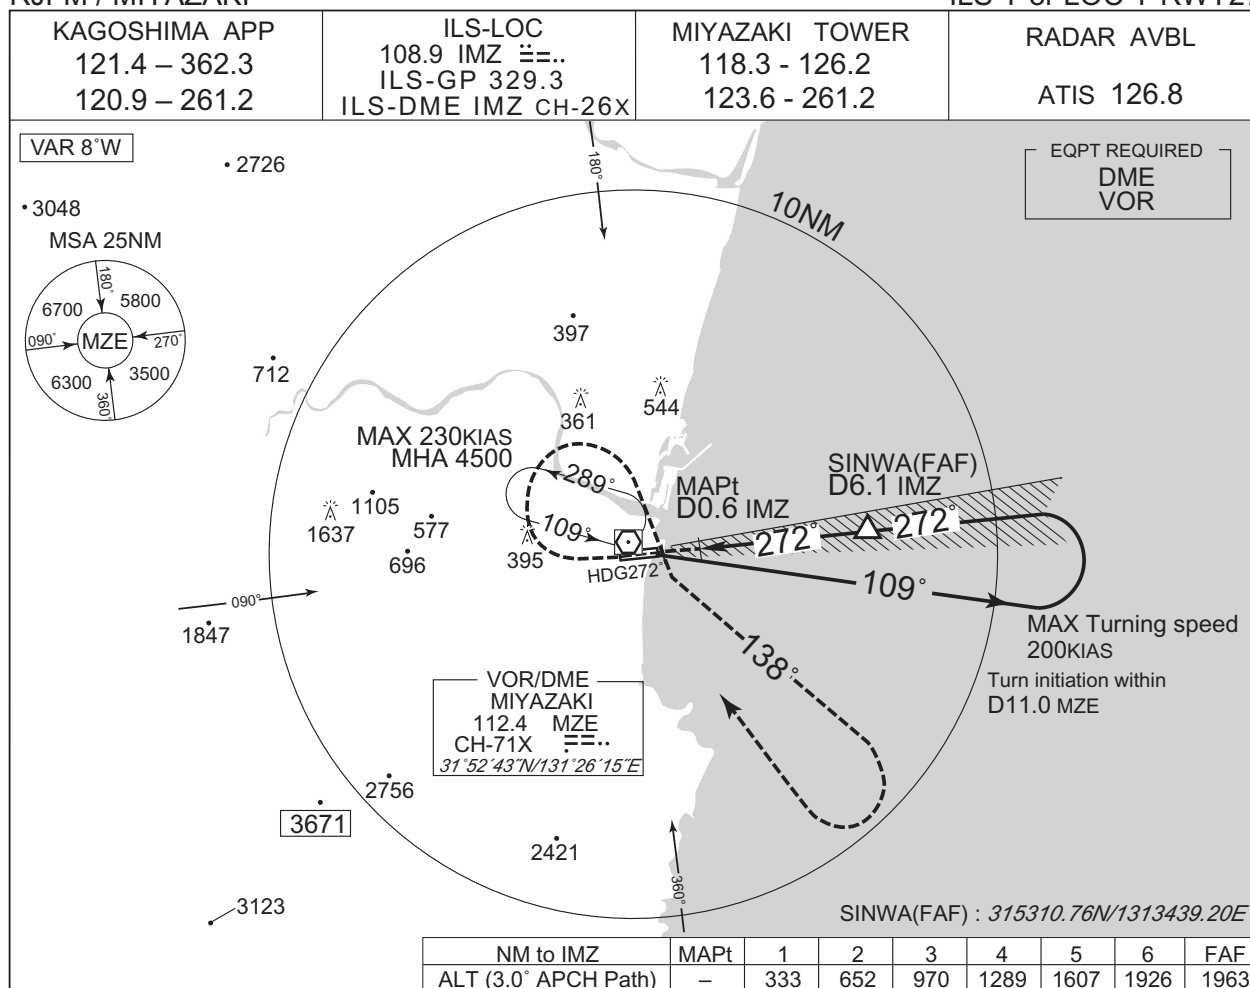

## MISSED APPROACH

Climb to 500FT on HDG 272°, turn right, via MZE R138 to 4500FT, turn right, direct to MZE VOR/DME and hold.  
Contact KAGOSHIMA APP.

Timing not authorized for defining the MAPt.

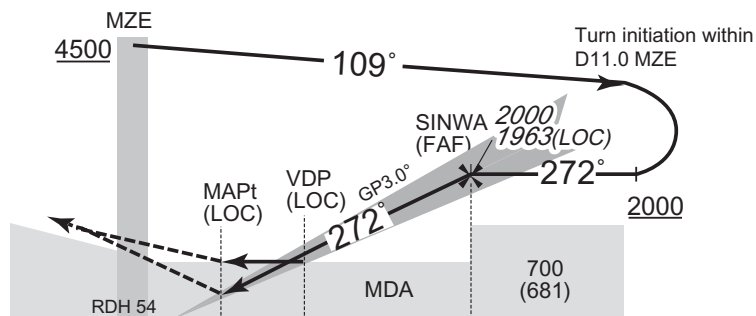

|            |     |     |     |     |
|------------|-----|-----|-----|-----|
| DME to IMZ | 0.2 | 0.6 | 0.8 | 6.1 |
| NM to THR  | 0   | 0.5 | 0.6 | 5.9 |

Missed APCH climb gradient MNM 4.0%


MINIMA THR elev. 21 AD elev. 19

| CAT | CAT I     |         | LOC       |         | CIRCLING  |      |
|-----|-----------|---------|-----------|---------|-----------|------|
|     | DA(H)     | RVR/CMV | MDA(H)    | RVR/CMV | MDA(H)    | VIS  |
| A   | 221 (200) | 1000    | 270 (251) | 1500    | 520 (501) | 1600 |
| B   |           |         |           | 1600    | 650 (631) | 2400 |
| C   |           |         |           | 1800    |           | 3200 |

MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : VAR.

INSTRUMENT APPROACH CHART

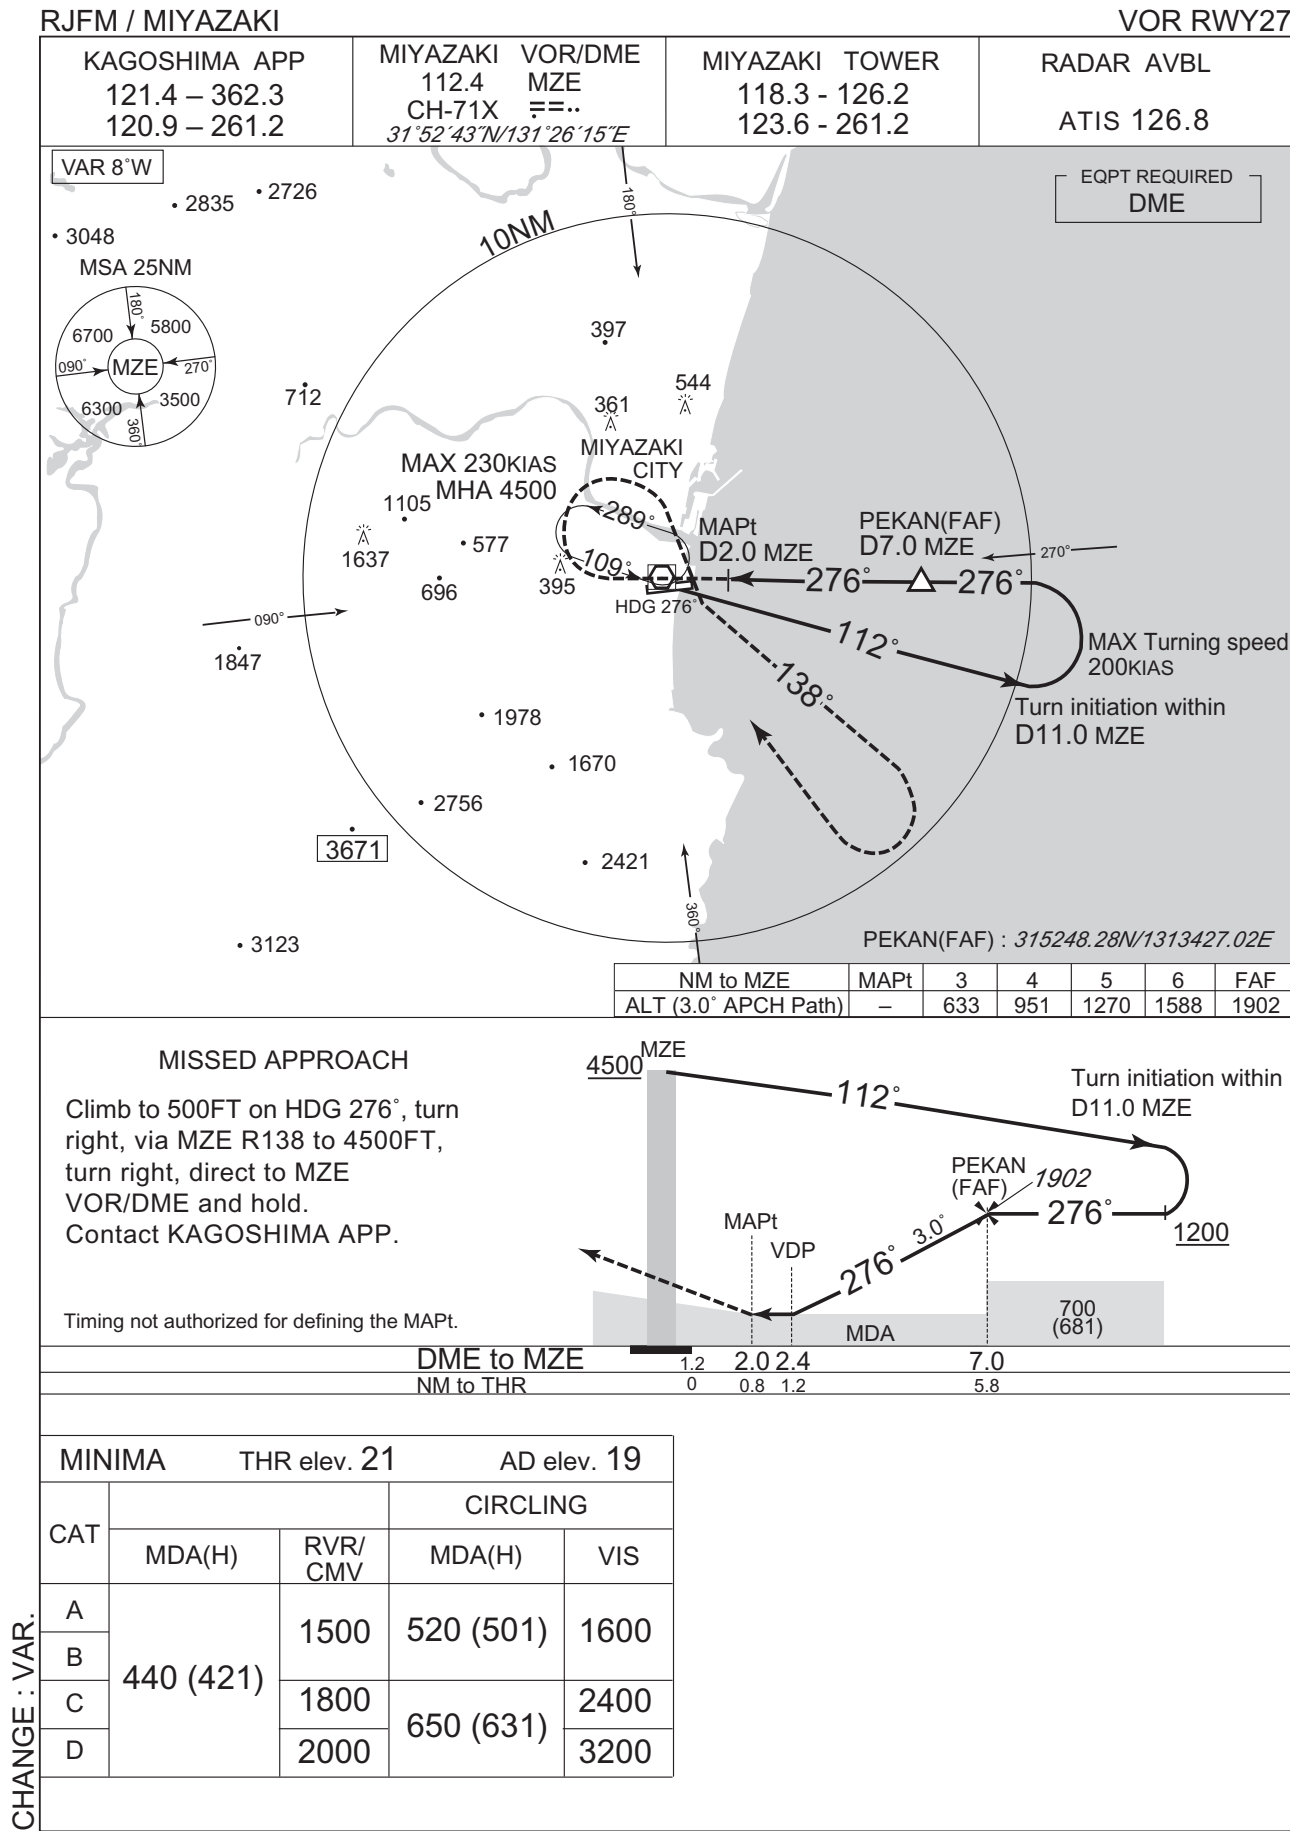




INSTRUMENT APPROACH CHART

RJFM / MIYAZAKI

RNP Z RWY09(AR)

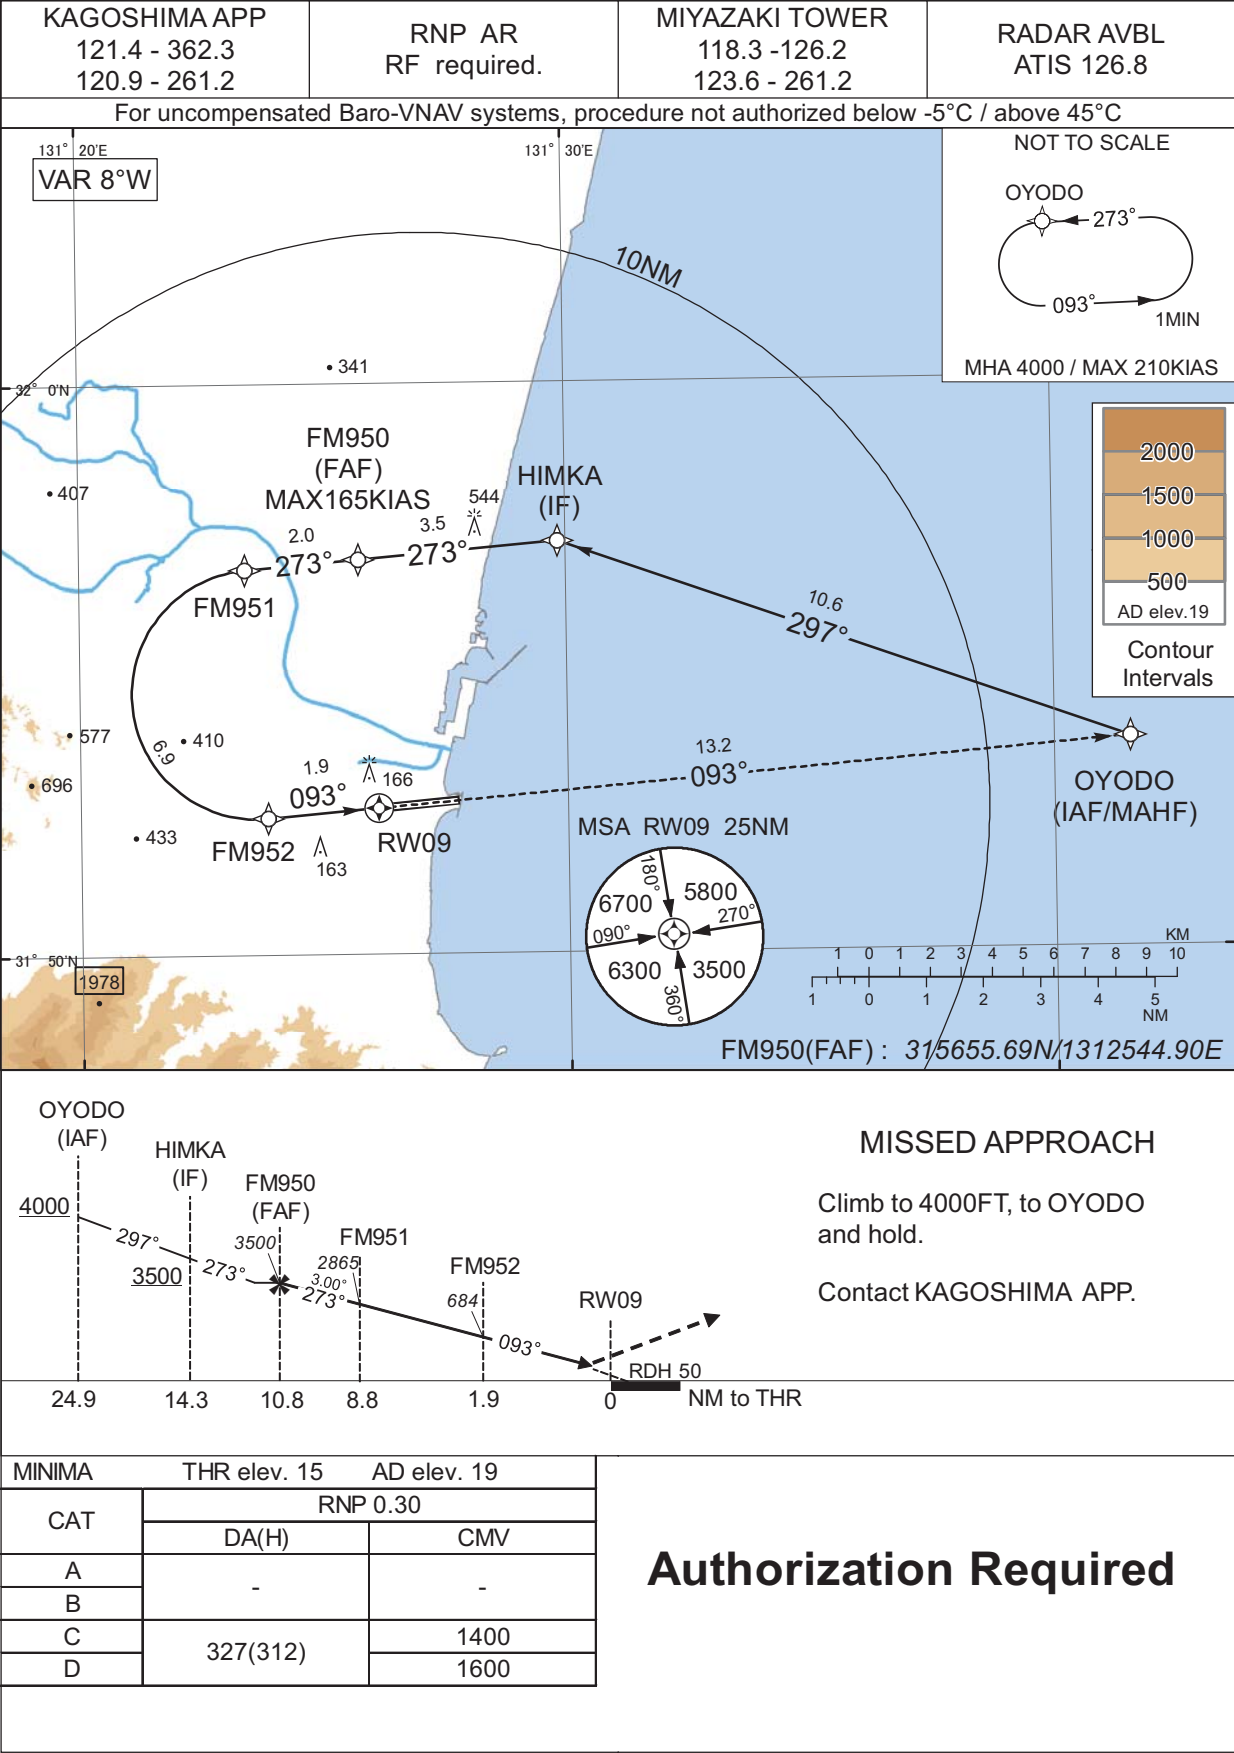

INSTRUMENT APPROACH CHART

RJFM / MIYAZAKI

RNP Z RWY09(AR)

| Coding Table  |                           |                     |          |               |                    |               |                |               |              |                 |           |
|---------------|---------------------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| Serial Number | Path Descriptor           | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
| 001           | IF                        | OYODO               | -        | -             | -7.5               | -             | -              | +4000         | -            | -               | -         |
| 002           | TF                        | HIMKA               | -        | 297 (289.7)   | -7.5               | 10.6          | -              | +3500         | -            | -               | 1.0       |
| 003           | TF                        | FM950               | -        | 273 (265.2)   | -7.5               | 3.5           | -              | 3500          | -165         | -               | 1.0       |
| 004           | TF                        | FM951               | -        | 273 (265.2)   | -7.5               | 2.0           | -              | 2865          | -            | -3.00           | 0.3       |
| 005           | RF Center: FMRF1 r=2.18NM | FM952               | -        | -             | -7.5               | 6.9           | L              | 684           | -            | -3.00           | 0.3       |
| 006           | TF                        | RW09                | Y        | 093 (085.1)   | -7.5               | 1.9           | -              | 65            | -            | -3.00/50        | 0.3       |
| 007           | TF                        | OYODO               | -        | 093 (085.1)   | -7.5               | 13.2          | -              | 4000          | -            | -               | 1.0       |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|--------------|-----------|
| Hold | OYODO               | 273 (265.9)           | -7.5               | 1.0 (-14000)        | L              | 4000                  | FL140                 | -210(-14000) | 1.0       |

| Waypoint Coordinates |                          |                          |                          |
|----------------------|--------------------------|--------------------------|--------------------------|
| Waypoint Identifier  | Coordinates              | RF Arc Center Identifier | Coordinates              |
| HIMKA                | 315713.28N / 1312950.79E | FMRF1                    | 315435.02N / 1312337.63E |
| FM950                | 315655.69N / 1312544.90E |                          |                          |
| FM951                | 315645.60N / 1312324.68E |                          |                          |
| FM952                | 315224.44N / 1312350.57E |                          |                          |
| RW09                 | 315234.26N / 1312607.02E |                          |                          |
| OYODO                | 315340.52N / 1314134.32E |                          |                          |


CHANGE : PROC course. VAR. HLDG pattern at OYODO added.




INSTRUMENT APPROACH CHART

RJFM / MIYAZAKI

RNP Y RWY09(AR)

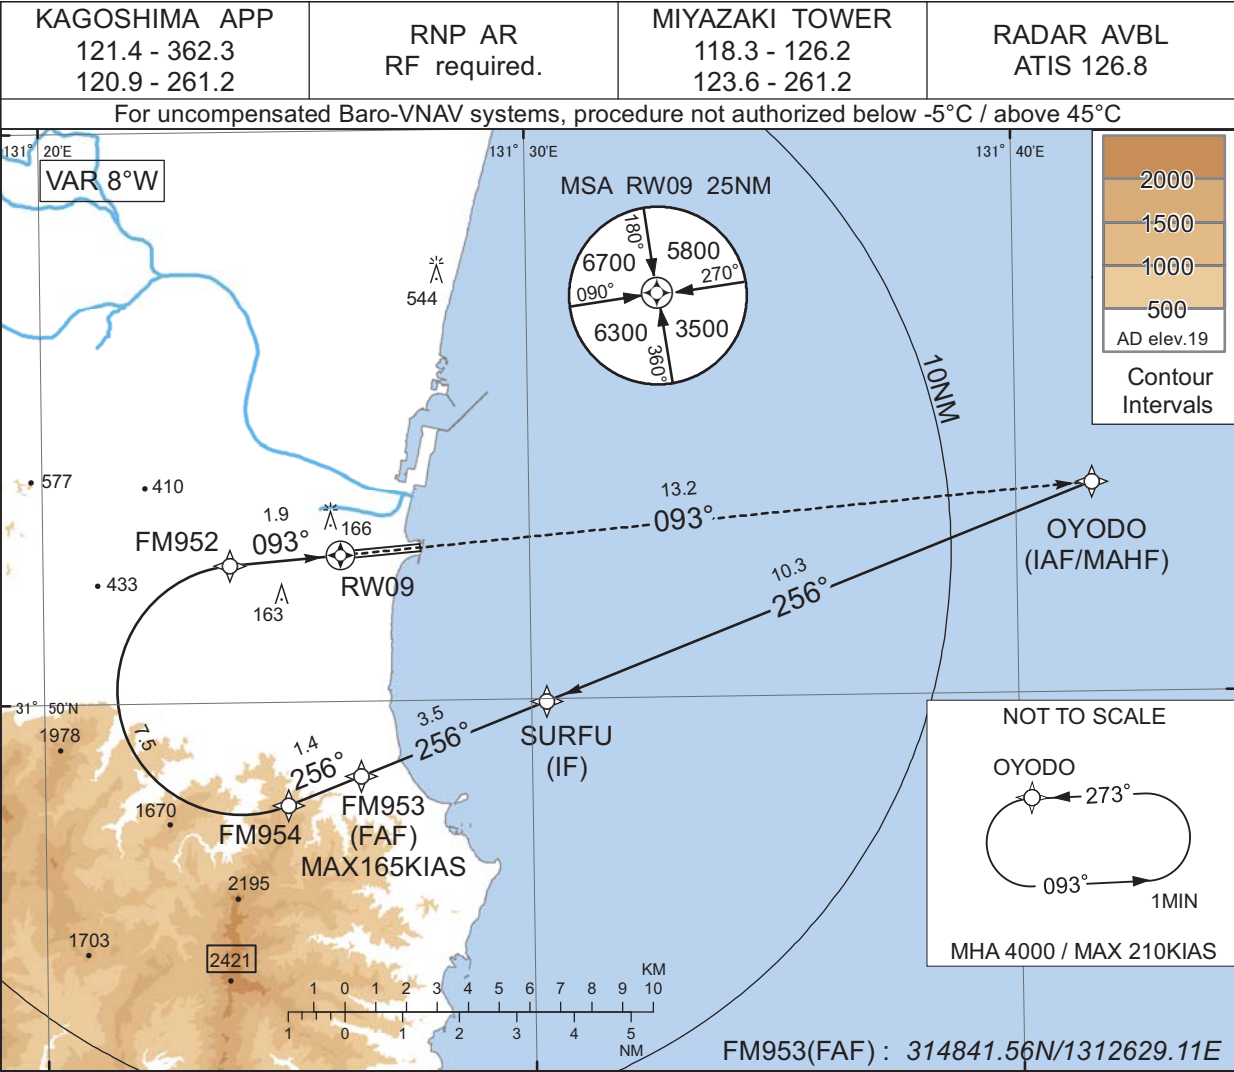

CHANGE : VAR. PROC course. HLDG pattern at OYODO.

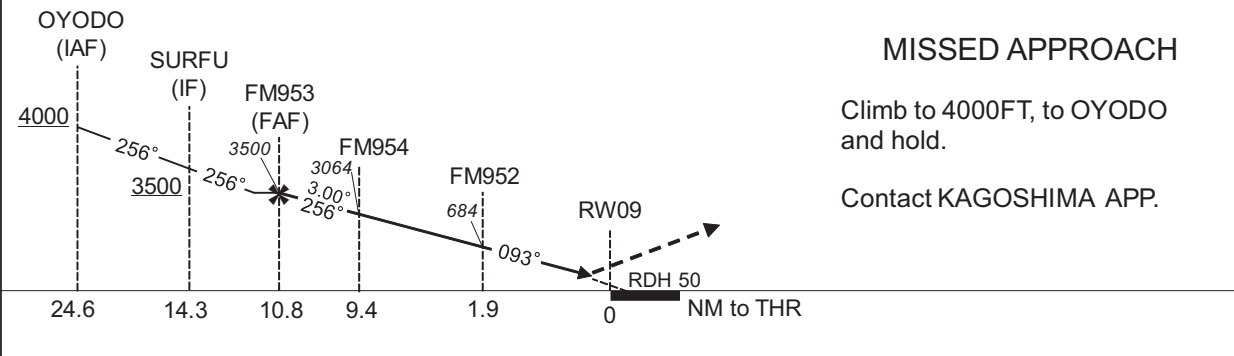

| MINIMA |          | THR elev. 15 | AD elev. 19 |
|--------|----------|--------------|-------------|
| CAT    | RNP 0.30 |              |             |
|        | DA(H)    | CMV          |             |
| A      |          |              |             |
| B      | -        |              |             |
| C      | 327(312) | 1400         |             |
| D      |          | 1600         |             |

Authorization Required

INSTRUMENT APPROACH CHART

RJFM / MIYAZAKI

RNP Y RWY09(AR)

| Coding Table  |                                    |                     |          |               |                    |               |                |               |              |                 |           |
|---------------|------------------------------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| Serial Number | Path Descriptor                    | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
| 001           | IF                                 | OYODO               | -        | -             | -7.5               | -             | -              | +4000         | -            | -               | -         |
| 002           | TF                                 | SURFU               | -        | 256 (248.8)   | -7.5               | 10.3          | -              | +3500         | -            | -               | 1.0       |
| 003           | TF                                 | FM953               | -        | 256 (248.7)   | -7.5               | 3.5           | -              | 3500          | -165         | -               | 1.0       |
| 004           | TF                                 | FM954               | -        | 256 (248.7)   | -7.5               | 1.4           | -              | 3064          | -            | -3.00           | 0.3       |
| 005           | RF<br>Center:<br>FMRF2<br>r=2.18NM | FM952               | -        | -             | -7.5               | 7.5           | R              | 684           | -            | -3.00           | 0.3       |
| 006           | TF                                 | RW09                | Y        | 093 (085.1)   | -7.5               | 1.9           | -              | 65            | -            | -3.00/50        | 0.3       |
| 007           | TF                                 | OYODO               | -        | 093 (085.1)   | -7.5               | 13.2          | -              | 4000          | -            | -               | 1.0       |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|--------------|-----------|
| Hold | OYODO               | 273 (265.9)           | -7.5               | 1.0 (-14000)        | L              | 4000                  | FL140                 | -210(-14000) | 1.0       |

| Waypoint Coordinates |  |  |  |  |  |  |  |  |  |  |  |
| Waypoint Identifier |  | Coordinates |  | RF Arc Center Identifier |  | Coordinates |  |
| SURFU |  | 314957.66N / 1313018.83E |  | FMRF2 |  | 315013.85N / 1312403.51E |  |
| FM953 |  | 314841.56N / 1312629.11E |  |  |  |  |  |
| FM954 |  | 314811.70N / 1312459.11E |  |  |  |  |  |
| FM952 |  | 315224.44N / 1312350.57E |  |  |  |  |  |
| RW09 |  | 315234.26N / 1312607.02E |  |  |  |  |  |
| OYODO |  | 315340.52N / 1314134.32E |  |  |  |  |  |

CHANGE : PROC course. VAR. HLDG pattern at OYODO added.


## INSTRUMENT APPROACH CHART

RJFM / MIYAZAKI


RNP X RWY09(AR)

KAGOSHIMA APP  
121.4 - 362.3  
120.9 - 261.2RNP AR  
RF required.MIYAZAKI TOWER  
118.3 - 126.2  
123.6 - 261.2RADAR AVBL  
ATIS 126.8

For uncompensated Baro-VNAV systems, procedure not authorized below -5°C / above 45°C

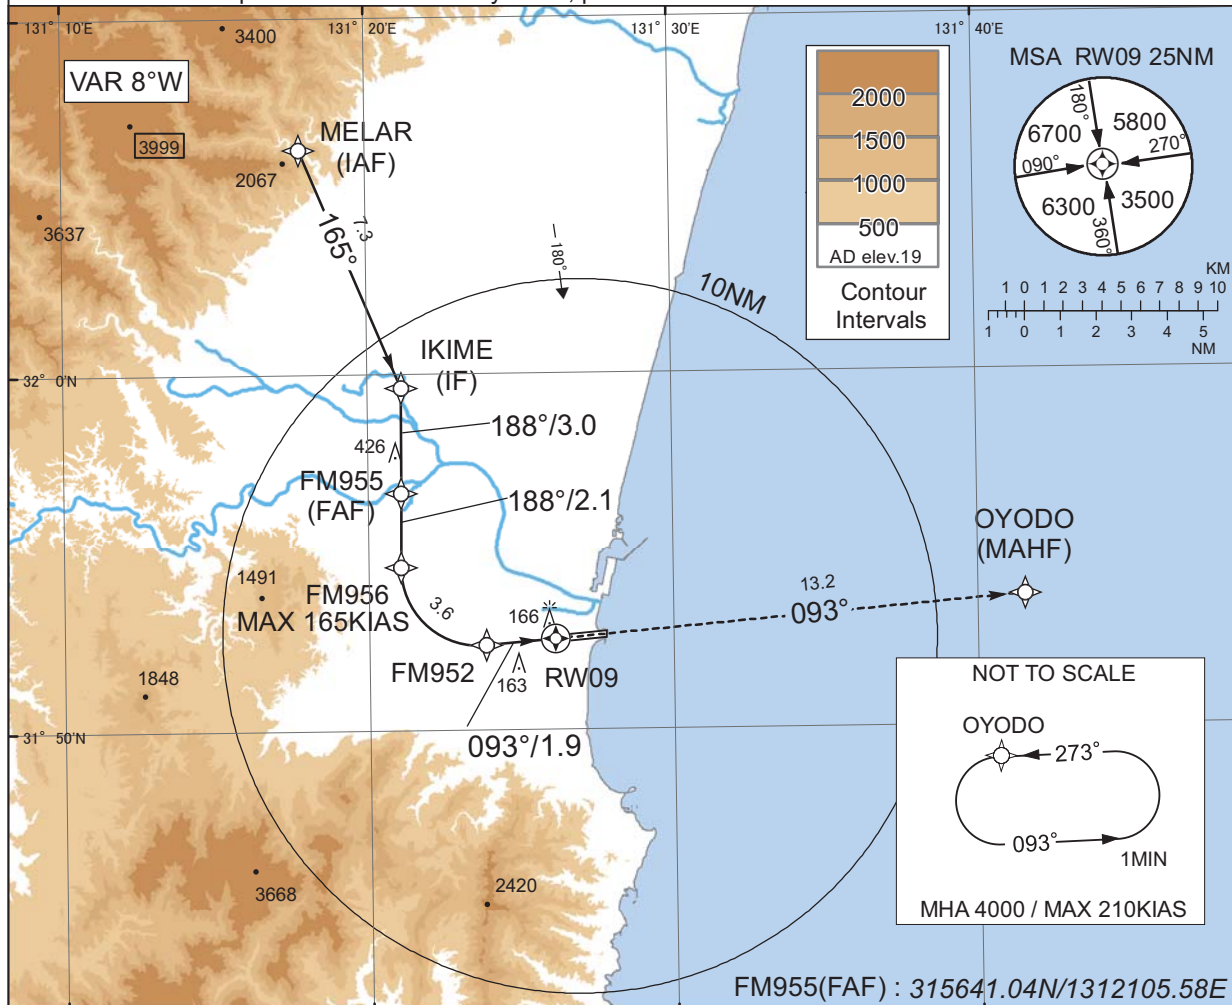

CHANGE : VAR. PROC course. HLDG pattern at OYODO.

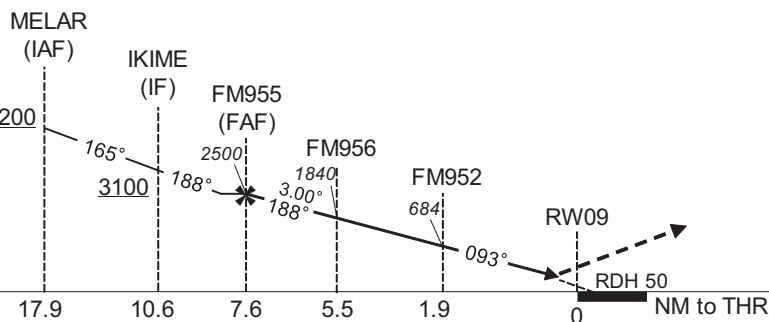

## MISSED APPROACH

Climb to 4000FT, to OYODO and hold.  
Contact KAGOSHIMA APP.

| MINIMA |          | THR elev. 15 | AD elev. 19 |
|--------|----------|--------------|-------------|
| CAT    | RNP 0.30 |              |             |
|        | DA(H)    | CMV          |             |
| A      | -        | -            |             |
| B      | -        | -            |             |
| C      | 327(312) | 1400         |             |
| D      |          | 1600         |             |

**Authorization Required**

INSTRUMENT APPROACH CHART

RJFM / MIYAZAKI

RNP X RWY09(AR)

| Coding Table  |                           |                     |          |               |                    |               |                |               |              |                 |           |
|---------------|---------------------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| Serial Number | Path Descriptor           | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
| 001           | IF                        | MELAR               | -        | -             | -7.5               | -             | -              | +5200         | -            | -               | -         |
| 002           | TF                        | IKIME               | -        | 165 (157.4)   | -7.5               | 7.3           | -              | +3100         | -            | -               | 0.3       |
| 003           | TF                        | FM955               | -        | 188 (180.6)   | -7.5               | 3.0           | -              | 2500          | -            | -               | 0.3       |
| 004           | TF                        | FM956               | -        | 188 (180.6)   | -7.5               | 2.1           | -              | 1840          | -165         | -3.00           | 0.3       |
| 005           | RF Center: FMRF1 r=2.18NM | FM952               | -        | -             | -7.5               | 3.6           | L              | 684           | -            | -3.00           | 0.3       |
| 006           | TF                        | RW09                | Y        | 093 (085.1)   | -7.5               | 1.9           | -              | 65            | -            | -3.00/50        | 0.3       |
| 007           | TF                        | OYODO               | -        | 093 (085.1)   | -7.5               | 13.2          | -              | 4000          | -            | -               | 1.0       |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|--------------|-----------|
| Hold | OYODO               | 273 (265.9)           | -7.5               | 1.0 (-14000)        | L              | 4000                  | FL140                 | -210(-14000) | 1.0       |

| Waypoint Coordinates |                          |                          |                          |
|----------------------|--------------------------|--------------------------|--------------------------|
| Waypoint Identifier  | Coordinates              | RF Arc Center Identifier | Coordinates              |
| MELAR                | 320620.09N / 1311750.24E | FMRF1                    | 315435.02N / 1312337.63E |
| IKIME                | 315938.25N / 1312107.83E |                          |                          |
| FM955                | 315641.04N / 1312105.58E |                          |                          |
| FM956                | 315436.46N / 1312104.01E |                          |                          |
| FM952                | 315224.44N / 1312350.57E |                          |                          |
| RW09                 | 315234.26N / 1312607.02E |                          |                          |
| OYODO                | 315340.52N / 1314134.32E |                          |                          |

CHANGE : PROC course. VAR. HLDG pattern at OYODO added.

## RJFM / MIYAZAKI

|                                                 |                        |                                                  |                          |
|-------------------------------------------------|------------------------|--------------------------------------------------|--------------------------|
| KAGOSHIMA APP<br>121.4 - 362.3<br>120.9 - 261.2 | RNP AR<br>RF required. | MIYAZAKI TOWER<br>118.3 - 126.2<br>123.6 - 261.2 | RADAR AVBL<br>ATIS 126.8 |
|-------------------------------------------------|------------------------|--------------------------------------------------|--------------------------|

131° 20'E

VAR 8°W

2000  
1500  
1000  
500  
AD elev.19

Contour Intervals

131° 30'E

MSA RW27 25NM

180°  
270°  
360°  
5800  
6300  
3500

10NM

NOT TO SCALE

OYODO

273°

093°

1MIN

MHA 2000 / MAX 210KIAS

32° 0'N

1160

1269

2228

1671

1686

31° 50'N

500

150

RW27

273°

4.3

FM752

1.1

FM751 (FAF)

1.2

FM750 MAX 185KIAS

2.4

MENYA (IF)

220°

3.0

KARAH (IAF)

220°

OYODO (MAHF)

1 0 1 2 3 4 5 6 7 8 9 10


1 0 1 2 3 4 5

NM

KM

FM751(FAF) : 315322.32N/1313358.20E

From RW27 on track 273°, at or above 500FT turn right, direct to OYODO and hold at 2000FT. Contact KAGOSHIMA APP.

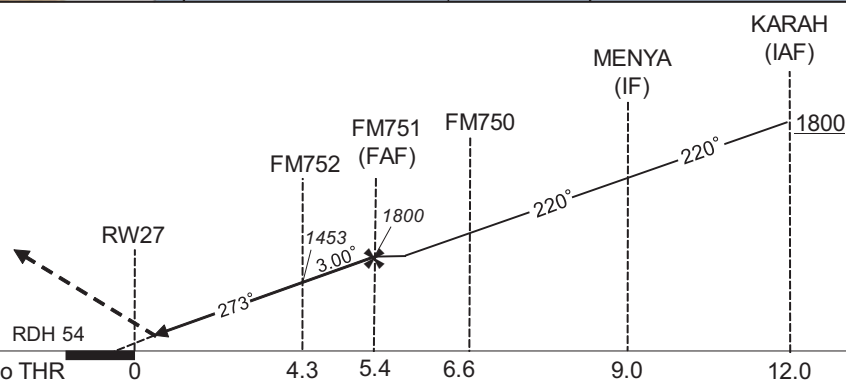

|        |              |             |
|--------|--------------|-------------|
| MINIMA | THR elev. 21 | AD elev. 19 |
| CAT    | RNP 0.30     |             |
|        | DA(H)        | RVR/CMV     |
| A      | -            | -           |
| B      |              |             |
| C      | 321(300)     | 1800        |
| D      |              | 2000        |

## Authorization Required

CHANGE : VAR. PROC course. HLDG pattern at OYODO.

INSTRUMENT APPROACH CHART

RJFM / MIYAZAKI

RNP RWY27(AR)

| Coding Table  |                           |                     |          |               |                    |               |                |               |              |                 |           |
|---------------|---------------------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| Serial Number | Path Descriptor           | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
| 001           | IF                        | KARAH               | -        | -             | -7.5               | -             | -              | +1800         | -            | -               | -         |
| 002           | TF                        | MENYA               | -        | 220 (212.3)   | -7.5               | 3.0           | -              | -             | -            | -               | 0.3       |
| 003           | TF                        | FM750               | -        | 220 (212.3)   | -7.5               | 2.4           | -              | -             | -185         | -               | 0.3       |
| 004           | RF Center: FMRF3 r=2.43NM | FM751               | -        | -             | -7.5               | 1.2           | R              | 1800          | -            | -               | 0.3       |
| 005           | RF Center: FMRF3 r=2.43NM | FM752               | -        | -             | -7.5               | 1.1           | R              | 1453          | -            | -3.00           | 0.3       |
| 006           | TF                        | RW27                | Y        | 273 (265.2)   | -7.5               | 4.3           | -              | 75            | -            | -3.00/54        | 0.3       |
| 007           | FA                        | -                   | -        | 273 (265.2)   | -7.5               | -             | -              | +500          | -            | -               | 1.0       |
| 008           | DF                        | OYODO               | -        | -             | -7.5               | -             | R              | 2000          | -            | -               | 1.0       |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|--------------|-----------|
| Hold | OYODO               | 273 (265.9)           | -7.5               | 1.0 (-14000)        | L              | 2000                  | FL140                 | -210(-14000) | 1.0       |

Waypoint Coordinates


| Waypoint Identifier | Coordinates              | RF Arc Center Identifier | Coordinates              |
|---------------------|--------------------------|--------------------------|--------------------------|
| KARAH               | 315841.41N / 1313818.57E | FMRF3                    | 315528.33N / 1313231.52E |
| MENYA               | 315609.28N / 1313625.03E |                          |                          |
| FM750               | 315409.97N / 1313456.09E |                          |                          |
| FM751               | 315322.32N / 1313358.20E |                          |                          |
| FM752               | 315302.73N / 1313245.72E |                          |                          |
| RW27                | 315241.06N / 1312741.80E |                          |                          |
| OYODO               | 315340.52N / 1314134.32E |                          |                          |

CHANGE : PROC course. VAR. HLDG pattern at OYODO added.




RJFM / MIYAZAKI

Visual REP

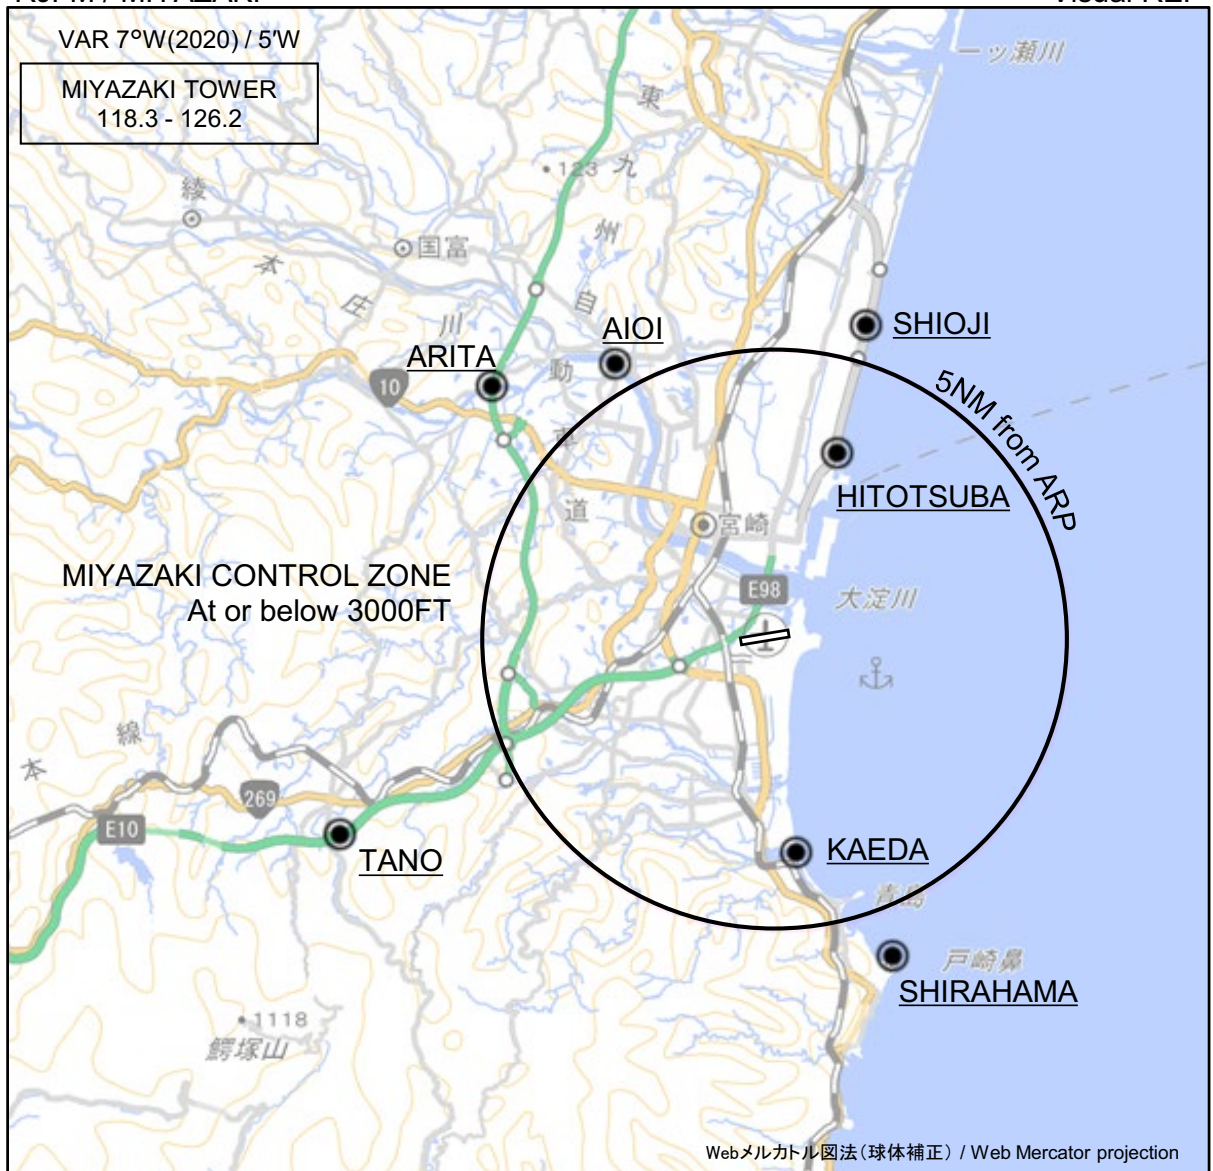

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

| Call sign        | BRG / DIST from ARP | Remarks                      |
|------------------|---------------------|------------------------------|
| 有田<br>Arita      | 312°T / 6.5NM       | 東九州自動車道大淀川橋<br>Bridge        |
| 相生<br>Aioi       | 330°T / 5.5NM       | 宮崎西環状線相生橋<br>Bridge          |
| 塩路<br>Shioji     | 016°T / 5.6NM       | 一ツ葉有料道路一ツ葉PA<br>Parking Area |
| 一ツ葉<br>Hitotsuba | 018°T / 3.4NM       | サンビーチ 一ツ葉<br>Beach           |
| 加江田<br>Kaeda     | 175°T / 3.7NM       | 加江田川河口<br>River mouth        |
| 白浜<br>Shirahama  | 160°T / 5.8NM       | 戸崎鼻先端のホテル<br>Hotel           |
| 田野<br>Tano       | 246°T / 8.2NM       | 宮崎自動車道田野IC<br>Interchange    |

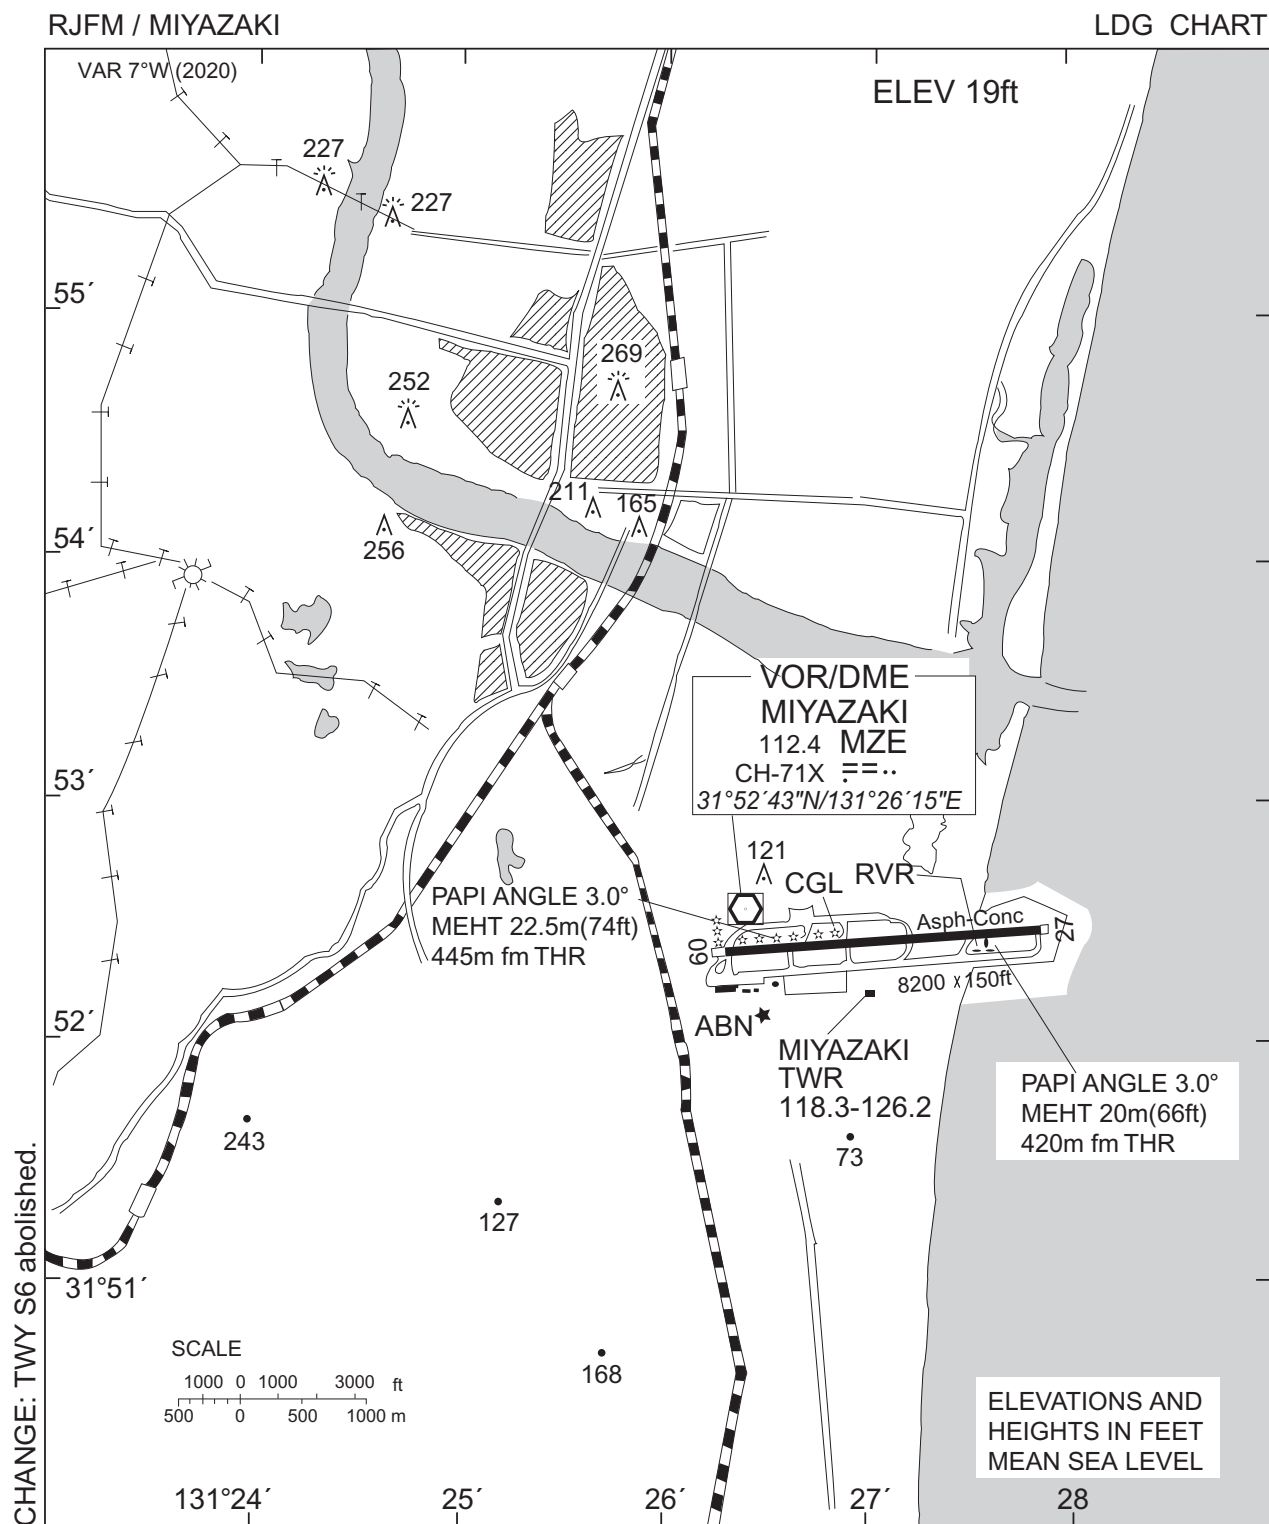



RJFM / MIYAZAKI

Minimum Vectoring Altitude CHART

VAR 7°W (2017)

CHANGE : Update(BTN 300° and 350°).

