


CHANGE : Description of strength of pavement.

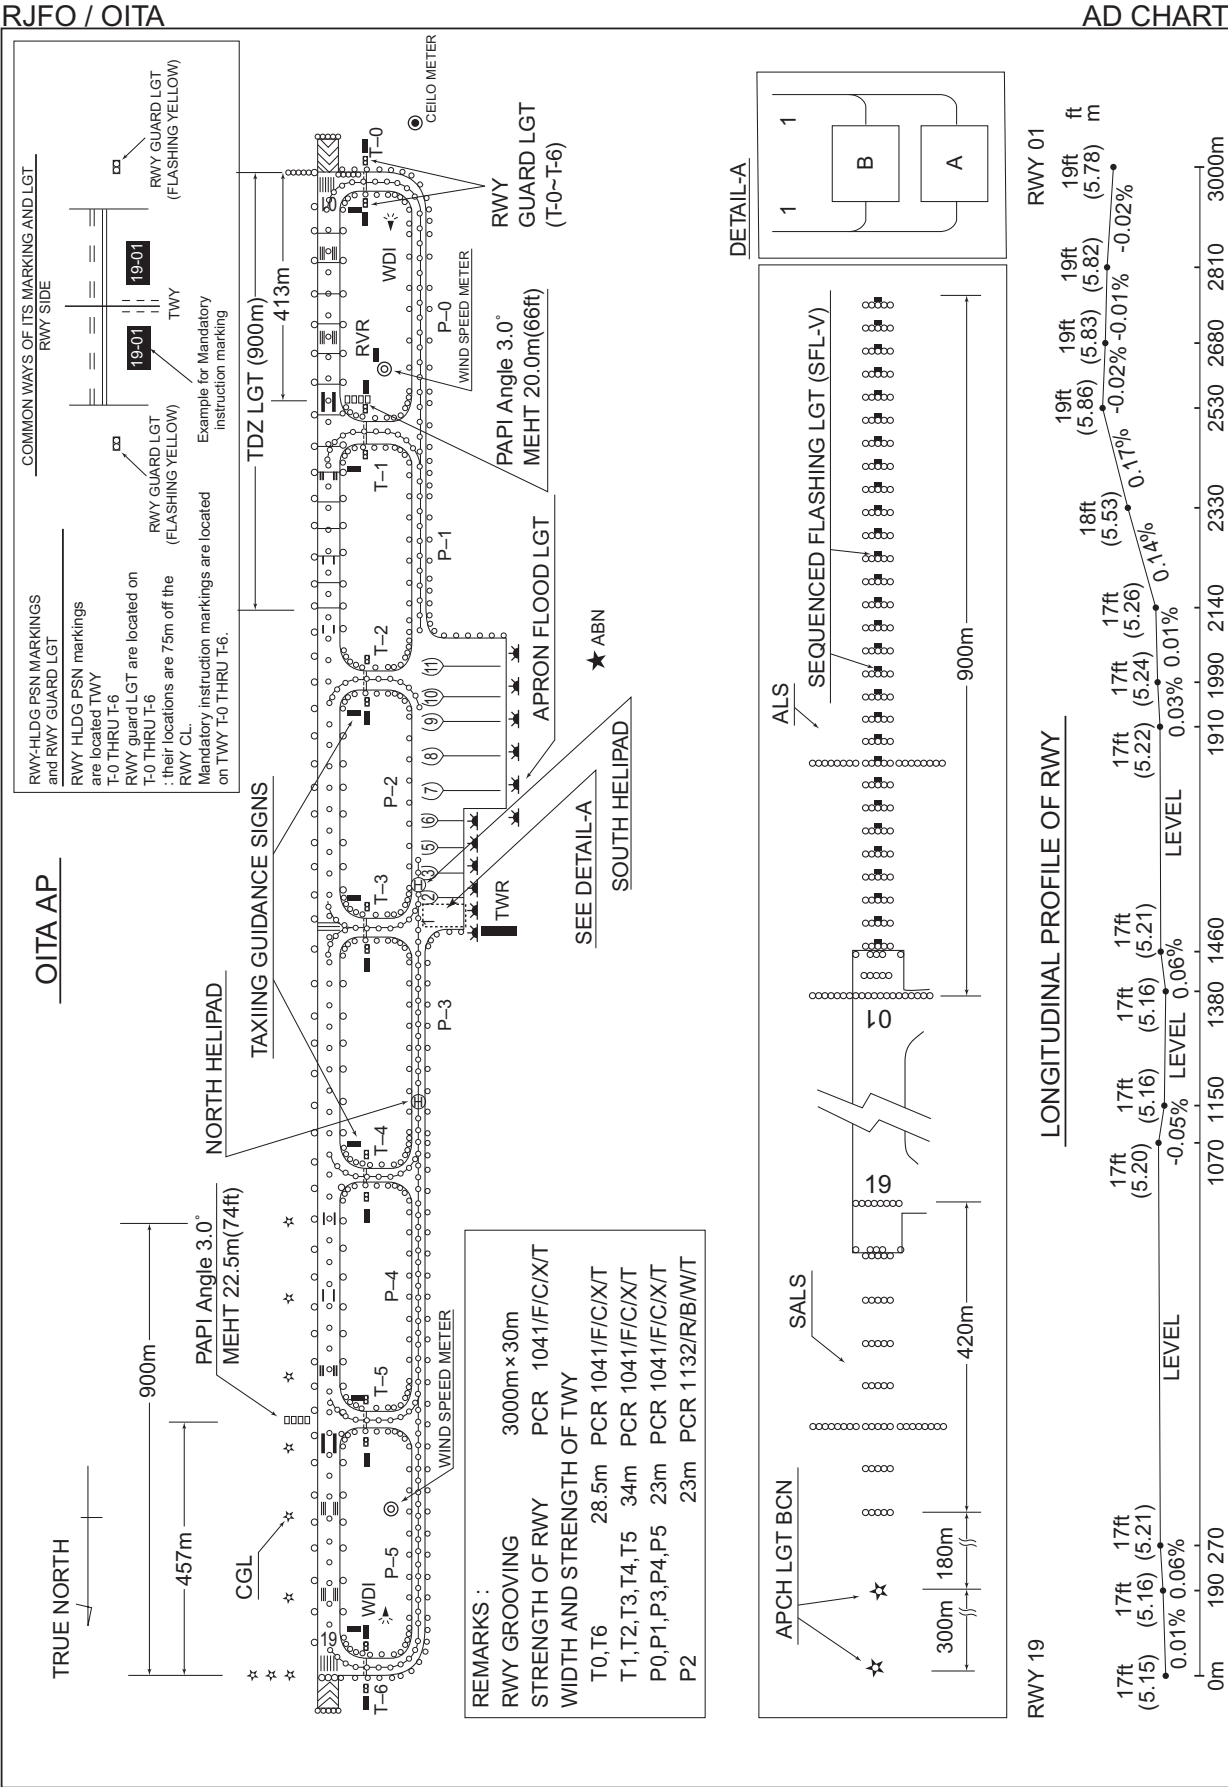

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

OITA AIRPORT
RWY : 01/19

DECLARED DISTANCES

RWY 01		RWY 19	
3000m	TAKE OFF RUN AVAILABLE	3000m	
3000m	TAKE OFF DISTANCE AVAILABLE	3000m	
3000m	ACCELERATE STOP DISTANCE AVAILABLE	3000m	
3000m	LANDING DISTANCE AVAILABLE	3000m	

LEGEND

LEGEND	
①	IDENTIFICATION NUMBER
⊙	POLE, TOWER, SPIRE, ANTENNA, ETC
✱	TREE
	RAILROAD
—+—+—	TRANSMISSION LINE OR OVERHEAD CABLE
△	TRIANGULATION POINT
★	AERONAUTICAL GROUND LIGHT
	LEVEE
—+—+—	RIVER


AMENDMENT RECORD

Nº	DATE	ENTERED BY

HORIZONTAL SCALE

FEET
0 1000 2000 3000 4000 5000 6000 7000 8000

METRES
0 500 1000 1500 2000

AERODROME OBSTACLE CHART-ICAO
TYPE B

STANDARD DEPARTURE CHART - INSTRUMENT

RJFO / OITA

SID


MUSASHI REVERSAL TWO DEPARTURE

RWY01 : Climb RWY HDG to 500FT, turn right HDG177° to intercept and proceed via TFE R132 to TFE 10.0DME,...


RWY19 : Turn left, climb via TFE R132 to TFE 10.0DME,...
...turn right, direct to TFE VOR/DME.
Cross TFE VOR/DME at or above 4000FT.

Note RWY01 : 5.0% climb gradient required up to 500FT.
OBST ALT 321FT located at 2.5NM 352° FM end of RWY01.

CHANGE : OBST.

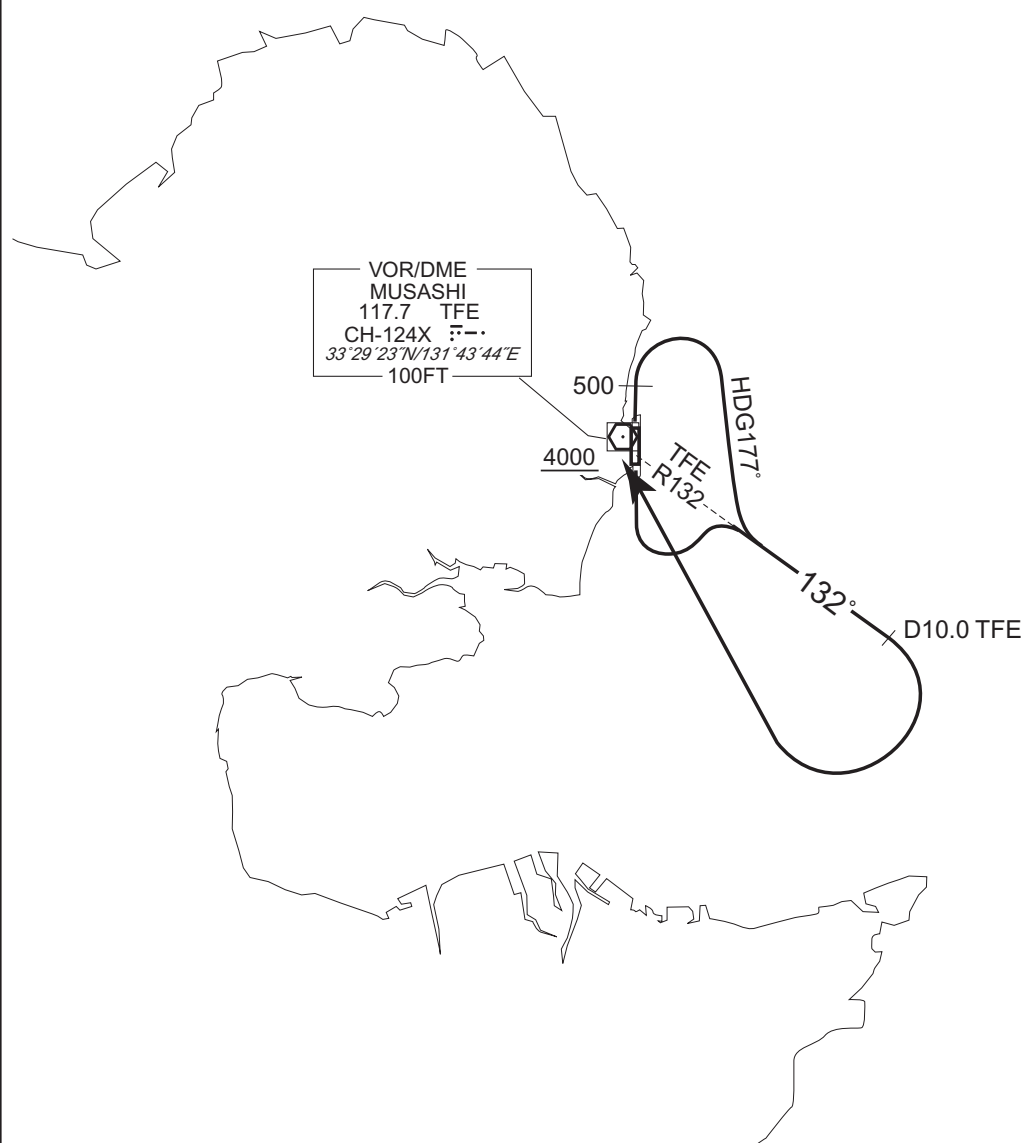

STANDARD DEPARTURE CHART - INSTRUMENT

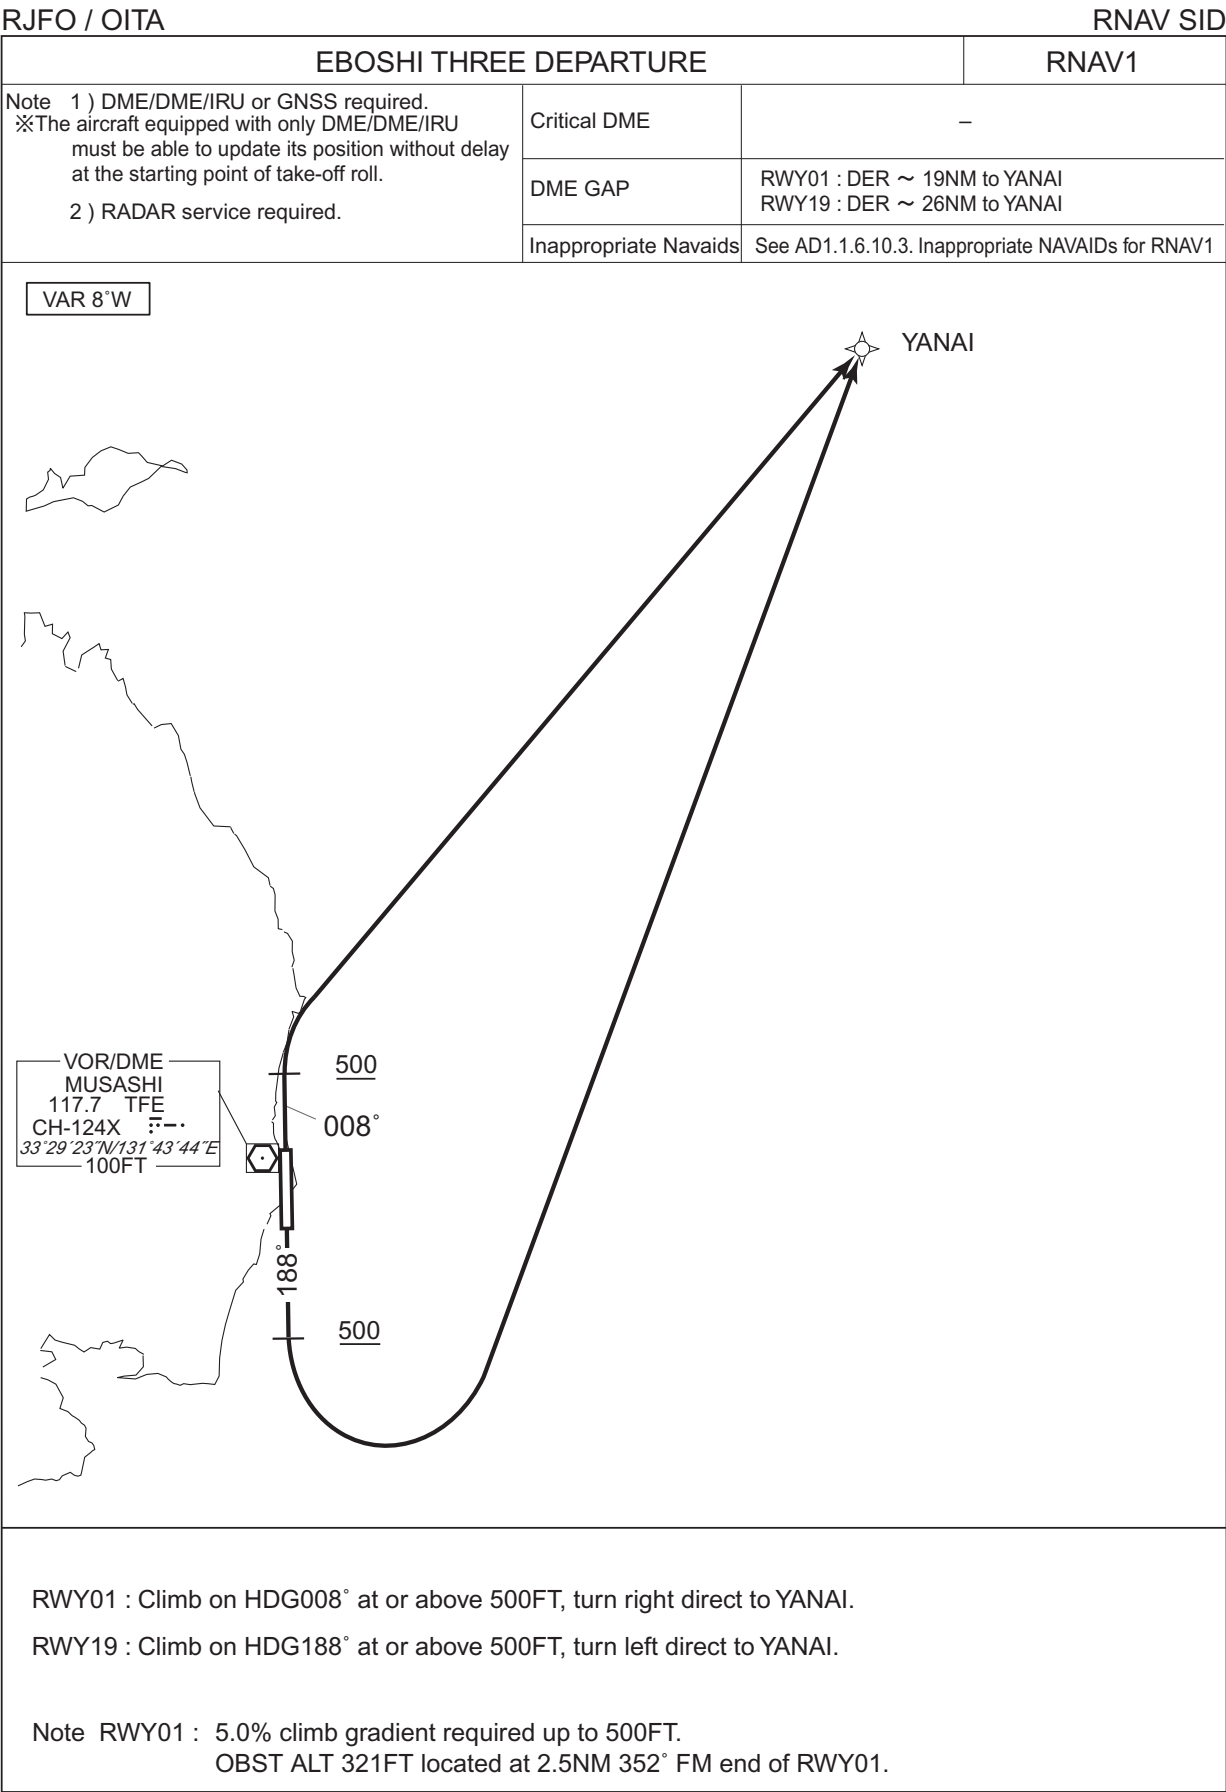

STANDARD DEPARTURE CHART - INSTRUMENT

RJFO / OITA

RNAV SID

EBOSHI THREE DEPARTURE

RWY01

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	008 (000.4)	-8.0	—	—	+500	—	—	RNAV1
002	DF	YANAI	—	—	-8.0	—	R	—	—	—	RNAV1

RWY19


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	188 (180.4)	-8.0	—	—	+500	—	—	RNAV1
002	DF	YANAI	—	—	-8.0	—	L	—	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates
YANAI	334622.9N / 1315917.1E

CHANGE : PROC renamed. PROC course. Waypoint Coordinates added.

STANDARD DEPARTURE CHART- INSTRUMENT

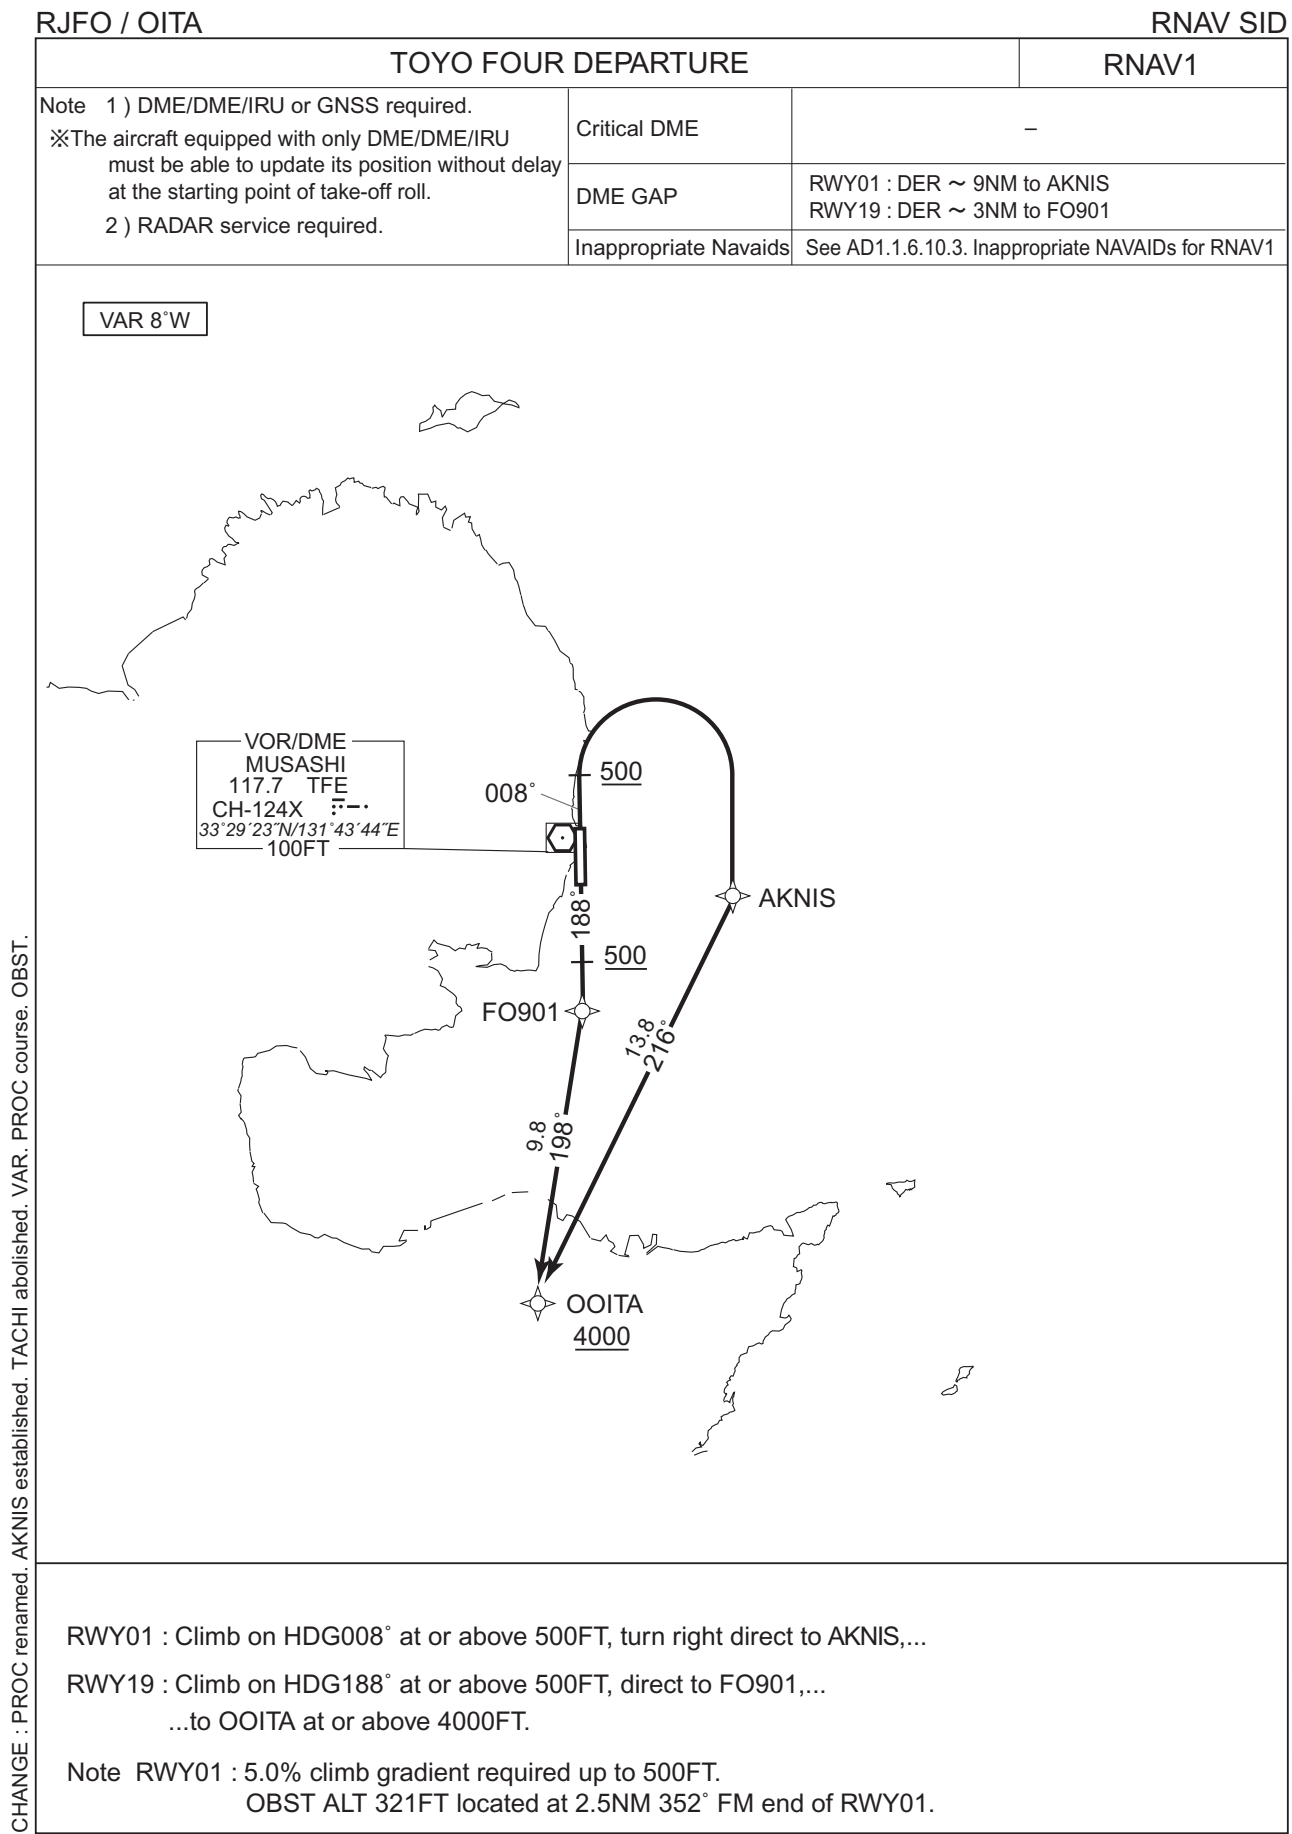

STANDARD DEPARTURE CHART- INSTRUMENT

RJFO / OITA

RNAV SID

TOYO FOUR DEPARTURE

RWY01

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	008 (000.4)	-8.0	—	—	+500	—	—	RNAV1
002	DF	AKNIS	—	—	-8.0	—	R	—	—	—	RNAV1
003	TF	OOITA	—	216 (208.1)	-8.0	13.8	—	+4000	—	—	RNAV1

RWY19


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	188 (180.4)	-8.0	—	—	+500	—	—	RNAV1
002	DF	FO901	—	—	-8.0	—	—	—	—	—	RNAV1
003	TF	OOITA	—	198 (189.8)	-8.0	9.8	—	+4000	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates
AKNIS	332524.3N / 1314958.2E
FO901	332251.1N / 1314410.5E
OOITA	331313.2N / 1314211.7E

CHANGE : AKNIS established. TACHI abolished. PROC course. Waypoint Coordinates added.

STANDARD DEPARTURE CHART - INSTRUMENT

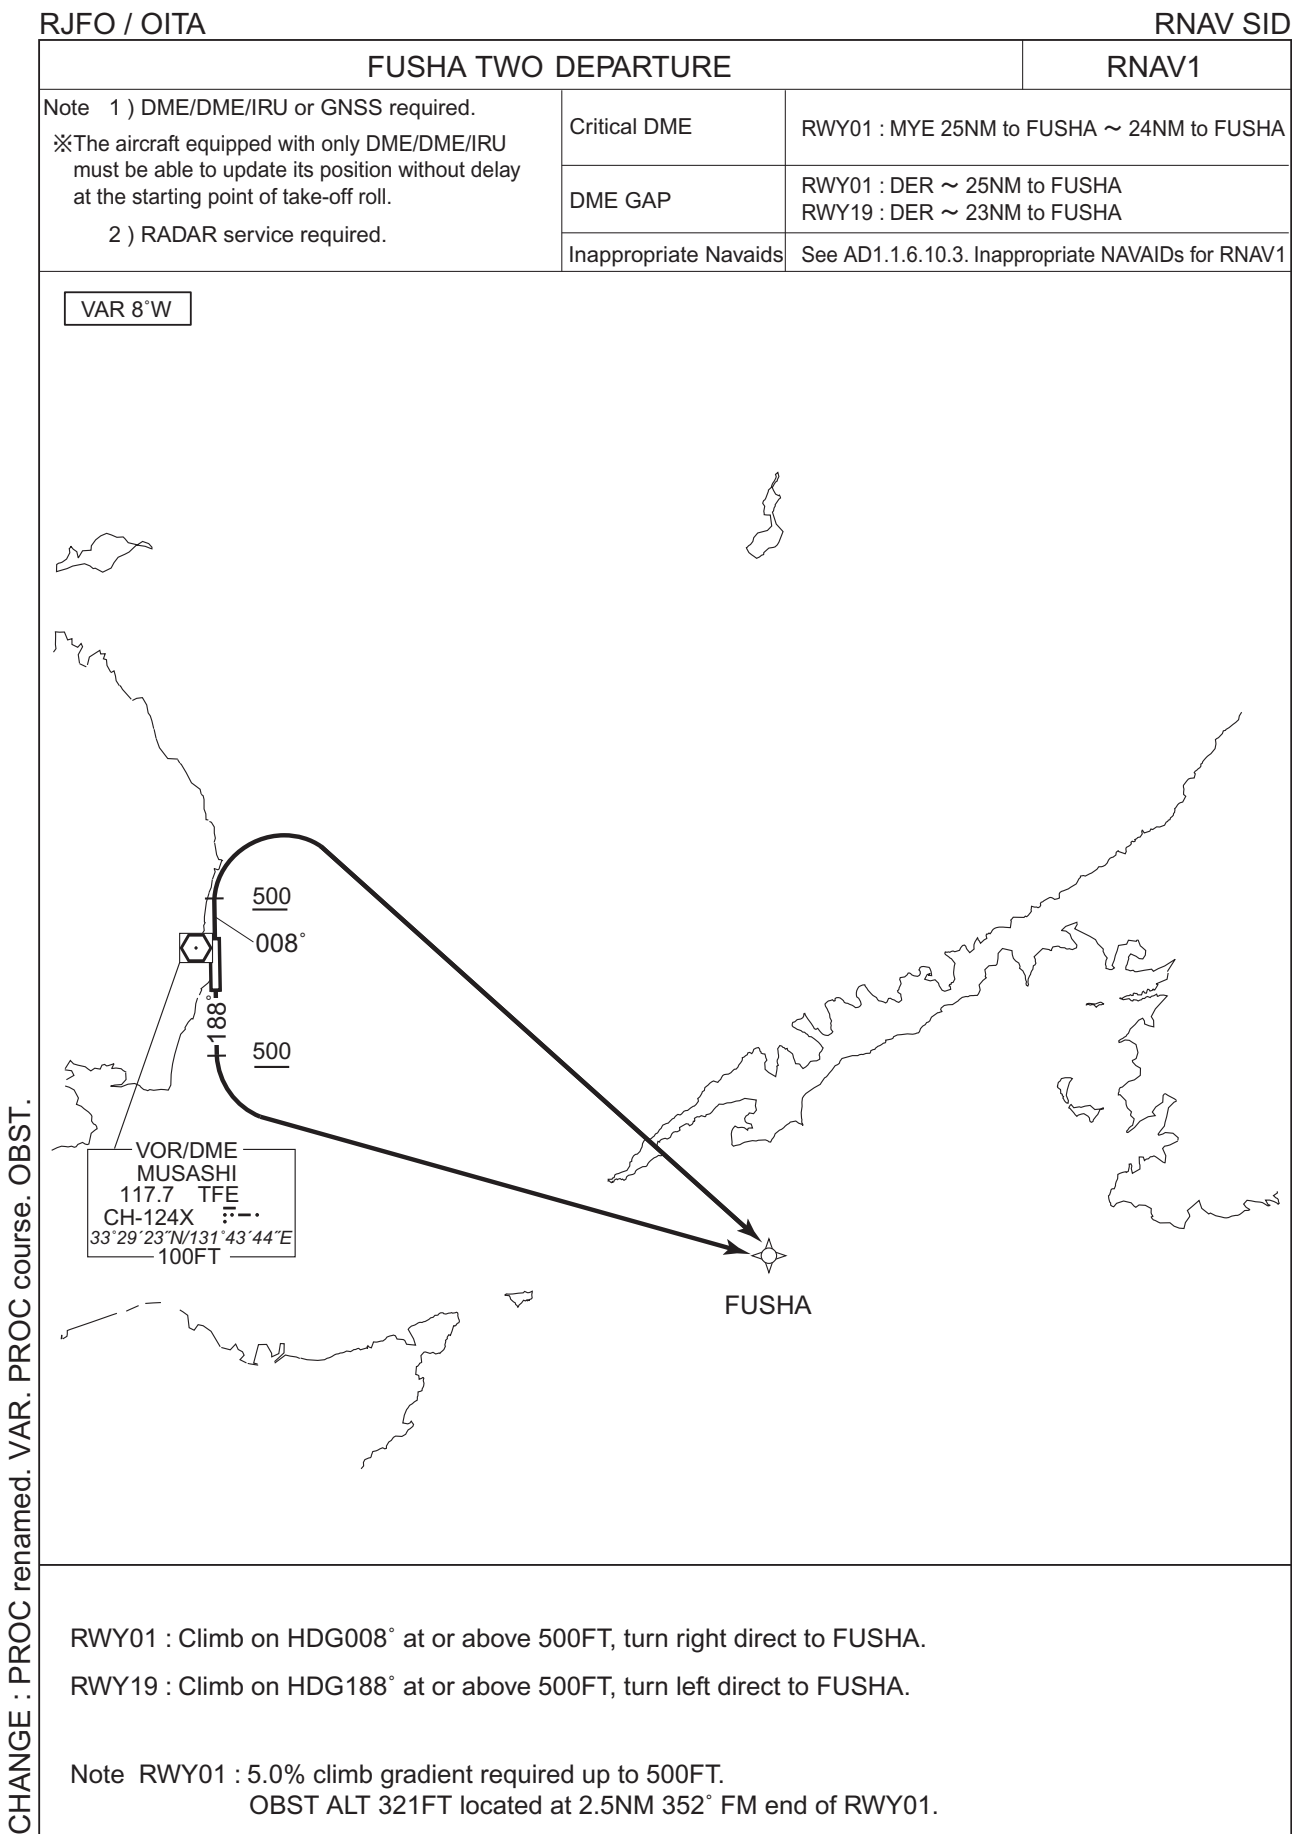

CHANGE : PROC renamed. VAR. PROC course. OBST.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFO / OITA

RNAV SID

FUSHA TWO DEPARTURE

RWY01

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	008 (000.4)	-8.0	—	—	+500	—	—	RNAV1
002	DF	FUSHA	—	—	-8.0	—	R	—	—	—	RNAV1

RWY19


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	188 (180.4)	-8.0	—	—	+500	—	—	RNAV1
002	DF	FUSHA	—	—	-8.0	—	L	—	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates
FUSHA	331737.7N / 1320814.6E

CHANGE : PROC renamed. PROC course. VAR. Waypoint Coordinates added.

STANDARD DEPARTURE CHART - INSTRUMENT

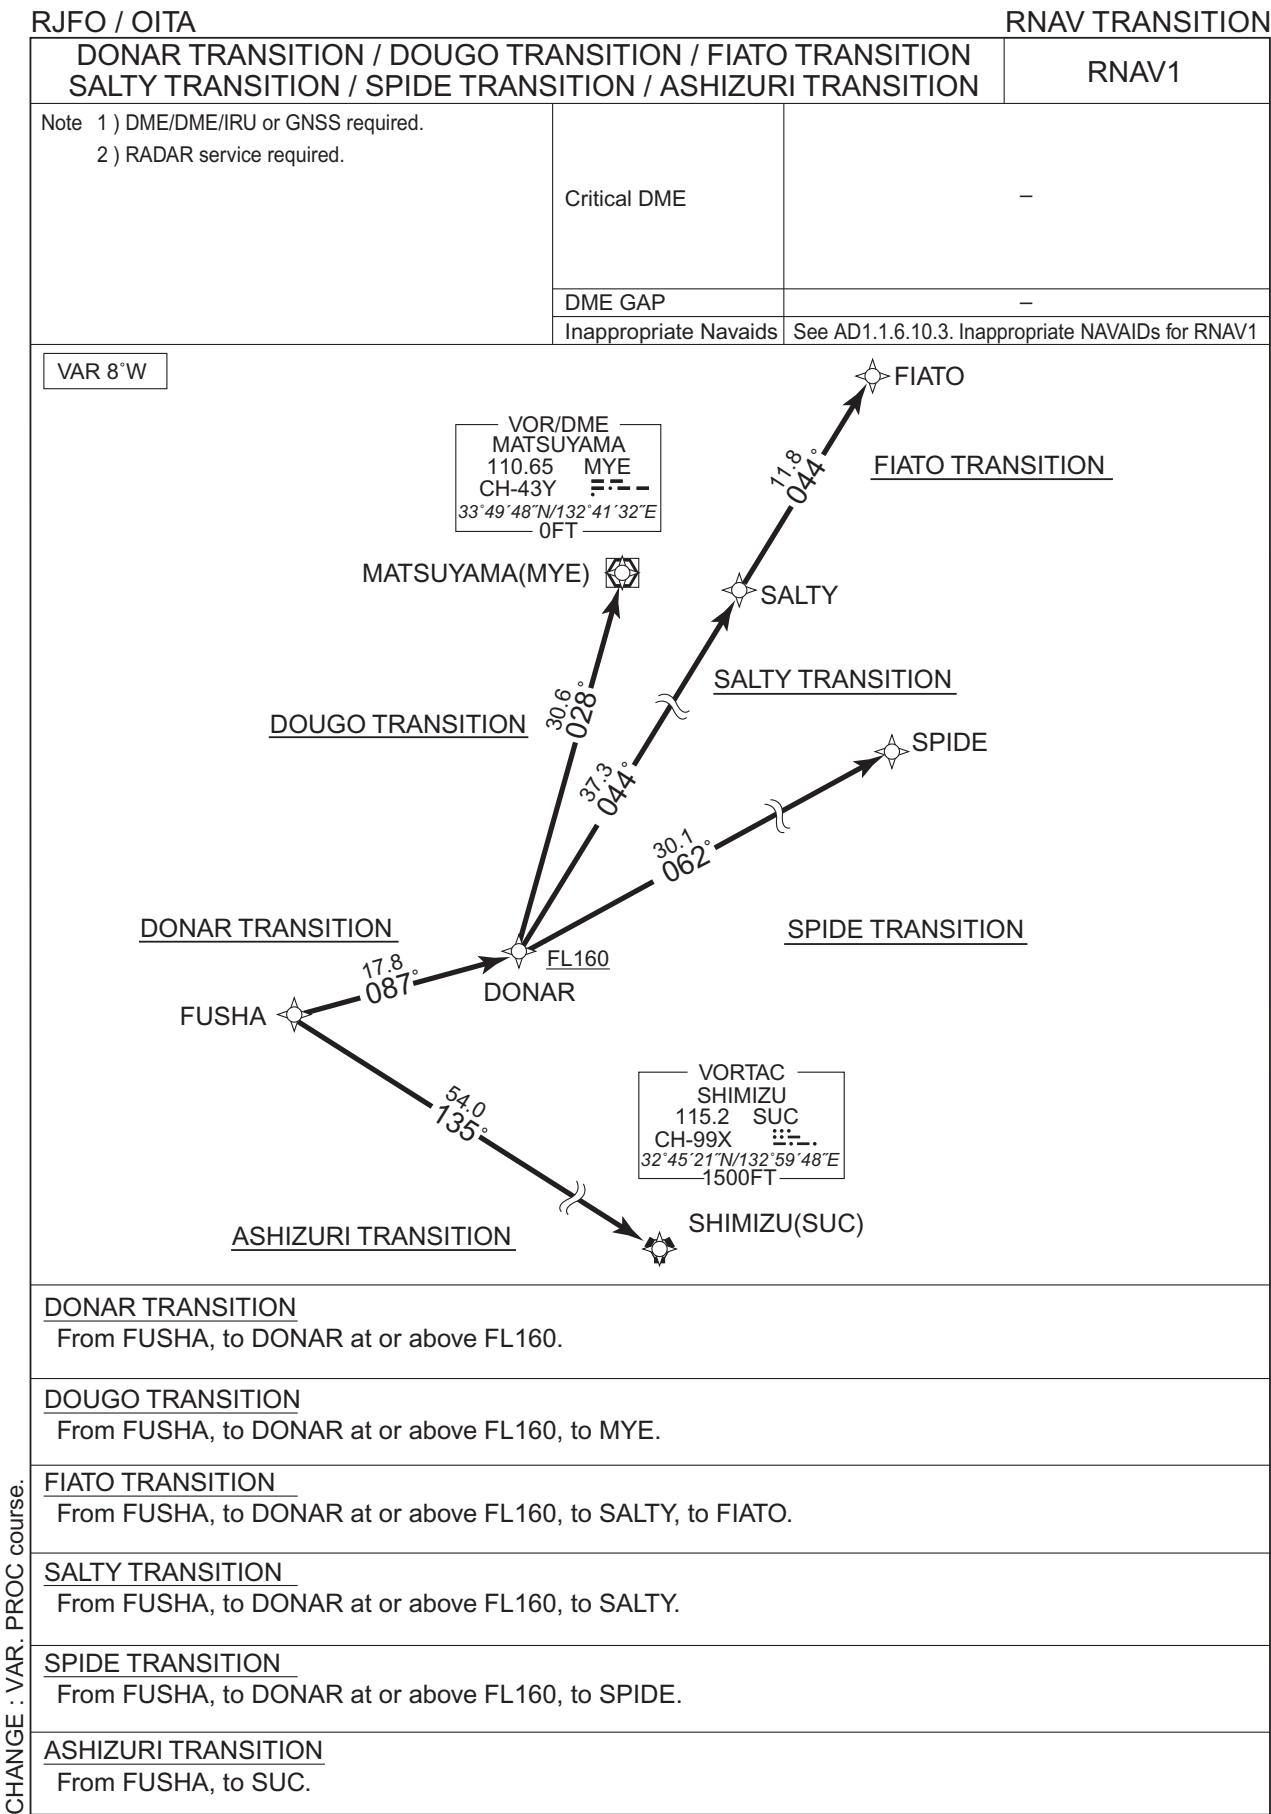

STANDARD DEPARTURE CHART - INSTRUMENT

RJFO / OITA

RNAV TRANSITION

DONAR TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	FUSHA	—	—	-8.0	—	—	—	—	—	RNAV1
002	TF	DONAR	—	087 (078.7)	-8.0	17.8	—	+FL160	—	—	RNAV1

DOUGO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	FUSHA	—	—	-8.0	—	—	—	—	—	RNAV1
002	TF	DONAR	—	087 (078.7)	-8.0	17.8	—	+FL160	—	—	RNAV1
003	TF	MYE	—	028 (019.8)	-8.0	30.6	—	—	—	—	RNAV1

FIATO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	FUSHA	—	—	-8.0	—	—	—	—	—	RNAV1
002	TF	DONAR	—	087 (078.7)	-8.0	17.8	—	+FL160	—	—	RNAV1
003	TF	SALTY	—	044 (036.1)	-8.0	37.3	—	—	—	—	RNAV1
004	TF	FIATO	—	044 (036.3)	-8.0	11.8	—	—	—	—	RNAV1

SALTY TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	FUSHA	—	—	-8.0	—	—	—	—	—	RNAV1
002	TF	DONAR	—	087 (078.7)	-8.0	17.8	—	+FL160	—	—	RNAV1
003	TF	SALTY	—	044 (036.1)	-8.0	37.3	—	—	—	—	RNAV1

CHANGE : PROC course. VAR.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFO / OITA

RNAV TRANSITION

SPIDE TRANSITION											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	FUSHA	—	—	-8.0	—	—	—	—	—	RNAV1
002	TF	DONAR	—	087 (078.7)	-8.0	17.8	—	+FL160	—	—	RNAV1
003	TF	SPIDE	—	062 (054.1)	-8.0	30.1	—	—	—	—	RNAV1
ASHIZURI TRANSITION											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	FUSHA	—	—	-8.0	—	—	—	—	—	RNAV1
002	TF	SUC	—	135 (126.5)	-8.0	54.0	—	—	—	—	RNAV1
Waypoint Coordinates											
Waypoint Identifier			Coordinates								
FUSHA			331737.7N / 1320814.6E								
DONAR			332105.1N / 1322904.7E								
MYE			334948.4N / 1324132.0E								
SALTY			335109.7N / 1325530.8E								
FIATO			340037.4N / 1330354.6E								
SPIDE			333840.2N / 1325818.0E								
SUC			324521.5N / 1325947.9E								

CHANGE : PROC course. VAR. Waypoint Coordinates added.

STANDARD ARRIVAL CHART- INSTRUMENT


RJFO / OITA

STAR


JEWEL ARRIVAL

From over DONKO, via TFE R038 to JEWEL.

Cross DONKO at or above 5000FT, cross JEWEL at or above 3000FT.

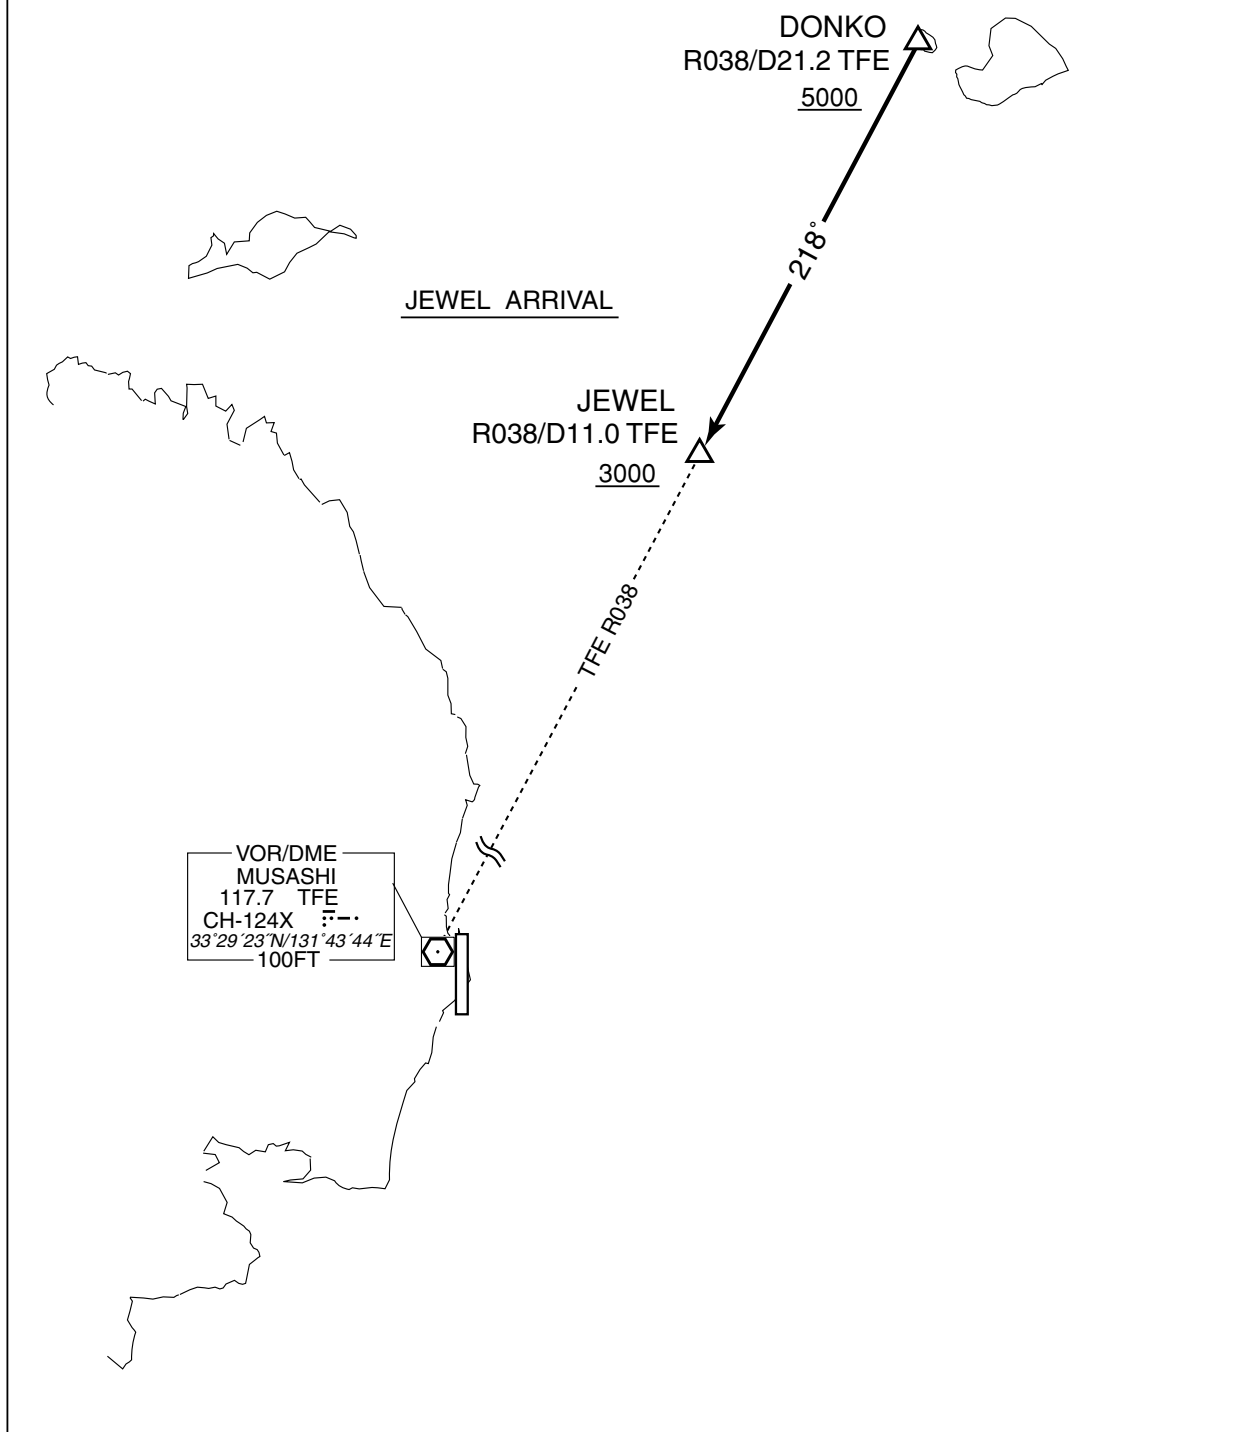

STANDARD ARRIVAL CHART- INSTRUMENT

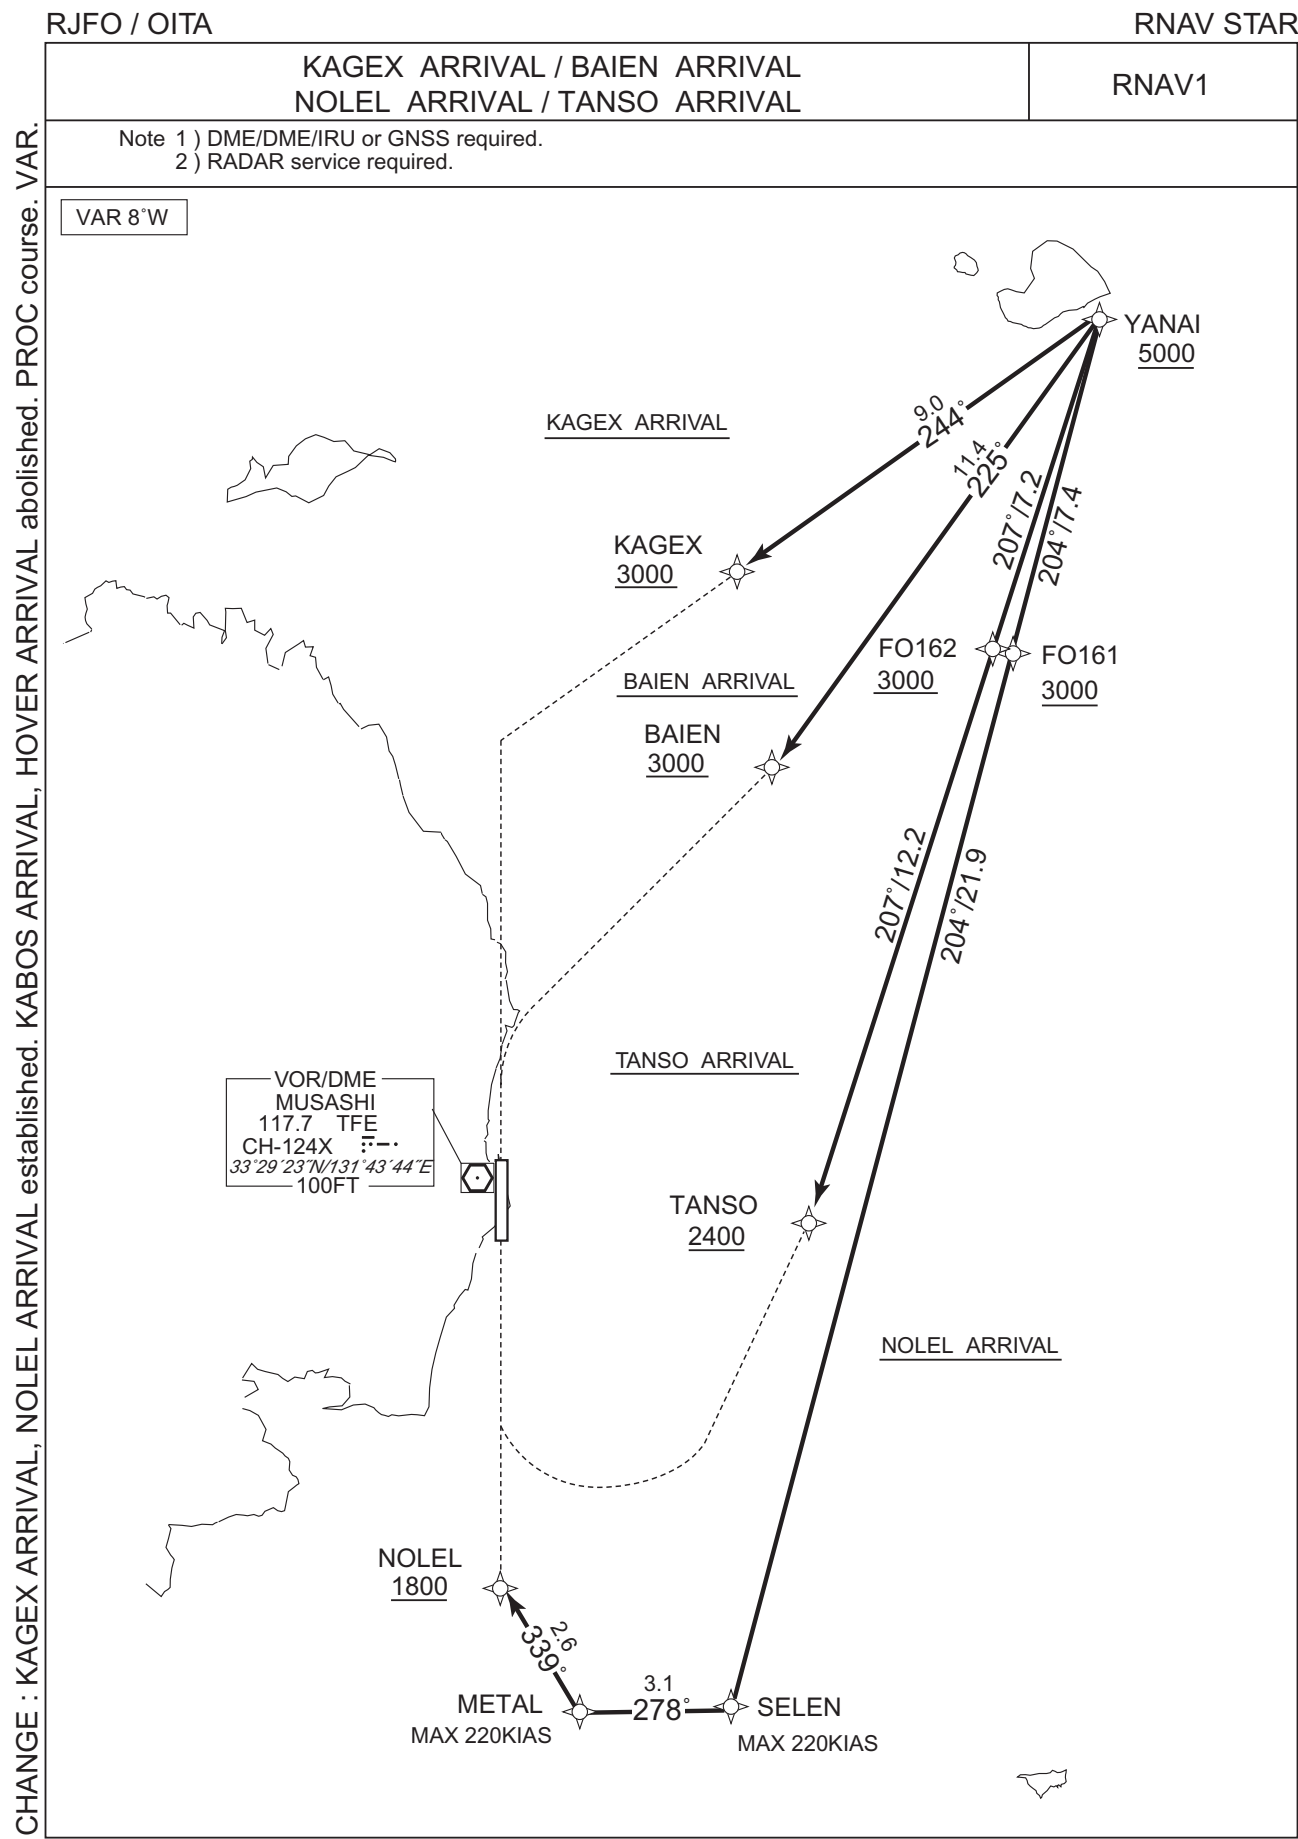

STANDARD ARRIVAL CHART - INSTRUMENT

RJFO / OITA

RNAV STAR

KAGEX ARRIVAL

From YANAI at or above 5000FT, to KAGEX at or above 3000FT.

Critical DME	—
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YANAI	—	—	-8.0	—	—	+5000	—	—	RNAV1
002	TF	KAGEX	—	244 (236.2)	-8.0	9.0	—	+3000	—	—	RNAV1

BAIEN ARRIVAL

From YANAI at or above 5000FT, to BAIEN at or above 3000FT.

Critical DME	—
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YANAI	—	—	-8.0	—	—	+5000	—	—	RNAV1
002	TF	BAIEN	—	225 (217.4)	-8.0	11.4	—	+3000	—	—	RNAV1

TANSO ARRIVAL

From YANAI at or above 5000FT, to FO162 at or above 3000FT, to TANSO at or above 2400FT.

Critical DME	—
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YANAI	—	—	-8.0	—	—	+5000	—	—	RNAV1
002	TF	FO162	—	207 (199.4)	-8.0	7.2	—	+3000	—	—	RNAV1
003	TF	TANSO	—	207 (199.4)	-8.0	12.2	—	+2400	—	—	RNAV1

CHANGE : KAGEX ARRIVAL established. PROC course. VAR.

STANDARD ARRIVAL CHART - INSTRUMENT

RJFO / OITA

RNAV STAR

NOLEL ARRIVAL
From YANAI at or above 5000FT, to FO161 at or above 3000FT, to SELEN, to METAL, to NOLEL at or above 1800FT.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YANAI	—	—	-8.0	—	—	+5000	—	—	RNAV1
002	TF	FO161	—	204 (196.4)	-8.0	7.4	—	+3000	—	—	RNAV1
003	TF	SELEN	—	204 (196.4)	-8.0	21.9	—	—	-220	—	RNAV1
004	TF	METAL	—	278 (270.5)	-8.0	3.1	—	—	-220	—	RNAV1
005	TF	NOLEL	—	339 (330.5)	-8.0	2.6	—	+1800	—	—	RNAV1

Waypoint Coordinates


Waypoint Identifier	Coordinates
YANAI	334622.9N / 1315917.1E
KAGEX	334121.2N / 1315016.7E
BAIEN	333720.4N / 1315059.8E
FO162	333936.2N / 1315624.8E
TANSO	332806.6N / 1315133.7E
FO161	333918.2N / 1315646.6E
SELEN	331818.8N / 1314923.1E
METAL	331820.3N / 1314541.2E
NOLEL	332036.2N / 1314409.4E

CHANGE : NOLEL ARRIVAL established. Waypoint Coordinates added. .

STANDARD ARRIVAL CHART - INSTRUMENT

RJFO / OITA

RNAV STAR RWY01

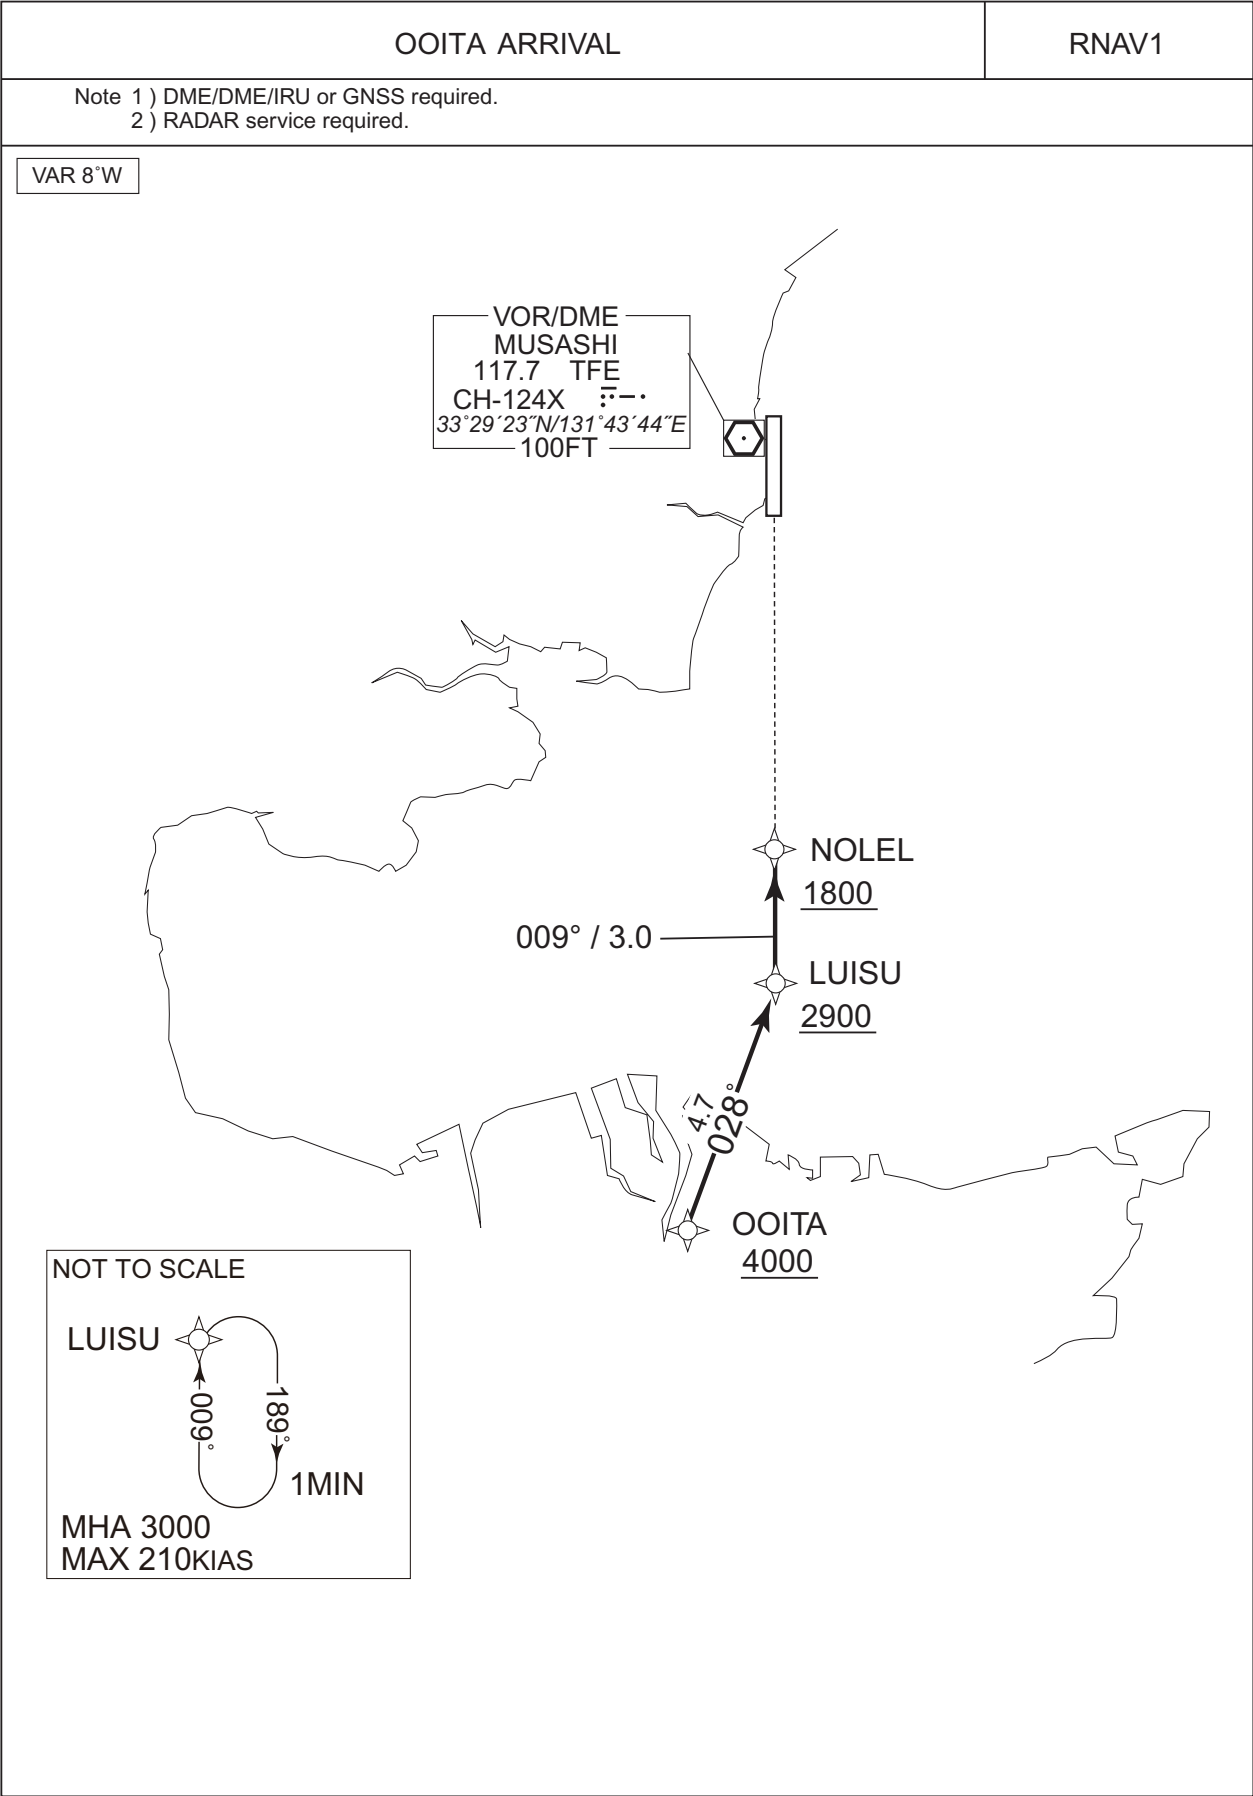

CHANGE : New PROC.

STANDARD ARRIVAL CHART - INSTRUMENT

RJFO / OITA

RNAV STAR

OOITA ARRIVAL

From OOITA at or above 4000FT, to LUISU at or above 2900FT, to NOLEL at or above 1800FT.

Critical DME	—
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OOITA	—	—	-8.0	—	—	+4000	—	—	RNAV1
002	TF	LUISU	—	028 (020.2)	-8.0	4.7	—	+2900	—	—	RNAV1
003	TF	NOLEL	—	009 (000.5)	-8.0	3.0	—	+1800	—	—	RNAV1


Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	LUISU	009 (000.5)	-8.0	1.0(-14000)	R	3000	FL140	-210(-14000)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates
OOITA	331313.2N / 1314211.7E
LUISU	331735.8N / 1314407.5E
NOLEL	332036.2N / 1314409.4E

CHANGE : New PROC.

CHANGE : VAR. NOLEL established. HOVER abolished. MINIMA for CIRCLING CAT C.

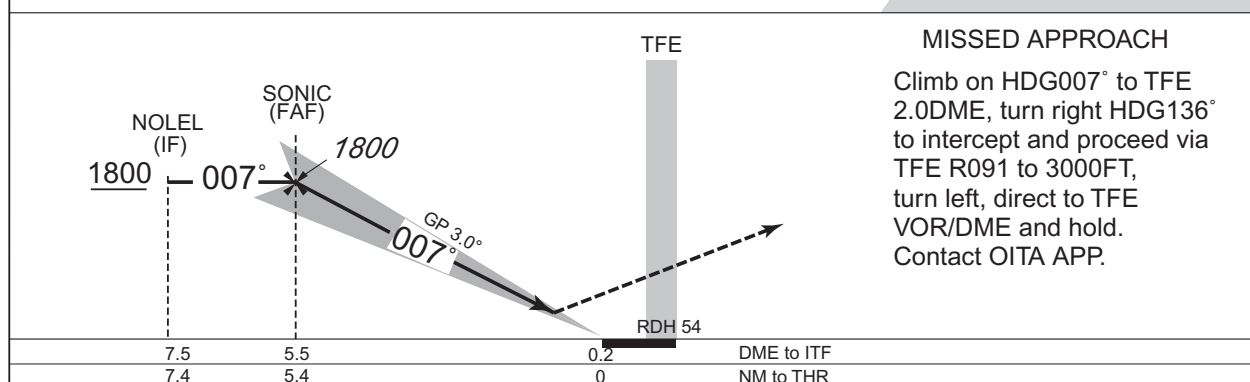


Missed APCH climb gradient MNM 4.0%.

MINIMA		THR elev. 19		AD elev. 17		
CAT	CAT I		CIRCLING			
	DA(H)	RVR/ CMV	MDA(H)	VIS		
A	219 (200)	550	430 (413)	1600		
B			470 (453)			
C			660 (643)			2400
D			760 (743)			3200


MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to **EAST** side of RWY only.

RJFO / OITA

OITA APP 120.6	ILS-LOC 111.5 ITF 32.1 ILS-GP 332.9 ILS-DME CH-52X	OITA TOWER 118.8 - 126.2	RADAR AVBL ATIS 127.8
-------------------	---	-----------------------------	--------------------------

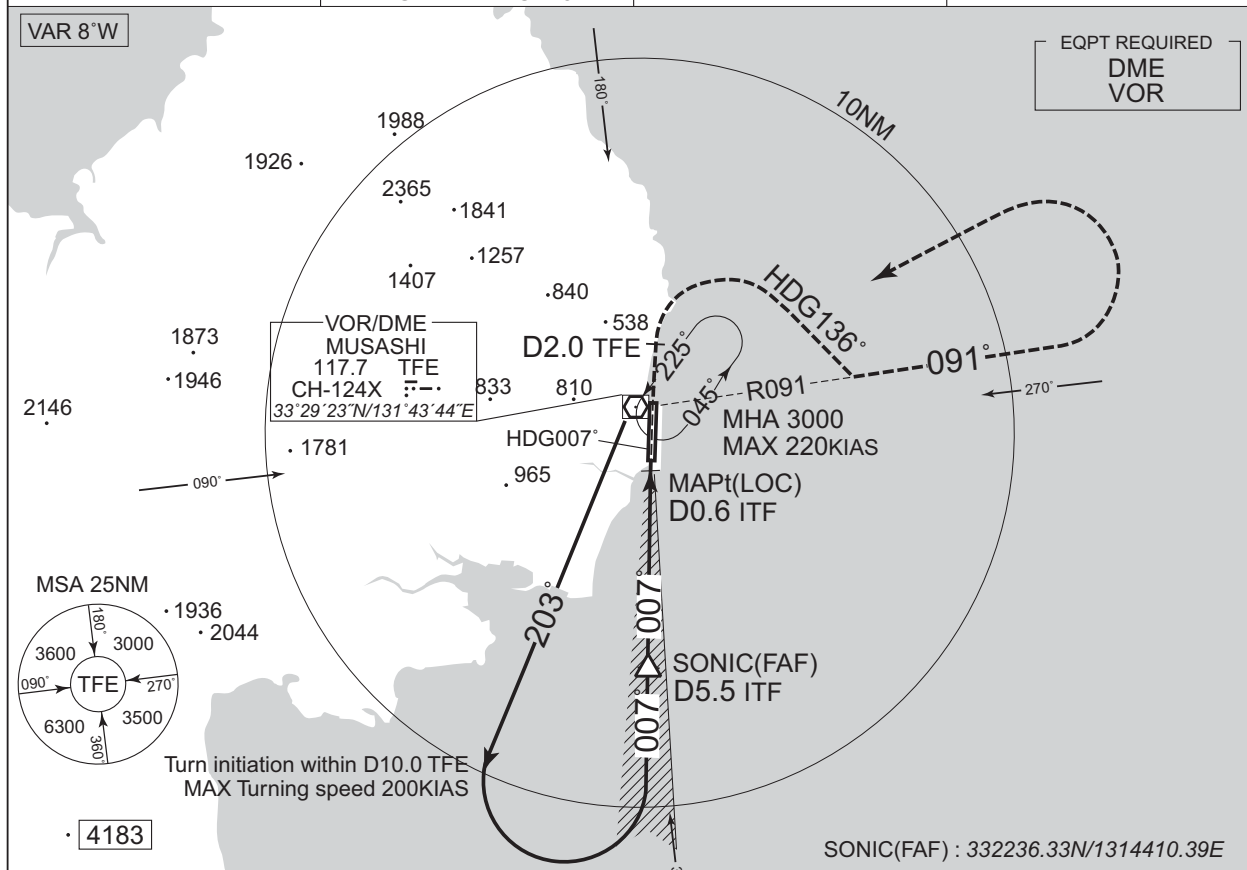

NM to ITF	FAF	5	4	3	2	1	MAPt
ALT (3.0° APCH Path)	1770	1604	1286	968	649	330	—

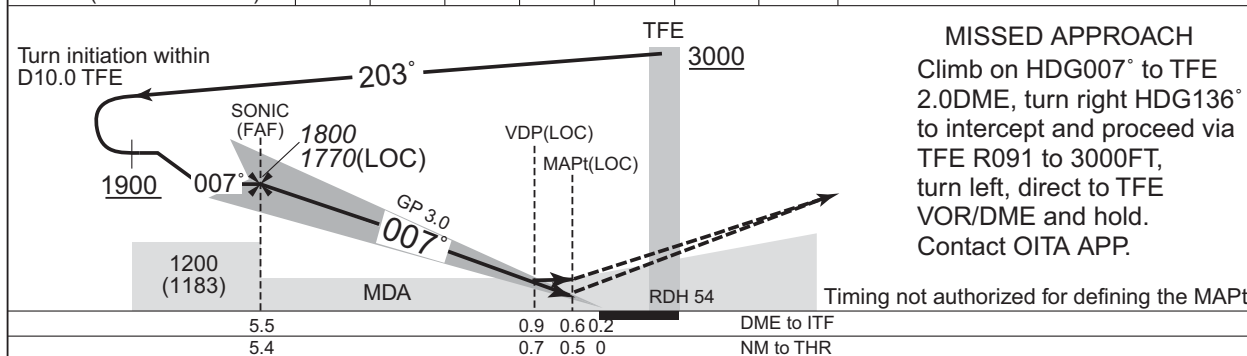

Missed APCH climb gradient MNM 4.0%.

MINIMA		THR elev. 19		AD elev. 17		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	219 (200)	550	300 (283)	800	430 (413)	1600
B					470 (453)	
C					660 (643)	
D				1200	760 (743)	3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to **EAST** side of RWY only.

CHANGE : PROC renamed.

RJFO / OITA

OITA APP
120.6

ILS - LOC	
111.5	ITF 332.9
ILS-GP	332.9
ILS-DME	CH-52X

OITA TOWER
118.8 - 126.2

RADAR AVBL
ATIS 127.8

Direct to MINIR, turn right
direct to BAIEN and hold
at 3000FT.
Contact OITA APP.

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to **EAST** side of RWY only.

20/2/25

INSTRUMENT APPROACH CHART

RJFO / OITA

ILS X RWY01

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TANSO	-	-	-8.0	-	-	+2400	-	-	RNP1
002	TF	FO153	-	200 (191.7)	-8.0	6.1	-	+1300	-200	-	RNP1
003	RF Center: FORF3 r=2.50NM	NINEN	-	-	-8.0	7.4	R	1300	-	-	RNP1

001	DF	MINIR	Y	-	-8.0	-	-	-	-	-	RNP1
002	DF	BAIEN	-	-	-8.0	-	R	3000	-	-	RNP1


Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	TANSO	198 (190.0)	-8.0	1.0(-14000)	L	2400	FL140	-210(-14000)	RNP1
Hold	BAIEN	243 (234.9)	-8.0	1.0(-14000)	L	3000	FL140	-210(-14000)	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
TANSO	332806.56N / 1315133.74E	FORF3	332237.18N / 1314709.46E
FO153	332206.75N / 1315004.78E		
NINEN	332238.32N / 1314410.42E		
MINIR	333001.00N / 1314414.31E		
BAIEN	333720.39N / 1315059.77E		

CHANGE : PROC renamed. MINIR, FO153 established. HLDG pattern. Waypoint Coordinates added.


INSTRUMENT APPROACH CHART

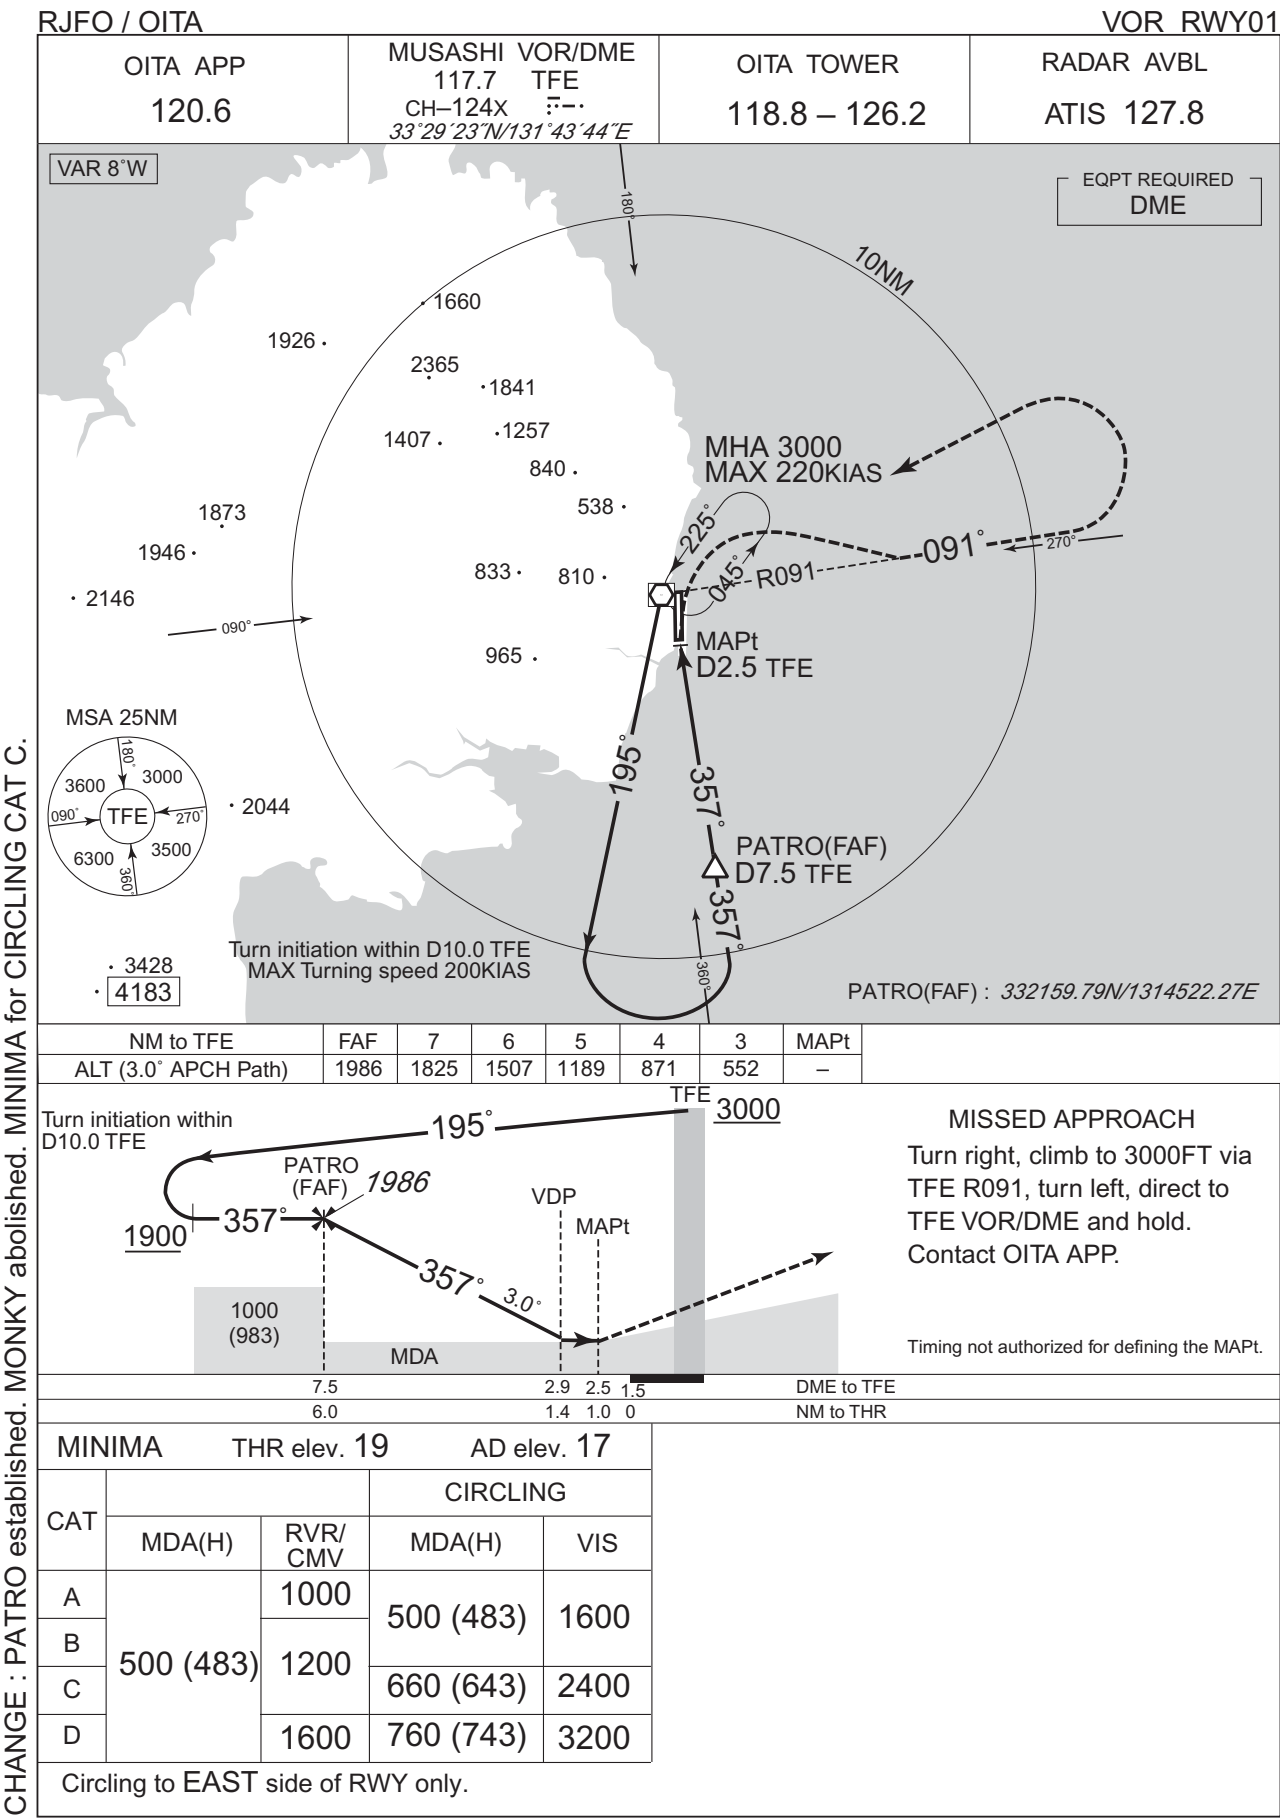

INSTRUMENT APPROACH CHART


RJFO / OITA

VOR A

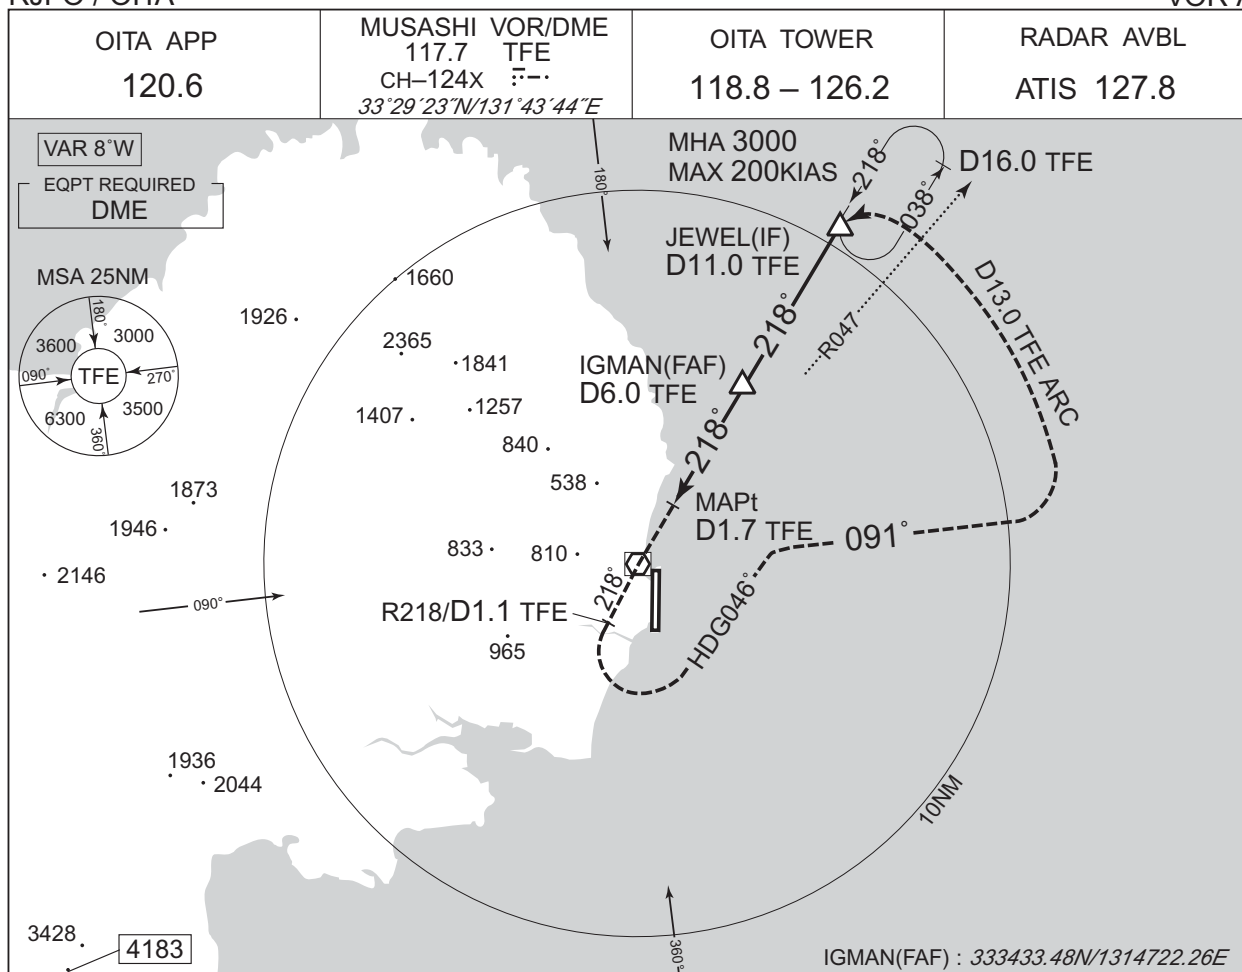**MISSED APPROACH**

Climb to 3000FT via TFE R218 to TFE 1.1DME, turn left HDG046° to intercept and proceed via TFE R091 to TFE 13.0DME, turn left, via TFE 13.0DME counterclockwise ARC to intercept and proceed via TFE R038 to JEWEL and hold. Contact OITA APP.

Timing not authorized for defining the MAPt.

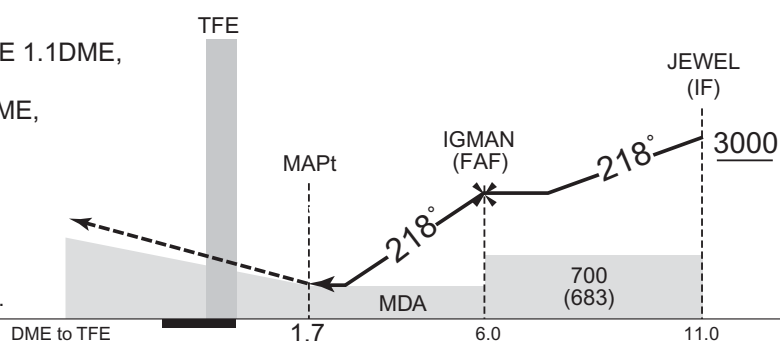

Missed APCH climb gradient MNM 5.0%.

MINIMA			AD elev. 17
CAT	CIRCLING		VIS
	MDA(H)		
A	440 (423)		1600
B	480 (463)		
C	660 (643)		2400
D	760 (743)		3200


MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to EAST side of RWY only.

CHANGE : IGMAN established. MELDY abolished. VAR.

CHANGE : KAGEX, AKILU established. KABOS, KUROSZ abolished. PROC course. VAR. HLDG pattern at TFE. ALT restriction at KAREI.
NIM to THR. Missed APCH climb gradient MNM. MINIMA.



INSTRUMENT APPROACH CHART

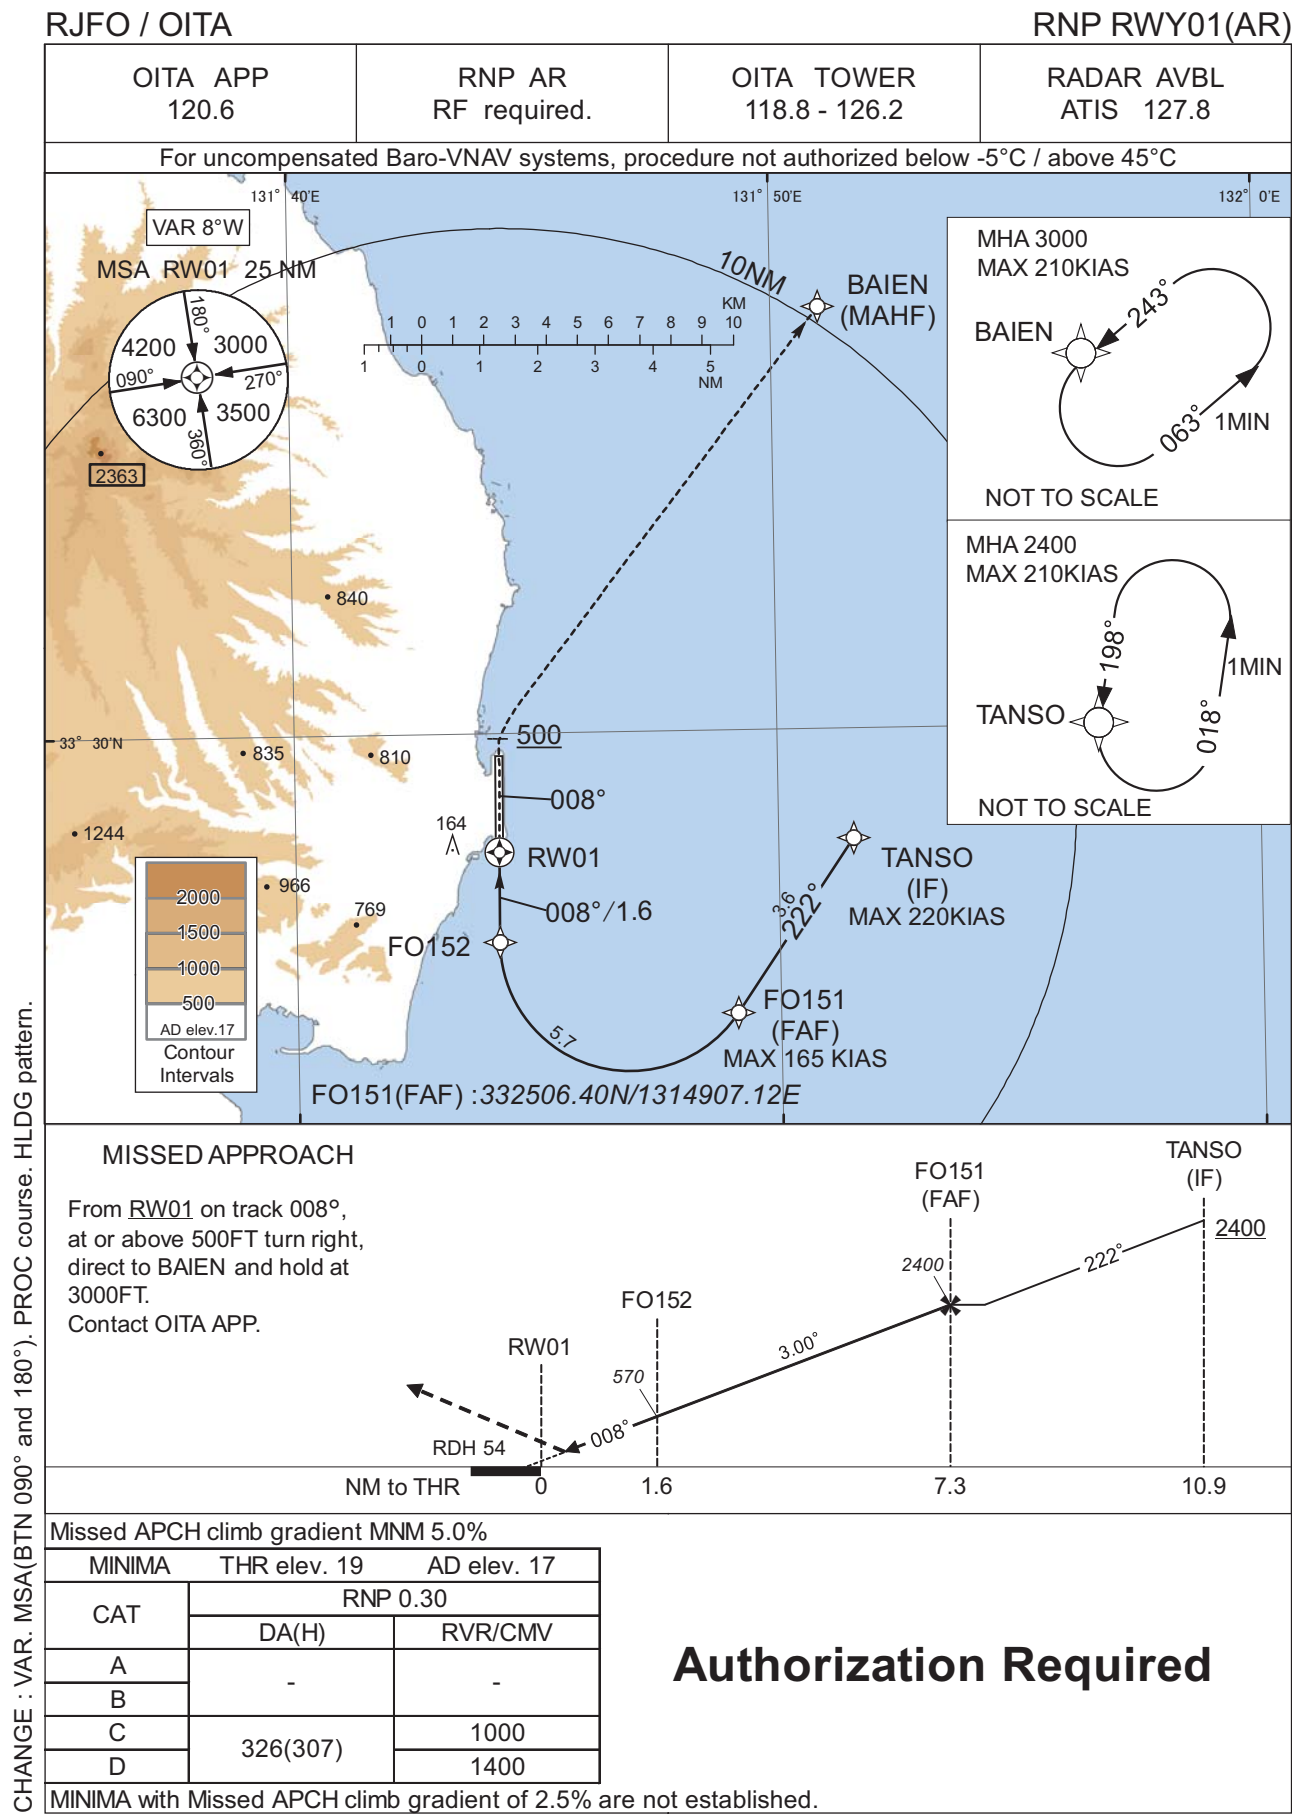

INSTRUMENT APPROACH CHART

RJFO / OITA

RNP RWY01(AR)

Coding Table											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	TANSO	-	-	-8.0	-	-	+2400	-220	-	-
002	TF	FO151	-	222 (214.2)	-8.0	3.6	-	2400	-165	-	1.0
003	RF Center: FORF1 r=2.25NM	FO152	-	-	-8.0	5.7	R	570	-	-3.00	0.3
004	TF	RW01	Y	008 (000.4)	-8.0	1.6	-	73	-	-3.00/54	0.3
005	FA	-	-	008 (000.4)	-8.0	-	-	+500	-	-	1.0
006	DF	BAIEN	-	-	-8.0	-	R	3000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	TANSO	198 (190.0)	-8.0	1.0 (-14000)	L	2400	FL140	-210(-14000)	1.0
Hold	BAIEN	243 (234.9)	-8.0	1.0 (-14000)	L	3000	FL140	-210(-14000)	1.0

Waypoint Coordinates			
Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
TANSO	332806.56N / 1315133.74E	FORF1	332622.64N / 1314653.79E
FO151	332506.40N / 1314907.12E		
FO152	332623.67N / 1314412.39E		
RW01	332757.53N / 1314413.22E		
BAIEN	333720.39N / 1315059.77E		

CHANGE : PROC course. VAR. HLDG pattern added.


RJFO / OITA

RNP Y RWY19(AR)

OITA APP 120.6	RNP AR RF required.	OITA TOWER 118.8 - 126.2	RADAR AVBL ATIS 127.8
-------------------	------------------------	-----------------------------	--------------------------

The map displays a flight path from FO951 (FAF) to BAIEN (IF/MAHF). The path is marked with a solid line and a dashed line. Key points along the path include FO952 (MAX 165KIAS) and FO953. The path is labeled with distances and bearings: 1.9, 235°, 1.6, 188°/1.6, 188°, 500, 5.0, 235°, and 10NM. A circular inset in the top left shows a compass rose with a heading of 090° and a distance of 6300. A scale bar at the bottom right indicates distances in NM (1 to 10) and KM (1 to 10). A legend in the bottom left shows contour intervals (2000, 1500, 1000, 500) and AD elev. 17. The map also shows the MSA RW19 25 NM and BAIEN (IF/MAHF) MAX 210KIAS. A circular inset in the top right shows a compass rose with a heading of 243° and a distance of 063° 1MIN. The text 'NOT TO SCALE' is present in the bottom right.

From RW19 on track 188°,
at or above 500FT turn left,
direct to BAIEN and hold at
3000FT.
Contact OITA APP.

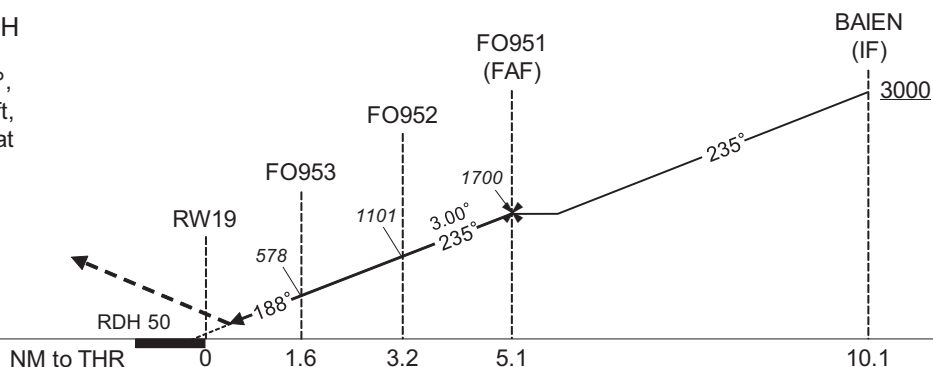

Missed APCH climb gradient MNM 5.0%

MINIMA	THR elev. 17	AD elev. 17
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B		
C	357(340)	1400
D		1600

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Authorization Required

INSTRUMENT APPROACH CHART

RJFO / OITA

RNP Y RWY19(AR)

Coding Table											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	BAIEN	-	-	-8.0	-	-	+3000	-210	-	-
002	TF	FO951	-	235 (226.8)	-8.0	5.0	-	1700	-	-	1.0
003	TF	FO952	-	235 (226.8)	-8.0	1.9	-	1101	-165	-3.00	0.3
004	RF Center: FORF2 r=2.02NM	FO953	-	-	-8.0	1.6	L	578	-	-3.00	0.3
005	TF	RW19	Y	188 (180.4)	-8.0	1.6	-	67	-	-3.00/50	0.3
006	FA	-	-	188 (180.4)	-8.0	-	-	+500	-	-	1.0
007	DF	BAIEN	-	-	-8.0	-	L	3000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	BAIEN	243 (234.9)	-8.0	1.0 (-14000)	L	3000	FL140	-210(-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
BAIEN	333720.39N / 1315059.77E	FORF2	333110.65N / 1314640.11E
FO951	333356.67N / 1314639.45E		
FO952	333239.42N / 1314500.88E		
FO953	333111.58N / 1314414.94E		
RW19	332934.89N / 1314414.08E		

CHANGE : PROC course. VAR. HLDG pattern added.

RJFO / OITA

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP.

Call sign	BRG / DIST from ARP	Remarks
姫島 Himeshima	346°T / 15.3NM	島 Island
ゴルフコース Golf course	345°T / 9.7NM	ゴルフ場 Golf course
行入ダム Gyonyu dam	321°T / 7.0NM	ダム Dam
イーストポイント East point	090°T / 10.0NM	海上 Over the sea
杵築 Kitsuki	232°T / 6.7NM	八坂川河口 River mouth (The Yasaka)
佐賀関 Saganoseki	152°T / 15.0NM	精錬所煙突 Chimney

RJFO / OITA

Minimum Vectoring Altitude CHART

