

## AD 2 AERODROMES

## RJNG AD 2.1 AERODROME LOCATION INDICATOR AND NAME

## RJNG - GIFU

## RJNG AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

|   |                                                                                                       |                              |
|---|-------------------------------------------------------------------------------------------------------|------------------------------|
| 1 | ARP coordinates and site at AD                                                                        | 352340N/1365210E             |
| 2 | Direction and distance from (city)                                                                    | 7NM E                        |
| 3 | Elevation/ Reference temperature                                                                      | 128ft / -                    |
| 4 | Geoid undulation at AD ELEV<br>PSN                                                                    | Nil                          |
| 5 | MAG VAR/ Annual change                                                                                | Nil                          |
| 6 | AD Administration, address,<br>telephone, telefax, telex, AFS,<br>e-mail and/or Web-site<br>addresses | Japan Air Self Defense Force |
| 7 | Types of traffic permitted(IFR/<br>VFR)                                                               | IFR/VFR                      |
| 8 | Remarks                                                                                               | Nil                          |

## RJNG AD 2.3 OPERATIONAL HOURS

|    |                           |                                                                                  |
|----|---------------------------|----------------------------------------------------------------------------------|
| 1  | AD Administration         | Nil                                                                              |
| 2  | Customs and immigration   | Nil                                                                              |
| 3  | Health and sanitation     | Nil                                                                              |
| 4  | AIS Briefing Office       | Nil                                                                              |
| 5  | ATS Reporting Office(ARO) | Nil                                                                              |
| 6  | MET Briefing Office       | 2100-1300 MON-FRI<br>2100-0800 SAT<br>2300-0800 SUN & HOL, Other time on request |
| 7  | ATS                       | Nil                                                                              |
| 8  | Fuelling                  | Nil                                                                              |
| 9  | Handling                  | Nil                                                                              |
| 10 | Security                  | Nil                                                                              |
| 11 | De-icing                  | Nil                                                                              |
| 12 | Remarks                   | Nil                                                                              |

**RJNG AD 2.4 HANDLING SERVICES AND FACILITIES**

|   |                                         |                    |
|---|-----------------------------------------|--------------------|
| 1 | Cargo-handling facilities               | Nil                |
| 2 | Fuel/ oil types                         | JET A-1 PLUS       |
| 3 | Fuelling facilities/ capacity           | To be issued later |
| 4 | De-icing facilities                     | Nil                |
| 5 | Hangar space for visiting aircraft      | Nil                |
| 6 | Repair facilities for visiting aircraft | Minor ACFT repairs |
| 7 | Remarks                                 | Nil                |

**RJNG AD 2.5 PASSENGER FACILITIES**

|   |                      |     |
|---|----------------------|-----|
| 1 | Hotels               | Nil |
| 2 | Restaurants          | Nil |
| 3 | Transportation       | Nil |
| 4 | Medical facilities   | Nil |
| 5 | Bank and Post Office | Nil |
| 6 | Tourist Office       | Nil |
| 7 | Remarks              | Nil |

**RJNG AD 2.6 RESCUE AND FIRE FIGHTING SERVICES**

|   |                                             |     |
|---|---------------------------------------------|-----|
| 1 | AD category for fire fighting               | Nil |
| 2 | Rescue equipment                            | Nil |
| 3 | Capability for removal of disabled aircraft | Nil |
| 4 | Remarks                                     | Nil |

**RJNG AD 2.7 SEASONAL AVAILABILITY-CLEARING**

|   |                             |     |
|---|-----------------------------|-----|
| 1 | Types of clearing equipment | Nil |
| 2 | Clearance priorities        | Nil |
| 3 | Remarks                     | Nil |

**RJNG AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA**

|   |                                     |                    |
|---|-------------------------------------|--------------------|
| 1 | Apron surface and strength          | To be issued later |
| 2 | Taxiway width, surface and strength | To be issued later |
| 3 | ACL and elevation                   | Not available      |
| 4 | VOR checkpoints                     | Nil                |
| 5 | INS checkpoints                     | Nil                |
| 6 | Remarks                             | Nil                |

**RJNG AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS**

|   |                                                                                                                |                                                              |
|---|----------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|
| 1 | Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands | Nil                                                          |
| 2 | RWY and TWY markings and LGT                                                                                   | RWY: RWY 10/28<br>(LGT): RTHL<br>TWY:<br>(LGT): TWY edge LGT |
| 3 | Stop bars                                                                                                      | Nil                                                          |
| 4 | Remarks                                                                                                        | Nil                                                          |

**RJNG AD 2.10 AERODROME OBSTACLES**

| RWY/Area affected | Obstacle type | Coordinates | Elevation | Markings/ LGT | Remarks |
|-------------------|---------------|-------------|-----------|---------------|---------|
| Nil               |               |             |           |               |         |

**RJNG AD 2.11 METEOROLOGICAL INFORMATION PROVIDED**

|    |                                                                        |                                                                                        |
|----|------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| 1  | Associated MET Office                                                  | GIFU                                                                                   |
| 2  | Hours of service<br>MET Office outside hours                           | 2100 - 1300 MON-FRI<br>2100 - 0800 SAT<br>2300 - 0800 SUN & HOL, Other time on request |
| 3  | Office responsible for TAF preparation<br>Periods of validity          | Nil                                                                                    |
| 4  | Trend forecast<br>Interval of issuance                                 | Nil                                                                                    |
| 5  | Briefing/ consultation provided                                        | Nil                                                                                    |
| 6  | Flight documentation<br>Language(s) used                               | Ja, En                                                                                 |
| 7  | Charts and other information available<br>for briefing or consultation | S, U                                                                                   |
| 8  | Supplementary equipment<br>available for providing information         | Nil                                                                                    |
| 9  | ATS units provided with information                                    | Nil                                                                                    |
| 10 | Additional information(limitation of service, etc.)                    | Nil                                                                                    |

**RJNG AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS**

| Designations<br>RWY<br>NR | TRUE<br>BRG              | Dimensions of<br>RWY(M) | Strength(PCN)and<br>surface of RWY                                                                      | THR coordinates<br>THR geoid undulation | THR elevation and<br>highest elevation of TDZ<br>of precision APP RWY |
|---------------------------|--------------------------|-------------------------|---------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------------------------------------------|
| 1                         | 2                        | 3                       | 4                                                                                                       | 5                                       | 6                                                                     |
| 10                        | To be<br>issued<br>Later | 2700×45                 | SW26300kg(57860lbs)<br>DW56000kg(123200lbs)<br>ST70300kg(154660lbs)<br>DT127200kg(279840lbs)<br>Asphalt | Nil                                     | Nil                                                                   |
| 28                        | To be<br>issued<br>Later | 2700×45                 | SW26300kg(57860lbs)<br>DW56000kg(123200lbs)<br>ST70300kg(154660lbs)<br>DT127200kg(279840lbs)<br>Asphalt | Nil                                     | Nil                                                                   |
| Slope of RWY              |                          | Strip<br>Dimensions(M)  | Remarks                                                                                                 |                                         |                                                                       |
| 7                         |                          | 10                      | 12                                                                                                      |                                         |                                                                       |
| Nil                       |                          | 3300×450<br>3300×450    |                                                                                                         |                                         |                                                                       |

## RJNG AD 2.13 DECLARED DISTANCES

| RWY Designator | TORA<br>(m) | TODA<br>(m) | ASDA<br>(m) | LDA<br>(m) | Remarks |
|----------------|-------------|-------------|-------------|------------|---------|
| 1              | 2           | 3           | 4           | 5          | 6       |
|                |             |             |             |            |         |

## RJNG AD 2.14 APPROACH AND RUNWAY LIGHTING

| RWY<br>Designator | APCH<br>LGT<br>type<br>LEN<br>INTST | RTHL<br>Color<br>WBAR | PAPI<br>(VASIS)<br>Angle<br>DIST FM<br>THR<br>MEHT | RTZL<br>LEN | RCLL<br>LEN<br>Spacing<br>Color<br>INTST | REDL<br>LEN<br>Spacing<br>Color<br>INTST | RENL<br>Color<br>WBAR | STWL<br>LEN<br>Color |
|-------------------|-------------------------------------|-----------------------|----------------------------------------------------|-------------|------------------------------------------|------------------------------------------|-----------------------|----------------------|
| 1                 | 2                                   | 3                     | 4                                                  | 5           | 6                                        | 7                                        | 8                     | 9                    |
| 10                |                                     |                       | PAPI<br>2.5°<br>-<br>49ft                          |             |                                          |                                          |                       |                      |
| 28                |                                     |                       | PAPI<br>2.5°<br>-<br>49ft                          |             |                                          |                                          |                       |                      |
| Remarks           |                                     |                       |                                                    |             |                                          |                                          |                       |                      |
| 10                |                                     |                       |                                                    |             |                                          |                                          |                       |                      |
|                   |                                     |                       |                                                    |             |                                          |                                          |                       |                      |

## RJNG AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

|   |                                                          |                                               |
|---|----------------------------------------------------------|-----------------------------------------------|
| 1 | ABN/IBN location, characteristics and hours of operation | ABN: 352306N/1365125E, White/Green EV9sec, HO |
| 2 | LDI location and LGT<br>Anemometer location and LGT      | LDI : LGTD                                    |
| 3 | TWY edge and center line lighting                        | TWY edge LGT : AVBL                           |
| 4 | Secondary power supply/ switch-over time                 | Nil                                           |
| 5 | Remarks                                                  | WDI LGT, OBST LGT                             |

## RJNG AD 2.16 HELICOPTER LANDING AREA

|                    |
|--------------------|
| To be issued later |
|--------------------|

## RJNG AD 2.17 ATS AIRSPACE

| Designation and lateral limits |                                                                                                                | Vertical limits (ft) | Airspace classification | ATS unit call sign Language | Remarks |
|--------------------------------|----------------------------------------------------------------------------------------------------------------|----------------------|-------------------------|-----------------------------|---------|
| 1                              |                                                                                                                | 2                    | 3                       | 4                           | 6       |
| GIFU CTR                       | Area within a radius of 5nm of GIFU ARP (35°24'N136°52'E) excluding area within a radius of 5nm of NAGOYA ARP. | 6,000 or below       | D                       | GIFU TOWER<br>En            |         |

## RJNG AD 2.18 ATS COMMUNICATION FACILITIES

| Service designation | Call sign   | Frequency                                                                                                      | Hours of operation                  | Remarks                                                                               |
|---------------------|-------------|----------------------------------------------------------------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------|
| 1                   | 2           | 3                                                                                                              | 4                                   | 5                                                                                     |
| TWR                 | Gifu Tower  | 236.8MHz<br>307.0MHz<br>247.0MHz(1)(2)<br>122.0MHz<br>123.1MHz(1)(2)<br>120.1MHz<br>243.0MHz(E)<br>121.5MHz(E) | 2100 - 1300<br>Other time<br>1HR PN | APP SER is provided by Centrair APP.<br><br>(1)For rescue only.<br>(2)AVBL on request |
| GND                 | Gifu Ground | 275.8MHz<br>126.2MHz                                                                                           | 2100 - 1300<br>Other time<br>1HR PN |                                                                                       |

## RJNG AD 2.19 RADIO NAVIGATION AND LANDING AIDS

| Type of aid | ID  | Frequency          | Hours of operation | Position of transmitting antenna coordinates | Elevation of DME transmitting antenna | Remarks                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------|-----|--------------------|--------------------|----------------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1           | 2   | 3                  | 4                  | 5                                            | 6                                     | 7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| TACAN       | GFT | 992MHz<br>(CH-31X) | H24                | 352330N/<br>1365130E                         |                                       | Unusable:<br>R000-010 beyond 35NM BLW 10000ft<br>R010-020 beyond 25NM BLW 10000ft<br>R020-030 beyond 25NM BLW 9000ft<br>R110-120 beyond 35NM BLW 8000ft<br>R120-130 beyond 25NM BLW 7000ft<br>R130-150 beyond 20NM BLW 6000ft<br>R150-160 beyond 20NM BLW 5000ft<br>R160-170 beyond 15NM BLW 4000ft<br>R170-180 beyond 10NM BLW 4000ft<br>R180-190 beyond 8NM BLW 4000ft<br>R190-200 beyond 7NM BLW 3000ft<br>R200-210 beyond 10NM BLW 5000ft<br>R210-220 beyond 15NM BLW 7000ft<br>R220-250 beyond 30NM BLW 7000ft<br>R250-260 beyond 20NM BLW 7000ft<br>R280-300 beyond 35NM BLW 7000ft<br>R300-310 beyond 25NM BLW 7000ft<br>R310-340 beyond 30NM BLW 8000ft |

---

### RJNG AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

|     |
|-----|
| Nil |
|-----|

2. Taxiing to and from stands

|     |
|-----|
| Nil |
|-----|

3. Parking area for small aircraft(General aviation)

|     |
|-----|
| Nil |
|-----|

4. Parking area for helicopters

|     |
|-----|
| Nil |
|-----|

5. Apron - taxiing during winter conditions

|     |
|-----|
| Nil |
|-----|

6. Taxiing - limitations

|     |
|-----|
| Nil |
|-----|

7. School and training flights - technical test flights - use of runways

|     |
|-----|
| Nil |
|-----|

8. Helicopter traffic - limitation

|     |
|-----|
| Nil |
|-----|

9. Removal of disabled aircraft from runways

|     |
|-----|
| Nil |
|-----|

### RJNG AD 2.21 NOISE ABATEMENT PROCEDURES

|     |
|-----|
| Nil |
|-----|

**RJNG AD 2.22 FLIGHT PROCEDURES****1. TAKE OFF MINIMA**

|                       | RWY | REDL AVBL       |            | REDL OUT |            |
|-----------------------|-----|-----------------|------------|----------|------------|
|                       |     | CEIL-RVR        | CEIL-VIS   | CEIL-RVR | CEIL-VIS   |
| TKOF ALTN<br>AP FILED | 10  | -               | 800'-1600m | -        | 800'-1600m |
|                       | 28  | 800'-1600m      | 800'-1600m | -        | 800'-1600m |
| OTHER                 | 10  | AVBL LDG MINIMA |            |          |            |
|                       | 28  |                 |            |          |            |

**2. Lost communication procedures for arrival aircraft under radar navigational guidance**

If radio communications with Centrair Approach/Radar are lost for 1 minute, squawk Mode A/3 Code 7600 and:

- (I)
1. Contact Gifu Tower.
  2. If unable, proceed in accordance with visual flight rules.
  3. If unable, proceed to MEIHO IAF at last assigned altitude or 6,000ft whichever is higher and execute TACAN RWY28 approach.
- (II) Procedures other than above will be issued when situation required.

**RJNG AD 2.23 ADDITIONAL INFORMATION**

Nil

**RJNG AD 2.24 CHARTS RELATED TO AN AERODROME**

Standard Departure Chart - Instrument (NORIC, NEO)  
 Standard Departure Chart - Instrument (NAGOYA)  
 Standard Departure Chart - Instrument (TRANSITION)  
 Instrument Approach Chart (TACAN RWY28)



STANDARD DEPARTURE CHART -INSTRUMENT

RJNG / GIFU

SID

NORIC TWO DEPARTURE

RWY28 : Climb via GFT R-285 to GFT 6DME, then turn right,....

RWY10 : Turn left, climb via GFT R-090 to GFT 7DME, then turn left,....  
....climb via GFT R-044 to HOUBA.

Note : When Take off RWY10/28, maintain rate of climb 300ft/NM  
or more until passing 11,500ft.

Caution : When take off RWY10, high terrain exists in southeast side of airport  
(Right of departure course).

NEO TWO DEPARTURE


RWY28 : Climb via GFT R-285 to GFT 6DME, then turn right,....

RWY10 : Turn left, climb via GFT R-090 to GFT 7DME, then turn left,....  
....climb via GFT R-308 to IBUKI.

Cross IBUKI at or above 11,000ft.

Note : When Take off RWY10/28, maintain rate of climb 300ft/NM  
or more until passing 4,500ft.

Caution : When take off RWY10, high terrain exists in southeast side of airport  
(Right of departure course).

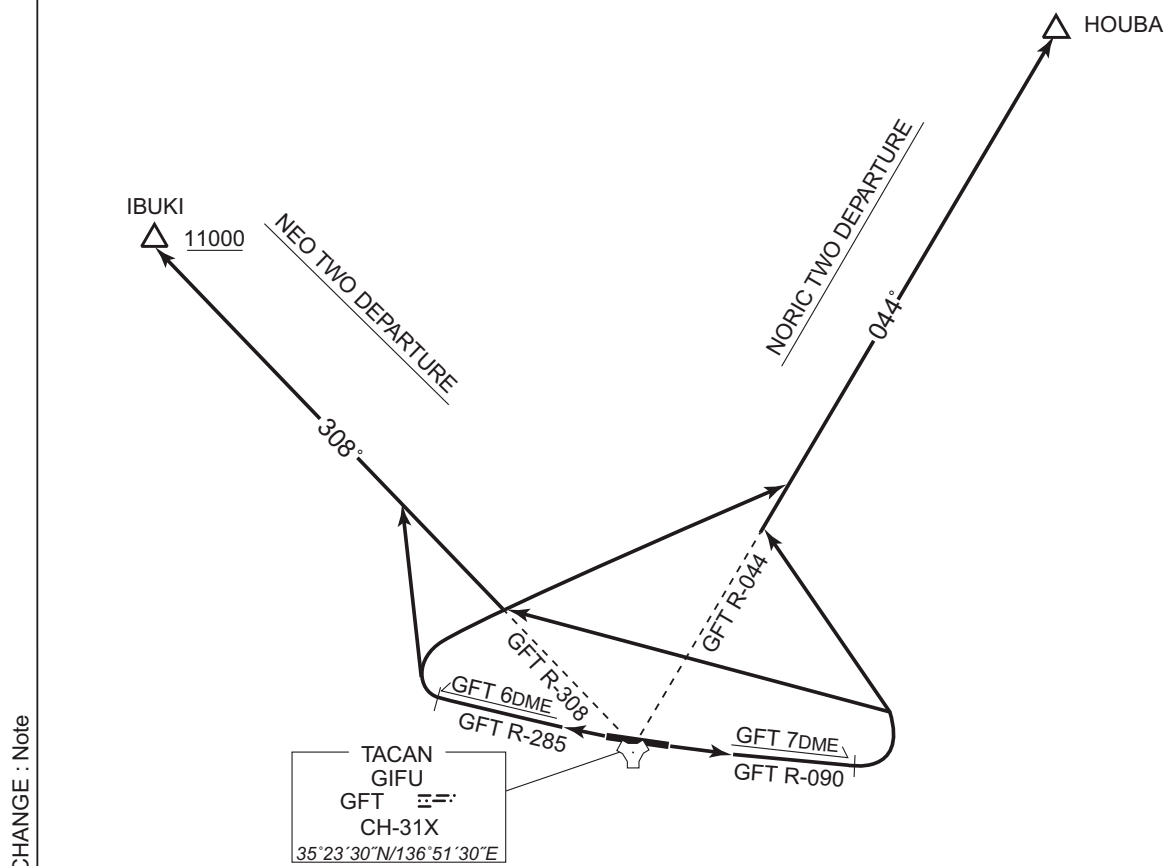

## STANDARD DEPARTURE CHART -INSTRUMENT

RJNG / GIFU

SID

NAGOYA ONE DEPARTURE

RWY28 : Climb via GFT R-285 to GFT 6DME, then turn left,....


RWY10 : Turn left, climb via GFT R-090 to GFT 7DME,....

.... proceed direct to KCC VORTAC.

Cross KCC VORTAC at or above 3,000ft.

Note : When Take off RWY10/28, maintain rate of climb 300ft/NM  
or more until passing 3,000ft.

Caution : When take off RWY10, high terrain exists in southeast side of airport  
(Right of departure course).

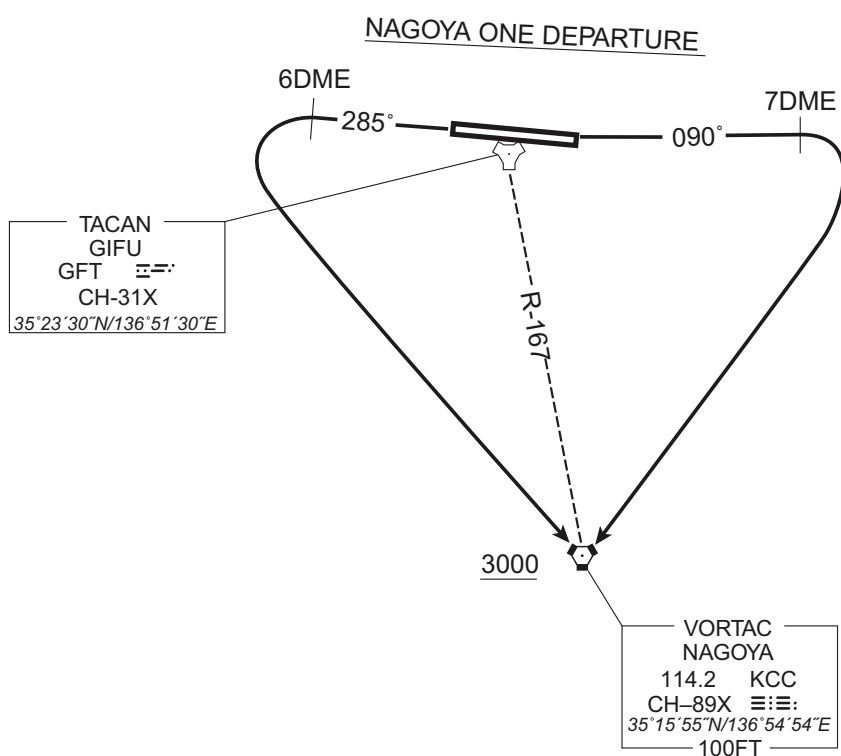

CHANGE : Note

STANDARD DEPARTURE CHART -INSTRUMENT

RJNG / GIFU

TRANSITION

ADGUN TRANSITION

From over IBUKI, via KCC 29.5DME counterclockwise ARC to intercept and proceed via KCC R262 to ADGUN.

Note: This TRANSITION is for TACAN equipped aircraft only.

OHNNO TRANSITION

From over IBUKI, via KCC 29.5DME clockwise ARC to intercept and proceed via KCC R348 to OHNNO.


Cross KCC R336 at or above FL150.

Note: This TRANSITION is for TACAN equipped aircraft only.

NIIGATA TRANSITION

From over HOUBA, proceed via KCC R034 to KROBE then via GTC R228(MRA FL220 for using TACAN only) to GTC VORTAC. Cross KCC R034/60DME at or above FL200.

CHANGE : MRA for using GTC TACAN added.

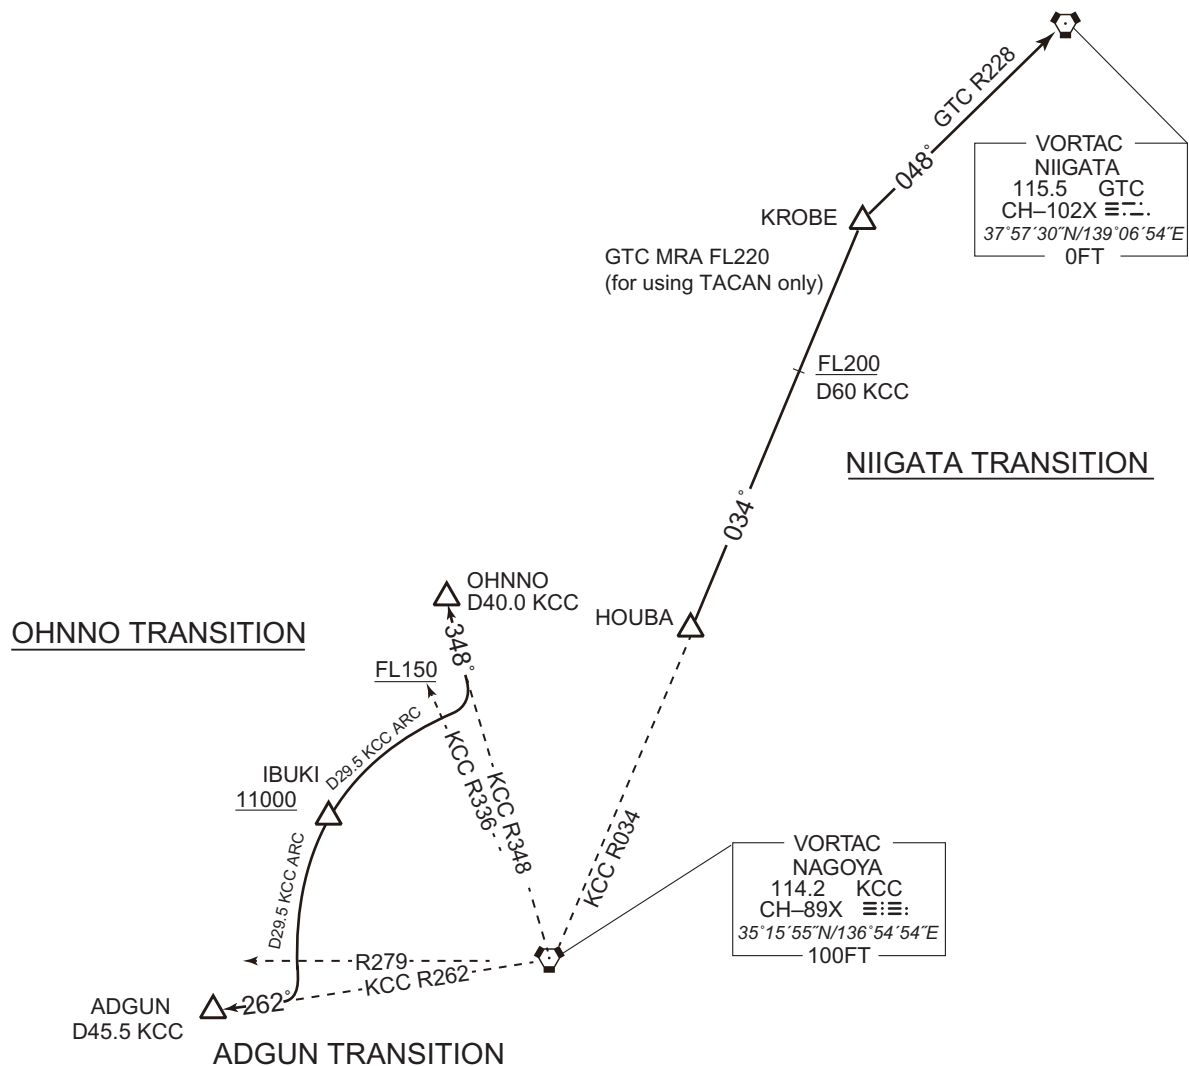


## STANDARD DEPARTURE CHART -INSTRUMENT

RJNG / GIFU


TRANSITION

ALPUS TRANSITION

From over KCC VORTAC, proceed via KCC R-088 to ALPUS.

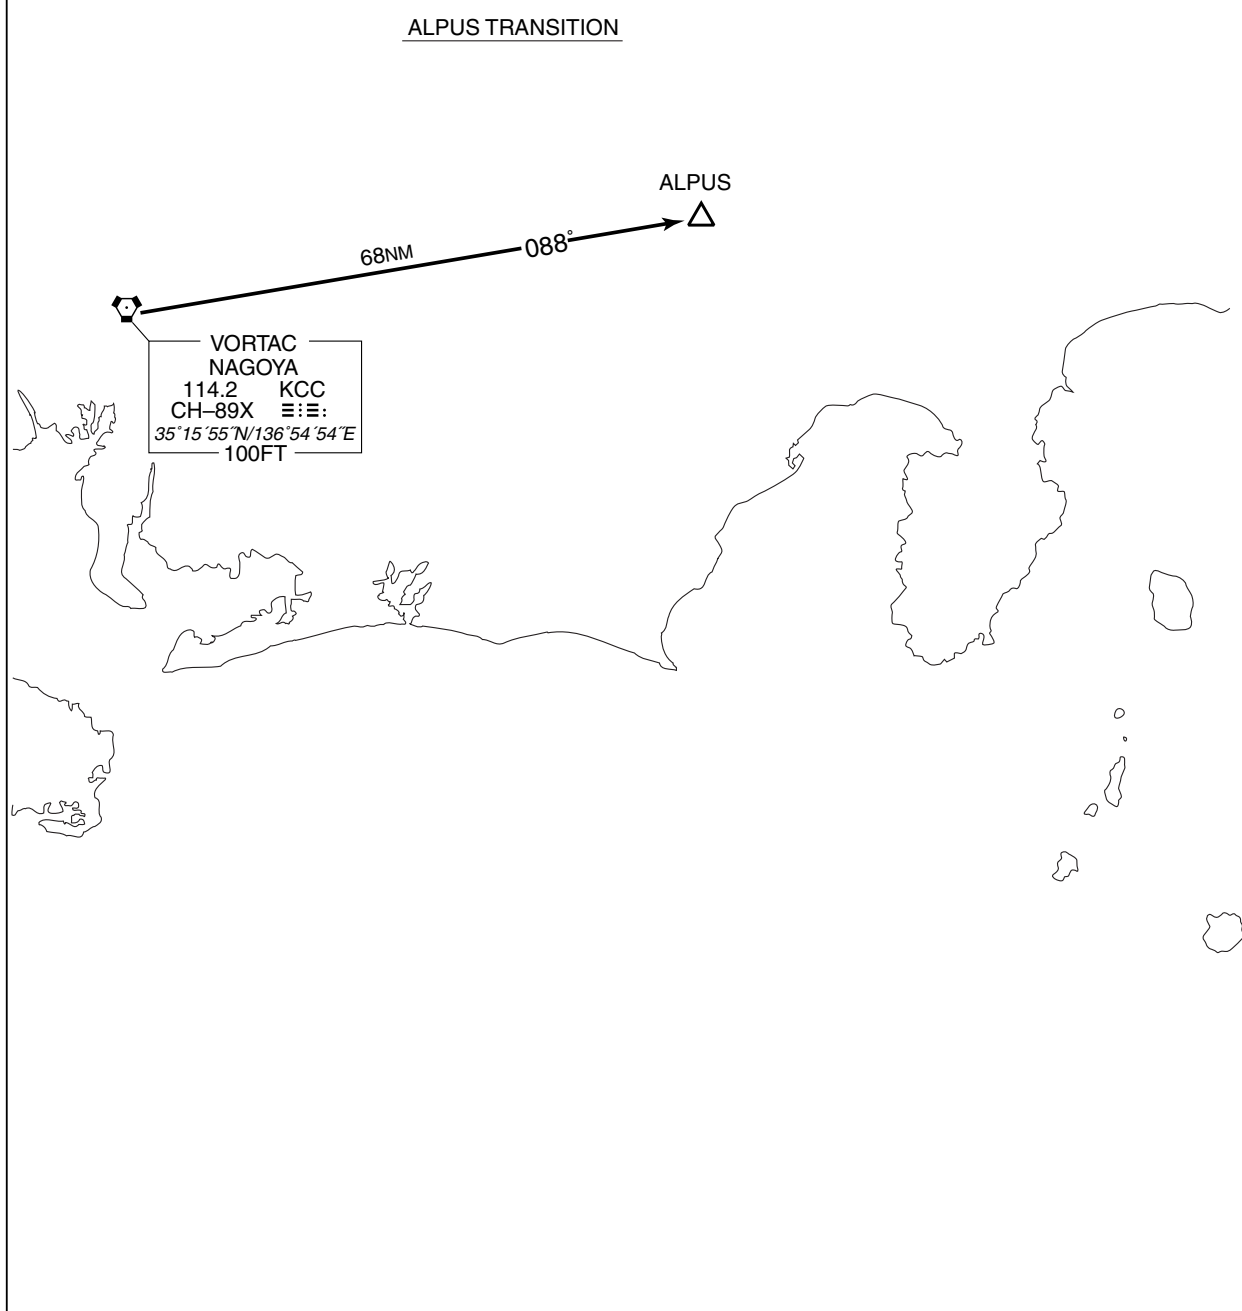

INSTRUMENT APPROACH CHART

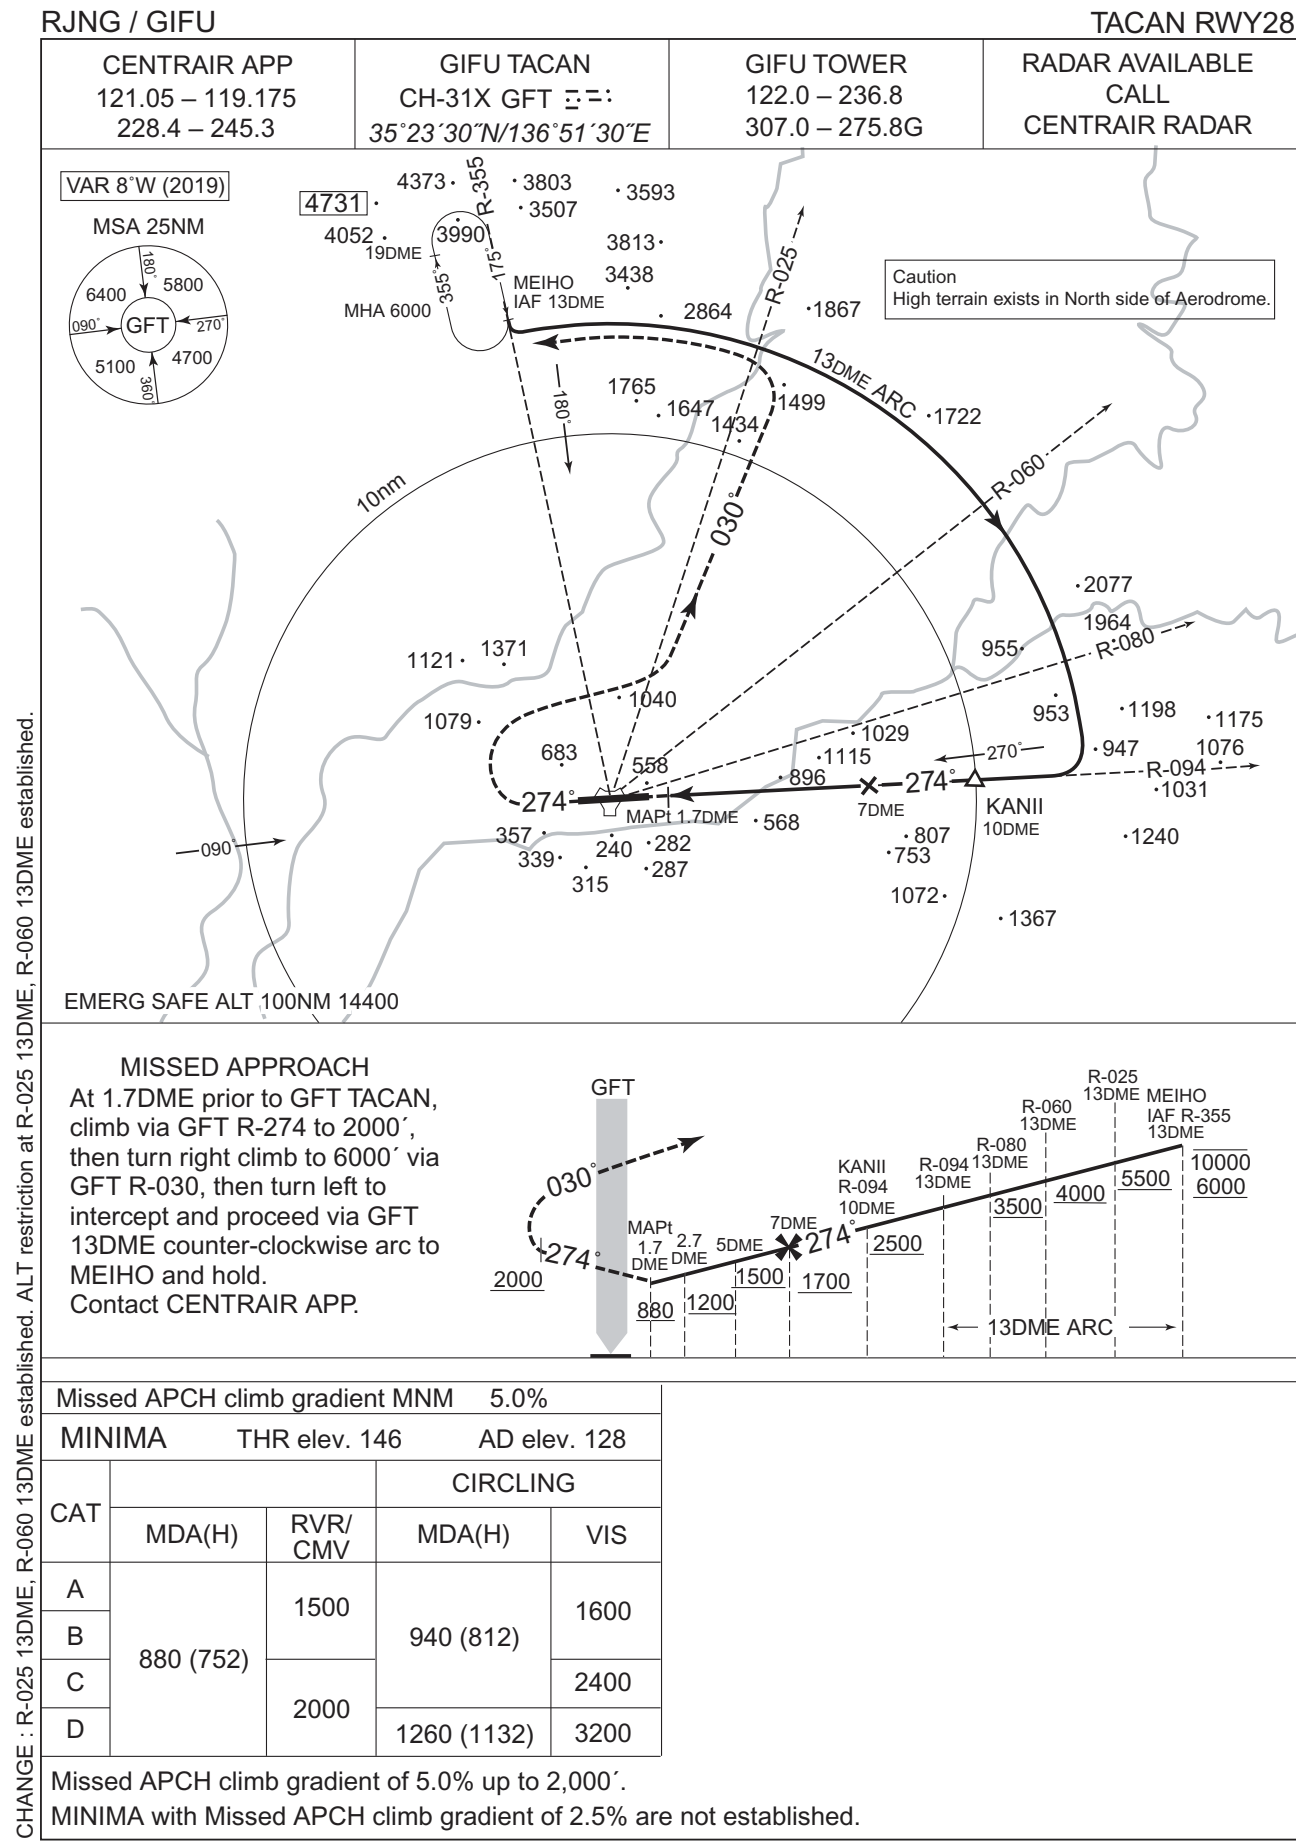

CHANGE : R-025 13DME established. ALT restriction at R-025 13DME. R-060 13DME established.