


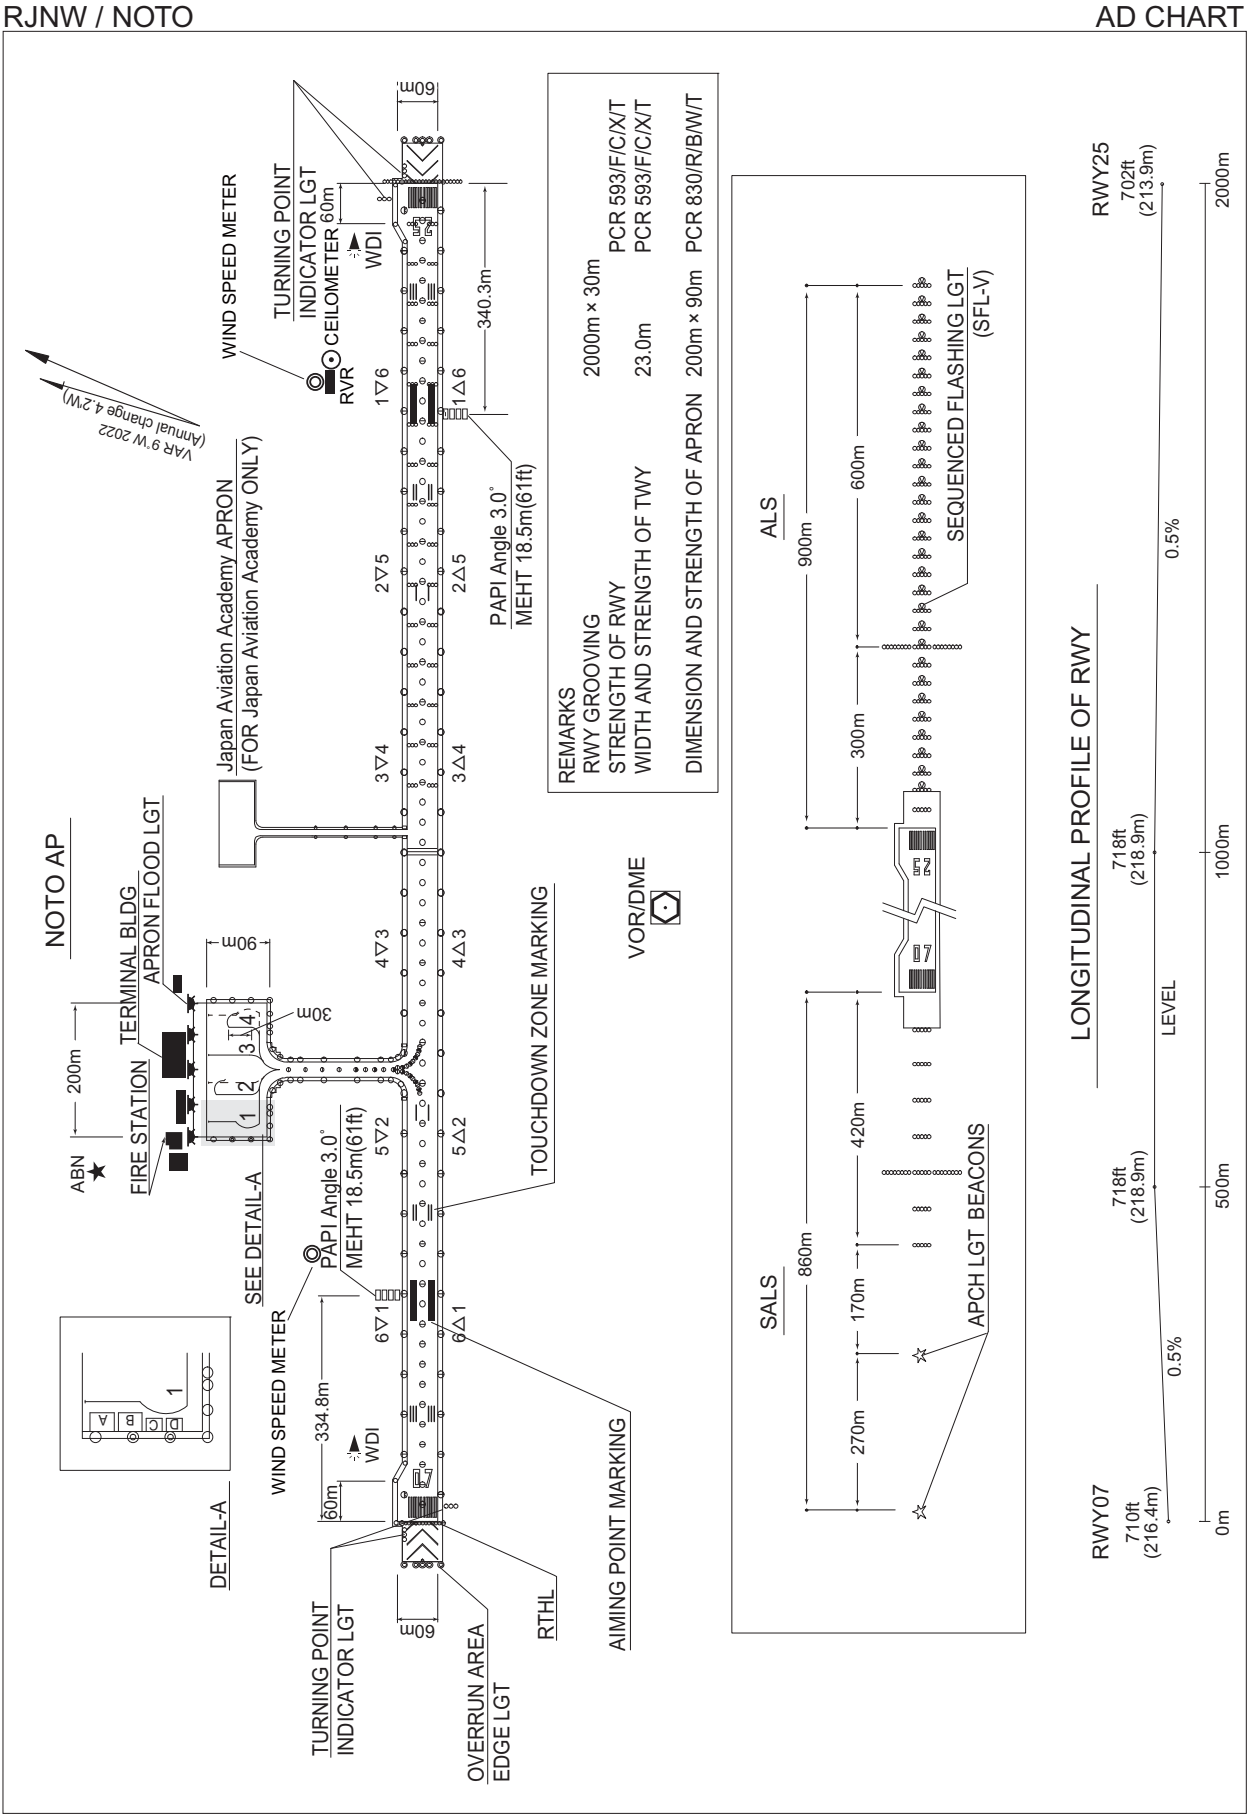

STANDARD DEPARTURE CHART -INSTRUMENT

RJNW / NOTO

SID

HISUI FOUR DEPARTURE


RWY07 : Climb RWY HDG to 1300FT, turn right...

RWY25 : Climb RWY HDG to 1200FT, turn left HDG 032° ...
...to intercept and proceed via NTE R077 to HISUI.

Note RWY07 : 5.0% climb gradient required up to 1300FT.

OBST ALT 772FT located at 0.3NM 046° FM end of RWY07.

CHANGE : PROC renamed. Note added. OBST figure deleted.

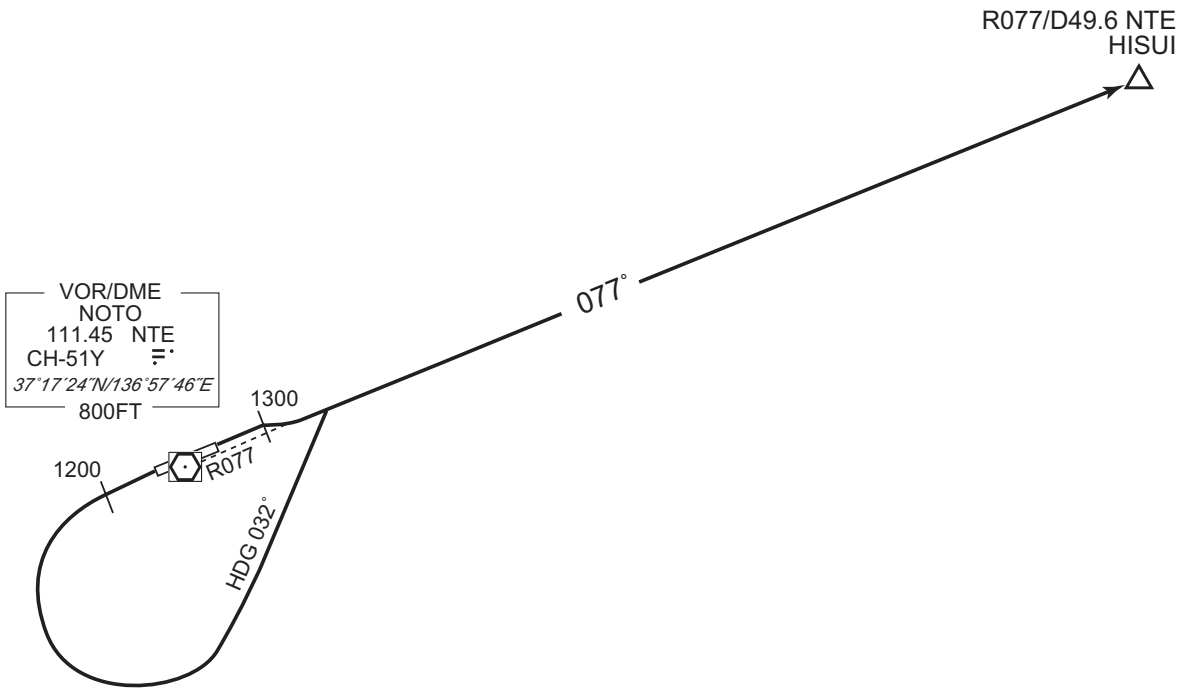

STANDARD DEPARTURE CHART -INSTRUMENT

RJNW / NOTO

SID

URUSI TWO DEPARTURE

RWY07 : Climb RWY HDG to 1300FT, turn right HDG217°...


RWY25 : Climb RWY HDG to 1200FT, turn left HDG127°...

...to intercept and proceed via NTE R172 to URUSI.

Cross URUSI at or above 8000FT.

Note RWY07 : 5.0% climb gradient required up to 1300FT.

OBST ALT 772FT located at 0.3NM 046° FM end of RWY07.

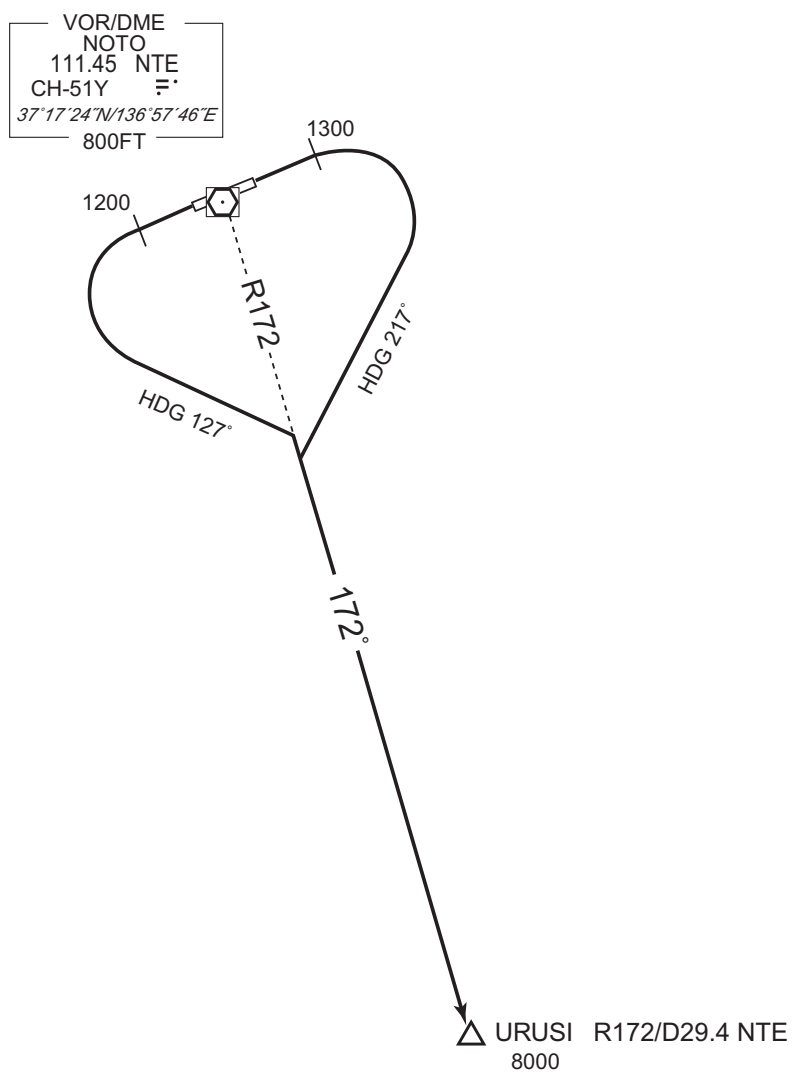

CHANGE : PROC renamed. Note added. OBST figure deleted.


STANDARD DEPARTURE CHART -INSTRUMENT

RJNW / NOTO

HOUSU ONE DEPARTURE

RNAV SID
RNP1

Note GNSS required.

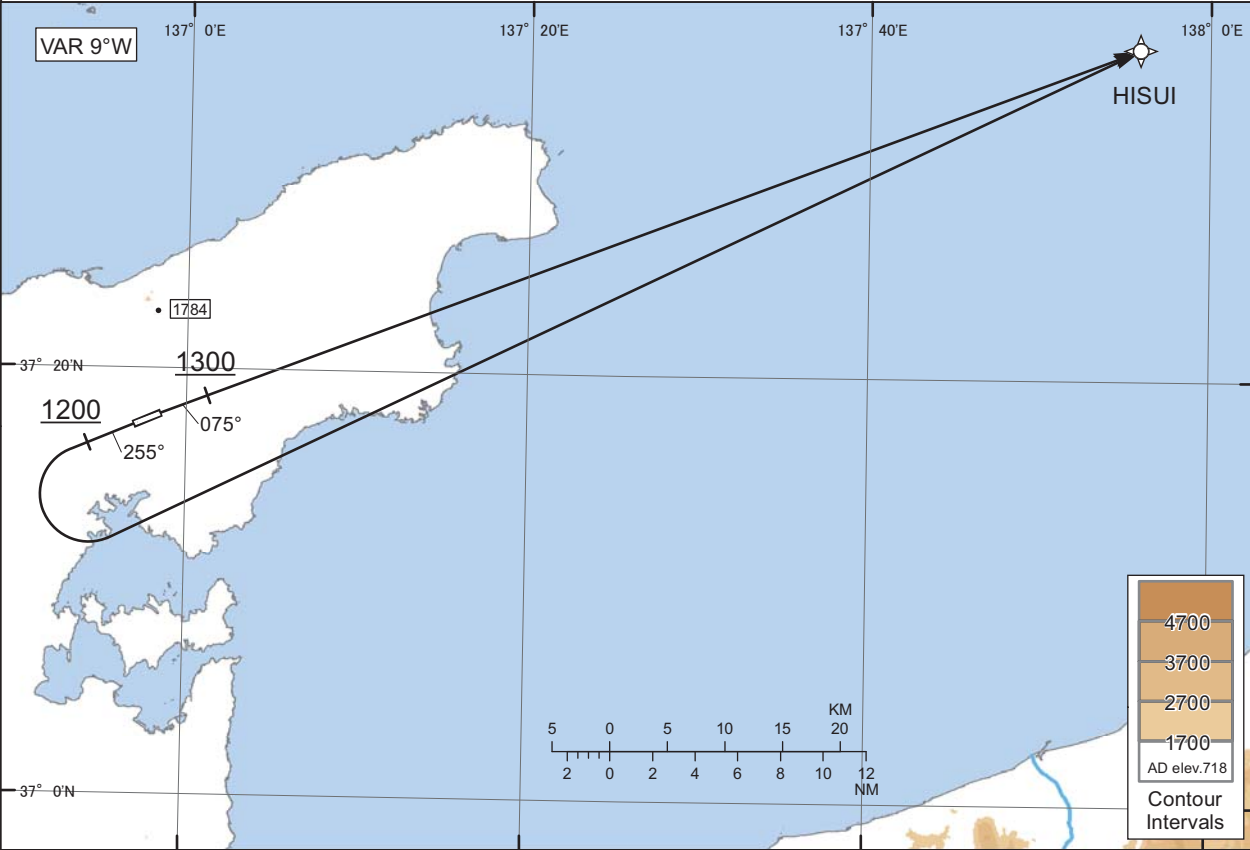

RWY07 : Climb on HDG075° at or above 1300FT, direct to HISUI.
RWY25 : Climb on HDG255° at or above 1200FT, turn left direct to HISUI.

Note RWY07 : 5.0% climb gradient required up to 1300FT.
OBST ALT 772FT located at 0.3NM 046° FM end of RWY07.

RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	075 (066.7)	-8.8	-	-	+1300	-	-	RNP1
002	DF	HISUI	-	-	-8.8	-	-	-	-	-	RNP1

RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	255 (246.7)	-8.8	-	-	+1200	-	-	RNP1
002	DF	HISUI	-	-	-8.8	-	L	-	-	-	RNP1

Waypoint Coordinates


Waypoint Identifier	Coordinates
HISUI	373534.5N / 1375553.1E

CHANGE : New PROC.

STANDARD DEPARTURE CHART -INSTRUMENT

RJNW / NOTO

RNAV SID

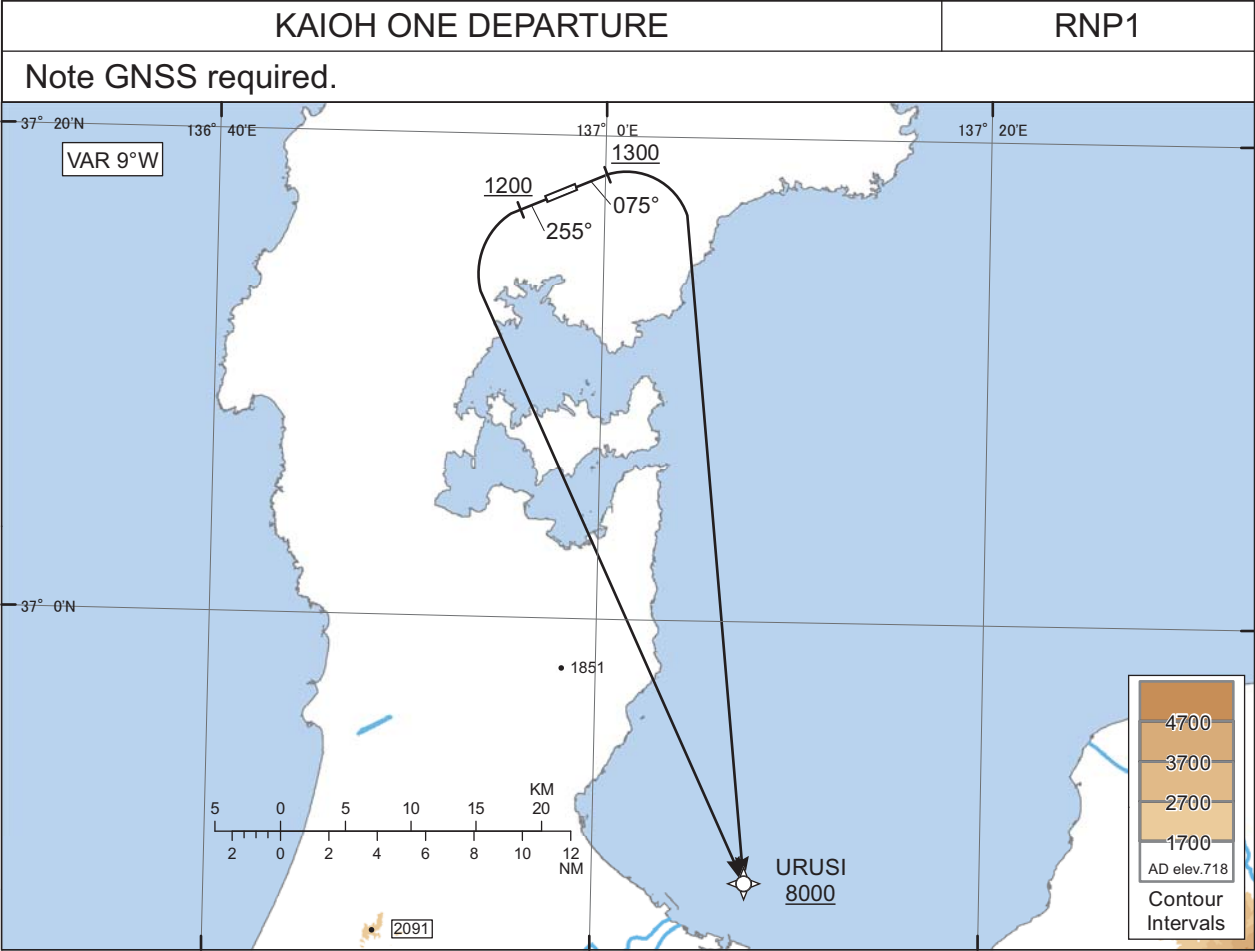

RWY07 : Climb on HDG075° at or above 1300FT, turn right direct to URUSI at or above 8000FT.
RWY25 : Climb on HDG255° at or above 1200FT, turn left direct to URUSI at or above 8000FT.

Note RWY07 : 5.0% climb gradient required up to 1300FT.
OBST ALT 772FT located at 0.3NM 046° FM end of RWY07.

RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	075 (066.7)	-8.8	-	-	+1300	-	-	RNP1
002	DF	URUSI	-	-	-8.8	-	R	+8000	-	-	RNP1

RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	255 (246.7)	-8.8	-	-	+1200	-	-	RNP1
002	DF	URUSI	-	-	-8.8	-	L	+8000	-	-	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates
URUSI	364909.2N / 1370753.5E


CHANGE : New PROC.

RJNW / NOTO RNAV STAR

CHANGE : Specification changed to RNP1(GORYU ARRIVAL). HAPPO ARRIVAL established. VAR. PROC course(KILCO ARRIVAL). Waypoint Coordinates added.

RNP1

Note GNSS required.

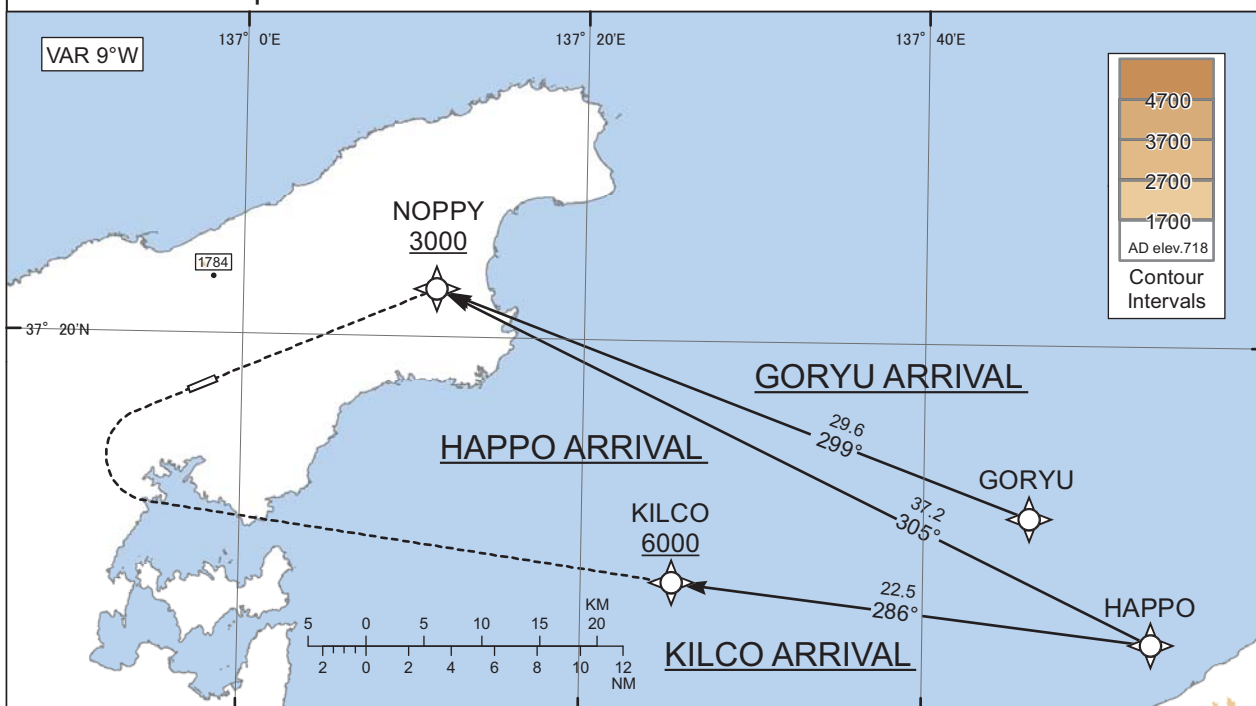

From GORYU, to NOPPY at or above 3000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GORYU	-	-	-8.8	-	-	-	-	-	RNP1
002	TF	NOPPY	-	299 (290.6)	-8.8	29.6	-	+3000	-	-	RNP1

From HAPPO, to NOPPY at or above 3000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	HAPPO	-	-	-8.8	-	-	-	-	-	RNP1
002	TF	NOPPY	-	305 (296.0)	-8.8	37.2	-	+3000	-	-	RNP1

From HAPPO, to KILCO at or above 6000FT.


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	HAPPO	-	-	-8.8	-	-	-	-	-	RNP1
002	TF	KILCO	-	286 (276.9)	-8.8	22.5	-	+6000	-	-	RNP1

Waypoint Identifier	Coordinates
GORYU	371154.6N / 1374610.4E
HAPPO	370604.9N / 1375320.7E
NOPPY	372214.7N / 1371120.0E
KILCO	370843.1N / 1372519.8E


INSTRUMENT APPROACH CHART

RJNW / NOTO


ILS Z or LOC Z RWY25

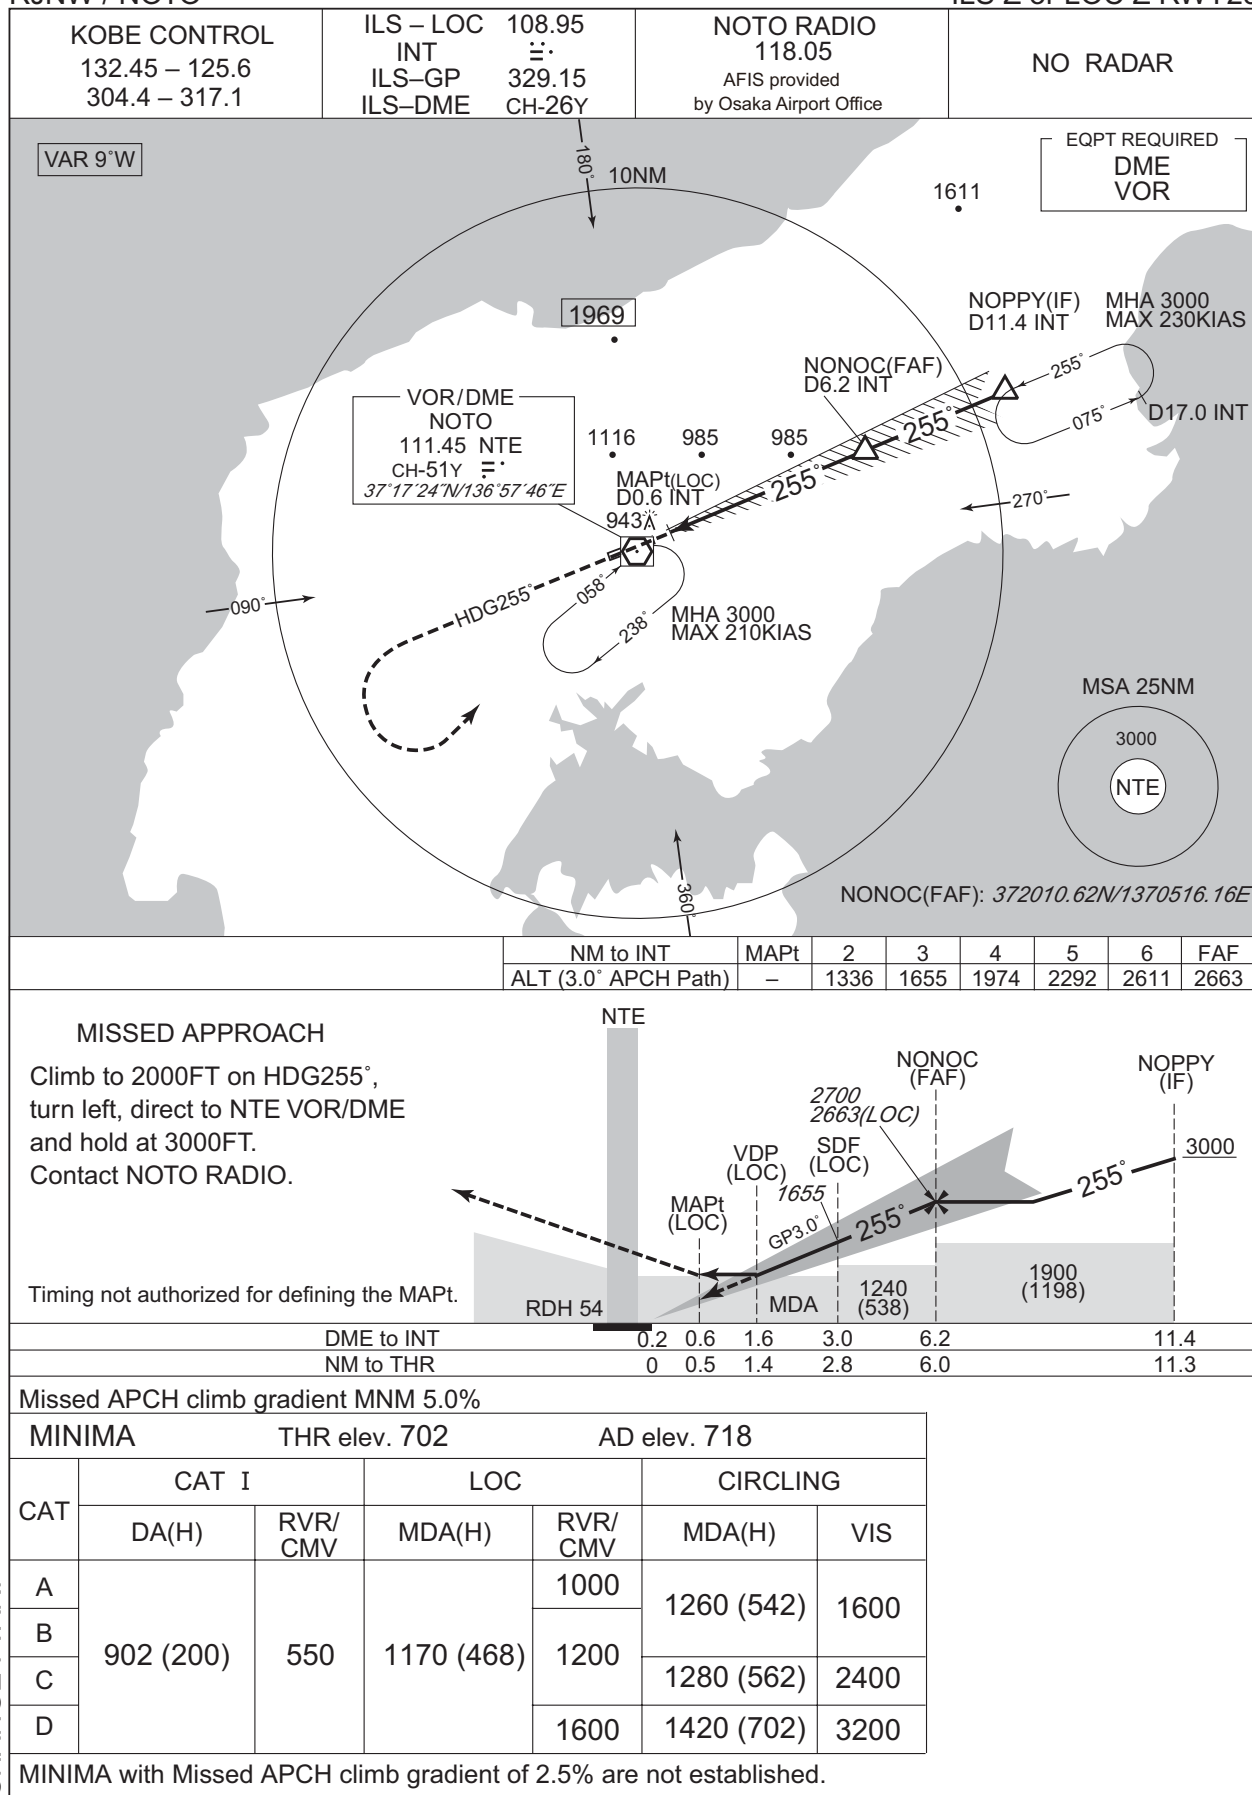


INSTRUMENT APPROACH CHART

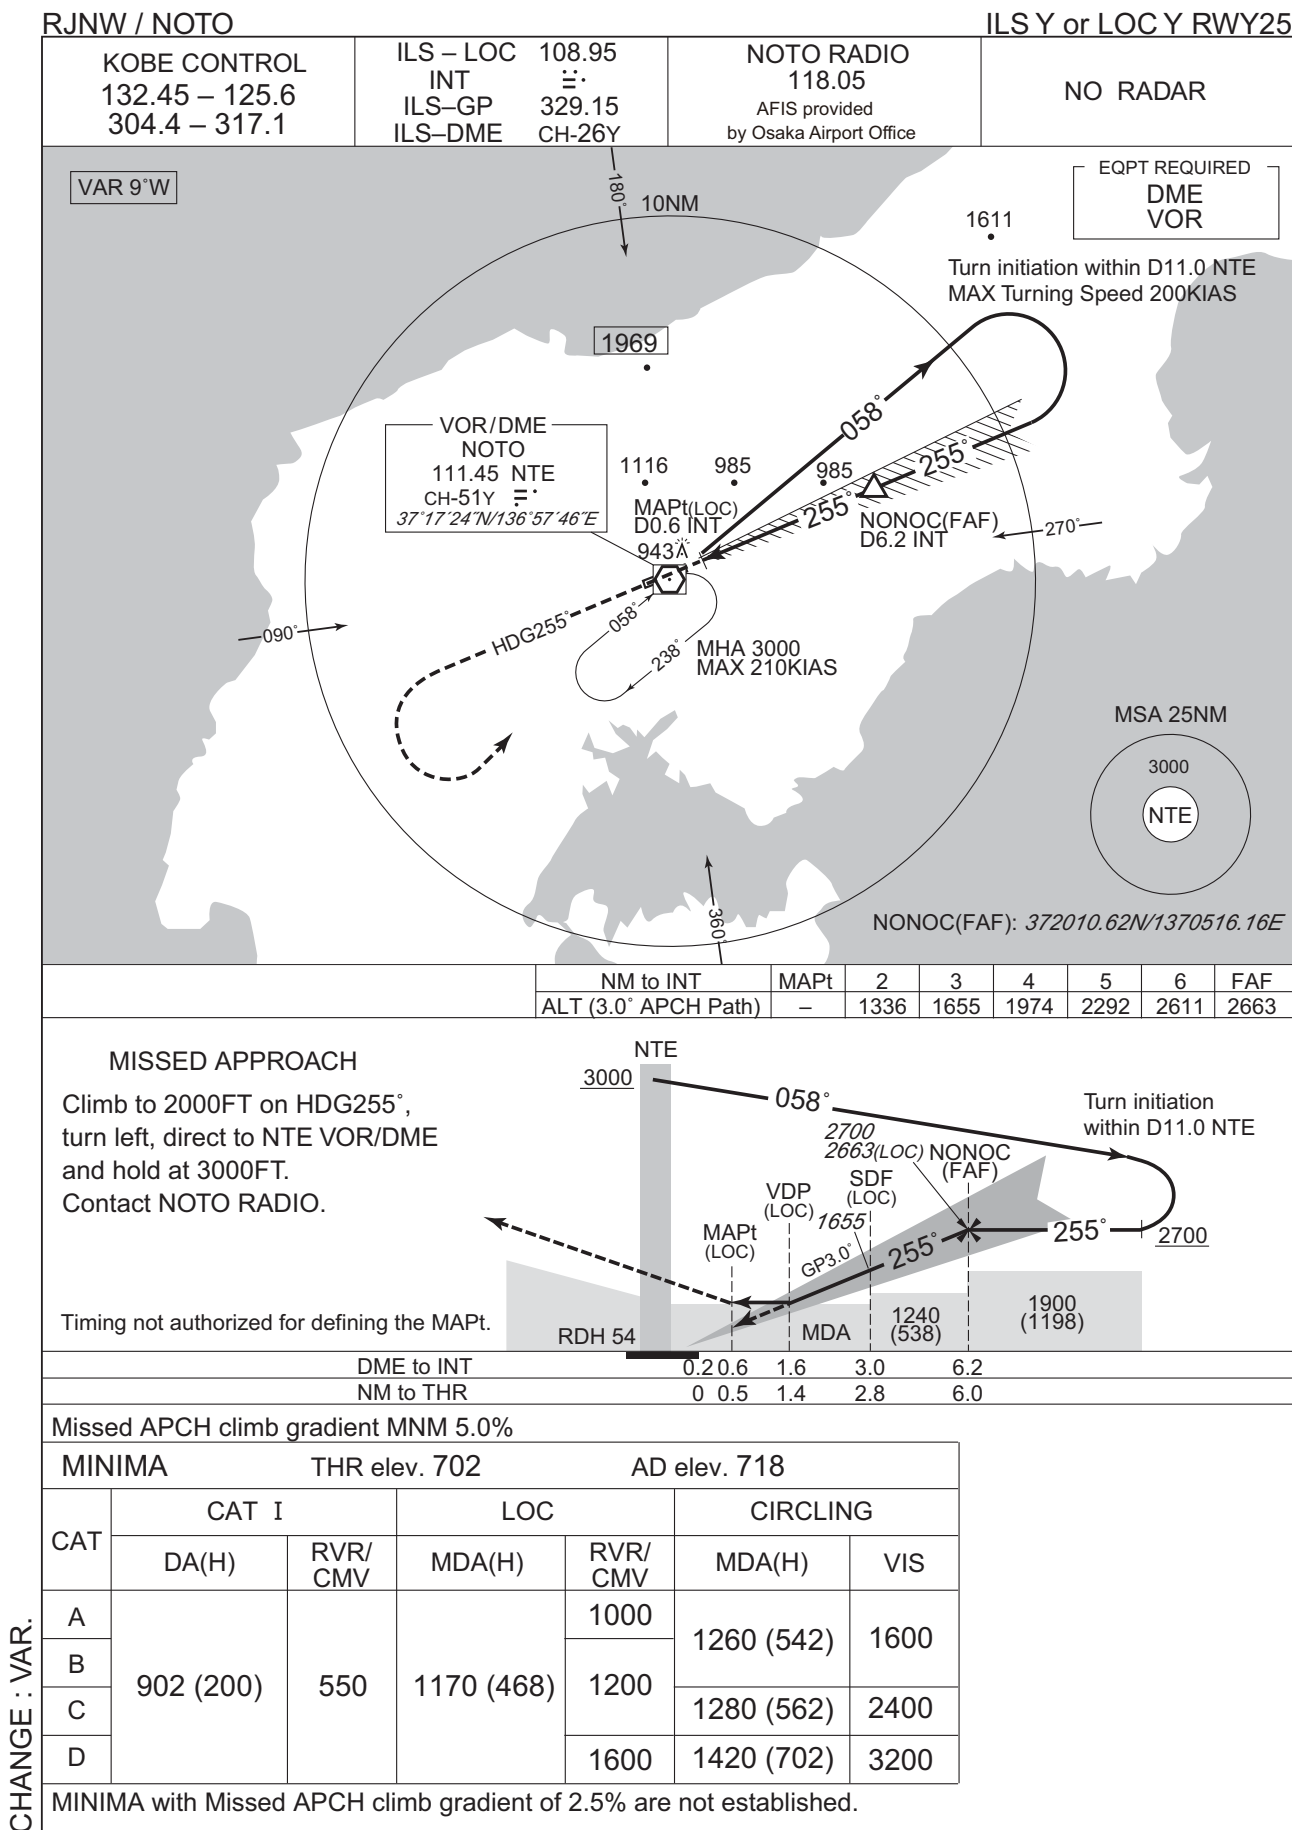


INSTRUMENT APPROACH CHART

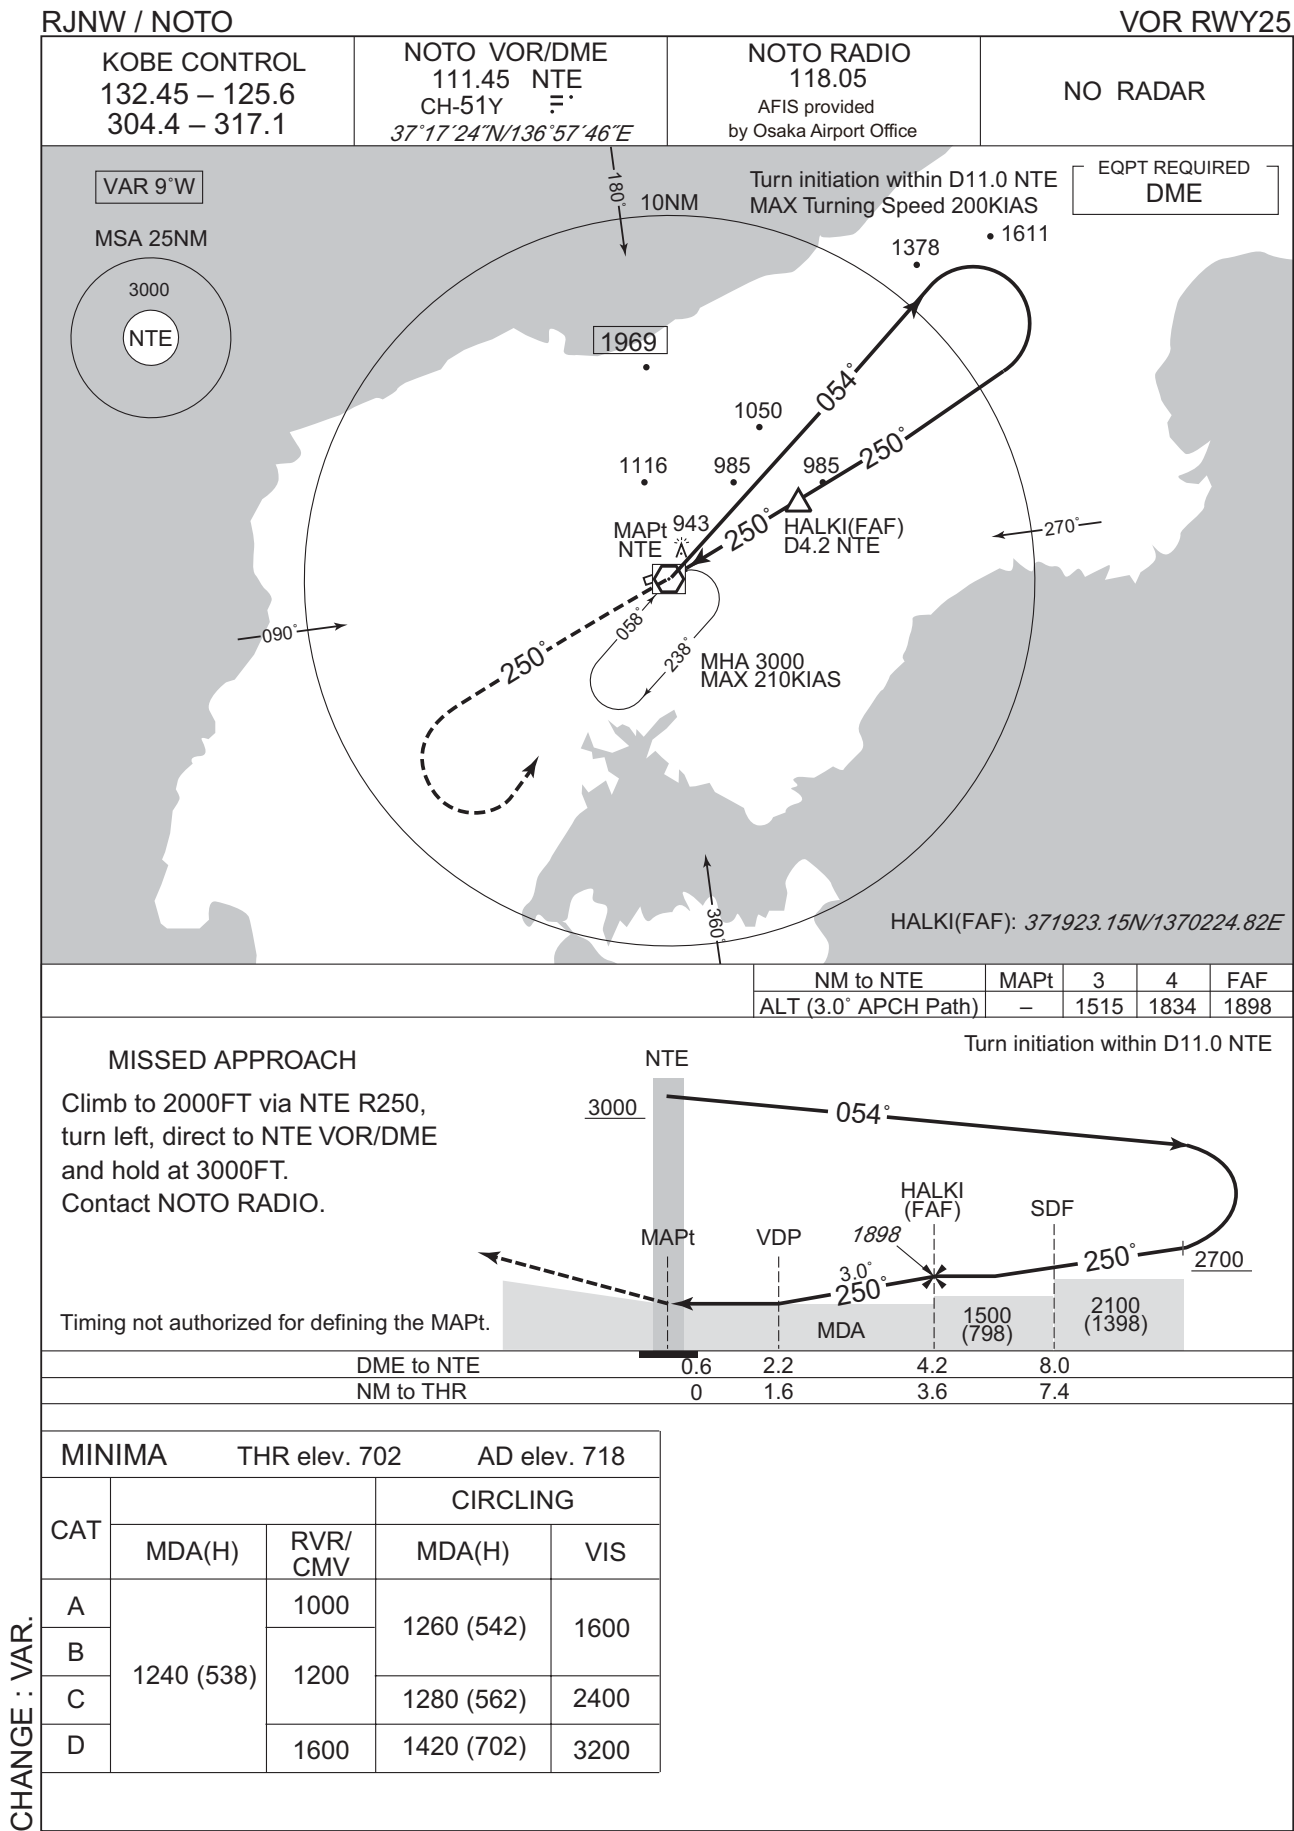


INSTRUMENT APPROACH CHART

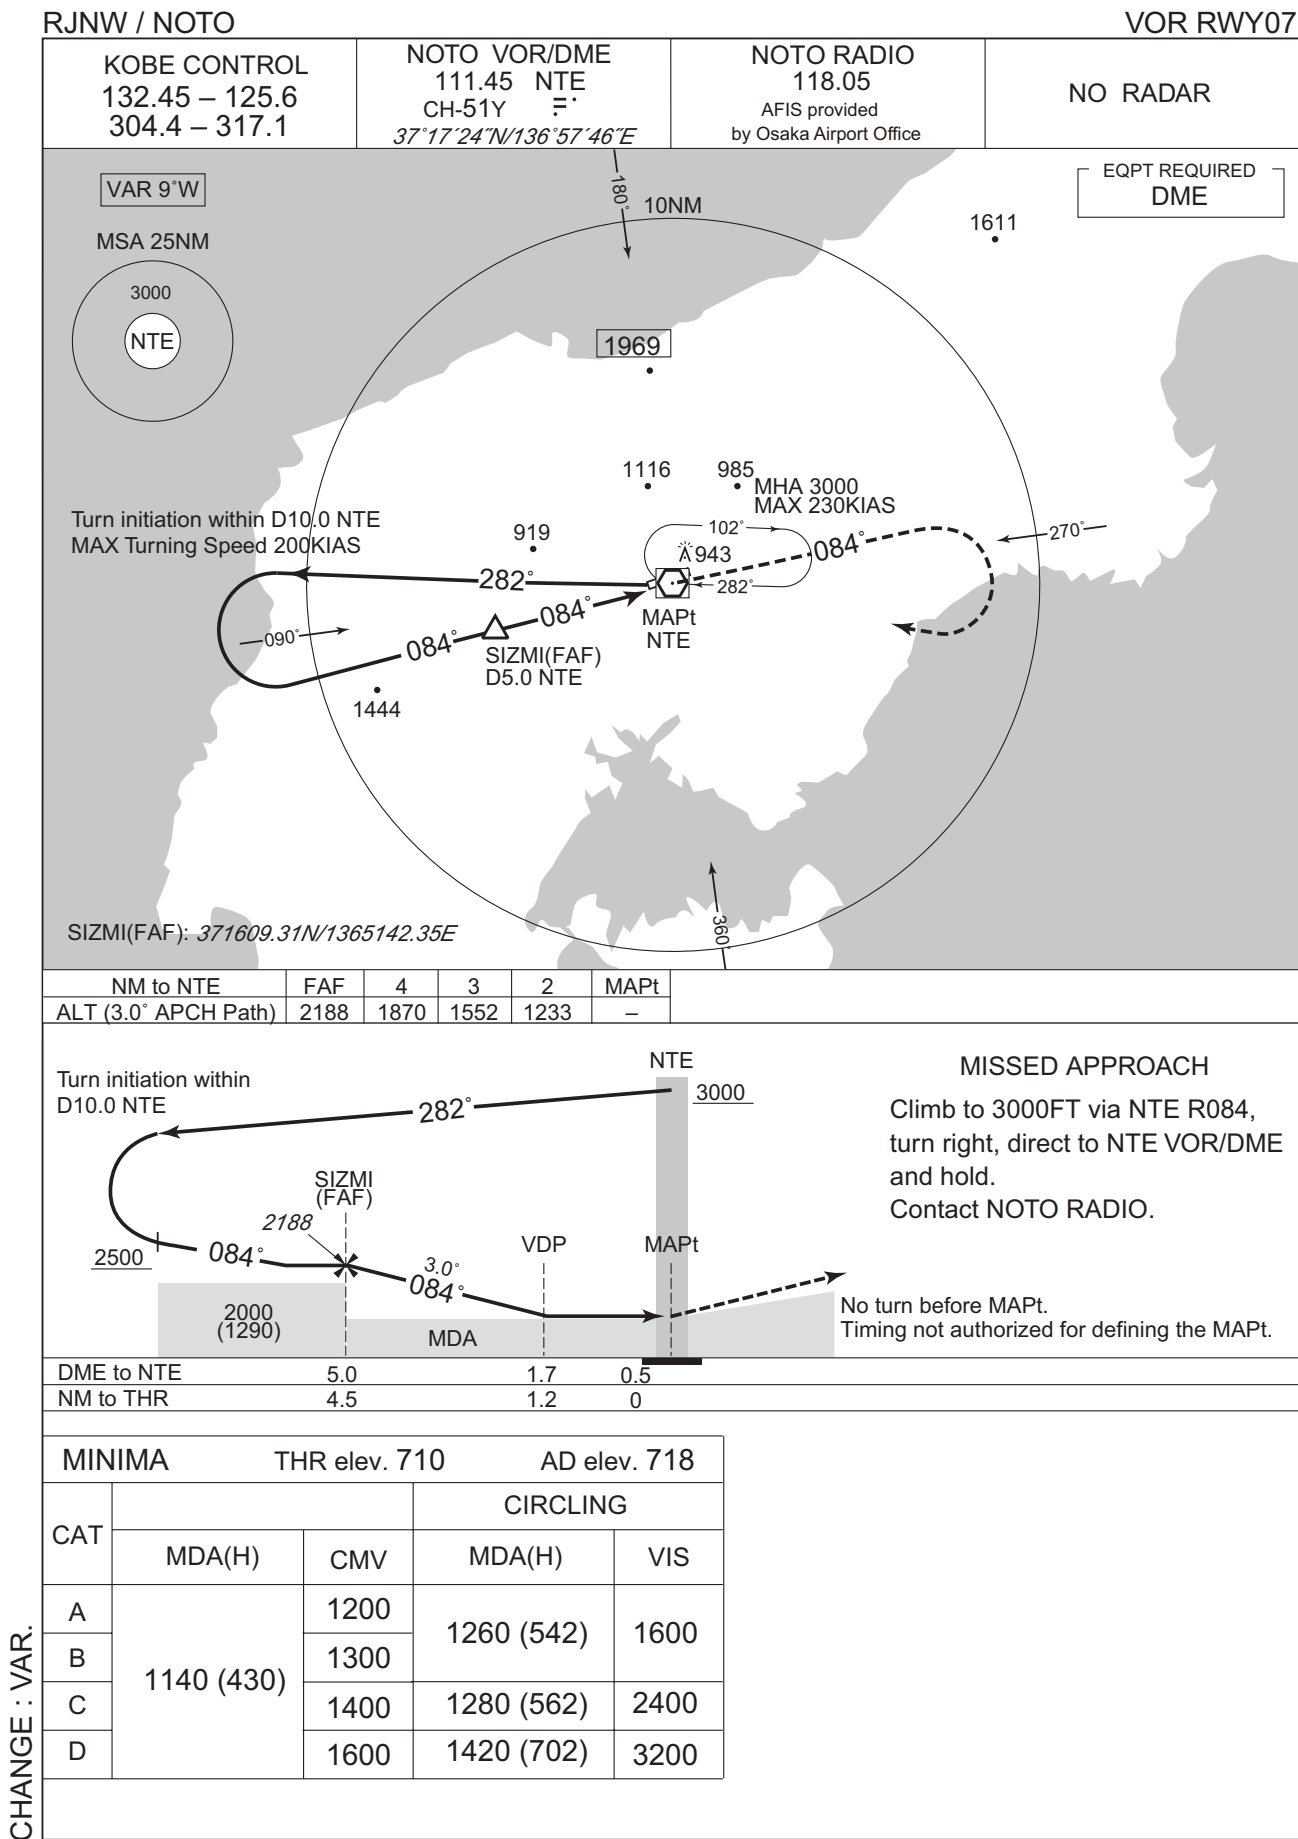

INSTRUMENT APPROACH CHART

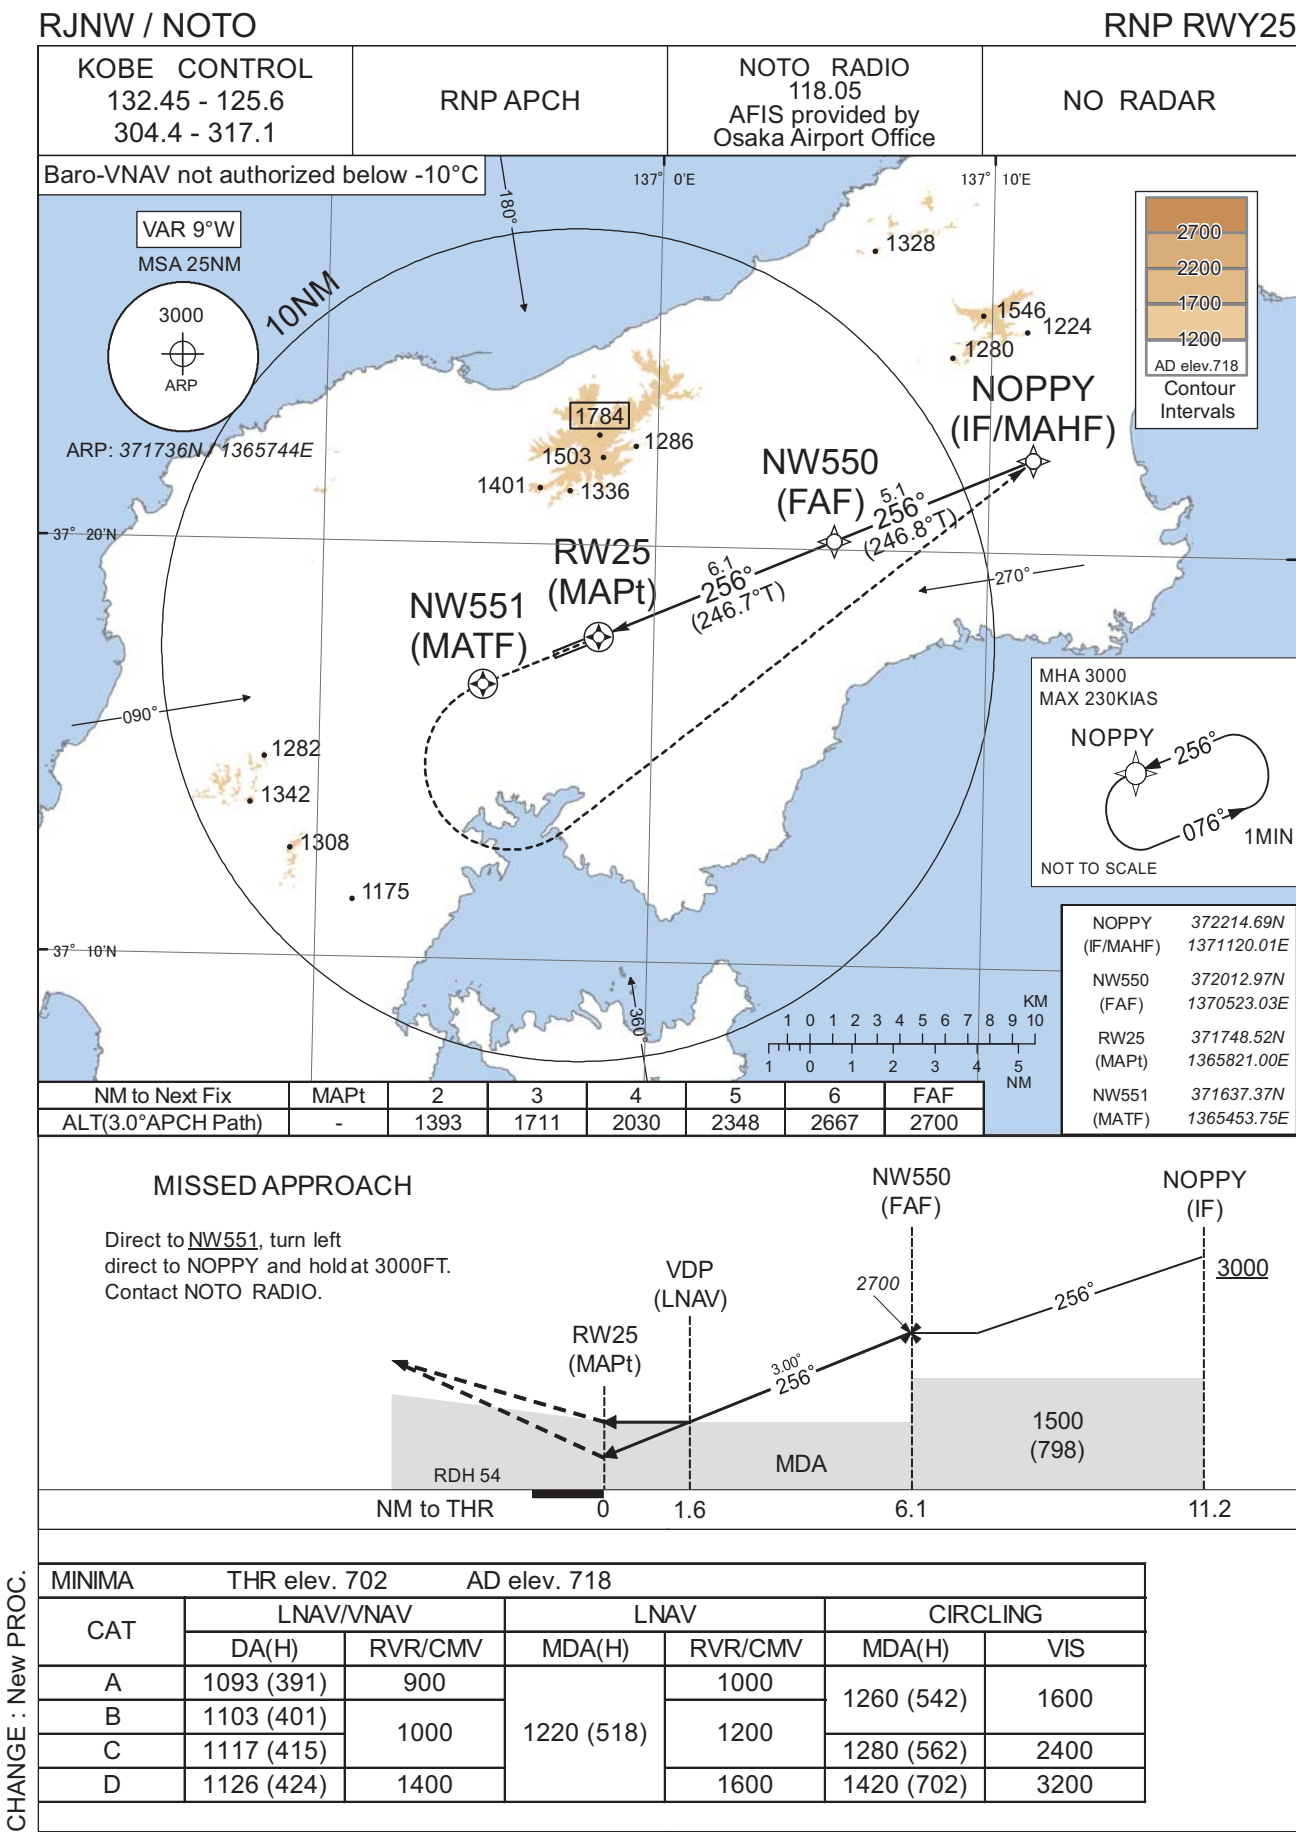

INSTRUMENT APPROACH CHART

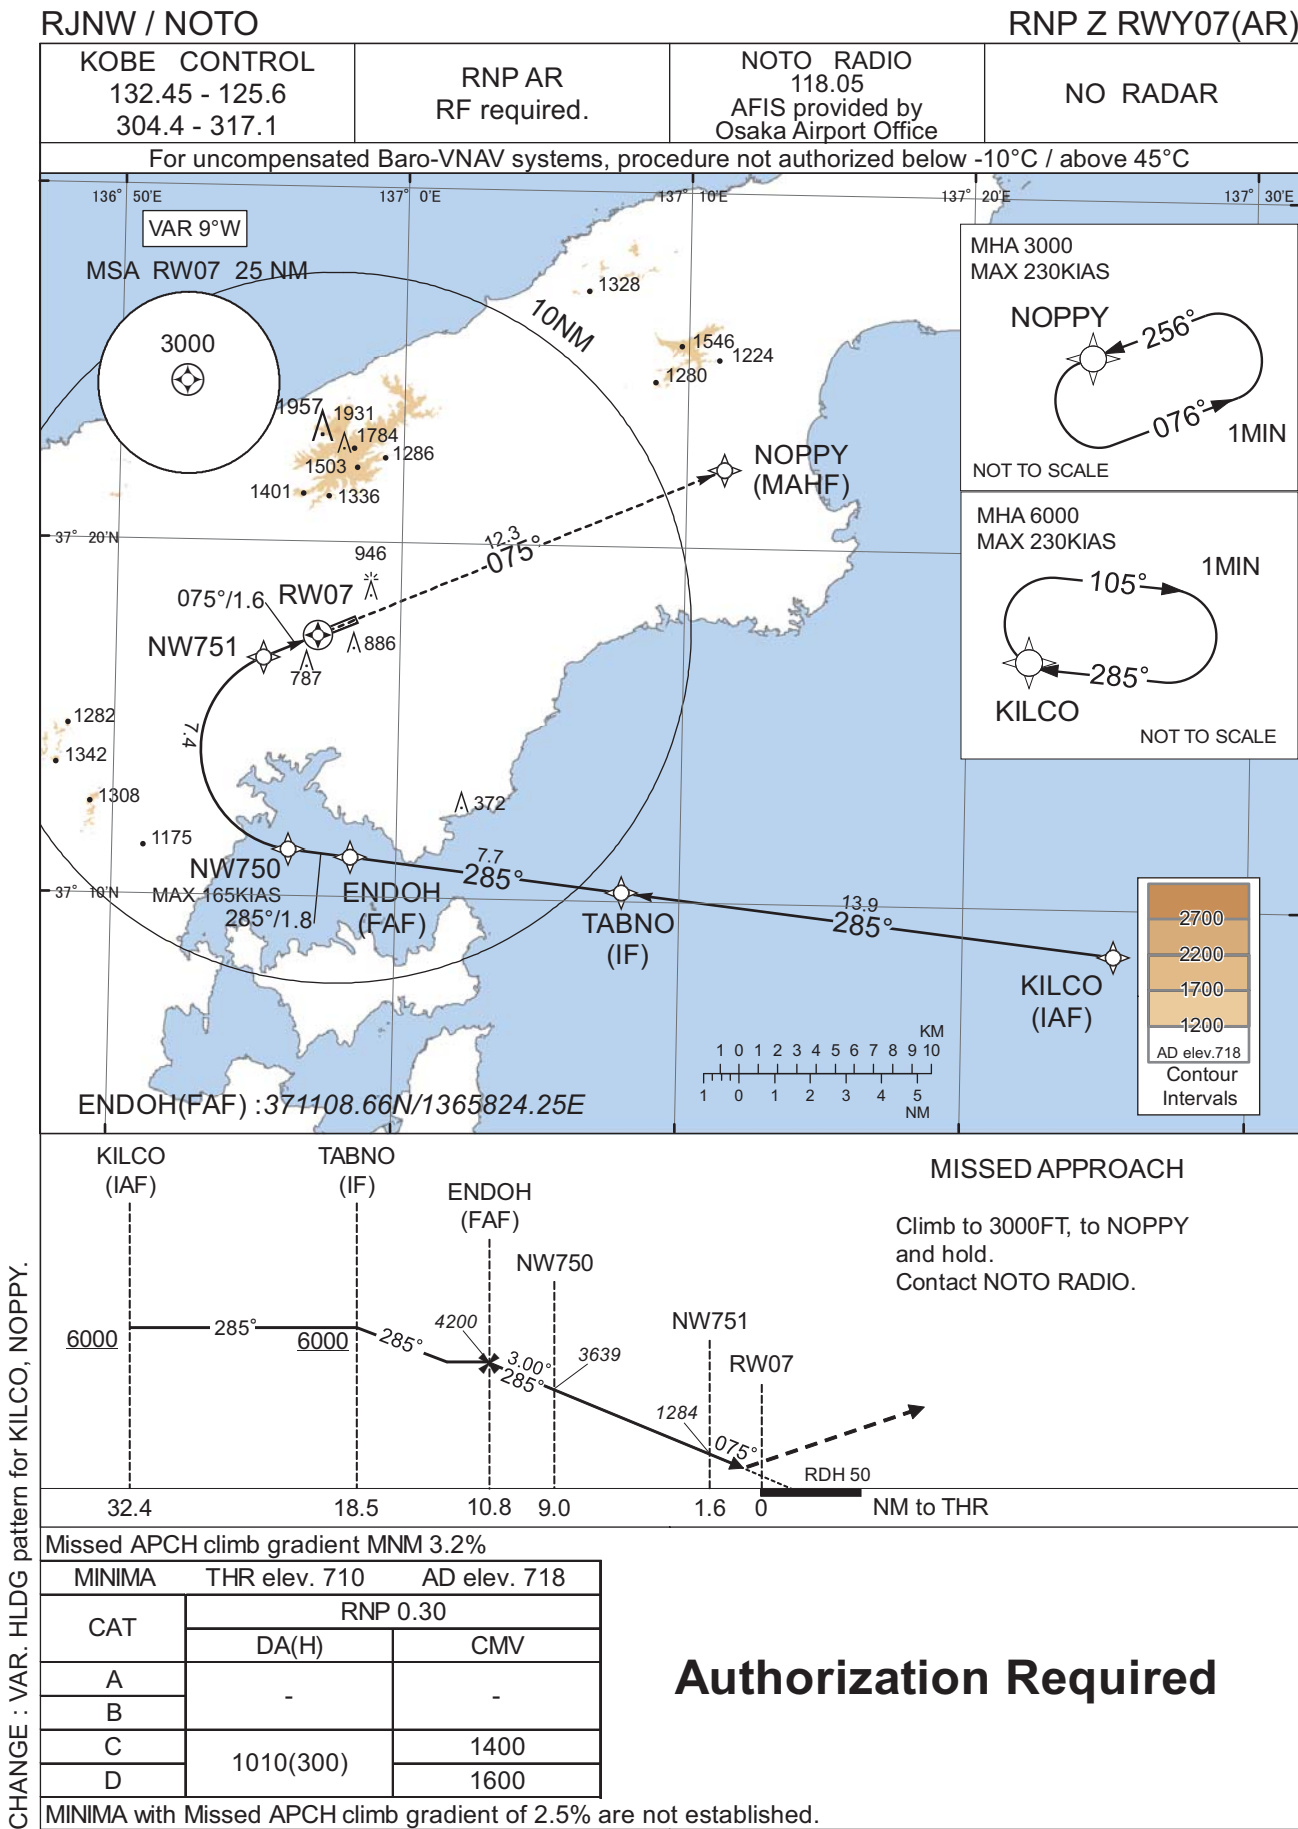

INSTRUMENT APPROACH CHART

RJNW / NOTO

RNP Z RWY07(AR)

Coding Table											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	KILCO	-	-	-8.8	-	-	+6000	-	-	-
002	TF	TABNO	-	285 (276.6)	-8.8	13.9	-	+6000	-	-	1.0
003	TF	ENDOH	-	285 (276.4)	-8.8	7.7	-	4200	-	-	1.0
004	TF	NW750	-	285 (276.3)	-8.8	1.8	-	3639	-165	-3.00	0.3
005	RF Center: NWRF1 r=2.82NM	NW751	-	-	-8.8	7.4	R	1284	-	-3.00	0.3
006	TF	RW07	Y	075 (066.6)	-8.8	1.6	-	760	-	-3.00/50	0.3
007	TF	NOPPY	-	075 (066.7)	-8.8	12.3	-	3000	-	-	1.0



Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	KILCO	285 (276.7)	-8.8	1.0 (-14000)	R	6000	FL140	-230 (-14000)	1.0
Hold	NOPPY	256 (246.9)	-8.8	1.0 (-14000)	L	3000	FL140	-230 (-14000)	1.0

Waypoint Coordinates			
Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
KILCO	370843.05N / 1372519.77E	NWRF1	371408.38N / 1365636.03E
TABNO	371017.61N / 1370758.59E		
ENDOH	371108.66N / 1365824.25E		
NW750	371120.22N / 1365612.92E		
NW751	371643.80N / 1365512.45E		
RW07	371722.92N / 1365706.38E		
NOPPY	372214.69N / 1371120.01E		

CHANGE : VAR. HLDG pattern for KILCO, NOPPY.

RJNW / NOTO

RNP Y RWY07(AR)



MINIMA	THR elev. 710	AD elev. 718
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B		
C	1010(300)	1400
D		1600

MINIMA with Missed APCH climb gradient of 2.5% are not established.

MISSED APPROACH

Climb to 3000FT, to NOPPY
and hold.
Contact NOTO RADIO.

Authorization Required

INSTRUMENT APPROACH CHART

RJNW / NOTO

RNP Y RWY07(AR)

Coding Table											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	NOPPY	-	-	-8.8	-	-	+4200	-	-	-
002	TF	BENKO	-	273 (264.0)	-8.8	4.2	-	+4200	-	-	1.0
003	TF	KONOS	-	273 (264.0)	-8.8	7.6	-	4200	-	-	1.0
004	TF	NW760	-	273 (263.9)	-8.8	2.0	-	3555	-165	-3.00	0.3
005	RF Center: NWRF2 r=2.10NM	NW761	-	-	-8.8	7.2	L	1257	-	-3.00	0.3
006	TF	RW07	Y	075 (066.6)	-8.8	1.6	-	760	-	-3.00/50	0.3
007	TF	NOPPY	-	075 (066.7)	-8.8	12.3	-	3000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	NOPPY	256 (246.9)	-8.8	1.0 (-14000)	L	3000	FL140	-230 (-14000)	1.0

Waypoint Coordinates



Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
NOPPY	372214.69N / 1371120.01E	NWRF2	371841.62N / 1365416.12E
BENKO	372148.26N / 1370603.41E		
KONOS	372059.84N / 1365630.70E		
NW760	372046.91N / 1365359.30E		
NW761	371645.85N / 1365518.43E		
RW07	371722.92N / 1365706.38E		
NOPPY	372214.69N / 1371120.01E		

CHANGE : VAR. PROC course. HLDG pattern for NOPPY.

INSTRUMENT APPROACH CHART

RJNW / NOTO

RNP X RWY07

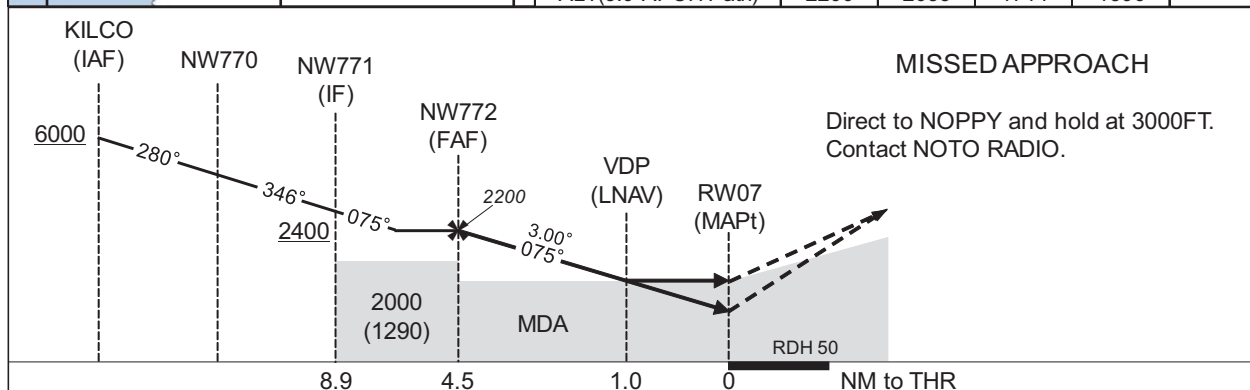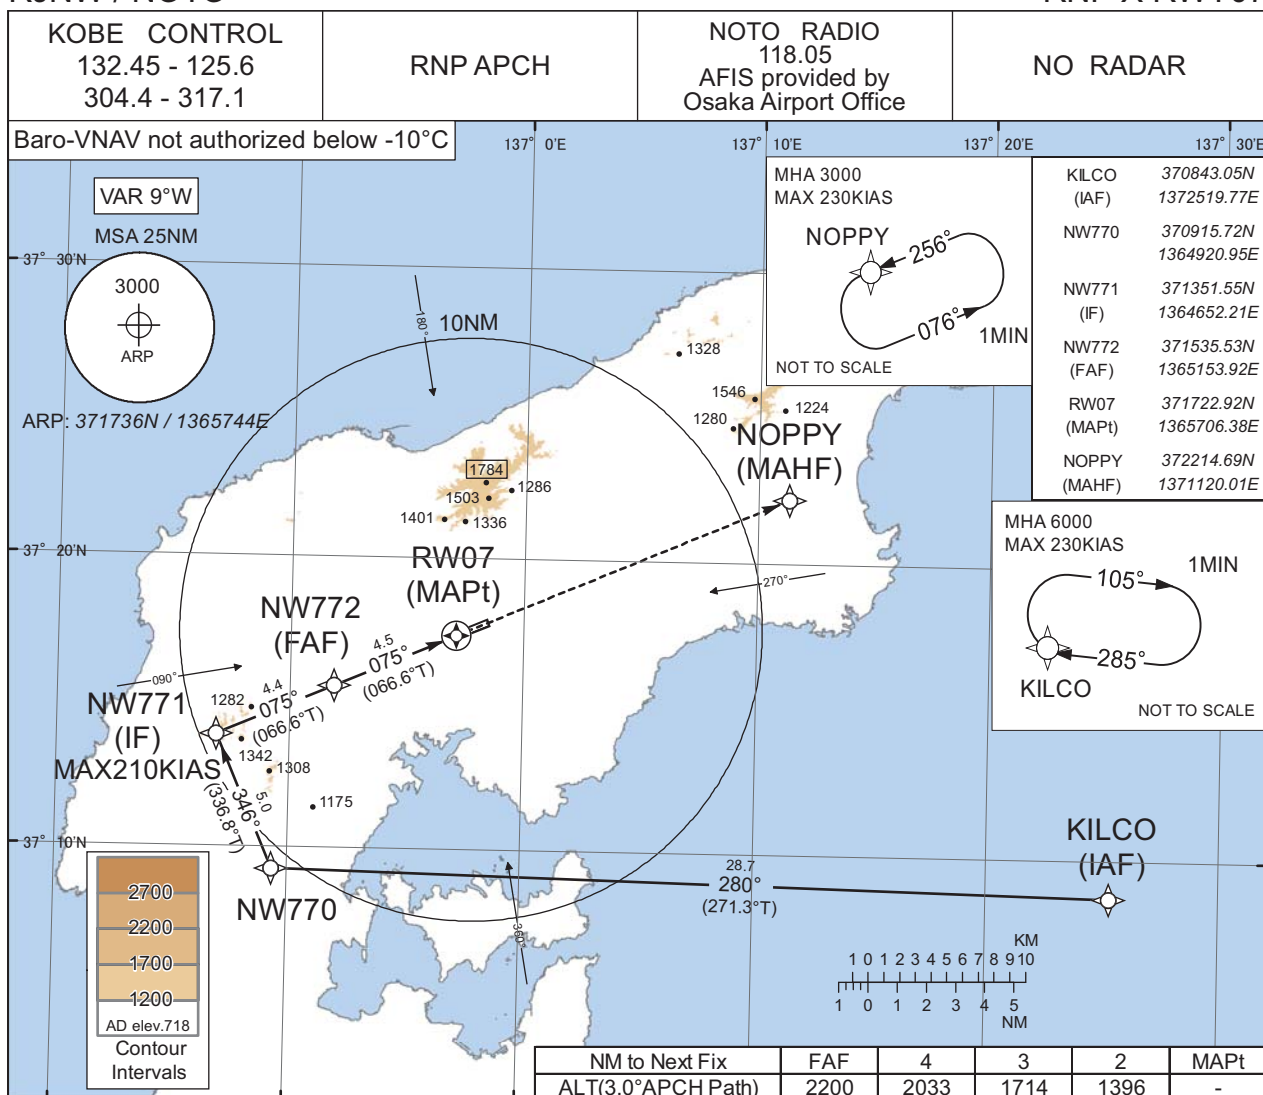

Missed APCH climb gradient MNM 3.0%

MINIMA		THR elev. 710		AD elev. 718		
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	962 (252)	1000	1060 (350)	1200	1260 (542)	1600
B		1100		1300		
C	972 (262)	1200	1070 (360)	1400	1280 (562)	2400
D	1001 (291)	1400	1080 (370)	1600	1420 (702)	3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : New PROC.

RJNW / NOTO

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
見附島 Mitsukejima	066°T / 14.9NM	島 Island
宇出津 Ushitsu	085°T / 9.1NM	港 Harbor
観音崎 Kannonzaki	158°T / 12.0NM	岬 Cape
ツインブリッジ TwinBridge	197°T / 9.8NM	橋 Bridge
穴水 Anamizu	210°T / 4.6NM	港 Harbor
海士崎 Amazaki	238°T / 16.5NM	岬 Cape
猿山 Saruyama	278°T / 11.7NM	岬 Cape
輪島 Wajima	335°T / 7.0NM	港 Harbor

RJNW / NOTO

Minimum Vectoring Altitude CHART

