


AERODROME CHART

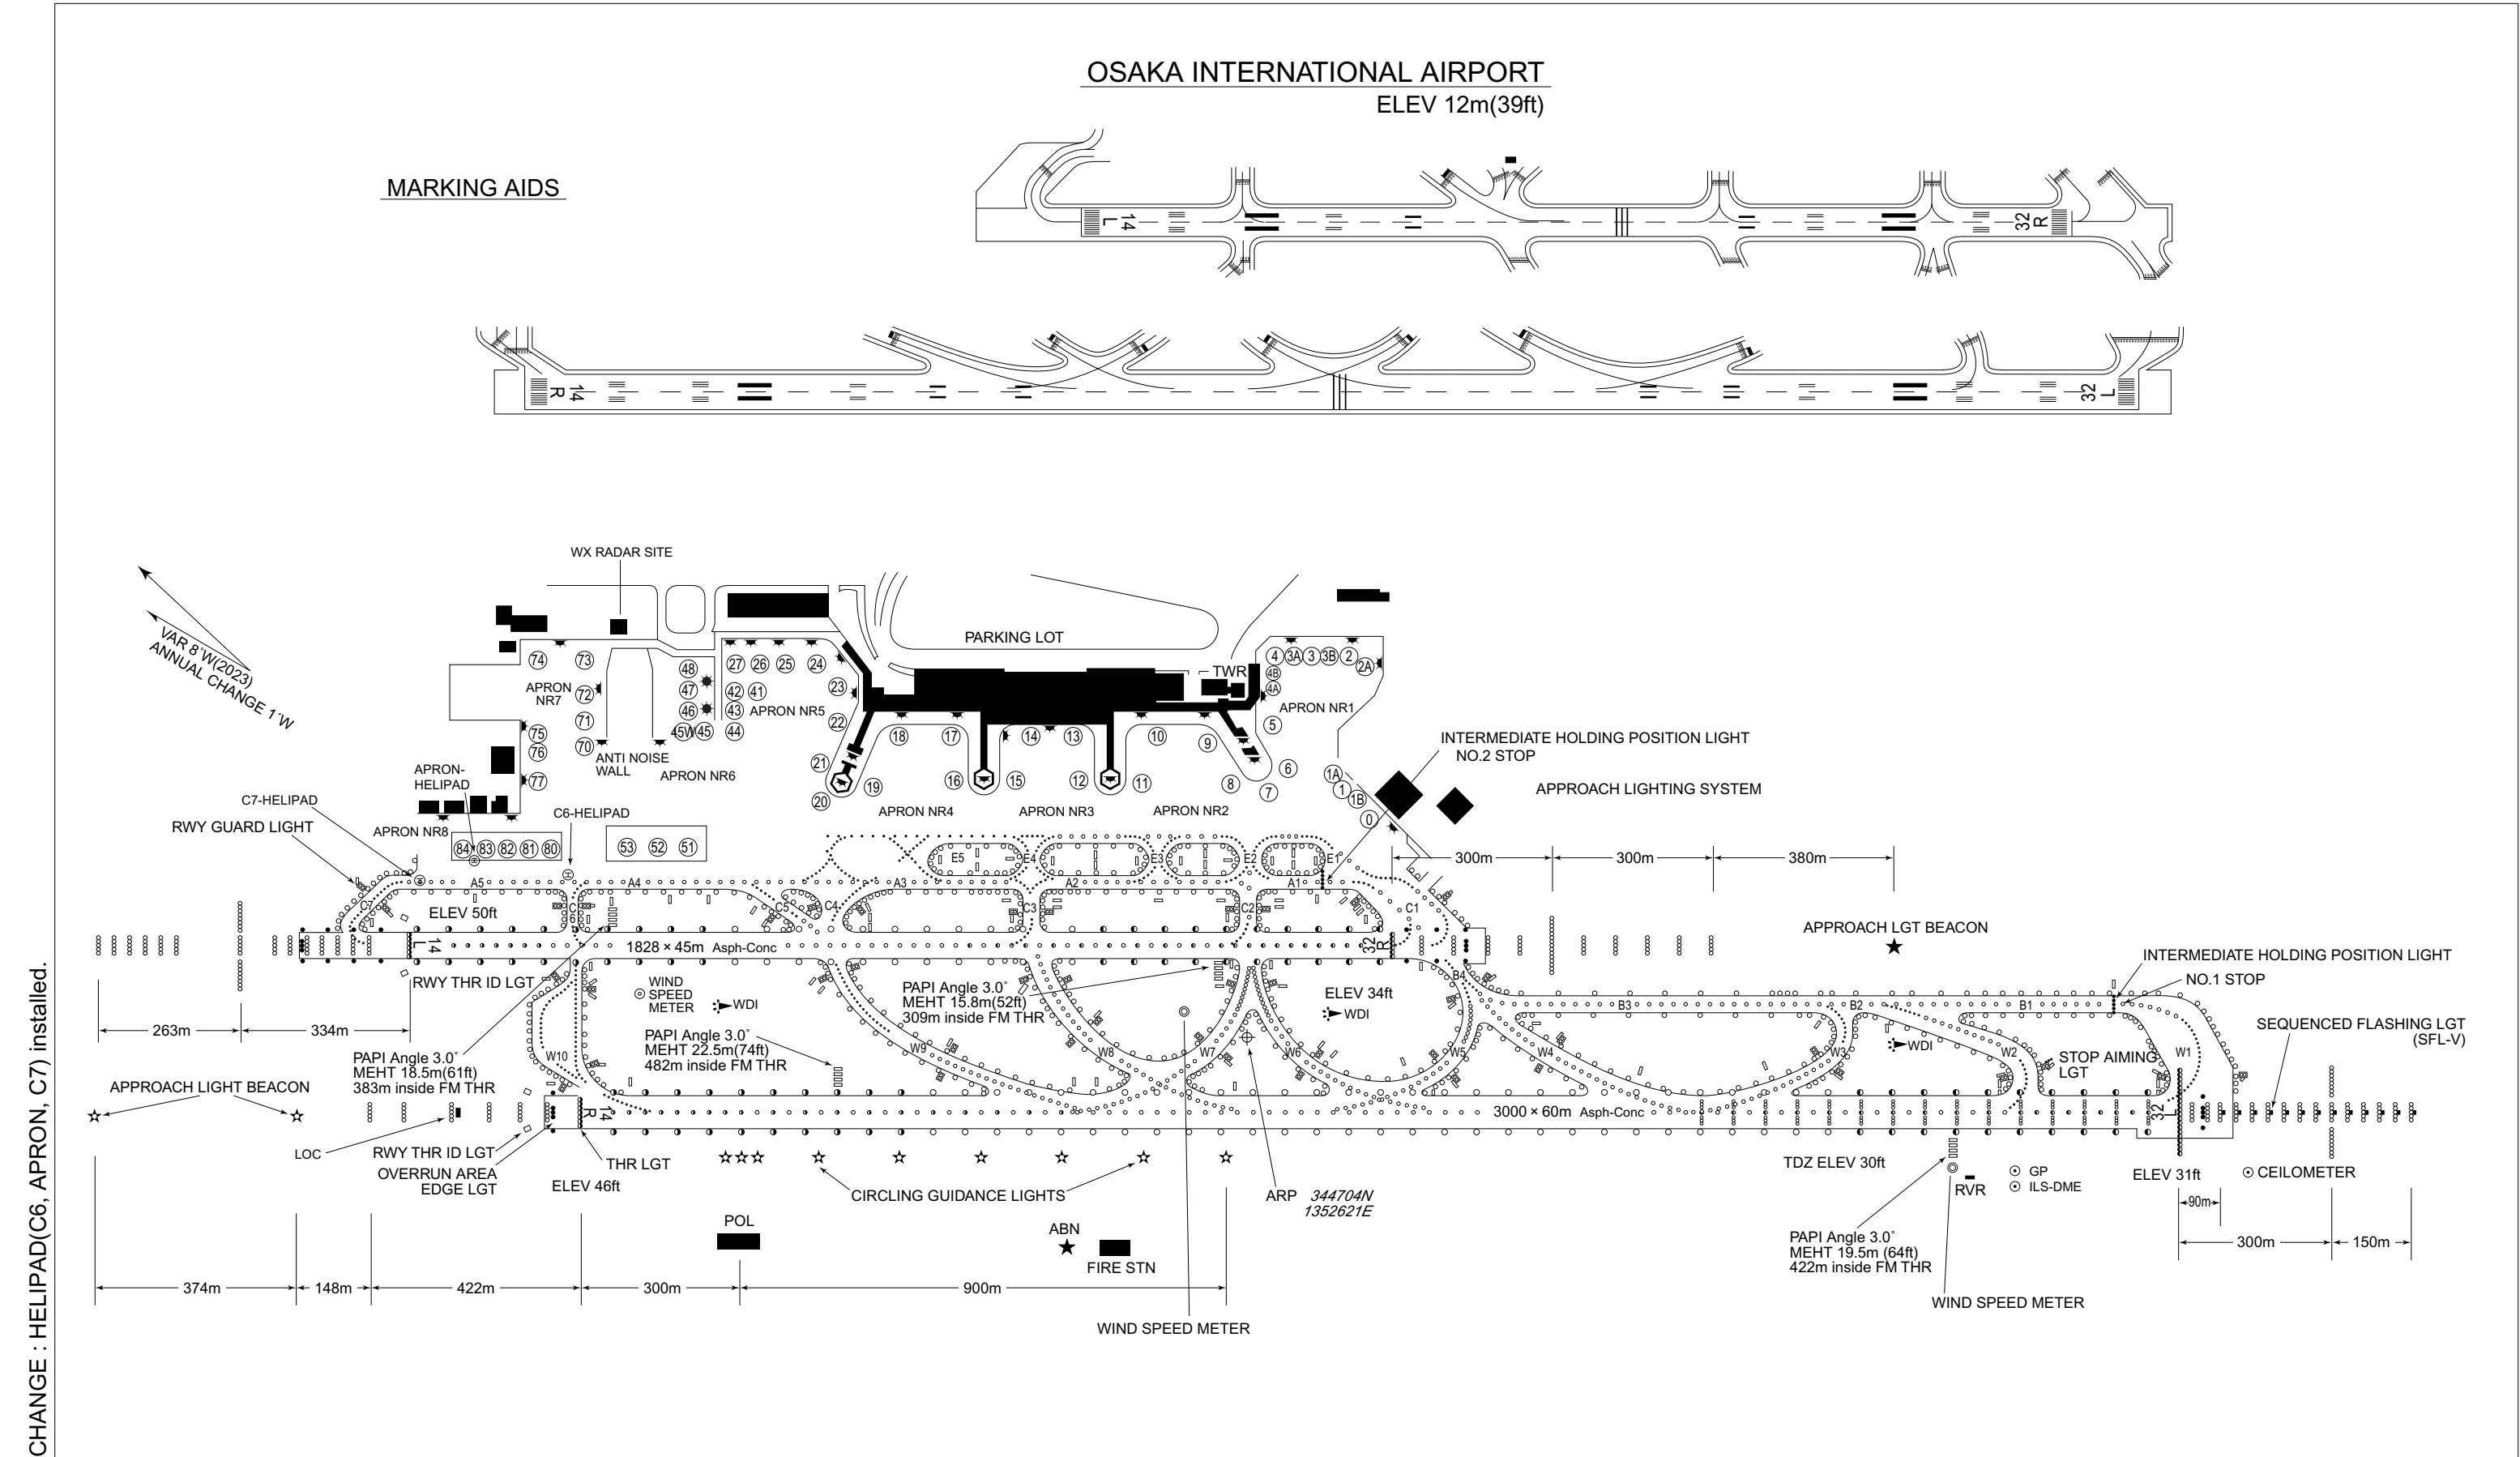



RJOO / OSAKA INTL

AD CHART

CHANGE : VAR.

Designation	Call Sign	Frequency (MHz)
ATIS	Osaka Intl Airport	128.6
DLVRY	Osaka Delivery	118.8
GND	Osaka Ground	121.7 126.2
TWR	Osaka Tower	118.1 126.2 236.8

OSAKA INTERNATIONAL AIRPORT
ELEV 12m(39ft)

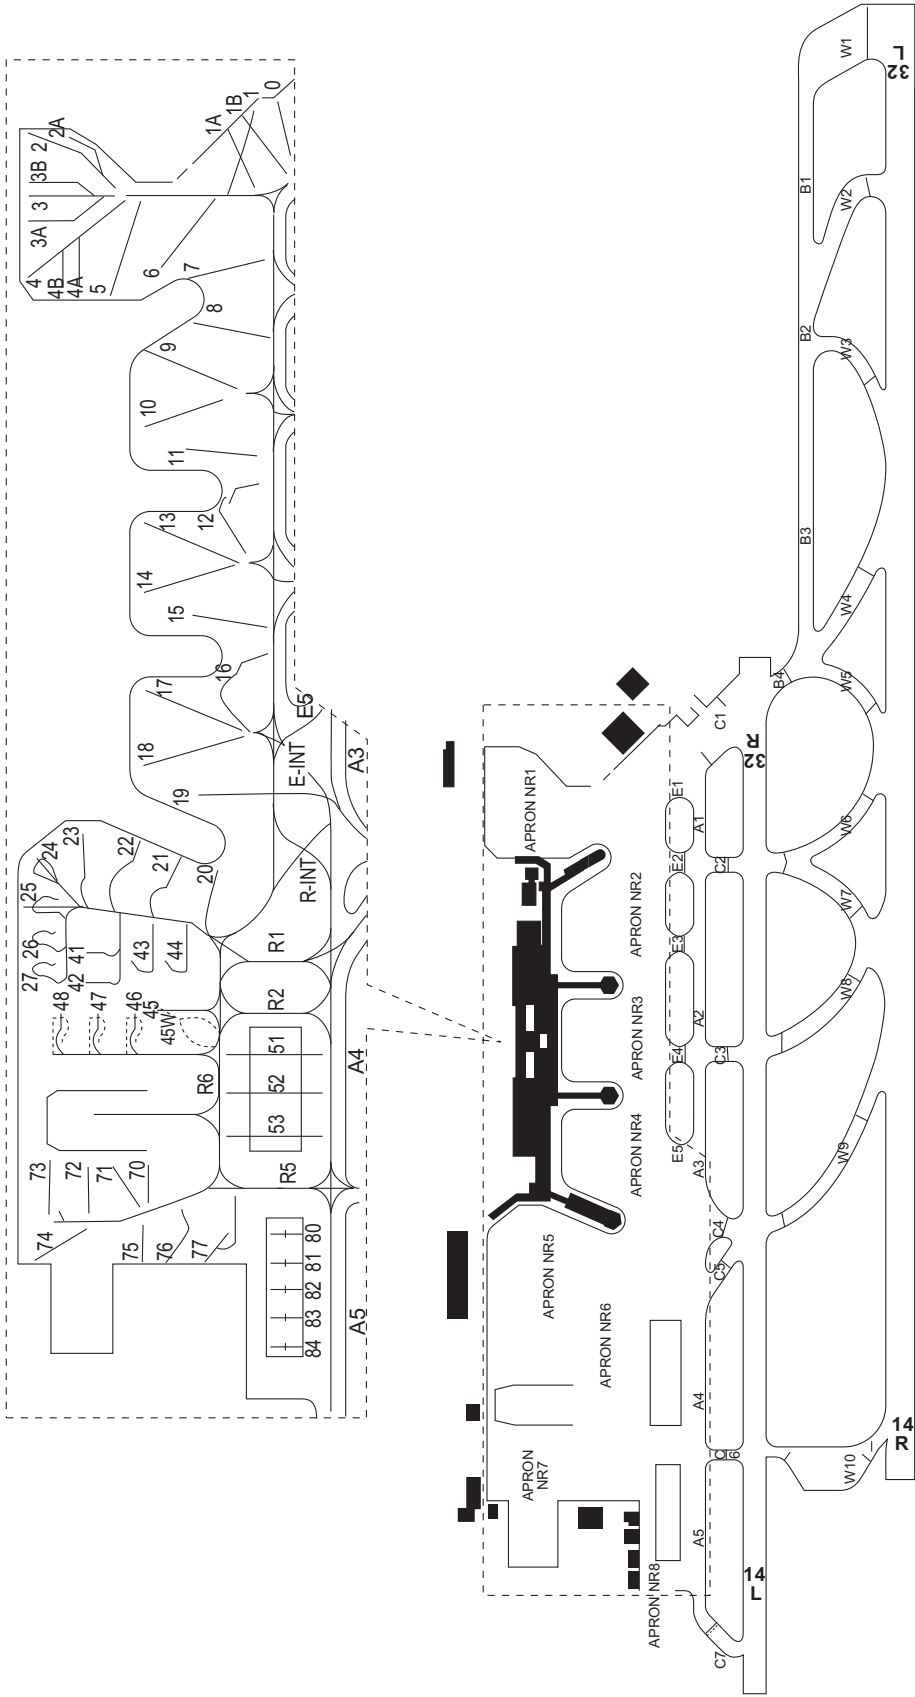

INTENTIONALLY LEFT BLANK

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC



OSAKA INTERNATIONAL AIRPORT
RWY : 14R/32L

DECLARED DISTANCES	
RWY 14R	RWY 32L
3000m TAKE OFF RUN AVAILABLE	3000m
3000m TAKE OFF DISTANCE AVAILABLE	3000m
3000m ACCELERATE STOP DISTANCE AVAILABLE	3000m
3000m LANDING DISTANCE AVAILABLE	3000m

SLOPE 1.2%

Vertical Scale: 0 to 400 FT, 0 to 125 M

Horizontal Scale: 9842 to 32000

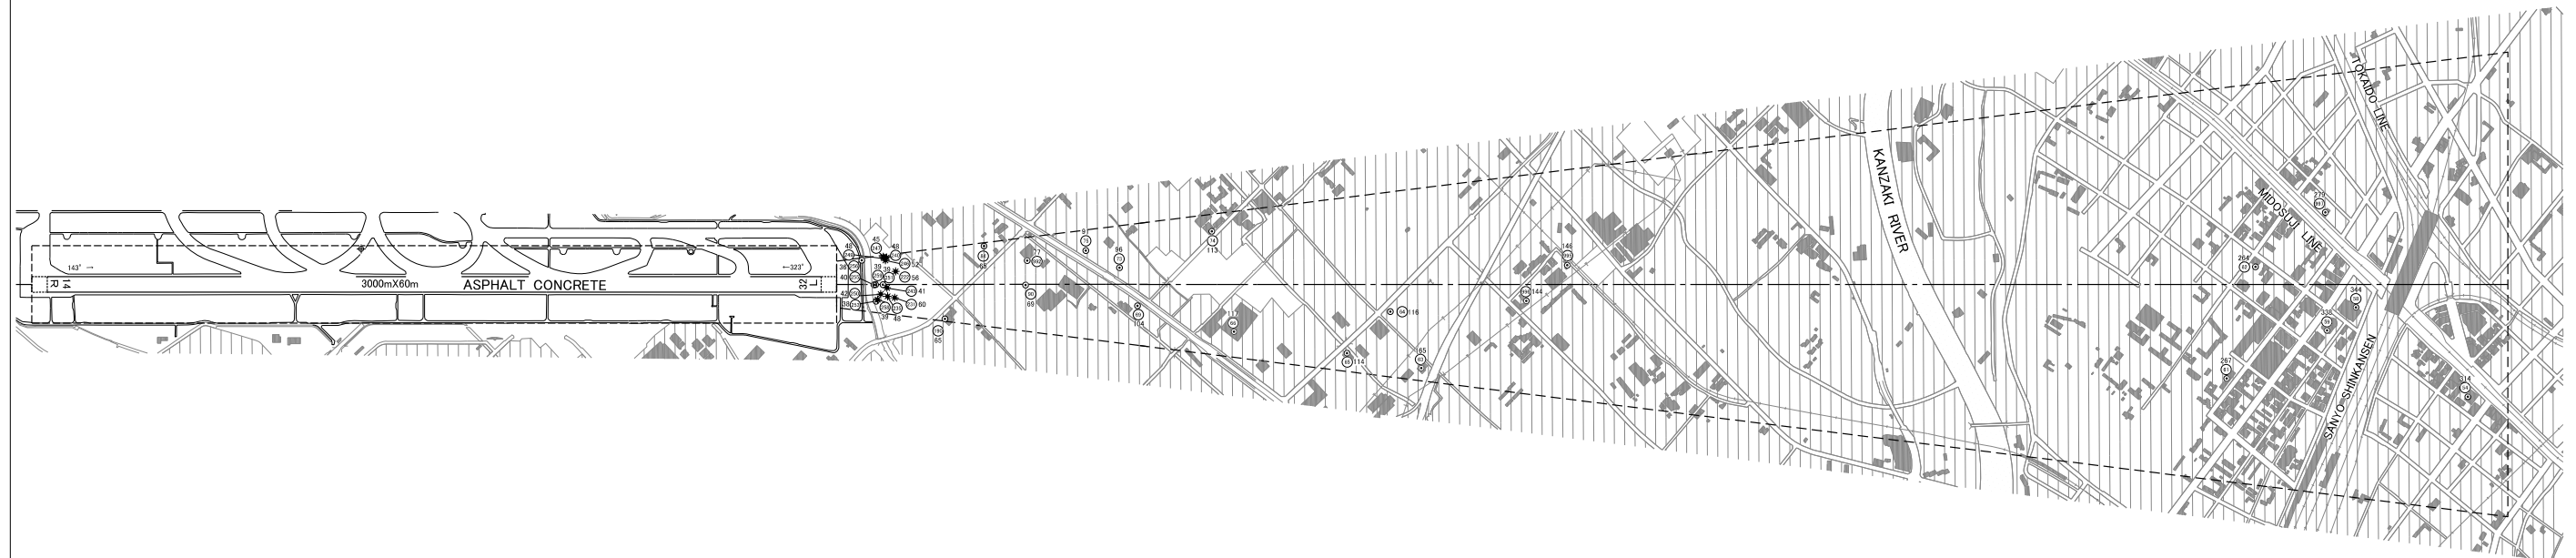


LEGEND		INSTRUMENT RECORD		
		NO.	DATE	ENTERED BY
	IDENTIFICATION NUMBER			
	POLE, TOWER, SPIRE, ANTENNA, ETC.			
	TREE			
	RAILROAD			
	RIVER			
	TRANSMISSION LINE OR OVERHEAD CABLE			
	TRIANGULATION POINT			
	AERONAUTICAL GROUND LIGHT			

CHANGE : Update

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC


MAGNETIC VARIATION 8°W-FEB 2022

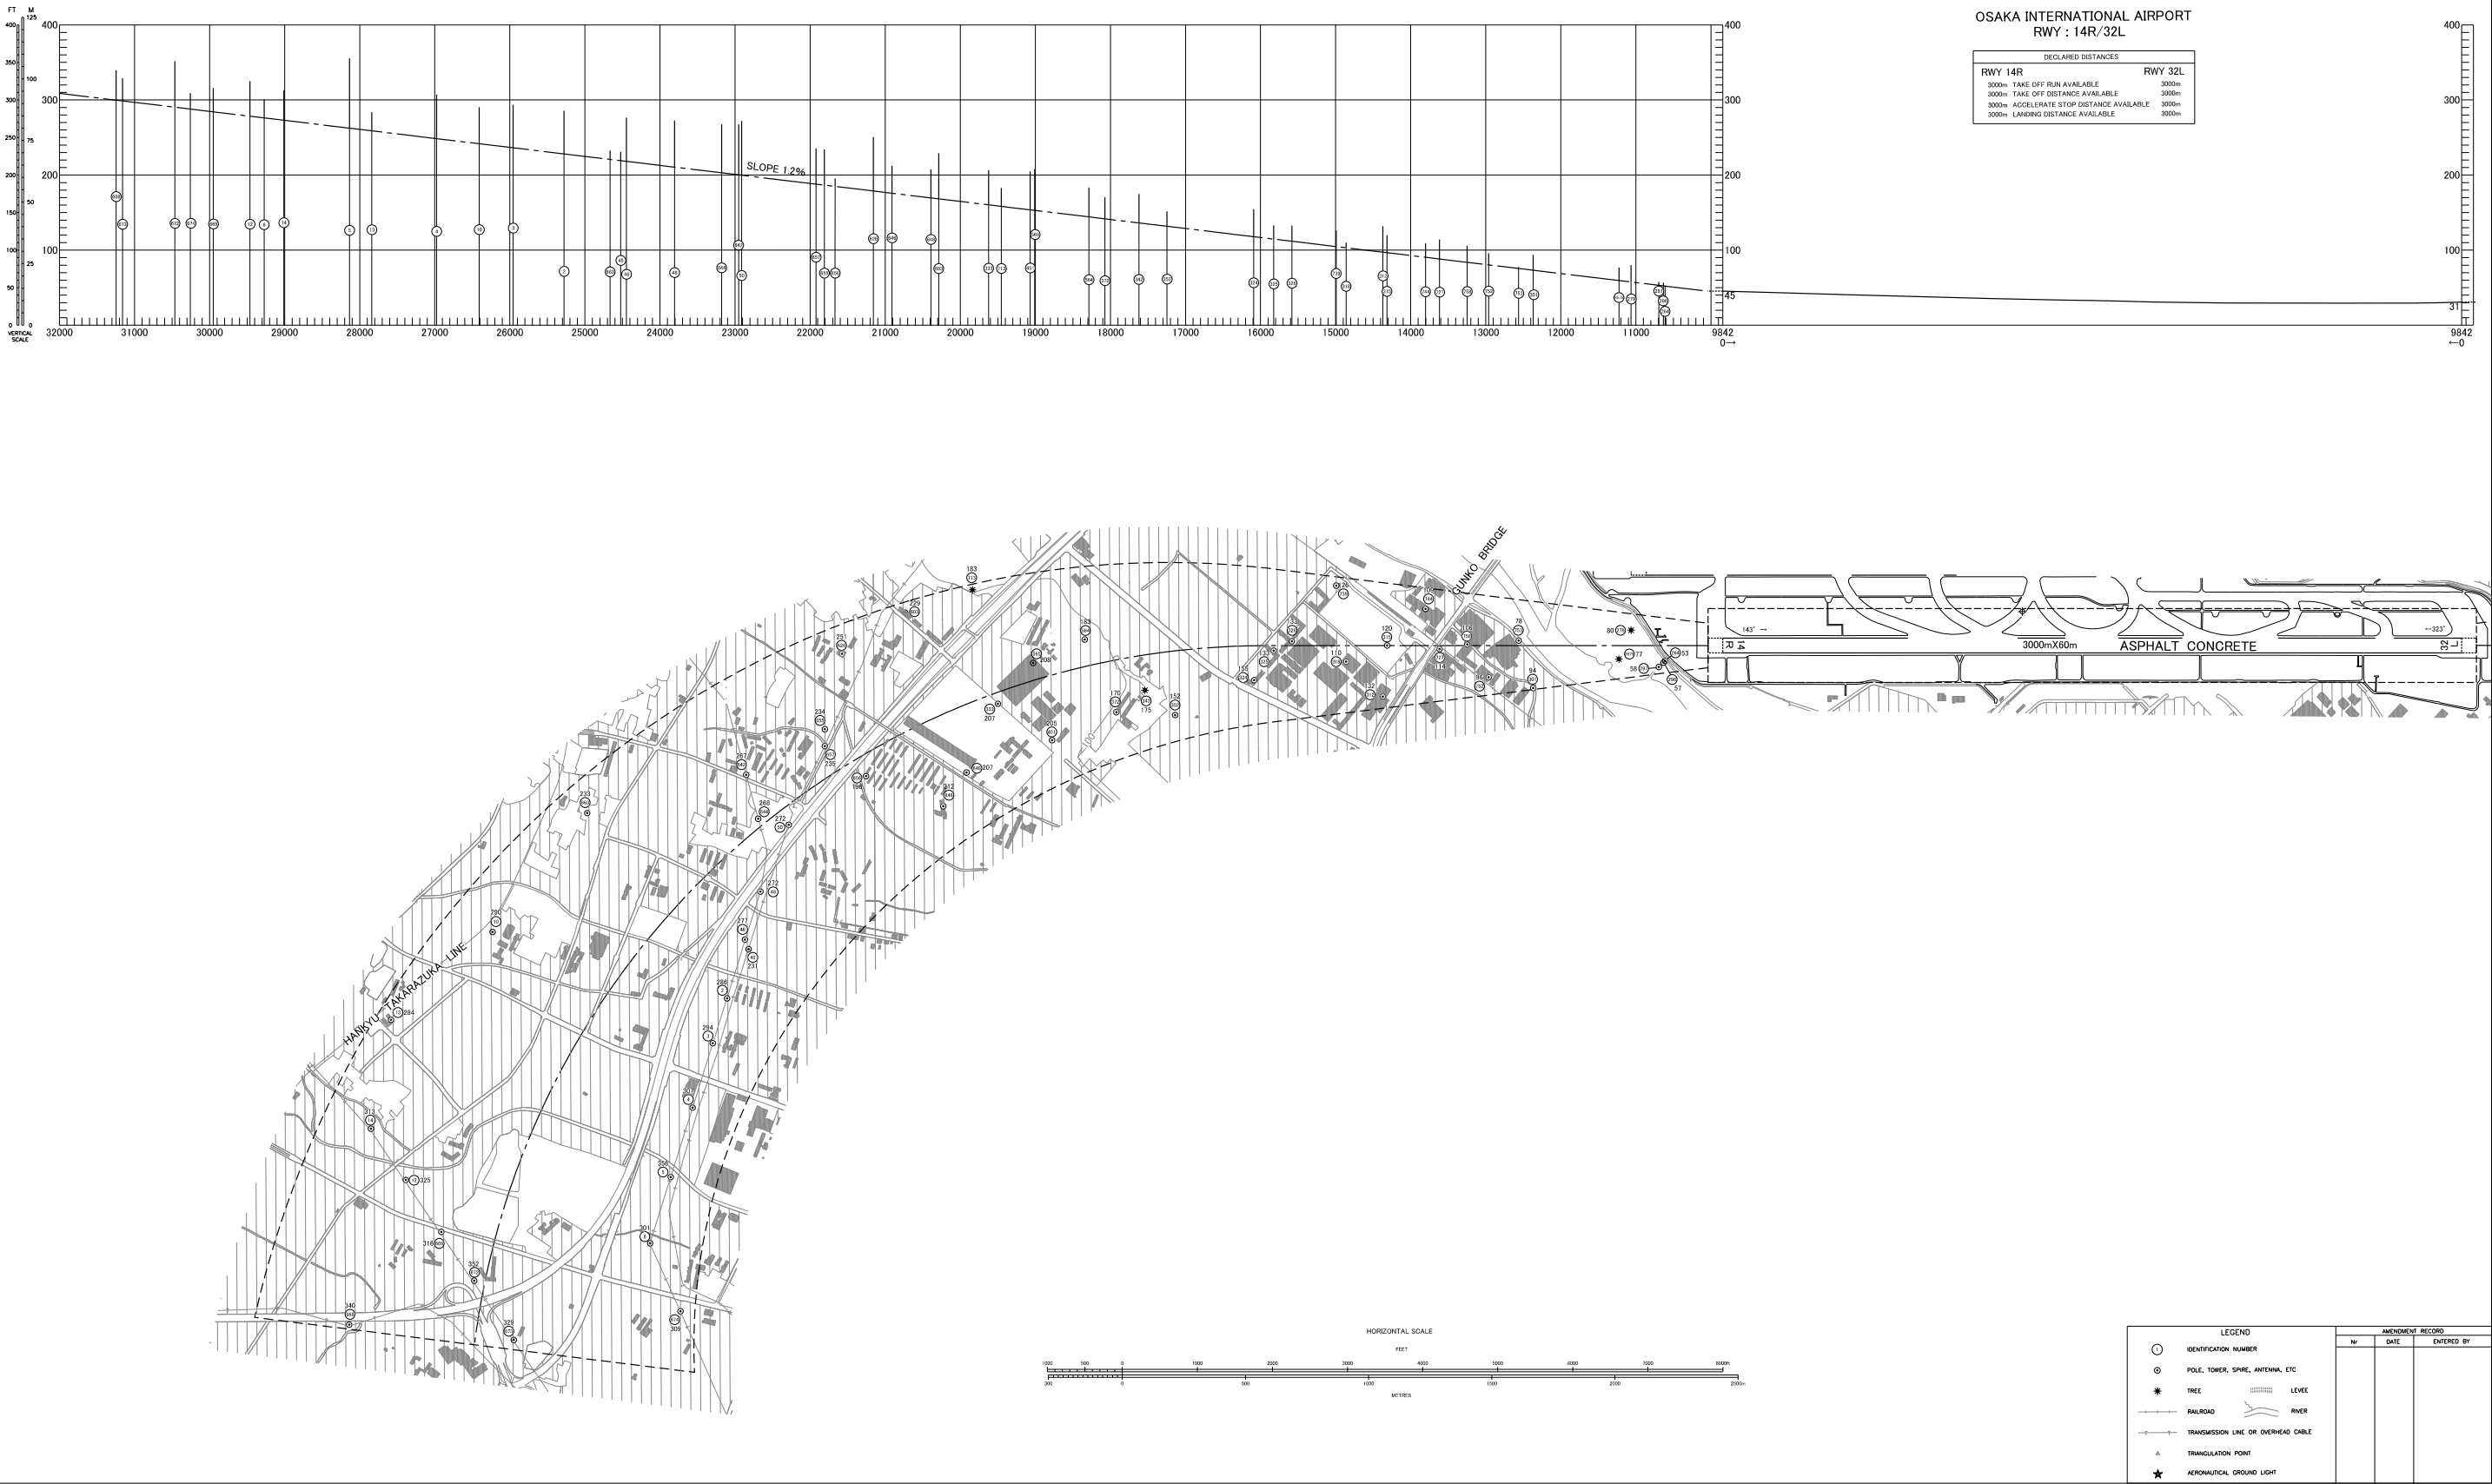

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC


MAGNETIC VARIATION 8°W-FEB 2022

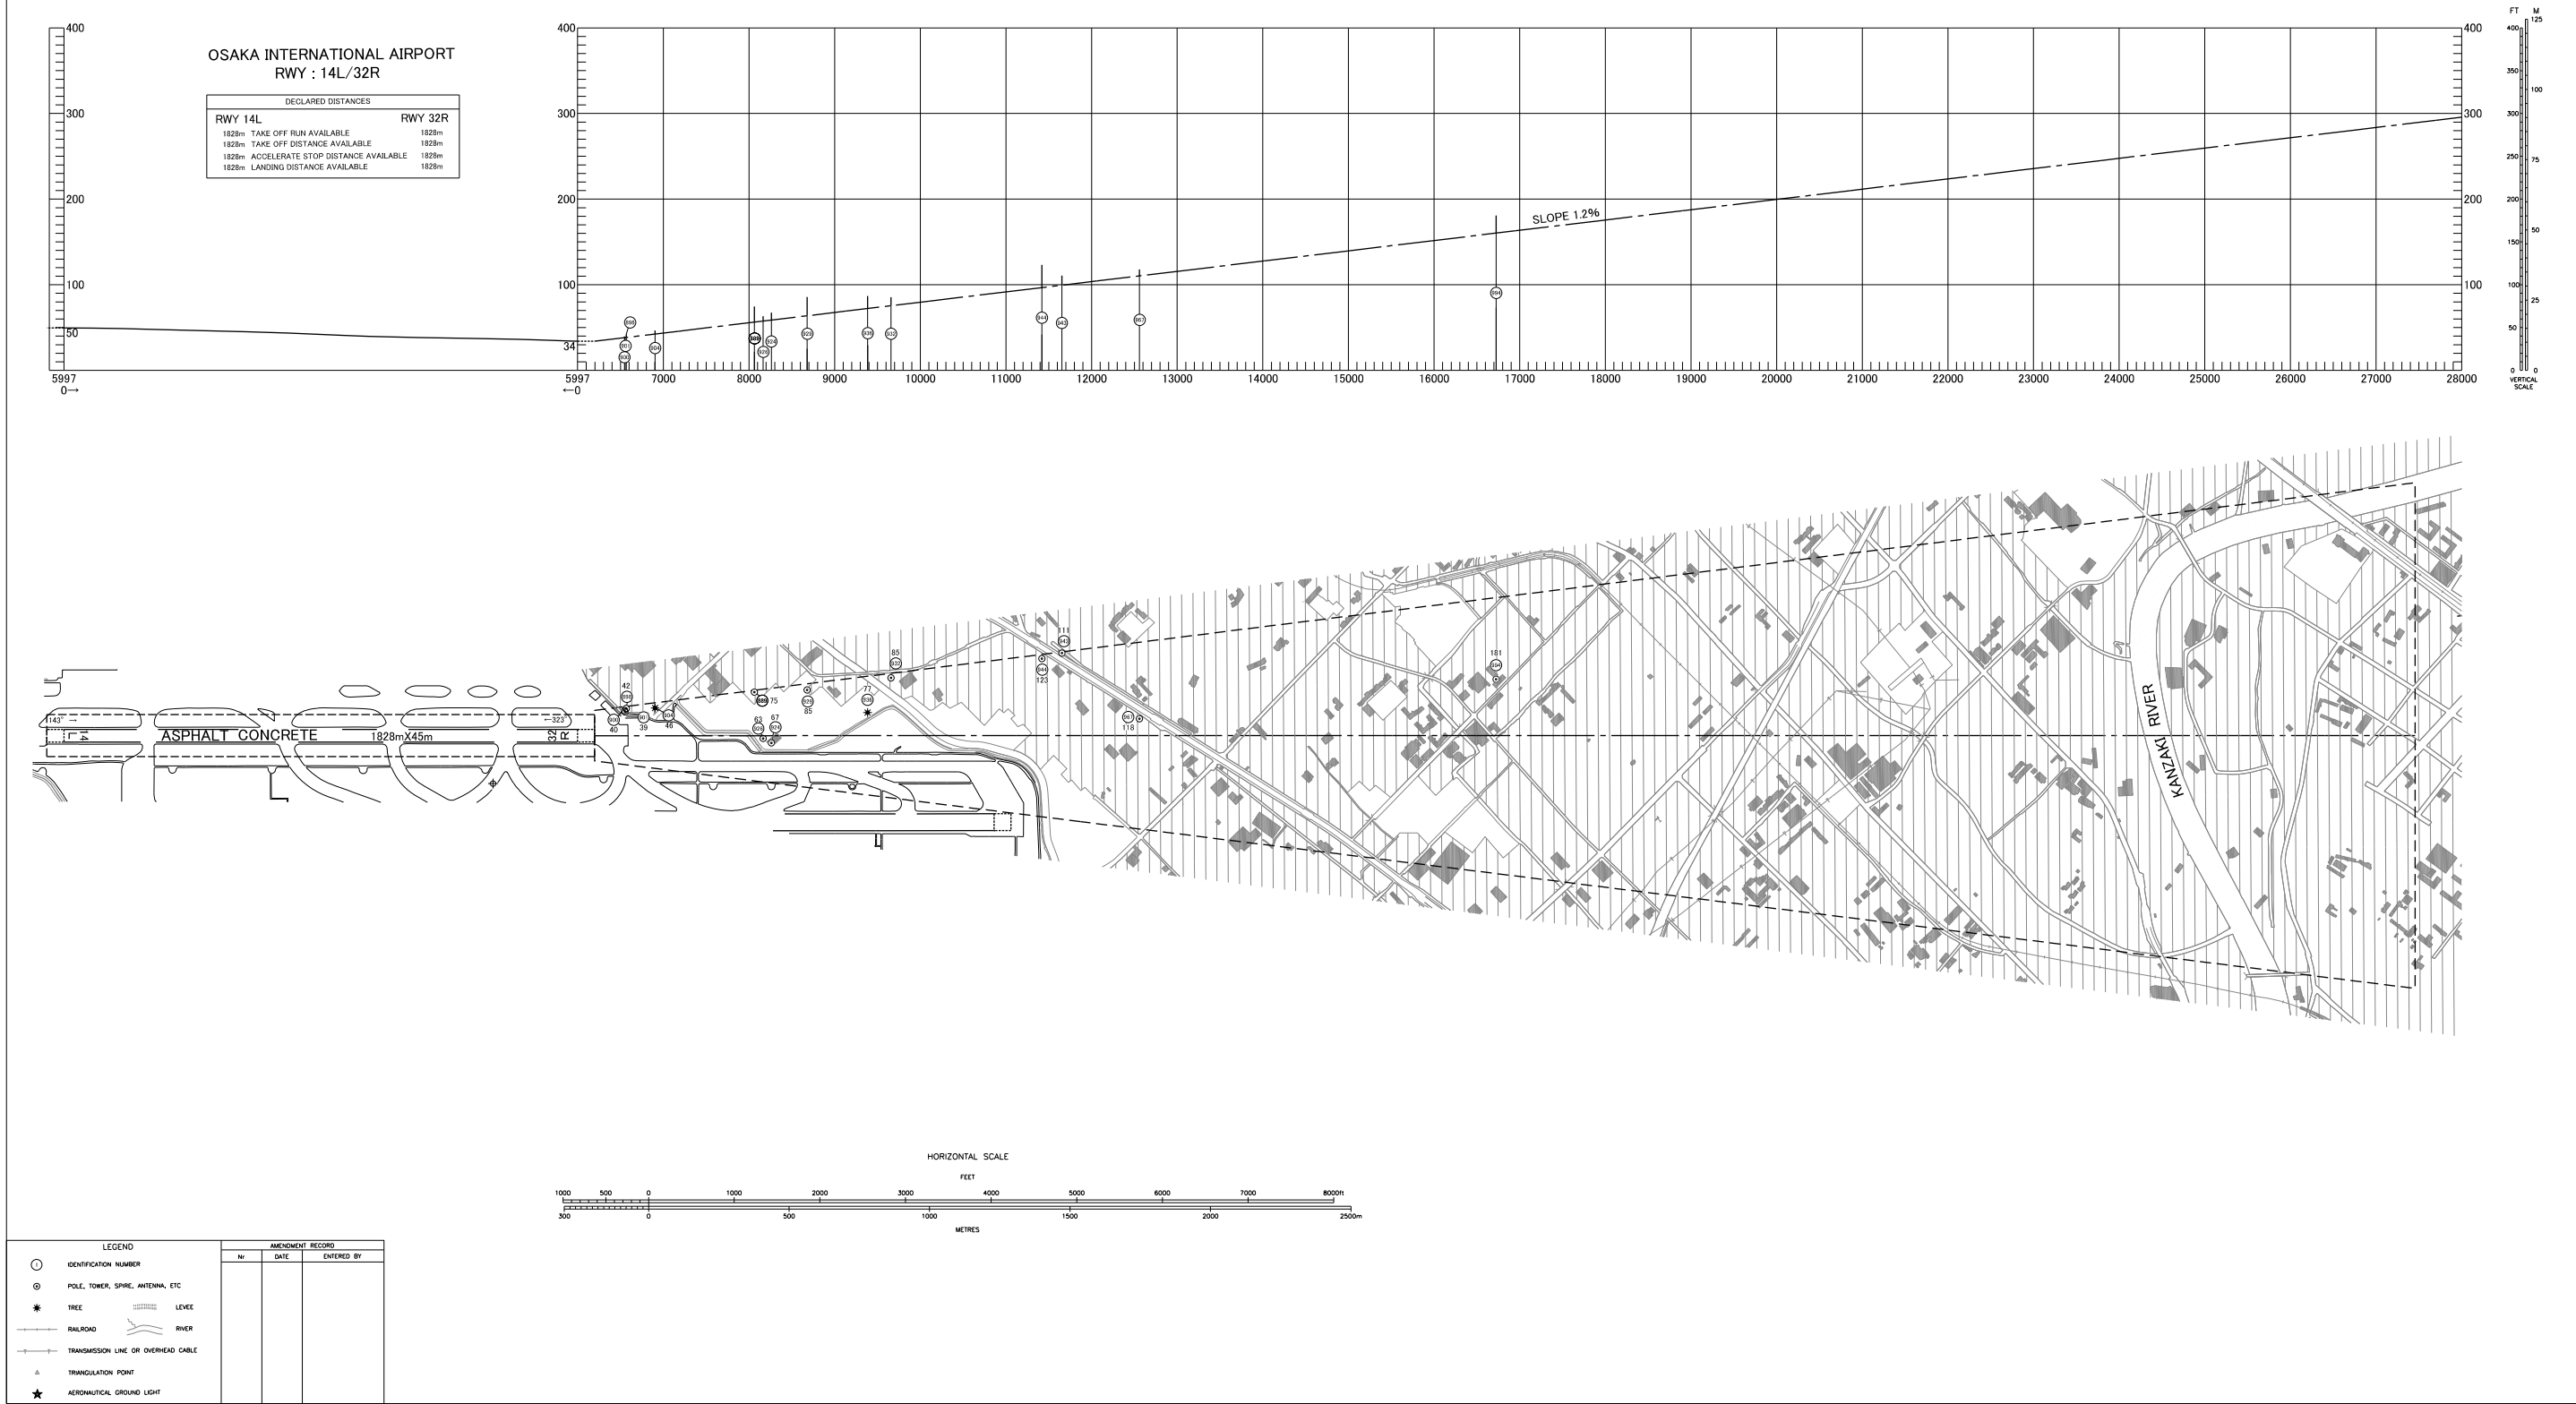

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)


DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

MAGNETIC VARIATION 8° W-FEB 2022

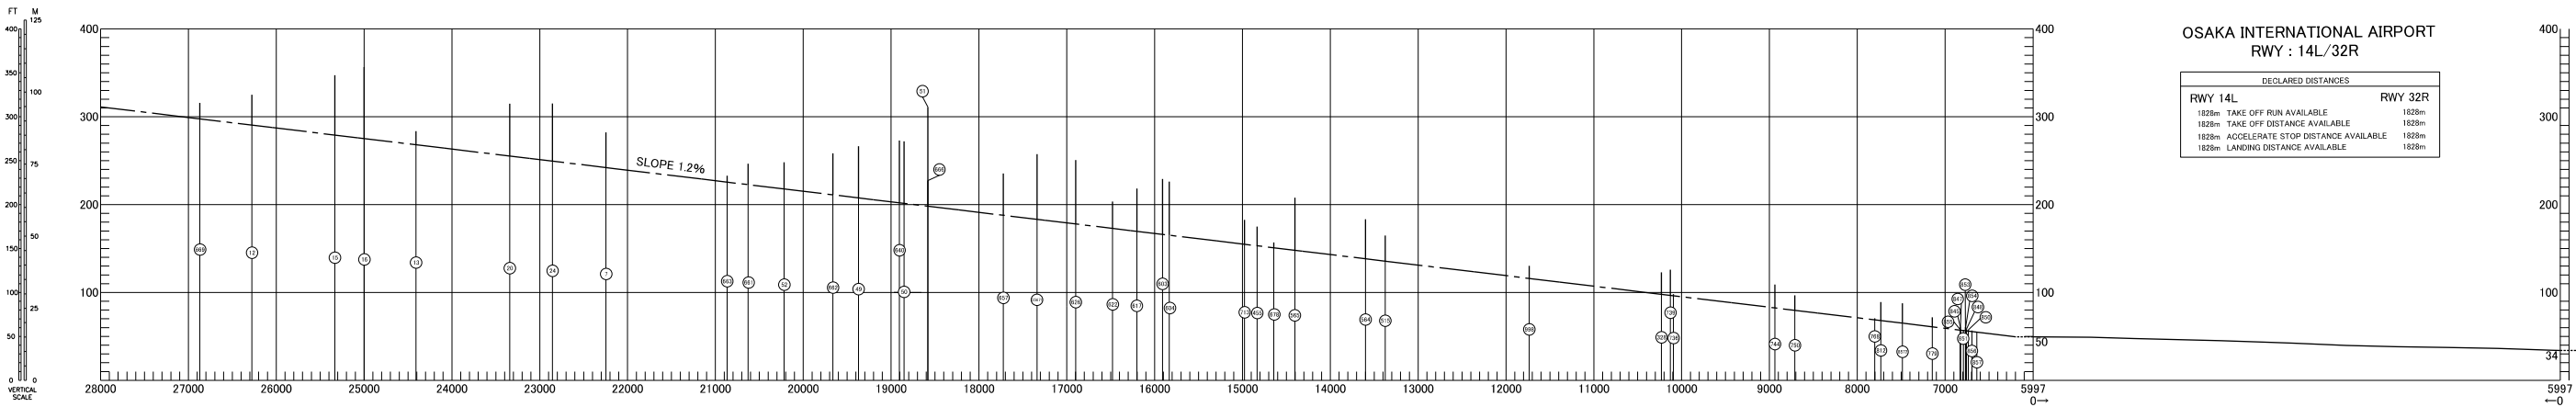

OSAKA INTERNATIONAL AIRPORT
RWY : 14L/32R

DECLARED DISTANCES			
RWY 14L		RWY 32R	
1828m	TAKE OFF RUN AVAILABLE	1828m	
1828m	TAKE OFF DISTANCE AVAILABLE	1828m	
1828m	ACCELERATE STOP DISTANCE AVAILABLE	1828m	
1828m	LANDING DISTANCE AVAILABLE	1828m	

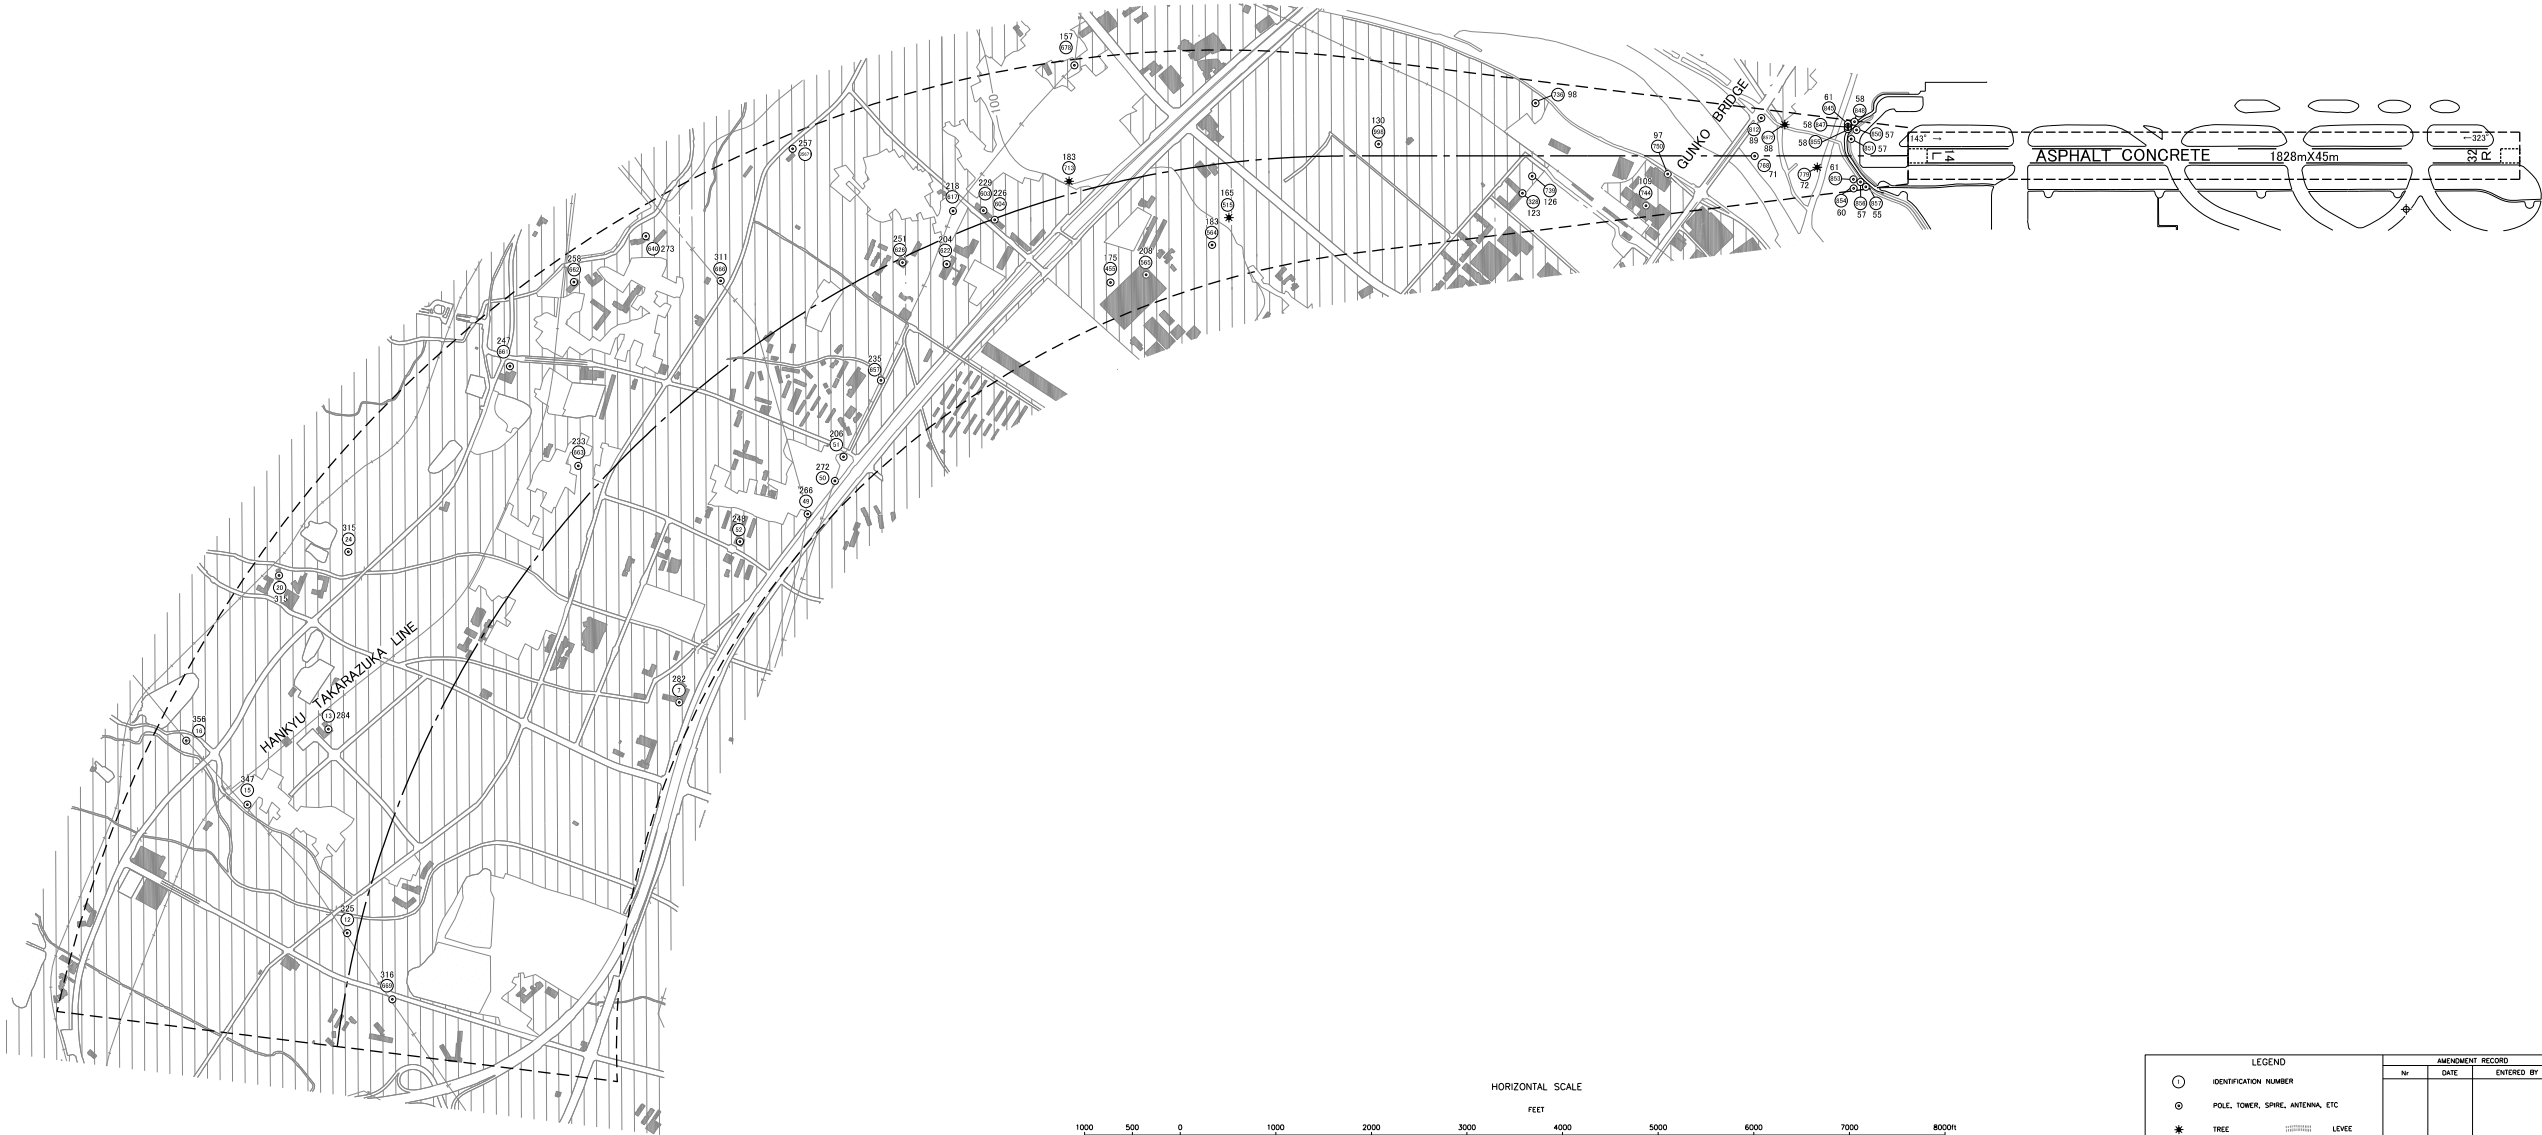


LEGEND		AMENDMENT RECORD		
①	IDENTIFICATION NUMBER	No.	DATE	ENTERED BY
⊙	POLE, TOWER, SPIRE, ANTENNA, ETC			
*	TREE			
—	RAILROAD			
—	TRANSMISSION LINE OR OVERHEAD CABLE			
△	TRIANGULATION POINT			
★	AERONAUTICAL GROUND LIGHT			
—	LEVEE			
—	RIVER			

CHANGE : Update

AERODROME OBSTACLE CHART-ICAO
TYPE B

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

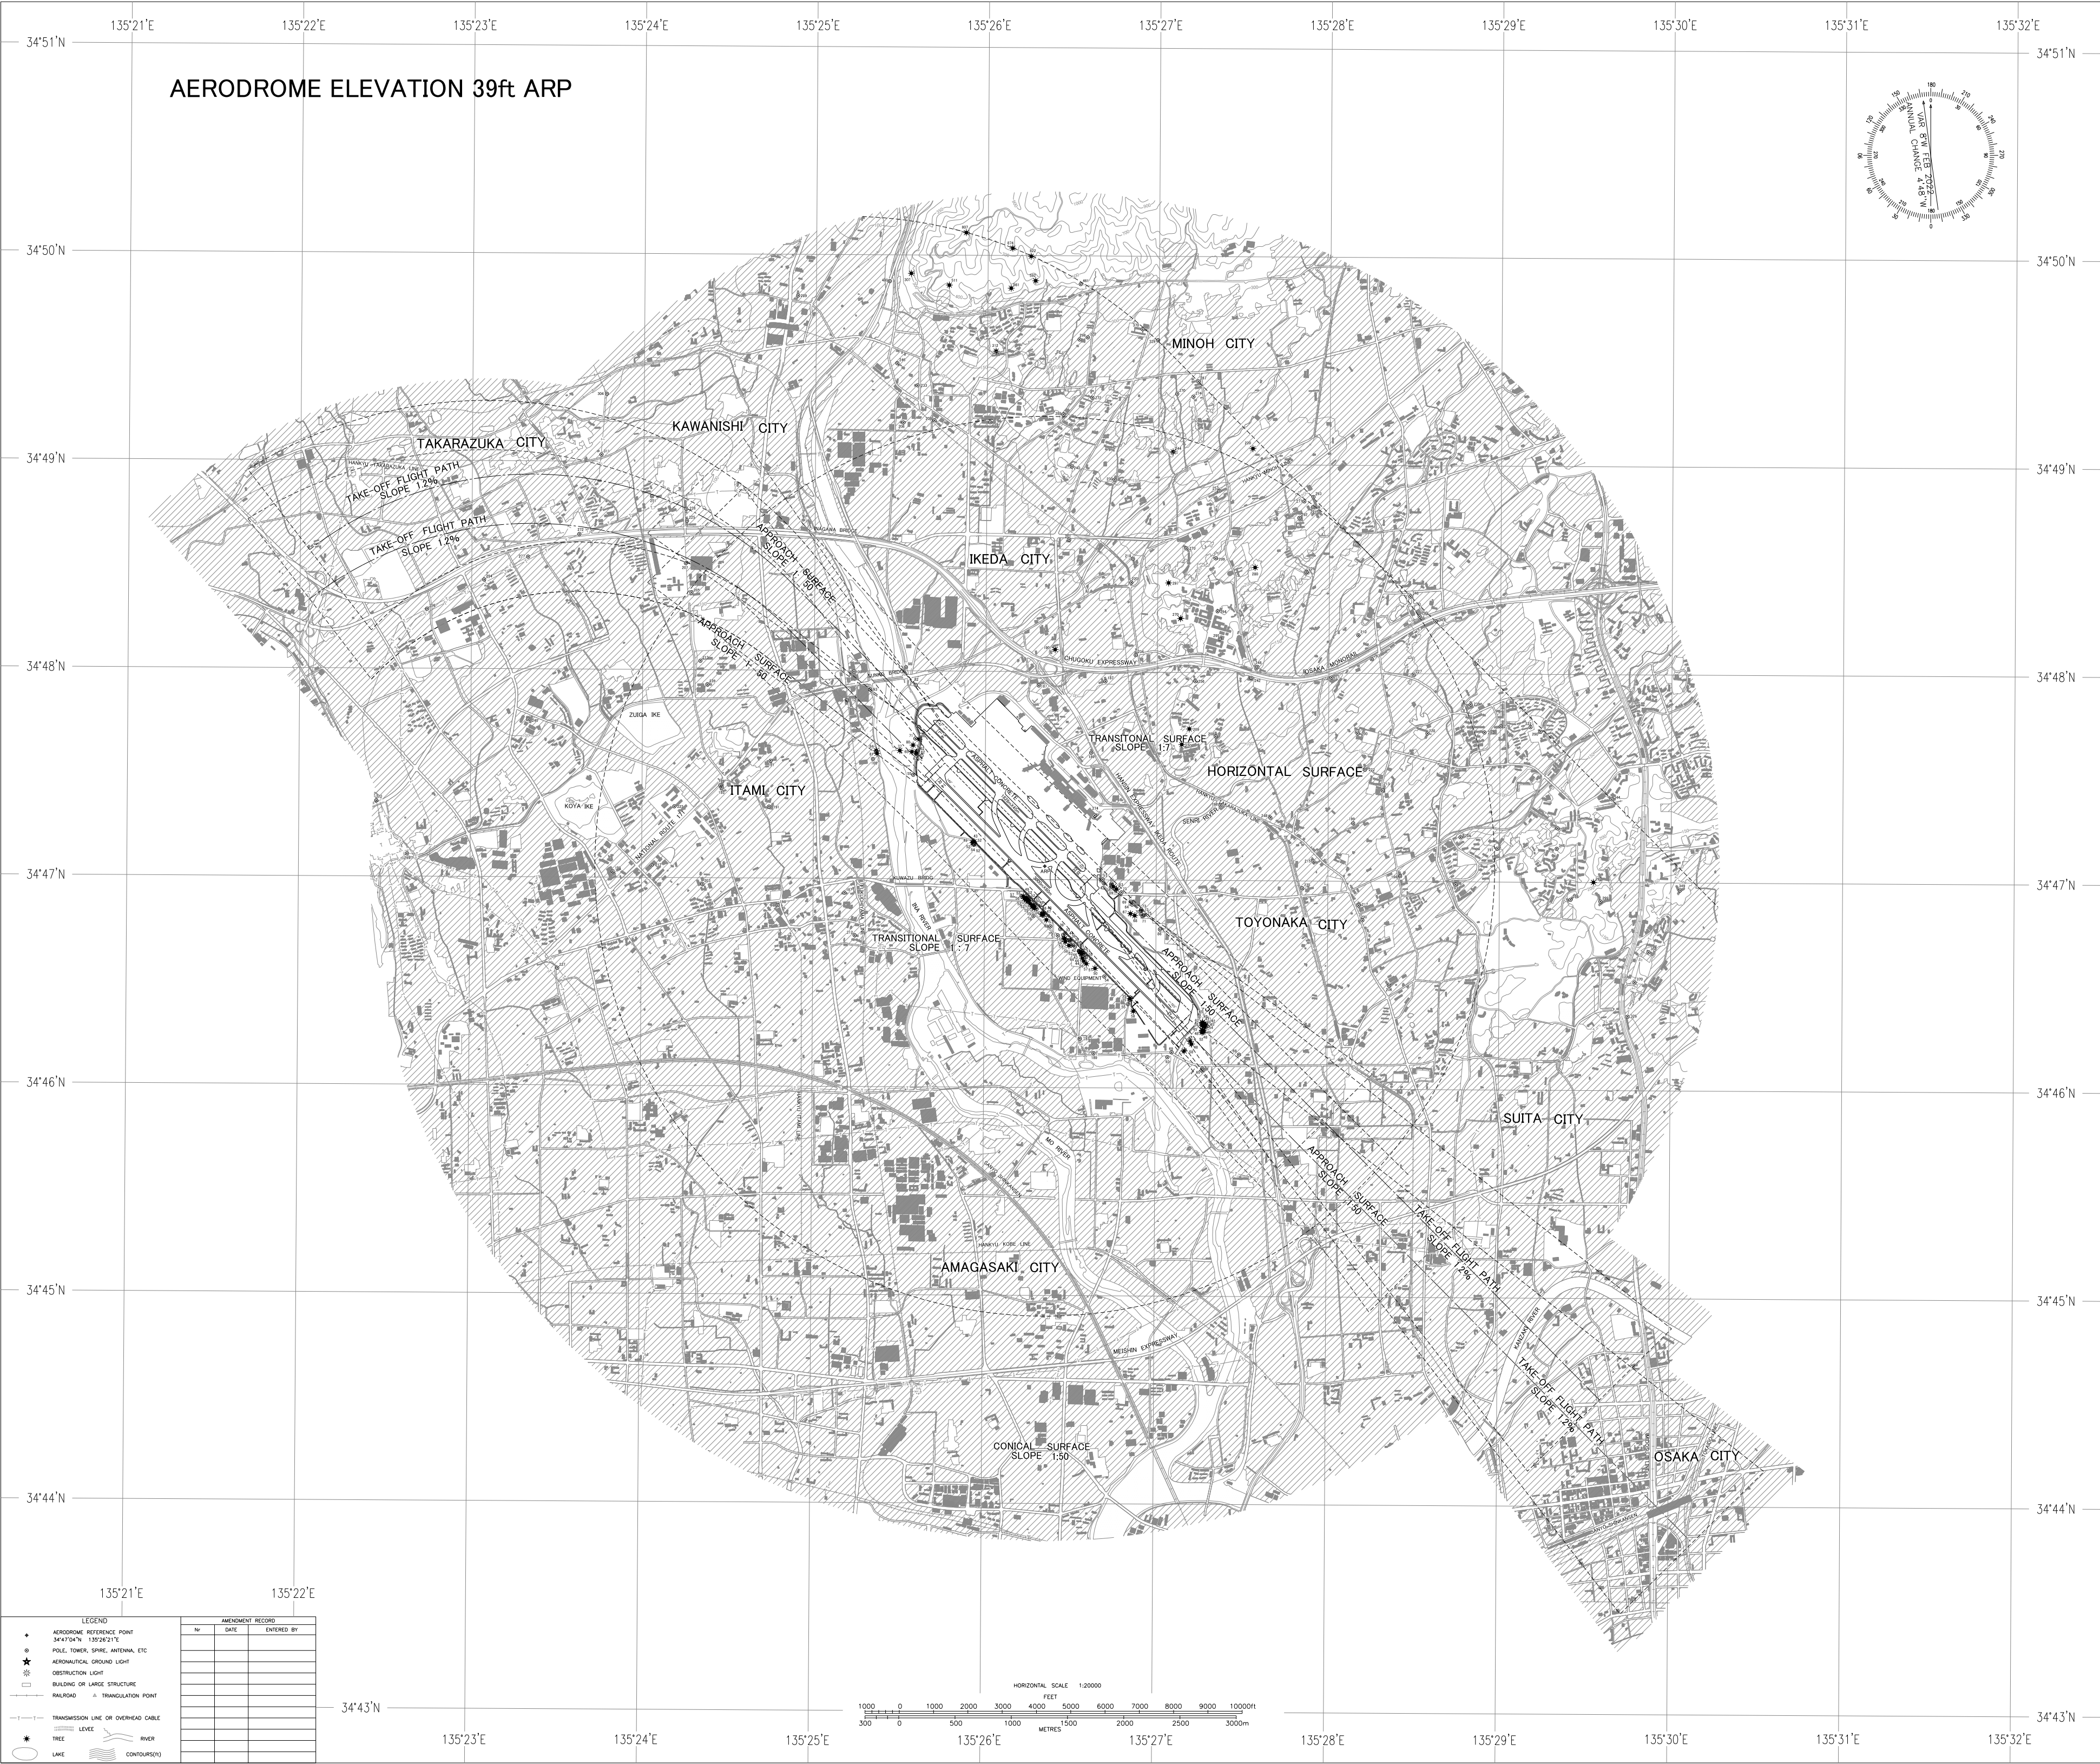

CHANGE : Update

STANDARD DEPARTURE CHART -INSTRUMENT

RJOO / OSAKA INTL

SID

ASUKA FOUR DEPARTURE

RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME,...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn left,...
...via ITE R101 to ASUKA.

Cross ASUKA at or above 5000FT.

Note : When take off RWY 14R/14L, following climb gradient should be maintained until 500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

PANAS ONE DEPARTURE


RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME,...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn left,...
...via ITE R101 to PANAS.

Note : When take off RWY 14R/14L, following climb gradient should be maintained until 500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050


CHANGE: New PROC(PANAS ONE DEPARTURE).

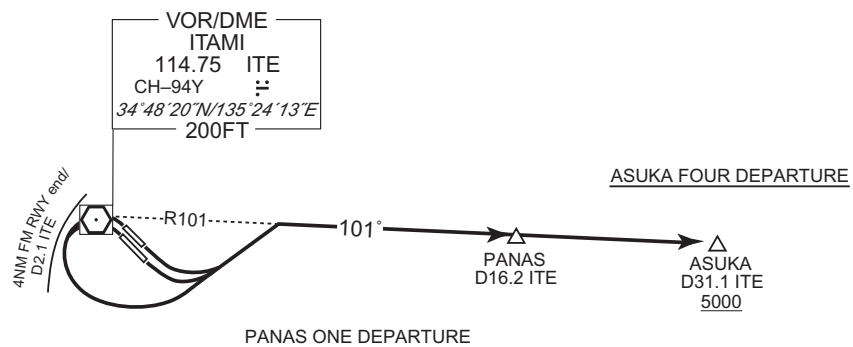

STANDARD DEPARTURE CHART -INSTRUMENT

RJOO / OSAKA INTL

RNAV TRANSITION

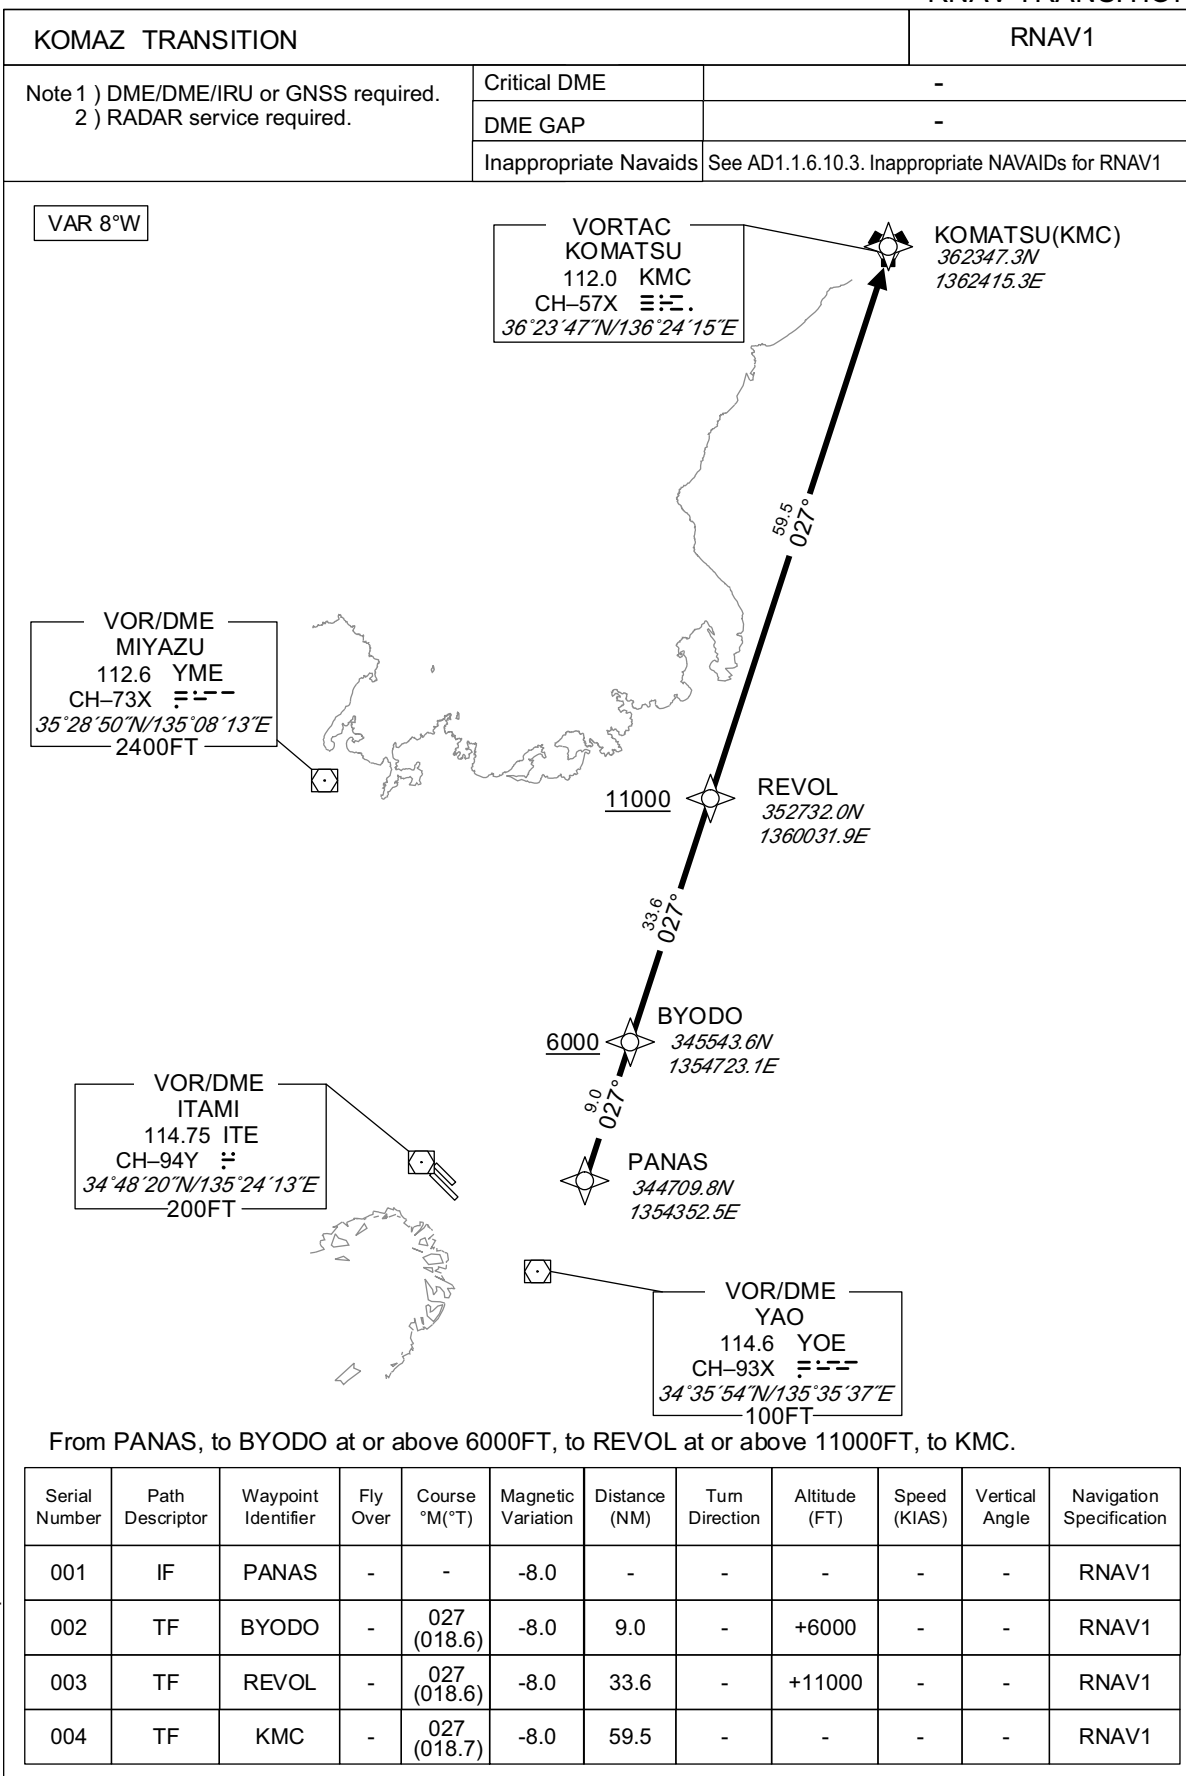

CHANGE : Description of VAR and PROC name.

STANDARD DEPARTURE CHART -INSTRUMENT

RJOO / OSAKA INTL

SID

IZUMI ONE DEPARTURE

RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME, via ITE R201 to YODOH,...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn right HDG230° to intercept and proceed via ITE R201 to YODOH,...

...turn left, via YOE R295 to intercept and proceed via ITE R184 to IZUMI.

Cross IZUMI at or above 6000FT.

Note : When take off RWY 14R/14L, following climb gradient should be maintained until 500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

VOR/DME
ITAMI
114.75 ITE
CH-94Y
34°48'20"N/135°24'13"E
200FT

4NM FM RWY end/
D2.1 ITE

201°

HDG230°

YODOH
D9.0 ITE
D12.1 YOE

D9.4 YOE
D9.6 ITE

YOE R295

184°

IZUMI
D21.9 ITE
6000

VOR/DME
YAO
114.6 YOE
CH-93X
34°35'54"N/135°35'37"E
100FT

CHANGE :Description of PROC name.

Civil Aviation Bureau,Japan (EFF:15 JUN 2023)

18/5/23

STANDARD DEPARTURE CHART -INSTRUMENT

RJOO / OSAKA INTL

SID

EAST REVERSAL FOUR DEPARTURE


RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME,...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn left,...
...via ITE R101 to 3000FT or above, turn left direct to ITE VOR/DME within ITE 14.0DME.

Cross ITE VOR/DME at assigned altitude.

Note : When take off RWY 14R/14L, following climb gradient should be maintained until 500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

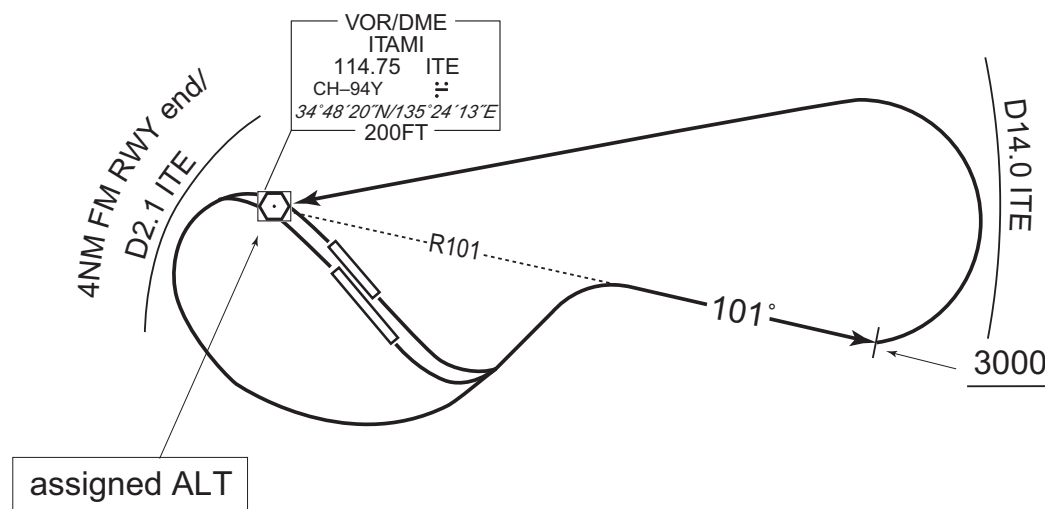

CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART -INSTRUMENT

AIP JAPAN

RJOO / OSAKA INTL

SID

TIGER TWO DEPARTURE

RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME, via ITE R201 until crossing YOE R301...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn right HDG230° until crossing YOE R301...


...turn right to intercept and proceed via YOE R291 to TIGER.

Cross TIGER at or above 6000FT.

Note : Following climb gradient should be maintained until 2500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

CHANGE : Description of PROC name.

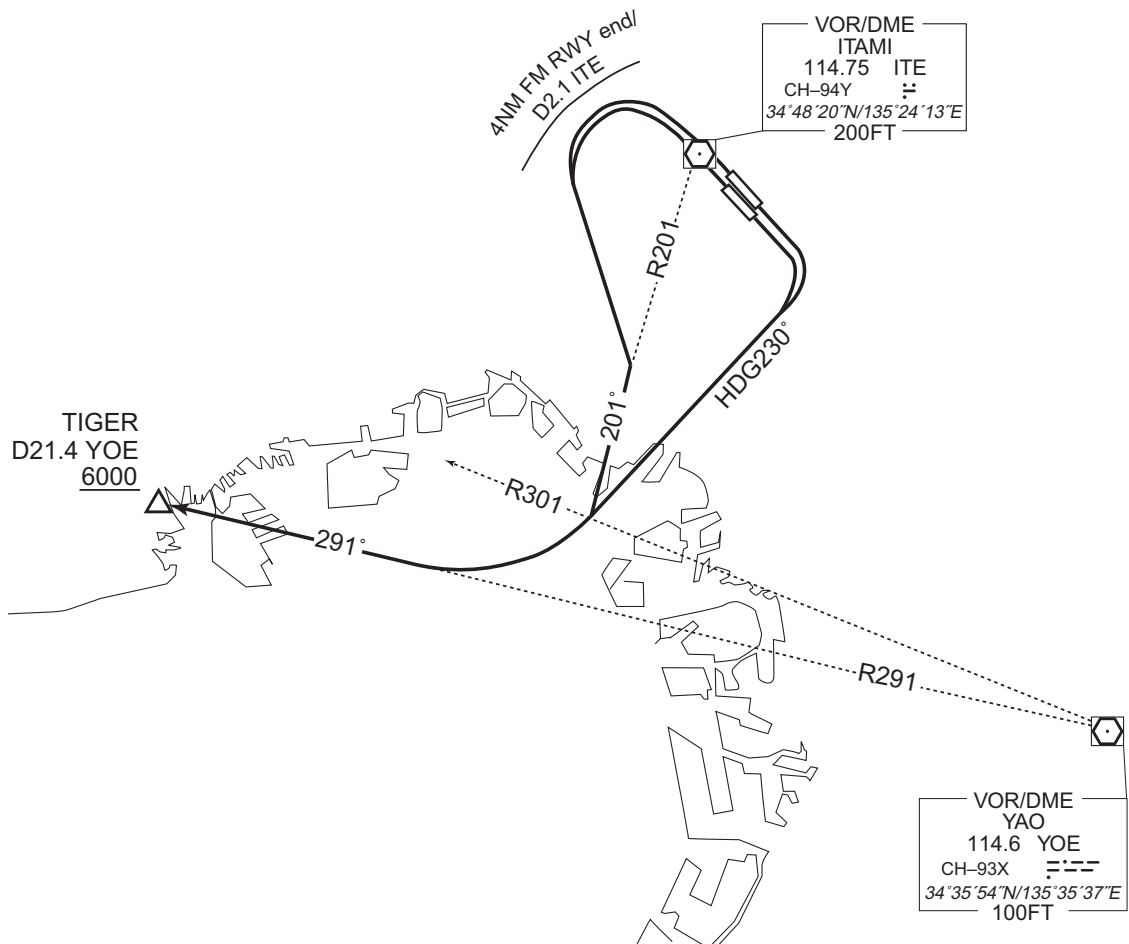


STANDARD DEPARTURE CHART -INSTRUMENT

RJOO / OSAKA INTL

TRANSITION

KAGAWA TRANSITION

From over TIGER, via YOE R291 to SUMAR, via ITE R260 to intercept and proceed via KTE R057 to KTE VOR/DME.
Cross SUMAR at or above 9000FT, cross ITE R260/43.1DME at or above FL180.

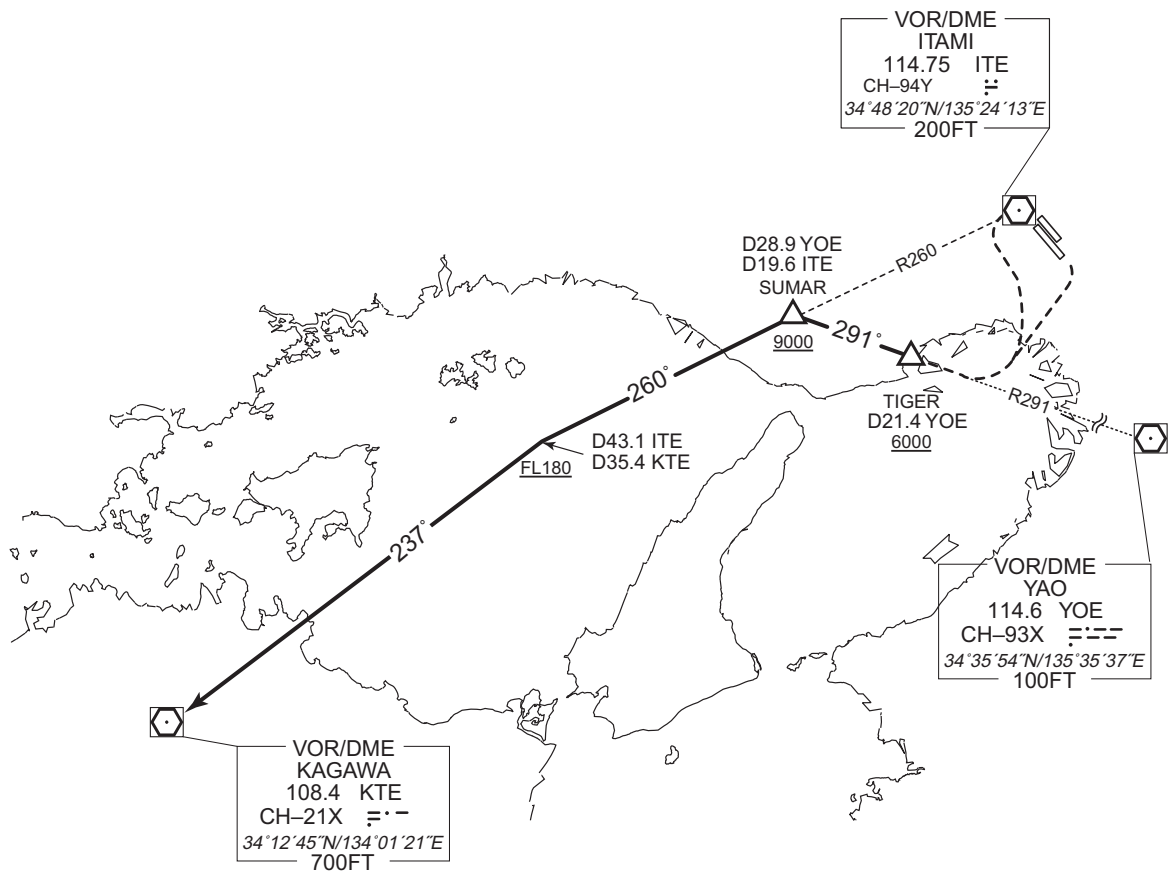

CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART -INSTRUMENT

RJOO / OSAKA INTL

TRANSITION

ASAGI TRANSITION

From over TIGER, via KCE R324 to ASAGI.
Cross KCE R324/22.4DME at or above 7000FT.


TOZAN TRANSITION

From over TIGER, via KCE R324 to TOZAN, via ASAGI.
Cross KCE R324/22.4DME at or above 7000FT, cross KCE R324/47.0DME at or above 10000FT.

BUMER TRANSITION

From over TIGER, via YO E R291 to intercept and proceed via KCE R311 to BUMER.

CHANGE : TOZAN TRANSITION. Radial FM KCE.

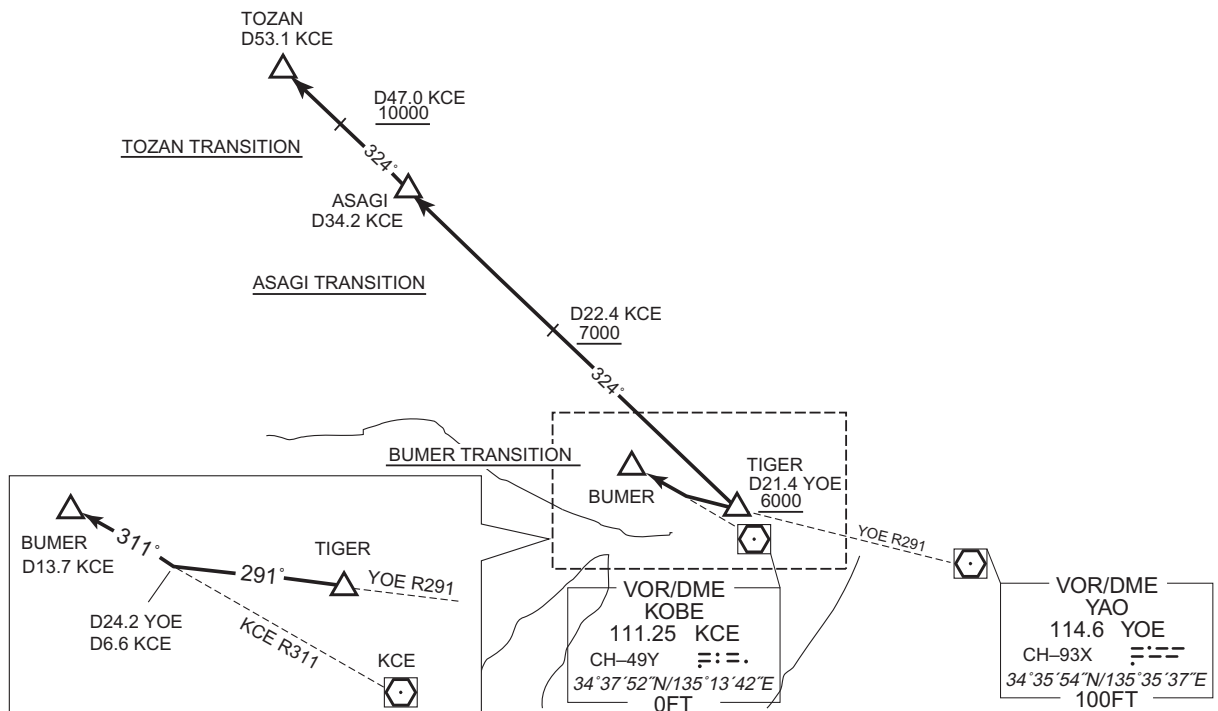

STANDARD DEPARTURE CHART-INSTRUMENT

RJOO / OSAKA INTL

SID and TRANSITION

MINAC FOUR DEPARTURE

RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME,...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn left,...
...via ITE R101 to intercept and proceed via KCE R077 to MINAC.


Note: When take off RWY14R/14L, following climb gradient should be maintained until 500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

NAGOYA TRANSITION

From over MINAC, via KCE R077 to YOKKA, via KCC R243 to KCC VORTAC.

CHANGE : PROC renamed. Radial FM KCE.

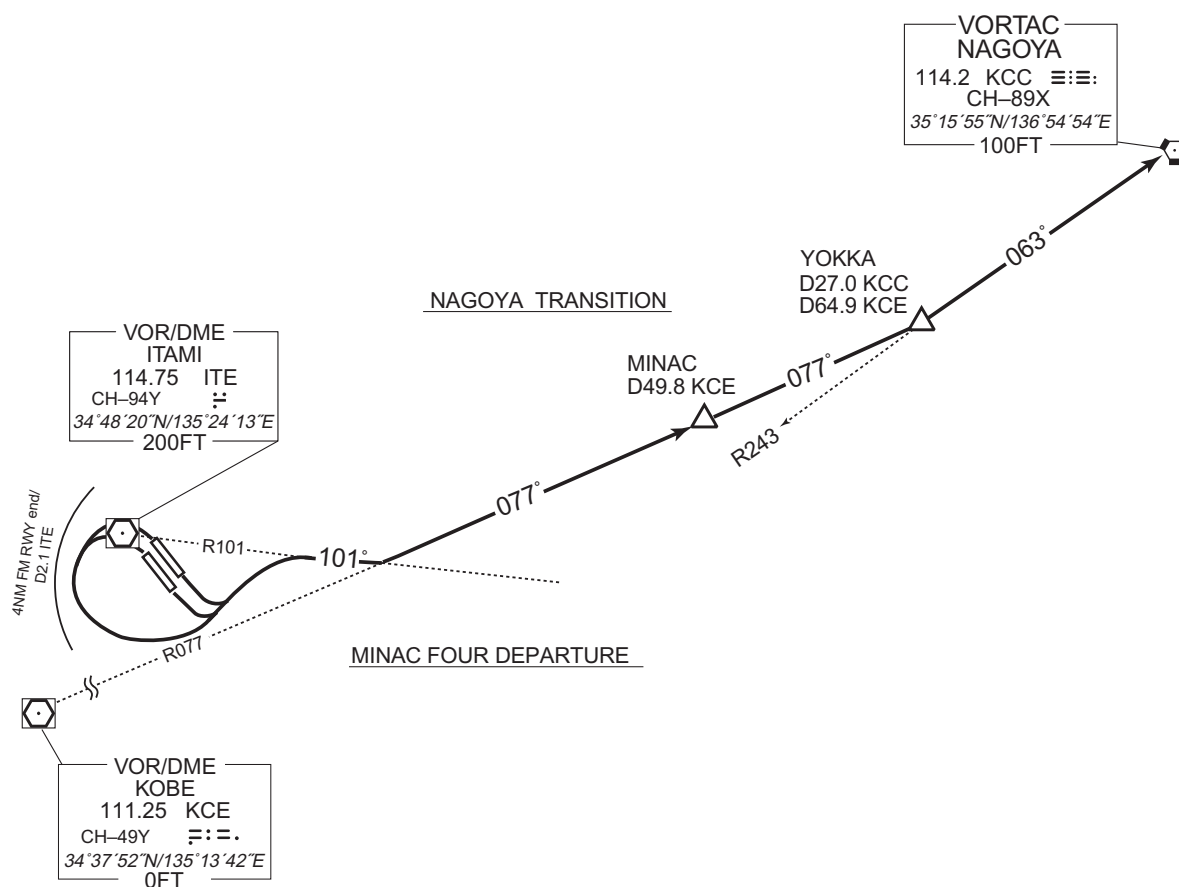


STANDARD DEPARTURE CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV TRANSITION

GUJYO TRANSITION / SHTLE TRANSITION			RNAV1
NOTE 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	Critical DME	-	
	DME GAP	-	
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1	

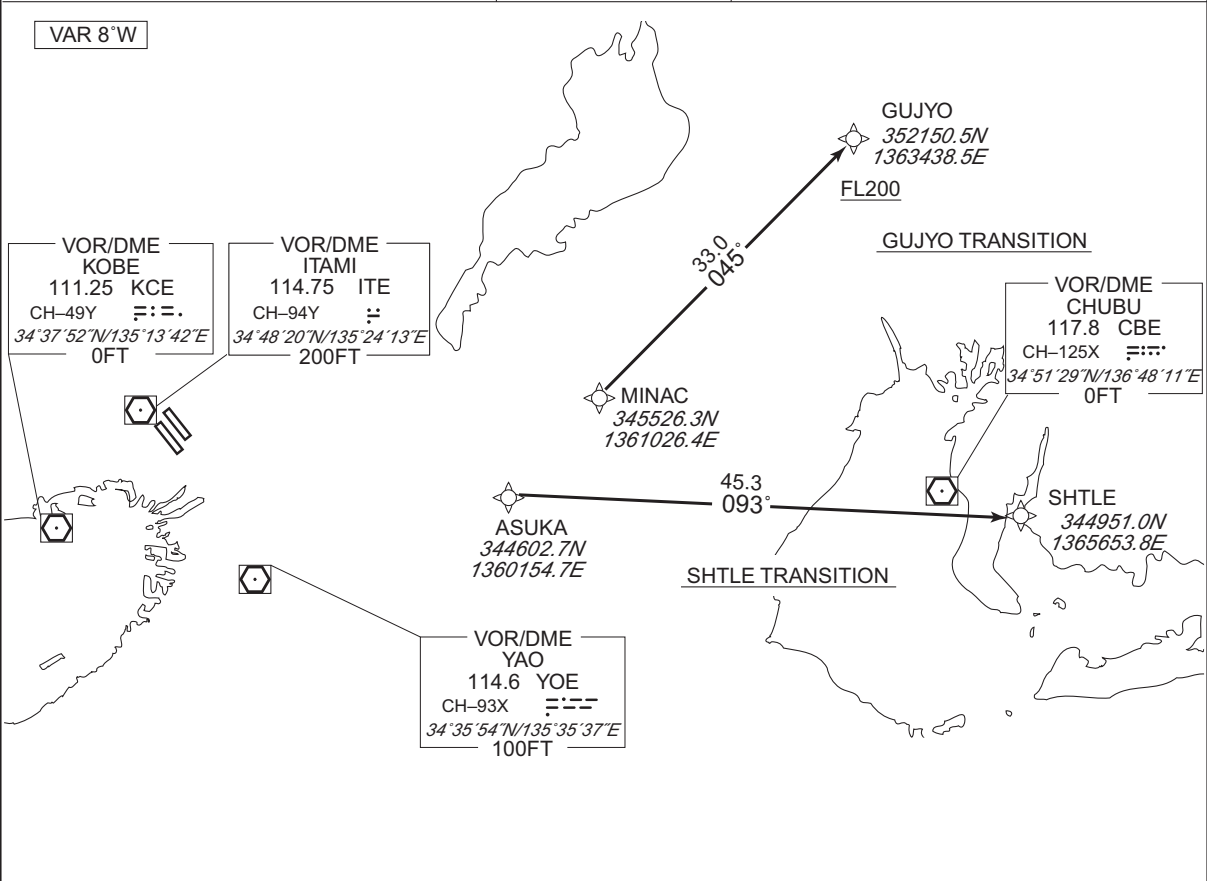

GUJYO TRANSITION											
From MINAC, to GUJYO at or above FL200.											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MINAC	-	-	-8.0	-	-	-	-	-	RNAV1
002	TF	GUJYO	-	045 (036.7)	-8.0	33.0	-	+FL200	-	-	RNAV1


SHTLE TRANSITION											
From ASUKA, to SHTLE.											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ASUKA	-	-	-8.0	-	-	-	-	-	RNAV1
002	TF	SHTLE	-	093 (084.9)	-8.0	45.3	-	-	-	-	RNAV1

CHANGE : Description of VAR.

STANDARD DEPARTURE CHART-INSTRUMENT

RJOO / OSAKA INTL


RNAV TRANSITION

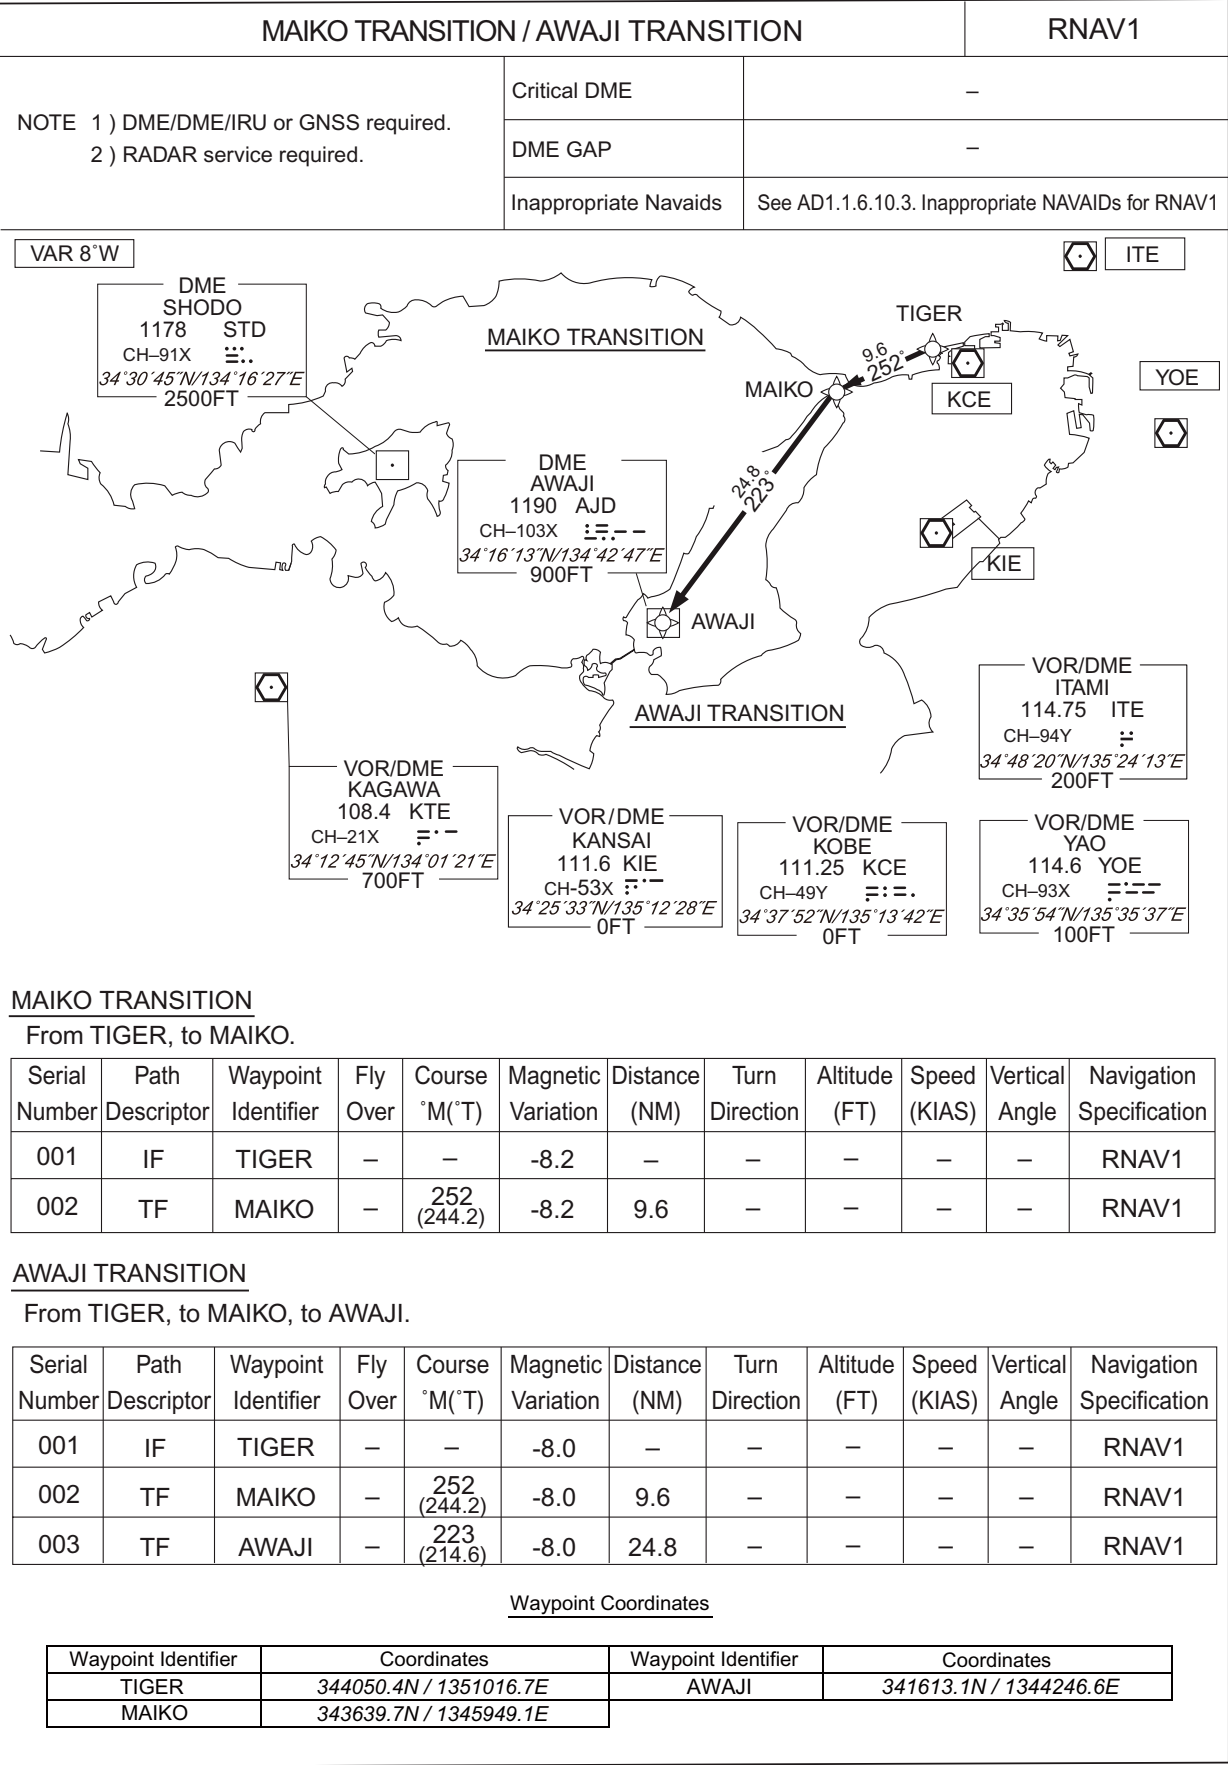

STANDARD DEPARTURE CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV TRANSITION

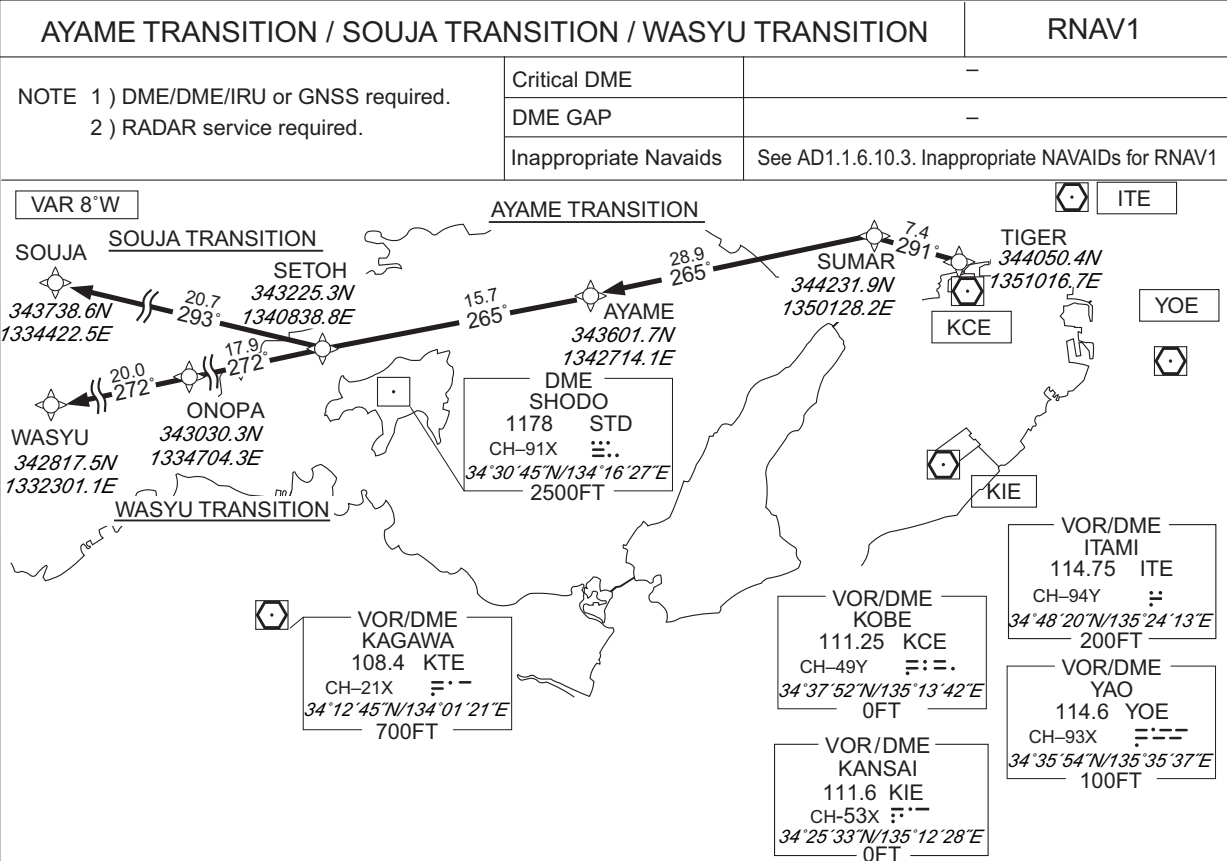

AYAME TRANSITION

From TIGER, to SUMAR, to AYAME.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TIGER	—	—	-8.1	—	—	—	—	—	RNAV1
002	TF	SUMAR	—	291 (283.2)	-8.1	7.4	—	—	—	—	RNAV1
003	TF	AYAME	—	265 (257.2)	-8.1	28.9	—	—	—	—	RNAV1

SOUJA TRANSITION

From TIGER, to SUMAR, to AYAME, to SETOH, to SOUJA.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TIGER	—	—	-8.1	—	—	—	—	—	RNAV1
002	TF	SUMAR	—	291 (283.2)	-8.1	7.4	—	—	—	—	RNAV1
003	TF	AYAME	—	265 (257.2)	-8.1	28.9	—	—	—	—	RNAV1
004	TF	SETOH	—	265 (256.8)	-8.1	15.7	—	—	—	—	RNAV1
005	TF	SOUJA	—	293 (284.8)	-8.1	20.7	—	—	—	—	RNAV1

CHANGE : TAKAMATSU TACAN abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV TRANSITION

WASYU TRANSITION

From TIGER, to SUMAR, to AYAME, to SETOH, to ONOPA, to WASYU.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TIGER	—	—	-8.1	—	—	—	—	—	RNAV1
002	TF	SUMAR	—	291 (283.2)	-8.1	7.4	—	—	—	—	RNAV1
003	TF	AYAME	—	265 (257.2)	-8.1	28.9	—	—	—	—	RNAV1
004	TF	SETOH	—	265 (256.8)	-8.1	15.7	—	—	—	—	RNAV1
005	TF	ONOPA	—	272 (263.9)	-8.1	17.9	—	—	—	—	RNAV1
006	TF	WASYU	—	272 (263.7)	-8.1	20.0	—	—	—	—	RNAV1

CHANGE : VAR. PROC course. ONOPA established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJOO / OSAKA INTL

STAR

IZUMI ARRIVAL

From over IZUMI, via ITE 21.9DME counterclockwise ARC to intercept and proceed via ITE R141 to IKOMA.


Cross ITE R141/19.0DME at or above 4000FT, cross IKOMA at or above 3500FT.

AGPUK ARRIVAL

From over AGPUK, via YOE R113 to intercept and proceed via ITE R141 to IKOMA.

Cross AGPUK at or above 9000FT, cross YOE R113/21.0DME at or above 4700FT, cross ITE R141/19.0DME at or above 4000FT, cross IKOMA at or above 3500FT.

CHANGE : AGPUK ARRIVAL established.

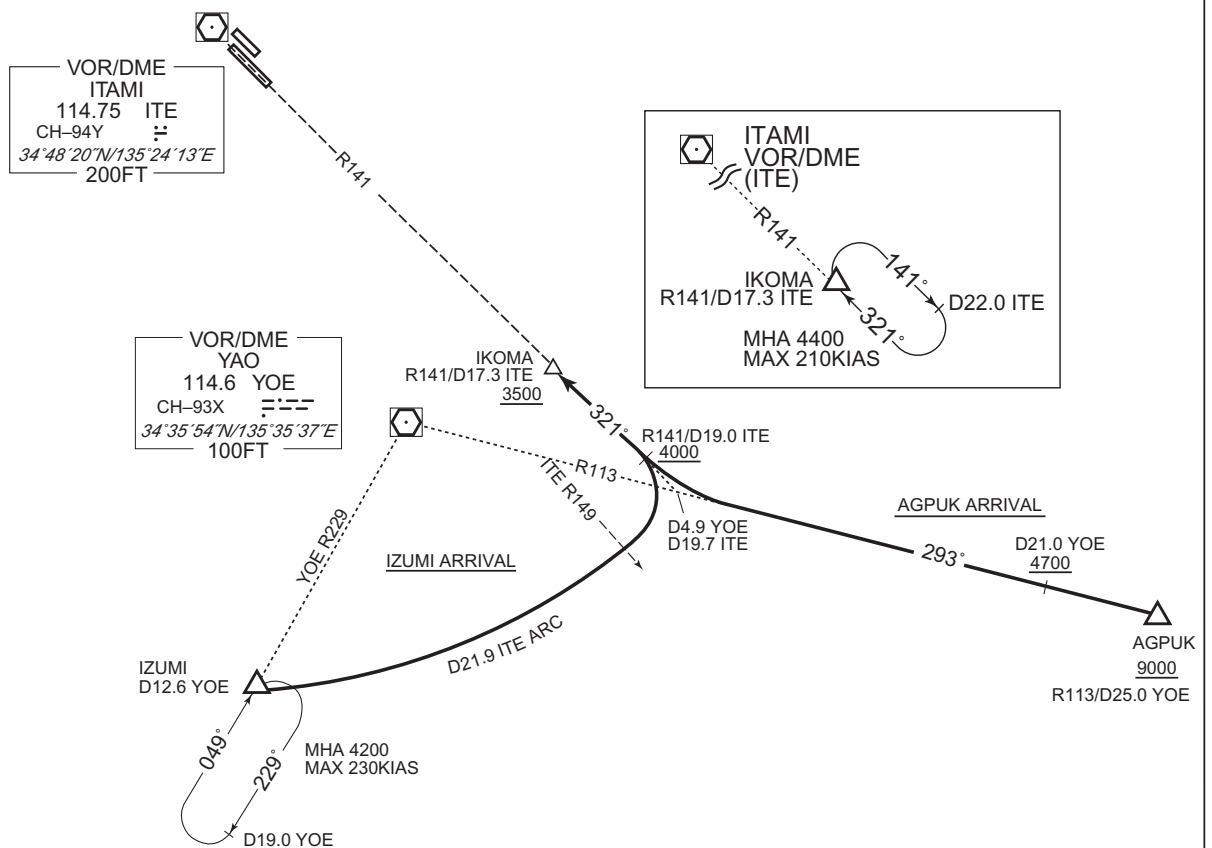

STANDARD ARRIVAL CHART-INSTRUMENT

RJOO / OSAKA INTL


RNAV STAR RWY32L/32R

IKOMA EAST ARRIVAL / IKOMA NORTH ARRIVAL

RNAV1

Note 1) DME/DME/IRU or GNSS required
2) RADAR service required

VAR 8°W

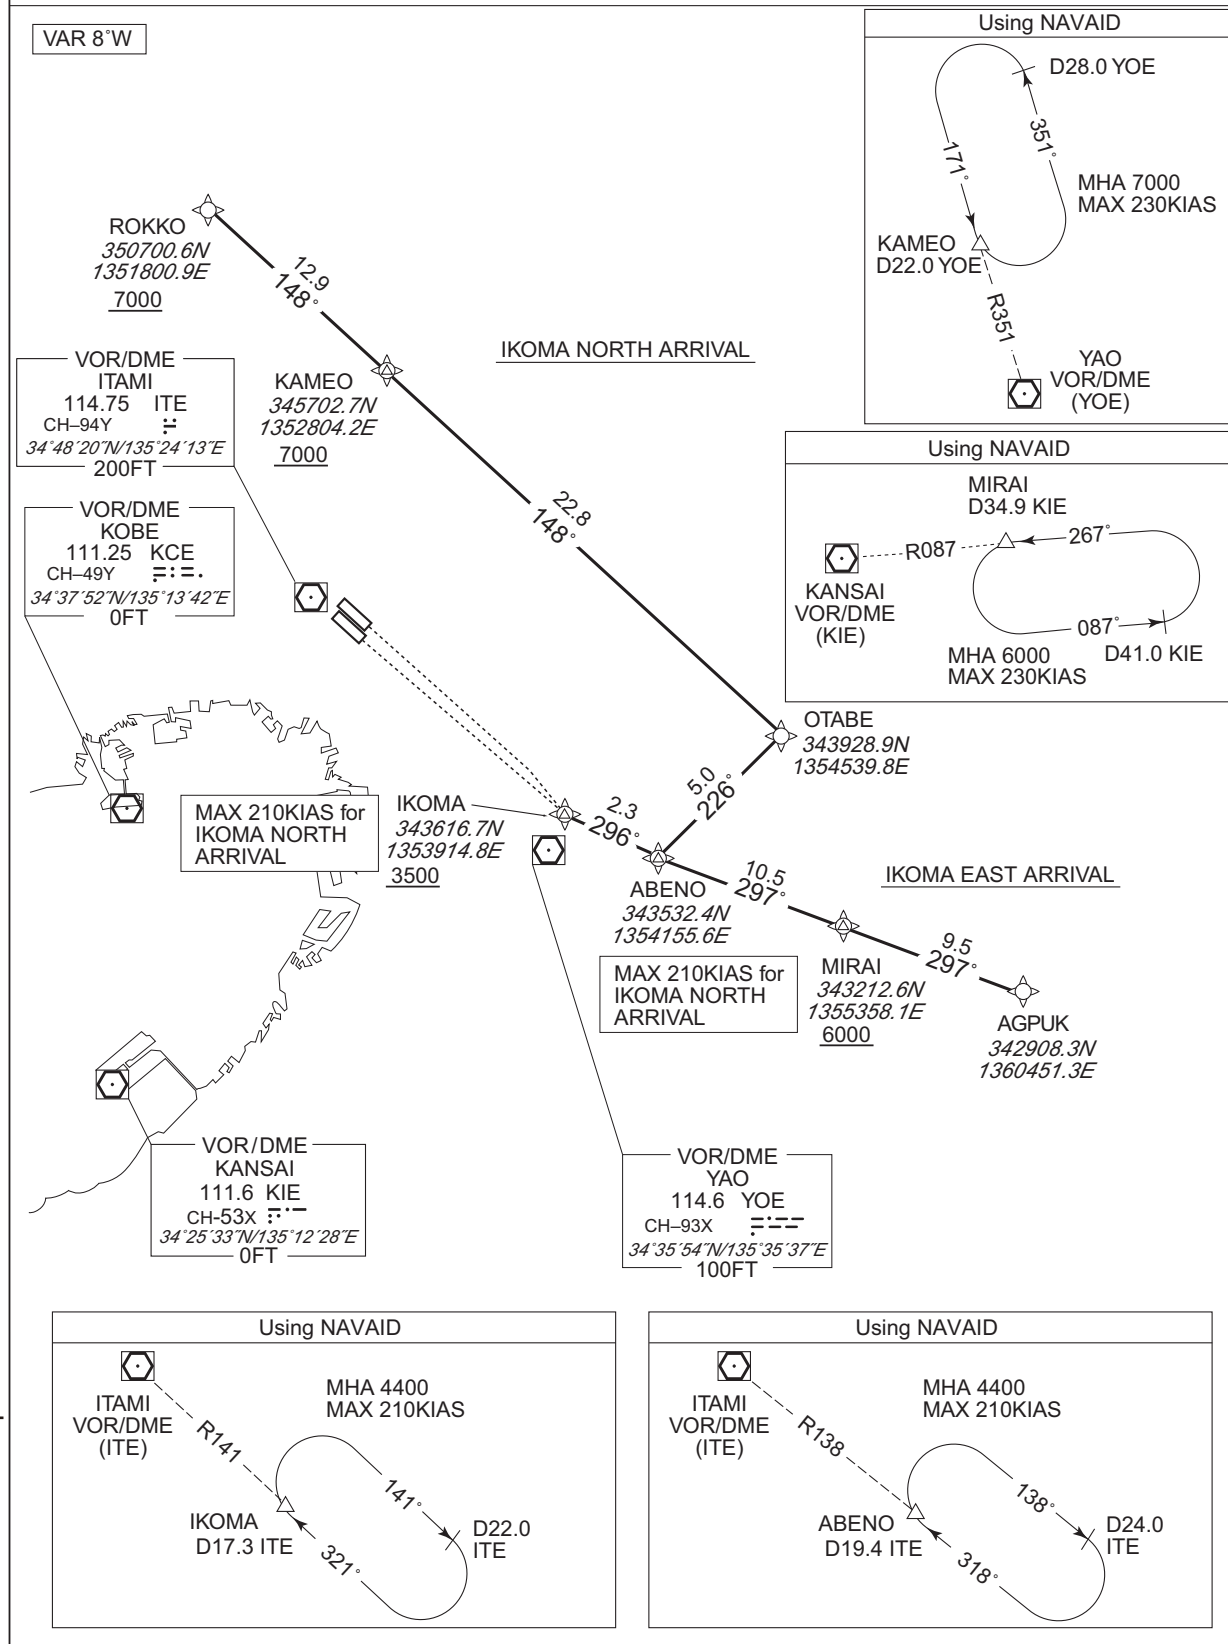

CHANGE : Description of VAR.

STANDARD ARRIVAL CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV STAR RWY32L/32R

IKOMA EAST ARRIVAL

From AGPUK, to MIRAI at or above 6000FT, to ABENO, to IKOMA at or above 3500FT.

Critical DME	KCC : AGPUK – MIRAI
DME GAP	–
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AGPUK	–	–	-8.0	–	–	–	–	–	RNAV1
002	TF	MIRAI	–	297 (288.7)	-8.0	9.5	–	+6000	–	–	RNAV1
003	TF	ABENO	–	297 (288.6)	-8.0	10.5	–	–	–	–	RNAV1
004	TF	IKOMA	–	296 (288.5)	-8.0	2.3	–	+3500	–	–	RNAV1

IKOMA NORTH ARRIVAL

From ROKKO at or above 7000FT, to KAMEO at or above 7000FT, to OTABE, to ABENO, to IKOMA at or above 3500FT.

Critical DME	ITE : 9.9NM to KAMEO – KAMEO YME : 19.7NM to OTABE – 13.7NM to OTABE
DME GAP	–
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ROKKO	–	–	-8.0	–	–	+7000	–	–	RNAV1
002	TF	KAMEO	–	148 (140.4)	-8.0	12.9	–	+7000	–	–	RNAV1
003	TF	OTABE	–	148 (140.5)	-8.0	22.8	–	–	–	–	RNAV1
004	TF	ABENO	–	226 (218.0)	-8.0	5.0	–	–	-210	–	RNAV1
005	TF	IKOMA	–	296 (288.5)	-8.0	2.3	–	+3500	-210	–	RNAV1

CHANGE : VAR. KODAI abolished. AGPUK established. PROC course.

STANDARD ARRIVAL CHART-INSTRUMENT


RJOO / OSAKA INTL

RNAV STAR RWY32L/32R

HABIK ARRIVAL


RNAV1

Note 1) DME/DME/IRU or GNSS required
2) RADAR service required

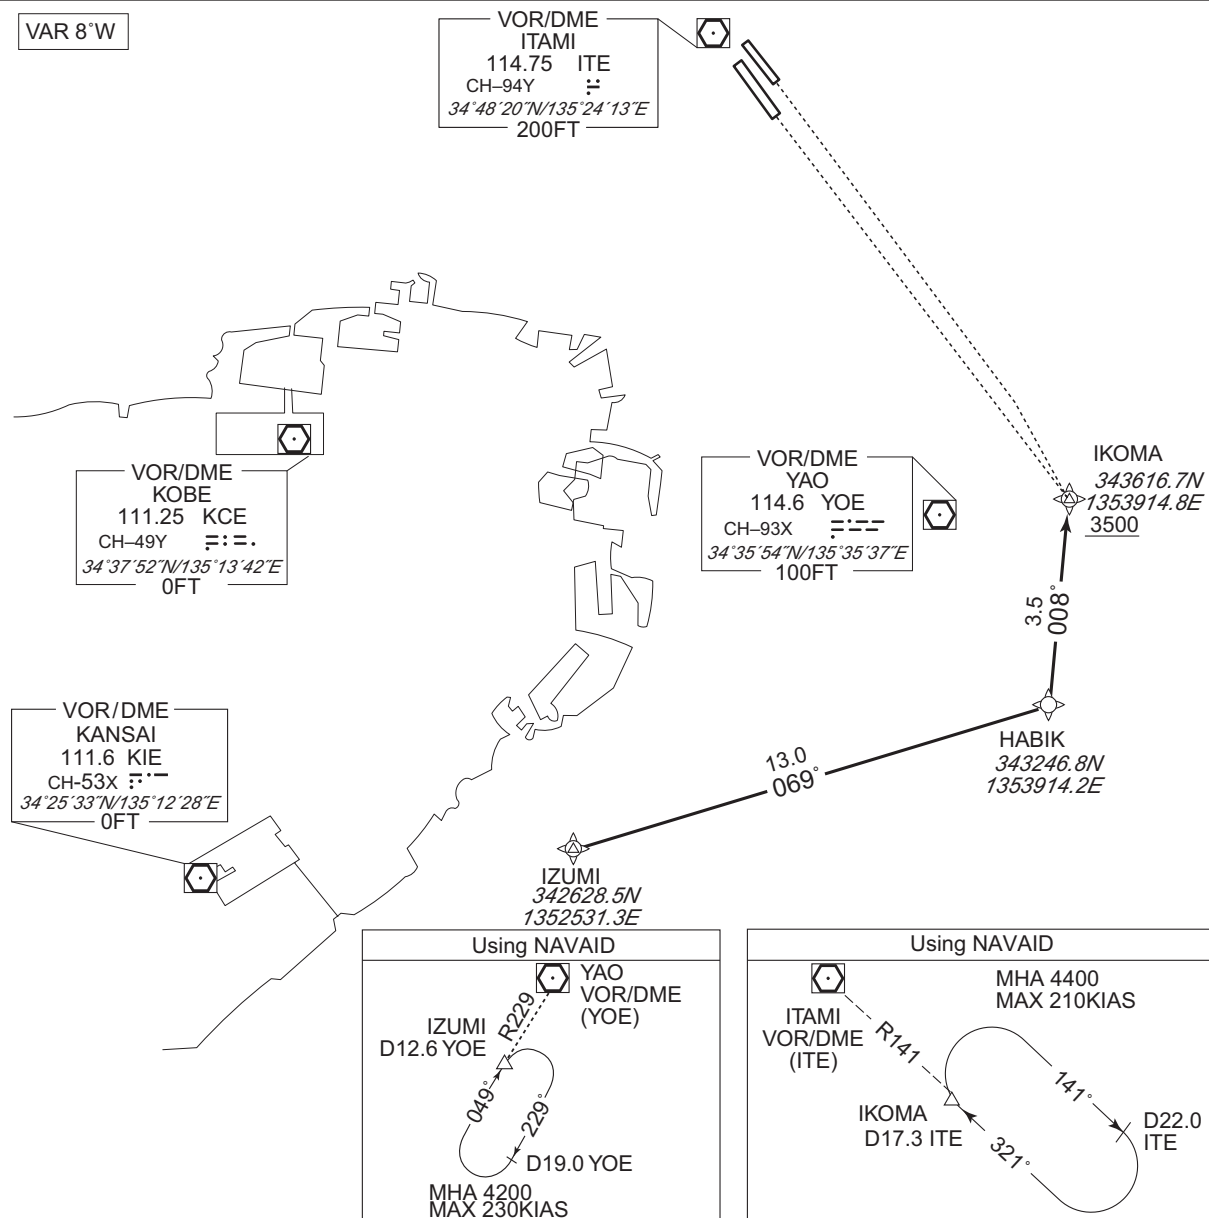

CHANGE : Description of VAR and PROC name.


INSTRUMENT APPROACH CHART

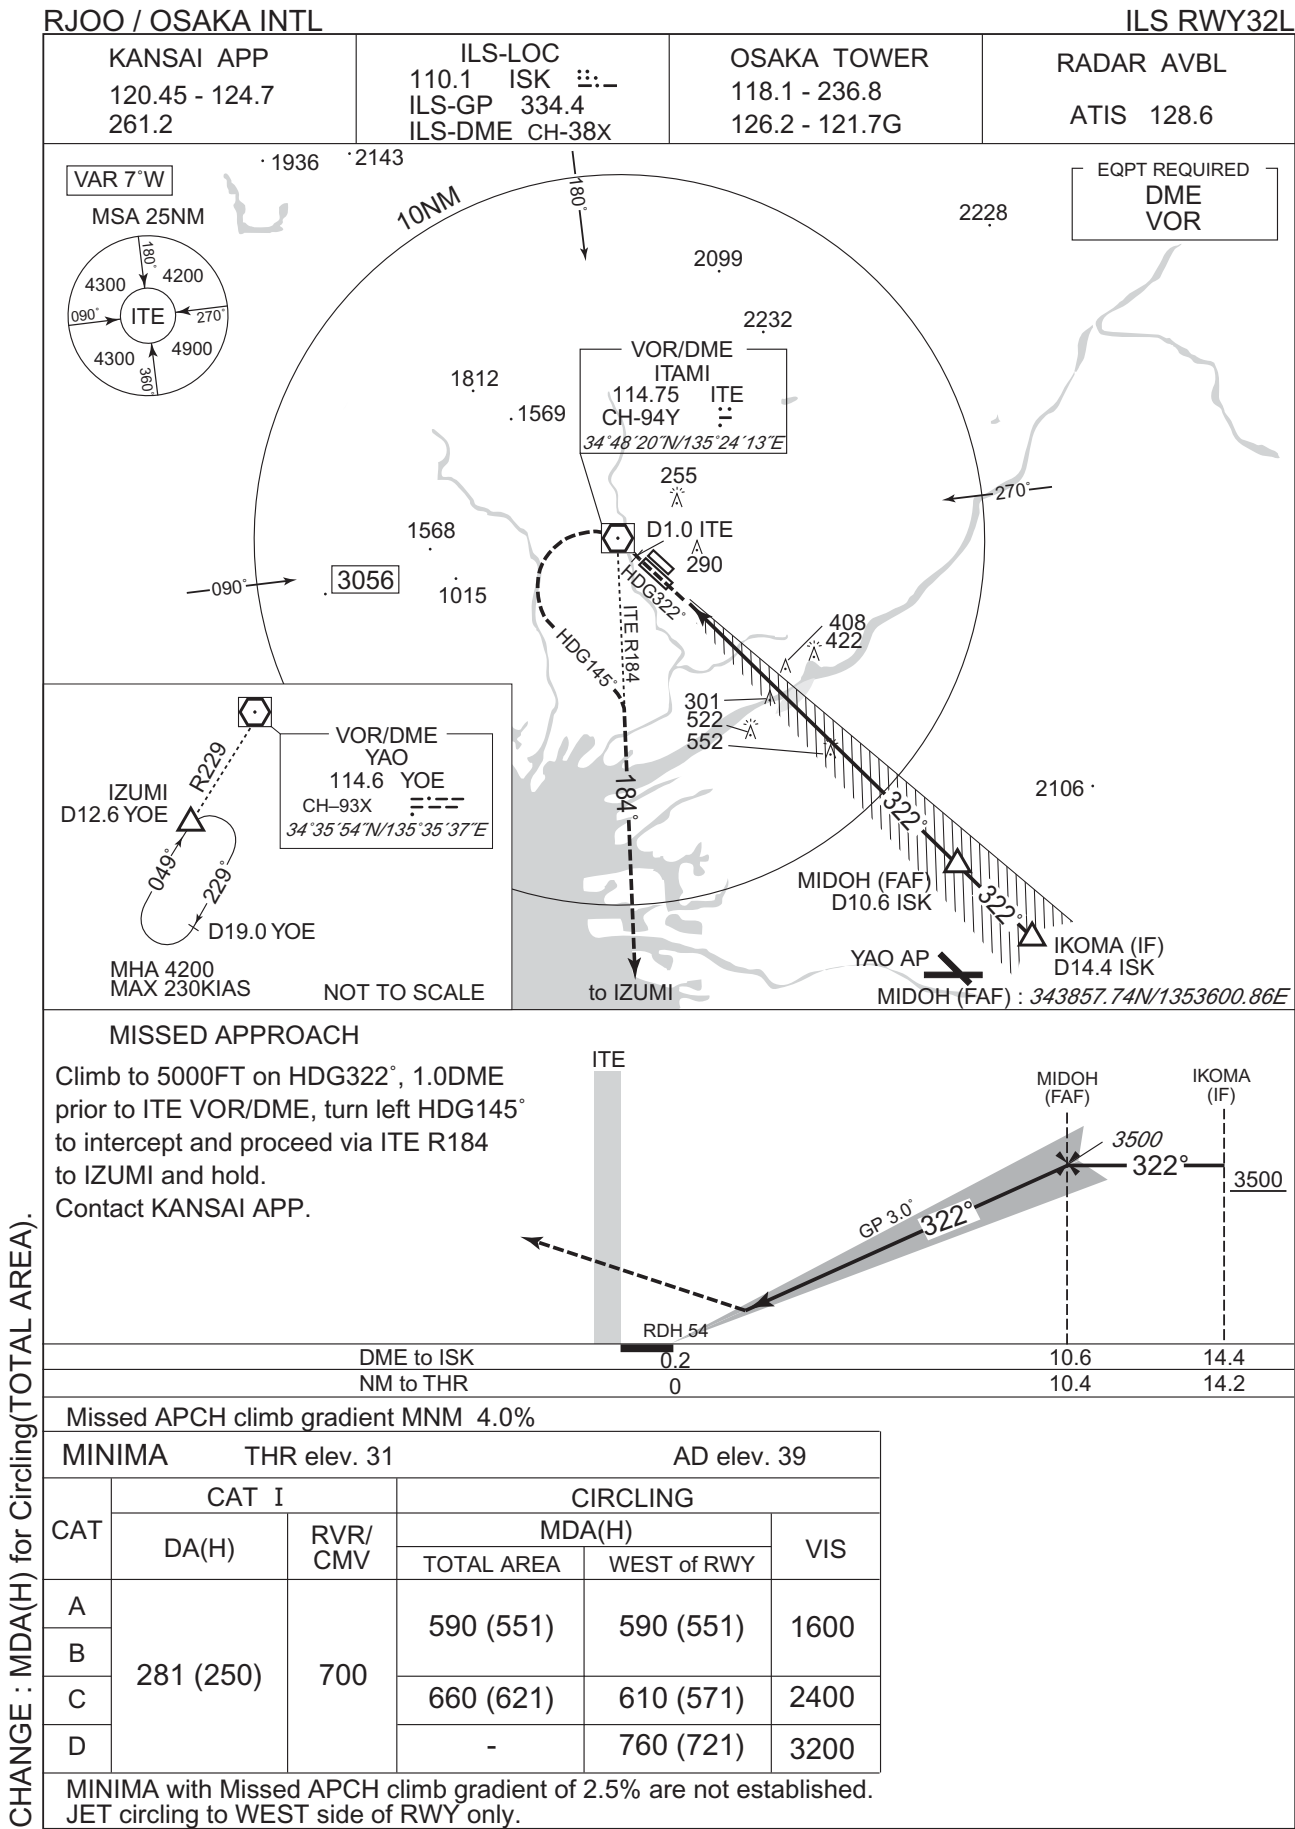

INSTRUMENT APPROACH CHART

RJOO / OSAKA INTL

LOC RWY32L

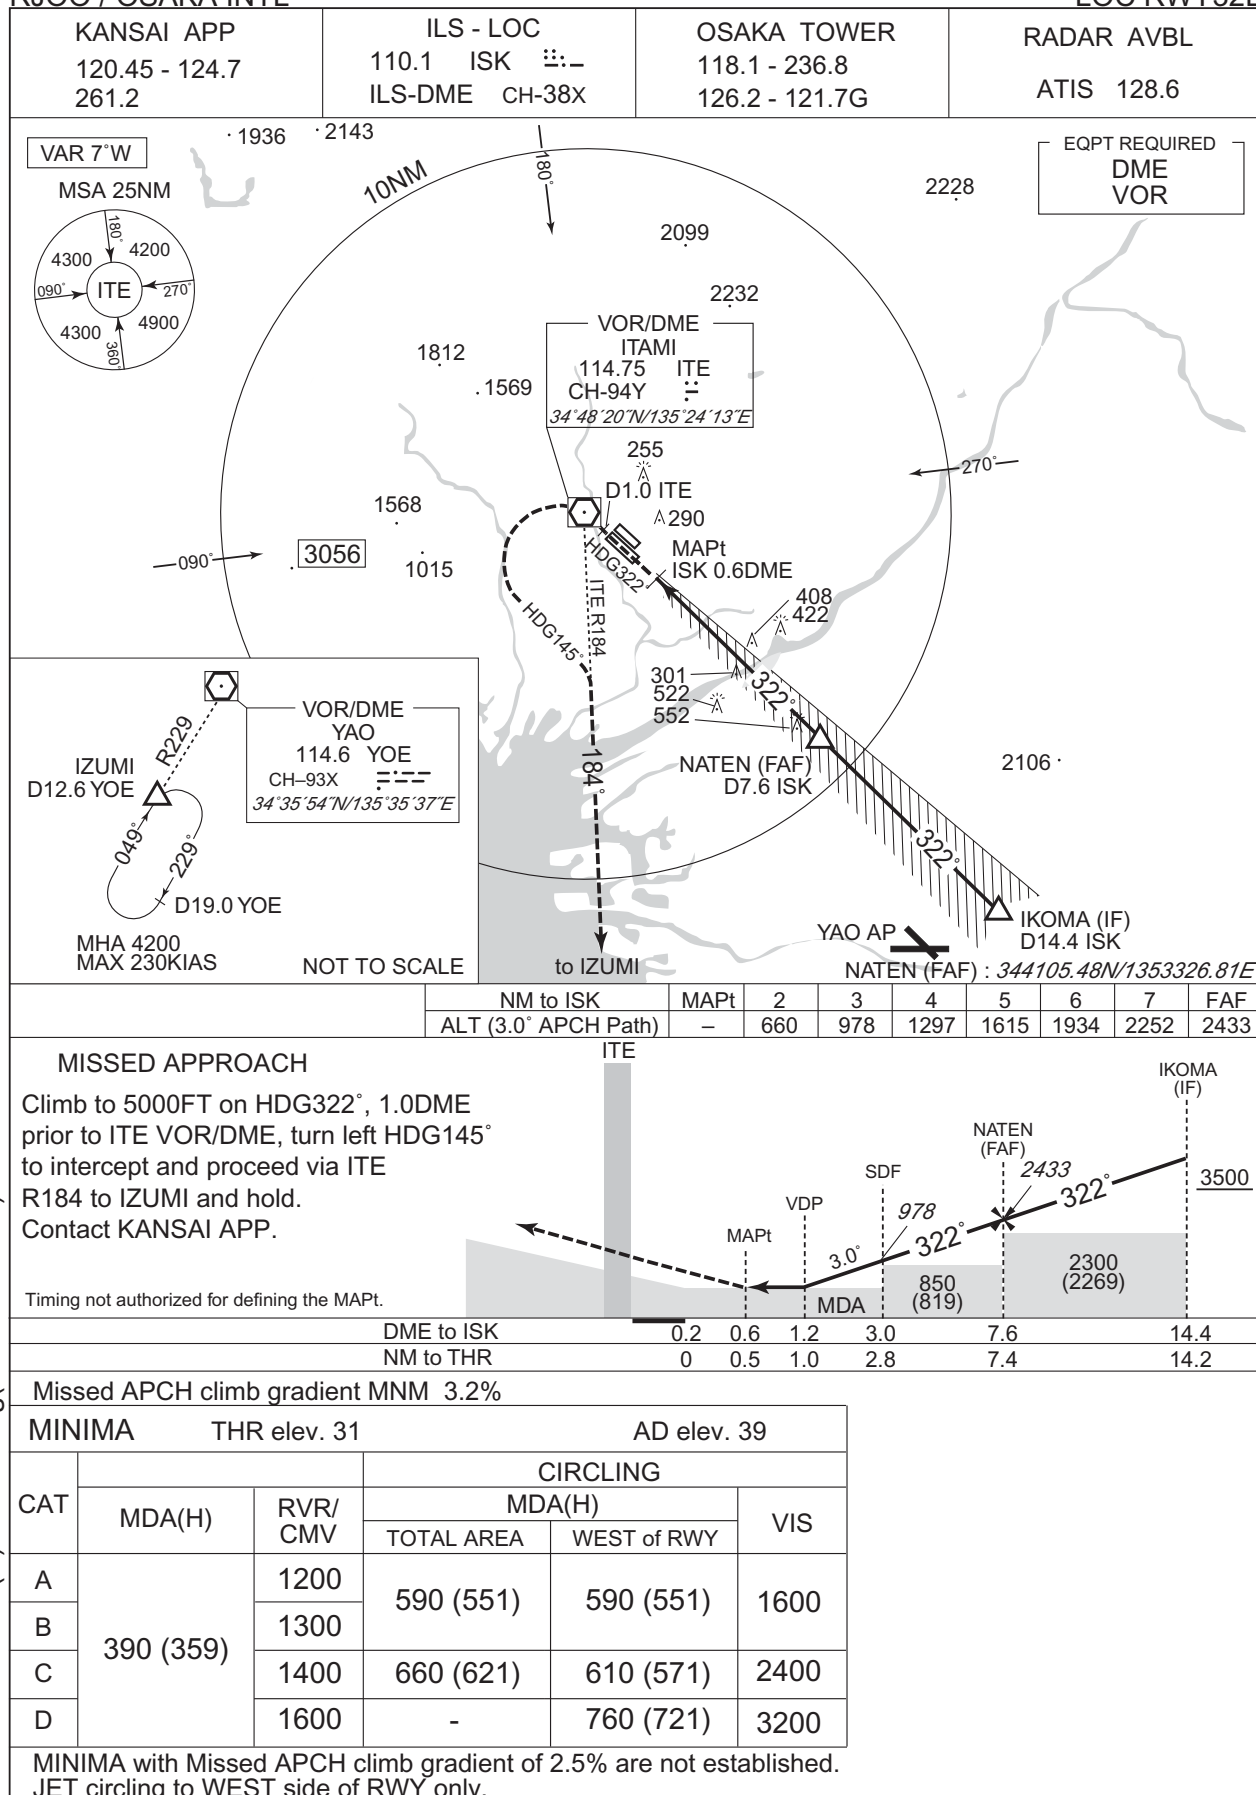


CHANGE : MDA(H) for Circling(TOTAL AREA).

RJOO / OSAKA INTL

VOR A

Climb to 5000FT on HDG321°, 1.0DME prior to ITE VOR/DME, turn left HDG145° to intercept and proceed via ITE R184 to IZUMI and hold.
Contact KANSAI APP.

Timing not authorized for defining the MAPt.

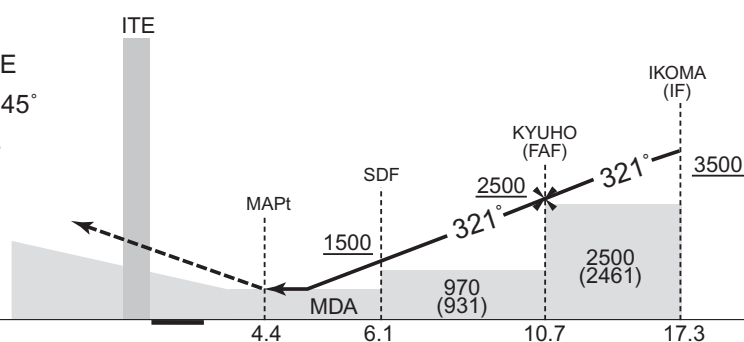

MINIMA		AD elev. 39	
CAT	CIRCLING		
	MDA(H)		VIS
	TOTAL AREA	WEST of RWY	
A	590 (551)	590 (551)	1600
B			
C	660 (621)	610 (571)	2400
D	-	760 (721)	3200

JET circling to WEST side of RWY only.

CHANGE : OCA/H BTN KYUHO and SDF. MDA(H) for Circling(TOTAL AREA).

RJOO / OSAKA INTL

RNP RWY32L

Missed APCH climb gradient MNM 6.0%												
MINIMA THR elev. 31 AD elev. 39												
CAT	LPV		LNAV/VNAV		LNAV		CIRCLING		VIS			
	DA(H)	RVR/CMV	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)					
							TOTAL AREA	WEST of RWY				
A	289(258)	1000	510(479)	1400	510(479)	1400	590(551)	590(551)	1600			
B	299(268)	1100		1500		1500						
C	309(278)	1200		1600		1600				660(621)	610(571)	2400
D	318(287)	1400		1800		1800				-	760(721)	3200
JET circling to WEST side of RWY only.												
Missed APCH climb gradient of 6.0% up to 2400FT.												

CHANGE : O2L53 established. MSAS CH added. Minimum TEMP for Baro-VNAV. HLDG Pattern. PROCALT at FAF. Missed APCH for Using VOR/DME abolished. OCA/H BTN KOSAK and UMEDA. LPV established. MINIMA. NM to THR at VDP.

INSTRUMENT APPROACH CHART

RJOO / OSAKA INTL

RNP RWY32L

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00469
SBAS service provider identifier	2	FPAP latitude	344728.7535N
Airport identifier	RJOO	FPAP longitude	1352543.3300E
Runway	323	Threshold crossing height	00016.5
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M32A	∟ length offset	0000
LTP/FTP latitude	344619.8985N	HAL	40.0
LTP/FTP longitude	1352706.7455E	VAL	50.0
CRC remainder	D799CA35		

Required additional data


LTP/FTP orthometric height	9.6
----------------------------	-----

CHANGE : FAS DATA BLOCK, Required additional data established.

INSTRUMENT APPROACH CHART


RJOO / OSAKA INTL

RNP RWY32R

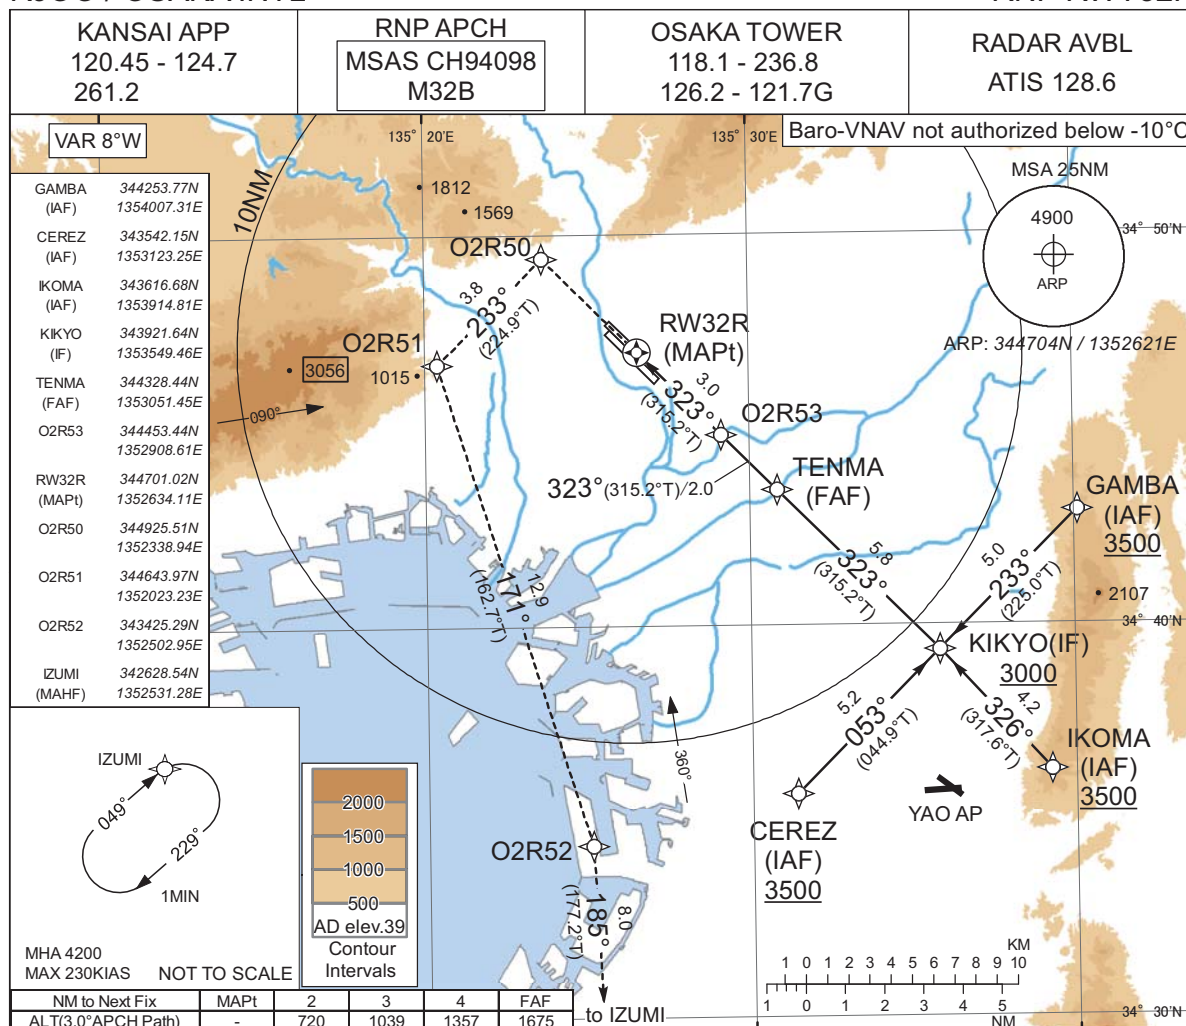

MISSED APPROACH

Climb to 5000FT, to O2R50,
to O2R51, to O2R52,
to IZUMI and hold.
Contact KANSAI APP.

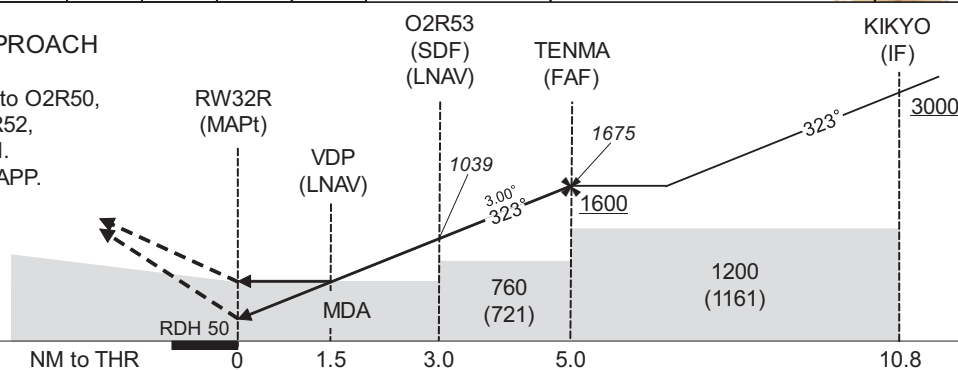

Missed APCH climb gradient MNM 6.0%

CAT	LPV		LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	400(366)	1200	530(496)	1400	530(491)	1400	570(531)	1600
B	410(376)	1300		1500		1500		2400
C	419(385)	1400		1600		1600		
D	429(395)	1600		1800		1800	760(721)	3200

Circling to WEST side of RWY only.

Missed APCH climb gradient of 6.0% up to 2500FT.

CHANGE : O2R53 established. MSAS CH added. Minimum TEMP for Baro-VNAV. HLDG Pattern. ALT(3.0°APCH Path). PROCALT.
Missed APCH for Using VOR/DME abolished. OCA/H. LPV established. MINIMA. NM to THR at VDP.

INSTRUMENT APPROACH CHART

RJOO / OSAKA INTL

RNP RWY32R

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00478
SBAS service provider identifier	2	FPAP latitude	344742.9515N
Airport identifier	RJOO	FPAP longitude	1352543.2590E
Runway	321	Threshold crossing height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M32B	∟ length offset	0000
LTP/FTP latitude	344700.9970N	HAL	40.0
LTP/FTP longitude	1352634.0960E	VAL	50.0
CRC remainder	49D4256C		


Required additional data

LTP/FTP orthometric height	10.6
----------------------------	------

CHANGE : FAS DATA BLOCK, Required additional data established.


RJOO / OSAKA INTL

HLDG PATTERN

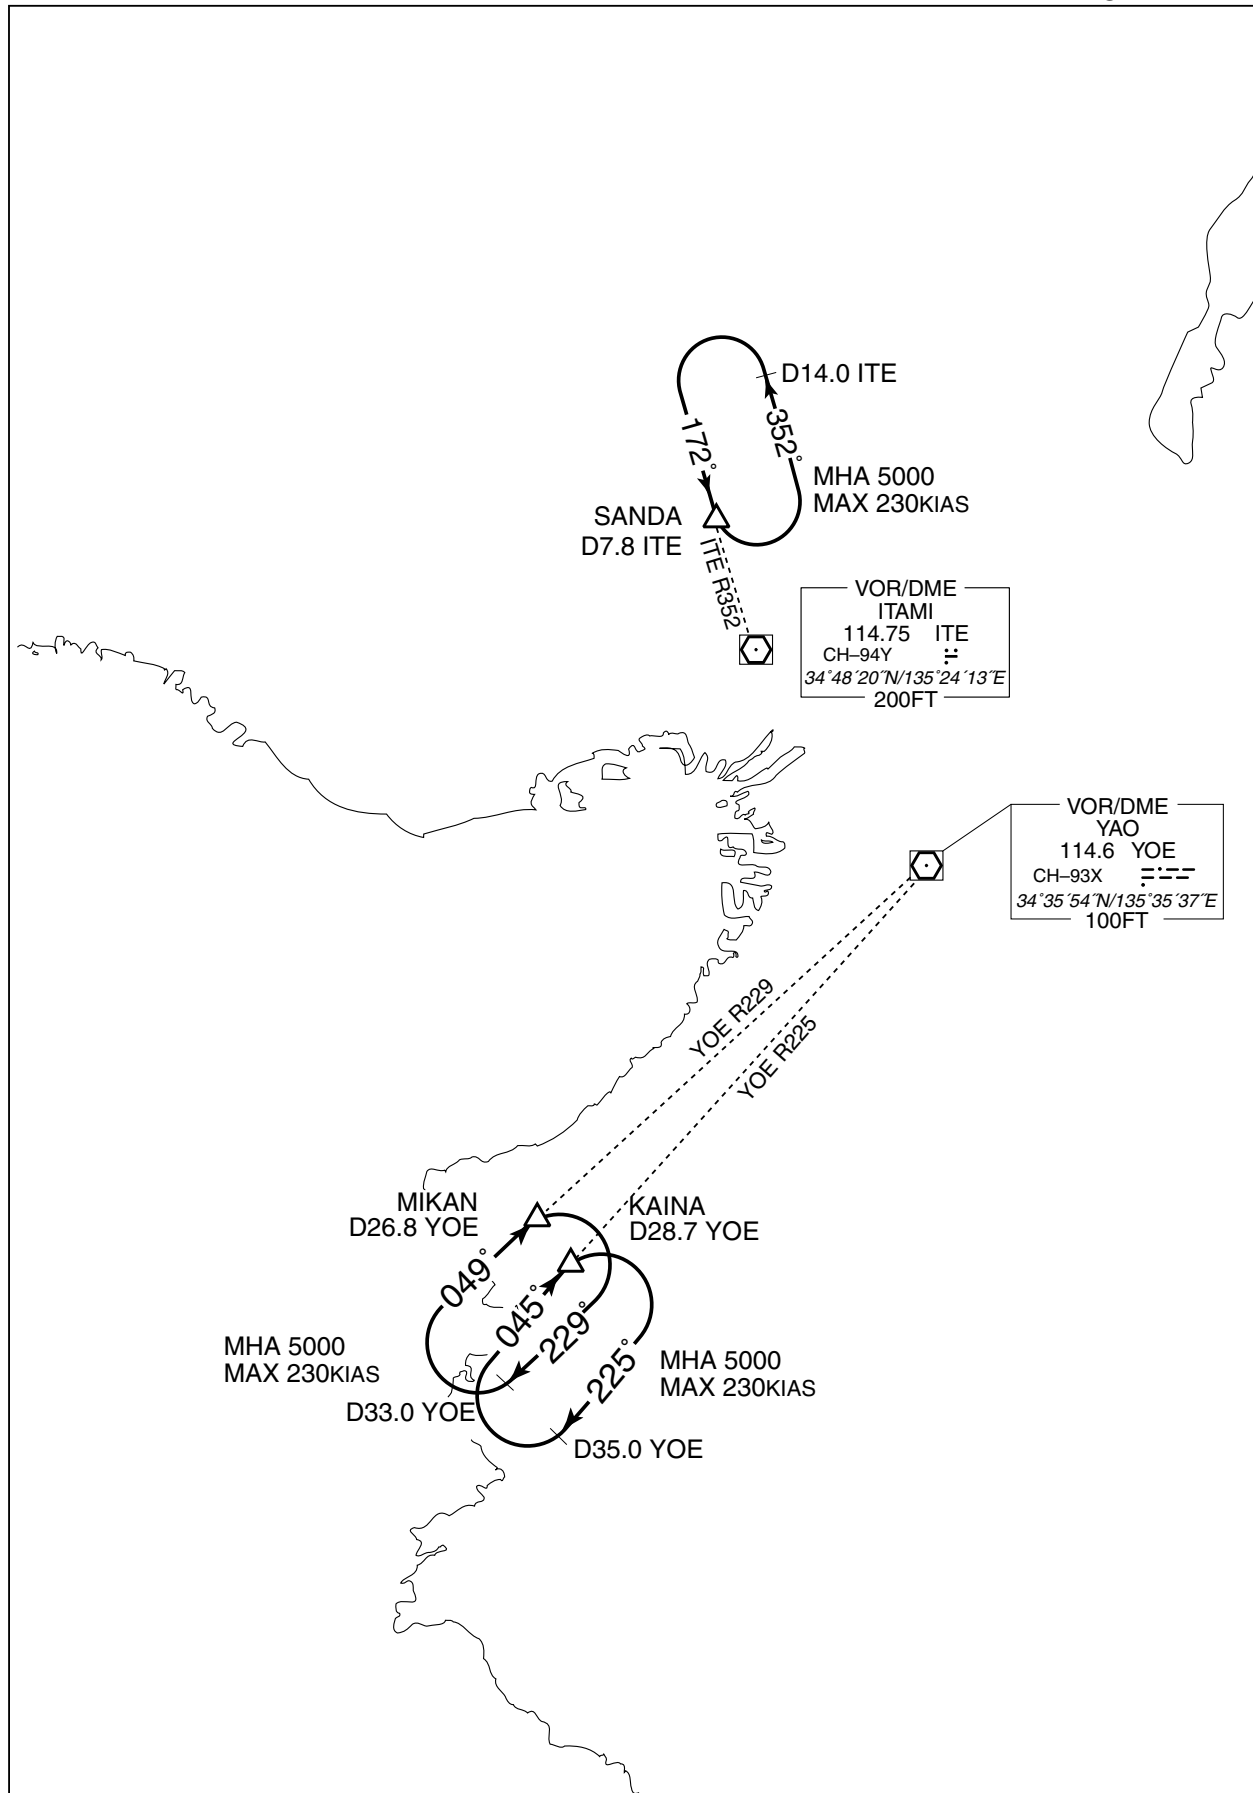

RJOO / OSAKA INTL


Visual REP

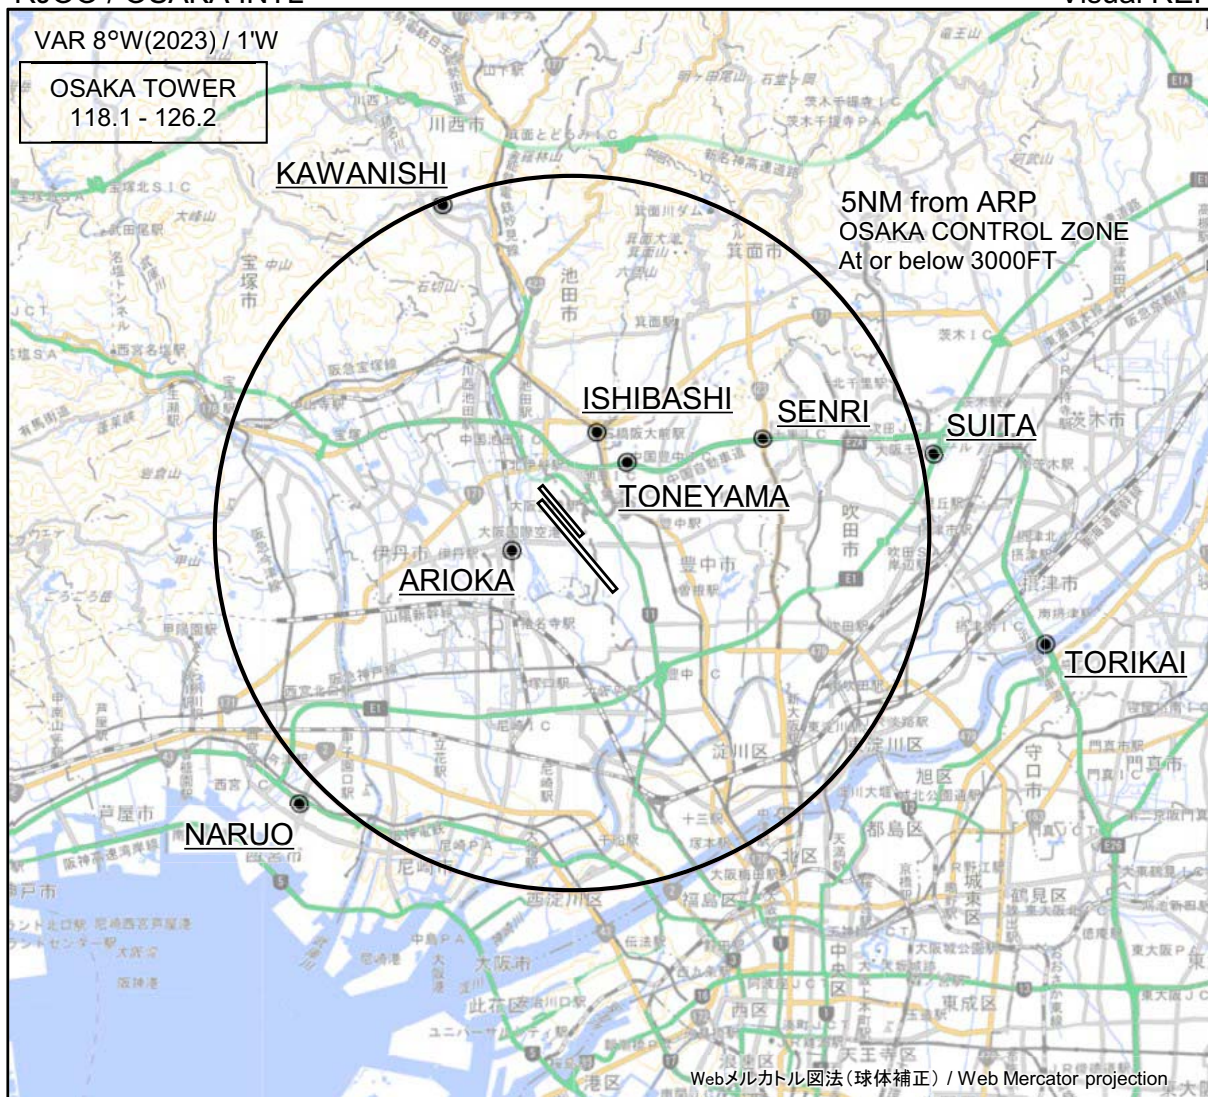

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : VAR.


Call sign	BRG / DIST from ARP	Remarks
川西 Kawanishi	339°T / 4.9NM	多田神社 Shrine
石橋 Ishibashi	013°T / 1.5NM	阪急石橋阪大前駅 Station
千里 Senri	063°T / 3.0NM	千里インターチェンジ Interchange
吹田 Suita	077°T / 5.2NM	吹田ジャンクション Junction
刀根山 Toneyama	037°T / 1.2NM	中国豊中インターチェンジ Interchange
有岡 Arioka	255°T / 0.9NM	JR伊丹駅 Station
鳥飼 Torikai	103°T / 6.8NM	鳥飼大橋 Bridge
鳴尾 Naruo	225°T / 5.4NM	甲子園球場 Baseball ground

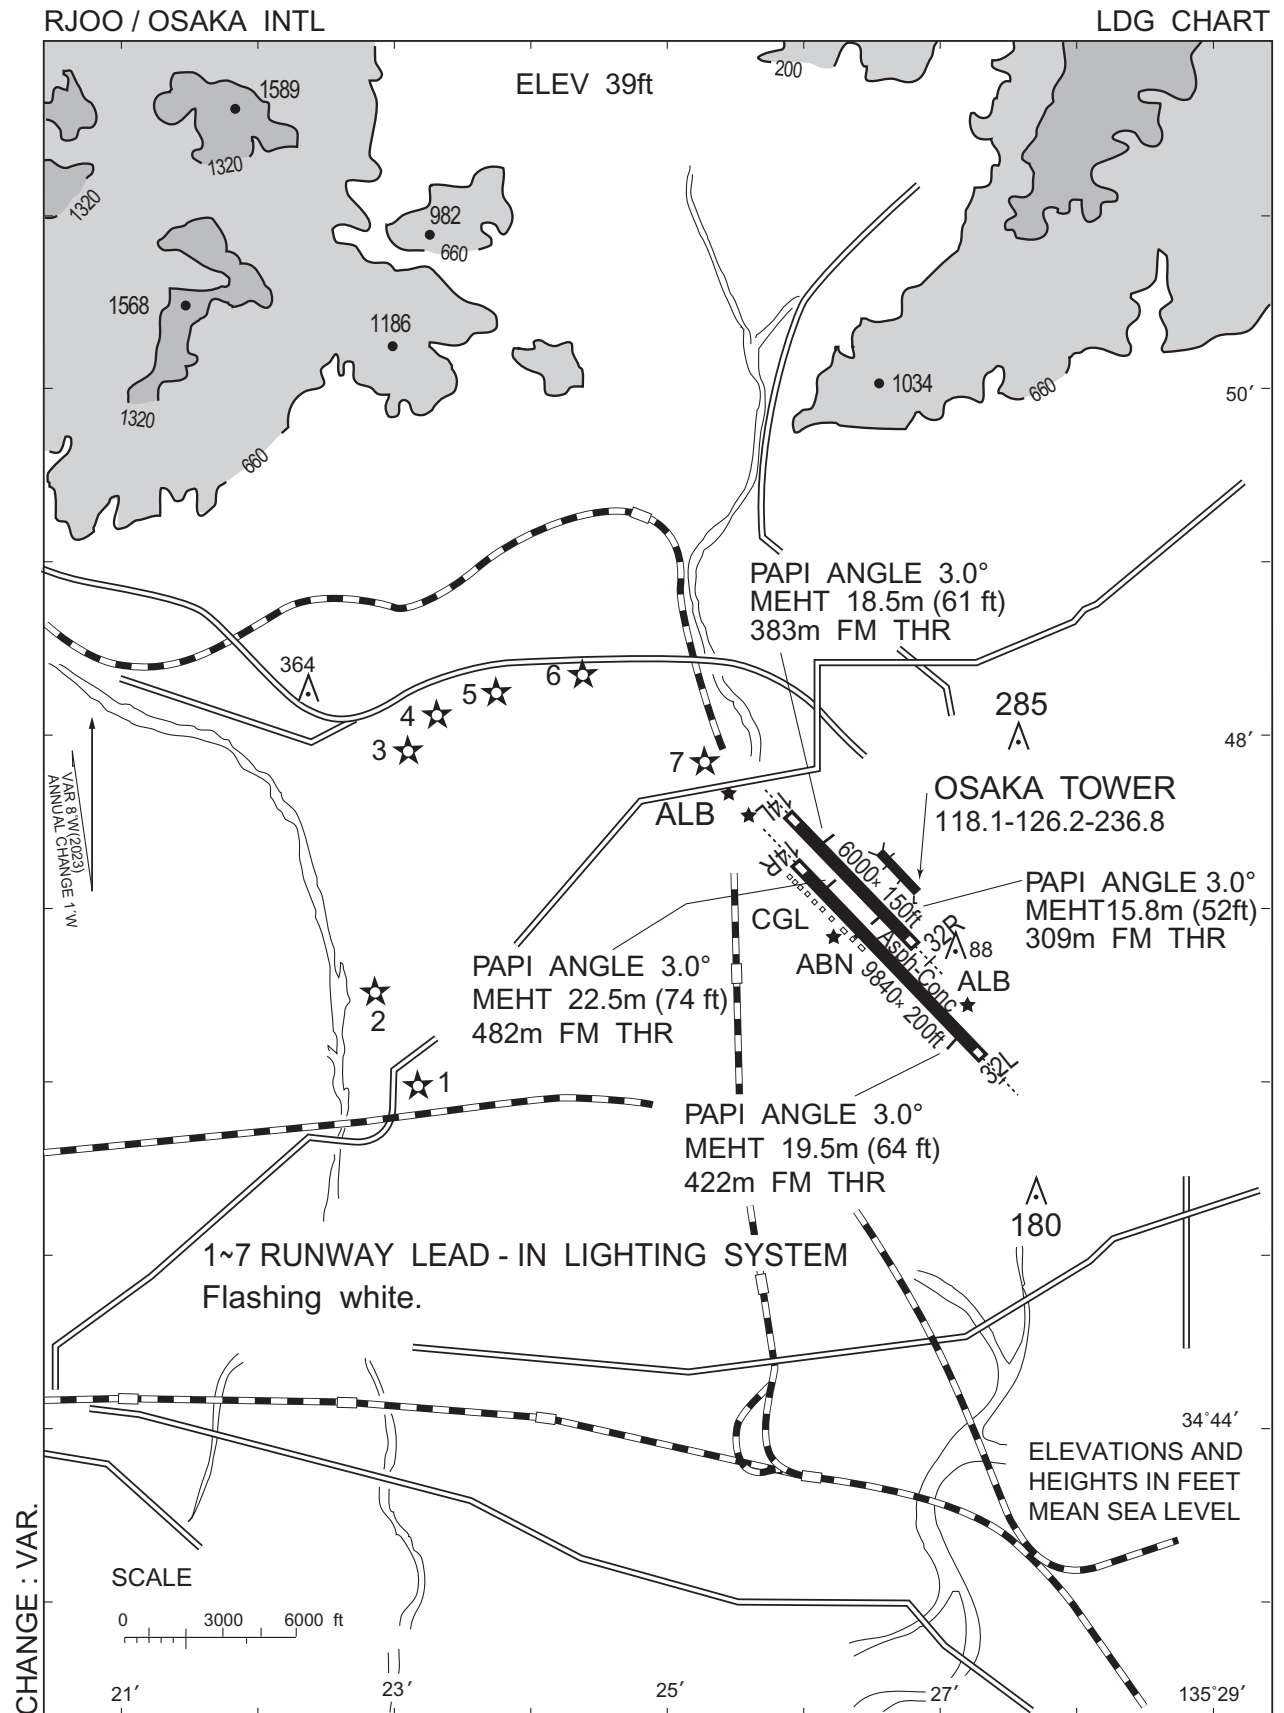

RJOO / OSAKA INTL

Minimum Vectoring Altitude CHART

VAR 8°W (2023)

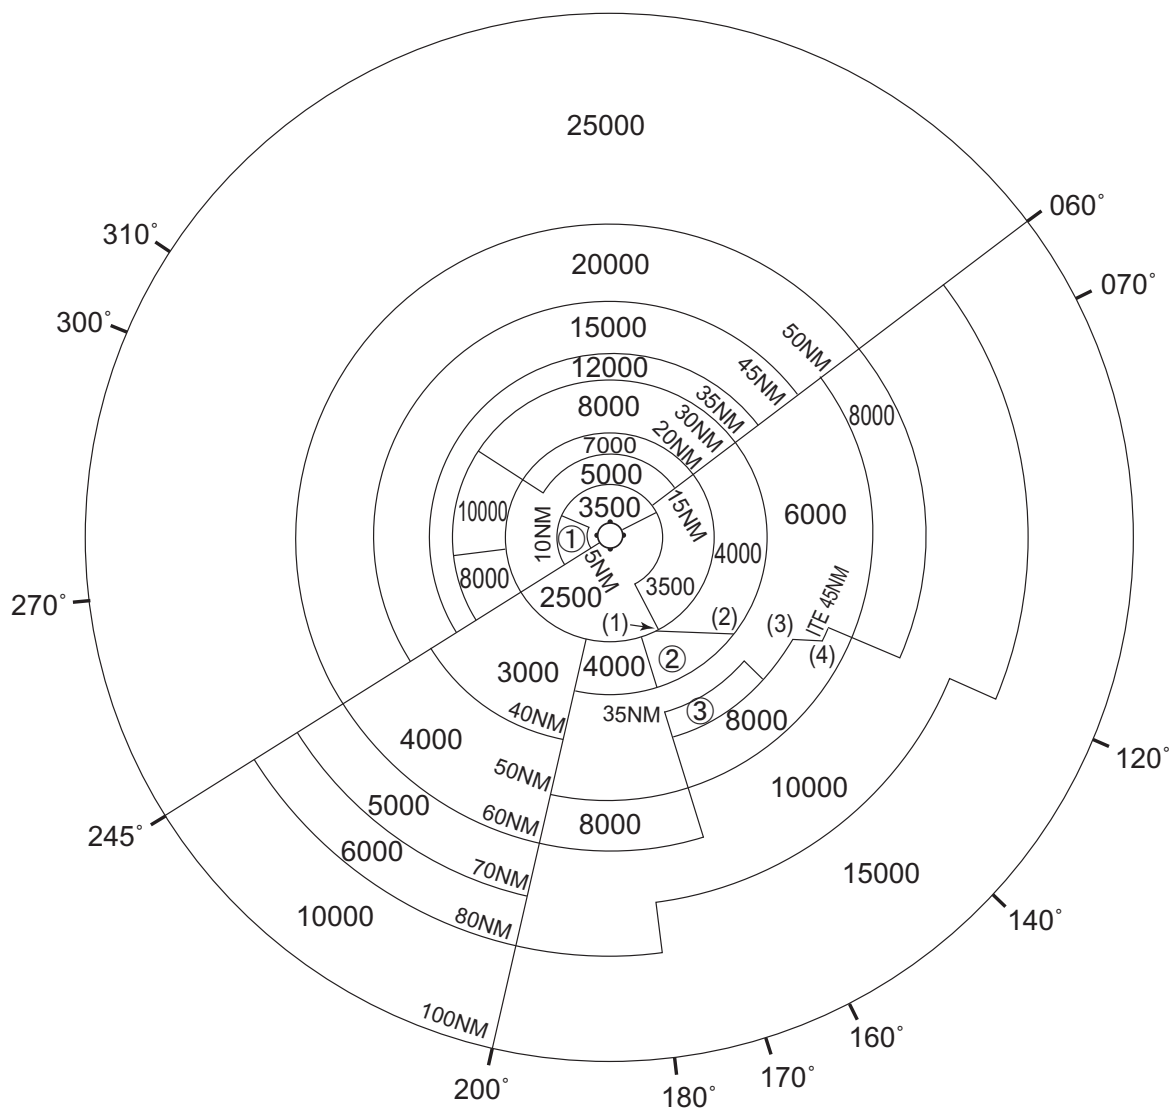

- ① 4100
② 5000
③ 7000

- (1) 342930N/1353527E
(2) 342925N/1355432E
(3) 342918N/1360849E
(4) 342924N/1361335E

CENTER: 344752N/1352550E (No.1 RADAR SITE)
CENTER: 344659N/1352600E (No.2 RADAR SITE)

CHANGE : Update(BTN 245° and 300°).