


RJKI / KIKAI

AD CHART

CHANGE : WIND SPEED METER, CEILOMETER added.

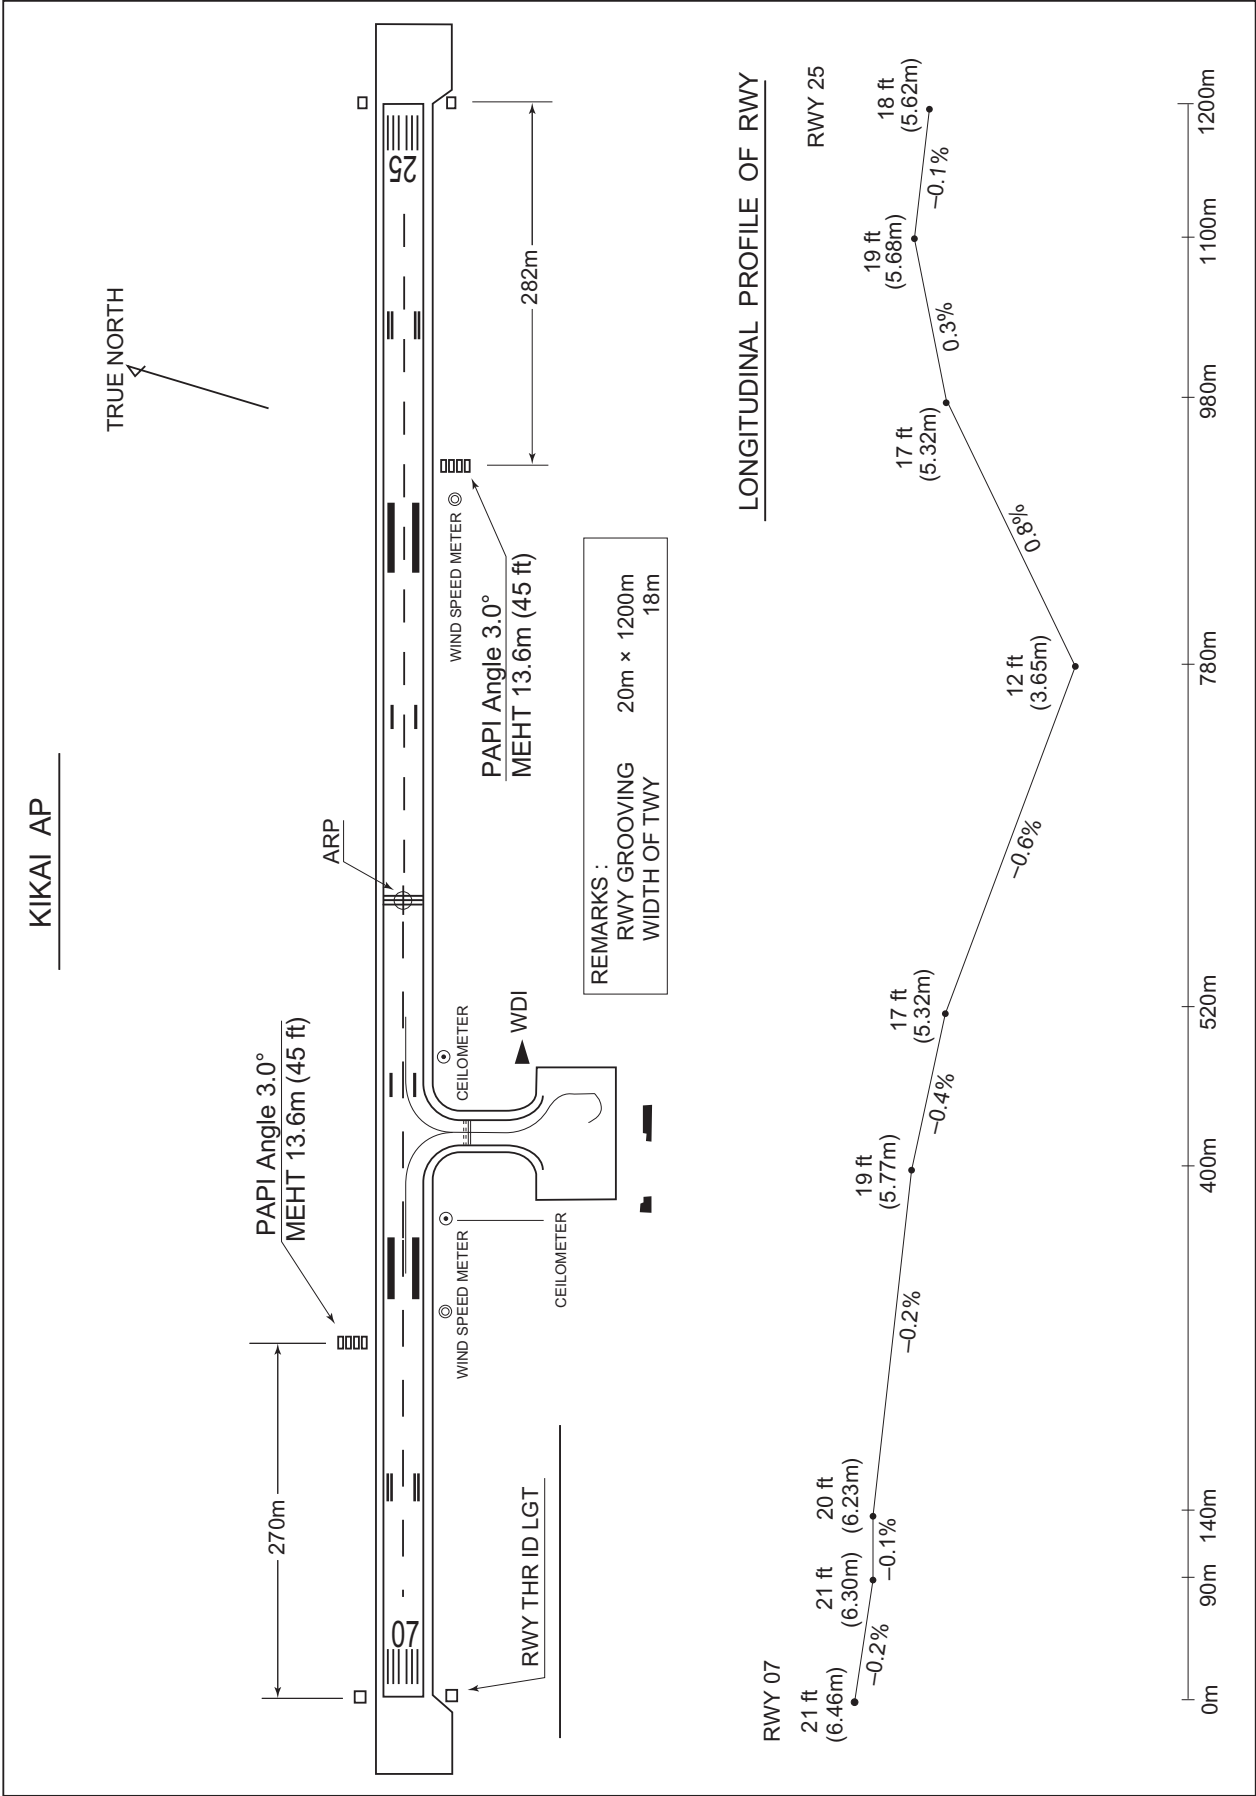

STANDARD DEPARTURE CHART -INSTRUMENT

RJKI / KIKAI

SID

KASARI TWO DEPARTURE

RWY07 : Turn left,...

RWY25: Turn right,...


...direct to AME VOR/DME.

Cross AME VOR/DME at or above 3000FT.


Note RWY07 : 5.0% climb gradient required up to 700FT.

OBST ALT 558FT located at 2.4NM 088° FM end of RWY07.

CHANGE : Description of PROC name.

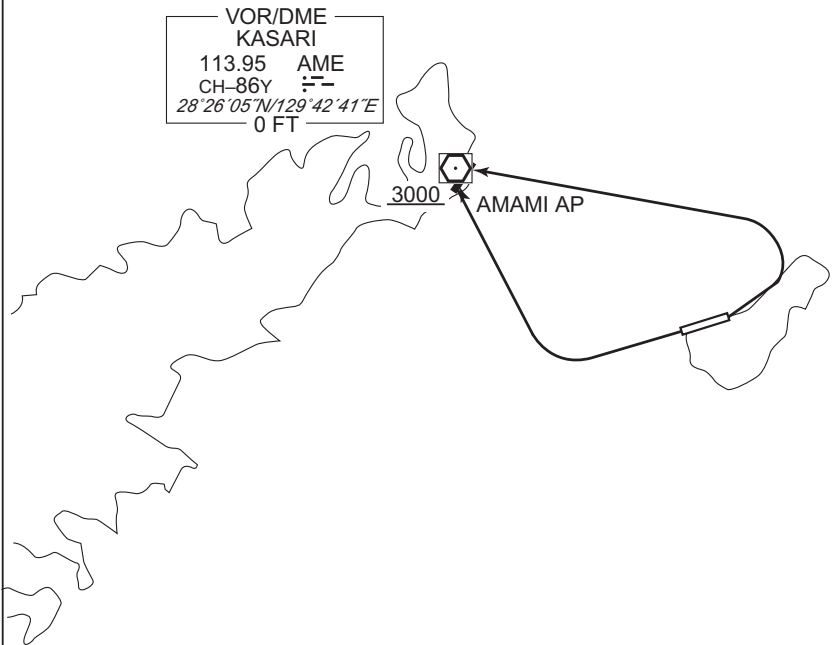

STANDARD DEPARTURE CHART -INSTRUMENT

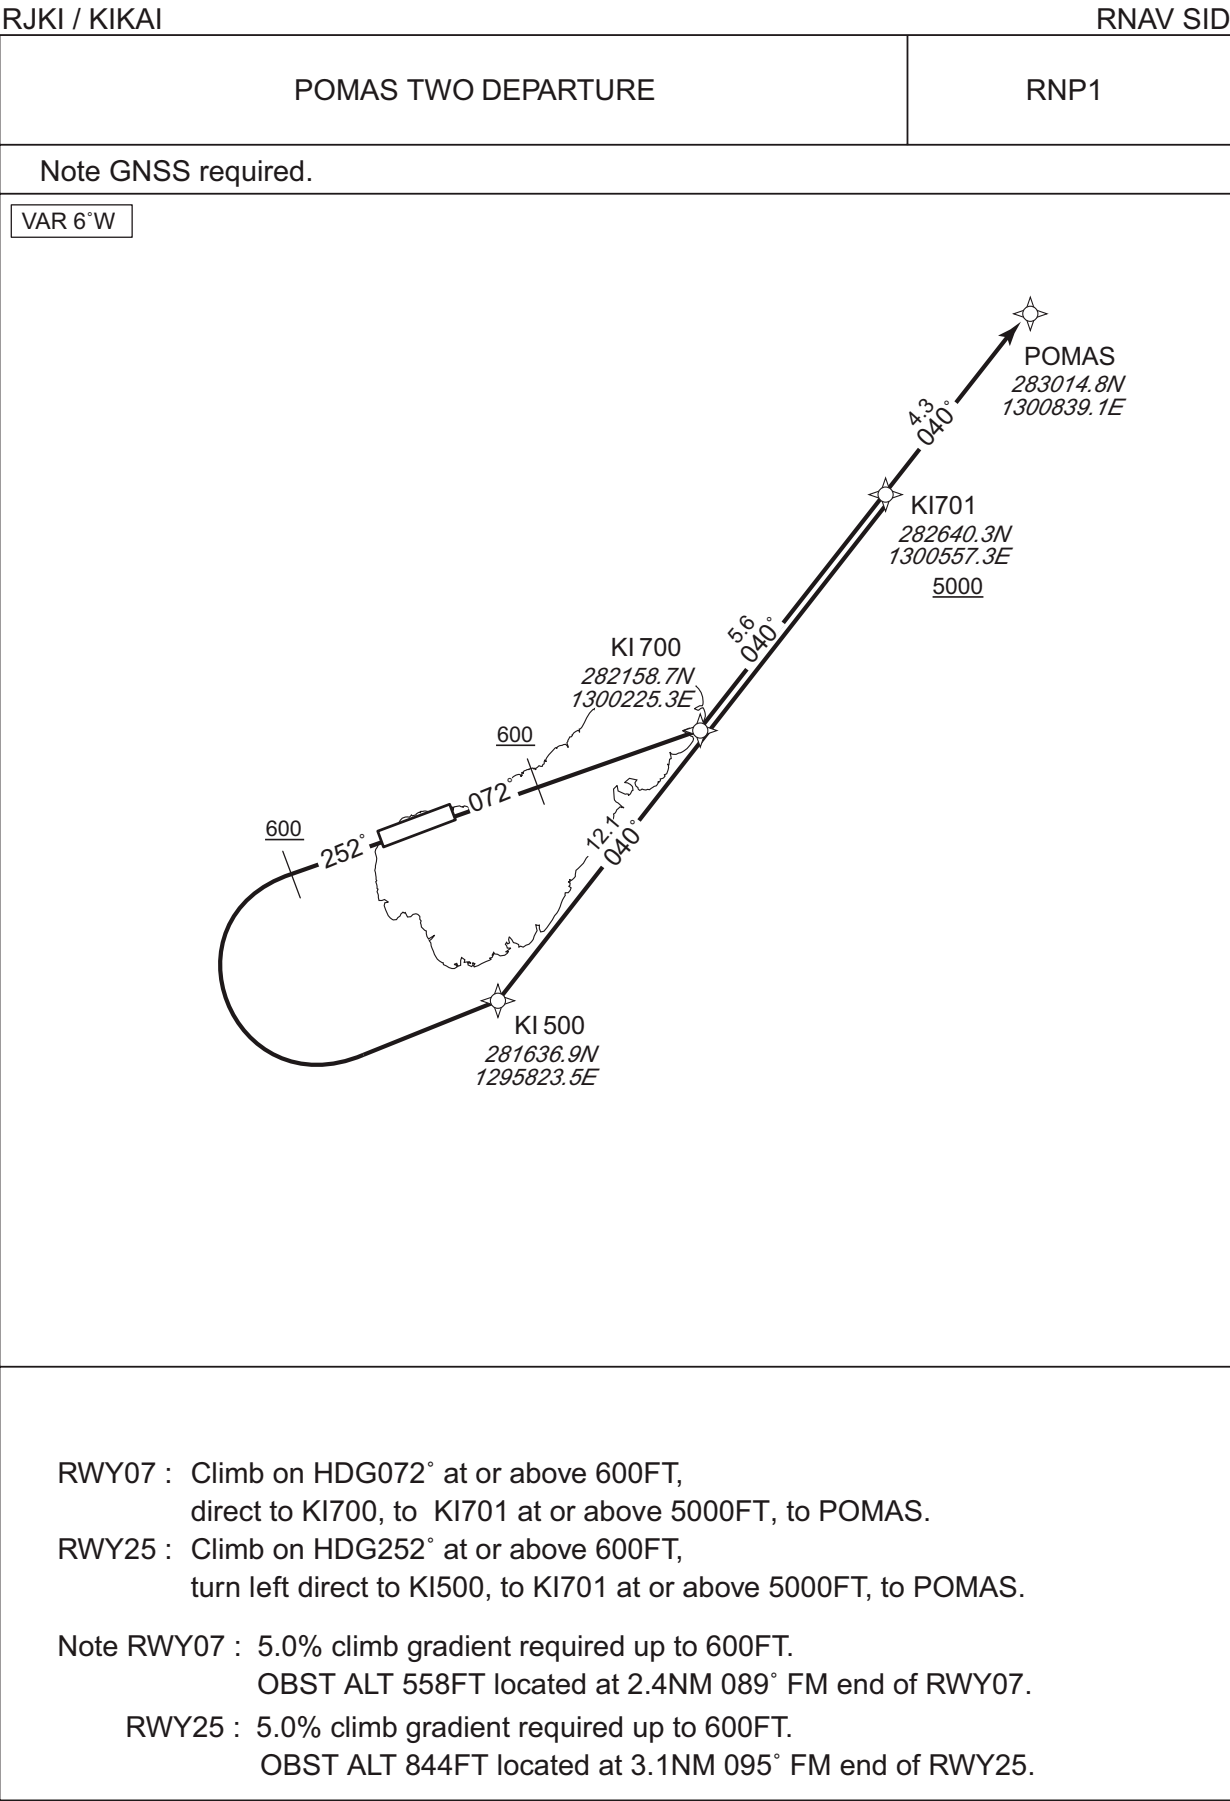

CHANGE : Description of PROC name and VAR.

STANDARD DEPARTURE CHART -INSTRUMENT

RJKI / KIKAI

RNAV SID

POMAS TWO DEPARTURE

RWY07


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	072 (065.7)	-6.1	-	-	+600	-	-	RNP1
002	DF	KI700	-	-	-6.1	-	-	-	-	-	RNP1
003	TF	KI701	-	040 (033.5)	-6.1	5.6	-	+5000	-	-	RNP1
004	TF	POMAS	-	040 (033.5)	-6.1	4.3	-	-	-	-	RNP1

RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	252 (245.7)	-6.1	-	-	+600	-	-	RNP1
002	DF	KI500	-	-	-6.1	-	L	-	-	-	RNP1
003	TF	KI701	-	040 (033.5)	-6.1	12.1	-	+5000	-	-	RNP1
004	TF	POMAS	-	040 (033.5)	-6.1	4.3	-	-	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART -INSTRUMENT

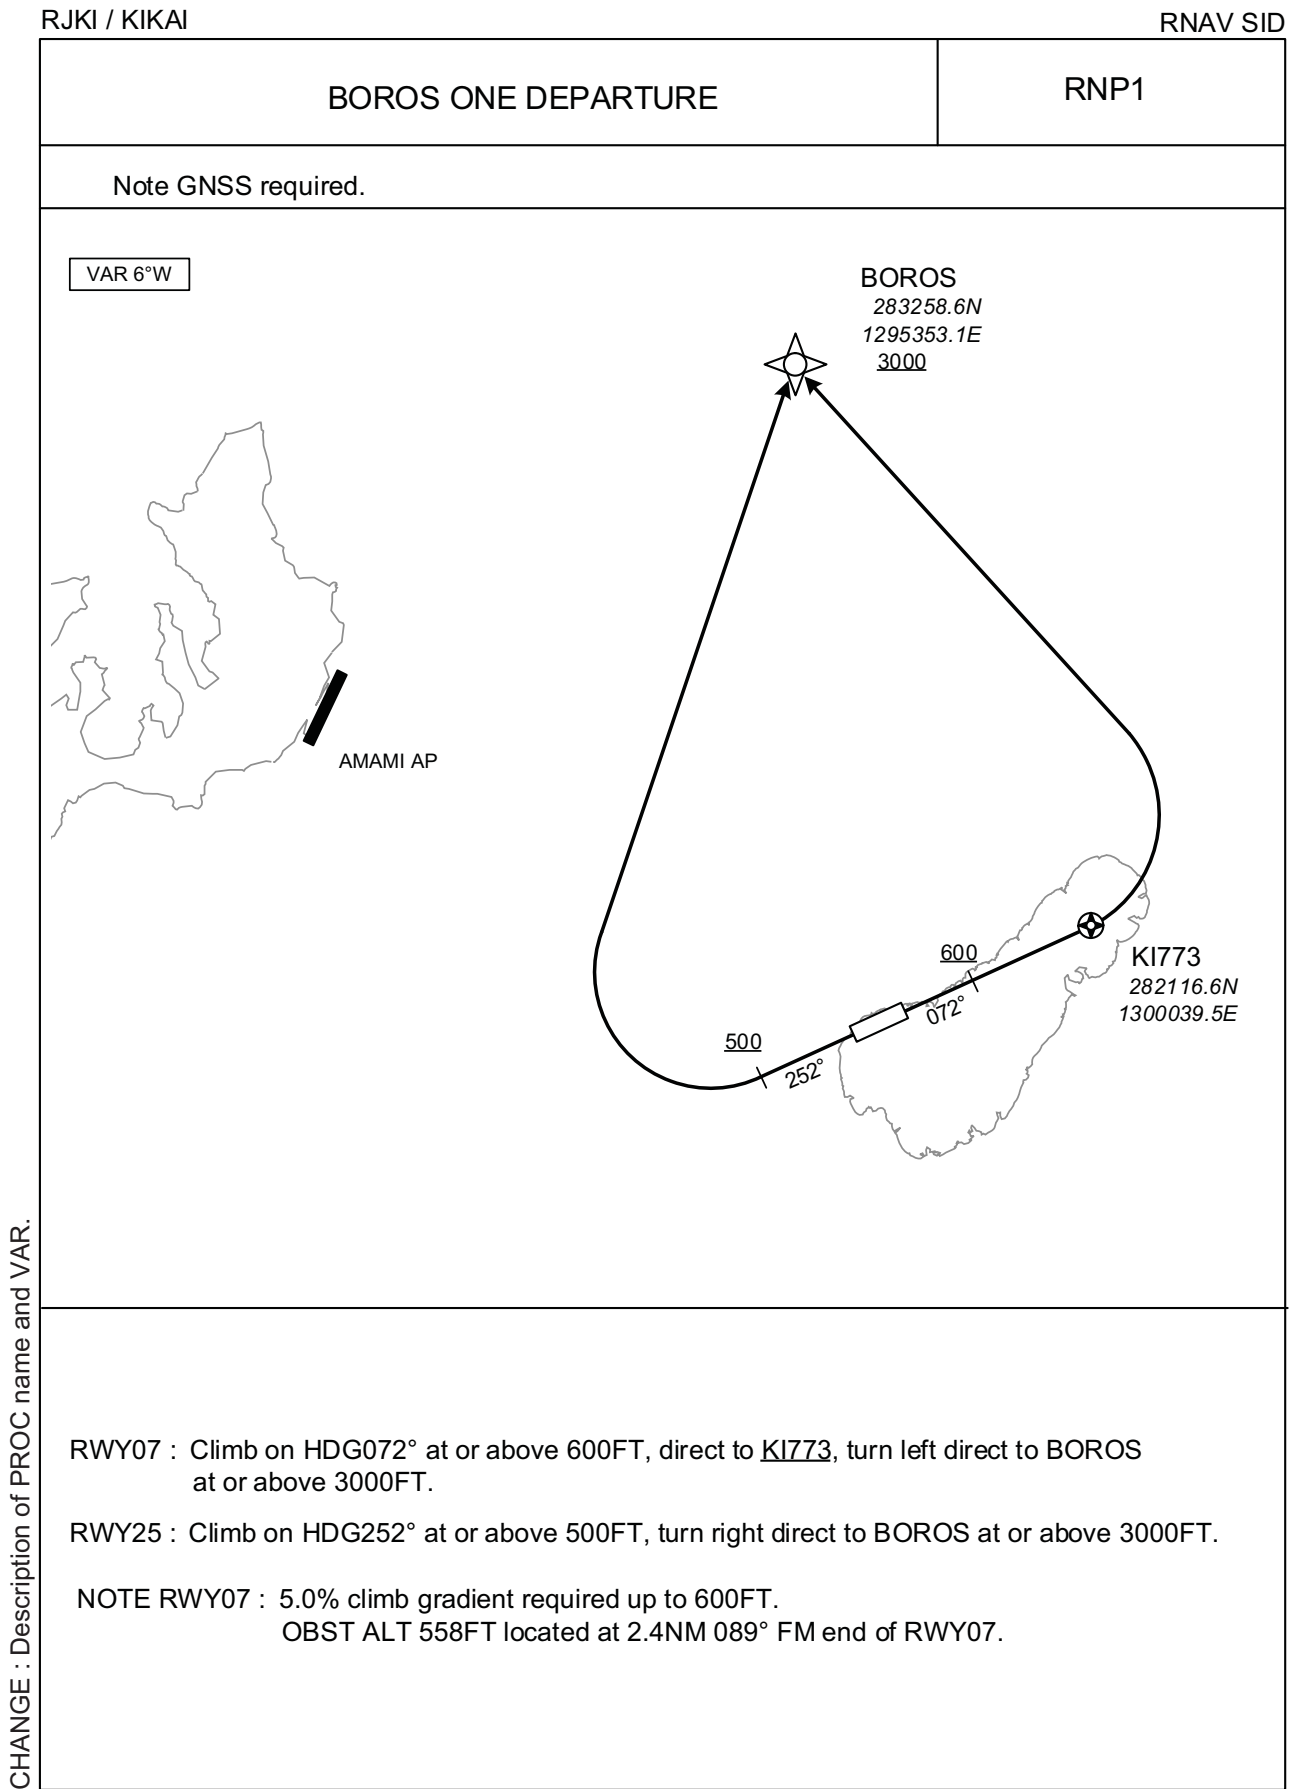

STANDARD DEPARTURE CHART -INSTRUMENT


RJKI / KIKAI

RNAV SID

BOROS ONE DEPARTURE											
RWY07											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	072 (065.7)	-6.1	-	-	+600	-	-	RNP1
002	DF	KI773	Y	-	-6.1	-	-	-	-	-	RNP1
003	DF	BOROS	-	-	-6.1	-	L	+3000	-	-	RNP1
RWY25											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	252 (245.7)	-6.1	-	-	+500	-	-	RNP1
002	DF	BOROS	-	-	-6.1	-	R	+3000	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART -INSTRUMENT

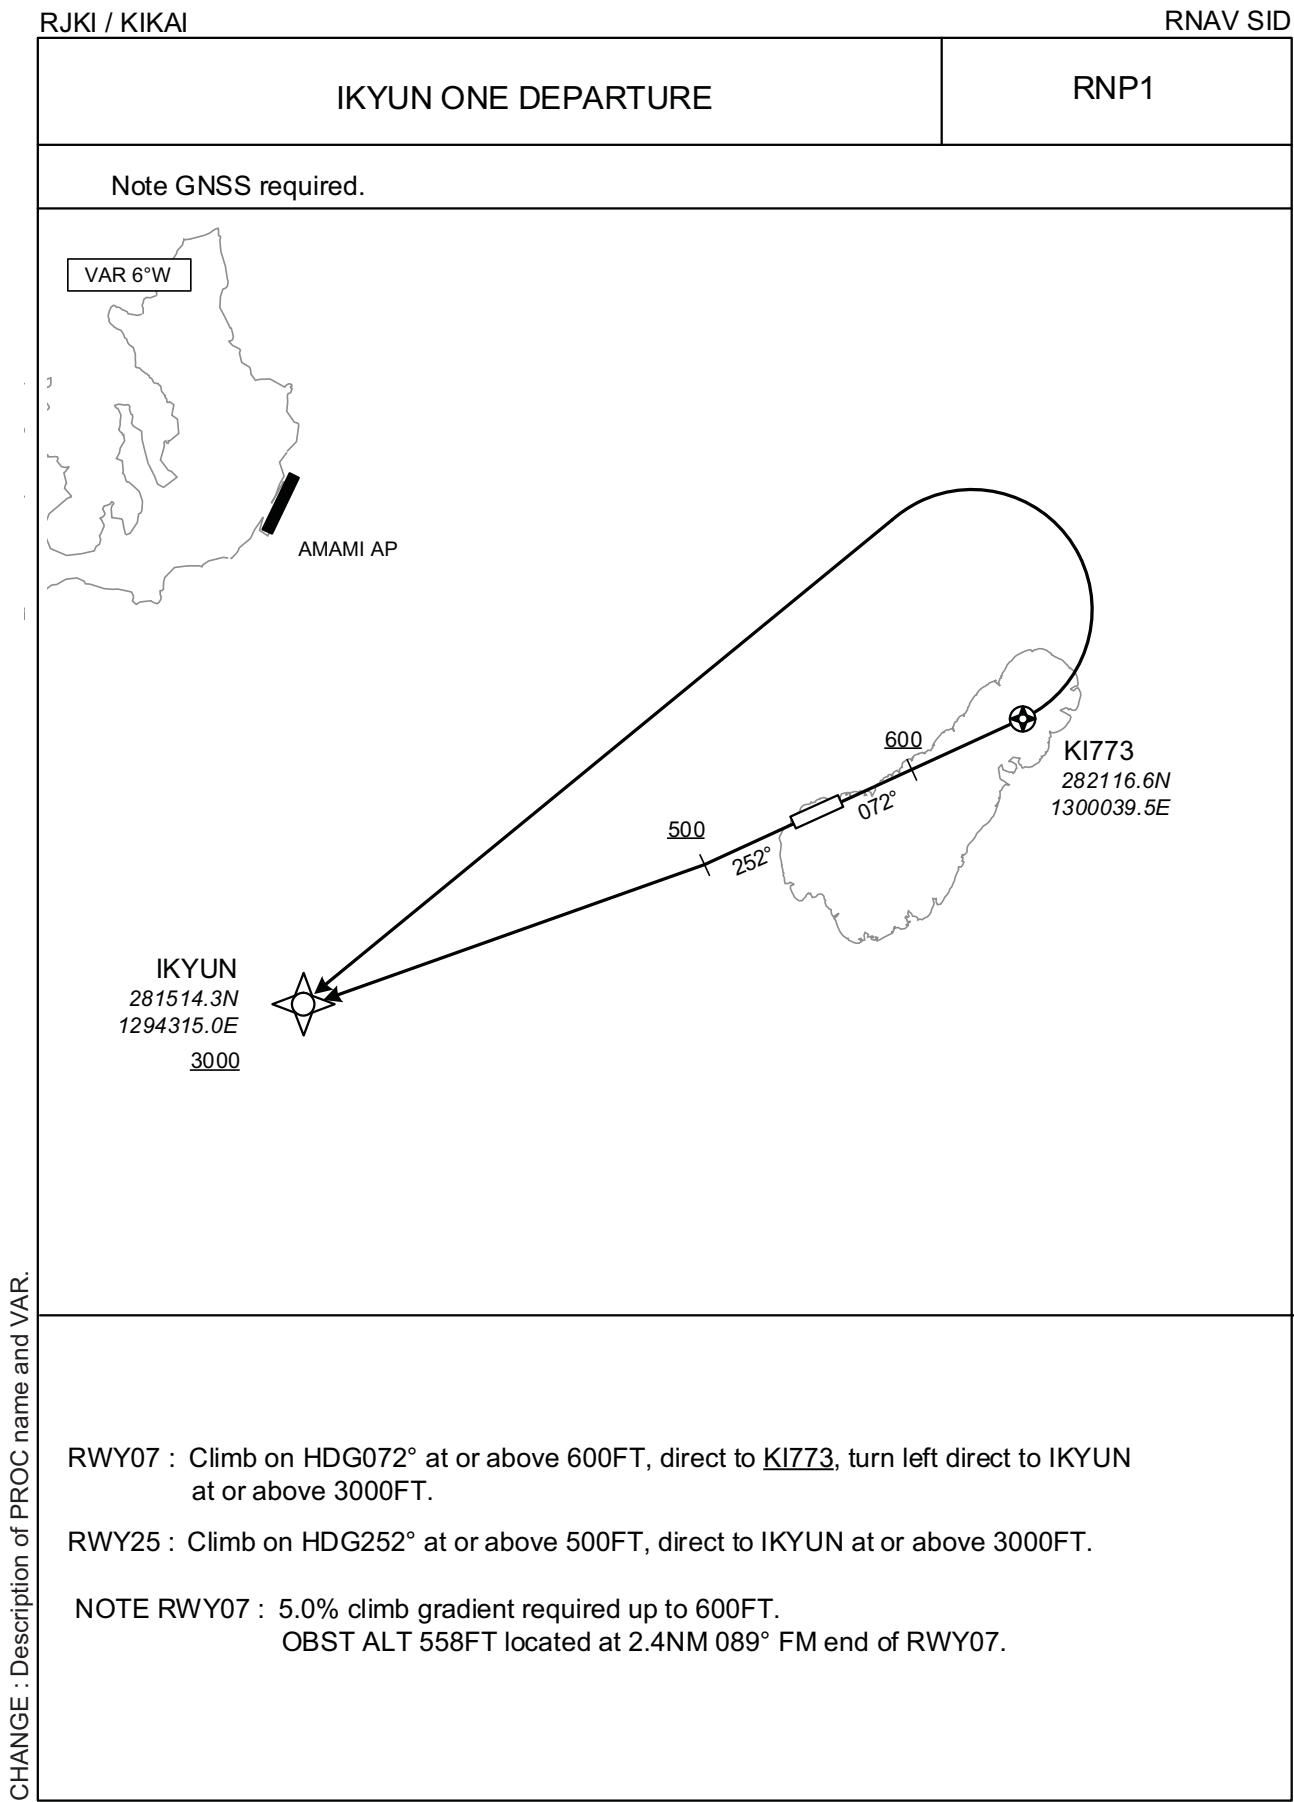

STANDARD DEPARTURE CHART -INSTRUMENT

RJKI / KIKAI

RNAV SID


IKYUN ONE DEPARTURE											
RWY07											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	072 (065.7)	-6.1	-	-	+600	-	-	RNP1
002	DF	KI773	Y	-	-6.1	-	-	-	-	-	RNP1
003	DF	IKYUN	-	-	-6.1	-	L	+3000	-	-	RNP1
RWY25											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	252 (245.7)	-6.1	-	-	+500	-	-	RNP1
002	DF	IKYUN	-	-	-6.1	-	-	+3000	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

INSTRUMENT APPROACH CHART

RJKI / KIKAI

VOR A

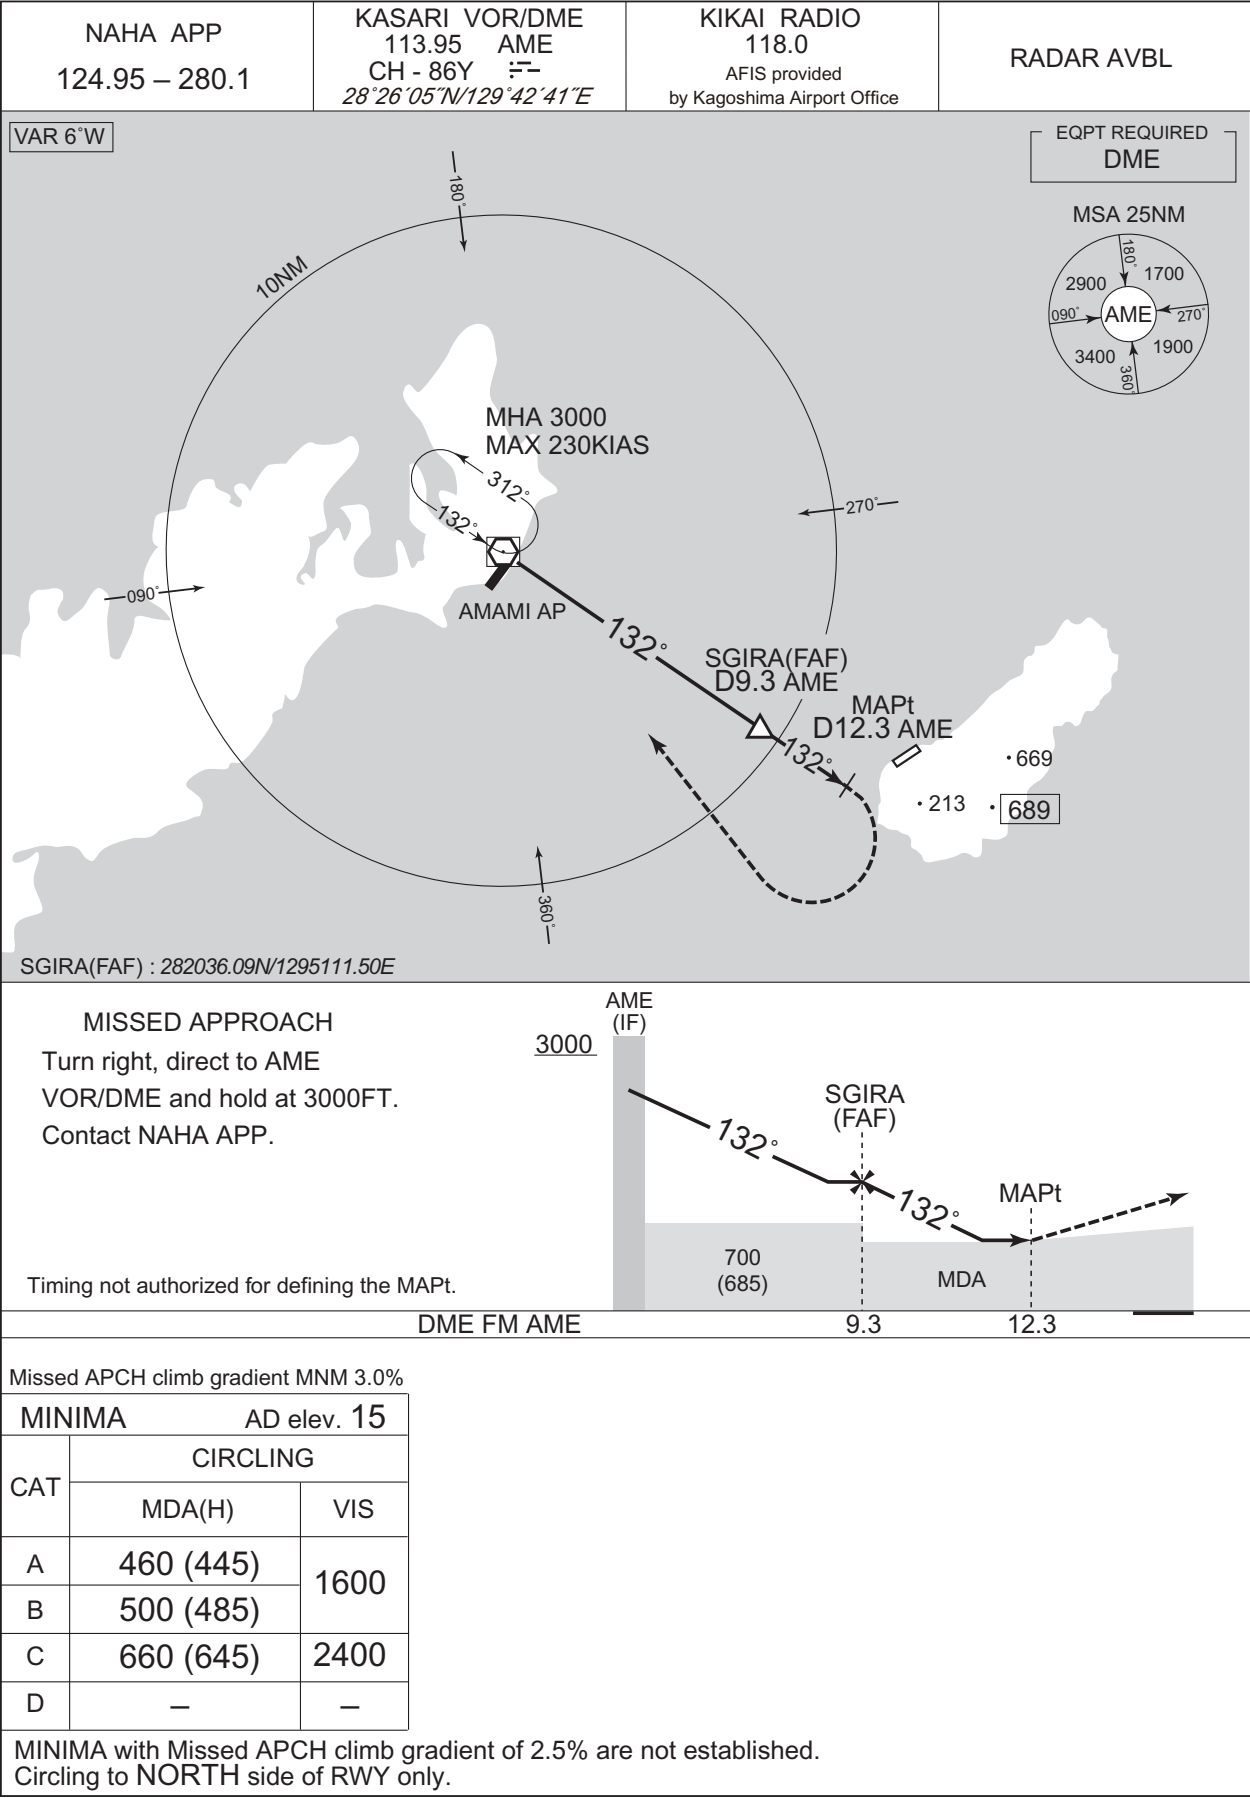

RJKI / KIKAI

NAHA APP
124.95 - 280.1

RNP APCH
MSAS CH84586
M07A

KIKAI RADIO
118.0
AFIS provided
by Kagoshima Airport Office

RADAR AVBL

Baro-VNAV not authorized below 0°C

Using NAVAID

NOT TO SCALE

AME VOR/DME

MHA 3000
MAX 210KIAS

IKEJI
D10.5 AME

D16.0 AME

178°

358°

130° 0'E

MSA 25NM

2800

ARP

ARP: 281917N / 1295541E

RNAV HLDG

KADON
MHA 3000
MAX 210KIAS

163°

343°

1 MIN

NOT TO SCALE

VAR 6°W

AMAMI AP

VOR/DME
KASARI
113.95 AME
CH-86Y
28°26'05"N/129°42'41"E

RYUZE(IAF)
3000

28° 20'N

-090°

162°
(155.8°T)

3.8

3.0

089°
(082.4°T)

IKEJI(IAF)
MAX 220KIAS
3000

072°
(065.6°T)

3.9

KI770(IF)
MAX 160KIAS

072°
(065.6°T)

MELUL(FAF)

3.5

072°
(065.6°T)

RW07(MAPt)

703

KADON(IAF/MAHF)
3000

342°
(335.8°T)

3.8

10NM

28° 10'N

1 0 1 2 3 4 5 6 7 8 9 10
KM


1 0 1 2 3 4 5
NM

2000
1500
1000
500
AD elev.15
Contour
Intervals

KADON (IAF/MAHF)	281236.50N 1294922.95E
IKEJI (IAF)	281541.27N 1294414.66E
RYUZE (IAF)	281933.41N 1294550.55E
KI770 (IF)	281604.97N 1294736.81E
MELUL (FAF)	281742.13N 1295140.33E
RW07 (MAPt)	281909.72N 1295520.22E
KI773 (MATF)	282116.63N 1300039.45E

NM to Next Fix	FAF	3	2	MAPt
AI T(3.0°APCH Path)	1200	1026	707	-

Direct to KI773, turn right
direct to KADON and hold
at 3000FT.
Contact NAHA APP.

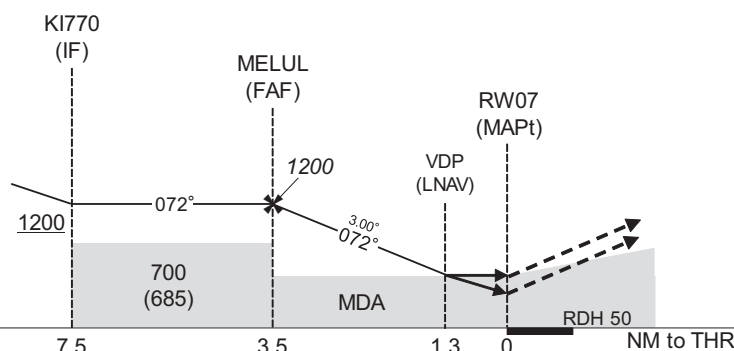

Missed APCH climb gradient MNM 5.0%	7.0	5.0
-------------------------------------	-----	-----

[illegible]

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Circling to NORTH side of RWY only.

CHANGE : MELUL, RW07 established. ARATI, KI772 abolished. MSAS CH added. MNM temperature for Baro-VNAV. MAX speed at KI770. ALT(3.0°APCH Path). Missed APCH climb gradient MNM. NM to THR. MINIMA.

INSTRUMENT APPROACH CHART

RJKI / KIKAI

RNP RWY07

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00334
SBAS service provider identifier	2	FPAP latitude	281932.2905N
Airport identifier	RJKI	FPAP longitude	1295617.0375E
Runway	07	Threshold crossing height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M07A	∟ length offset	0496
LTP/FTP latitude	281909.7150N	HAL	40.0
LTP/FTP longitude	1295520.2855E	VAL	50.0
CRC remainder	2634AFC8		

Required additional data


LTP/FTP orthometric height	6.2
----------------------------	-----

CHANGE : FAS DATA BLOCK, Required additional data established.

INSTRUMENT APPROACH CHART

RJKI / KIKAI

RNP Z RWY25

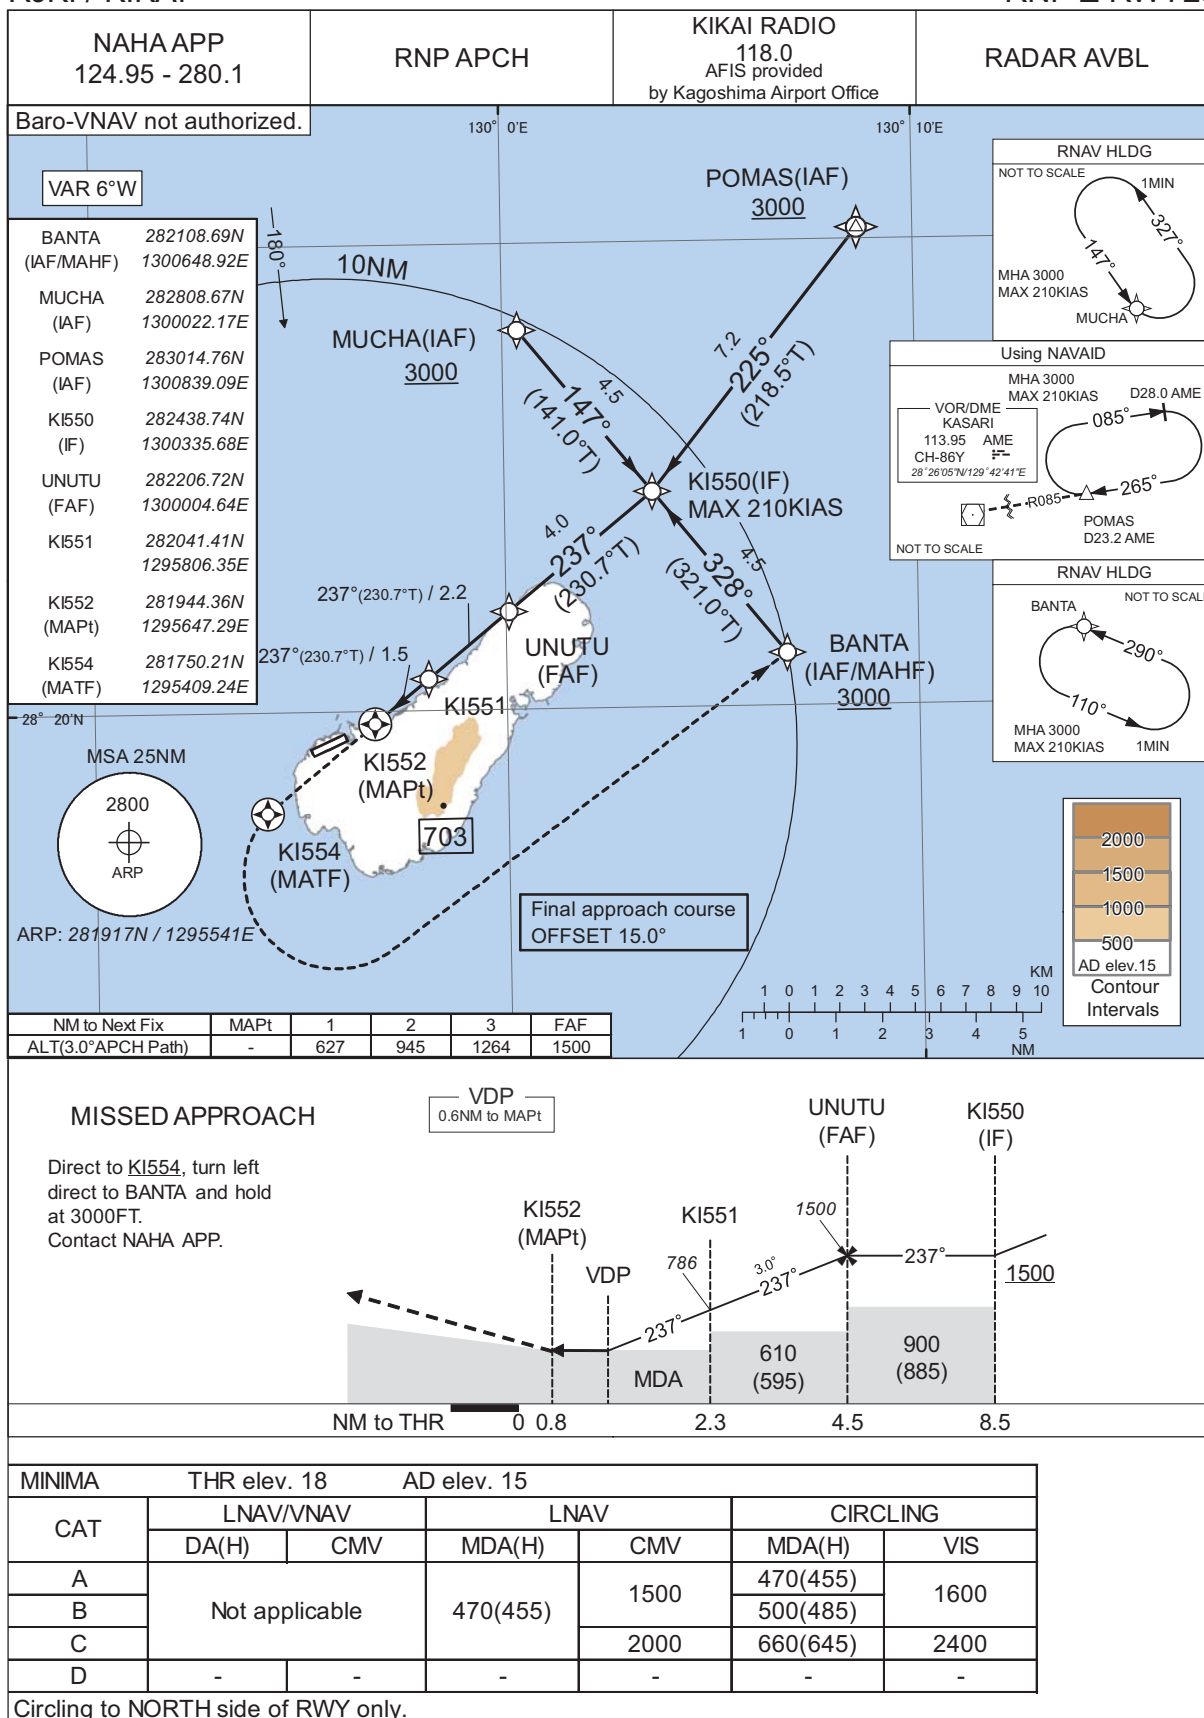


RJKI / KIKAI

RNP Y RWY25(LPV only)



Direct to KI557, turn left
direct to TENES and hold
at 3000FT.
Contact NAHA APP.

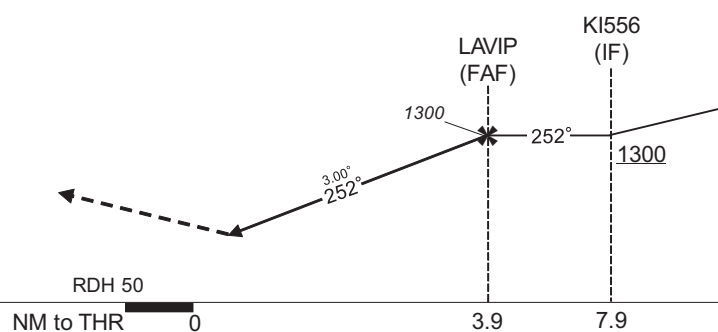

MINIMA		THR elev. 18	AD elev. 15	
CAT	LPV		CIRCLING	
	DA(H)	CMV	MDA(H)	VIS
A	269(251)	1500	460(445)	1600
B	279(261)		500(485)	
C	289(271)	1600	660(645)	2400
D	-	-	-	-

	Circling to NORTH side of RWY only.	
--	-------------------------------------	--

INSTRUMENT APPROACH CHART

RJKI / KIKAI

RNP Y RWY25(LPV only)

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00325
SBAS service provider identifier	2	FPAP latitude	281903.1220N
Airport identifier	RJKI	FPAP longitude	1295503.7170E
Runway	25	Threshold crossing height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator	Y	Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M25A	∟ length offset	0496
LTP/FTP latitude	281925.7000N	HAL	40.0
LTP/FTP longitude	1295600.4670E	VAL	50.0
CRC remainder	06DA9E79		


Required additional data

LTP/FTP orthometric height	5.3
----------------------------	-----

CHANGE : New PROC.

RJKI / KIKAI

Visual REP

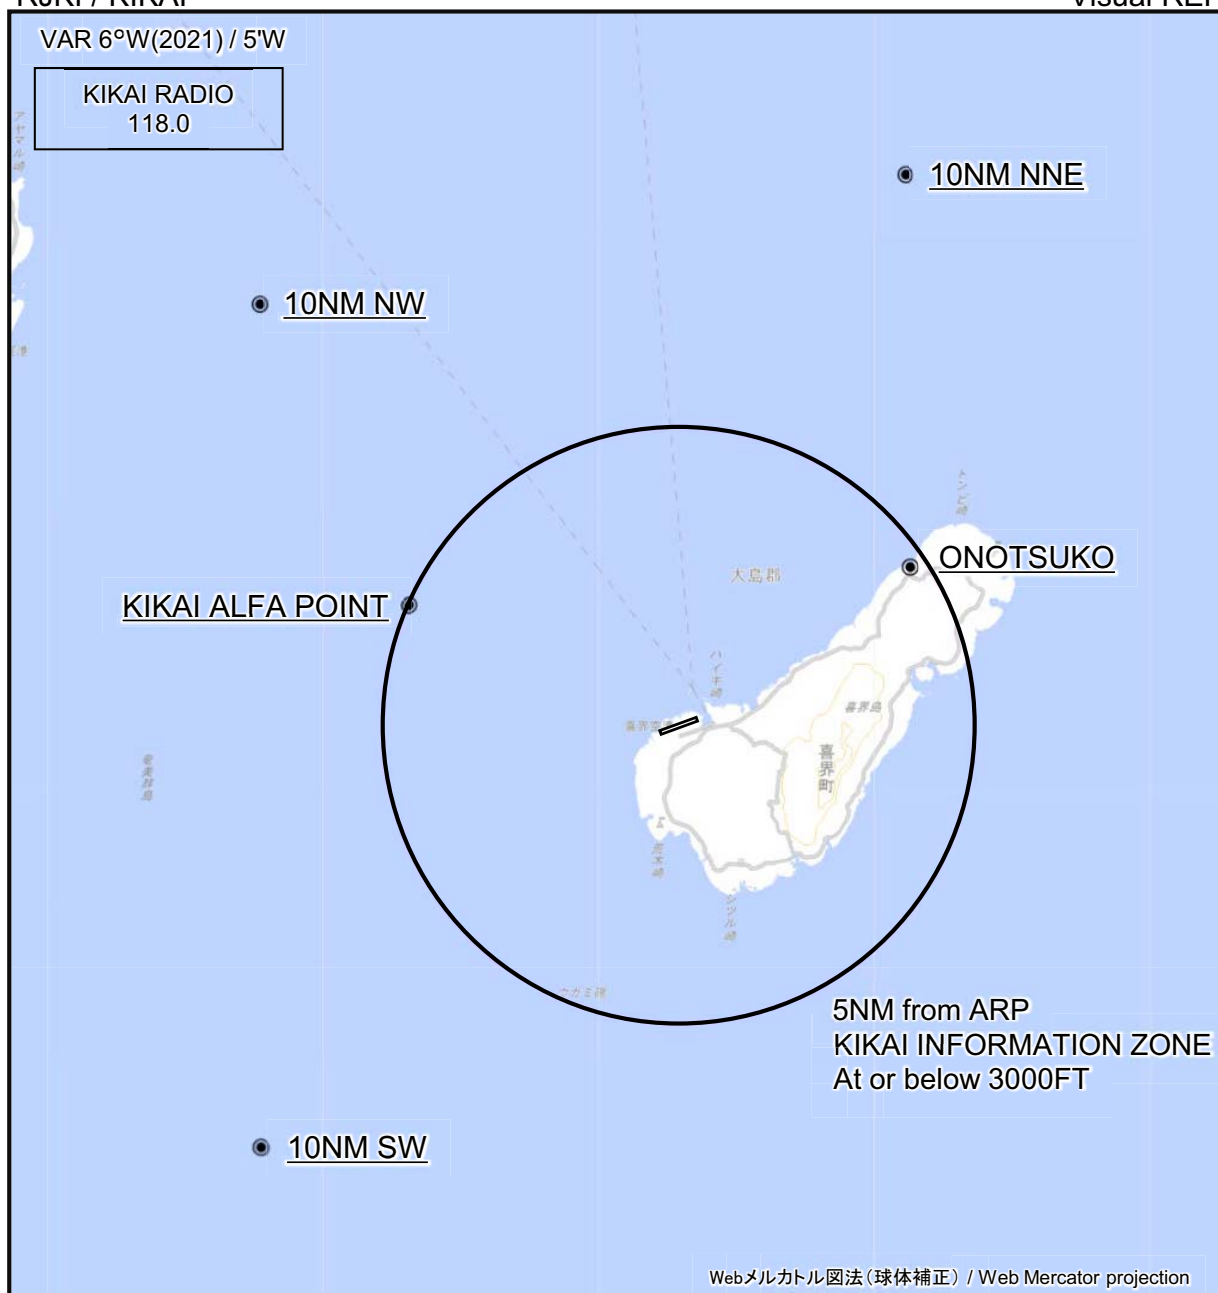

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
10NM NNE	022°T / 10.0NM	海上 Over the sea
10NM NW	315°T / 10.0NM	海上 Over the sea
小野津港 Onotsuko	056°T / 4.7NM	港 Harbor
喜界ALFA POINT Kikai Alfa Point	294°T / 5.0NM	喜界空港と奄美空港を結ぶ直線上 On the straight line connecting Kikai AP and Amami AP
10NM SW	225°T / 10.0NM	海上 Over the sea

