


RJNW / NOTO

AD CHART

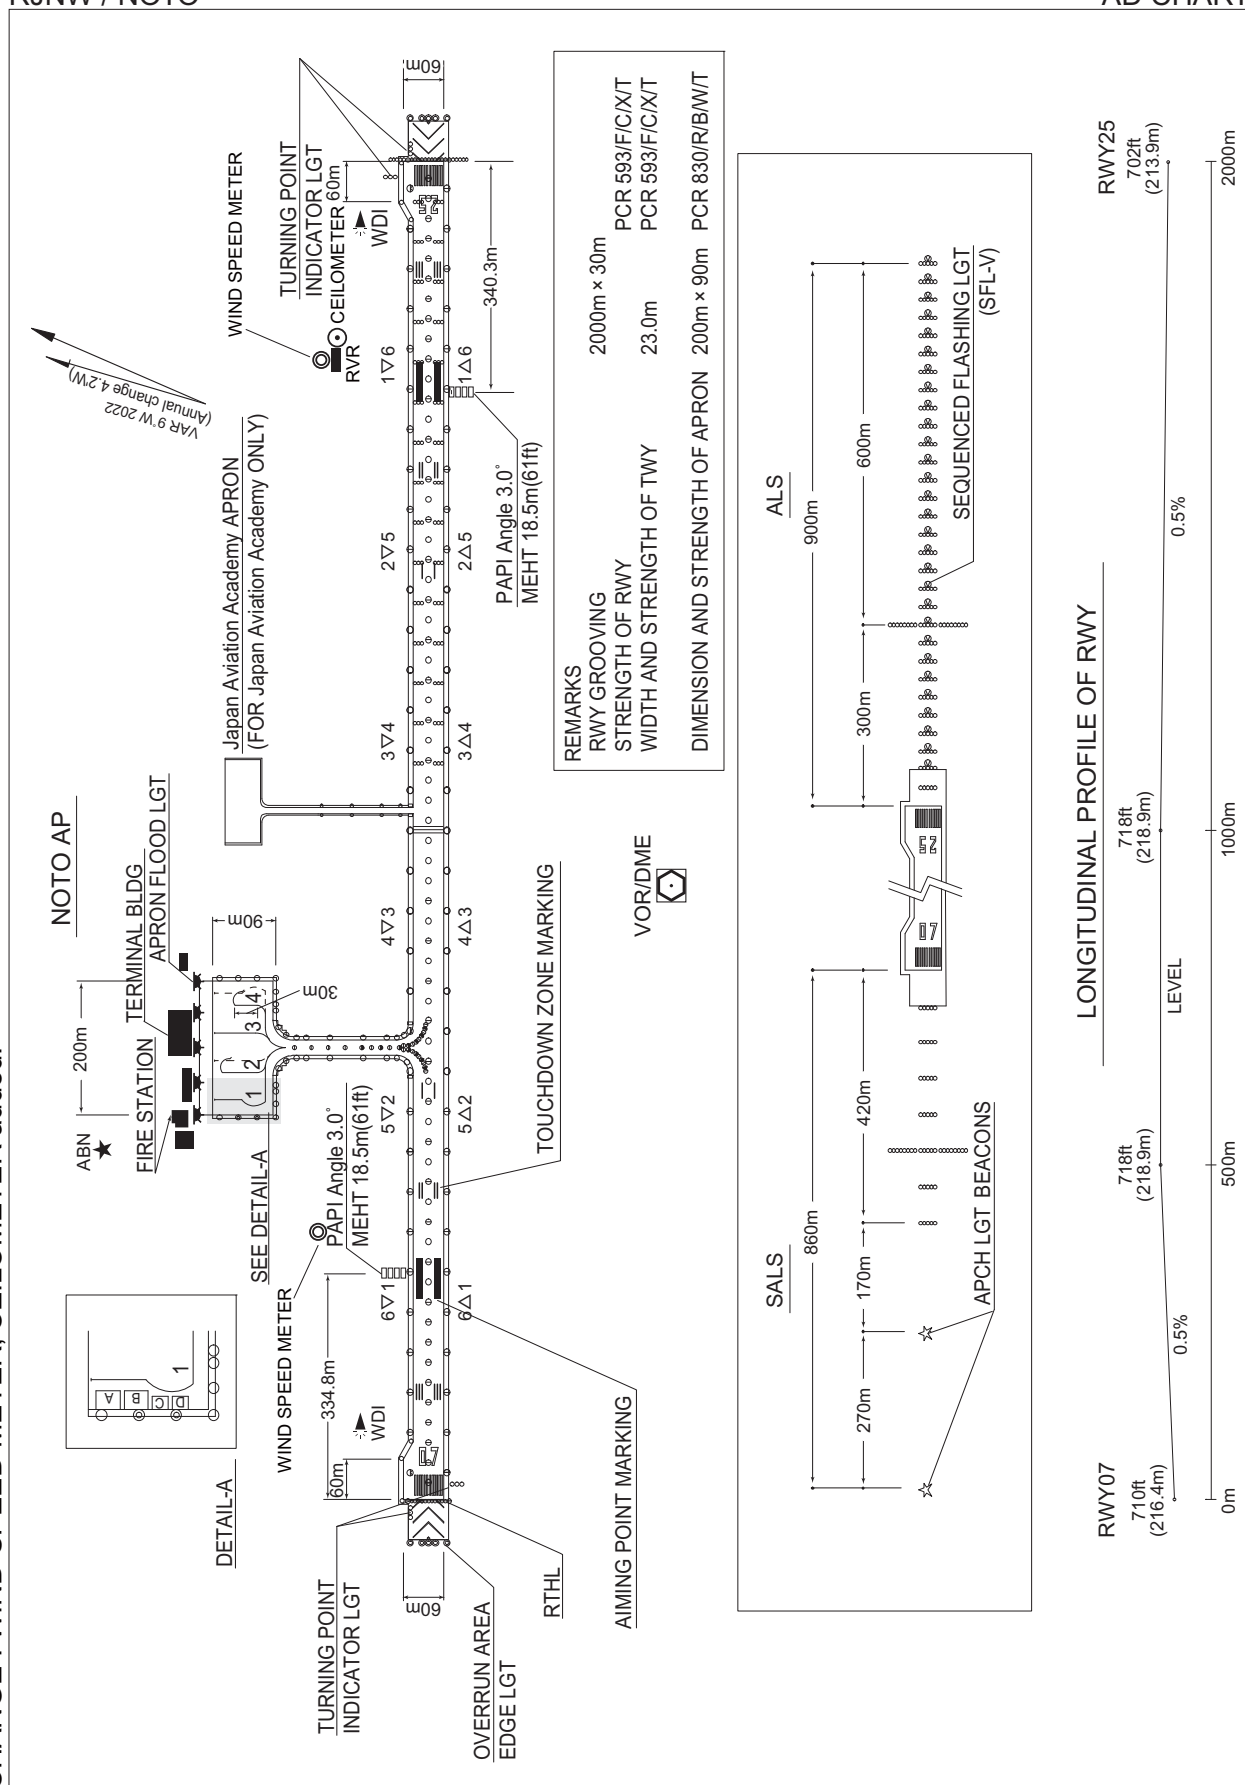

STANDARD DEPARTURE CHART -INSTRUMENT

RJNW / NOTO

SID

HISUI FOUR DEPARTURE


RWY07 : Climb RWY HDG to 1300FT, turn right...

RWY25 : Climb RWY HDG to 1200FT, turn left HDG 032° ...
...to intercept and proceed via NTE R077 to HISUI.

Note RWY07 : 5.0% climb gradient required up to 1300FT.

OBST ALT 772FT located at 0.3NM 046° FM end of RWY07.

CHANGE : PROC renamed. Note added. OBST figure deleted.

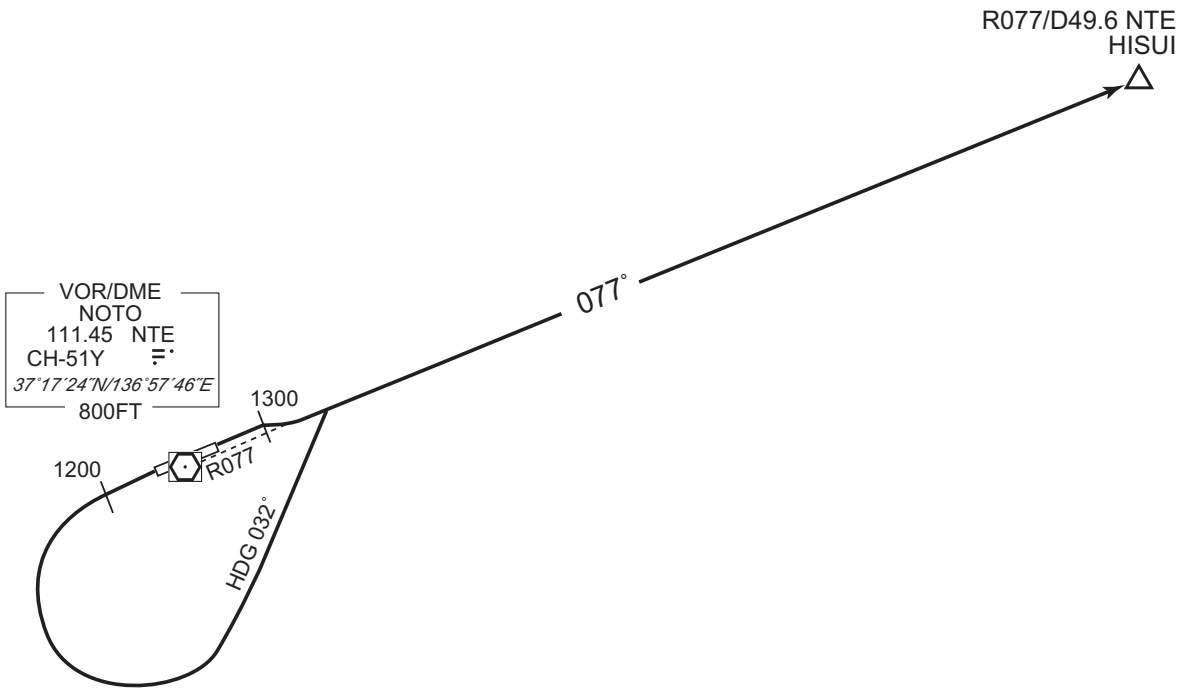

STANDARD DEPARTURE CHART -INSTRUMENT

RJNW / NOTO

SID

URUSI TWO DEPARTURE

RWY07 : Climb RWY HDG to 1300FT, turn right HDG217°...


RWY25 : Climb RWY HDG to 1200FT, turn left HDG127°...

...to intercept and proceed via NTE R172 to URUSI.

Cross URUSI at or above 8000FT.

Note RWY07 : 5.0% climb gradient required up to 1300FT.

OBST ALT 772FT located at 0.3NM 046° FM end of RWY07.

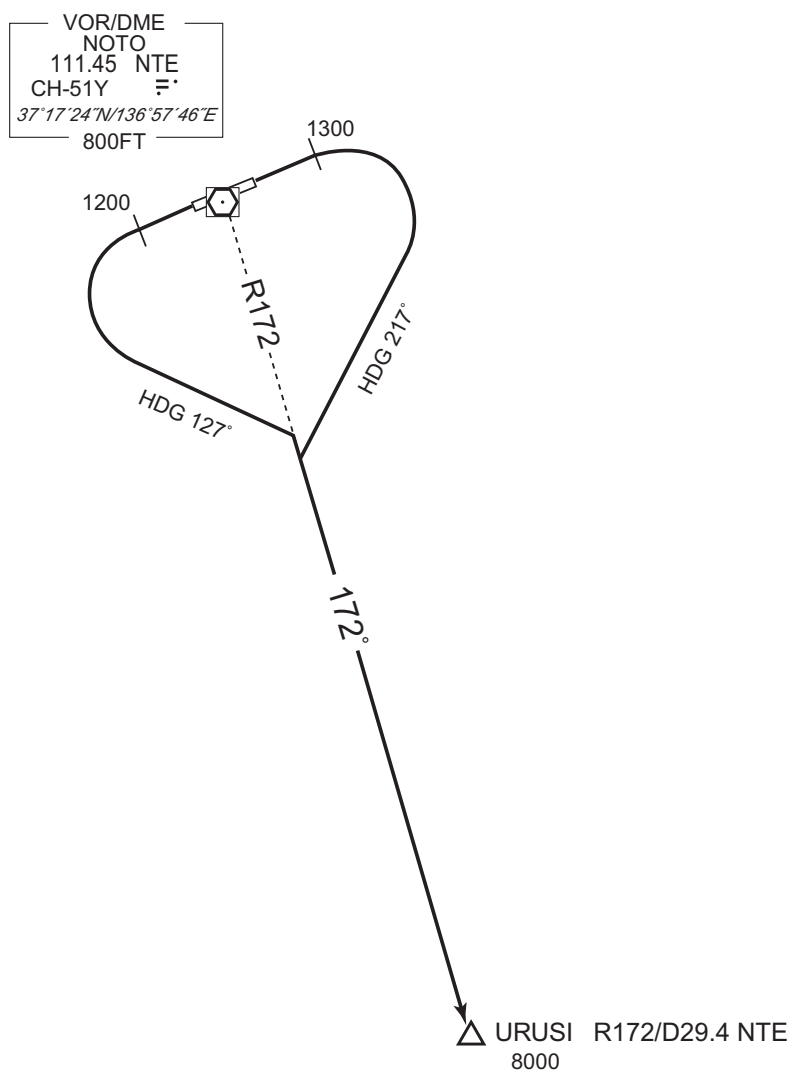


CHANGE : PROC renamed. Note added. OBST figure deleted.

STANDARD DEPARTURE CHART -INSTRUMENT

RJNW / NOTO

RNAV SID

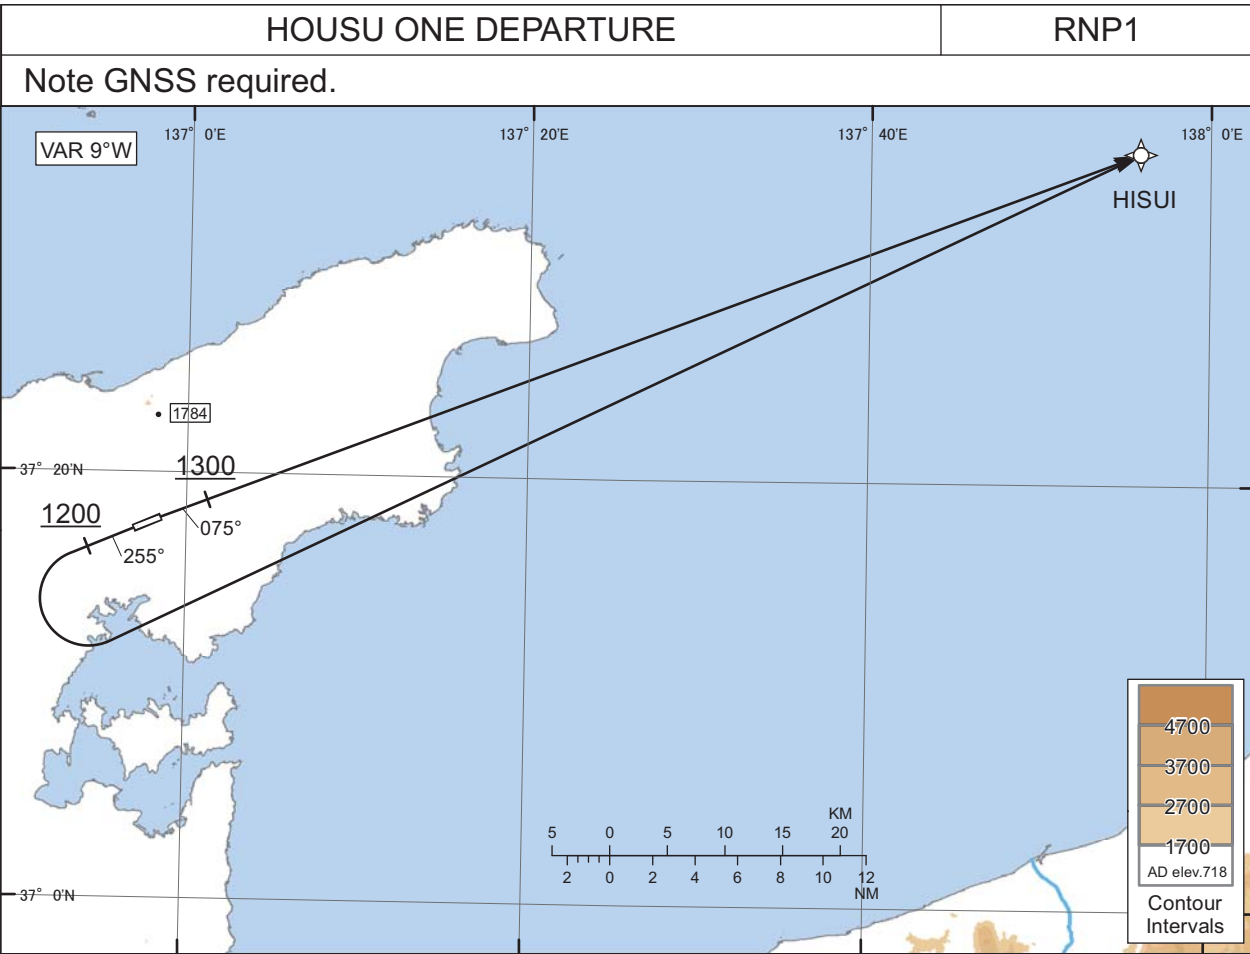

RWY07 : Climb on HDG075° at or above 1300FT, direct to HISUI.
RWY25 : Climb on HDG255° at or above 1200FT, turn left direct to HISUI.

Note RWY07 : 5.0% climb gradient required up to 1300FT.
OBST ALT 772FT located at 0.3NM 046° FM end of RWY07.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	075 (066.7)	-8.8	-	-	+1300	-	-	RNP1
002	DF	HISUI	-	-	-8.8	-	-	-	-	-	RNP1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	255 (246.7)	-8.8	-	-	+1200	-	-	RNP1
002	DF	HISUI	-	-	-8.8	-	L	-	-	-	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates
HISUI	373534.5N / 1375553.1E

CHANGE : New PROC.

RJNW / NOTO

RNAV SID

RNP1

OBST ALT 772FT located at 0.3NM 046° FM end of RWY07.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	075 (066.7)	-8.8	-	-	+1300	-	-	RNP1
002	DF	URUSI	-	-	-8.8	-	R	+8000	-	-	RNP1


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	255 (246.7)	-8.8	-	-	+1200	-	-	RNP1
002	DF	URUSI	-	-	-8.8	-	L	+8000	-	-	RNP1

Waypoint Identifier	Coordinates
URUSI	364909.2N / 1370753.5E

Civil Aviation Bureau, Japan (EFF:25 DEC 2025)

27/11/25


STANDARD ARRIVAL CHART -INSTRUMENT

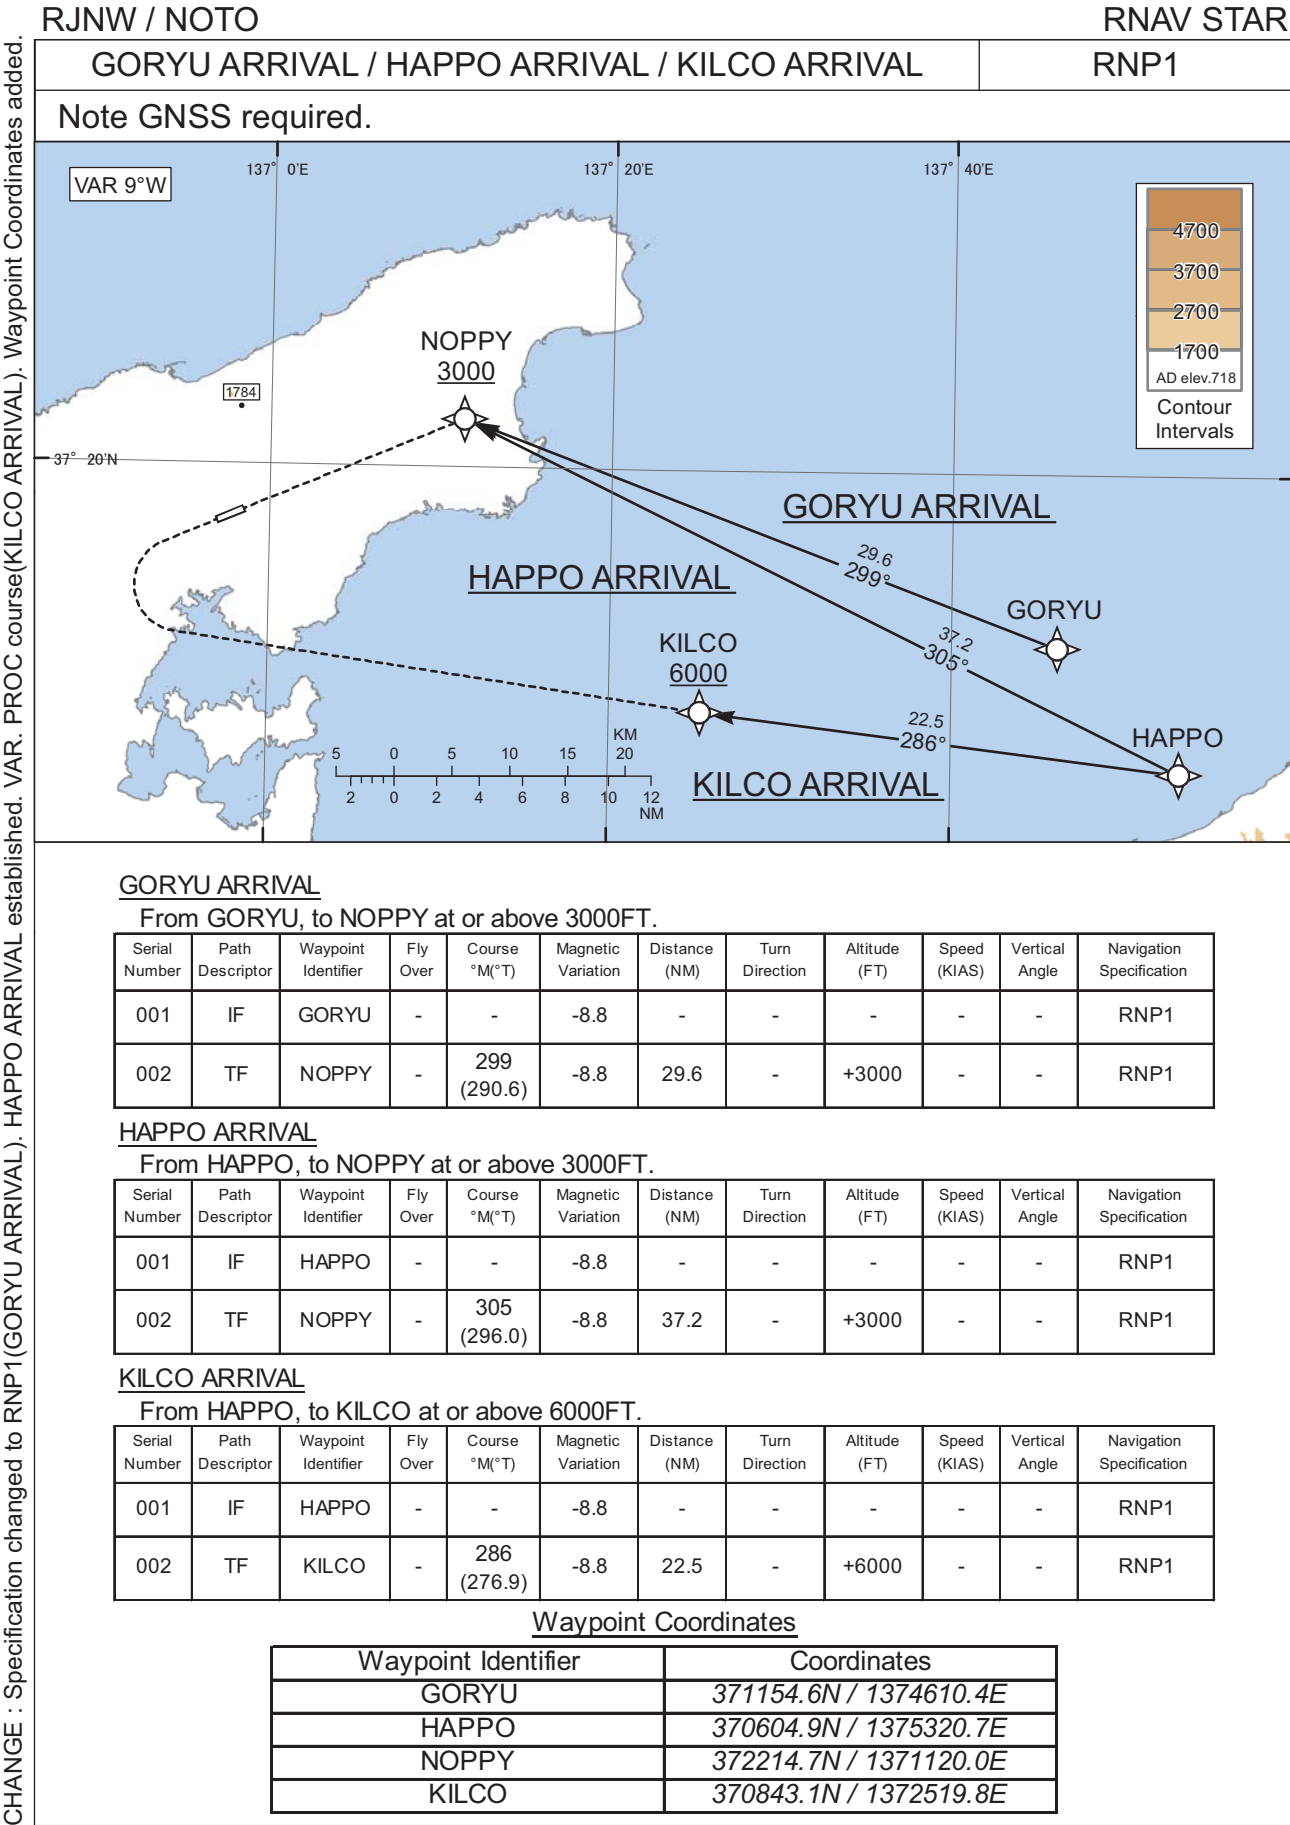


INSTRUMENT APPROACH CHART

RJNW / NOTO

ILS Z or LOC Z RWY25

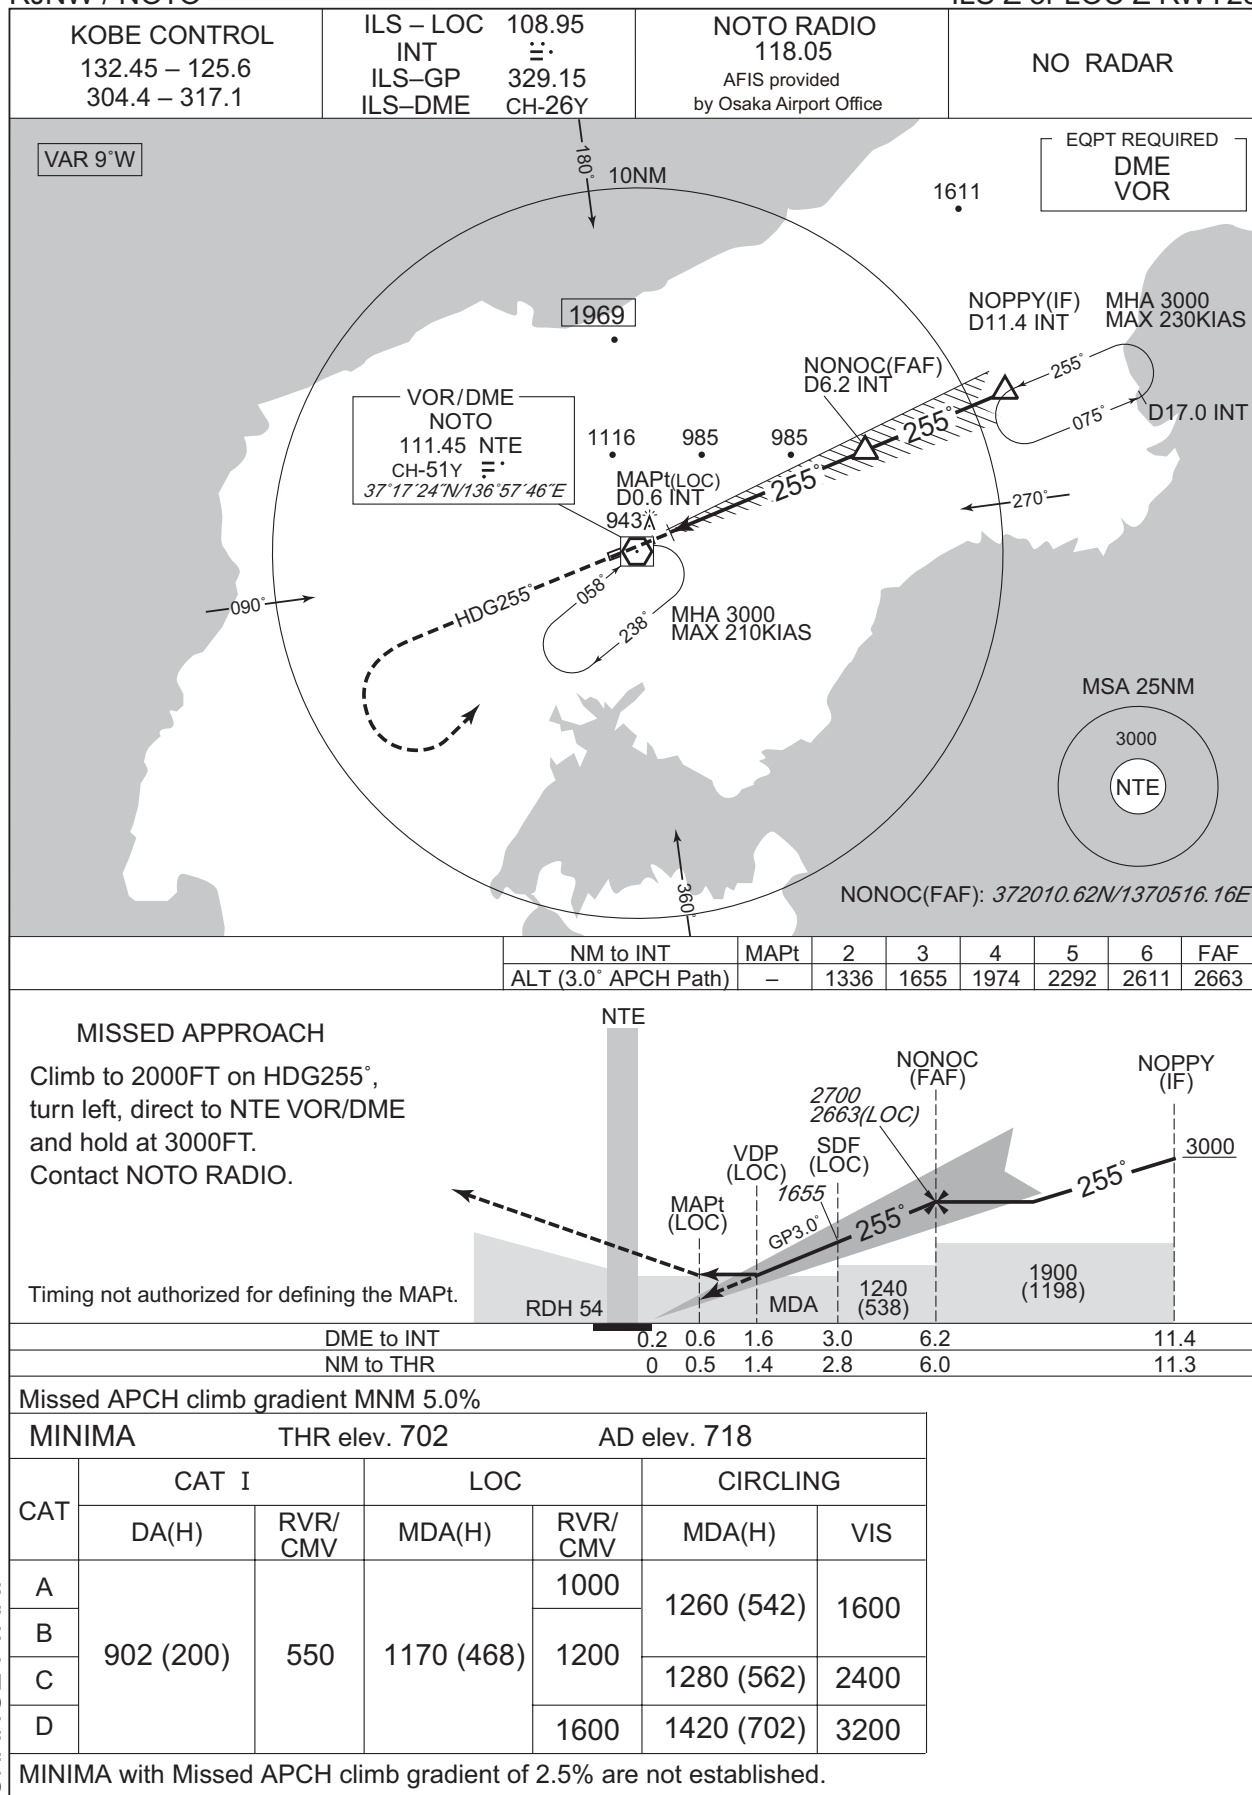

INSTRUMENT APPROACH CHART

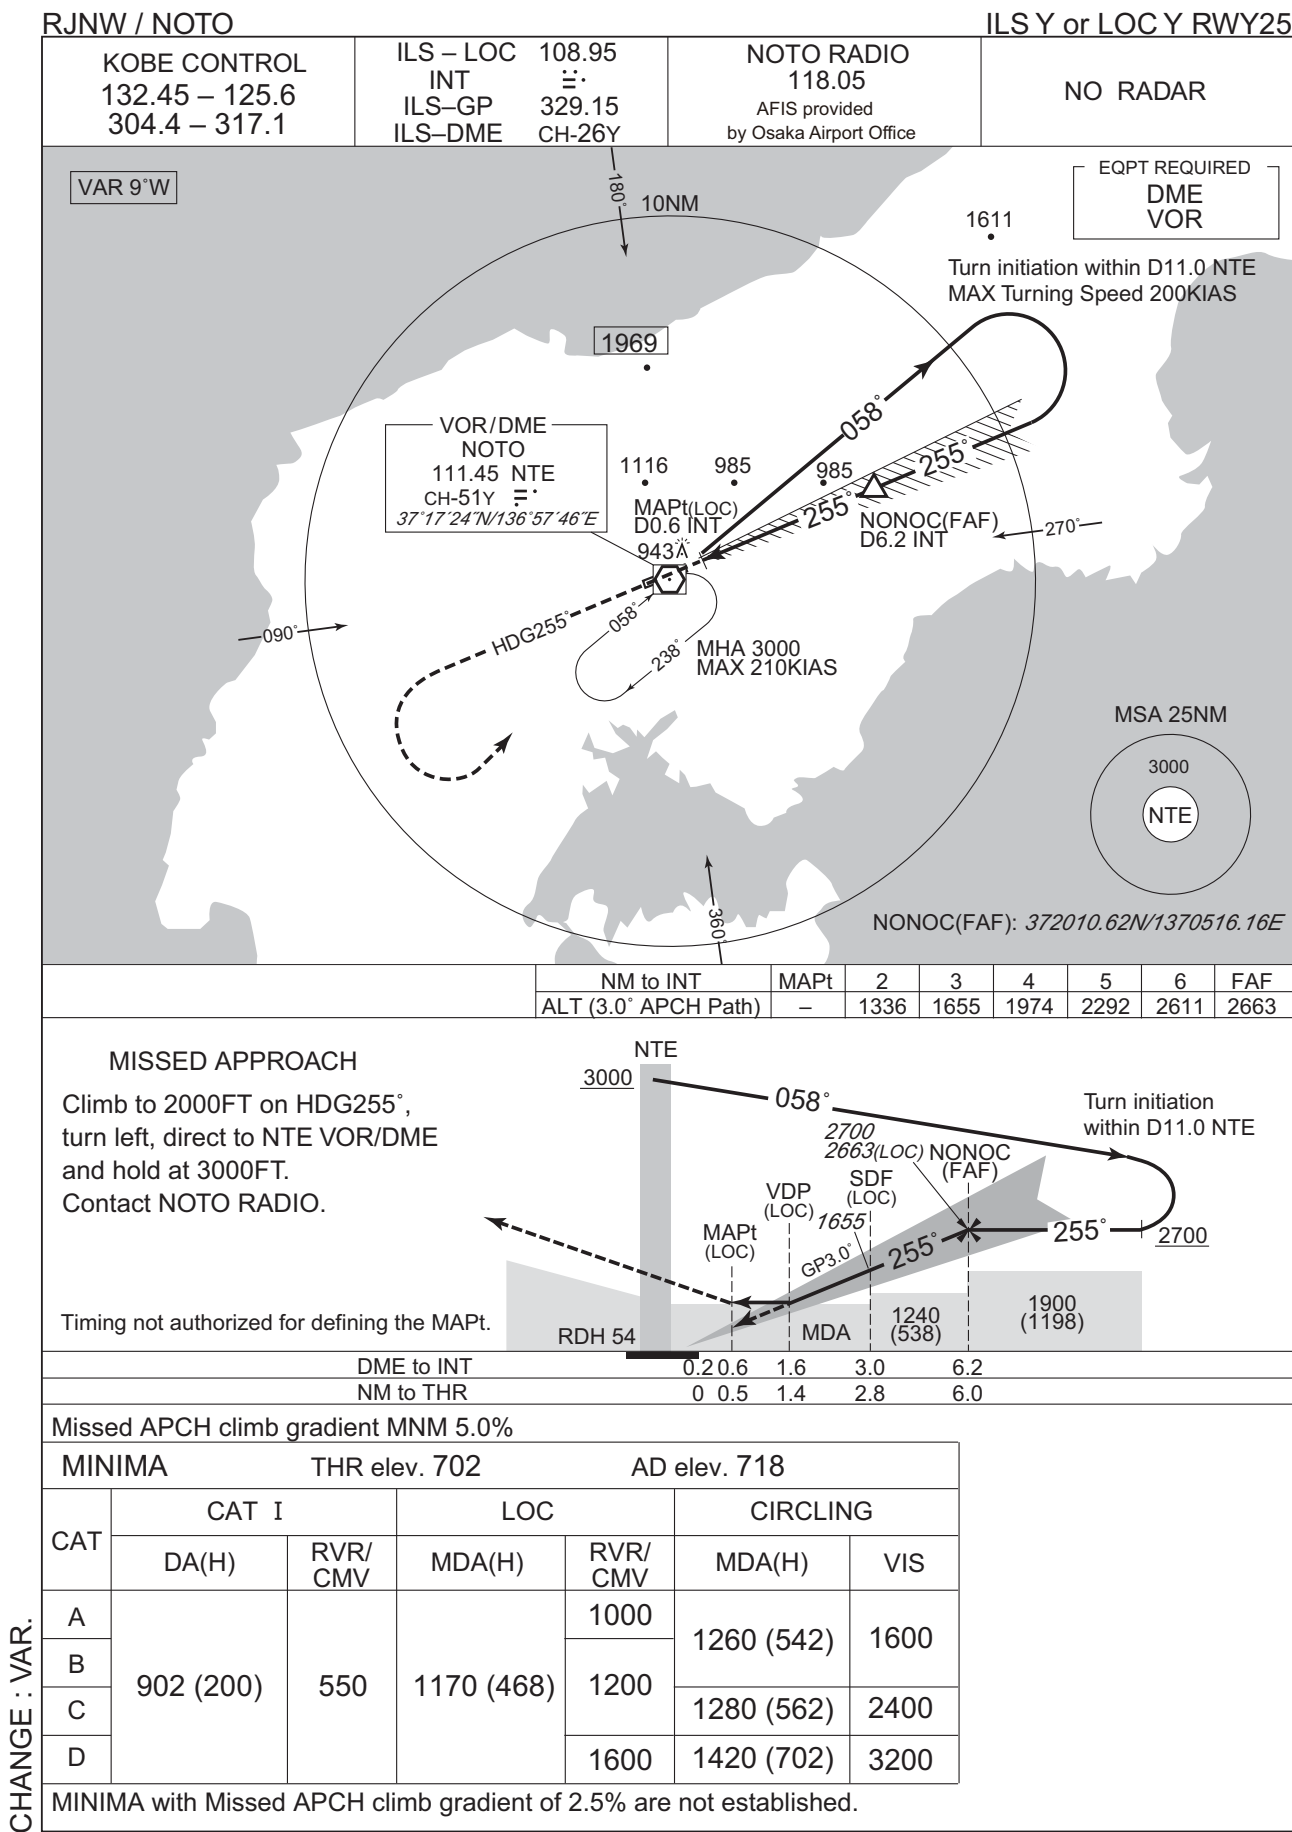


INSTRUMENT APPROACH CHART

RJNW / NOTO

VOR RWY25


KOBE CONTROL 132.45 – 125.6 304.4 – 317.1	NOTO VOR/DME 111.45 NTE CH-51Y <i>37°17'24"N/136°57'46"E</i>	NOTO RADIO 118.05 AFIS provided by Osaka Airport Office	NO RADAR
---	---	--	----------

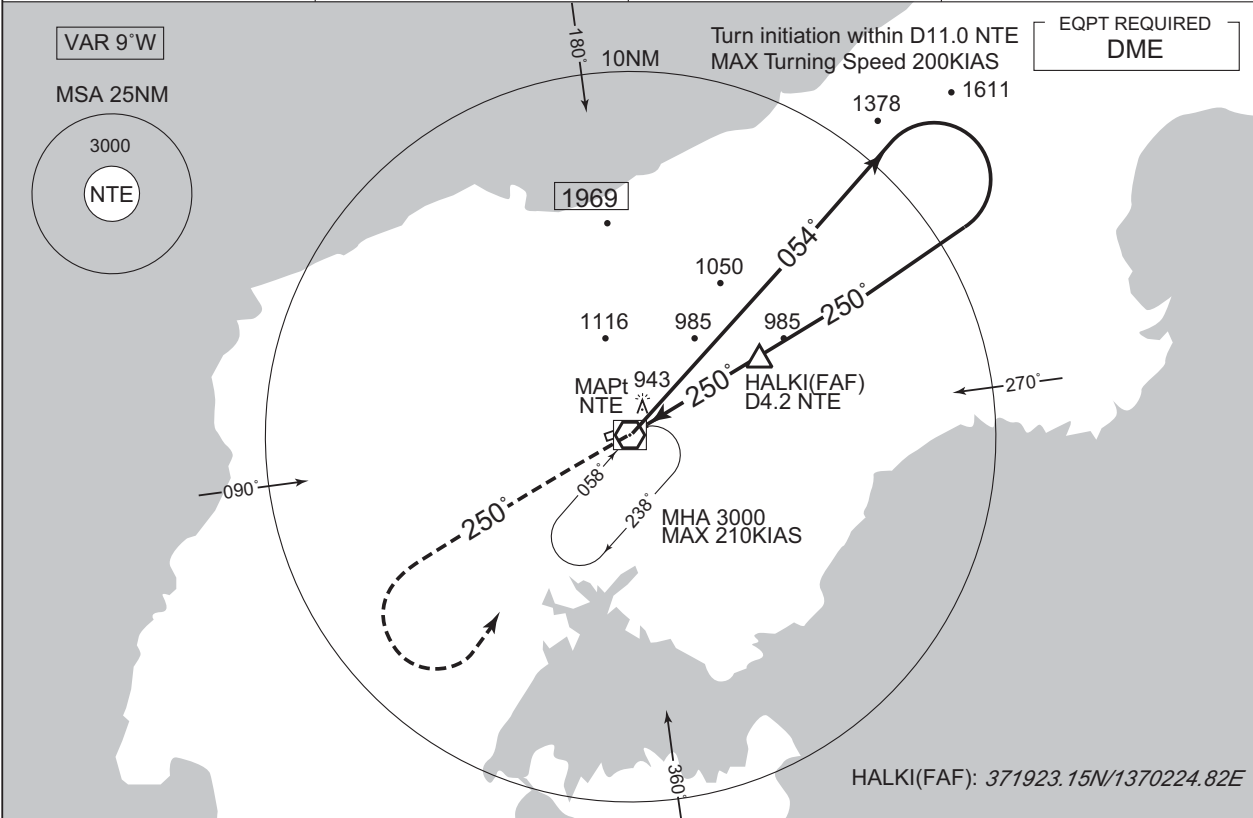

NM to NTE	MAPt	3	4	FAF
ALT (3.0° APCH Path)	–	1515	1834	1898

MISSED APPROACH

Climb to 2000FT via NTE R250,
turn left, direct to NTE VOR/DME
and hold at 3000FT.
Contact NOTO RADIO.

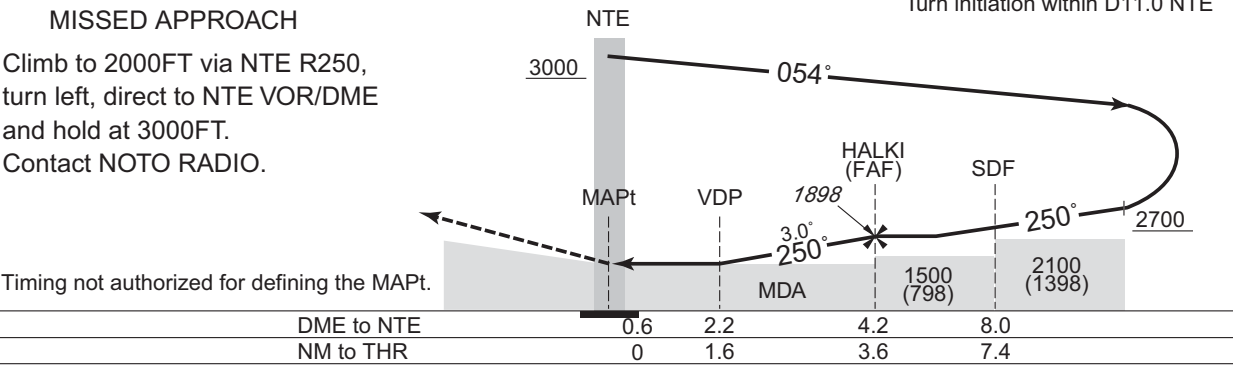


MINIMA		THR elev. 702	AD elev. 718	
CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	1240 (538)	1000	1260 (542)	1600
B		1200		
C			1280 (562)	2400
D		1600	1420 (702)	3200

CHANGE : VAR.


INSTRUMENT APPROACH CHART

RJNW / NOTO


VOR RWY07

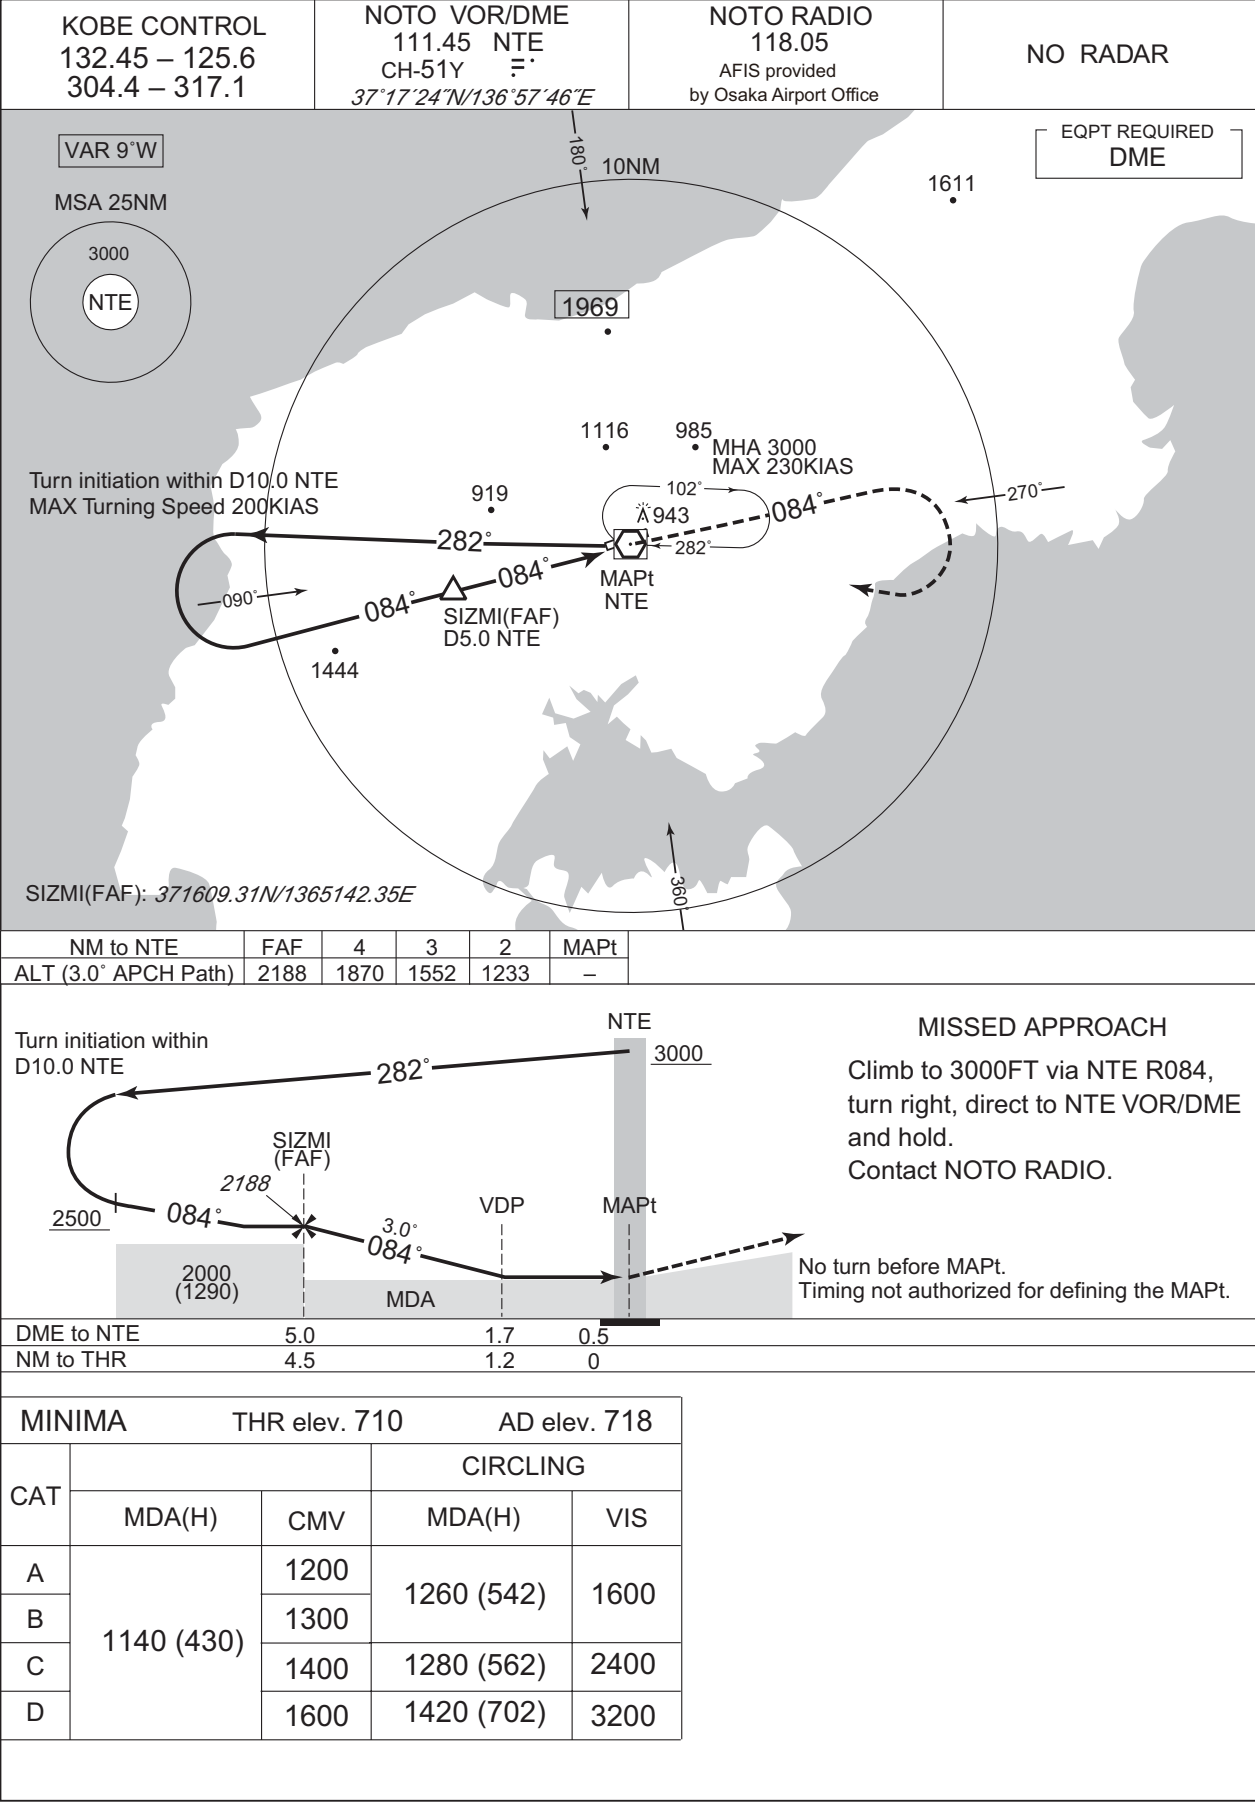

INSTRUMENT APPROACH CHART

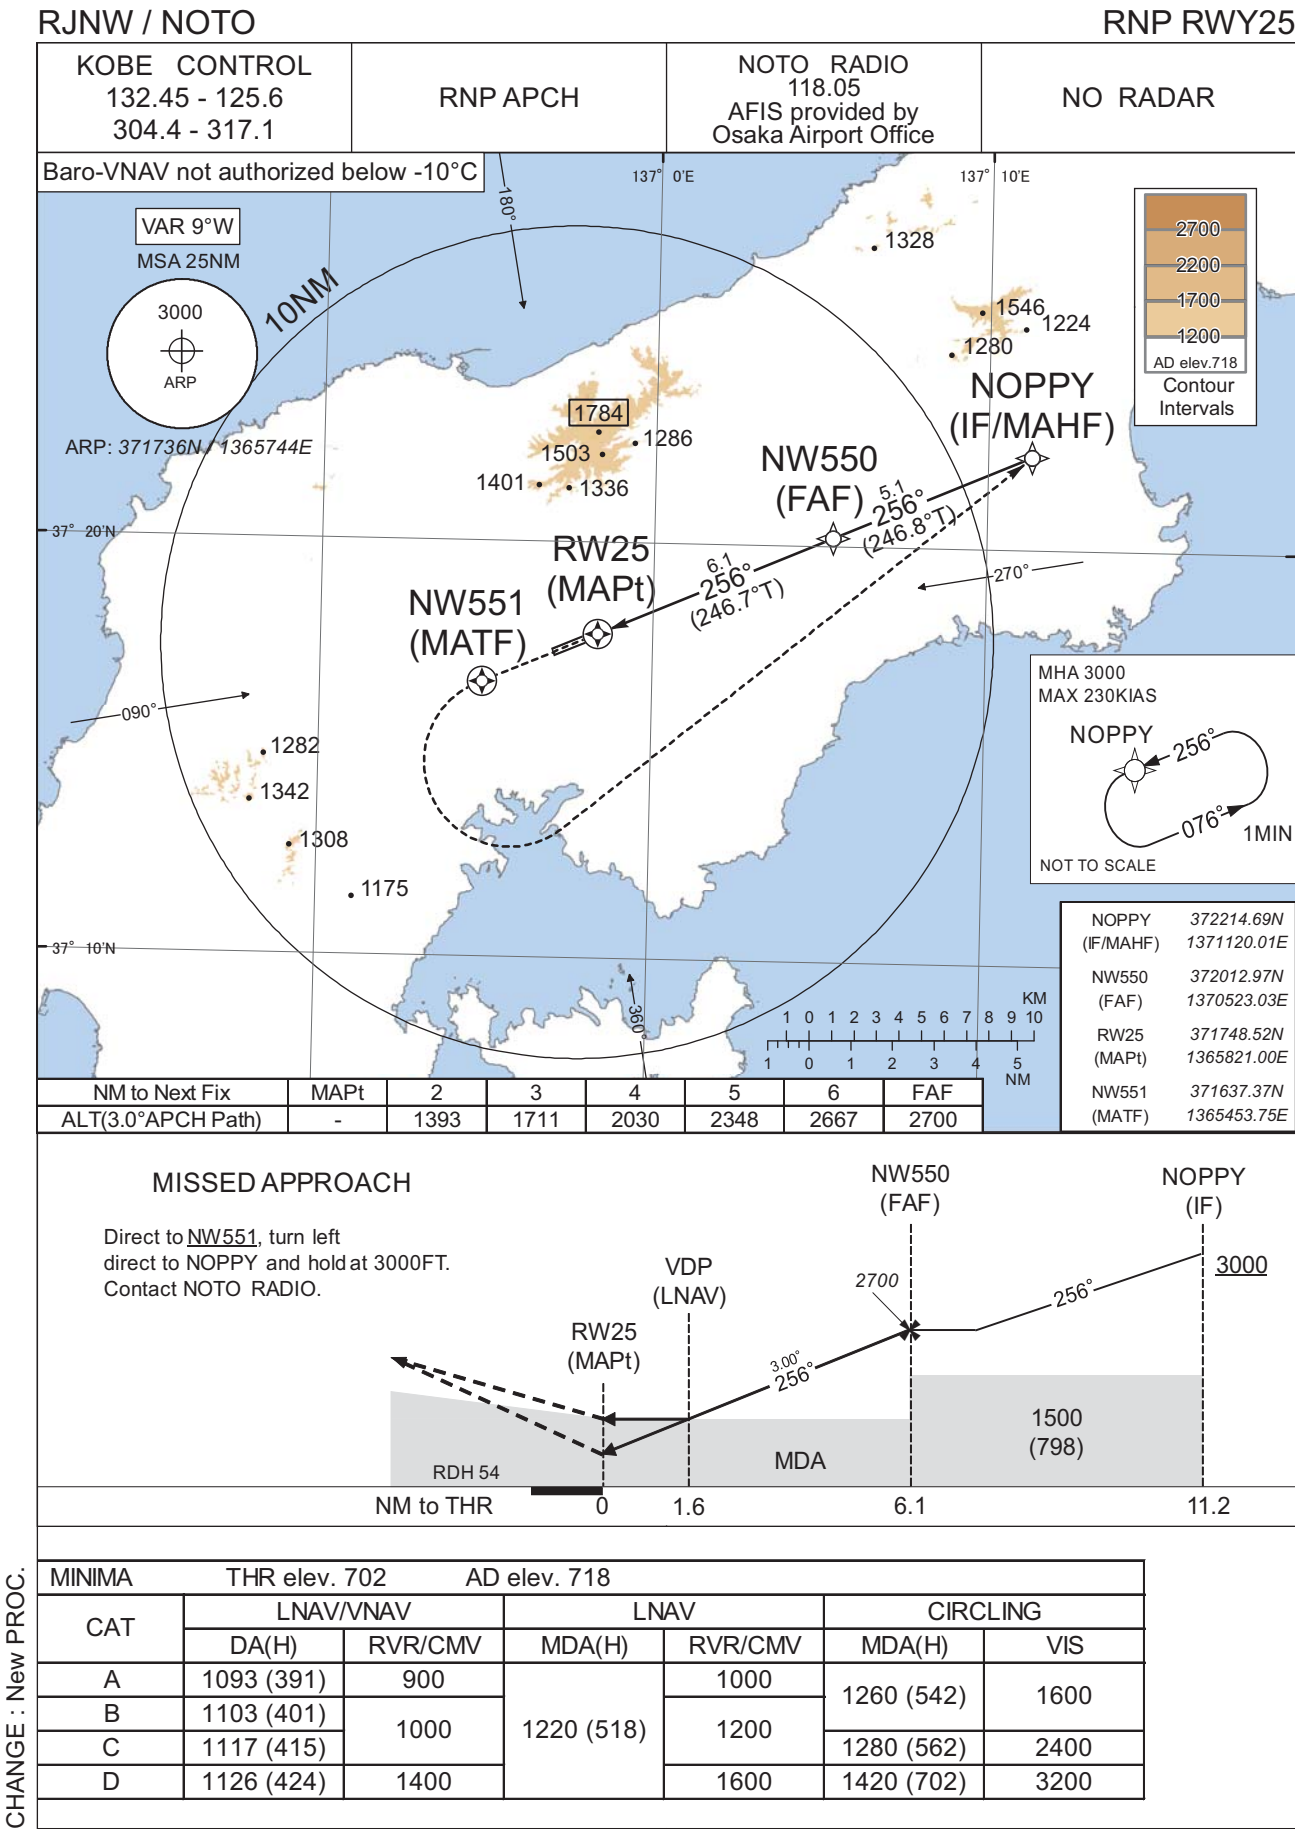

INSTRUMENT APPROACH CHART

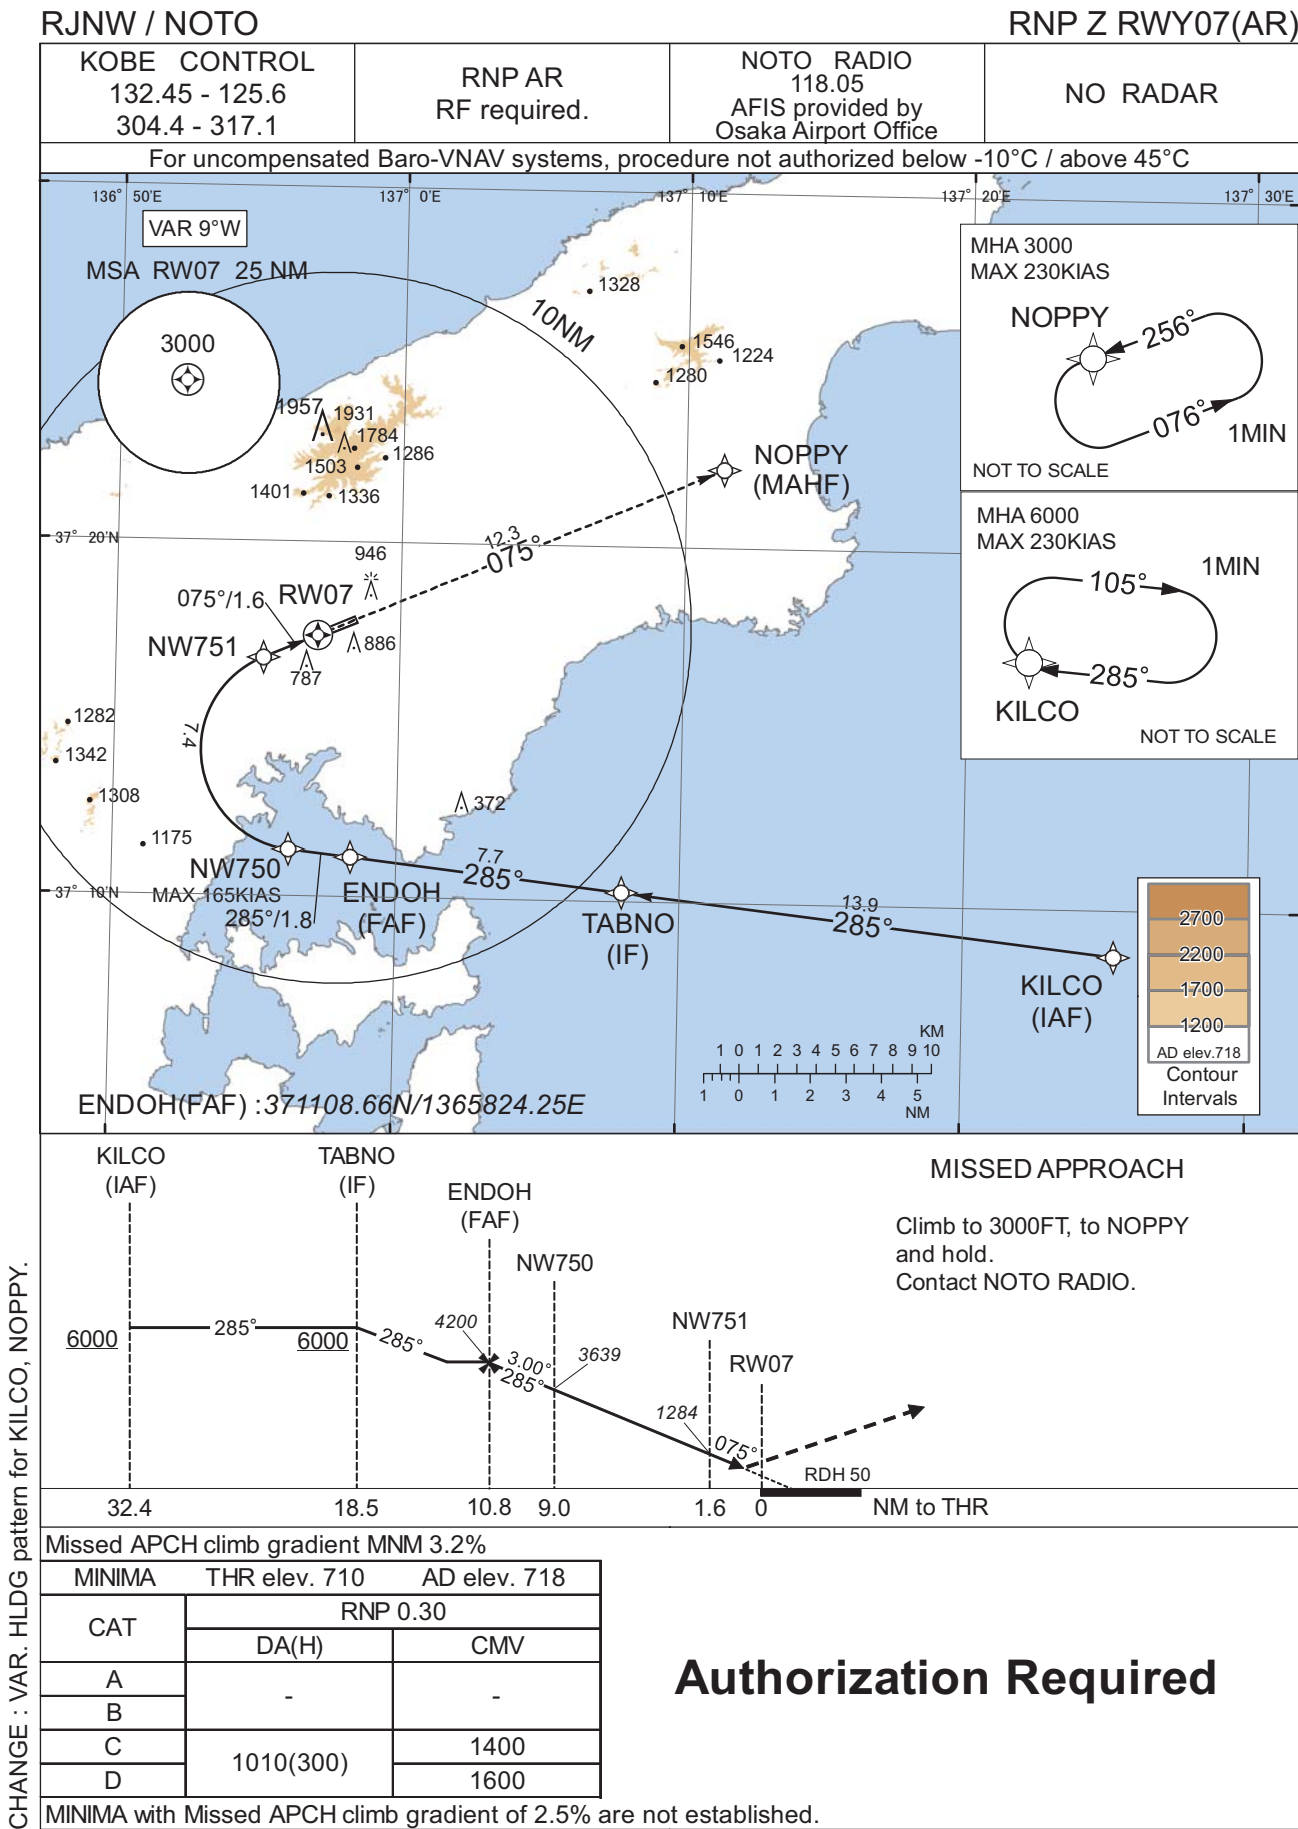

INSTRUMENT APPROACH CHART

RJNW / NOTO

RNP Z RWY07(AR)


Coding Table											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	KILCO	-	-	-8.8	-	-	+6000	-	-	-
002	TF	TABNO	-	285 (276.6)	-8.8	13.9	-	+6000	-	-	1.0
003	TF	ENDOH	-	285 (276.4)	-8.8	7.7	-	4200	-	-	1.0
004	TF	NW750	-	285 (276.3)	-8.8	1.8	-	3639	-165	-3.00	0.3
005	RF Center: NWRF1 r=2.82NM	NW751	-	-	-8.8	7.4	R	1284	-	-3.00	0.3
006	TF	RW07	Y	075 (066.6)	-8.8	1.6	-	760	-	-3.00/50	0.3
007	TF	NOPPY	-	075 (066.7)	-8.8	12.3	-	3000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	KILCO	285 (276.7)	-8.8	1.0 (-14000)	R	6000	FL140	-230 (-14000)	1.0
Hold	NOPPY	256 (246.9)	-8.8	1.0 (-14000)	L	3000	FL140	-230 (-14000)	1.0

Waypoint Coordinates			
Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
KILCO	370843.05N / 1372519.77E	NWRF1	371408.38N / 1365636.03E
TABNO	371017.61N / 1370758.59E		
ENDOH	371108.66N / 1365824.25E		
NW750	371120.22N / 1365612.92E		
NW751	371643.80N / 1365512.45E		
RW07	371722.92N / 1365706.38E		
NOPPY	372214.69N / 1371120.01E		

CHANGE : VAR. HLDG pattern for KILCO, NOPPY.

INSTRUMENT APPROACH CHART

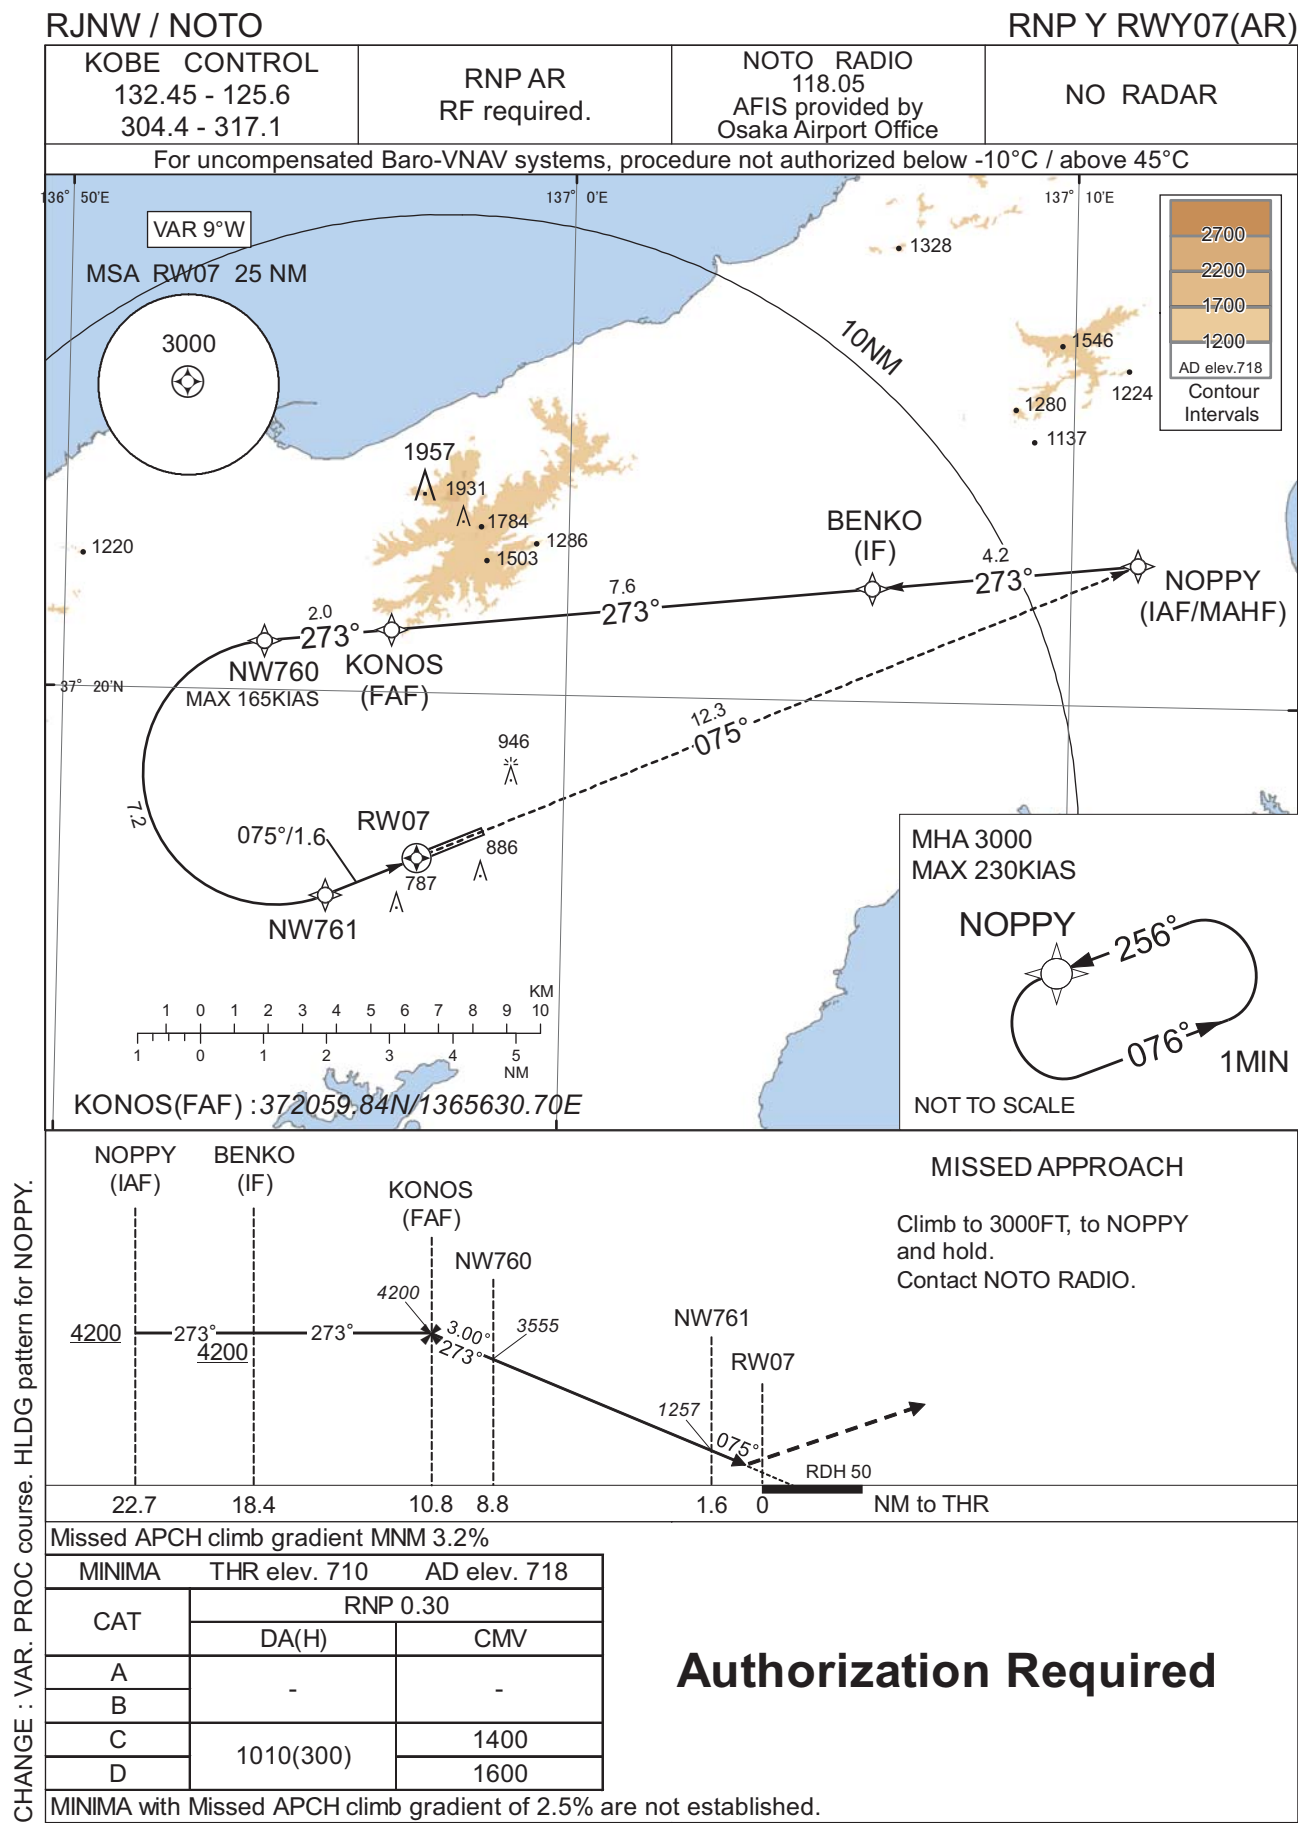

INSTRUMENT APPROACH CHART

RJNW / NOTO

RNP Y RWY07(AR)

Coding Table											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	NOPPY	-	-	-8.8	-	-	+4200	-	-	-
002	TF	BENKO	-	273 (264.0)	-8.8	4.2	-	+4200	-	-	1.0
003	TF	KONOS	-	273 (264.0)	-8.8	7.6	-	4200	-	-	1.0
004	TF	NW760	-	273 (263.9)	-8.8	2.0	-	3555	-165	-3.00	0.3
005	RF Center: NWRF2 r=2.10NM	NW761	-	-	-8.8	7.2	L	1257	-	-3.00	0.3
006	TF	RW07	Y	075 (066.6)	-8.8	1.6	-	760	-	-3.00/50	0.3
007	TF	NOPPY	-	075 (066.7)	-8.8	12.3	-	3000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	NOPPY	256 (246.9)	-8.8	1.0 (-14000)	L	3000	FL140	-230 (-14000)	1.0

Waypoint Coordinates



Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
NOPPY	372214.69N / 1371120.01E	NWRF2	371841.62N / 1365416.12E
BENKO	372148.26N / 1370603.41E		
KONOS	372059.84N / 1365630.70E		
NW760	372046.91N / 1365359.30E		
NW761	371645.85N / 1365518.43E		
RW07	371722.92N / 1365706.38E		
NOPPY	372214.69N / 1371120.01E		

CHANGE : VAR. PROC course. HLDG pattern for NOPPY.

INSTRUMENT APPROACH CHART

RJNW / NOTO

RNP X RWY07

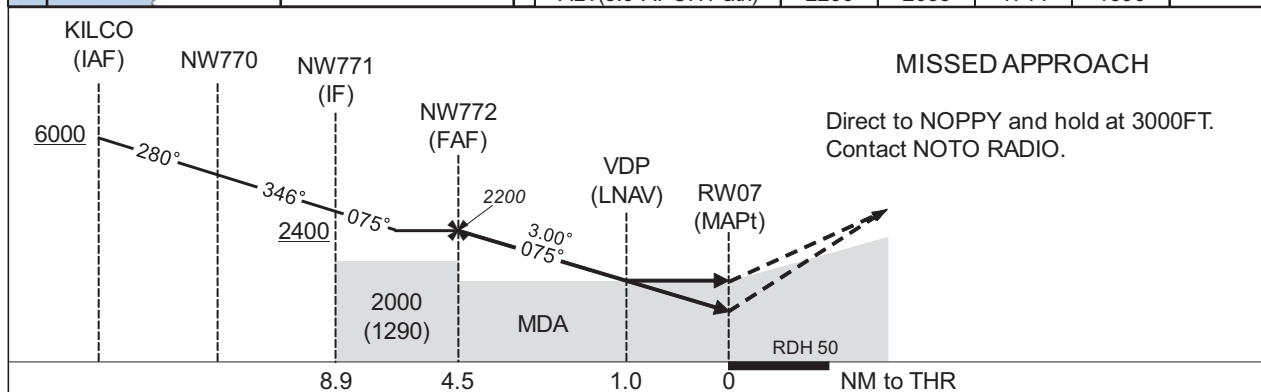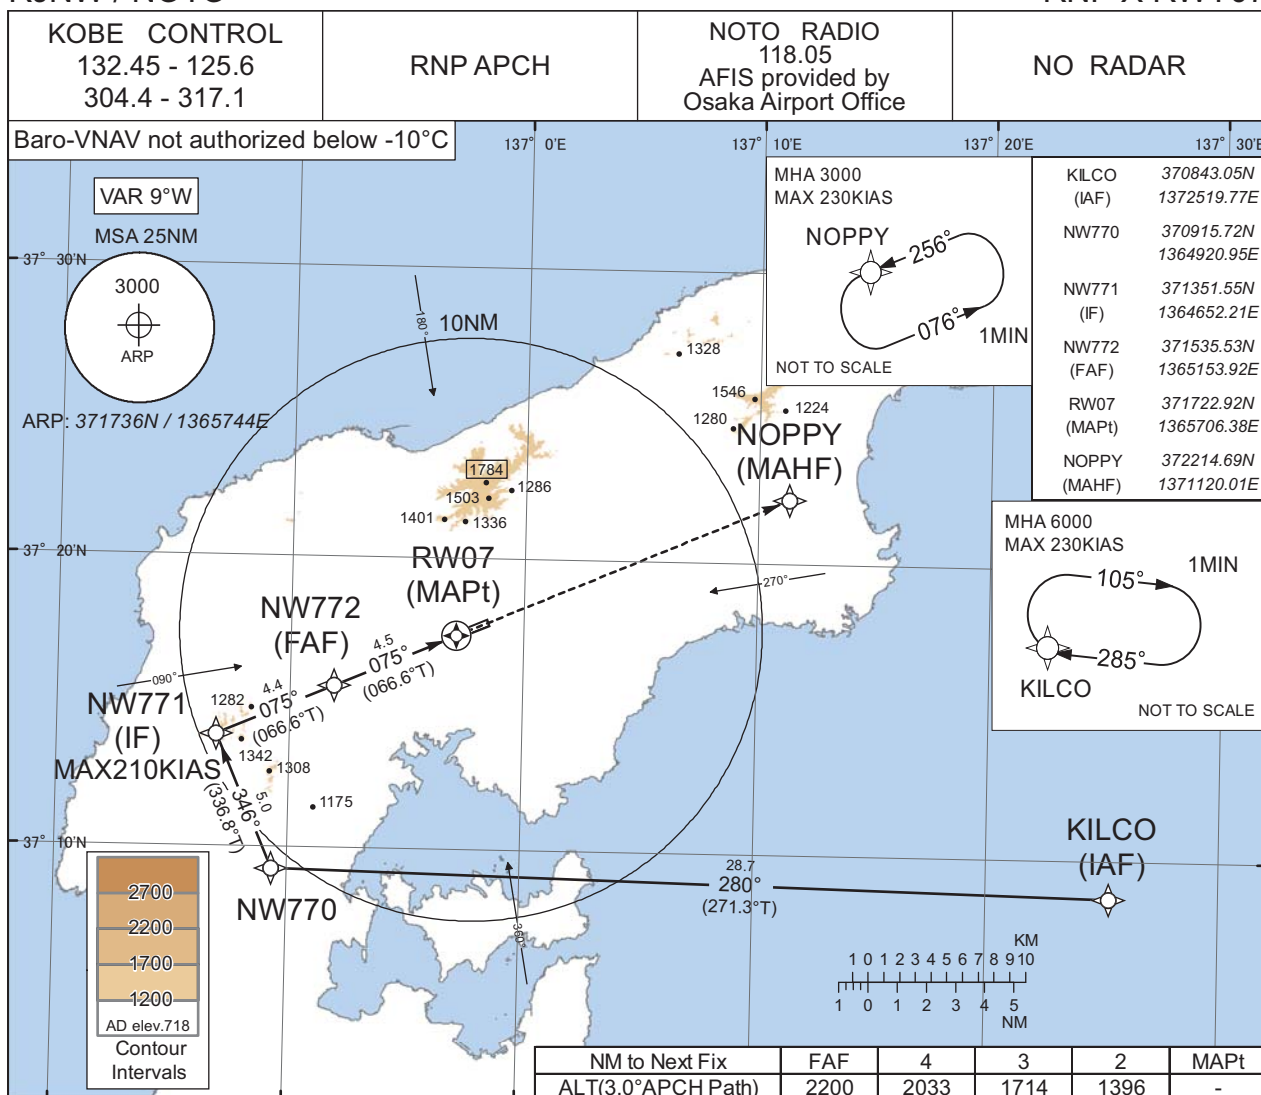

Missed APCH climb gradient MNM 3.0%


MINIMA	THR elev. 710	AD elev. 718				
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	962 (252)	1000	1060 (350)	1200	1260 (542)	1600
B		1100		1300		
C	972 (262)	1200	1070 (360)	1400	1280 (562)	2400
D	1001 (291)	1400	1080 (370)	1600	1420 (702)	3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : New PROC.

RJNW / NOTO

Visual REP

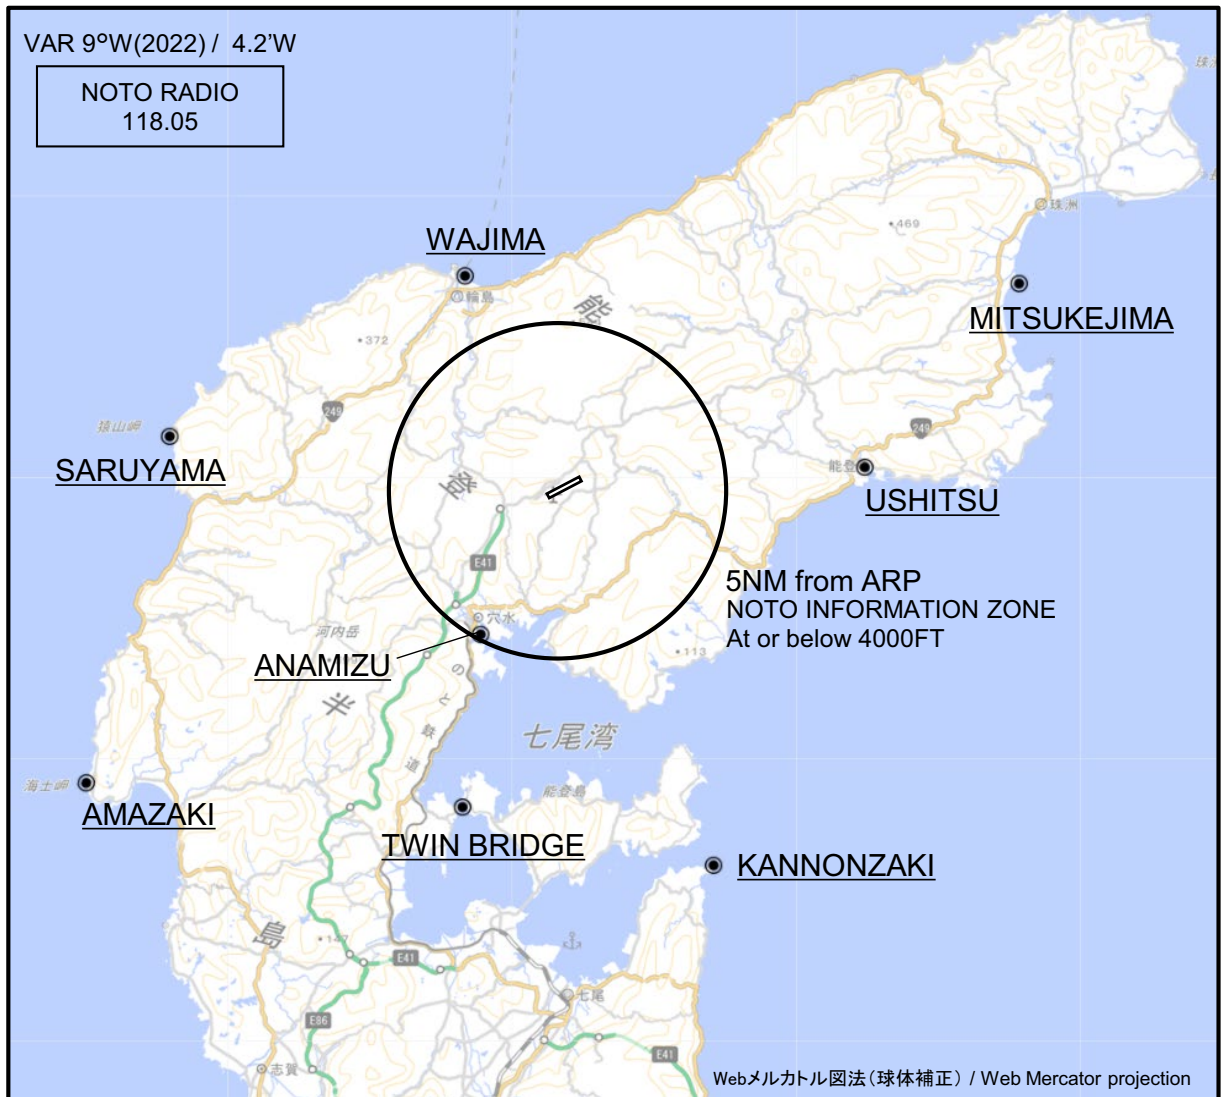


※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
見附島 Mitsukejima	066°T / 14.9NM	島 Island
宇出津 Ushitsu	085°T / 9.1NM	港 Harbor
観音崎 Kannonzaki	158°T / 12.0NM	岬 Cape
ツインブリッジ TwinBridge	197°T / 9.8NM	橋 Bridge
穴水 Anamizu	210°T / 4.6NM	港 Harbor
海士崎 Amazaki	238°T / 16.5NM	岬 Cape
猿山 Saruyama	278°T / 11.7NM	岬 Cape
輪島 Wajima	335°T / 7.0NM	港 Harbor

RJNW / NOTO

Minimum Vectoring Altitude CHART

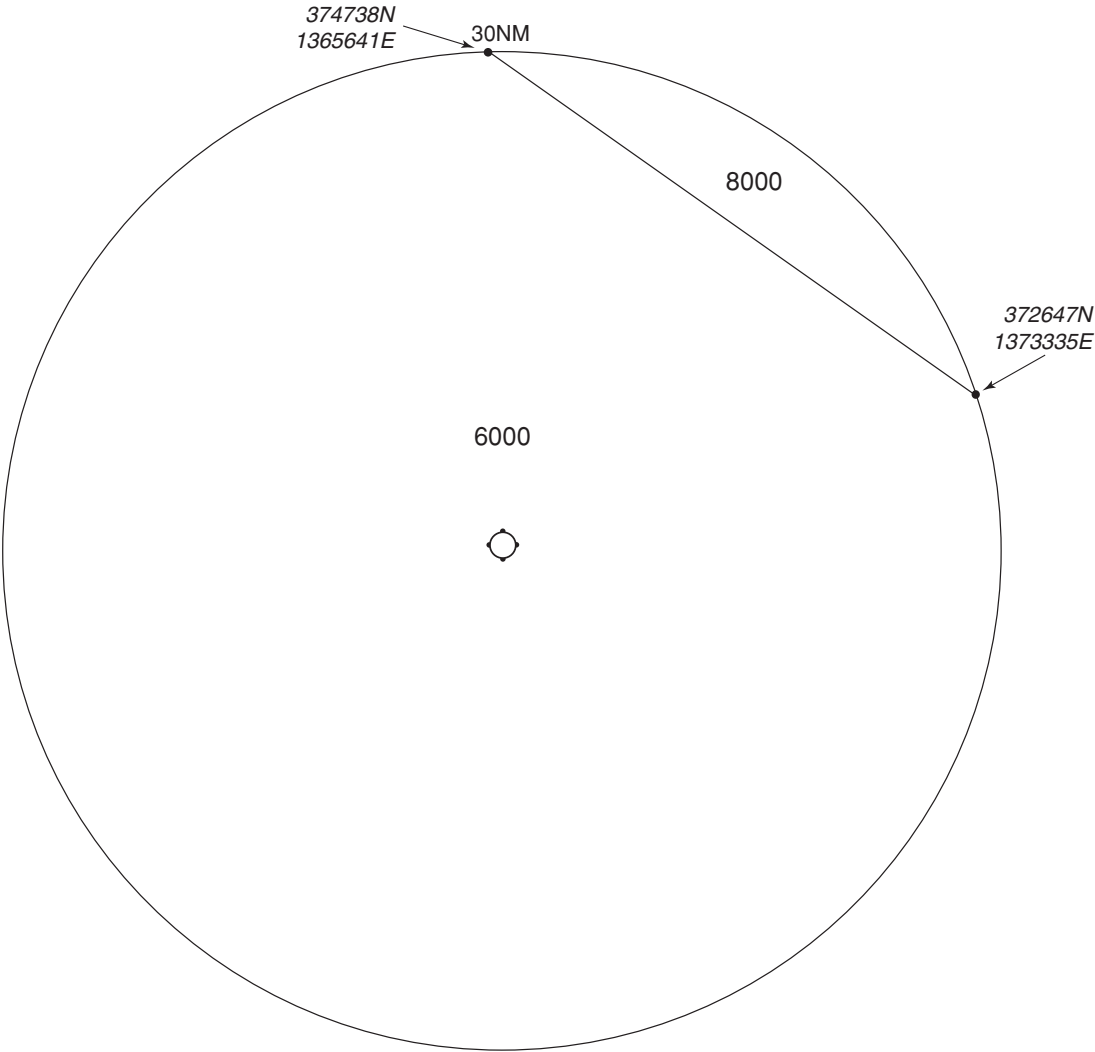

CENTER : 371736N/1365744E (ARP)