


[illegible]

## RJSI / HANAMAKI

SID

...to intercept and proceed via HPE R010 to OHSHU.

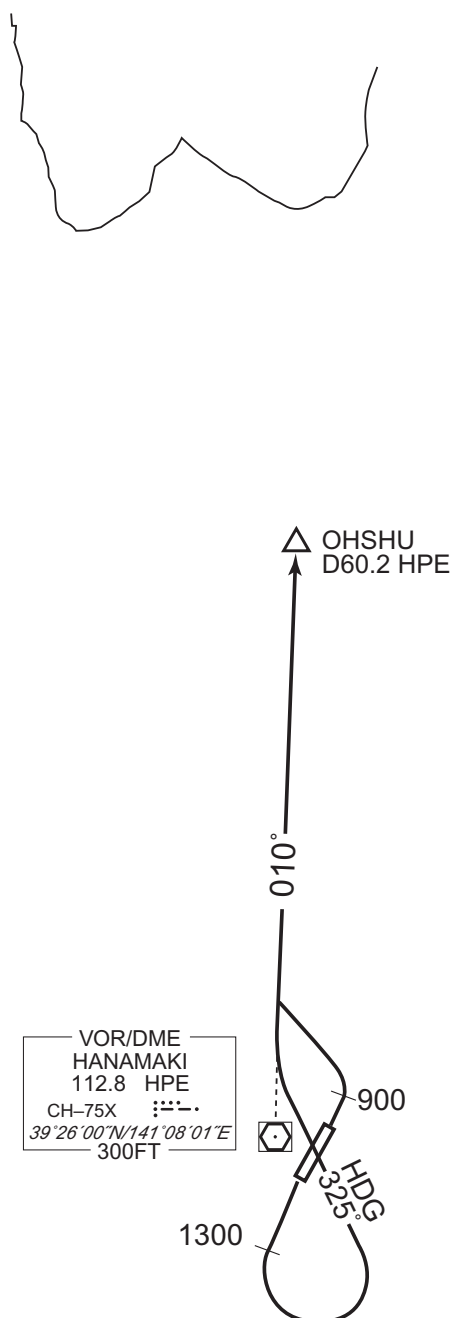

CHANGE : PROC course. PROC renamed.

## STANDARD DEPARTURE CHART -INSTRUMENT

RJSI / HANAMAKI

SID

NIIGATA SIX DEPARTURE

RWY 02 : Climb RWY HDG to HPE 3.5 DME, turn right...

RWY 20 : Climb RWY HDG to HPE 3.5 DME, turn left...

...proceed to HPE VOR/DME, via HPE R236 to HPE 50.0DME(GTC 79.6DME),  
via GTC R055 to GTC.Cross HPE VOR/DME at or above 2200 FT, cross HPE R236/50.0DME  
(GTC R055/79.6DME) at or above 12000 FT.


Note RWY02 : 4.5% climb gradient required up to 2400FT.

OBST ALT 1641FT located at 4.1NM 091° FM end of RWY02.

RWY20 : 3.9% climb gradient required up to 1100FT.

OBST ALT 722FT located at 2.8NM 166° FM end of RWY20.

CHANGE : SID renamed. ALT restriction at R236/D50.0 HPE, R055/D79.6 GTC.

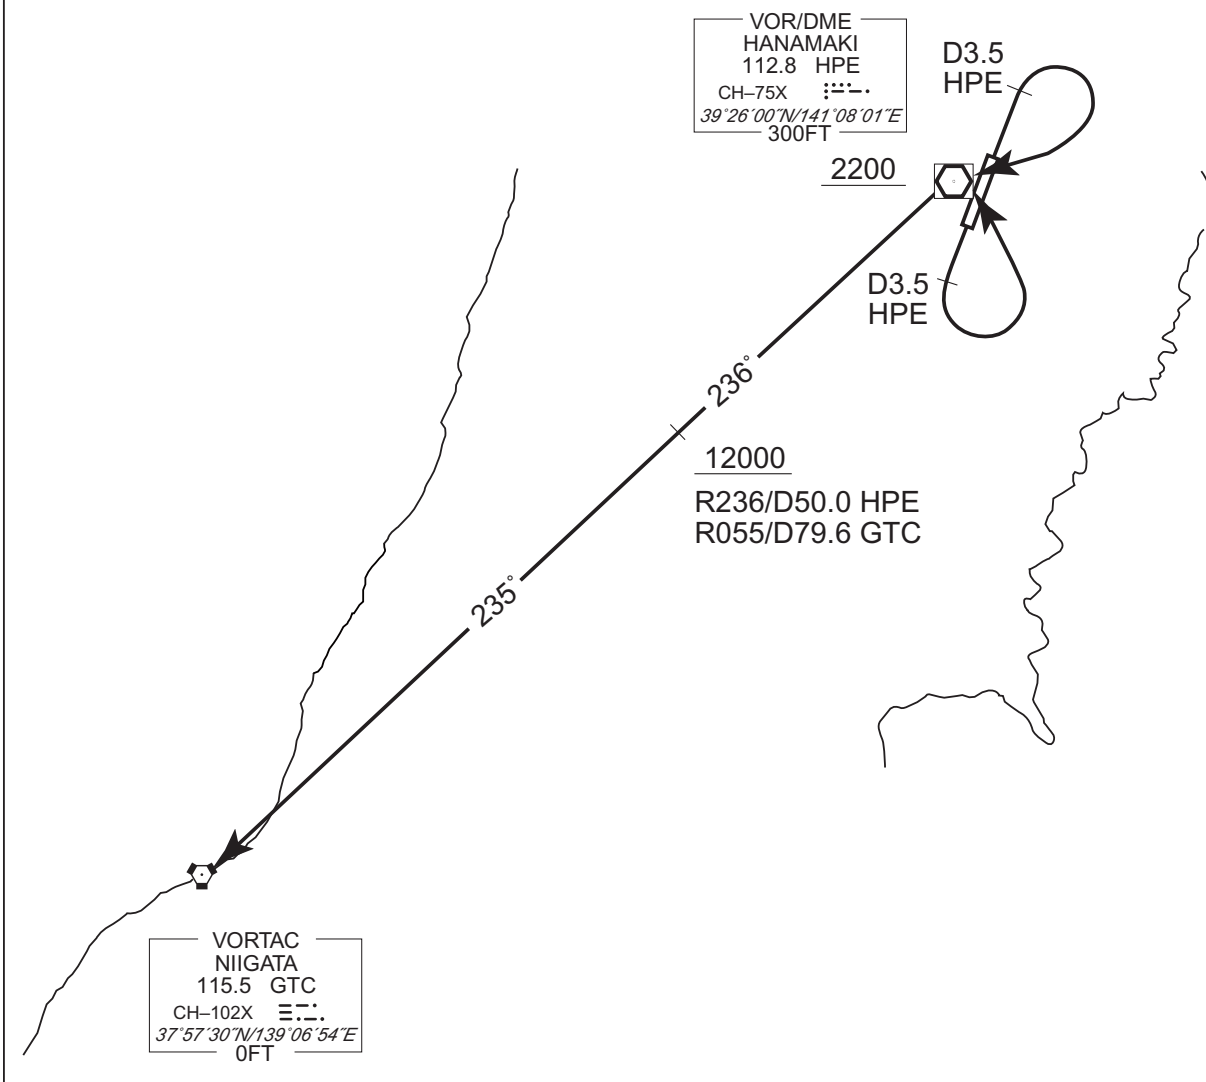

STANDARD DEPARTURE CHART -INSTRUMENT

RJSI / HANAMAKI

SID

HANAMAKI REVERSAL THREE DEPARTURE

RWY 02 : Climb RWY HDG to 700FT, via HPE R022 to 6.0 DME, turn right...


RWY 20 : Climb RWY HDG to 700FT, via HPE R195 to 6.0 DME, turn left...

...direct to HPE VOR/DME.

Cross HPE VOR/DME at or above 6000FT.

Note RWY02 : 5.0% climb gradient required up to 3200FT.

OBST ALT 2691FT located at 9.1NM 058° FM end of RWY02.

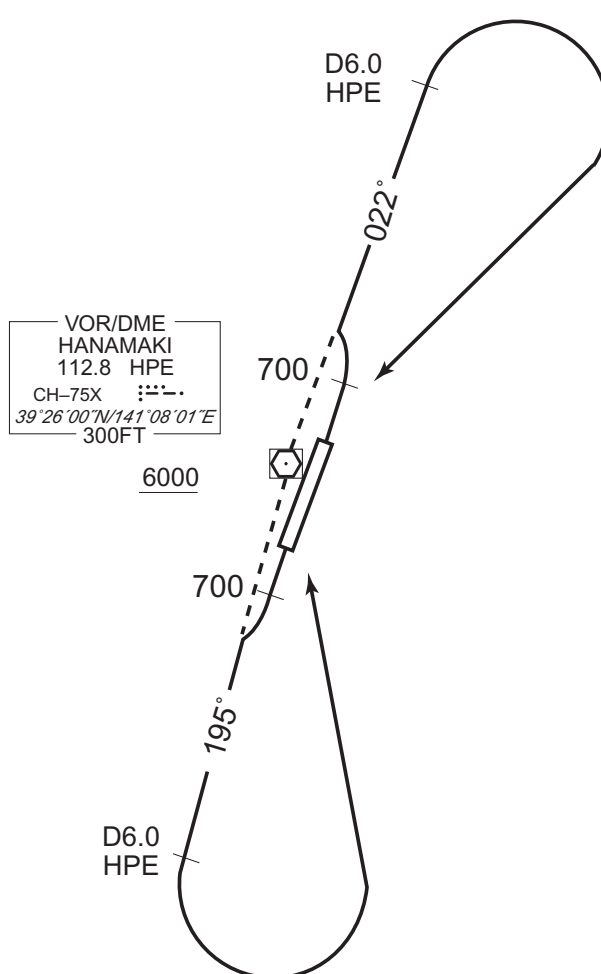

CHANGE : PROC renamed. PROC course.

STANDARD DEPARTURE CHART -INSTRUMENT

RJSI / HANAMAKI

RNAV SID

SAMBO ONE DEPARTURE

RNP1

Note GNSS required.

VAR 9°W

RWY02 : Climb on HDG 019° at or above 700FT, direct to AKARI, to DASCO to SAMBO.

RWY20 : Climb on HDG 199° at or above 1300FT, turn right direct to SI010, to AKARI, to DASCO to SAMBO .

Note RWY02 : 4.0% climb gradient required up to 700FT.  
OBST ALT 318FT located at 0.2NM 061° FM end of RWY02.

RWY20 : 4.0% climb gradient required up to 2700FT.  
OBST ALT 3117FT located at 10.7NM 351° FM end of RWY20.

RWY02

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course M(T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|-------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 019 (010.7) | -8.7               | -             | -              | +700          | -            | -              | RNP1                     |
| 002           | DF              | AKARI               | -        | -           | -8.7               | -             | -              | -             | -            | -              | RNP1                     |
| 003           | TF              | DASCO               | -        | 009 (000.8) | -8.7               | 7.9           | -              | -             | -            | -              | RNP1                     |
| 004           | TF              | SAMBO               | -        | 345 (336.6) | -8.7               | 21.9          | -              | -             | -            | -              | RNP1                     |

RWY20

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course M(T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|-------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | VA              | -                   | -        | 199 (190.7) | -8.7               | -             | -              | +1300         | -            | -              | RNP1                     |
| 002           | DF              | SI010               | -        | -           | -8.7               | -             | R              | -             | -            | -              | RNP1                     |
| 003           | TF              | AKARI               | -        | 025 (016.7) | -8.7               | 17.0          | -              | -             | -            | -              | RNP1                     |
| 004           | TF              | DASCO               | -        | 009 (000.8) | -8.7               | 7.9           | -              | -             | -            | -              | RNP1                     |
| 005           | TF              | SAMBO               | -        | 345 (336.6) | -8.7               | 21.9          | -              | -             | -            | -              | RNP1                     |

CHANGE : Description of VOR/DME.

STANDARD DEPARTURE CHART -INSTRUMENT


RJSI / HANAMAKI

RNAV SID

HANKA ONE DEPARTURE

RNP1

Note GNSS required

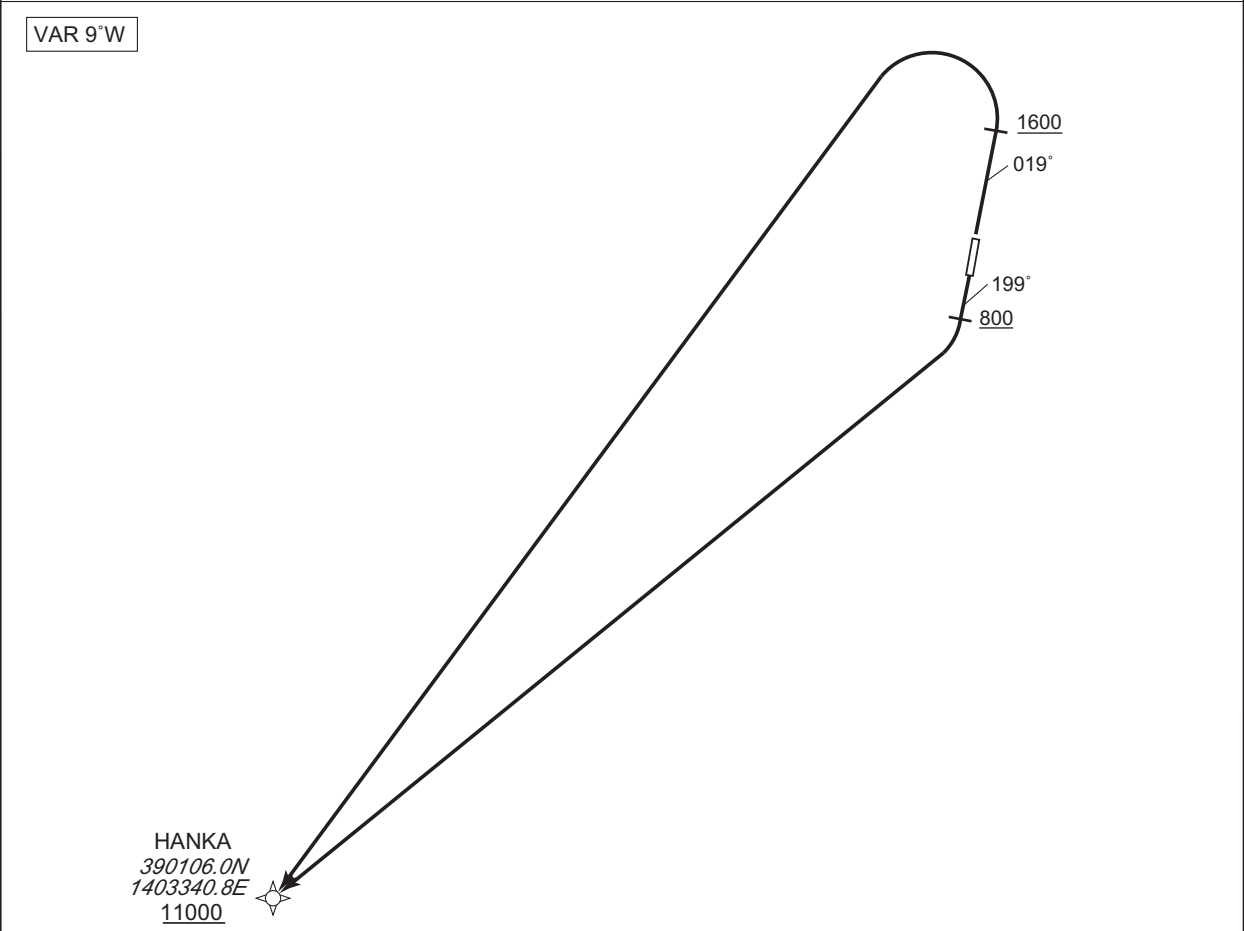

RWY02 : Climb on HDG 019° at or above 1600FT, turn left direct to HANKA, at or above 11000FT.  
RWY20 : Climb on HDG 199° at or above 800FT, turn right direct to HANKA, at or above 11000FT.  
Note RWY02: 5.0% climb gradient required up to 3600FT.  
OBST ALT 1936FT located at 5.5NM 340° FM end of RWY02.  
OBST ALT 3018FT located at 8.2NM 310° FM end of RWY02.  
RWY20: 5.0% climb gradient required up to 5400FT.  
OBST ALT 4593FT located at 18.2NM 227° FM end of RWY20.  
OBST ALT 5151FT located at 20.8NM 232° FM end of RWY20.

CHANGE : Description of VOR/DME:

| RWY02         |                 |                     |          |               |                    |               |                |               |              |                |                          |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001           | VA              | —                   | —        | 019 (010.7)   | -8.7               | —             | —              | +1600         | —            | —              | RNP1                     |
| 002           | DF              | HANKA               | —        | —             | -8.7               | —             | L              | +11000        | —            | —              | RNP1                     |


| RWY20         |                 |                     |          |               |                    |               |                |               |              |                |                          |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001           | VA              | —                   | —        | 199 (190.7)   | -8.7               | —             | —              | +800          | —            | —              | RNP1                     |
| 002           | DF              | HANKA               | —        | —             | -8.7               | —             | R              | +11000        | —            | —              | RNP1                     |

**INTENTIONALLY LEFT BLANK**

STANDARD ARRIVAL CHART - INSTRUMENT

RJSI / HANAMAKI

RNAV STAR RWY02

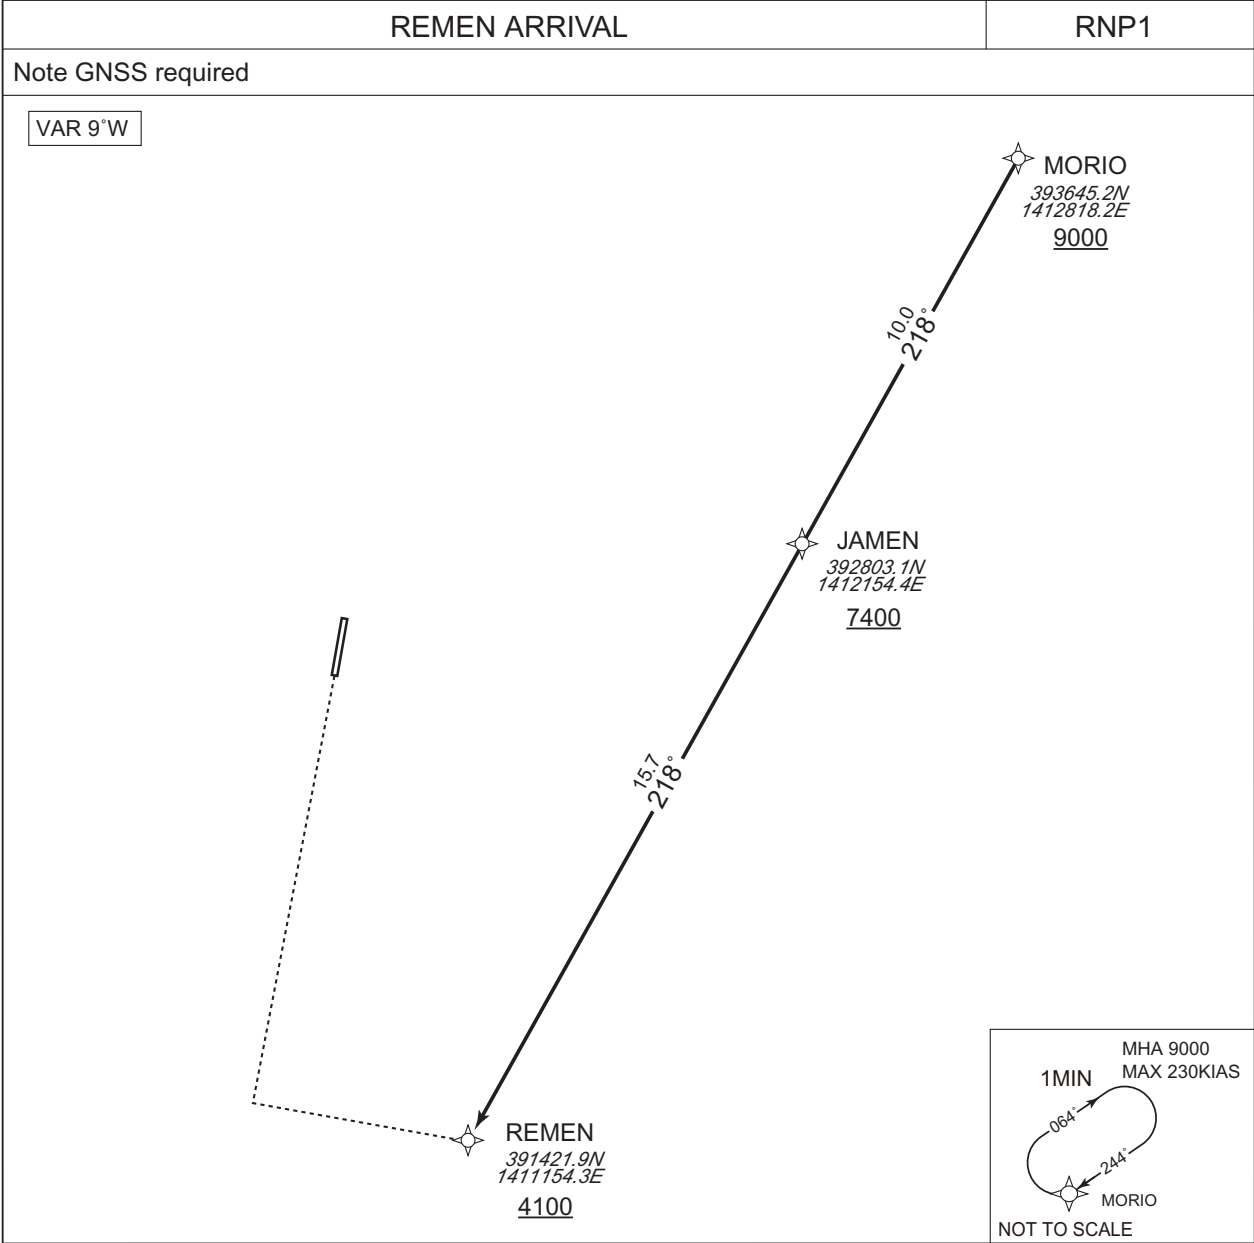

From MORIO at or above 9000FT, to JAMEN at or above 7400FT, to REMEN at or above 4100FT.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | MORIO               | —        | —             | -8.8               | —             | —              | +9000         | —            | —              | RNP1                     |
| 002           | TF              | JAMEN               | —        | 218 (209.6)   | -8.8               | 10.0          | —              | +7400         | —            | —              | RNP1                     |
| 003           | TF              | REMEN               | —        | 218 (209.5)   | -8.8               | 15.7          | —              | +4100         | —            | —              | RNP1                     |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|--------------|--------------------------|
| Hold | MORIO               | 244 (235.7)           | -8.8               | 1.0(-14000)         | R              | 9000                  | FL140                 | -230(-14000) | RNP1                     |


CHANGE : Description of VOR/DME.



STANDARD ARRIVAL CHART - INSTRUMENT

RJSI / HANAMAKI

RNAV STAR RWY20

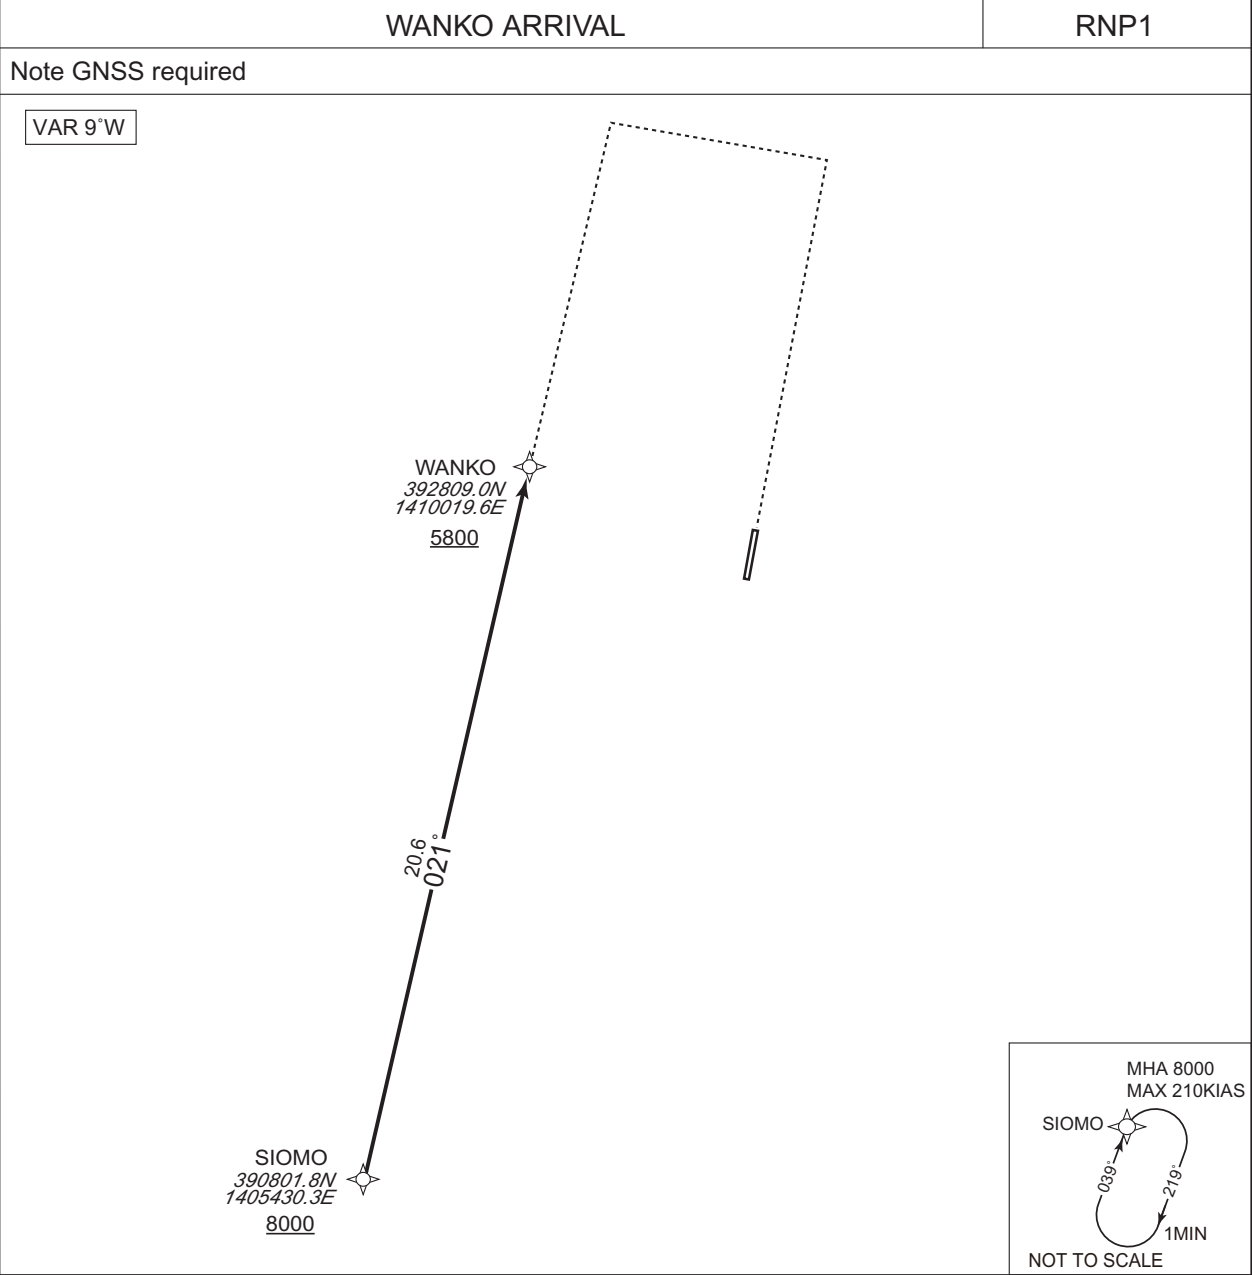


From SIOMO at or above 8000FT, to WANKO at or above 5800FT.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | SIOMO               | —        | —             | -8.8               | —             | —              | +8000         | —            | —              | RNP1                     |
| 002           | TF              | WANKO               | —        | 021 (012.6)   | -8.8               | 20.6          | —              | +5800         | —            | —              | RNP1                     |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|--------------|--------------------------|
| Hold | SIOMO               | 039 (030.1)           | -8.8               | 1.0(-14000)         | R              | 8000                  | FL140                 | -210(-14000) | RNP1                     |

CHANGE : Description of VOR/DME.


STANDARD ARRIVAL CHART - INSTRUMENT

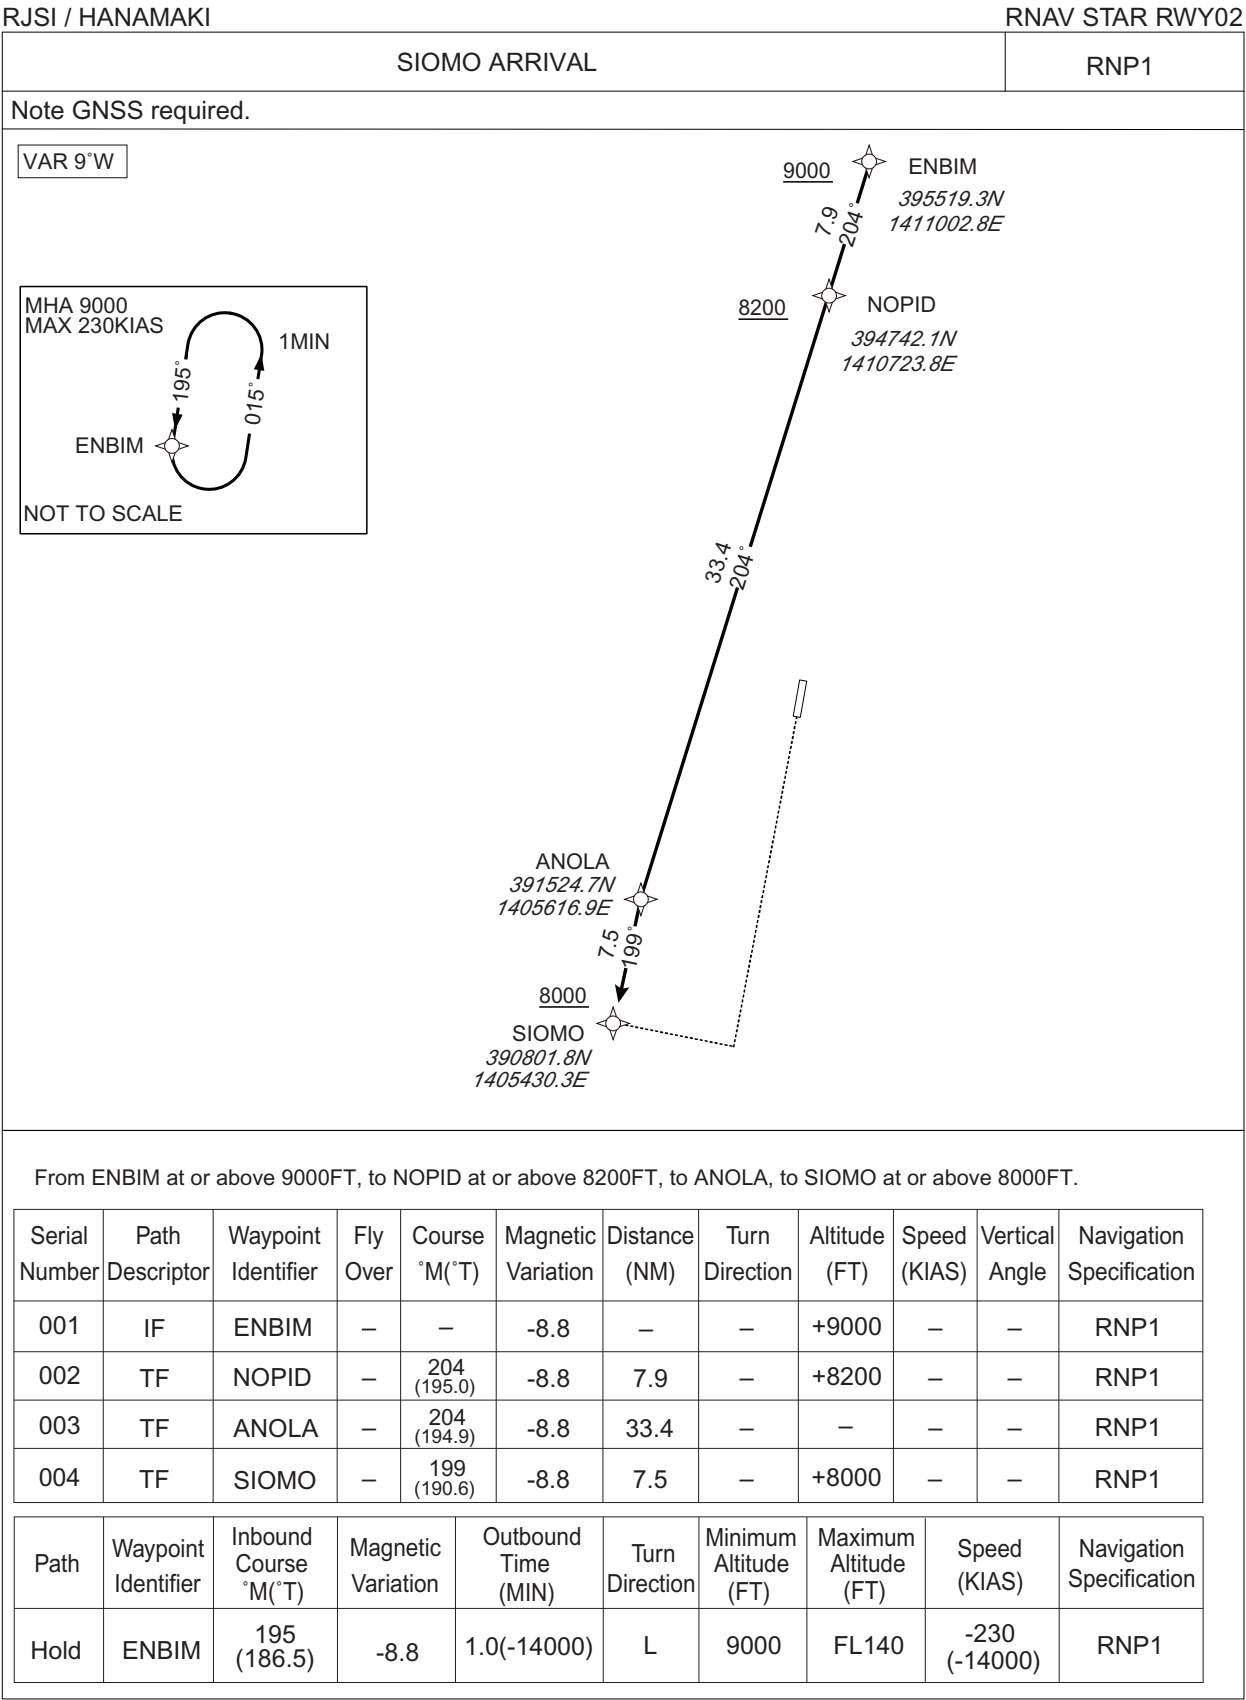

STANDARD ARRIVAL CHART - INSTRUMENT

RJSI / HANAMAKI

RNAV STAR RWY20

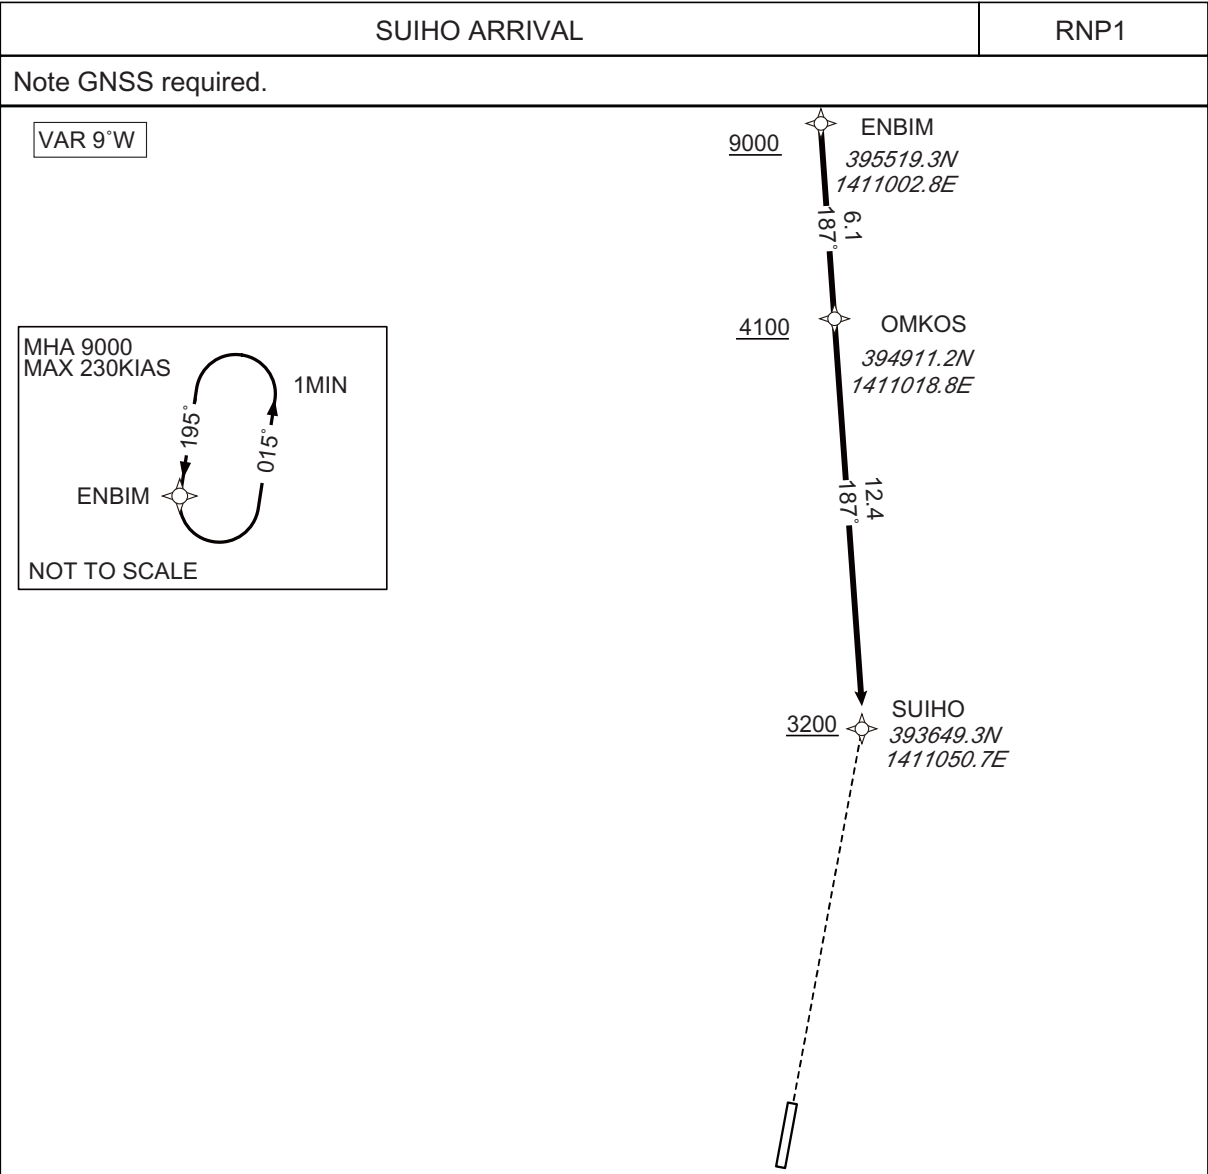

From ENBIM at or above 9000FT, to OMKOS at or above 4100FT, to SUIHO at or above 3200FT.


| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | ENBIM               | —        | —             | -8.8               | —             | —              | +9000         | —            | —              | RNP1                     |
| 002           | TF              | OMKOS               | —        | 187 (178.1)   | -8.8               | 6.1           | —              | +4100         | —            | —              | RNP1                     |
| 003           | TF              | SUIHO               | —        | 187 (178.1)   | -8.8               | 12.4          | —              | +3200         | —            | —              | RNP1                     |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)  | Navigation Specification |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|---------------|--------------------------|
| Hold | ENBIM               | 195 (186.5)           | -8.8               | 1.0(-14000)         | L              | 9000                  | FL140                 | -230 (-14000) | RNP1                     |

CHANGE : Description of VOR/DME.

STANDARD ARRIVAL CHART - INSTRUMENT

RJSI / HANAMAKI RNAV STAR RWY20

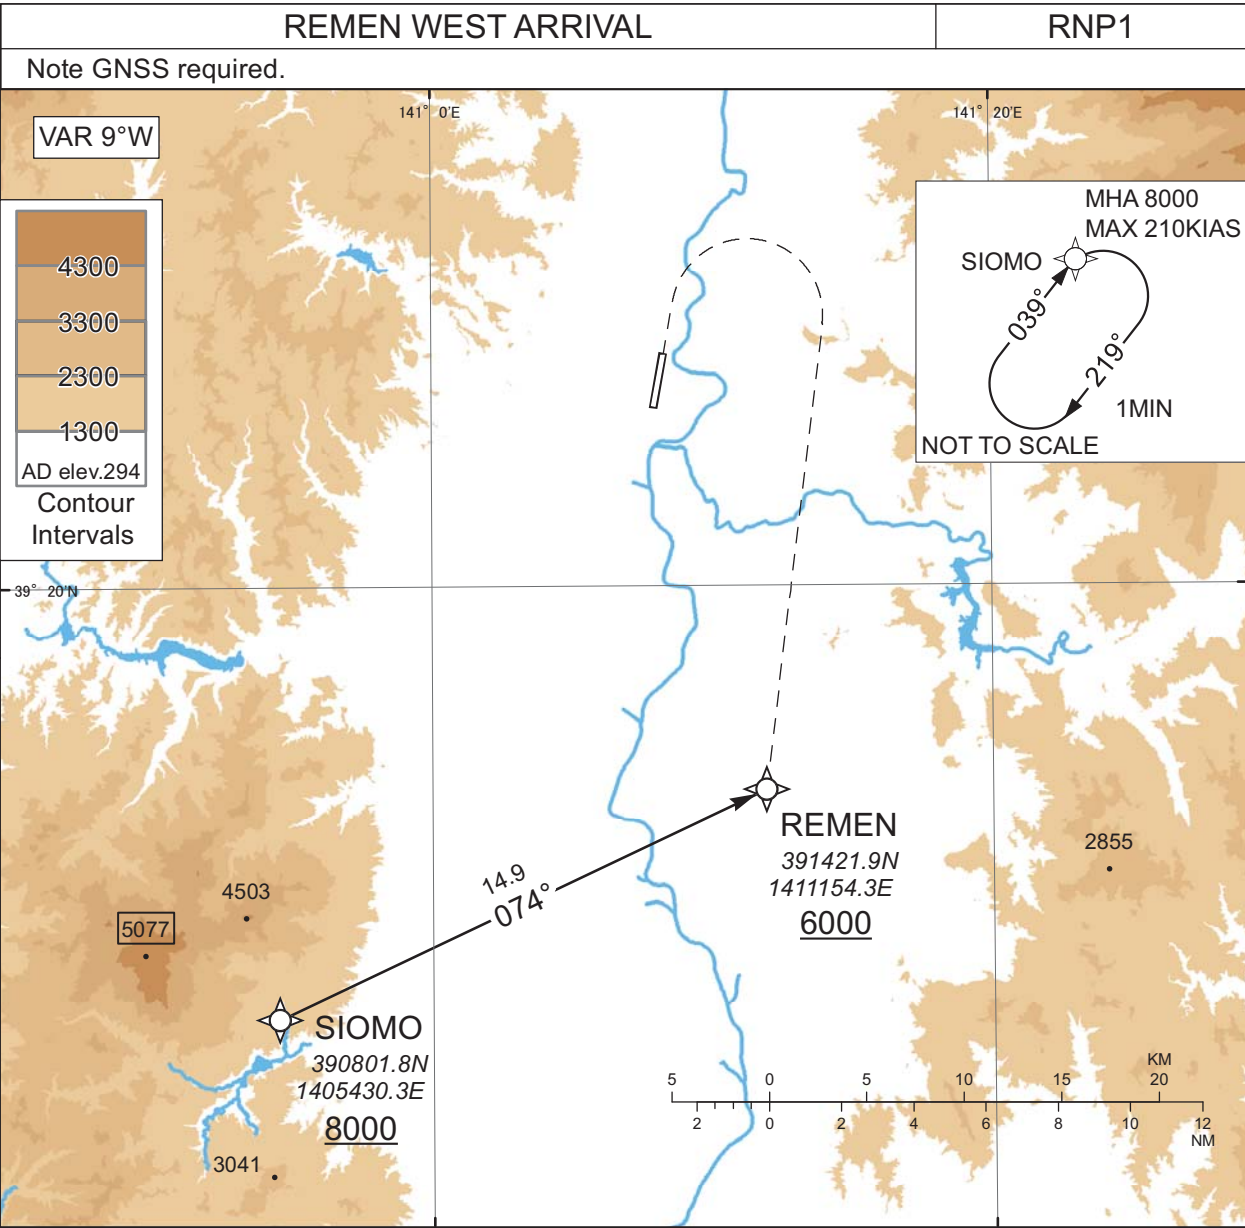

CHANGE : Description of VOR/DME:

From SIOMO at or above 8000FT, to REMEN at or above 6000FT.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001           | IF              | SIOMO               | -        | -             | -8.8               | -             | -              | +8000         | -            | -              | RNP1                     |
| 002           | TF              | REMEN               | -        | 074 (064.7)   | -8.8               | 14.9          | -              | +6000         | -            | -              | RNP1                     |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|--------------|--------------------------|
| Hold | SIOMO               | 039 (030.1)           | -8.8               | 1.0(-14000)         | R              | 8000                  | FL140                 | -210(-14000) | RNP1                     |

**INTENTIONALLY LEFT BLANK**

## RJSI / HANAMAKI

ILS Z or LOC Z RWY20

VAR 9°W

MSA 25NM

EQPT REQUIRED  
DME  
VOR

Turn initiation within D13.0 HPE  
MAX Turning speed 200KIAS

7800  
270°  
HPE  
090°  
6200  
360°  
7400

10NM

3086 3045 1854 917 2577 6290 2746

HIZME(FAF)  
D5.6 IHP

460 726  
442 A MAPt(LOC)  
D0.7 IHP

3083 1674 446 A MHA 4000  
MAX 230KIAS

441 A HANAMAKI CITY

2812 202° 700

VOR/DME  
HANAMAKI  
112.8 HPE  
CH-75x  
39°26'00"N/141°08'01"E

D8.0 HPE


2893 1176

HIZME(FAF) : 393142.42N/1410935.33E

| NM to IHP            | MAPt | 2   | 3    | 4    | 5    | FAF  |
|----------------------|------|-----|------|------|------|------|
| ALT (3.0° APCH Path) | —    | 929 | 1247 | 1566 | 1884 | 2072 |

Climb via HPE R202 to  
HPE 8.0DME, turn left,  
direct to HPE VOR/DME  
and hold at 4000FT.  
Contact SHIRAKAMI APP.

Timing not authorized for  
defining the MAPt.

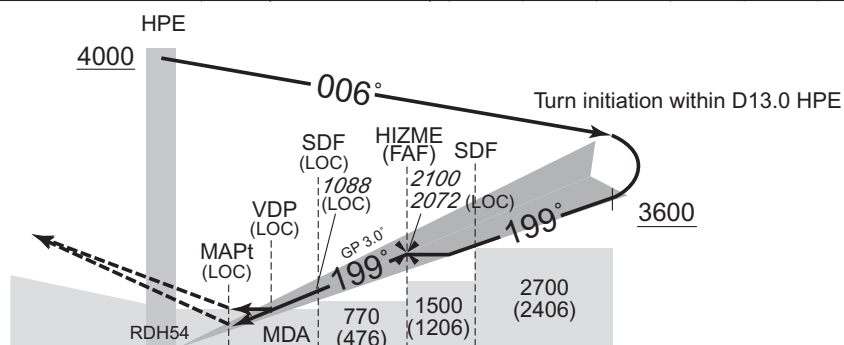


|            |     |     |     |     |     |     |
|------------|-----|-----|-----|-----|-----|-----|
| DME to IHP | 0.2 | 0.7 | 1.3 | 2.5 | 5.6 | 9.3 |
| NM to THR  | 0   | 0.5 | 1.2 | 2.3 | 5.4 | 9.1 |

| MINIMA |           | THR elev. 298 |           | AD elev. 294 |            |      |
|--------|-----------|---------------|-----------|--------------|------------|------|
| CAT    | CAT I     |               | LOC       |              | CIRCLING   |      |
|        | DA(H)     | RVR/<br>CMV   | MDA(H)    | RVR/<br>CMV  | MDA(H)     | VIS  |
| A      | 498 (200) | 550           | 700 (406) | 900          | 760 (466)  | 1600 |
| B      |           |               |           | 1000         | 860 (566)  |      |
| C      |           |               |           |              | 1000 (706) | 2400 |
| D      |           |               |           |              |            | 1400 |

CHANGE : VAR. MSA(BTN 270° and 360°). DME to IHP. NM to THR. MDA(H) for LOC.

INSTRUMENT APPROACH CHART

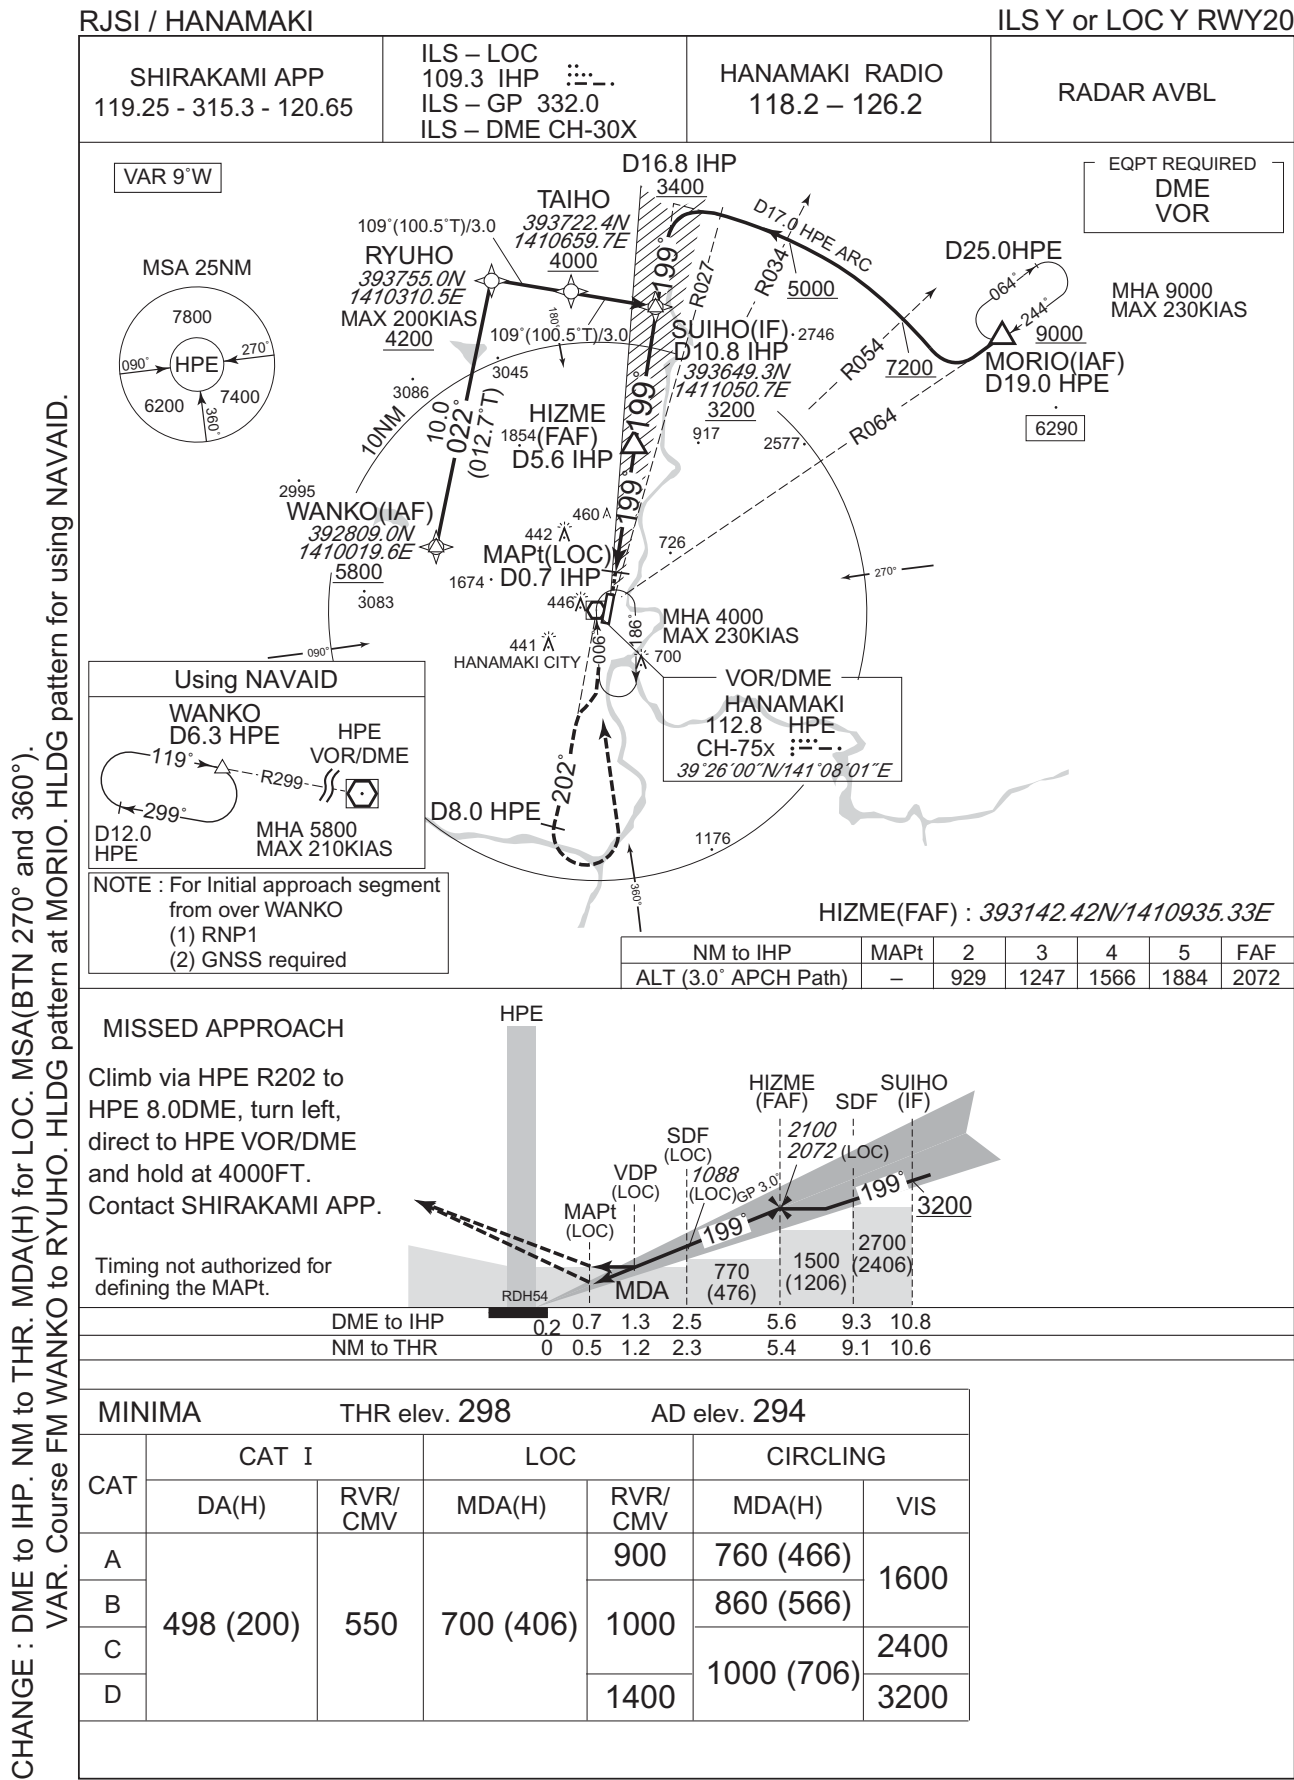

## RJSI / HANAMAKI

SHIRAKAMI APP  
119.25 - 315.3 - 120.65

HANAMAKI VOR/DME  
112.8 HPE  
CH-75X  
39°26'00"N/141°08'01"E

HANAMAKI RADIO  
118.2 – 126.2

RADAR AVBL

VAR 9°W

MSA 25NM

EQPT REQUIRED  
DME

6290

MASAH(FAF) : 393052.04N/1410931.09E

|                      |      |     |      |      |      |
|----------------------|------|-----|------|------|------|
| NM to HPE            | MAPt | 2   | 3    | 4    | FAF  |
| ALT (3.0° APCH Path) | —    | 849 | 1168 | 1486 | 1805 |

MISSED APPROACH

Climb via HPE R202 to HPE  
8.0DME, turn left, direct to  
HPE VOR/DME and hold  
at 4000FT.  
Contact SHIRAKAMI APP.

Timing not authorized for defining the MAPt.

|            |     |     |     |     |      |
|------------|-----|-----|-----|-----|------|
| DME to HPE | 0.4 | 1.6 | 2.5 | 5.0 | 10.0 |
| NM to THR  | 0   | 1.2 | 2.1 | 4.6 | 9.6  |

MINIMA

THR elev. 298


AD elev. 294

| CAT |           |             | CIRCLING   |      |
|-----|-----------|-------------|------------|------|
|     | MDA(H)    | RVR/<br>CMV | MDA(H)     | VIS  |
| A   | 700 (406) | 900         | 760 (466)  | 1600 |
| B   |           | 1000        | 860 (566)  |      |
| C   |           | 1400        | 1000 (706) | 2400 |
| D   |           |             |            | 3200 |



INSTRUMENT APPROACH CHART

RJSI / HANAMAKI VOR RWY02

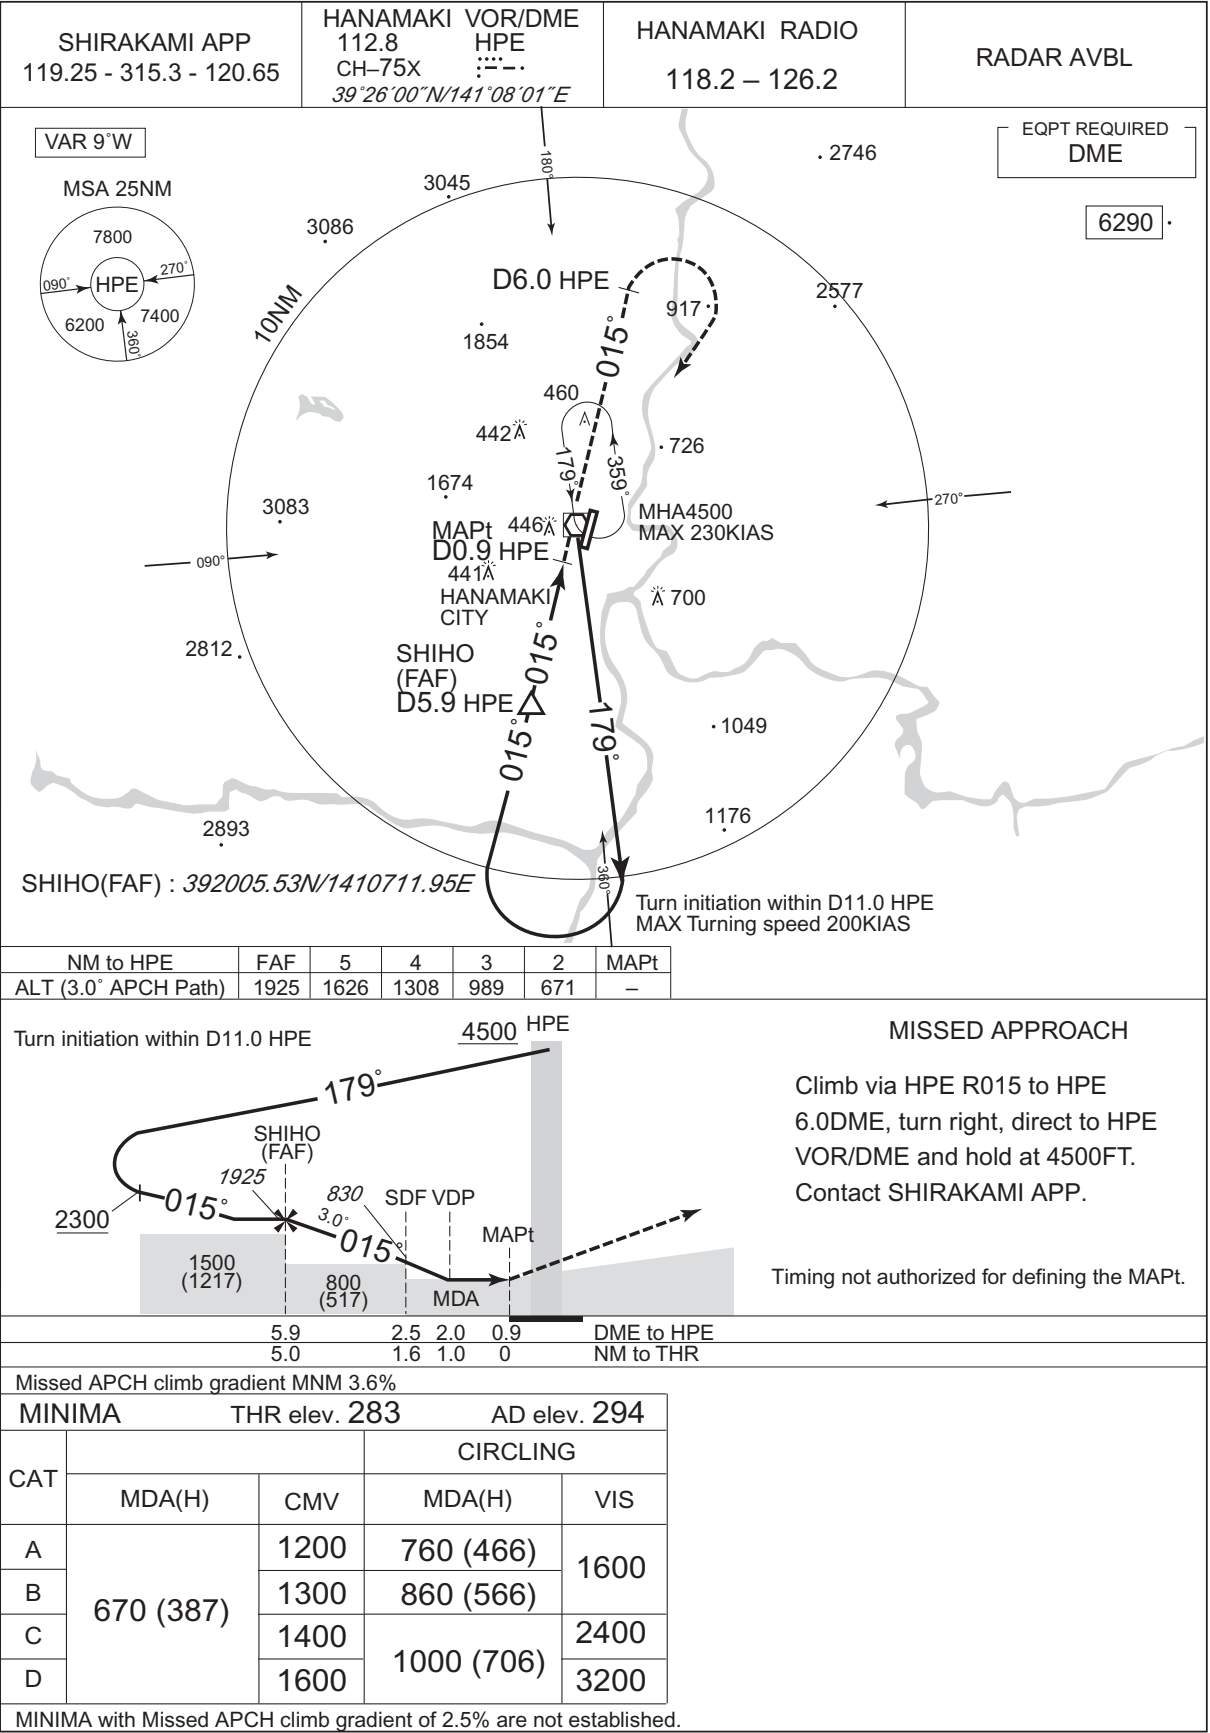

CHANGE : VAR. MSA(BTN 270° and 360°). PROC course. Missed APCH course. HLDG pattern.  
OCA(H). DME to HPE. MINIMA for MDA(H).

## RJSI / HANAMAKI

RNP Z RWY02



## INSTRUMENT APPROACH CHART


RJSI / HANAMAKI

RNP Y RWY02(AR)

SHIRAKAMI APP  
119.25 - 315.3 - 120.65RNP AR  
RF required.HANAMAKI RADIO  
118.2 - 126.2

RADAR AVBL

For uncompensated Baro-VNAV systems, procedure not authorized below -20°C / above 45°C

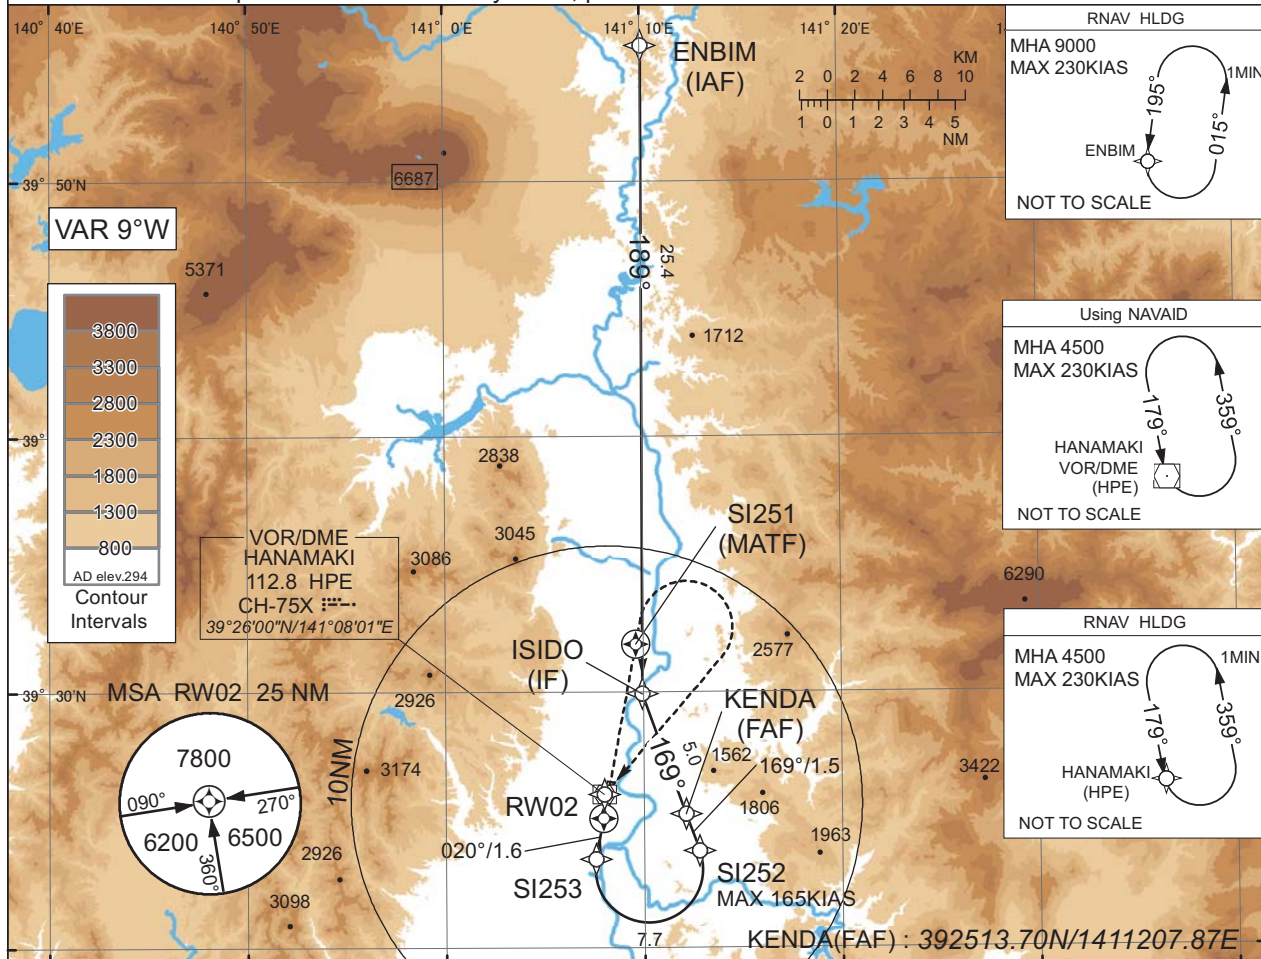ENBIM  
(IAF)

9000

41.3

ISIDO  
(IF)

4000

15.9

KENDA  
(FAF)

3800

10.9

SI252

9.4

SI253

1.6

848

0

RWY02

RDH 50

## MISSED APPROACH

Climb to 4500FT, direct to  
SI251, turn right direct to  
HPE and hold.  
Contact SHIRAKAMI APP.

NM to THR

Missed APCH climb gradient MNM 4.0%

| MINIMA | THR elev. 283 | AD elev. 294 |
|--------|---------------|--------------|
| CAT    | RNP 0.30      |              |
|        | DA(H)         | CMV          |
| A      | -             | -            |
| B      | -             | -            |
| C      | 595(312)      | 1400         |
| D      |               | 1600         |

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Authorization Required

CHANGE : HLDG pattern for using NAVAID. RNAV HLDG at HANAMAKI.

INSTRUMENT APPROACH CHART

RJSI / HANAMAKI

RNP Y RWY02(AR)


| Coding Table  |                              |                     |          |               |                    |               |                |               |              |                 |           |
|---------------|------------------------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| Serial Number | Path Descriptor              | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
| 001           | IF                           | ENBIM               | -        | -             | -8.8               | -             | -              | +9000         | -            | -               | -         |
| 002           | TF                           | ISIDO               | -        | 189 (180.2)   | -8.8               | 25.4          | -              | +4000         | -            | -               | 1.0       |
| 003           | TF                           | KENDA               | -        | 169 (160.3)   | -8.8               | 5.0           | -              | 3800          | -            | -               | 1.0       |
| 004           | TF                           | SI252               | -        | 169 (160.4)   | -8.8               | 1.5           | -              | 3312          | -165         | -3.00           | 0.3       |
| 005           | RF Center: SIRF1<br>r=2.10NM | SI253               | -        | -             | -8.8               | 7.7           | R              | 848           | -            | -3.00           | 0.3       |
| 006           | TF                           | RW02                | Y        | 020 (010.7)   | -8.8               | 1.6           | -              | 333           | -            | -3.00/50        | 0.3       |
| 007           | DF                           | SI251               | Y        | -             | -8.8               | -             | -              | -             | -            | -               | 1.0       |
| 008           | DF                           | HPE                 | -        | -             | -8.8               | -             | R              | 4500          | -            | -               | 1.0       |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)  | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|---------------|-----------|
| Hold | ENBIM               | 195 (186.5)           | -8.8               | 1.0 (-14000)        | L              | 9000                  | FL140                 | -230 (-14000) | 1.0       |
| Hold | HPE                 | 179 (169.7)           | -8.9               | 1.0 (-14000)        | L              | 4500                  | FL140                 | -230 (-14000) | 1.0       |

| Waypoint Coordinates |  |                          |                          |                          |
|----------------------|--|--------------------------|--------------------------|--------------------------|
| Waypoint Identifier  |  | Coordinates              | RF Arc Center Identifier | Coordinates              |
| ENBIM                |  | 395519.34N / 1411002.82E | SIRF1                    | 392304.37N / 1411014.42E |
| ISIDO                |  | 392956.45N / 1410957.05E |                          |                          |
| KENDA                |  | 392513.70N / 1411207.87E |                          |                          |
| SI252                |  | 392347.07N / 1411247.89E |                          |                          |
| SI253                |  | 392327.97N / 1410734.24E |                          |                          |
| RW02                 |  | 392503.58N / 1410757.62E |                          |                          |
| SI251                |  | 393152.68N / 1410937.82E |                          |                          |
| HPE                  |  | 392600.09N / 1410800.60E |                          |                          |

CHANGE : HLDG at HPE. VAR.

INSTRUMENT APPROACH CHART

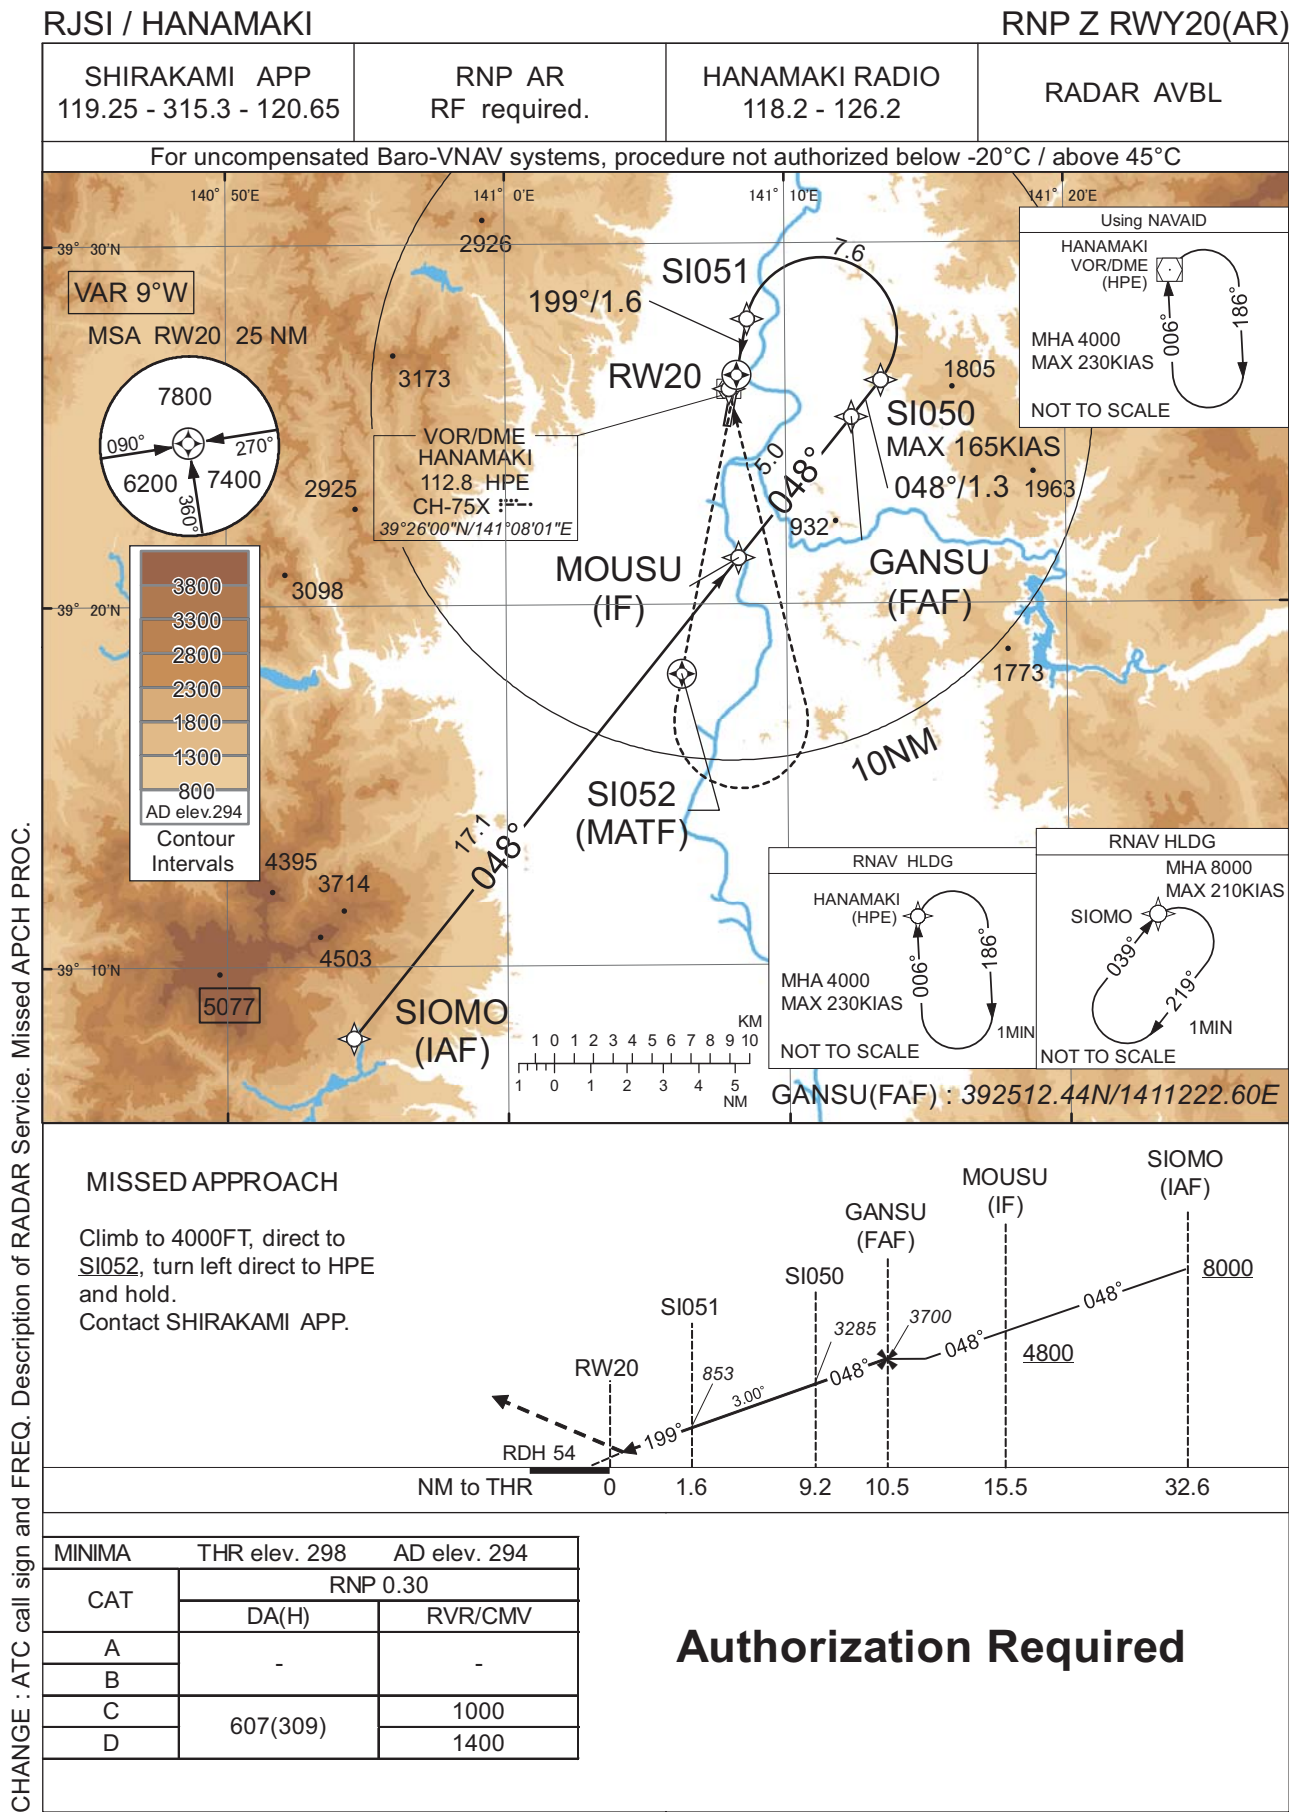



## INSTRUMENT APPROACH CHART

RJSI / HANAMAKI

RNP Z RWY20(AR)

Coding Table

| Serial Number | Path Descriptor           | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
|---------------|---------------------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| 001           | IF                        | SIOMO               | -        | -             | -8.8               | -             | -              | +8000         | -            | -               | -         |
| 002           | TF                        | MOUSU               | -        | 048 (038.8)   | -8.8               | 17.1          | -              | +4800         | -            | -               | 1.0       |
| 003           | TF                        | GANSU               | -        | 048 (038.9)   | -8.8               | 5.0           | -              | 3700          | -            | -               | 1.0       |
| 004           | TF                        | SI050               | -        | 048 (038.9)   | -8.8               | 1.3           | -              | 3285          | -165         | -3.00           | 0.3       |
| 005           | RF Center: SIRF2 r=2.10NM | SI051               | -        | -             | -8.8               | 7.6           | L              | 853           | -            | -3.00           | 0.3       |
| 006           | TF                        | RW20                | Y        | 199 (190.7)   | -8.8               | 1.6           | -              | 352           | -            | -3.00/54        | 0.3       |
| 007           | DF                        | SI052               | Y        | -             | -8.8               | -             | -              | -             | -            | -               | 1.0       |
| 008           | DF                        | HPE                 | -        | -             | -8.8               | -             | L              | 4000          | -            | -               | 1.0       |


| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)  | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|---------------|-----------|
| Hold | SIOMO               | 039 (030.1)           | -8.8               | 1.0 (-14000)        | R              | 8000                  | FL140                 | -210 (-14000) | 1.0       |
| Hold | HPE                 | 006 (357.5)           | -8.8               | 1.0 (-14000)        | R              | 4000                  | FL140                 | -230 (-14000) | 1.0       |

Waypoint Coordinates

| Waypoint Identifier | Coordinates              | RF Arc Center Identifier | Coordinates              |
|---------------------|--------------------------|--------------------------|--------------------------|
| SIOMO               | 390801.78N / 1405430.28E | SIRF2                    | 392732.73N / 1411119.82E |
| MOUSU               | 392119.11N / 1410818.81E |                          |                          |
| GANSU               | 392512.44N / 1411222.60E |                          |                          |
| SI050               | 392613.23N / 1411326.21E |                          |                          |
| SI051               | 392756.30N / 1410839.89E |                          |                          |
| RW20                | 392623.24N / 1410817.11E |                          |                          |
| SI052               | 391806.42N / 1410615.76E |                          |                          |
| HPE                 | 392600.09N / 1410800.60E |                          |                          |

CHANGE : PROC renamed.

INSTRUMENT APPROACH CHART

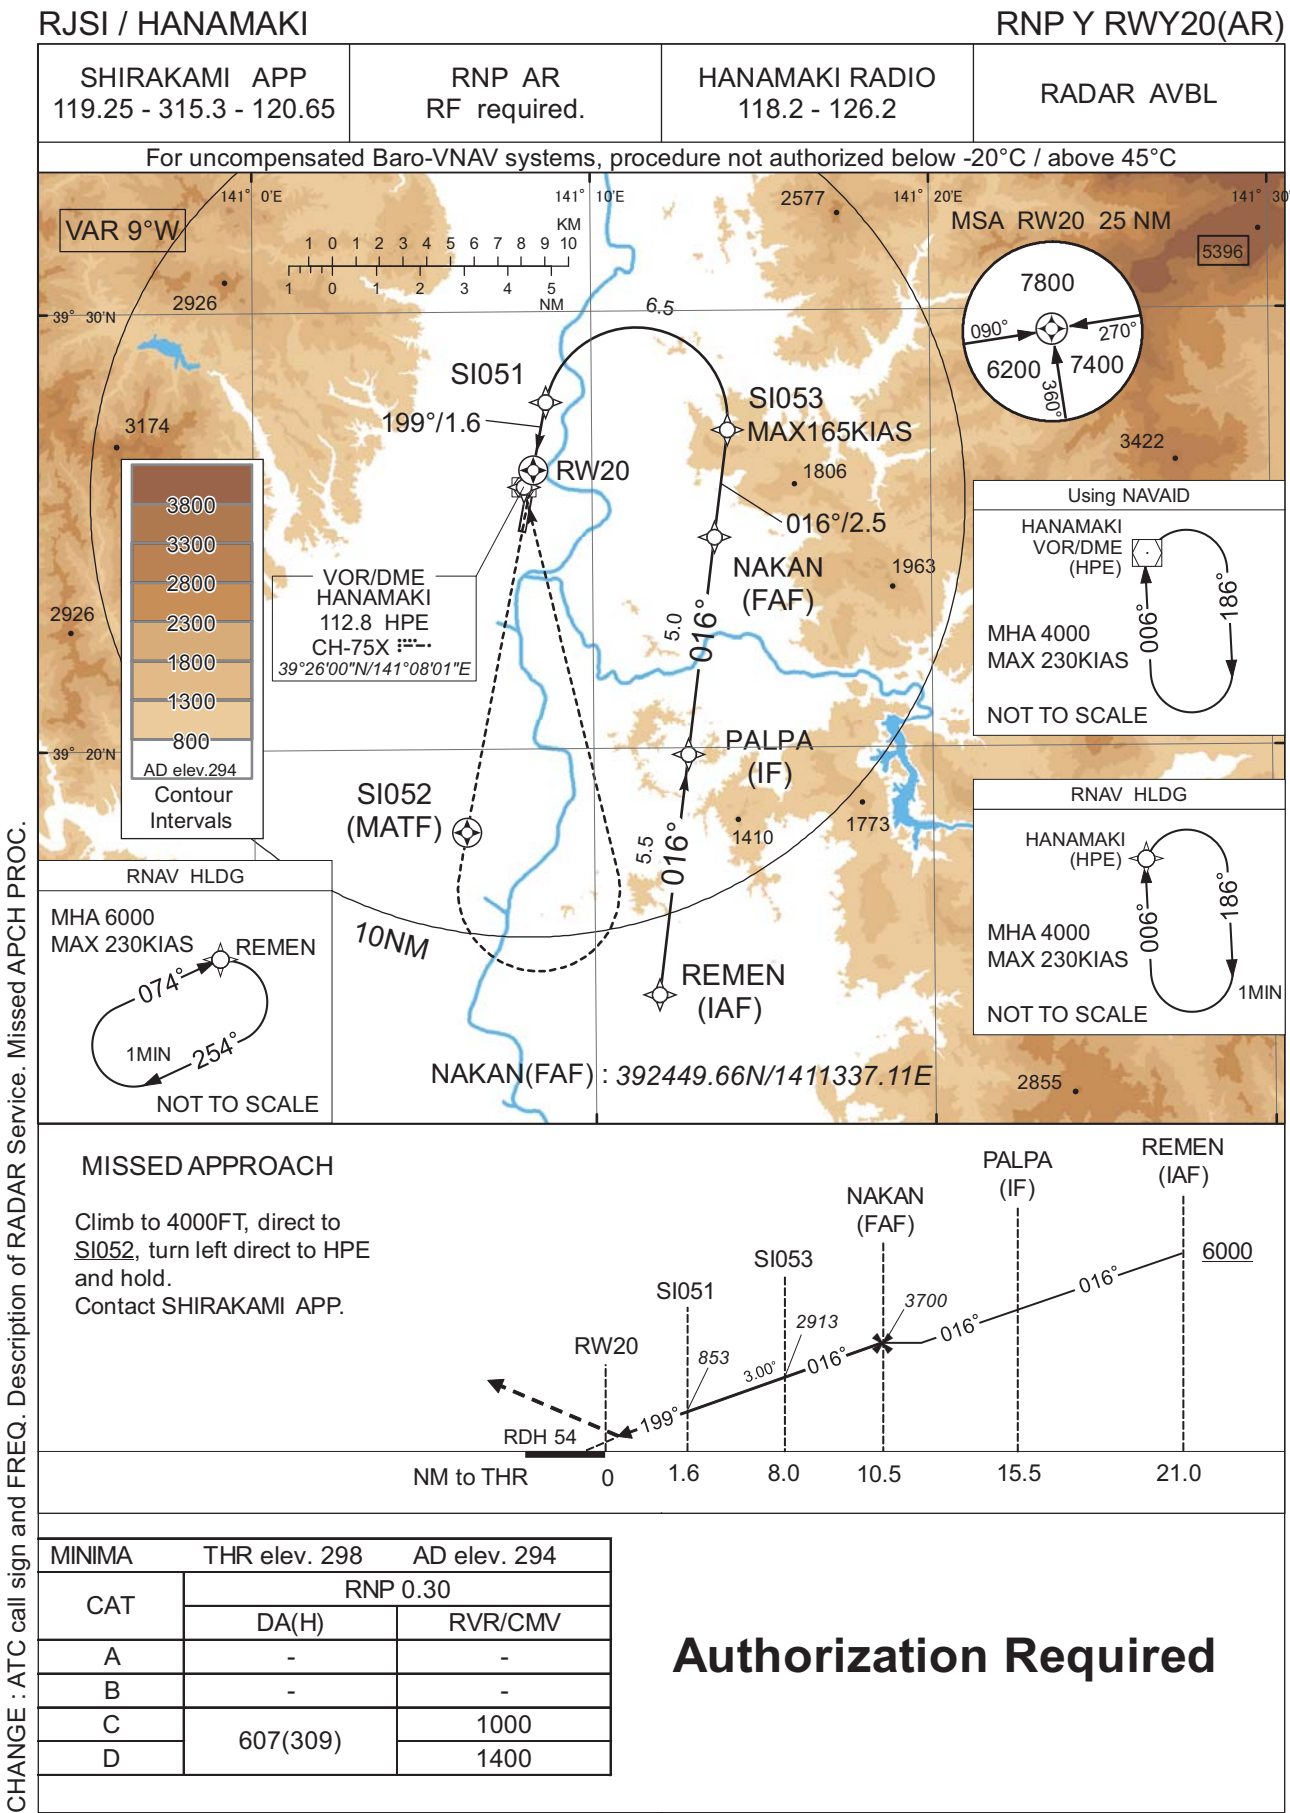

## INSTRUMENT APPROACH CHART

RJSI / HANAMAKI

RNP Y RWY20(AR)

Coding Table

| Serial Number | Path Descriptor           | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
|---------------|---------------------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| 001           | IF                        | REMEN               | -        | -             | -8.8               | -             | -              | +6000         | -            | -               | -         |
| 002           | TF                        | PALPA               | -        | 016 (007.2)   | -8.8               | 5.5           | -              | -             | -            | -               | 1.0       |
| 003           | TF                        | NAKAN               | -        | 016 (007.2)   | -8.8               | 5.0           | -              | 3700          | -            | -               | 1.0       |
| 004           | TF                        | SI053               | -        | 016 (007.2)   | -8.8               | 2.5           | -              | 2913          | -165         | -3.00           | 0.3       |
| 005           | RF Center: SIRF2 r=2.10NM | SI051               | -        | -             | -8.8               | 6.5           | L              | 853           | -            | -3.00           | 0.3       |
| 006           | TF                        | RW20                | Y        | 199 (190.7)   | -8.8               | 1.6           | -              | 352           | -            | -3.00/54        | 0.3       |
| 007           | DF                        | SI052               | Y        | -             | -8.8               | -             | -              | -             | -            | -               | 1.0       |
| 008           | DF                        | HPE                 | -        | -             | -8.8               | -             | L              | 4000          | -            | -               | 1.0       |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS)  | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|---------------|-----------|
| Hold | REMEN               | 074 (065.0)           | -8.8               | 1.0 (-14000)        | R              | 6000                  | FL140                 | -230 (-14000) | 1.0       |
| Hold | HPE                 | 006 (357.5)           | -8.8               | 1.0 (-14000)        | R              | 4000                  | FL140                 | -230 (-14000) | 1.0       |

Waypoint Coordinates


| Waypoint Identifier | Coordinates              | RF Arc Center Identifier | Coordinates              |
|---------------------|--------------------------|--------------------------|--------------------------|
| REMEN               | 391421.92N / 1411154.27E | SIRF2                    | 392732.73N / 1411119.82E |
| PALPA               | 391951.68N / 1411248.23E |                          |                          |
| NAKAN               | 392449.66N / 1411337.11E |                          |                          |
| SI053               | 392716.81N / 1411401.29E |                          |                          |
| SI051               | 392756.30N / 1410839.89E |                          |                          |
| RW20                | 392623.24N / 1410817.11E |                          |                          |
| SI052               | 391806.42N / 1410615.76E |                          |                          |
| HPE                 | 392600.09N / 1410800.60E |                          |                          |

CHANGE : PROC renamed.



RJSI / HANAMAKI


Visual REP

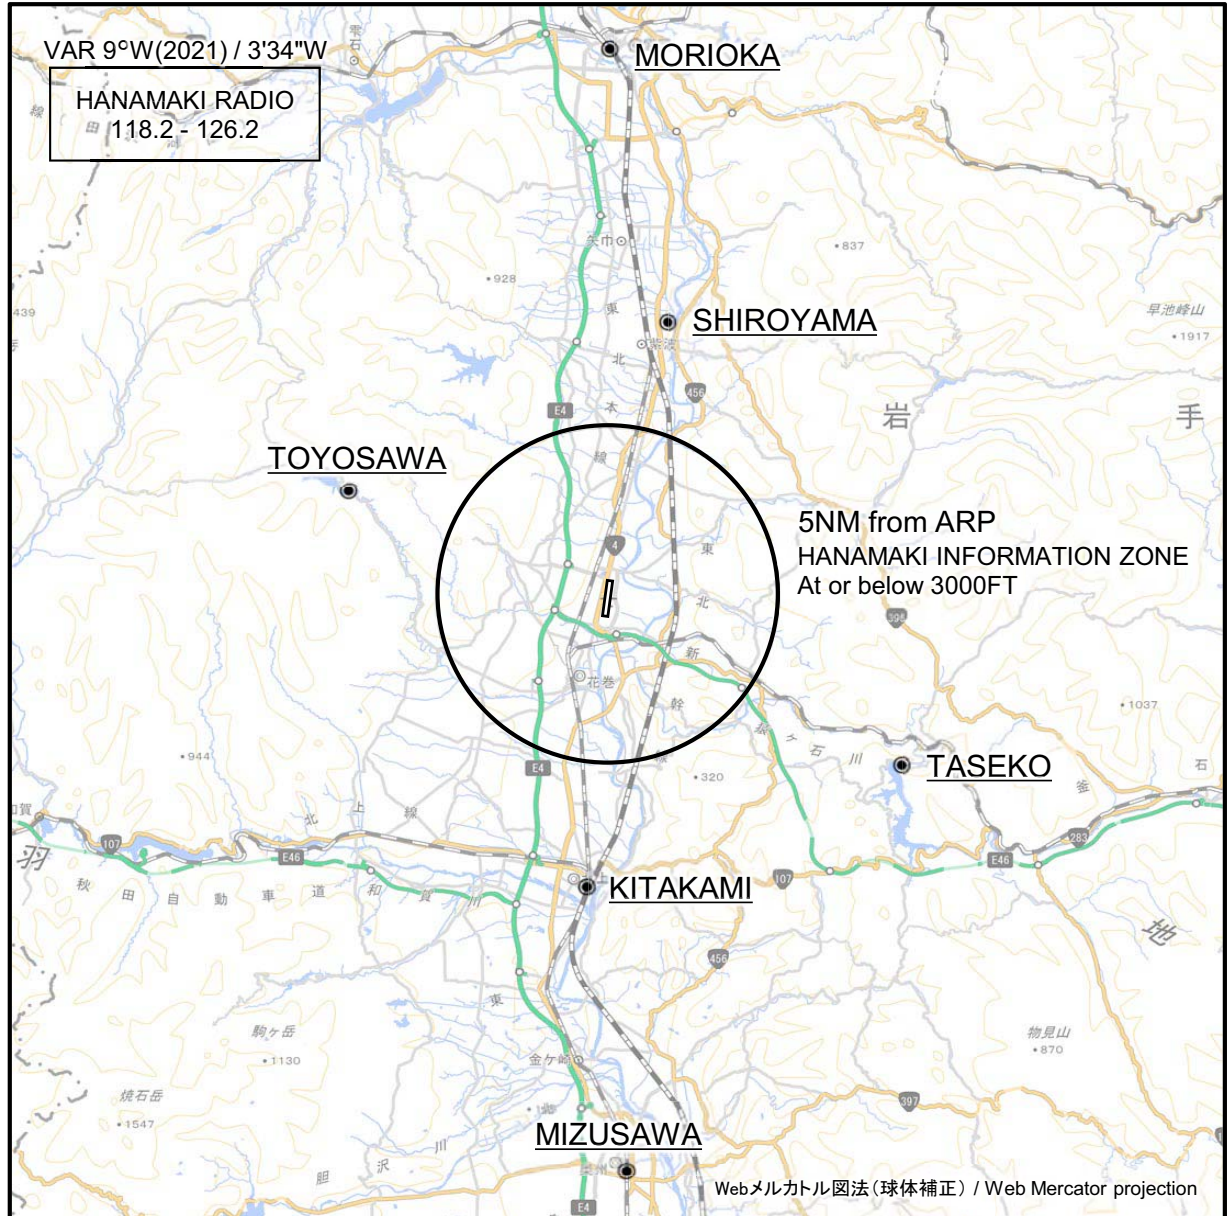

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).


CHANGE : Map updated. BRG/DIST from ARP. Taseko established. Tsuchisawa abolished.

| Call sign       | BRG / DIST from ARP | Remarks                    |
|-----------------|---------------------|----------------------------|
| 盛岡<br>Morioka   | 360°T / 16.4NM      | JR駅<br>JR Station          |
| 城山<br>Shiroyama | 012°T / 8.4NM       | 城跡<br>The site of a castle |
| 豊沢<br>Toyosawa  | 293°T / 8.1NM       | 豊沢ダム<br>Dam                |
| 田瀬湖<br>Taseko   | 121°T / 10.0NM      | 田瀬ダム<br>Dam                |
| 北上<br>Kitakami  | 184°T / 8.9NM       | JR駅<br>JR Station          |
| 水沢<br>Mizusawa  | 178°T / 17.4NM      | JR駅<br>JR Station          |

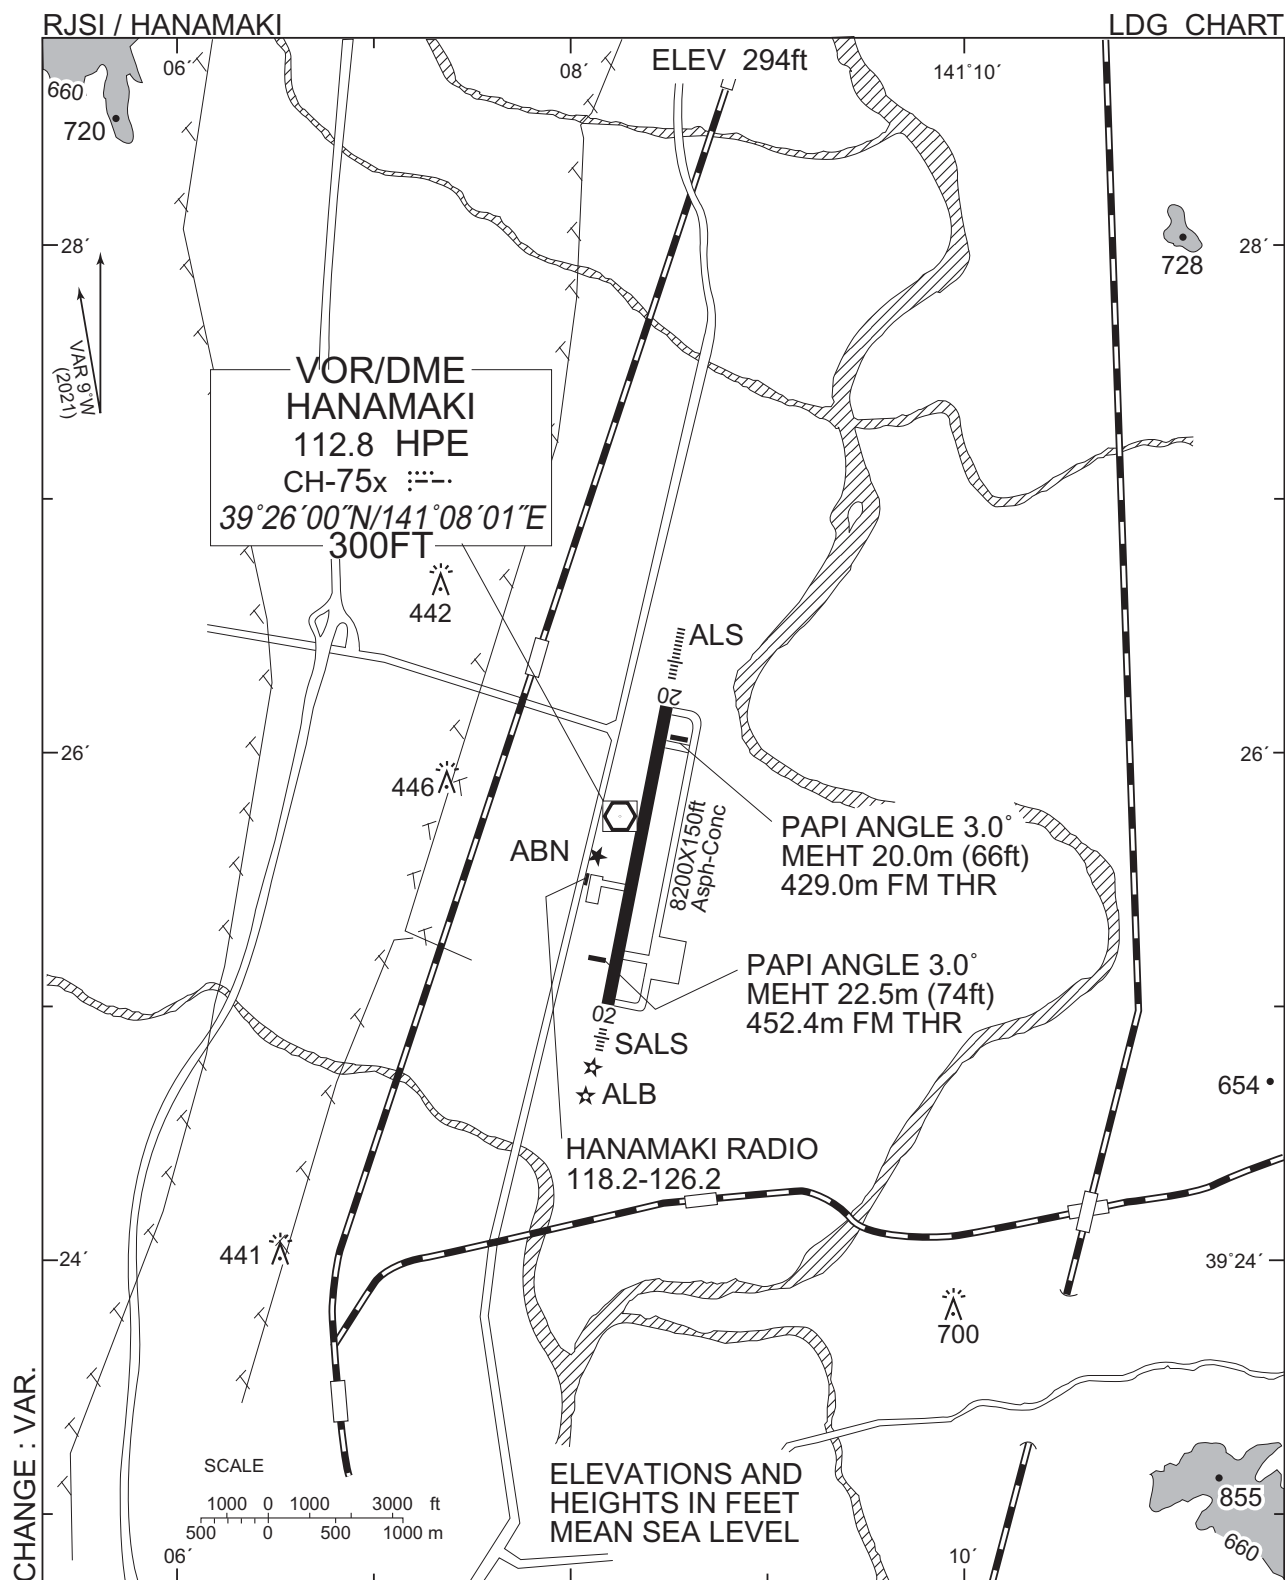

RJSI / HANAMAKI

Minimum Vectoring Altitude CHART

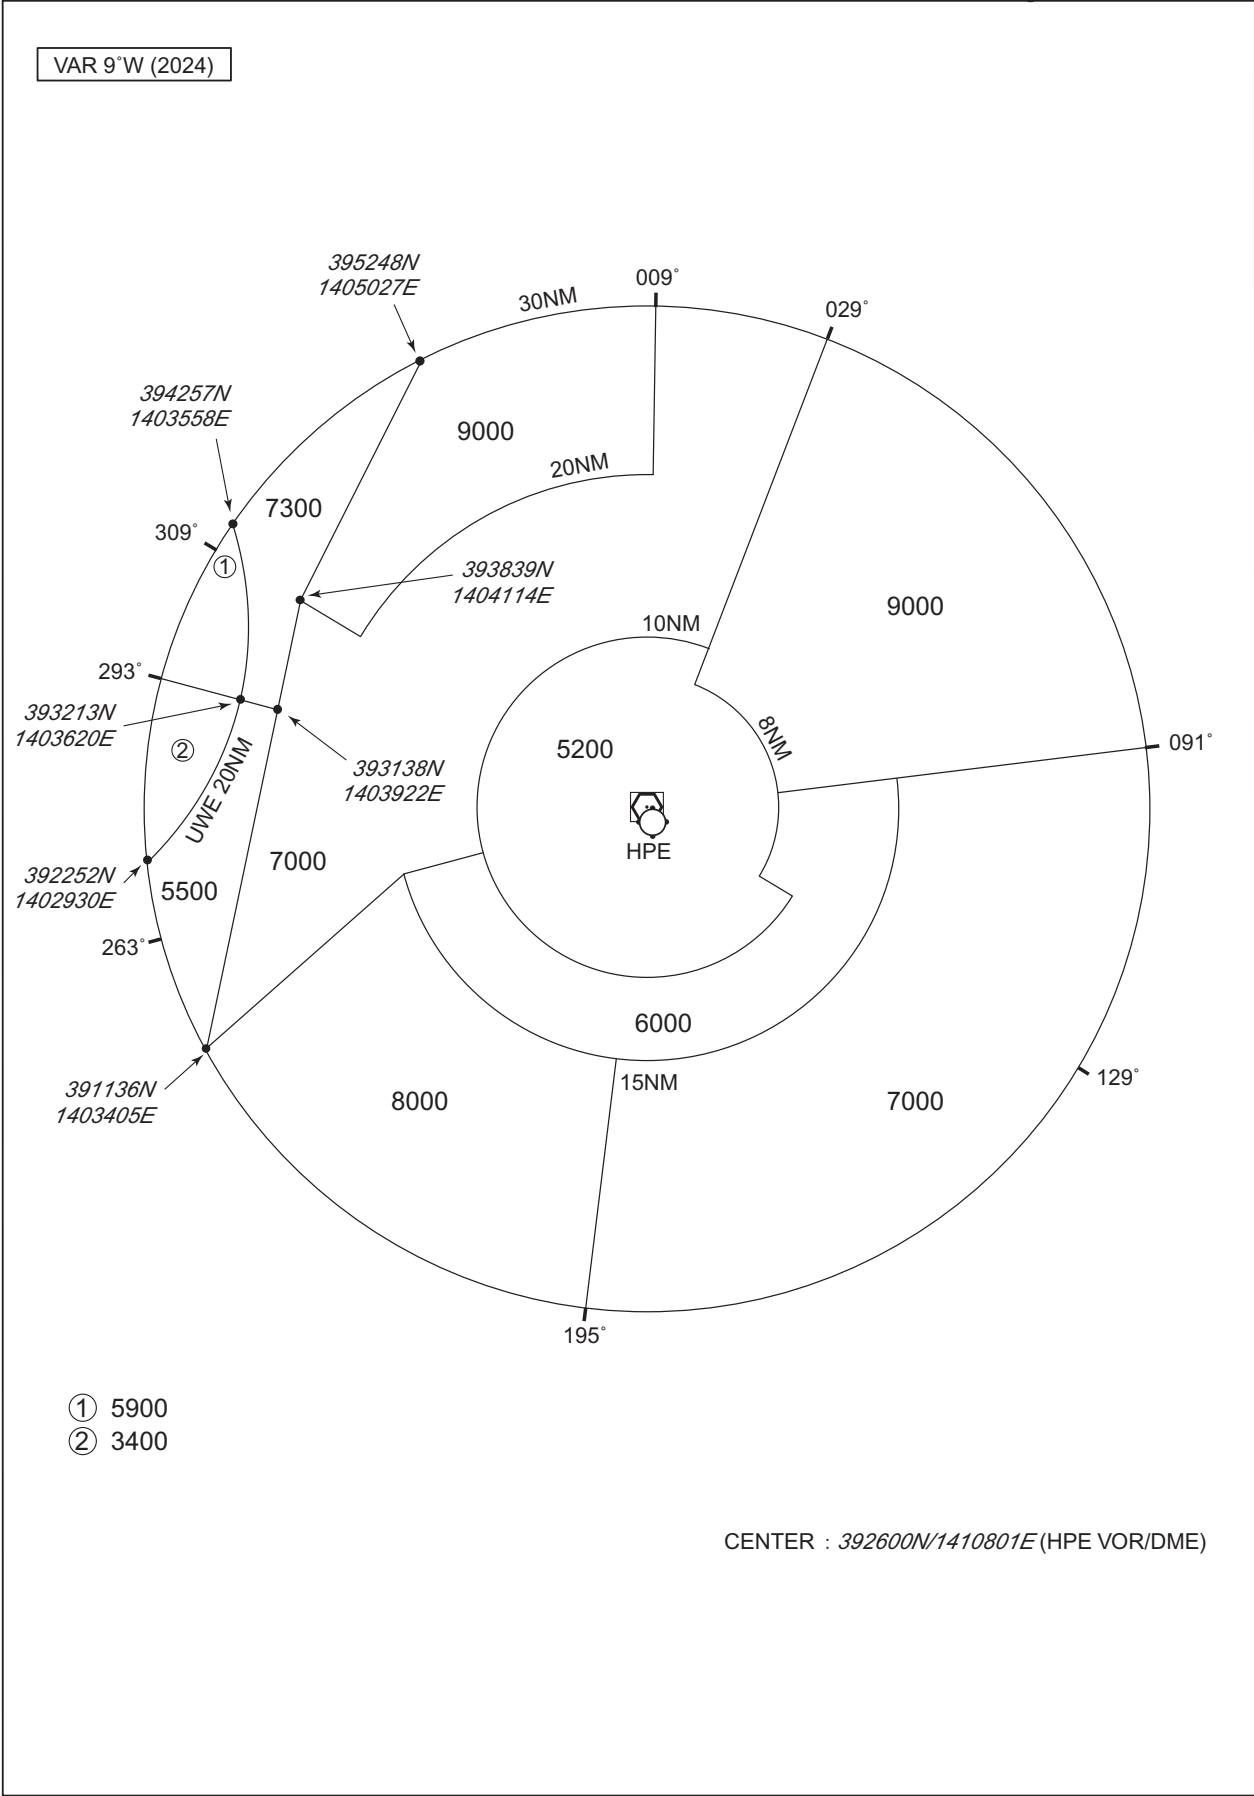

CHANGE : Update.